



SMARTI, a Suite for Multi-resolution Atmospheric Radiative Transmission Interface library developed at DRDC-Valcartier

Vincent Ross (AEREX Avionique Inc.),

Denis Dion (DRDC-Valcartier)

Jean-François Lepage (DRDC-Valcartier)

**32nd Review of Atmospheric Transmission Models
Meeting
June 14th 2010**



Defence Research and
Development Canada

Recherche et développement
pour la défense Canada

Canada

Report Documentation Page			Form Approved OMB No. 0704-0188	
<p>Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p>				
1. REPORT DATE 14 JUN 2010	2. REPORT TYPE	3. DATES COVERED 00-00-2010 to 00-00-2010		
4. TITLE AND SUBTITLE SMARTI, a Suite for Multi-resolution Atmospheric Radiative Transmission Interface library developed at DRDC-Valcartier			5a. CONTRACT NUMBER	
			5b. GRANT NUMBER	
			5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)			5d. PROJECT NUMBER	
			5e. TASK NUMBER	
			5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Defence R&D Canada - Valcartier, 2459 Pie-XI Blvd North, Quebec (Quebec) G3J 1X5 Canada,			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)	
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited				
13. SUPPLEMENTARY NOTES				
14. ABSTRACT				
15. SUBJECT TERMS				
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 21
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	19a. NAME OF RESPONSIBLE PERSON	



Contents

- Introducing the SMART and SMARTI libraries
- Features & benefits
- More on wide band correlated-ks
- Possible application
- Current projects implementing SMART/SMARTI
 - KARMA engagement simulator
 - PSAD-PIR on the FREMM French frigates
- Conclusion



The SMART library

SMART

for multiresolution

atmospheric

radiative

transmission

I nterface



The SMART library

- SMART (0.1 beta) features
 - Spectral and wideband CK transmittance & radiance
 - MODTRAN molecular extinctions (CK)
 - Seamless integration of MOD4v3r1
 - MODTRAN and DRDC aerosol models
 - Falling snow model (DRDC)
 - DRDC accurate refracted path calculation
 - 2-stream (flux) and DISORT (N-stream) MS calculations
 - Lambert and sea surface (DRDC analytical model) BRDF. Others to come.
 - Optimized by using advanced C++ programming methods
 - Intuitive like C++, fast like Fortran/C



The SMART library


- High language portability (SMARTI)
 - C++ (native)
 - Java
 - Matlab (through Java)
 - Python
- Other language wrappers are possible/planned
 - C#, Lisp, Lua, Octave, Pearl, PHP, Pike, TCL, R, Ruby, and more...



The SMART library

- No modifications to the MODTRAN source code is necessary
 - Works with the official MODTRAN4 executable
 - Plans to support MODTRAN 5 in the near future


MODTRAN

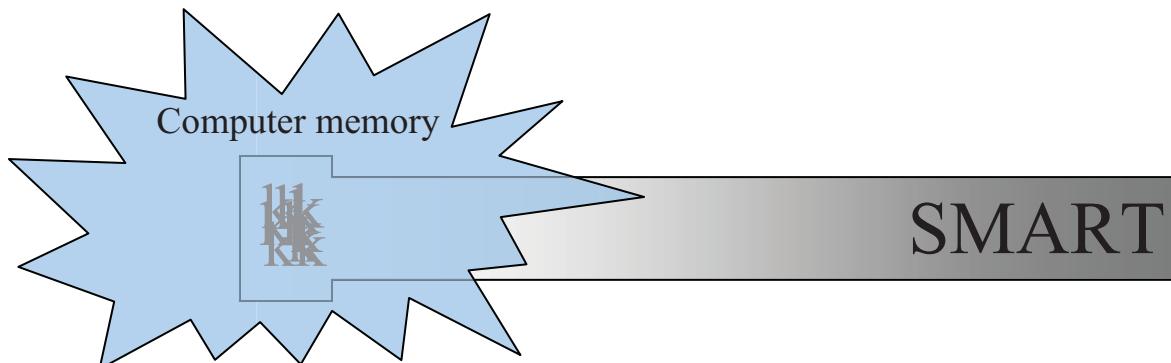



Benefits


- Accuracy
 - Spectral results are almost identical to MODTRAN 4.
 - Wideband radiance results are within 5% of full MODTRAN 4 calculations
- Speed (wideband)
 - Over 1000 lines of sight per second (excluding initialization) in single and 2-flux multiple scattering
 - 50 lines of sight per second with 16 stream DISORT.

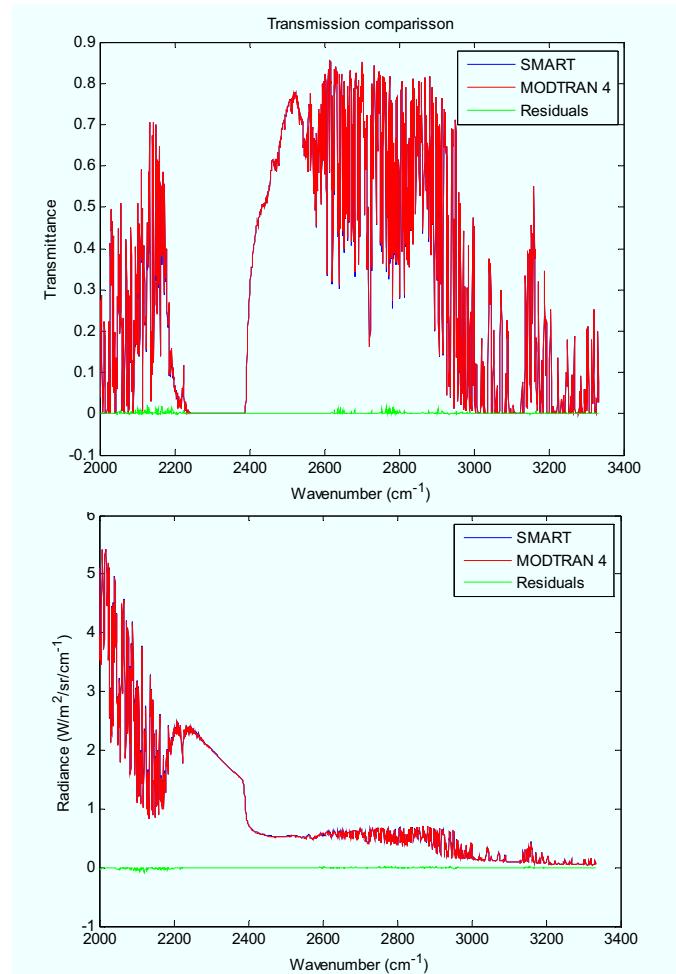



A correlated-k refresher

- Transformation to Correlated-K space

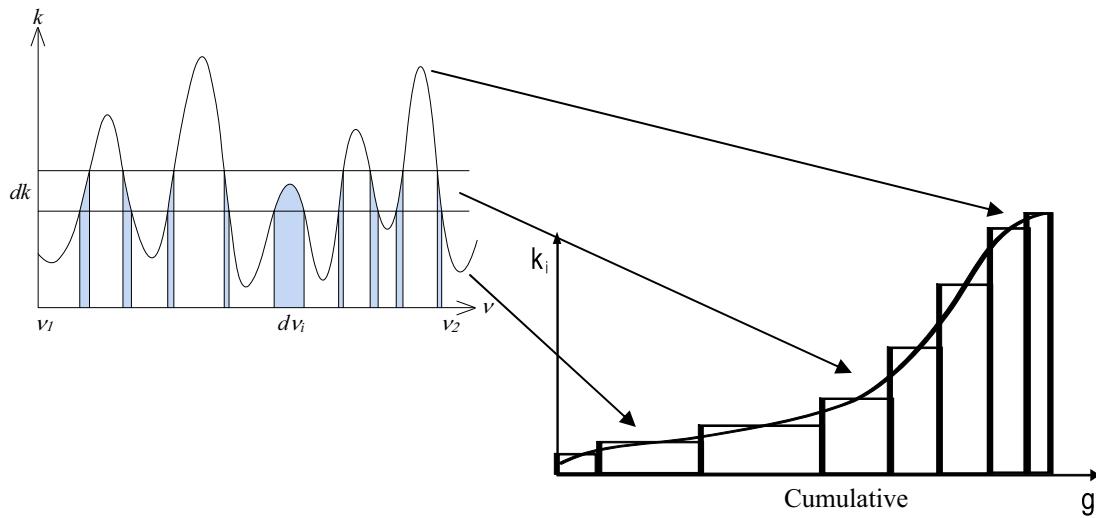

- Monotonic function need much fewer points to be represented accurately


$$T = \sum_i \exp(-k_i(g) \cdot s) \Delta g_i$$




Wideband correlated-ks

- Converting MODTRAN4™ CK extinctions to wideband CK

1) Sort

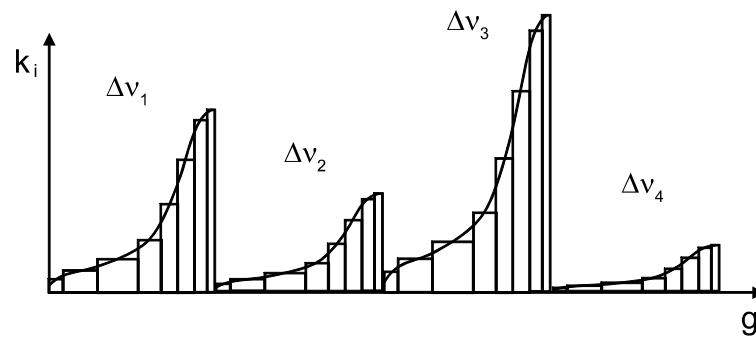


2) Interpolate

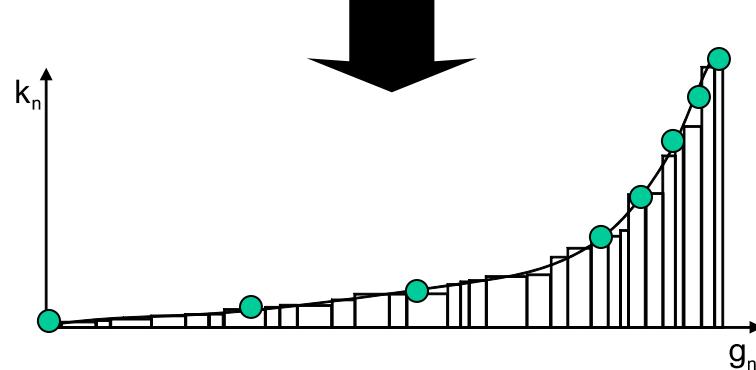



Applications


- Scene modeling:
 - Simulators
 - Assessing target detection/tracking algorithms.
 - Training

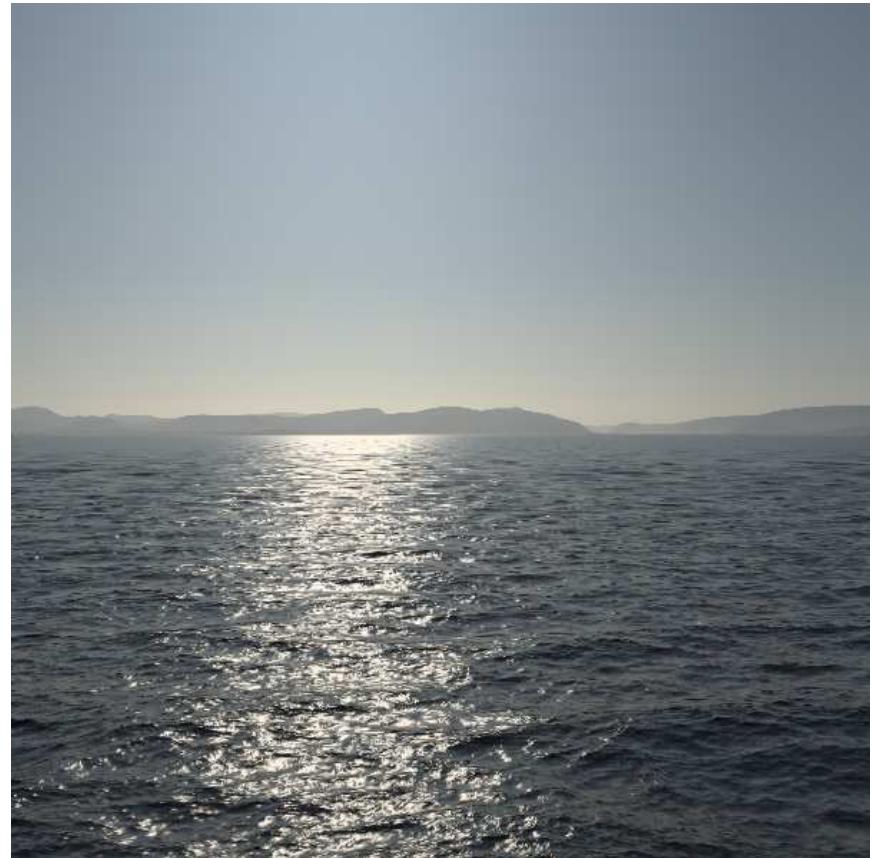



Applications

- EOTDA applications:
 - Contrast maps
 - Detection probability
 - “What if” scenarios
 - (requires especially optimized RT codes)

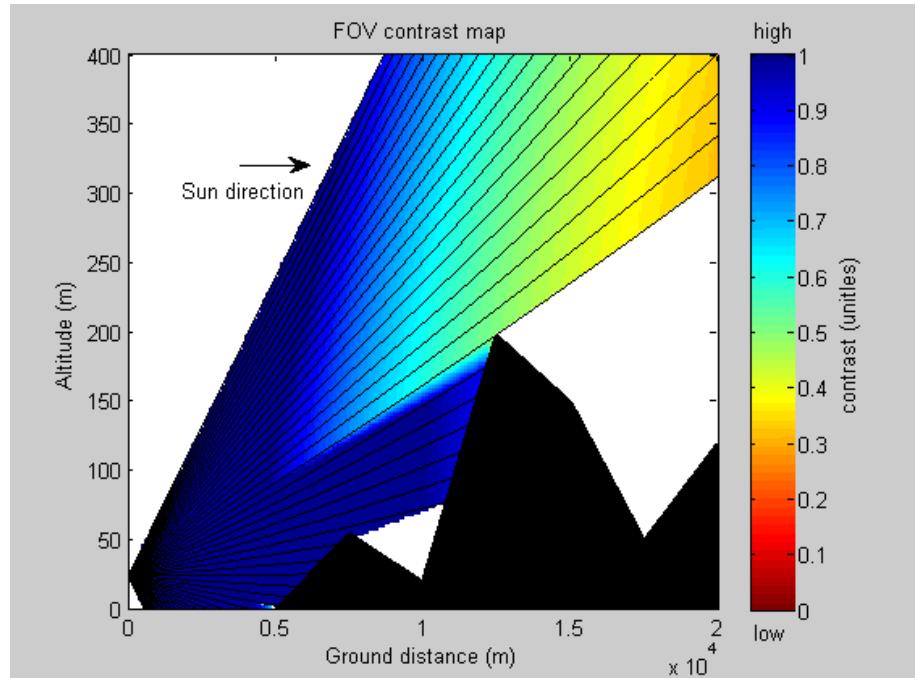

- Modeling for multi-spectral detectors.



Powered by Karma

Current projects: KARMA simulation framework

Environment

- Atmospheric transmittance
- EO/IR scene



Munition

- Dynamics
- Guidance
- Control
- Autopilot
- Propulsion
- Fuze
- EO/IR seeker
- EO/IR signature



Expendable (flare)

- Dynamics
- EO/IR signature

Platform (target, launcher)


- Dynamics
- Self-defence system
 - Expendable dispenser
 - DIRCM
 - MAWS
- Weapon system
 - Designator
 - Launch rail
- EO/IR signature



Current projects: KARMA simulation framework

IR scene Generation:

- IR scene = Input to the seeker models
- SMART atmosphere model
 - Dynamic atmospheric properties
 - Wideband-CK computations

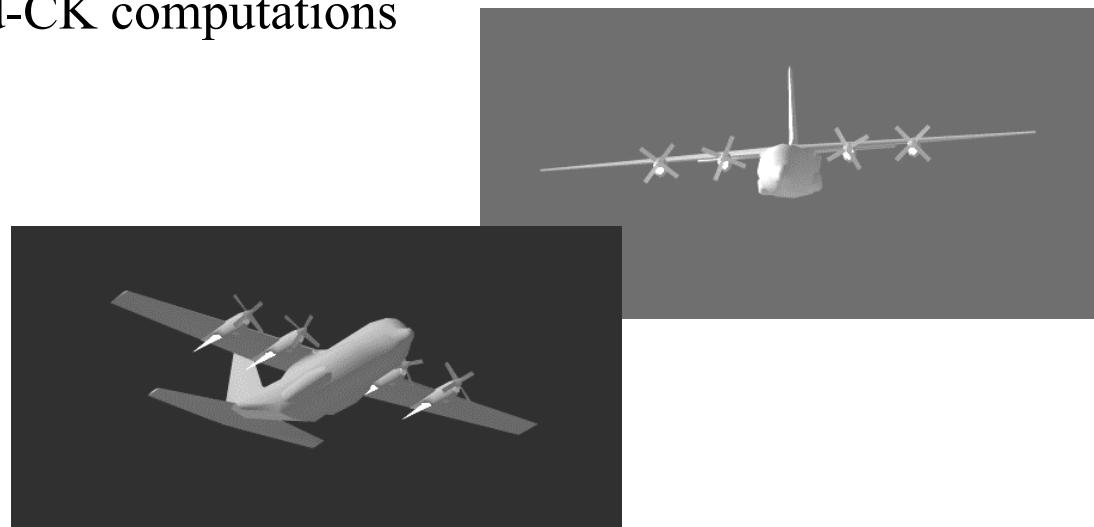




Example KARMA Video





Current projects: MPIR (PSAD)

- PSAD-MPIR on the French FREMM (Multi Mission European FRigate)

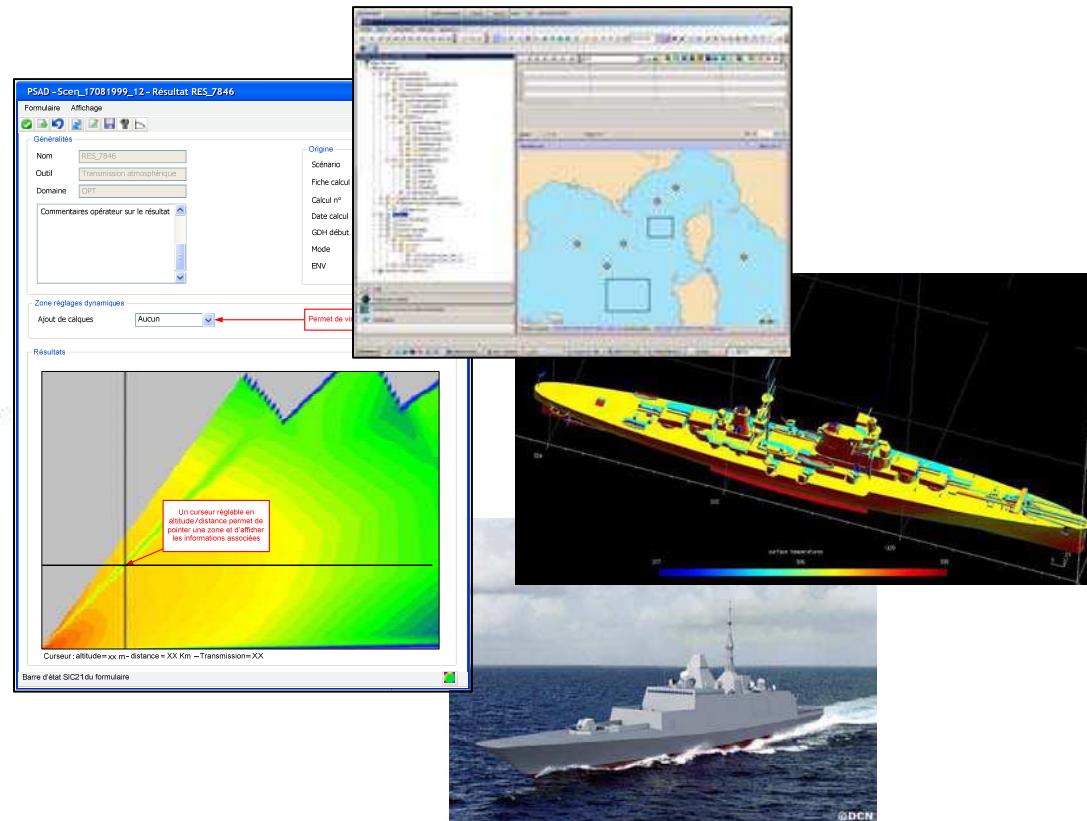

Thermal ship image courtesy of Fabian Lapierre, Royal Naval Academy of Belgium.
(Computed using OSMOSIS)



Conclusion

- SMART(I) v1.0 beta is now ready.
- SMARTI is already in use in Canadian/International collaborative projects
- Interested beta users are welcome.
- Imaging, multispectral and EOTDA applications would benefit
- Divergence from MODTRAN 4 in radiance and transmittance are below 5% for most visible and IR bands in wide CK mode



Conclusion

Thank you!

Contacts:

Vincent Ross
vross@aerex.ca

Denis Dion
denis.dion@drdc-rddc.gc.ca



Results - 0.4 to 0.7 μm

- Accuracy

	Single	2 Str MS	16 Str DISORT
R (% from MOD4)	0.41%	0.44%	0.18%
T (% from MOD4)	0.32%		

- Speed

	W-CK (17 ck)	W-CK (2 Str)	W-CK (16 Str)	MOD4 (5 cm^{-1})	MOD4 (2 Str)	MOD4 (16 Str)
Time (s)	0.00078 s	0.00125 s	0.166 s	0.83 s	2.86 s	3061 s
Ratio to W-CK	-	-	-	1064	2288	18439

(45° slant path from ground to space in a maritime environment, sun at 57° from zenith)



Results - 3.0 to 5.0 μm

- Accuracy

	Single	2 Str MS	16 Str DISORT
R (% from MOD4)	2.3%	1.5%	1.8%
T (% from MOD4)	3.0%		

- Speed

	W-CK (17 ck)	W-CK (2 Str)	W-CK (16 Str)	MOD4 (1 cm^{-1})	MOD4 (2 Str)	MOD4 (16 Str)
Time (s)	0.00124 s	0.00234	0.19 s	1.05 s	3.08 s	1586
Ratio to W-CK	-	-	-	847	1316	8347

(45° slant path from ground to space in a maritime environment, sun at 57° from zenith)



Results - 8.0 to 12.0 μm

- Accuracy

	Single	2 Str MS	16 Str DISORT
R (% from MOD4)	0.61%	0.75%	0.87%
T (% from MOD4)	10.2%		

- Speed

	W-CK (17 ck)	W-CK (2 Str)	W-CK (16 Str)	MOD4 (1 cm^{-1})	MOD4 (2 Str)	MOD4 (16 Str)
Time (s)	0.00031 s	0.00078	0.020 s	0.41 s	1.03 s	63.7 s
Ratio to W-CK	-	-	-	1323	1321	3185

(45° slant path from ground to space in a maritime environment, sun at 57° from zenith)



Results – 10.0 to 12.0 μm

- Accuracy

	Single	2 Str MS	16 Str DISORT
R (% from MOD4)	0.77%	0.82%	0.72%
T (% from MOD4)	1.25%		

O₃ Band?