

## **Fieldable Microsystems II (FMII)**

David Fries

U. South Florida, Marine Science Dept, 140 7<sup>TH</sup> Ave So. St. Petersburg, FL 33701  
phone (727)553-3961 fax (727) 553-3967 email [dfries@marine.usf.edu](mailto:dfries@marine.usf.edu)

R.T. Short

U. South Florida, Marine Science Dept, 140 7<sup>TH</sup> Ave So. St. Petersburg, FL 33701  
phone: (727)553-3961 fax: (727) 553-3967 email: [tshort@marine.usf.edu](mailto:tshort@marine.usf.edu)

Grant Number: N000149810848

### **LONG-TERM GOALS**

The overall goal of this work involves the development of self contained, fieldable micro sensors fabricated with micromachining technology. The targeted integrated sensor comprises a microanalytical segment, integrated detection electronics and associated telemetry functionality for both a chemical sensor (explosive detection) and physical sensor (CTD).

### **OBJECTIVES**

The main focus of the effort is to advance the design, fabrication and field testing of a microfluidic device as an adaptive chemical analyzer that utilizes on-chip reaction separation and either a photonic or an electrochemical detection strategy. The implementation of two different fluid-flow pump mechanisms and the use of hybrid packaging for electronic integration are a portion of the development effort. The scope of work included multiple developments: field deploy a separations device; advance seawater sampling preconcentration, devise an integrated opto chip; develop chip HPLC that includes a mini high-pressure pump and mini power supply; place temperature and conductivity and depth functions on a planar surface and develop sensor packaging techniques.

### **APPROACH**

As in the past we rely on the advances in our non standard MEMS fabrication methods that we have developed for ease of creation of the MEMS and to further the microsensors for the field. The microfluidic chemical separations sensor has two main paths of development: ship board CE system and mini HPLC field sensor. Method development for seawater matrices is a necessary task for all field analysis. The current project includes the transfer of the lab based chemical processor for deployment in the field along with advancing the CTD physical sensor.


### **WORK COMPLETED**

#### *Shipboard CE system*

We have a completed lab system and have focused effort on the one technical obstacle left for shipboard deployment for protein distribution measurements: protein purification. We have developed a temperature sensitive hydrogel based approach for the separation. Figure 1 shows the results from

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>30 SEP 2002</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2002 to 00-00-2002</b>	
4. TITLE AND SUBTITLE <b>Fieldable Microsystems II (FMII)</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>U. South Florida, Marine Science Dept.,140 7TH Ave So. St.,Petersburg,,FL,33701</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <b>The overall goal of this work involves the development of self contained, fieldable micro sensors fabricated with micromachining technology. The targeted integrated sensor comprises a microanalytical segment, integrated detection electronics and associated telemetry functionality for both a chemical sensor (explosive detection) and physical sensor (CTD).</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>8</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			


our “smart” hydrogel Simplified extractions for protein preconcentration from seawater for field use have been difficult to achieve. Effort on the protein purification process is continuing.

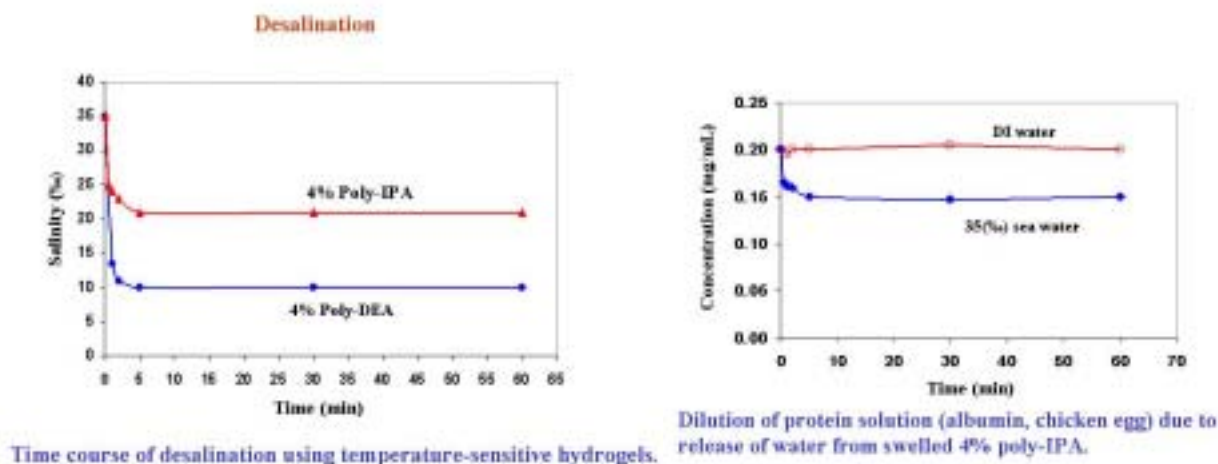

**Figure 1. Protein purification results from temperature sensitive hydrogel for sample prep of seawater.**

### *HPLC- pump*



For the HPLC version system we have continued progress on the high pressure fluid micropump. We have tested the concept and we have fabricated onchip patterned explosive material. We have tested and moved fluids from one fluidic chamber to a separate chamber as proof of fluid control.

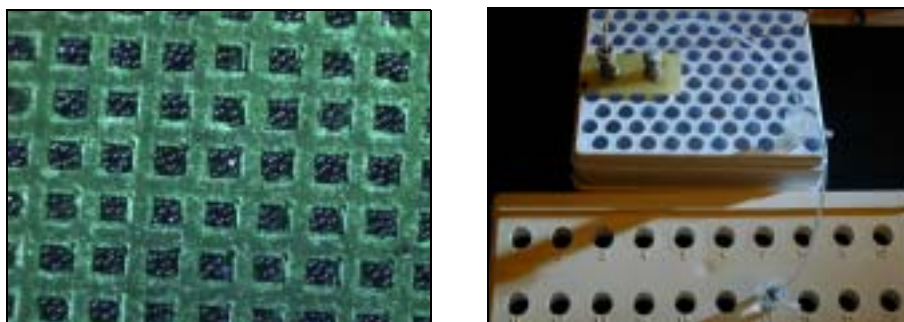

**Figure 2. Explosive powder in microwell array (left). Fluid transfer test bed that resulted in complete transfer of fluid in upper chamber to lower chamber from overpressurization provided by explosive source in upper left corner of image.**

### *Micro Power Generation*



We have also made progress on the final design of the fluidic-based power supply and have generated power using a mini coil and 25 psi source.

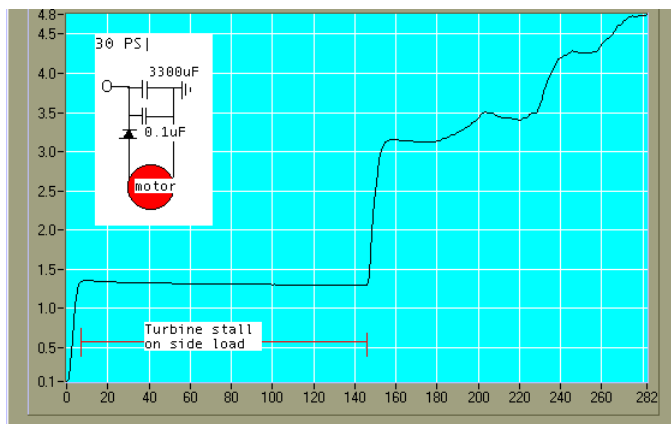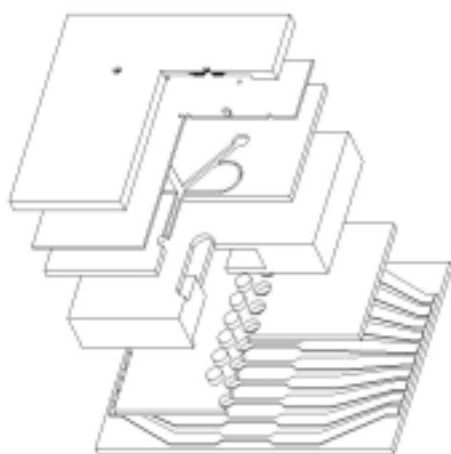

**Figure 3. Fluid pressure- mechanical to electric generator design (left). Four volts generated using fluid pressure and mini coil and circuit listed.**

### Opto-electronic cube.


The compact LED/PD based opto-analyzer has made progress. We have a designed and are testing a disposable cube analyzer for explosives residues and other environmental targets using embedded solid phase extraction. Our approach is to use these detectors coupled tightly with AUV's for a robotic chemical screening. We are focusing our efforts to include the mini-system on the Ranger mini-AUV from Nekton Research.

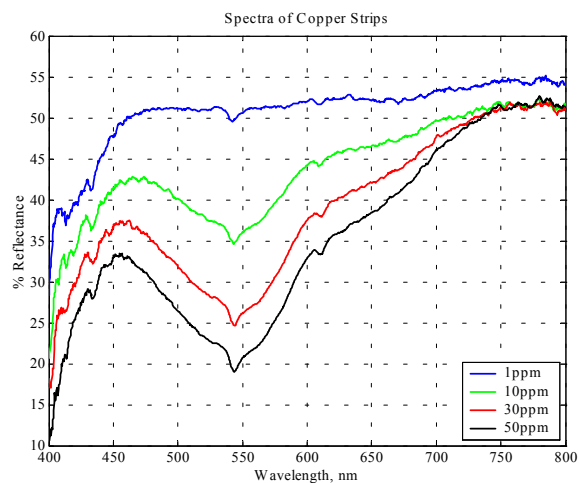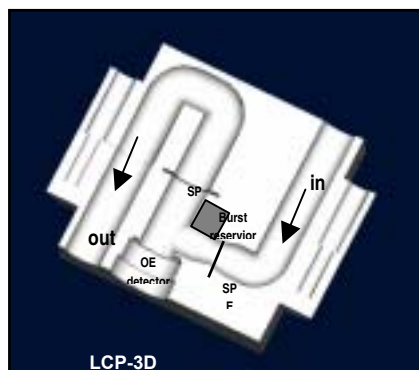

**Figure 4. Robotic Chem Sensor design (left). Fabricated prototype (center). Results from Cu sensitive solid phase material. Decreased reflectance signal from the strip with increasing sample concentration and/or increasing volume sampled.**


## Electrochemical Detection system/nose

We have made continued progress for the electrochemical detection mode of the CE device and pressure driven devices through our partnership with Dr Wang (NMSU) with a focus on explosives detection. In order to make a fieldable system we have expedited the deployment of the three-electrode voltammetric remote sensor. The probe has proven results for seawater analysis for explosives. We are in process of making a submersible system for 4<sup>th</sup> quarter deployment.

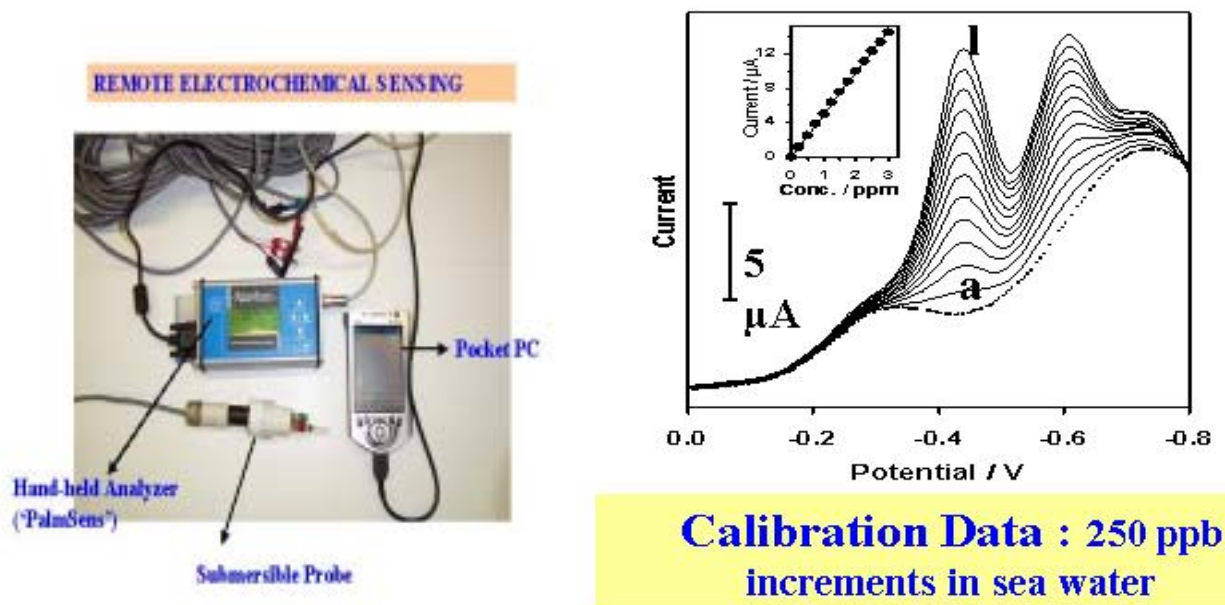

**Figure 5. Remote voltammetric sensor system (left). Explosive residues data from the lab system. MicroCTD**


We have used the previous progress on the torioidal conductivity sensor formed in multi-layer PCB substrates as the design basis for the entire CTD system. We have focused much of our effort on liquid crystal polymer (LCP) for creating this PCBMEMS system due to its superior water resistance and the process steps for processing the LCP material.

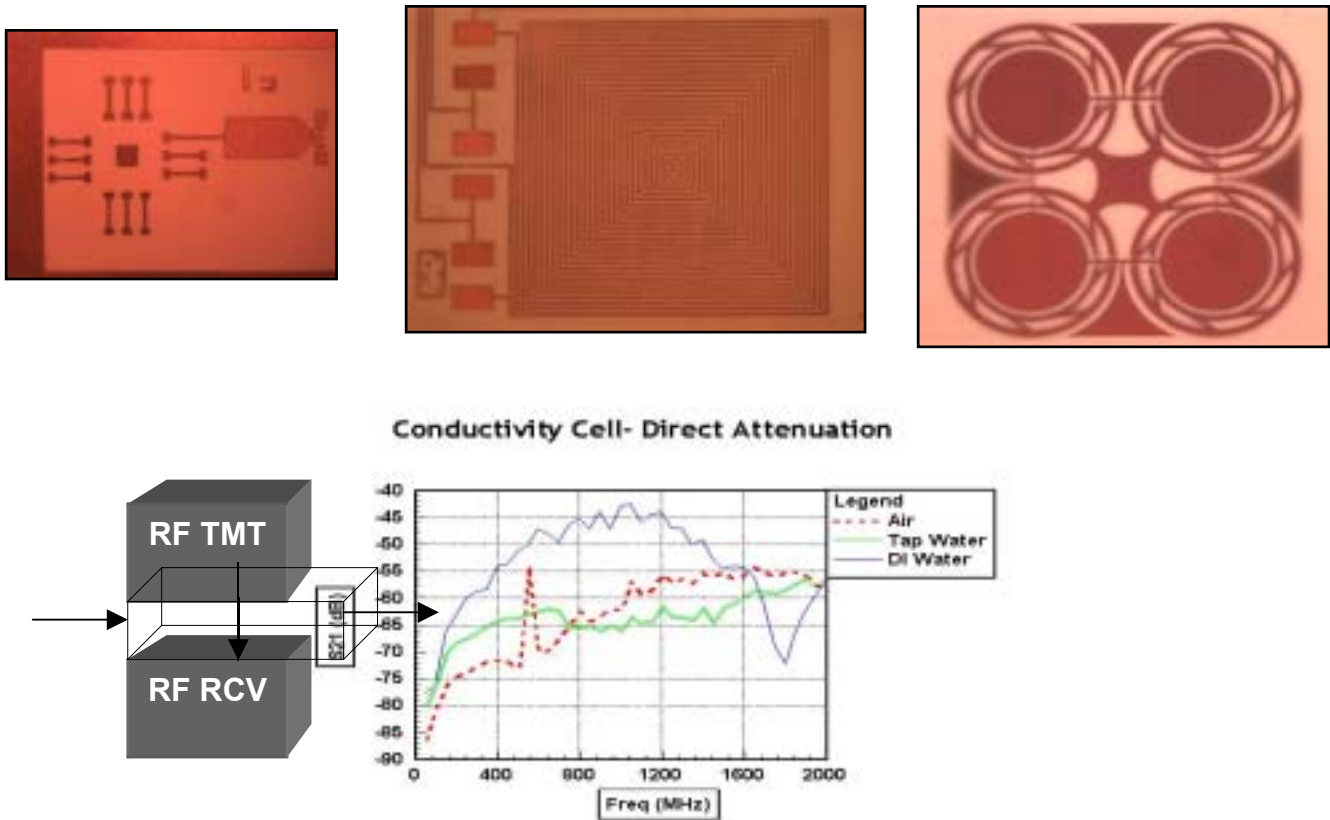

**Figure 6.** *C,T,D sensors fabricated in LCPMEMS fabrication process (above, left to right). Results from conductivity measurements of a laminated cell in a direct RF measurement mode. This mode has a small channel between the coils (left) and a direct attenuation measurement is made (right).*

### Integrated microchip Ionsprayer


We have focused on the microchip ion sprayer towards modeling and understanding a direct introduction liquid sprayer with integrated ion lensing. Next steps are the fabrication of the chip using our developed LCPMEMS fabrication process for fluidics, sprayer and integrated lens system.

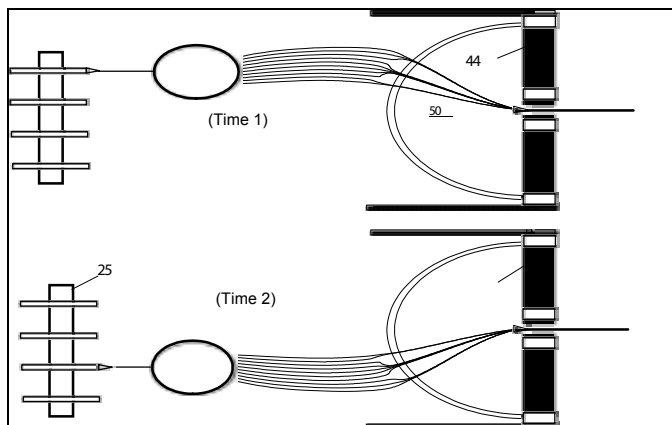

**Figure 7.** *SIMION modeling of a spray chip with hemispherical laminated lens system focusing ions into a detector aperture showing increased compression of the sprayed ions from tip array (at left).*

## Sensor Array Packaging

Also included in the project is the creation of a system in a package approach towards integrated marine microsensors. We have proceeded with a folded flex system in a package approach and are currently in design and fabrication efforts with Tessera Inc.

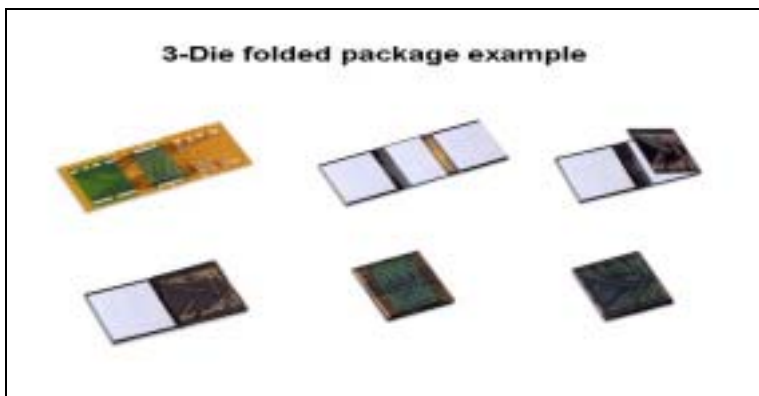

*Figure 8. Folded flex system in package approach for the microdatalogger portion of the integrated fieldable microsystem.*

## RESULTS

We have contributed to advances in the field of Maritime MEMS and the techniques needed to fabricate microfluidic-based systems for field analytical purposes. We have initiated primary work in the development of PCBMEMS, an emerging field. This project has encountered expected difficulties in transferring lab techniques into the field. Our current focus is to push integration of the explosive lab prototypes into the field for homeland security support.

## IMPACT/APPLICATIONS

This proof of technology demonstration has impact for both marine science and ocean systems applications as a design and development paradigm that can allow the creation of inexpensive microsensors. Ocean Observing Systems, Operational Oceanography and Homeland Security will benefit from the new manufacturing and technology approach.

## TRANSITIONS

We expect this technology practice to emerge as the global ocean observing efforts emerge and large sensor arrays and sensor grids are implemented.

## RELATED PROJECTS

We are involved in another (SMDC-ARMY) project aimed at a field sensor for terrestrial monitoring applications.

## **PATENTS, PUBLICATIONS, TECHNOLOGY TRANSFER**

Fries, D.P., Steimle, G., Broadbent, H., Natarajan, S., Weller, T., Maskless Lithographic PCB/Laminate MEMS for a Salinity Sensing System, Intl. Soc . Packaging and Microelectronics, Adv. Tech Workshop, Sept 2002, Denver, CO

Fries, D.P., Securing Harbor Systems, SeaMIST: Sea Micro Integrated Systems Technology, COMMS Comm. MicroSystems Symposium 2002, Sept. 2002, Ypsilanti, MI