

A Shallow-Water Swath Bathymetry System

Roger D. Flood
Marine Sciences Research Center
State University of New York
Stony Brook, NY 11794-5000
phone: (516) 632-6971 fax: (516) 632-8820 email: rflood@sunysb.edu

Chuck Nittrouer
Oceanography Department
University of Washington

Larry Mayer
Ocean Mapping Group
University of New Brunswick
Award Number: N000149810306

LONG-TERM GOAL

Our long-term goal is to understand the processes which create and modify the sea bed in the coastal zone and to understand how seabed morphology can be studied using high-resolution swath mapping techniques (for bathymetry and backscatter).

OBJECTIVES

Swath-mapping techniques have proven extremely valuable to the study of sea-floor morphology on continental shelves, slopes and margins, mid-ocean ridges and in the deep ocean, but systems designed for continental shelf and deeper-water environments are not optimized for the shallow-water of coastal settings. Swath-mapping systems optimum for shallow water have recently become available; however, until our system became operational in late 1998 no shallow-water system existed in the U.S. academic community for use in research programs. Our objective is to fill this critical gap by obtaining, installing and using a research-grade shallow-water swath bathymetry system that can be moved between vessels as required. This kind of high-resolution morphological data will contribute to ONR programs in the coastal zone such as STRATAFORM and SAX99.

APPROACH

We are building a shallow-water swath bathymetry system designed around a Kongsberg Simrad EM 3000 multibeam echosounder which can operate in water depths of 0.5 to over 100 m. Other major system components include a TSS POS/MV (navigation and attitude), Sun and SGI computers (data processing and display), gyroscope (heading), CTD (sound velocity structure) and tide gauge (water level). The EM 3000 is a research-grade shallow-water multibeam echosounder that operates at 300 kHz and creates echosounding beams with nominal widths of 1.5°. The accuracy of the depth measurement is 5 cm. The multibeam system can be operated with either one or two transducer heads. With one transducer head (our standard operational mode), about 120 beams are created, the maximum ping rate is 20 times a sec and the maximum swath width is four times water depth. When an optional

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 30 SEP 1999		2. REPORT TYPE		3. DATES COVERED 00-00-1999 to 00-00-1999	
4. TITLE AND SUBTITLE A Shallow-Water Swath Bathymetry System				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) State University of New York, Stony Brook, Marine Sciences Research Center, Stony Brook, NY, 11794				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			


second head is used, the number of beams doubles, the maximum ping rate is 9 times a second, and the maximum swath width is 10 times water depth. The ratio between swath width and water depth decreases as water depth increases because of the attenuation of the 300 kHz sound in the water. In water depths of 10 m and at a speed of 10 kts, the resulting bathymetric and backscatter data has an along-track spacing of about 20 cm (50 cm when using two heads) and across track spacing of as little as 30 cm. This resolution is sufficient to map medium to large-scale bed forms and other features with dimensions of about 1 meter. The EM 3000 also collects backscatter data (side-scan sonar) which is processed with a knowledge of seafloor bathymetry. Unlike other shallow-water multibeam systems, the side-scan sonar record is co-located with the bathymetry record, allowing detailed correlations between bottom morphology and sediment composition. We have installed the single-head system on the R/V Onrust, a 60-foot research vessel operated by the Marine Sciences Research Center at Stony Brook, but the installation is not permanent and the system can be moved between vessels as research opportunities arise. This project is a cooperative effort between this group and Dale Chayes and Jay Ar dai at the Lamont-Doherty Earth Observatory. Chayes and Ar dai support the installation of this system on the R/V Onrust and other vessels through a separate contract from ONR while Flood owns and operates the equipment and directs the scientific operations.

WORK COMPLETED

The items in our basic system have been purchased, installed, and integrated into a system on the R/V Onrust. We have demonstrated that the system collects high-quality data depth, backscatter, and imagery data. The portability of the system has been demonstrated in that the system, including transducer, has been installed on and removed from the R/V Onrust a number of times to allow for the vessel to be used by workers in other disciplines. We made a short cruise in the New Jersey STRATAFORM area in fall, 1998, to collect EM 3000 data in an area previously surveyed with an EM 1000 multibeam system (water depths ~10 to 200 m). We also installed our EM 3000 system on the R/V Coral Sea (Humboldt College) using a pole mount in September, 1999, to survey along the inshore end of the STRATAFORM S-Transect (water depths ~6 to 50 m). The portion of this survey deeper than 40 m overlaps with the EM 1000 survey previously done in this area. We are using the SwathEd software package of the Ocean Mapping Group, University of New Brunswick, on our computers for post-processing and display of multibeam data. The SwathEd processing package is optimized for rapid data reduction, allowing preliminary survey results to be available by the end of the cruise.

RESULTS

Initial results of our surveys have demonstrated the high-quality of the EM 3000 data products and the range of morphological elements resolvable by the system (Figure 1). Indeed, our results have already provided new insight into the range of processes important for generating the morphology of the sea floor in the coastal ocean. We have used the system on the R/V Onrust at speeds up to 10 knots and up to sea state 5. We have been able to resolve small-scale features in water depths to 200 m, and we have found several shipwrecks, most of which are not shown on existing charts. Sedimentary moats found around many of the shipwrecks suggest long-term sediment transport directions. Other morphological elements resolved include large and small sand waves, boulders with moats, bedrock outcrops, sand mining pits, drag marks, buoy anchors, debris dropped by barges and cargo ships, and unusual morphology apparently created by a hard-substrate communities (including corals and sponges).

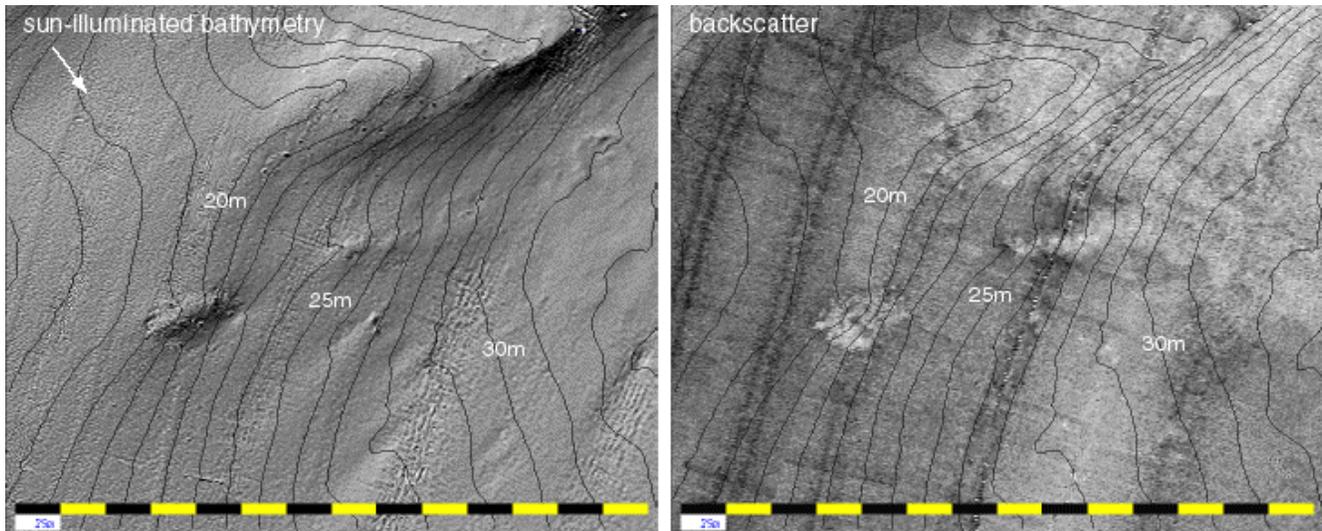

1. Example EM 3000 multibeam images from western Long Island Sound collected as part of the MSRC REU program. Left: image of sea-bed morphology created by shining a light across the bottom topography from the upper left (sun-illuminated bathymetry). One meter contour intervals are labeled. Right: image of backscatter for the same section of the sea bed as imaged on the left (higher backscatter is lighter gray shade). Ship tracks trend NNE-SSW; gridding interval for images is 1 m. The images show natural features (e.g., east-west ridge in upper part of image with probable outcropping bedrock and sediment tails) and man-made features (e.g., circular feature in upper right that was probably created by debris dumped by a ship). Sediment tails behind small features on the sun-illuminated bathymetry show bottom flow to the lower left. Some of the topographic features in the sun-illuminated bathymetry are associated with backscatter anomalies, but many are not. Similarly, not all areas of high backscatter are associated with bathymetric features. Alternating bands on scale bar are each 25 m wide.

IMPACT/APPLICATIONS

Our work to date clearly demonstrates the high quality of the data generated by our research-grade EM 3000 multibeam system as well as the importance of multibeam data in understanding seabed morphology in the coastal regions. Our system will provide important data in support of studies into a number of acoustical and environmental problems. The system can be installed on a variety of vessels after the design and installation of appropriate mounting systems.

TRANSITIONS

We are completing the testing and evaluation phase for our system and we are applying our research-grade shallow-water multibeam system to a number of coastal problems.

RELATED PROJECTS

We have used our EM 3000 system in several studies for research and educational programs in 1999. In addition to the S-Transform survey in the STRATAFORM area, we also conducted a survey as part of the ONR-supported High Frequency Sound Interaction in Ocean Sediments DRI (SAX99).

Educational programs include classes with SUNY Stony Brook WISE (Women in Science and Engineering) and UREC (Undergraduate Research program) students and participation in the MSRC/SUNY Research Experience for Undergraduate (REU) programs. Other research programs include completing the mapping of 35 miles of the Hudson River (for the New York State Department of Environmental Conservation) and mapping from about 10 to 40 m water depths off Grays Harbor off southwest Washington State (for the Washington State Department of Ecology). We used a dual-head system for the Washington State survey. Users of our multibeam data for both the SAX99 and the Washington State studies say that our results caused experiments using bottom-mounted arrays to be revised to take into account local topography. This kind of impact is possible using our system because preliminary results of the survey are available shortly after the survey is completed.

PUBLICATIONS

Flood, R.D., 1999. High Resolution Imaging of Bed Forms in Nearshore Environments Using a Swath Mapping System (abs). Trans. American Geophysical Union, v. 80.

Flood, R.D., 1999. Multibeam Mapping in Long Island Coastal Waters (abs), Geology of Long Island and Metropolitan New York (April 24, 1999), Long Island Geologists Annual Meeting Abstract Volume.