

COMPARISON OF EXPERIMENTAL DATA TO THAT OF A SEMI-EMPIRICAL MODEL FOR HELICAL MCG'S

P.T. Tracy

Tracy Physical Sciences Research
Huntsville, AL
Ptracy1458@aol.com

Ya. Tkach

Institute of Electromagnetic Research
Kharkov, Ukraine
slt@iemr.vl.kharkov.ua

L.L. Altgilbers

Advanced Technology Directorate
U.S. Army Space and Missile Defense Command
P.O. Box 1500
Huntsville, AL 35807
Larry.Altgilbers@smdc.army.mil

Abstract

A semi-empirical model of helical magnetocumulative generators (MCGs) has been developed. Two constants that are independent of the type of helical generator and the nature of the load and a single adjustable variable (the characteristic time) have been identified. To verify this model, calculated results were compared to experimental data for four helical MCGs - the Mark IX, FLEXY-I, EF-3, and Ranchito generators. The calculated results are in good agreement with the experimental data, as well as those generated by other codes.

I. INTRODUCTION

Even though magnetocumulative generators (MCGs) have been in use for almost 50 years, their fundamental physics has not been systematically studied until recently. Texas Tech University is currently conducting a systematic experimental study of helical generators and the U.S. Army Space and Missile Defense Command (USASMDC) a theoretical study. The objective of USASMDC's effort is to benchmark a computer model that will allow them to study the physics of the helical generator in detail. In order to benchmark this model, calculated results were compared to experimental data for the Mark IX and Ranchito MCGs developed at Los Alamos National Laboratory

(LANL), the FLEXY-I developed at Loughborough University in the United Kingdom, and the EF-3 developed at the Institute of Atomic Physics in Romania. A description of the mathematical model used in the code is provided in Paper P1-E30 of this conference.

II. COMPARISON OF CALCULATED TO EXPERIMENTAL RESULTS

The dimensions of each generator are presented in Table 1 and the measured or calculated initial current, detonation velocity, load inductance, and other values in Table 2.

A. Mark IX Generator

The Mark IX was tested with two different loads having inductances of 56.5 and 35 nH. These two generator tests are referred to as the Mark IX-1 and Mark IX-2, respectively. Using the parameter values from Table 2, the output current was calculated and is plotted in Figs. 1 and 2. For a load inductance of 35 nH, the peak value of the calculated current is ~27 MA and occurs at ~190 μ s. According to [1], the measured average peak current is ~28 MA and occurs at approximately ~180 μ s. For a load inductance of 56.5 nH, the peak value of the calculated current is ~25 MA and occurs at ~200 μ s. The measured average peak current is ~24

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE JUN 2001		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Comparison Of Experimental Data To That Of Semiempirical Model For Helical MCGS				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Tracy Physical Sciences Research Huntsville, AL				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. IEEE International Pulsed Power Conference (19th). Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License.					
14. ABSTRACT A semi-empirical model of helical magnetocumulative generators (MCGs) has been developed. Two constants that are independent of the type of helical generator and the nature of the load and a single adjustable variable (the characteristic time) have been identified. To verify this model, calculated results were compared to experimental data for four helical MCGs - the Mark IX, FLEXY-I, EF-3, and Ranchito generators. The calculated results are in good agreement with the experimental data, as well as those generated by other codes.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

MA and occurs at approximately $\sim 200 \mu\text{s}$. The calculated curve closely matches the curve given in [1] over the entire range of time that data was collected.

B. FLEXY I Generator

Using the values in Table 2, the output current of the FLEXY I was calculated and is plotted in Fig. 3. The calculated peak current is $\sim 7.4 \text{ MA}$ and occurs at $\sim 150 \mu\text{s}$. According to [2], the measured peak current is $\sim 7.3 \text{ MA}$ and occurs at $\sim 150 \mu\text{s}$. The calculated curve closely matches the measured curve over the time that data was measured.

C. EF-3 Generator

Using the parameter values in Table 2, the output current of the EF-3 was calculated and is plotted in Fig. 4. The calculated peak current is $\sim 3.4 \text{ MA}$ and occurs at $\sim 200 \mu\text{s}$. According to [2], the peak current is about $\sim 2.8 \text{ MA}$ and occurs at about $\sim 190 \mu\text{sec}$. At times less than $190 \mu\text{s}$, the calculated currents are in close agreement with the measured values.

D. Ranchito Generator

Using the parameter values in Table 2, the output current of the Ranchito generator was calculated and is plotted in Fig. 5. The peak value of the current is calculated to be $\sim 2.8 \text{ MA}$ and occurs at $\sim 190 \mu\text{s}$. According to [3], the measured peak current was $\sim 1.6 \text{ MA}$ at $170 \mu\text{s}$. The experimental curve abruptly ends at this point in time. At $170 \mu\text{s}$, the calculated current

is 1.6 MA and for times earlier than $170 \mu\text{s}$, the calculated current closely matches the measured values. The calculated current goes to zero at $234 \mu\text{s}$.

III. SUMMARY

In summary, this semi-empirical model that describes the physical operation of helical MCGs appears to give reasonable results over a relatively wide range of design and operating conditions. The two areas requiring further study are the time dependent behavior of the electrical resistance over the complete period of operation and the physical nature of the characteristic time. These studies are being carried out at the present time and will be the subject of future papers.

IV. REFERENCES

- [1] C.M. Fowler and R.S. Caird, "The Mark IX Generator", Seventh IEEE Pulsed Power Conference, Monterey, CA, June 11-14 (1989) and private communications with C.M. Fowler.
- [2] B.M. Novac, et al., "Design, Construction, and Testing of Explosive-Driven Helical Generators", Aug (1994).
- [3] E.R. Parkinson, K.A. Jamison, et al., "Continued Benchmarking of an FCG Code", Proceedings of the 12th Pulsed Power Conference, Monterey (1999).

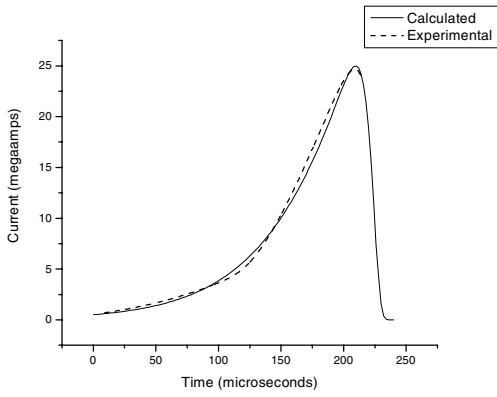


Figure 1. Calculated and Measured Output Current of the Mark IX-1 Generator.

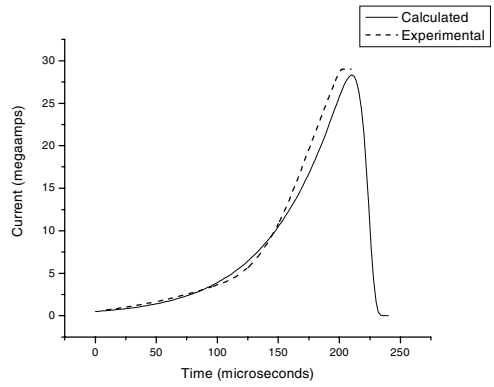


Figure 2. Calculated and Output Current of the Mark IX-2.

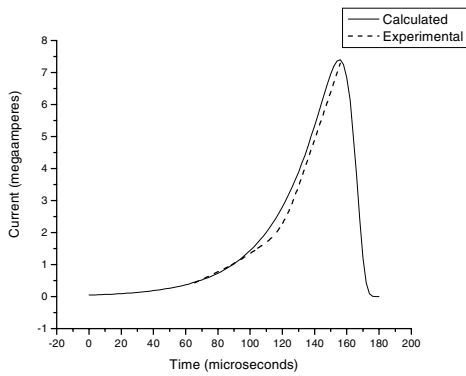


Figure 3. Calculated and Measured Output Current of the FLEXY I Generator.

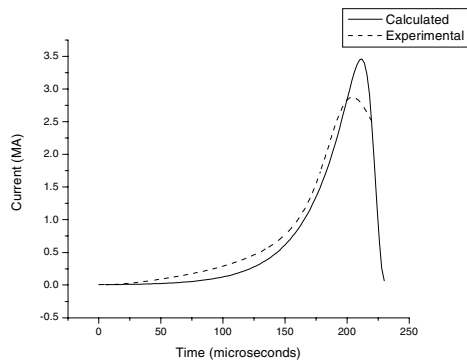


Figure 4. Calculated and Measured Output current of the EF-3 Generator.

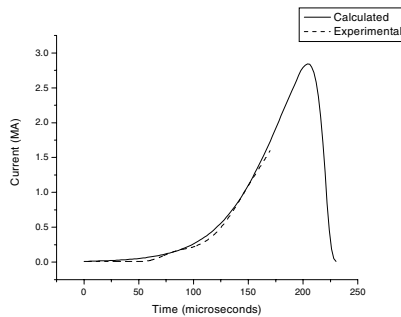


Figure 5. Calculated and Measured Output Current of the Ranchito Generator.

Generator	Number Of Sections	Stator Length (cm)	Stator Radius (cm)	Armature Length (cm)	Armature Radius (cm)	Initial Inductance (μH)
Mark IX	4	111.8	17.8	1730	8.65	9.445
EF-3	15	150	16	-	8	741.6
FLEXY I	8	112	21.2	-	10.6	59.4
Jemez	2	46.2	10.2	76.2	-	28.8
Ranchito	5		11.43			148.3

Table 1. Dimensions and Initial Inductance of the Helical Generators Under Investigation

Generator	I_0 (kA)	V_{det} (km/s)	R_0 (Ohms)	t_0 (μs)	τ (μs)	L_{load} (nH)
Mark IX-1	500	8.83	3.15×10^{-4}	196	48	35
Mark IX-2	500	8.83	3.15×10^{-4}	196	48	56.5
EF-3	10	8.25	0.0148	198	31	110
FLEXY I	48	8.2	0.00212	137	29.2	40
Jemez 01	4	8.4	0.0179	93.7	17.25	36.4
Jemez 02	20	8.4	0.00358	93.7	20.5	36.4
Ranchito		8.25	0.0148	198	30.7	330

Table 2. Initial and Calculated Values for the Helical Generators Under Investigation.