

INVESTIGATION OF THE EFFECTS OF WATERLINE SWITCH CAPACITANCE ON THE ELECTRICAL PREPULSE OF THE Z-ACCELERATOR*

R. W. Shoup
Defense Threat Reduction Agency
1680 Texas Street S. E.
Kirtland Air Force Base, NM 87117-5669, USA

R. B. Spielman, K. W. Struve, and W. A. Stygar
Sandia National Laboratories
P. O. Box 5800, Mail Stop 1194
Albuquerque, NM 87185-1194, USA

Abstract

The Z-accelerator at the Sandia National Laboratories (SNL) was modified in 1996 to deliver a 20 MA pulse to a z-pinch load in 100 ns. The pulsed-power driver is a 36-module waterline accelerator. Each waterline contains four self-break switches as part of the pulse-forming section. A study was conducted to investigate the effects of increasing the capacitance of the waterline switches on the shape of the electrical prepulse at the load. Past studies have shown that increasing the prepulse at the z-pinch load increases the x-ray output power. In this study, one set of switches with its surrounding waterline hardware was modeled in 3-D and capacitance calculated using the electrostatic code, COULOMB. The capacitance values were used in a SCREAMER model of the Z-accelerator. SCREAMER, an SNL-developed, lumped-element circuit code was used to calculate the time-dependent current waveforms delivered to the z-pinch load. The design was changed and a new capacitance matrix and output waveforms were calculated. This paper presents the results of the COULOMB 3-D modeling, and the SCREAMER circuit-model analyses.

I. INTRODUCTION

In some applications of pulsed power accelerators it is desirable to produce an electrical output that contains no prepulse. A water switching technique was developed at Sandia National Laboratories which reduces the prepulse voltage by reducing the capacity across the waterline switch [1]. The switching technique allows the pulse forming lines to be stacked in parallel and electrically isolated from the load after the line has been discharged.

On the Z-accelerator, the prepulse is suppressed by the use of a prepulse shield in the switch geometry.

In other applications, it is desirable to produce an output that contains a prepulse. In an experiment performed to investigate the influence of a prepulse current on a fiber z-pinch, it was reported [2] that the x-ray yield increased by several factors when the prepulse current increased.

In the subject study, the 3-D models of the waterline switch and associated hardware are developed for configurations with and without a prepulse shield. The computer code COULOMB [3] was used to develop the model and to calculate the capacitance of the switch for each case. The switch capacitance for each one was incorporated in the SCREAMER model of the Z-accelerator. SCREAMER [4] was used to calculate the resulting time-dependent current prepulse waveforms at the z-pinch load. The results of the COULOMB and SCREAMER analyses are presented for a waterline configured with and without a prepulse shield.

II. THE SWITCH MODEL

Each waterline in the pulse-forming section of the Z-accelerator contains four self-break switches, a prepulse shield, and supporting hardware. The geometrical model was developed in COULOMB using the computer-aided-drawing capabilities of the software. The waterline was modeled as a two-section metal cylinder. One section was drawn as a 68" diameter cylinder, 23" long. The second section was drawn as a 54" diameter cylinder, 22.5" long. The prepulse shield was modeled as a 0.5" thick plate, 54" in diameter, and containing a 15.25" diameter hole in each quadrant of the shield. The prepulse shield was situated in between the two water-filled cylinders.

* Work performed at Sandia National Laboratories. Sandia is a multi-program laboratory operated by Sandia Corporation, a Lockheed Martin Company for the United States Department of Energy under Contract No. DE-AC04-94AL85000.

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE JUN 1999	2. REPORT TYPE N/A	3. DATES COVERED -	
4. TITLE AND SUBTITLE Investigation Of The Effects Of Waterline Switch Capacitance On The Electrical Prepulse Of The Zaccelerator		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Defense Threat Reduction Agency 1680 Texas Street S. E. Kirtland Air Force Base, NM 87 117-5669, USA		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited			
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License.			
14. ABSTRACT The Zaccelerator at the Sandia National Laboratories (SNL) was modified in 1996 to deliver a 20 MA pulse to a z-pinch load in 100 ns. The pulsed-power driver is a 36- module waterline accelerator. Each waterline contains four self-break switches as part of the pulse-forming section. A study was conducted to investigate the effects of increasing the capacitance of the waterline switches on the shape of the electrical prepulse at the load. Past studies have shown that increasing the prepulse at the z-pinch load increases the x-ray output power. In this study, one set of switches with its surrounding waterline hardware was modeled in 3-D and capacitance calculated using the electrostatic code, COULOMB. The capacitance values were used in a SCREAMER model of the Z-accelerator. SCREAMER, an SNL-developed, lumped-element circuit code was used to calculate the time-dependent current waveforms delivered to the z-pinch load. The design was changed and a new capacitance matrix and output waveforms wem calculated. This paper presents the results of the COULOMB 3-D modeling, and the SCREAMER circuitmodel analyses.			
15. SUBJECT TERMS			
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	SAR
			18. NUMBER OF PAGES 4
			19a. NAME OF RESPONSIBLE PERSON

Each switch pair was modeled as two metal spheres connected to supporting structures by metal rods. The two spheres are separated by a 2.756" gap. A 2.75" diameter sphere is mounted on a rod that is 0.375" in diameter, and 1.0" long on the input line. A 2.5" diameter sphere is mounted on a rod that is 0.75" in diameter and 7.75" long on the output line. This side of the switch extends through the 15.25" diameter hole in the prepulse shield. The supporting structures were modeled as oblong shaped metal rings. The top ring was 6" wide and 9" long. The bottom ring was 2" wide and 7" long. The four switches have a periodic symmetry about the center axis; consequently, only one quadrant of the model was needed to calculate the capacitance of the switches. The COULOMB 3-D model of the waterline with four switches is shown in Figure 1 where the waterline is rotated 90° counter-clockwise from the horizontal. One quadrant of the waterline section is presented in Figure 2.

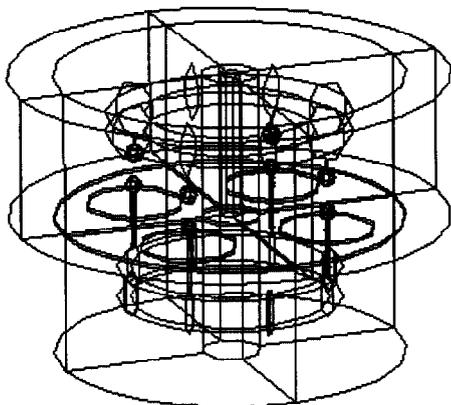


Figure 1. COULOMB 3-D model of the waterline switches on the Z-accelerator.




Figure 2. One quadrant of the waterline switch with prepulse shield.




Figure 3. One quadrant of the waterline switch without a prepulse shield.

The upper volume, the lower volume, and the hole in the prepulse shield contained water as a dielectric ($\epsilon_r = 81$). The rear post in the upper volume was modeled as a polyethylene ($\epsilon_r = 2.26$) insulator. All other parts are metal and defined as four conductors. Conductor 1 is the upper electrode, rod, and support structure. Conductor 2 is the lower electrode, rod, and support structure. Conductor 3 is the outer wall of the top cylinder. Conductor 4 is the outer wall of the bottom cylinder, the prepulse shield, and the rear post of the bottom cylinder.

The model of the waterline switch without a prepulse shield is shown in Figure 3 where the waterline is rotated 90° counterclockwise from the horizontal. The conductors were defined the same as the case with a prepulse shield except that Conductor 4 was made up of the outer wall of the bottom cylinder and the rear post.

III. CAPACITANCE CALCULATIONS

COULOMB uses the boundary element method to solve for field distributions and to calculate the inductance and capacitance of a system of conductors. COULOMB was used to calculate the capacitance of the switch electrodes and other conductors in the Z-waterlines. The conductors were assigned numbers as described above. The switch capacitance is given as C_{12} , the capacitance from Conductor 1 to Conductor 2, or as C_{21} , the capacitance from Conductor 2 to Conductor 1. COULOMB calculated both for the switch configured with a prepulse shield and both for the switch without a prepulse shield.

The results of the switch capacitance calculations are presented in Table 1.

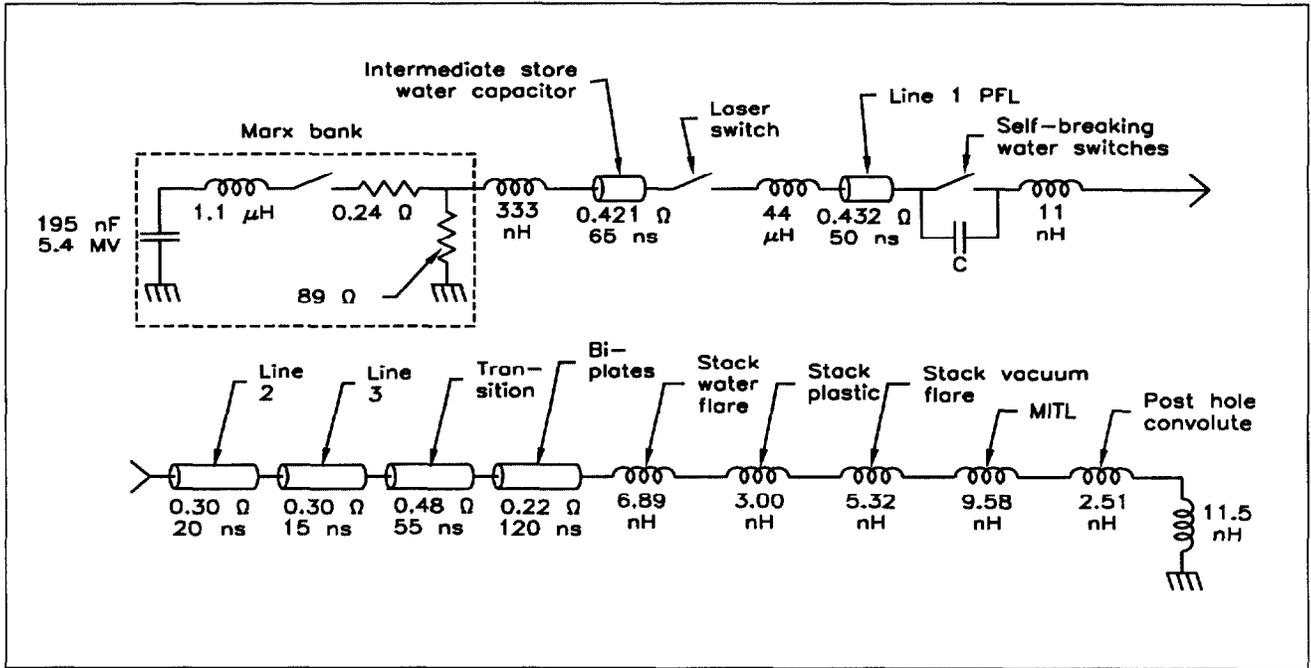


Figure 4. SCREAMER circuit model of one level of the Z-accelerator

Table 1. Capacitance of Z-waterline switch

	1 - switch	4 - switches
With PPS	88 pF	352 pF
Without PPS	255 pF	1020 pF

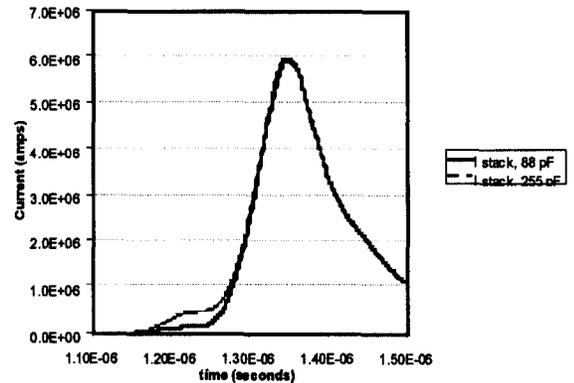


Figure 5. SCREAMER output current predictions for one level of the Z-accelerator.

IV. CIRCUIT MODEL OF Z

The SCREAMER model of the Z-accelerator is presented in Figure 4. The circuit represents nine transmission lines in parallel on one of four levels. The capacitance, C, across the switch represents the capacitance of four water line switches in parallel on each of the nine lines or 36 capacitors in parallel. The current output of the waterline is plotted in Figure 5 for the two cases of interest.

V. ANALYSIS RESULTS

The results of the COULOMB switch-capacitance calculations and the SCREAMER prepulse-current calculations are summarized in Table 2 for the Z-waterline switches configured with and without a prepulse shield.

Table 2. Capacitance and prepulse current summary.

	Switch Capacitance	I-prepulse @ 1.25 μsec
With PPS	88 pF	223 kA
Without PPS	255 pF	473 kA

VI. CONCLUSIONS

It is apparent from the results that the prepulse shield does suppress the prepulse current. Use of the prepulse shield decreases the capacitance of the four waterline switches from 1020 pF to 352 pF. On the other hand, if a greater prepulse current is desired, the prepulse shield could be removed.

The Z-accelerator contains several more switches in the waterline each equipped with prepulse shields. These switches are presently shorted out. The COULOMB and SCREAMER models developed in the subject study could be used to investigate the effects of varying the capacitance on multiple waterline switches on the electrical output of the Z-accelerator.

VII. REFERENCES

- [1] D. L. Johnson, J. P. VanDevender, and T. H. Martin, "Low Prepulse, High Power Density Water Dielectric Switching," in *Proc. of IEEE Pulsed Power Conference*, 1979, p. 191.
- [2] A. Lorenz, F. N. Beg, J. Ruiz-Camacho, J. Worley, and A. E. Dangor, "Influence of a Prepulse Current on a Fiber Z Pinch," *Physical Review Letters*, Volume 81, Number 2, pp. 361-364, 13 July 1998.
- [3] "COULOMB, Three-dimensional, Electric Field Solver, Version 4.0, Users and Technical Manual," Integrated Engineering Software, Winnipeg, Manitoba, Canada.
- [4] M. L. Kiefer, K. L. Fugelso, K. W. Struve, M. M. Widner, "SCREAMER, A Pulsed Power Design Tool, User's Guide for Version 2.0," August 25, 1995.