

DTIC FILE COPY

Reproduced by

AD-A955 988

IT SERVICE CENTER
TECHNICAL INFORMATION AGENCY

U. S. BUILDING, DAYTON, 2, OHIO

REEL-C 0520 S DTIC
0520 ELECTED NOV 23 1990 B D

A.T.I. 161843

"NOTICE: When Government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the U.S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto."

DISTRIBUTION STATEMENT A

Approved for public release
Distribution Unlimited

90 11 23 018

THIS IS A GOVERNMENT PUBLICATION

UNCLASSIFIED

ATI 161 343

(Copies obtainable from ASTIA-DSC)

Office of Naval Research, Naval Research Lab., Wash., D.C.
(NRL Report 4621)

The Velocity of Sound in Sea Water at Zero Depth

Del Grosso, V. A. 13 June 1958 7 pp. tables, graphs

Waves, Sound - Velocity
Acoustics, Underwater
Waves, Sea
Sound

Physics (E3)
Radiation (S)

UNCLASSIFIED

Accession For

NTIS GRA&I

DTIC TAB

Unannounced

Justification _____

By _____

Distribution/ _____

Availability Codes

Avail and/or
Dist Special

A-1



UNANNOUNCED

NRL REPORT 4002

THE VELOCITY OF SOUND IN SEA WATER AT ZERO DEPTH

V. A. Del Grosso

Propagation Branch
Sound Division

ATT No. 161843
ASTIA FILE COPY

June 11, 1952



NAVAL RESEARCH LABORATORY
WASHINGTON, D.C.

ABSTRACT

The velocity of sound has been measured in natural sea water samples at megacycle frequencies by means of modern interferometric techniques. From these measurements, an empirical equation has been formulated, and new tables and graphs of the velocity of sound in natural sea water at "zero" depth are presented on the basis of this equation.

The validity of utilizing these velocity tables at sonar frequencies is based on theoretical work which indicates the error introduced by so doing is at least an order of magnitude smaller than the claimed accuracy. The accuracy of these tables is estimated to be within ± 0.2 meter per second. The velocity values range approximately 2-4 meters per second higher than those in existing tables.

PROBLEM STATUS


This is an interim report; work on the general project is continuing.

AUTHORIZATION

NRL Problem S02-04
RDB Project NR 522-040

Manuscript submitted May 15, 1952

DISCLAIMER NOTICE

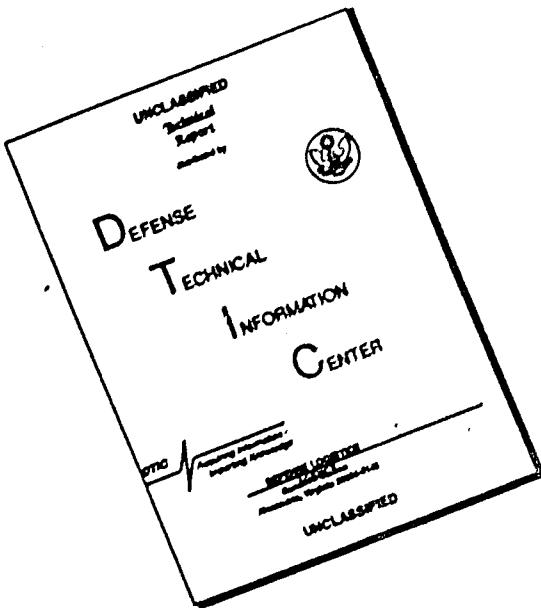

**THIS DOCUMENT IS BEST
QUALITY AVAILABLE. THE COPY
FURNISHED TO DTIC CONTAINED
A SIGNIFICANT NUMBER OF
PAGES WHICH DO NOT
REPRODUCE LEGIBLY.**

UNCLASSIFIED

Naval Research Laboratory, Report 4002.
THE VELOCITY OF SOUND IN SEA WATER AT ZERO
DEPTH, by V. A. Del Grossi, 39 pp. & figs.,
June 11, 1952.

The velocity of sound has been measured in natural sea water samples at megacycle frequencies by means of modern interferometric techniques. From these measurements, an empirical equation has been formulated, and new tables and graphs of the velocity of sound in natural sea water at "zero" depth are presented on the basis of this equation.

The validity of utilizing these velocity tables at sonar frequencies is based on theoretical work which indicates the error introduced by so doing is at least an order of magnitude smaller than the claimed (over)

Unclassified

1. Underwater
sound - Velocity

1. Del Grossi, V. A.

UNCLASSIFIED

Naval Research Laboratory, Report 4002.
THE VELOCITY OF SOUND IN SEA WATER AT ZERO
DEPTH, by V. A. Del Grossi, 39 pp. & figs.,
June 11, 1952.

The velocity of sound has been measured in natural sea water samples at megacycle frequencies by means of modern interferometric techniques. From these measurements, an empirical equation has been formulated, and new tables and graphs of the velocity of sound in natural sea water at "zero" depth are presented on the basis of this equation.

The validity of utilizing these velocity tables at sonar frequencies is based on theoretical work which indicates the error introduced by so doing is at least an order of magnitude smaller than the claimed (over)

Unclassified

1. Underwater
sound - Velocity

1. Del Grossi, V. A.

Naval Research Laboratory, Report 4002.
THE VELOCITY OF SOUND IN SEA WATER AT ZERO
DEPTH, by V. A. Del Grossi, 39 pp. & figs.,
June 11, 1952.

The velocity of sound has been measured in natural sea water samples at megacycle frequencies by means of modern interferometric techniques. From these measurements, an empirical equation has been formulated, and new tables and graphs of the velocity of sound in natural sea water at "zero" depth are presented on the basis of this equation.

The validity of utilizing these velocity tables at sonar frequencies is based on theoretical work which indicates the error introduced by so doing is at least an order of magnitude smaller than the claimed (over)

Unclassified

1. Underwater
sound - Velocity

1. Del Grossi, V. A.

The velocity of sound has been measured in natural sea water samples at megacycle frequencies by means of modern interferometric techniques. From these measurements, an empirical equation has been formulated, and new tables and graphs of the velocity of sound in natural sea water at "zero" depth are presented on the basis of this equation.

The validity of utilizing these velocity tables at sonar frequencies is based on theoretical work which indicates the error introduced by so doing is at least an order of magnitude smaller than the claimed (over)

Unclassified

CONTENTS

INTRODUCTION	1
BACKGROUND	1
EXPERIMENTAL PROCEDURE	1
RESULTS AND DISCUSSION	2
THE CONCEPT OF SALINITY	3
VALIDITY OF THESE MEASUREMENTS AT SONAR FREQUENCIES	4
ACKNOWLEDGMENTS	4
REFERENCES	5
TABLES AND FIGURES	6

THE VELOCITY OF SOUND IN SEA WATER AT ZERO DEPTH

INTRODUCTION

An accurate knowledge of the velocity of sound in sea water as a function of temperature, chemical composition (salinity and dissolved gas content), and pressure (depth) is essential to sonar—not only for ranging determinations but for calculation of possible refraction which may operate either to channel the sound energy or to send this energy into the ocean depths.

Available tables for the calculation of sound velocity in the ocean are based either on theoretical computations or radio-acoustic ranging (1-5). These latter field measurements, however, assume the existence of homogeneous water between two distant points. The theoretical tables use compressibility and density determinations made over forty years ago and assume the temperature dependence of specific heat for distilled water to be the same as for sea water.

Kuwahara's tables (3), calculated from empirical formulas for the compressibility of sea water, are as accurate as any, and are generally used in this country. These tables have been graphically presented (6), and used by the Naval Research Laboratory. A comparison of velocity values obtained from various tables is made for "normal" sea water of 35 parts per thousand (ppt or ‰) salinity in Table 1.

BACKGROUND

Preliminary measurements of sound velocity in sea water with a less accurate instrument (7) (i.e., ± 1 m/sec) indicated that Kuwahara's tables yield velocities that are too low by 3-4 m/sec. The Revised British Admiralty Tables (4) yield velocities slightly lower than Kuwahara's. Kuwahara claims an accuracy of 3 m/sec for his tables, but the preliminary evidence seemed to indicate that his error is systematic and that his values are consistently low. More information was desired to check the need for revision of sound velocity tables.

The ultrasonic interferometers in present use at the Naval Research Laboratory, capable of measuring the velocity of sound in liquids to a precision of 1 part in 10,000, were chosen as ideal instruments for checking the existing tables.

EXPERIMENTAL PROCEDURE

Samples of sea water were obtained from the Bermuda-Key West area by various field parties from the Sound Division, NRL. Of the samples received, three were selected

*For convenience, see chart after the text.

on the basis of clarity and freedom from foreign material. Data concerning these samples will be found in Table 2. The samples were received within one to four days after collection, and their sound velocity was determined with a one-megacycle ultrasonic interferometer as soon as received, and at intervals throughout the investigation. Chlorinities were determined by the Mohr method of AgNO_3 titration using a special elongated-scale burette made by the Machlett Company and patterned after a modification of the original Mohr burette suggested by the Woods Hole Oceanographic Institution. Toward the end of this investigation a potentiometric titration with the Beckman automatic titrator and a $\text{Ag}-\text{AgCl}$ electrode in conjunction with a calomel reference electrode was developed. This technique frees the operator from the close control required as the end point is approached, and eliminates the human factor in choosing the relatively difficult to determine colorimetric end point.

The temperature of the interferometer bath was controlled by Magna-Set thermo-regulators adjusted to better than $\pm 0.01^\circ \text{C}$ by means of a Leeds and Northrup 8160 Platinum Resistance Thermometer in conjunction with an L&N G-1 Mueller Bridge and an L&N 2430-A galvanometer. The interferometer cell temperature was determined by Bureau of Standards calibrated mercury-in-glass thermometers which could be estimated to $\pm 0.02^\circ \text{C}$.

To obtain various salinities in the range 19-41 parts per thousand, the natural sea water samples were diluted with distilled water and evaporated under vacuum. The chlorinity of each of the solutions was actually determined by Mohr titration in the same manner as the chlorinities of the original samples. The salinities were calculated by the empirical relationship established by an International Commission (8). This relationship is

$$\text{Salinity} = 0.03 + 1.805 \times \text{Chlorinity}.$$

Sound velocities in the various sea water samples obtained by the above method were determined over a temperature range of 0° to 40°C . The measurements were made at a one-megacycle frequency, but several determinations were made at three megacycles.

RESULTS AND DISCUSSION

The experimental determinations of sea water sound velocity were plotted in two series of graphs (not given here), velocity vs. temperature with salinity parameter and velocity vs. salinity with temperature parameter. The points in the latter graph formed straight lines for individual temperatures. From this graph, velocity values at integral temperatures and salinities were read to ± 0.1 meter per second. These values were then processed by the method of least squares to yield the following empirical equation for the velocity of sound in sea water over a range of salinities from 19-41 parts per thousand and a range of temperatures from 0° to 40°C .

$$\begin{aligned} V_m &= 1448.6 + 4.613 t_c - .0523 t_c^2 \\ &\quad + 1.25 (S-35) - .011 (S-35) (t_c) + .0027 \times 10^{-3} (S-35) t_c^3 \\ &\quad - 2 \times 10^{-7} (S-35)^4 (1 + .577 t_c - .0072 t_c^2) \end{aligned}$$

The last term of this equation becomes significant as salinity approaches zero, and yields velocities in agreement with experimental values for distilled water ($S = 0^\circ/\text{psu}$). However, as no determinations were made from 0-19 parts per thousand salinity, the use of this equation in this range of salinities is not recommended. In Table 3 the experimental determinations of velocity are compared with the velocities corresponding to the same physical conditions obtained by the use of the empirical equation.

No significant difference was observed between the three natural sea water samples obtained from different locations when their measured velocities were compared with the sound velocities obtained by use of the empirical equation. No change in measured sound velocity was detected in any of the natural sea water samples over an approximately two-week period after receipt.

Table 4 is a comparison of velocity values obtained from Kuwahara's tables and the empirical equation.

Figure 1 and Figures 1a-g are graphical representations of this equation in metric units and Figure 2 and Figures 2a-p are the same graphs in British units. Figures 3 and 4 show the temperature dependence of the salinity coefficient of velocity in metric and British units respectively, together with a comparison of Kuwahara's values.

Tables 5, 6, and 7 are the corrections to the velocity of sound in sea water of 35 parts per thousand salinity at 0°C temperature and "zero" depth (V_0 0°C, 35 ppt, $Op = 1448.6$ m/sec) for changes in temperature and/or salinity.

Table 5 contains values of V_t , the temperature correction to the velocity of sound in sea water of 35 ppt salinity referred to a temperature of 0°C. Table 6 contains values of V_s , the salinity correction to the velocity of sound in sea water at 0°C temperature referred to a salinity of 35 ppt. Table 7 contains values of V_{st} , the combined salinity-temperature correction to the velocity of sound in sea water of 35 ppt salinity and 0°C temperature for any simultaneous changes of temperature and salinity. These tables are believed to yield values of sound velocity to the same degree of precision as the empirical equation, i.e., better than ± 0.2 m/sec.

THE CONCEPT OF SALINITY

A word of caution is advisable in the physical interpretation of these tables. The concept of salinity has been established by an International Commission and salinity is defined as "the total amount of solid material in grams contained in one kilogram of sea water when all the carbonate has been converted to oxide, the bromine and iodine replaced by chlorine, and all organic matter completely oxidized" (8). It has been found that "regardless of the absolute concentration, the relative proportions of the different major constituents are virtually constant except in regions of high dilution (low salinity) where minor deviations may occur" (8). Thus salinity is usually determined by measuring chlorinity, a defined term, now redefined to be made independent of changes in atomic weights thus: "The number giving the chlorinity is, grams per kilogram of a sea water sample is identical with the number giving the mass in grams of 'atomic weight silver' just necessary to precipitate the halogens in 0.3285233 kilogram of the sea water sample." Because of changes in atomic weights, the original definition of chlorinity is now called the chlorine-equivalent. The chlorine-equivalent is the quantity determined by the AgNO_3 titration, and the ratio of chlorine-equivalent to chlorinity is at present 1.00045. Neither the chlorine-equivalent nor the chlorinity represent the actual amount of chlorine in a sea water sample; bromine and iodine, as well as chlorine, participate in the AgNO_3 titration, whereas fluorine does not. Neither does the salinity, by definition, represent the total quantity of dissolved solids in sea water. The technique of determining the defined salinity, however, yields reproducible results. The following empirical equation has been obtained (3) for the dissolved solids content:

$$S^2 = 0.073 + 1.311 \times C^{1.3} \text{ g.}$$

It can be shown that the total amount of dissolved solids is greater than the defined salinity.

The point to be brought forth here is that Knudsen's Hydrographical Tables (in widespread use by oceanographers) have been shown to hold very well over the normal range of the concentration of sea water but are not necessarily valid for highly diluted or concentrated sea water. The diluted samples (from the Baltic Sea) used in preparing Knudsen's tables had been diluted by river water containing relatively large quantities of dissolved solids. Thus, the equation relating salinity to chlorinity shows a salinity of 0.93 ppt for zero chlorinity. The salinity determined by titration of sea water that had been diluted by water containing a lesser quantity of dissolved solids would be smaller than that obtained from Knudsen's tables. Conversely, if the sea water were diluted with water containing a greater quantity of dissolved solids, the salinity obtained from Knudsen's tables would be too low.

The validity of the chlorinity-salinity-density relationships as established by the International Commission depends upon the ratios of the more abundant substances in sea water being virtually constant. However, "chlorinities" determined by titration of sea water diluted by melting sea ice were consistently higher than those computed from density measurements (10,11). In this case, the diluting water was essentially distilled water. The dependence of the Cl-S-density relations on the dissolved solids content of the diluting water and the restricted application of these relations to highly diluted water occurring naturally or prepared in the laboratory should be kept in mind.

The sea water samples used in this investigation were prepared by evaporation under vacuum or by dilution with distilled water of "mid-ocean" water. Previous work has shown the velocity of sound in sea water to be an approximately linear summation of the velocities of the components (7), and thus the validity of this work also depends on the constancy of the ratios of major constituents of sea water.

VALIDITY OF THESE MEASUREMENTS AT SONAR FREQUENCIES

A question arises concerning the validity of utilizing at sonar frequencies these velocity measurements obtained at megacycle frequencies. A relaxational phenomenon exists for sea water with a frequency of about 200 kc at 22.5° C. It is true that a small dispersion of sound velocity accompanies a relaxational absorption, but the generally accepted work of Kneser (13) shows this dispersion to be very small indeed. He gives the expression

$$V_{\infty}^2 - V_0^2 = \frac{2}{\pi} \alpha_m^* V_0 V_x$$

where V_0 is the sound velocity at very low frequency, V_x is the sound velocity at very high frequency, and α_m^* is the maximum value of the amplitude coefficient of absorption per wavelength for the relaxational frequency N_m . This can be written approximately as

$$\frac{V_x - V_0}{V} \approx \frac{\alpha_m^*}{\pi}$$

Using the approximate value of 50×10^{-12} obtained by Wallen (12) for α_m^* and 1.5×10^7 cm.⁻¹ sec.⁻¹ for $V_x - V_0 \approx 0.024$ meter sec., a value which is well within experimental error,

ACKNOWLEDGMENTS

I am grateful to Dr. W. E. Harkness, Director of the Naval Research Laboratory, for his permission to publish this work; to Dr. G. E. Moore, Head of the Acoustics Division, for his interest and support; and to Mr. R. L. Johnson, Head of the Chemistry Division, for his help in the preparation of the tables.

advice; to Paul Fougère,* who performed many of the determinations; and to B. J. Schweitzer and C. A. Boudreau for generous help with the calculations.

* Now at Boston College, Chestnut Hill, Mass.

REFERENCES

1. Stephenson, E. B., "Velocity of Sound in Sea Water," Phys. Rev. 21, Series 2, 181-185 (1923)
2. Heck, N. H., and Service, J. H., "Velocity of Sound in Sea Water," U.S. Coast and Geodetic Survey, Spec. Publ. No. 108 (1924)
3. Kuwahara, S., "Velocity of Sound in Sea Water and Calculation of the Velocity for Use in Sonic Sounding," Hydrographic Rev. 16, 123-140 (1939)
4. Mathews, D. J., "Tables of Velocity of Sound in Pure Water and Sea Water," 2nd ed. (British Admiralty Publication H. D., 1930), p. 282
5. Wood, A. B., "A Textbook of Sound," 2nd ed. (G. Bell and Sons, London:1941), pp. 261-266
6. Stephenson, E. B., and Woodsmall, F. J., "The Velocity of Sound in Sea Water," NRL Report No. S-1722, 11 April 1941
7. Weissler, A., and Del Grosso, V. A., "The Velocity of Sound in Sea Water," J. Acoust. Soc. Am. 23, 219-223 (1951)
8. Sverdrup, H. U., Johnson, M. W., and Fleming, R. H., "The Oceans," (Prentice Hall, Inc., New York:1942), p. 51 and references contained therein
9. Lyman, J., and Fleming, R. H., J. Marine Research 3, 134-146 (1940)
10. "Scientific Results of Norwegian North Polar Expedition with the Maud," J. Malmgren 1, No. 5 (1927)
11. Ibid., Sverdrup, H. U., 4, No. 2 (1929)
12. Wilson, O. B., and Leonard, R. W., "Absorption of Ultrasonic Waves in Aqueous Solutions of Magnesium Sulfate," Univ. of California, Dept. of Physics, Tech. Report No. 4, Contract N6 ont-27507, June 1951
13. Bergmann, L., "Der Ultraschall und Seine Anwendung in Wissenschaft und Technik," 5 ed. (S. Hirzel Verlag, Stuttgart, 1940), pp. 344-353

TABLES AND FIGURES

<u>TABLES</u>	<u>NO.</u>	<u>PAGE</u>
Velocity of Sound in Sea Water (from various tables)	1	7
Sea Water Sample Data	2	7
Comparison of Experimental Determinations and Values from Empirical Equation	3	8
Comparison of Values from Empirical Equation and Kuwahara's Tables	4	9
Correction to Standard Velocity for Temperature Change	5	10
Correction to Standard Velocity for Salinity Change	6	11
Correction to Standard Velocity for Simultaneous Temperature and Salinity Changes	7	12

FIGURES

Velocity of Sound at Zero Depth Metric Units	1	13
Velocity of Sound at Zero Depth Metric Units - Expanded Scale	1 a-g	14-20
Velocity of Sound at Zero Depth - British Units	2	21
Velocity of Sound at Zero Depth - British Units Expanded Scale	2 a-p	22-37
Salinity Coefficient of Velocity vs. Temperature Metric Units	3	38
Salinity Coefficient of Velocity vs. Temperature British Units	4	39

TABLE 1
Velocity of Sound in Sea Water
(from various tables)

Depth (m)	Temp. (°C)	Sal. (‰)	Velocity (m/sec)				
			Heck & Service	Wood	Br. Adm. 1927	Br. Adm. 1939	Kuwahara 1939
0	0	35	1450	1450	1445.3	1445.4	1445.5
0	10	35	1489	1488	1486.8	1486.7	1486.8
0	20	35	1514	1519	1518.6	1518.7	1518.7
0	30	35	--	1543	1543.0	1543.1	1543.2

TABLE 2
Sample Data

Sample No.	Date Collected	Date Received	Collection Location		Original Salinity (‰)	Temp. "in situ" (°C)	Exper. Salinity (‰)
			Lat.	Long.			
1	7/30/51	7/31/51	24°25'N	81°26'W	34.27	29	34.27
1	7/30/51	7/31/51	24°25'N	81°26'W	34.27	29	40.43
1	7/30/51	7/31/51	24°25'N	81°26'W	34.27	29	29.02
1	7/30/51	7/31/51	24°25'N	81°26'W	34.27	29	19.77
2	8/24/51	8/27/51	24°40'N	80°46'W	37.12	29	37.12
2	8/24/51	8/27/51	24°40'N	80°46'W	37.12	29	31.49
3	8/31/51	9/4/51	32°13'N	69°29'W	37.29	29	37.29
3	8/31/51	9/4/51	32°13'N	69°29'W	37.29	24	24.20

NAVAL RESEARCH LABORATORY

TABLE 3
Comparison of Experimental Determinations and Values
from Empirical Equation

Salinity (‰)	Temperature (°C)	V _{exp.} (m/sec)	V _{eq.} (m/sec)	V _{exp.-V_{eq.}} (m/sec)
40.43	40.0	1569.2	1569.1	+0.1
	30.2	1551.6	1551.8	-0.2
	20.0	1527.5	1527.5	0.0
	10.1	1496.5	1496.3	+0.2
	0.0	1455.3	1455.4	-0.1
37.29	39.1	1564.9	1565.0	-0.1
	30.0	1548.0	1548.2	-0.2
	25.0	1537.1	1537.2	-0.1
	20.0	1524.3	1524.3	0.0
	15.0	1509.5	1509.4	+0.1
	10.0	1492.5	1492.5	0.0
	5.0	1472.9	1473.2	-0.3
	0.0	1451.4	1451.5	-0.1
	29.9	1547.7	1547.9	-0.2
34.27	40.0	1563.6	1563.6	+0.2
	30.0	1545.3	1545.5	-0.2
	20.0	1521.3	1521.1	+0.2
	10.0	1489.1	1489.0	+0.1
	0.0	1447.7	1447.7	0.0
	40.0	1561.3	1561.2	+0.1
31.49	30.0	1542.8	1542.6	+0.2
	20.0	1518.5	1518.3	+0.2
	10.0	1485.8	1485.8	0.0
	0.0	1444.2	1444.2	0.0
	40.0	1558.9	1559.0	-0.1
29.02	30.0	1540.5	1540.6	-0.1
	20.0	1515.9	1515.7	+0.2
	10.0	1483.1	1482.9	+0.2
	0.0	1441.1	1441.1	0.0
	40.0	1554.8	1554.9	-0.1
24.20	30.0	1536.1	1536.1	0.0
	20.0	1510.9	1510.8	+0.1
	10.0	1477.5	1477.5	0.0
	0.0	1434.9	1435.1	-0.2
	40.0	1551.1	1551.0	+0.1
19.77	30.0	1532.2	1531.9	+0.3
	20.0	1506.4	1506.2	+0.2
	10.0	1472.5	1472.5	+0.1
	5.0	1452.1	1452.2	-0.1
	0.0	1429.7	1429.6	+0.1
0	40.0	1520.5	1520.7	-0.2
	35.0	1520.3	1520.7	+0.2
	30.0	1502.9	1502.6	+0.3
	25.0	1476.3	1477.0	-0.2
	20.0	1443.1	1442.7	+0.4
	15.0	1410.5	1410.5	0.0
	10.0	1383.0	1383.0	0.0
0	5.0	1427.0	1427.4	-0.4
	0.0	--	1414.8	--

TABLE 4
Comparison of Velocity Values from Empirical Equations and Kuwahara's Tables

Temp (°C)	Meters per Second					
	S = 31 ppt		S = 35 ppt		S = 39 ppt	
	Kuwahara	NRL	Kuwahara	NRL	Kuwahara	NRL
0	1440.3	1443.7	1445.5	1448.6	1450.7	1453.7
1	44.8	48.1	50.0	53.0	55.2	58.1
2	49.4	52.5	54.5	57.5	59.6	62.4
3	53.8	57.0	58.9	61.9	64.0	66.7
4	58.1	61.2	63.1	66.0	68.1	71.0
5	1462.3	1465.5	1467.3	1470.4	1472.3	1475.2
6	66.5	69.6	71.4	74.5	76.3	79.2
7	70.5	73.6	75.4	78.4	80.3	83.1
8	74.5	77.4	79.3	82.2	84.2	87.0
9	78.3	81.2	83.1	86.0	87.9	90.7
10	1482.0	85.1	1486.8	1488.8	1491.6	1494.4
11	85.7	88.7	90.4	93.4	95.1	97.9
12	89.2	92.2	93.9	97.0	98.6	101.3
13	92.7	95.7	97.3	1000.3	1002.0	104.7
14	96.0	99.0	1000.6	103.6	105.2	108.0
15	1499.3	1502.4	1503.9	1506.9	1508.5	1511.2
16	1502.5	05.6	07.0	10.0	11.5	14.2
17	05.6	08.8	10.1	13.0	14.6	17.2
18	08.6	11.8	13.0	16.0	17.5	20.2
19	11.5	14.8	15.9	19.0	20.3	23.1
20	1514.3	1517.8	1518.7	1521.9	1523.1	1526.0
21	17.2	20.6	21.5	24.7	25.9	28.7
22	19.6	23.2	24.1	27.3	28.4	31.3
23	22.4	25.9	26.7	29.9	31.0	33.9
24	25.0	28.4	29.2	32.4	33.5	36.4
25	1527.5	1531.0	1531.7	1535.0	1535.9	1538.8
26	29.9	33.4	34.1	37.3	38.3	41.2
27	32.3	35.8	36.4	39.6	40.6	43.5
28	34.5	38.0	38.7	41.9	42.9	45.8
29	36.9	40.3	41.0	44.1	45.1	48.0
30	1539.1	1542.5	1543.2	1545.3	1547.3	1550.2

TABLE 5
Correction V_t to V_0° C, 35 ppt, $Op = 1448.6$ m/sec for Changes in Temperature

TABLE 6
Correction V_s to $V_{0^{\circ}\text{C}}$, 35 ppt. Op = 1.448.6 m/sec for Changes in Salinity

Salinity ($^{\circ}/\text{oo}$)	0	.1	.2	.3	.4	.5	.6	.7	.8	.9
0	-43.8	-19.9	-19.8	-19.6	-19.5	-19.4	-19.2	-19.1	-19.0	-18.9
1.9	-20.0	-18.6	-18.5	-18.4	-18.2	-18.1	-18.0	-17.9	-17.8	-17.6
2.9	-18.8	-17.4	-17.2	-17.1	-17.0	-16.9	-16.8	-16.6	-16.5	-16.4
2.1	-17.5	-16.2	-16.0	-15.9	-15.8	-15.6	-15.5	-15.4	-15.2	-15.1
2.2	-16.2	-15.0	-14.9	-14.8	-14.6	-14.5	-14.4	-14.2	-14.1	-13.9
2.3	-15.0	-13.8	-13.6	-13.5	-13.4	-13.2	-13.1	-13.0	-12.9	-12.8
2.4	-12.5	-12.4	-12.2	-12.1	-12.0	-11.9	-11.8	-11.6	-11.5	-11.4
2.5	-11.2	-11.1	-11.0	-10.9	-10.8	-10.6	-10.5	-10.4	-10.2	-10.1
2.6	-10.0	-9.9	-9.8	-9.6	-9.5	-9.4	-9.2	-9.1	-9.0	-8.9
2.7	-8.8	-8.6	-8.5	-8.4	-8.2	-8.1	-8.0	-7.9	-7.8	-7.6
2.8	-7.5	-7.4	-7.2	-7.1	-7.0	-6.9	-6.8	-6.6	-6.5	-6.4
2.9	-6.2	-6.1	-6.0	-5.9	-5.8	-5.6	-5.5	-5.4	-5.2	-5.1
3.0	-5.9	-4.9	-4.8	-4.6	-4.5	-4.4	-4.2	-4.1	-4.0	-3.9
3.1	-3.7	-3.6	-3.5	-3.4	-3.2	-3.1	-3.0	-2.9	-2.8	-2.6
3.2	-2.5	-2.4	-2.2	-2.1	-2.0	-1.9	-1.8	-1.6	-1.5	-1.4
3.3	-1.2	-1.1	-1.0	-0.9	-0.8	-0.6	-0.5	-0.4	-0.2	-0.1
3.4	0.0	0.1	0.2	0.4	0.5	0.6	0.8	0.9	1.0	1.1
3.5	1.2	1.4	1.5	1.6	1.8	1.9	2.0	2.1	2.2	2.4
3.6	2.5	2.6	2.8	2.9	3.0	3.1	3.2	3.4	3.5	3.6
3.7	3.7	3.9	4.0	4.1	4.2	4.4	4.5	4.6	4.8	4.7
3.8	5.0	5.1	5.2	5.4	5.5	5.6	5.8	5.9	6.0	6.1
3.9	6.2	6.4	6.5	6.6	6.8	6.9	7.0	7.1	7.2	7.4
4.0	7.5									

Interpolation between 0 $^{\circ}/\text{oo}$ and 16 $^{\circ}/\text{oo}$ salinity is not recommended.

TABLE 7
Correction V_{sat} to V_{0°C}, 35 ppt, Op = 1448.6 m/sec for Simultaneous Changes in Salinity and Temperature

T (°C)	S ‰										41
	0*	19	21	23	25	27	29	31	33	35	
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
2	+ 0.9	+ 0.4	+ 0.3	+ 0.3	+ 0.3	+ 0.2	+ 0.1	+ 0.1	+ 0.1	+ 0.1	- 0.1
4	+ 2.0	+ 0.9	+ 0.8	+ 0.7	+ 0.5	+ 0.4	+ 0.3	+ 0.2	+ 0.1	+ 0.1	- 0.3
6	+ 2.8	+ 1.3	+ 1.1	+ 1.0	+ 0.8	+ 0.6	+ 0.5	+ 0.3	+ 0.2	+ 0.2	- 0.5
8	+ 3.7	+ 1.7	+ 1.5	+ 1.3	+ 1.1	+ 0.8	+ 0.6	+ 0.4	+ 0.2	+ 0.2	- 0.6
10	+ 4.4	+ 2.0	+ 1.7	+ 1.5	+ 1.3	+ 1.0	+ 0.7	+ 0.5	+ 0.3	+ 0.3	- 0.7
12	+ 5.3	+ 2.4	+ 2.1	+ 1.8	+ 1.4	+ 1.2	+ 0.9	+ 0.6	+ 0.3	+ 0.3	- 0.9
14	+ 6.2	+ 2.8	+ 2.5	+ 2.1	+ 1.7	+ 1.4	+ 1.1	+ 0.7	+ 0.3	+ 0.3	- 1.1
16	+ 6.9	+ 3.1	+ 2.7	+ 2.3	+ 1.9	+ 1.6	+ 1.2	+ 0.8	+ 0.4	+ 0.4	- 1.2
18	+ 7.6	+ 3.4	+ 3.0	+ 2.6	+ 2.1	+ 1.7	+ 1.3	+ 0.9	+ 0.4	+ 0.4	- 1.3
20	+ 8.4	+ 3.8	+ 3.4	+ 2.9	+ 2.4	+ 1.9	+ 1.4	+ 1.0	+ 0.5	+ 0.5	- 1.4
22	+ 9.2	+ 4.2	+ 3.6	+ 3.1	+ 2.6	+ 2.1	+ 1.6	+ 1.0	+ 0.5	+ 0.5	- 1.6
24	+ 9.7	+ 4.4	+ 3.9	+ 3.3	+ 2.7	+ 2.2	+ 1.7	+ 1.1	+ 0.5	+ 0.5	- 1.7
26	+ 10.4	+ 4.7	+ 4.1	+ 3.5	+ 2.9	+ 2.4	+ 1.8	+ 1.2	+ 0.6	+ 0.6	- 1.8
28	+ 10.9	+ 5.0	+ 4.3	+ 3.7	+ 3.1	+ 2.5	+ 1.9	+ 1.2	+ 0.6	+ 0.6	- 1.9
30	+ 11.4	+ 5.2	+ 4.5	+ 3.9	+ 3.3	+ 2.6	+ 1.9	+ 1.3	+ 0.7	+ 0.7	- 1.9
32	+ 12.0	+ 5.4	+ 4.8	+ 4.1	+ 3.4	+ 2.7	+ 2.0	+ 1.4	+ 0.7	+ 0.7	- 2.0
34	+ 12.3	+ 5.6	+ 4.9	+ 4.2	+ 3.5	+ 2.8	+ 2.1	+ 1.4	+ 0.7	+ 0.7	- 2.1
36	+ 12.6	+ 5.8	+ 5.0	+ 4.3	+ 3.6	+ 2.9	+ 2.2	+ 1.4	+ 0.7	+ 0.7	- 2.2
38	+ 13.0	+ 5.9	+ 5.2	+ 4.4	+ 3.7	+ 3.0	+ 2.2	+ 1.5	+ 0.7	+ 0.7	- 2.2
40	+ 13.2	+ 6.0	+ 5.3	+ 4.5	+ 3.7	+ 3.0	+ 2.3	+ 1.5	+ 0.7	+ 0.7	- 2.3

* Interpolation between 0°/‰ and 19°/‰ salinity is not recommended.

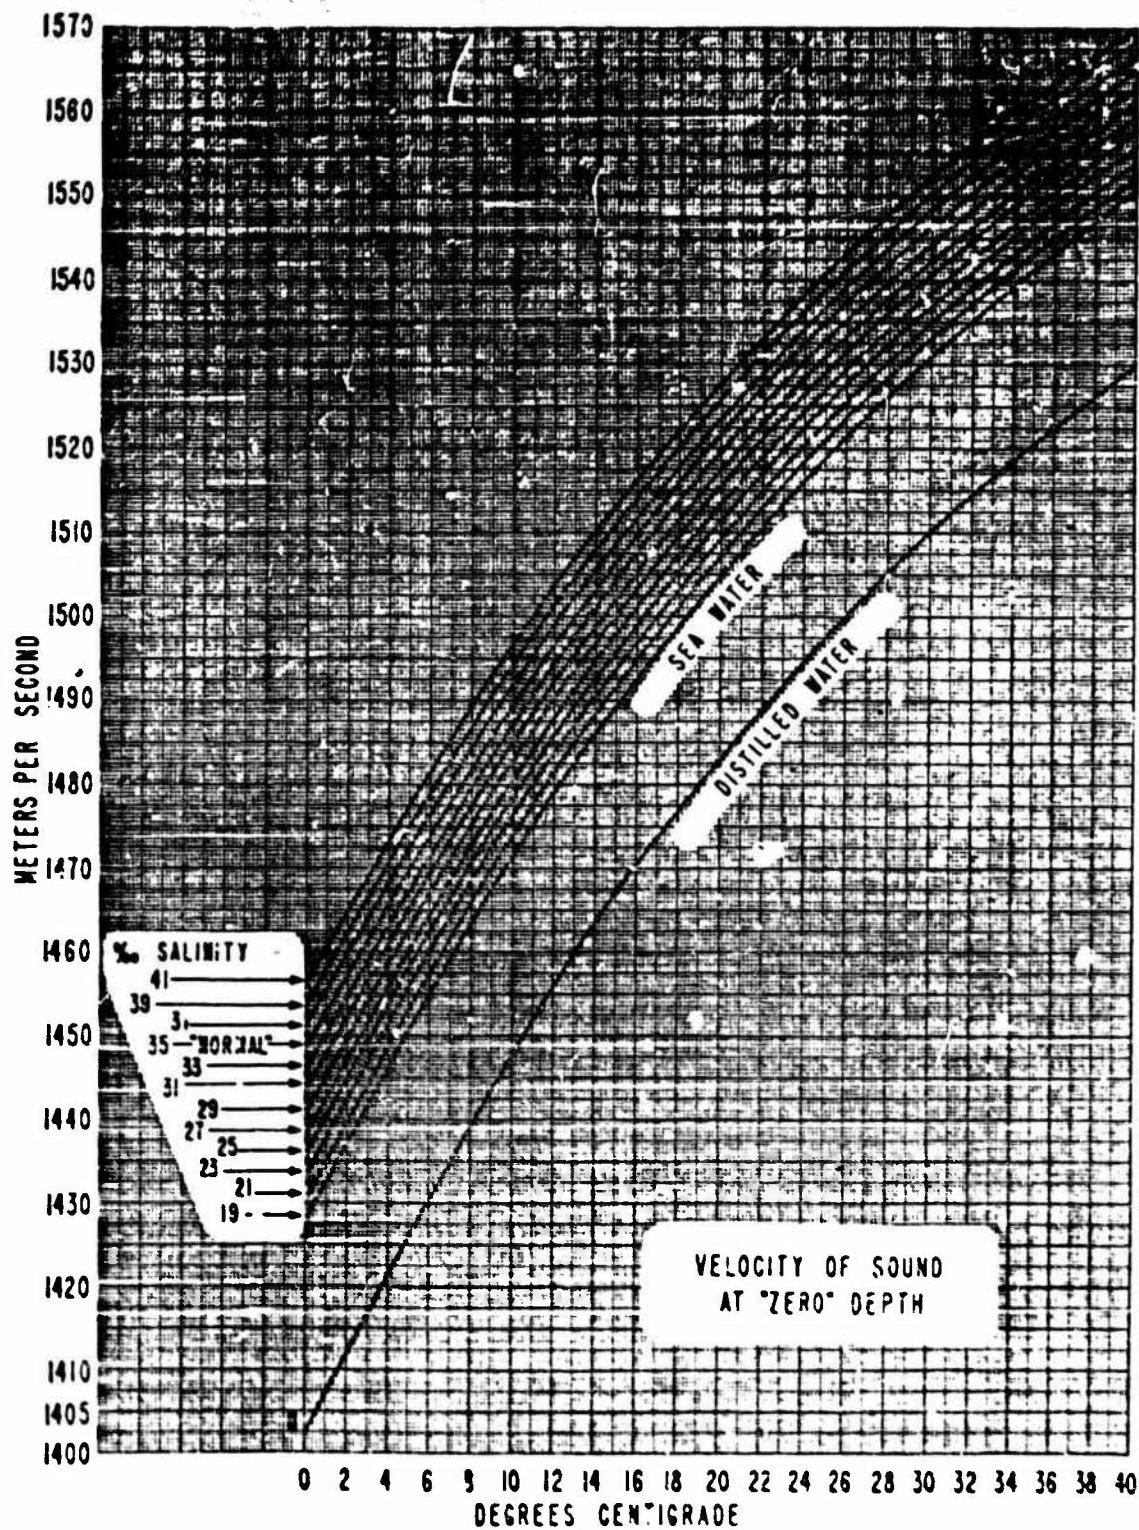


Figure 1 - Velocity of Sound at Zero Depth Metric Units

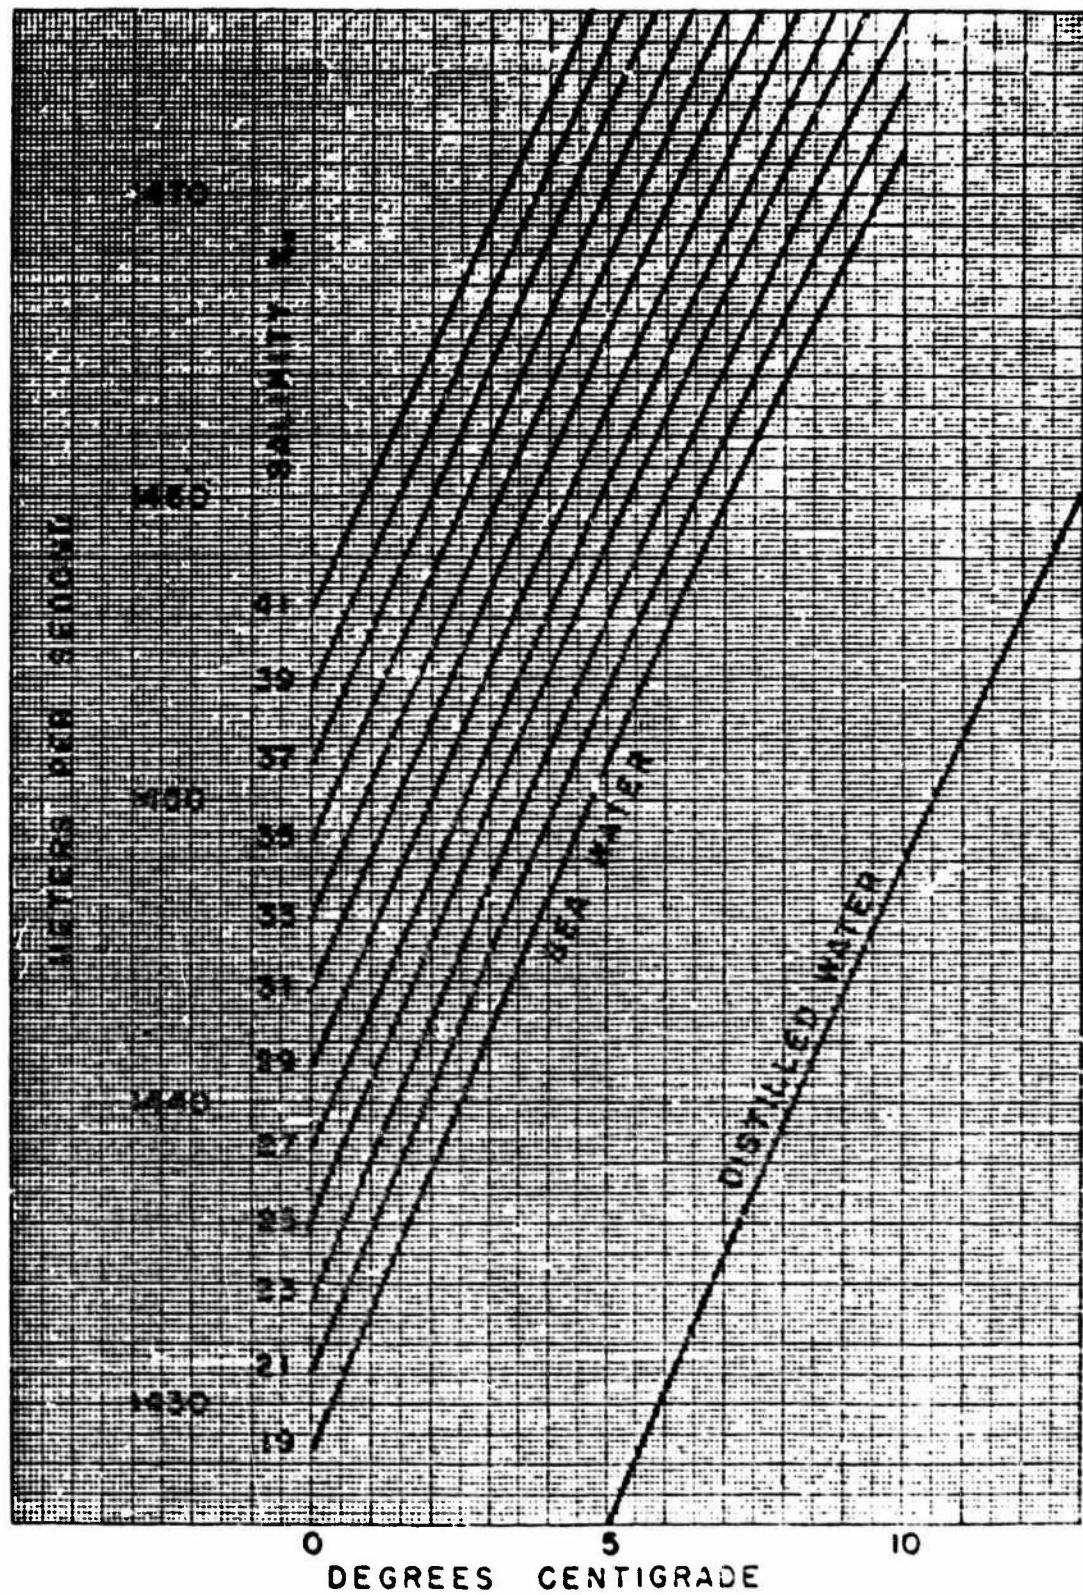


Figure 1-a

Figure 1-a-g - Velocity of Sound at Zero Depth Metric Units - Expanded Scale

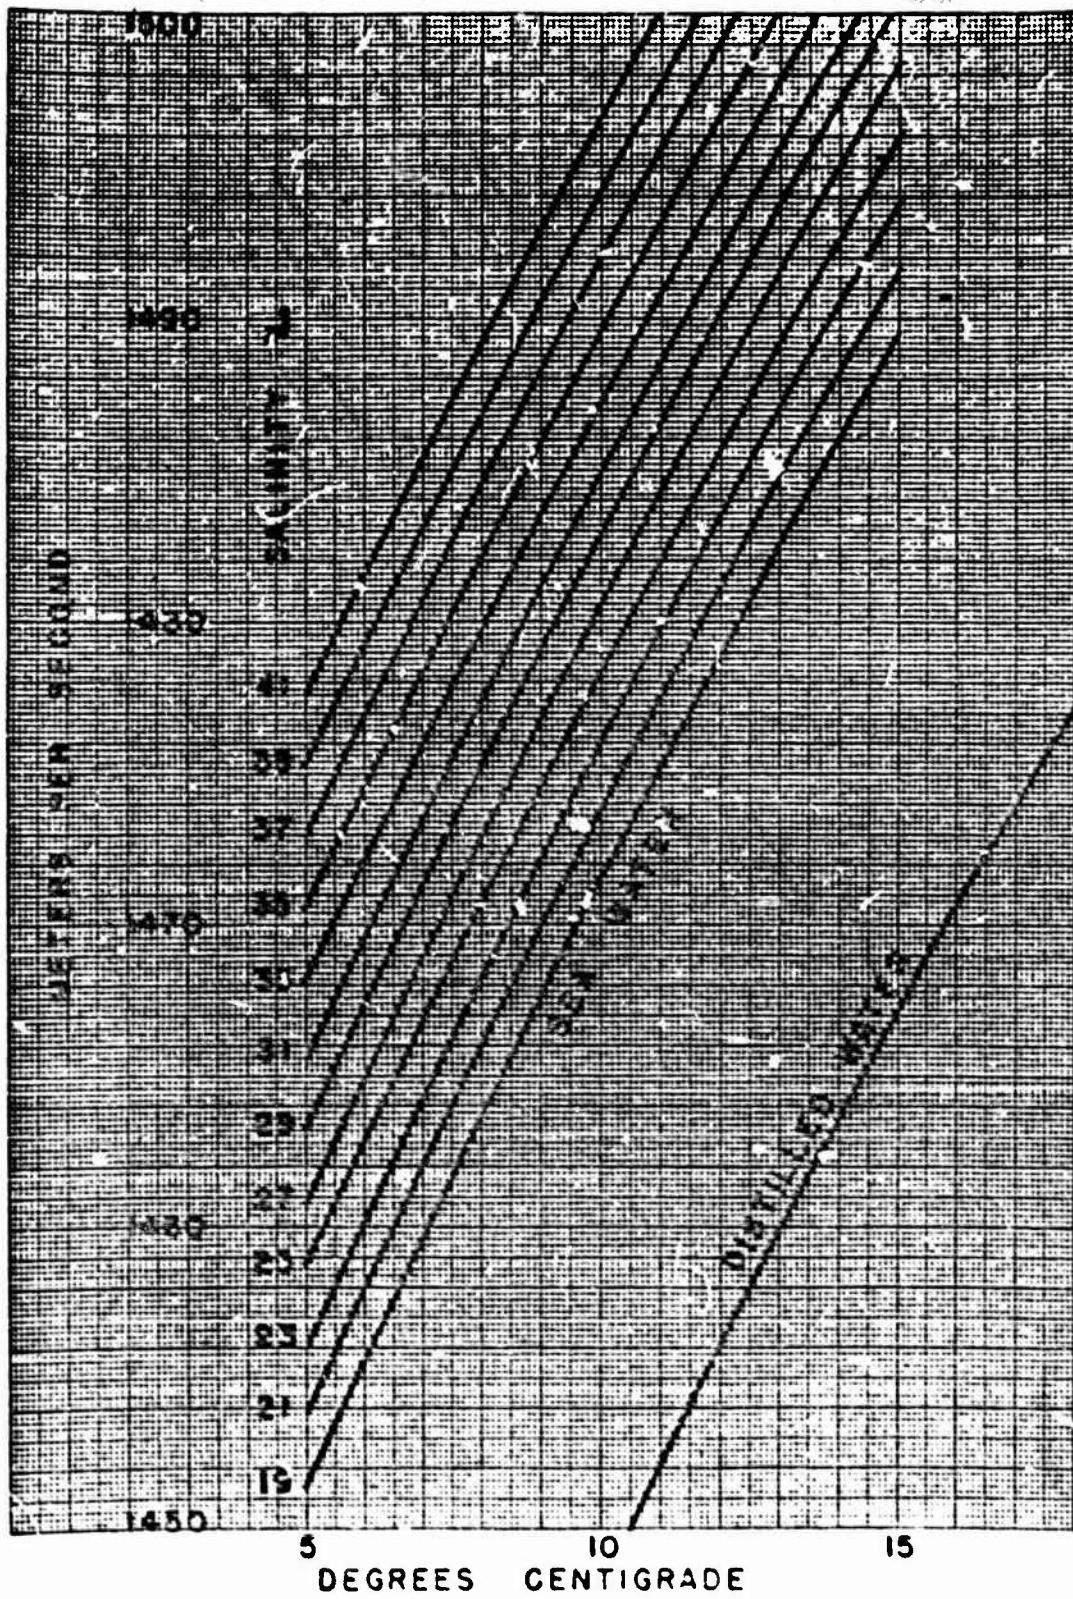


Figure 1-6

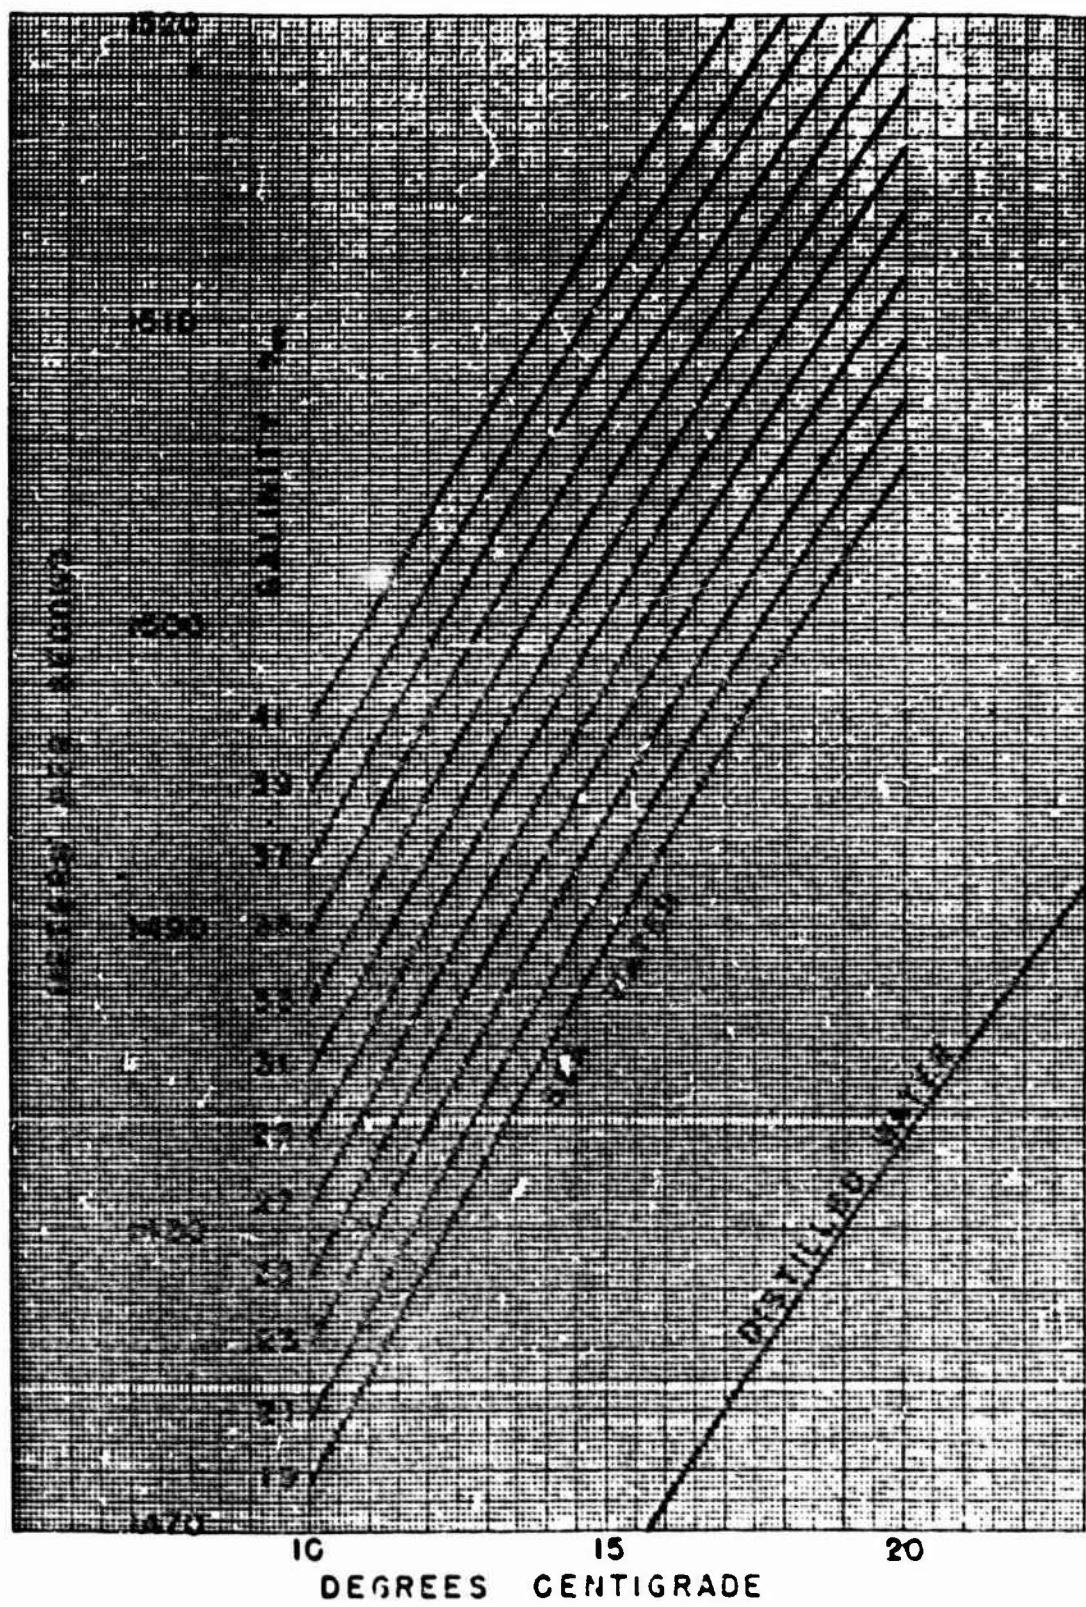


Figure 1-c

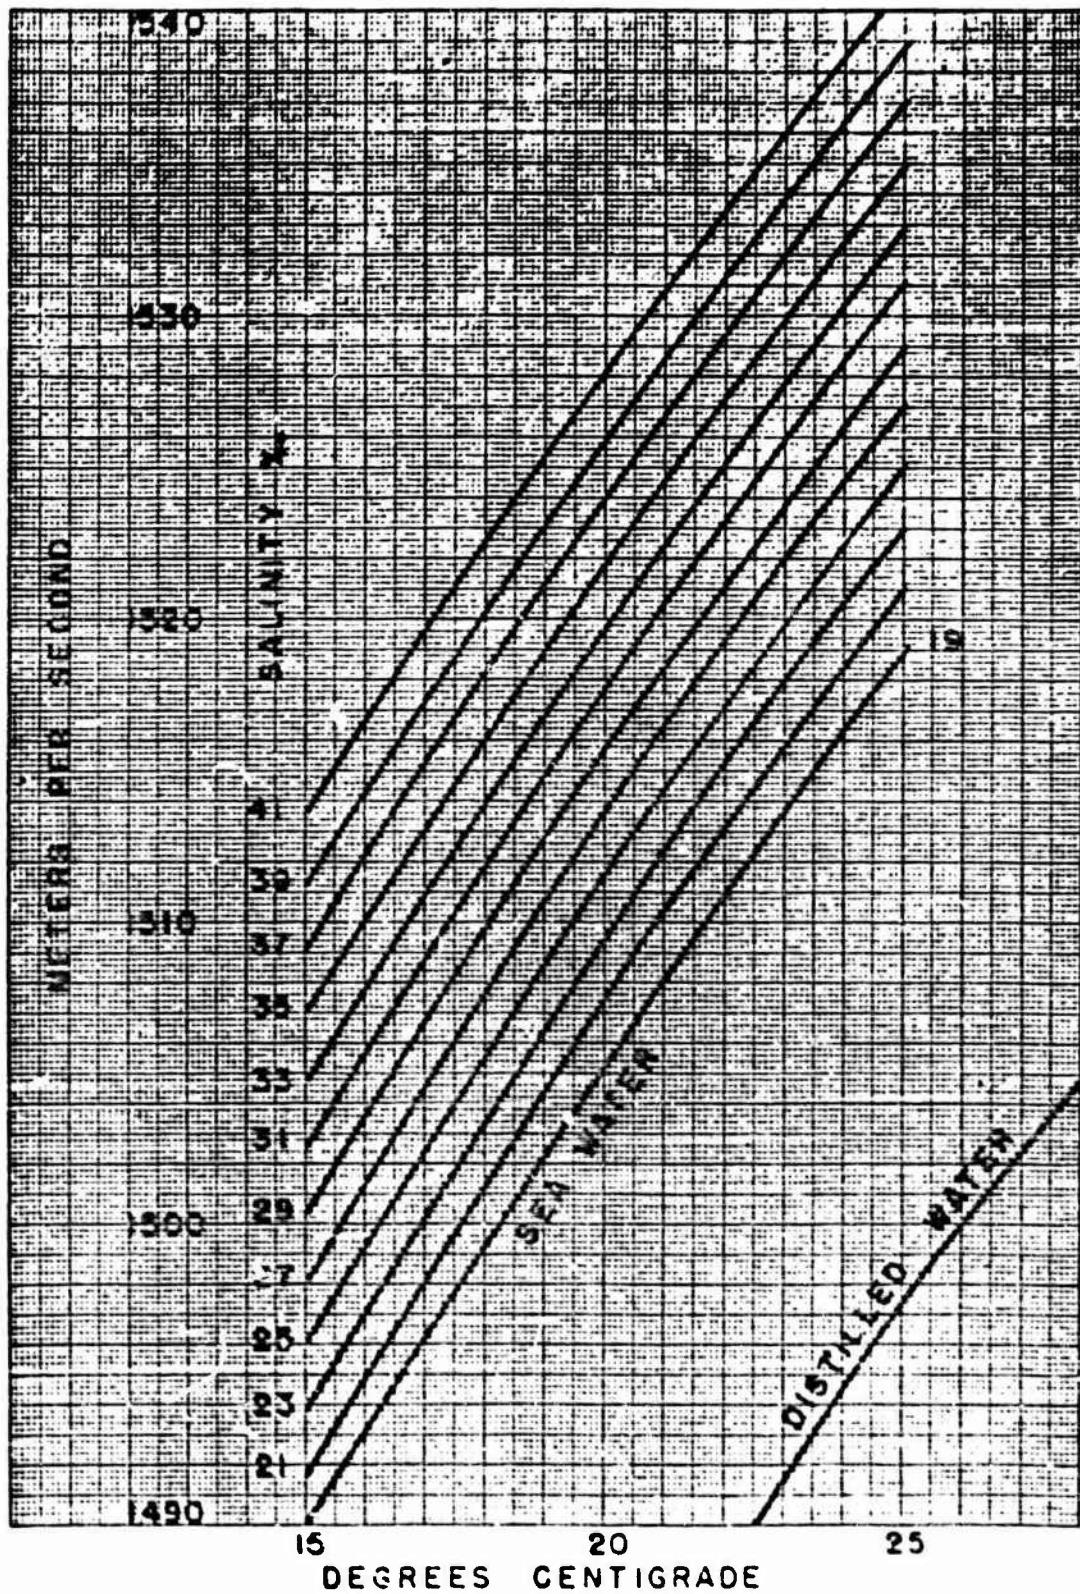


Figure 1-d

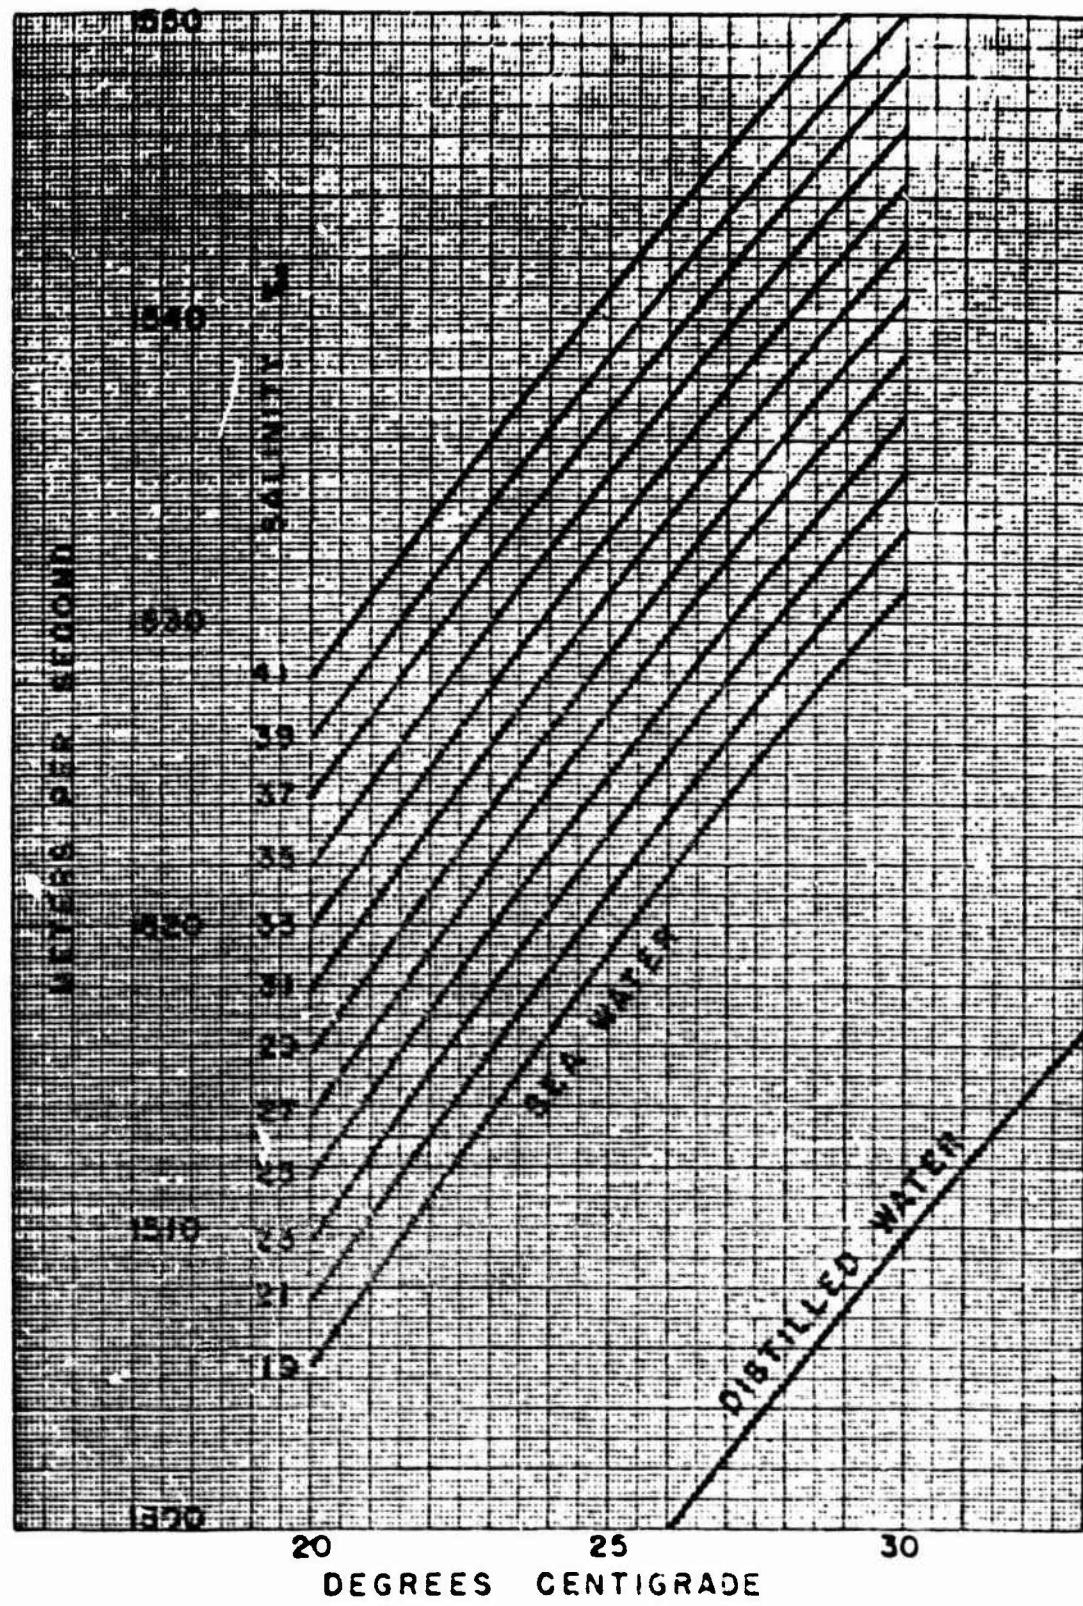


Figure 1-e

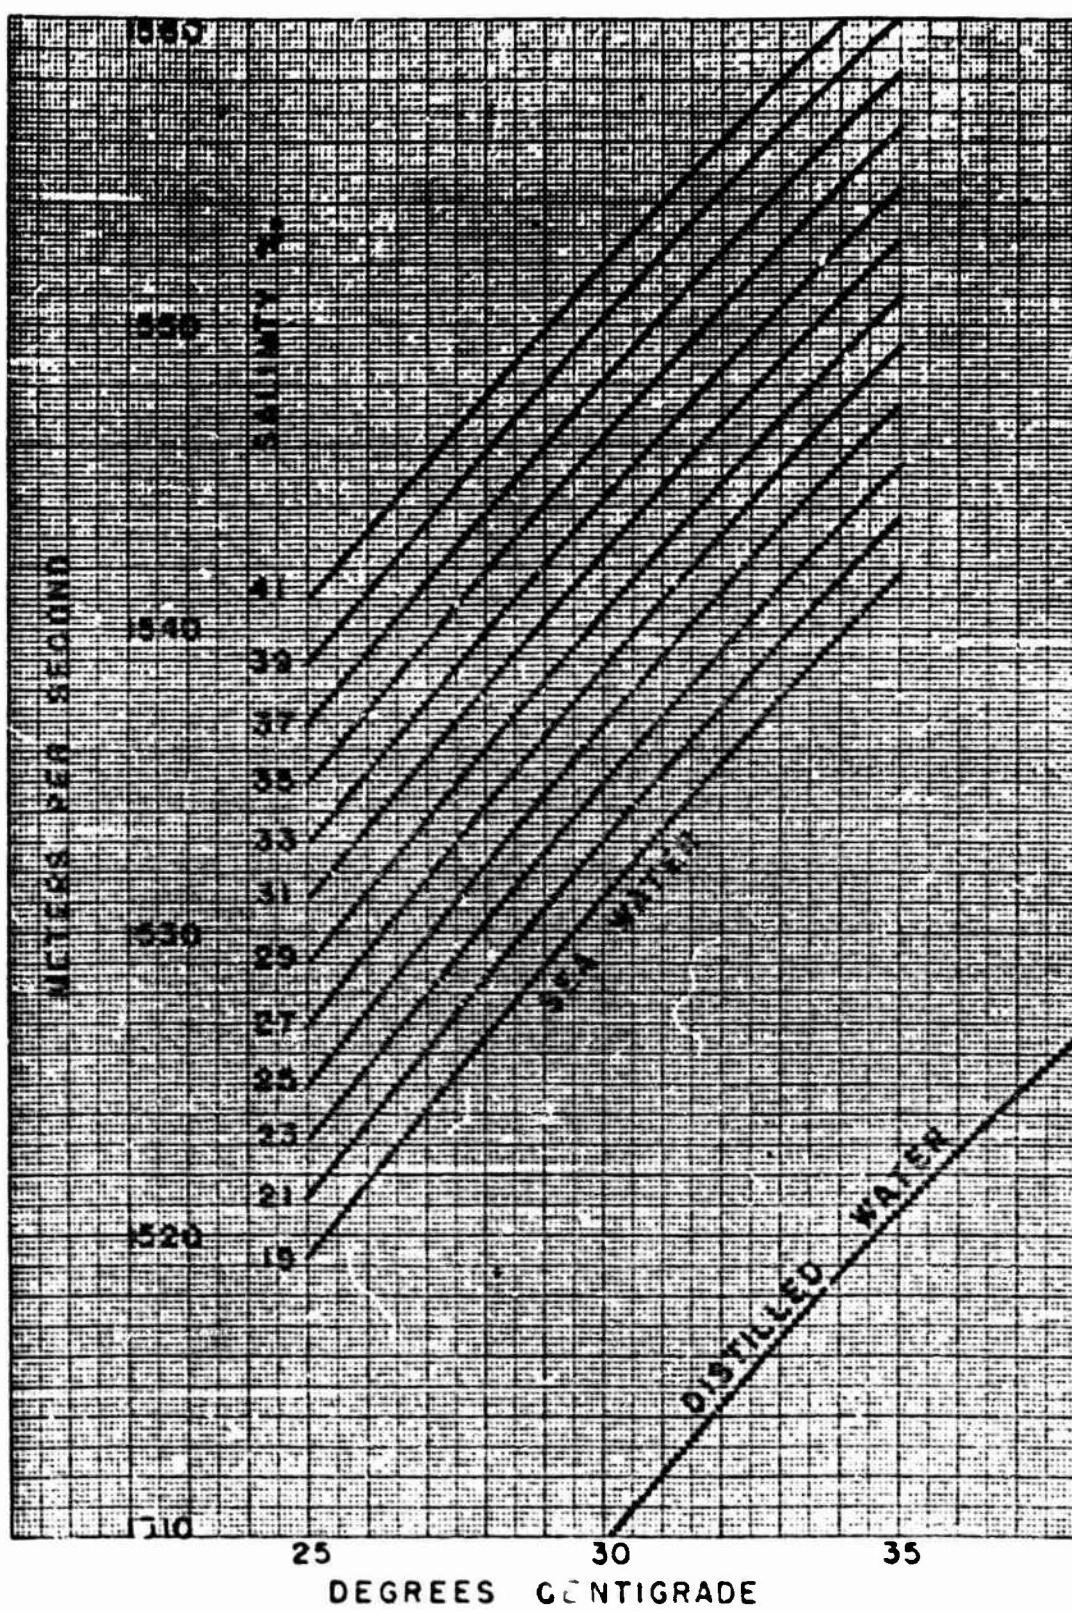


Figure 1-1

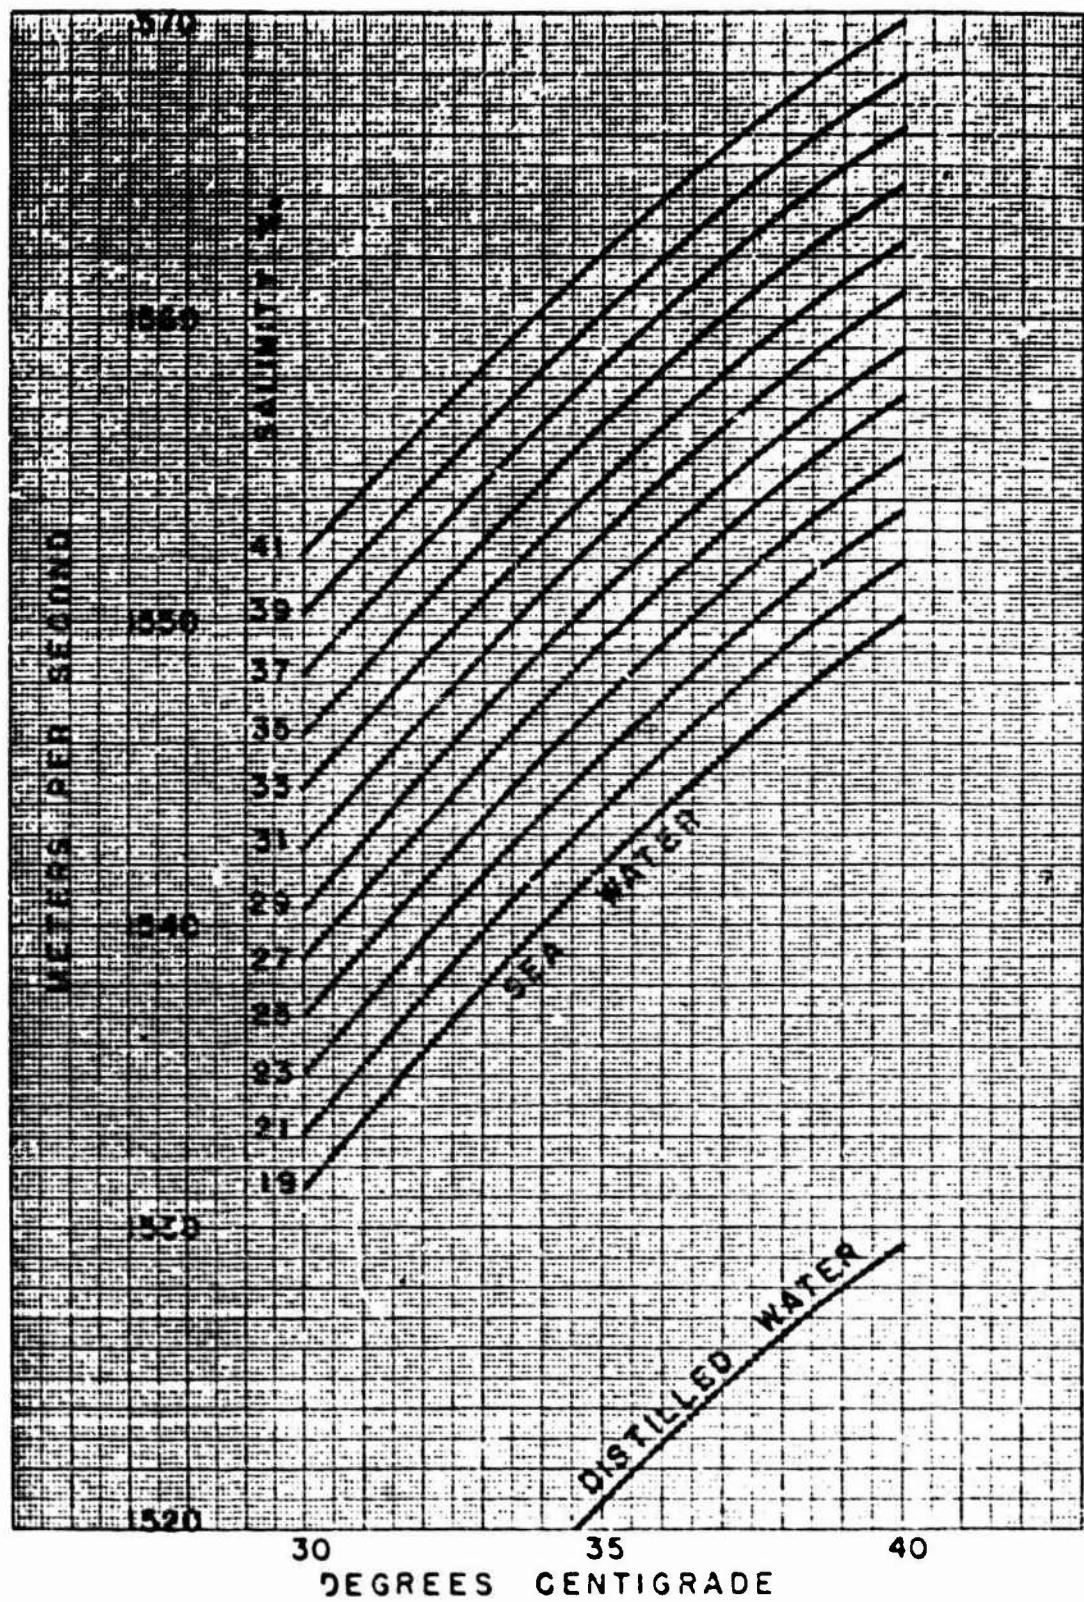


Figure 1-g

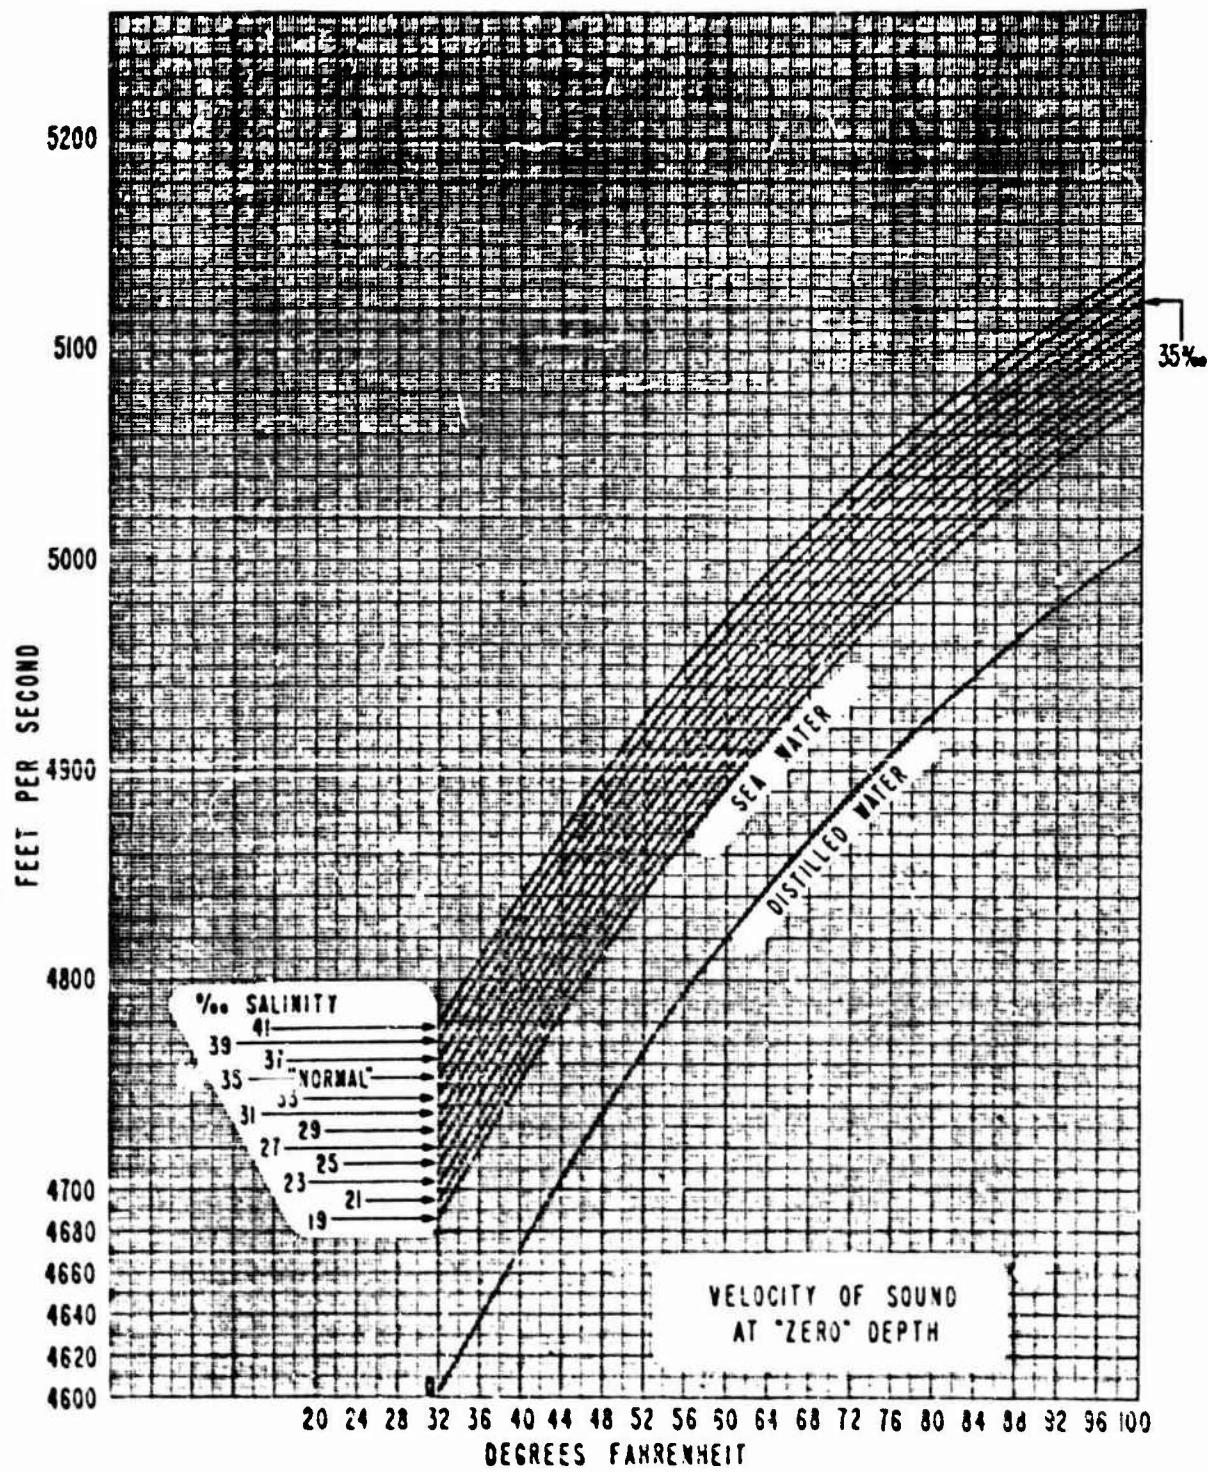


Figure 2 - Velocity of Sound at Zero Depth - British Units

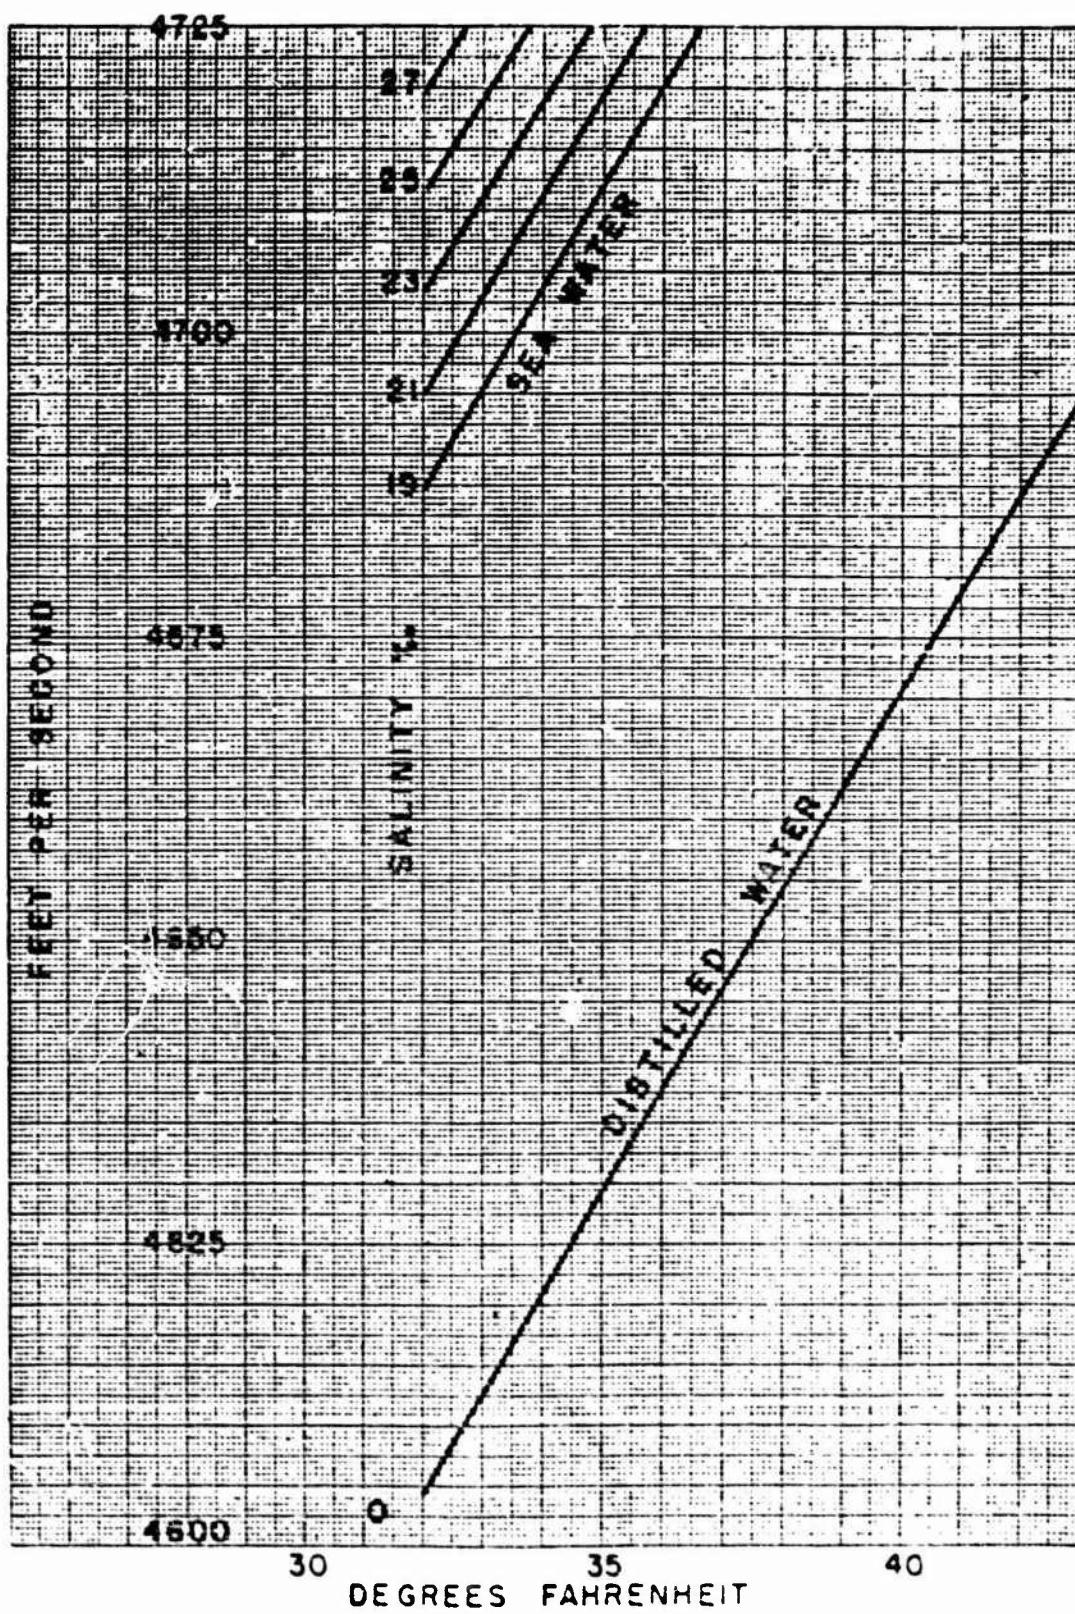


Figure 2-a

Figure 2-a-a - Velocity of Sound at Zero Depth - British Units - Standard Salinity

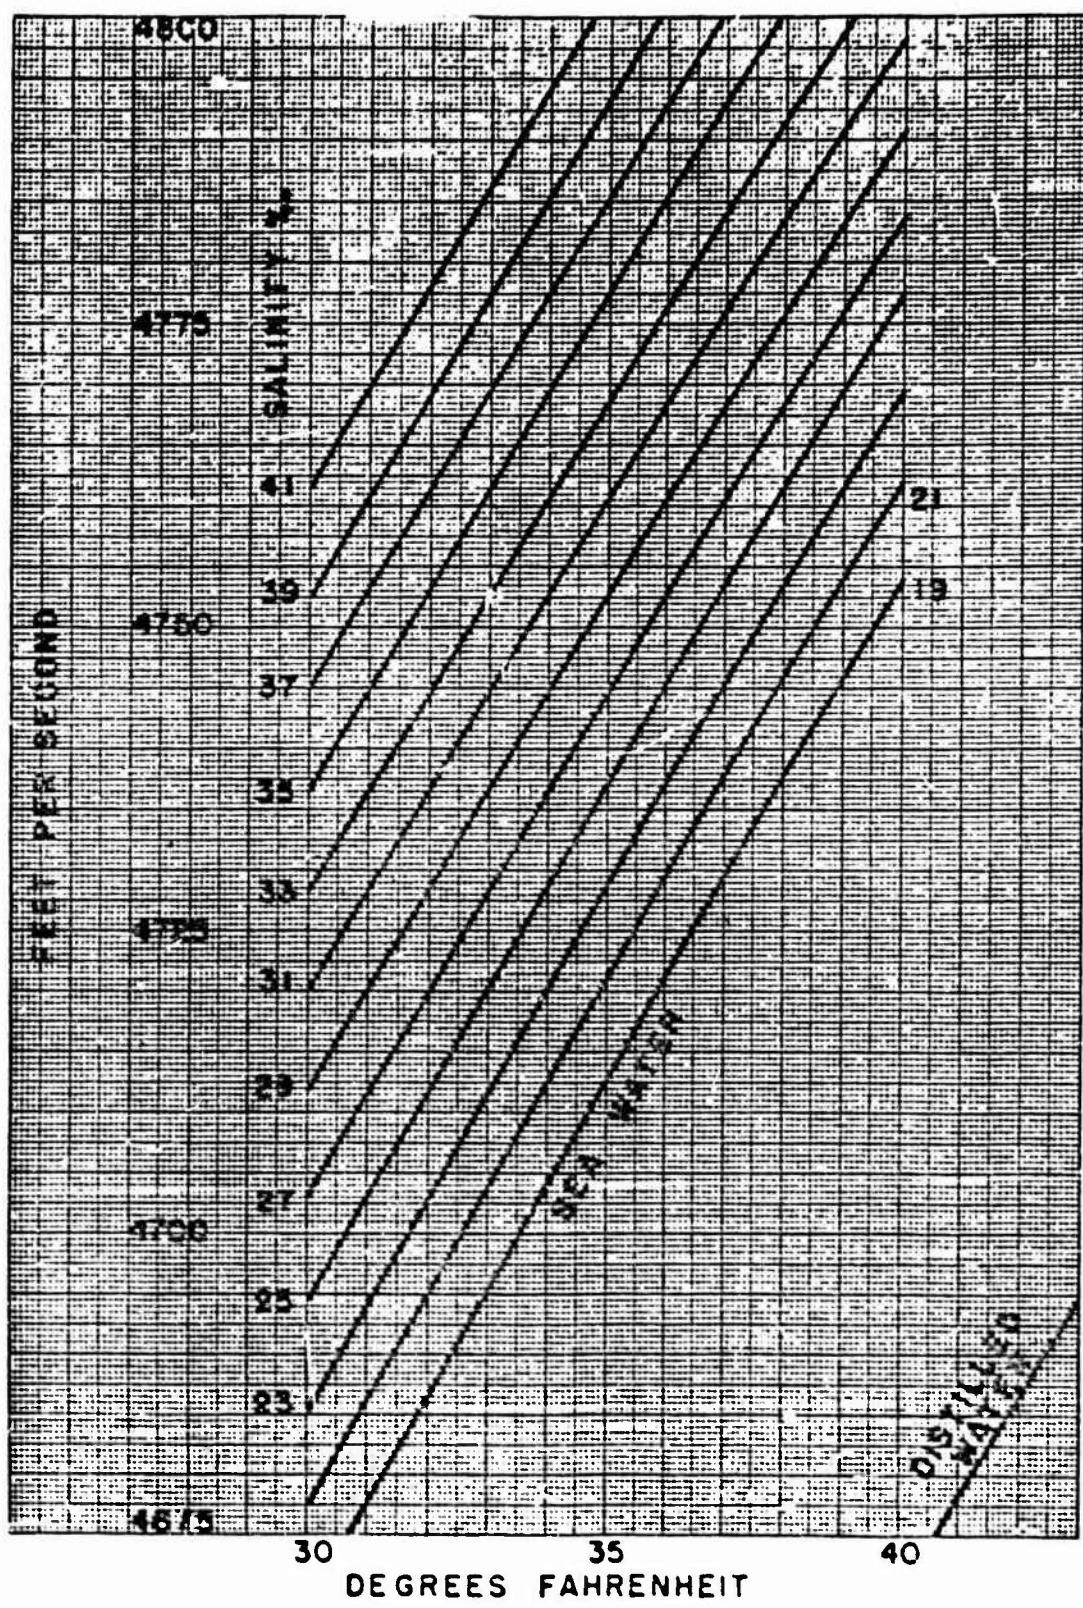


Figure 2-b

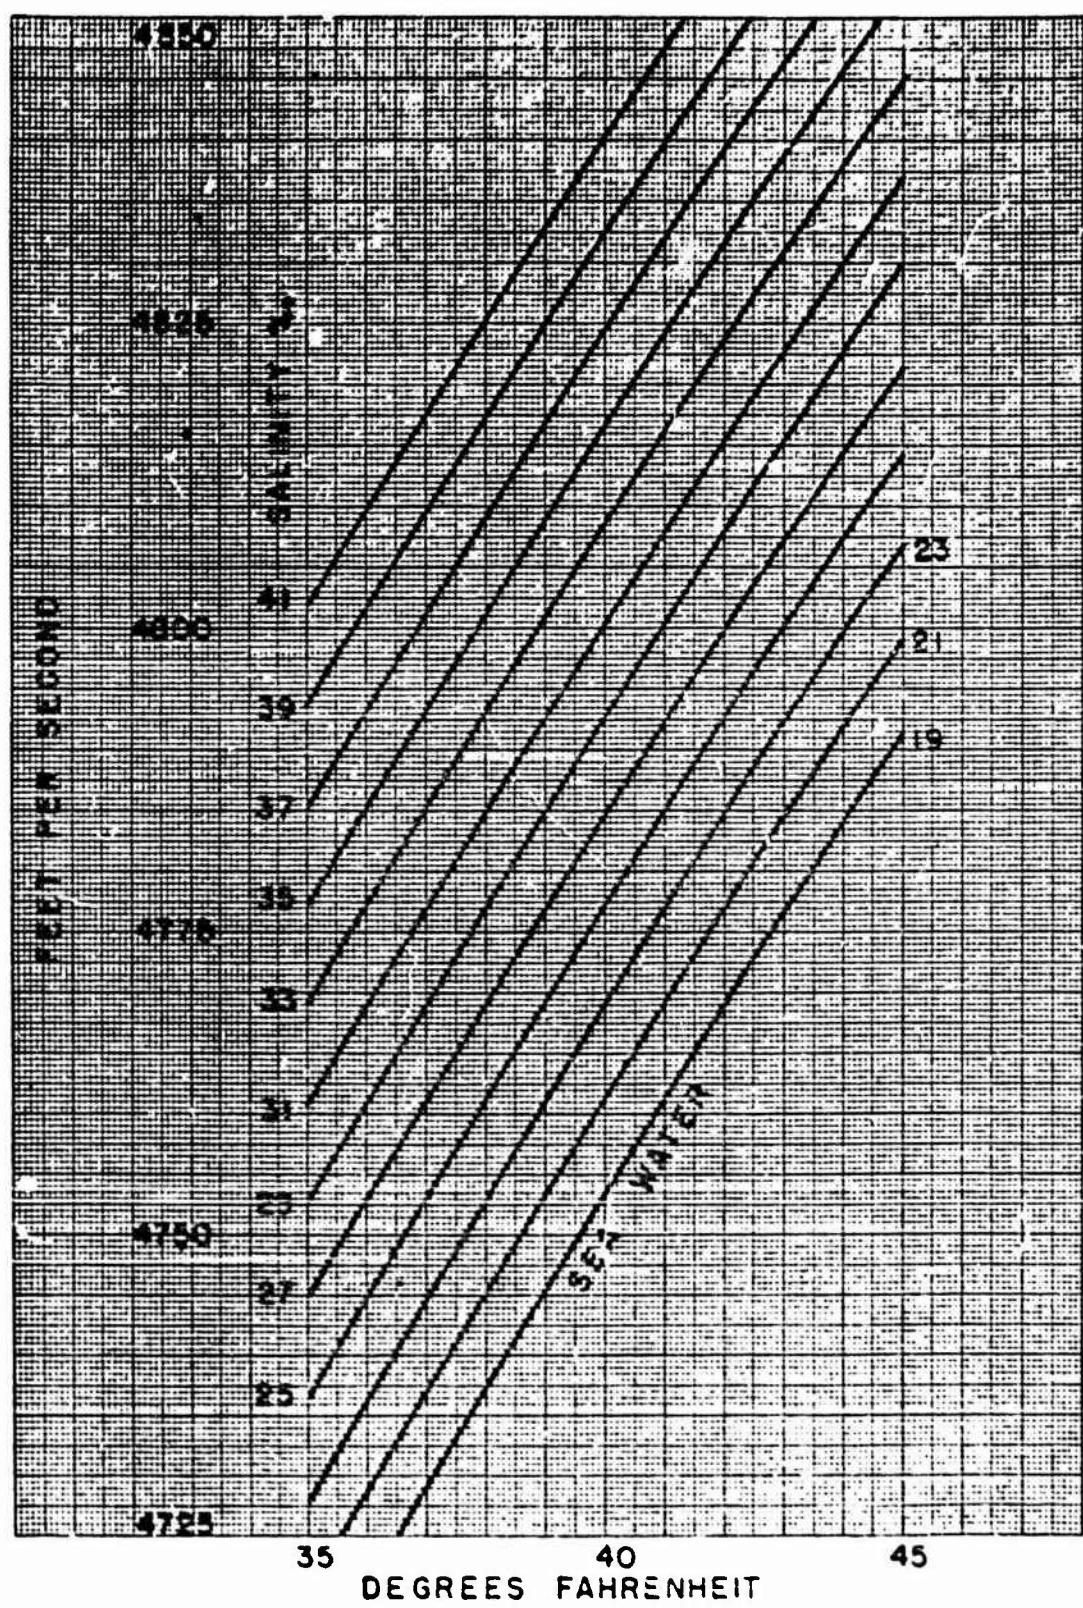


Figure 2- c

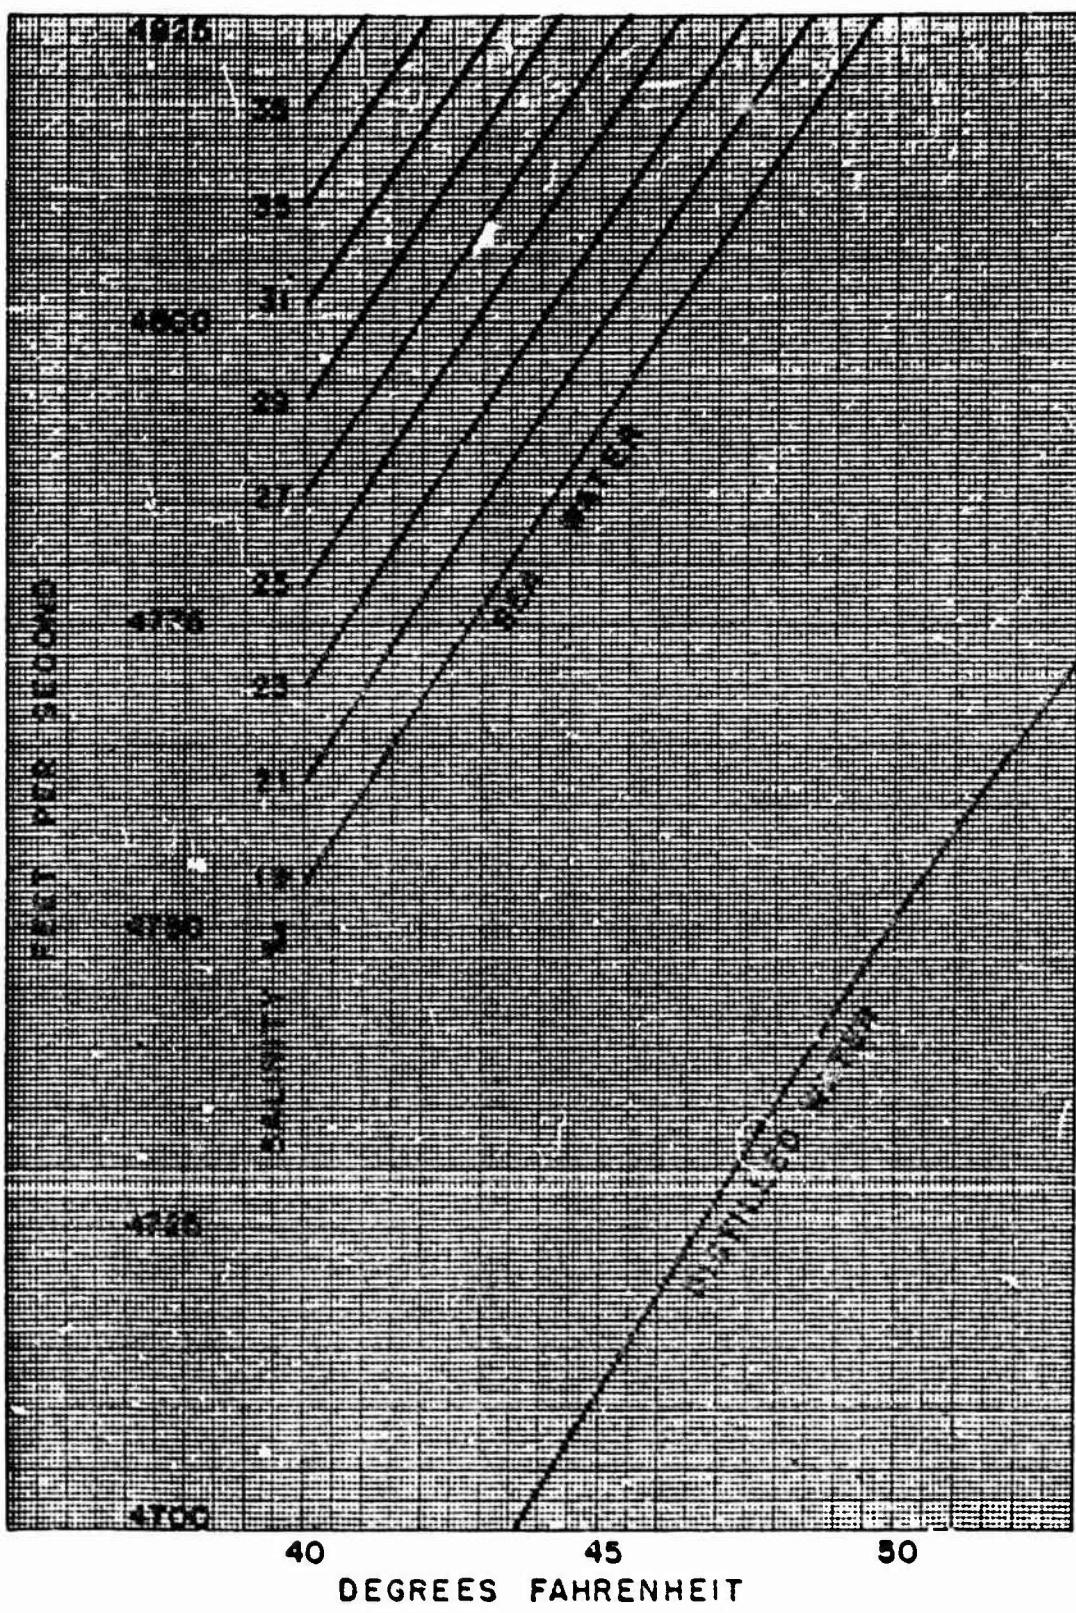


Figure 2-d

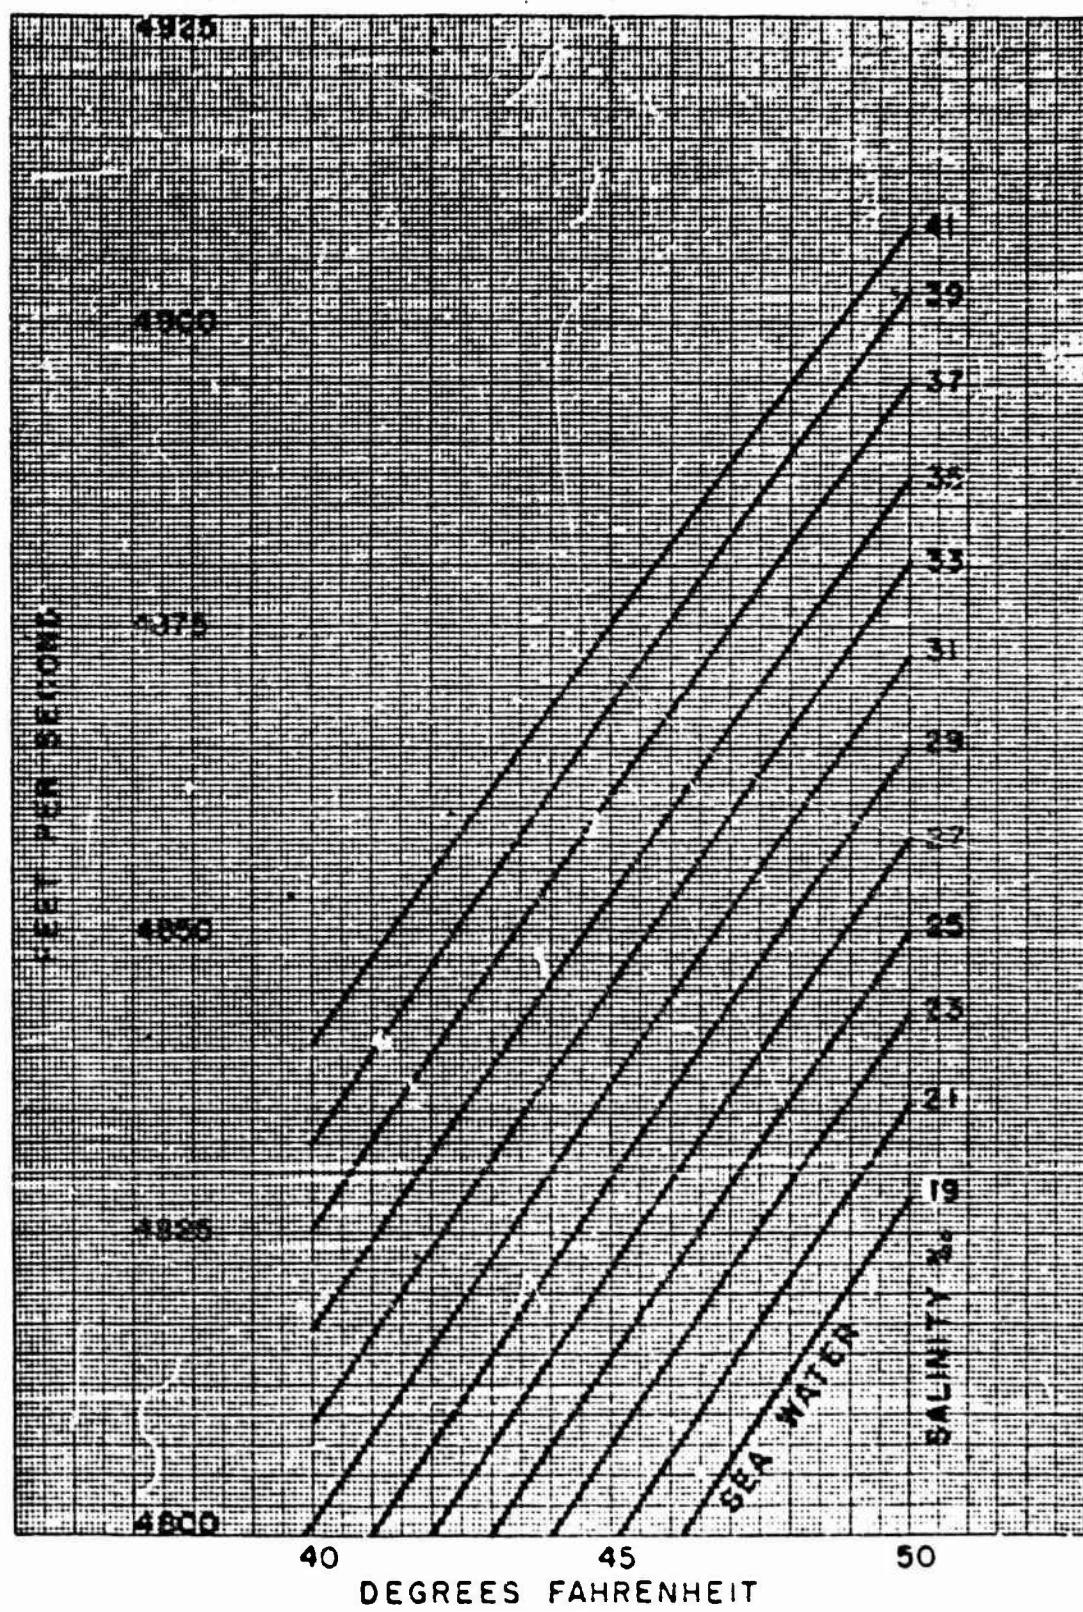


Figure 2-e

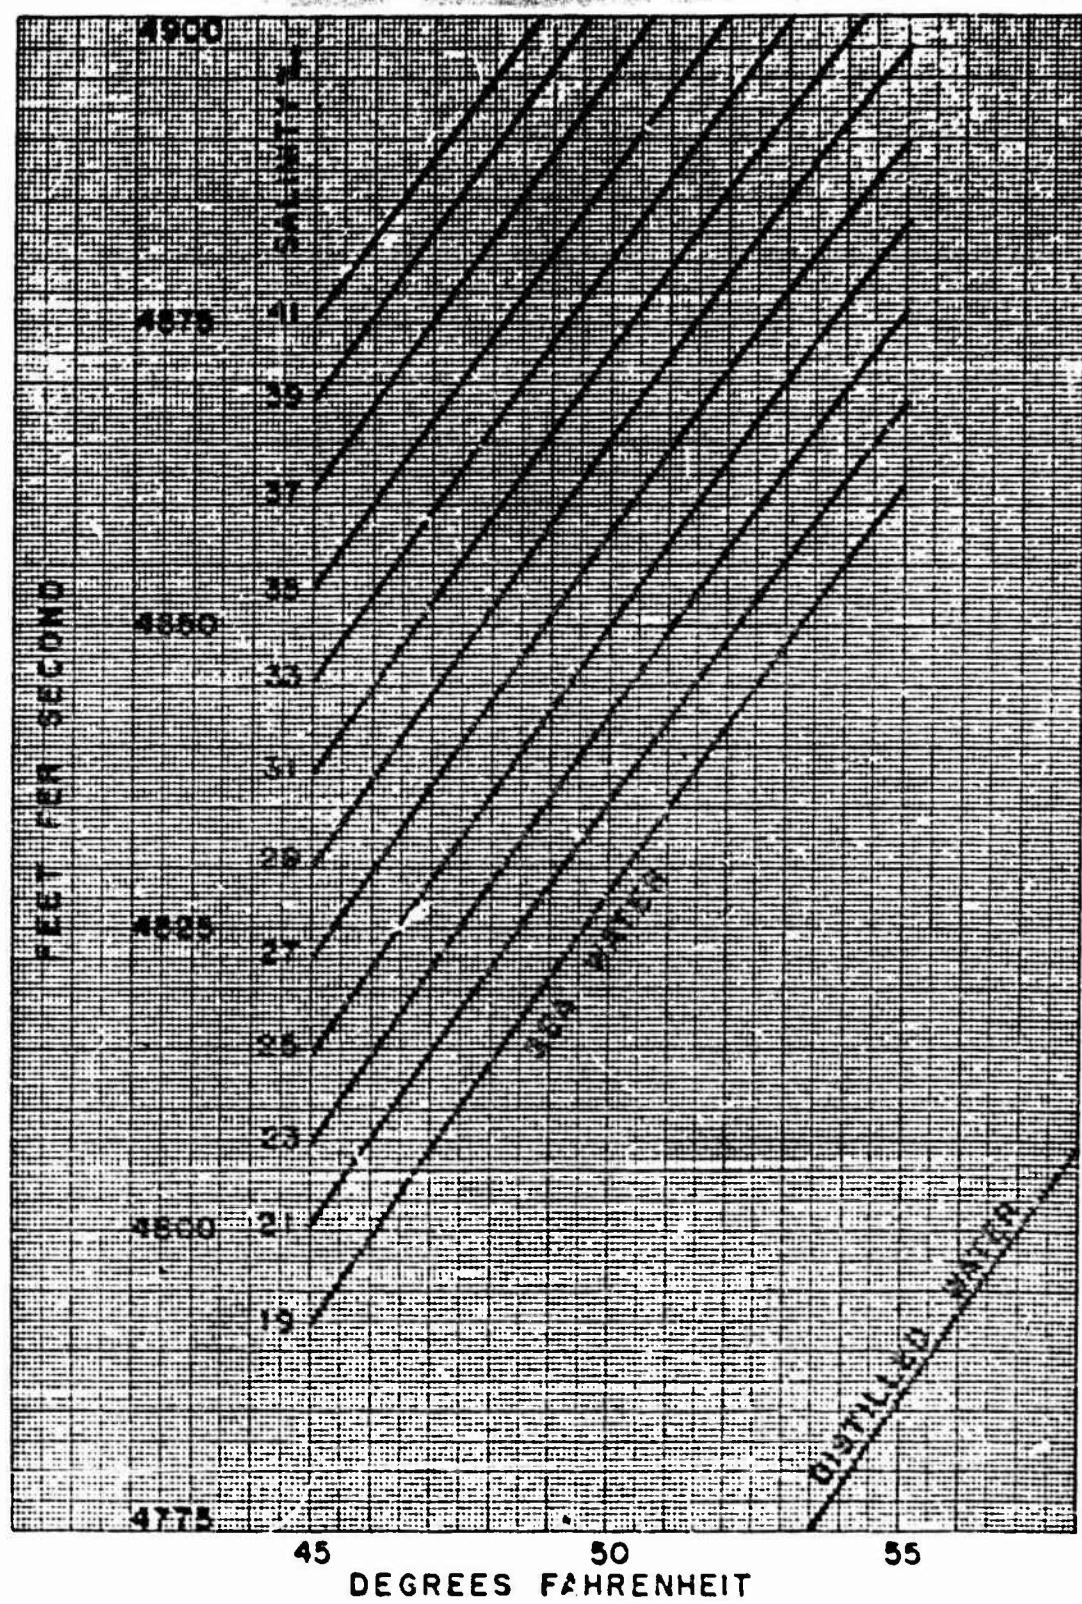


Figure 2-1

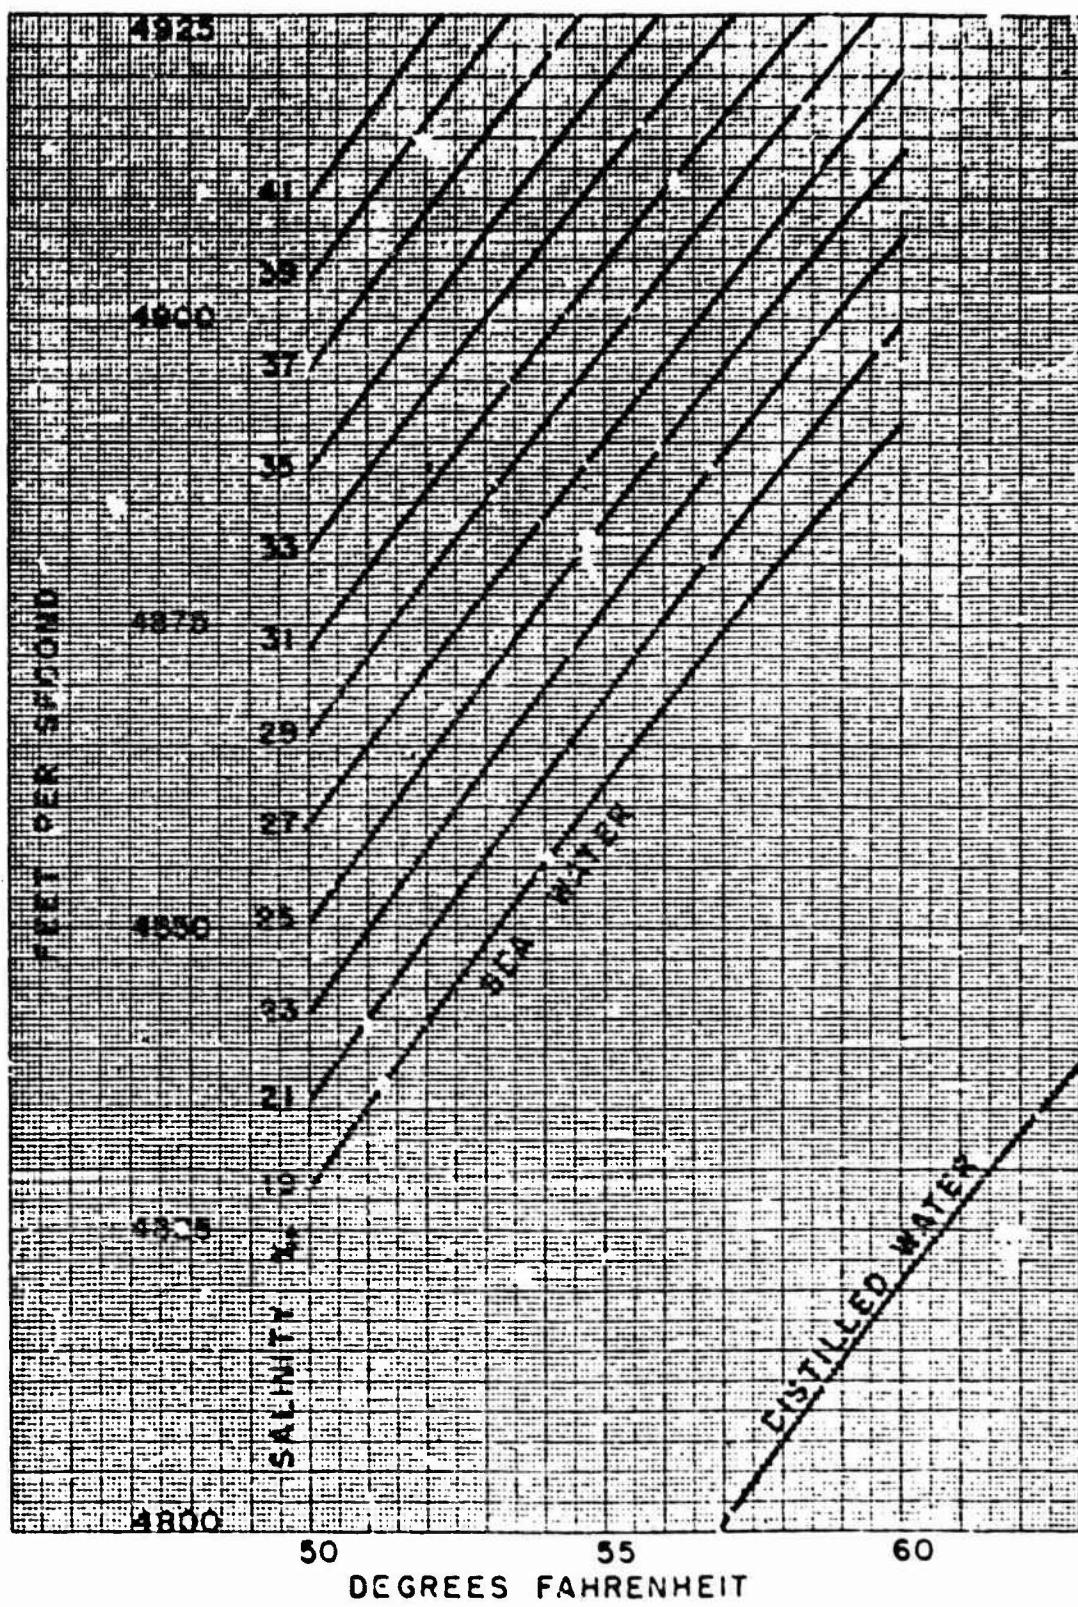


Figure 2-g

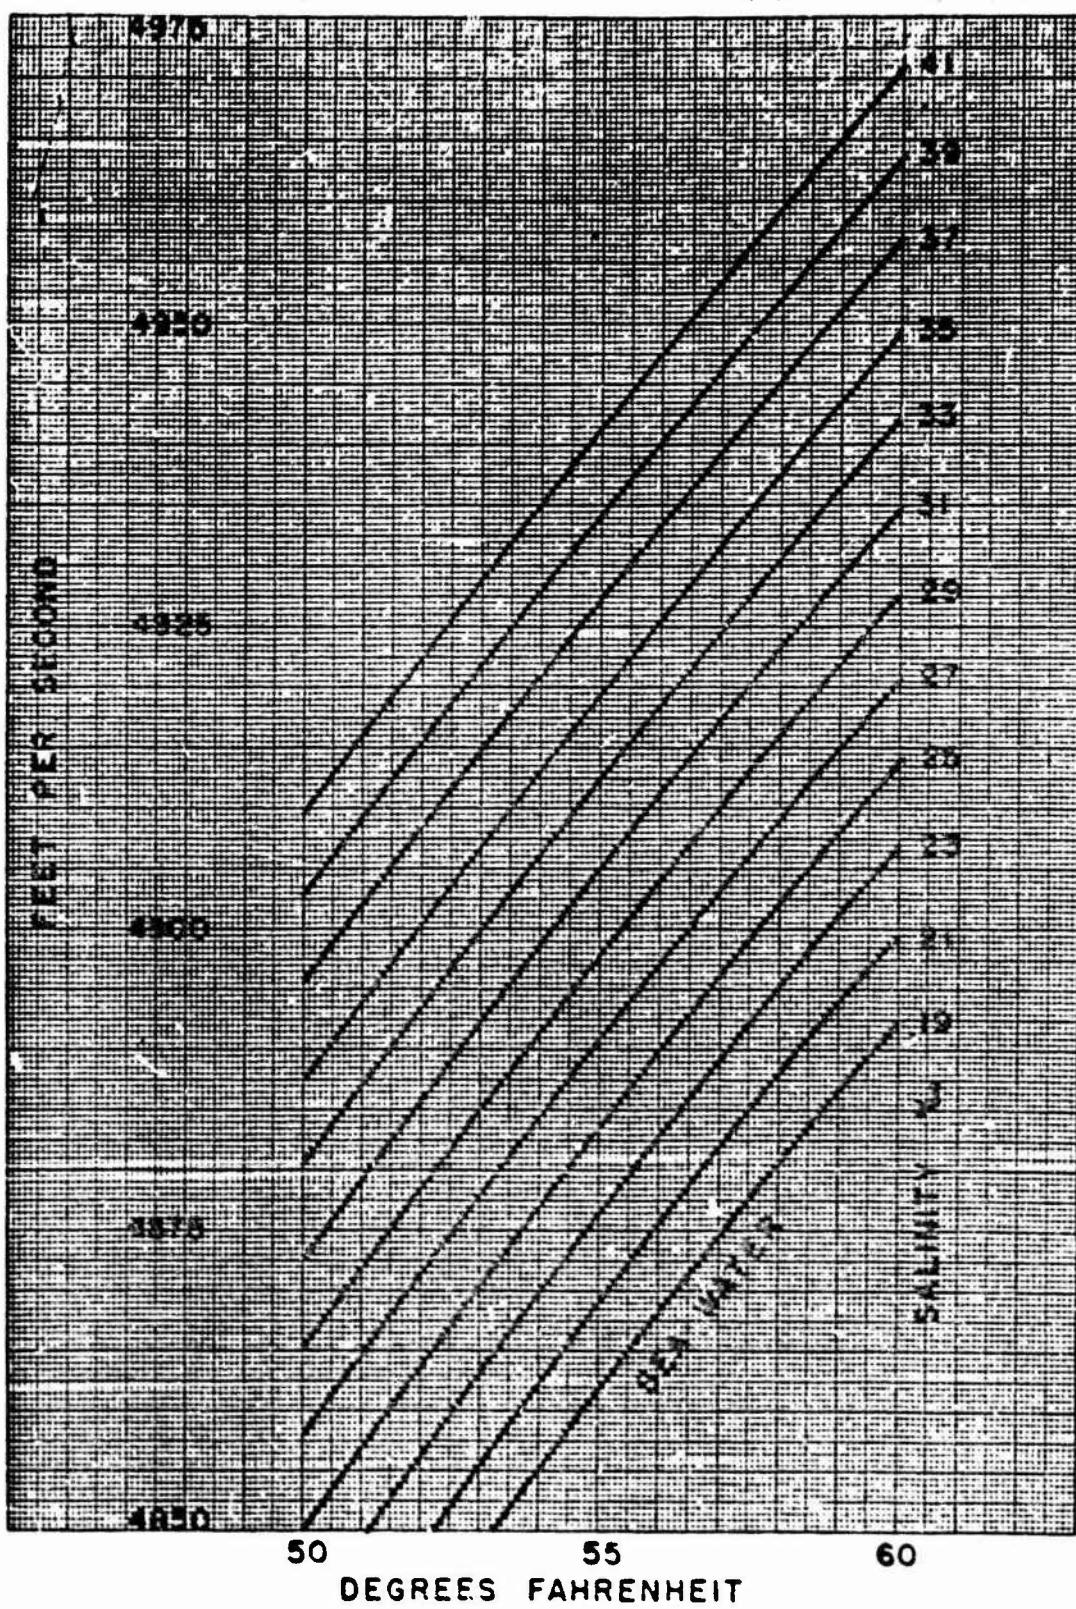


Figure 2-h

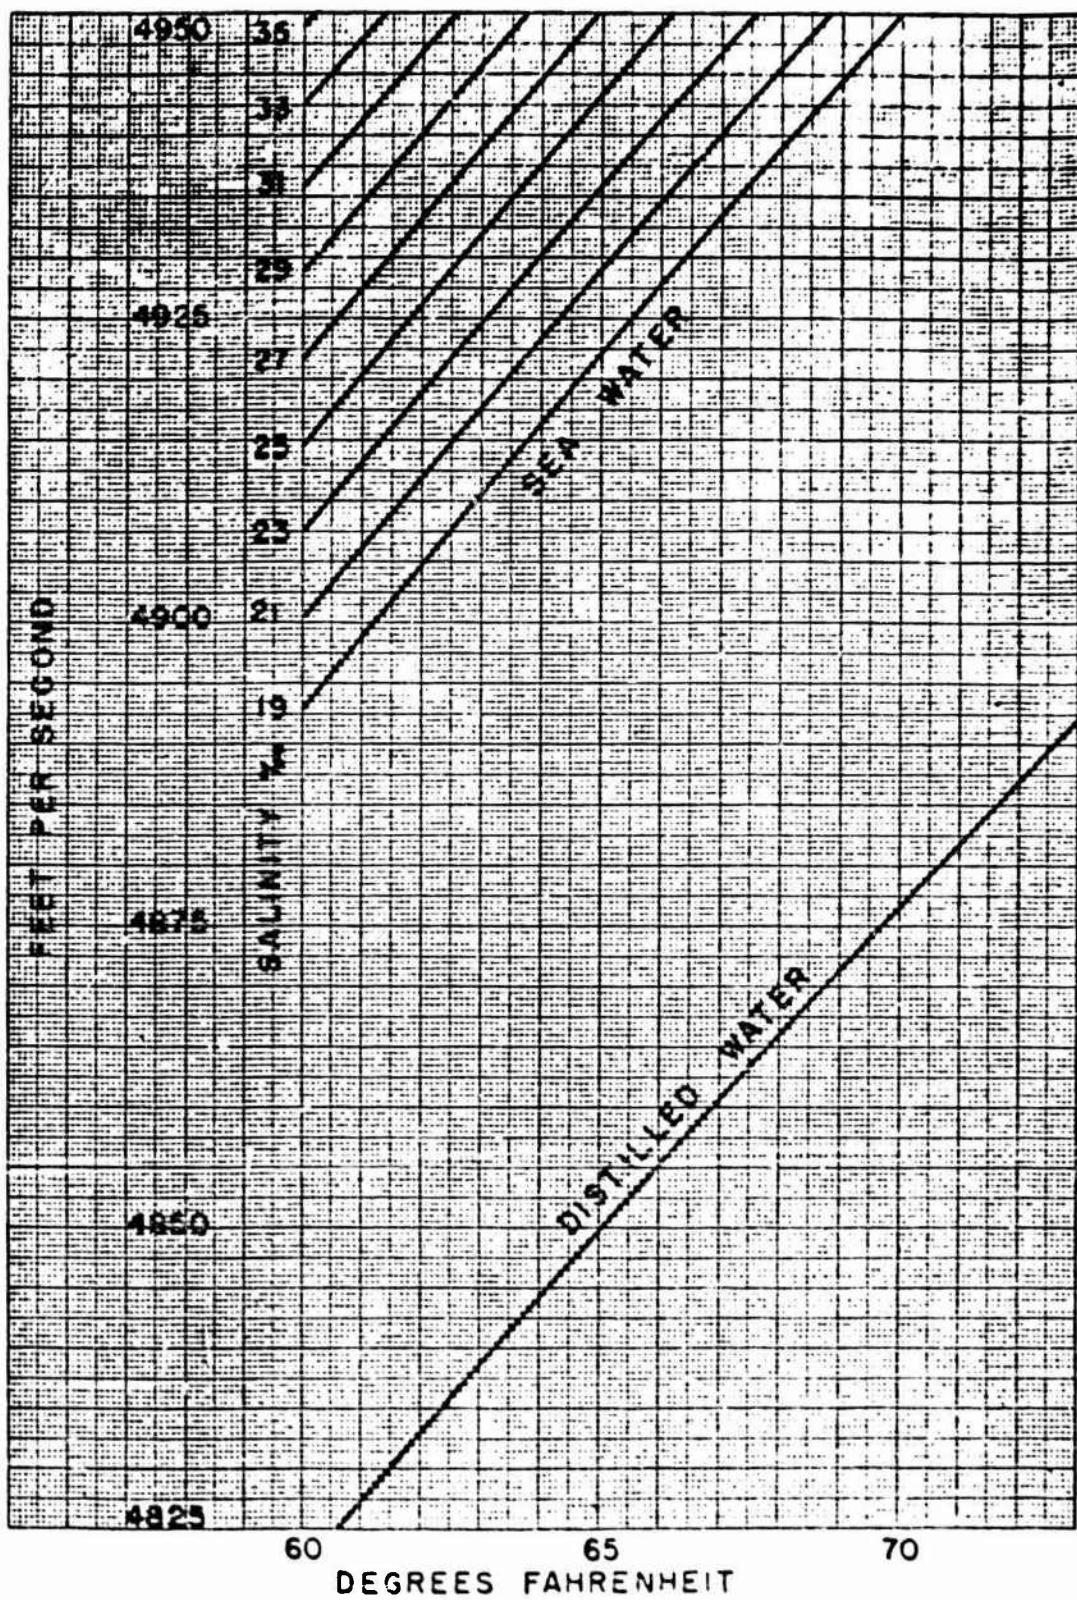


Figure 2-1

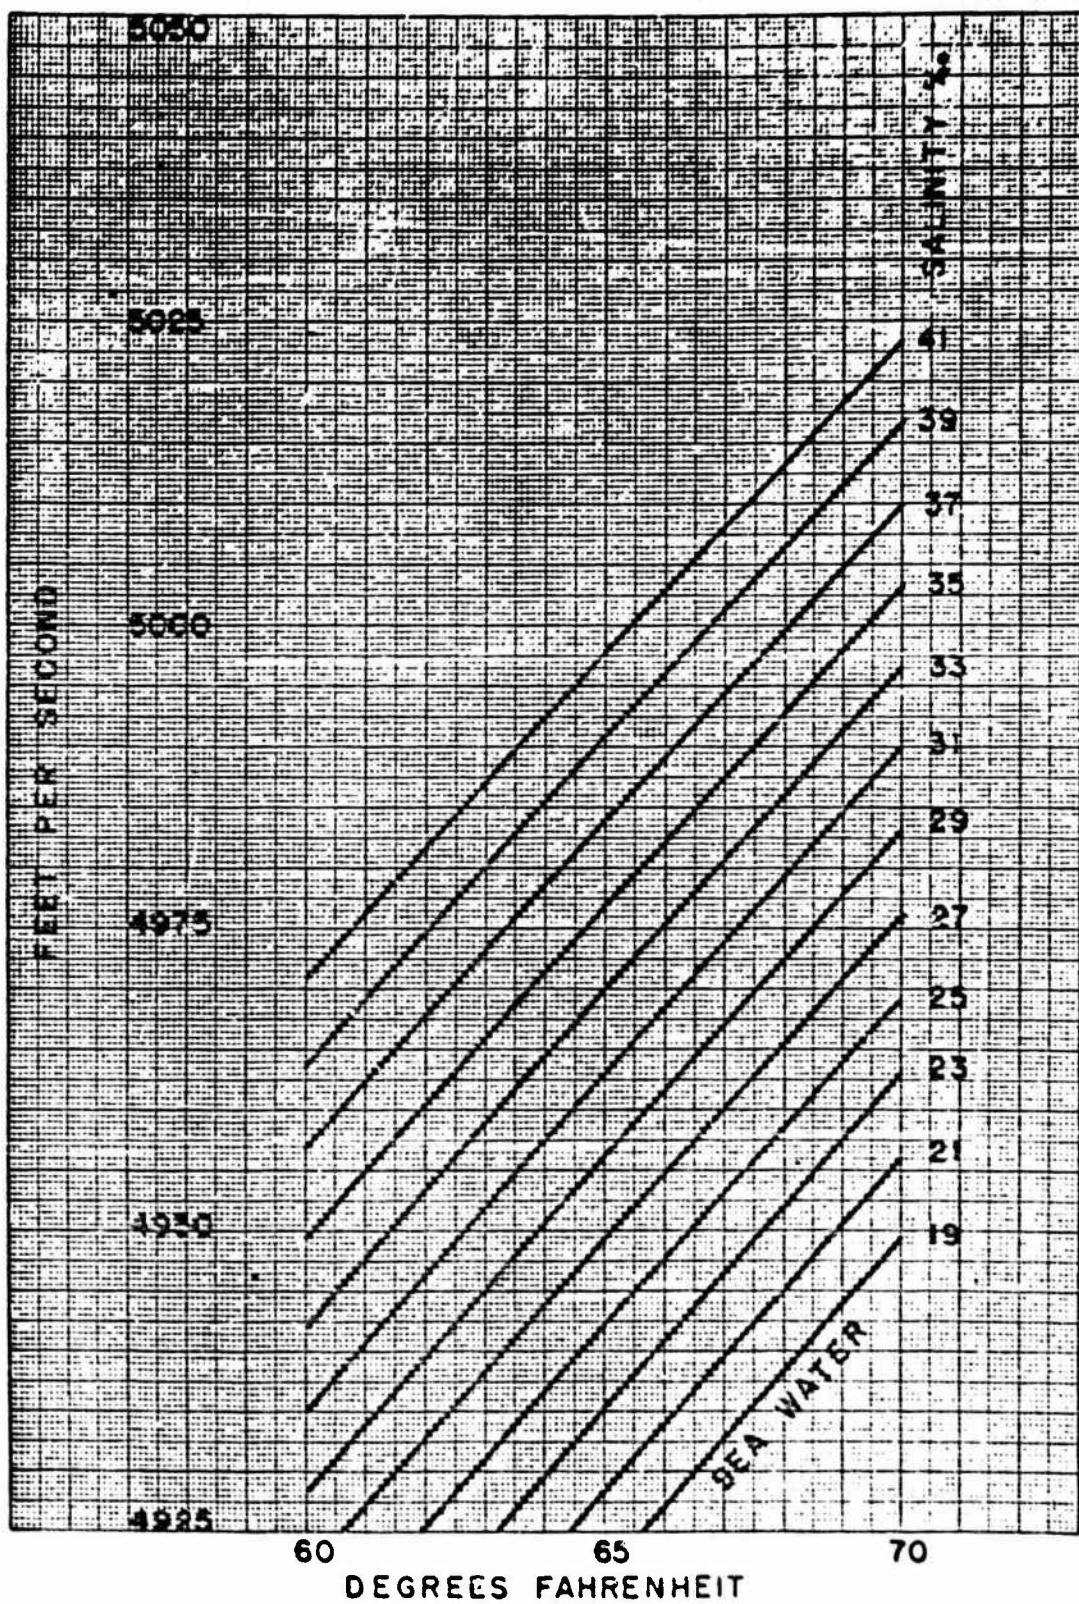


Figure 2-j

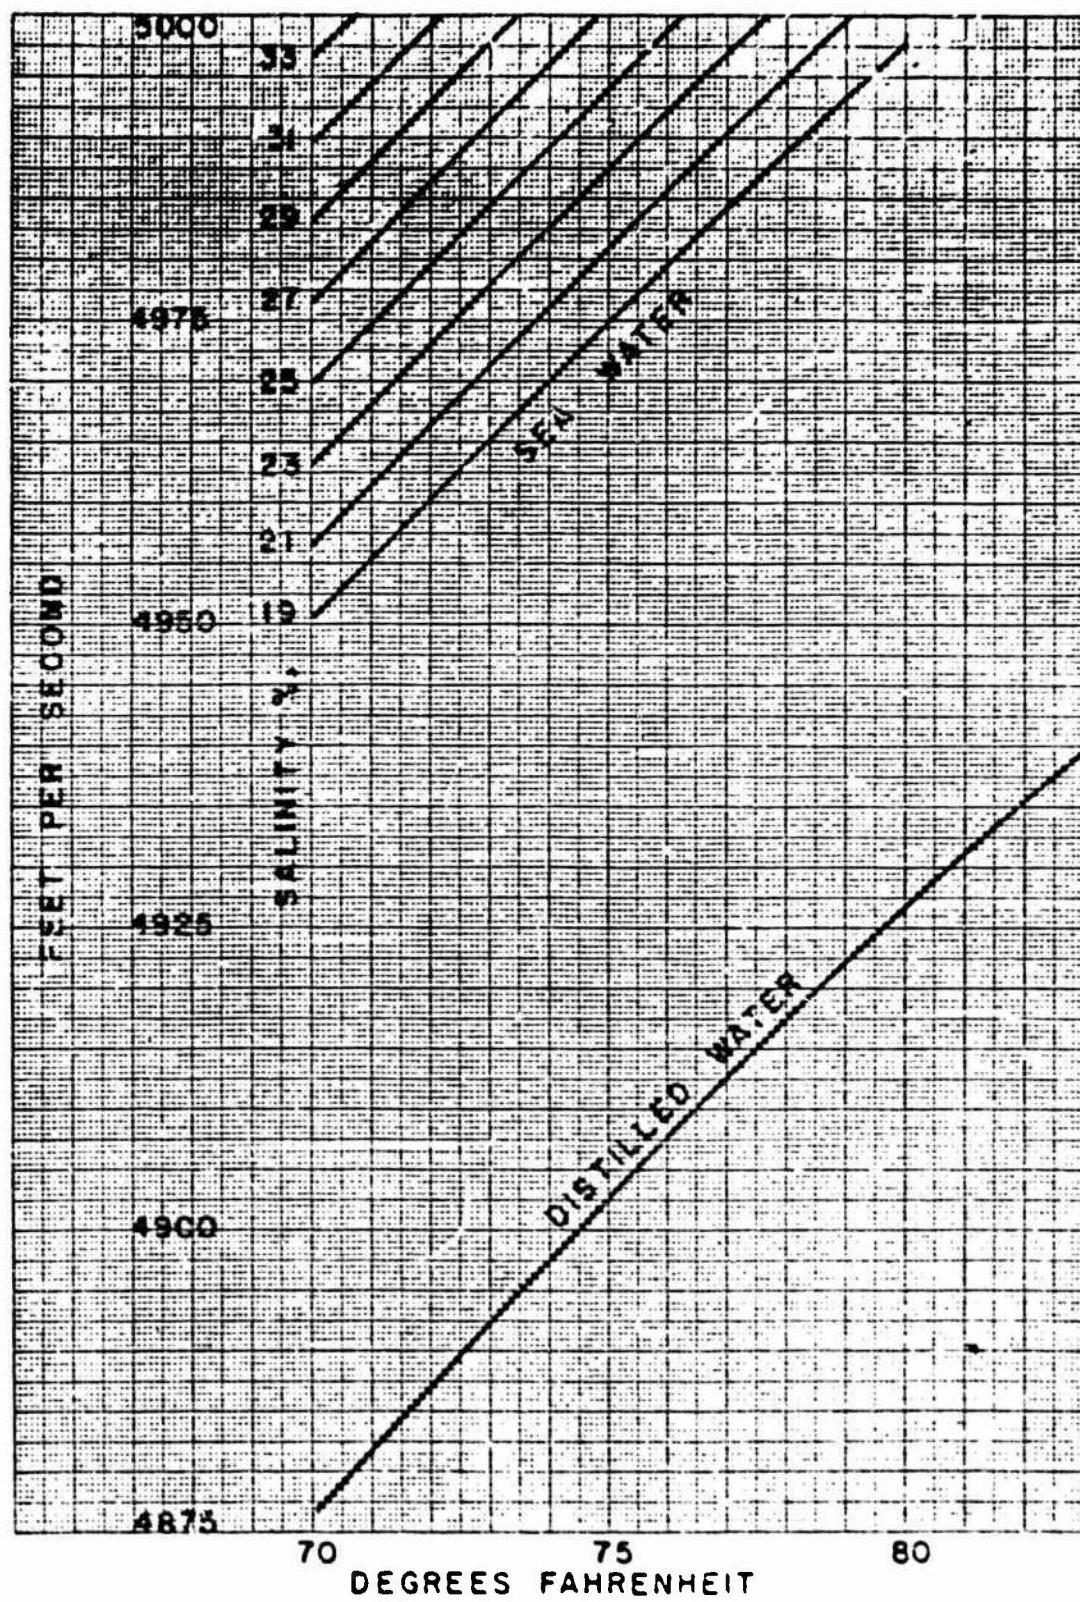


Figure 2-k

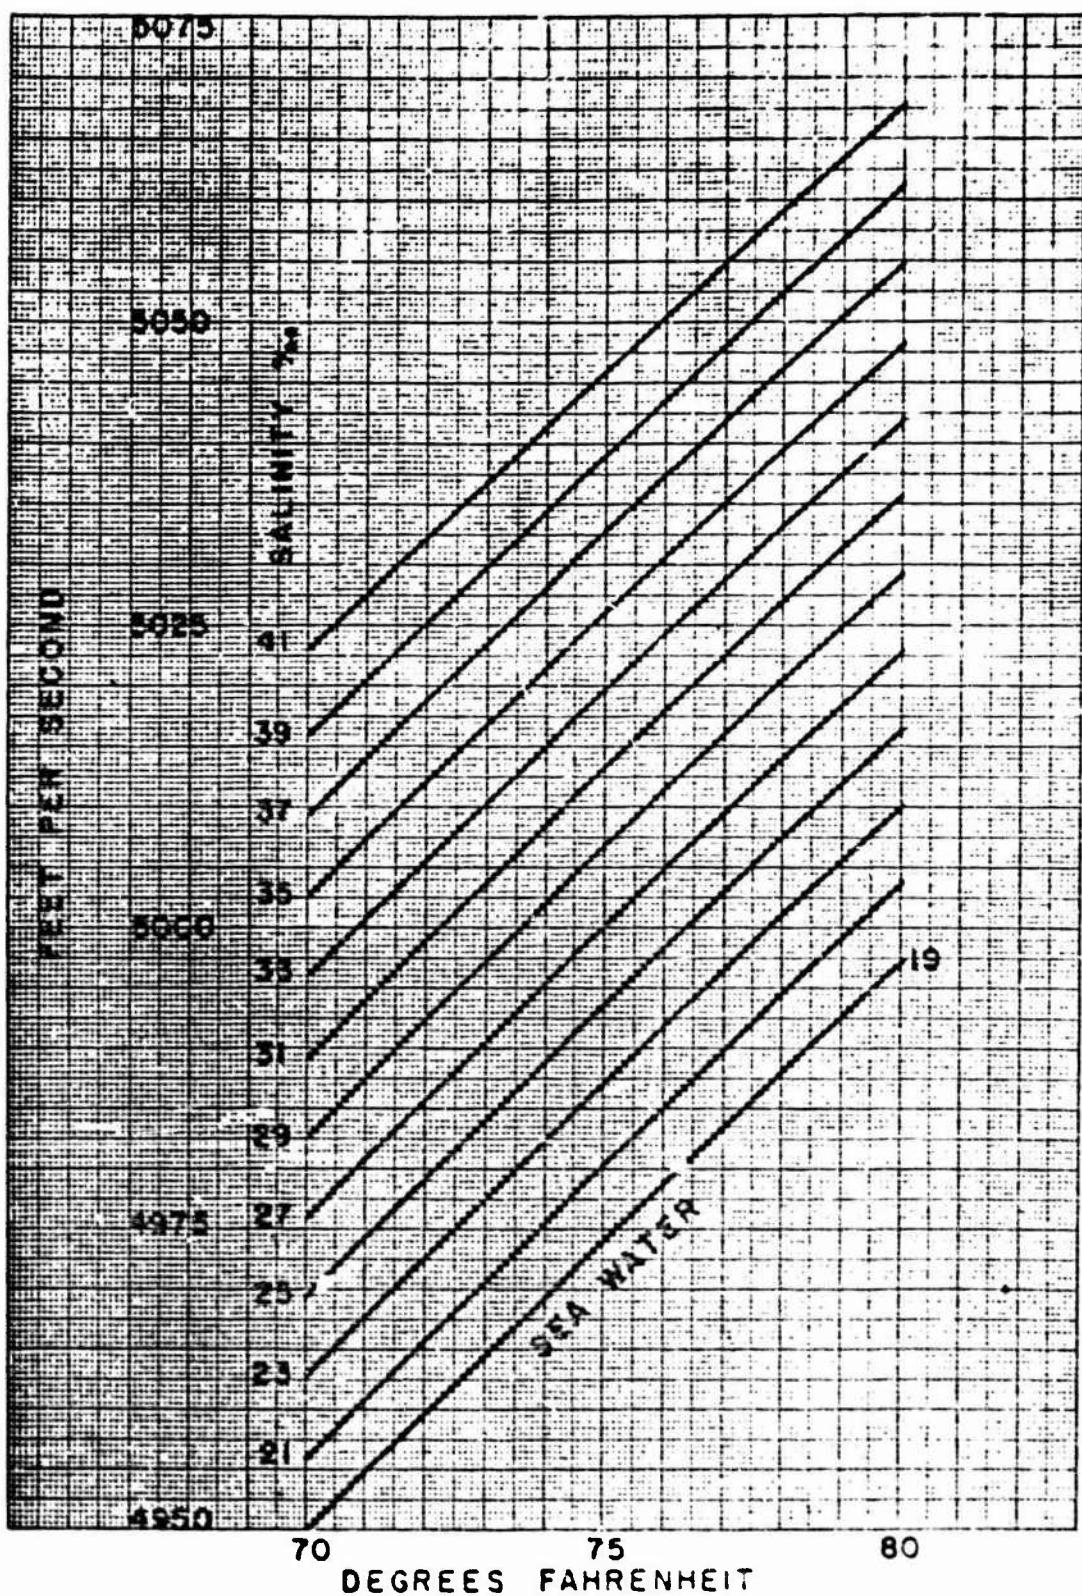


Figure 2-1

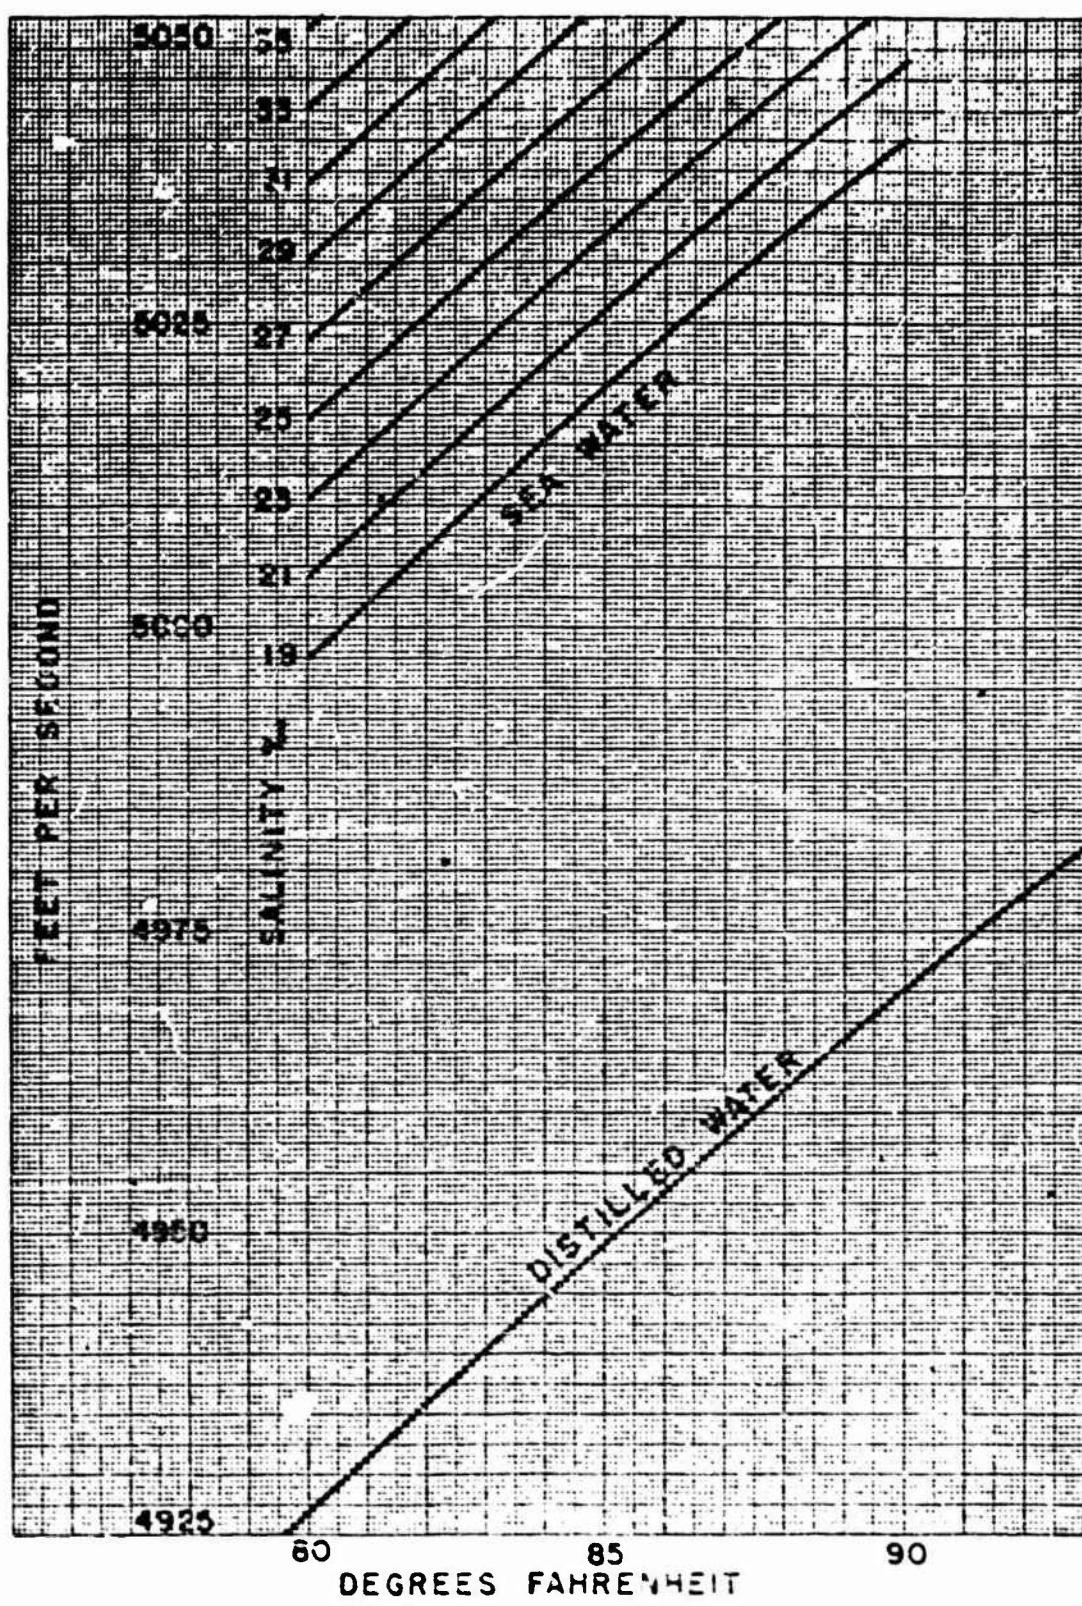


Figure 2-m

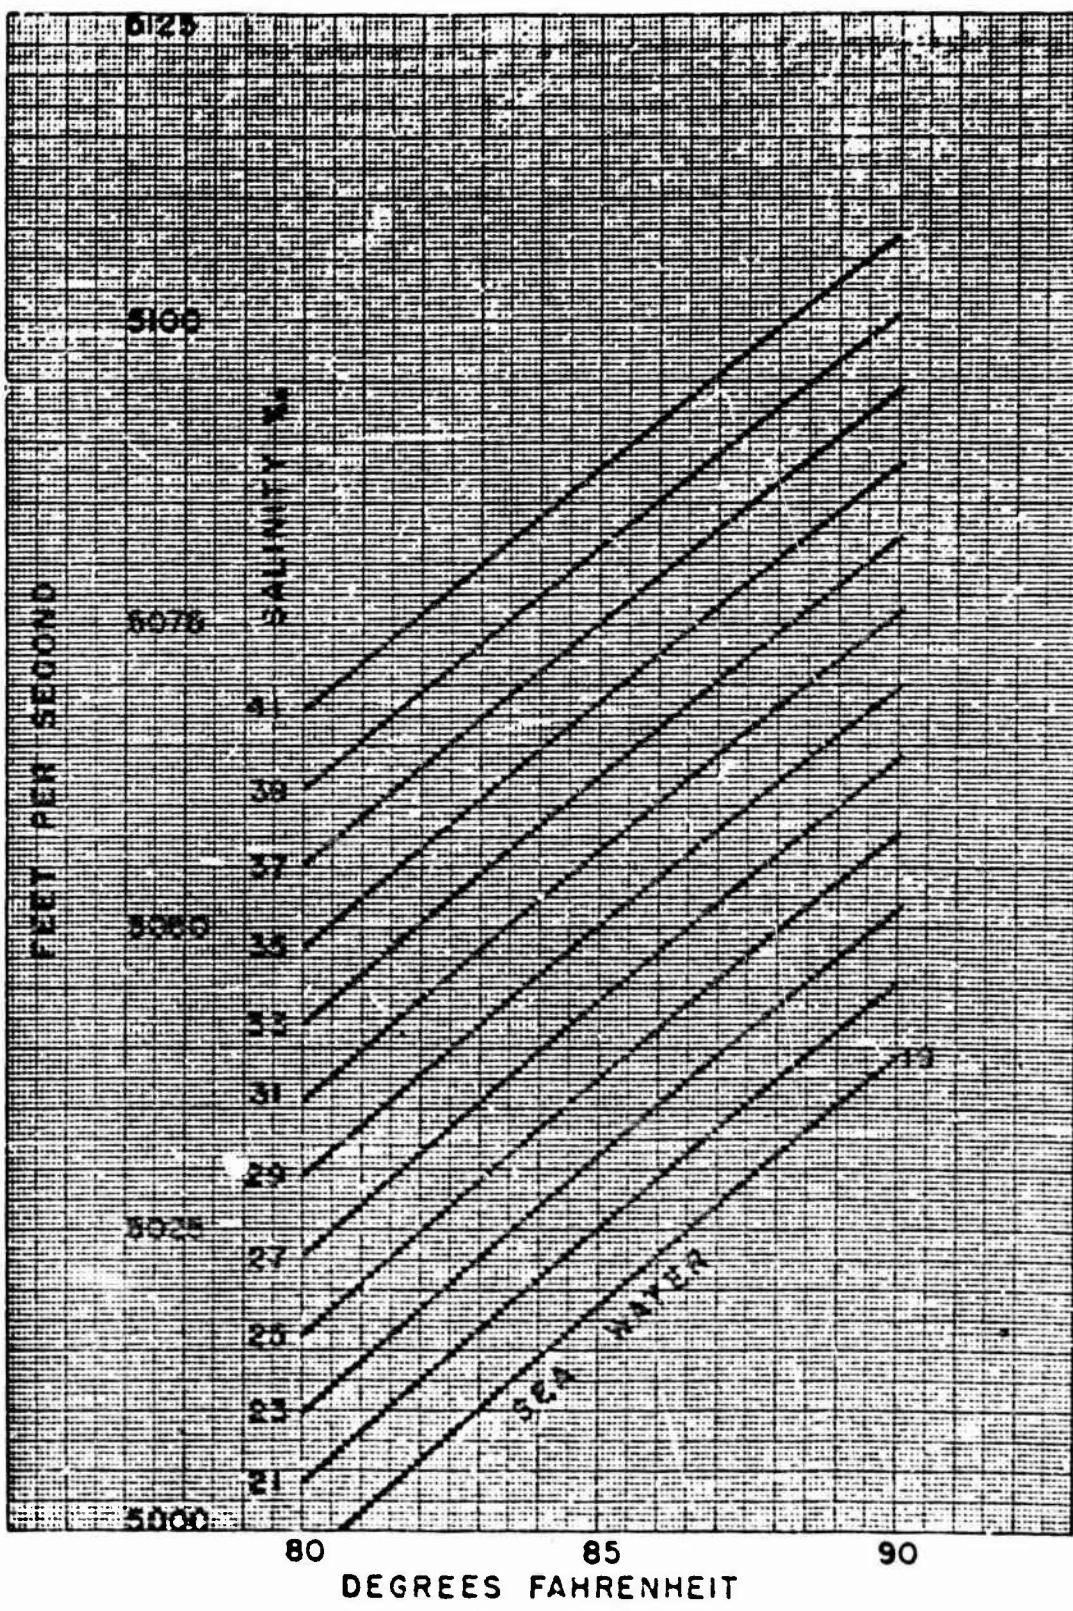


Figure 2-n

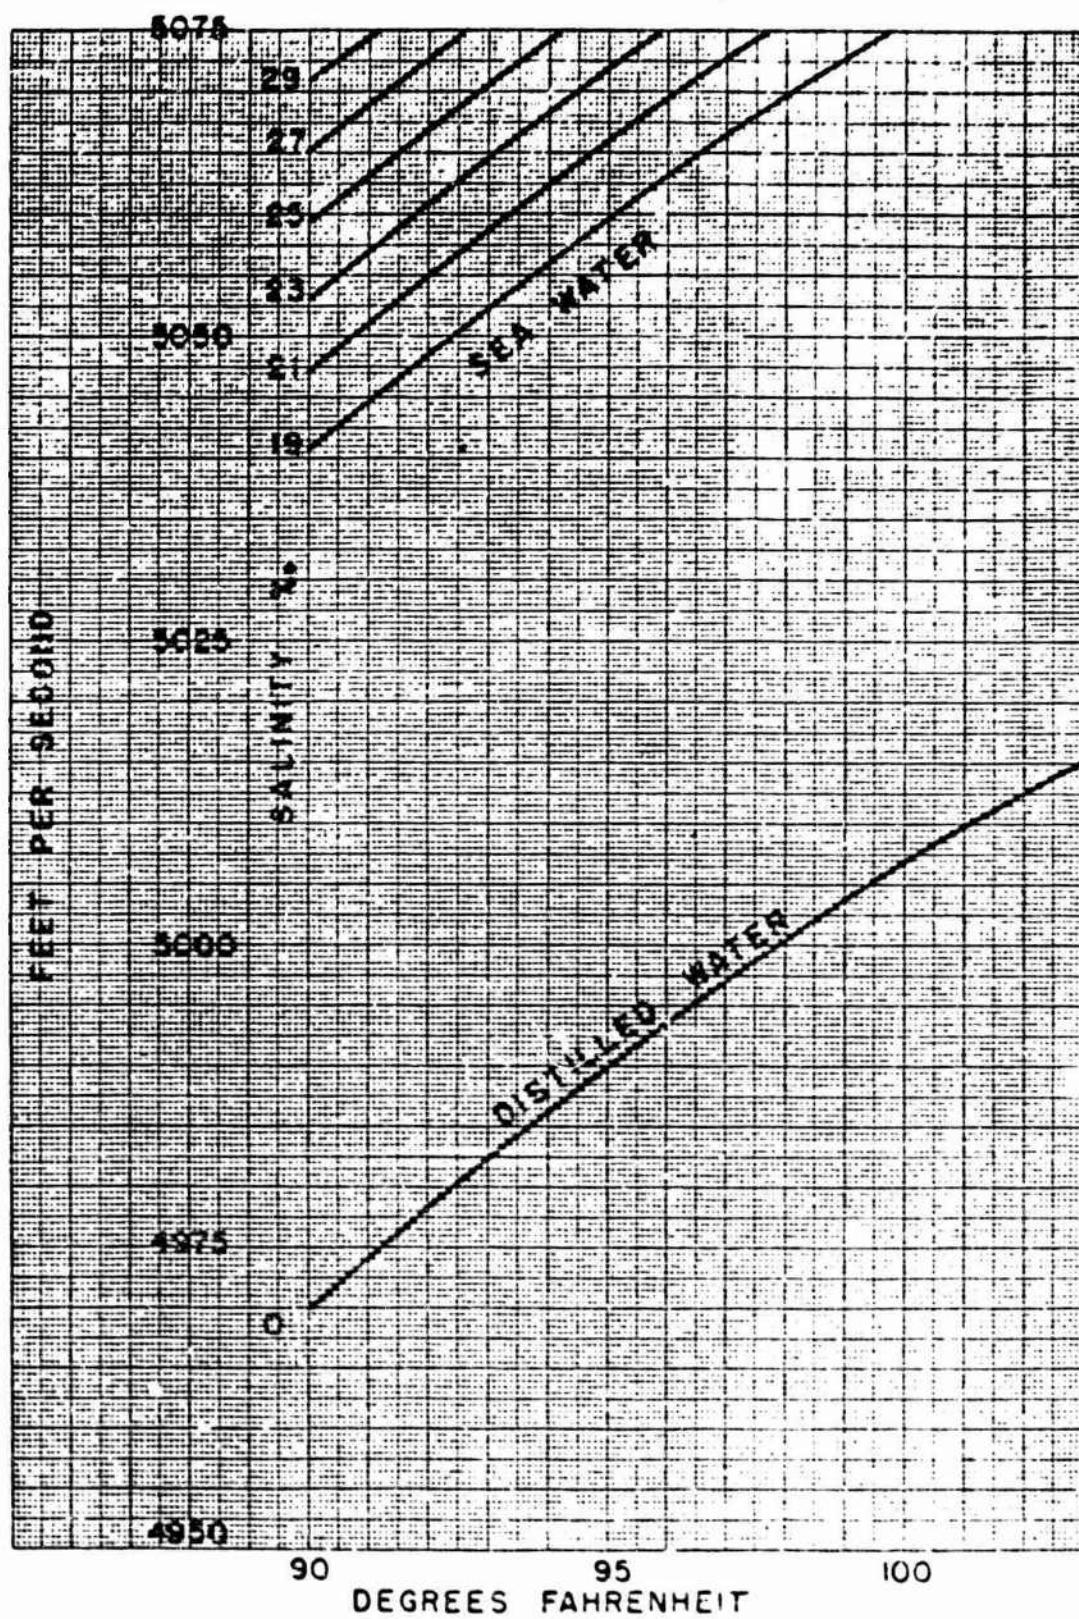


Figure 2-0

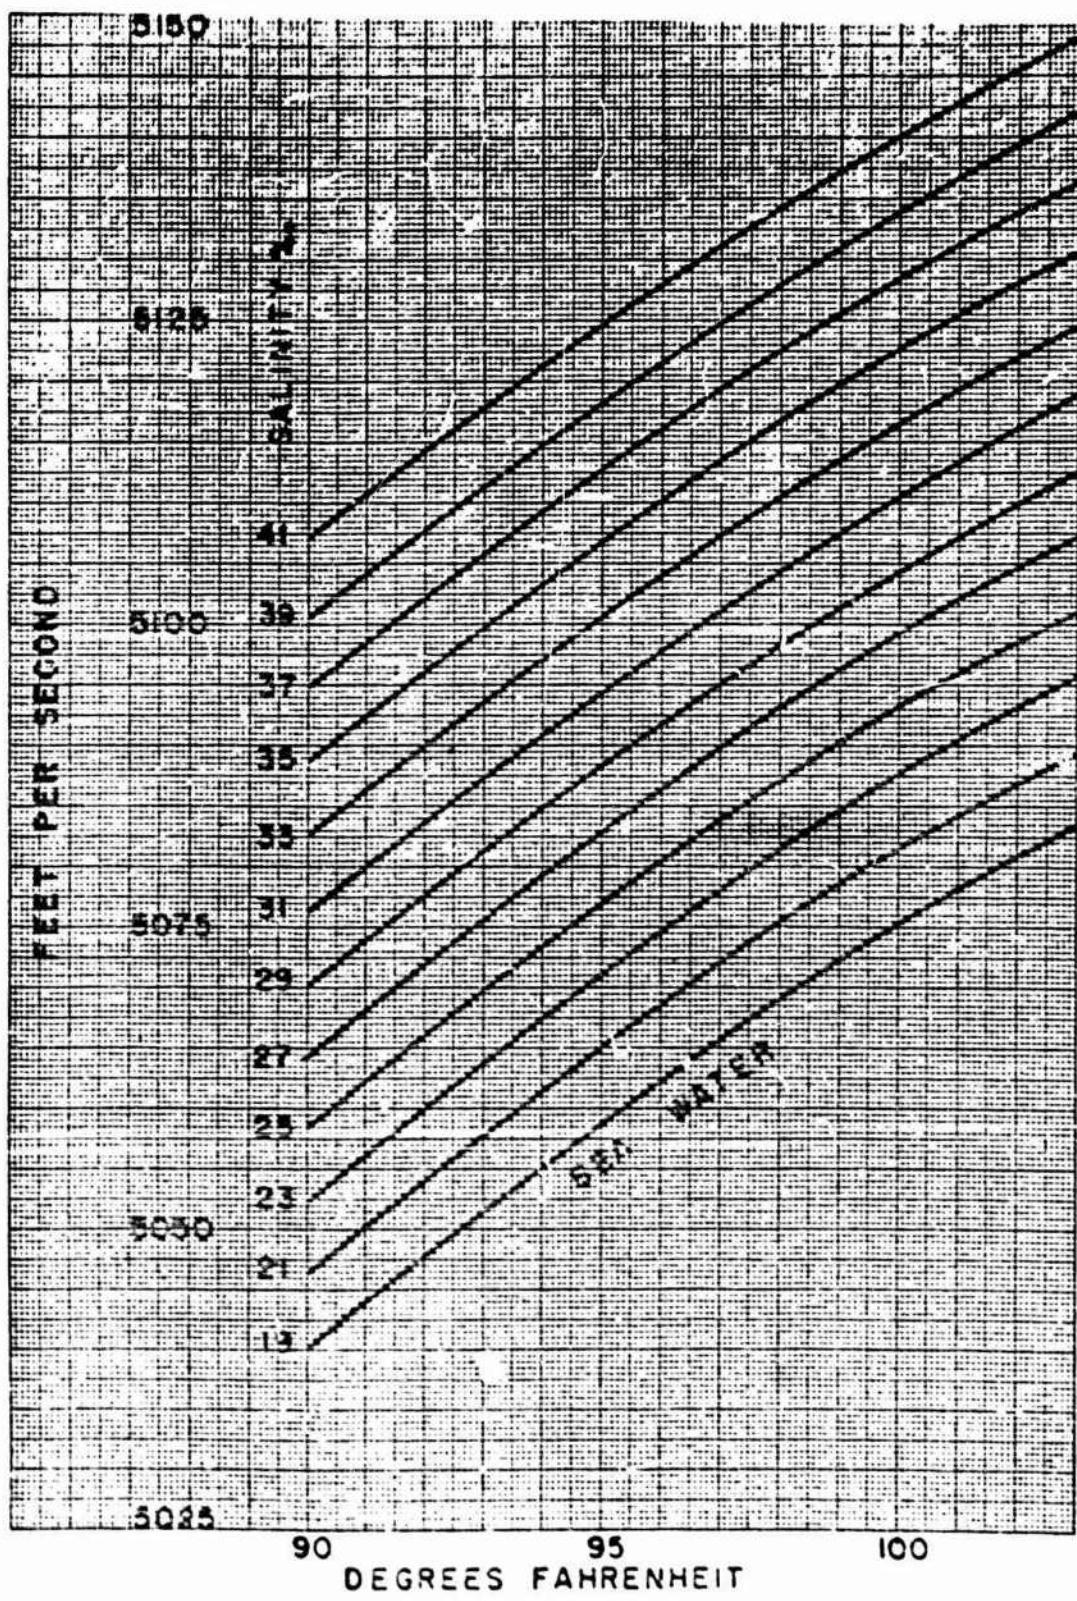


Figure 2-p

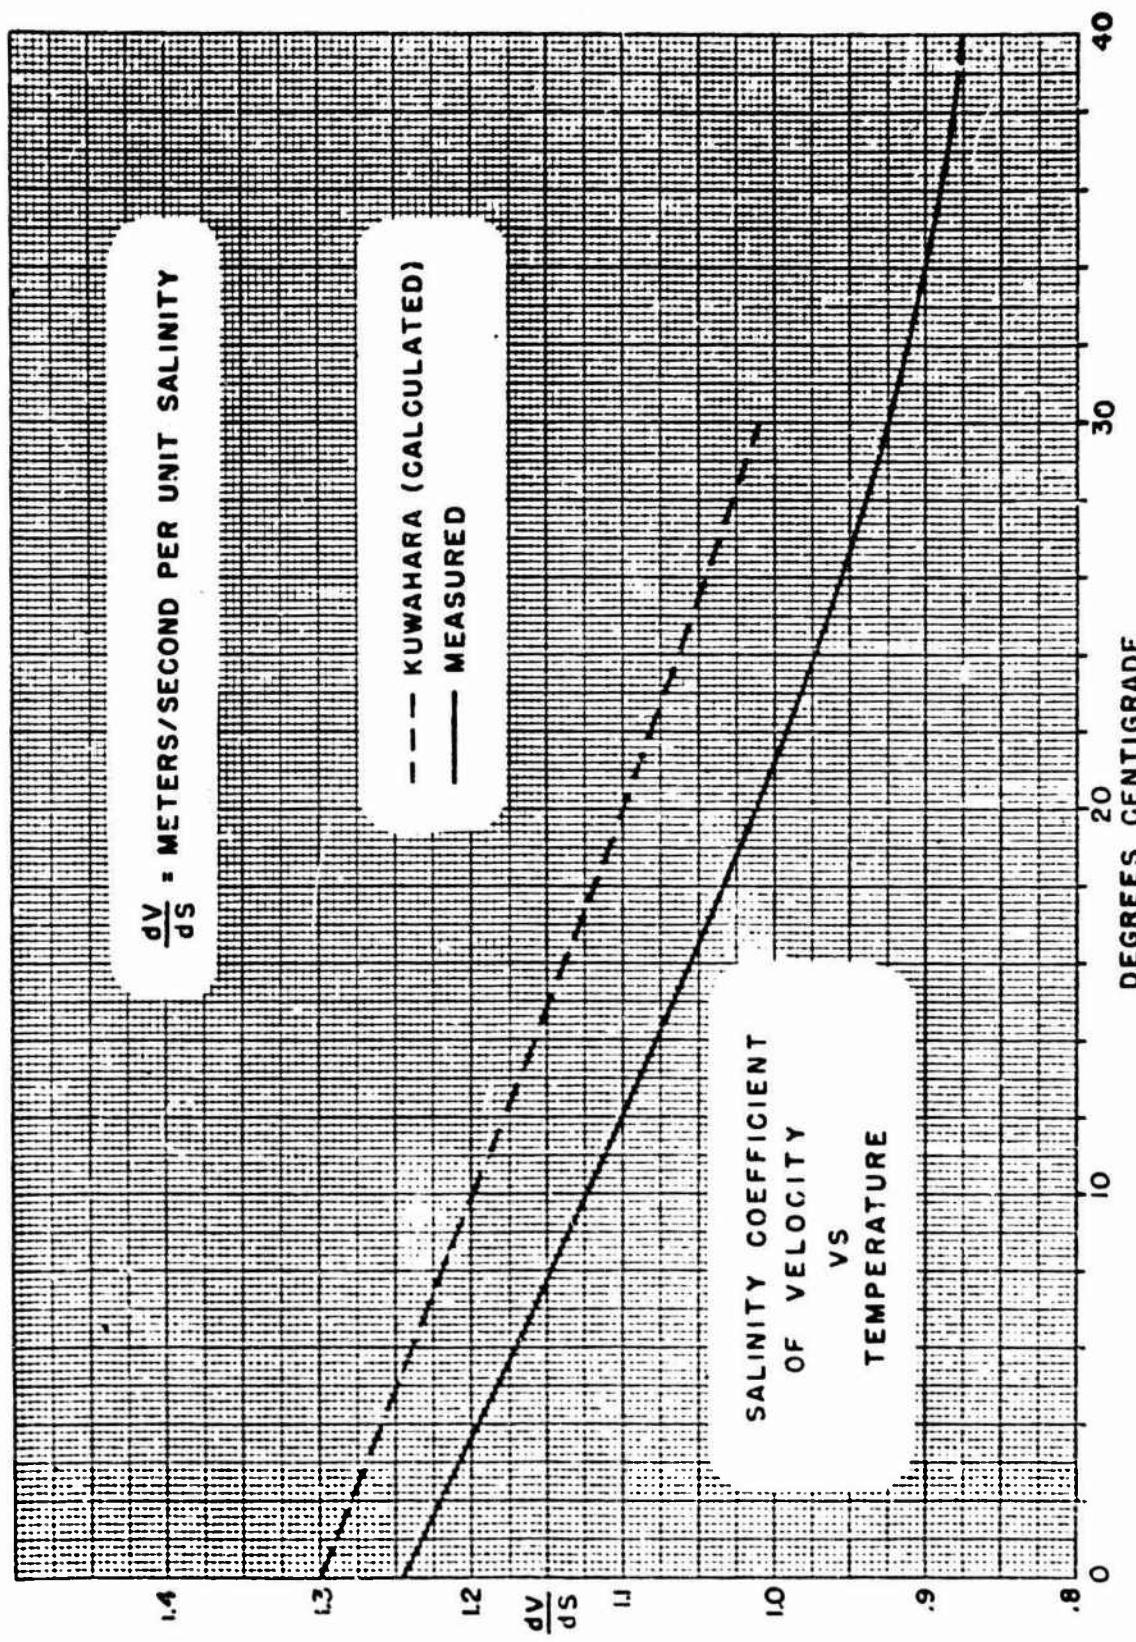


Figure 3 - Salinity Coefficient of Velocity vs. Temperature Metric Units

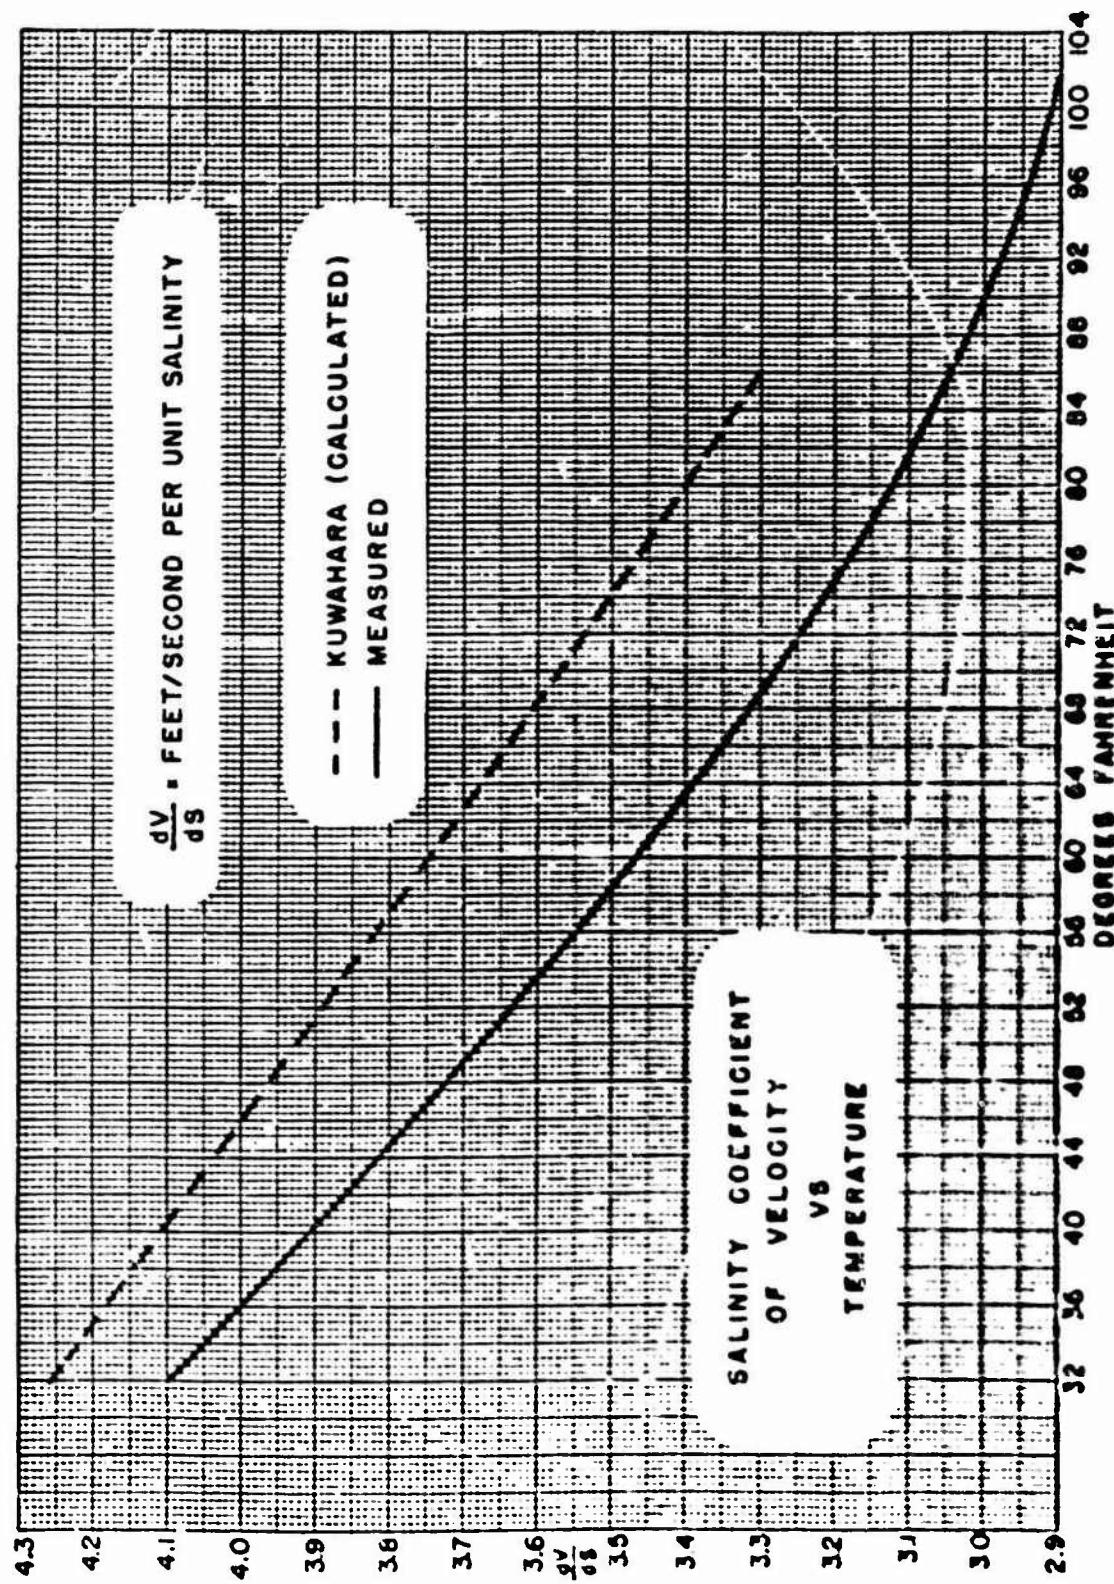


Figure 4 - Salinity Coefficient of Velocity vs. Temperature British Units

Reproduced by

DOCUMENT SERVICE CENTER

ARMED SERVICES TECHNICAL INFORMATION

U. S. BUILDING, DAYTON, 2, OHIO

REEL-C

500

A.T.I.

101043

"NOTICE: When Government or other drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the Government thereby incurs no responsibility, nor any of whatsoever; and the fact that the Government may have furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, in any manner, licensing the holder or any other person to manufacture, or conveying any rights or permission to manufacture, sell any patented invention that may in any way be related thereto."

UNCLASSIFIED

ATI-161 843

Office of Naval Research, Naval Research Lab.,
Washington, D.C. (NRL Report 4002)

THE VELOCITY OF SOUND IN SEA WATER AT
ZERO DEPTH, by V.A. Del Grosso. 11 June '52,
39 pp. incl. tables, graphs. UNCLASSIFIED

Velocity of sound was measured in natural sea water samples at megacycle frequencies by means of modern interferometric techniques. An empirical equation was formulated from these measurements, and new tables and graphs of the velocity of sound in natural sea water at "zero" depth are presented on the basis of this equation. The validity of utilizing

(over)

DIVISION: Physics (62)

SECTION: Radiation (6)

DISTRIBUTION: Copies obtainable from ASTIA-DSC.

1. Waves, Sound - Velocity
2. Acoustics, Underwater
3. Water, Sea
4. Sonar
- L. Del Grosso, V.A.

When this card has served its purpose, it may be destroyed in accordance with AFM 209-1, Army Reg. 500-9 or OPMAR Inst. 551-1.

ARMED SERVICES TECHNICAL INFORMATION AGENCY
DOCUMENT SERVICE CENTER

ATI- 161 843

these velocity tables at sonar frequencies is based on theoretical work which indicates the error introduced by so doing is at least an order of magnitude smaller than the claimed accuracy. The accuracy of these tables is estimated to be within ± 0.2 meter per second. The velocity values range approximately 2-4 meters per second higher than those existing tables.