

UNCLASSIFIED

AD NUMBER

ADB014581

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; AUG 1976. Other requests shall be referred to Air Force Aero-Propulsion Lab., Wright-Patterson AFB, OH 45433.

AUTHORITY

AFAL ltr 29 Nov 1978

THIS PAGE IS UNCLASSIFIED

THIS REPORT HAS BEEN DELIMITED  
AND CLEARED FOR PUBLIC RELEASE  
UNDER DOD DIRECTIVE 5200.20 AND  
NO RESTRICTIONS ARE IMPOSED UPON  
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION UNLIMITED.

2

AFAPL-TR-76-54 ✓

(2)

ADBO14581

# COMBUSTION TESTS OF RJ-5 FUEL BLENDS

RAMJET TECHNOLOGY BRANCH  
RAMJET ENGINE DIVISION

AJ NO. \_\_\_\_\_  
DDC FILE COPY

AUGUST 1976

TECHNICAL REPORT AFAPL-TR-76-54  
FINAL REPORT FOR PERIOD FEBRUARY THROUGH JULY 1976

Distribution limited to U.S. Government agencies only; Test and Evaluation; August 1976. Other requests for this document must be referred to AF Aero-Propulsion Laboratory (RJT), WPAFB, Ohio 45433.

AIR FORCE AERO-PROPULSION LABORATORY  
AIR FORCE WRIGHT AERONAUTICAL LABORATORIES  
AIR FORCE SYSTEMS COMMAND  
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433

DDC  
RECEIVED  
NOV 5 1976  
REGULATORY  
B

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Distribution limited to U.S. Government agencies only; Test and Evaluation; August 1973. Other requests for this document must be referred to AF Aero-Propulsion Laboratory (RJT), WPAFB, Ohio 45433.

This technical report has been reviewed and is approved for publication.

Roy R. Craig  
R. R. CRAIG  
Project Engineer

Joseph Petrarca  
J. PETRARCA  
Project Engineer

John T. Hojnacki  
J. T. HOJNACKI  
Project Engineer

P. L. Buckley  
P. L. BUCKLEY  
Project Engineer

FOR THE COMMANDER:

Frank D. Stull  
FRANK D. STULL  
Chief, Ramjet Technology Branch  
Ramjet Engine Division

ACCESSION for	
DTIC	White Section <input type="checkbox"/>
DDC	Buff Section <input checked="" type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION .....	
BY .....	
DISTRIBUTION/AVAILABILITY CODES	
Digi.	AVAIL. CODE/SPECIAL
B	

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER AFAPL-TR-76-54	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER	Kept.
4. TITLE (and Subtitle) Combustion Tests of RJ-5 Fuel Blends,	5. TYPE OF REPORT & PERIOD COVERED Final Feb - Jul 76	6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR R. R. Craig, J. Petrarca, J. T. Hojnacki P. L. Buckley	8. CONTRACT OR GRANT NUMBER(s)	9. PERFORMING ORGANIZATION NAME AND ADDRESS AF Aero Propulsion Laboratory Wright-Patterson AFB, OH 45433	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 3012-11-08
11. CONTROLLING OFFICE NAME AND ADDRESS AF Aero Propulsion Laboratory Wright-Patterson AFB, OH 45433	12. REPORT DATE August 1976	13. NUMBER OF PAGES 24	12 32p.
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) Unclassified	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Distribution limited to U.S. Government agencies only; Test and Evaluation; August 1976. Other requests for this document must be referred to AF Aero-Propulsion Laboratory (RJT), WPAFB, Ohio 45433.			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Combustors Ramjet Combustion Dump Combustors Heavy Hydrocarbon Fuel			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) An experimental investigation was conducted on the addition of viscosity reducing additives to RJ-5 fuel. The tests were to determine if the additives hindered or improved the combustion efficiency of the basic RJ-5 fuel. The tests were conducted in a 12 inch diameter dump combustor with a L/D of 4, no flameholder and a 50% nozzle at three different inlet air temperatures. The fuels employed for the tests were JP-4, RJ-5, SI-80 (20% isobutylbenze and 80% RJ-5) and HDF-2 (21% exo-tetrahydrodicyclopentadiene			

DD FORM 1, JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

011570

YB

Cont. of 20:

and 79% RJ-5). At inlet air temperatures of 750°R pronounced differences in combustion efficiencies were observed for the four fuels. As the inlet air temperature was raised to 1250°R, these differences tended to become greatly diminished.

FOREWORD

This report contains the results of an effort to determine what effect various RJ-5 fuel blends may have on ramjet dump combustor performance. The work was performed in the Ramjet Division and the Fuels and Lubrication Division of the Air Force Aero-Propulsion Laboratory, Wright-Patterson AFB, Ohio, under Project 3012, Task 301212, and Work Unit 30121208. The effort was conducted by R. R. Craig/RJT, J. Petrarca/SFF, J. T. Hojnacki/RJT, and P. L. Buckley/RJT during the period of February to July 1976.

## TABLE OF CONTENTS

SECTION	PAGE
I. INTRODUCTION	1
II. EXPERIMENTAL PROCEDURE	3
A. Test Hardware	3
B. Test Rig	3
C. Combustion Efficiency	4
III. DISCUSSION & RESULTS	5
IV. CONCLUSIONS	8
REFERENCES	24

## LIST OF ILLUSTRATIONS

FIGURE	PAGE
1. Comparison of Fuel Blend Performance. $T_{T_2} = 772^\circ\text{R}$ ; $P_C = 16$ psia.	11
2. Comparison of Premixed Fuel-Air Performance for Fuel Blends. $T_{T_2} = 768^\circ\text{R}$ ; $P_C = 16$ psia.	12
3. Comparison of Fuel Blend Performance. $T_{T_2} = 1012^\circ\text{R}$ ; $P_C = 16$ psia.	13
4. Comparison of Premixed Fuel-Air Performance for Fuel Blends. $T_{T_2} = 1000^\circ\text{R}$ ; $P_C = 16$ psia.	14
5. Comparison of Fuel Blend Performance. $T_{T_2} = 1238^\circ\text{R}$ ; $P_C = 16$ psia.	15
6. Comparison of Premixed Fuel-Air Performance for Fuel Blends. $T_{T_2} = 1210^\circ\text{R}$ ; $P_C = 16$ psia.	16
7. Effect of Inlet Air Temperature on JP-4 Combustion. $P_C = 16$ psia.	17
8. Effect of Inlet Air Temperature on RJ-5 Combustion. $P_C = 16$ psia.	18
9. Effect of Inlet Air Temperature on SI-80 Combustion. $P_C = 16$ psia.	19
10. Effect of Inlet Air Temperature on HMF2 Combustion. $P_C = 16$ psia.	20
11. Comparison of Fuel Blend Performance. $T_{T_2} = 768^\circ\text{R}$ ; $P_C = 10$ psia.	21
12. Comparison of Fuel Blend Performance. $T_{T_2} = 992^\circ\text{R}$ ; $P_C = 10$ psia.	22
13. Comparison of Fuel Blend Performance. $T_{T_2} = 1248^\circ\text{R}$ ; $P_C = 10$ psia.	23

## SYMBOLS

A	Area - in <sup>2</sup>
f/a	Fuel-to-Air Ratio
F	Thrust Stand Force - lbs.
P	Pressure - psia
S <sub>a</sub>	Air Specific Stream Thrust
T	Temperature - °R
ΔT <sub>t</sub>	Total Temperature Rise Across Combustor

## SUBSCRIPTS

0	Ambient
5	Nozzle Exit
*	Sonic Point
c	Combustor
i	Ideal
t	Stagnation Conditions
exhaust	Exhaust Section Value
ext	Value at Nozzle Outside Diameter
seal	Value at Exhaust Seal Diameter

SECTION I  
INTRODUCTION

Current ramjet powered, volume limited missile designs employ a heavy hydrocarbon fuel, RJ-5, in order to achieve maximum range. Operating environments of the missile may require pumping and controlling of the fuel at temperatures in the range of  $-40^{\circ}\text{F}$  to  $-65^{\circ}\text{F}$ .

The RJ-5 fuel is composed of hydrogenated dimers of Norbornadiene. In the past, the RJ-5 fuel produced in the batch process had a true freezing point around  $+23^{\circ}\text{F}$ . A current continuous process development program with the Sun Oil Company indicates an RJ-5 can be produced with a freezing point of  $-40^{\circ}\text{F}$ . Additional processing techniques may lower the freezing point to  $-65^{\circ}\text{F}$ . The RJ-5 is the only known hydrocarbon which has a volumetric heating value of 160,000 BTU/gallon and is still a mobile liquid at low temperatures.

Hamilton Standard has recently identified the maximum state-of-the-art viscosity for the fuel control as between 400 and 500 c.s. The main disadvantage of RJ-5 is that its high viscosities at low temperatures imposes operational restrictions on the missile system. Two approaches are possible to deal with this restriction. The first is to maintain the temperature of the fuel (by heating) above the value which corresponds to the viscosity limit. The second is to use an RJ-5 blend whose viscosity does not exceed the imposed limit over the temperature environment of the missile system. For many future systems, the environment of the missile has not yet been defined.

The Fuels Branch of AFAPL has been evaluating different diluents with RJ-5 fuel. The most effective one for reducing viscosity while maintaining a high heat of combustion is exo-tetrahydrodicyclopentadiene (exo-THDCPD).

This hydrocarbon was synthesized by Sun Oil Company under Contract F33615-73-C-2022. Its properties are listed in Table 1. Data such as viscosity as a function of weight percent exo-THDCPD for different temperatures has been produced.<sup>1</sup> This data will enable the missile design engineer to perform a trade-off study between missile range and fuel heating requirements based upon the temperature restraints.

The Navy at the Naval Weapons Center has also been developing RJ-5 blends for ramjet systems. The fuel SI-80 (80% RJ-5 and 20% isobutylbenzene) was specifically designed for the MRE. The only guideline used was that the viscosity of the fuel should not exceed 170 c.s. at -40°F. This limit was due to the MRE fuel control system.<sup>2</sup>

This in-house test program was set up to look at what effects the diluents, exo-THDCPD and isobutylbenzene, might have on the combustion performance of RJ-5 fuel blends. Inlet air temperature was varied along with pressure and fuel injection location. Fuel temperature was a constant 70°F.

A follow-on program should look at the effect of very cold fuel, at least -40°F, on combustion and injection characteristics.

SECTION II  
EXPERIMENTAL PROCEDURE

A. Test Hardware:

The test hardware for these tests was the large scale, baseline hardware described in Reference 3. The combustor was 12" in diameter and the nozzle throat area was 50% of the combustor area. In addition to our standard fuel injection plane, 4 1/8" from the dump station, fuel could be injected 10 feet upstream of the combustor in the highly turbulent region where the test rig is fed air from twelve 2" flex hoses. Injection here should have produced a uniform mixture to the combustor; however, no measurements were made to verify this assumption, because of a lack of instrumentation for performing the necessary measurements.

B. Test Rig:

The combustor hardware was mounted on a thrust stand designed for measuring absolute levels of thrust. The movable deck of the thrust stand is 14 ft. in length and 4 ft. wide. The deck is suspended from 4 flexures 15 inches long, 4 inches wide and 0.036 inches thick. Calibration of the thrust stand load cell was accomplished by applying a force at the combustor centerline through a reference load cell.

Heated air was supplied from the laboratory's indirect fired furnace through twelve 2" D flex hoses to the combustor hardware. Inlet air temperatures were monitored with chromel-alumel thermocouples, shielded to reduce recovery factor effects. Air flow rates were measured with flange tap, square edge orifice plates, and fuel flow rates were measured with turbine type flow-meters.

In order to maintain a choked nozzle while operating the combustors at sub-atmosphere pressures, the nozzles were connected to the laboratory

exhauster system by means of a flexible rolling seal. The exhaust system was maintained at approximately 3 psia. Use of the seal required that all nozzles be water-cooled.

Data was recorded on magnetic tape at a rate of 40 channels per second via a Hewlett-Packard 2012B digital data acquisition system.

### C. Combustion Efficiency:

The definition of combustion efficiency used throughout this report is:

$$\eta_c = \frac{\Delta T_t}{\Delta T_{ti}}$$

where  $\Delta T_t$  is the total temperature rise across the combustor as computed from the thrust measurement and  $\Delta T_{ti}$  is the ideal total temperature rise for the measured fuel-to-air ratio as computed from equilibrium chemistry calculations. Since absolute thrust is measured, corrections for ambient pressure acting on the hardware and exhauster seal forces must be made in order to obtain the sonic air specific stream thrust,  $S_a^*$ . These corrections are:

$$S_a^* = \frac{F}{W_a} + \frac{P_o A^*}{W_a} + \frac{(P_o - P_{\text{exhaust}})}{W_a} \left[ \frac{(A_{\text{seal}} + A_{\text{ext}})}{2} - A^* \right]$$

Three-dimensional tables of  $S_a^*$  versus  $T_{t5}$  and  $P_{t5}$ , computed by means of equilibrium chemistry routines, are then used to determine  $T_{t5}$  from  $S_a^*$  and  $P_c$ .

SECTION III  
DISCUSSION & RESULTS

For these tests, four different fuels were used, JP-4, RJ-5, SI-80, and HDF-2. The test matrix consisted of three different inlet air temperatures of approximately 750°R, 1000°R and 1250°R with two different air flow rates which would yield combustor pressures of approximately 16 psia to 10 psia. Fuel flow was then varied to produce increments in fuel-air ratio of approximately 0.005.

The fuel HDF-2 is composed of 79% RJ-5 and 21% exo-THDCPD. Its properties are shown in Table 2. This fuel was tailored through blending to have a viscosity around 400 c.s. at -40°F. In the final analysis, its viscosity was actually 355 c.s. This translates into a viscosity reduction of 79.1% over the baseline RJ-5. The volumetric heating value of HDF-2 is only 3.3% lower than the RJ-5.

The fuel, SI-80, is composed of 80% RJ-5 and 20% isobutylbenzene and was supplied to AFAPL by B. Burdette of NWC. Its properties are also listed in Table 2. The volumetric heat of combustion of SI-80 is approximately 1,000 Btu/gallon lower than reported in literature by the Navy. The Navy value, 154,000 Btu/gallon, was based on one data point and may be in error.<sup>4</sup> The viscosity reduction of SI-80 over RJ-5 at -40°F is 89.5%. Its volumetric heating value is 5.6% lower than RJ-5.

The objective of these tests was not to obtain high combustion efficiencies but rather to be able to discern differences in performance of the fuels when inlet air temperatures and air flows were changed. This is best accomplished when efficiencies are on the order of 70% to 80% and not when they are 95%.

Figure 1 compares performance obtained for the four fuels at a nominal air flow of 8 lb/sec and a nominal inlet air temperature of 750°R. At low fuel-air ratios, all four fuels yield similar performance. At a fuel-air ratio of about 0.04, the combustor went into a radial mode combustion instability for all fuels except the RJ-5. This instability ceased for the HDF-2 at a fuel-air ratio of 0.05 and .055 for the SI-80. Performance was then similar to that for the RJ-5.

Figure 2 is a comparison of the performance obtained with the four fuel blends under pre-mixed conditions. Inlet air temperature and air flow are similar to those of Figure 1. In comparing Figures 2, 4 and 6, it is seen that the low temperature pre-mixed data for the RJ-5, SI-80 and HDF-2 is not consistent with the 1000°R and 1250°R data. For the pre-mixed JP-4 data, performance increases as inlet air temperature increases and the fuel-air ratio, at which the steep rise in performance occurs, decreases. At 1000°R and 1250°R with RJ-5, SI-80 and HDF-2, performance is slightly less than the JP-4 performance, but the low temperature data is higher than the JP-4 data. The reason for this reversal in trends is not known.

Figures 3 and 5 are comparisons for injection of the fuels near the dump at inlet air temperatures of 1000°R and 1250°R, respectively, and appear to be consistent with Figure 1. Figures 7, 8, 9 and 10 are cross plots of the data of Figures 1, 3 and 5 to show the changes experienced for each individual fuel, with inlet air temperatures. With all fuels, except RJ-5, combustor screech was audibly detected. The severity of the instabilities decreased with increasing inlet air temperatures and were minor in terms of danger of damage to the combustor.

Figures 11, 12 and 13 compare the performance obtained at air flows of 5 lb/sec for the three inlet air temperatures. Performance is generally lower than that obtained at the higher air flow and is dramatically reduced for the low inlet air temperature case. Combustor instabilities have disappeared, at the low inlet air temperature, for all the fuels except the JP-4.

SECTION IV

CONCLUSIONS

1. The diluents *exo*-THDCPD and isobutylbenzene appear to have very little effect on combustor performance for room temperature fuels.
2. The fuels, IDF-2 and SI-80, gave a viscosity reduction over RJ-5 of 79.1% and 89.5%, respectively. The volumetric energy penalty is 3.3% for IDF-2 and 5.6% for SI-80.
3. A discrepancy of approximately 1000 BTU/gal in the volumetric heat of combustion reported in literature and obtained through testing was found for SI-80.
4. Comparison combustion tests still need to be performed with cold fuels, but little difference should be evident as long as the atomization of the fuel by the injectors is sufficient to ensure rapid vaporization of the fuel droplets.

TABLE 1. Properties of Exo-TIHCPD

Formula	$C_{10}H_{16}$
Purity, wt %	99
Specific Gravity 60°/60°F	0.939
Net Heat of Combustion	
BTU/lb	18,105
BTU/gal	141,563
Viscosity, cs	
@ 100°F	2.24
0°F	8.02
-40°F	18.00
-65°F	36.49
Flashpoint, °F	132

TABLE 2. Properties of High Density Test Fuels

<u>PROPERTIES</u>	<u>HDF-2</u>	<u>SI-80</u>	<u>RJ-5*</u>
Formula	C <sub>12.9</sub> H <sub>17.7</sub>	C <sub>13.0</sub> H <sub>17.2</sub>	C <sub>14.0</sub> H <sub>18.3</sub>
Specific Gravity 60°/60°F	1.0499	1.0305	1.0870
Net Heat of Combustion			
BTU/lb	17,922	17,823	17,907
BTU/gal	156,702	152,957	162,104
Viscosity, cs**			
@100°F	8.3	4.7	13.9
0°F	72.0	37.0	220.0
-40°F	355.0	178.0	1700.0
-65°F	1,570	745.0	12,057

\* Ashland Batch 2 for Comparison

\*\* HDF-2 and SI-80 Data Provided by B. Burdette

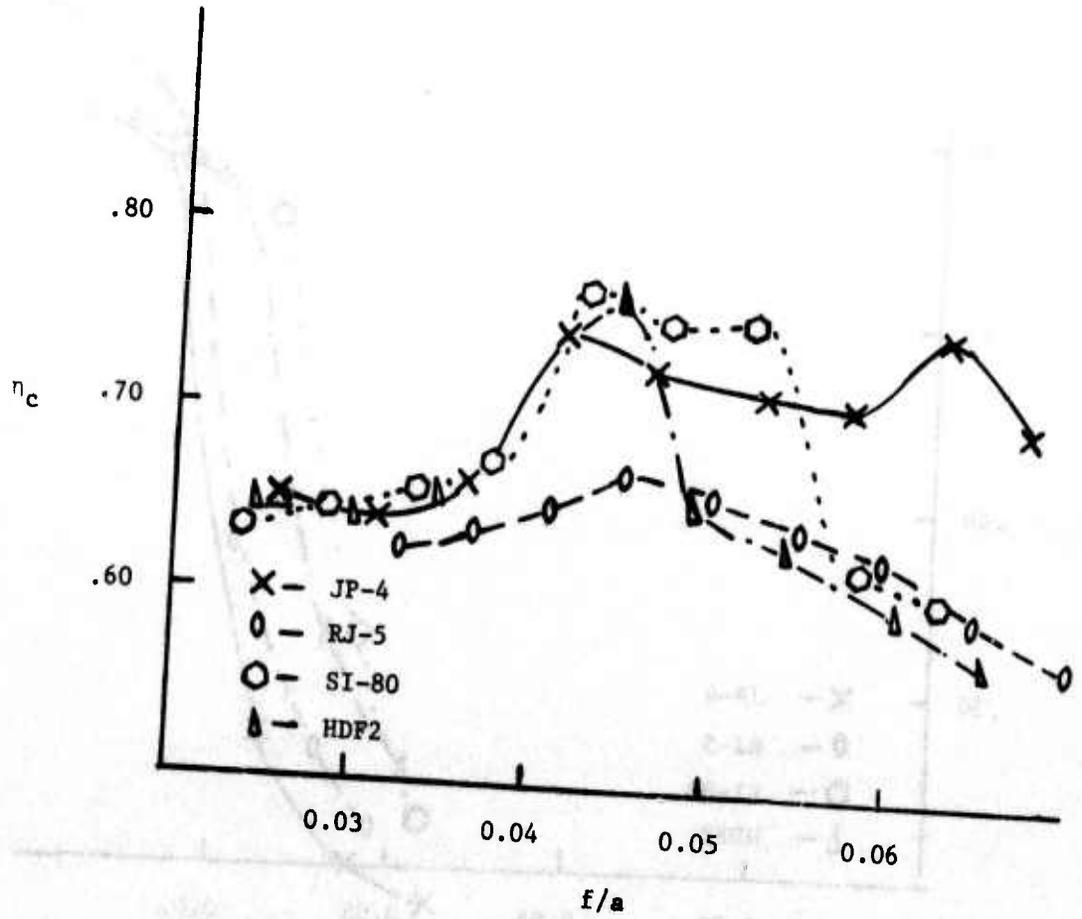


Figure 1 - Comparison of Fuel Blend Performance

$T_{T2} = 772^\circ R$

$P_C = 16 \text{ psia}$

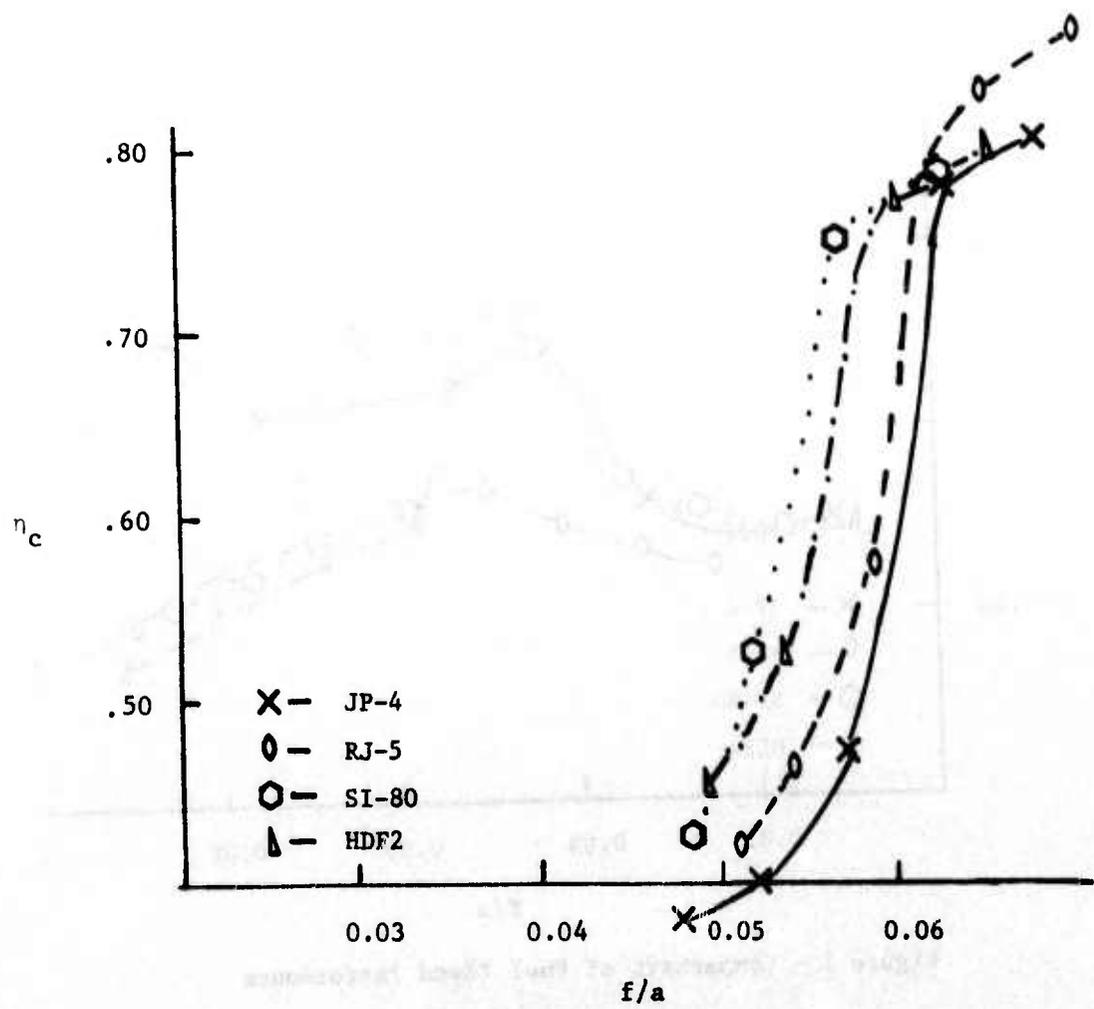


Figure 2 - Comparison of Premixed Fuel-Air Performance for Fuel Blends

$T_{T_2} = 768^\circ R$   
 $P_C = 16 \text{ psia}$

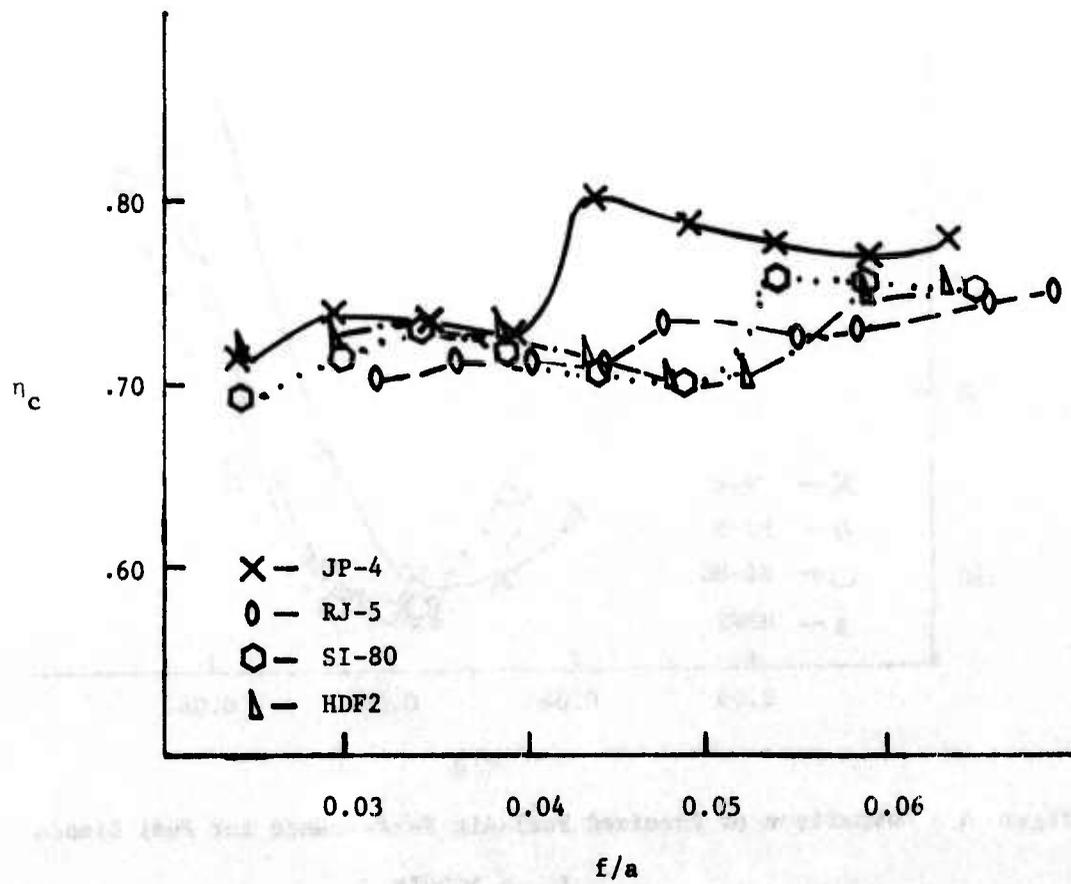


Figure 3 - Comparison of Fuel Blend Performance

$T_{T_2} = 1012^\circ R$

$P_C = 16 \text{ psia}$

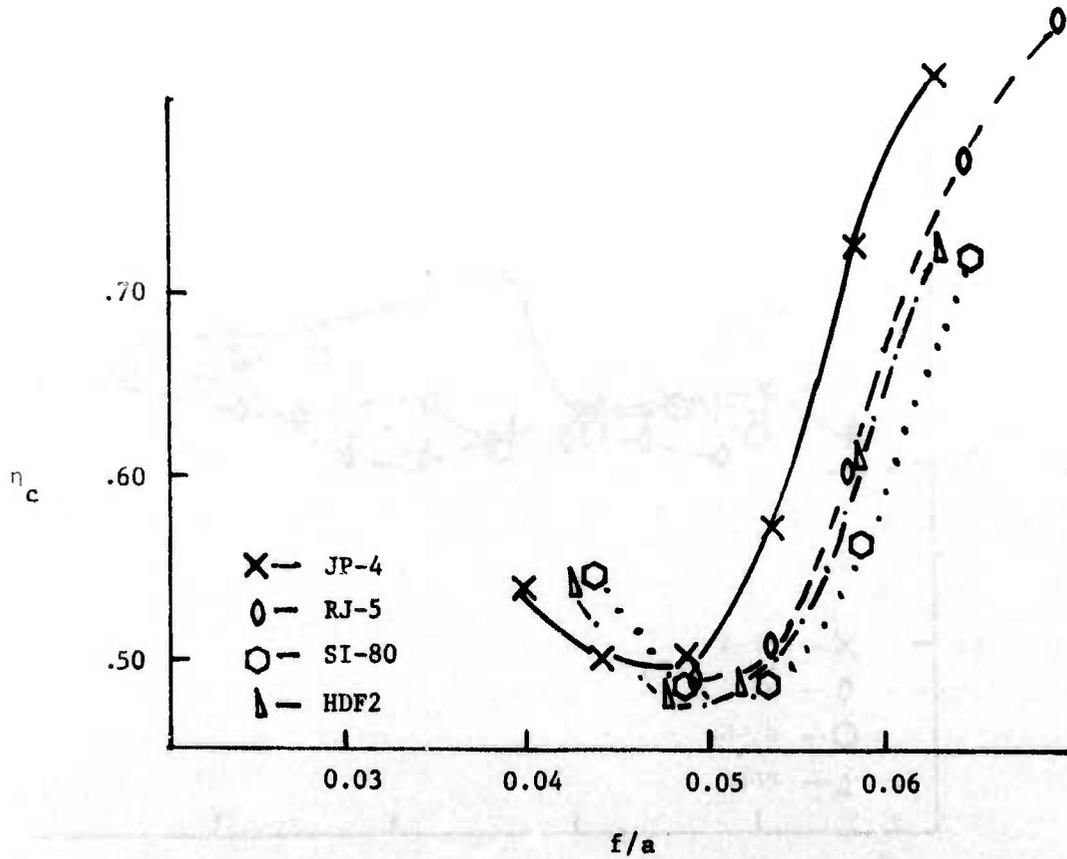


Figure 4 - Comparison of Premixed Fuel-Air Performance for Fuel Blends

$T_{T_2} = 1000^\circ R$   
 $P_C = 16 \text{ psia}$

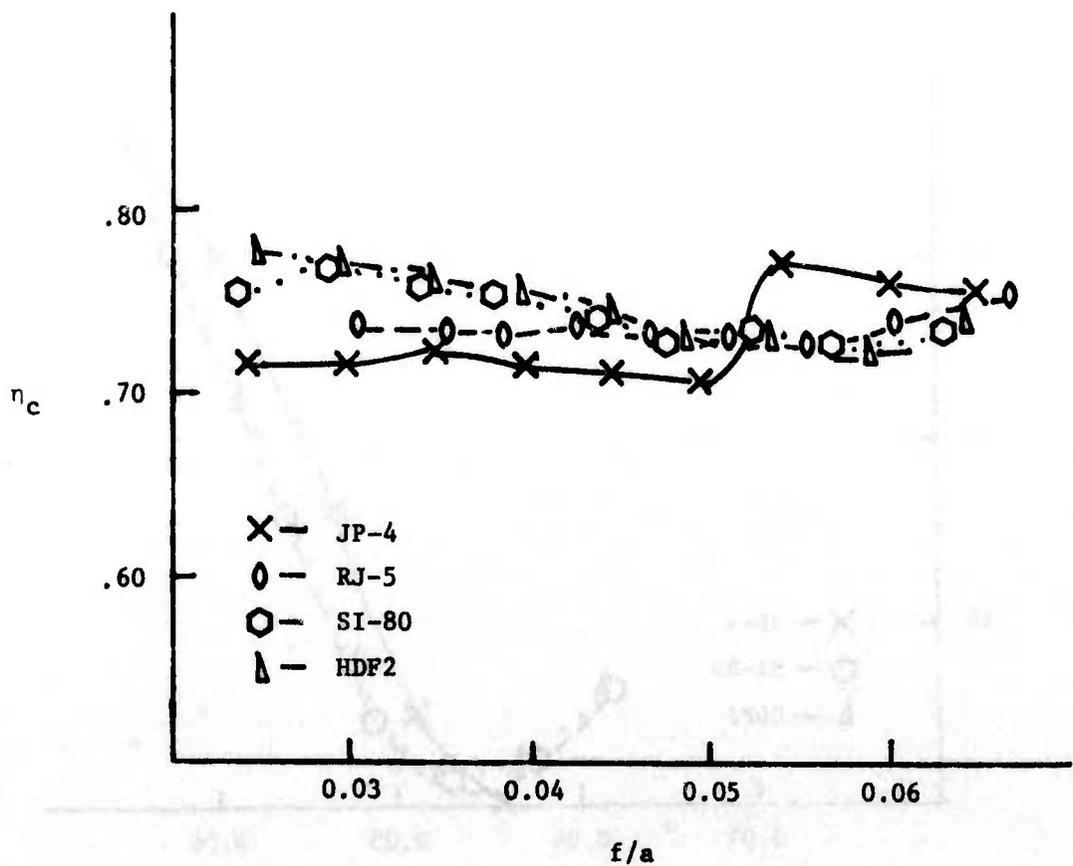


Figure 5 - Comparison of Fuel Blend Performance

$T_{T_2} = 1238^{\circ}R$

$P_C = 16 \text{ psia}$

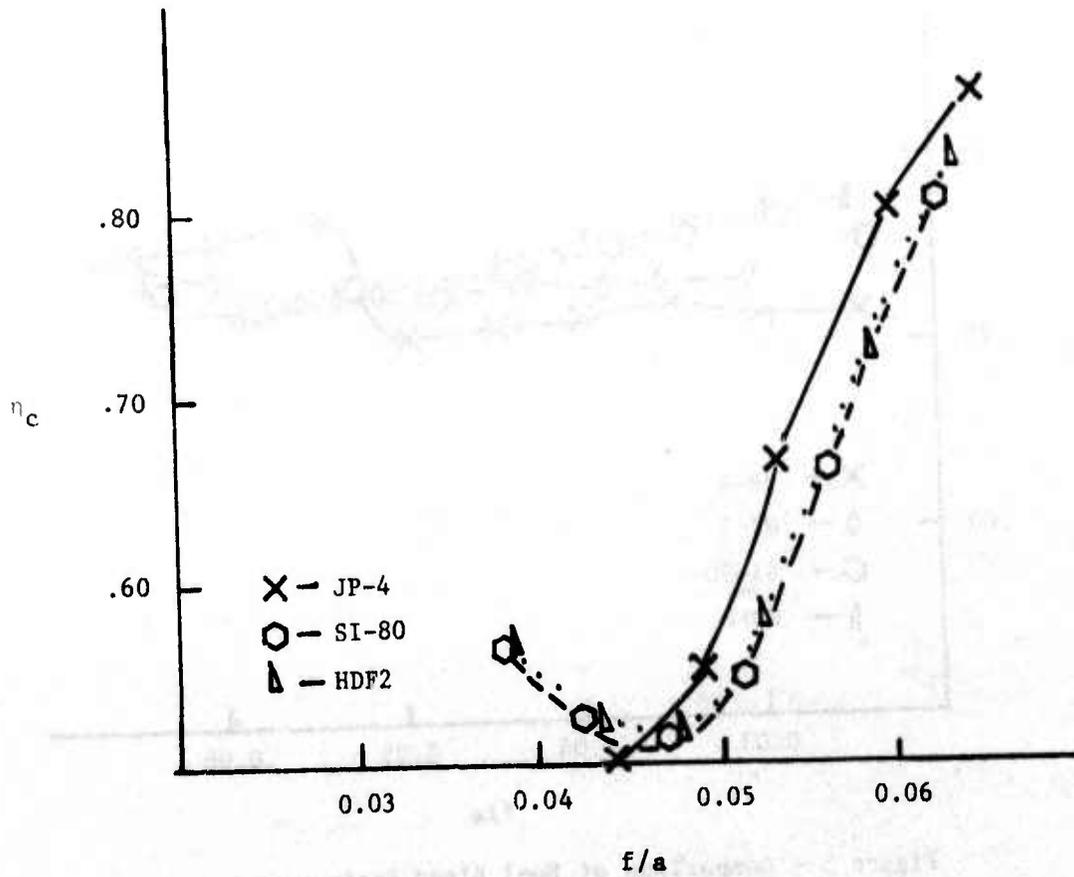


Figure 6 - Comparison of Premixed Fuel-Air Performance for Fuel Blends

$T_{T_2} = 1210^\circ R$   
 $P_C = 16 \text{ psia}$

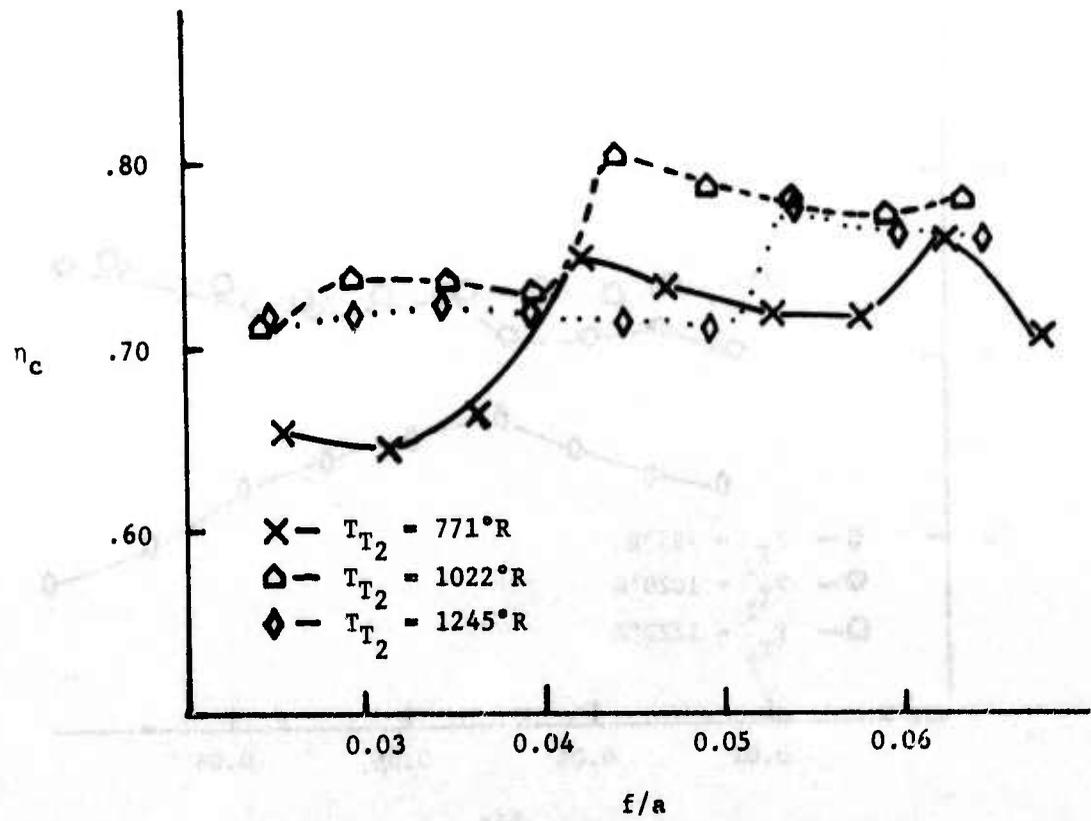


Figure 7 - Effect of Inlet Air Temperature on JP-4 Combustion

$P_C = 16$  psia

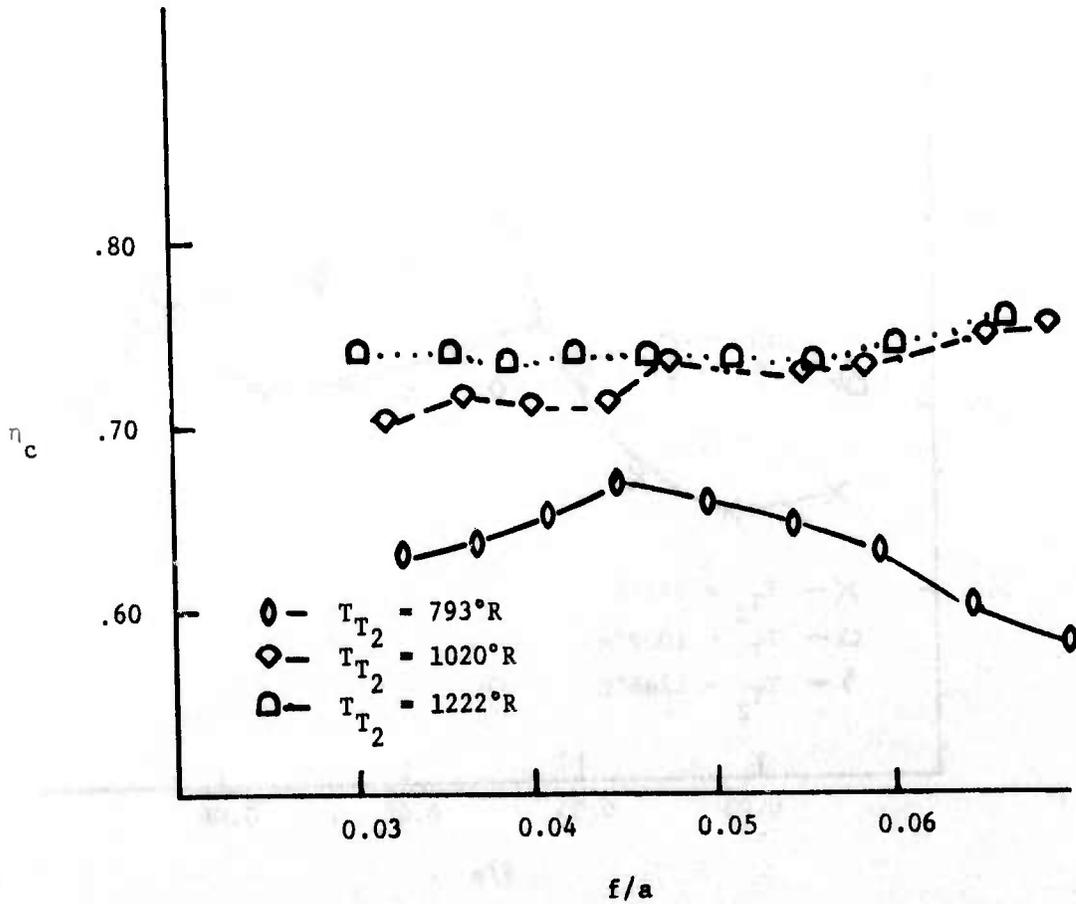


Figure 8 - Effect of Inlet Air Temperature on RJ-5 Combustion

$P_C = 16$  psia

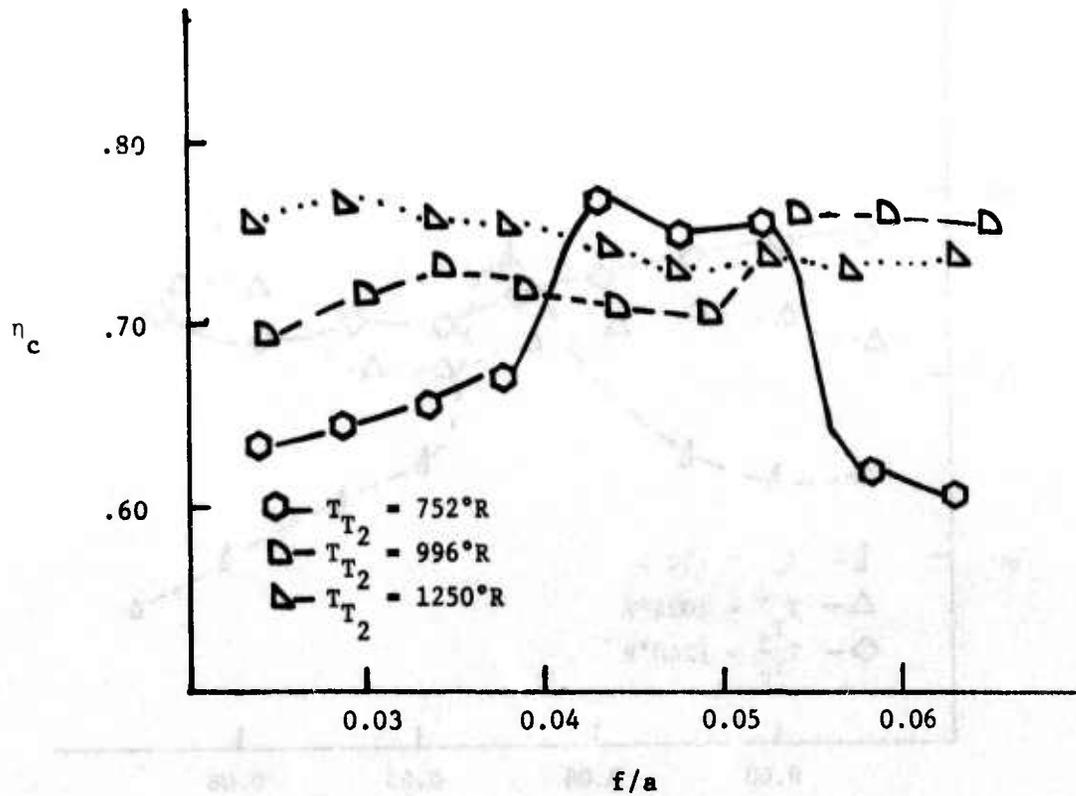


Figure 9 - Effect of Inlet Air Temperature on SI-80 Combustion

$P_C = 16$  psia

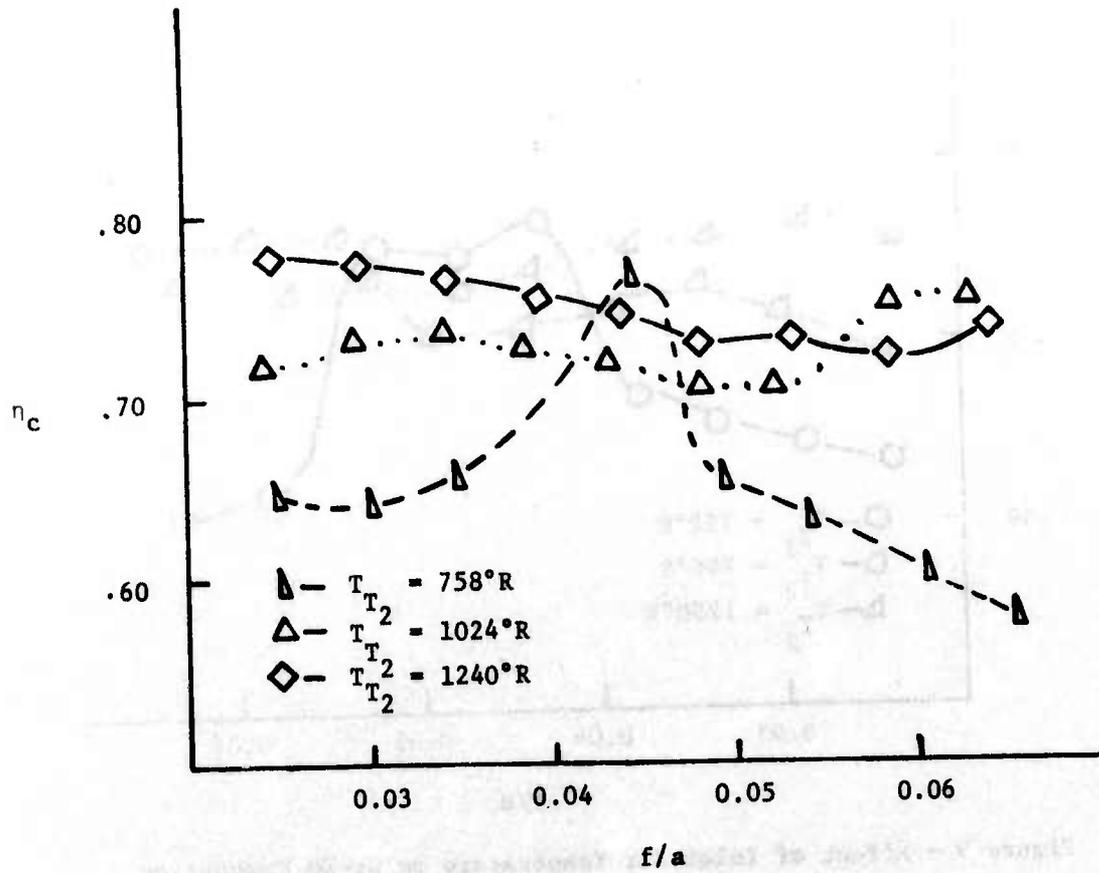


Figure 10 - Effect of Inlet Air Temperature on HDF2 Combustion

$P_C = 16$  psia

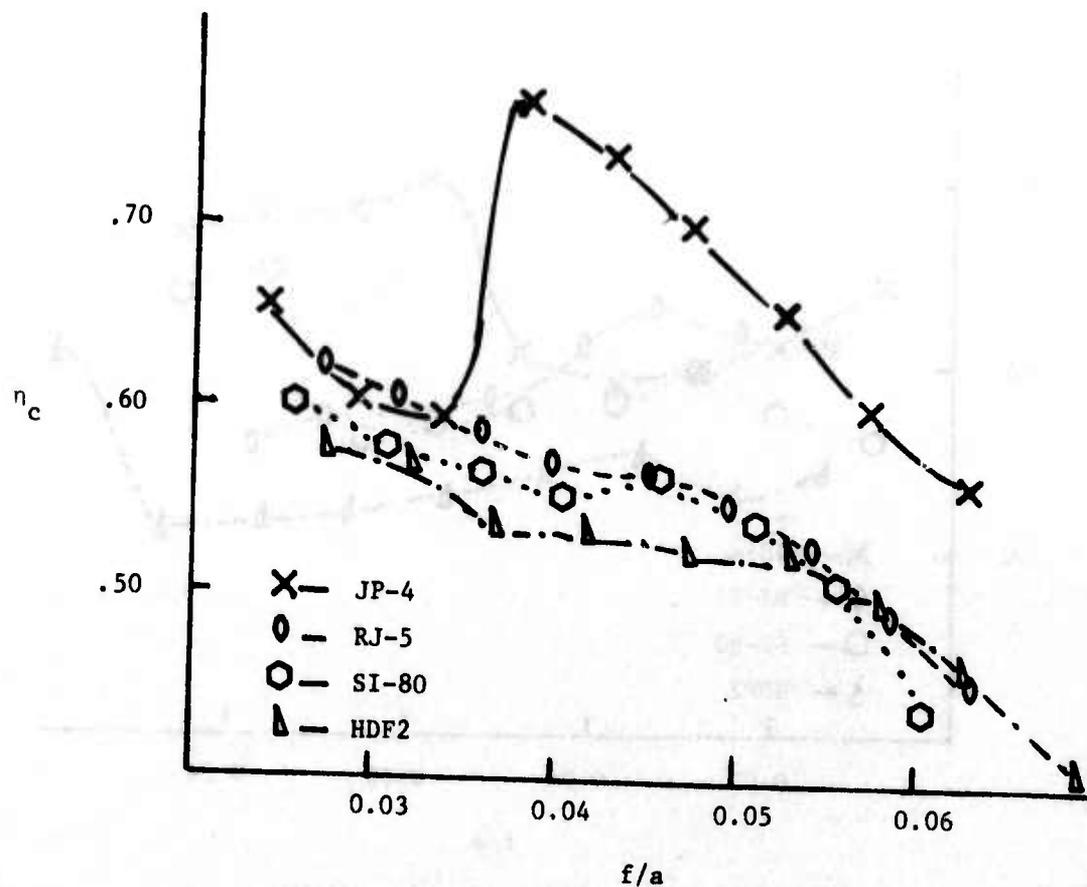


Figure 11 - Comparison of Fuel Blend Performance

$T_{T_2} = 768^\circ R$

$P_C = 10 \text{ psia}$

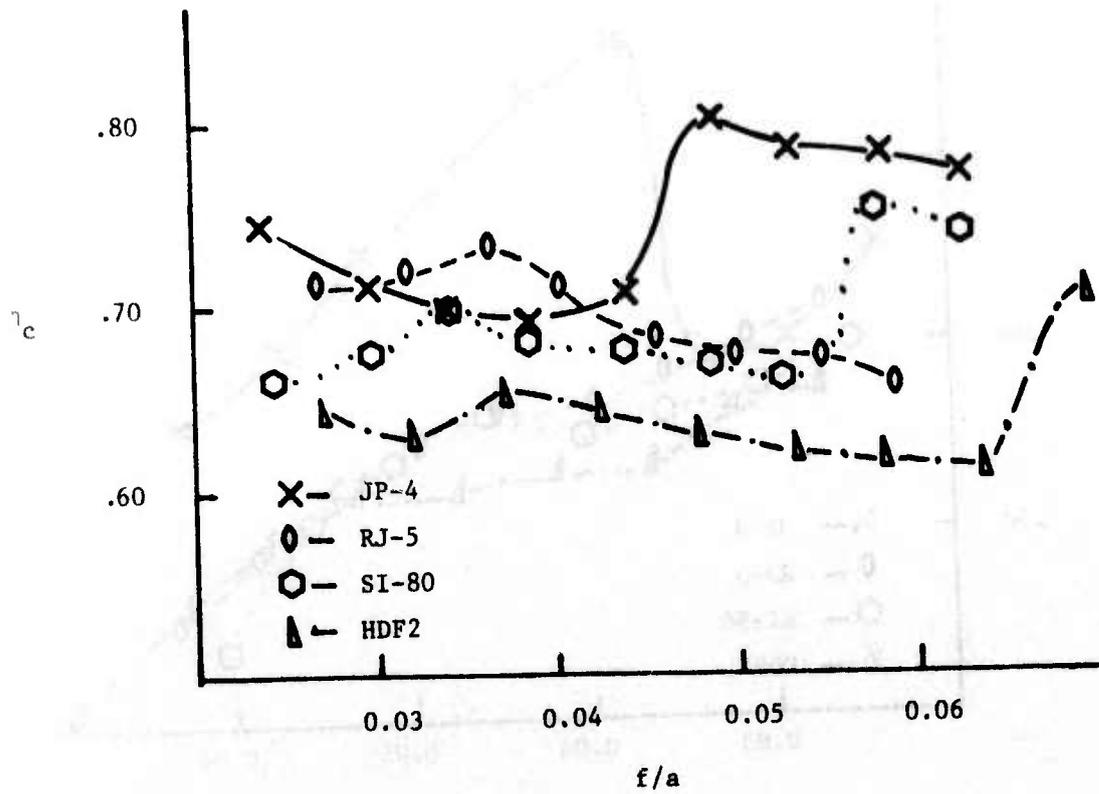


Figure 12 - Comparison of Fuel Blend Performance

$T_{T_2} = 992^\circ R$   
 $P_C = 10 \text{ psia}$

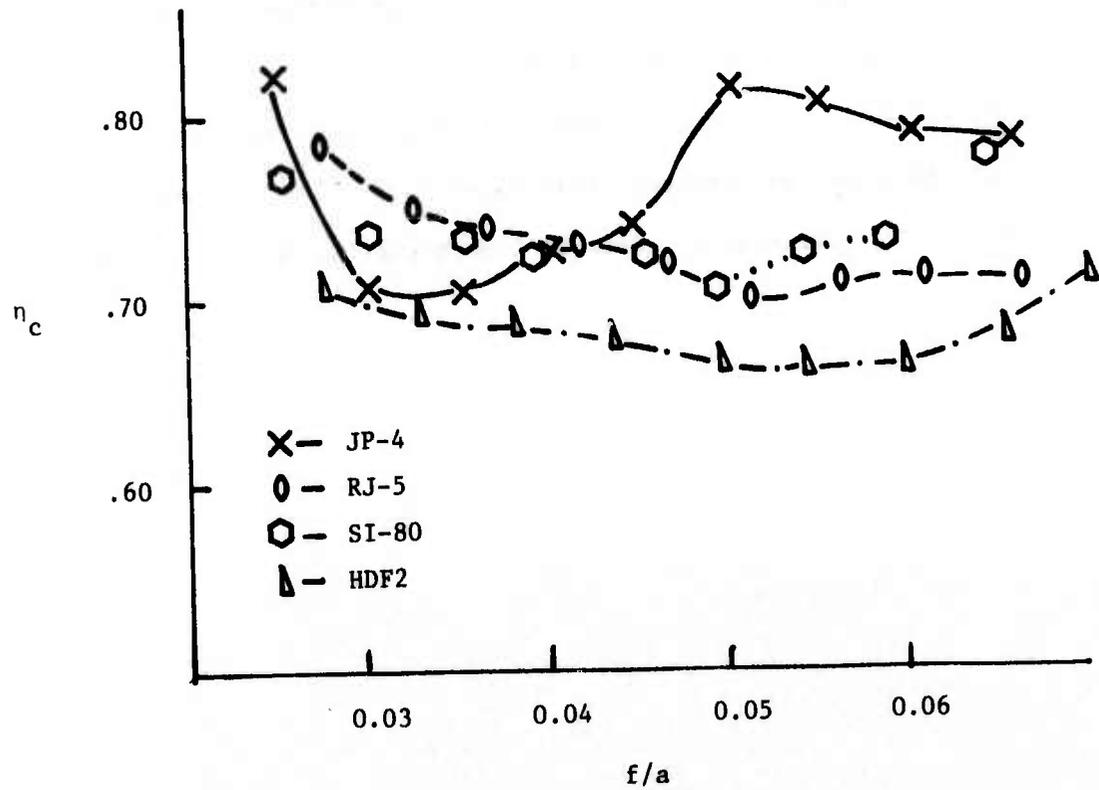


Figure 13 - Comparison of Fuel Blend Performance

$T_{T_2} = 1248^\circ R$   
 $P_C = 10 \text{ psia}$

REFERENCES

1. Lander, H. R., "High Density Fuel Development," AFSC Science & Engineering Symposium, October 1975.
2. Burdette, G. W., Bryant, J. T., Wood, S. E., "Airbreather Fuels Research," NAVAIR Research Program Review, November 1975.
3. Craig, R. R., Buckley, P. L., and Stull, F. D., "Large Scale, Low Pressure Dump Combustor Performance," AIAA Paper No-75-1303, September 1975.
4. Burdette, G. W., Petrarca, J., Private Communication, April 27, 1976.