

UNCLASSIFIED

AD NUMBER
ADB065170
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; Apr 1981. Other requests shall be referred to Flight Dynamics Laboratory; Attn: AFWAL/FIBG, Wright-Patterson AFB, OH 45433.
AUTHORITY
AFWAL ltr, 22 Jul 1988

THIS PAGE IS UNCLASSIFIED

AFWAL-TR-81-3162
Part I



ADB065170

F-111E FLIGHT VIBRATION AND ACOUSTICS TEST
PROGRAM

PART I
TEST INSTRUMENTATION, TEST PROCEDURE AND DATA REDUCTION

Structural Vibration Branch
Structures and Dynamics Division

April 1982

Final Report for Period 25 July 1978 - 30 April 1981

SUBJECT TO EXPORT CONTROL LAWS

This document contains information for manufacturing or using munitions of war. Export of the information contained herein, or release to foreign nationals within the United States, without first obtaining an export license, is a violation of the International Traffic-in-Arms Regulations. Such violation is subject to a penalty of up to 2 years imprisonment and a fine of \$100,000 under 22 USC 2778.

Include this notice with any reproduced portion of this document.

Distribution limited to U.S. Government agencies only; test and evaluation April 1981. Other requests for this document must be referred to Flight Dynamics Laboratory (AFWAL/FIBG), Wright-Patterson Air Force Base, Ohio 45433.

DTIC
ELECTE
JUN 15 1982
S B D

FLIGHT DYNAMICS LABORATORY
AIR FORCE WRIGHT AERONAUTICAL LABORATORIES
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433

82 06 14 060

DTIC FILE COPY

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This technical report has been reviewed and is approved for publication.

John T. Ach

JOHN T. ACH
Technical Manager
Data Analysis Group

Charles E. Thomas

CHARLES E. THOMAS
Chief
Structural Vibration Branch

FOR THE COMMANDER

Ralph L. Kuster, Jr.

RALPH L. KUSTER, JR., Colonel, USAF
Chief, Structures and Dynamics Division
Flight Dynamics Laboratory

Copies of this report should not be returned unless return is required by security consideration, contractual obligations, or notice on a specific document.

"If your address has changed, if you wish to be removed from our mailing list, or if the addressee is no longer employed by your organization please notify AFMIL/FIBG, W-P AFB, OH 45433 to help maintain a current mailing list".

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFWAL-TR-81-3162, Part I	2. GOVT ACCESSION NO. AD-3065170L	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) F-111E FLIGHT VIBRATION AND ACOUSTIC TEST PROGRAM Part I, Test Instrumentation, Test Procedure, and Data Reduction	5. TYPE OF REPORT & PERIOD COVERED Final Technical Report 25 July 1978 - 30 April 1981	
7. AUTHOR(s) John T. Ach Dansen L. Brown David L. Banaszak	Gerald A. Plzak Donald E. Seely Edmund R. Hotz	6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Flight Dynamics Laboratory (AFWAL/FIBG) Air Force Wright Aeronautical Laboratories Wright-Patterson AFB OH 45433	8. CONTRACT OR GRANT NUMBER(s)	
11. CONTROLLING OFFICE NAME AND ADDRESS Flight Dynamics Laboratory (AFWAL/FI) Air Force Wright Aeronautical Laboratories Wright-Patterson AFB OH 45433	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Program Element 62201F Project 2401, Task 240104 Work Unit 24010401	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	12. REPORT DATE April 1982	
	13. NUMBER OF PAGES 157	
	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Distribution limited to U. S. Government agencies only; test and evaluation April 1981. Other requests for this document must be referred to Flight Dynamics Laboratory (AFWAL/FIBG), Wright-Patterson Air Force Base, Ohio 45433.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Flight Tests Vibration Acoustics Gunfire Vibration Weapons Bay Environment Dynamics Data		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A comprehensive test program was conducted on an F-111E aircraft for the purpose of collecting dynamics data, primarily vibration and acoustic data, at selected locations throughout the aircraft under test conditions within the operational envelope of the aircraft. Data were recorded from 133 accelerometers and micro- phones at 60 test conditions including gunfiring passes. In addition, flight and engine parameter data were also recorded. The test program is documented by pre- senting the details on the test instrumentation, transducer locations, test pro- cedures and flight conditions. Test results are limited to overall and peak root		

DD FORM 1473 1 JAN 73 EDITION OF 1 NOV 68 IS OBSOLETE

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

20. ABSTRACT (Continued)

mean square (RMS) levels which give a coarse indication of the dynamics environment of the F-111E. Detailed test results will be presented in the parts of this report which will follow.

FOREWORD

This report documents an in-house effort conducted by the Structural Vibration Branch, Structures and Dynamics Division, Flight Dynamics Laboratory, Air Force Wright Aeronautical Laboratories, Wright-Patterson Air Force Base, Ohio.

This investigation was conducted under Flight Dynamics Laboratory Project 2401, Vibration Prediction and Control, Measurement and Analysis, Work Unit 24010401, Dynamics Environment on Current and Future Air Force Flight Vehicles.

The test aircraft was provided by 3246th Test Wing, Eglin Air Force Base, Florida. Mr. R. White (3246th TW/TETT) was the focal point for the test program conducted at Eglin Air Force Base during the July 1978 - September 1980 time period. The test support was provided by the 3246th TW under Test Number 1472TA02, Support of AFFDL F-111 Vibration/Acoustic Testing. AFWAL/FIBG personnel who had primary responsibility for the test program were Messrs D. E. Seely and E. R. Hotz. Other personnel who made major contributions to the success of this effort were Messrs R. D. Talmadge, C. N. Willhite, J. E. Huffman and L. P. Vaughn. Special acknowledgment is due Mrs. Diana Howdysshell for typing the manuscript.

This report is Part I of a planned number of parts concerned with the F-111E flight test program. Part I presents the details of the test program with test results presented only to give an indication of data trends and data quality. The parts to follow will deal primarily with the spectral and statistical analysis of the recorded data.

This report was released for publication by the authors in August 1981.

TABLE OF CONTENTS

SECTION		PAGE
I	INTRODUCTION	1
II	DESCRIPTION OF TEST VEHICLE	2
III	TEST INSTRUMENTATION	3
IV	TEST PROCEDURE	10
V	DATA REDUCTION AND PRESENTATION	15
VI	PLANNED DATA ANALYSIS	24
VII	CONCLUSIONS	26
	APPENDIX A - TRANSDUCER LOCATIONS AND AIRCRAFT TEST CONFIGURATION	27
	APPENDIX B - RMS ACCELERATION AND SOUND PRESSURE LEVEL DATA	115
	APPENDIX C - SAMPLE LISTINGS OF TEMPERATURES, FLIGHT PARAMETERS AND OTHER PDAS DATA	138
	REFERENCES	145

Accession For	
NTIS GRA&I	<input type="checkbox"/>
DTIC TAB	<input checked="" type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
B	

DTIC
COPY
INSPECTED
3

LIST OF FIGURES

FIGURE		PAGE
1	Data Acquisition System	4
2	Overall Transducer Locations	7
3	Data Playback and Reduction System	16
4	RMS Detector Frequency Response	17
5	Typical RMS Time Histories	19
6	Typical Flat Amplitude RMS Time Histories	21
7	Typical Varying Amplitude RMS Time Histories	22
A-1	Accelerometer Locations in Nose Equipment Bay	28
A-2	Accelerometer Locations on Left Main Instrument Panel	29
A-3	Accelerometer Locations on Center and Right Main Instrument Panel	30
A-4	Accelerometer Locations on Center Console	31
A-5	Sketch of Accelerometer and Microphone Locations in Weapons Bay	32
A-6	Thermocouple Locations in Right Side Nose Equipment Bay	33
A-7	Cross Reference: Transducer Number with Figure Number of Photograph Showing Precise Transducer Location	34
A-8	Transducer Locations in Right Side Equipment Bay	36
A-9	Transducer Locations Near Ballistics Computer Compartment	37
A-10	Transducer Locations Aft of TFR Computer Compartment	38
A-11	Transducer Locations Near TFR Computer Compartment	39
A-12	Transducer Locations Near Power/AMP AN/ARC-112 Compartment	40

LIST OF FIGURES (Cont'd)

FIGURE		PAGE
A-13	Transducer Location Near ANT CONT AN/ARC-112	41
A-14	Transducer Locations Near AN/ARN-52 Compartment	42
A-15	Transducer Locations Near AMP Relay AN/ARA-50 Compartment	43
A-16	Transducers Locations in Left Side Equipment Bay	44
A-17	Transducer Locations Near SYNCHRONIZER AN/APQ-113 Compartment	45
A-18	Transducer Locations Near Flight Control Computer Compartment	46
A-19	Transducer Locations Above Flight Control Computer Compartment	47
A-20	Transducer Locations Near Computing Gyro AN/ASG-23 Compartment	48
A-21	Transducer Locations Near Amplifier AN/ALQ-94 Compartment	49
A-22	Transducer Locations on Forward Side of Bulkhead Near Forward Looking Radar	50
A-23	Transducer Location on Forward Bulkhead, Right Side Near Bottom Behind DC Power Panel	51
A-24	Transducer Location on Forward Bulkhead, Left Side Aft of Gen. Control Compartment	52
A-25	Transducer Locations on Forward Bulkhead on Left Side Aft of AC Power Transfer Assy Compartment	53
A-26	Transducer Locations on Nose Bulkhead, Right Side Near Top of TFR Computer Compartment	54
A-27	Transducer Location on Right Side of Fuselage 65 inches Aft of Nose Tip in Radome	55
A-28	Transducer Locations on Right Side of Fuselage 65 inches Aft of Nose Tip	56
A-29	Transducer Locations on Underside of Fuselage at FS 145	57

LIST OF FIGURES (Cont'd)

FIGURE		PAGE
A-30	Transducer Locations on Fuselage in Front of Cockpit at FS 155	58
A-31	Transducer Locations on Nose Gear Door	59
A-32	Transducer Locations on Nose Gear Door (Backside)	60
A-33	Transducer Locations on Right Side of Fuselage Below Canopy	61
A-34	Transducer Locations on Right Side of Fuselage Below Canopy	62
A-35	Transducer Locations on Right Side of Fuselage at FS 357	63
A-36	Transducer Locations on Top of Fuselage Aft of Canopy at FS 370	64
A-37	Transducer Locations on Left Horizontal Stabilator	65
A-38	Transducer Locations on Forward Left Side of Vertical Stabilator Near Fuselage	66
A-39	Transducer Locations on Top of Vertical Stabilator	67
A-40	Transducer Locations on Left Inboard Wing	68
A-41	Transducer Locations on Left Center Wing	69
A-42	Transducer Locations on Left Outboard Wing	70
A-43	Transducer Locations on Left Tip of Wing	71
A-44	Transducer Locations in Weapons Bay	72
A-45	Transducer Locations in Aft Section of Weapons Bay	73
A-46	Transducer Locations on Upper Forward Wall of Weapons Bay	74
A-47	Transducer Locations on Forward Wall of Weapons Bay	75
A-48	Transducer Locations in Forward Upper Right Section of Weapons Bay	76

LIST OF FIGURES (Cont'd)

FIGURE		PAGE
A-49	Transducer Location in Forward Upper Right Section of Weapons Bay (Actual Location of C4M)	77
A-50	Transducer Locations in Forward Upper Left Section of Weapons Bay	78
A-51	Transducer Locations in the Center Upper Right Section of Weapons Bay	79
A-52	Transducer Location in the Center Upper Right Section of Weapons Bay (Actual Location of C8M)	80
A-53	Transducer Locations in the Center Upper Left Section of Weapons Bay	81
A-54	Transducer Location in the Center of the Left Wall of the Weapons Bay	82
A-55	Transducer Location on Center Ceiling Beam of Weapons Bay at FS 280	83
A-56	Transducer Location on Center Ceiling Beam of Weapons Bay at FS 305	84
A-57	Transducer Locations on Center Ceiling of Weapons Bay Beam at FS 330 and 355	85
A-58	Transducer Locations on Lower Right Center of Weapons Bay Forward Wall	86
A-59	Transducer Locations on Instrument Panel	87
A-60	Transducer Locations on Instrument Panel	88
A-61	Transducer Locations on Left Sidewall near Bottom of Instrument Panel	89
A-62	Transducer Locations on Bottom Right Side of Instrument Panel and Sidewall	90
A-63	Transducer Location Near Top of Instrument Panel Near Center	91
A-64	Transducer Location on Right Side of Instrument Panel	92
A-65	Transducer Locations on Left Side of Instrument Panel	93

LIST OF FIGURES (Cont'd)

FIGURE		PAGE
A-66	Transducer Location on Center Console	94
A-67	Transducer Location on Forward Landing Gear Door	95
A-68	Transducer Location on Left Main Landing Gear Near Pivot	96
A-69	Transducer Locations on Top of Vertical Stabilator	97
A-70	Transducer Location near Tip of Left Wing	98
A-71	Transducer Locations on Left Engine	99
A-72	Transducer Locations on Left Engine Forward Mount	100
A-73	Transducer Locations on Accessory Gear Box	101
A-74	Transducer Location on Firing Plug Terminal	102
A-75	Transducer Locations Near TFR Equipment Compartment	103
A-76	Transducer Locations Near TFR ECS Duct	104
A-77	Transducer Locations in Right Forward Bay	105
A-78	Transducer Location on Right Forward Bay Door	106
A-79	Transducer Location Below Ballistics Computer Compartment on Structure	107
A-80	Transducer Location Near Top of TFR Compartment	108
A-81	Transducer Location Near AN/ARC-109 Compartment	109

LIST OF TABLES

TABLE		PAGE
1	Vibration and Acoustic Transducers	5
2	PDAS Transducers	6
3	Test Conditions Producing Flat RMS Amplitude Response as a Function of Time	11
4	Test Conditions Producing Varying RMS Amplitude Response as a Function of Time	12
A-1	Description of Transducer Locations	111
A-2	PUID/CHANNEL/SWITCH POSITION MATRIX	113
A-3	Aircraft Test Configurations	114
B-1	Overall RMS Levels Produced by Stabilized Flight Conditions Listed in Table 3	116
B-2	Peak or Maximum RMS Levels Produced by Transient Flight Conditions Listed in Table 4	130
C-1	List of Signals Input to PDAS	139
C-2	Sample Listing of Typical Temperature Data	140
C-3	Sample Listing of Typical Flight Parameter Data	141
C-4	Sample Listing of Automatic Gain Control Amplifier Gain Status	142

SECTION I INTRODUCTION

One of the most severe problems in airborne equipment design, application, testing, and use is the lack of sufficient data to define the actual dynamic environment under which equipment in the vehicle must operate. In most cases, this lack of data has resulted in: (1) overdesigning the equipment which results in excessive cost, size and weight or (2) underdesigning the equipment with a resulting lack of reliability and limited service life. This problem is even more acute in designing both equipment and structures used in high speed aircraft which must operate in a severe dynamics environment.

To alleviate this deficiency, the Structural Vibration Branch, Structures and Dynamics Division, Flight Dynamics Laboratory, has implemented a comprehensive data acquisition program aimed at obtaining vibration and acoustic data on all available aircraft.

This report describes the flight test program conducted on an F-111E aircraft. The purpose of this program was to collect dynamics data, primarily vibration and acoustics data, at selected locations throughout the aircraft under test conditions within the operational envelope of the aircraft. Additional data including temperature, pressure, air flow rate, and humidity were also collected. The purpose of this report is to document the test program by presenting the details of the test instrumentation, transducer locations, test procedures, and flight conditions. Test results are limited to overall and peak root mean square (RMS) levels which give a coarse indication of the dynamics environment of the F-111E. It is intended that this report be used primarily for selecting transducers and test conditions requiring more detailed data reduction. Detailed test results will be presented in the parts of this report which will follow.

SECTION II
DESCRIPTION OF TEST VEHICLE

The F-111E aircraft, manufactured by the Fort Worth Division of General Dynamics, is a two-place, all-weather, high or low altitude, supersonic, tactical fighter bomber. The aircraft has dual controls and requires a crew of two, seated side-by-side. The aircraft provides the pilot with the in-flight capability to select any angle of wing sweep between 16 and 72.5 degrees. The aircraft has full-span fowler action, double slotted trailing edge flaps, and is powered by two TF30 fan jet afterburning engines internally mounted in the fuselage. The aircraft has a conventional tricycle gear with the main gear as a single assembly. The aircraft has a large vertical stabilizer and a conventional rudder plus ventral strakes located on the lower portion of the engine access doors approximately 30 degrees from the vertical.

The F-111E aircraft used for the test program was Tail Number 68-058. During the period 5 Oct 79 to 18 Sep 80, there were 37 test flights. On each test flight, the aircraft was configured to collect dynamics data for various combinations of internal and external stores. The internal stores included an M61 20MM cannon which was fired on nine of the flights. The aircraft was also flown with two types of experimental fluctuating pressure suppressors (spoilers) installed forward of the weapons bay and a slanted ramp installed in front of the rear bay wall. These devices were being tested to determine their effectiveness in reducing noise in the weapons bay when the bay doors were open.

SECTION III
TEST INSTRUMENTATION

The airborne data acquisition system is shown in block diagram in Figure 1. The system used 104 accelerometers and 29 microphones to measure the vibration and acoustic environment of the aircraft. The type and characteristics of the transducers used to measure acceleration and sound pressure level are summarized in Table 1. In addition to dynamic transducers (accelerometers and microphones), the system used 15 thermocouples, two airflow sensor systems, a humidity sensor, and a pressure transducer to measure slower varying aircraft characteristics. These transducers are summarized in Table 2. In addition, the total instrumentation system included: (1) an in-house fabricated programmable transfer box; (2) a 12-position Legax, Inc. switch box; (3) a Master six-channel automatic gain changing (AGC) amplifier box; (4) a Secondary six-channel AGC amplifier box, (5) a pair of frequency multiplexers (Microcom Corp. Micromount Model MM402-10) each consisting of two voltage controlled oscillators (VCO) and one mixer amplifier with respective VCO center frequencies and deviations of 128 KHz \pm 16 KHz (\pm 2.5V) and 176 KHz \pm 16 KHz (\pm 2.5V); (6) a Mars 2000 Tape Recorder; (7) a Base Ten, Inc. Portable Data Acquisition System (PDAS) Data Collector; (8) a time code generator; and (9) voice from the aircraft intercom system.

A complete listing of all transducer identification numbers, locations, and types is contained in Table A-1. Overall transducer locations are illustrated in Figure 2. Figures A-1 thru A-6 are more detailed drawings showing transducer locations. Figure A-7 cross references the transducer number with the Figure numbers (A-8 - A-81) of the photographs which show the precise transducer locations.

Where possible, accelerometers were mounted by using double sided #10-32

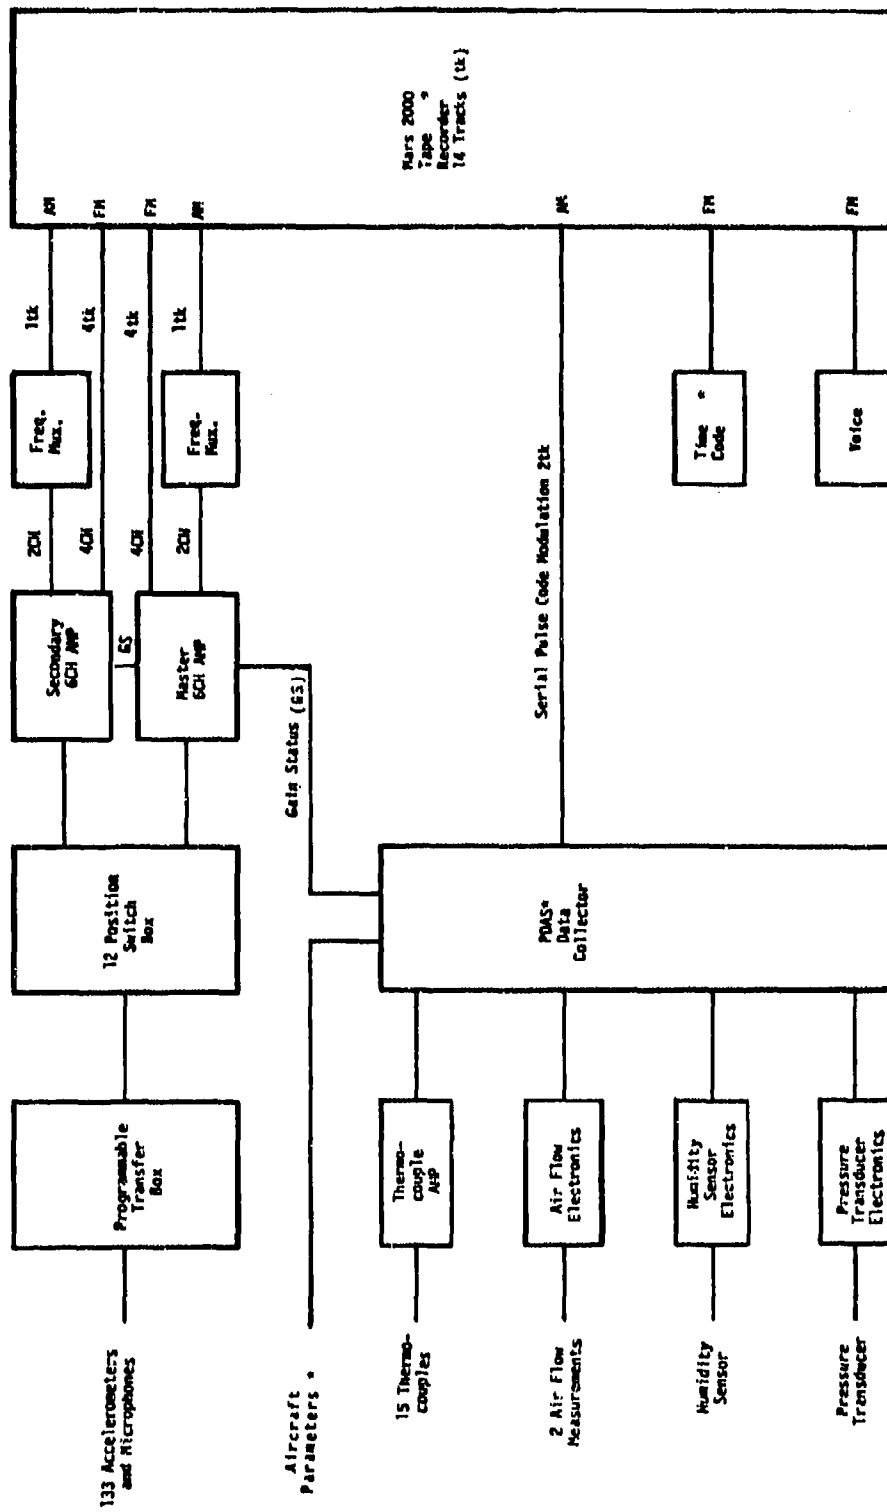



Figure 1. Data Acquisition System

TABLE 1
VIBRATION AND ACOUSTIC TRANSDUCERS

<u>TRANSDUCER TYPE</u>	<u>MODEL</u>	<u>QUAN- TITY</u>	<u>TEMP RANGE</u>	<u>NOM CAP (pfd)</u>	<u>NOMINAL SENSITIVITY</u>	<u>FREQ. RESPONSE (100 Megohms Load)</u>
Columbia Crystal Accelerometer	902-H	68	-65 F to 300 F	8,000	10mvp/gpk	1HZ- 6KHZ
Columbia Crystal Accelerometer	902-HT	17	-65 F to +500 F	8,000	10mvp/gpk	1HZ- 6KHZ
Endevco Crystal Accelerometer	2215	14	-65 F to +350 F	10,000	10mvp/gpk	2HZ- 6KHZ (+5%)
Endevco Crystal Accelerometer	2245	5	-320 F to +750 F	200	10mvp/gpk	25HZ- 5KHZ (+5%)
Gulton Piezoelectric Microphone	MVA-2100 (5/8")	29	-100 F to +300F	3,500	32mvrms/ 140dB SPL	2HZ-10KHZ (+3dB)
		133				

TABLE 2
PDAS TRANSDUCERS

<u>TRANSDUCER TYPE</u>	<u>SIGNALS</u>	<u>VALUES</u>	<u>RANGE</u>	<u>COMMENTS</u>
Type J (Iron-Constantan) Thermocouples	15	-1.25V to +3.25V	Programmable	
Rosemount Model 510CV1-Air Flow Measurement System	2	+20mVdc 0-5VDC	-65 F-150 F 1#/s-10#/s	Not operational due to improper installation
Thunder Scientific, Humidity Sensor Signal Conditioner Model SC-2000-HI-T11 Sensing Element Model BR-101B-LI	1	0-10VDC	0%-100%	
Pressure Transducer	1	0-5VDC	30"Hg-3"Hg	
AGC Amplifier Communicator Out	12	+2.5VDC	-10db to 60db	
Switchbox, Ledex	1	0-5VDC	1-12	
Eglin-Supplied Aircraft Parameters	30			

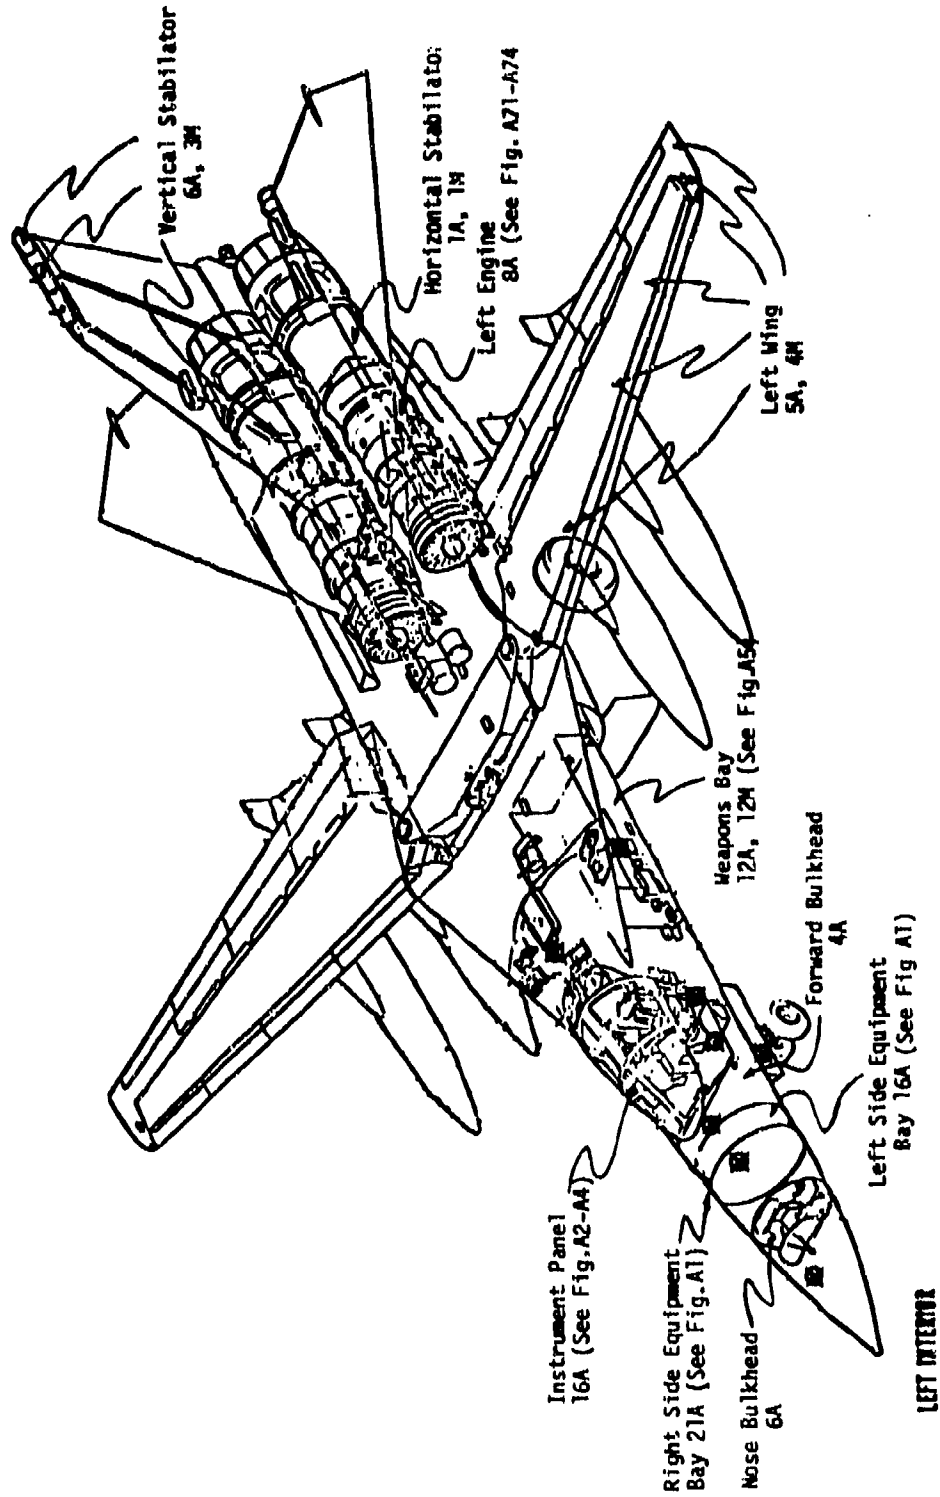

Note:

- A = Accelerometer
- M = Microphone
- ▣ = Location of AMM Pair

Figure 2. Overall Transducer Locations

insulated mounting studs. One side of the stud attached to the accelerometer and the other side attached to drilled and tapped holes in the structure. A single sided stud was used where holes were not allowed. The flat side of the stud was glued to a clean and sanded surface of the structure using Eastman 910 cement and the #10-32 side was attached to the accelerometer. Most of the microphone brackets were installed using a special glue formulated by Eglin personnel. Some of the microphones were installed by drilling and tapping holes to match the microphone bracket mounting holes. All external microphones were flush mounted where possible. Thermocouples which sensed structural temperatures were attached to the surfaces with epoxy. Thermocouples measuring air temperature were suspended in the air. Specific information concerning transducer mounting can be obtained from the photographs in Figures A-8 - A-B1.

Each microphone and accelerometer was calibrated in the Laboratory by AFWAL/F1BG to obtain sensitivity and frequency response characteristics. After installation and prior to the initial test flight, the accelerometers were calibrated end-to-end by inserting a known calibration signal at the transducer end of the system and recording the resultant electrical signal on tape. The microphones were calibrated by applying a precise 124dB SPL to each microphone with a Bruel & Kjaer Instruments, Inc. type 4220 Pistonphone and recording this resultant electrical signal on tape. The system calibration was then determined in the Laboratory using the calibration tape.

The complete listing of PDAS input signals is given in Table C-1. In addition to the temperature, airflow, humidity, and pressure sensors mentioned earlier, the PDAS accepted aircraft parameters supplied by other aircraft systems and recorded simultaneously with the signals from transducers. The PDAS Data Collector time division multiplexed all the input signals shown in Table C-1. The system digitally encoded each data sample to a 10 bit binary word which was then converted into a serial pulse code modulation output. The

PDAS system output was 80 k bits/second. The gain status codes from each of the 12 AGC amplifiers and switch position code were also multiplexed by the PDAS.

The signal leads from the 133 accelerometers and microphones were assigned to the 144 inputs of the switch box by the Programmable Transfer Box. Six of the signal leads were paralleled to two or more switch box input slots. The Ledex, Inc. Switch Box had 12 switch positions with 12 signals output for each position of the switch. This permitted switching through 144 input signals 12 at a time. For example, switch position 1 switched in input slots 1-12, switch position 2 switched in input slots 13-24, and so forth. The AGC amplifiers would automatically change gain to provide an optimum input signal level for the recorder and multiplexers. In addition, each amplifier had a gain status output which was a DC level that identified the gain level. These 12 gain status signals were input to the PDAS system. Eight amplifier signals and two frequency multiplexed outputs were then input to the tape recorder as shown in the block diagram (Figure 1). Thus, 4 of the 12 amplifier outputs were frequency multiplexed into 2 tape tracks as shown in the block diagram (Figure 1). Frequency modulation (FM) recording with a center frequency of 54 KHz (Wide Band 1) was used for the amplifier outputs, and amplitude modulation (AM) recording was used for the frequency multiplexer and PDAS outputs. Table A-2 shows the transducer ID, tape track (channel), and switch position assignments.

The accuracy limitations of the flight measurement system were due to error contributions from the transducers, signal conditioning equipment, and tape recorder. The maximum error of any one of these elements is unlikely to exceed $\pm 5\%$ of full-scale output. A reasonable estimate of maximum likely overall error is the root-mean-square of the errors from the three contributors or 8.7% of full-scale output.

SECTION IV
TEST PROCEDURE

Dynamics data were recorded for test conditions which included ground runup, takeoff, climb, level acceleration and deceleration runs, sideslips, turns, stabilized flight, gunfiring passes, landing, and standard maneuvers. A complete listing of these test conditions including Mach numbers and altitudes is given in Tables 3 and 4. The test conditions listed in Table 4 are more of a transient nature, while those listed in Table 3 are for stabilized flight.

The test coordinator was initially provided a list of the desired flight test conditions. From this list, the test pilot selected the specific test conditions to be flown on each flight or mission. The initial missions concentrated on acquiring data samples throughout the aircraft flight envelope and identifying maneuvers that resulted in higher vibration/acoustic environments.

During a stabilized flight condition, data were recorded simultaneously for 12 transducers that were grouped together on one switch position. The switch was then advanced to the next position and data were recorded for the second set of 12 transducers while the pilot maintained the same stabilized flight condition. This procedure continued until the switch had been sequenced through all 12 positions and data had been recorded for all 133 accelerometers and microphones. Several of the accelerometers and microphones were paralleled onto two or more switch positions in anticipation of a need for time correlation with transducers on these other switch positions. Typical data samples were 20 seconds.

For the flight test conditions which were of a transient nature, (e.g., takeoff, acceleration and deceleration runs, and maneuvers), it was necessary to repeat each test condition for each of the switch positions. In these cases, the tape recorder was turned on just prior to performing the test condition and shut off at completion of the test condition. This resulted in test records in some cases of 3 to 5 minutes in duration. It should be noted that all of the data input to the PDAS

TABLE 3

TEST CONDITIONS PRODUCING FLAT RMS AMPLITUDE RESPONSE AS A FUNCTION OF TIME

Test Condition Number	Mach Number	Altitude (K Ft)	Test Condition
7	.85	3	Steady heading sideslip
8	.85	3	Level turn, constant G
17	.60	3	Stabilized level flight
18	.70	3	Stabilized level flight
19	.80	3	Stabilized level flight
20	.90	3	Stabilized level flight
21	1.00	3	Stabilized level flight
22	.80	15	Stabilized level flight
23	.90	15	Stabilized level flight
24	1.00	15	Stabilized level flight
25	1.20	15	Stabilized level flight
27	.90	30	Stabilized level flight
28	1.00	30	Stabilized level flight
29	1.20	30	Stabilized level flight
57	.7	17	MSL instrumentation check
60	.62	3	Gunfire (4 seconds), altitude - level
61	.65	15	Gunfire (4 seconds), altitude - 10 degree dive
62	.68	10	Gunfire (4 seconds), altitude - 10 degree dive
63	.92	30	Gunfire (4 seconds), altitude - 10 degree dive
64	.73	15	Gunfire (4 seconds), altitude - 10 degree dive
65	.92	30	Gunfire (4 seconds), altitude - 15 degree dive
66	.68	15	Gunfire (4 seconds), altitude - 20 degree dive
67	.80	13	Gunfire (4 seconds), altitude - 30 degree dive
78			Weapon carriage
83	.75	10	Stabilized level flight
84	.60	5	Stabilized level flight
85	.70	8	Stabilized level flight
86	.60	10	Stabilized level flight
87	.70	10	Stabilized level flight
88	.75	15	Stabilized level flight
89	.70	15	Stabilized level flight
90	.78	3	Stabilized level flight

TABLE 4

TEST CONDITIONS PRODUCING VARYING RMS AMPLITUDE
RESPONSES AS A FUNCTION OF TIME

Condition Number	Mach Number	Altitude (K Ft)	Test Condition
1			Ground run, taxi prior to takeoff
2			Ground run, taxi after landing
4			Takeoff from engine run-up to 15 seconds after liftoff
5			Landing, 20 seconds before to 15 seconds after touchdown
9	.85	3	Level turn, Max G
12	1.05-.50	3	Standard maneuver #3, level deceleration (Speed Brakes Out)
13			Standard maneuver #4, aerobatics
14	.4-1.05	3	Level acceleration
15	.5-1.2	15	Level acceleration
16	.75-1.3	30	Level acceleration
38	1.1-.4	3	Deceleration, weapons bay open
39	1.2-.5	15	Deceleration, weapons bay open
40	1.3-.7	30	Deceleration, weapons bay open
41	1.0-.45	5	Deceleration, weapons bay open
42	1.0-.4	3	Deceleration, weapons bay closed
43	1.2-.45	15	Deceleration, weapons bay closed
44	1.3-.7	30	Deceleration, weapons bay closed
50	.5-1.12	17K	Level acceleration
51	.9-1.13	15	Speed dash, missile on
53	1.07-1.25	30	Speed dash, missile on
55	.98-1.1	35	Speed dash, missile and camera on
56	.9-1.1	8	Speed dash, missile and camera on
79	1.1	12	Weapon release

(e.g., thermocouple, flight parameters and amplifier gains) were recorded any-time the tape recorder was switched on.

The slow (3-5 minute) aircraft acceleration runs from minimum to maximum Mach numbers at several altitudes were made to allow structural resonances which might be present to build to a peak. These resonances could well occur at Mach numbers for which no stabilized data were to be recorded. When a possible resonance was indicated in playback of the data, the Mach number and altitude for this resonance were determined and a request made to fly this condition in a stabilized test condition.

An operational restriction on the aircraft prohibited acceleration runs with the weapons bay doors open. Therefore, deceleration runs from maximum to minimum Mach number at different altitudes were made with the weapons bay doors open. The following bay configurations were tested:

- (1) Empty
- (2) With M61 20MM cannon installed
- (3) With M61 and BDU-8 installed
- (4) With two BDU-8s installed
- (5) With and without modifications (spoilers in front of bay and slanted ramp at rear of bay)

A total of 37 records of data were recorded during gunfire passes where 14,000 rounds of ammunition were fired by a M61 20MM cannon mounted in the right weapons bay. Each gunfiring pass consisted of 3-4 seconds of continuous firing at a rate of 100 rounds/second. A 2.5 minute waiting period was required between firings for gun cooling time.

On nine of the test flights, the aircraft was carrying either two or four external stores on the wing pivot pylons. The stores included the GBU 10C/B, MK84 and the CTU-2. External stores were released on some of the flights.

AFWAL-TR-81-3162

Table A-3 relates weapons bay configuration, external store configuration, and M61 gunfiring records with particular flight mission numbers.

SECTION V
DATA REDUCTION AND PRESENTATION

Data tapes recorded on each test flight were copied and sent to AFWAL/FIBG for data reduction. Figure 3 shows a block diagram of the system used to accomplish the playback and processing of the FM, AM, pulse code modulation (PCM), and frequency multiplexed data contained on each test tape. The primary purpose of this initial data reduction was to quickly assess the quality of the recorded data in order to identify any flight instrumentation problems which required correction prior to continuing with the flight test program. This approach for identifying and correcting instrumentation problems aided in improving overall data quality. Approximately 86% of the data are considered usable.

Each data tape was played back and reduced on the system shown in Figure 3. Six channels of data were reduced at a time; this required two passes through the tape to process all twelve channels of dynamics data. During each pass through the tape, six channels of data were stripped out on an oscillograph recorder at a paper speed of 0.1 inches per second with time code printed on the edge of the paper. These stripouts were used in correlating test conditions from the flight test card or log with the data actually recorded on tape. The oscillograph stripouts were also useful in determining the quality of the recorded data. Simultaneously while stripping out the data on the oscillograph each of the six analog data channels was also input to RMS detectors. The RMS detectors had a time constant of 230 milliseconds with a very flat frequency response as shown in Figure 4. The DC output of each RMS detector was input to an analog to digital conversion system simultaneously with the gain status of each AGC amplifier and the instantaneous time read from the time code tape track. These data were sampled at the lowest available digitizing rate of seven samples per second for each input channel. This rate provided more than adequate resolution and could have been lowered to 1 or 2 samples per input channel. This part of the data

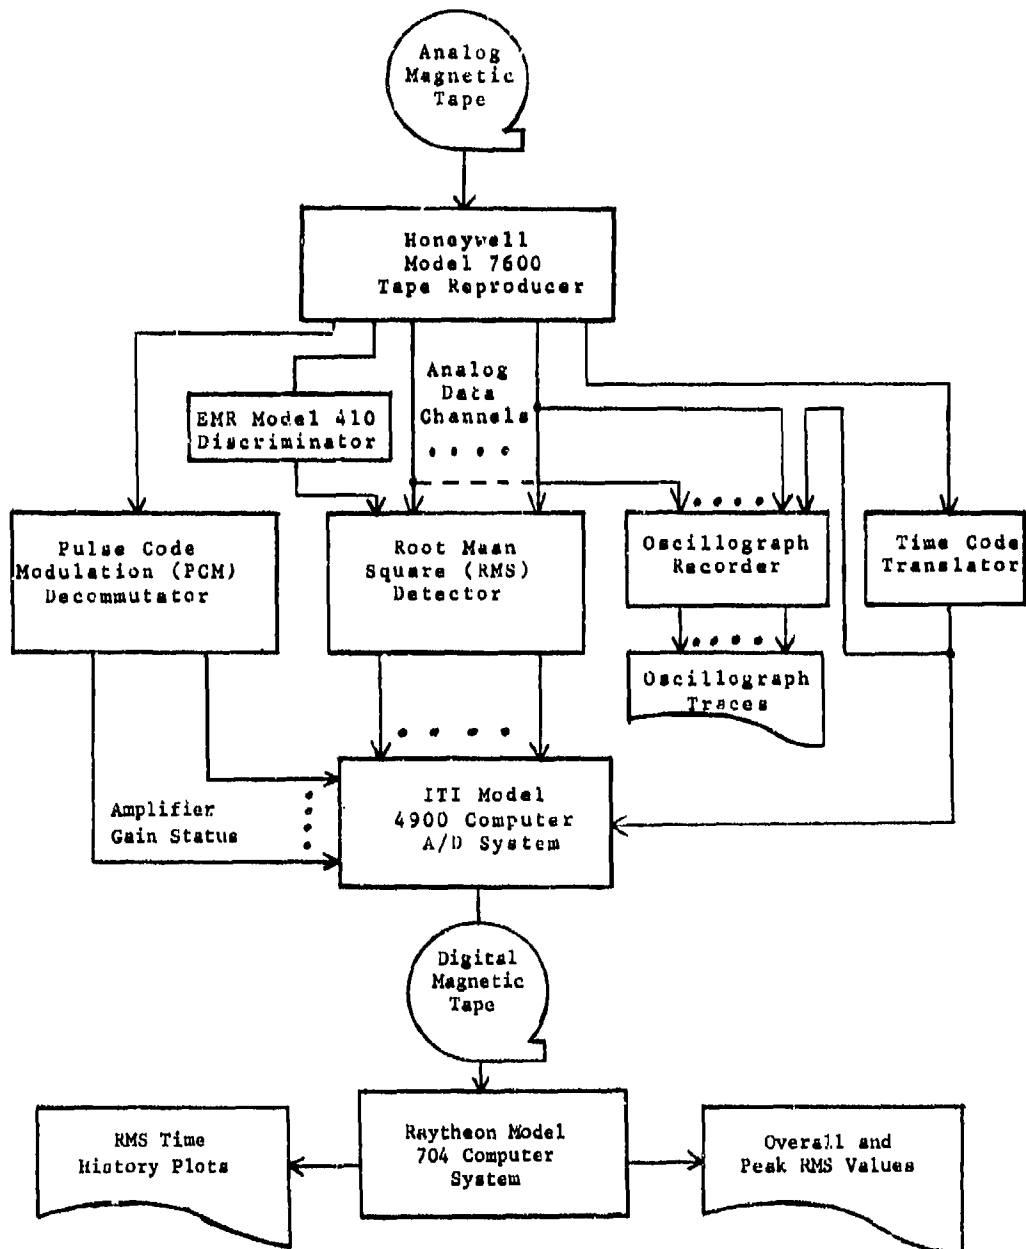


Figure 3. Data Playback and Reduction System

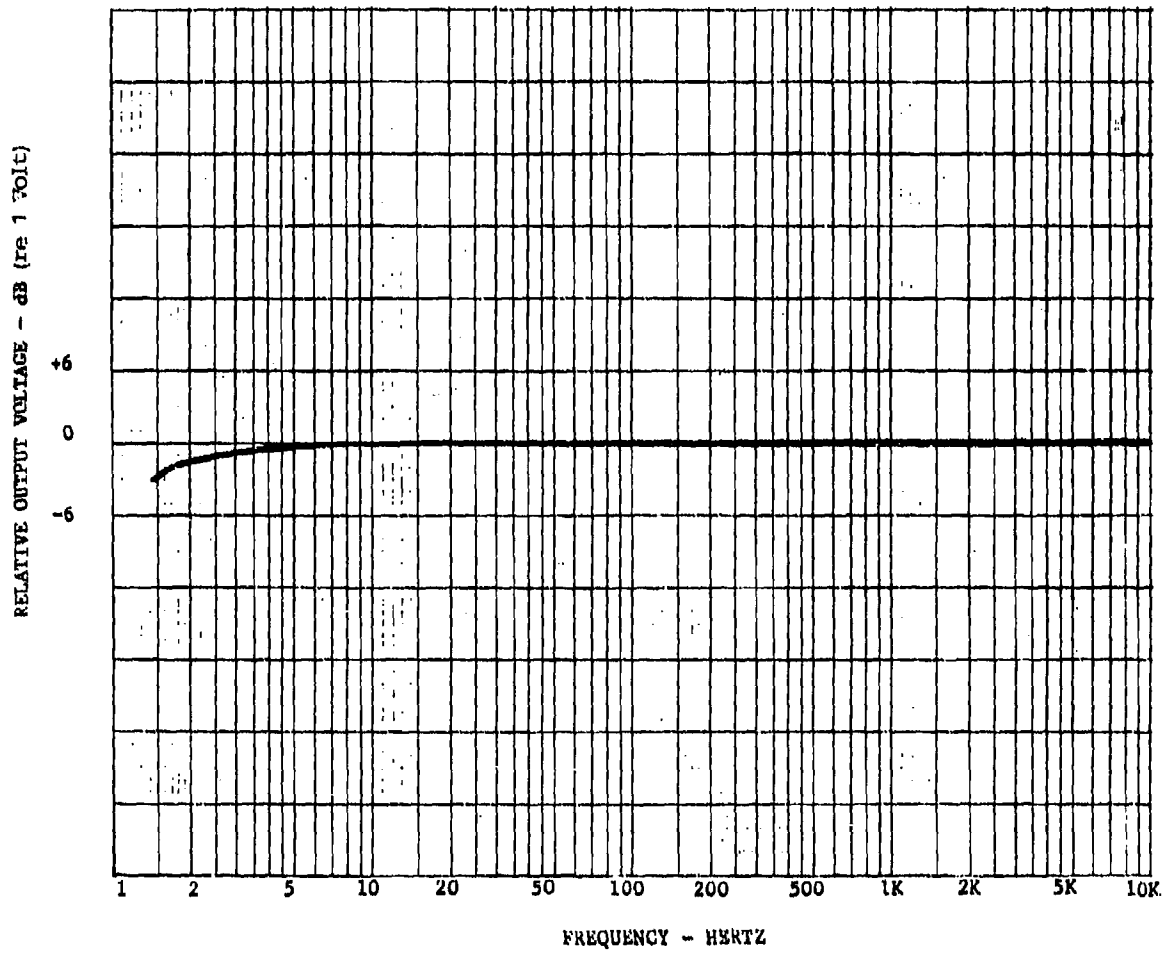


Figure 4. RMS Detector Frequency Response

reduction process was automated; therefore, once the system was set up, the flight tape could be played back in its entirety with no operator assistance required other than rewinding the tape and starting it for the second pass.

The digital tape produced by the analog to digital system was then input to a Raytheon Model 704 computer system along with transducer sensitivities and pickup identification (PUID) codes. Computer software then applied the proper amplifier gain factor and the matching transducer sensitivity to each data sample to produce RMS time history data in engineering units of G-PMS for accelerometer data and dB-sound pressure level for microphone data. Individual RMS time history plots were then made for each transducer for all test records. The initial time history plots revealed a need for additional smoothing to reduce the effects of transients in the data which were directly related to the data acquisition or reduction instrumentation. Examples of these are: a momentary loss of PCM demodulator synchronization signal, change of amplifier gain, and change of switch position. To overcome this problem, a "running average" technique was employed. This averaging technique simply replaced each data point with the average of its amplitude and the amplitude of some specified number of successive data points. It was determined that an eight-point running average produced the desired smoothing. Three typical time history plots are shown in Figure 5. A symbol plotted on the time history curve indicates that during the recording of the data, the signal level exceeded the set upper or lower level limits of the auto-gain ranging amplifier causing the amplifier to step up or down in gain to bring the data signal back into the optimum range of the tape recorder. Printed in the upper right corner of each plot is the initial amplifier gain level in dB (e.g., 40dB = X100 gain) and the actual start time of the record. Any gain change is printed below the starting gain along with the time of occurrence. This information is very useful in performing further data reduction. In addition, the overall RMS level which is computed over the entire test record is printed along

Mission No. 1016, 19 May 80

Test Condition - 9: Left Turn, Max g, Mach 0.85 @ 3K feet

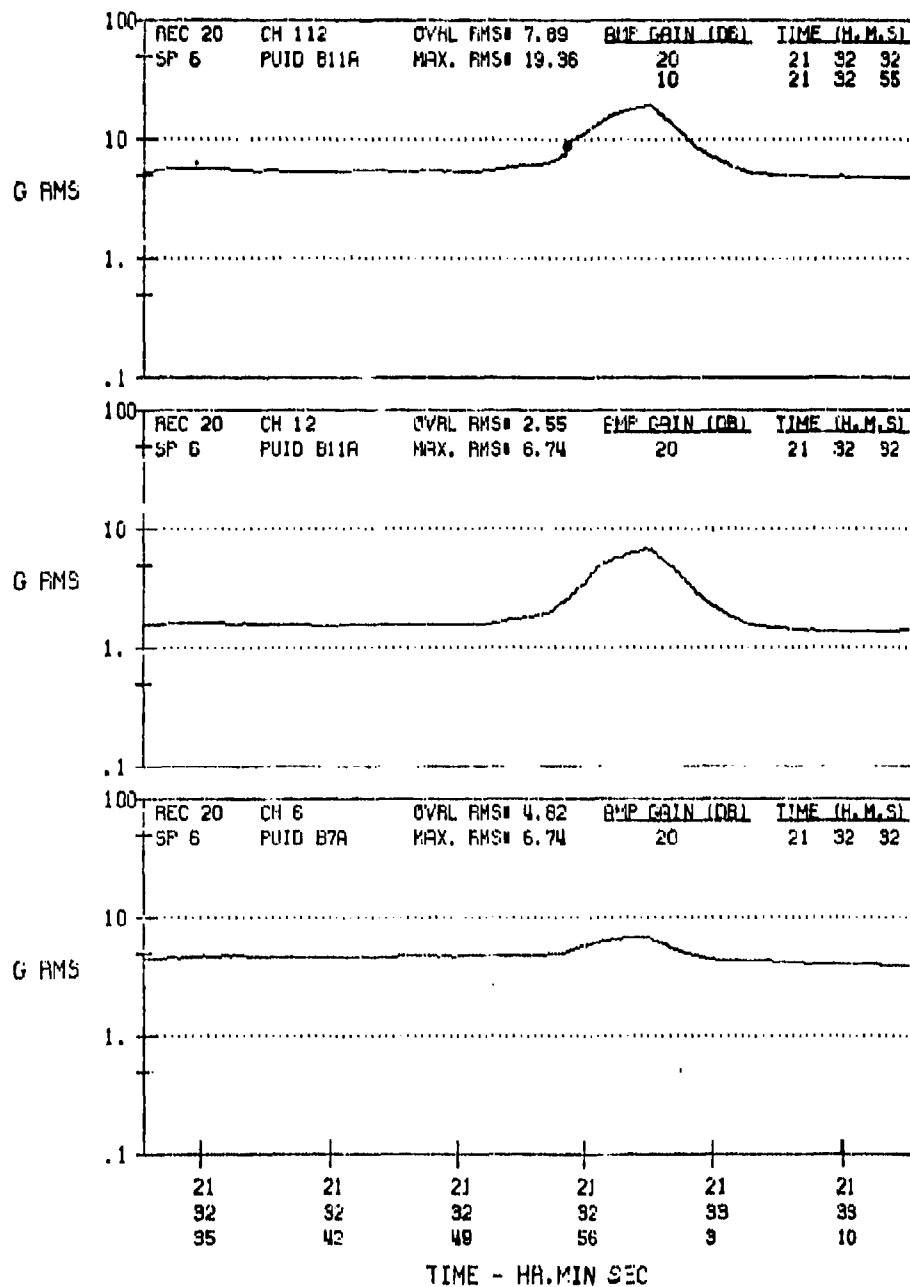


Figure 5 Typical RMS Time Histories

with the maximum RMS level attained during the test record.

Approximately 7200 individual time history plots were produced. Since it is not feasible to include that many plots in this report, it was decided to present this data in condensed but still usable form. About one-half of the time history plots exhibit a relative flat or constant amplitude. Figure 6 shows three typical examples of this type of time history. Data which exhibits this flat amplitude response with time can be represented by its overall RMS level. A list of flight conditions which produced relatively flat amplitude time history responses was given in Table 3. The overall RMS levels for transducer data recorded for these test conditions are given in Appendix B, Table B-1. This table contains the RMS data for each set of 12 transducers for each indicated switch position. In many cases, the same test condition was flown more than once. This is indicated in the tables by consecutive entries of the same test condition code. Time history plots which do not exhibit a flat amplitude level are produced by flight conditions of a transient nature. A list of these flight conditions was given in Table 4. Figure 7 shows three typical examples of time history plots with varying amplitude levels. For this type of data, the maximum amplitude which occurs within a given test record is of more value than the overall RMS. Appendix B, Table B-2 presents maximum RMS levels as read from the time history plots for each transducer.

Data which has been identified as unusable due to instrumentation problems is indicated in Tables B-1 and B-2 by an RMS amplitude of .00. These instrumentation problems were identified during the data editing phase of producing the RMS values. It is suspected that a limited amount of questionable data still remains to be identified. This questionable data probably represents less than 1-2% of the presented RMS data and will be identified during the future spectral analysis phase of data reduction. The spectral analyses will identify the frequency and amplitude of the complex responses which were summed

Mission No. 1012, 28 Apr 80

Test Condition - 23: Stabilized Level Flight, Mach 0.9 @ 15K Feet

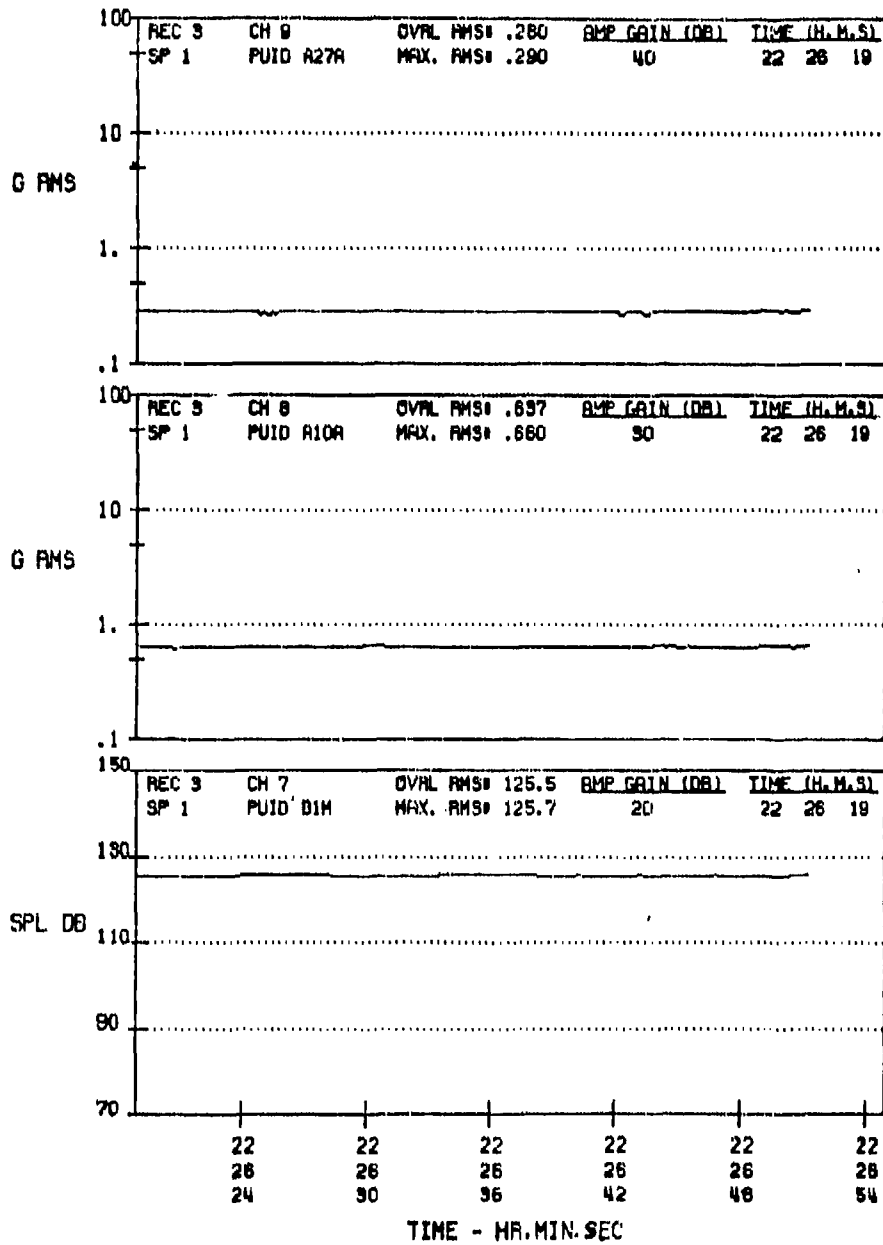


Figure 6 Typical Flat Amplitude RMS Time Histories

Mission No. 3013, 30 Apr 80

Test Condition - 15: Level Acceleration, Mach 0.5-1.05 @ .15K Feet

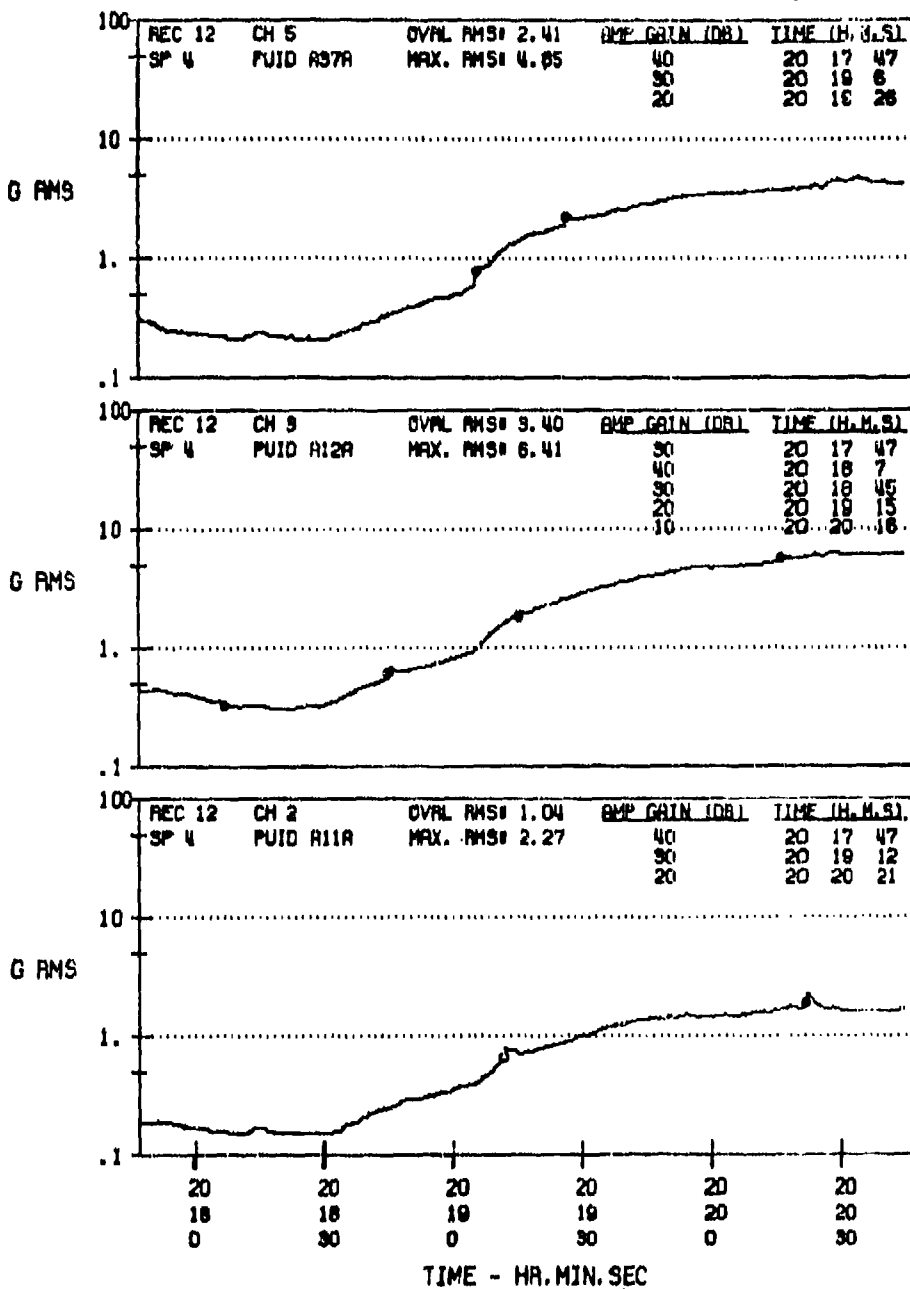


Figure 7 Typical Varying Amplitude RMS Time Histories

in the RMS process to produce each overall RMS amplitude level. This information will be presented in succeeding parts of this report.

Reduction of the large amount of data collected on the PCM channel has been limited to making computer listings of this data at one-second time intervals. These listings were provided by the Math Lab at Eglin AFB FL. Appendix C, Tables C-1 thru C-4 are reproductions of typical listings for each type of printout. These listings are available for later use in correlating aircraft measured dynamic response with flight parameters, temperatures, flow rates, etc.

SECTION VI
PLANNED DATA ANALYSIS

The dynamics data measured on the F-111E will be used in several specific efforts now being conducted within the Air Force. These efforts are briefly described in the following paragraphs.

1. AFWAL/FIBG Work Unit 24010414. The title of this work unit is "Vibration Analysis and Testing Technology". A major part of this work unit is devoted to the development and verification of empirical methods for the prediction of both linear and angular vibration of aircraft structures. Much of the data measured on the F-111E will be used to improve and expand these existing prediction methods. The data will also be used to study a new prediction technique for vibration transmitted from external skin structure to internal compartment sub-structure and equipment. This will involve using measurements from pairs of accelerometers and microphones which were installed at specified locations throughout the F-111E aircraft.

2. AFWAL/FIBE Work Unit 24010146. The title of this work unit is "Acoustics Research". One area being studied under this work unit is internal weapons bay aero-acoustic environments. The internal weapons bay environment immediately before and during weapons release continues to present severe aircraft, weapons design, structural, and operational problems. A substantial part of the F-111E vibration and acoustics test program was conducted to measure the weapons bay aeroacoustic environment with the bay doors open with and without fluctuating pressure suppression devices installed. This measured data will be evaluated to determine effectiveness of the suppression devices in reducing the weapons bay aeroacoustic environment. Initial results of this effort were reported in Reference 2.

3. AFWAL/FIBG Work Unit 24010401. The title of this work unit is "Dynamics Environment on Current and Future Air Force Flight Vehicles". Overall

RMS vibration measurements will be modeled as the sum of a general mean plus a location effect plus a test condition effect plus an interaction constant times the product of these two effects. From these results, locations and test conditions for broad band spectral analyses will be selected. Then spectral magnitudes at each frequency will be modeled in the same way and the results plotted to show on the same graph, the same frequency spectrum of the general mean, the location effect, the test condition effect, and the interaction constant. These results can then, in turn, be used to determine the need for further narrow band analyses. Regression analyses will be employed to model the test condition effects as functions of airspeed, altitude, engine power, etc. Analyses of variance will be used to model location effects in terms of structural characteristics and direction. Factor analyses will also be used to determine the extent to which all spectral plots obtained can be modeled as linear combinations of a few more fundamental plots. This work will be reported in subsequent parts of this report.

4. TN-ASD-AFWAL-2011-75-17(01). The title of this technology need (TN) is "Updated Dynamics Qualification Test Criteria and Techniques" dated 17 Oct 80. The objective of this TN is to refine and augment the dynamic test methods of MIL-STD-810. One particular area to be updated is that which covers gunfire criteria. The gunfire vibration prediction method contained in the present version of MIL-STD-810 was developed prior to 1975. Gunfire data from the F-111E test program and from other recent test programs will be used to evaluate a recently developed simplified gunfire vibration prediction method. Vibration and acoustic data will also be made available for updating other sections of MIL-STD-810 as well.

SECTION VII

CONCLUSIONS

1. A large quantity of vibration and acoustic test data recorded throughout the operational flight envelope of the F-111E is now available for use in dynamics research and development efforts, designing electronic and electro-optical systems, updating dynamics qualification test criteria, and solving present and future operational dynamics problems on the F-111E.
2. To improve the overall quality of dynamics test data on large flight test programs, it is essential that test tapes be played back and reviewed for quality following each test flight with adequate time provided to correct major instrumentation problems prior to continuing the flight test program. The use of an RMS Detector System and time history computer software provides an effective "quick look" method for determining the quality of flight test data.
3. The flight parameter data which was sampled and recorded along with the dynamics data was very useful in correlating aircraft performance with dynamics response. Much of the scatter in the dynamics data can be attributed to the difficulty in maintaining stable flight conditions over the length of test records and the necessity of setting up and repeating flight conditions for each set of 12 transducers.

APPENDIX A

TRANSDUCER LOCATIONS AND AIRCRAFT TEST CONFIGURATIONS

FIGURES

- A-1 Accelerometer Locations in Nose Equipment Bay
- A-2 Accelerometer Locations on Left Main Instrument Panel
- A-3 Accelerometer Locations on Center and Right Main Instrument Panel
- A-4 Accelerometer Locations on Center Console
- A-5 Sketch of Accelerometer and Microphone Locations in Weapons Bay
- A-6 Thermocouple Locations in Right Side Nose Equipment Bay
- A-7 Cross Reference: Transducer Number with Figure Number of Photograph Showing Precise Transducer Location
- A-8 - A-81 Photos of Transducer Locations

TABLES

- A-1 Description of Transducer Locations
- A-2 PUID/Channel/Switch Position Matrix
- A-3 Aircraft Test Configurations

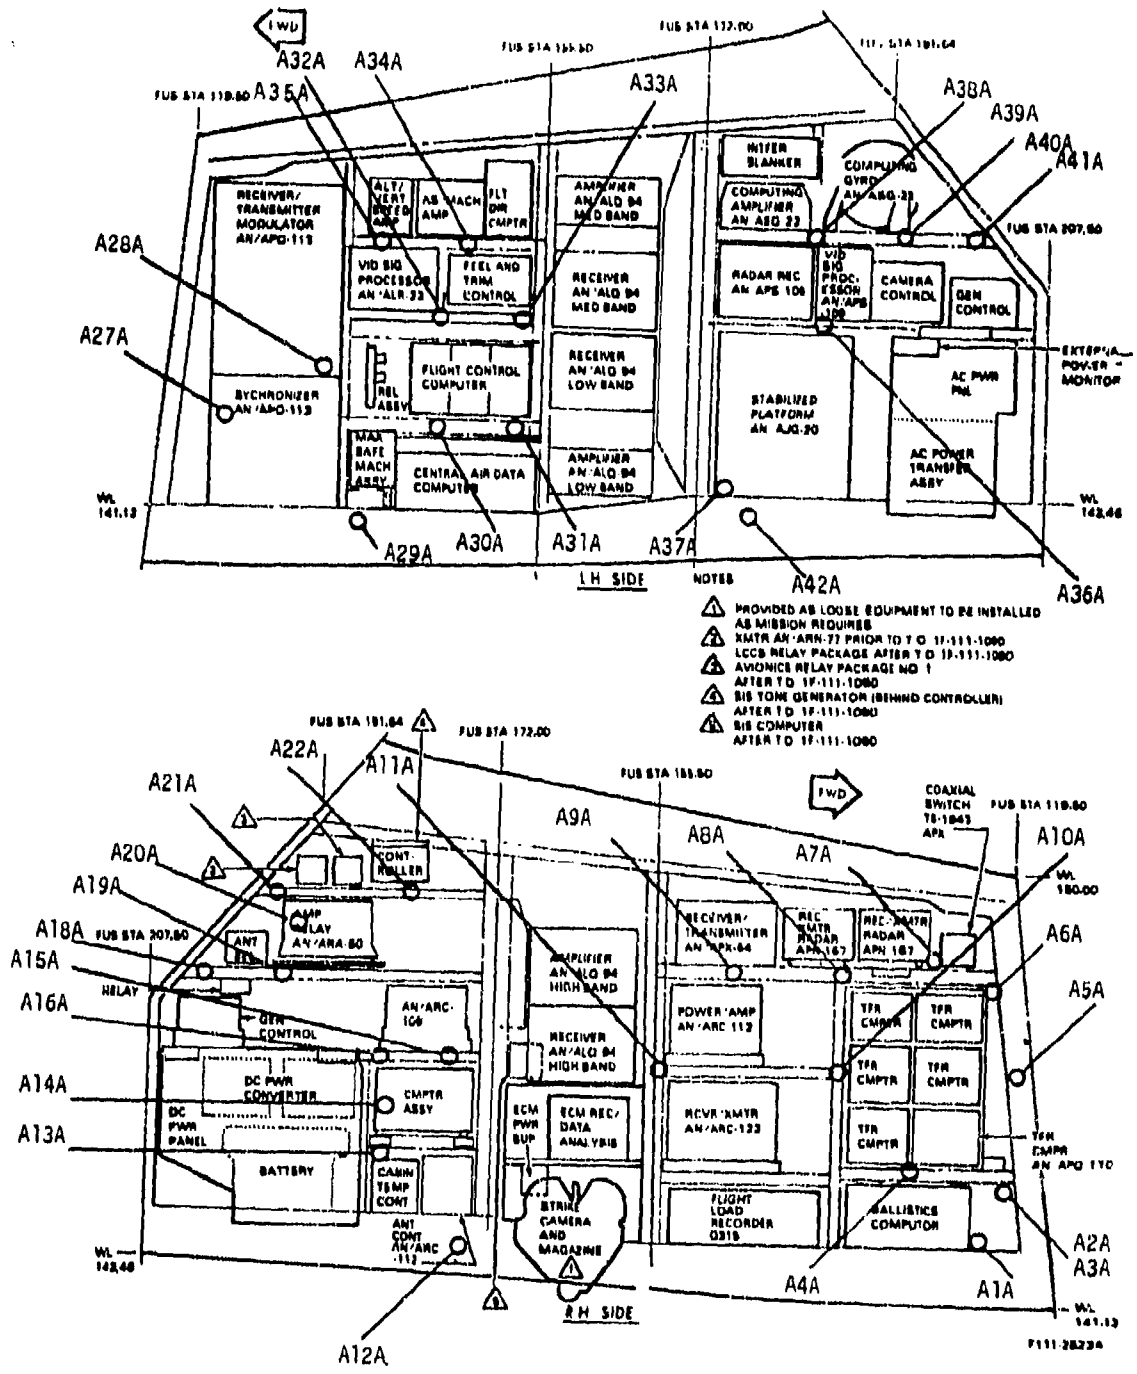


Figure A-1 Accelerometer Locations in Nose Equipment Bays

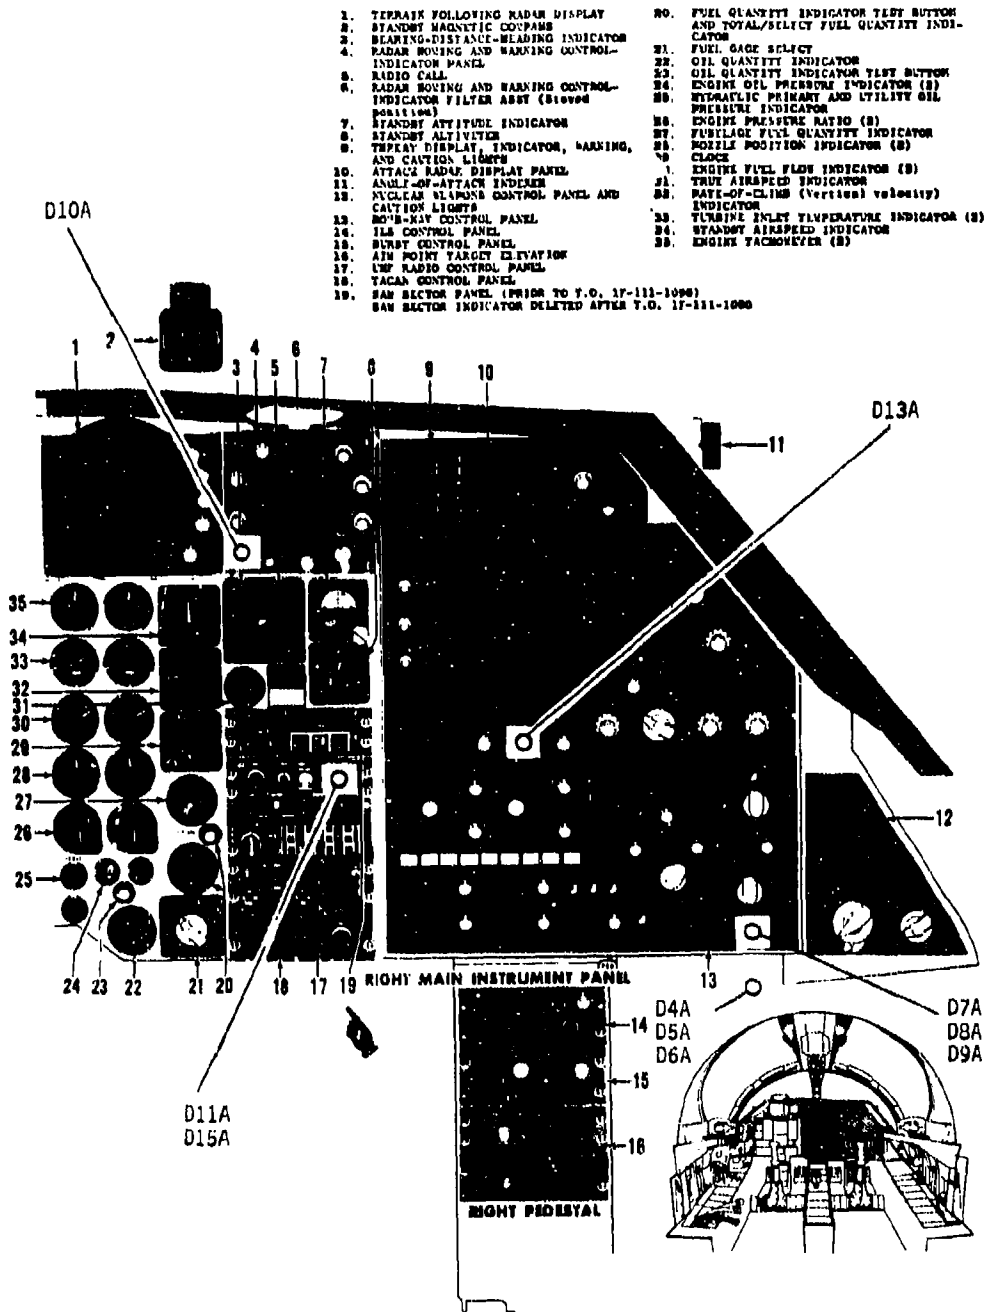


Figure A-3 Accelerometer Locations on Center and Right Main Instrument Panel


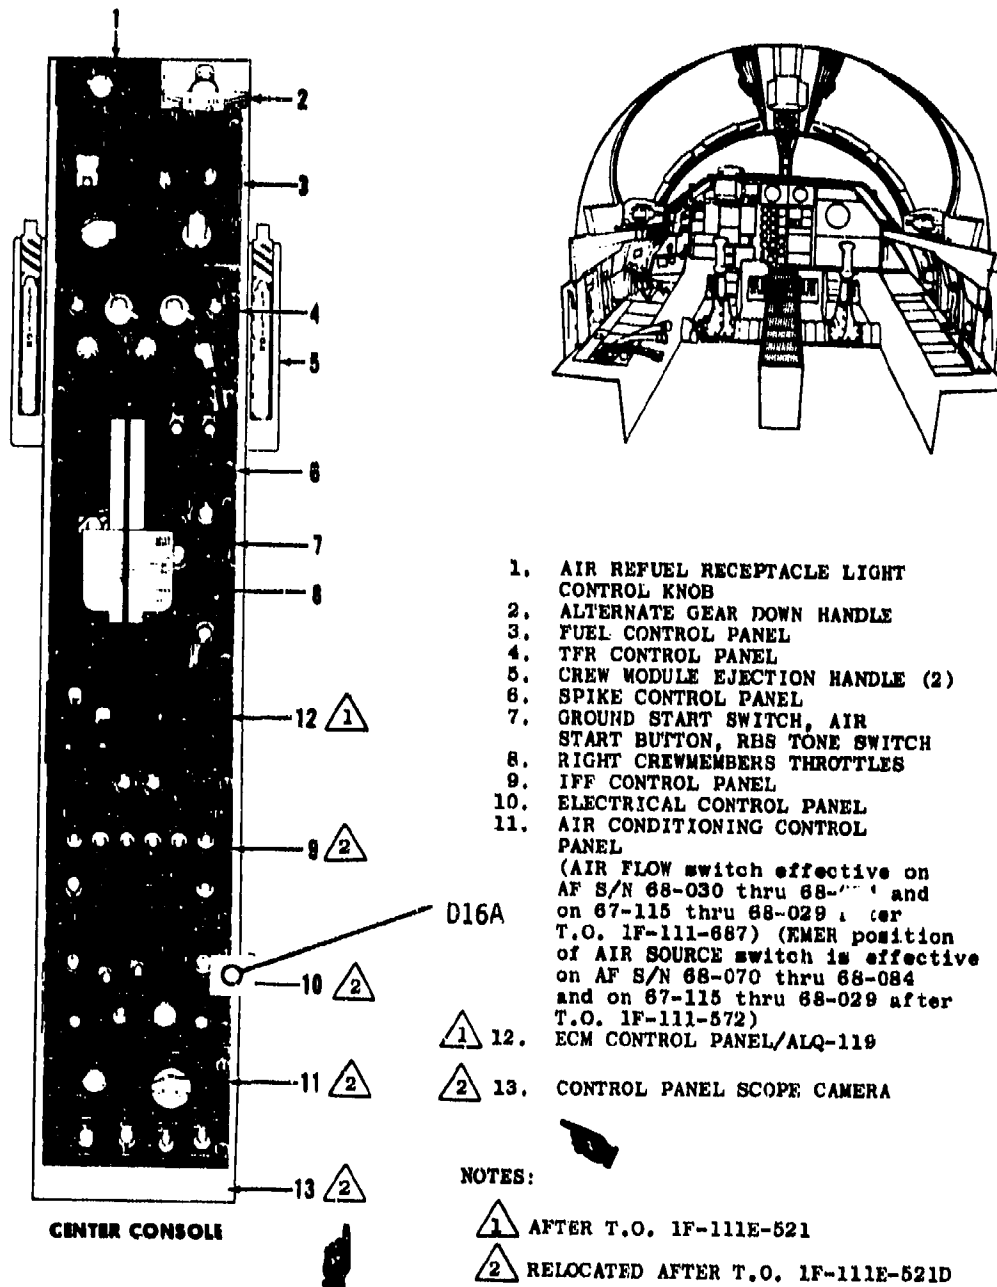



Figure A-4 Accelerometer Locations on Center Console

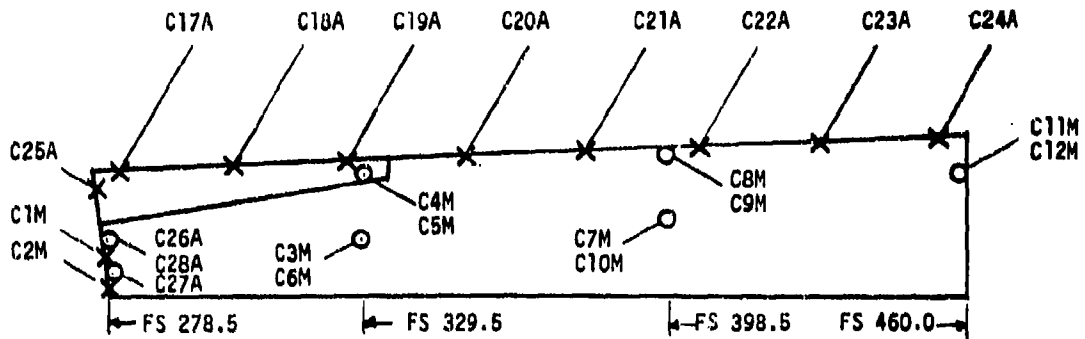

SIDE VIEW

X - ACCELEROMETER

O - MICROPHONE

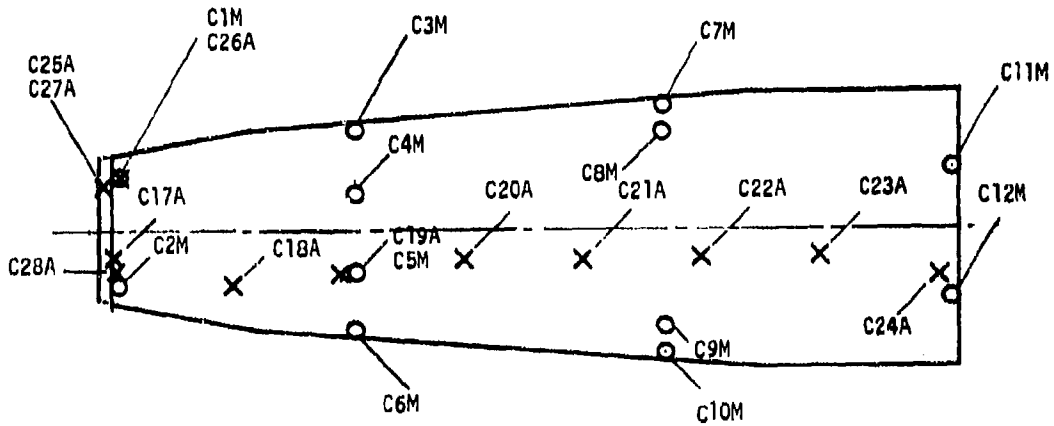

BOTTOM VIEW

Figure A-5 Sketch of Accelerometer and Microphone Locations in Weapons Bay

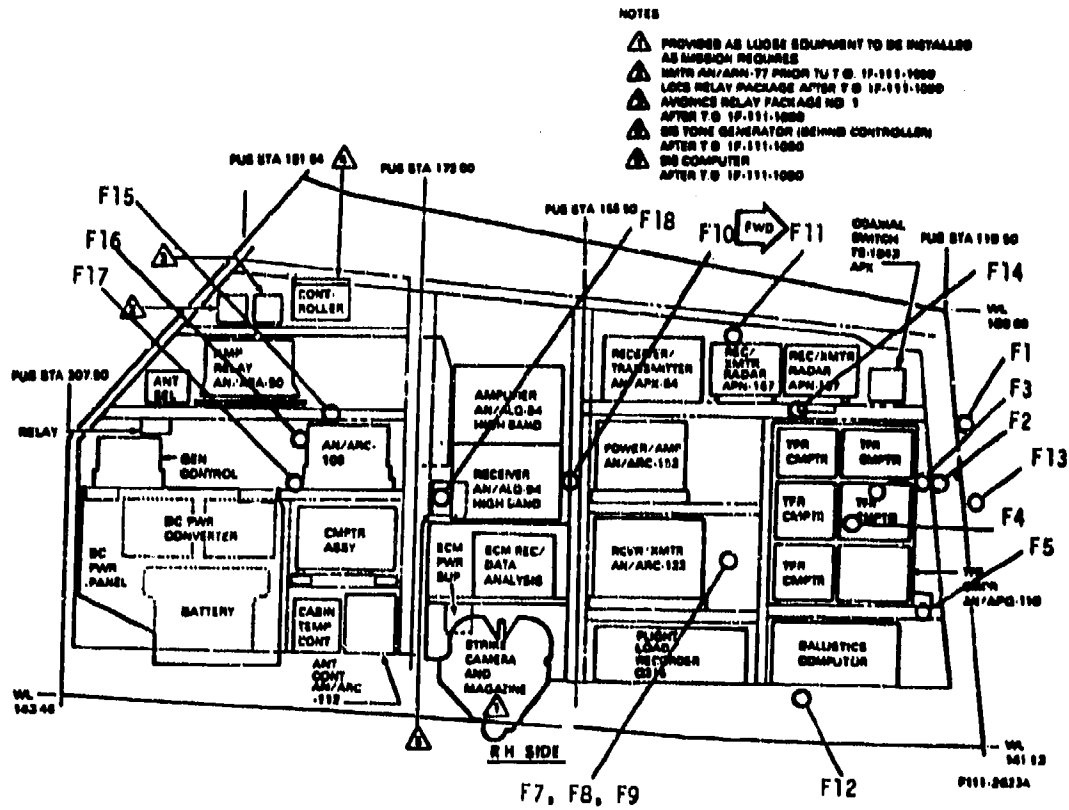


Figure A-6 Thermocouple Locations in Right Side Nose Equipment Bay

TRANSDUCER NUMBER	FIGURE NUMBER	TRANSDUCER NUMBER	FIGURE NUMBER	TRANSDUCER NUMBER	FIGURE NUMBER
A1A	A-8, A-9	A33A	A-16, A-19	B8A	A-36
A2A	A-8, A-9	A34A	A-16, A-19	B9A	A-37
A3A	A-8, A-9	A35A	A-16, A-19	B10A	A-38
A4A	A-8, A-9	A36A	A-16, A-20	B11A1	A-38
A5A	A-10	A37A	A-16, A-21	B11A2	A-38
A6A	A-8, A-11	A38A	A-16, A-20	B12A	A-39, A-69
A7A	A-8, A-11	A39A	A-16, A-20	B13A	A-40
A8A	A-8, A-11	A40A	A-16, A-20	B14A	A-41
A9A	A-8, A-12	A41A	A-16, A-20	B15A	A-42
A10A	A-8, A-11	A42A	A-16, A-21	B16A	A-43
A11A	A-8, A-12	A43A	A-22	B1M	A-27, A-28
A12A	A-8, A-13	A44A	A-22	B2M	A-29
A13A	A-8, A-14	A45A	A-23	B3M	A-30
A14A	A-8, A-14	A46A	A-24	B4M	A-31, A-32
A15A	A-8, A-14	A47A	A-25	B5M	A-33, A-34
A16A	A-8, A-14	A48A	A-25	B6M	A-33, A-34
A18A	A-8, A-15	A49A	A-26	B7M	A-35
A19A	A-8, A-15	A50A	A-26	B8M	A-36
A20A	A-8, A-15	A51A	A-26	B9M	A-37
A21A	A-8, A-15	A52A	A-9	B10M	A-38
A22A	A-8, A-15	B1A	A-28	B12M	A-39, A-69
A27A	A-16, A-17	B2A	A-29	B13M	A-40
A28A	A-16, A-17	B3A	A-30	B14M	A-41
A29A	A-16, A-18	B4A	A-32	B15M	A-42
A30A	A-16, A-18	B5A	A-34	B16M	A-43
A31A	A-16, A-18	B6A	A-34	C1M	A-46, A-47
A32A	A-16, A-19	B7A	A-35	C2M	A-47
				C3M	A-48

Figure A-7 Cross Reference: Transducer Number with Figure Number of Photograph Showing Precise Transducer Location

TRANSDUCER NUMBER	FIGURE NUMBER	TRANSDUCER NUMBER	FIGURE NUMBER	TRANSDUCER NUMBER	FIGURE NUMBER
C4M	A-48, A-49	D7A	A-60, A-62	F4	A-75
C5M	A-50	D8A	A-60, A-62	F5	A-9
C6M	A-44, A-56	D9A	A-60, A-62	F6	A-75
C7M	A-51	D10A	A-60, A-63	F7	A-76
C8M	A-51, A-62	D11A	A-60, A-64	F8	A-76
C9M	A-53	D12A	A-59, A-65	F9	A-8, A-77
C10M	A-54	D13A	A-60, A-64	F10	A-8, A-77
C11M	A-45	D14A	A-59, A-65	F11	A-78
C12M	A-45	D15A	A-60, A-64	F12	A-8, A-79
C17A	A-55	D16A	A-66	F13	A-22
C18A	A-44, A-56	E1M	A-31, A-67	F14	A-80
C19A	A-44, A-50	E2A	A-71, A-72	F15	A-8, A-81
C20A	A-44, A-57	E3A	A-71, A-72	F16	A-81
C21A	A-44	E4A	A-71	F17	A-81
C22A	A-44	E5A	A-71	F18	A-77
C23A	A-45	E6A	A-68	F19	A-74
C24A	A-45	E7M	A-39, A-69		
C25A	A-46	E11A	A-69		
C26A	A-47, A-58	E12A	A-69		
C27A	A-47, A-58	E13A	A-70		
C28A	A-47	E14A	A-71, A-73		
D1A	A-59, A-61	E15A	A-71, A-73		
D2A	A-59, A-61	A16A	A-71, A-73		
D3A	A-59, A-61	A17A	A-71, A-74		
D4A	A-60, A-62	F1	A-22		
D5A	A-60, A-62	F2	A-10		
D6A	A-60, A-62	F3	A-8, A-26		

Figure A-7 (Cont) Cross Reference: Transducer Number with
Figure Number of Photograph Showing
Precise Transducer Location



Figure A-8. Transducer Locations in Right Side Equipment Bay

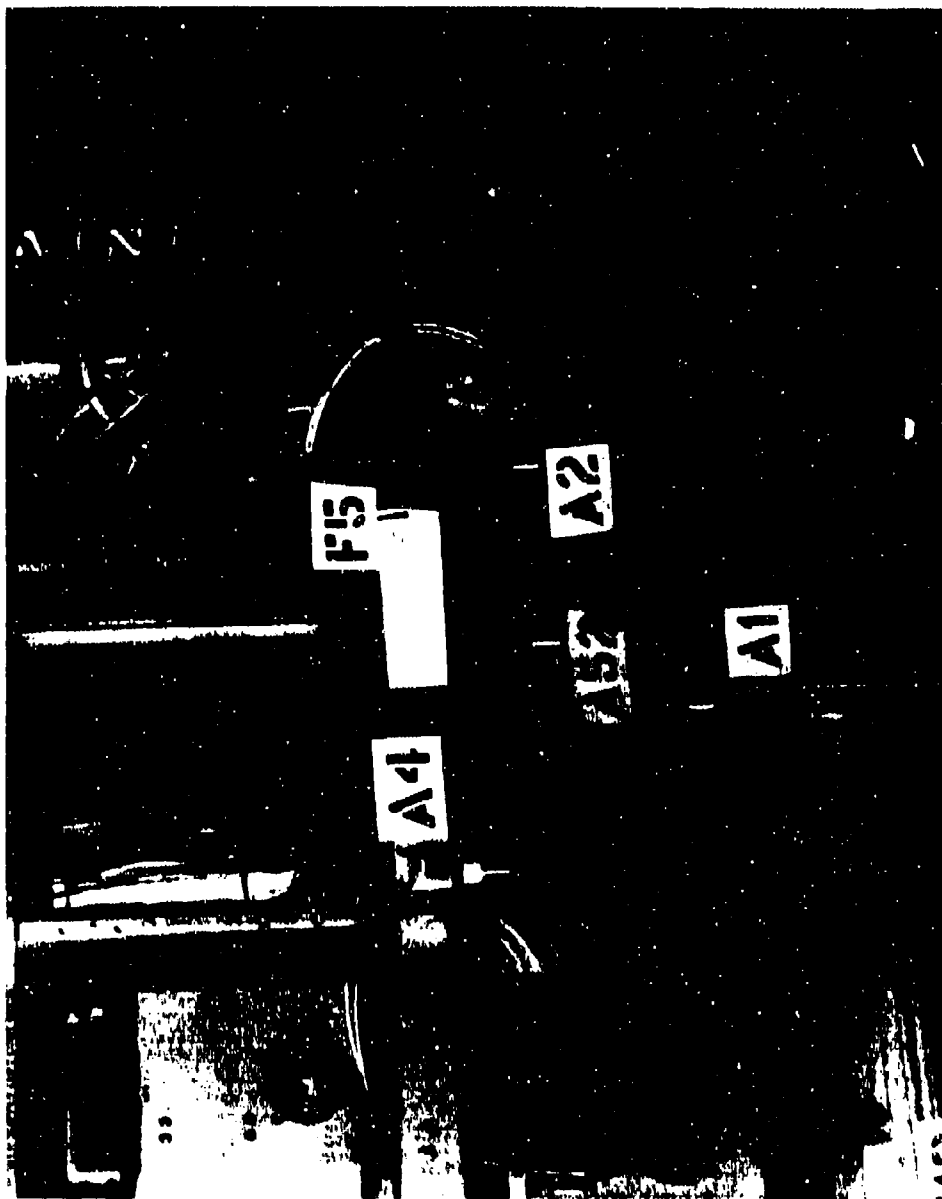


Figure A-9. Transducer Locations Near Ballistics Computer Compartment



Figure A-10. Transducer Locations Aft of TFR Computer Compartment



Figure A-11. Transducer Locations Near TFR Computer Compartment

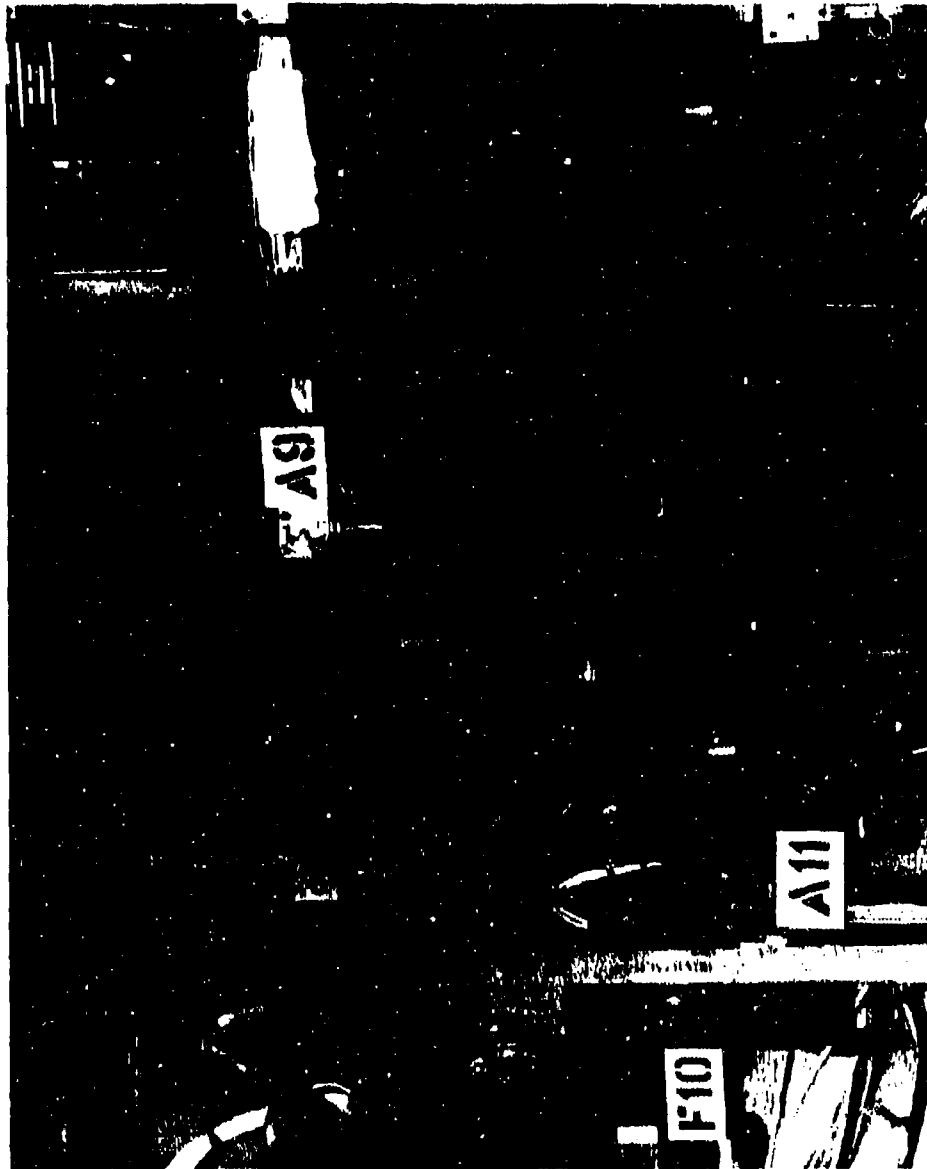


Figure A-12. Transducer Locations Near Power/AMP AN/ARC-112 Compartment

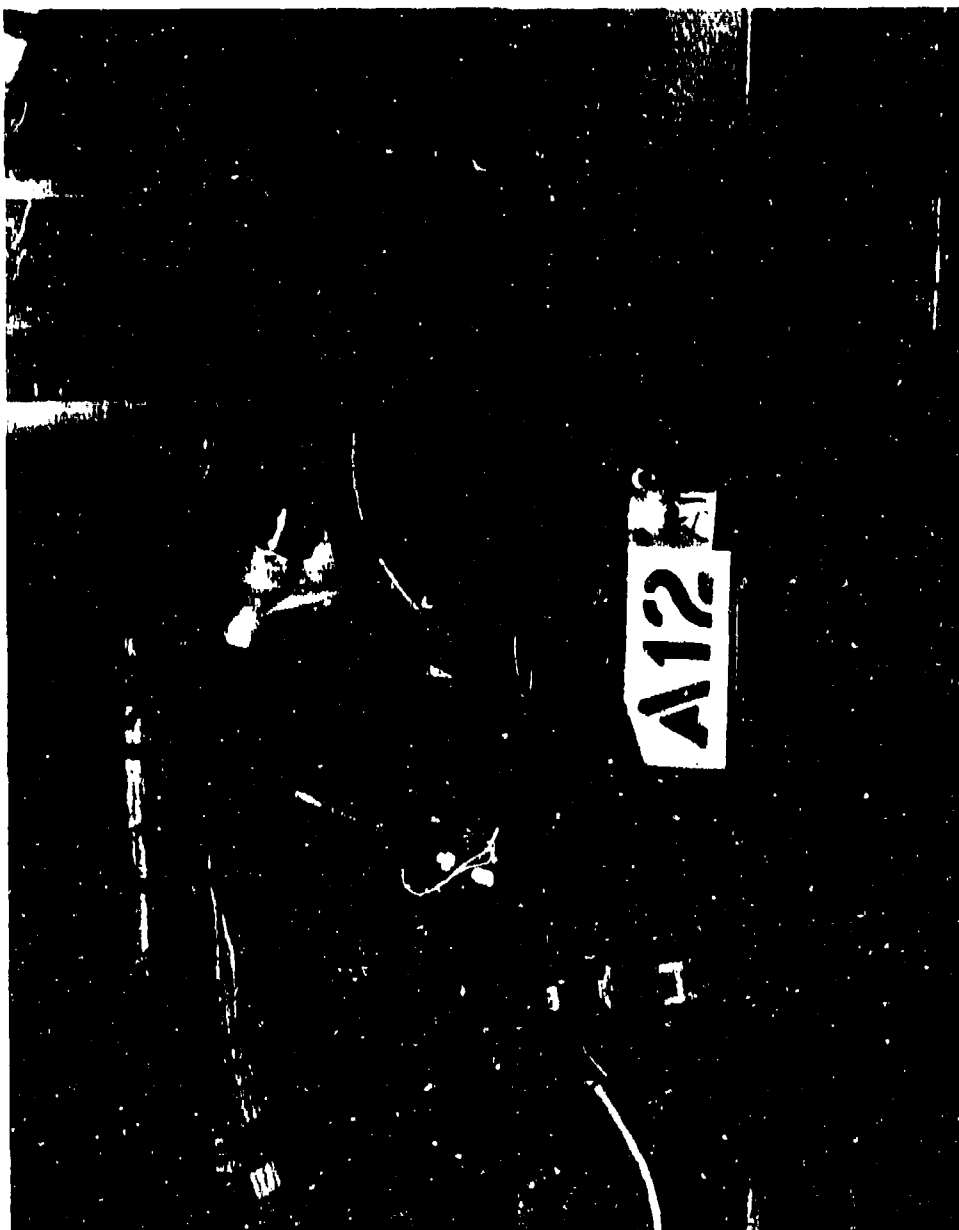


Figure A-13. Transducer Location Near ANT CONT AN/ARC-112

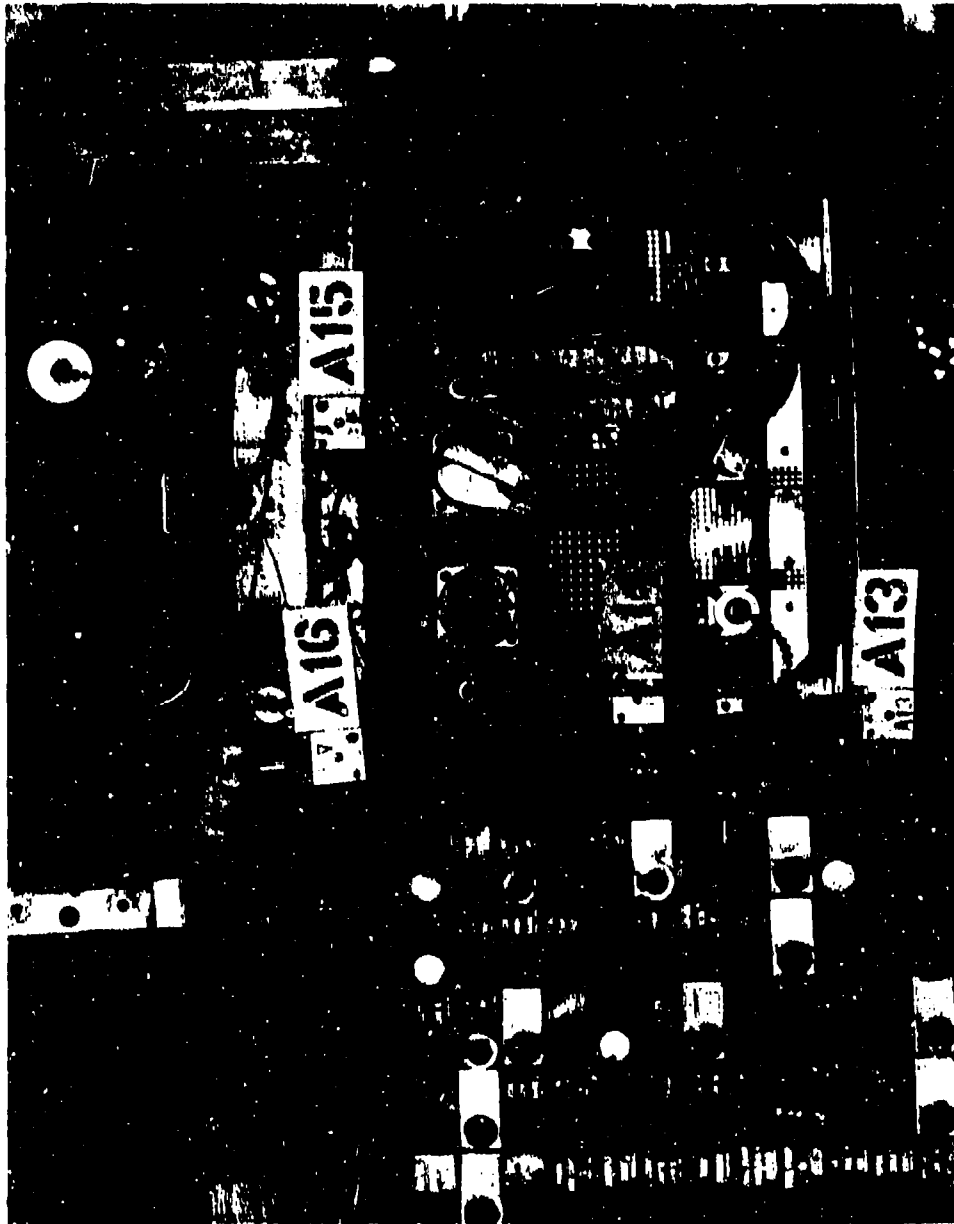


Figure A-14. Transducer Locations Near AN/ARN-52 Compartment



Figure A-15. Transducer Locations Near AMP Relay AN/ARA-50 Compartment

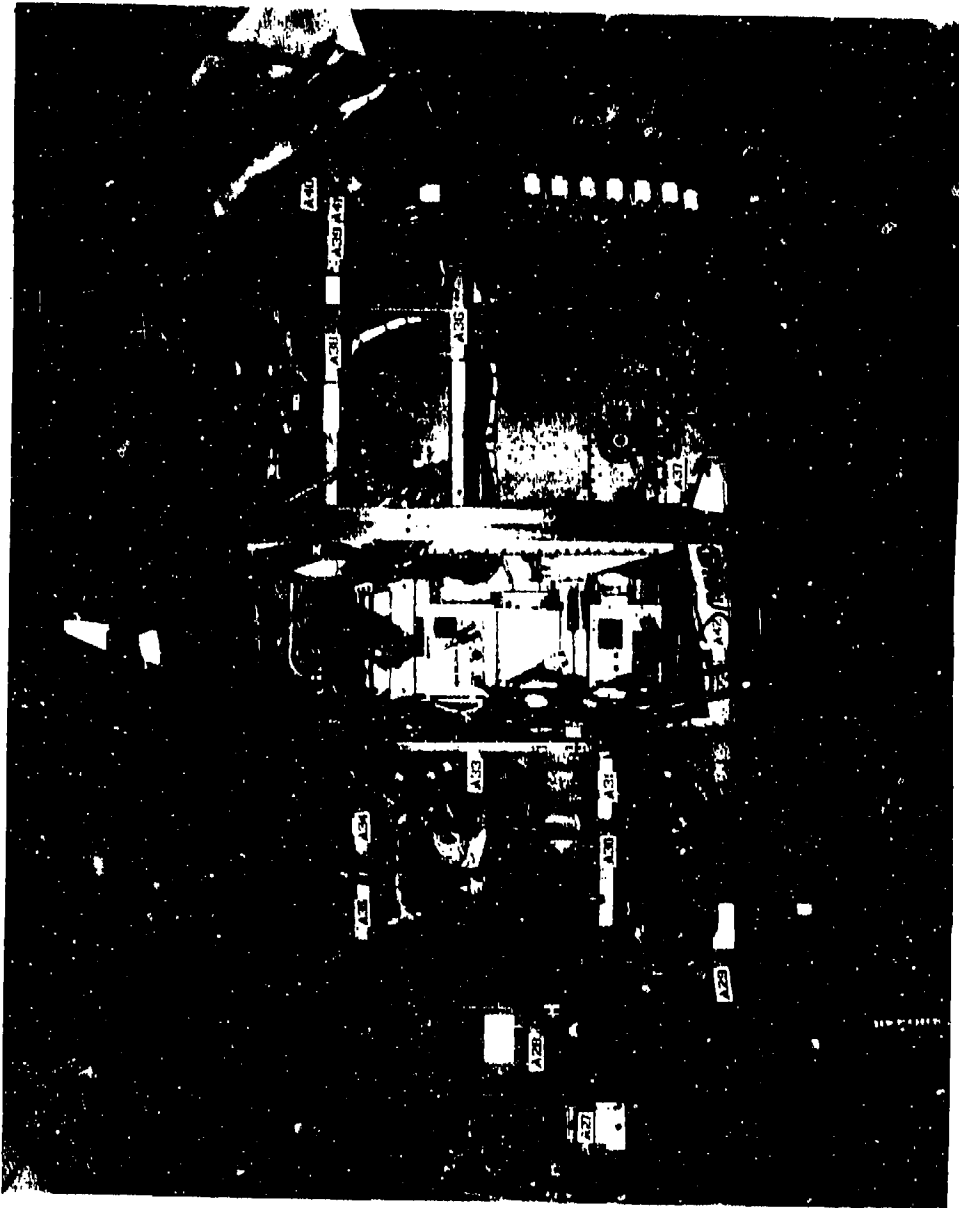


Figure A-16. Transducers Locations in Left Side Equipment Bay

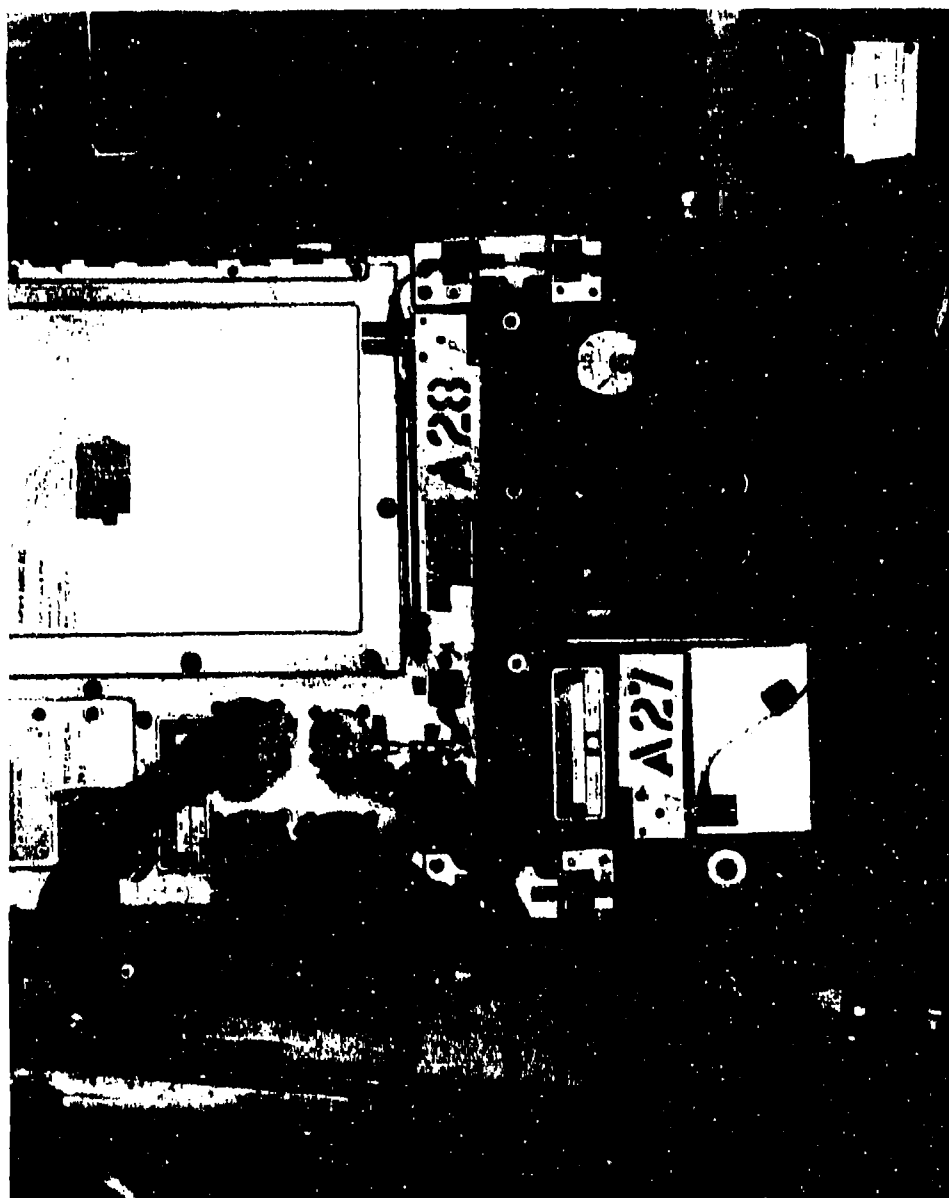


Figure A-17. Transducer Locations Near SYNCHRONIZER AN/APQ-113 Compartment

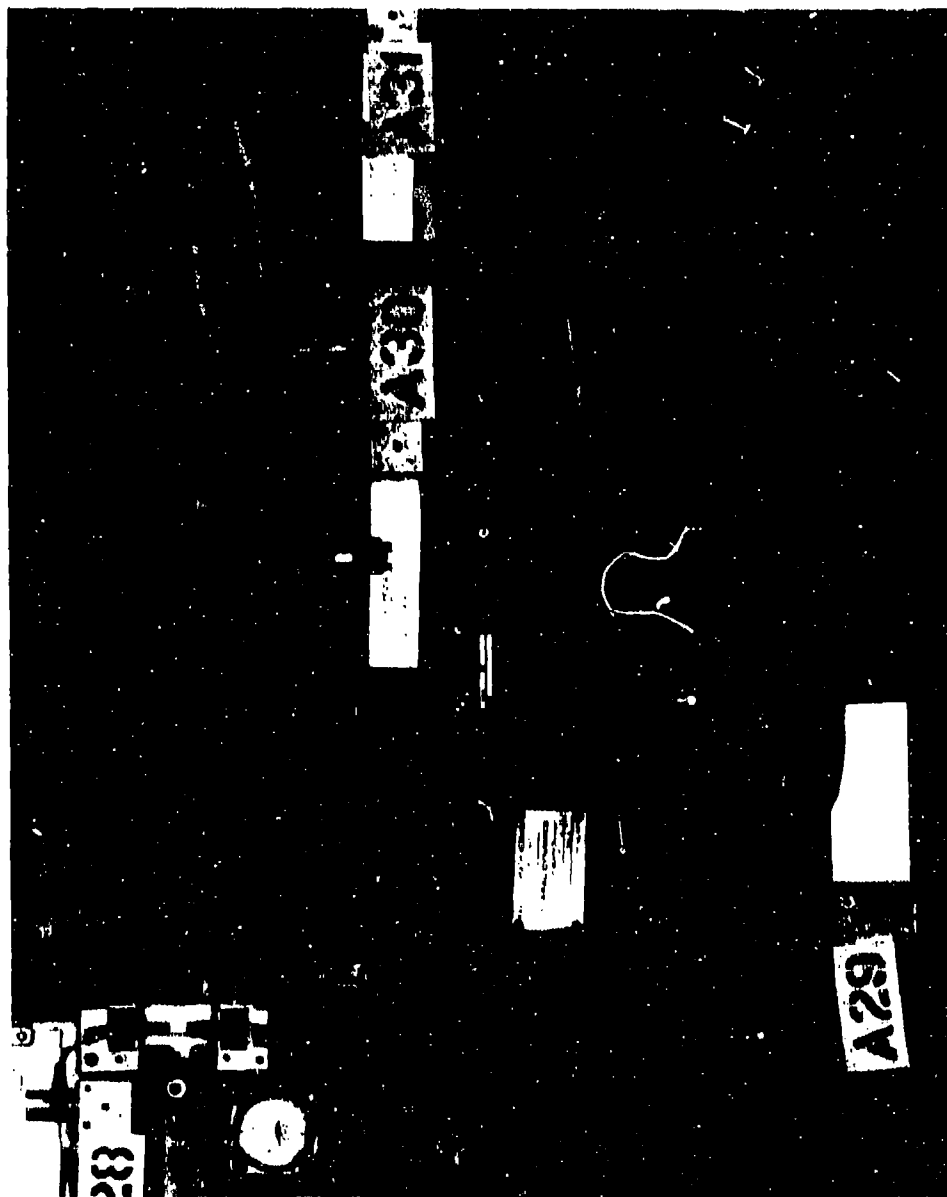


Figure A-18. Transducer Locations Near Flight Control Computer Compartment



Figure A-19. Transducer Locations Above Flight Control Computer Compartment

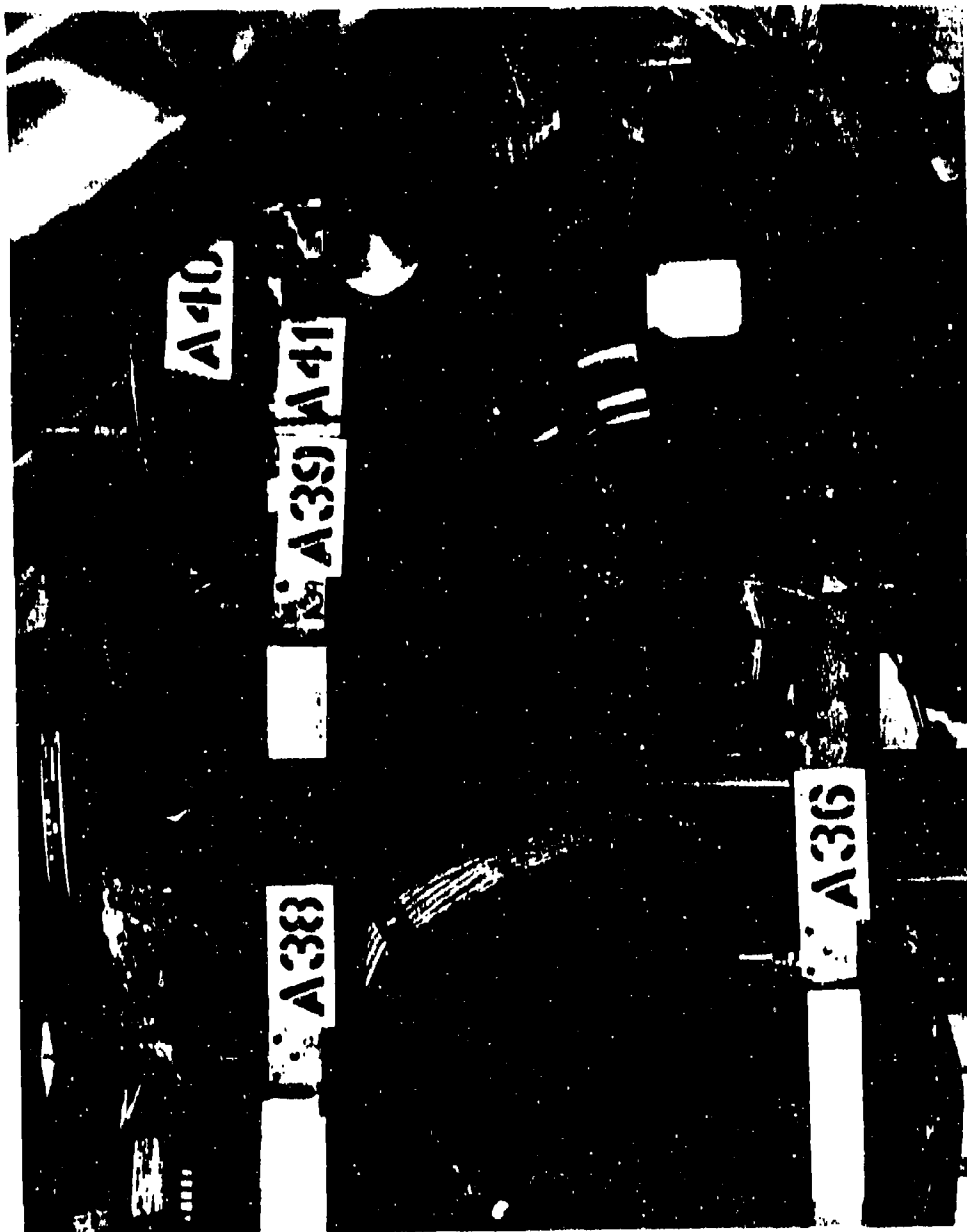


Figure A-20. Transducer Locations Near Computing Gyro AN/ASG-23 Compartment

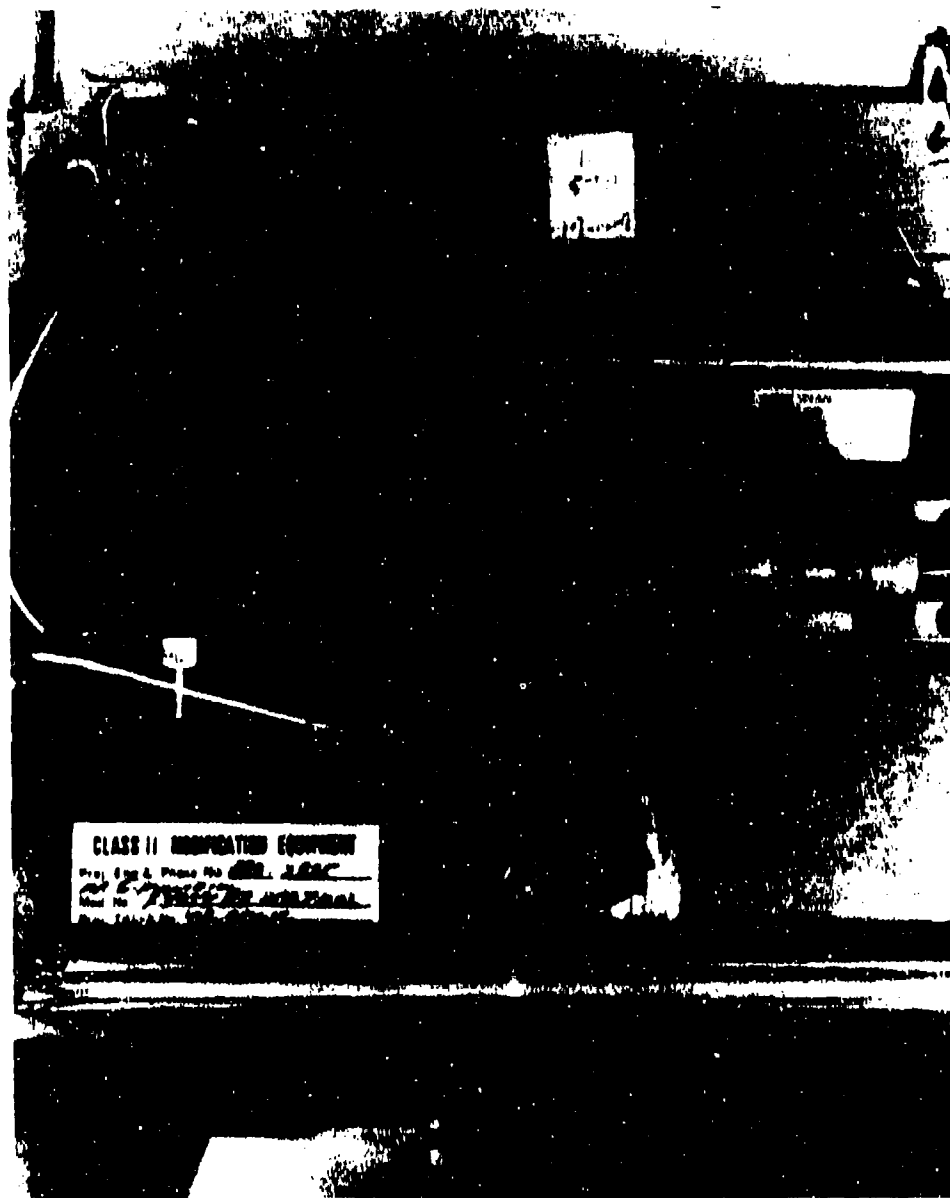


Figure A-21. Transducer Locations Near Amplifier AN/ALQ-94 Compartment.

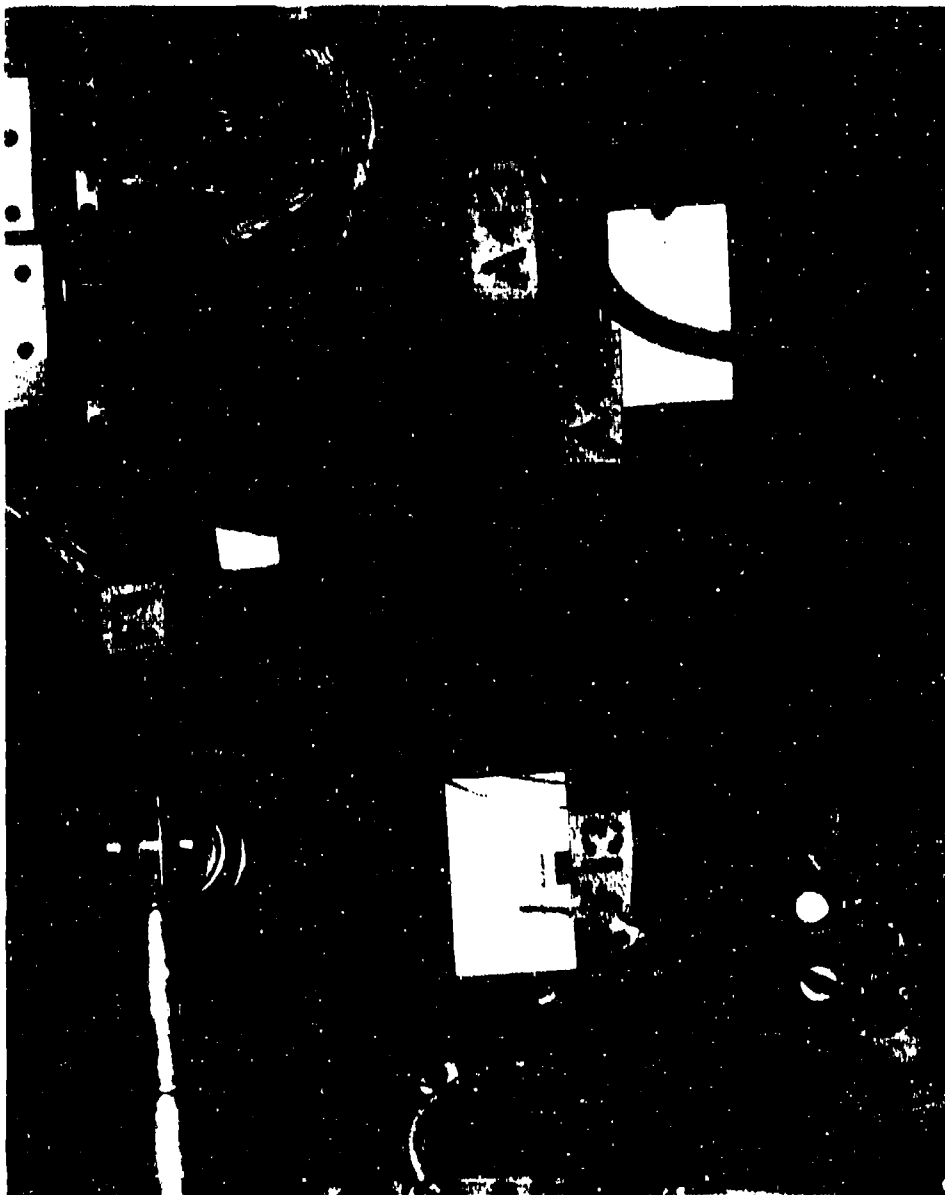


Figure A-22. Transducer Locations on Forward Side of Bulkhead Near Forward Looking Radar



Figure A-23. Transducer Location on Forward Bulkhead, Right Side Near Bottom Behind DC Power Panel



Figure A-24. Transceiver Location on Forward Bulkhead, Left Side Aft of Gen. Control Compartment



Figure A-25. Transducer Locations on Forward Bulkhead on Left Side Aft of AC Power Transfer Assy
Compartment

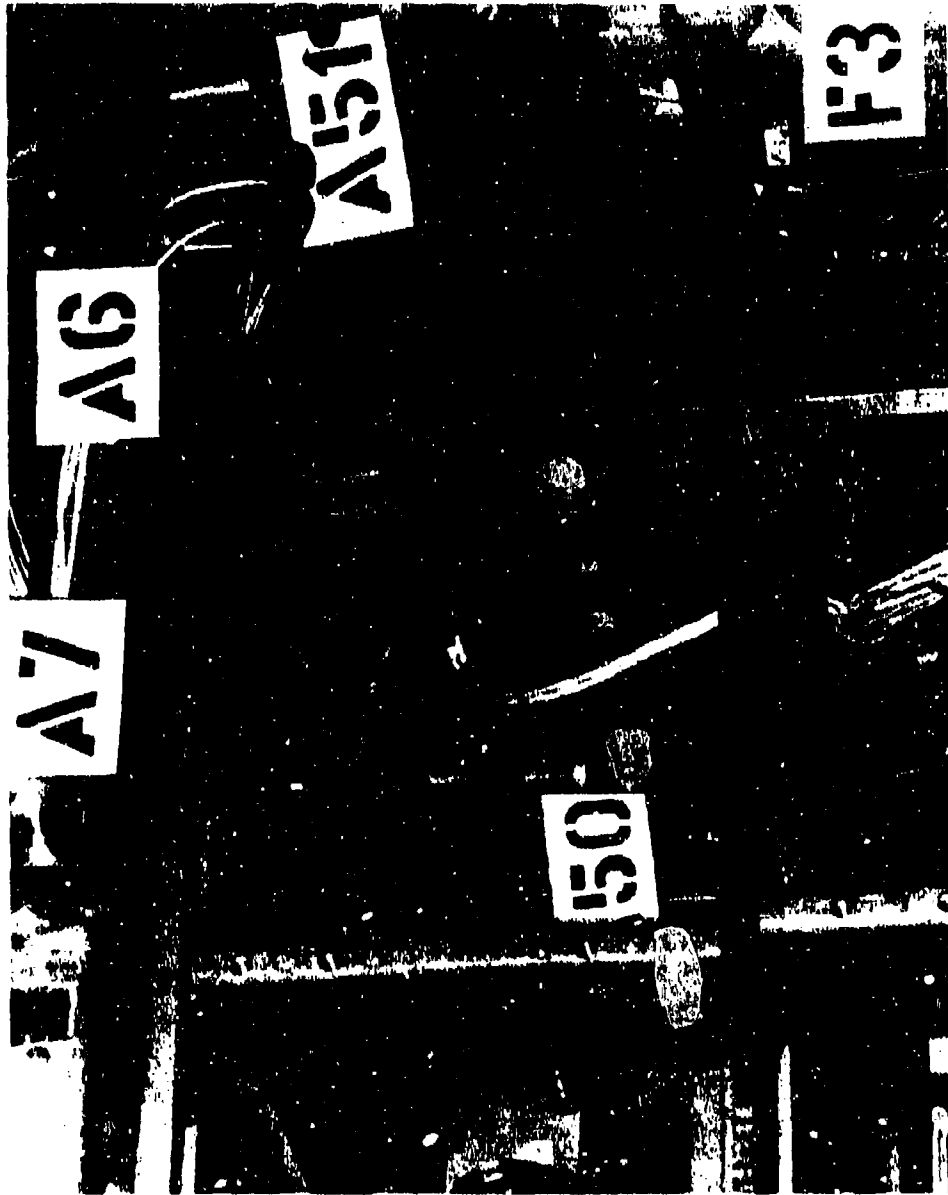


Figure A-26. Transducer Locations on Nose Bulkhead, Right Side Near Top of TFR Computer Compartment

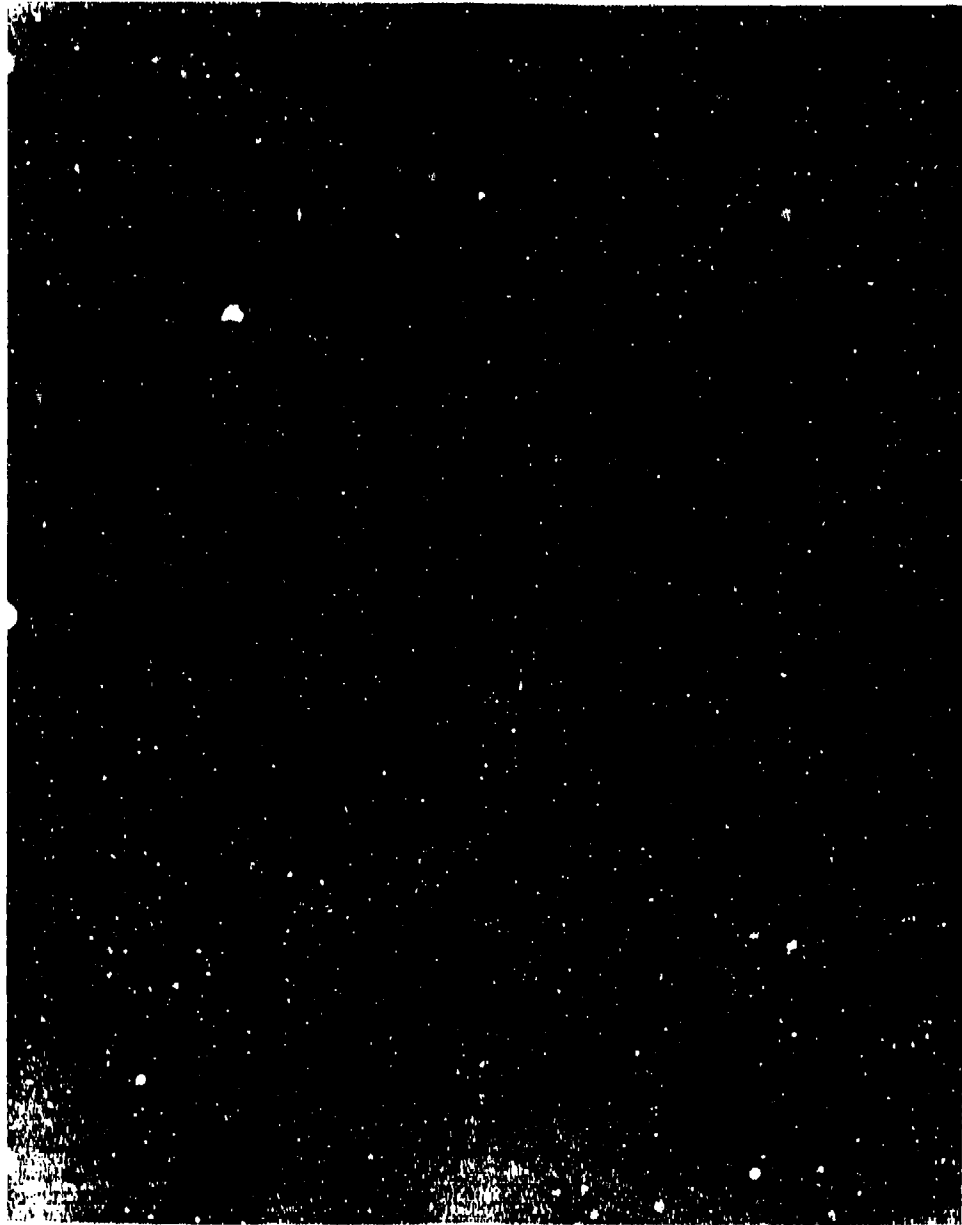


Figure A-27. Transducer Location on Right Side of Fuselage 65 inches Aft of Nose Tip in Radome

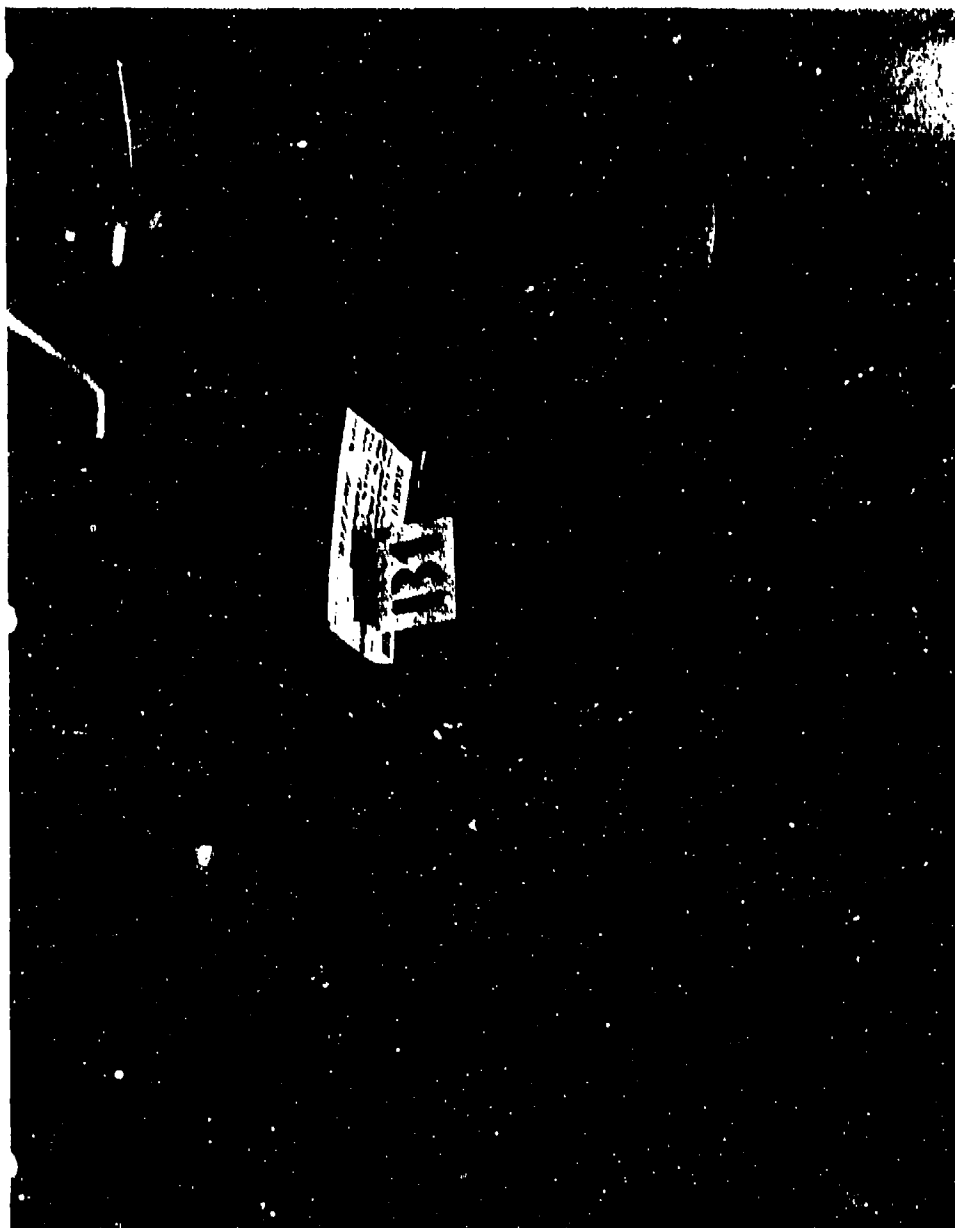


Figure A-28. Transducer Locations on Right Side of Fuselage 65 inches Aft of Nose Tip



Figure A-29. Transducer Locations on Underside of Fuselage at FS 145

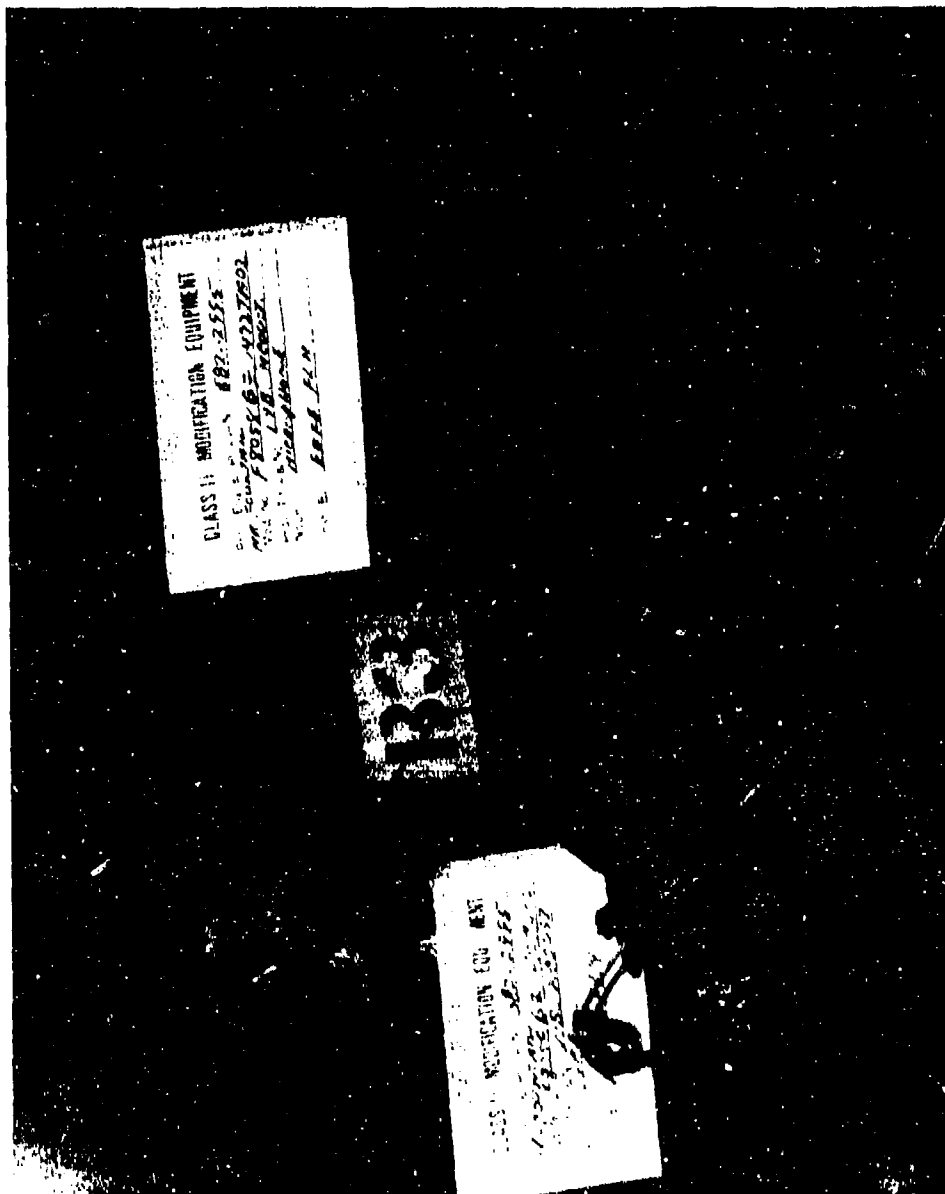


Figure A-30. Transducer Locations on Fuselage in Front of Cockpit at FS 155



Figure A-31. Transducer Locations on Nose Gear Door

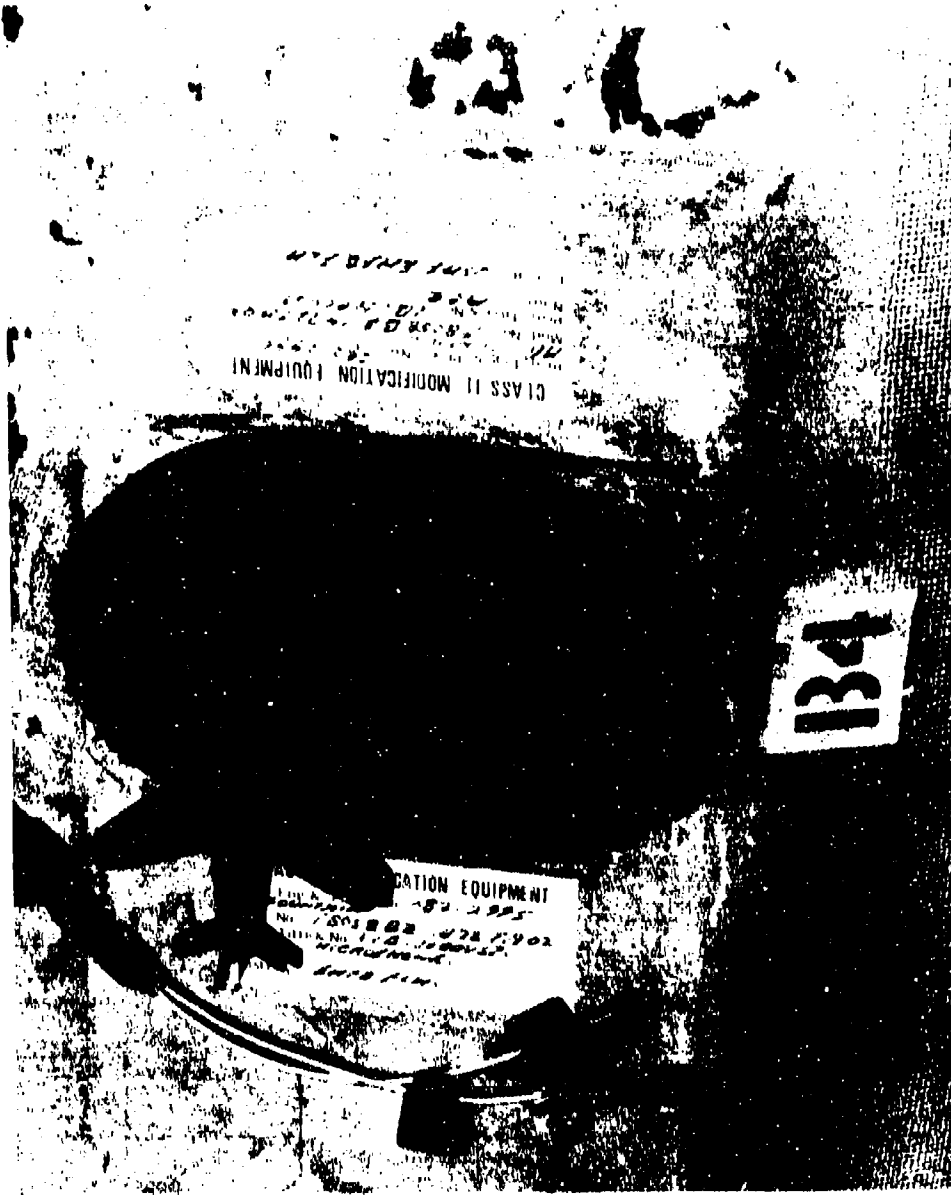


Figure A-32. Transducer Locations on Nose Gear Door (Backside)

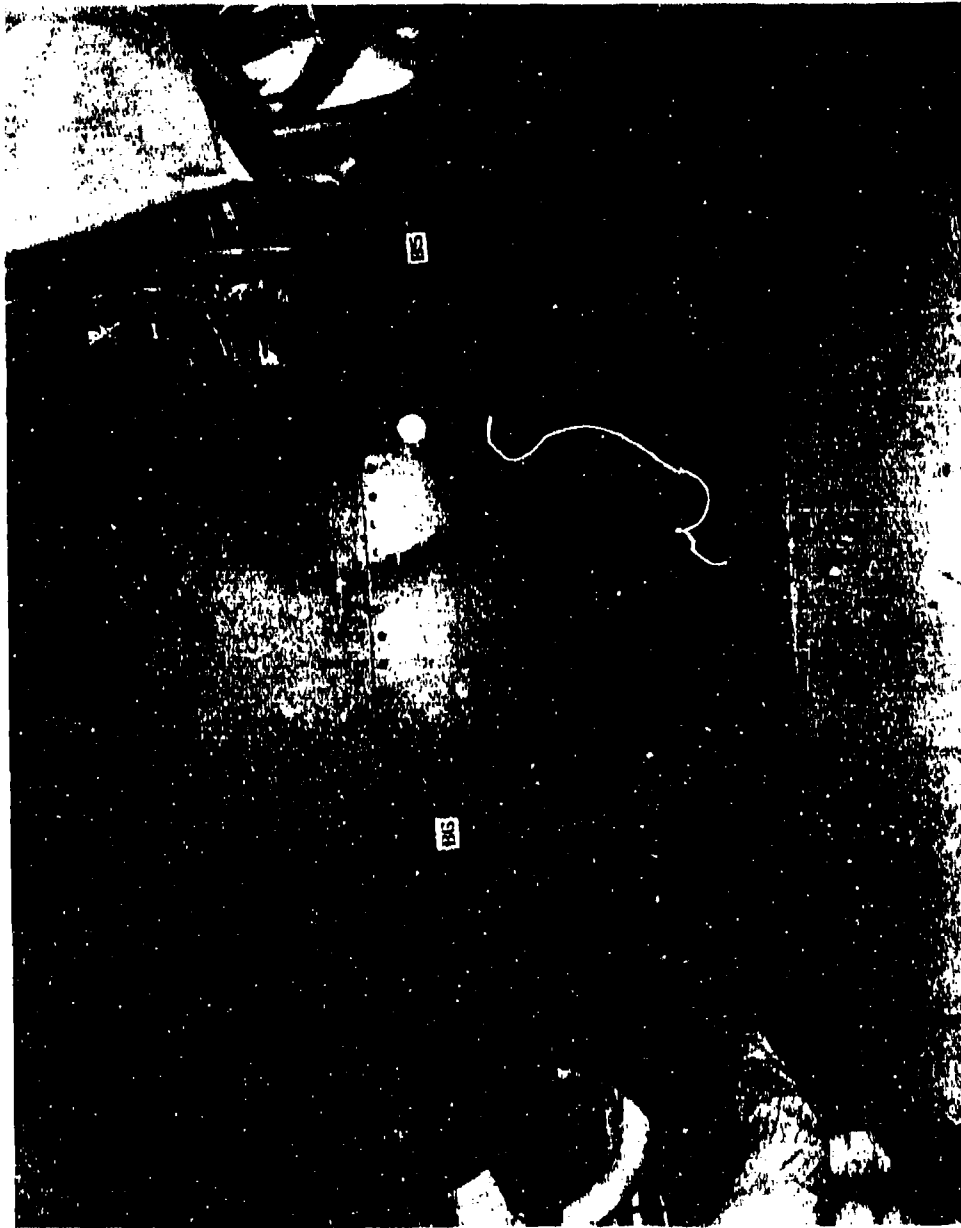


Figure A-33. Transducer Locations On Right Side of Fuselage Below Canopy



Figure A-34. Transducer Locations on Right Side of Fuselage Below Canopy

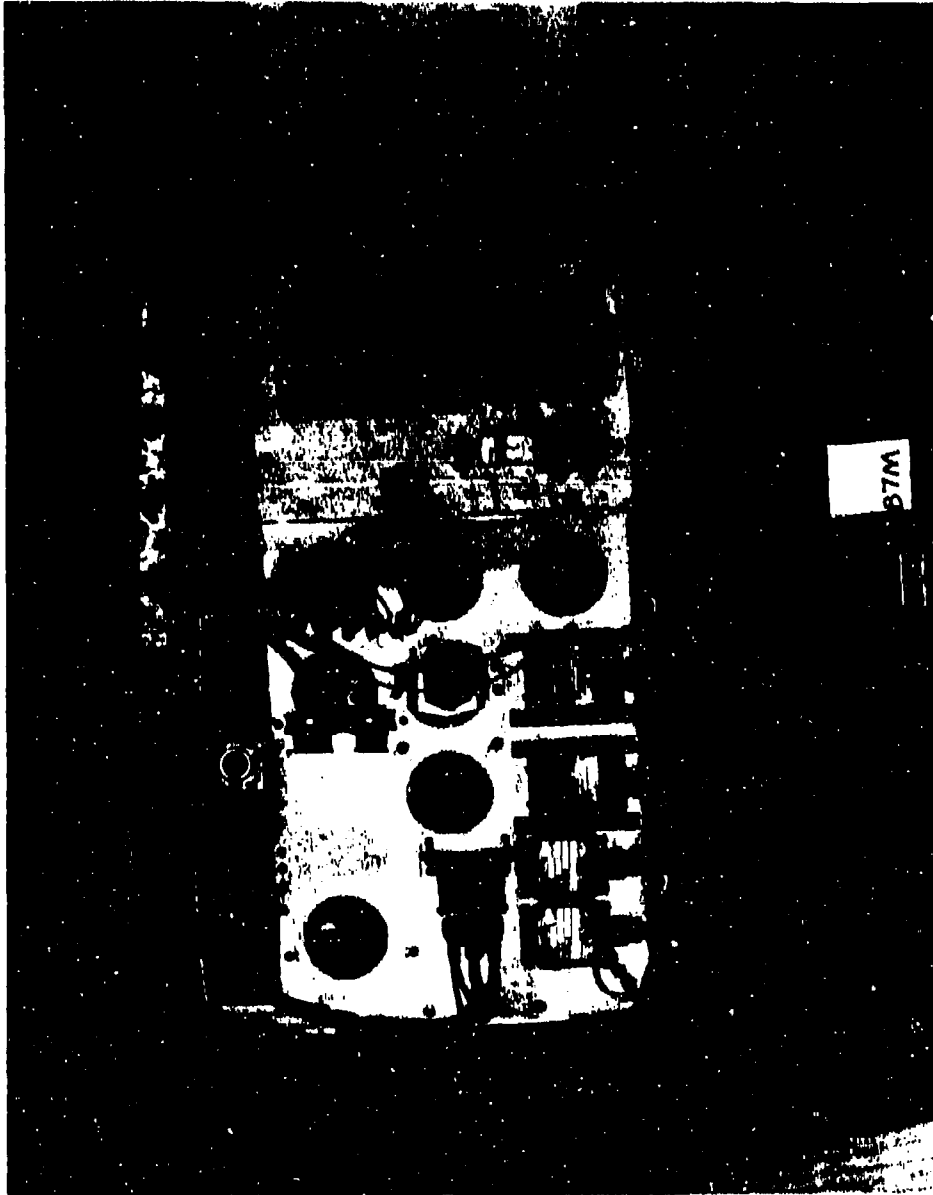


Figure A-35. Transducer Locations on Right Side of Fuselage At FS 357

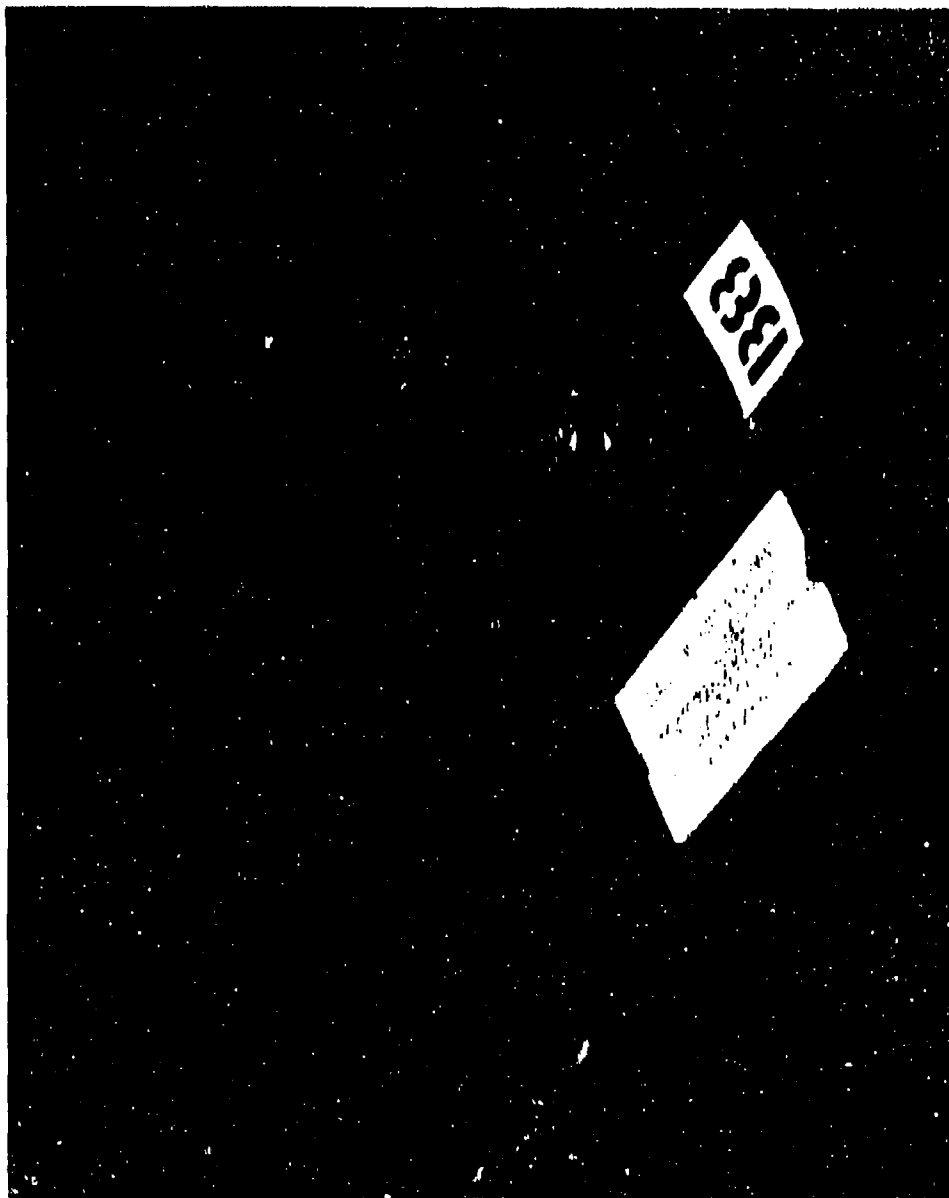


Figure A-36. Transducer Locations on Top of Fuselage Aft of Canopy at FS 370

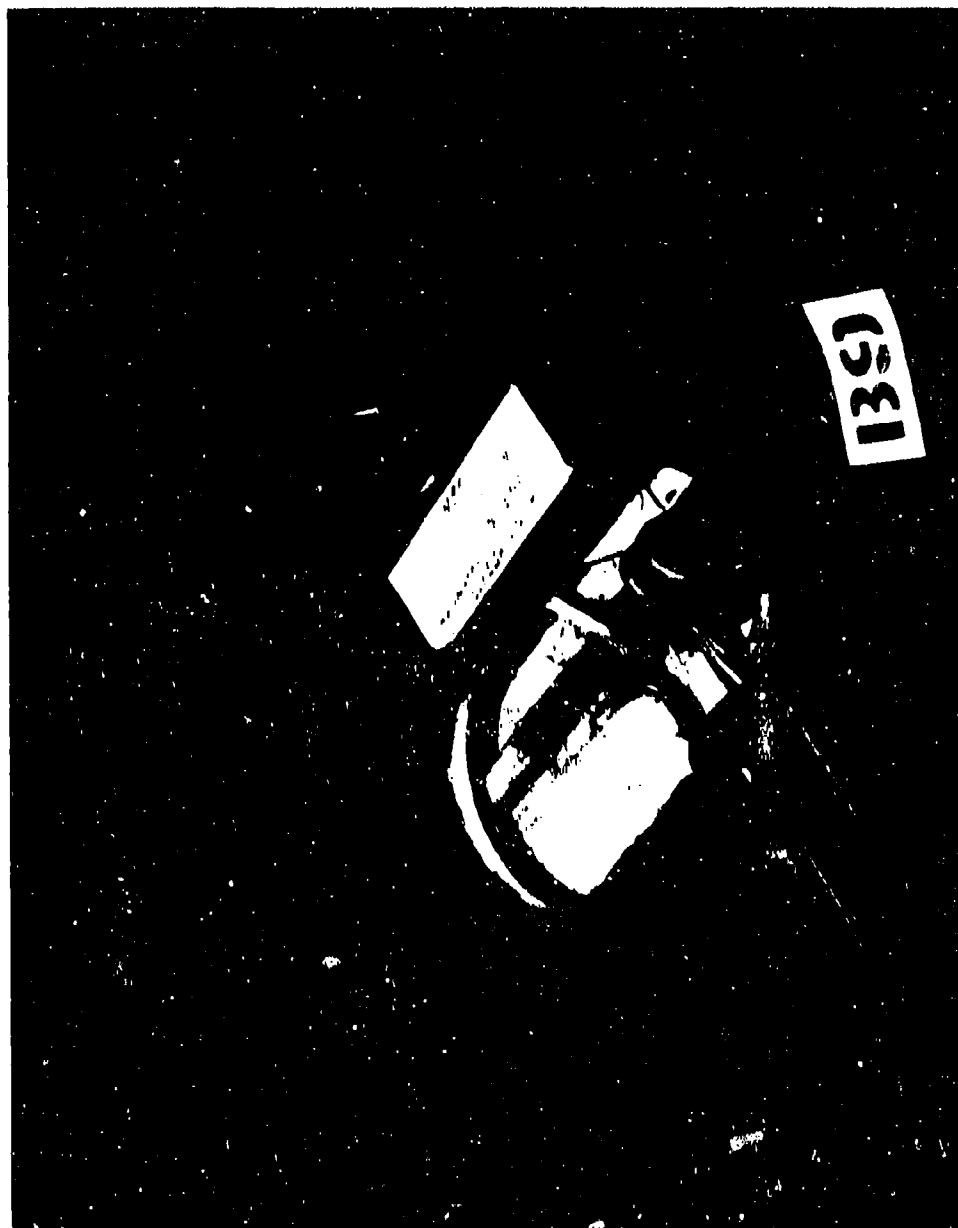


Figure A-37. Transducer Locations on Left Horizontal Stabilator



Figure A-38. Transducer Locations on Forward Left Side of Vertical Stabilator Near Fuselage

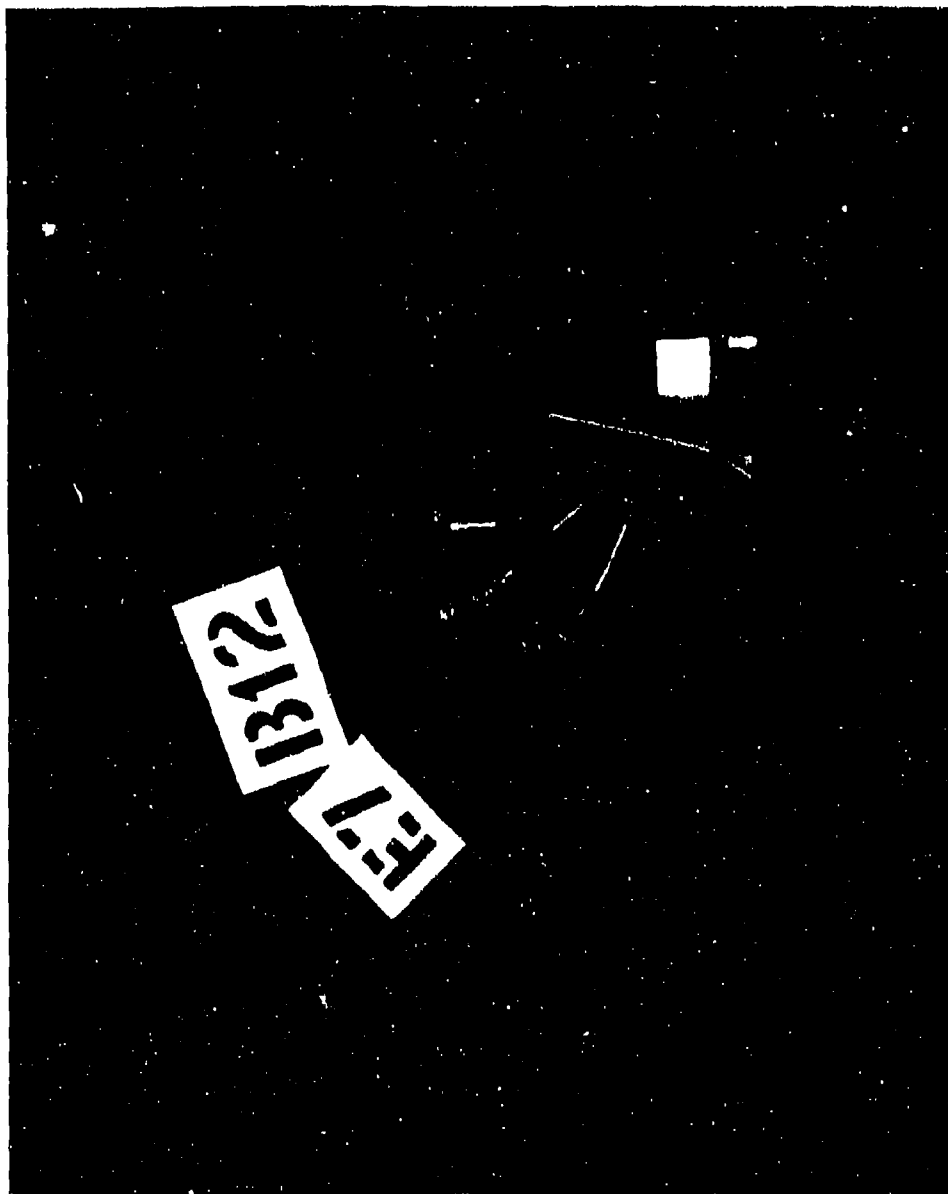


Figure A-39. Transducer Locations on Top of Vertical Stabilator

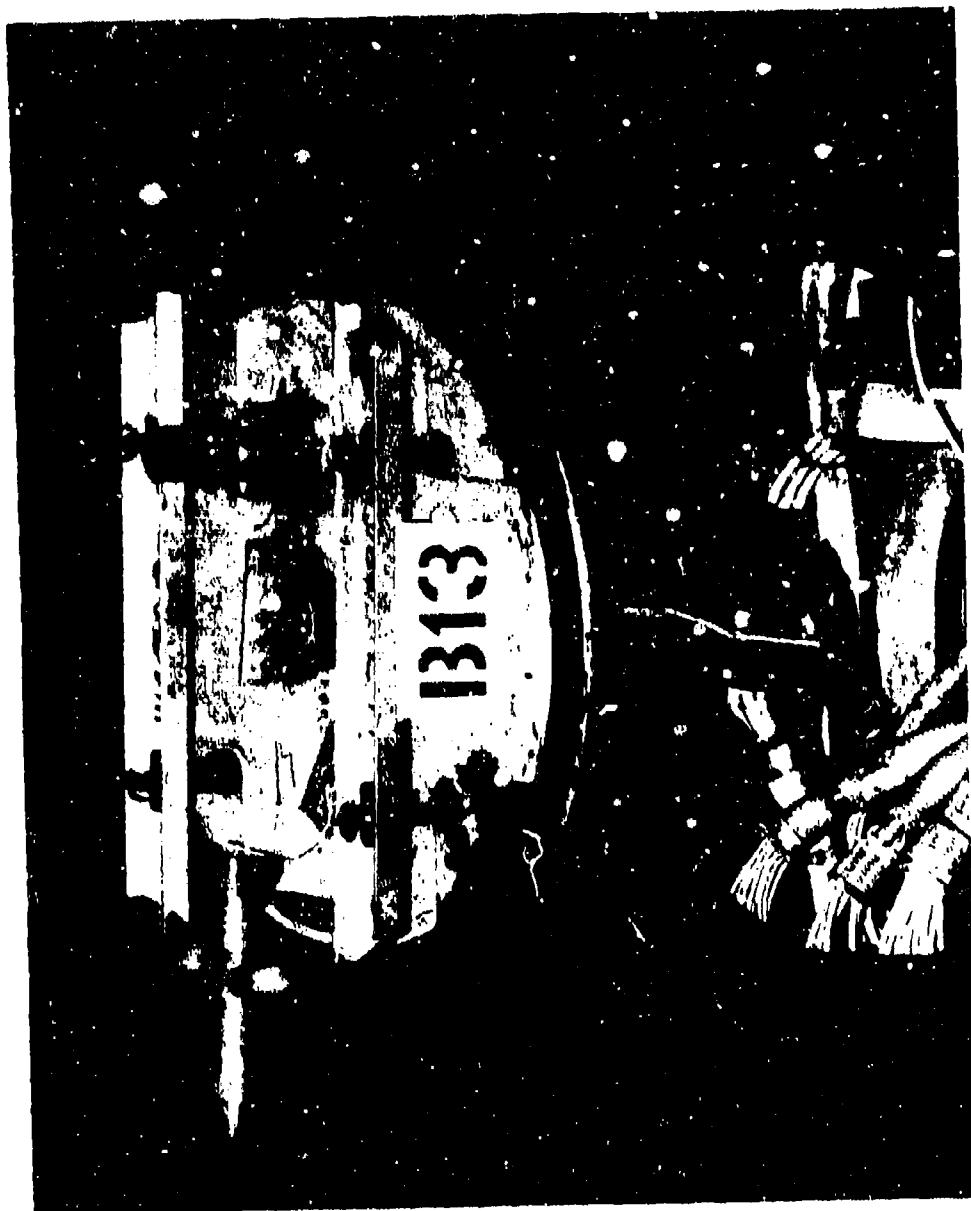


Figure A-40. Transducer Locations on Left Inboard Wing



Figure A-41. Transducer Locations on Left Center Wing

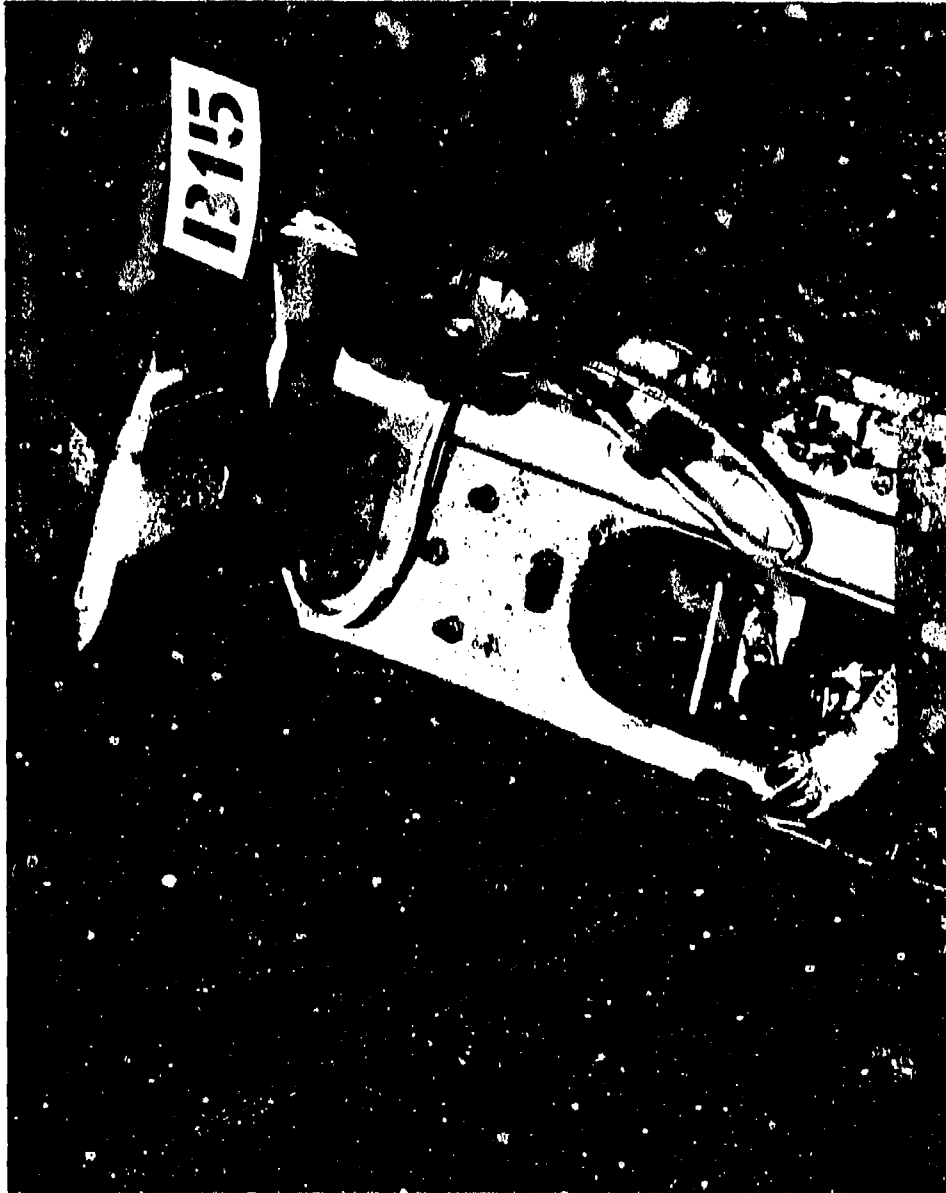


Figure A-42. Transducer Locations on Left Outboard Wing

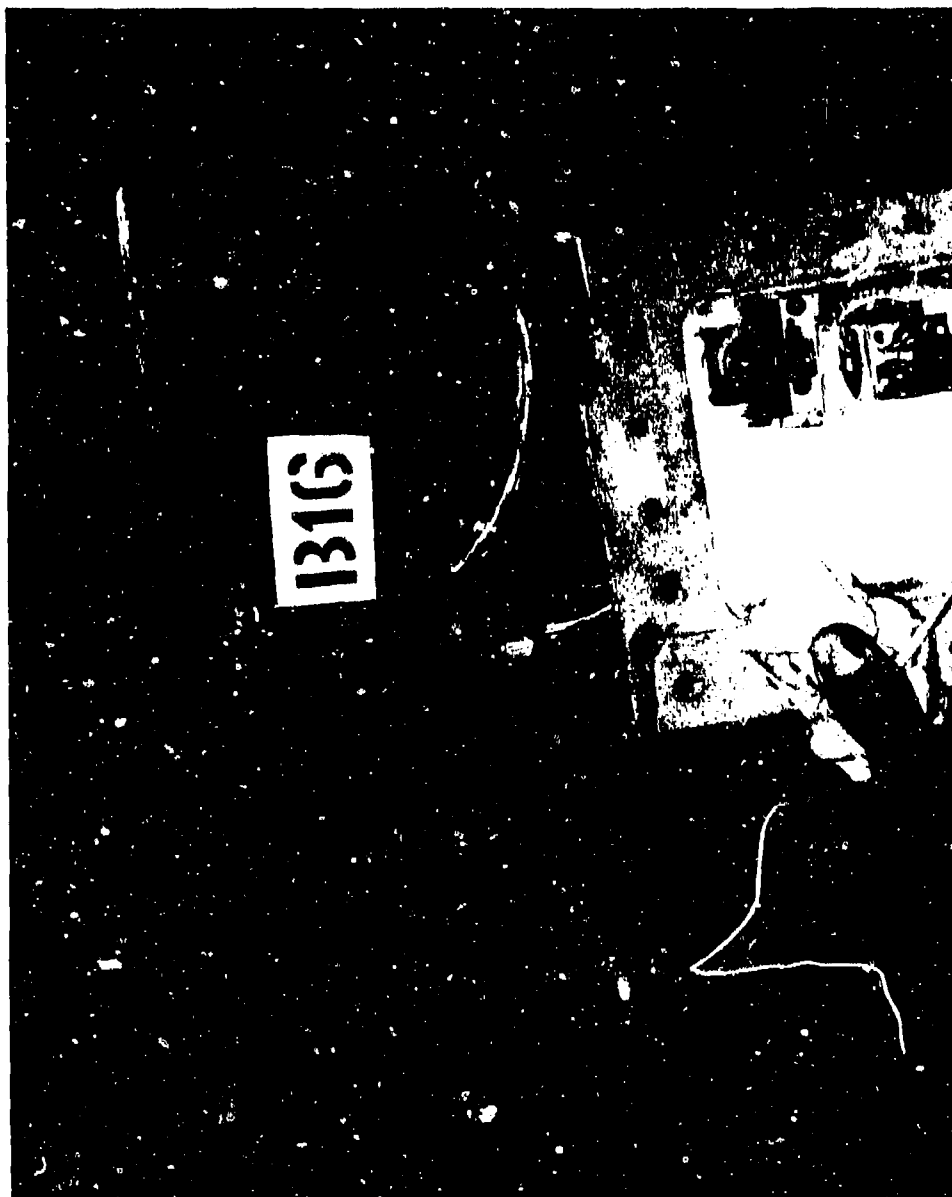


Figure A-43. Transducer Locations on Left Tip of Wing



Figure A-44. Transducer Locations in Weapons Bay



Figure A-45. Transducer Locations in Aft Section of Weapons Bay

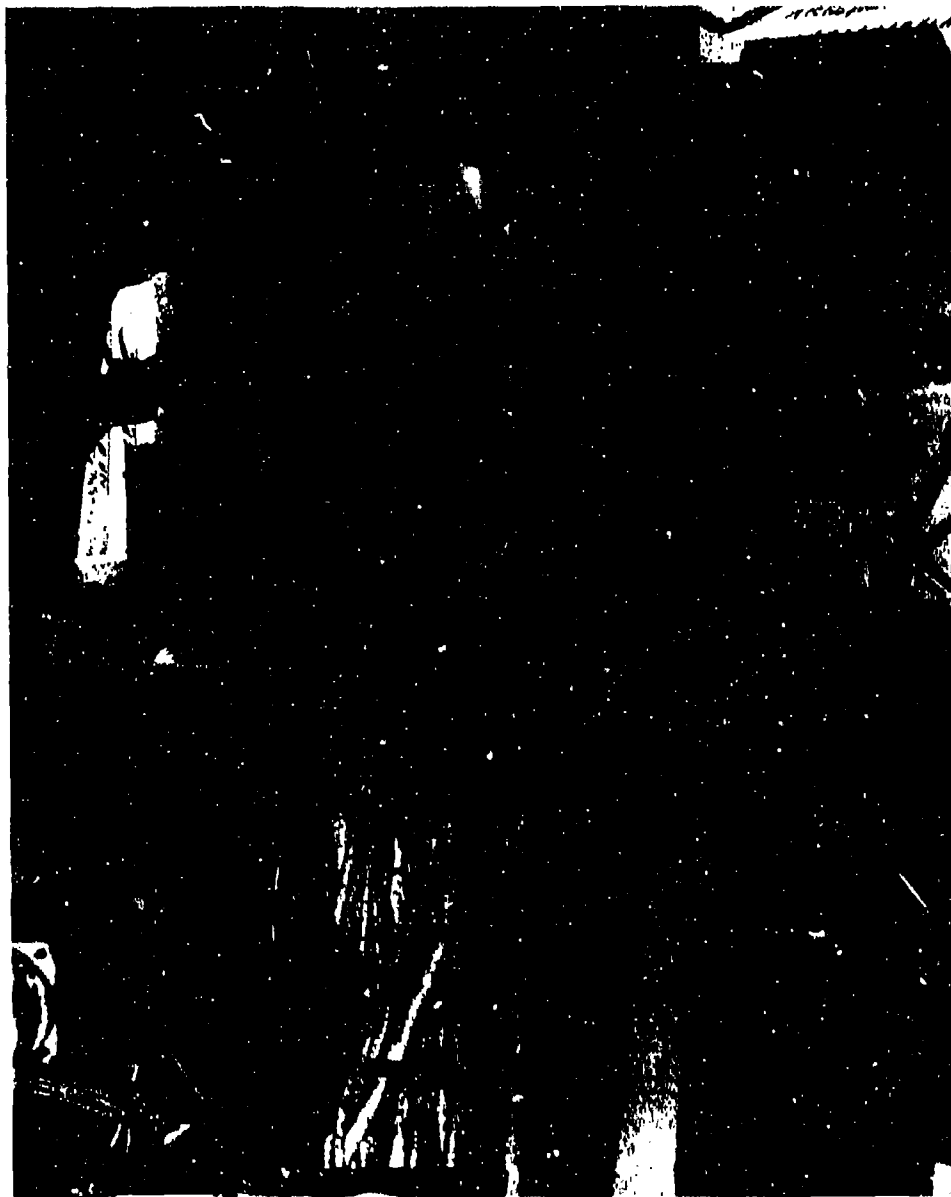


Figure A-46. Transducer Locations on Upper Forward Wall of Weapons Bay

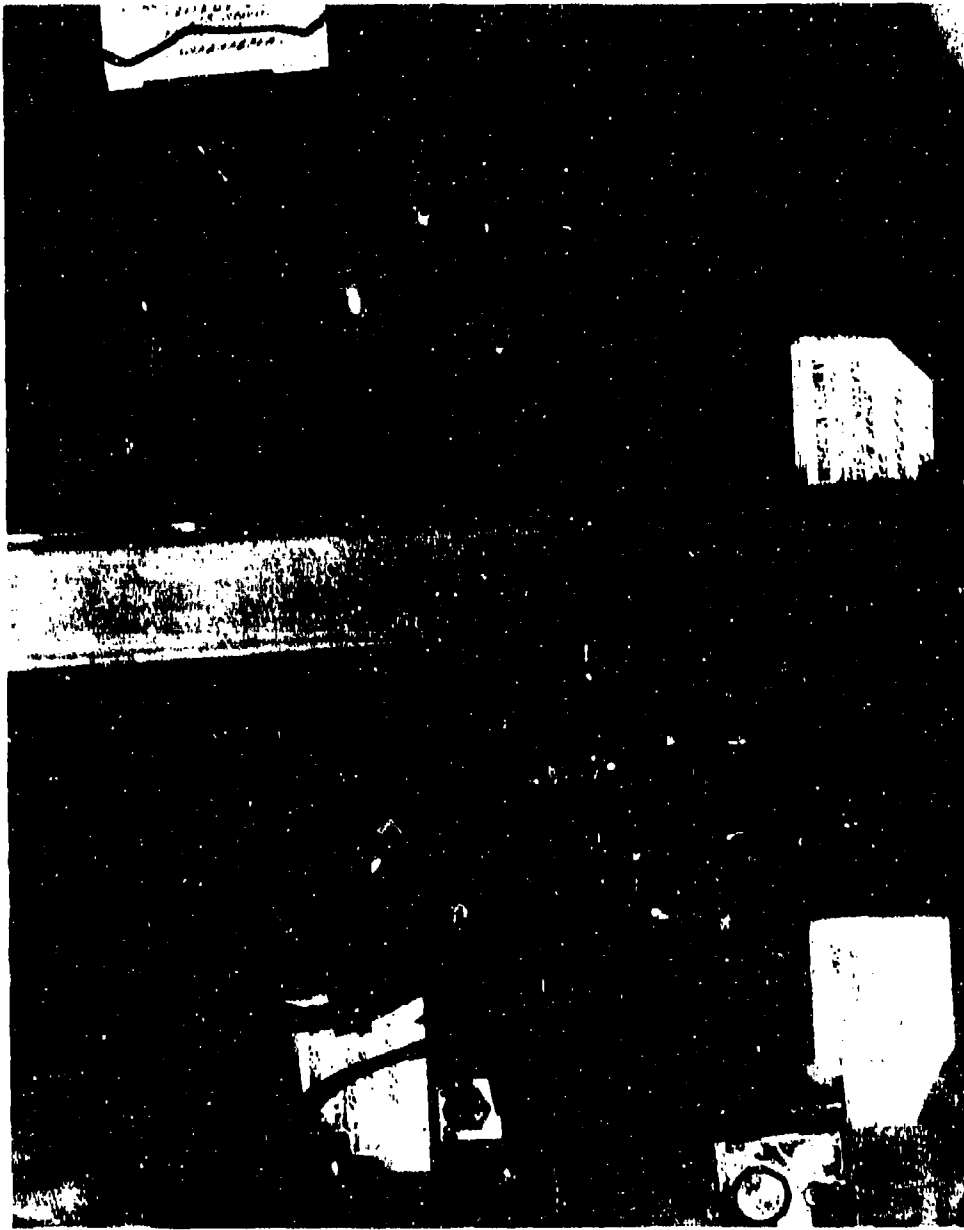


Figure A-47. Transducer Locations On Forward Wall of Weapons Bay

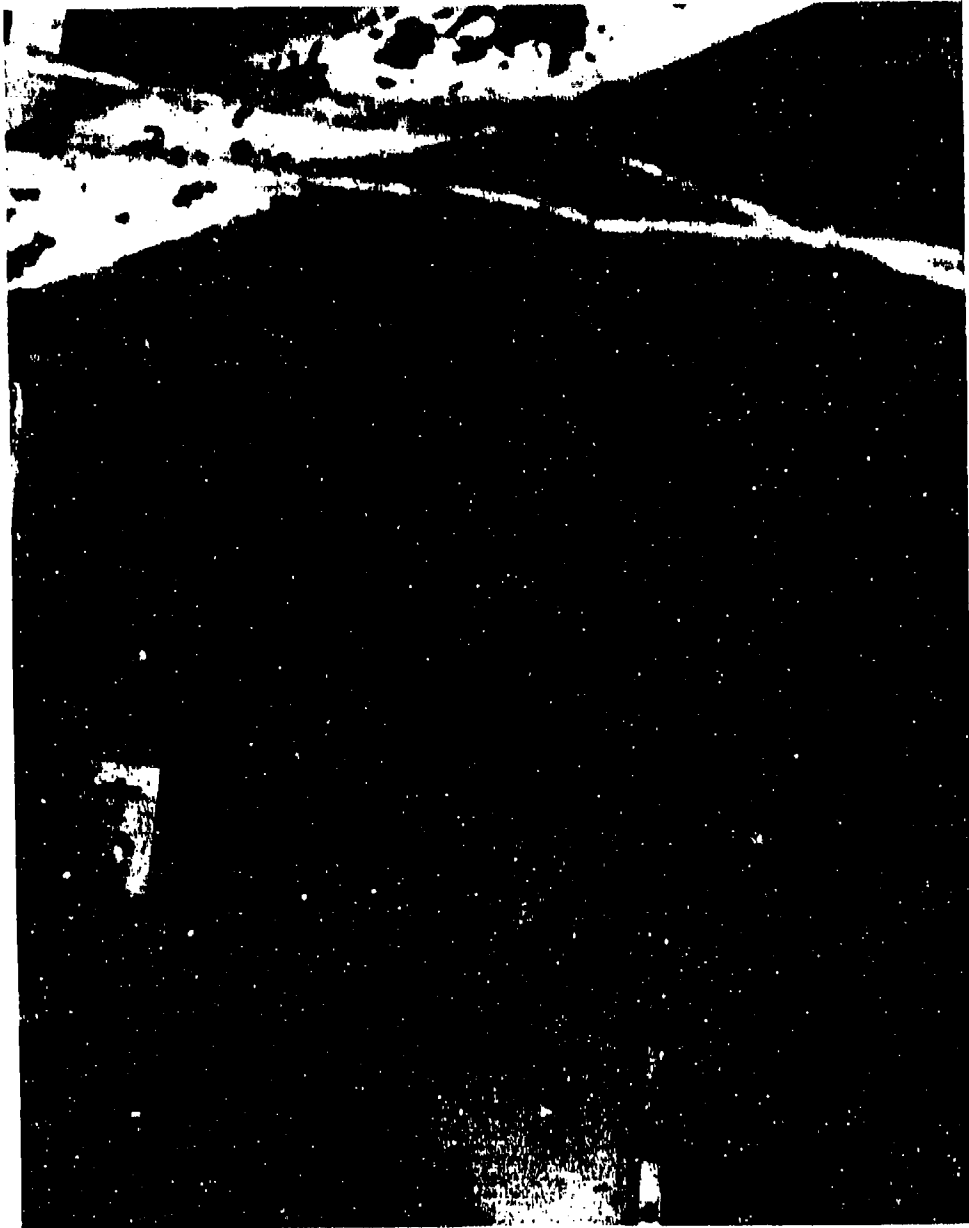


Figure A-48. Transducer Locations in Forward Upper Right Section of Weapons Bay



Figure A-49. Transducer Location in Forward Upper Right Section of Weapons Bay (Actual Location of C4M)

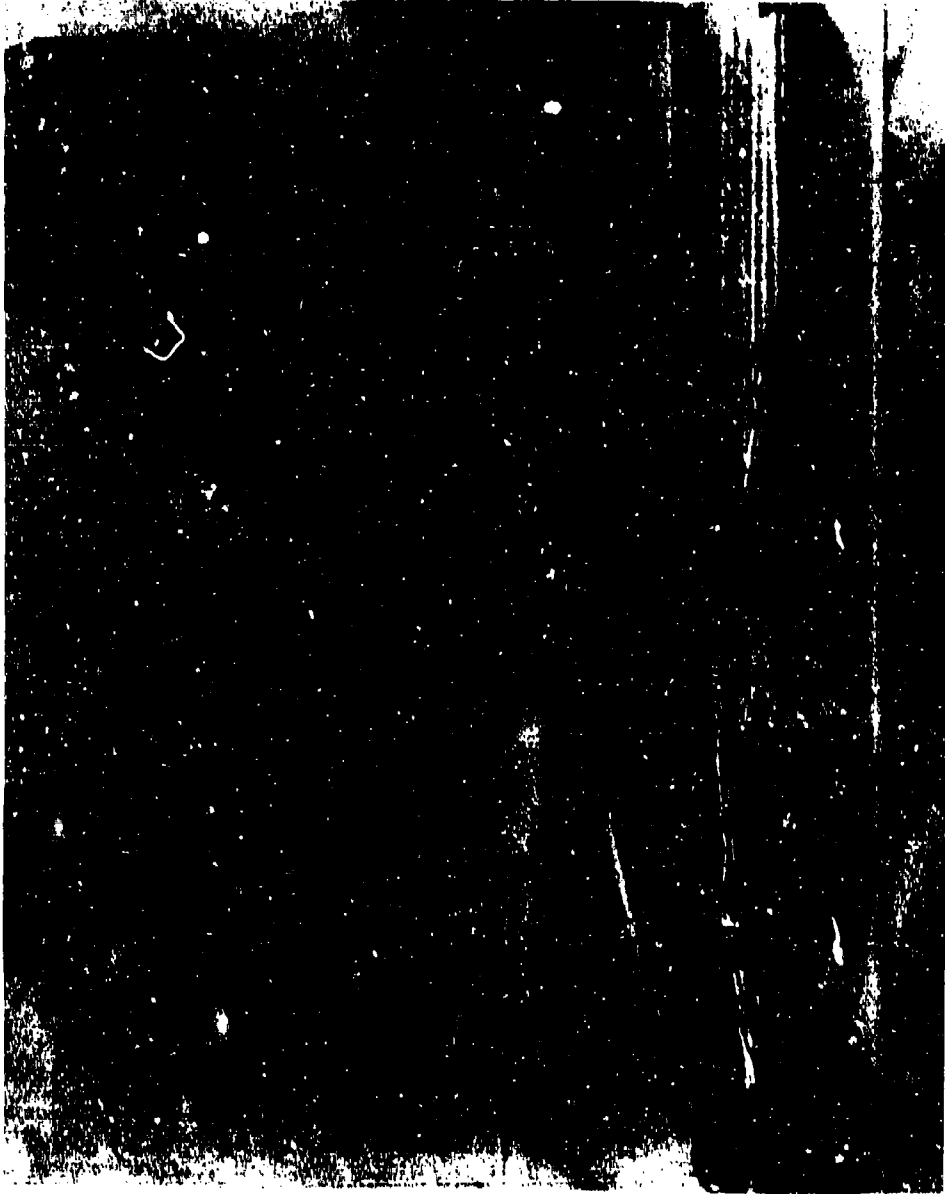


Figure A-50. Transducer Locations in Forward Upper Left Section of Weapons Bay



Figure A-51. Transducer Locations in the Center Upper Right Section of Weapons Bay



Figure A-52. Transducer Location in the Center Upper Right Section of Weapons Bay (Actual Location of CBM)

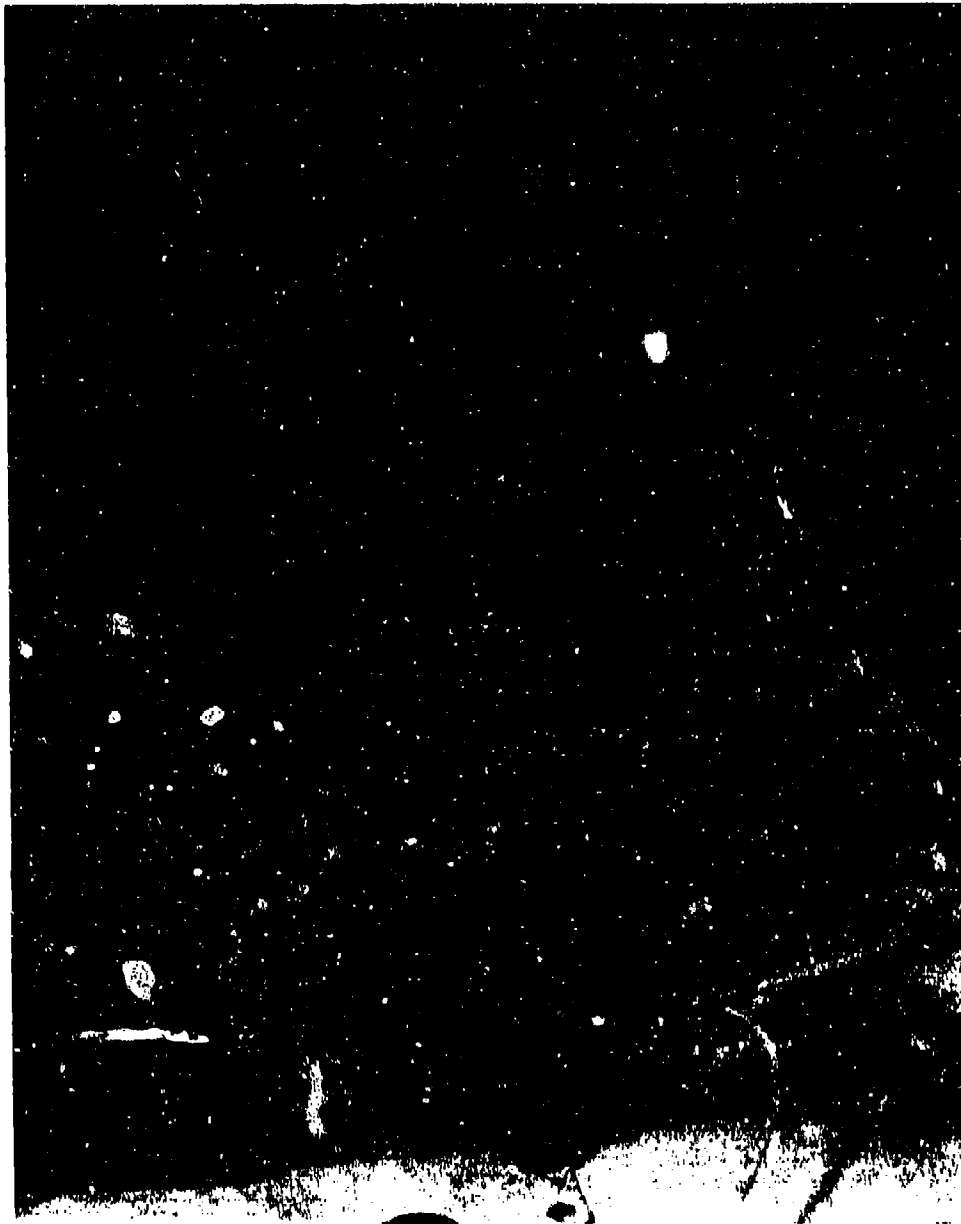


Figure A-53. Transducer Locations in the Center Upper Left Section of Weapons Bay

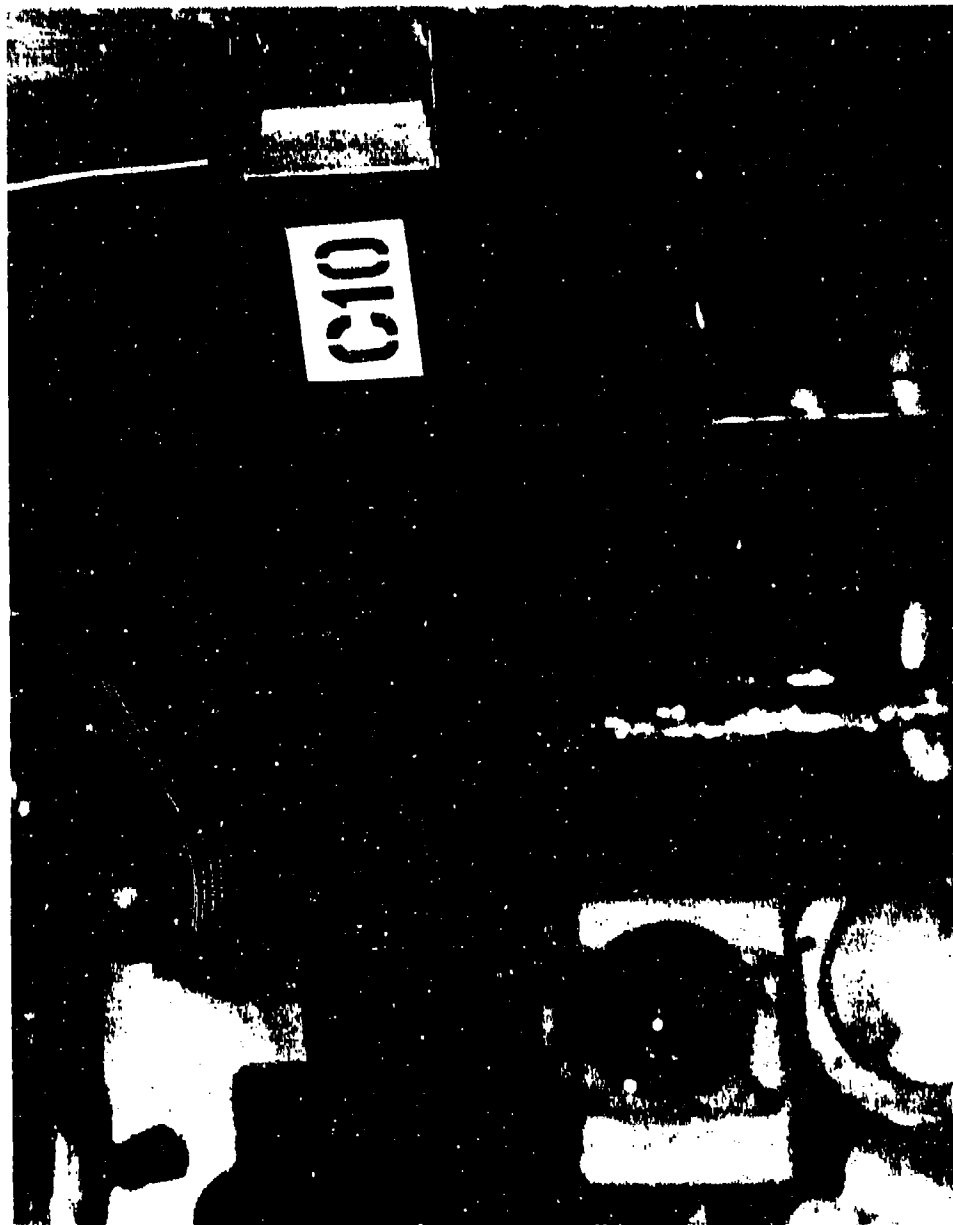


Figure A-54. Transducer Location in the Center of the Left Wall of the Weapons Bay

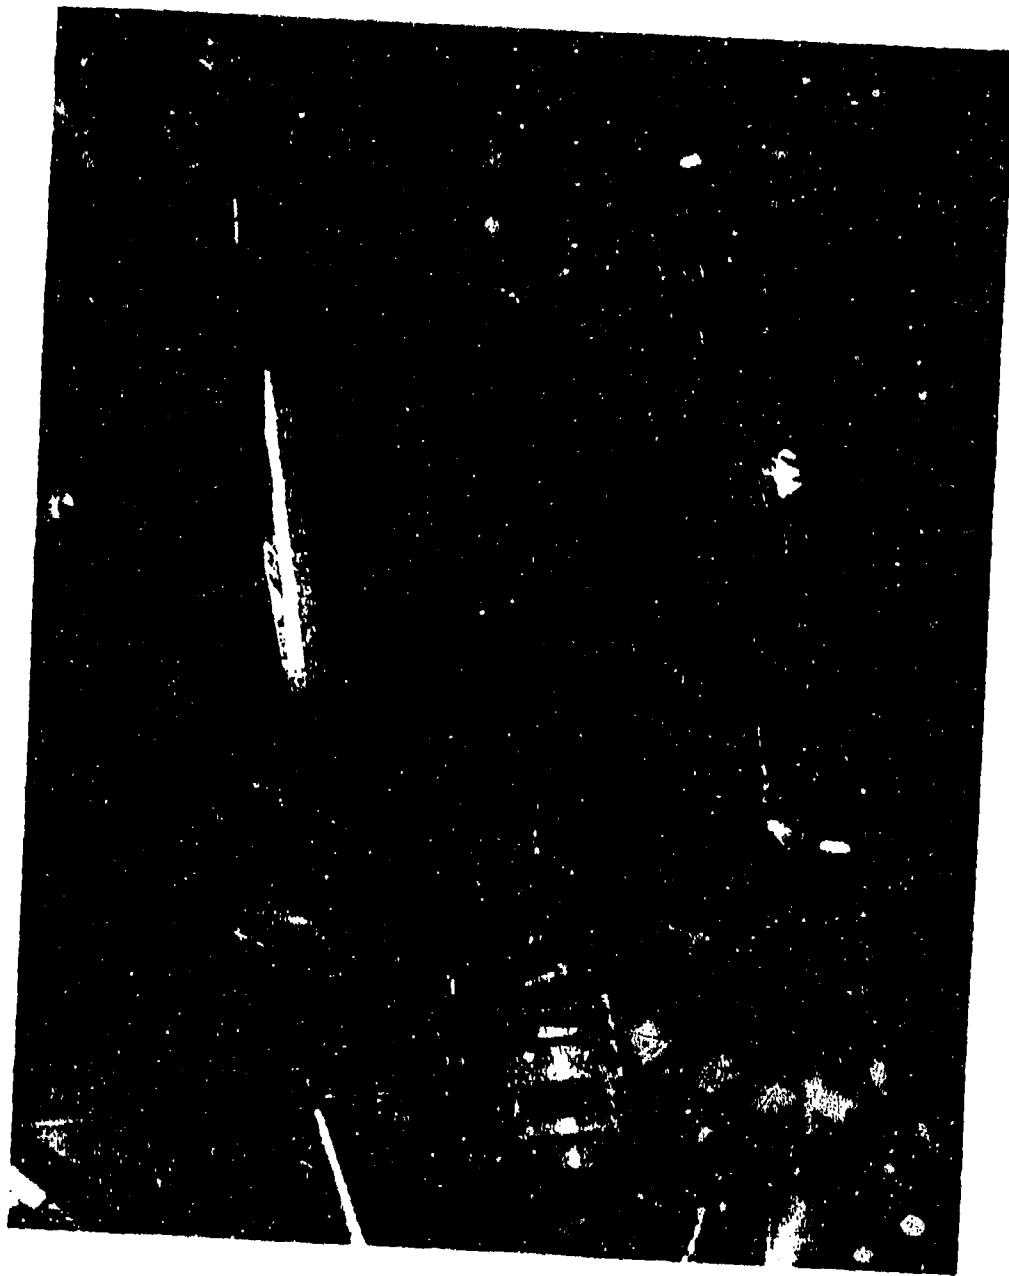


Figure A-55. Transducer Location on Center Ceiling Beam of Weapons Bay at FS 280

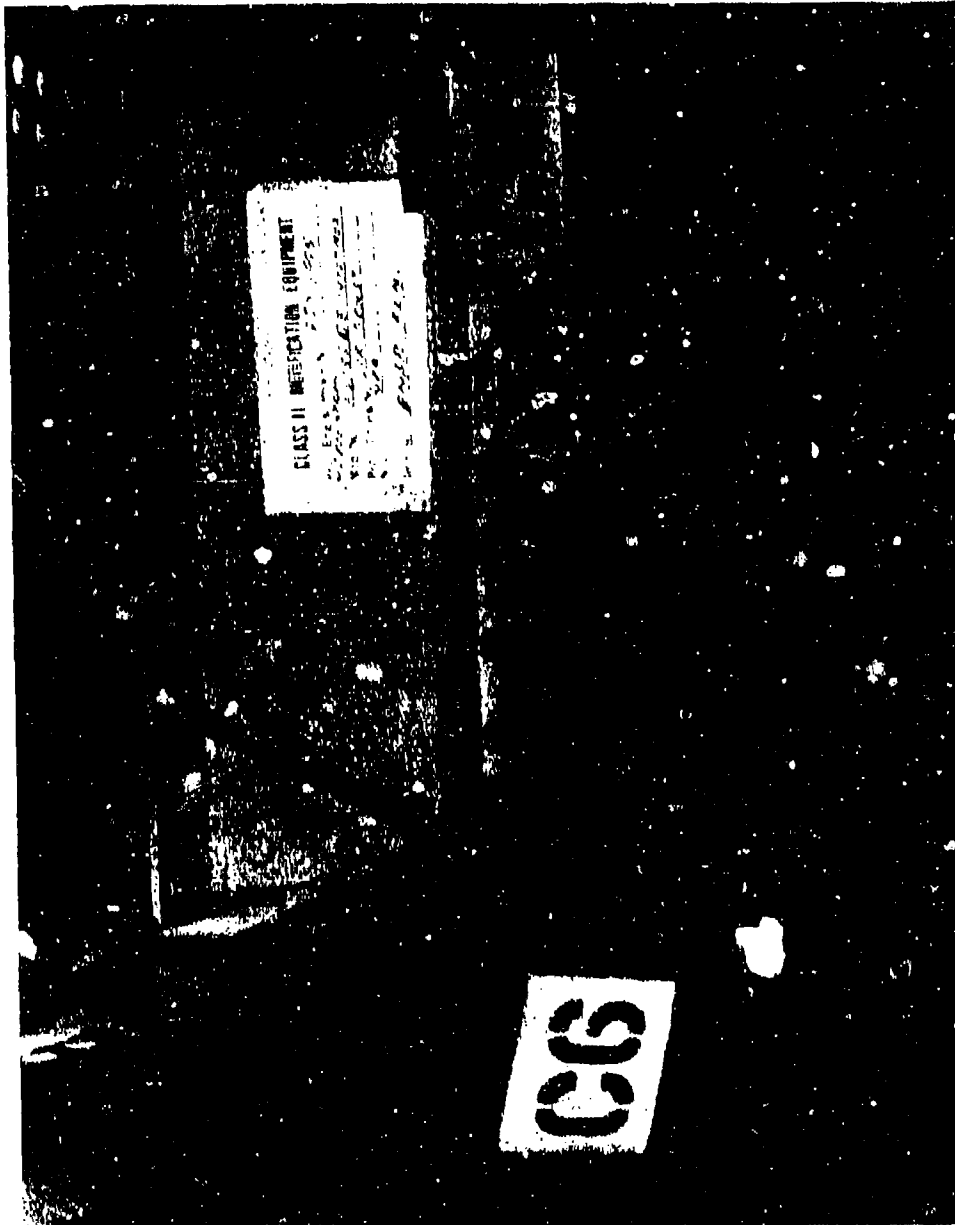


Figure A-56. Transducer Location on Center Ceiling Beam of Weapons Bay at FS 305

THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.



Figure A-57. Transducer Locations on Center Ceiling of Weapons Bay Beam at FS 330 and 355

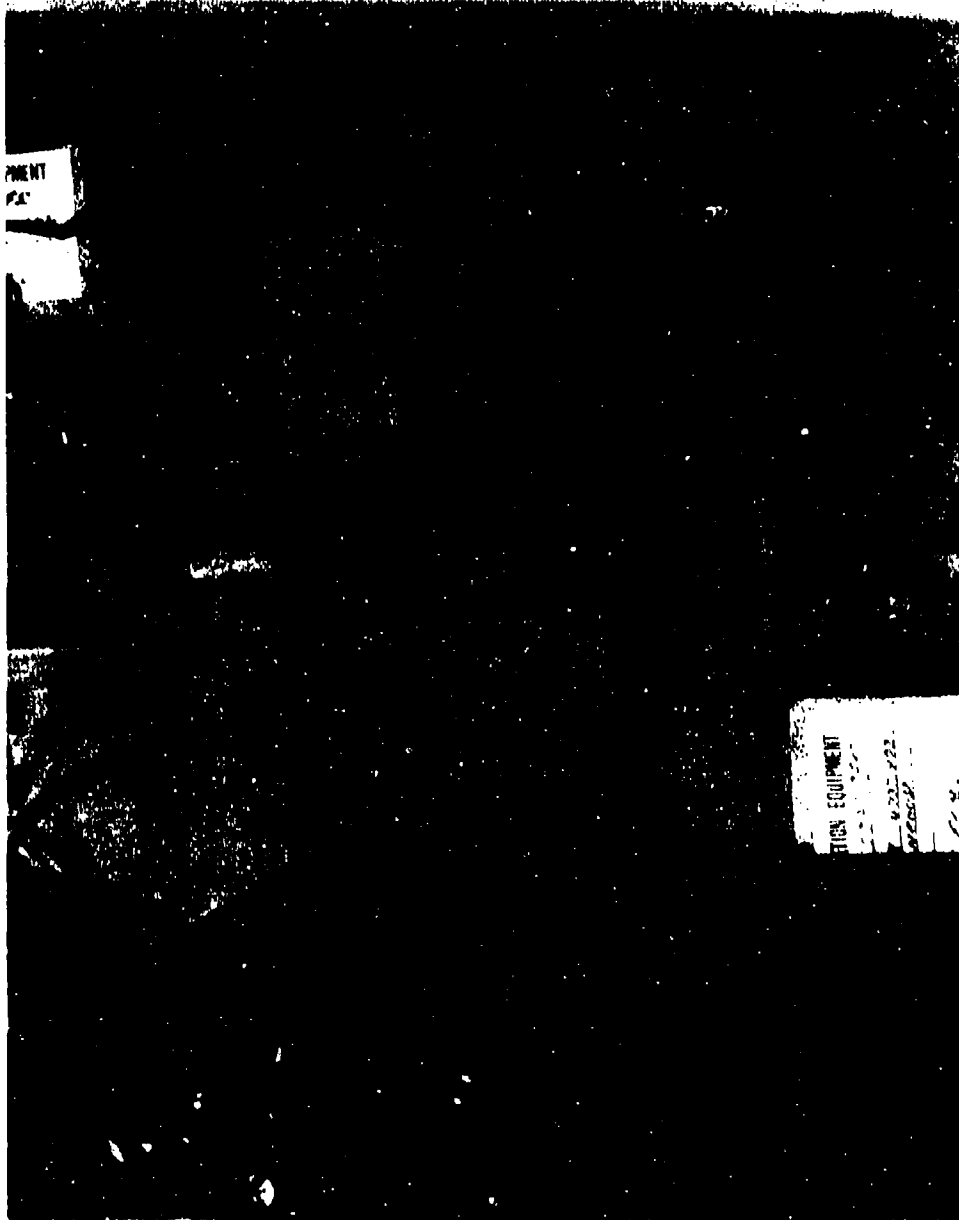


Figure A-58. Transducer Locations on Lower Right Center of Weapons Bay Forward Wall

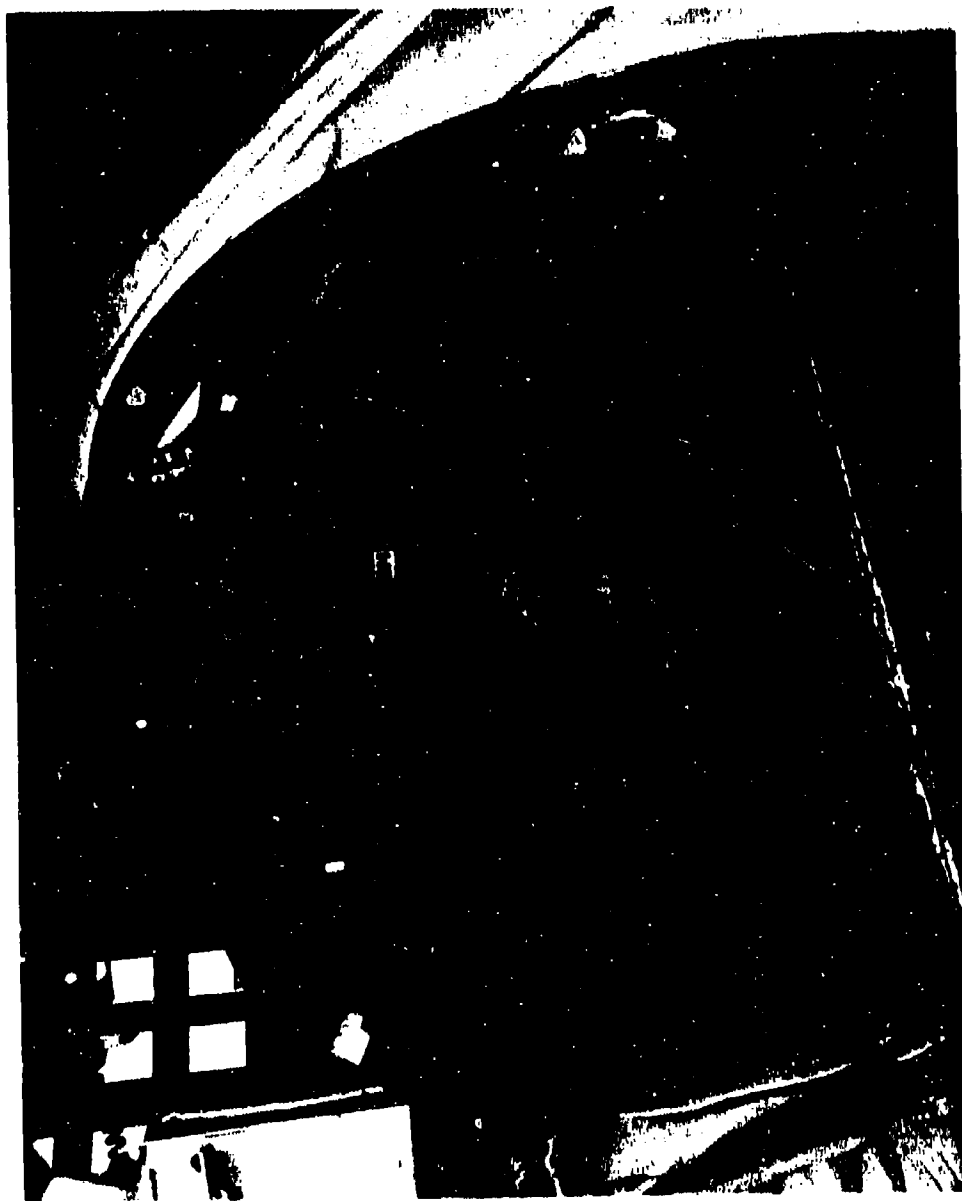


Figure A-59. Transducer Locations on Instrument Panel



Figure A-60. Transducer Locations on Instrument Panel



Figure A-61. Transducer Locations on Left Sidewall near Bottom of Instrument Panel

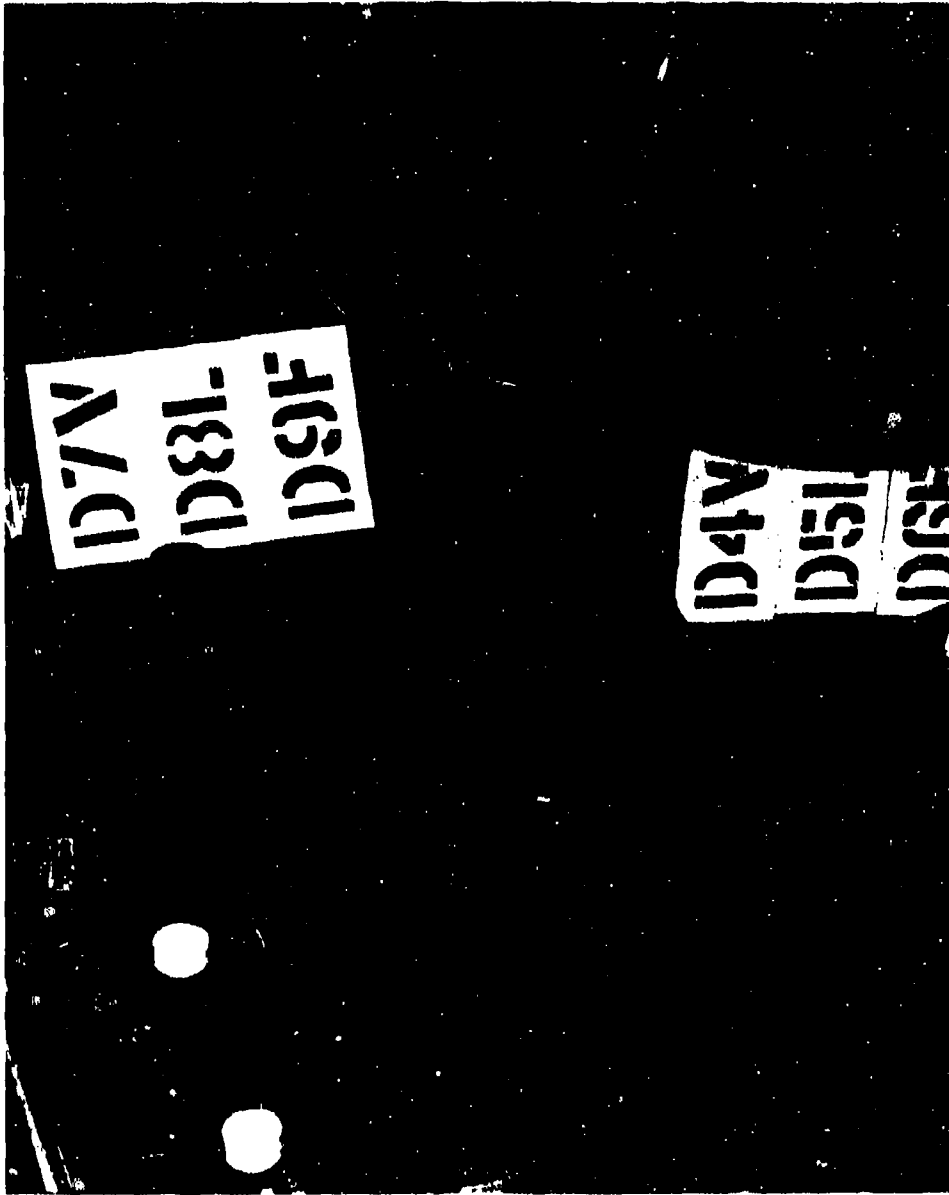


Figure A-62. Transducer Locations on Bottom Right Side on Instrument Panel and Sidewall

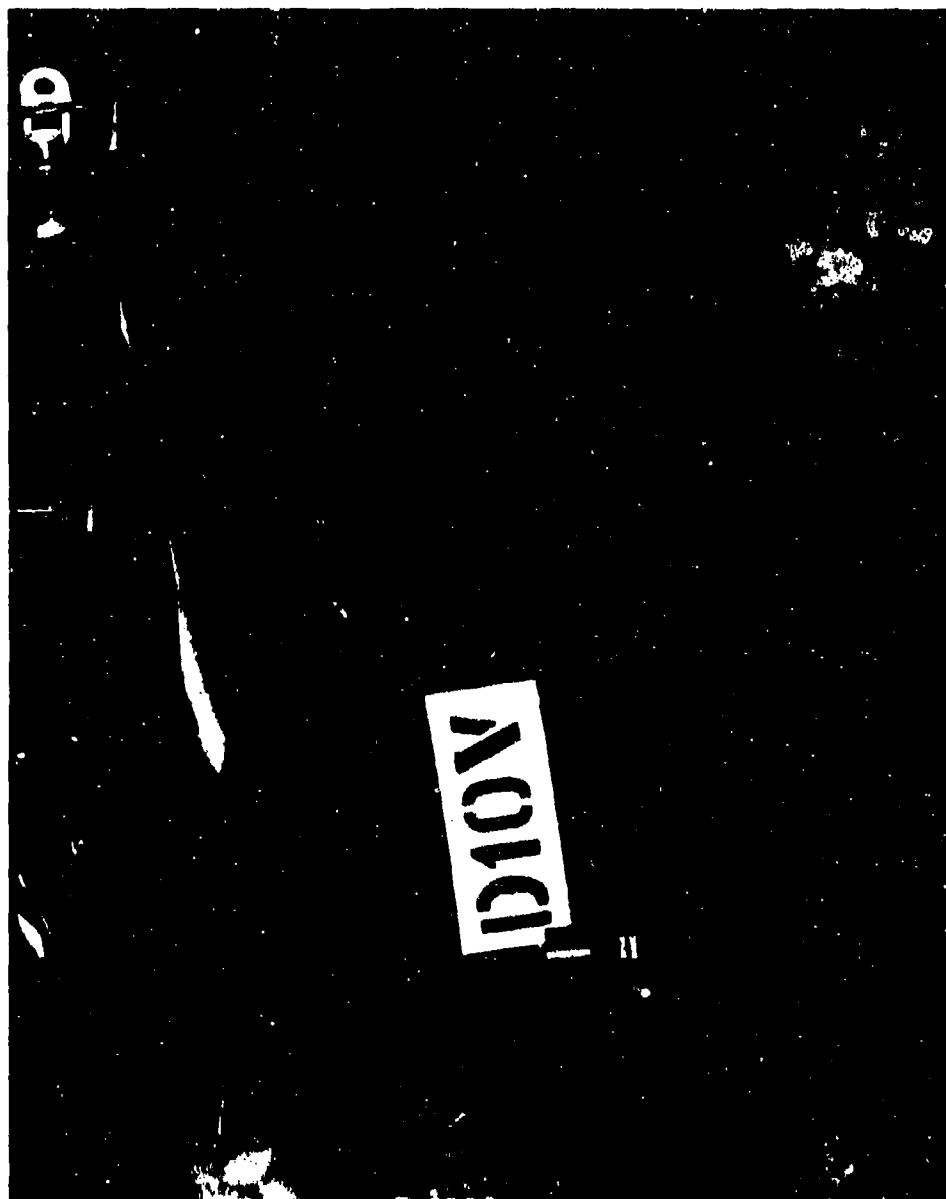


Figure A-63. Transducer Location Near Top of Instrument Panel Near Center

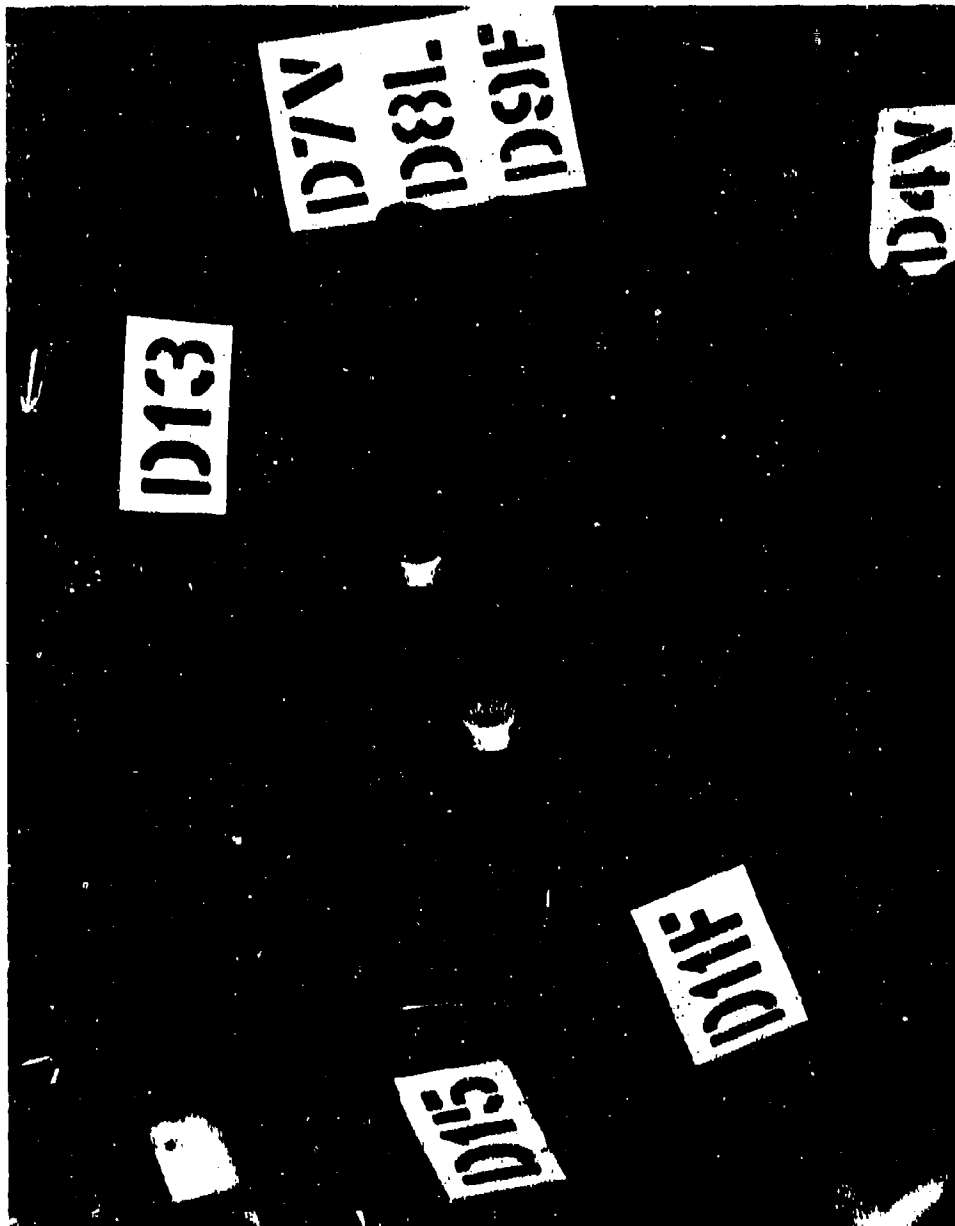


Figure A-64. Transducer Location on Right Side of Instrument Panel

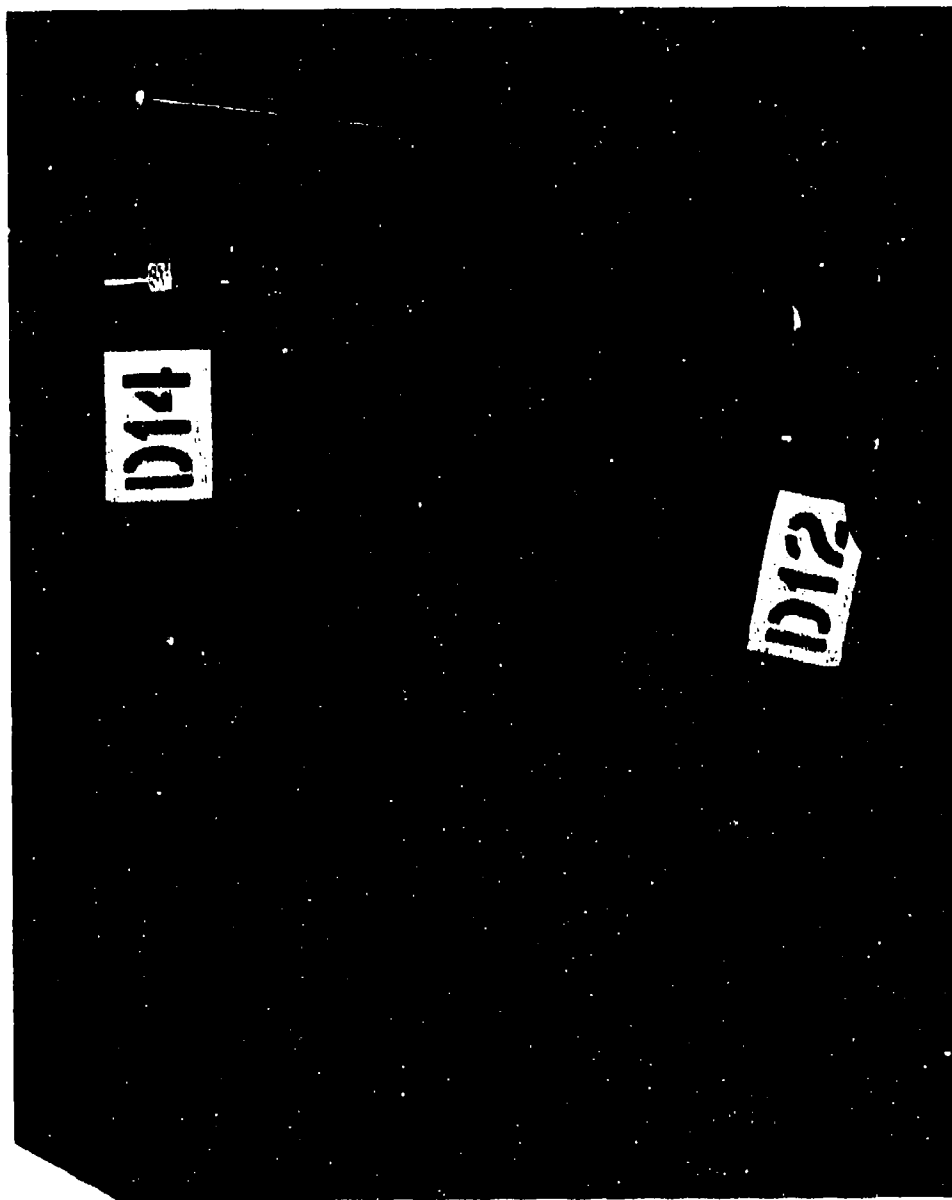


Figure A-65. Transducer Locations on Left Side of Instrument Panel



Figure A-66. Transducer Location on Center Console

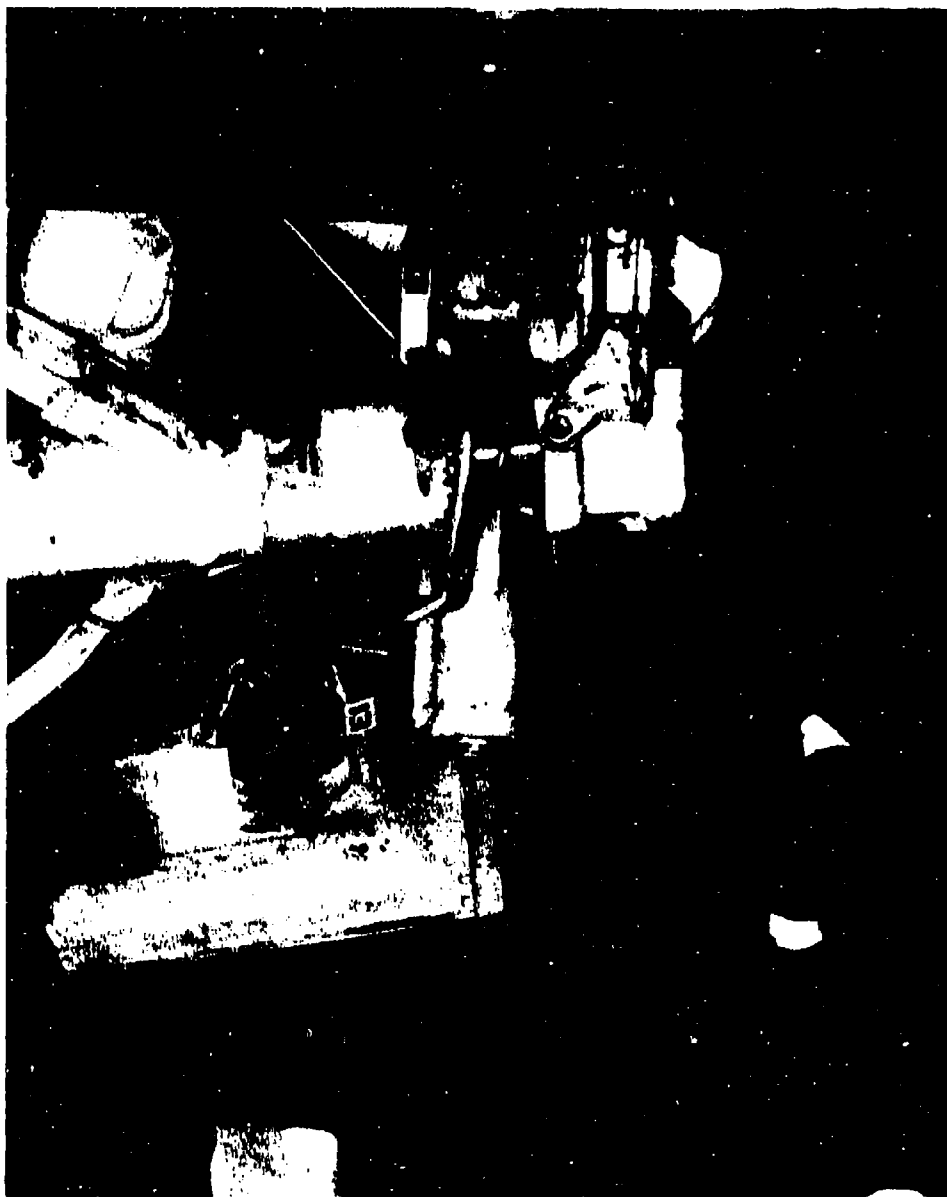


Figure A-67. Transducer Location on Forward Landing Gear Door

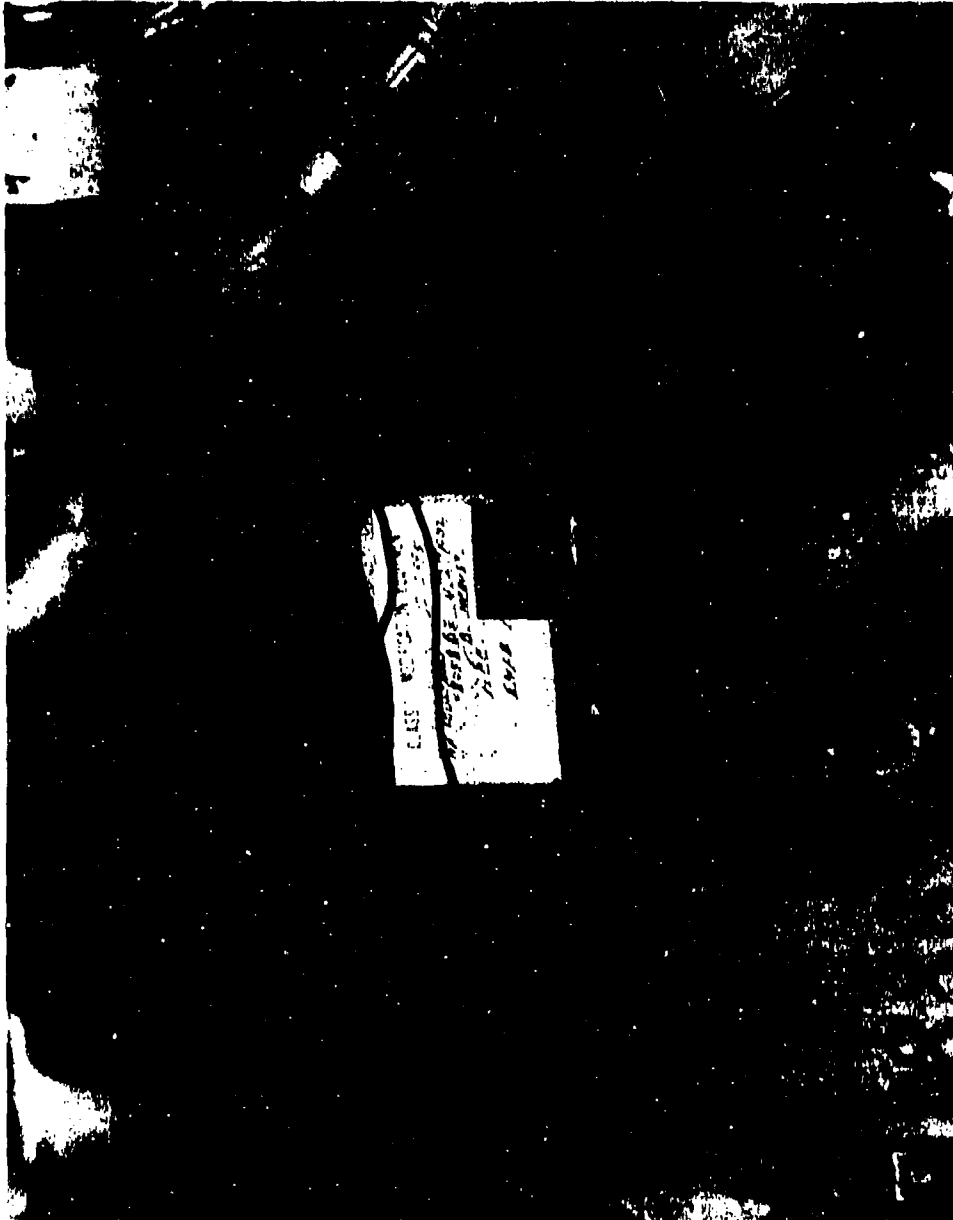


Figure A-68. Transducer Location On Left Main Landing Gear Near Pivot

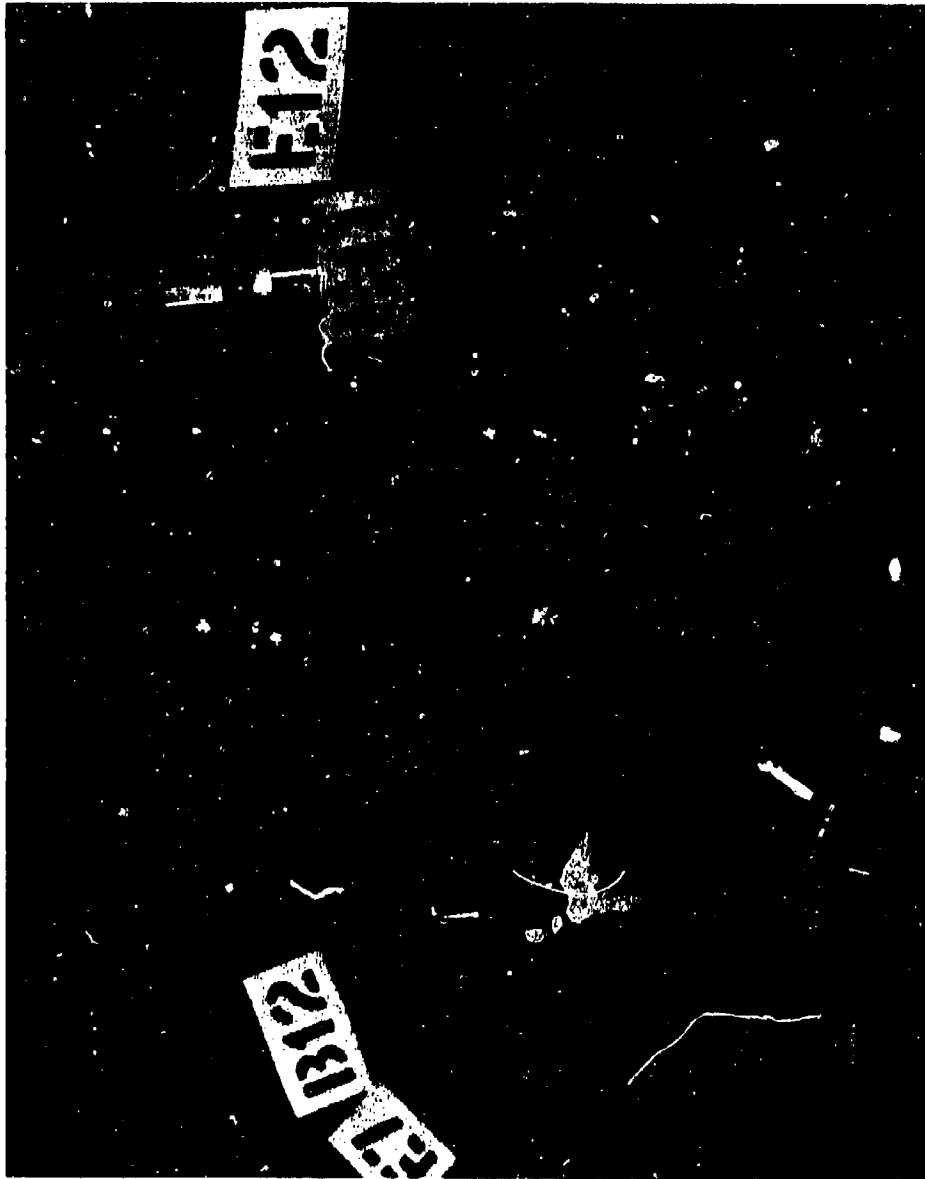


Figure A-69. Transducer Locations on Top of Vertical Stabilizer

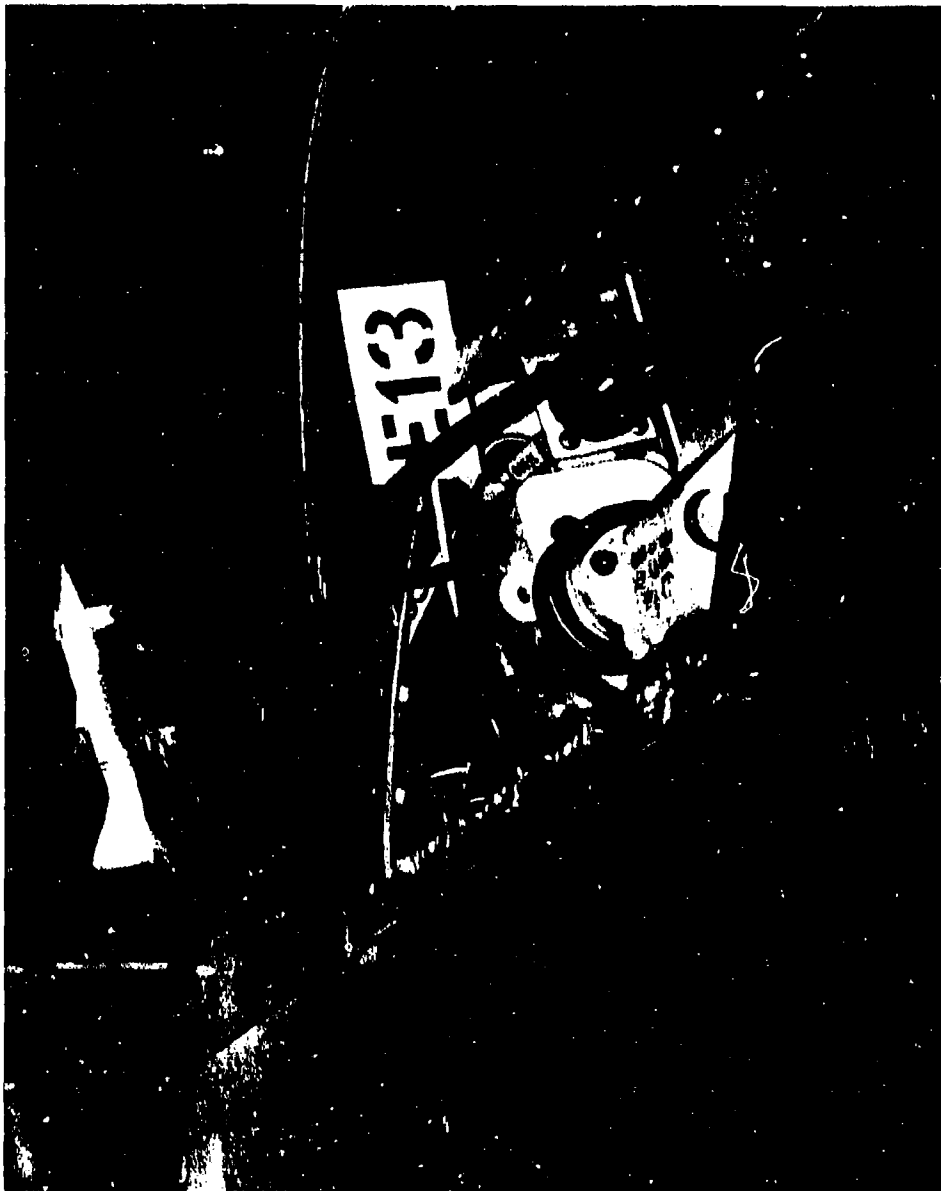


Figure A-70. Transducer Location near Tip of Left Wing



Figure A-71. Transducer Locations on Left Engine



Figure A-72. Transducer Locations on Left Engine Forward Mount

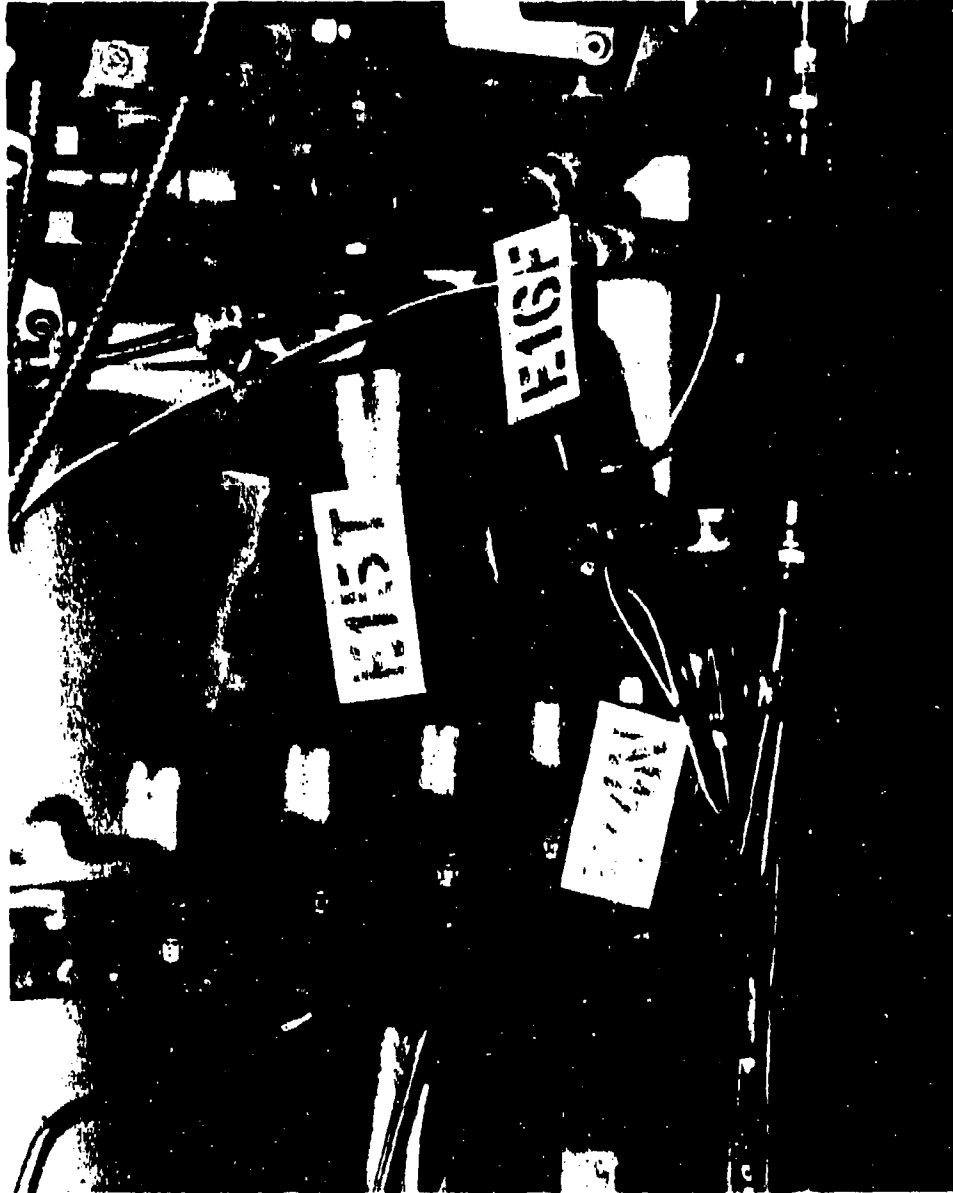


Figure A-73. Transducer Locations on Accessory Gear Box

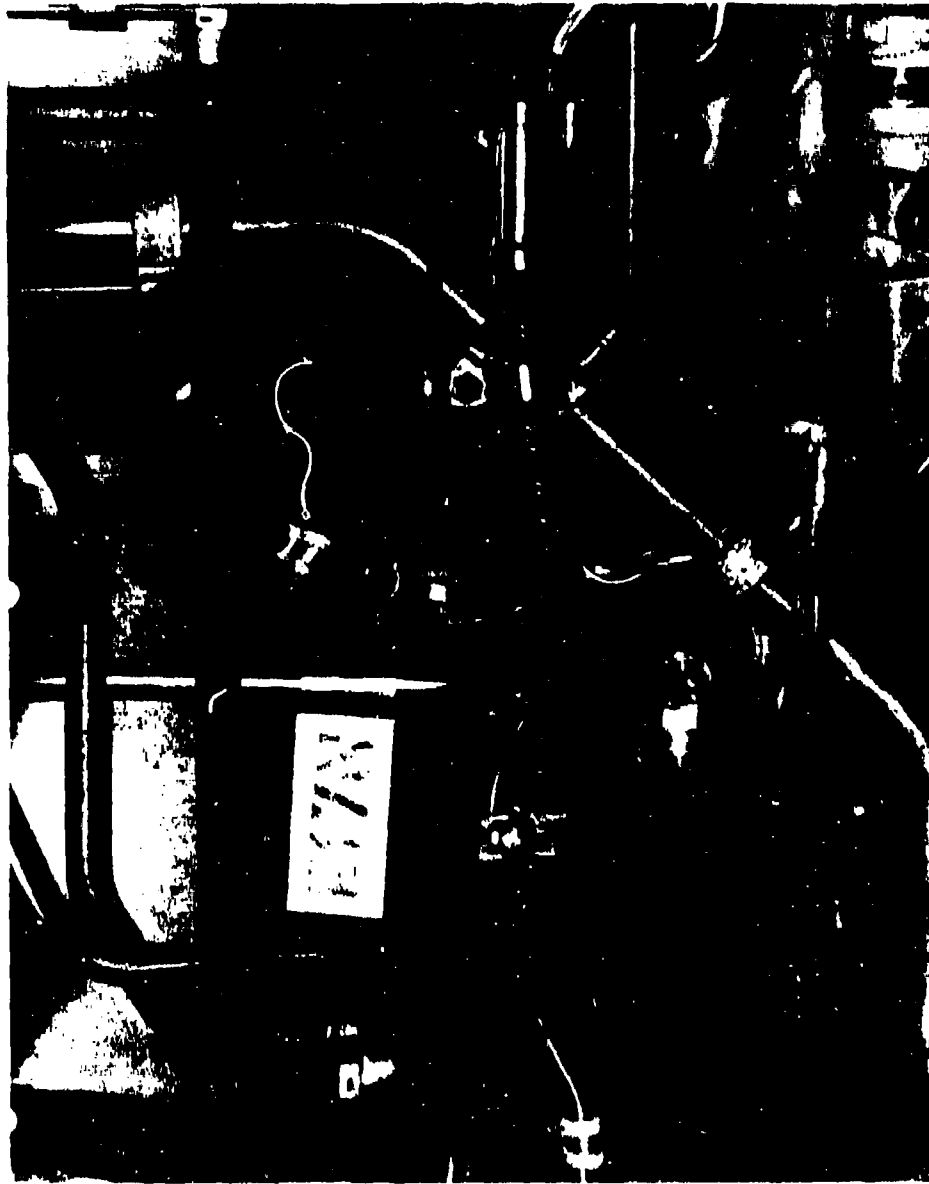


Figure A-74. Transducer Location on Firing Plug Terminal

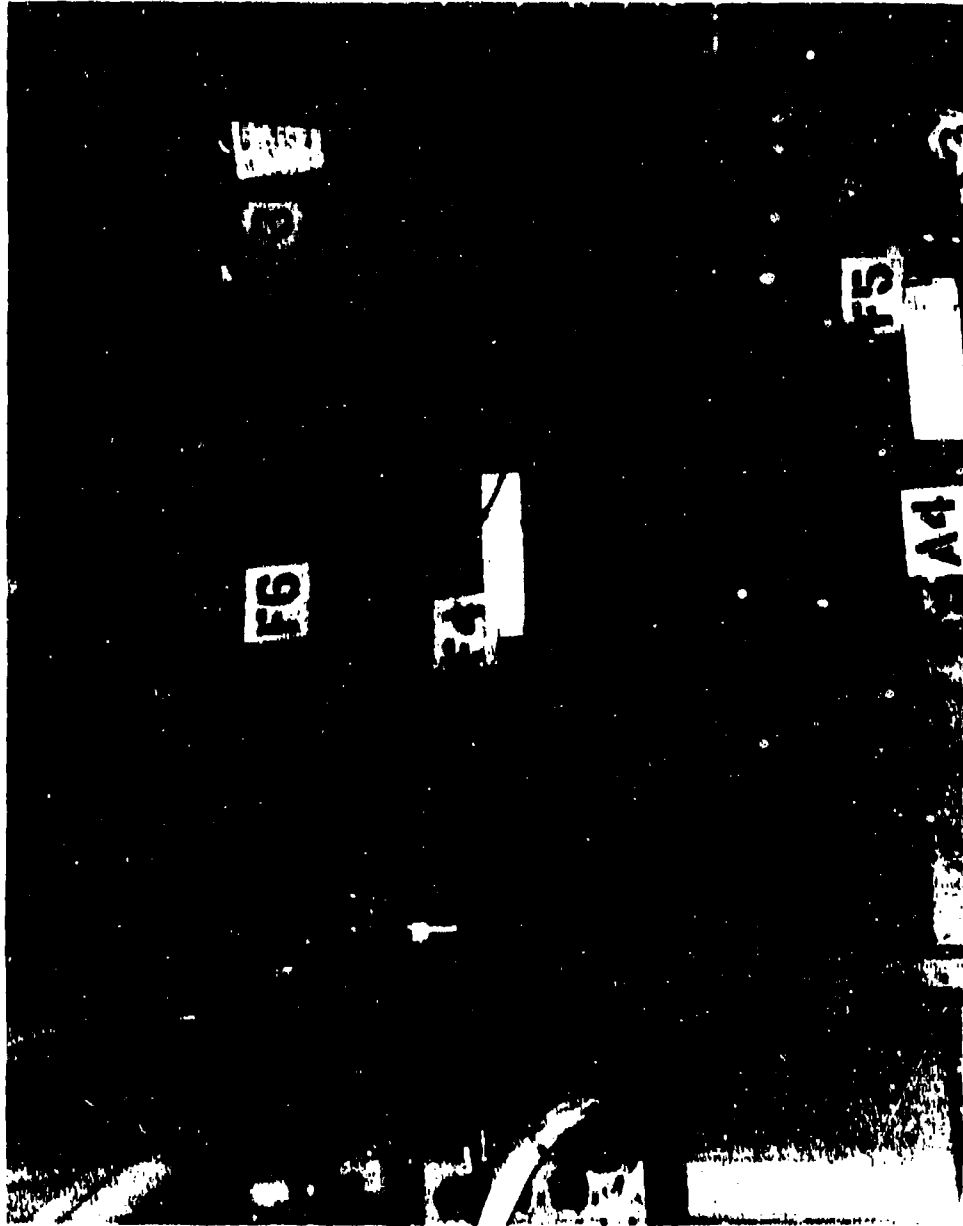


Figure A-75. Transducer Locations Near TFR Equipment Compartment



Figure A-76. Transducer Locations near TFR ECS Duct

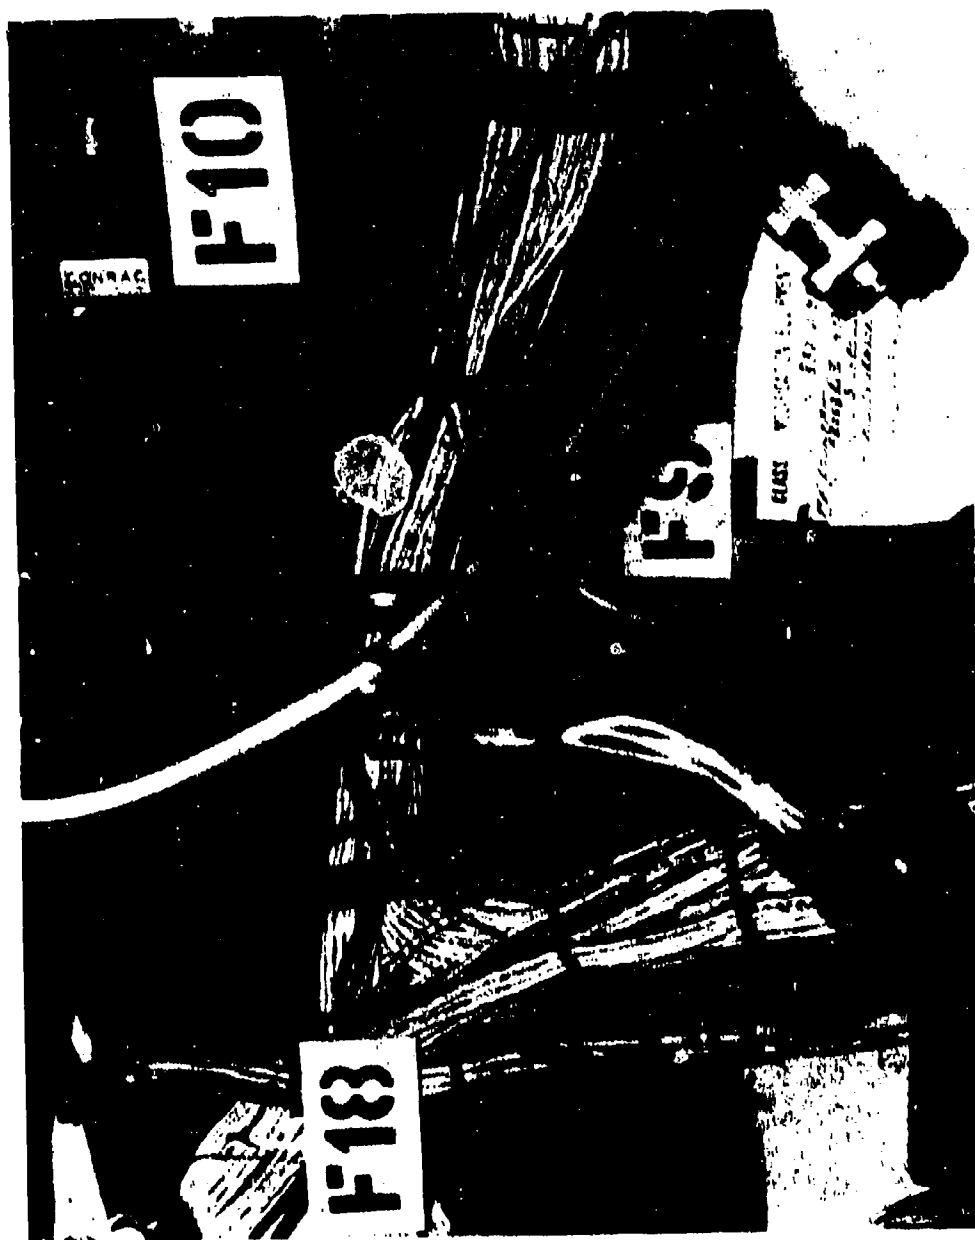


Figure A-77. Transducer Locations in Right Forward Bay



Figure A-78. Transducer Location on Right Forward Bay Door

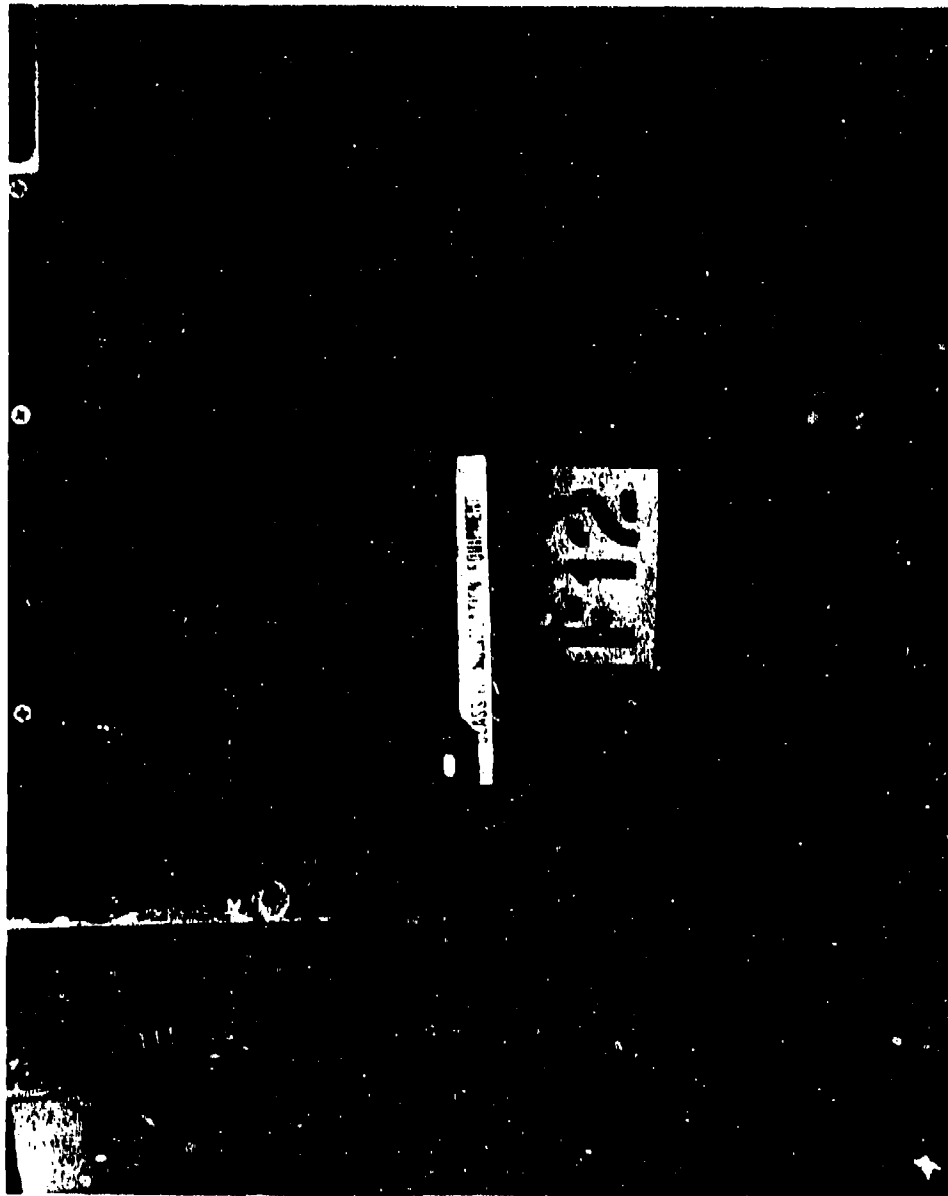


Figure A-79. Transducer Location Below Ballistics Computer Compartment on Structure

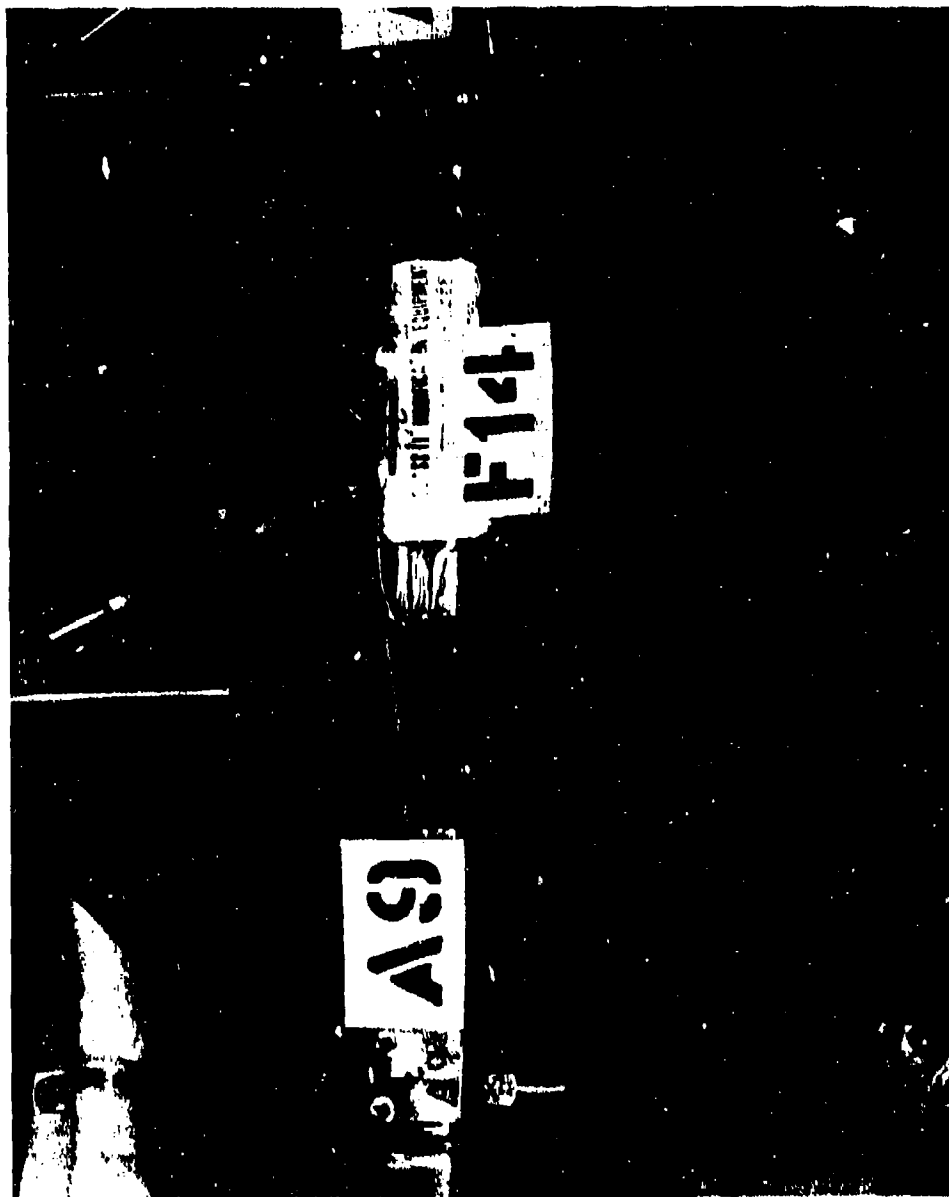


Figure A-80. Transducer Location Near Top of TFR Compartment

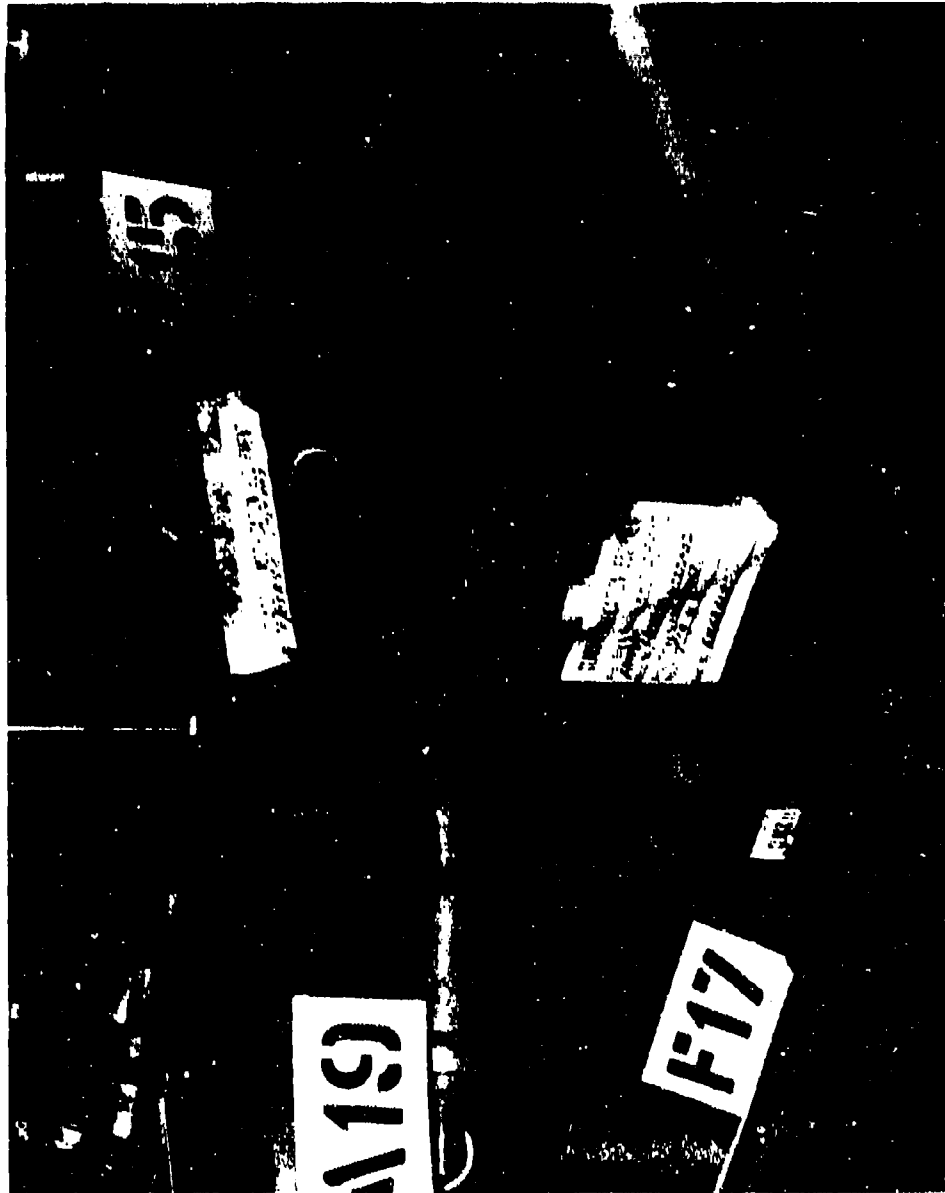


Figure A-81. Transducer Location Near AN/ARC-109 Compartment

TABLE A-1

DESCRIPTION OF TRANSDUCER LOCATIONS*

			72	81	81
A1A	VERT	= ON STRUCTURE APT OF BALLISTICS COMPUTER	183	-20	147
A2A	VERT	= FWD END OF HORIZ SUPPORT UNDER TFR COMPUTER COMP. NEAR BKHD	189	-20	181
A3A	LAY	= NEAR 18	189	-20	181
A4A	VERT	= CENTER OF HORIZ SUPPORT BELOW TFR COMPUTER COMP.	190	-20	181
A5A	NORM	= FWD INSIDE FLANGE WHERE DOOR RECEYS CENTER OF TFR EMPY COMPARTMENT	110	-27	180
A6A	VERT	= HORIZONTAL SUPPORT ABOVE TFR COMPUTER COMP. NEAR BKHD	181	-20	178
A7A	VERT	= CENTER OF HORIZ SUPPORT ABOVE TFR COMPUTER COMP.	180	-23	178
A8A	VERT	= HORIZ SUPPORT UNDER APT CORNER OF RECEIVER RADAR APN-147	137	-23	171
A9A	VERT	= CENTER OF HORIZ SUPPORT ABOVE POWER/AMP AN/ARC-118 COMPARTMENT	148	-24	171
A10A	VERT	= FWD CORNER OF HORIZ SUPPORT FOR POWER/AMP AN/ARC-118	137	-24	161
A11A	VERT	= APT END OF HORIZ SUPPORT BRACKET FOR POWER/AMP AN/ARC-118	186	-24	161
A12A	VERT	= FWD CORNER OF SUPPORT STRUCTURE UNDER ANT. CONT. AN/ARC-118	174	-25	161
A13A	VERT	= UNDER APT OUTER SHOCK MOUNT FOR COMPT. ASSY	104	-20	164
A14A	VERT	= ON COMPT. ASSY ABOVE SHOCK MOUNT	102	-24	164
A15A	VERT	= CENTER OF HORIZ SUPPORT UNDER AN/ARC-118	177	-20	163
A16A	VERT	= ON HORIZ SUPPORT UNDER APT CORNER OF AN/ARC-118	184	-20	163
A17A	VERT	= APT CORNER OF HORIZ SUPPORT ABOVE GEN CONTROL	202	-30	170
A18A	VERT	= UNDER APT OUTER SHOCK MOUNT FOR AMP RELAY AN/ARA-88	199	-30	170
A19A	VERT	= ON AMP RELAY AN/ARA-88 ABOVE SHOCK MOUNT	199	-30	174
A20A	VERT	= APT CORNER OF HORIZ SUPPORT FOR MTR AN/ARN-77	188	-30	177
A21A	VERT	= CENTER OF HORIZ SUPPORT - FOR MTR AN/ARN-77	181	-30	177
A22A	VERT	= UNDER FWD CORNER OF SYNCHRONIZER AN/APG-113	182	-10	168
A23A	VERT	= LOWER APT CORNER RCVR/MTR MOB AN/APG-113	133	-10	164
A24A	VERT	= SUPPORT SHELF BY LOWER APT MOUNT FOR SYNCHRONIZER	137	-24	161
A25A	VERT	= CENTER OF HORIZ SUPPORT UNDER FLIGHT CONT. COMPUTER	140	-24	160
A26A	VERT	= APT CORNER HORIZ SUPPORT UNDER FLIGHT CONT. COMPUTER	195	-24	160
A27A	VERT	= CENTER OF HORIZ SUPPORT UNDER FEEL & TRIM CONTROL	144	-24	160
A28A	VERT	= APT CORNER OF HORIZ SUP. BRACKET UNDER FEEL & TRIM CONTROL	193	-24	160
A29A	VERT	= CENTER OF HORIZ SUPPORT UNDER 18/MACH AMP	147	-23	165
A30A	VERT	= FWD CORNER OF HORIZ SUPPORT UNDER ALT/VEST SPEED AMP	138	-23	168
A31A	VERT	= HORIZ SUPPORT UNDER VID SIG PROCESSOR AN/APB-100	185	-30	160
A32A	VERT	= FWD LOWER MOUNT BRACKET FOR STAB PLATFORM AN/AJG-88	178	-20	164
A33A	VERT	= UNDER APT OUTER SHOCK MOUNT FOR COMPUTING AMP AN/ASB-23	105	-30	167
A34A	VERT	= UNDER SHOCK MOUNT FOR COMPUTING BYRD AN/ASB-23	193	-30	167
A35A	VERT	= APT CORNER OF HORIZ SUPPORT FOR BYRD AN/ASB-23	201	-30	167
A36A	FSA	= CORNER OF HORIZ SUP. BRACKET FOR BYRD AN/ASB-23	201	-30	167
A37A	VERT	= STRUCTURE UNDER STABILIZED PLATFORM AN/AJG-88	170	-27	168
A38A	VERT	= NEAR TOP RIGHT MOUNT OF FWD LOOKING RADAR FWD SIDE OF BKHD.	114	-20	164
A44A	FSA	= NEAR A43A	110	-20	164
A46A	NORM	= ON BKHD NEAR BOTTOM BEHIND DC POWER PANEL	207	-23	168
A47A	NORM	= ON BKHD APT OF GEN. CONTROL UNIT	207	-24	168
A48A	NORM	= ON BKHD APT OF AC POWER TRANSFER ASSY COMP.	207	-22	164
A49A	NORM	= ON BKHD BELOW 147 NEAR BOTTOM EDGE	207	-22	164
A50A	NORM	= ON NOSE BKHD NEAR TOP REAR CORNER OF TFR COMPUTER COMP.	116	-10	167
A51A	NORM	= NEAR 189	116	-10	167
A52A	NORM	= ON NOSE BKHD NEAR TOP FRONT CORNER OF TFR COMPUTER COMP.	116	-20	168
A53A	NORM	= ON NOSE BKHD NEAR BALLISTICS COMPUTER COMP.	120	-14	160
B1M	FLUSH	= CENTER OF RIGHT SIDE, 66" APT. NOSE TIP	-95	-20	170
B1A	NORMAL	TO SKIN NEAR B1M	-95	-20	170
B2M	FLUSH	= 475 APT. NOSE BKHD, 1PS. RIGHT FROM BOTTOM	148	-18	170

NOTE: Accelerometers are identified with an A and microphones with an M in the last character of the transducer ID. The transducers F1-F19 are thermocouples.

TABLE A-1 (Continued)
DESCRIPTION OF TRANSDUCER LOCATIONS

B24	NORMAL TO SKIN NEAR B2M	140	-12	135
B3H	FLUSH - NEAR TOP FWD OF CANOPY 12° LEFT OF C/L	162	22	160
B3A	NORMAL TO SKIN NEAR B3M	150	25	150
B4N	FLUSH - 48° FWD OF WEAPONS BAY ON NOSE DEAR DOOR	230	7	135
B4A	NORMAL TO SKIN NEAR B4M	230	7	135
B5H	FLUSH - 113° AFT NOSE SKHD, 21° BELOW BOTTOM EDGE OF RT CANOPY (119)	234	-30	170
B5A	NORMAL TO SKIN NEAR B5M	230	-30	170
B6H	FLUSH - FA 200 C/L	242	-30	170
B6A	NORMAL TO SKIN NEAR B6M	240	-30	170
B7H	FLUSH - CENTER OF PANEL 2200 RT. SIDE	307	-30	163
B7A	NORMAL TO SKIN NEAR B7M	307	-30	163
B8H	FLUSH - ON PANEL 2400, 4° AFT OF FWD EDGE	340	10	220
B8A	NORMAL TO SKIN NEAR B8M	370	30	220
B9H	FLUSH - PANEL UPPER ACCESS TO TORQUE TUBE/HORIZ STAB LEFT SIDE	740	00	200
B9A	NORMAL TO SKIN NEAR B9M	740	00	200
B10H	FLUSH - VERT. STAB. FWD LEFT PANEL NEAR FUSELAGE	710	0	210
B10A	NORMAL TO SKIN NEAR B10M	710	0	210
B11A1	FA - NEAR B10	702	0	210
B11A2	VERT - NEAR B10	707	0	210
B12H	FLUSH - TOP OF VERTICAL STABILIZER	820	0	310
B12A	NORMAL TO SKIN NEAR B12M	870	0	310
B13H	FLUSH - INBOARD LEFT WING	810	150	200
B13A	NORMAL TO SKIN NEAR B13M	810	150	200
B14H	FLUSH - CENTER LEFT WING	800	27	200
B14A	NORMAL TO SKIN NEAR B14M	800	27	200
B15H	FLUSH - OUTBOARD LEFT WING	800	7.0	200
B15A	NORMAL TO SKIN NEAR B15M	800	7.0	200
B16H	FLUSH - TIP OF LEFT WING	800	200	200
B16A	NORMAL TO SKIN NEAR B16M	800	200	200
C1H	FLUSH - WEAPONS BAY FWD WALL ONE-FOURTH DOWN RIGHT SIDE	220	-12	150
C2H	FLUSH - WEAPONS BAY FWD WALL MIDWAY DOWN LEFT SIDE	270	11	147
C3H	FLUSH - WEAPONS BAY 51° AFT FWD WALL, MIDDLE OF RIGHT WALL	320	-20	163
C4H	FLUSH - WEAPONS BAY 51° AFT FWD WALL, RIGHT SIDE OF CEILING	320	0	167
C5H	FLUSH - WEAPONS BAY 51° AFT FWD WALL, LEFT SIDE OF CEILING	320	0	167
C6H	FLUSH - WEAPONS BAY 51° AFT FWD WALL, MIDDLE OF LEFT WALL	320	22	163
C7H	FLUSH - WEAPONS BAY 120° AFT OF FWD WALL, MIDDLE OF RIGHT WALL	320	-22	167
C8H	FLUSH - WEAPONS BAY 120° AFT OF FWD WALL, RT. SIDE OF CEILING	320	-21	173
C9H	FLUSH - WEAPONS BAY 120° AFT OF FWD WALL, LEFT SIDE OF CEILING	320	21	173
C10H	FLUSH - WEAPONS BAY 120° AFT OF FWD WALL, MIDDLE OF LEFT WALL	320	20	167
C11H	FLUSH - WEAPONS BAY AFT WALL ONE-FOURTH DOWN RIGHT CENTER	400	-12	164
C12H	FLUSH - WEAPONS BAY AFT WALL ONE-FOURTH DOWN LEFT CENTER	400	10	160
C17A	VERT. - CENTER CEILING BEAM OF WEAPONS BAY AT FA 200	200	0	160
C18A	VERT. - CENTER CEILING BEAM OF WEAPONS BAY AT FA 300	300	10	160
C19A	VERT. - CENTER CEILING BEAM OF WEAPONS BAY AT FA 350	320	0	160
C20A	VERT. - CENTER CEILING BEAM OF WEAPONS BAY AT FA 350	300	0	171
C21A	VERT. - CENTER CEILING BEAM OF WEAPONS BAY AT FA 350	320	0	172
C22A	VERT. - CENTER CEILING BEAM OF WEAPONS BAY AT FA 400	400	0	173
C23A	VERT. - CENTER CEILING BEAM OF WEAPONS BAY AT FA 450	470	0	174
C24A	VERT. - CENTER CEILING BEAM OF WEAPONS BAY AT FA 450	400	0	175
C25A	NORM. - UPPER RIGHT CENTER OF FWD WALL OF WEAPONS BAY	274	-12	160
C26A	NORM. - RIGHT CENTER OF FWD WALL OF WEAPONS BAY	277	-12	160
C27A	NORM. - LOWER RIGHT CENTER OF FWD WALL OF WEAPONS BAY	277	-12	163
C28A	NORM. - LEFT CENTER OF FORWARD WALL OF WEAPONS BAY	270	0	160
D1A	VERT. - SIDEWALL BELOW LT. BOTTOM CORNER OF INSTRUMENT PANEL	230	24	170

TABLE A-1 (Concluded)

DESCRIPTION OF TRANSDUCER LOCATIONS

D2A	LAT - NEAR D1A	230	24	178
D3A	FSA - NEAR D1A	232	24	178
D4A	VERT - SIDEWALL BELOW RT. BOTTOM CORNER OF INSTRUMENT PANEL	231	-27	173
D5A	LAT - NEAR D4A	231	-27	173
D6A	FSA - NEAR D4A	231	-27	173
D7A	VERT - ON INSTRUMENT PANEL LOWER RIGHT SIDE	231	-28	174
D8A	LAT - NEAR D7A	231	-28	174
D9A	FSA - NEAR D7A	231	-28	174
D10A	VERT - NEAR TOP CENTER OF INSTRUMENT PANEL	228	-1	198
D11A	FSA - 8" OFF C/L, LOWER INSTRUMENT PANEL ON YAGAN ARM-84 UNIT	230	0	188
D12A	VERT - CENTER OF LEFT INSTRUMENT PANEL	230	0	187
D13A	VERT - CENTER OF RIGHT INSTRUMENT PANEL	230	0	188
D14A	VERT - ON RIGHT SIDE MOUNT OF GUN-SIGHT	228	37	198
D15A	VERT - NEAR D11A	230	0	188
D16A	VERT - AFT ON CENT CONSOLE ON ARC-100U, C-8304, CONTROL RECEIVER TRANS UNIT	227	-4	137
F1M	PLUMB - FWD LANDING GEAR DOOR, MIDDLE, 18" FWD OF AFT EDGE	228	7	138
E2A	NORMAL - LEFT ENGINE LY FWD MOUNT	230	68	178
E3A	TANGENTIAL - LEFT ENGINE LY FWD MOUNT	230	68	178
E4A	NORMAL - LEFT ENGINE LY AFT MOUNT	228	68	168
E5A	TANGENTIAL - LEFT ENGINE LY AFT MOUNT	228	68	168
E6A	VERT - LT MAIN LANDING GEAR UPPER NEAR PIVOT (FOR LANDING LOADS)	228	18	148
E7M	PLUMB - CENTER OF VERT STAB 1" BELOW RIB	228	0	318
E11A	VERT - TIP AFT OF VERT STAB ON STRUCTURE	278	118	318
E12A	LAT - NEAR E11A	278	118	318
E13A	VERT - FWD TIP OF LEFT WING	228	228	228
E14A	NORMAL - ON ACCESSORY GEAR BOX	248	88	148
E15A	TANGENTIAL - ON ACCESSORY GEAR BOX	248	88	148
E16A	FSA - ON ACCESSORY GEAR BOX	248	88	148
E17A	TANGENTIAL - ON FIRING PLUG TERMINAL, LEFT ENGINE	228	88	188
F1	T/C1 - SURFACE TEMP, FWD SIDE OF BULKHEAD INSIDE MADOME	118	0	171
F2	T/C2 - SURFACE TEMP, AFT SIDE OF NOSE BULKHEAD	128	-24	166
F3	T/C3 - AIR TEMP, NEAR AFT SIDE OF NOSE BULKHEAD	128	-28	164
F4	T/C4 - OUTLET ECB AIR TEMP, TFR TRANSMITTER	128	-28	161
F5	T/C5 - SURFACE TEMP, TFR SUPPORT (FWD)	128	-28	162
F6	T/C6 - TFR TRANSMITTER OULET ECB AIR TEMP.	128	-28	163
F7	T/C7 - TFR ECB AIR INLET TEMP. (IN DUCT)	141	-14	182
F8	APR - TFR ECB AIR FLOW RATE (IN DUCT)	141	-14	187
F9	MUM - TFR ECB AIR INLET DEPOINTS TEMP. (IN DUCT)	141	-14	182
F10	FWD - RIGHT FORWARD BAY PRESSURE	127	-24	163
F11	T/C8 - RIGHT FORWARD BAY DOOR SKIN SURFACE TEMP.	127	-28	172
F12	T/C9 - SURFACE TEMP, OF BOTTOM STRUCTURE RIGHT FWD BAY	133	-28	148
F13	T/C10 - AIR TEMP, FWD SIDE OF BULKHEAD INSIDE MADOME	118	0	163
F14	T/C11 - AIR TEMP, ABOVE AND LEFT OF TFR	134	-24	171
F15	T/C12 - AIR TEMP, ABOVE ARC-164	121	-38	178
F16	T/C13 - AIR TEMP, AFT OF ARC-164	123	-28	167
F17	T/C14 - OULET AIR ECB TEMP. OF ARC-164	124	-28	164
F18	APR - ECB AIRFLOW RATE TO AN/ARC-168 (IN DUCT)	179	-14	168
F19	T/C15 - LEFT ENGINE NEAR E17	228	88	188

TABLE A-2
 PUID/CHANNEL/SWITCH POSITION MATRIX

	TAPE CHANNEL											
	2	3	5	6	7	8	9	10	12A	12B	13A	13B
SP 1	A1A	A2A	B1A	A29A	B1M	A16A	A27A	A32A	A28A	A42A	A3A	A4A
SP 2	A21A	A22A	A36A	A40A	A39A	A41A	A6A	A5A	A7A	A9A	A6A	E6A
SP 3	A31A	A36A	B3A	B2A	B3M	B2M	A34A	A38A	A43A	A44A	A35A	E6A
SP 4	A11A	A12A	A37A	A33A	A13A	A19A	A14A	A20A	A15A	A16A	A18A	E6A
SP 5	B5A	B6A	B6M	B5M	D15A	D1A	E2A	D12A	D14A	E12A	E6A	E13A
SP 6	B7M	B8M	B8A	B7A	B10M	B9M	B18A	B9A	B11A1	B11A2	B12M	B12A
SP 7	B13M	B14M	B14A	B13A	B16M	B15M	B16A	B15A	E7M	E12A	E11A	E13A
SP 8	C1M	C2M	C4M	C3M	C6M	C5M	C8M	C7M	C9M	C12M	C10M	C11M
SP 9	C17A	C17A	C19A	C24A	C20A	E1M	C21A	B4M	B4A	E6A	C22A	C23A
SP 10	D4A	D5A	D8A	D7A	D2A	D10A	D6A	D13A	D16A	D11A	D9A	D3A
SP 11	C25A	A49A	A50A	C27A	A51A	C26A	A52A	C28A	A45A	A46A	A47A	A48A
SP 12	E2A	E3A	E5A	E4A	E14A	E6A	E16A	E15A	E17A	E13A	D14A	B12M

(VOICE-CH#1 PCM-CH#4&11 TIME-CH#14)

TABLE A-3
AIRCRAFT TEST CONFIGURATIONS

Flight Mission Number	Flight Date	Left Weapons Bay Configuration	Right Weapons Bay Configuration	Switch Position for Weapons Bay Doors Open	Spoiler Configuration #1, #2, #3	External Store Configuration Sta3, Sta4, Sta5, Sta6	Switch Position Gun Fire
5030	5 Oct 79	Clean	Clean	1,9,9	Clean	None	None
3712	7 Nov 79	Clean	Clean	None	Clean	None	None
3028	14 Nov 79	Clean	Clean	None	Clean	None	None
1014	3 Dec 79	Clean	Clean	3	Clean	None	None
3020	5 Dec 79	Clean	Clean	8	Clean	None	None
3012/3015	9 Jan 80	Clean	Clean	8,9	Clean	GBU	None
5015	18 Jan 80	Clean	Clean	9	Clean	10C/B	10C/B
5018	18 Jan 80	Clean	Clean	8,9	Clean	GBU	None
1010	21 Jan 80	Clean	Clean	8	Clean	10C/B	10C/B
1011	23 Apr 80	Clean	Clean	None	Clean	None	None
1012	23 Apr 80	Clean	Clean	None	#2	None	None
3012	30 Apr 80	BDU-8	BDU-8	8,9,8	#1	None	None
3013	30 Apr 80	BDU-8	BDU-8	9,8,9	#1	10C/B	None
4705	1 May 80	BDU-8	BDU-8	8,9	#2	None	None
4706	1 May 80	BDU-8	BDU-8	8,9,9	#2	None	None
2008	6 May 80	Clean	Clean	8,9,8,9	#1, #3	None	None
2006/2010	13 May 80	Clean	Gun (No Ammo)	9,9	#1	None	None
5011	16 May 80	Clean	Gun (No Ammo)	None	#1	10C/B	10C/B
1015	19 May 80	Clean	Gun (No Ammo)	None	#1	CTU-2	CTU-2
1016	19 May 80	Clean	Gun (No Ammo)	8	#1	None	None
5014	23 May 80	BDU-8	Gun (No Ammo)	8,9,8	#1	None	None
2702	27 May 80	BDU-8	Gun (No Ammo)	8,9	#1	None	None
5012	16 May 80	Clean	Gun (No Ammo)	None	#1	None	None
5019	6 Jun 80	Clean	Gun (2X Rounds)	8,9	#1*	None	None
5020	6 Jun 80	Clean	Gun (2X Rounds)	8,9	#1*	None	None
1010	9 Jun 80	Clean	Gun (2X Rounds)	8	None	None	None
1011	9 Jun 80	Clean	Gun (2X Rounds)	8,9,8,9	None	None	None
2015/12/16	10 Jun 80	Clean	Gun (2X Rounds)	None	None	PK84	PK84
3013	11 Jun 80	BDU-8	Gun (2X Rounds)	8,9,9,8	None	None	None
3014	11 Jun 80	Clean	Gun (2X Rounds)	None	None	CTU-2	CTU-2
1010	16 Jun 80	Clean	Gun (7X Rounds)	None	None	PK84	PK84
5012/5016	20 Jun 80	Clean	Gun (2X Rounds)	None	None	PK84	PK84
1010	23 Jun 80	Clean	Clean	8,9,8	None	10C/B	10C/B
6702	13 Sep 80	BDU-8	BDU-8	8,8	None	None	None
6704	13 Sep 80	Clean	Clean	8,8	#1	None	None
3704	17 Sep 80	Clean	Clean	8,9,8	#2	None	None
4023	18 Sep 80	Clean	Clean	None	#2	None	None

1,2,3,4,5
1,2,6,7,8,9
10,11,12,1,2,3
5,1,2,3,4
5,9,10,11,12

1,2,3,4,5
1,2,3,4,5

*Left Spoiler Only

APPENDIX B

RMS ACCELERATION AND SOUND PRESSURE LEVEL DATA

Table B-1 Overall RMS Levels Produced by Stabilized Flight
Condition Listed in Table 3

Table B-2 Peak or Maximum RMS Levels Produced by Transient
Flight Conditions Listed in Table 4

TABLE B-1
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION: 1																
TC	MISSION	DATE	REC	A1A	A2A	B1A	A29A	A30A	A42A	A44A	Q1M	A10A	A27A	A32A	A3A	A4A
7	1816	000519	23	2.00	.70	.00	2.10	.40	13.10	127.00	.00	.00	.40	.55	.05	.00
	3813	000611	22	1.00	.78	.00	2.14	.34	2.09	137.00	.00	.00	.35	.44	.03	.00
17	5014	000523	3	.50	.35	.20	.60	.10	3.00	124.00	.30	.15	.15	.20	.20	.00
	3814	000611	3	.50	.31	.23	.54	.11	.52	119.60	.31	.14	.14	.23	.23	.00
18	1810	000623	5	.90	.49	.40	1.27	.22	1.10	125.50	.57	.25	.25	.27	.42	.00
19	2310	000506	3	1.30	.60	.04	2.00	.40	13.00	127.00	.00	.30	.30	.50	.00	0.09
	1315	000519	3	1.00	.00	.50	1.40	.20	0.50	127.00	.00	.20	.20	.35	.40	.00
	2702	000527	3	1.30	.65	.70	1.00	.34	13.10	.00	.70	.33	.47	.50	.00	.00
21	1816	000519	3	2.10	1.10	1.30	3.00	.70	24.30	130.00	1.30	.50	.50	.93	.03	.00
22	3012	000430	3	.00	.40	.00	1.10	.20	7.70	124.40	.00	.00	.00	.30	.00	.00
	0702	000613	4	.05	.40	.02	1.30	.22	2.00	.00	.70	.20	.20	.40	.10	1.20
	0704	000613	3	.00	.44	.00	1.20	.21	2.70	123.70	.71	.29	.29	.10	.00	1.20
24	1812	000420	18	1.70	.40	1.10	2.10	.30	15.00	.00	.00	.25	.25	.50	.70	0.20
	4706	000501	3	1.50	.00	1.10	2.10	.30	15.00	127.30	.00	.40	.40	.50	.70	0.40
27	1811	000420	3	.61	.20	.40	.00	.23	0.00	122.20	.37	.25	.25	.31	.20	1.00
28	1011	000420	15	.70	.00	.50	1.00	.30	0.00	123.00	.00	.30	.30	.34	.40	2.00
29	1811	000420	31	1.00	.02	1.00	1.20	.23	9.00	127.00	.00	.31	.31	.34	.07	2.00
00	5019	000606	19	4.70	2.00	10.00	6.40	15.00	7.00	130.00	2.70	1.00	1.00	1.50	2.00	.00
	1211	000200	15	5.70	2.60	11.51	0.97	24.00	10.70	.00	3.00	1.40	1.40	1.90	2.30	.00
01	5020	000606	18	3.00	1.50	0.50	4.00	10.00	0.20	127.20	1.00	.70	.70	1.20	1.20	.00
02	1010	000009	19	5.30	2.20	12.30	7.40	14.00	0.00	130.50	2.40	1.10	1.10	2.11	2.20	.00
04	2015	000610	19	4.00	1.00	11.00	7.00	13.50	0.20	127.40	2.50	.90	.90	1.40	2.40	.00
05	1010	000610	21	2.00	1.10	0.00	4.10	0.40	.00	126.70	1.40	.00	.00	.07	1.30	.00
07	3012	000620	15	5.50	2.00	13.70	0.10	0.00	7.90	127.30	2.00	1.12	1.12	1.30	2.20	.00
04	3019	000606	23	.50	.32	.30	.00	.12	.00	122.00	.35	.13	.13	.14	.30	.00
05	5012	000620	4	.00	.30	.32	.70	.13	.70	123.00	.40	.10	.10	.17	.30	.00
06	2015	000610	3	.35	.21	.17	.32	.14	.31	120.00	.23	.10	.10	.12	.17	.00

TABLE B-1 (Continued)
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION 1													
87	3010 000406	3	.78	.48	1.00	.38	.98	124.00	.48	.28	.28	.38	.99
	1010 000409	3	.69	.36	.89	.12	.82	123.00	.37	.14	.14	.20	.88
	1010 000616	3	.78	.34	.84	.18	.79	123.00	.56	.17	.18	.38	.88
88	3020 000606	2	.63	.33	.59	.02	.17	.96	123.20	.35	.19	.20	.89
89	1011 000609	3	.53	.38	.71	.28	.76	123.18	.33	.24	.24	.24	.89
	3013 000611	3	.55	.29	.67	.12	.84	123.00	.38	.14	.15	.25	.88
90	2006 000513	9	1.10	.58	1.58	.38	9.48	125.48	.68	.36	.40	.88	2.50

SWITCH POSITION 2															
YC	POSITION	RATE	SEC	A21A	A22A	A30A	A40A	A7A	A9A	A39A	A41A	A6A	A8A	A8A	A8A
7	1016 000519	24	1.20	1.10	2.68	1.28	1.00	2.38	1.78	1.88	.87	.77	1.38	1.89	.88
	3013 000611	23	.71	.72	1.88	2.08	.78	.78	.88	.88	.87	.85	1.78	.77	.88
17	5014 000523	4	.39	.35	.52	.32	.36	.66	.41	.34	.34	.39	.76	.27	.88
	3214 000611	4	.38	.28	.25	.38	.15	.28	.38	.38	.38	.38	.38	.28	.88
18	1316 000523	8	.43	.88	.38	.38	.22	.32	.38	.41	.41	.48	.94	.38	.88
19	2008 000506	4	1.08	1.16	3.08	1.28	1.88	4.08	2.08	.88	.88	.78	1.78	1.18	3.08
	1015 000519	4	.88	.88	2.08	.98	.88	2.38	1.38	.82	.84	1.08	.83	.88	.88
21	1016 000519	4	2.08	2.08	5.38	2.38	1.68	4.28	3.08	1.68	1.28	2.38	1.28	.88	.88
22	3012 000438	4	.78	.88	1.68	.78	.38	1.78	1.08	.78	.88	.78	.88	.88	.88
	6702 000513	5	.77	.78	1.68	.85	.81	.82	1.88	.88	.48	.88	.88	.56	.88
	6704 000613	4	.88	.88	1.78	.78	.78	.55	1.18	.82	.48	.88	.88	.52	.88
23	1012 000426	4	.98	.88	2.18	1.08	.88	2.78	1.48	1.58	.78	1.08	.88	2.28	.88
24	1012 000428	16	1.28	.58	3.18	1.48	1.18	2.48	1.78	1.28	.88	1.38	1.18	2.48	.88
	4706 000501	4	1.38	1.28	5.28	1.48	1.18	2.78	2.08	1.38	.88	1.88	1.88	2.38	.88
25	1012 000428	28	1.78	.38	2.98	1.68	.68	2.18	2.88	1.48	1.28	2.08	.88	4.28	.88
27	1011 000428	4	.81	.88	1.38	1.08	.35	1.28	1.18	1.48	.38	.38	.38	1.18	.88
28	1011 000426	16	.78	.88	1.58	1.28	.48	1.18	1.28	1.68	.88	.88	.88	1.18	.88
29	1011 000428	32	1.18	1.08	1.68	1.28	.48	1.18	1.38	1.48	.78	1.28	.48	2.18	.88

TABLE B-1 (Continued)
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION: 2															
TC	MISSION	DATE	RFC	A21A	A22A	A30A	A40A	A7A	A9A	A30A	A41A	A8A	A9A	A8A	A8A
68	5019	000604	20	9.00	6.20	5.30	5.00	1.70	1.50	4.00	5.00	2.00	2.00	4.20	1.70
	1211	000609	16	7.00	6.00	6.00	7.20	2.30	2.10	5.00	8.30	2.40	2.40	4.20	2.10
61	5020	000606	19	4.50	4.70	4.00	3.00	1.50	1.20	3.70	3.00	1.00	1.00	3.50	1.50
62	1010	000609	20	4.90	4.50	5.00	4.00	1.70	1.30	4.30	5.40	2.20	4.00	1.70	2.00
64	2015	000610	20	3.40	.00	3.40	3.20	1.30	1.30	2.10	3.00	1.30	3.00	1.30	2.00
65	1010	000616	22	3.40	2.00	3.30	4.00	1.20	1.10	3.70	3.50	1.20	2.20	1.20	2.00
67	5012	000620	16	4.70	4.30	5.00	4.00	1.40	1.30	3.00	4.00	2.10	4.30	1.40	2.00
84	5019	000606	20	.34	.23	.36	.20	.10	.10	.30	.30	.30	.30	.60	.20
85	5012	000620	5	.39	.27	.40	.40	.23	.23	.40	.40	.30	.70	.25	.00
86	2015	000610	4	.29	.00	.26	.27	.15	.16	.20	.20	.30	.54	.10	.00
87	5019	000606	4	.40	.30	.40	.40	.22	.20	.40	.40	.40	.70	.22	.00
	1010	000609	4	.32	.24	.20	.20	.10	.10	.20	.31	.30	.72	.24	.00
	1010	000616	4	.40	.27	.32	.32	.22	.22	.50	.50	.40	.72	.24	.00
88	5020	000606	3	.40	.30	.70	.70	.20	.23	.60	.60	.30	.60	.20	.00
89	1011	000609	4	.50	.40	1.20	1.20	.17	.15	1.10	1.20	.20	.32	.10	.00
	3013	000611	4	.30	.22	.30	.31	.10	.10	.30	.40	.33	.50	.20	.00
91	2006	000513	10	.00	.00	2.50	1.00	.90	2.30	1.30	.70	.40	1.00	.00	.40

SWITCH POSITION: 3															
TC	MISSION	DATE	RFC	A31A	A30A	B3A	B2A	A43A	A44A	B3A	B2A	B2A	A34A	A30A	A30A
7	1010	000519	25	.00	.00	.00	2.00	.40	2.20	.00	.00	.00	.00	.00	.00
	3013	000611	24	.00	.70	6.00	.00	.30	.70	.00	141.00	.00	.00	.00	.00
17	5014	000523	5	.00	.00	.00	4.00	.00	.00	.00	100.00	.00	.00	.00	.00
	5014	000523	0	.24	.22	1.00	3.30	.23	.22	130.00	130.00	.14	.21	.10	.00
	3014	000611	5	.00	.00	1.00	.70	.20	.22	130.00	130.00	.10	.17	.14	.00
10	1010	000623	7	.33	.00	2.00	1.30	.20	.32	.00	.00	.10	.20	.20	.00

TABLE B-1 (Continued)
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION, J	YC	MISSION	DATE	RFC	A31A	A36A	B3A	B7A	A43A	A44A	B2M	B2M	A39A	A39A	E6A
19	2000	000506	5	.00	1.00	5.00	27.00	.50	2.20	.00	150.30	.00	.00	.00	3.20
1015	000510	5	.02	.00	3.50	23.00	.40	2.00	.00	137.00	.00	.00	.50	.40	2.00
2702	000527	5	1.00	1.00	5.40	52.00	.40	2.30	.00	100.00	.00	.00	.60	.52	.00
21	1016	000510	5	1.40	2.00	10.00	52.00	.00	4.10	140.00	161.00	.00	.00	1.20	1.20
22	3012	000430	5	.60	.60	2.00	16.00	.30	1.30	131.20	156.00	.00	.00	.40	.00
23	1012	000420	5	.00	.74	4.00	21.00	.40	1.00	.00	.00	.00	.02	.54	.57
24	1012	000420	17	.00	1.00	6.10	24.00	.50	2.40	131.00	.00	.00	.70	.54	.07
4706	000501	5	.06	.05	6.10	26.00	.50	2.30	132.00	100.00	.00	.00	.04	.56	.75
25	1012	000420	20	.00	.00	5.60	17.00	.60	2.00	.70	103.00	.00	.40	.65	.60
27	1011	000420	5	.57	.46	2.60	0.70	.21	1.10	127.00	104.50	.00	.26	.30	1.30
20	1011	000420	17	.63	.50	3.00	9.30	.20	1.10	120.00	100.00	.00	.32	.40	1.40
29	1011	000420	35	.70	.60	3.00	10.00	.30	.00	120.20	151.10	.00	.30	.40	1.00
00	5010	000506	21	2.00	1.00	6.20	15.00	1.40	2.20	.00	.00	.00	.04	1.40	1.00
5010	000506	22	2.00	1.70	7.00	15.00	1.40	2.30	.00	.00	.00	.00	1.00	1.40	1.00
1011	000509	17	2.70	2.00	7.90	14.00	1.50	3.00	.00	.00	.00	.00	1.10	1.70	1.30
02	1010	000509	21	1.30	.00	4.40	12.00	1.20	1.00	143.00	105.40	.00	1.00	1.20	1.40
60	1010	000510	15	1.50	1.30	6.10	10.50	1.20	1.00	.00	102.00	.00	1.10	1.10	1.40
07	5012	000520	17	.00	.00	0.10	11.00	1.20	2.00	142.00	.00	.00	1.20	1.30	.00
04	5010	000506	37	.24	.14	1.10	.05	.21	.20	135.00	135.30	.00	.13	.10	.00
05	5012	000520	6	.30	.10	1.40	1.10	.22	.20	136.00	130.30	.00	.15	.25	.00
06	2015	000510	5	.20	.00	.05	.00	.20	.20	136.00	135.10	.00	.10	.10	.00
07	5010	000506	5	.30	.20	1.70	1.10	.24	.30	135.00	137.40	.00	.14	.24	.20
1010	000509	5	.27	.10	1.50	1.00	.22	.27	135.00	.00	.00	.13	.22	.20	
1010	000510	5	.30	.20	1.00	1.10	.22	.27	134.00	.00	.00	.15	.20	.21	
00	5020	000500	4	.40	.30	2.40	1.10	.20	.20	127.00	130.70	.00	.23	.30	.24
09	1011	000500	5	.32	.22	1.10	1.00	.10	.23	120.00	.00	.00	.20	.20	.00
3013	000511	5	.24	.13	1.20	1.00	.20	.20	.23	120.00	130.00	.00	.11	.22	.10
00	2000	000510	11	.00	.05	3.40	21.50	.30	1.70	.00	150.00	.00	.40	.40	3.40

TABLE B-1 (Continued)

OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
CONDITIONS LISTED IN TABLE 3

SWITCH POSITION ¹	4	YC	MISSION	DATE	RCC	A11A	A12A	A37A	A35A	A18A	A16A	A13A	A19A	A14A	A20A	A10A	E6A
7	5012	000020	20	1.50	2.20	1.30	.10	1.10	.84	.70	.51	.13	.17	.43	.00	.00	
17	5014	000523	7	.53	1.10	.50	.00	.60	1.50	.73	.41	.10	.14	.26	.10	.00	
	3014	000611	6	.42	.60	.30	.00	.40	.30	.20	.24	.00	.10	.15	.00	.00	
18	1010	000623	0	.64	1.02	.60	.10	.52	.41	.31	.20	.09	.11	.23	.00	.00	
19	2308	000506	6	1.40	4.00	3.00	.20	2.00	5.10	2.30	1.30	.26	.30	1.00	3.10	.00	
	1015	000510	6	1.10	.00	2.00	.10	1.50	4.00	2.00	1.10	.20	.30	.70	.00	.00	
	2702	000527	6	1.50	4.00	2.50	.12	2.10	6.00	2.60	1.30	.20	.30	1.00	.00	.00	
21	1016	000510	6	2.40	7.40	5.10	.20	5.00	11.40	4.00	2.00	.43	4.00	2.00	.00	.00	
22	3013	000430	3	.00	2.30	1.70	.11	1.10	3.10	1.50	.02	.15	.20	.00	.00	.00	
	4705	000501	4	.02	2.30	1.00	.17	1.10	3.00	1.00	.20	.22	.50	2.00	.00	.00	
23	1012	000420	6	1.20	5.00	2.50	.16	.17	4.00	2.00	1.20	.21	.30	.00	2.00	.00	
24	1012	000420	10	1.70	4.50	3.20	.20	2.10	5.00	2.50	1.50	.30	.20	1.00	2.00	.00	
	4706	000501	6	1.50	4.00	3.20	.21	2.20	6.20	3.00	1.40	.30	.26	1.00	2.00	.00	
25	1012	000420	30	1.00	7.10	4.10	.20	2.10	6.40	2.30	1.40	.30	.23	1.30	4.00	.00	
27	1011	000420	6	.50	1.00	1.40	.10	.00	2.70	1.22	.70	.20	.20	.50	1.30	.00	
28	1011	000420	10	.60	2.40	1.70	.20	1.00	3.00	1.40	.77	.20	.20	.50	1.00	.00	
29	1011	000420	34	1.00	3.00	2.20	.20	1.10	3.40	1.40	1.10	.20	.20	.70	2.00	.00	
60	5010	000600	23	2.00	0.00	5.70	.34	4.00	3.50	1.00	4.10	.30	.51	3.70	.00	.00	
	1011	000600	10	3.30	0.50	0.00	.50	5.14	3.70	2.50	5.20	.43	.30	4.70	.00	.00	
	5012	000620	10	3.30	0.40	0.20	.40	3.00	3.00	2.50	3.00	.57	.57	3.00	.00	.00	
66	1010	000610	10	2.70	7.00	5.20	.37	4.40	3.10	1.00	3.30	.33	.00	3.40	.00	.00	
84	5010	000600	20	.50	.77	.40	.00	.47	.37	.24	.27	.07	.00	.10	.00	.00	
85	5012	000620	7	.30	.00	.52	.00	.43	.40	.23	.30	.00	.12	.21	.00	.00	
86	2015	000610	6	.30	.60	.20	.10	.40	.20	.20	.23	.00	.10	.16	.00	.00	
87	5010	000600	6	.47	.00	.50	.10	.45	.40	.30	.30	.07	.00	.20	.00	.00	
	1010	000600	6	.44	.70	.47	.00	.44	.34	.30	.27	.07	.10	.10	.00	.00	
	1010	000610	6	.50	.02	.47	.10	.44	.35	.24	.20	.10	.12	.21	.00	.00	

TABLE B-1 (Continued)
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION 4		TC	MISSION	DATE	REC	A11A	A12A	A37A	A33A	A15A	A16A	A13A	A14A	A28A	A10A	F0A
88	5020	800606	5	.46	.85	.60	.00	.50	.30	.30	.30	.30	.00	.10	.22	.00
89	1011	800609	6	.40	.60	.54	.10	.45	.30	.22	.32	.29	.09	.13	.24	.00
	3013	800611	6	.40	.65	.40	.10	.40	.30	.20	.24	.19	.10	.17	.06	.00
90	2006	800513	12	1.10	2.90	2.10	.10	1.00	4.00	1.00	.99	.20	.30	.79	3.50	.00
SWITCH POSITION 8		TC	MISSION	DATE	REC	B5A	B6A	B6M	B5M	D14A	E12A	D15A	D1A	E2A	F12A	F13A
7	5012	800628	21	3.20	3.50	122.50	.00	.15	0.00	.10	.20	93.20	.12	1.40	.00	.00
17	5014	800523	8	.70	.62	124.30	.00	.10	11.40	.07	.17	95.50	.10	.02	.00	.00
	3014	800611	7	.50	.50	.00	136.00	.10	4.10	.10	.13	45.00	.10	.14	.00	.00
18	1010	800623	6	1.23	1.23	.00	.00	.12	5.30	.07	.17	74.50	.11	1.53	.00	.00
19	2008	800506	7	3.10	4.00	137.00	130.00	.20	20.00	.10	.50	90.30	.13	1.00	37.00	.00
	1015	800510	7	2.00	.00	140.00	136.00	.14	17.30	.10	.40	62.40	.10	1.00	.00	.00
	2702	800527	7	3.40	3.10	139.70	139.00	.20	21.30	.10	.40	85.00	.20	1.00	.00	.00
21	1016	800510	7	6.00	6.10	141.10	.00	.20	35.00	.15	.73	47.20	.17	1.70	.00	.00
22	3013	800438	4	1.90	2.20	131.20	135.10	.10	12.00	.10	.30	.60	.10	.00	.00	.00
	4705	800501	5	1.70	1.90	140.00	.00	.10	12.00	.10	.30	.00	.10	.70	24.00	.00
23	1012	800428	7	2.60	1.10	137.10	.00	.12	15.40	.09	.40	.00	.10	.02	36.00	.00
24	1012	800428	10	3.60	4.10	139.00	.00	.16	21.00	.11	.50	67.20	.12	.00	23.10	.00
	4705	800501	7	3.60	4.00	139.20	130.30	.13	23.00	.10	.53	.00	.10	.74	21.00	.00
26	1012	800428	31	5.00	.00	141.20	142.00	.10	17.10	.10	.52	77.90	.11	1.40	72.10	.00
27	1011	800428	7	2.20	1.70	.00	135.00	.10	9.00	.10	.27	43.00	.10	.50	17.00	.00
28	1011	800428	10	2.40	2.20	139.60	136.40	.20	12.00	.10	.30	52.20	.10	.50	26.00	.00
29	1011	800428	35	3.30	3.30	139.20	130.00	.10	11.00	.07	.30	47.20	.10	.50	30.20	.00
60	5019	800606	24	27.50	34.10	140.10	160.00	.93	4.70	1.50	4.30	110.10	.44	1.30	.00	.00
	2015	800610	10	20.10	33.40	139.00	150.00	.60	4.00	1.70	4.50	110.20	.60	1.40	.00	.00
	5012	800628	10	29.70	30.00	139.50	160.20	.60	4.40	2.20	5.10	104.20	.60	1.40	.00	.00

TABLE B-1 (Continued)
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION: 5																							
TC	MISSION	DATE	RFC	85A	86A	86M	86N	87A	87M	87N	88A	88M	88N	89A	89M	89N	90A	90M	90N	91A	91M	91N	
63	1811	880609	19	19.00	21.48	.00	145.48	.00	4.98	.62	2.70	101.48	.33	1.38	.00								
65	1818	880614	17	26.00	29.78	139.78	.00	.46	5.78	.00	2.70	89.18	.48	.94	.00								
64	5819	880606	29	1.00	1.00	120.00	.00	.10	3.00	.07	.16	78.38	.18	1.28	.00								
85	5812	880628	8	1.28	1.48	119.18	129.88	.12	4.38	.09	.15	77.88	.11	1.28	.00								
86	2815	880618	7	.58	.58	.00	.00	.10	4.48	.18	.13	78.78	.18	.00	.00								
87	5819	880606	7	.89	.91	118.88	.00	.18	3.78	.10	.28	66.88	.08	1.08	.00								
1818	880606	7	.81	.82	118.88	.00	.00	.18	3.58	.06	.14	88.48	.18	.82	.00								
1818	880614	7	.88	.88	117.38	122.88	.00	.11	4.78	.18	.13	49.88	.11	.92	.00								
68	5828	880606	6	1.08	1.08	119.98	133.88	.08	4.08	.08	.28	85.88	.18	.85	.00								
89	1811	880609	7	.62	.63	.86	.00	.18	3.28	.18	.15	46.88	.11	.88	.00								
3813	880611	7	.78	.78	117.88	.23	.18	3.88	.18	.13	57.88	.18	.88	.00									
90	2806	880613	13	1.98	2.28	139.88	135.00	.13	18.98	.08	.48	83.28	.08	.18	27.88								

SWITCH POSITION: 6																							
TC	MISSION	DATE	RFC	87M	88M	88A	87A	88A1	88A2	88M	89M	89A	89M	89A	89M	90A	89M	90A	89M	90A	89M	90A	
7	5812	880628	22	142.98	.00	3.18	3.00	1.00	2.10	143.88	.00	8.00	17.00	138.00	.00								
8	1816	880519	17	143.18	141.18	4.48	5.88	2.78	7.00	142.28	154.88	5.88	7.88	135.88	.00								
17	5814	880523	9	.88	137.88	1.78	1.78	.63	2.58	135.88	134.18	1.00	4.88	128.88	.00								
3814	880611	8	136.88	134.88	1.78	1.38	.55	.74	135.88	.00	1.88	7.88	125.88	.00									
18	1818	880623	18	.88	.88	2.38	2.38	1.00	1.28	.00	.88	3.48	12.18	138.38	.00								
19	2808	880506	8	142.88	141.88	3.88	5.88	1.28	5.00	.00	159.88	4.88	12.88	134.88	16.48								
1815	880519	8	.88	.88	3.88	3.88	.00	4.88	.00	156.88	3.48	8.88	131.18	.88									
2782	880527	8	142.88	141.88	13.18	4.18	1.38	5.88	.00	152.88	4.38	4.18	134.88	.00									
21	1816	880519	8	147.88	.88	5.88	9.88	3.88	9.88	142.28	158.88	7.88	17.78	138.38	.88								
3813	880434	5	136.18	.98	2.18	3.18	.74	2.00	136.38	131.88	2.58	5.38	.88	.88									
4785	880501	6	.88	134.48	2.88	3.88	.78	3.88	131.88	.88	2.48	5.28	131.88	11.88									

TABLE B-1 (Continued)

OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
CONDITIONS LISTED IN TABLE 3

SWITCH POSITION	6	1													
TC	MISSION	DATE	REC	87M	88M	89A	87A	811A1	811A2	810M	89M	810A	89A	812M	812A
23	1812	888428	8	139.00	.00	2.48	4.58	1.18	4.88	131.00	.00	3.40	7.48	131.10	1.40
24	1812	888428	28	141.48	138.00	3.48	6.98	2.18	.00	.00	.00	5.58	12.38	136.00	17.00
	4705	888581	8	143.00	137.00	3.00	7.00	2.18	6.60	135.00	154.48	5.38	14.00	137.00	17.58
25	1812	888428	32	.00	.00	.00	.00	3.00	18.00	135.00	155.00	7.28	16.00	126.00	12.78
27	1811	888428	8	131.00	132.00	2.00	2.88	.98	.00	.00	147.00	2.48	3.00	125.00	.00
28	1811	888428	28	134.00	.00	2.28	3.00	1.00	6.00	.00	150.00	4.38	6.00	126.00	18.00
29	1811	888428	36	136.38	.00	3.18	4.00	1.00	5.78	128.00	152.88	4.38	9.48	122.00	9.00
68	5828	888688	14	.00	141.88	5.00	34.38	.99	.64	136.38	152.28	2.76	9.00	129.00	.00
66	1818	888616	19	.00	.00	5.48	31.38	2.18	2.00	138.00	154.38	4.48	16.00	132.48	.00
84	5819	888688	38	.00	136.00	1.00	1.78	.78	.98	135.28	145.00	2.88	7.00	129.38	.00
85	5812	888628	9	.00	136.00	2.18	1.00	.98	1.00	134.68	147.18	2.68	9.18	129.00	.00
86	2815	888618	8	.00	.00	1.48	1.28	.52	.78	131.00	.00	2.88	4.28	133.00	.00
87	5818	888688	8	.00	134.58	2.00	2.00	.78	.67	132.18	144.00	2.38	7.38	127.00	.00
	1818	888689	8	.00	134.00	1.98	1.78	.71	.89	132.00	145.00	2.48	9.00	131.00	.00
	1818	888616	8	.00	134.00	2.18	1.78	.84	1.00	132.00	147.28	2.88	9.48	131.58	.00
88	5828	888688	7	.00	132.00	2.00	2.00	.78	.62	128.68	146.00	2.48	7.58	128.58	.00
89	1811	888689	8	.00	132.00	1.98	1.48	1.00	.00	.00	144.00	2.00	7.00	129.58	.00
	3813	888611	8	.00	133.00	1.58	1.48	.18	.77	130.00	148.00	2.00	8.00	129.00	.00
98	2886	888513	14	148.00	148.00	2.48	3.00	1.00	3.98	.00	137.28	3.28	9.58	131.68	14.88

TABLE B-1 (Continued)
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION: 7		IC	MISSION	DATE	REC	R13H	R14M	R14A	R15A	F2M	E12A	R16M	R15H	R16A	R15A	E13A
7	5812	080628	23	132.00	145.00	44.10	4.40	144.00	6.20	.00	.00	.00	.00	.00	7.00	4.00
8	1816	080519	18	147.00	146.00	14.00	32.00	129.00	24.40	170.00	135.00	49.00	9.00	5.40	.00	.00
17	5814	080523	18	.00	.00	4.00	1.00	133.40	11.30	170.10	.00	40.40	2.00	2.00	.00	.00
16	3814	080617	11	.00	.00	2.30	2.42	135.00	4.50	167.00	.00	58.40	3.00	4.00	.00	.00
19	2808	080504	9	135.40	.00	3.00	12.00	141.00	20.00	170.20	.00	51.40	4.40	5.00	37.00	.00
1815	080519	9	136.20	.00	3.00	10.00	130.00	18.00	170.00	.00	50.00	4.00	4.00	4.00	.00	.00
2782	080527	9	133.00	139.00	3.10	4.40	143.00	21.40	175.10	136.20	60.00	5.20	4.70	.00	.00	.00
21	1816	080519	9	144.40	.00	4.00	10.00	134.00	34.00	152.40	133.00	27.50	0.00	0.70	.00	.00
22	3813	080638	6	141.40	135.10	1.70	14.20	130.00	13.00	160.00	134.00	31.10	3.00	.00	.00	.00
4705	080501	7	140.00	.00	1.70	14.60	136.00	14.00	161.00	.00	29.00	3.70	3.00	23.00	.00	.00
23	1812	080428	9	139.10	135.00	1.00	10.40	141.00	16.00	.00	.00	39.00	4.40	3.50	34.10	.00
24	1812	080428	21	142.20	132.00	2.50	11.00	144.00	21.00	150.20	.00	14.00	4.30	5.00	22.00	.00
4706	080501	9	144.00	134.00	3.20	12.00	141.00	22.00	150.00	133.00	18.00	4.40	5.30	23.30	.00	.00
25	1812	080428	33	142.00	146.00	3.00	0.70	139.00	17.00	150.00	134.00	33.00	5.10	3.00	60.00	.00
27	1811	080428	6	137.00	132.00	5.00	10.00	134.00	9.00	150.00	.00	16.00	3.00	2.10	16.00	.00
28	1811	080428	21	141.30	135.00	10.00	10.00	140.00	13.00	151.00	130.00	15.00	6.00	2.40	27.00	.00
29	1811	080428	37	142.00	143.00	4.00	11.40	132.00	10.00	153.00	131.00	9.20	3.40	2.40	20.00	.00
68	5826	080606	15	134.00	.00	4.00	2.00	133.00	4.40	160.20	.00	44.00	3.00	3.20	.00	.00
84	5819	080606	31	.00	.00	4.50	1.00	133.00	3.70	.00	133.00	30.00	2.50	2.00	.00	.00
86	2815	080610	9	.00	.00	1.10	1.50	130.00	3.50	150.20	.00	40.00	3.00	2.00	.00	.00
87	5819	080606	9	.00	.00	2.20	2.00	130.00	5.00	165.00	125.00	43.30	3.00	3.50	.00	.00
1810	080609	9	.00	.00	2.30	2.30	130.40	3.90	163.10	124.20	30.10	2.90	3.10	.00	.00	.00
1810	080616	9	.00	.00	2.40	1.50	136.00	4.00	164.50	132.50	40.00	3.00	3.50	.00	.00	.00
88	5820	080606	8	.00	.00	1.00	2.40	136.00	4.00	160.30	.00	50.40	3.00	2.00	.00	.00
89	1811	080609	9	.00	.00	2.00	1.70	132.00	3.40	150.00	.00	35.00	2.50	2.50	.00	.00
3813	080611	9	.00	.00	2.00	1.50	130.00	3.30	.00	.00	30.00	2.30	2.50	.00	.00	.00
2806	080513	15	135.30	143.00	3.20	12.10	137.00	16.00	173.00	141.60	52.00	4.30	4.30	20.40	.00	.00

TABLE B-1 (Continued)

OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
CONDITIONS LISTED IN TABLE 3

SLITCH POSITION: A	TC	MISSION	DATE	REC	C1K	C2K	C4K	C3M	C9K	C12K	C6M	C5H	C8K	C7M	C10M	C11M
17	5814	000523	11	127.00	127.10	.00	.00	120.10	130.00	120.00	126.00	.00	.00	.00	129.50	.00
18	3014	000511	12	.00	120.00	.00	.00	127.00	110.50	125.00	125.00	.00	.00	.00	127.00	.00
19	2000	000506	10	136.00	136.20	135.10	133.00	135.00	135.00	135.00	135.00	135.00	135.00	136.00	135.00	142.00
1815	000519	10	131.00	.00	.00	132.00	134.00	131.00	.00	131.00	.00	.00	132.00	.00	132.00	.00
2152	000522	10	133.00	133.00	.00	.00	135.00	137.00	135.00	132.00	.00	.00	135.00	.00	135.00	.00
21	1016	000510	11	133.00	140.00	.00	.00	141.00	141.20	139.00	139.00	.00	.00	.00	140.20	.00
22	3013	000430	7	122.00	125.20	125.00	130.10	129.10	130.00	132.40	130.00	130.00	131.00	131.00	.00	.00
4705	000501	8	125.00	127.00	125.00	130.00	130.00	126.50	132.00	130.00	130.00	130.00	132.00	132.00	130.00	140.00
6702	000513	6	.00	.00	120.00	129.00	115.00	130.00	125.00	120.00	.00	.00	132.00	132.00	130.00	130.00
6704	000513	5	.00	132.50	121.50	126.00	117.00	136.00	122.00	130.00	130.00	130.00	131.00	131.00	131.00	131.00
23	1012	000426	10	127.00	.00	126.00	128.00	133.10	133.30	133.20	133.30	133.30	133.30	134.00	134.00	142.00
24	1012	000426	22	120.00	.00	120.00	130.00	130.00	130.00	137.20	130.00	137.20	130.00	136.00	137.00	147.00
4706	000501	10	127.00	.00	125.00	133.00	137.00	.00	130.00	135.00	137.00	130.00	136.00	136.00	147.00	.00
25	1012	000428	34	129.30	122.00	.00	132.00	140.10	143.00	140.30	140.40	141.30	142.10	141.00	151.00	.00
27	1011	000428	10	120.00	.00	119.00	121.00	129.00	120.00	120.00	120.00	120.00	120.00	120.00	120.00	120.00
26	1011	000420	22	124.00	129.00	123.20	124.00	132.00	133.00	132.00	132.00	132.00	132.00	133.00	131.00	142.00
29	1011	000420	30	125.00	.00	.00	125.00	134.00	137.00	135.10	135.10	136.00	135.00	134.00	145.00	.00
60	5020	000506	16	157.50	135.00	.00	.00	149.00	135.00	149.00	150.00	.00	.00	146.50	.00	.00
84	5019	000506	32	120.00	120.20	.00	.00	120.00	120.00	120.00	127.00	.00	.00	120.00	.00	.00
86	2015	000510	10	110.00	.00	.00	.00	123.00	110.50	122.00	123.00	.00	.00	120.00	.00	.00
87	5019	000506	10	115.00	129.10	.00	.00	120.10	120.00	120.00	127.00	.00	.00	127.00	.00	.00
1010	000509	10	110.00	.00	.00	.00	127.40	119.00	125.00	126.10	.00	.00	120.00	.00	120.00	.00
1010	000516	10	113.00	121.50	.00	.00	126.00	110.50	125.00	125.00	.00	.00	120.00	.00	120.00	.00
80	5020	000506	9	120.00	121.00	.00	.00	120.00	120.00	127.00	127.00	.00	.00	120.00	.00	.00
89	1011	000500	10	115.50	110.00	.00	.00	124.00	116.00	125.00	124.00	.00	.00	124.00	.00	.00
3013	000511	10	.00	110.00	.00	.00	126.00	117.00	121.00	123.50	.00	.00	120.00	.00	120.00	.00
93	2006	000513	16	120.00	131.30	.00	.00	131.00	133.00	130.20	130.50	.00	.00	131.50	140.60	.00

TABLE B-1 (Continued)
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90
IC	MISSION	DATE	SEC	C17A	C18A	C19A	C21A	R4A	R5A	C28A	F1H	C21A	R4H	C22A	C23A																																																																			
7	1010	000523	17	1.00	1.23	1.00	1.00	1.00	1.45	1.30	142.70	1.50	140.00	1.50	.00																																																																			
8	1016	000519	19	2.10	1.40	1.40	2.10	5.30	4.10	1.10	.00	1.20	142.10	1.50	.00																																																																			
17	5014	000523	12	.67	.40	.40	1.00	2.30	2.50	.47	140.00	.40	.00	.00	.00																																																																			
18	3014	000611	13	.30	.40	.37	.05	.60	1.00	1.41	137.20	.41	134.00	.00	.00																																																																			
19	2000	000506	11	2.10	1.40	1.40	2.20	7.00	3.30	1.00	.00	1.10	142.40	1.30	4.20																																																																			
1015	000519	11	1.10	1.00	1.00	1.50	3.10	3.30	1.00	145.40	.00	140.00	1.00	.00																																																																				
2702	000527	11	1.70	1.10	1.10	2.30	5.20	3.90	1.00	148.10	1.00	143.10	1.10	.00																																																																				
21	1016	000519	12	3.00	2.00	2.00	3.50	7.00	6.30	2.00	154.00	2.00	150.00	2.20	.00																																																																			
22	3013	000430	0	1.30	.00	.90	1.20	3.00	1.50	.52	.00	.60	130.20	.00	.00																																																																			
4705	000501	9	1.00	.00	.70	1.00	2.00	2.10	.50	.00	.50	130.30	.00	2.30																																																																				
3704	000917	2	.40	.51	1.20	.52	1.30	1.70	2.00	1.00	130.00	.26	.50	.00																																																																				
25	1012	000420	11	1.40	.50	1.05	1.40	4.20	2.00	.04	.00	.31	142.00	1.00	3.20																																																																			
24	1012	000420	23	2.20	.00	1.50	1.60	5.00	2.50	1.20	149.40	1.30	145.20	1.40	4.00																																																																			
4706	000501	11	2.00	1.70	1.30	1.70	6.20	3.00	1.00	140.00	1.30	145.40	1.40	4.00																																																																				
25	1012	000420	35	3.00	.00	2.10	2.00	7.00	5.30	1.70	152.40	2.00	149.20	2.00	6.70																																																																			
27	1011	000420	11	.60	.40	.50	.60	2.00	1.40	.50	141.00	.50	136.00	5.00	4.30																																																																			
28	1011	000420	23	1.00	1.00	.00	.00	3.30	1.50	.65	145.00	.73	140.10	.00	2.00																																																																			
29	1011	000420	39	1.30	1.00	1.00	1.00	5.00	2.00	.83	149.00	.00	144.30	1.00	3.00																																																																			
57	4023	000910	2	.57	.53	1.45	.10	1.70	2.00	3.70	120.00	1.00	.00	.23	.00																																																																			
60	5020	000506	17	30.50	14.70	15.00	3.30	220.00	1.00	9.40	177.20	5.20	160.40	5.00	.00																																																																			
2015	000610	16	34.70	15.20	14.90	3.10	.00	1.30	0.10	0.00	0.00	0.00	0.00	0.00	0.00																																																																			
84	5019	000500	33	.00	.56	.62	1.00	2.10	1.10	.55	142.40	.50	135.00	.73	.00																																																																			
86	2015	000610	11	.30	.33	.27	.02	.22	.70	.37	.00	.32	.00	.40	.00																																																																			
87	5017	000506	11	.70	.60	.60	1.00	2.30	.05	.54	142.10	.50	134.30	.67	.00																																																																			
1017	000609	11	.40	.40	.42	1.00	.70	.70	.40	.40	136.40	.66	.00	.00																																																																				
1010	000610	11	.42	.47	.40	1.10	1.10	.07	.47	.47	137.00	.47	137.00	.70	.00																																																																			
00	5020	000506	10	.00	.60	.60	.00	2.00	.70	.52	144.00	.49	134.00	.50	.00																																																																			
89	1011	000609	11	.00	.40	.33	.00	.22	.70	.40	137.10	.40	.00	.00	.00																																																																			
3013	000611	11	.37	.40	.34	.70	.70	.70	.40	.40	136.00	.40	135.00	.45	.00																																																																			
90	2000	000513	17	1.20	.00	.00	1.00	4.00	3.50	.70	.00	.00	130.00	1.00	3.00																																																																			

TABLE B-1 (Continued)
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION: 10	TC	MISSION	DATE	RFC	D4A	D5A	D6A	D7A	D16A	D11A	D2A	D18A	D6A	D13A	D9A	D3A
	7	1010	00023	18	.38	.40	.16	.11	.13	.68	.38	.11	.38	.12	.13	.00
	17	5014	00023	13	.17	.16	.14	.08	.13	2.00	.28	.09	.28	.18	.12	.00
	18	5014	00051	14	.00	.28	.12	.10	.10	.00	.15	.10	.15	.10	.11	.00
	19	2000	00056	12	.48	.50	.28	.18	.30	.50	.58	.19	.48	.17	.14	1.30
		1015	00059	12	.30	.00	.15	.09	.20	2.10	.30	.10	.48	.14	.13	.00
		2702	00027	12	.45	.30	.17	.10	.20	.10	.46	.10	.57	.10	.16	.00
	21	1016	00059	13	.70	.60	.28	.20	.50	2.00	.70	.17	.93	.30	.20	.00
	22	3013	00030	9	.25	.33	.16	.16	.18	.32	.32	.10	.27	.13	.00	.00
		4705	00051	10	.20	.30	.13	.11	.17	.30	.30	.09	.24	.12	.11	.72
	23	1012	00042	12	.40	.45	.15	.11	.25	.40	.42	.19	.37	.15	.13	1.10
	24	1012	00042	24	.45	.60	.00	.14	.30	.40	.58	.12	.50	.20	.16	1.40
		4706	00051	12	.40	.60	.24	.14	.30	.40	.60	.12	.54	.22	.28	1.00
	25	1012	00042	36	.00	.00	.10	.14	.32	.43	.58	.13	.00	.22	.17	1.70
	27	1011	00042	12	.00	.30	.30	.10	.10	.20	.30	.00	.24	.12	.11	.70
	28	1011	00042	24	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
		1011	00042	25	.00	.31	.16	.00	.10	.30	.35	.11	.27	.14	.13	.07
		1011	00042	26	.00	.32	.15	.00	.20	.30	.40	.10	.22	.15	.13	.05
	29	1011	00042	40	.00	.43	.14	.00	.22	.30	.32	.09	.41	.15	.12	.00
	00	1010	00000	15	2.95	2.65	.90	.94	3.50	.97	3.70	.00	4.30	1.27	.90	.00
		2015	00010	17	.00	.00	1.00	1.10	4.00	.74	4.20	1.20	5.50	1.00	1.00	.00
	04	5010	00000	34	.16	.16	.14	.00	.12	.55	.10	.09	.10	.10	.12	.00
	06	2015	00010	12	.00	.12	.12	.10	.10	.60	.13	.10	.12	.10	.12	.00
	07	5010	00000	12	.00	.20	.15	.10	.12	.50	.20	.10	.20	.10	.13	.00
		1010	00000	12	.00	.13	.13	.00	.10	.55	.10	.00	.10	.10	.13	.00
		1010	00016	12	.00	.20	.12	.10	.11	.10	.17	.10	.15	.11	.11	.00
	08	5020	00000	11	.10	.17	.10	.00	.14	.00	.20	.07	.20	.00	.10	.00
	09	1011	00000	12	.00	.20	.15	.00	.16	.50	.20	.11	.20	.11	.12	.00
		3013	00011	12	.13	.13	.14	.10	.10	.10	.15	.10	.10	.10	.11	.00
	90	2006	00013	10	.30	.40	.20	.10	.20	.32	.40	.10	.30	.10	.10	1.10

TABLE B-1 (Continued)
 OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
 CONDITIONS LISTED IN TABLE 3

SWITCH POSITION, II	YC	MISSION	CATE	RFC	525A	449A	489B	527A	445A	446A	451A	526A	452A	528A	448A
7	1010	000622	15	.00	.53	.72	1.10	.92	.62	.42	.35	.47	1.27	.90	.00
17	5014	000523	14	1.10	.30	.35	1.50	.40	1.40	.20	.00	.30	1.00	.00	.00
18	3014	000611	15	.40	.30	.30	.70	.42	.30	.23	.00	.36	1.10	.32	.00
19	2000	000506	13	5.00	.50	.70	0.00	2.00	5.00	.50	5.10	.00	4.40	3.00	4.40
	1015	000519	13	2.40	.00	.50	3.30	1.00	3.30	.40	.00	.50	3.00	2.00	.00
	2702	000527	13	3.50	.63	.07	4.30	1.00	4.00	.52	.02	.42	.35	2.00	.00
21	1016	000519	14	6.00	1.00	1.20	11.00	3.40	6.30	.00	.10	.00	7.00	5.00	.00
22	3013	000430	10	3.20	.33	.40	7.00	1.00	3.00	.31	3.40	.40	3.00	.00	.00
	4705	000501	11	1.00	.30	.40	7.00	1.00	3.00	.30	2.20	.35	2.00	1.50	3.00
23	1012	000420	13	2.50	.45	.60	9.30	1.40	4.00	.50	3.00	.40	3.00	2.10	4.20
24	1012	000420	25	3.70	.00	.70	14.00	2.10	5.00	.60	4.20	.63	4.10	3.10	9.00
	4706	000501	13	4.30	.00	.00	10.00	2.50	.00	.00	4.30	.00	4.00	3.00	7.00
25	1012	000420	37	4.00	.95	1.10	13.00	3.30	7.30	.00	5.10	.00	5.20	4.10	8.50
27	1011	000420	13	1.40	.27	.20	6.20	1.00	4.20	2.50	1.70	.25	1.50	1.30	3.10
28	1011	000420	27	2.00	.30	.37	7.30	1.10	5.00	.30	2.30	.30	2.10	1.70	4.00
	1011	000420	29	1.40	.20	.30	7.00	1.00	4.00	.30	.20	.30	.30	1.40	4.00
29	1011	000420	41	2.70	.51	.00	6.00	2.00	5.00	.50	3.00	.42	3.00	2.20	6.00
00	1010	000609	17	2.20	2.50	2.00	115.10	11.20	16.40	2.00	.00	2.00	124.00	23.20	.00
	2015	000610	10	.30	2.40	2.30	95.20	11.50	12.00	2.50	.00	2.50	102.30	20.40	.00
04	3012	000606	35	.95	.20	.30	2.00	.30	.37	.22	.00	.20	1.70	.00	.00
06	2015	000610	13	.00	.17	.22	.31	.25	.40	.24	.00	.10	.00	.32	.00
07	5019	000606	13	1.00	.30	.30	1.70	.42	.50	.25	.00	.30	2.00	.50	.00
	1010	000609	13	.30	.27	.30	.60	.40	.35	.23	.00	.30	1.00	.52	.00
	1010	000610	13	.62	.29	.30	.70	.42	.51	.23	.10	.30	1.00	.53	.00
08	5020	000606	12	1.00	.30	.40	2.00	.50	.52	.00	.27	2.00	.00	.00	.00
09	1011	000609	13	.00	.20	.20	.70	.50	1.00	.20	.00	.30	1.00	.70	.00
	3013	000611	13	.50	.23	.30	.60	.42	.40	.20	.00	.25	1.00	.45	.00
00	2000	000513	10	2.00	.50	.60	3.10	1.10	3.50	.40	.00	.50	2.00	1.00	3.50

TABLE B-1 (Concluded)

OVERALL RMS LEVELS PRODUCED BY STABILIZED FLIGHT
CONDITIONS LISTED IN TABLE 3

SWITCH POSITION, 12		TC	MISSION	DATE	REC	F2A	F3A	F3B	F4A	F4B	F14A	F14B	F16A	F16B	DIGA	D16A	D16B
7	1818	88823	28	85.00	200.25	35.00	37.00	18.30	17.40	1.50	20.00	27.00	.30	.00	.00	.00	.00
17	5814	88823	15	116.00	22.30	23.00	29.00	31.00	17.00	1.20	19.00	25.00	.10	.00	.00	.00	.00
18	3814	88811	16	58.20	15.00	28.30	25.00	28.00	7.00	15.00	1.50	18.00	23.00	.12	.00	.00	.00
19	2888	88856	14	85.20	33.20	29.00	42.00	47.00	37.10	19.00	1.10	20.20	26.30	.20	146.10	.00	.00
1815	88819	14	73.20	.00	26.00	36.00	43.30	37.00	19.00	1.10	19.40	26.30	.13	.00	.00	.00	.00
2782	88827	14	95.00	36.00	29.00	38.00	39.40	36.40	17.00	1.20	20.70	27.00	.17	.00	.00	.00	.00
22	3813	88838	11	.00	.00	.00	.00	23.30	.00	.05	.00	.00	.00	.00	.00	.00	.00
4785	88858	12	.00	5.00	.00	.00	.00	25.00	.00	.70	.00	.00	.00	.00	.18	148.10	.00
23	1812	88842	14	64.40	11.30	27.00	35.30	45.30	14.10	.70	10.00	19.00	.13	143.10	.00	.00	.00
24	1812	88842	26	71.00	11.00	36.00	33.00	49.00	14.20	.00	17.20	19.00	.19	144.00	.00	.00	.00
4786	88858	14	.00	.00	.00	.00	.00	23.00	.00	.05	.00	.00	.13	145.00	.00	.00	.00
25	1812	88842	38	88.00	15.00	38.00	38.00	65.00	15.30	1.50	10.00	19.30	.19	138.00	.00	.00	.00
27	1811	88842	14	42.70	16.40	24.50	22.50	32.60	15.30	.40	19.10	28.00	.18	135.00	.00	.00	.00
1811	88842	30	41.00	18.00	28.00	25.00	33.00	14.00	15.00	.40	16.00	18.00	.18	135.00	.00	.00	.00
28	1811	88842	20	47.10	12.00	25.40	27.30	38.00	15.30	.50	10.20	20.00	.16	138.00	.00	.00	.00
29	1911	88842	42	54.20	38.00	27.00	41.00	51.00	15.20	.70	20.00	.00	.12	132.00	.00	.00	.00
68	1818	88869	18	106.00	28.70	38.00	36.30	38.00	8.40	19.00	2.00	21.10	29.20	.50	.00	.00	.00
84	5819	88866	36	6.44	18.00	18.40	24.10	26.20	5.90	15.10	1.20	17.00	19.30	.10	.00	.00	.00
86	2815	88861	14	81.50	22.20	28.20	26.60	29.00	5.20	.00	.02	18.00	23.00	.10	.00	.00	.00
87	5818	88866	14	38.00	17.00	21.00	24.30	30.30	7.00	10.00	.00	21.00	27.00	.10	.00	.00	.00
1818	88869	14	48.30	18.00	19.20	27.00	33.00	7.00	17.00	.03	21.00	26.30	.10	.00	.00	.00	.00
1818	88861	14	43.70	26.00	15.00	22.70	32.00	8.20	18.20	1.00	29.70	27.00	.12	.00	.00	.00	.00
88	5828	88866	13	45.00	18.00	19.00	29.20	34.00	7.90	17.90	.72	20.00	24.20	.00	.00	.00	.00
89	1811	88869	14	59.40	18.00	17.00	24.00	34.10	7.00	.00	.00	22.00	23.00	.11	.00	.00	.00
3813	88861	14	64.00	16.00	.00	28.00	37.00	6.50	.00	.00	21.50	23.00	.10	.00	.00	.00	.00
98	2886	88853	22	56.00	26.00	35.00	30.40	33.00	17.00	1.40	19.30	28.20	.15	141.00	.00	.00	.00

TABLE B-2
 PEAK OR MAXIMUM RMS LEVELS PRODUCED BY TRANSIENT
 FLIGHT CONDITIONS LISTED IN TABLE 4

SWITCH POSITION: 1																								
TC	MISSION	DATE	MCC	A1A	A2A	A3A	A4A	A5A	A6A	A7A	A8A	A9A	A10A	A11A	A12A	A13A	A14A	A15A	A16A	A17A	A18A	A19A	A20A	
1	3012	000430	1	.30	.20	.40	.70	.90	2.40	110.20	.20	.00	.10	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
	4705	000501	1	.30	.26	.44	.61	.13	2.40	130.00	.20	.14	.10	.12	.43	.00	.00	.00	.00	.00	.00	.00	.00	.00
	6702	000913	1	.30	.22	.36	.60	.25	.65	115.70	.17	.15	.16	.15	.15	.15	.15	.15	.15	.15	.15	.15	.15	.15
	6704	000913	1	.16	.13	.22	.30	.10	.35	100.00	.00	.05	.13	.13	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
2	1016	000519	32	.30	.35	.64	.62	.33	1.20	110.00	.30	.27	.42	.10	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
4	1011	000420	2	.35	.33	.92	.30	.90	1.40	133.00	.30	.35	.46	.10	1.50	.00	.00	.00	.00	.00	.00	.00	.00	.00
5	1012	000420	42	.30	.30	.40	.57	.24	1.30	120.40	.23	.23	.27	.16	1.01	.00	.00	.00	.00	.00	.00	.00	.00	.00
	5010	000600	37	.50	.47	.56	.60	.40	.64	122.00	.40	.36	.43	.22	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
	1011	000600	20	.41	.51	.50	.69	.37	1.35	130.30	.30	.30	.34	.21	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
15	2702	000527	16	2.30	1.20	1.30	2.00	.30	19.50	.00	1.00	.45	.65	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
	5020	000600	20	2.20	1.10	1.20	2.20	.30	3.00	.00	.92	.30	.30	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
	1010	000600	22	2.30	1.00	1.30	2.00	.20	2.71	132.50	.01	.33	.30	.70	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
	3013	000611	15	1.65	1.10	1.27	2.00	.31	3.12	131.00	1.10	.30	.44	.70	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
10	1012	000420	30	1.00	.40	1.00	2.40	.40	.60	120.10	.70	.60	.55	.01	2.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
	3012	000430	0	1.10	.72	1.20	1.40	.30	10.00	120.00	.50	.00	.36	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
70	2000	000513	5	2.50	1.10	1.40	2.00	.70	35.00	131.00	1.30	.00	1.00	1.00	0.50	.00	.00	.00	.00	.00	.00	.00	.00	.00

SWITCH POSITION: 2																							
TC	MISSION	DATE	MCC	A21A	A22A	A30A	A40A	A7A	A0A	A30A	A41A	A0A	A0A	A0A	A0A	A0A	A0A	A0A	A0A	A0A	A0A	A0A	A0A
1	3013	000430	1	.20	.12	.13	.21	.11	.52	.10	.30	.20	.41	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
	4705	000501	1	.17	.10	.10	.17	.00	.33	.14	.20	.10	.34	.10	1.40	.00	.00	.00	.00	.00	.00	.00	.00
	2020	000500	1	.20	.10	.10	.20	.10	.30	.10	.20	.10	.30	.20	.00	.00	.00	.00	.00	.00	.00	.00	.00
	5010	000523	1	.30	.20	.10	.22	.11	.62	.25	.35	.33	.50	.20	.00	.00	.00	.00	.00	.00	.00	.00	.00
	2702	000527	1	.10	.13	.15	.22	.10	.52	.24	.34	.25	.04	.13	.00	.00	.00	.00	.00	.00	.00	.00	.00
	3013	000611	1	.26	.15	.13	.26	.10	.12	.22	.30	.21	.42	.12	.00	.00	.00	.00	.00	.00	.00	.00	.00
2	4705	000501	21	.10	.12	.12	.20	.10	.63	.16	.17	.13	.40	.10	1.20	.00	.00	.00	.00	.00	.00	.00	.00
	2702	000527	21	.17	.00	.10	.20	.00	.41	.13	.20	.23	.42	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00
	1010	000600	24	.52	.49	.20	.30	.15	.17	.36	.63	.37	.19	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
4	3013	000611	2	.42	.70	.45	.50	.62	1.37	.40	.37	.30	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
	6702	000913	2	.62	1.03	.50	.73	.70	1.00	.75	.51	.36	.40	1.20	.40	.00	.00	.00	.00	.00	.00	.00	.00
	6704	000913	2	.36	.41	.47	.44	.30	.55	.54	.30	.50	.40	.50	.00	.00	.00	.00	.00	.00	.00	.00	.00

TABLE B-2 (Continued)
 PEAK OR MAXIMUM RMS LEVELS PRODUCED BY TRANSIENT
 FLIGHT CONDITIONS LISTED IN TABLE 4

SWITCH POSITION: 2																
YC	MISSION	DATE	RCC	A21A	A22A	A30A	A40A	A7A	A9A	A39A	A41A	A6A	A5A	A6A	A6A	E6A
5	1811	080428	43	.39	.34	.39	.46	.49	1.08	.48	.39	.32	.44	.58	.58	3.08
	1812	080428	43	.48	.37	.33	.38	.38	1.62	.69	.36	.28	.58	.49	.49	3.08
	3812	080438	14	.33	.34	.40	.47	.58	2.78	.42	.43	.88	.58	.88	.88	1.08
	5825	080686	24	.32	.33	.37	.42	.48	.58	.37	.48	.26	.44	.65	.65	1.08
	1818	080689	24	.27	.38	.37	.43	.41	.49	.37	.43	.38	.58	.46	.46	1.08
9	2782	080527	4	1.08	1.08	2.48	1.28	1.63	4.08	1.78	1.08	.83	1.28	1.38	.88	1.08
12	1816	080519	16	2.38	2.88	6.78	2.78	2.48	8.08	3.48	1.94	1.18	2.88	2.88	.88	1.08
14	1815	080519	15	2.98	.88	9.28	2.98	2.78	9.88	4.98	2.38	1.58	2.48	1.88	.88	1.08
	5819	080686	15	1.43	1.88	1.58	1.38	.88	.78	1.38	1.58	1.38	2.38	.88	.88	1.08
15	2782	080527	18	1.75	2.88	6.88	2.28	1.78	3.88	2.94	1.98	1.28	2.15	1.28	.88	1.08
	5828	080686	22	1.88	.78	1.88	1.88	.68	.52	.93	1.24	.96	1.94	.58	.88	1.08
	3813	080611	17	1.88	.72	1.38	1.28	.51	.54	1.08	1.29	1.88	1.94	.71	.88	1.08
16	3812	080438	18	1.18	1.28	2.88	2.88	.78	1.58	2.48	3.48	.88	1.28	.88	.88	1.08
79	2886	080513	8	2.88	1.28	7.48	2.88	2.48	5.88	3.18	2.18	1.48	2.38	1.88	1.88	5.18
SWITCH POSITION: 3																
YC	MISSION	DATE	RCC	A31A	A36A	B3A	B2A	A43A	A46A	B3M	B2M	A34A	A36A	A35A	A35A	E6A
1	1811	080428	1	.17	.86	.41	.72	.12	.31	123.98	138.28	.11	.21	.89	1.53	1.53
2	1812	080428	44	.28	.19	.44	.71	.16	.33	129.88	128.48	.17	.23	.17	1.28	1.28
	3813	080438	21	.17	.85	.44	.61	.12	.24	121.88	128.88	.16	.28	.88	.88	1.28
	4788	080581	23	.24	.18	.38	1.88	.28	.78	128.88	129.88	.22	.48	.28	1.18	1.18
	2886	080586	24	.14	.85	.38	.69	.18	.24	117.88	138.88	.18	.15	.18	1.88	1.88
	3813	080611	28	.28	.86	.34	.58	.28	.78	118.88	127.38	.19	.22	.17	.88	1.08
4	3812	080438	2	.48	.38	.58	1.98	.58	2.38	128.88	148.88	.88	.88	.88	.88	1.08
	5814	080523	2	.38	.38	.78	3.88	.32	1.38	123.88	145.88	.38	.58	.38	.88	1.08
	2782	080527	2	.32	.26	.58	2.58	.34	1.88	128.88	148.88	.34	.37	.31	.88	1.08
5	1818	080519	31	.39	.26	.42	.78	.31	1.18	122.88	141.88	.33	.48	.34	.88	1.08
	2782	080527	28	.38	.28	.48	2.88	.28	1.88	128.88	148.88	.38	.38	.28	.88	1.08
	3813	080611	23	.39	.27	.38	.75	.38	.48	21.88	127.38	.35	.45	.35	.88	1.08
14	1818	080519	17	1.78	.88	18.88	.88	.81	4.78	.88	151.88	1.88	1.88	1.88	1.88	1.88
	5819	080686	17	1.88	1.88	8.98	5.88	.88	1.18	.88	.88	.88	.78	.88	.88	1.08
15	5812	080438	12	1.63	2.48	7.38	33.48	.68	3.38	131.88	159.48	.88	.88	.88	.88	1.08
16	2888	080584	19	.76	.85	3.38	18.88	.43	2.88	132.88	158.78	.38	.88	.88	3.48	3.48
79	2886	080513	8	1.48	1.88	8.98	51.88	.78	3.88	144.88	168.88	.88	.88	1.88	1.88	4.48

TABLE B-2 (Continued)
 PEAK OR MAXIMUM RMS LEVELS PRODUCED BY TRANSIENT
 FLIGHT CONDITIONS LISTED IN TABLE 4

SWITCH POSITION: 4															
YC	MISSION	DATE	REC	A11A	A12A	A37A	A33A	A19A	A16A	A135	A10A	A14A	A28A	A18A	E0A
1	3014	000011	1	.16	.46	.39	.03	.14	.14	.15	.21	.13	.13	.24	.00
2	1011	000420	44	.00	.32	.20	.04	.11	.41	.00	.13	.11	.22	.11	.02
	3012	000430	15	.00	.20	.21	.10	.12	.44	.10	.13	.00	.10	.00	.00
4	3013	000430	2	.31	.36	.40	.04	.37	1.20	.40	.30	.30	.30	.00	.00
	1015	000510	2	.16	.00	.30	.02	.30	1.20	.30	.40	.20	.20	.20	.00
	3014	000615	2	.20	.42	.30	.03	.30	.34	.33	.30	.20	.25	.25	.00
12	2702	000527	15	2.70	0.00	0.20	.25	7.00	10.00	5.00	3.00	.77	.54	2.60	.00
14	5014	000523	16	2.00	0.70	0.00	.30	0.00	20.50	5.00	3.10	.70	.00	2.40	.00
	1011	000609	24	2.34	5.40	2.00	.10	1.70	1.30	1.00	.00	.24	.20	.00	.00
	5012	000620	24	2.30	4.00	2.00	.10	2.20	1.00	.00	.25	.23	.24	.50	.00
15	3013	000430	12	2.20	7.10	4.00	.27	3.00	0.70	4.00	2.00	.50	.37	.00	.00
16	2000	000500	21	1.00	4.00	2.40	.21	1.50	4.00	2.00	1.00	.23	.23	.00	3.30
70	3014	000615	9	.40	.71	.34	.04	.42	.32	.25	.30	.13	.17	.10	.00
SWITCH POSITION: 5															
YC	MISSION	DATE	REC	00A	00A	00M	05M	D14A	E12A	D15A	D1A	E2A	012A	E0A	E13A
1	2015	000010	1	.00	.01	117.40	109.70	.13	1.10	.07	.16	21.00	.14	.64	.00
4	4705	000501	2	.70	1.42	130.00	130.00	.10	30.00	.00	.20	.00	.10	.03	0.42
	4705	000501	3	.50	.02	.00	140.00	.24	22.10	.12	.17	.30	.20	1.00	20.70
5	3013	000430	20	1.04	2.03	131.00	133.00	.01	14.00	.34	.30	.00	.30	.00	.00
	2006	000513	25	1.70	1.20	127.40	127.00	.70	11.70	.20	.30	111.70	.50	1.00	9.70
	0702	000013	13	1.07	1.10	120.70	130.00	.70	0.00	.20	.31	117.10	.37	.47	5.00
	0704	000013	11	1.70	1.20	131.00	134.70	.06	4.00	.31	.31	77.00	.30	.30	7.40
12	4700	000501	15	0.70	6.00	142.00	143.00	.00	44.40	.40	.00	.00	.40	3.00	33.00
14	2000	000500	17	7.00	0.00	00	143.00	.50	33.00	.30	1.00	110.50	.50	2.00	51.40
	5014	000523	10	7.20	7.00	00	143.00	.24	31.70	.25	.01	07.00	.20	2.00	0.00
	1011	000609	26	7.00	7.20	127.00	143.00	.27	11.20	.16	.47	00.30	.10	2.11	.00
15	0702	000013	7	7.40	0.00	00	00	.16	0.00	.40	.57	04.30	.14	.77	19.00
	0704	000013	6	7.00	0.10	00	00	.30	0.00	.15	.00	70.00	.14	.00	20.30
16	1015	000510	10	3.00	.00	00	130.20	.13	11.30	.00	.30	70.40	.14	.05	.00
	1011	000609	22	3.00	4.20	123.00	140.10	.12	3.00	.00	.23	05.30	.10	.70	.00
	3013	000615	00	3.20	4.00	124.00	00	.11	3.00	.00	.20	05.40	.11	.05	.00
70	3012	000430	0	.70	0.30	144.40	140.00	.20	33.00	.70	.00	.00	.23	.00	.00

TABLE B-2 (Continued)
 PEAK OR MAXIMUM RMS LEVELS PRODUCED BY TRANSIENT
 FLIGHT CONDITIONS LISTED IN TABLE 4

SWITCH POSITION: 6															
TC	MISSION	DATE	REC	87M	88M	88A	87A	811A1	811A2	810M	89M	810A	89A	812M	812A
1	1818	888316	1	133,18	127,00	136	1,36	.22	29	126,00	134,50	.50	.31	123,00	.00
	1818	888623	1	124,78	131,00	.47	1,08	.38	34	128,00	136,50	.94	.62	125,00	.00
4	4786	888581	2	136,28	134,38	2,48	2,59	3,00	8,28	131,00	152,00	6,00	3,28	141,08	30,00
	1818	888316	2	132,28	136,00	9,00	2,28	2,76	3,48	136,18	153,00	8,90	7,98	148,18	.00
	1818	888623	2	137,48	.00	2,03	2,42	3,27	3,28	136,00	149,48	9,68	6,78	148,38	.00
5	4785	888581	20	135,68	127,00	1,53	2,33	.50	2,08	139,00	148,00	1,68	3,38	127,28	9,73
	2015	888318	21	131,00	127,00	.83	1,48	.12	.28	.00	.00	.33	.19	129,00	.00
9	1916	888519	20	145,98	144,50	10,10	6,78	6,78	19,48	149,48	166,50	14,48	14,00	138,48	.00
12	3813	888611	25	147,58	147,58	5,48	8,78	3,00	.00	156,00	168,00	9,00	24,00	143,00	.00
14	4785	888581	15	150,00	.00	6,78	13,28	3,28	18,00	144,00	199,00	8,60	22,00	138,00	32,00
16	1815	888519	21	138,28	.00	3,00	3,00	1,68	.00	132,00	152,00	4,00	18,00	129,00	.00
	3814	888523	24	136,38	136,00	3,28	4,10	1,96	6,18	132,58	152,18	3,68	11,38	127,78	.00
29	3814	888611	18	.00	.00	3,98	1,00	.97	.00	138,00	.00	2,00	11,68	136,00	.00

SWITCH POSITION: 7															
TC	MISSION	DATE	REC	813M	814M	814A	813A	E7M	E12A	816M	815M	816A	815A	E11A	E13A
1	1815	888519	1	114,00	.00	.13	.10	110,60	3,00	131,00	121,00	.40	.00	.48	.00
2	1818	888618	24	115,00	118,00	2,26	.32	129,00	1,10	131,00	121,00	1,00	1,00	1,00	.00
	1818	888623	22	129,00	.00	2,28	2,98	132,48	3,58	140,00	131,00	7,48	5,98	1,00	.00
	6782	888913	14	127,58	129,00	.79	.73	128,18	.92	134,00	126,78	.37	.34	.43	.00
	6784	888913	12	123,00	124,00	.78	.58	122,58	.78	135,00	122,00	.58	.58	.53	.00
4	1816	888519	2	135,08	148,00	2,98	2,00	129,00	23,00	162,00	144,00	10,00	8,00	9,00	.00
5	4786	888581	22	138,58	143,00	1,71	4,68	127,78	16,00	163,00	146,00	7,58	5,00	3,58	28,00
	1818	888623	21	128,00	135,00	2,28	3,48	133,00	6,78	.00	143,00	9,60	4,76	3,96	.00
9	1816	888519	21	156,28	168,00	121,40	46,80	136,00	36,18	175,50	143,00	60,90	31,28	6,78	.00
12	3813	888611	26	123,00	.00	5,00	1,78	133,00	5,00	165,00	.00	24,30	2,00	4,48	.00
	3813	888611	27	144,58	150,00	6,28	12,78	148,18	15,28	175,00	152,00	66,80	11,18	8,98	.00
14	4785	888581	18	144,00	146,00	5,78	23,00	145,00	34,38	177,00	149,00	64,00	7,60	8,13	48,00
	2018	888586	15	148,00	145,66	4,98	36,18	144,00	36,18	177,60	.00	63,68	8,18	8,63	51,00

TABLE B-2 (Continued)
 PEAK OR MAXIMUM RMS LEVELS PRODUCED BY TRANSIENT
 FLIGHT CONDITIONS LISTED IN TABLE 4

SWITCH POSITION: 7															
TC	MISSION	DATE	REC	013M	014M	014A	013A	07M	E12A	016M	018M	016A	015A	E11A	E13A
15	4785	080501	13	.00	.00	5.00	22.30	141.40	10.40	173.20	.00	47.10	6.23	5.40	50.00
	4786	080501	16	.00	.00	4.00	21.30	140.00	19.10	174.60	.00	45.40	7.00	3.80	42.00
16	1011	080600	20	.00	.00	9.00	11.40	130.00	4.20	155.40	.00	39.10	9.20	3.00	.00
	6782	080913	10	124.10	125.50	.50	4.00	139.40	4.30	161.40	.00	34.90	9.30	3.30	22.00
	6784	080913	9	125.10	126.50	.50	5.50	130.50	3.90	100.20	.00	32.00	11.40	2.70	20.30
79	3012	080430	7	150.00	140.00	4.00	53.00	140.30	33.10	174.00	.00	.00	.00	.00	.00
	2006	080513	4	146.00	146.70	4.10	26.00	147.90	42.90	166.00	.00	92.70	10.20	9.30	.00
SWITCH POSITION: 8															
TC	MISSION	DATE	REC	C1M	C2M	C4M	C3M	C0M	C12M	C3M	C5M	C0M	C7M	C10M	C11M
2	1015	080510	24	120.00	.00	.00	.00	114.00	120.00	114.00	110.00	.00	.00	119.00	.00
38	3013	080430	15	160.70	155.00	152.00	164.00	.00	107.00	140.00	163.00	167.00	.00	.00	.00
	4785	080501	16	155.00	135.00	155.00	160.00	162.10	.00	165.00	157.30	162.00	166.00	169.00	.00
	2006	080506	16	144.00	145.00	145.00	147.00	152.40	192.30	150.00	147.00	153.00	157.10	157.30	164.00
	1016	080510	16	154.00	.00	.00	.00	159.00	166.20	160.00	155.00	.00	.00	165.00	.00
	3014	080523	17	152.00	153.70	.00	.00	157.00	105.00	160.00	155.00	.00	.00	163.00	.00
	5010	080600	16	146.20	136.00	.00	.00	151.50	148.40	157.00	149.40	.00	.00	156.00	.00
	1011	080600	25	157.00	136.00	.00	.00	160.00	150.50	167.00	150.00	.00	.00	157.00	.00
	1018	080623	12	100.10	156.00	.00	.00	164.10	133.70	152.10	100.50	.00	.00	150.00	.00
39	3012	080430	15	146.30	150.00	153.00	150.00	161.00	.00	161.00	137.00	.00	164.00	.00	.00
	4786	080501	17	147.10	144.00	150.00	134.40	161.70	.00	164.00	150.00	161.50	163.70	163.30	.00
	2006	080513	22	130.00	.00	.00	.00	155.00	154.40	159.00	152.00	.00	.00	163.30	167.10
	1016	080510	30	130.50	140.00	.00	.00	157.00	162.70	156.00	153.00	.00	.00	160.00	.00
	2702	080527	17	137.00	140.00	.00	.00	150.00	162.00	157.00	153.00	.00	.00	164.00	.00
	5020	080600	21	137.00	126.00	.00	.00	160.40	152.00	162.00	150.00	.00	.00	162.00	.00
	1010	080600	23	144.00	127.00	.00	.00	161.50	152.90	161.00	150.70	.00	.00	162.00	.00
	3013	080611	16	146.00	120.00	.00	.00	155.00	152.00	162.00	101.30	.00	.00	150.50	.00
	6702	080913	8	142.20	155.00	149.10	150.00	160.40	105.20	151.00	155.10	162.10	160.00	101.20	164.20
	6704	080913	7	143.00	157.50	150.00	151.00	163.50	.00	153.00	150.10	154.50	150.30	162.00	162.00
	3704	080917	5	.00	153.00	146.00	153.00	161.00	164.50	.00	152.00	150.00	162.20	157.00	165.00
40	3012	080430	9	144.00	135.00	142.00	145.00	156.70	161.00	150.00	151.00	.00	162.00	.00	.00
	4786	080501	19	140.00	140.00	145.00	145.00	156.30	.00	157.00	153.00	150.40	161.70	150.00	171.00
	2006	080506	23	140.00	145.00	140.00	152.00	150.00	133.00	157.00	157.00	160.00	160.00	160.00	163.00
	1015	080510	28	130.00	.00	.00	.00	151.30	157.00	162.00	150.00	.00	.00	155.00	.00
	3014	080523	21	134.00	140.00	.00	.00	154.00	157.00	157.00	150.00	.00	.00	157.00	.00
	1011	080600	21	143.00	.00	.00	.00	150.00	140.00	163.00	150.00	.00	.00	143.00	.00
	3213	080611	21	144.00	132.00	.00	.00	167.00	140.00	156.00	157.00	.00	.00	152.00	.00
	1010	080623	16	144.00	147.00	.00	.00	160.10	152.50	143.00	157.50	.00	.00	150.00	.00
	6702	080913	11	139.00	150.50	143.30	140.00	160.00	105.00	147.00	150.00	164.60	150.20	160.00	160.00
	6704	080913	10	145.00	150.00	150.00	150.00	152.50	160.00	147.00	154.00	157.00	153.00	160.00	160.00
	3704	080917	0	140.00	.00	130.00	150.00	155.00	160.00	.00	150.00	154.00	157.00	152.00	160.30

TABLE B-2 (Continued)
 PEAK OR MAXIMUM RMS LEVELS PRODUCED BY TRANSIENT
 FLIGHT CONDITIONS LISTED IN TABLE 4

SWITCH POSITION: 8															
TC	MISSION	DATE	REC	C1A	C2A	C4A	C3A	C0A	C12A	C5A	C6A	C0M	C7A	C10A	C11A
42	3013	888434	19	145.00	137.00	134.00	143.00	142.00	.00	144.00	142.00	145.00	144.00	144.00	.00
4785	888501	19	142.46	142.40	130.00	140.00	141.00	.00	143.00	141.00	143.40	144.00	144.00	144.00	.00
44	1312	888428	48	127.88	125.00	127.00	127.00	130.00	149.00	137.00	137.00	130.00	130.00	130.00	147.00
SWITCH POSITION: 9															
TC	MISSION	DATE	REC	C17A	C18A	C19A	C24A	B4A	E6A	C20A	E1A	C21A	B0A	C22A	C23A
1	1816	888519	1	.36	.28	.38	.61	.58	.30	.30	130.00	.30	130.00	1.00	.00
1811	888609	1	.51	.25	.20	.68	.33	.60	.60	.33	130.10	.29	116.00	1.00	.00
5812	888628	1	.34	.22	.28	.60	.99	.30	.30	.37	134.20	.27	.00	.00	.00
5812	888628	2	.41	.26	.19	.54	.91	.35	.35	.21	132.30	.21	.00	.00	.00
4	1811	888609	2	1.10	.39	.35	.84	.81	1.12	.27	148.00	.32	121.30	.53	.00
5812	888628	3	1.70	.53	.40	.72	1.58	1.30	.54	132.30	.49	132.30	.50	.00	.00
3704	888917	1	.73	.48	1.08	.67	1.20	2.38	4.00	124.10	1.78	138.00	.26	.74	.00
4823	888918	1	.65	.48	1.08	.65	1.50	3.00	4.00	124.30	1.89	135.70	.27	.77	.00
5	4823	888918	5	.64	.29	1.14	.45	1.60	1.00	3.00	122.00	1.20	120.00	.32	.72
9	1816	888519	22	2.20	1.73	1.71	3.50	5.20	4.00	1.60	.00	1.60	144.00	1.99	.00
12	5812	888628	25	2.00	1.90	2.00	3.71	3.00	3.70	3.00	133.00	2.00	145.00	2.50	.00
15	2006	888513	21	2.30	1.70	1.80	2.40	11.00	3.70	1.20	.00	1.60	149.00	1.90	6.20
16	3813	888611	19	.71	.90	.82	2.70	1.10	.90	.90	140.00	.93	141.00	1.00	.00
38	3813	888430	17	6.00	5.00	8.00	9.00	12.00	6.20	5.40	150.00	6.00	142.50	.00	.00
4785	888501	17	6.00	7.00	8.10	7.97	12.00	18.00	18.00	6.00	150.30	8.15	153.10	9.00	.40
2808	888506	18	6.01	6.50	7.00	6.60	14.00	8.00	8.00	8.00	157.40	7.20	153.00	8.70	26.00
1018	888510	18	4.00	.00	5.00	9.00	10.00	9.00	9.00	6.00	154.70	7.70	153.00	5.70	.00
5014	888523	19	4.30	5.00	5.00	8.00	10.30	6.50	5.00	150.00	5.60	153.00	5.00	.00	.00
3019	888504	18	2.10	2.50	2.90	4.60	3.40	2.40	2.40	5.60	145.00	3.50	133.00	3.10	.00
1811	888609	27	2.30	4.00	4.30	9.00	9.00	2.30	4.00	5.00	.00	5.00	9.00	5.00	.00
1811	888623	14	3.00	5.00	6.00	9.50	3.50	3.00	6.00	146.00	6.20	147.00	6.40	.00	.00
39	3813	888430	13	4.40	5.00	7.10	8.20	13.00	5.00	4.70	155.00	5.10	149.00	.00	.00
4785	888501	14	4.20	4.00	7.20	7.30	9.00	4.70	4.00	151.00	5.50	153.00	5.00	16.70	.00
2722	888527	19	5.00	5.00	6.00	7.00	10.10	8.00	4.20	153.00	5.00	150.00	5.00	.00	.00
5222	888604	23	3.20	4.70	5.30	5.20	7.00	1.50	5.00	137.70	5.20	143.50	4.70	.00	.00
3813	888611	10	2.00	3.20	3.60	8.00	2.40	1.40	3.80	145.00	.00	144.00	.00	.00	.00

TABLE B-2 (Continued)
 PEAK OR MAXIMUM RMS LEVELS PRODUCED BY TRANSIENT
 FLIGHT CONDITIONS LISTED IN TABLE 4

SWITCH POSITIONS 9															
TC MISSION	DATE	REC	C17A	C18A	C19A	C24A	64A	E6A	C28A	E1M	C21A	84M	E22A	C23A	
48	3012	88838	11	2.00	1.00	4.00	8.00	3.00	3.00	151.00	.00	146.00	.50	.00	
48	4786	888501	21	2.40	4.00	4.00	5.10	4.00	3.00	150.00	4.00	145.00	3.90	19.00	
2088	888506	22	4.00	3.00	5.00	8.00	10.00	4.00	5.00	152.40	5.00	147.00	5.50	15.00	
1816	888518	22	2.00	.00	3.40	3.00	6.00	3.00	3.30	152.60	3.30	145.00	2.60	.00	
1811	888608	23	1.10	2.00	2.00	7.10	.00	.00	3.00	141.00	4.20	142.00	3.60	.00	
3013	888611	18	1.43	2.60	3.15	7.00	1.00	1.00	3.30	141.60	4.20	142.00	3.60	.00	
38	2886	888513	24	4.00	4.00	5.00	6.00	10.00	5.00	155.20	4.30	140.00	4.00	11.00	
51	3784	888917	4	2.20	2.00	4.00	2.00	4.00	7.10	123.00	7.40	149.00	.30	3.30	
3784	888917	6	4.00	9.10	9.30	4.00	6.00	12.00	12.00	125.10	11.00	150.20	.50	9.20	
53	3764	888917	8	1.50	2.30	3.00	1.20	.00	4.00	6.10	122.00	4.20	146.00	.30	1.30
55	4823	888916	3	.01	.01	2.00	.77	3.70	3.20	6.70	120.10	2.90	143.20	.26	.01
86	4823	888918	4	3.60	3.30	6.00	2.00	11.30	10.40	120.00	8.20	151.50	.41	3.50	
79	5812	888628	11	1.16	1.40	1.30	2.00	1.00	1.00	146.00	1.60	143.00	2.00	.00	
5812	888628	12	1.30	1.60	1.60	4.00	2.40	2.00	1.00	146.00	2.70	146.50	2.30	.00	
SWITCH POSITIONS 10															
TC MISSION	DATE	REC	04A	06A	08A	07A	016A	011A	02A	010A	06A	013A	09A	03A	
1	1818	888609	1	.17	.21	.10	.00	.00	.17	.11	.30	.00	.12	.00	
4	2886	888513	3	.22	.24	.25	.23	.24	.36	.26	.10	.23	.27	.79	
1818	888609	2	.26	.19	.35	.32	.28	.08	.45	.20	.20	.27	.26	.00	
2015	888610	2	.26	.20	.39	.33	.27	.06	.43	.28	.32	.27	.25	.00	
5	1915	888519	23	.20	.00	.37	.30	.31	2.50	.32	.34	.24	.30	.21	
13	1816	888519	26	.40	.42	.01	.10	.30	2.40	.01	.14	.00	.20	.00	
14	3013	888438	14	1.20	1.43	.09	.49	.00	1.42	1.20	.20	1.00	.47	.00	
1518	888623	11	.72	.05	.04	.25	.25	.99	.40	.17	.00	.31	.22	.00	
14	4786	888501	18	.35	.46	.10	.14	.05	.40	.42	.13	.45	.00	1.20	
58	2886	888513	25	.60	.00	.03	.10	.24	.47	.60	.10	.60	.20	1.00	
79	5812	888628	16	.00	.76	.24	.22	.23	.09	.40	.15	.75	.21	.00	

TABLE B-2 (Concluded)
 PEAK OR MAXIMUM RMS LEVELS PRODUCED BY TRANSIENT
 FLIGHT CONDITIONS LISTED IN TABLE 4

SWITCH POSITION: 11																
TC	MISSION	DATE	REC	C25A	A49A	A50A	C27A	A45A	A46A	A51A	C26A	A62A	C20A	A47A	A48A	
2	2006	000513	26	.43	.00	.16	.40	.00	2.00	.10	.00	.10	.00	.50	2.00	
4	5020	000606	1	.73	.17	.82	4.30	.67	1.43	.14	.60	.14	1.60	.00	.00	
8	2098	000506	25	.68	.10	.20	2.00	.40	4.00	.15	.00	.20	.02	.50	2.00	
13	1016	000519	27	3.90	.69	.67	5.30	3.00	5.20	.50	.00	.00	4.50	3.00	.00	
14	3013	000430	16	9.50	1.39	1.52	29.70	4.77	12.30	1.10	19.30	1.10	9.30	.00	.00	
15	1010	000623	13	.00	1.10	1.40	.00	2.81	.00	.02	.00	.00	6.10	2.50	.00	
15	1016	000519	29	6.00	.07	1.20	12.10	3.60	0.00	.00	.00	.75	0.70	4.00	.00	
16	4706	000501	20	3.10	.59	.76	0.20	2.50	0.50	.54	3.30	.49	3.00	2.50	7.00	
79	5012	000620	13	.00	.07	1.13	2.40	2.20	1.20	.73	.00	.76	3.30	2.10	.00	
SWITCH POSITION: 12																
TC	MISSION	DATE	REC	C2A	E3A	E6A	E4A	E17A	E13A	E14A	E0A	E10A	E15A	D14A	D12A	
1	2006	000513	2	11.50	7.00	.00	6.90	15.00	1.00	11.20	.00	11.00	12.50	.26	126.00	
5010	000606	1	20.00	14.50	9.20	10.90	21.50	.36	13.40	.50	16.00	13.60	.16	.00	.00	
2	5014	000523	22	15.00	10.00	10.00	10.00	10.00	2.00	13.00	.40	12.00	13.00	.40	.00	
5012	000620	27	12.00	7.00	9.50	0.50	17.50	.32	10.00	.53	11.00	15.10	.20	.00	.00	
4	2008	000506	2	70.00	50.50	40.00	43.00	30.00	17.90	22.00	1.00	20.00	31.00	.50	151.70	
5010	000606	2	99.00	27.90	20.00	41.00	51.00	5.00	20.00	1.10	23.00	30.10	.20	.00	.00	
8	5014	000523	22	01.30	24.00	24.70	33.00	35.50	12.00	16.90	1.00	10.70	20.00	.03	.00	
5012	000620	26	90.00	22.00	23.30	20.00	26.30	7.10	14.00	1.60	16.60	21.10	.60	.00	.00	
13	1016	000519	20	100.00	37.30	34.90	47.30	42.50	50.00	20.70	1.30	20.70	20.00	.20	.00	
14	3013	000430	10	.00	.00	.00	.00	.00	00.00	.00	.00	.00	.00	.00	.00	
15	1016	000519	10	50.40	.00	36.40	39.00	47.30	19.00	2.00	22.10	27.10	.30	.00	.00	
10	1010	000623	15	70.40	22.70	30.70	32.60	36.20	21.20	20.30	1.10	23.60	20.90	.15	.00	
79	5012	000620	10	100.00	36.50	29.40	38.50	57.00	75.00	20.20	2.70	23.70	51.90	.27	.00	

APPENDIX C

SAMPLE LISTINGS OF TEMPERATURES, FLIGHT
PARAMETERS AND OTHER PDAS DATA

Table C-1	List of Signals Input to PDAS
Table C-2	Sample Listing of Typical Temperature Data
Table C-3	Sample Listing of Typical Flight Parameter Data
Table C-4	Sample Listing of Automatic Gain Control Amplifier Gain Status

TABLE C-1
LIST OF SIGNAL INPUTS TO PDAS

<u>Abbreviation</u>	<u>Signal Description</u>
STABL	Horizontal Stabilator Left
STABR	Horizontal Stabilator Right
PITCH	Pitch
RUD POS	Rudder Position
ROLL	Roll
PITCH R	Pitch Rate
MACH	Mach Number
EPR L	Engine Pressure Ratio, Left
FUEL	Total Fuel
ALT	Altitude
ASP	Airspeed
EPR R	Engine Pressure Ratio, Right
HDG	Heading
SS ANG	Sideslip Angle
A/ATT	Angle of Attack
N2R	N2 Right-Engine Spool Speed
N2L	N2 Left-Engine Spool Speed
YAW R	Yaw Rate
AY	Lateral Acceleration - Ay
RAM T	Ram Air Temperature
RAT	Ram Air Turbine Excitation
ROLL R	Roll Rate
AZ	Vertical Acceleration c.g. - Az
SENSE 8B	Air Flow Sensor Temperature 2B
FLOW 8B	Air Flow Rate 10/20
DIF PR	Differential Pressure - Never Used
GAIN 1 thru GAIN 12	Gain of AGC Amplifiers 1 thru 12
HUM	Relative Humidity
SENSE HUM	Relative Humidity Temperature
ABS PR	Absolute Pressure in Equipment Bay
SENS F 18	Air Flow Sensor Temperature 1B
TC1 thru TC15	Thermocouples Numbers 1 thru 15
FLOW F18	Air Flow Rate 9/14
EVENT	Weapons Switch Off and Weapons Release
F FLOW R	Fuel Flow, Right
F FLOW L	Fuel Flow, Left
STEP	Switch Position
ACCEL 1 thru 15	Flutter Accelerometers 1 thru 15
R ST	Roll, Stick Position
P ST	Pitch, Stick Position
IN DAMP	Inboard Damper - Not Used
C DAMP	Center Damper - Not Used
IN SPOIL	Inboard Spoiler
OUT SPOIL	Outboard Spoiler
PED POS	Rudder Pedal Position
WNG SWP DEG	Wing Sweep Degrees

TABLE C-3 (Cont). SAMPLE LISTING OF TYPICAL FLIGHT PARAMETER DATA

MSB 1813 9 JUNE 1988																FILE NUMBER 1	
PROJECT IATZTAR2		TIME	SS ARG	KOG	EPG	FPP	EVENT	ABS	FAT	FAM						NEGATIVE HOURS INDICATE A JUMP IN TIME	
7777		27 35 58	1 1	0	1	1	1	1	1	1	1						
7777		27 35 58	1 1	0	1	1	1	1	1	1	1						
7777		27 35 58	1 1	0	1	1	1	1	1	1	1						
7777		27 35 58	1 1	0	1	1	1	1	1	1	1						
7777		27 35 58	1 1	0	1	1	1	1	1	1	1						

TABLE C-4. SAMPLE LISTING OF AUTOMATIC GAIN CONTROL AMPLIFIER GAIN STATUS

PROJECT	INSTRUMENT	STEP	DATE	TIME	SECTOR	ANGLE	MODE	STATUS	AMPLITUDE	PHASE	FREQUENCY	GAIN	ADJUSTMENT	OPERATOR
PROJECT 14242	INSTRUMENT 14242	STEP 1	1981	JUNE	1981	1	1	1	1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0
									1.0	0.0	10.0	1.0	1.0	1.0

REFERENCES

1. Test Directive No. 1472TA02/9991T498, Support of AFFDL F-111 Vibration/ Acoustic Testing.
2. L. L. Shaw, Full Scale Flight Evaluation of Suppression Concepts for Flow Induced Fluctuation Pressures in a Cavity, Flight Dynamics Laboratory, Wright-Patterson AFB OH, AFWAL-TM-81-69-F1BE, 1981.