

UNCLASSIFIED

AD NUMBER

ADB805347

CLASSIFICATION CHANGES

TO: unclassified

FROM: restricted


LIMITATION CHANGES

TO:  
Approved for public release; distribution is unlimited.

FROM:  
Distribution authorized to DoD only; Administrative/Operational Use; JUL 1940. Other requests shall be referred to National Aeronautics and Space Administration, Washington, DC. Pre-dates formal DoD distribution statements. Treat as DoD only.

AUTHORITY

NACA list dtd 28 Sep 1945; NASA TR Server website

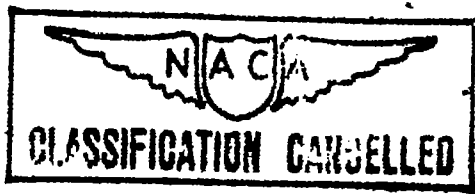

JUL 24 1940

~~CLASSIFIED~~

TECHNICAL NOTES

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

No. 768

CORRELATION OF KNOCKING CHARACTERISTICS OF FUELS  
IN AN ENGINE HAVING A HEMISPHERICAL  
COMBUSTION CHAMBER

By A. M. Rothrock and Raymond J. Biermann  
Langley Memorial Aeronautical Laboratory

To be returned to  
the files of the Langley  
Memorial Aeronautical  
Laboratory.

Washington  
July 1940



NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

TECHNICAL NOTE NO. 768

CORRELATION OF KNOCKING CHARACTERISTICS OF FUELS  
IN AN ENGINE HAVING A HEMISPHERICAL  
COMBUSTION CHAMBER

By A. M. Rothrock and Arnold E. Biermann

SUMMARY

Data are presented to show the effects of inlet-air pressure, inlet-air temperature, and compression ratio on the maximum permissible performance obtained with a cylinder having a hemispherical-dome combustion chamber. The five aircraft-engine fuels used have octane numbers varying from 90 to 100 plus 2 ml of tetraethyl lead per gallon. The data were obtained on a  $5\frac{1}{4}$ -inch by  $4\frac{3}{4}$ -inch liquid-cooled engine operating at 2,500 rpm. The compression ratio was varied from 6.0 to 8.9. The inlet-air temperature was varied from 110° to 310° F. For each set of conditions, the inlet-air pressure was increased until audible knock occurred and then reduced 2 inches of mercury before data were recorded. The results for each fuel can be correlated by plotting the calculated end-gas density factor against the calculated end-gas temperature. Measurements of spark-plug electrode temperatures showed that, with two spark plugs, cutting off the switch to one spark plug lowered the electrode temperature of that plug from a value of 1,365° F to a value of 957° F. The results indicate that the surface temperatures of combustion-chamber areas which become new sources of ignition markedly increase after ignition commences.

INTRODUCTION

The N.A.C.A. has been conducting an investigation on the knocking characteristics of high-octane fuels. Results obtained from an engine with a four-valve flat-disk combustion chamber, from an engine with a four-valve pent-roof combustion chamber, and from a C.F.R. engine have been reported in references 1, 2, and 3, respectively.

Previous analyses of the problem of engine knock have shown that the most important independent variables in any one engine are the ones that control the end-gas density and temperature and the mixture ratio. The results from the previous tests showed that a certain amount of correlation exists between the knocking-characteristic curves obtained for several fuels used in different engines but that certain differences are caused by the variation in engine design.

The present report gives the data thus far obtained with a cylinder having a hemispherical-dome combustion chamber of aluminum alloy. Other cylinders tested at this laboratory for knocking characteristics have had cast-iron combustion chambers. The knocking characteristics were determined for five fuels over a range of compression ratios and inlet-air densities.

In the tests conducted at the N.A.C.A. laboratory with high antiknock fuels at high output, afterfiring from hot spark plugs has presented a serious problem except when the plugs have been water-cooled. Some information has been included in this report showing the effect of water cooling on the temperature of the spark-plug center electrode and also the difference in electrode temperatures of firing and nonfiring spark plugs.

#### APPARATUS AND METHODS

The aircraft-engine cylinder used during these tests had an aluminum-alloy head and jacket, with the head screwed and shrunk onto a steel barrel. This cylinder has a  $5\frac{1}{4}$ -inch bore and a  $4\frac{3}{4}$ -inch stroke, giving a displacement of 102.8 cubic inches. The combustion chamber is of the hemispherical type having two poppet valves operated through rockers by an overhead camshaft. The inlet-valve stem was sodium-cooled, and both the stem and the head of the exhaust valve were sodium-cooled. The two spark plugs in this cylinder are diametrically opposite and at an angle of approximately  $45^\circ$  with respect to a line between the valves. The compression ratio was changed by varying the spacer thickness under the cylinder flange.

Except where otherwise noted, the following quantities were held constant during these tests:

Valve timing - Inlet opens	30° B.T.C.
Inlet closes	65° A.B.C.
Exhaust opens	66° B.B.C.
Exhaust closes	32° A.T.C.
Spark advance (retarded for 1-percent drop in power) -	29°.
Engine speed - - - - -	2,500 rpm.
Engine cooling - - - - -	ethylene glycol, outlet temperature, 250° F.
Fuel-air ratio (for maximum knock) - - - - -	approximately 0.076.
Spark plugs - - - - -	BG 344-S.

The fuel-air ratio was calculated from measurements of the weight of fuel and of the volume of air entering the engine. Thermocouples were used to measure the exhaust temperature, the wall temperature just above the piston travel on the inlet side, the flange temperature on the inlet side, the tip temperature of one spark-plug center electrode, and the mixture temperature. The mixture thermocouple was shielded. The calculated thermal conductivity of the spark-plug center electrode was impaired approximately 10 percent by installing the thermocouple in the electrode tip. For the tests in which the spark-plug electrode temperature was measured, the spark plug was located at the front of the engine near the exhaust valve. The outer shells of the spark plugs were water-cooled during all of the tests except the ones made to determine electrode temperatures. Peak cylinder pressures were obtained with the N.A.C.A. balanced-disk indicator. The higher values of the peak pressures correspond to the last intermittent flashes of the neon tube used with the maximum-pressure indicator; the lower values correspond to an almost steady flash of the neon tube.

The inlet air was electrically heated. Because of the excessive time lag of electric heaters, it has been found difficult to change the inlet-air temperature rapidly and to hold it at the desired value. In the present set-up, these difficulties have been overcome by means of

a three-way valve; one intake port is connected to a source of air at 500° F (thermostatically controlled), and the other is arranged for inducting air at room temperature. The air temperature can be rapidly changed by adjusting this valve to admit different proportions of cold and hot air. The two air streams were mixed in a large tank before entering the engine.

The procedure used in determining the knocking limitation of a fuel was as follows: With a constant inlet-air temperature and with the maximum-knock fuel mixture, the inlet-air pressure was raised until audible knock occurred. The inlet pressure was then arbitrarily reduced 2 inches of mercury before data were taken. This procedure prevented damage to the engine from running for prolonged periods under knocking conditions and also avoided the necessity for taking data while the engine was operating under the unstable conditions that accompany knock.

The fuels tested were made up from C.F.R. S-1 and C.F.R. M-2 reference fuels with additions of tetraethyl lead ( $\text{PbEt}_4$ ); the following five fuels were tested:

Fuel	S-1 (percent)	M-2 (percent)	Tetraethyl lead, ml per gallon
1	90	10	0
2	95	5	0
3	100	0	0
4	100	0	1.0
5	100	0	2.0

In the table and the curves, the fuels are referred to by the percentage of S-1 and the tetraethyl-lead content. Tests were conducted at compression ratios of 6.0, 7.5, and 8.9 and at five inlet-air temperatures covering the range from 110° to 310° F.

The engine-performance data were computed by the method outlined in reference 1.

## RESULTS AND DISCUSSION

## Knocking Characteristics

The principal test results, giving the engine performance for inlet pressures of 2 inches of mercury below the audible-knock inlet pressure, are presented in table I. As shown by the data, some of the test conditions were repeated at another time with somewhat different results; a considerable difference occurred in the specific fuel consumptions and the cylinder temperatures. Although no explanation has been found, differences in piston-ring condition or the presence of afterfiring probably accounts for some of these discrepancies.

In figure 1, the power developed with the several fuels (for inlet-air pressure for audible knock less 2 inches of mercury) is presented for the three compression ratios. Curves of the peak cylinder pressures obtained for three inlet-air temperatures and two compression ratios are shown in figure 2. The experimental values (table I) have not been placed on the curves because the points are scattered. The curves as drawn represent the general trend of the data. The pressure values given are the lower readings of the N.A.C.A. balanced-disk maximum-pressure indicator.

It was pointed out in reference 1 that whether knock takes place in an internal-combustion engine depends on the density and the temperature in the end gas. Reference 2 shows that the end-gas density approaches a maximum value expressed by

$$K\rho_3 = \frac{RP_1}{T_1} \left( 1 + \frac{H}{c_v T_1 R} \right)^{\frac{1}{\gamma}}$$

in which  $\rho_3$  gas density in knocking zone immediately preceding knock.

$P_1$  inlet-air pressure.

$T_1$  inlet-air temperature.

$\gamma$  adiabatic coefficient.

$c_v$  specific heat of mixture at constant volume.

R compression ratio of engine.

H heat content per pound of mixture.

K a constant.

It has also been shown in reference 2 that the end-gas temperature  $T_3$  approaches a maximum value expressed by

$$T_3 = T_1 R^{\gamma-1} \left( 1 + \frac{H}{c_v T_1 R^{\gamma-1}} \right)^{\frac{\gamma-1}{\gamma}}$$

An analysis of the results presented in reference 2 showed that fairly good correlation of the data from a pent-roof and a flat-disk type of combustion chamber could be obtained by simplifying the density expression to  $RP_1/T_1$  and by using the inlet-air temperature instead of the expression for  $T_3$ . An attempt to correlate the data of the present report in a similar manner is shown in figure 3. A fairly wide spread of the data is noticed for the different compression ratios, especially for the 90- and the 95-percent S-1 fuels. In general, the 100-percent S-1 and the S-1 plus tetraethyl lead could not be used at the lowest compression ratio because of the limitations of the apparatus as regards boost.

As shown by figure 4, a somewhat better correlation of the present data is obtained by substituting  $T_1 R^{\gamma-1}$  for the inlet-air temperature. The spread of the points, however, does not justify the use of these factors.

A still further improvement in the correlation of the present data is obtained by using the more exact expressions for the density factor,  $K\rho_3$ , and the estimated end-gas temperature,  $T_3$ . These results are plotted in figure 5. Although some scatter of the points is apparent, this scatter is, in general, less than the discrepancy between the sets of data at the same compression ratios.

In reference 2 it was noted that the coordinate  $RP_1/T_1$  could not be used for the C.F.R. engine, and the difference between the coordinates used to correlate the data for the C.F.R. engine and for the larger engines reported in reference 1 was attributed to the difference in



displacement of the engines. The present results, however, showed that, for an engine similar in size to those discussed in reference 1, the best correlation was obtained when the calculated values of  $K\rho_3$  and  $T_3$  were used as the coordinates for the knock-rating curves of the different fuels. The difference in the criteria giving the best correlation of the knock data for the engines discussed in reference 2 and for the present engine must therefore be concluded to be a result not of engine size but of the interrelation of several engine factors. As long as there are differences in engine design or until the end-gas temperature and density can be directly measured, these differences in correlating factors will probably continue and must be attributed to the engine rather than to the fuel.

#### Spark-Plug Electrode Temperatures

Some temperature measurements of the tip of the central electrode of one spark plug are presented in figure 6. The curves in this figure were obtained by progressively increasing the inlet pressure until knock occurred. In one instance, cutting the front-plug ignition switch caused a reduction in temperature from  $1,365^\circ$  to  $957^\circ$  F. The fact that the nonfiring spark plug was probably in the end-gas zone during knock raised its temperature very little above the normal course of the curve. The heating effect of the spark itself caused a negligible rise in electrode temperature, as determined by opening and closing the ignition switch while motoring the engine.

Water-cooling the nonfiring spark plug lowered the electrode temperature from  $970^\circ$  to  $870^\circ$  F. A slightly greater drop in the temperature of the firing spark plug would probably result from water cooling.

The information presented in figure 6 also shows what may result when overheated combustion-chamber surfaces become auxiliary sources of ignition. Once ignition starts from an overheated surface, the temperature of the surface may rise somewhat, as shown in figure 6, depending upon the location of the surface with respect to a spark plug. The reasons for this rise in the temperature of the region where ignition starts as given by Lewis and von Elbe in reference 4 may be condensed as follows: At the source of ignition, the burning gas expands at a practically constant pressure, which is the compression pressure. It is subse-

quently compressed to nearly its original volume by the combustion of the rest of the gas in the chamber. The work of compression exceeds the work of expansion because the compression of the gas at the source of ignition takes place at a steadily increasing pressure; whereas, the expansion took place at the lower initial pressure. As a result, the gas remote from the source of ignition loses some of its energy but the gas at the source of ignition gains energy in excess of the chemical energy released within it. The result is a temperature gradient, rising toward the source of ignition, the temperature difference of which amounts to several hundred degrees.

The data in figure 6 indicate why, under certain circumstances, preignition can lead to very rapid engine failure. Assume that, because of unequal cooling throughout the cylinder, the hottest spot in the combustion-chamber surface is in the end-gas zone. Once preignition starts in this zone, the zone is no longer the end-gas zone but becomes the first part of the charge to burn. This change of the gas surrounding the hot spot from the end-gas zone to the first part of the charge to burn can cause an increase in the surface temperature at the hot spot of as much as  $400^{\circ}$  F, as shown by figure 6. This increase in the temperature of the hot spot will advance the timing of the preignition, which will further increase the hot-spot temperature. This unstable condition will lead to earlier ignition of the charge on each successive cycle and to eventual failure of the engine. The rapidity of the engine failure, once the preignition has started, depends on the rapidity with which the foregoing actions take place.

### CONCLUSIONS

The results of the present tests of five fuels in a cylinder having a hemispherical-dome combustion chamber showed that:

1. The data on knock could be correlated by plotting the calculated end-gas density factor,  $K\rho_3$ , against the calculated end-gas temperature,  $T_3$ .
2. The particular factors used to correlate knocking test data depend upon the engine design; until the end-gas temperature and density can be directly determined, there will be differences in the correlating factors.

3. Cutting off the ignition from one of two spark plugs lowered the electrode temperature of that plug from 1,365° to 957° F.

4. Surface temperatures of combustion-chamber areas that become new sources of ignition may increase markedly after ignition commences.

Langley Memorial Aeronautical Laboratory,  
National Advisory Committee for Aeronautics,  
Langley Field, Va., May 2, 1940.

#### REFERENCES

1. Rothrock, A. M., and Biermann, Arnold E.: Engine Performance and Knock Rating of Fuels for High-Output Aircraft Engines. T.N. No. 647, N.A.C.A., 1938.
2. Rothrock, A. M., and Biermann, Arnold E.: The Knocking Characteristics of Fuels in Relation to Maximum Permissible Performance of Aircraft Engines. T.R. No. 655, N.A.C.A., 1939.
3. Lee, Dana W.: The Effects of Engine Speed and Mixture Temperature on the Knocking Characteristics of Several Fuels. T.N. No. 767, N.A.C.A., 1940.
4. Lewis, Bernard, and von Elbe, Guenther: Combustion, Flames and Explosions of Gases. Univ. Press (Cambridge), 1938, p. 167.

Fuel	Com- pres- sion ratio	Inlet- air temper- ature (°F)	Mix- ture tem- per- ature (°F)	Inlet pres- sure (in.Hg absolu- te)	Imp (lb/ sq in.)	Indi- cated fuel consumption (lb/ihp/ hr)	Peak pres- sure (low)	Peak pres- sure (high)	Exhaust temper- ature (°F)	Flange temper- ature (°F)	Wall temper- ature (°F)	
80 percent S-1	6.0	*117	88.0	44.5	225	0.433	825	950	1,331	248	-	
		*153	117.9	43.7	206	.453	800	1,000	1,311	202	-	
		*204	184.8	39.7	178	.451	780	900	1,279	222	-	
		*271	211.6	37.8	155	.462	630	800	1,270	200	-	
		*297	244.2	38.4	141	.453	580	750	1,264	219	-	
		125	95.5	48.4	228	.535	-	-	-	-	350	385
		173	138.3	44.3	203	.523	-	-	-	-	309	376
		*212	171.5	42.3	180	.528	-	-	-	-	285	373
		*257	210.0	41.4	159	.500	-	-	-	-	255	353
		*302	248.8	38.3	149	.500	-	-	-	-	238	354
		118	110.1	34.2	182	.479	-	-	-	-	233	330
		158	132.3	31.4	141	.485	-	-	-	-	229	324
		*204	184.7	30.4	119	.481	-	-	-	-	207	317
		*250	198.1	29.5	107	.542	-	-	-	-	221	322
		*300	207.8	28.8	94	.481	-	-	-	-	192	320
	117	98.7	27.3	123	.430	535	800	1,264	233	316		
	157	126.5	26.0	117	.410	535	800	1,321	200	313		
	*206	181.8	24.2	95	.408	480	950	1,351	300	308		
	*242	178.0	23.8	78	.440	425	525	1,302	268	304		
	*279	192.8	21.8	73	.470	425	525	1,302	263	297		
	137	98.2	24.9	118	.399	590	775	1,403	285	288		
	170	139.0	23.9	105	.434	550	730	1,384	268	288		
	*212	189.0	22.7	94	.424	430	580	1,372	280	240		
	*258	208.5	21.1	79	.449	360	540	1,378	277	237		
	*121	91.3	55.6	270	.454	1,050	1,200	1,345	206	267		
	*146	119.9	53.7	253	.480	1,050	1,250	1,314	229	258		
	*219	176.0	50.3	217	.475	900	1,100	1,313	204	246		
	*255	214.9	48.3	192	.492	780	950	1,307	213	240		
	*296	251.2	45.2	175	.480	760	900	1,287	264	253		
	125	95.1	49.2	339	.484	-	-	-	-	284	378	
	173	135.0	47.9	326	.522	-	-	-	-	319	375	
	*215	175.0	46.4	202	.514	-	-	-	-	342	364	
	*256	207.0	45.2	187	.508	-	-	-	-	353	360	
	*297	241.0	39.3	159	.528	-	-	-	-	344	362	
	116	110.1	35.4	177	.455	-	-	-	-	334	336	
156	136.3	33.1	149	.450	-	-	-	-	321	325		
197	182.2	32.3	125	.470	-	-	-	752	250	329		
*248	196.3	30.2	117	.460	-	-	-	1,188	206	321		
*305	216.8	29.3	103	.530	-	-	-	1,144	183	318		
113	88.0	28.8	132	.407	600	800	1,380	310	327			
151	128.3	27.8	124	.407	575	725	1,297	301	314			
196	149.5	25.8	108	.420	575	750	1,343	270	314			
*243	173.2	24.8	90	.420	525	600	1,358	272	311			
*285	198.2	22.3	81	.400	400	600	1,348	281	308			
126	101.5	27.1	133	.481	630	900	1,331	275	256			
171	134.0	27.5	134	.427	-	-	1,349	283	238			
*215	171.9	25.3	107	.409	-	-	1,377	266	210			
*255	197.4	23.7	94	.482	-	-	1,335	269	214			
*300	225.0	21.1	73	.502	-	-	1,365	208	218			
123	101.4	41.0	306	.453	-	-	1,375	231	356			
161	129.3	39.0	188	.441	-	-	1,297	229	348			
*209	167.9	37.1	164	.446	-	-	1,240	245	345			
*239	199.5	34.9	145	.433	-	-	1,223	228	353			
*292	239.1	33.5	129	.437	-	-	1,217	190	327			
116	95.0	31.7	157	.388	600	900	1,389	314	327			
164	132.3	30.2	140	.435	775	925	1,384	307	317			
*200	159.9	28.4	115	.461	600	800	1,379	292	312			
*241	175.7	26.1	98	.458	475	600	1,364	277	309			
*290	196.5	24.2	87	.443	425	500	1,355	275	308			
128	98.3	31.6	167	.473	-	-	1,326	301	244			
171	137.8	28.8	141	.468	-	-	1,364	290	244			
*216	175.2	27.3	120	.472	-	-	1,359	278	215			
*259	203.2	25.1	99	.508	-	-	1,358	274	209			
*297	226.0	23.1	88	.484	-	-	1,383	269	222			
*322	234.1	27.5	243	.481	880	1,100	1,343	247	-			
*119	118.8	49.9	257	.458	-	-	-	-	-	-		
*158	112.9	49.5	233	.441	-	-	-	1,208	256	365		
*220	163.6	48.8	219	.442	-	-	-	1,180	160	378		
*260	195.8	45.9	201	.463	1,150	1,250	1,178	168	376			
*313	248.2	42.1	173	.448	900	1,000	1,187	173	365			
128	100.0	43.0	227	.413	-	1,250	-	-	288	342		
162	137.6	40.2	200	.409	-	-	-	-	232	341		
*205	173.9	38.5	183	.408	-	-	-	-	273	339		
*238	195.8	36.0	160	.410	650	1,050	-	-	312	352		
*282	222.4	34.6	148	.414	750	1,050	-	-	303	333		
*115	82.6	54.3	277	.438	-	-	-	1,247	253	385		
*170	126.0	52.2	242	.445	-	-	-	1,195	265	397		
*199	158.9	51.5	237	.448	-	-	-	1,209	233	379		
*252	206.2	47.8	206	.433	1,200	1,325	1,198	162	370			
*291	228.4	46.0	191	.437	1,100	1,300	1,188	175	373			
122	93.0	46.6	245	.403	1,100	1,200	-	-	340	348		
163	138.0	42.1	214	.475	-	-	-	-	291	341		
*204	173.2	41.0	198	.468	-	-	-	-	246	339		
*246	200.8	40.1	178	.468	1,000	1,150	-	-	315	335		
*283	229.7	35.7	149	.478	760	1,075	-	-	312	338		

\*Accompanied by afterfiring.

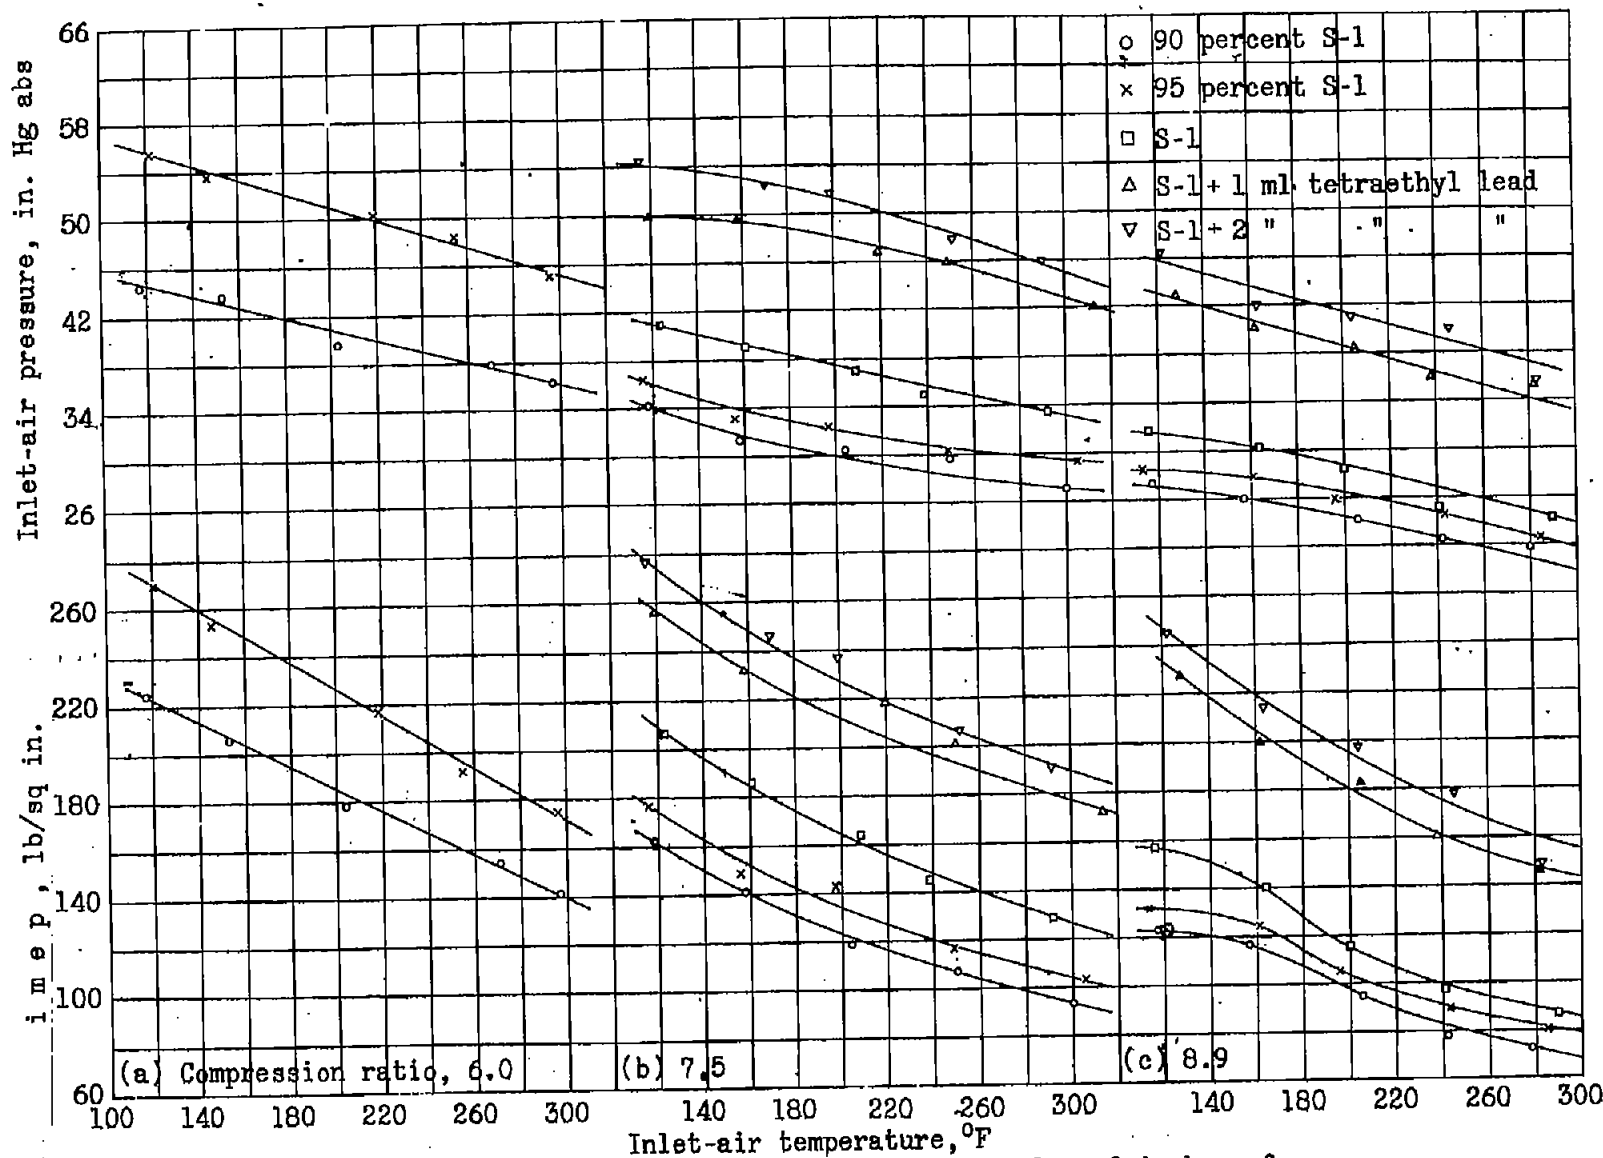


Figure 1 a to c.- Engine performance for audible-knock pressure less 2 inches of mercury.

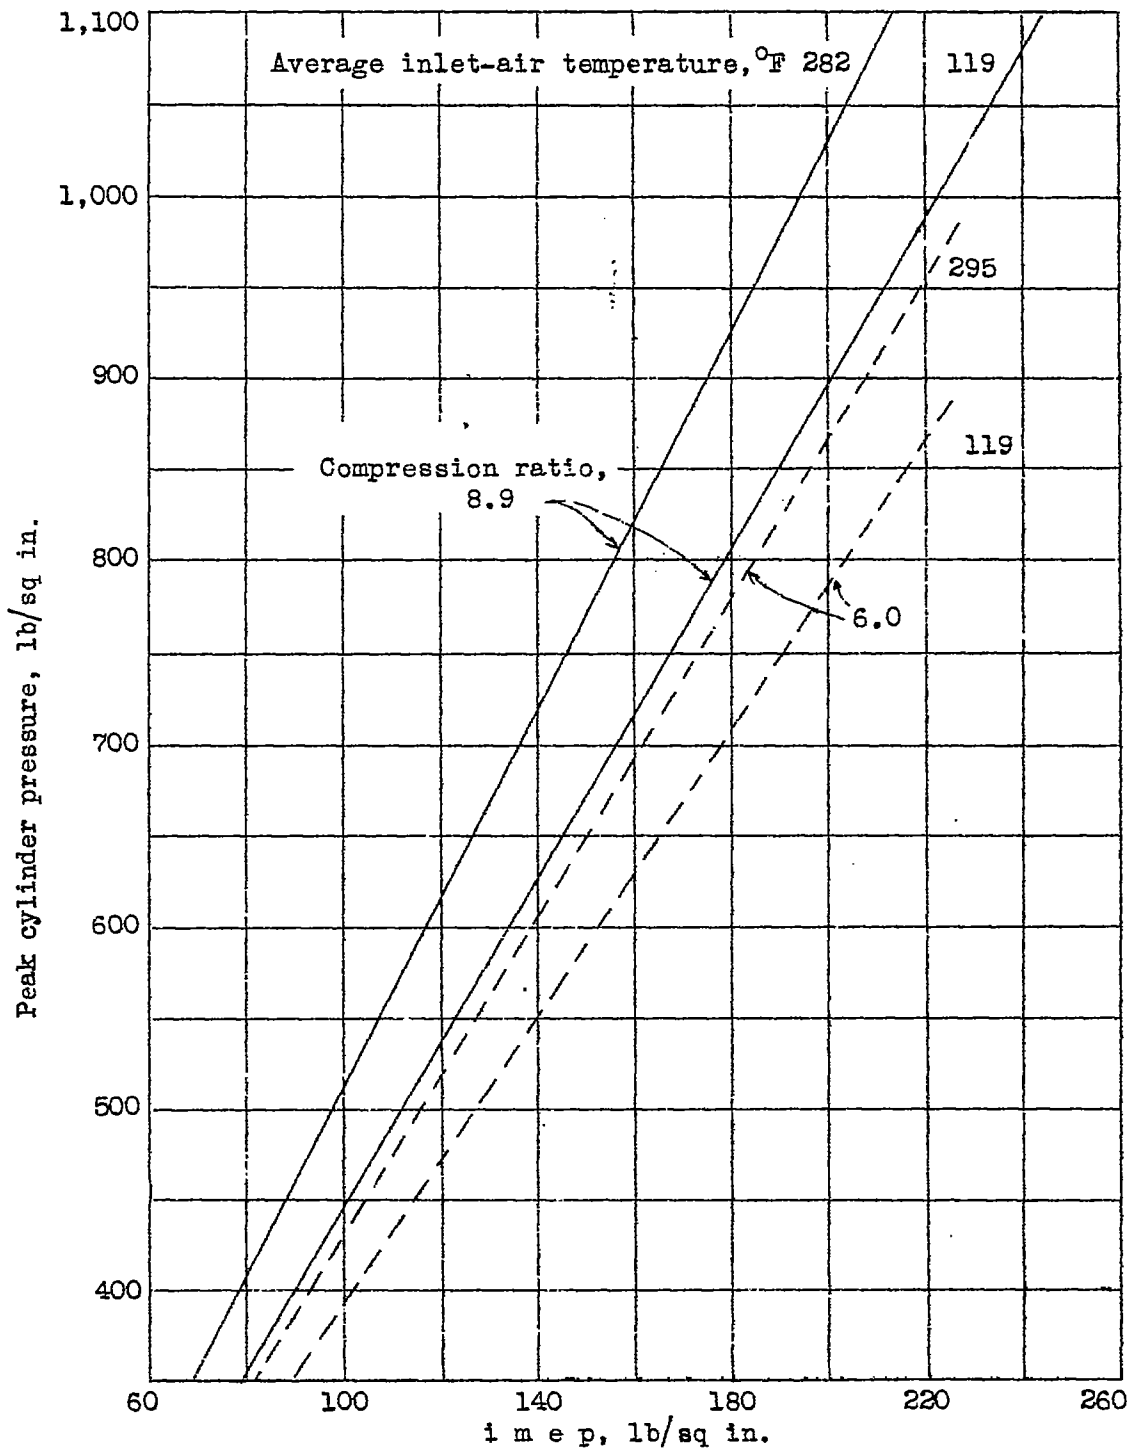


Figure 2.- Variation of maximum cylinder pressure with inlet-air temperature and compression ratio.


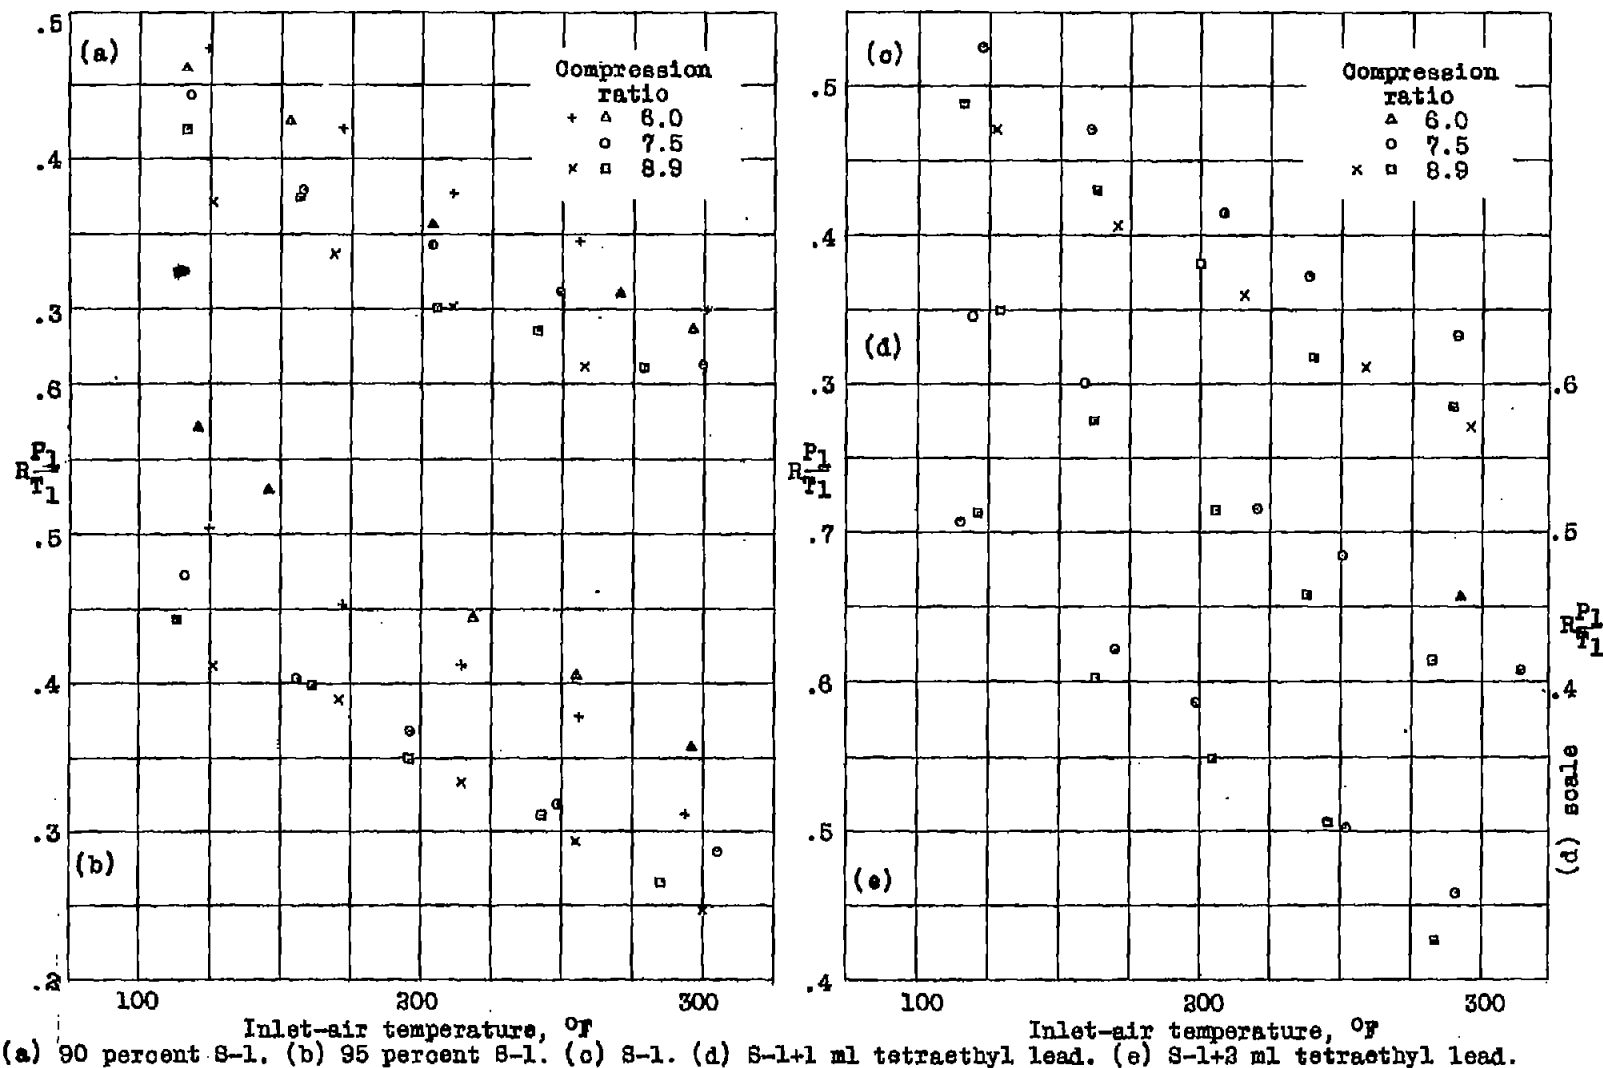



Figure 3 a to e.- Effect of inlet-air temperature on the maximum permissible density factor,  $R_{P1}^{A1}$



(a) 90 percent S-1. (b) 95 percent S-1. (c) S-1. (d) S-1+1 ml tetraethyl lead. (e) S-1+2 ml tetraethyl lead.

Figure 4 a to e.- Relationship between the temperature factor  $T_1 R V^{-1}$  and the maximum permissible density factor,  $R_1 P_1$ .

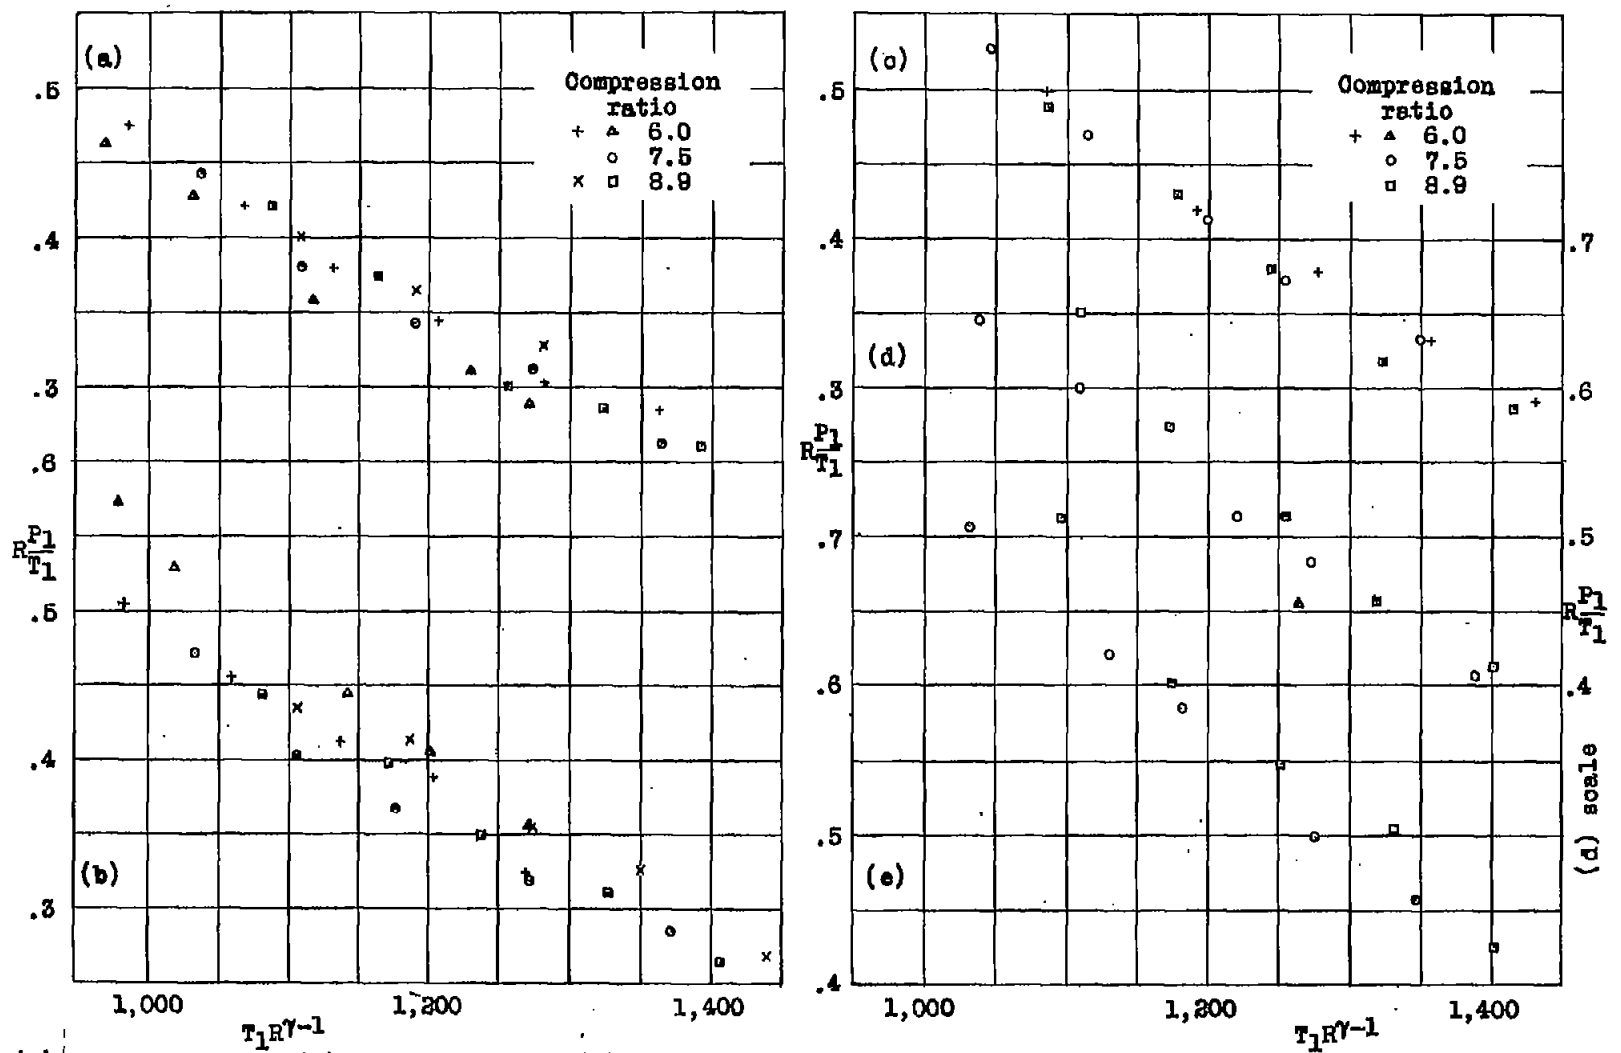

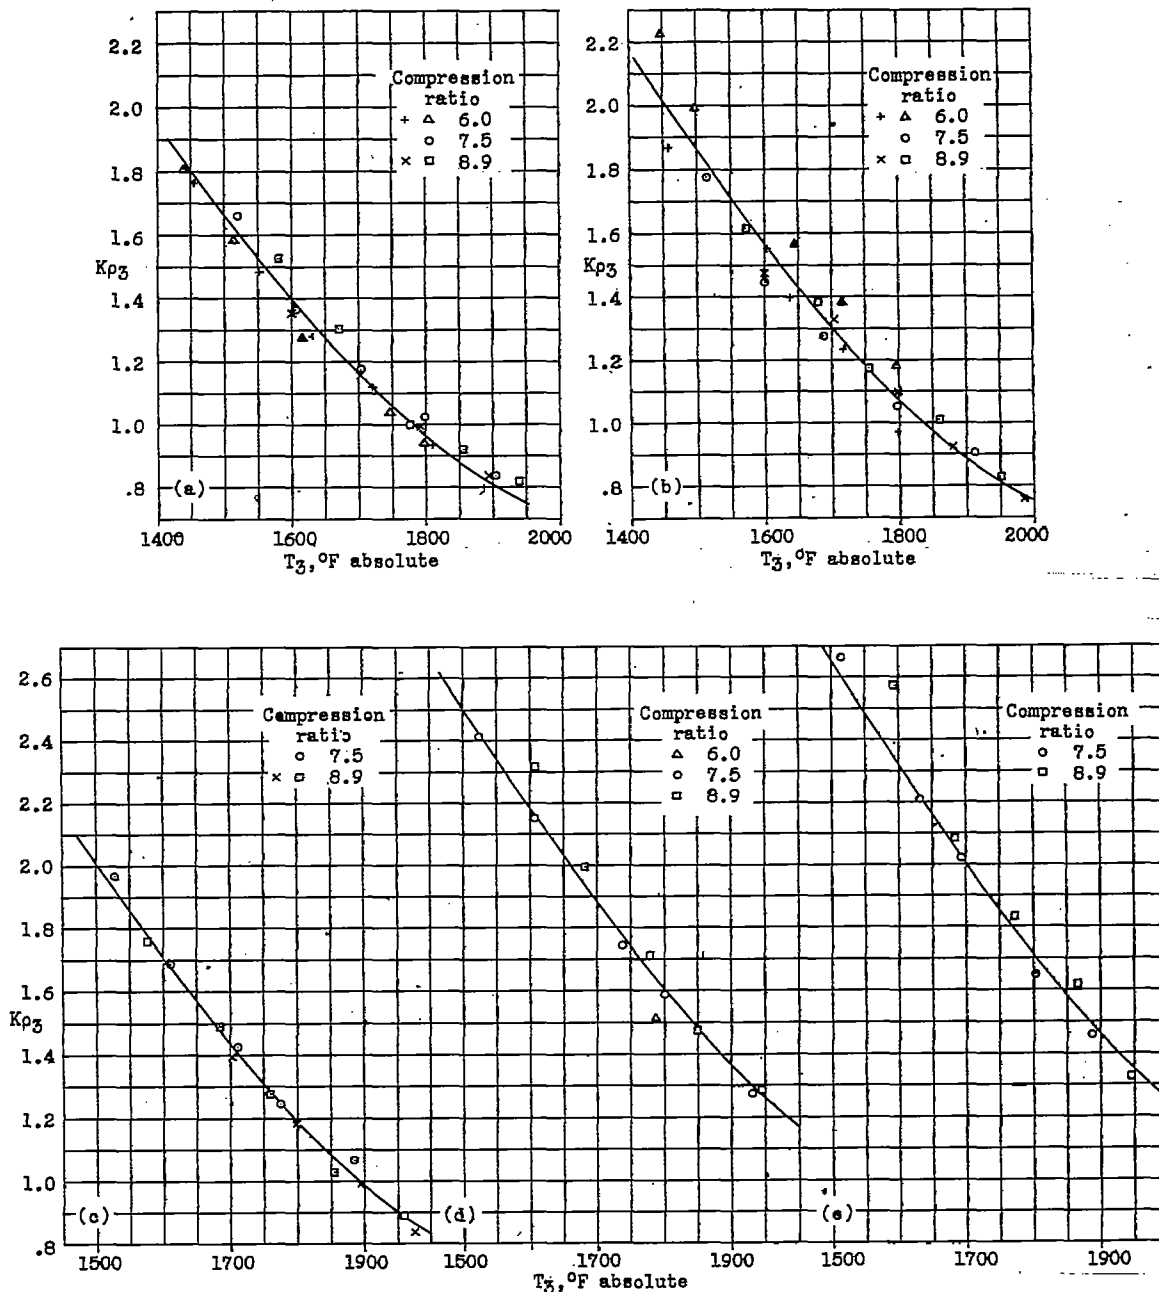

(a) 90 percent S-1. (b) 95 percent S-1. (c) S-1. (d) S-1+1 ml tetraethyl lead. (e) S-1+2 ml tetraethyl lead.

Figure 5 a to e.- Effect of estimated temperature  $T_3$  of end-gas on the maximum permissible end-gas density factor,  $Kp_3$ .

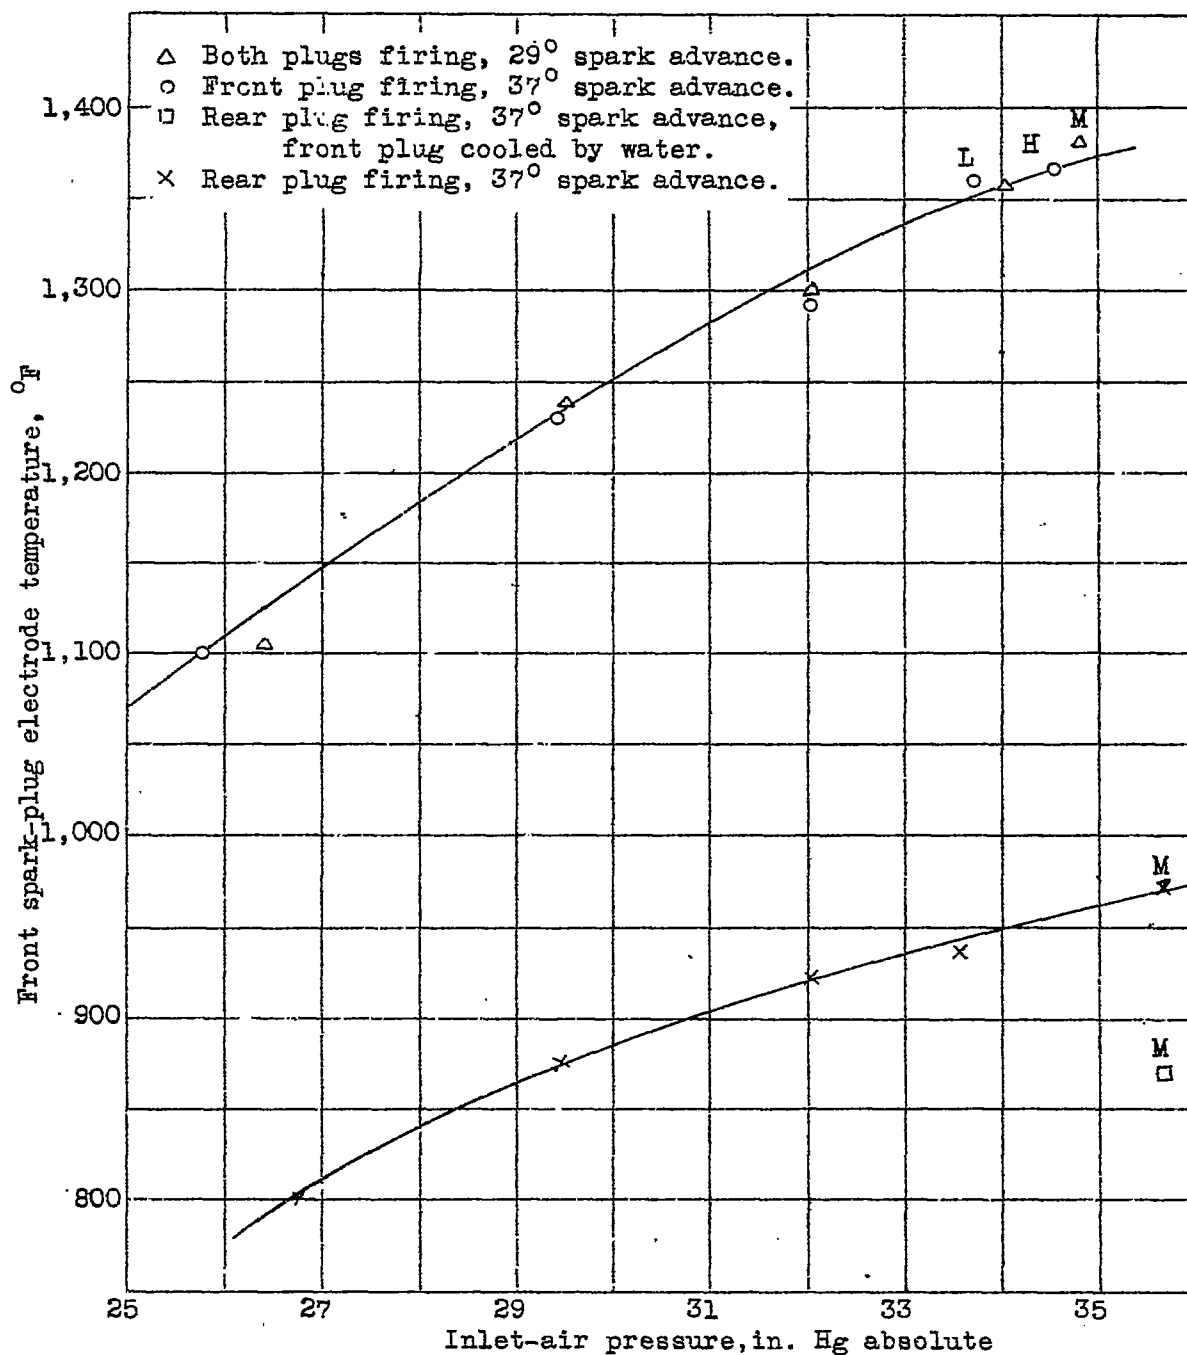


Figure 6.- Front spark-plug electrode temperatures with the plug firing and not firing and with water flowing over the plug. Compression ratio, 7.5; engine speed, 2,000 rpm; maximum-knock mixture; inlet-air temperature,  $120^\circ\text{F}$ ; ethylene glycol temperature,  $240^\circ\text{F}$ ; S-1 fuel; spark retarded for 99 percent maximum power. L, light pinking knock; M, medium loud knock; H, hard knock.

Rothrock, A. M.  
Biermann, A. E.

DIVISION: Fuels and Lubricants (12)  
SECTION: Analysis and Testing (8)  
CROSS REFERENCES: Fuels, Antiknock - Testing (42622)

ORIG. AGENCY NUMBER  
TN-768

AUTHOR(S)

*Shape, Combustion Chamber*

REVISION

AMER. TITLE: Correlation of knocking characteristics of fuels in an engine having a hemispherical combustion chamber

FORG'N. TITLE: *copy of Aviation Fuels*

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D. C.

TRANSLATION:

COUNTRY	LANGUAGE	FORG'N. CLASS.	U. S. CLASS.	DATE	PAGES	ILLUS.	FEATURES
U. S.	Eng.		<del>Rept.</del>	Jul'40	16	7	tables, graphs

## ABSTRACT

Data show effects of inlet-air pressure, inlet-air temperature, and compression ratio on maximum permissible performance of five fuels with octane numbers varying from 90-100 plus 2 ml of tetraethyl lead per gal in a cylinder having hemispherical-dome combustion chamber. Compression ratio and inlet-air temperature were varied from 6.0 to 8.9 and 110° to 310°F, respectively. Measurement of spark-plug electrode temperatures showed that with 2 spark-plugs, cutting off the ignition of one lowered the electrode temperature of that plug from 1365° to 957°.

NOTE: Requests for copies of this report must be addressed to: N.A.C.A., Washington, D. C.

AD-B805 347

CAL INDEX  
FILED

WRIGHT FIELD, OHIO, USAAF

17-0-31 MAR 57

*340 400 R+*

1948

Classification cancelled per amendment  
of List NASA dd. 28 Sept 1957  
George W. Jordan, JSCG. 29 Nov 1957