


Serial No. 828,232  
Filing Date 25 March 1997  
Inventor William H. Nedderman, Jr.

NOTICE

The above identified patent application is available for licensing. Requests for information should be addressed to:

OFFICE OF NAVAL RESEARCH  
DEPARTMENT OF THE NAVY  
CODE OCCC3  
ARLINGTON VA 22217-5660

**DTIC QUALITY INSPECTED 4**



19970721 056

1 Navy Case No. 77951

2  
3 STRUT-MOUNTED DRAG BALANCE

4  
5 STATEMENT OF GOVERNMENT INTEREST

6 The invention described herein may be manufactured and used  
7 by or for the Government of the United States of America for  
8 governmental purposes without the payment of any royalties  
9 thereon or therefore.

10  
11 BACKGROUND OF THE INVENTION

12 (1) Field of the Invention

13 The present invention relates generally to the measurement  
14 of drag forces on a surface, and more particularly to a strut-  
15 mounted drag balance for measuring drag force on a flat plate  
16 moving through a medium.

17 (2) Description of the Prior Art

18 The performance of a vehicle moving through a medium is  
19 limited by the drag force of the medium on the vehicle. To  
20 improve efficiency and reduce the power required to move the  
21 vehicle through the medium, numerous drag reduction methods have  
22 been tried. It is customary to test drag reduction methods by  
23 model testing in towing basins or wind and water tunnels where a

1 scaled model of the vehicle is towed through the medium or the  
2 medium is flowed past the model. To measure drag forces on the  
3 model, a towing post, or strut is attached to the model through a  
4 load cell, or drag balance. Typical prior art drag balances, as  
5 exemplified by U.S. Patent No. 5,343,742 to Cusanelli et al.,  
6 consist essentially of a hollow metal cube, generally four inches  
7 on a side, with portions of the sides removed, leaving planar top  
8 and bottom surfaces connected by four legs. The strut is  
9 attached to the top surface and the model is attached to the  
10 lower surface. Forces exerted on the model cause bending in the  
11 legs which is measured using strain gages attached to the legs.  
12 When the model is submerged in the medium such that the towing  
13 post extends into the medium, the strut is streamlined to  
14 minimize extraneous drag forces exerted on the strut, and the  
15 drag balance is placed within the scaled model. Testing of drag  
16 reduction methods which do not rely on vehicle shape to reduce  
17 drag, e.g., polymer injection and magneto hydrodynamic turbulence  
18 control devices, is complicated by the difficulty of predicting  
19 drag on a model shaped as a scaled vehicle. It is preferable to  
20 test such drag reduction methods using a flat plate model since  
21 drag calculations are much simpler for a flat plate model than  
22 for a hydrodynamically shaped model, thus actual test results can  
23 be easily compared to theoretical predictions. Since the flat

1 plate has no interior volume, the drag balance cannot be placed  
2 within the plate. The cubic configuration of current drag  
3 balances would cause considerable turbulence if placed between  
4 the strut and the flat plate. If the drag balance were placed  
5 above the strut, the drag forces exerted on the strut itself  
6 would corrupt the drag reduction measurements. Additionally, The  
7 size of current drag balances also prevents their placement  
8 within an efficiently streamlined strut.  
9

#### 10 SUMMARY OF THE INVENTION

11 Accordingly, it is an object of the present invention to  
12 provide a drag balance which does not create additional  
13 turbulence when towed through a medium.

14 Another object of the present invention is to provide a drag  
15 balance which can be mounted in close proximity to a flat plate  
16 model.

17 Still another object of the present invention is to provide  
18 a drag balance which can be incorporated into a streamlined strut  
19 or towing post.

20 Other objects and advantages of the present invention will  
21 become more obvious hereinafter in the specification and  
22 drawings.

1           In accordance with the present invention, a drag balance is  
2       provided within a hollow region of a streamlined strut. The drag  
3       balance has a ground frame attached inside the strut and a  
4       balance frame attached to the flat plate at the base of the  
5       strut. The ground frame and balance frame are connected by  
6       flexures which allow only a small amount of lateral movement of  
7       the balance frame and model relative to the ground frame and  
8       strut. Strain gages are attached to one or more of the flexures  
9       to determine the amount of bending in the flexures and thus  
10      obtain a measure of the drag forces exerted on the model. Since  
11      the drag balance is mounted within the streamlined strut,  
12      turbulence is minimized. The drag balance is also connected  
13      directly to the model at the base of the strut such that drag  
14      forces on the model can be accurately determined. Further, the  
15      ground frame and balance frame can be easily shaped to conform  
16      within an efficiently streamlined strut.

#### 17 18                           BRIEF DESCRIPTION OF THE DRAWINGS

19           A more complete understanding of the invention and many of  
20      the attendant advantages thereto will be readily appreciated as  
21      the same becomes better understood by reference to the following  
22      detailed description when considered in conjunction with the  
23      accompanying drawings wherein corresponding reference characters

1 indicate corresponding parts throughout the several views of the  
2 drawings and wherein:

3 FIG. 1 is a schematic representation of a drag reduction  
4 measurement test system using the drag balance of the present  
5 invention;

6 FIG. 2 is a side view of the drag balance of the present  
7 invention shown mounted within a cross section of a strut;

8 FIG. 3 is a cross sectional view taken along the line 3-3 of  
9 FIG. 2 showing a top view of the drag balance of the present  
10 invention mounted within a streamlined strut; and

11 FIG. 4 is an isometric view of the drag balance of the  
12 present invention.

#### 13 14 DESCRIPTION OF THE PREFERRED EMBODIMENT

15 Referring now to FIG. 1, there is shown a schematic  
16 representation of a drag reduction measurement system 10. A tow  
17 carriage 12 rides on rails 14 above the surface of medium 16. A  
18 streamlined strut 18 is suspended from carriage 12 and extends  
19 into medium 16. Strut 18 is hollow and has a drag balance, shown  
20 by dashed outline 20, mounted within its lower portion. A flat  
21 plate 22 is attached to the lower end of drag balance 20. As  
22 carriage 12 moves along rails 14, strut 18 and plate 22 are moved

1 through medium 16. Drag forces exerted by medium 16 on plate 22  
2 are transferred to and measured by drag balance 20.

3 Referring now to FIGs. 2 through 4, FIG. 2 shows a side  
4 cross sectional view of the lower end of strut 18 with drag  
5 balance 20 mounted therein. FIG. 3 shows a cross section taken  
6 along line 3-3 of FIG. 2 and FIG. 4 shows an isometric view of  
7 drag balance 20. Drag balance 20 consists of upper and lower  
8 ground frames, 24a and 24b, and upper and lower balance frames,  
9 26a and 26b. It can be seen that frames 24a, 24b, 26a and 26b  
10 are shaped to generally conform to the streamline shape of strut  
11 18. Two ground columns 28 are spaced along the longitudinal axis  
12 X-X of drag balance 20 and are attached between upper and lower  
13 ground frames, 24a and 24b, passing through balance bores 30 in  
14 upper balance frame 26a. Similarly, two balance columns 32 are  
15 attached between upper and lower balance frames, 26a and 26b,  
16 along axis X-X and passing through ground bores 34 in lower  
17 ground frame 24b. In the preferred embodiment shown, columns 28  
18 and 32 are shown as round rods press fit into corresponding press  
19 fit bores 36 in the frames. It will be readily understood that  
20 the columns can be of generally any shape and can be affixed to  
21 the frames in any suitable manner. The round shape of columns 28  
22 and 32 shown allows for easy machining of bores 30 and 34. Press  
23 fitting allows for easy assembly and disassembly of drag balance

20. A flexure plate 38 is attached at each end of the frames between upper ground frame 24a and upper balance frame 26a and between lower ground frame 24b and lower balance frame 26b. In the preferred embodiment shown, flexure plates 38 are fabricated of stainless steel feeler gage stock such that movement parallel to axis X-X is accommodated by bending of flexure plates 38 about an axis Y-Y, perpendicular to axis X-X, while the stiffness of flexure plates 38 about axis X-X prevents movement parallel to axis Y-Y. Flexure plates 38 are attached to the frames by cap screws 40 passing through flexure caps 42 and threading into the frames. It will also be readily understood that flexure plates 38 can be attached to frames 24a, 24b, 26a and 26b by any suitable means which would allow for their easy removal. Drag balance 20 is attached to flat plate 2 by means of bolts 44 passing through extensions 26c at either end of lower balance frame 26b. Drag balance 20 is secured inside strut 18 by means of securing screws 46 passing through strut 18 and threading into securing bores 48 on upper and lower ground frames 24a and 24b. In the embodiment shown, a total of four securing screws 46 are provided for each of ground frames 24a and 24b, two to each side of axis X-X. However, it will be understood that any suitable means of releasably securing ground frames 24a and 24b within strut 18 may be used. In order to maintain ground frames 24a and



1 24b and balance frames 26a and 26b steady during handling, two  
2 lock pins 50 are provided, each pin extending through lower  
3 ground frame 24b and into respective balance columns 32. Prior  
4 to testing, pins 50 are removed to allow bending of flexure  
5 plates 38. Lock pin bores 52 may be provided in strut 18,  
6 aligned with pins 40, to facilitate removal of pins 50. In order  
7 to measure the drag forces exerted on flat plate 22, strain gages  
8 54 are provided on one or more of flexure plates 38 with data  
9 leads 56 to a processor (not shown). Drag forces exerted on flat  
10 plate 22 in the direction of axis X-X are transferred to bottom  
11 balance frame 26b, which is directly attached to flat plate 22  
12 and to top balance frame 26a through balance columns 32. The  
13 drag forces result in the movement of balance frames 26a and 26b  
14 relative to ground frames 24a and 24b, causing flexure plates 38  
15 to bend. Strain gages 54 measure the amount of strain in flexure  
16 plates 38 and hence the drag force causing the strain. Ground  
17 frames 24a and 24b and balance frames 26a and 26b are also  
18 provided with communication bores 58 for control wiring and the  
19 like to be connected to flat plate 22 or other model being towed.

20 The drag balance thus described is compact and can be made  
21 to easily fit within a streamlined strut. It provides a  
22 convenient and accurate way to measure drag forces on a model  
23 when a drag balance cannot be fitted within the model itself.

1 The drag balance is attached directly to the model for an  
2 accurate measurement of the drag forces exerted on the model, yet  
3 provides a streamlined shape to prevent undesired turbulence.

4 Although the present invention has been described relative  
5 to a specific embodiment thereof, it is not so limited. The  
6 exact materials and shapes described can be modified to suit the  
7 testing conditions encountered. Various column shapes, including  
8 square and I-shaped, may be used and the columns may be welded or  
9 bolted to the frames. The material and thickness of the flexure  
10 plates can be varied to suit the expected drag forces. Further,  
11 the flexure plates may be welded to the frames at one end rather  
12 than being screwed to the frames.

13 Thus, it will be understood that many additional changes in  
14 the details, materials, steps and arrangement of parts, which  
15 have been herein described and illustrated in order to explain  
16 the nature of the invention, may be made by those skilled in the  
17 art within the principle and scope of the invention,

1 Navy Case No. 77951

2

3

STRUT-MOUNTED DRAG BALANCE

4

5

ABSTRACT OF THE DISCLOSURE

6 A drag balance for measuring drag forces on a model is  
7 described which mounts within a hollow region of a streamlined  
8 strut. The strut is attached to a carriage for towing the model  
9 through a medium. The drag balance has a ground frame attached  
10 inside the strut and a balance frame attached to the flat plate  
11 at the base of the strut. The ground frame and balance frame are  
12 connected by flexures which allow only a small amount of movement  
13 of the balance frame and model relative to the ground frame and  
14 strut in the towing direction. Strain gages are attached to one  
15 or more of the flexures to determine the amount of bending in the  
16 flexures and thus obtain a measure of the drag forces exerted on  
17 the model. Mounting the drag balance within the streamlined  
18 strut minimizes turbulence and allows the drag balance to be  
19 connected directly to the model at the base of the strut such  
20 that drag forces on the model are accurately determined.

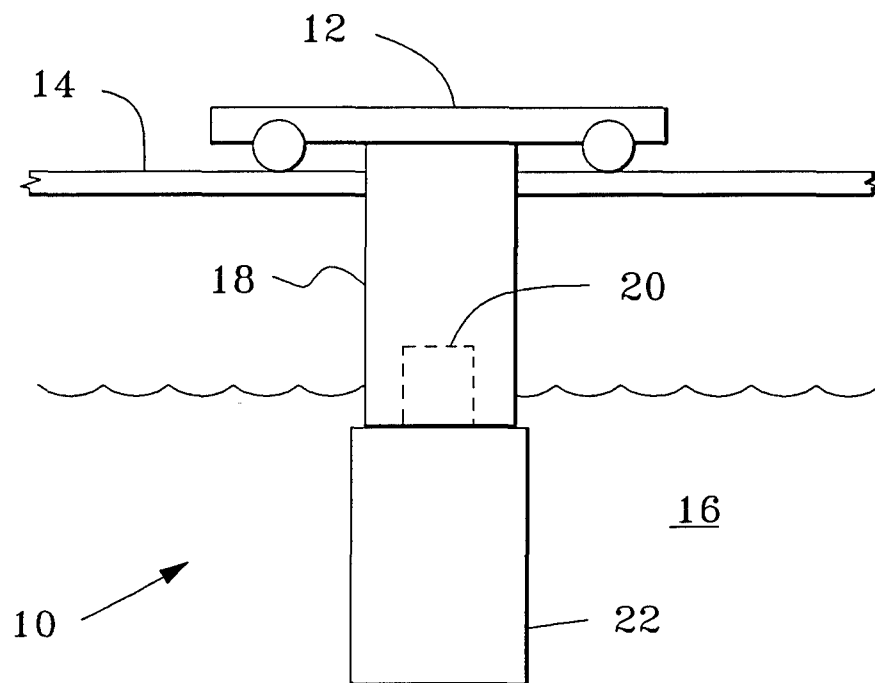


FIG. 1

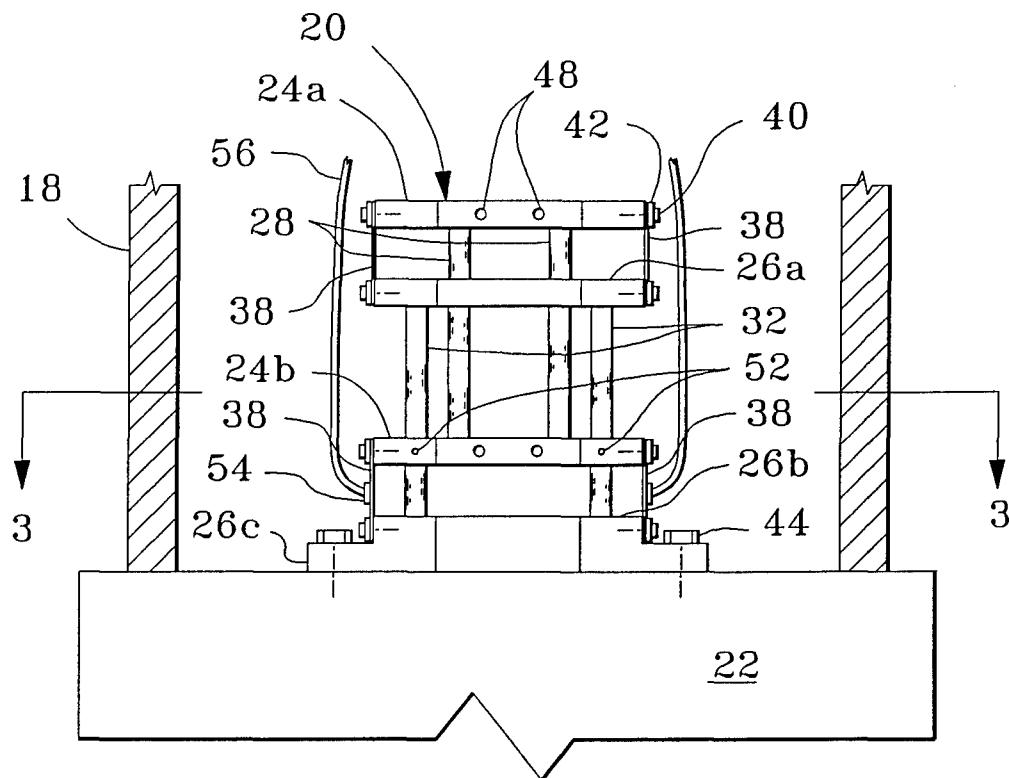


FIG. 2

