

Serial Number            07/853,221  
Filing Date              16 March 1992  
Inventor                 Daniel S. Lenko  
                               Thomas P. Frederick

NOTICE

The above identified patent application is available for licensing. Requests for information should be addressed to:

OFFICE OF NAVAL RESEARCH  
DEPARTMENT OF THE NAVY  
CODE 00CC  
ARLINGTON VA 22217-5660

19990304 018

DISTRIBUTION STATEMENT A  
Approved for public release;  
Distribution Unlimited

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28

Navy Case No. 73,413

MINIATURE, LOW POWER, ELECTROMECHANICAL SAFETY & ARMING DEVICE

BACKGROUND OF THE INVENTION

This invention relates generally to safety arming devices for ordnance involving use of an explosive train interrupter to prevent inadvertent detonation of an explosive charge.

Various timing mechanisms are presently known involving spring-driven clockwork units, fluid timers or electronic delay devices for establishing safe separation time through an explosive train interrupter, precluding premature propagation between primary and secondary explosives. One popular mechanical type of explosive train interrupter involves uses of a rotatable blocking disc as disclosed for example in U.S. Patent Nos. 2,960,037, 3,425,353, 4,389,937 and 4,603,635 to Raech, Jr. et al., Halling, Golay et al. and Boudreau, respectively. According to each of the latter patents, the blocking disc is spring driven to an armed position upon release from its latched safety position. Such mechanical interrupters are however characterized by relatively rapid and uncontrolled displacement of the blocking disc, more suitable for remotely delivered ordnance where timing accuracy is not particularly critical. As to the timing mechanisms heretofore utilized to achieve safe separation time as aforementioned, they are susceptible to temperature variations, as well as being relatively costly.

1 It is therefore an important object of the present  
2 invention to provide a less costly and more reliably accurate  
3 explosive train interrupter that is particularly suitable for  
4 manual or hand emplaced ordnance.

5 SUMMARY OF THE INVENTION

6 In accordance with the present invention the blocking disc  
7 of an explosive train interrupter is driven by an electrically  
8 energized drive module featuring a miniature type of stepping  
9 motor drivingly connected through reduction gearing to the  
10 blocking disc for regulated rotation thereof accurately timed  
11 by supply of motor energizing pulses from a crystal-controlled  
12 pulse generator to initiate and terminate angular displacement  
13 of the blocking disc between its safe and armed positions.

14 Series connected switches interconnect a battery source of  
15 voltage with the pulse generator to supply the energizing  
16 pulses to the stepping motor. One of such switches is closed  
17 in response to manual displacement of a locking rod from a disc  
18 latching position against a spring bias to initiate said  
19 rotation of the blocking disc. The other of the switches is  
20 opened in response to arrival of the blocking disc at its armed  
21 position to deenergize the pulse generator and thereby promptly  
22 terminate rotation of the blocking disc. Rotation of the  
23 blocking disc between such positions is regulated by frictional  
24 rotational resistance and pulsation of the driving torque  
25 applied by the stepping motor through the reduction gearing of  
26 the drive module to the blocking disc with a high mechanical  
27 advantage.

28

1 BRIEF DESCRIPTION OF THE DRAWING FIGURES

2 Other objects, advantages and novel features of the  
3 invention will become apparent from the following detailed  
4 description of the invention when considered in conjunction  
5 with the accompanying drawing wherein:

6 FIG. 1 is a partial side section view of an ordnance  
7 device showing the safety arming mechanism associated therewith  
8 in a safe position in accordance with one embodiment of the  
9 invention.

10 FIG. 1A is a side section view of a portion of the device  
11 shown in FIG. 1 displaced from its safe position;

12 FIG. 2 is a partial section view taken substantially  
13 through a plane indicated by section line 2-2 in FIG. 1;

14 FIG. 3 is a partial section view taken substantially  
15 through a plane indicated by section line 3-3 in FIG. 2;

16 FIG. 4 is schematic and electrical circuit diagram  
17 illustrating the system associated with the apparatus shown in  
18 FIGS. 1, 2 and 3;

19 FIG. 5 is a partial section view corresponding to FIG. 2  
20 showing modifications of the device in accordance with  
21 alternative embodiments of the invention; and

22 FIG. 6 is a partial section view taken substantially  
23 through a plane indicated by section line 6-6 in FIG. 5.

24 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

25 Referring now to the drawing in detail, FIG. 1  
26 illustrates a hand emplaced ordnance generally referred to by  
27 reference numeral 10 having an explosive charge 12 to which an  
28

1 explosive initiation train is established from an electric  
2 detonator 14 through a lead or booster 16. The ordnance  
3 housing 18 enclosing the charge 12 also encloses a safety  
4 arming mechanism generally to by reference numeral 20 in FIG.  
5 1, with which the detonator 14 is associated.

6 The safety arming mechanism 20 also has associated  
7 therewith, according to certain installational embodiments of  
8 the present invention, arming electronics 22 and firing  
9 electronics 24, as diagrammed in FIG. 4, subject to the control  
10 of series connected switch assemblies 26 and 28. The switch  
11 assembly 26 is operated by a cam actuator formation 30 carried  
12 on one axial face of an interrupter in the form of a blocking  
13 disc element 32 as shown in FIGS. 1 and 3. The switch assembly  
14 28, on the other hand, is operated by an actuator element 34  
15 fixed to an elongated locking rod 36 of a latch mechanism 38.  
16 The blocking disc 32 is angularly displaced about the axis of  
17 its shaft 40 by a drive module 42 as shown in FIG. 1 and  
18 diagrammed in FIG. 4.

19 The locking rod 36 of the latch mechanism 38 is shown in  
20 FIG. 1 in its initial latching position holding the blocking  
21 disc 32 in its safe position. The locking rod is reliably held  
22 in its latch position by a cotter pin 44 inserted through a  
23 transverse bore 46 in the pin aligned with holes in lugs 48  
24 projecting from the housing 18. The cotter pin 44 may be  
25 manually withdrawn by means of a pull ring 50 connected to the  
26 pin by a lanyard 52. The locking rod 36 may then be manually  
27 pushed inwardly into the housing 18 against the bias of a  
28

1 spring 54 to a release position in which it is held by a  
2 spring-biased ball lock 55 received in a notch 57 formed in the  
3 rod 36 as shown in FIG. 1A.

4 The spring 54 is in engagement with an inner latch  
5 formation 56 on the locking rod received within a peripheral  
6 notch 58 holding the blocking disc 32 in its safe position as  
7 shown in FIGS. 1 and 2. In such safe position, the blocking  
8 disc 32 prevents the detonator 14 from acting on the booster 16  
9 thereby interrupting the explosive initiation train. When the  
10 disc 32 is angularly displaced by a predetermined angle to an  
11 armed position, an opening 60 formed therein, as shown in FIG.  
12 2, is aligned between the detonator 14 and booster 16 to enable  
13 initiation of charge 12 by operation of the electric detonator  
14 14. As the disc 32 reaches such armed position, the cam  
15 actuator formation 30 actuates the switch assembly 26 to  
16 terminate disc movement.

17 Angular displacement of the blocking disc 32 from the  
18 safe position occurs when the latch formation 56 at the inner  
19 end of locking rod 36 is axially displaced from the notch 58 to  
20 a release position against the bias of spring 54 as  
21 aforementioned. A spring-biased friction pad 59 bears against  
22 disc 32 to exert frictional resistance thereon as shown in FIG.  
23 1, to prevent inadvertent angular displacement. During axial  
24 displacement of the locking rod 36 to the release position, the  
25 switch assembly 28 is actuated by actuator 34 to initiate  
26 displacement of the blocking disc 32 by the drive module 42.

27  
28

1           Actuation of the switch assembly 28 by actuator 34 closes  
2 a normally open switch 62 thereof as diagrammed in FIG. 4  
3 connecting a source of DC voltage 64, such as a 1.5 volt  
4 battery, to the drive module 42 through a normally closed  
5 switch 66 of the switch assembly 26 electrically connected in  
6 series with switch 62. The drive module 42 according to the  
7 embodiment diagrammed in FIG. 4, includes a pulse generator 68  
8 that is crystal driven at 32.768 KHz for example when energized  
9 by the voltage source 64 through switches 62 and 66. Timed  
10 pulses of alternating polarity are thereby applied at a rate of  
11 one pulse per second, for example, to a miniature stepping  
12 motor 70 of the module through which relatively low  
13 intermittent output driving force or torque is produced.  
14 Through reduction gearing 72 as diagrammed in FIG. 4, the motor  
15 70 rotates the blocking disc 32 at a mechanical advantage of at  
16 least 450 (450 motor revolutions per 90° rotation of disc 32)  
17 to overcome the frictional regulating resistance aforementioned  
18 for precisely timed angular displacement of the blocking disc  
19 32. In the armed position of the blocking disc, the cam  
20 actuator 30 mounted thereon opens the switch 66 in the switch  
21 assembly 26 to interrupt the supply of energizing voltage to  
22 the drive module 42 causing deenergization thereof and  
23 immediate cessation of angular displacement of the blocking  
24 disc. The foregoing actuation of switch assembly 26 also  
25 displaces switch 78 to a position connecting electric detonator  
26 14 to firing electronics 24.  
27  
28

1           As an additional safety measure, operation of the  
2 electric detonator 14 may be disabled when the locking rod 36  
3 is in its initial latch position by grounding of a fire  
4 capacitor 74, usually associated with the detonator, through a  
5 disconnect switch 76 of the switch assembly 28. Further, the  
6 detonator is also disabled in the safe position of the blocking  
7 disc 32 by grounding, through switch 78 of the switch assembly  
8 26, and by disconnection of the detonator from its firing  
9 electronics 24 as diagrammed in FIG. 4.

10           FIGS. 5 and 6 illustrate certain alternative embodiments  
11 wherein a rotatable blocking disc 32', generally similar in  
12 function and arrangement to blocking disc 32 hereinbefore  
13 described, is formed with external gear teeth 80 associated  
14 with the reduction gearing through which disc 32' is  
15 drivingly connected to the stepping motor of the drive module.  
16 Rotational regulation for the disc 32' is provided by a one-way  
17 ratchet pawl 82. The pawl 82 is pivotally displaceable against  
18 a spring bias in a clockwise direction as viewed in FIG. 5 to  
19 unidirectionally limit angular displacement of disc 32' in the  
20 clockwise direction indicated by arrow 84 as well as to  
21 yieldably resist rotation in such direction. Thus, in the  
22 event of failure of the reduction gearing, inadvertent angular  
23 displacement of disc 32' to its armed position will be  
24 prevented with additional insurance.

25           FIG. 5 illustrates yet another alternative feature  
26 wherein the opening 60 associated with blocking disc 32 is  
27 replaced by a conductive detonation transfer element 86 adapted  
28 to be aligned between the detonator 14 and booster 16 of the



1 explosive ignition train in the armed position of the blocking  
2 disc 32'.

3 Numerous other modifications and variations of the present  
4 invention are possible in light of the foregoing teachings. It  
5 is therefore to be understood that

6 the invention may be practiced otherwise than  
7 as specifically described.

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26



27

28


2 ABSTRACT OF THE DISCLOSURE

3 The blocking disc serving as an explosive train interrupter  
4 of a safety and arming mechanism is angularly displaced from  
5 its safe position by a stepping motor through reduction gearing  
6 in response to timed energizing pulses applied thereto from a  
7 crystal-controlled pulse generator. The blocking disc is  
8 releasably latched in its safe position by a locking rod  
9 controlling the supply and cut-off of energizing voltage to the  
10 pulse generator to accurately time displacement of the disc to  
11 an armed position.


12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28

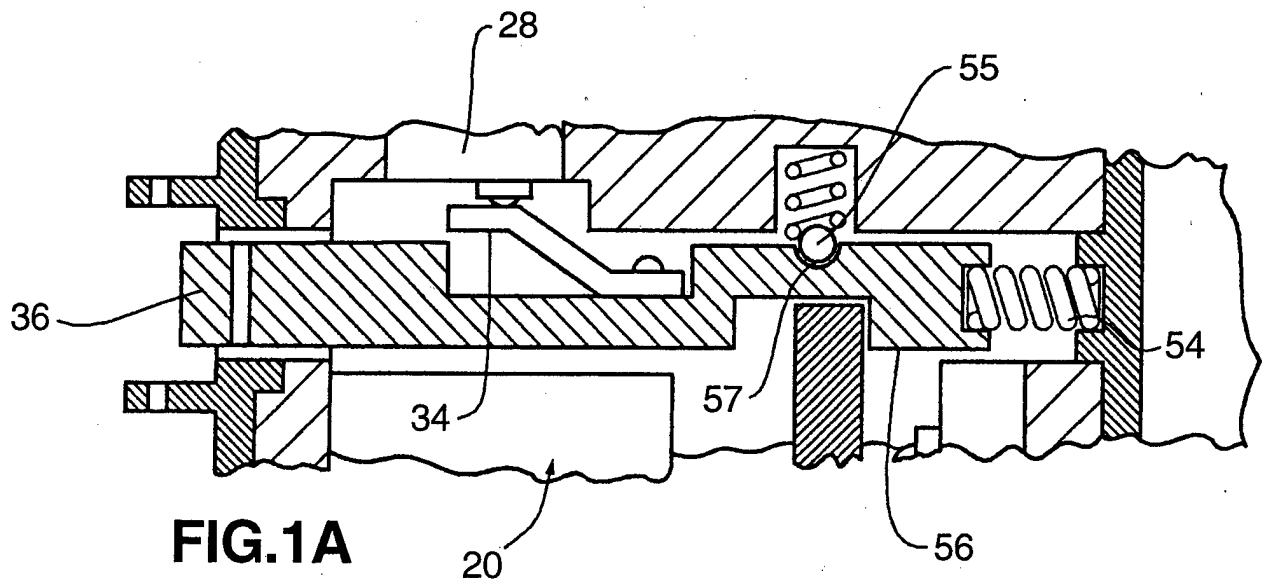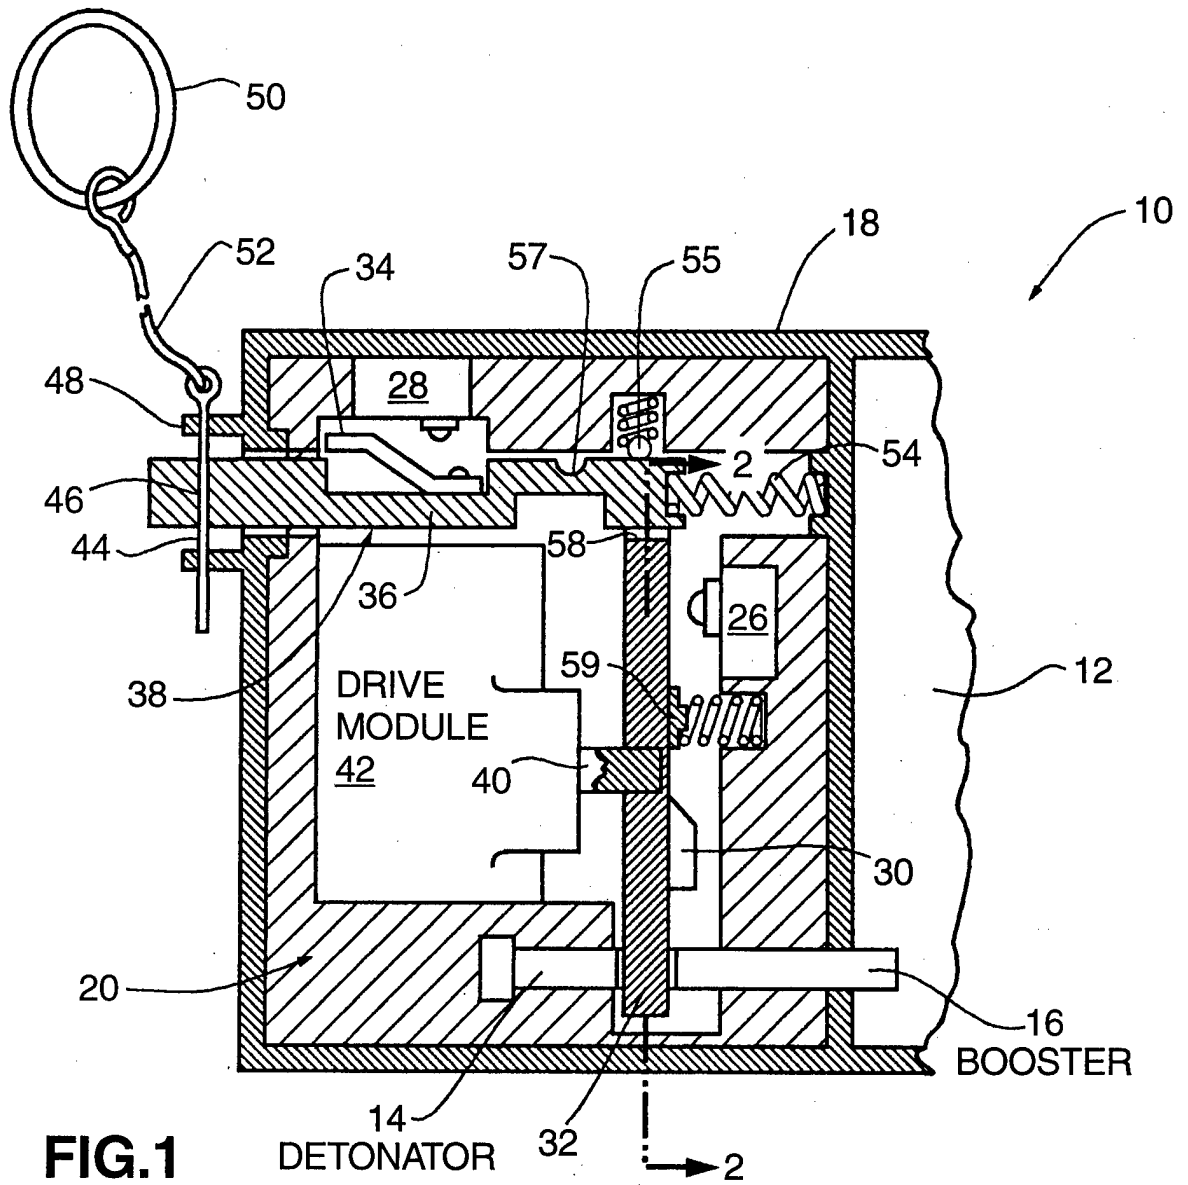


**FIG.2**

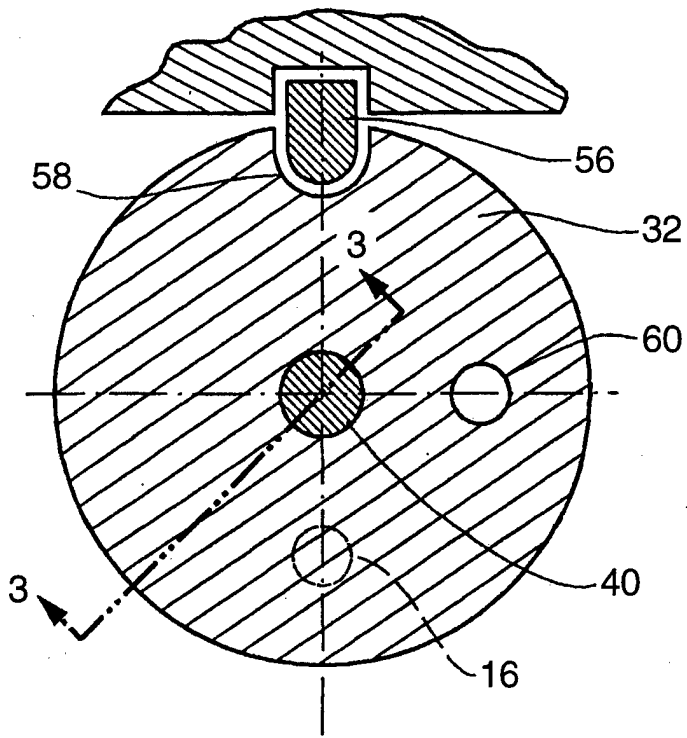


**FIG.3**

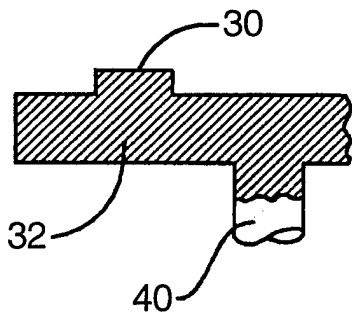

**FIG.6**

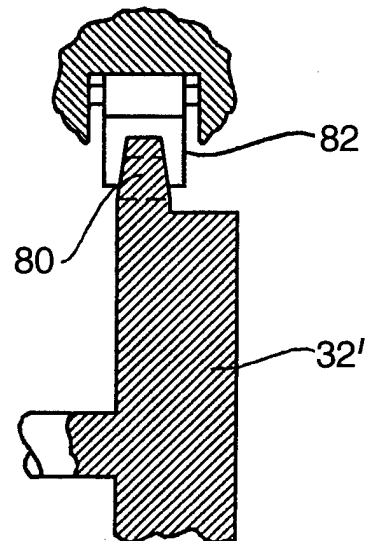

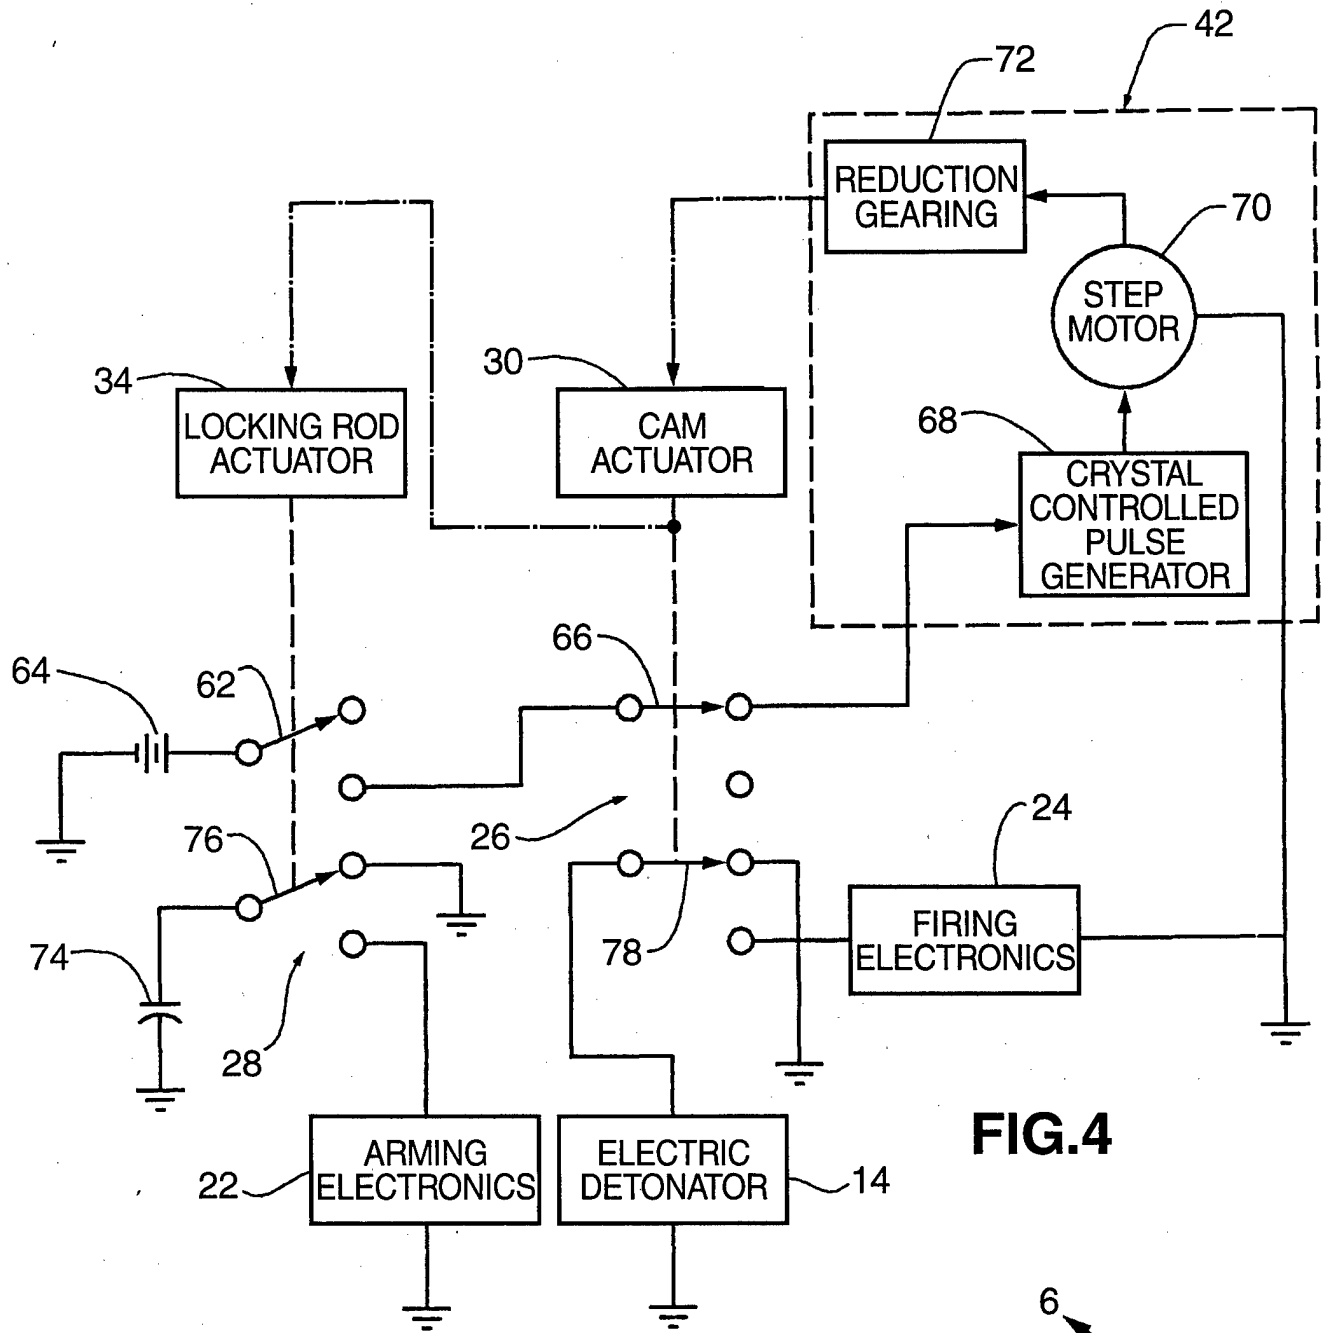

**FIG. 4**

**FIG. 5**

