



DEPARTMENT OF THE NAVY
OFFICE OF COUNSEL
NAVAL UNDERSEA WARFARE CENTER DIVISION
1176 HOWELL STREET
NEWPORT RI 02841-1708

IN REPLY REFER TO:

Attorney Docket No. 78161
Date: 20 December 2002

The below identified patent application is available for licensing. Requests for information should be addressed to:

PATENT COUNSEL
NAVAL UNDERSEA WARFARE CENTER
1176 HOWELL ST.
CODE 000C, BLDG. 112T
NEWPORT, RI 02841

Serial Number 10/224,230
Filing Date 8/19/02
Inventor Robert V. Belenger

If you have any questions please contact Michael J. McGowan, Patent Counsel, at 401-832-4736.

DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited

110 063

SPEECH TO TOUCH TRANSLATOR ASSEMBLY AND METHOD

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN that (1) ROBERT V. BELENGER, employee of the United States Government, and (2) GENNARO R. LOPRIORE, citizens of the United States of America, and residents of (1) Raynham, County of Bristol, Commonwealth of Massachusetts, and (2) Somerset, County of Bristol, Commonwealth of Massachusetts, have invented certain new and useful improvements entitled as set forth above, of which the following is a specification.

MICHAEL J. MCGOWAN, ESQ.
Reg. No. 31042
Naval Undersea Warfare Center
Division, Newport
Newport, RI 02841-1708
TEL: 401-832-4736
FAX: 401-832-1231

20030110 063



23523

PATENT TRADEMARK OFFICE

1 Attorney Docket No. 78161

2

3 SPEECH TO TOUCH TRANSLATOR ASSEMBLY AND METHOD

4

5 STATEMENT OF GOVERNMENT INTEREST

6 The invention described herein may be manufactured and used
7 by and for the Government of the United States of America for
8 Governmental purposes without the payment of any royalties
9 thereon or therefor.

10

11 CROSS REFERENCE TO OTHER PATENT APPLICATIONS

12 Not applicable.

13

14 BACKGROUND OF THE INVENTION

15 (1) Field of the Invention

16 The invention relates to an assembly and method for
17 assisting a person who is both hearing and sight impaired to
18 understand a spoken word, and is directed more particularly to an
19 assembly including a set of fingers in contact with the person's
20 body and activatable in a coded manner, in response to speech
21 sounds, to exert combinations of pressure points on the person's
22 body.

23 (2) Description of the Prior Art

24 Various devices and methods are known for enabling hearing-
25 handicapped individuals to receive speech. Sound amplifying

1 devices, such as hearing aids are capable of affording a
2 satisfactory degree of hearing to some with a hearing impairment.
3 For the deaf, or those with severe hearing impairments, no means
4 is available that enables them to receive conveniently and
5 accurately speech with the speaker absent from view. With the
6 speaker in view, a deaf person can speech read, i.e., lip read,
7 what is being said, but often without a high degree of accuracy.
8 The speaker's lips must remain in full view to avoid loss of
9 meaning. Improved accuracy can be provided by having the speaker
10 "cue" his speech using hand forms and hand positions to convey
11 the phonetic sounds in the message. The hand forms and hand
12 positions convey approximately 40% of the message and the lips
13 convey the remaining 60%. However, the speaker's face must still
14 be in view.

15 The speaker may also convert the message into a form of sign
16 language understood by the deaf person. This can present the
17 message with the intended meaning, but not with the choice of
18 words or expression of the speaker. The message can also be
19 presented by fingerspelling, i.e., "signing" the message letter-
20 by-letter, or the message can simply be written out and
21 presented.

22 Such methods of presenting speech require the visual
23 attention of the hearing-handicapped person.

24 It is apparent that if the deaf person is also blind, the
25 aforementioned devices and methods are not helpful. People with

1 both hearing and sight losses have a much more difficult problem
2 to overcome in trying to acquire information and communicate with
3 the world. Before they can respond to any communication directed
4 at them, they must be able to understand what is being said in
5 real time, or close to real time, and preferably without the use
6 of elaborate and cumbersome computer aided methods more suitable
7 for a fixed location than a relatively more mobile life style.

8 There is thus a need for a device which can convert, or
9 translate, spoken words to signals which can be felt, that is,
10 received tactually, by a deaf and blind person to whom the spoken
11 words are directed.

12

13

SUMMARY OF THE INVENTION

14

15

16

17

18

Accordingly, an object of the invention is to provide a
speech to touch translator assembly and method for converting a
spoken message into tactile sensations upon the body of the
receiving person, such that the receiving person can identify
certain tactile sensations with corresponding words.

19

20

21

22

23

24

25

With the above and other objects in view, a feature of the
invention is the provision of a speech to touch translator
assembly comprising an acoustic sensor for detecting word sounds
and transmitting the word sounds, a sound amplifier for receiving
the word sounds from the acoustic sensor and raising the sound
signal level thereof, and transmitting the raised sound signal, a
speech sound analyzer for receiving the raised sound signal from

1 the sound amplifier and determining at least some of (a)
2 frequency thereof, (b) relative loudness variations thereof, (c)
3 suprasegmental information therein, (d) intonational information
4 therein, (e) contour information therein, and (f) time sequence
5 thereof, converting (a)-(e) to data in digital format, and
6 transmitting the data in the digital format. A phoneme sound
7 correlator receives the data in digital format and compares the
8 data with a phonetical alphabet. A phoneme library is in
9 communication with the phoneme sound correlator and contains all
10 phoneme sounds of the selected phonetic alphabet. The translator
11 assembly further comprises a match detector in communication with
12 the phoneme sound correlator and the phoneme library and
13 operative to sense a predetermined level of correlation between
14 an incoming phoneme and a phoneme resident in the phoneme
15 library, and a phoneme buffer for (a) receiving phonetic phonemes
16 from the phoneme library in time sequence, and for (b) receiving
17 from the speech sounds analyzer data indicative of the relative
18 loudness variations, suprasegmental information, intonational
19 information, and time sequences thereof, and for (c) arranging
20 the phonetic phonemes from the phoneme library and attaching
21 thereto appropriate information as to relative loudness, supra-
22 segmental and intonational information, for use in a format to
23 actuate combinations of pressure fingers, each combination being
24 correlated with a phoneme. An array of actuators is provided,
25 each for initiating movement of one of the pressure fingers, the

1 actuators being operable in combination, each combination being
2 representative of a particular phoneme, the pressure fingers
3 being adapted to engage the body of an operator, such that the
4 feel of a combination of pressure fingers is interpretable by the
5 operator as a word sound.

6 In accordance with a further feature of the invention, there
7 is provided a method for translating speech to tactile sensations
8 on the body of an operator to whom the speech is directed. The
9 method comprises the steps of sensing word sounds acoustically
10 and transmitting the word sounds amplifying the transmitted word
11 sounds and transmitting the amplified word sounds, analyzing the
12 transmitted amplified word sounds and determining at least some
13 of (a) frequency thereof, (b) relative loudness variations
14 thereof, (c) suprasegmental information therein, (d) intonational
15 information therein, (e) contour information therein, and (f)
16 time sequences thereof, converting (a)-(f) to data in digital
17 format, transmitting the data in digital format, comparing the
18 transmitted data in digital format with a phoneticized alphabet
19 in a phoneme library, determining a selected level of correlation
20 between an incoming phoneme and a phoneme resident in the phoneme
21 library, arraying the phonemes from the phoneme library in time
22 sequence and attaching thereto the (a)-(e) determined from the
23 analyzing of the amplified word sounds, and placing the arranged
24 phonemes in formats to actuate selected combinations of pressure
25 finger actuators, each of the combinations being correlated with

1 one of the phonemes with (a)-(e) attached thereto, wherein the
2 actuators cause the pressure fingers to engage the body of the
3 operator in the selected combinations.

4 The above and other features of the invention, including
5 various novel details of combinations of components and method
6 steps, will now be more particularly described with reference to
7 the accompanying drawings and pointed out in the claims. It will
8 be understood that the particular assembly and method embodying
9 the invention are shown by way of illustration only and not as
10 limitations of the invention. The principles and features of
11 this invention may be employed in various and numerous
12 embodiments without departing from the scope of the invention.

13

14

BRIEF DESCRIPTION OF THE DRAWINGS

15

Reference is made to the accompanying drawings in which is
16 shown an illustrative embodiment of the invention, from which its
17 novel features and advantages will be apparent, and wherein:

18

FIG. 1 is a block diagram illustrative of one form of the
19 assembly and method illustrative of an embodiment of the
20 invention; and

21

FIG. 2 is a chart showing an illustrative arrangement of pressure
22 finger actuators and the spoken sounds, or phonemes, represented
23 by various combinations of pressure fingers.

1 DESCRIPTION OF THE PREFERRED EMBODIMENTS

2 Only 40+ speech sounds represented by a phonetic alphabet,
3 such as the Initial Teaching Alphabet (English), shown in FIG. 2,
4 or the more extensive International Phonetics Alphabet (not
5 shown), usable for many languages, need to be considered in
6 dynamic translation of speech sounds, or phonemes 10 to touch
7 code 12. In practice, the user "listens" to a speaker or some
8 other audio source by feeling the combinations of the coded,
9 phoneticized words as a set of changing pressure imprints on pre-
10 selected spots on the listener's body, for example on the fingers
11 and palm of a hand. With training, the meaning of the touch
12 coded phoneticized words are apparent to someone who understands
13 the particular language being spoken.

14 The phonemes 10 comprising the words in a sentence are
15 sensed via electro-acoustic means 14 and amplified to a level
16 sufficient to permit their analysis and breakdown of the word
17 sounds into amplitude and frequency characteristics in a time
18 sequence. The sound characteristics are put into a digital
19 format and correlated with the contents of a phonetic phoneme
20 library 16 that contains the phoneme set for the particular
21 language being used. A correlator 18 compares the incoming
22 digitized phoneme with the contents of the library 16 to
23 determine which of the phonemes in the library, if any, match the
24 incoming word sound of interest. When a match is detected, the
25 phoneme of interest is copied from the library and sent to a

1 phoneme to sound code converter, where the digitized form of the
2 phoneme is coded into a six bit code 20 that actuates the
3 appropriate pressure fingers in contact with the user's body.
4 The contact can be made by the user holding a hand grip shaped
5 actuator device in his hand, such that the six pressure fingers
6 are in contact with one of each fingers and the palm. If the
7 user is unable to hold the grip because of some physical
8 disability, the pressure fingers can be attached to some other
9 location on the body in a manner which permits the user to tell
10 what pressure fingers are providing the pressure and thus what
11 phoneme is represented by the code.

12 The speech sounds 10 are coded into combinations of pressure
13 fingers actuations - one combination for each phoneme - in a
14 series of combinations representing the phoneticized word(s)
15 being spoken. A six digit binary code, for example, is
16 sufficient to permit the coding of all English phonemes, with
17 spare code capacity for about 20 more. An additional digit can
18 be added if the language being phonetized contains more phonemes
19 than can be accommodated with six digits.

20 The practice or training required to use the device is
21 similar to learning a language of some forty odd words coded for
22 in the actuation combinations of the pressure fingers. By using
23 the device in a simulation mode, a user is able to "listen" to
24 spoken words including his own, a recording, or from some other
25 source, and feel the phoneticized words as combinations of

1 pressure points on the different fingers and palm, for example,
2 if a hand grip is used. As stated above, if a hand grip is not
3 suitable, due to a user's physical handicap, the pressure fingers
4 can be appropriately attached to parts of the body having a sense
5 of touch.

6 Referring to FIG. 1, the directional acoustic sensor 14
7 detects the word sounds produced by a speaker or other source.
8 The directional acoustic sensor preferably is a sensitive, high
9 fidelity microphone suitable for use with the frequency range of
10 interest.

11 A high fidelity sound amplifier 22 raises a sound signal
12 level to one that is usable by a speech sound analyzer 24. The
13 high fidelity acoustic amplifier 22 is suitable for use with the
14 frequency range of interest and with sufficient capacity to
15 provide the driving power required by the speech sound analyzer
16 24.

17 The analyzer 24 determines the frequencies, relative
18 loudness variations and their time sequence for each word sound
19 sensed. The speech sound analyzer 24 is further capable of
20 determining the suprasegmental and intonational characteristics
21 of the word sound, as well as contour characteristics of the
22 sound. At least some of such information, with its' time
23 sequence, is converted to a digital format for later use by the
24 phoneme sound correlator 18 and a phoneme buffer 26. The

1 determinations of the analyzer 24 are presented in a digital
2 format to a phoneme sound correlator 18.

3 The correlator 18 uses the digitized data contained in the
4 phoneme of interest to query the phonetic phoneme library 16,
5 where the appropriate phoneticized alphabet is stored in a
6 digital format. Successive library phoneme characteristics are
7 compared to the incoming phoneme of interest in the correlator
8 18. A predetermined correlation factor is used as a basis for
9 determining "matched" or "not matched" conditions. A "not
10 matched" condition results in no input to the phoneme buffer 26
11 and no subsequent activation of the pressure fingers 30.
12 Similarly, word spacing intervals do not activate the pressure
13 fingers 30, telling the user that a word is completed and the
14 next phoneme starts a new word. The correlator 18 queries the
15 phonetic alphabet phoneme library 16 to find a digital match for
16 the word sound characteristics in the correlator.

17 The library 16 contains all the phoneme sounds of a
18 phoneticized alphabet characterized by their relative amplitude
19 and frequency content in a time sequence. When the match
20 detector 28 signals a match, the appropriate digitized phonetic
21 phoneme is copied from the phoneme buffer 28, where it is stored
22 and coded properly to activate the appropriate pressure fingers
23 to be interpreted by the user as a particular phoneme.

24 When a match is detected by a match detector 28, the phoneme
25 of interest is copied from the library 16 and stored in the

1 phoneme buffer 26, where it is coded for actuation of the
2 appropriate pressure fingers 30. The match detector 28 is a
3 correlation detection device capable of sensing a predetermined
4 level of correlation between an incoming phoneme and one resident
5 in the phoneme library 16. At this time, it signals the library
6 16 to enter a copy of the appropriate phoneme into the phoneme
7 buffer 26.

8 The phoneme buffer 26 is a digital buffer capable of
9 assembling and arranging the phonemes from the library 16 in
10 their proper time sequence in digitized form coded in a suitable
11 format to actuate the proper pressure finger combination for the
12 user to interpret as a particular phoneme.

13 The pressure fingers 30 are miniature electro-mechanical
14 devices mounted in a hand grip (not shown) or arranged in some
15 other suitable manner that permits the user to "read" and
16 understand the code 20 (FIG. 2) transmitted by the pressure
17 finger combinations 12 actuated by the particular word sound.
18 The number of actuators and pressure fingers required suits the
19 phoneme set of the particular language being used, with six being
20 suitable for the English language. Seven actuators are more than
21 sufficient for most languages. See FIG. 2 for an example of a
22 binary coding scheme.

23 There is thus provided a speech to touch translator assembly
24 and method which enables a person with both hearing and sight
25 handicaps to understand the spoken word.

1 It will be understood that many additional changes in the
2 details, method steps and arrangement of components, which have
3 been herein described and illustrated in order to explain the
4 nature of the invention, may be made by those skilled in the art
5 within the principles and scope of the invention as expressed in
6 the appended claims.

1 Attorney Docket No. 78161

2
3 SPEECH TO TOUCH TRANSLATOR ASSEMBLY AND METHOD

4
5 ABSTRACT OF THE DISCLOSURE

6 A speech to touch translator assembly and method for
7 converting spoken words directed to an operator into tactile
8 sensations caused by combinations of pressure point exertions on
9 the body of the operator, each combination of pressure points
10 exerted signifying a phoneme of one of the spoken words,
11 permitting comprehension of spoken words by persons that are deaf
12 and blind.

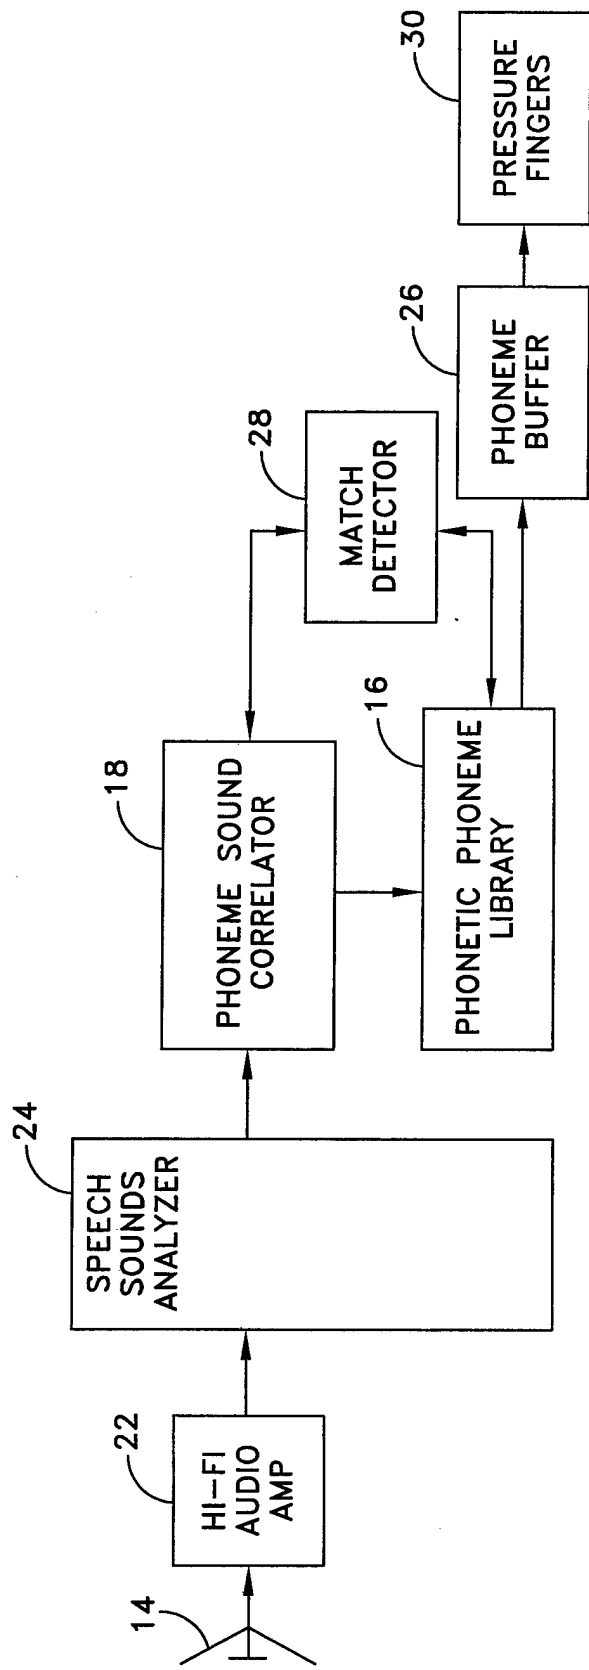


FIG. 1

ENGLISH PHONEMES (WORD SOUNDS) WITH A SET OF PRESSURE FINGER ACTUATION CODES

0=PRESSURE FINGER NOT ACTUATED
1=PRESSURE FINGER ACTUATED

CONSONANT SOUNDS				PRESSURE FINGER ACTUATION CODES					
				PRESSURE FINGER #					
				1	2	3	4	5	6
1	p	as in	sip	0	0	0	0	0	1
2	p	as in	pen	0	0	0	0	1	0
3	b	as in	bit	0	0	0	0	1	1
4	m	as in	map	0	0	0	1	0	0
5	w	as in	wit	0	0	0	1	0	1
6	ou	as in	out	0	0	0	1	1	0
7	f	as in	fat	0	0	0	1	1	1
8	v	as in	vat	0	0	1	0	0	0
9	t	as in	thin	0	0	1	0	0	1
10	th	as in	this	0	0	1	0	1	0
11	st	as in	step	0	0	1	0	1	1
12	t	as in	tip	0	0	1	1	0	0
13	d	as in	dip	0	0	1	1	0	1
14	n	as in	nip	0	0	1	1	1	0
15	l	as in	lip	0	0	1	1	1	1
16	tt	as in	utter	0	1	0	0	0	0
17	s	as in	sip	0	1	0	0	0	0
18	z	as in	zip	0	1	0	0	1	0
19	r	as in	red	0	1	0	0	1	1
20	ss	as in	mission	0	1	0	1	0	0
21	s	as in	vision	0	1	0	1	0	1
22	ck	as in	sick	0	1	0	1	1	0
23	k	as in	kiss	0	1	0	1	1	1
24	g	as in	give	0	1	1	0	0	0
25	ng	as in	king	0	1	1	0	0	1
26	y	as in	yet	0	1	1	0	1	0
27	l	as in	bite	0	1	1	0	1	1
28	h	as in	hit	0	1	1	1	0	0
29	ee	as in	beet	0	1	1	1	0	1
30	l	as in	bit	0	1	1	1	1	0
31	l	as in	bid	0	1	1	1	1	1
32	ai	as in	aid	1	0	0	0	0	0
33	a	as in	at	1	0	0	0	0	1
34	ur	as in	hurt	1	0	0	0	1	0
35	e	as in	bet	1	0	0	0	1	1
36	a	as in	about	1	0	0	1	0	0
37	u	as in	putt	1	0	0	1	0	1
38	a	as in	father	1	0	0	1	1	0
39	oo	as in	food	1	0	0	1	1	1
40	oo	as in	foot	1	0	1	0	0	0
41	oe	as in	toe	1	0	1	0	0	1
42	aw	as in	law	1	0	1	0	1	1

FIG. 2