



DEPARTMENT OF THE NAVY

OFFICE OF COUNSEL
NAVAL UNDERSEA WARFARE CENTER DIVISION
1176 HOWELL STREET
NEWPORT RI 02841-1708

IN REPLY REFER TO:

Attorney Docket No. 82839

Date: 22 October 2003

The below identified patent application is available for licensing. Requests for information should be addressed to:

PATENT COUNSEL
NAVAL UNDERSEA WARFARE CENTER
1176 HOWELL ST.
CODE 00OC, BLDG. 112T
NEWPORT, RI 02841

Serial Number 10/600,726
Filing Date 6/23/03
Inventor Michael T. Ansay

If you have any questions please contact James M. Kasischke, Deputy Counsel, at 401-832-4736.

AN ASSEMBLY OF UNDERWATER BODIES AND LAUNCHER THEREFOR

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT (1) MICHAEL T. ANSAY, and (2) JOHN R. LITTLE, citizens of the United States of America, employees of the United States Government, and residents of (1) Johnston, County of Providence, State of Rhode Island, and (2) Swansea, County of Bristol, Commonwealth of Massachusetts, have invented certain new and useful improvements entitled as set forth above, of which the following is a specification.

JAMES M. KASISCHKE, ESQ.
Reg. No. 36562
Naval Undersea Warfare Center
Division, Newport
Newport, RI 02841-1708
TEL: 401-832-4736
FAX: 401-832-1231

20031121 098

DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited



23523

PATENT TRADEMARK OFFICE

1 Attorney Docket No. 82839

2
3 AN ASSEMBLY OF UNDERWATER BODIES AND LAUNCHER THEREFOR

4
5 STATEMENT OF GOVERNMENT INTEREST

6 The invention described herein may be manufactured and used
7 by or for the Government of the United States of America for
8 Governmental purposes without the payment of any royalties
9 thereon or therefor.

10
11 BACKGROUND OF THE INVENTION

12 (1) Field of the Invention

13 The invention relates to the launch of bodies from
14 submarines at various depths, and is directed more particularly
15 to the launch of bodies, such as weapons, vehicles, and the like,
16 from locations outside the pressure hulls of submarines.

17 (2) Description of the Prior Art

18 The United States Navy has expressed a need to carry greater
19 payloads of weapons/vehicles on submarines and a need to launch
20 weapons/vehicles from modular, external, payload bays.
21 Traditionally, such bodies have been stowed inside submarine
22 torpedo rooms, protected from the pressure and corrosiveness of
23 the ocean environment, and then launched from the submarine
24 torpedo tubes when needed.

1 Accordingly, there is a need for an assembly for underwater
2 bodies, including an appropriate launcher therefor, which
3 assembly is adapted to be mounted outside a submarine pressure
4 hull, and is operable to separate the underwater bodies from the
5 launcher by force of gravity.

7 SUMMARY OF THE INVENTION

8 An object of the invention is, therefore, to provide a
9 launch assembly mounted outside the pressure hull of a submarine,
10 for housing and releasing bodies underwater, and underwater
11 bodies for exiting the launch assembly and dropping downwardly by
12 force of gravity until well clear of the submarine, and
13 thereafter navigating under its own power.

14 With the above and other objects in view, a feature of the
15 present invention is the provision of an assembly of underwater
16 bodies and a launcher therefor. The assembly is adapted for
17 mounting on a submarine outside the pressure hull. The assembly
18 includes a launcher comprising a housing for enclosing an
19 underwater body, a body support structure within the housing for
20 supporting the body, a pressure regulator system in communication
21 with the housing for imposing a selected pressure on an interior
22 of the housing, a hatch pivotally mounted on the housing, and an
23 actuator for opening the hatch to permit the body to exit the
24 hatch, and for closing the hatch. The assembly further includes
25 an underwater body comprising a self-propelled body adapted to

1 exit by gravity from the launcher. A release device is disposed
2 on at least one of the launcher and the body for releasing the
3 body from the launcher to permit the exit of the body from the
4 launcher by gravity.

5 The above and other features of the invention, including
6 various novel details of construction and combinations of parts,
7 will now be more particularly described with reference to the
8 accompanying drawings and pointed out in the claims. It will be
9 understood that the particular assembly embodying the invention
10 is shown by way of illustration only and not as a limitation of
11 the invention. The principles and features of this invention may
12 be employed in various and numerous embodiments without departing
13 from the scope of the invention.

14 15 BRIEF DESCRIPTION OF THE DRAWINGS

16 Reference is made to the accompanying drawings in which is
17 shown an illustrative embodiment of the invention, from which its
18 novel features and advantages will be apparent, wherein
19 corresponding reference characters indicate corresponding parts
20 throughout the several views of the drawings and wherein:

21 FIG. 1 is a diagrammatic perspective view of one form of an
22 assembly of underwater bodies and a launcher therefor,
23 illustrative of an embodiment of the invention;

24 FIG. 2 is a widthwise sectional view of the assembly of FIG.
25 1;

1 FIG. 3 is a perspective view of one underwater body released
2 from the launcher of FIGS. 1 and 2; and

3 FIG. 4 is a perspective view of the underwater body of FIG.
4 3, after having activated its self-propelling means.

5
6 DESCRIPTION OF THE PREFERRED EMBODIMENTS

7 Referring to FIGS. 1 and 2, it will be seen that the
8 illustrative assembly includes a launcher 10 for retaining and
9 selectively releasing one or more underwater bodies 12.

10 The launcher 10 preferably is a cylindrically-shaped housing
11 14 closed at an upper end 16 and open at a lower end 18. A hatch
12 20 is provided at the lower end 18 and is operable to close the
13 housing lower end 18.

14 Disposed within the housing 14 is a support framework 22
15 configured to provide support for the one or more bodies 12.
16 Preferably, the framework 22 is of a substantially rigid
17 construction covered with an elastomeric material. Similarly,
18 the housing 14 is of a substantially rigid material with the
19 interior surface covered with an elastomeric material. The
20 framework 22 loosely holds the underwater bodies 12 inside the
21 housing 14. The elastomeric material cushions the bodies 12
22 against shock loads and aggressive submarine maneuvers. The
23 framework 22 and underwater bodies occupy most of the housing
24 interior volume. Optionally, the assembly may include rigid

1 sleeves 23 mounted in the framework 22 and in which the bodies 12
2 are slidably retained.

3 The housing 14 and closed hatch 20 provide a water tight
4 container which protects the bodies 12 from corrosive seawater
5 and from high sea pressures. The container is adapted to
6 withstand sea pressure at the deepest operating depths of the
7 submarine on which it is mounted. The container normally is
8 maintained at atmospheric pressure with gas, such as air.

9 Pressurization of the container is effected by a gas or
10 water pressurization system 24, which typically comprises a high-
11 pressure air flask system which may include the submarine main
12 ballast tanks, or a gas generator. Prior to a launch, the
13 pressurization system 24 operates to increase the pressure in the
14 container to substantially equal the outside water pressure. A
15 seal is positioned around lower end 18 of housing 14. By
16 maintaining a slight negative pressure in the container with
17 respect to the environmental pressure, sealing of the hatch 20
18 against the housing 14 will be maintained.

19 The hatch 20 is operated by an actuator 26 which, upon
20 equalization of pressure inside and outside the container, causes
21 the hatch 20 to open. Inasmuch as the inside and outside
22 pressures are substantially equal, opening of the hatch 20 is not
23 undertaken against relatively heavy outside pressure. In a
24 preferred embodiment, actuator 26 is a hydraulic actuator that is
25 connected to the submarine's hydraulic system. Control of

1 actuator 26 is provided by the hydraulic system. A sensor can be
2 positioned on actuator 26 to indicate the position of actuator 26
3 and hatch 20. Other types of actuators such as pneumatic or
4 electrical actuators can also be used for this purpose.

5 Inasmuch as the housing 14 is opened at the lower end 18,
6 the pressurized air is confined to the housing, keeping the
7 bodies 12 therein dry and free from contact with seawater.

8 The housing 14 is provided with a release device 28 which
9 locks the bodies 12 in the housing, and releases a selected body
10 upon receiving a release signal from inside the submarine.

11 Each of the underwater bodies 12 may be provided with a
12 weight 30 which is releasably attached to the body and jettisoned
13 after launch (FIG. 3). If the body 12 is sufficiently heavy to
14 descend from the housing 14 the weight 30 may be omitted.

15 In an alternative embodiment, each of the bodies 12 is
16 provided with an individual release mechanism 32 and held
17 thereby, rather than by the release mechanism 28 referred to
18 above.

19 In operation and in preparation for a launch, the submarine
20 maneuvers into a position sufficiently distant from the ocean
21 bottom to allow a body 12 to drop from the submarine. Using the
22 gas pressurization system 24, the interior of the housing is
23 pressurized so as to have internal pressure substantially equal
24 to external sea pressure. Inasmuch as the bodies 12 and support
25 framework 22 occupy most of the volume of the housing, relatively

1 little pressurized air is required, at least with a fully loaded
2 housing. Upon equalization of pressure, the hatch actuator 26
3 opens the hatch 20. A "firing" signal from the submarine serves
4 to unlock the release mechanism in use, 28 or 32, which permits a
5 body 12 to slide out of the framework 22 and into the sea
6 therebelow, clear of the housing 14.

7 Upon clearing the housing 14, the weight 30, if used, is
8 jettisoned and a self-propelling means is started, whereupon the
9 launched body 12 starts its travel (FIG. 4), in accordance with a
10 guidance system, to carry out a mission.

11 The hatch actuator 26 closes the hatch 20 and the gas
12 pressurization system 24 then draws air from the housing 14 until
13 the pressure in the housing returns to atmospheric. The
14 withdrawn air may be exhausted or, preferably, is returned to the
15 submarine pressurized air system.

16 There is thus provided a reliable and inexpensive assembly
17 of weapons and launcher therefor, which assembly is located
18 outside the pressure hull of the submarine. Use of the assembly
19 herein described in lieu of the usual torpedo room arrangement
20 eliminates the need for torpedo tubes, impulse tanks, shutter
21 doors, inlet cylinders, missile doors, breech doors, and weapon
22 handling and loading systems. Further, by locating the
23 underwater bodies external to the submarine pressure hull, the
24 weight of the bodies is greatly reduced, in view of the buoyant
25 force difference between air and water. This difference allows

1 for a smaller and less costly submarine volume to float the
2 weight of the underwater bodies.

3 It will be understood that many additional changes in the
4 details, materials, steps and arrangement of parts, which have
5 been herein described and illustrated in order to explain the
6 nature of the invention, may be made by those skilled in the art
7 within the principles and scope of the invention as expressed in
8 the appended claims.

1 Attorney Docket No. 82838

2

3 AN ASSEMBLY OF UNDERWATER BODIES AND LAUNCHER THEREFOR

4

5 ABSTRACT OF THE DISCLOSURE

6 An assembly of underwater bodies and a launcher therefor.

7 The assembly is adapted for mounting on a submarine outside the
8 pressure hull. The assembly includes a launcher having a housing
9 for enclosing an underwater body, a body support structure within
10 the housing for supporting the body, a pressure regulator system
11 in communication with the housing for imposing a selected
12 pressure on an interior of the housing, a hatch pivotally mounted
13 on the housing, and an actuator for opening the hatch to permit
14 the body to exit the hatch, and for closing the hatch. The
15 underwater body is a self-propelled body adapted to exit by
16 gravity from the launcher. A release device is disposed on the
17 launcher for releasing the body from the launcher to permit the
18 exit of the body from the launcher by gravity.

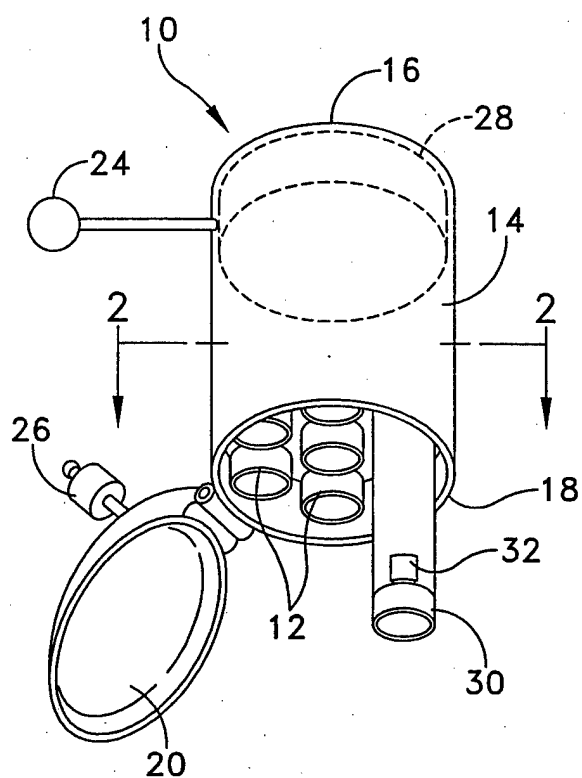


FIG. 1

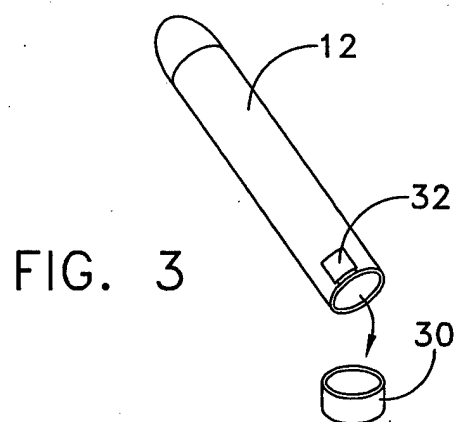


FIG. 3




FIG. 4

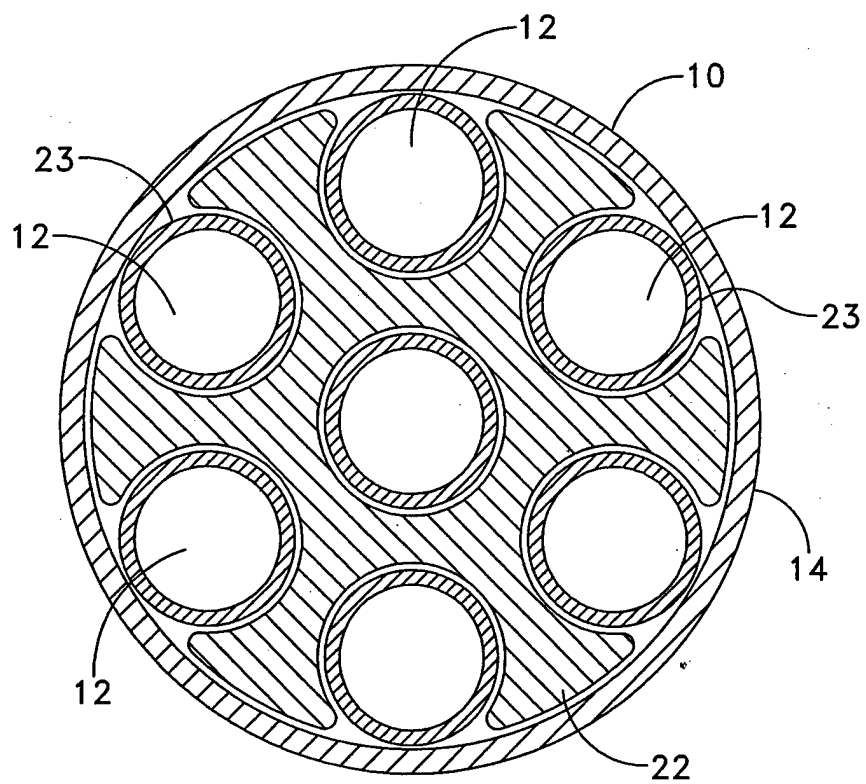


FIG. 2