



DEPARTMENT OF THE NAVY

OFFICE OF COUNSEL
NAVAL UNDERSEA WARFARE CENTER DIVISION
1176 HOWELL STREET
NEWPORT RI 02841-1708

IN REPLY REFER TO:

Attorney Docket No. 82829
Date: 2 February 2004

The below identified patent application is available for licensing. Requests for information should be addressed to:

PATENT COUNSEL
NAVAL UNDERSEA WARFARE CENTER
1176 HOWELL ST.
CODE 000C, BLDG. 112T
NEWPORT, RI 02841

Serial Number 10/672,969
Filing Date 9/29/03
Inventor Michael T. Ansay

If you have any questions please contact James M. Kasischke, Deputy Counsel, at 401-832-4736.

DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited

Attorney Docket No. 82829
Customer No. 23523

SUBMARINE AIR BAG LAUNCH ASSEMBLY

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT (1) MICHAEL T. ANSAY, and (2) JOHN R. LITTLE, citizens of the United States of America, employees of the United States Government, and residents of (1) Johnston, County of Providence, State of Rhode Island, and (2) Swansea, County of Bristol, Commonwealth of Massachusetts, have invented certain new and useful improvements entitled as set forth above, of which the following is a specification.

JAMES M. KASISCHKE, ESQ.
Reg. No. 36562
Naval Undersea Warfare Center
Division, Newport
Newport, RI 02841-1708
TEL: 401-832-4736
FAX: 401-832-1231

20040213 102

1 Attorney Docket No. 82829

2

3

SUBMARINE AIR BAG LAUNCH ASSEMBLY

4

5

STATEMENT OF GOVERNMENT INTEREST

6

7

8

9

10

11

BACKGROUND OF THE INVENTION

12

(1) Field of the Invention

13

14

15

16

17

(2) Description of the Prior Art

18

19

20

21

22

23

24

The invention described herein may be manufactured and used by and for the Government of the United States of America for Governmental purposes without the payment of any royalties thereon or thereto.

The present invention relates to a launch assembly for expelling bodies from an underwater vehicle, and more particularly to an air bag launch assembly for launching weapons and/or vehicles from a submarine.

Traditionally, weapons and other vehicles have been stowed inside a submarine's torpedo room where they are protected from the corrosiveness of the ocean. The weapons may thereafter be launched from the submarine torpedo tubes as needed. An alternate launch method used by submarines involves launching weapons from individual air tight pressure vessels that are located external to the submarine's pressure hull. These

1 individual pressure vessels are stored within modular, external
2 bays and protect the individual weapons from the high pressure
3 and corrosiveness of the ocean environment.

4 The traditional method of storing weapons inside the
5 submarine's pressure hull theoretically allows for very dense
6 packing of weapons. However, if the space occupied by the
7 torpedo tubes, impulse tanks, shutter doors, inlet cylinders,
8 muzzle doors, breech doors, weapon launchers, and the weapon
9 loading and handling system is added to the space occupied by
10 the weapons, the apparent packing density of weapons is lost.
11 By locating vehicles external to the submarine's pressure hull,
12 the weight of the vehicles is greatly reduced. This is due to
13 the buoyant force difference between air and water. This weight
14 difference allows for a smaller less costly submarine volume to
15 float the weight of the vehicles.

16 Individual weapons located in individual pressure vessels
17 external to the submarine's pressure hull also occupy excessive
18 space thus limiting the packing density, and adding significant
19 weight to the submarine. Each individual pressure vessel has
20 its own thick walled cylinder, self contained gas generator,
21 launch capsule, muzzle door, weapon positive pressure
22 ventilation system, and operational hydraulics and linkages.
23 This adds to the complexity as well as the weight of the system.

1 Accordingly, there is needed in the art a launch system
2 which is low in cost to construct and operate, high in
3 reliability, easy to maintain, and safe to operate. Preferably,
4 the launch system should also be simple in design, quiet during
5 operation, relatively lightweight, and compact.

6

7

SUMMARY OF THE INVENTION

8 The present invention is directed to an air bag launch
9 assembly which allows for modular loading onto a submarine, the
10 launch of weapons external to the submarine pressure hull, while
11 also achieving greater packing densities. The air bag launch
12 assembly provides a simple method of launching weapons and/or
13 vehicles from densely packed storage bins located within modular
14 payload bays on submarines. According to one embodiment, the
15 air bag launch assembly includes a large, watertight pressure
16 container or payload bay, one or more smaller, watertight weapon
17 canisters used to contain the weapon and/or vehicle and which is
18 sized to fit within the larger pressure container; and one or
19 more air bag inflators attached to the top and/or sides of the
20 small weapon canisters. A support framework designed to hold
21 multiple weapon canisters in position within the larger
22 container may also be provided. Preferably, the containers are
23 designed to withstand pressure to the deepest operating depths
24 of the submarine to which they are attached, whereas the

1 smaller, weapon canisters need only be capable of withstanding
2 shallow sea pressures since they are housed within the larger
3 containers.

4

5

BRIEF DESCRIPTION OF THE DRAWINGS

6 It should be understood that the drawings are provided for
7 the purpose of illustration only and are not intended to define
8 the limits of the invention. The foregoing and other objects
9 and advantages of the embodiments described herein will become
10 apparent with reference to the following detailed description
11 when taken in conjunction with the accompanying drawings in
12 which:

13 FIG. 1 is a perspective view of an air bag launch assembly
14 according to the present invention in a closed, non-operative
15 position;

16 FIG. 2 is a perspective view of the air bag launch assembly
17 of FIG. 1 in an open position;

18 FIG. 3 is a cross-sectional view of the air bag launch
19 assembly taken along lines 3-3 of FIG. 2; and

20 FIG. 4A and 4B are diagrammatic representations of the air
21 bag launch assembly of FIG. 1 during launch of a weapon or other
22 device.

1 DESCRIPTION OF THE PREFERRED EMBODIMENTS

2 Referring now to the Figures, the air bag launch assembly
3 10 includes a payload bay or pressure container 12 designed to
4 be mounted externally on a hull, one or more smaller canisters
5 14 for storing a weapon, vehicle, or other device (not shown)
6 and which is sized to fit within the larger pressure container
7 12; and one or more air bag inflators 16 (FIG. 4) supported on a
8 corresponding canister. The larger pressure container 12 is
9 preferably watertight and should be made of a material that can
10 withstand ocean pressure to the deepest operating depths of the
11 submarine hull to which the pressure container is to be
12 attached. The containers 12 may be removably attached to the
13 hull of the submarine in any known manner and may preferably
14 include a body 18 sized to hold the smaller canisters 14, and a
15 cover or hatch 20 which is moveable between a closed (FIG. 1)
16 and an open (FIG. 2) position for launching the canisters 14.
17 The body 18 may preferably be cylindrical, as shown, or any
18 alternate shape. In the closed position, the pressure container
19 12 will normally be filled with air until a canister launch is
20 desired. Because the large pressure containers 12 are used to
21 protect the devices stored within the smaller canisters 14 from
22 the corrosive seawater, they should also be made of a corrosion
23 resistant material. A watertight seal may also be provided so

1 that the containers remain watertight when closed as the
2 submarine maneuvers through the ocean environment.

3 The smaller canisters 14 can be provided to protect the
4 weapon, vehicle or other device during a dry launch as it
5 travels a short distance through the ocean water and up to the
6 ocean's surface. The canisters 14 may include a cylindrical
7 body 22 that houses the weapon, vehicle, or other device to be
8 launched, as shown, or any alternate shape and a top enclosure
9 24. Once the ocean's surface is reached, the top enclosure 24
10 of the canister 14 is opened to allow the device to exit. The
11 canister design is similar to past Harpoon weapon canisters used
12 when Harpoon weapons were launched from horizontal torpedo
13 tubes. If desired, canister 14 can have a bottom enclosure 26
14 which may also be opened to allow exhaust gases to escape during
15 launch of the device from the canister 14. An optional tether
16 27 is shown for providing communication between body 18 or
17 submarine and canister 14 after release. The watertight
18 canisters 14 also prevent corrosion and/or electrical damage to
19 the stored device, as the devices remain dormant until needed.
20 In particular, when the large container 12 is flooded to
21 equalize pressure with the ambient ocean surroundings, the small
22 canister protects their stored weapons and/or vehicles. Thus,
23 the individual canisters 14 get wet each time the large
24 container 12 is flooded to launch a weapon and/or vehicle. The

1 watertight canisters 14 are also provided to help reduce the
2 weight of the weapon and/or vehicle, and assist in ascending the
3 devices to the ocean's surface.

4 For a weapon and/or vehicle that can withstand the ocean's
5 depth pressures and corrosiveness, the watertight canister 14
6 need not be provided. In such a case, the air bag inflators 16
7 can be attached directly to the weapon and/or vehicle without
8 the use of a separate canister. Alternately, the individual
9 watertight canisters 14 can be designed to withstand sea
10 pressure to the full operational depths of the submarine. This
11 would eliminate the need for the single large airtight pressure
12 container 18. However, it would require that the smaller
13 canisters 14 be designed for continuous seawater immersion. The
14 individual weapon and/or vehicle canisters may also be tethered
15 to the large pressure container, or to the submarine, so that
16 the canisters can be retracted back into the submarine, if
17 necessary.

18 Air bag inflators 16 are used to lift the canisters 14 from
19 the pressure container 12 using the buoyancy of air in water.
20 One or more inflators 16 are preferably attached to the body 22
21 and/or top enclosure 24 of the individual canisters 14. The air
22 bag inflator 16 on the top enclosure 24 of the canister 14A is
23 preferably used to lift the canister out of the pressure

1 container during launch. First, the large container 12 is
2 flooded, equalized in pressure, and the hatch 20 is opened.

3 Each air bag assembly 16 has an air bag 17A and an inflator
4 17B joined in communication with air bag 17A. Air bag 17A can
5 be any fluid impermeable bag that is capable of being stowed in
6 the available space. This bag can be made from Mylar, rubber, a
7 polymer material or the like. In a first embodiment, the
8 inflator 17B can be a gas generator that is electrically
9 activated to generate an inflation gas on receipt of an
10 electrical signal. Gas generators are well known in the art of
11 automobile air bag inflators. As an alternative, the inflator
12 17B can be a compressed gas source having an electrically
13 actuated valve that releases the compressed gas into air bag 17A
14 on receipt of a control signal. In either embodiment, inflator
15 17B should provide sufficient gas to lift canister 14 at the
16 operational depth while not providing excessive gas that could
17 rupture air bag 17A. Lifting air bag assemblies 16 must have a
18 mechanism for coping with launches at depth and changing air
19 pressures as the canister ascends. Stabilizing air bag
20 assemblies 17C can be activated near the surface and have less
21 need to accommodate depth pressures.

22 Once the container 12 is opened the air bag or bags are
23 deployed to raise the weapon and/or vehicle canister 14 out of
24 the submarine and into the water environment for a wet launch,

1 or up to the ocean's surface for a dry launch. The buoyant
2 force on the gas filled air bag provides the lift force to raise
3 the weapon canister out of the container. Given that the weapon
4 canisters contain air, and due to the buoyant force of water,
5 the weapon canisters are relatively light in water and only a
6 small lift force is necessary to raise the weapon canister.
7 Once the weapon canister is a sufficient distance from the
8 submarine, the top air bag 17A and/or the inflator 17B may be
9 jettisoned and side air bag inflators may be deployed.

10 The side air bag inflators 17C are preferably used during a
11 dry launch to buoy the weapon canister the remaining distance up
12 through the ocean water and to the ocean's surface. Once the
13 ocean's surface is reached, the side air bags may be used to
14 stabilize the canister as it floats, and may thereafter be used
15 to stabilize the weapon during launch. After the weapon is
16 launched, the air bag inflator and the weapon canister may
17 remain on the ocean's surface until they can be recovered.

18 For a wet launch, the side air bags are not needed. During
19 a wet launch, after the top air bag has removed the canister a
20 safe distance from the submarine, the weapon or vehicle's own
21 propulsion system preferably directs the weapon and/or vehicle
22 toward its target. The top air bag can be jettisoned at that
23 time.

1 A support framework 28 (FIGS. 2 and 3) may be provided to
2 loosely hold the canisters 14 inside the larger containers 12.
3 A loose, non-rigid connection may preferably be provided between
4 the canisters 14 and the support framework 28 in order to allow
5 for easy loading and launching. A rigid connection is not
6 needed, as the canisters 14 will be held in place by the
7 normally vertical orientation of the submarine and the weight of
8 the canisters. However, a soft, shock absorbent material may be
9 used to cover the support framework and interior portions of the
10 container in order to cushion the canisters during aggressive
11 submarine maneuvers and shock loads.

12 Operation of the air bag launch assembly 10 will now be
13 described with reference to the Figures.

14 Once a weapon launch is called for, the submarine assumes a
15 position sufficiently close to the ocean's surface. The large
16 watertight containers 12 are then filled with water to equalize
17 its pressure with the surrounding ambient ocean conditions. The
18 water will occupy the air space around the small weapon
19 canisters 14 inside the large container 12. When the pressure
20 inside the large container 12 is balanced against the ambient
21 ocean pressure, the top hatch 20 on the large container 12 is
22 opened. Once the container 12 is opened, the air bag or bags
23 are deployed to raise the weapon and/or vehicle canister 14 out
24 of the submarine and into the water environment for a wet

1 launch, or up to the ocean's surface for a dry launch. As
2 described above, the top air bags 17A are preferably used to
3 raise the canisters out of the containers. The side air bags
4 17C are preferably used during a dry launch to ascend the weapon
5 canister the remaining distance up through the ocean water and
6 to the ocean's surface. Once the ocean's surface is reached,
7 the side air bags may be used to stabilize the canister as it
8 floats, and may thereafter be used to stabilize the weapon
9 during launch. As previously noted, for a wet launch, the side
10 air bags are not needed and the top air bag may be jettisoned
11 when the weapon and/or vehicle's own guidance and propulsion
12 system takes over. Preferably, the air bags are launched from a
13 vertical position within the canisters. However, the air bags
14 may also be sized to launch from many small angles from
15 vertical. In doing so the air bag buoyant force merely has to
16 overcome the frictional force and the weapon and/or vehicles
17 weight to lift the weapon and/or vehicle out of the support
18 framework.

19 As will be appreciated, the combination of a large
20 watertight pressure container, a small airtight weapon canister,
21 a support framework, and an air bag inflator represent an
22 improved method of launching weapons underwater. The advantages
23 of the launch assembly include; easy loading/unloading of
24 weapons, increased weapon packing density, cost and weight

1 savings, and reliability advantages. The weapons can be
2 loaded/unloaded individually or as an entire cartridge inside
3 the support framework making them easy to load and unload. In
4 either case, the weapon canister or weapons cartridge is simply
5 lowered vertically into the large container or raised vertically
6 out of it. Once loaded, the weapons are naturally secured in
7 place due to their own weight, the designated space limitations,
8 and the normally vertical orientation of the submarine.

9 Using the air bag launcher assembly also increases the
10 packing density of the weapons. Given a higher packing density,
11 either more weapons can be carried on a same size submarine or
12 the same number of weapons can be carried on a smaller
13 submarine. Current systems use individual pressure vessels for
14 each weapon and large weapon launching systems such as gas
15 generators, air turbine pumps, ram pumps, and elastomeric
16 ejection systems. All these components occupy a significant
17 amount of space. In contrast, one air bag inflator is small
18 enough to fit into a person's hand.

19 The air bag launch assembly also eliminates the need for
20 several complicated, expensive, and heavy components. If it is
21 used to replace the existing torpedo tube weapon launching
22 systems, several torpedo room components can be eliminated.
23 Example components that may be eliminated include; impulse
24 tanks, torpedo tubes, air turbine pumps, inlet cylinders,

1 shutter doors, high efficiency inlets, and the weapon loading
2 and handling systems. If it is used to replace the existing
3 vertical launch system components such as the gas generator, the
4 individual thick walled pressure vessel, the individual capsule,
5 the individual muzzle door, and the individual hydraulic systems
6 can be eliminated. In addition, the air bag launch assembly
7 will be less costly to maintain since there are fewer components
8 that require servicing.

9 Since the air bag assembly has fewer components that make
10 up the entire launch system it is expected to have increased
11 reliability and reduced maintenance. Because the air bag
12 launcher itself has no moving parts, the wearing of parts over
13 time is not a concern. Air bag inflators have demonstrated such
14 reliability that they are used in millions of automobiles for
15 personnel safety. The other components that make up the air bag
16 vertical launch system are also well understood and known to be
17 reliable.

18 It will be understood that many additional changes in the
19 details, materials, steps and arrangement of parts, which have
20 been herein described and illustrated in order to explain the
21 nature of the invention, may be made by those skilled in the art
22 within the principle and scope of the invention as expressed in
23 the appended claims.

1 Attorney Docket No. 82829

2

3

SUBMARINE AIR BAG LAUNCH ASSEMBLY

4

5

ABSTRACT OF THE DISCLOSURE

6

7

8

9

10

11

12

13

14

15

An air bag launch assembly is disclosed which allows for modular loading onto a submarine, the launch of weapons or vehicles external to the submarine pressure hull, while also achieving greater packing density. The air bag launch assembly includes a large, watertight pressure container; one or more smaller, watertight canisters used to contain the weapon or vehicle. The canisters are sized to fit within the larger pressure container. An air bag inflator is attached to the top and/or sides of the small canister to buoy the canister out of the container.

FIG. 1

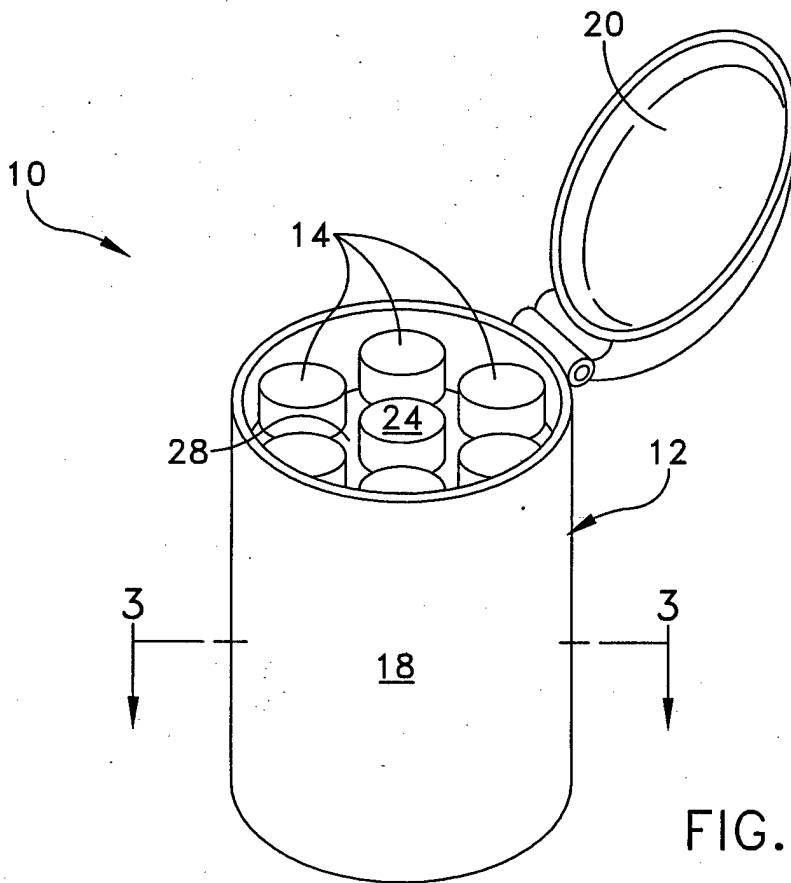
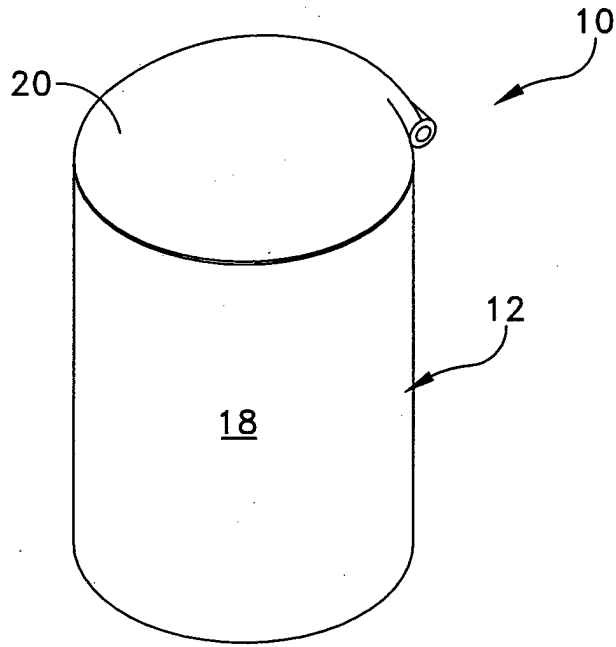


FIG. 2

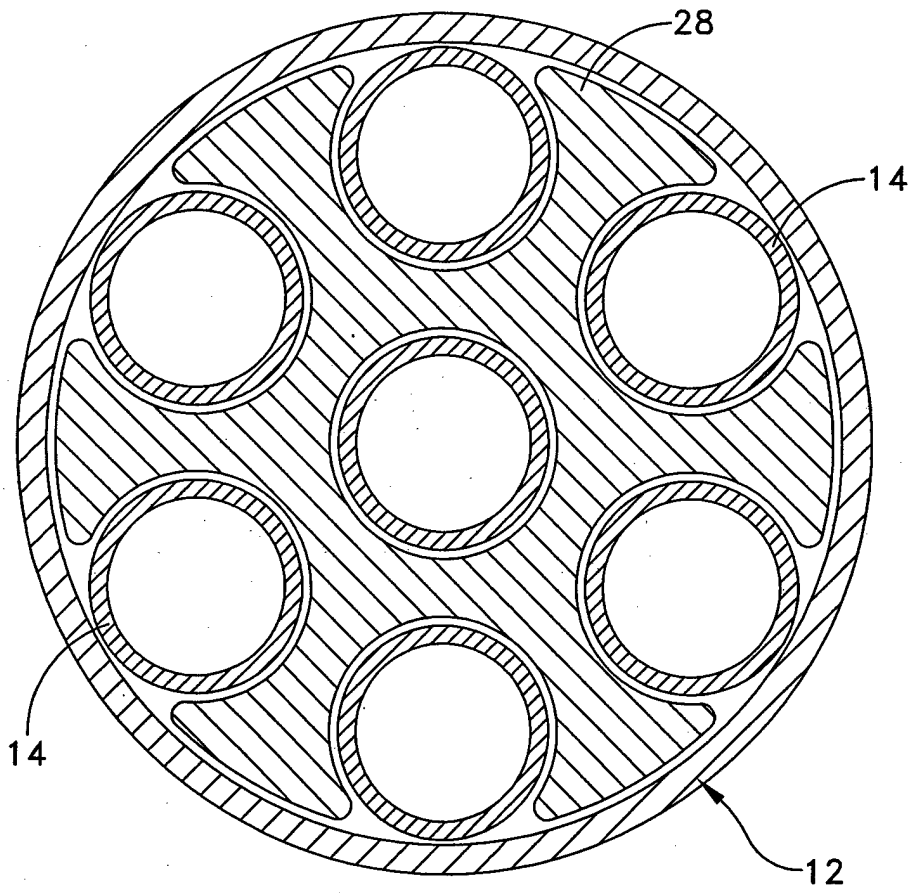


FIG. 3

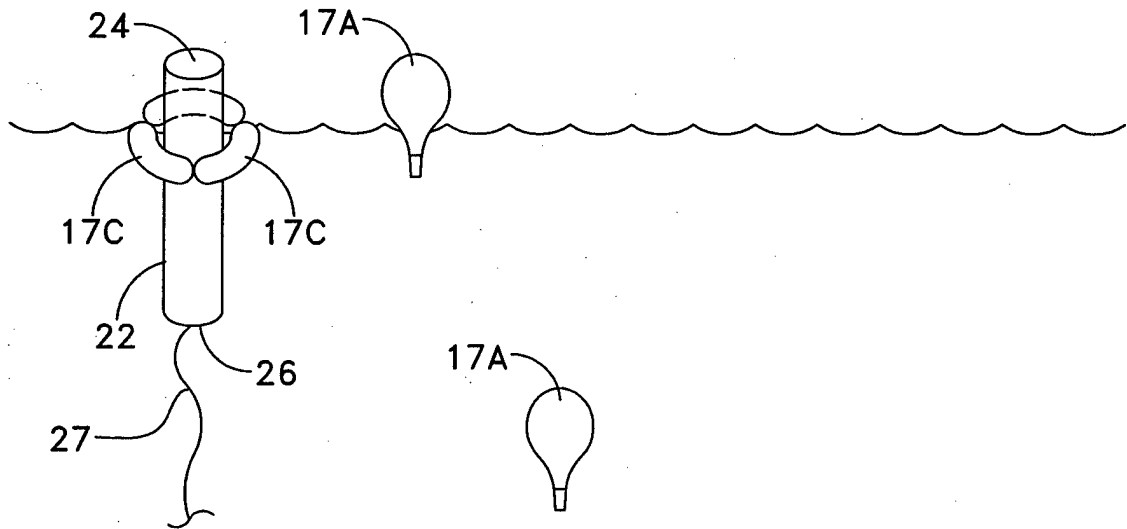


FIG. 4B

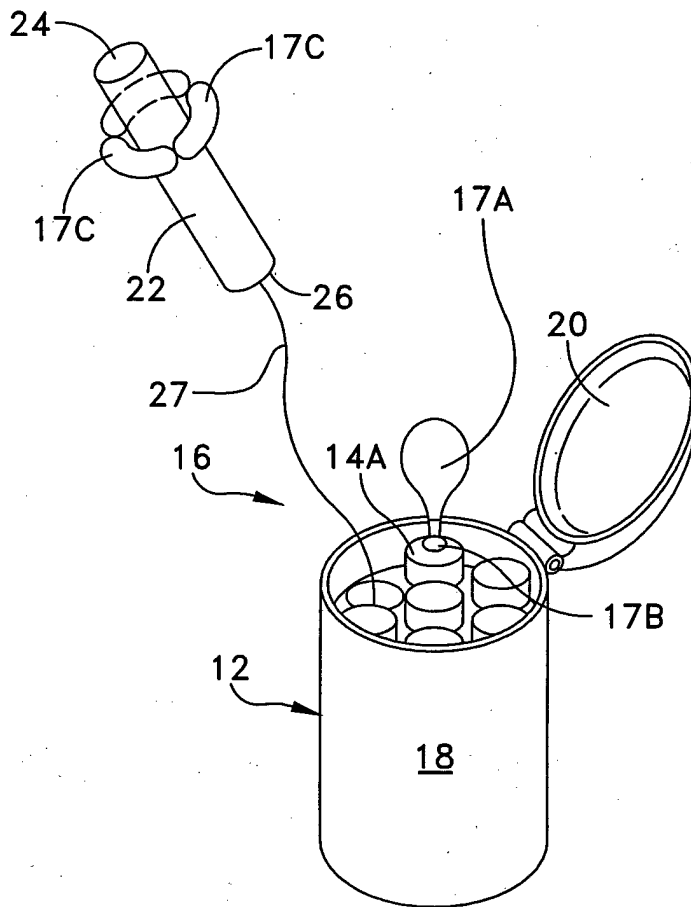


FIG. 4A