



DEPARTMENT OF THE NAVY
NAVAL UNDERSEA WARFARE CENTER
DIVISION NEWPORT
OFFICE OF COUNSEL (PATENTS)
1176 HOWELL STREET
BUILDING 112T, CODE 000C
NEWPORT, RHODE ISLAND 02841-1708



PHONE: 401 832-4736
DSN: 432-4736

FAX: 401 832-1231
DSN: 432-1231

Attorney Docket No. 84255
Date: 20 June 2005

The below identified patent application is available for licensing. Requests for information should be addressed to:

PATENT COUNSEL
NAVAL UNDERSEA WARFARE CENTER
1176 HOWELL ST.
CODE 000C, BLDG. 112T
NEWPORT, RI 02841

Serial Number 11/076,111
Filing Date 18 February 2005
Inventor Dehua Huang

DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited

If you have any questions please contact Jean-Paul A. Nasser, Patent Counsel, at 401-832-5293.

20050630 020

Attorney Docket No. 84255
Customer No. 23523

MOSAIC PROCESS FOR THE FABRICATION
OF AN ACOUSTIC TRANSDUCER ARRAY

TO ALL WHOM IT MAY CONCERN

BE IT KNOWN THAT DEHUA HUANG, employee of the United States Government, citizen of the United States of America, and resident of Portsmouth, County of Newport, State of Rhode Island, has invented certain new and useful improvements entitled as set forth above of which the following is a specification:

JEAN-PAUL A. NASSER, Esq.
Reg. No. 53372

1 Attorney Docket No. 84255

2

3

MOSAIC PROCESS FOR THE FABRICATION

4

OF AN ACOUSTIC TRANSDUCER ARRAY

5

6

STATEMENT OF GOVERNMENT INTEREST

7

The invention described herein may be manufactured and used

8

by or for the Government of the United States of America for

9

governmental purposes without the payment of any royalties

10

thereon or therefore.

11

12

CROSS REFERENCE TO OTHER RELATED APPLICATIONS

13

Not applicable.

14

15

BACKGROUND OF THE INVENTION

16

(1) Field of the Invention

17

The present invention relates generally to methods of

18

processing piezoceramic transducer arrays, and more particularly

19

to a new method for processing piezoceramic acoustic transducer

20

arrays based on the mosaic arranging of piezoceramic materials

21

with urethane.

1 (2) Description of the Prior Art

2 Piezoceramic acoustic transducer material has found its
3 applications in underwater acoustic sonar transducers and arrays
4 and has shown promising performance.

5 Currently, the great majority of the sonar transducer
6 arrays are composed of piezoceramic transducer elements that are
7 identical with respect to their physical sizes, to their shapes
8 and to the type of materials used to manufacture them. The
9 advantage of maintaining uniform size, shape and material is to
10 maintain control in the quality of the transducer
11 characteristics. There is, however, a disadvantage in
12 maintaining a rigid uniformity. The trade-off is a loss in the
13 flexibility of sonar array design that is limited to specific
14 shapes and sizes.

15 There is a need for a new method of manufacturing
16 underwater acoustic transducer arrays. Such a method should
17 provide the means to manufacture piezoceramic transducer arrays
18 with predetermined specific attributes and performance
19 expectations. It should encompass any arbitrary surface
20 geometry possible using numerical simulation techniques, and
21 should not be restricted to only certain shapes of piezoceramic
22 materials in order to optimize the acoustical performance in a
23 controllable fashion when such piezoceramic materials are at the
24 preliminary stage of manufacturing the transducer array. What

1 is needed is a mosaic process for the fabrication of acoustic
2 transducer arrays.

3

4 SUMMARY OF THE INVENTION

5 It is a general purpose and object of the present invention
6 to provide a method for fabricating acoustic transducer arrays
7 made of piezoceramic material.

8 A still further object of the invention is to provide a
9 method for fabricating acoustic transducers of shaped
10 piezoceramic material elements in which the shape of the
11 piezoceramic elements conforms to a given array geometry.

12 A still further object of the invention is to provide a
13 method for fabricating acoustic transducer arrays that only uses
14 the minimum amount of piezoceramic material necessary to limit
15 excess piezoceramic material that would otherwise interfere with
16 the function of the transducer array.

17 These objects are accomplished in accordance with the
18 present method according to the following. A desired
19 performance level for a proposed acoustic transducer array is
20 established. A geometric shape for the array is derived, based
21 on the established performance specifications, such as the array
22 beam pattern, side lobe suppression, sensitivities and
23 impedance. Basic elements of the array are formed from
24 piezoceramic materials of varying shapes rather than the using a

1 uniform shape. These basic elements are then arranged in a
2 mosaic method into the geometric shape for the array that was
3 derived. The interstices are filled with urethane to link the
4 basic elements together, thereby forming the entire piezoceramic
5 transducer array.

6

7 BRIEF DESCRIPTION OF THE DRAWINGS

8 FIG. 1 illustrates the different piezoceramic shapes
9 arranged in a mosaic of a larger specific pattern;

10 FIG. 2 illustrates different piezoceramic materials cut
11 into different shapes;

12 FIG. 3 illustrates the different piezoceramic shapes being
13 arranged using mechanical frames;

14 FIG. 4 illustrates a piezoceramic acoustic transducer array
15 composed of a mosaic of smaller different piezoceramic shapes
16 bound together by urethane.

17

18 DESCRIPTION OF THE PREFERRED EMBODIMENT

19 The first step of the method is to determine the
20 utilization and performance expectations of the acoustic
21 transducer array. In the preferred embodiment, the utilization
22 will be for acoustic transducer arrays utilized in underwater
23 sonar applications. The performance expectations will be linked
24 to the type of acoustic beam pattern sought, the degree of side

1 lobe suppression, the weighting, the impedance, the transmitting
2 voltage response and the receiving response. Once a
3 determination of utilization and performance expectations has
4 been made, a unique geometry can be derived through both
5 physical prototyping and computer modeling that satisfies these
6 expectations. For example, in referring to FIG. 1, the acoustic
7 transducer array 10 is in a star shaped geometric pattern
8 similar to a compass rose. This geometric pattern was derived
9 through physical prototyping and computer modeling commonly
10 known and used in the art. An acoustic transducer with this
11 geometric pattern exhibits a significant degree of side lobe
12 suppression. It will be appreciated that a variety of different
13 surface geometries are possible depending upon the desired
14 performance requirements, and the invention is therefore not
15 limited to the example illustrated herein.

16 The next step is to choose the appropriate types of
17 piezoceramic materials to use. The selections are based on
18 which piezoceramic materials best satisfy the performance
19 expectations and can include PZT-5. Once the materials are
20 selected, electrodes (not shown) are applied to the top and
21 bottom surfaces of the material. In the preferred embodiment,
22 electrodes are applied before the mosaic fabrication of the
23 acoustic transducer. The electrode surfaces may be formed using

1 techniques currently known in the art such as copper or silver
2 plating and the like.

3 The next step is to cut the selected piezoceramic material
4 into various smaller shapes to fabricate the transducer array.
5 These smaller shapes as illustrated in FIG. 1 are the basic
6 elements from which the larger geometric pattern of the
7 transducer array is fabricated using the mosaic process. The
8 basic elements will serve as the building blocks of the
9 geometric shape for the larger piezoceramic transducer array,
10 much as colored tiles serve as the fundamental components of a
11 larger mosaic image. The shape of the basic elements will
12 depend upon the larger geometric shape of the acoustic
13 transducer array that is to be fabricated. In FIG. 2, the basic
14 elements 20, 22, 24 and 26 are shaped into triangles of specific
15 length and angle size. It is important to note that more than
16 one shape of triangle is used, and that the various individual
17 basic elements 20, 22, 24 and 26 can be made of different
18 piezoceramic material as illustrated by the shading in FIG. 2.

19 The basic elements are arranged in a mosaic method using
20 mechanically adjustable frames 28 as illustrated in FIG. 3
21 specifically designed to hold the basic elements in place to
22 form the desired geometric shape of the piezoceramic transducer
23 array. Each separate basic element is arranged at precise
24 measured angles and orientation to the other elements based on

1 the derived unique geometry of the acoustic transducer array.
2 Referring now to FIG. 4, once all of the basic elements are
3 arranged as a mosaic into the derived geometric shape, the
4 frames are carefully removed, and urethane 30 is then used to
5 fill in the interstices between the basic elements. As the
6 urethane 30 cures, it bonds the mosaic of separate basic
7 elements into the larger derived geometric shape. It is
8 important to keep the electrodes free of the urethane 30 bonding
9 material. Once curing is accomplished, it may be necessary to
10 smooth out the urethane 30 to maintain consistent shape and
11 height.

12 The main advantage of the present invention over the prior
13 art is that by arranging piezoceramic basic elements into a
14 mosaic to fabricate a larger piezoceramic transducer array of a
15 predetermined derived geometric shape there is a dramatic
16 increase in flexibility with regard to the derived geometric
17 shapes that can be used to suit the needs of a sonar
18 application. Rather than taking a large block of piezoceramic
19 material and attempting to shape it to suit the needs of the
20 sonar application, or rather than using different shaped
21 electrodes on a single large block of piezoceramic material
22 where parts of the block have no electrode contact, a mosaic
23 arrangement of piezoceramic materials ensures a precise
24 geometric shape and ensures that there is no "extra"

1 piezoceramic material (i.e. material having no electrode
2 contact). By modifying the actual shape of the piezoceramic
3 material itself (rather than the electrodes) there is no extra
4 piezoceramic material that would otherwise interfere with the
5 performance. In this way there is better isolation of the
6 piezoceramic material and only the desired areas are excited.
7 Thus, the mosaic method of arranging basic elements allows a
8 mixture of different cross sectional geometry patterns for
9 optimization of acoustic transducer array performance such as
10 side lobe suppression, bandwidth manipulation and increases or
11 decreases in sensitivities.

12 This invention has been disclosed in terms of certain
13 embodiments. It will be apparent that many modifications can be
14 made to the disclosed apparatus without departing from the
15 invention. Therefore, it is the intent of the appended claims
16 to cover all such variations and modifications as come within
17 the true spirit and scope of this invention.

2

3

MOSAIC PROCESS FOR THE FABRICATION

4

OF AN ACOUSTIC TRANSDUCER ARRAY

5

6

ABSTRACT OF THE DISCLOSURE

7

8 A method that involves establishing the performance level of a
9 proposed acoustic transducer array. Deriving a geometric shape for
10 the array based on the established performance level. Selecting
11 piezoceramic materials based on considerations related to the
12 performance level and derived geometry. Forming small primary shapes
13 of the selected piezoceramic materials for use as the basic elements
14 of the larger derived geometric shape of the array. Arranging the
15 basic elements into a mosaic of the larger derived geometric shape.
16 Filling the interstices between the basic elements with urethane to
17 bind the mosaic of basic elements thereby fabricating the completed
18 piezoceramic transducer array.

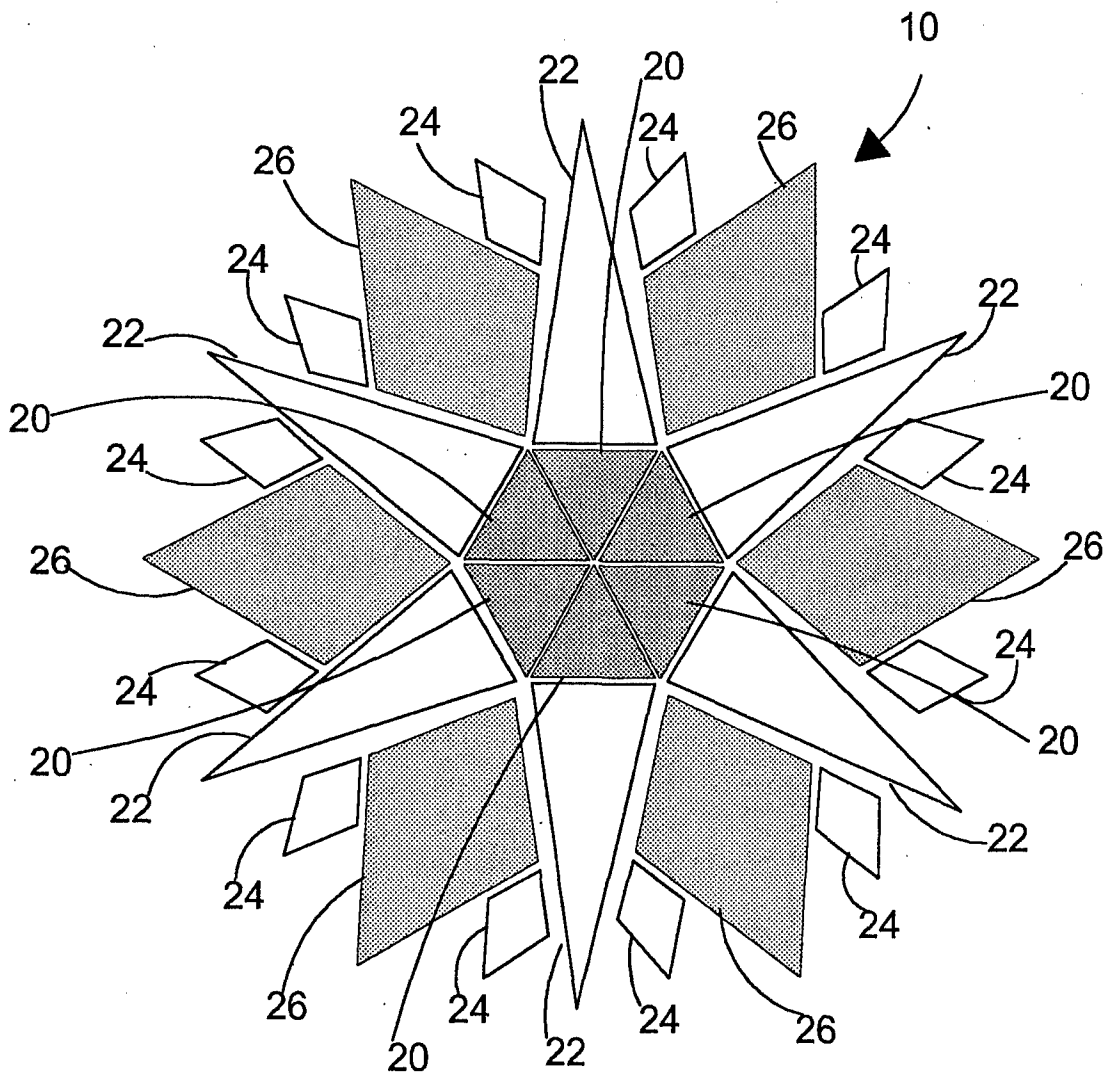


FIG. 1

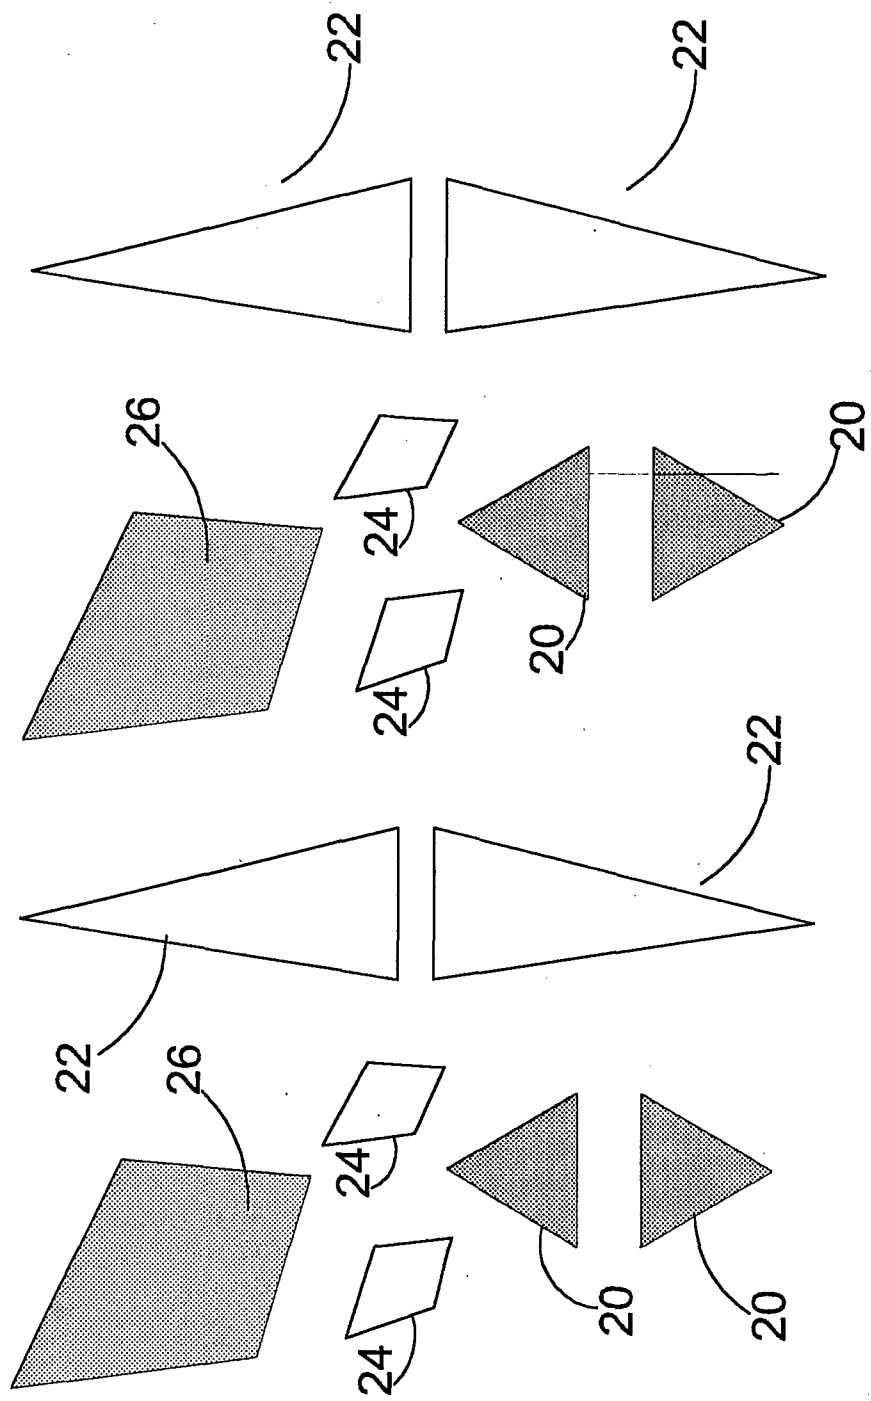


FIG. 2

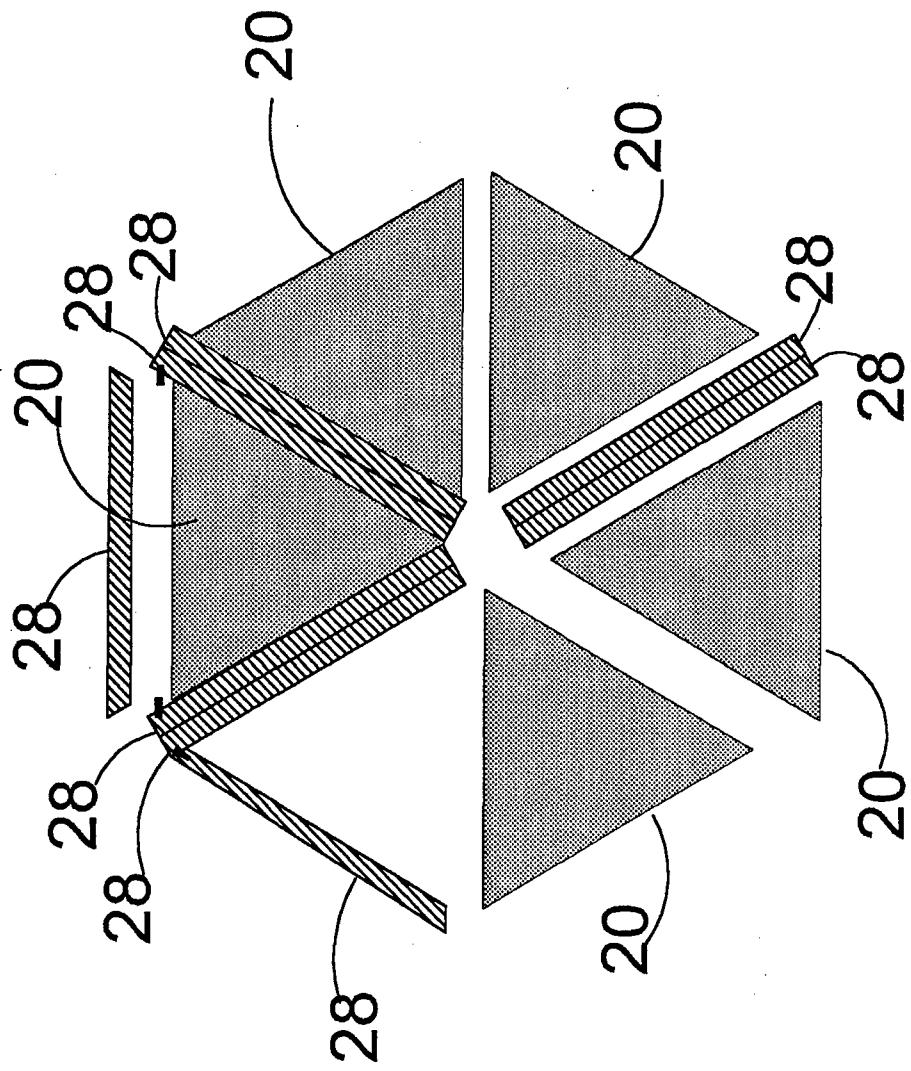


FIG. 3

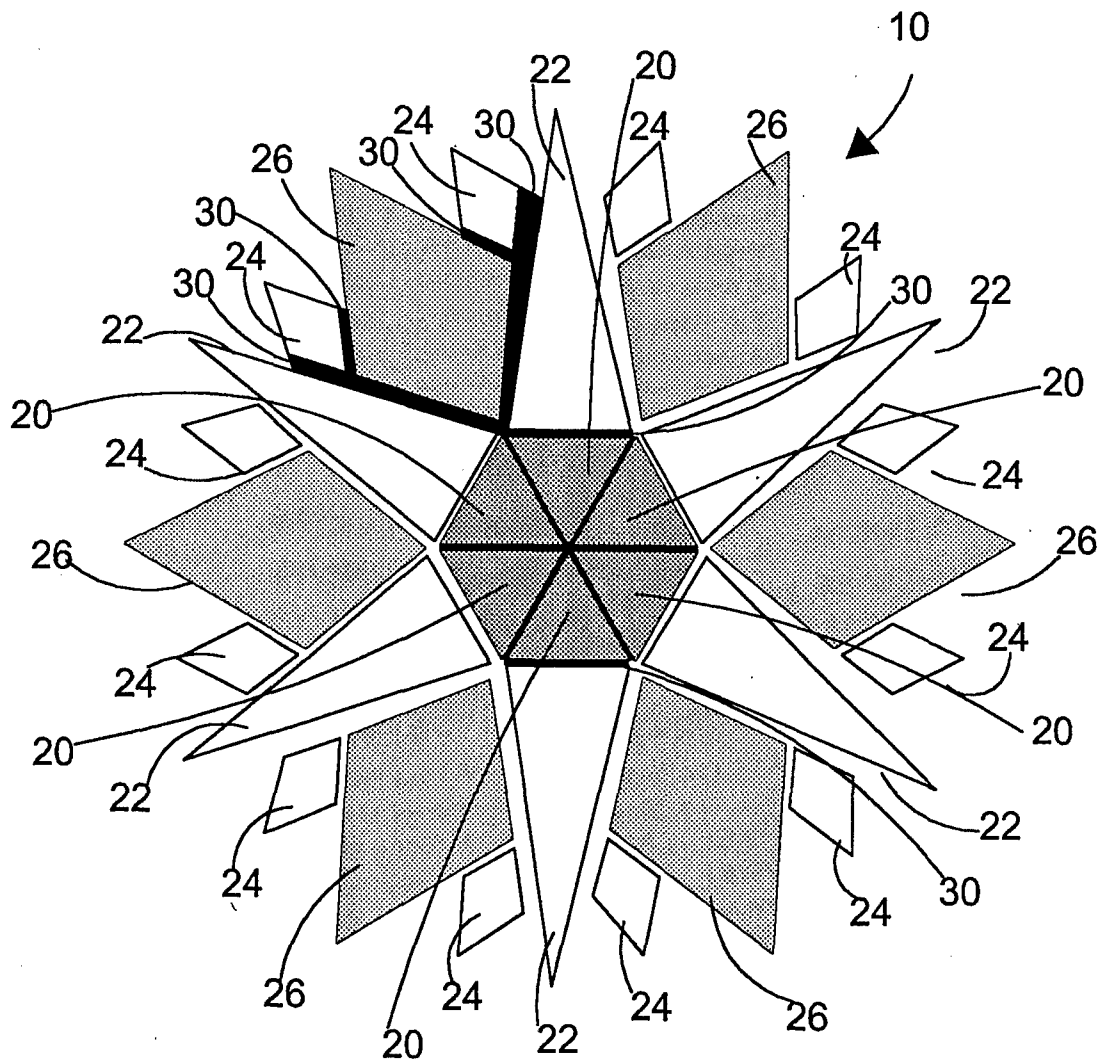


FIG. 4