



DEPARTMENT OF THE NAVY  
NAVAL UNDERSEA WARFARE CENTER  
DIVISION NEWPORT  
OFFICE OF COUNSEL (PATENTS)  
1176 HOWELL STREET  
BUILDING 11, CODE 000C  
NEWPORT, RHODE ISLAND 02841-1708



PHONE: 401 832-4736  
DSN: 432-4736

FAX: 401 832-1231  
DSN: 432-1231

Attorney Docket No. 83435  
Date: 20 February 2007

The below identified patent application is available for licensing. Requests for information should be addressed to:

PATENT COUNSEL  
NAVAL UNDERSEA WARFARE CENTER  
1176 HOWELL ST.  
CODE 000C, BLDG. 112T  
NEWPORT, RI 02841

Serial Number      11/185,084  
Filing Date        15 July 2005  
Inventor            Todd P. Drury

If you have any questions please contact James M. Kasischke, Supervisory Patent Counsel, at 401-832-4230.

DISTRIBUTION STATEMENT  
Approved for Public Release  
Distribution is unlimited

1 Attorney Docket No. 84435

2

3 **EXTRACTION AND RENDERING TECHNIQUES FOR**

4 **DIGITAL CHARTING DATABASES**

5

6 **STATEMENT OF GOVERNMENT INTEREST**

7 The invention described herein may be manufactured and used  
8 by or for the Government of the United States of America for  
9 governmental purposes without the payment of any royalties  
10 thereon or therefor.

11

12 **BACKGROUND OF THE INVENTION**

13 **1. Field of the Invention**

14 The present invention relates to a general-purpose  
15 methodology for extracting and rendering data from digital  
16 charting databases and, more particularly, to a method for  
17 integrating and combining bathymetric/topographic data from  
18 several sources operating on ordinary desktop personal  
19 computers.

20 **2. Description of the Prior Art**

21 A necessary prerequisite to display a 3-dimensional (3-D)  
22 tactical picture is the ability to access bottom/terrain data  
23 and render those data in real time. For example, any submarine-  
24 based tactical system must access information from the

1 submarine's combat control system (CCS) databases. An onboard  
2 bathymetry database used in support of the Common Tactical  
3 Picture (CTP) is the NIMA product Digital Nautical Chart (DNC).  
4 The DNC is an unclassified, vector-based digital database  
5 containing maritime features essential for safe marine  
6 navigation. The database consists of a portfolio of  
7 approximately 5000 nautical charts that provide global marine  
8 navigation between 84° North latitude and 81° South latitude and  
9 supports a variety of Geographic Information System (GIS)  
10 applications. NIMA has produced the DNC to support worldwide  
11 navigation requirements of the U.S. Navy and U.S. Coast Guard.

12 In addition to bathymetry the DNC database contains nautical  
13 features consisting of points, lines, and polygons. These  
14 features have been collected individually and assembled to  
15 support its use by GIS and other scientific applications.

16 The size of both modeled and measured data in the DNC  
17 database presents a challenge to computer's ability to extract  
18 the data and visualize it at interactive speed. Older methods  
19 of visualization relied on heavy post-processing of the data  
20 into image files that could be played back as movies or plotted  
21 and studied for future use. These methods were slow and failed  
22 to fully exploit the information value of the data. There are  
23 varied efforts underway to progress toward interactive  
24 visualization. For example, tools exist for comparing

1 multivariate data sets to imagery data sets in both geographic  
2 and multivariate feature space. An example tool supports  
3 various input data formats, allows visualization in three data  
4 spaces, active querying with text output in two data spaces,  
5 selection of areas, and manual classification in two data  
6 spaces. Still, graphics systems of mid-end workstations often  
7 cannot render the geometry fast enough to be interactive.

8 U.S. Patent No. 6,515,663 to Hung et al. describes a method  
9 and apparatus for the efficient rendering of a three-dimensional  
10 object on a flat screen in stereo 3-D such that the left and  
11 right eyes can view two different images (i.e. the same object  
12 from slightly different viewpoints), making the image appear to  
13 extend out of the screen and into real three-dimensional space.

14 U.S. Patent No. 6,556,194 to Shiono describes a method of  
15 combining partial descriptions of a three-dimensional object,  
16 obtained from different perspectives, and merging that data into  
17 a single, complete description of that object, valid from all  
18 perspectives. The method defines shape vectors using ranges and  
19 directions from the surface points. The various sets of shape  
20 vectors from differing perspectives are then merged through  
21 vector arithmetic, yielding a single, unified shape vector  
22 description of the object.

23 U.S. Patent No. 6,563,500 to Kim et al describes a method  
24 and apparatus for the efficient coding and decoding of a 3-D

1 triangle mesh dataset for the purpose of transmission. The  
2 method attempts to speed transmission by coding to allow the  
3 receiving end to begin mesh reconstruction before the entire  
4 dataset is received, and also allowing partial reconstruction  
5 even if there is lost data. The method basically consists of  
6 taking a complete 3-D mesh dataset, splitting it into chunks,  
7 encoding it, sending it, receiving it, decoding it, and  
8 recombining it. The mesh is split along natural "fault lines"  
9 as opposed to arbitrary division lines, chosen to make the  
10 pieces regular in size and shape.

11 U.S. Patent No. 6,606,089 to Margadant describes a method  
12 of visualizing spatially resolved data by means of a  
13 superposition of texture maps. The method involves taking  
14 sampled three-dimensional data, loading it as texture maps (a  
15 two-dimensional surface that is "wrapped around" a three-  
16 dimensional object, giving the 3-D object a surface texture  
17 similar to that of the 2-D surface, analogous to applying  
18 wallpaper, paint, or veneer to a real object, and then allowing  
19 the graphics rendering hardware to superpose these maps to  
20 rapidly create a pictorial representation of the data). The  
21 method avoids rendering a complete mesh description of the  
22 object and instead rapidly generates pictures of the data.

23 None of the foregoing approaches are well-suited for DNC  
24 data which requires "direct read" software that provides for

1 display without data manipulation. The present invention finds  
2 that "direct read" is possible by extraction of all information  
3 (including both navigational and bathymetric information)  
4 generated from the DNC database, and generating a three-  
5 dimensional triangle mesh description of sampled data. The  
6 present system as will be disclosed integrates and combines  
7 bathymetric/topographic data from several sources operating on  
8 ordinary desktop personal computers, saving development time and  
9 associated expenses in addition to providing for widespread  
10 portability.

#### 11

#### 12 **SUMMARY OF THE INVENTION**

13 It is, therefore, a primary object of the present invention  
14 to provide a method for integrating and combining  
15 bathymetric/topographic data from several sources operating on  
16 ordinary desktop personal computers.

17 It is a further object of the present invention to provide  
18 a methodology for integrating and overlapping  
19 bathymetry/topographic data points into a regularly sized  
20 rendering tile in which the data points are not overlapping but  
21 are accurately representing the sampling density of the  
22 extracted data points.

23 It is a still further object of the present invention to  
24 provide a method for extracting and rendering data from digital

1 charting databases as described above by constructing a library  
2 that can easily be modified to accommodate other data sets, both  
3 in situ and archival.

4 It is a still further object of the present invention to  
5 provide a method as described above which is capable of use by  
6 the general public as well as the military because it is  
7 designed to work with both classified and unclassified  
8 bathymetric/topographic databases for oceanography, terrain  
9 mapping and even mapping of extraterrestrial bodies, etc.

10 These and other objects of the present invention are  
11 accomplished by a method for extracting and rendering data from  
12 digital charting databases. The method is preferably  
13 implemented in software form generally by integrating and  
14 combining bathymetric/topographic data from several sources into  
15 a stream of three-dimensional data points, creating a triangle  
16 surface mesh, and dividing it into pieces along arbitrary lines  
17 to create regularly sized and shaped areas for efficient storing  
18 and rendering. The method works by forming an initial triangle  
19 mesh of the area and then refining the mesh by incrementally  
20 adding each point to the mesh, until a full mesh representation  
21 is achieved. The large single-mesh is then broken down into  
22 discrete geographic regions, and the region data is converted  
23 into a standard file format for viewing and/or processing.

24

1                                   **BRIEF DESCRIPTION OF THE DRAWINGS**

2           Other objects, features, and advantages of the present  
3 invention will become more apparent from the following detailed  
4 description of the preferred embodiments and certain  
5 modifications thereof when taken together with the accompanying  
6 drawings in which:

7           FIG. 1 is a flow chart of a method for extracting and  
8 rendering data from digital charting databases according to a  
9 primary embodiment of the present invention; and

10          FIG. 2-13 are sequential geometric drawings illustrating  
11 the method steps 100-500 as described below.

12  
13                                   **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

14          The present invention is a method for extracting and  
15 rendering data from digital charting databases. The method is  
16 readily implemented in software form for use on a conventional  
17 computer workstation with an appropriate operating system. The  
18 computer workstation may be, for example, a conventional  
19 personal computer with standard internal components (e.g. a  
20 microprocessor with peripheral chipset mounted on an appropriate  
21 motherboard). Of course, other more or less powerful computer  
22 systems can be used, but it is suggested that the computer  
23 system meet the minimum system requirements for intense video  
24 applications such as gaming. The user interface is preferably



1 a conventional color monitor and standard input devices such as  
2 a keyboard and mouse. The operating system is preferably LINUX  
3 9.0 based or another operating adaptive and known to those  
4 skilled in the art. The software of the present invention may  
5 be compressed onto one or more installation disks and may be  
6 loaded onto a computer system as described above using  
7 conventional installation macros such as those provided with the  
8 aforementioned operating systems.

9 FIG. 1 is a top level flow chart delineating the basic  
10 steps required to perform the method of the present invention.  
11 At step 100, bathymetric/topographic data is taken from several  
12 data sources DATA1.N.

13 At step 200, the data from DATA1..N is combined into a  
14 single stream of three-dimensional data points. This entails  
15 combining the data points and sorting all points by the x or y  
16 coordinate.

17 At step 300, the combined and sorted data from DATA1.N is  
18 connected in triangles, forming an initial triangle mesh of the  
19 area. This artificial starting mesh comprises a single triangle  
20 that completely bounds the input data. The triangle mesh is  
21 refined by incrementally adding each streaming point from step  
22 200 to the mesh, until a full mesh representation is achieved.

1 Next, at step 400, the large-file data is "rendered into  
2 chunks", e.g., broken down into geographic regions of a  
3 predetermined fixed size.

4 Finally, at step 500 the rendered data is converted to a  
5 standard file format such as "Open Inventor" or other known  
6 format for visualization.

7 Steps 100-500 are described below in more detail.

8  
9 Step 100: Importing bathymetric/topographic data from several  
10 data sources DATA1.N.

11 The software imports three dimensional coordinate data from  
12 one or multiple sources, including the DNC database and others.  
13 Consequently, the collective data can have gaps and overlaps.  
14 More data provides additional detail.

15  
16 Step 200: Combining data into a single stream of three-  
17 dimensional data points ("streaming points").

18 The data from multiple sources is converted to x, y, and z  
19 coordinate data and is combined into one large file for  
20 processing.

1 Step 300: Form initial triangle mesh of the area.

2

3       The combined single-file data is connected into a triangle  
4 mesh surface in order to make an artificial starting mesh  
5 consisting of a single triangle that completely bounds the input  
6 data. This can be done using the following algorithm:

7       1st.The combined data is sorted by the coordinates of the  
8 largest dimension (x, y or z) so that triangles can be created  
9 along a moving front. FIG. 2 illustrates a combined datafile in  
10 which the largest dimension is X. This data would be sorted  
11 along the X axis, which reduces the number of calculations. For  
12 the purposes of this function, the Y and Z dimensions are  
13 ignored.

14  
15       2nd.Calculate an encompassing triangle 10 by creating  
16 virtual vertices 12A, 12B, and 12C as shown in FIG. 3. An  
17 exemplary set of code for performing this function may be  
18 written in Borland Turbo C and is provided as follows:

```
19       float dx=maxx-minx;  
20       float dy=max_y-min_y;  
21       float dmax = max(dx,dy);  
22       float xmid=(minx+maxx)/2.0;  
23       float ymid=(min_y+max_y)/2.0;  
24       pt1.x = xmid - 2.0 * dmax;
```

```
1   pt1.y = ymid - dmax;
2   pt1.z = 0.0;
3   pt3.x = xmid;
4   pt3.y = ymid + 2.0 * dmax;
5   pt3.z = 0.0;
6   pt2.x = xmid + 2.0 * dmax;
7   pt2.y = ymid - dmax;
8   pt2.z = 0.0;
```

9

10 3rd.Start with a point having an extreme value in the  
11 sorted dimension X. In FIG. 4 this would be no. 14.

12

13 4th.Beginning with point 14, and for each point moving  
14 inward along X, perform the following substeps.

15 Remove triangles from consideration if the point's X coordinate  
16 is greater than the sum of the x-coordinate of the center of the  
17 triangle's circumcircle + the radius of the circumcircle. The  
18 circumcircle is a triangle's circumscribed circle, i.e., the  
19 unique circle that passes through each of the triangles three  
20 virtual vertices 12A, 12B, and 12C. The center of the  
21 circumcircle is called the circumcenter, and the circle's radius  
22 R is called the circumradius.

1           b. Make a list of triangles which include the point 14.  
2 These would be the triangle with vertices 12A, 12B, and 12C in  
3 FIG. 5.

4  
5           c. Make list of triangles whose circumcircle includes point  
6 14, but do not contain point 14 themselves (these triangles will  
7 be used in step f). No triangle meets this criteria.

8  
9           d. Remove all triangles that include the point 14. See  
10 FIG. 6.

11  
12           e. Construct new triangles by drawing lines between the  
13 point 14 and the vertices of the removed triangles. FIG. 7  
14 shows this in the basic case.

15  
16           f. Tentatively remove all bordering triangles whose  
17 circumcircles include the point 14 (the triangles found in step  
18 c).

19  
20           g. Construct trial triangles from point 14 to each  
21 tentatively removed triangle vertex.

22           h. Test for overlap of the newly created triangles by  
23 seeing if the constructed line crosses a previously drawn line.

1           i.If no overlap then confirm the new triangles and  
2 remove the old triangles.

3  
4           ii.If overlap then restore the tentatively removed  
5 triangle causing the new line to overlap and remove overlapping  
6 line.

7  
8           i.Add new triangles. In FIG. 7, these are the triangles  
9 having sides 18A, 18B, and 18C; 18C, 18D, and 18E; and 18B, 18D,  
10 and 18F.

11  
12          j.Calculate circumcircles. FIG. 8 shows the circumcircles  
13 20, 22 and 24.

14  
15          5th.Move on to the next point (point 15). FIGS. 9, 10 and  
16 11 show the continuation of this process. Upon completion of the  
17 process, FIG. 12 is obtained.

18  
19          6th.Remove all triangles joined to virtual points (e.g.,  
20 12A, 12B, and 12C). From FIG. 12, points 12A, 12B and 12C are  
21 removed along with all connecting lines resulting in FIG. 13.

1 Step 400: Render into chunks.

2       Creation of the triangular mesh per steps 100-300 above  
3 creates a large file that must be broken down into geographic  
4 region. This is accomplished with the following substeps.

5           1st. Take points beyond tile size

6           2nd. Apply four clipping planes -- one each for the  
7 northern, southern, eastern, and western extremes of the desired  
8 tile area.

9           3rd. Create linear interpolated points where clipping  
10 planes intersect. These points will not be visible.

11          4th. Remove all points and triangles beyond the bounds  
12 of the tile. This will leave a regularly-shaped triangular mesh  
13 that covers exactly the tile area specified.

14

15 Step 500: Convert to a standard file format.

16       The files are then converted into a standard file format.

17 For the uses of this invention the standard format is OPEN  
18 INVENTOR (or comparable system known to those skilled in the  
19 art) an object-oriented 3-D toolkit offering a comprehensive  
20 solution to interactive graphics programming problems. The  
21 format presents a programming model based on a 3-D scene  
22 database that simplifies graphics programming.

1       The above-described method for integrating and combining  
2 bathymetric/topographic data from several sources into a  
3 regularly sized rendering tile in which the data points are not  
4 overlapping but are accurately representing the sampling density  
5 of the extracted data points constructs a library that can  
6 easily be modified to accommodate other data sets, both in-situ  
7 and archival. The method works with both classified and  
8 unclassified bathymetric/topographic databases for oceanography,  
9 terrain mapping and even mapping of extraterrestrial bodies,  
10 etc.

11       Having now fully set forth the preferred embodiment and  
12 certain modifications of the concept underlying the present  
13 invention, various other embodiments as well as certain  
14 variations and modifications of the embodiments herein shown and  
15 described will obviously occur to those skilled in the art upon  
16 becoming familiar with said underlying concept. It is to be  
17 understood, therefore, that the invention may be practiced  
18 otherwise than as specifically set forth in the appended claims.



2

3

**EXTRACTION AND RENDERING TECHNIQUES FOR**

4

**DIGITAL CHARTING DATABASES**

5

6

**ABSTRACT OF THE DISCLOSURE**

7 Disclosed is a method for extracting and rendering data  
8 from digital charting databases. The software method integrates  
9 and combines bathymetric/topographic data from several sources  
10 into a stream of three-dimensional data points, creating a  
11 triangle surface mesh, and dividing it into pieces along  
12 arbitrary lines to create regularly sized and shaped areas for  
13 efficient storing and rendering. The method works by forming an  
14 initial triangle mesh of the area and then refining the mesh by  
15 incrementally adding each point to the mesh, until a full mesh  
16 representation is achieved. The large single file is then  
17 broken down into discrete geographic regions, and the region  
18 data is converted into a standard file format for viewing and/or  
19 processing.

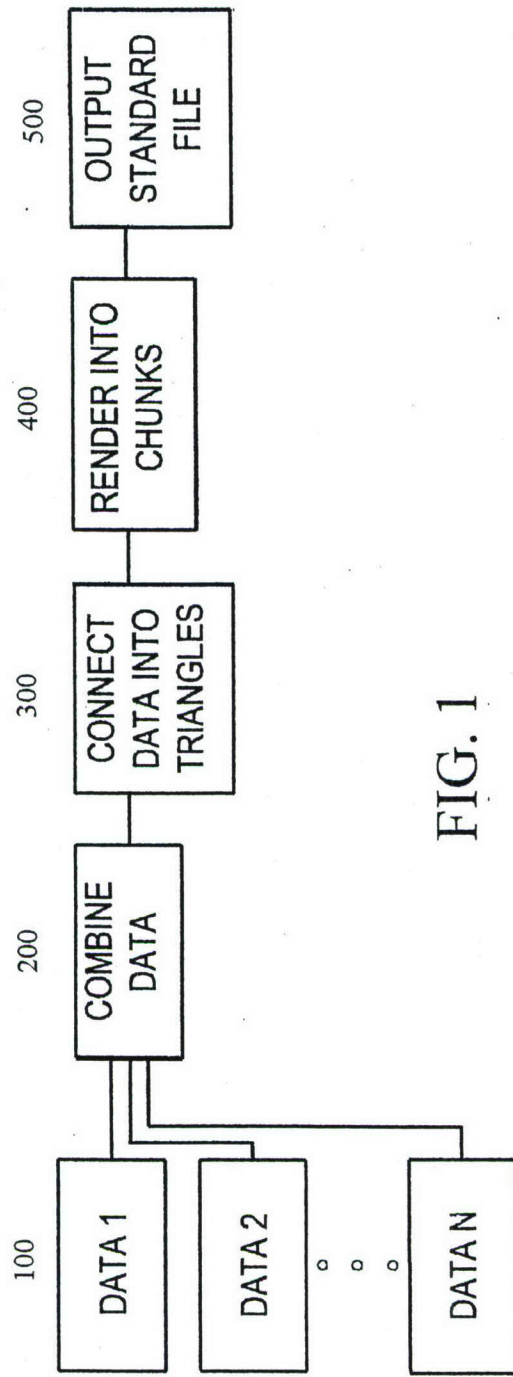


FIG. 1

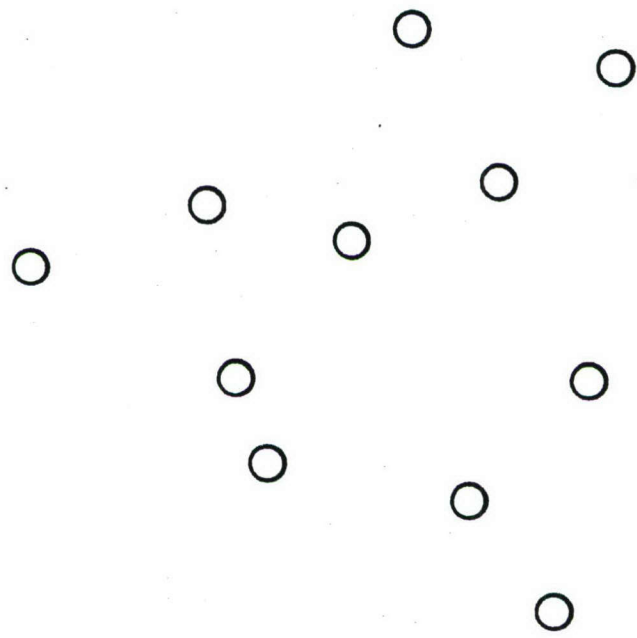


FIG. 2

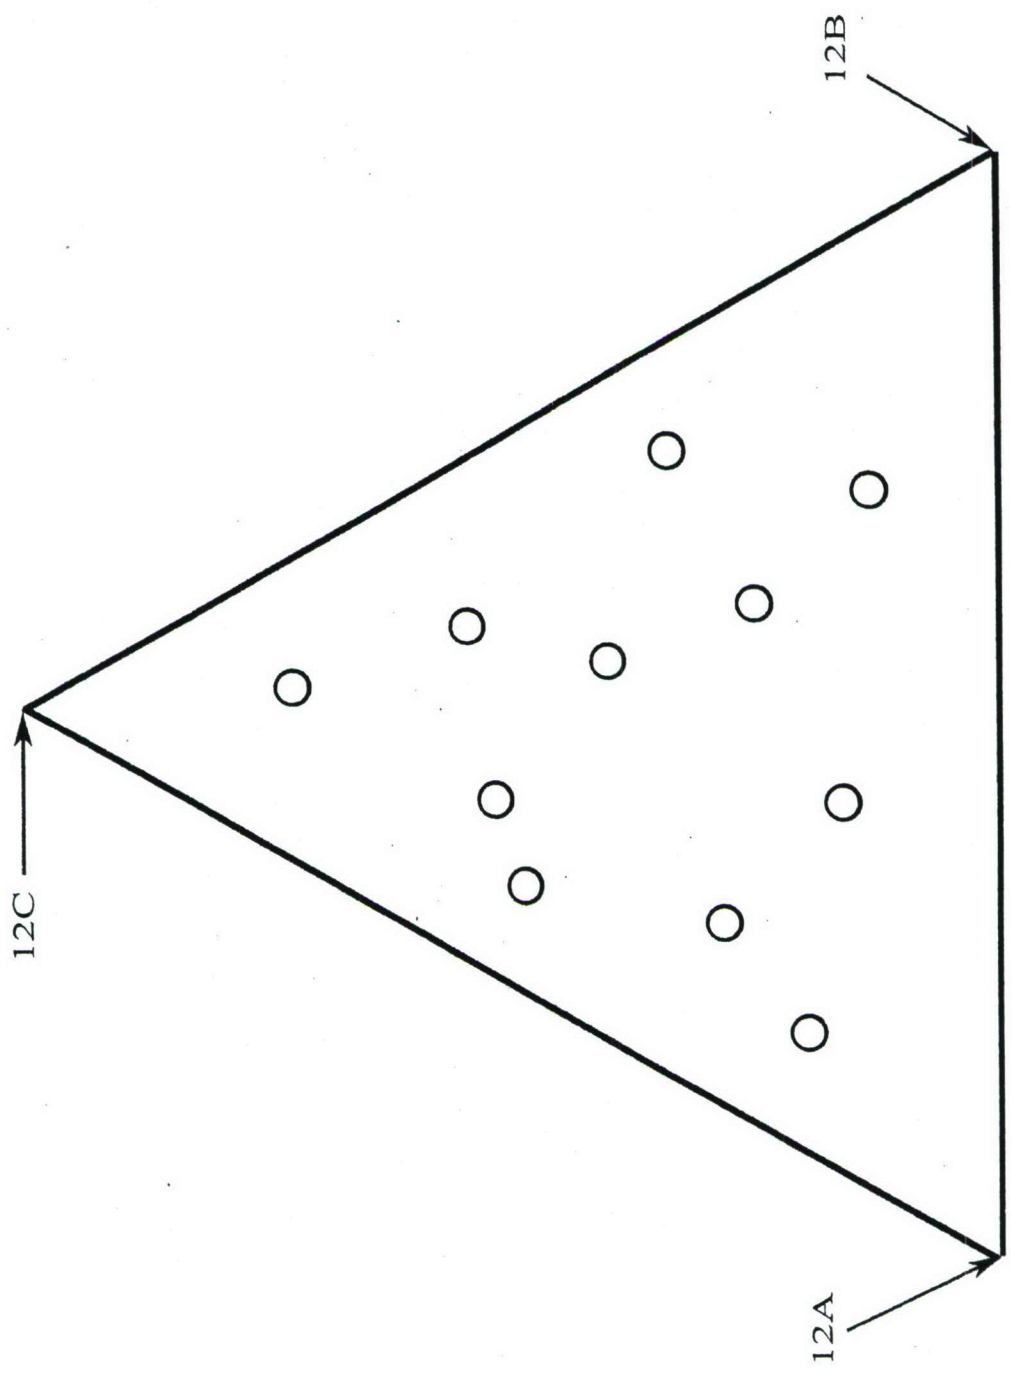


FIG. 3

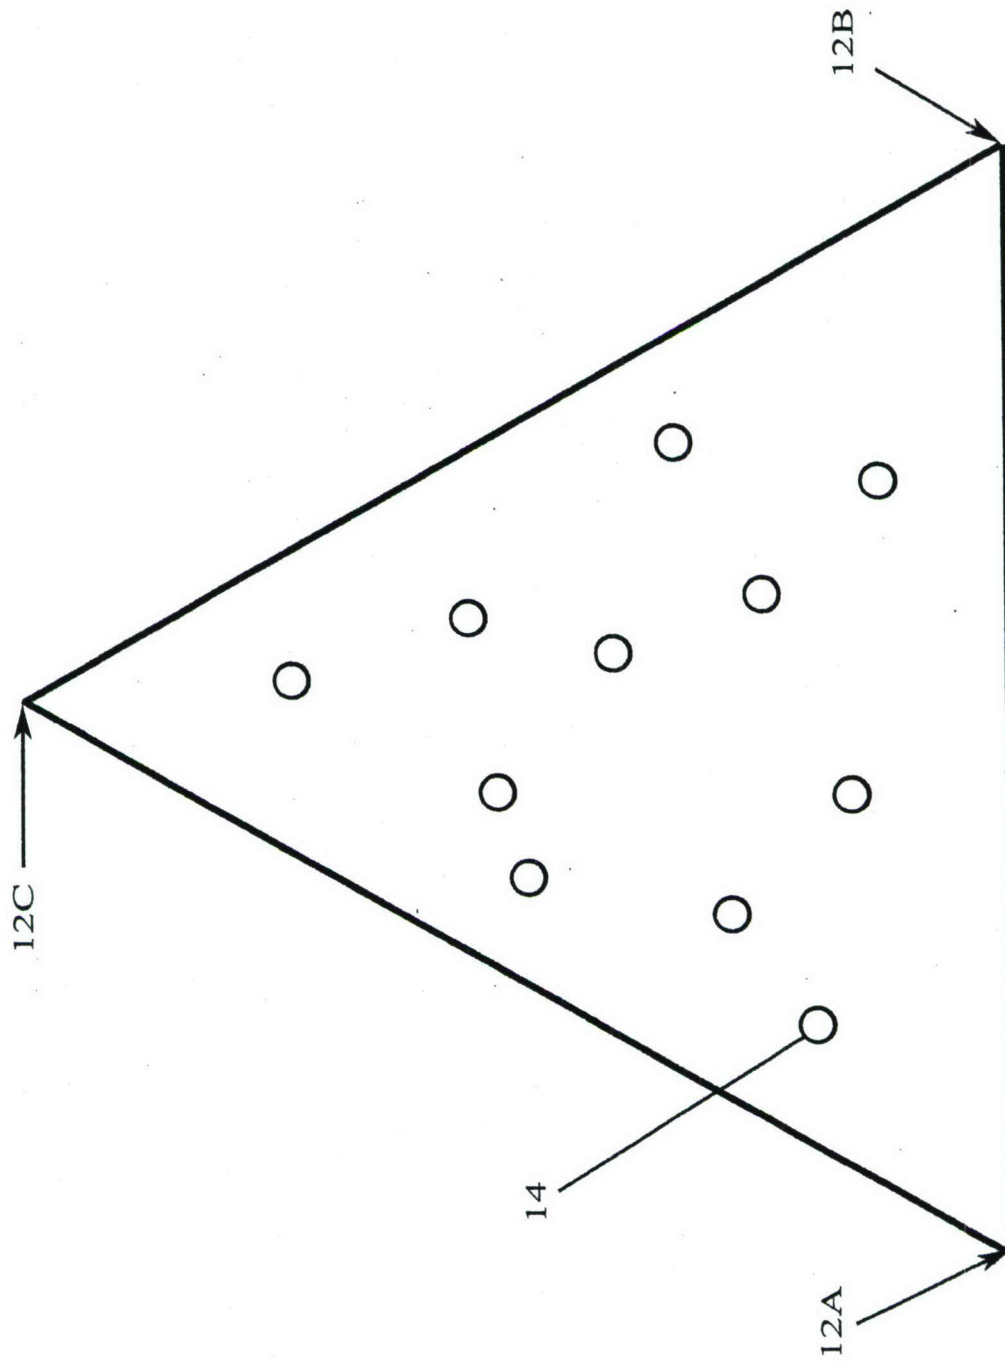


FIG. 4

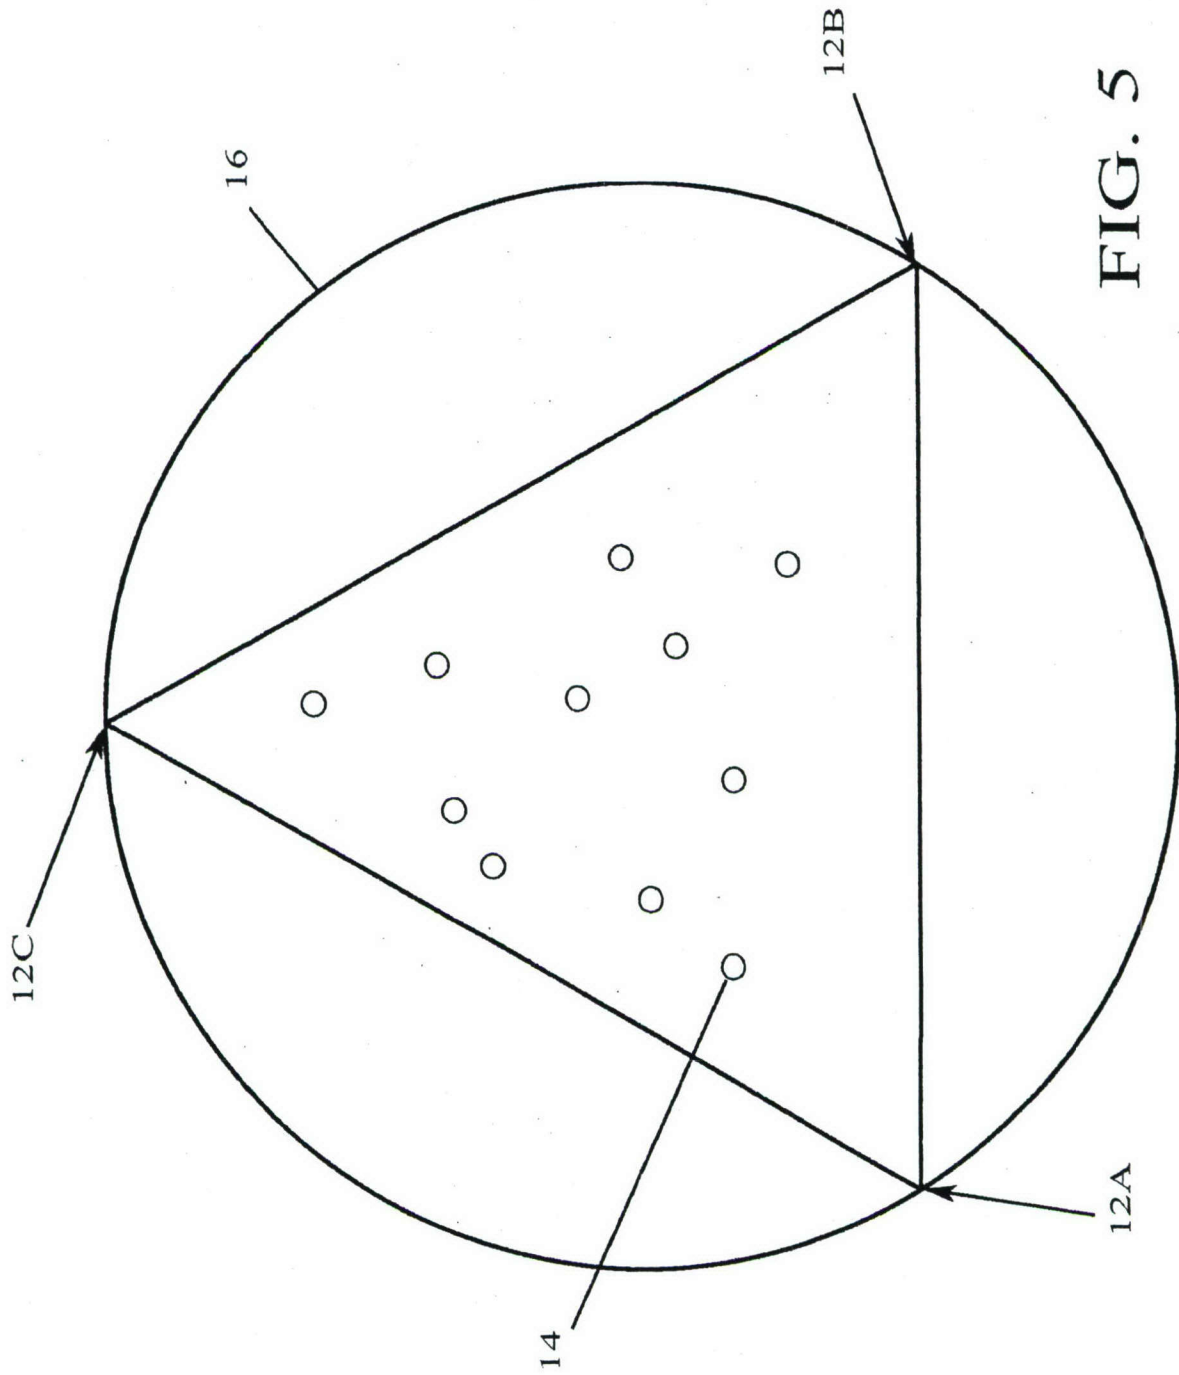


FIG. 5

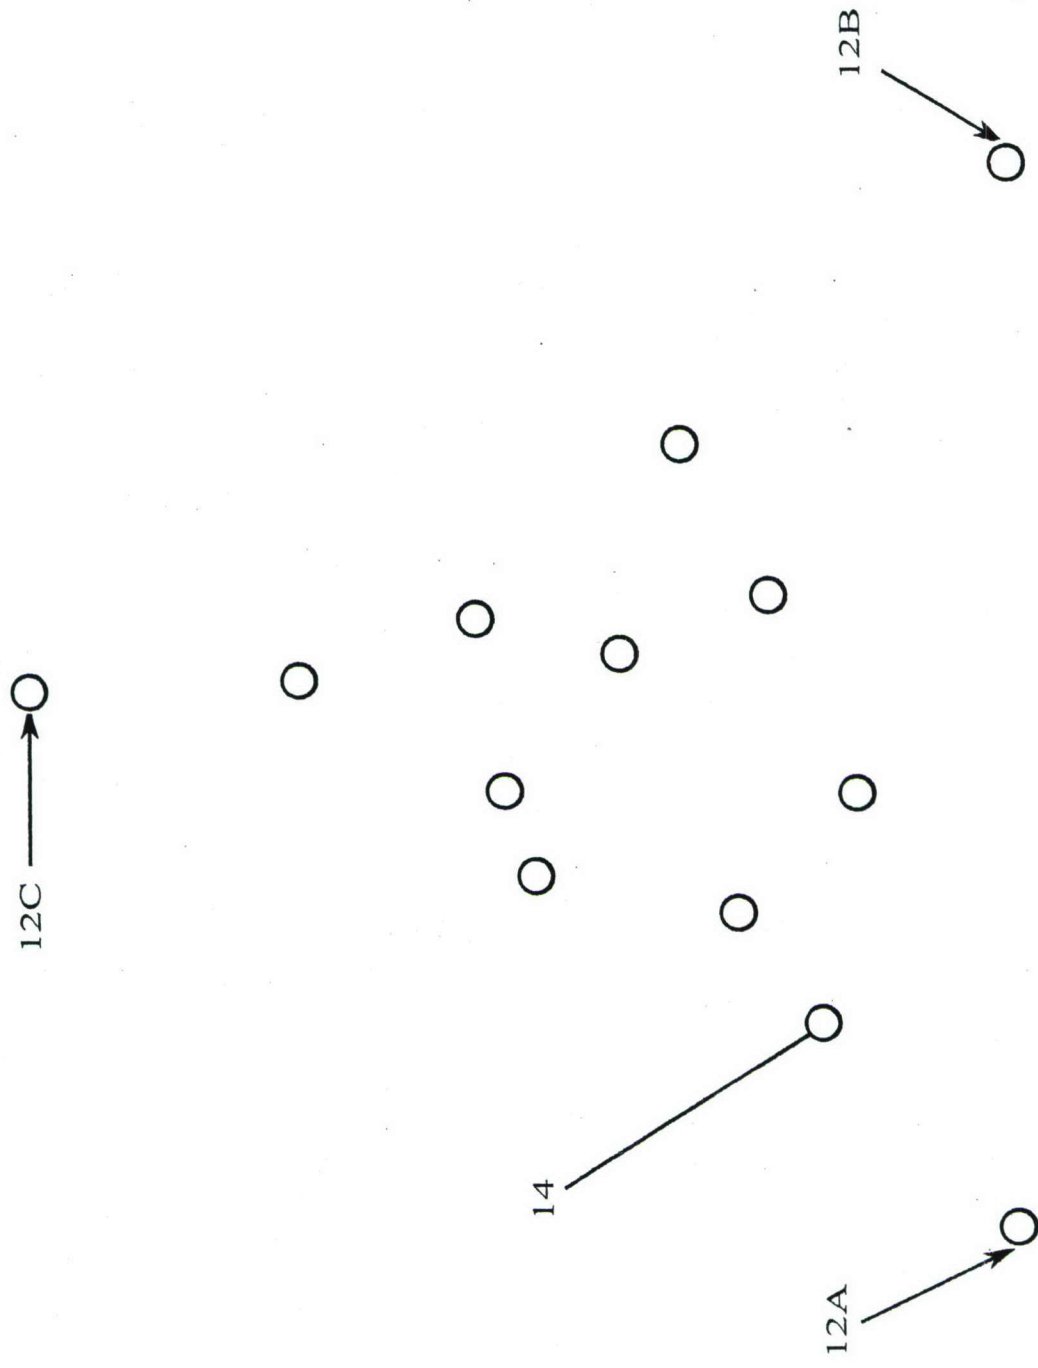


FIG. 6

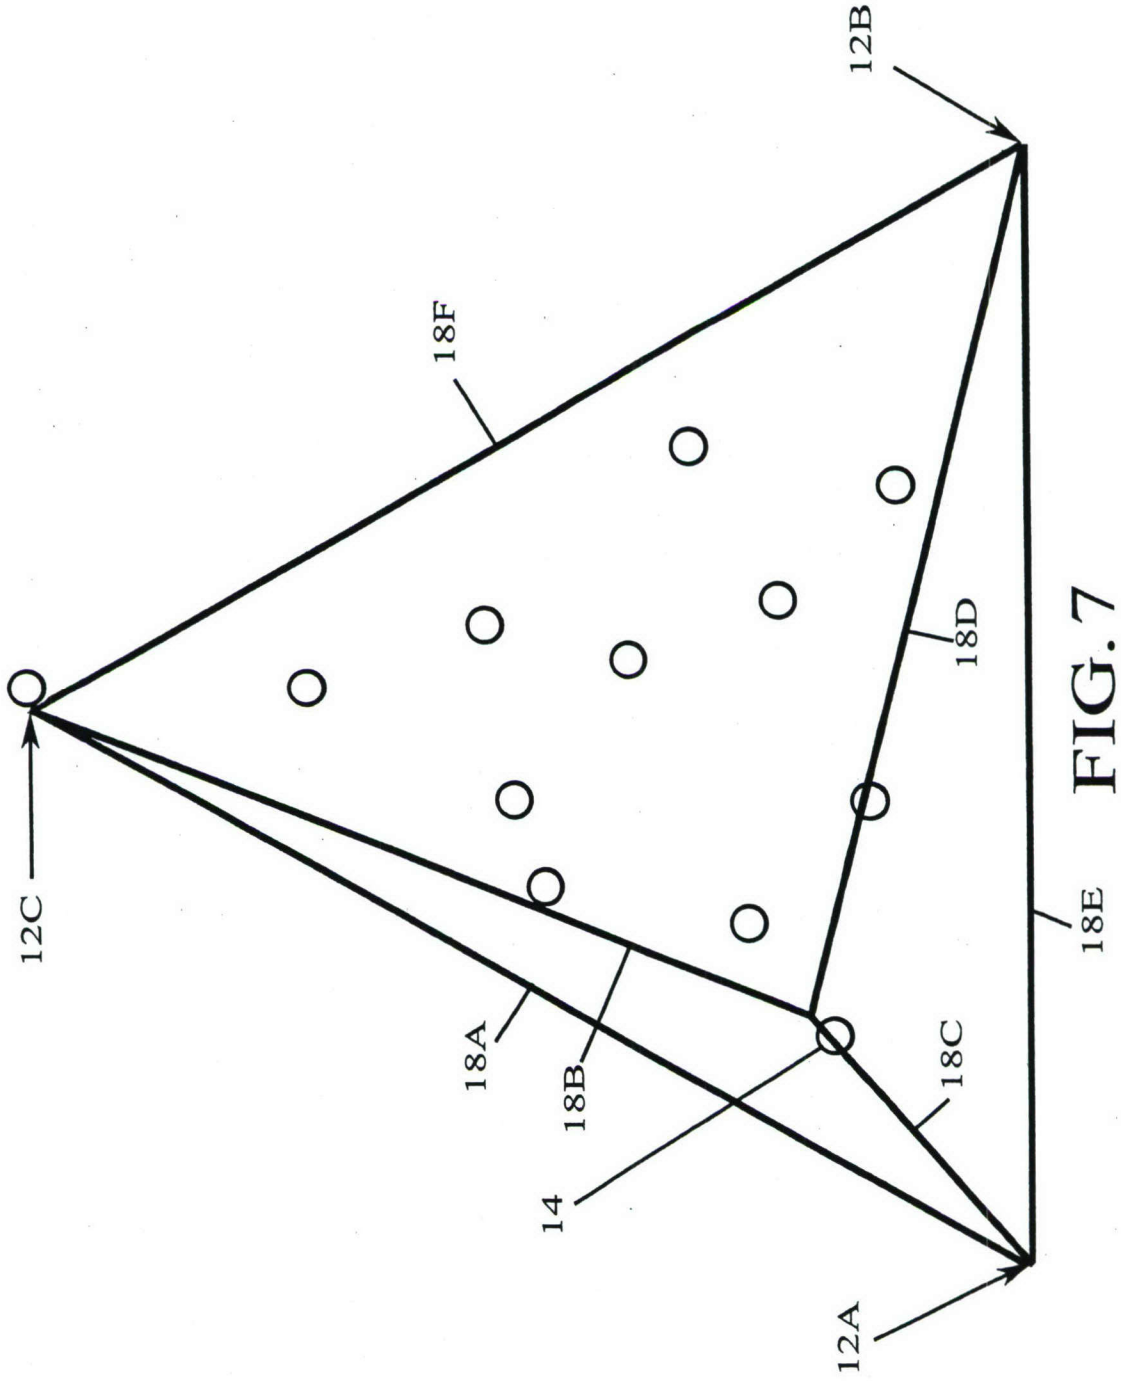


FIG. 7



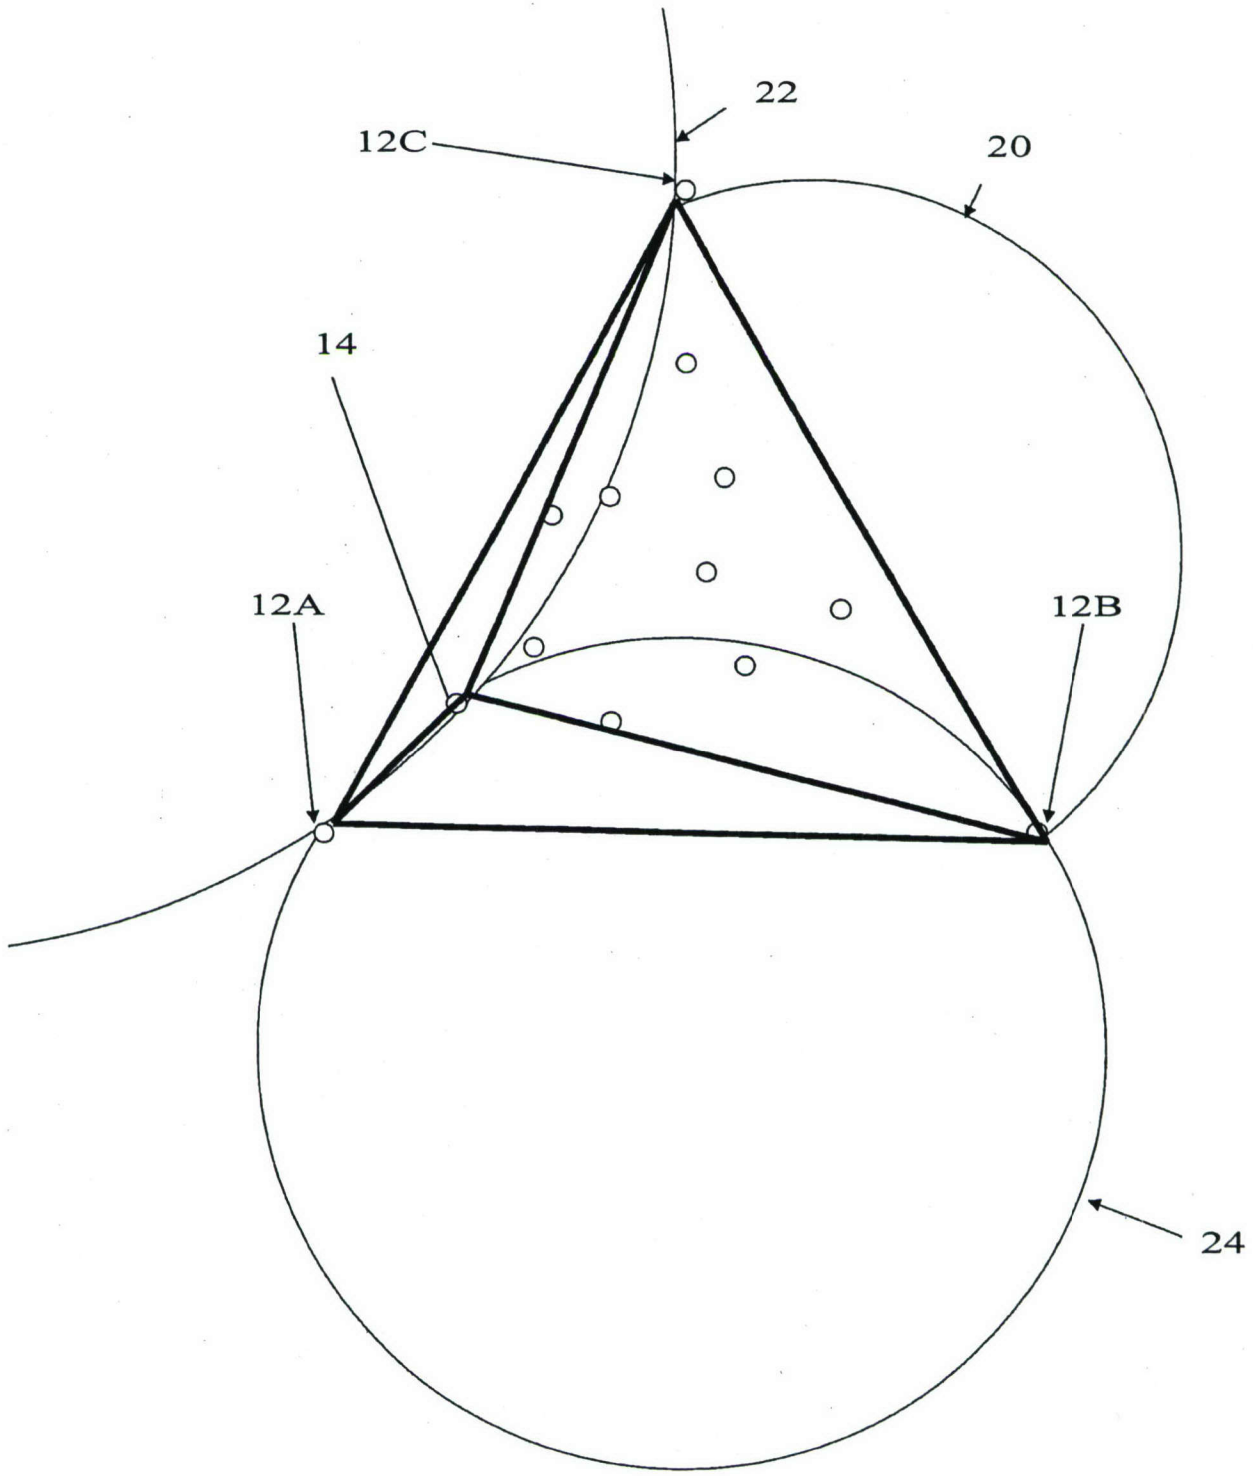


FIG. 8

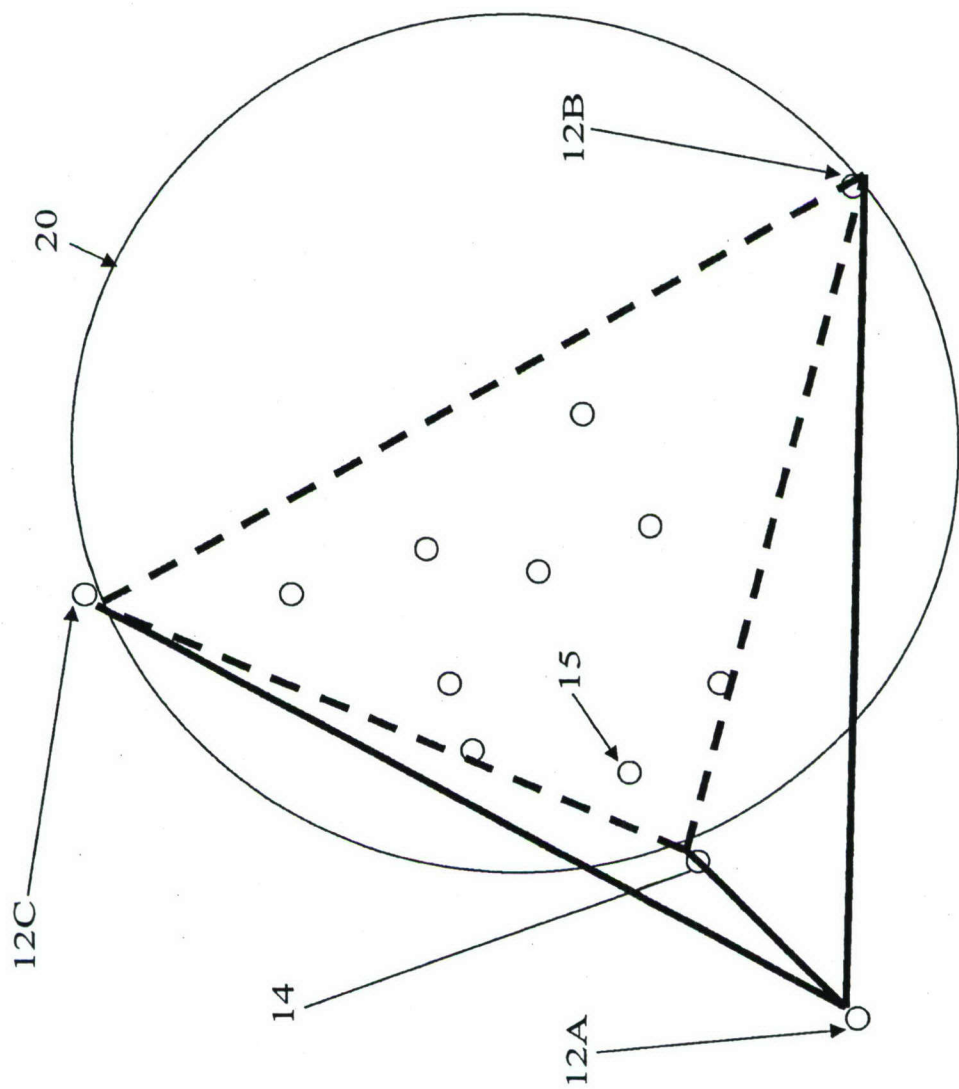


FIG. 9

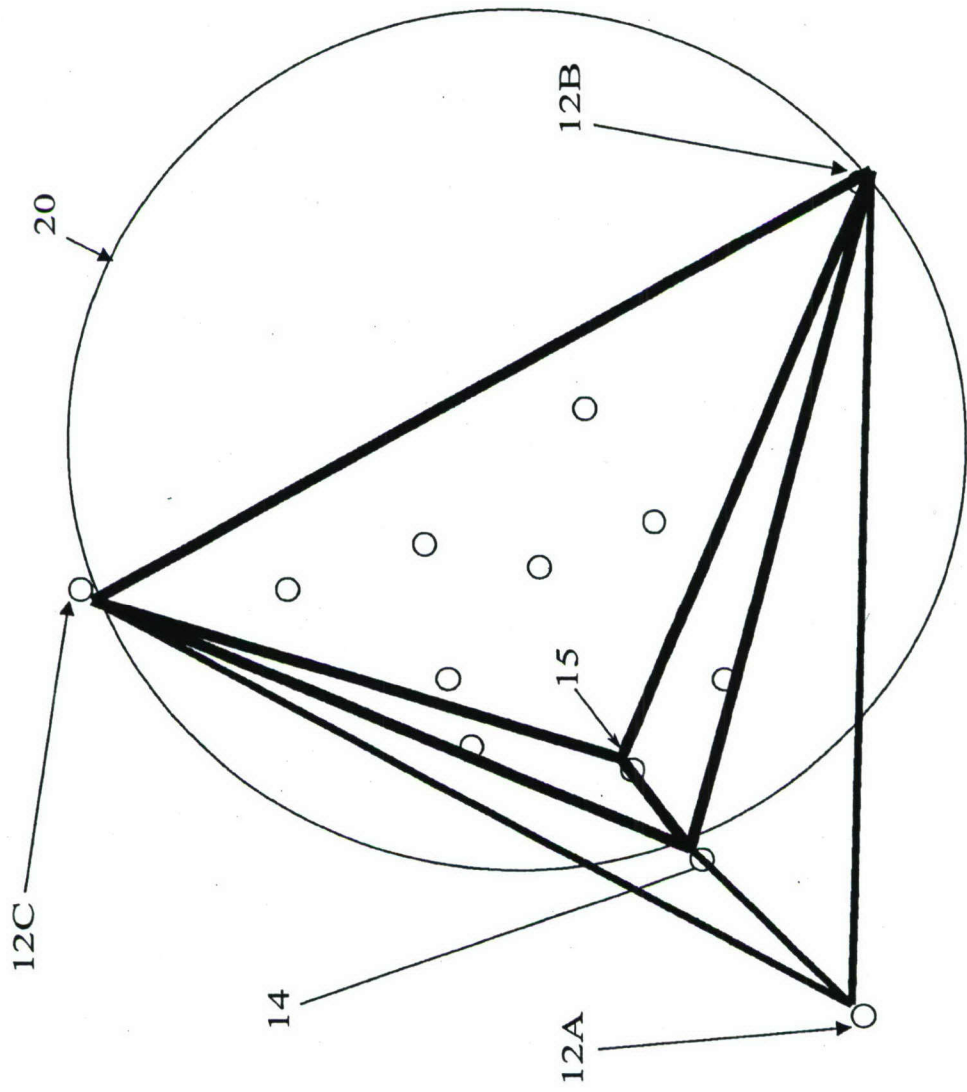


FIG. 10

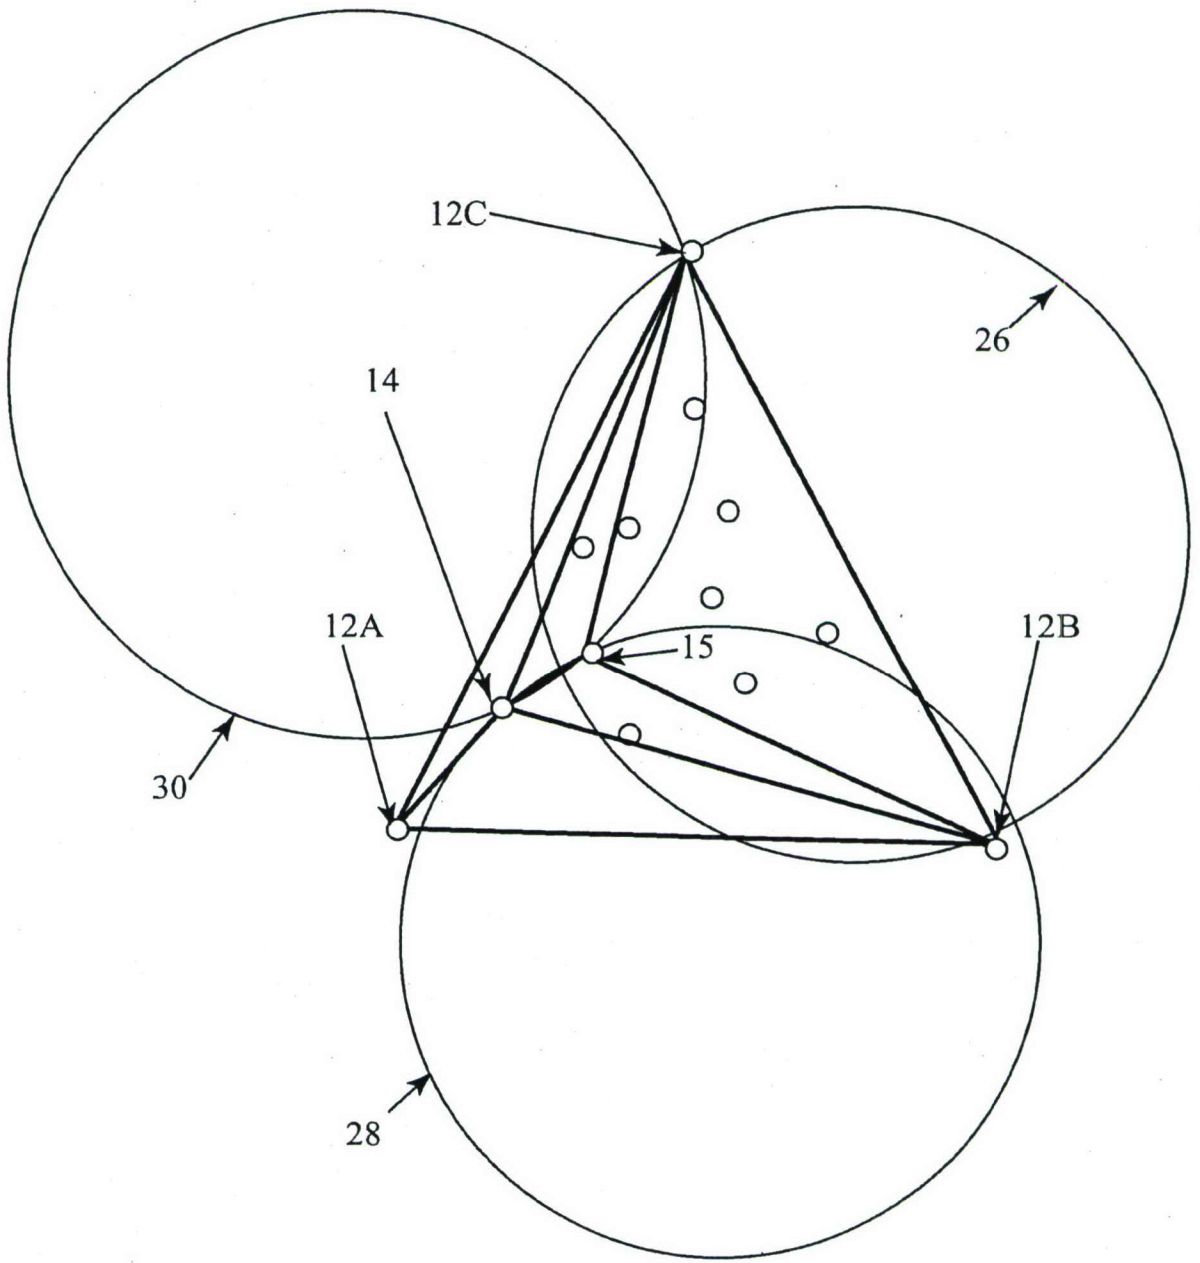


FIG. 11

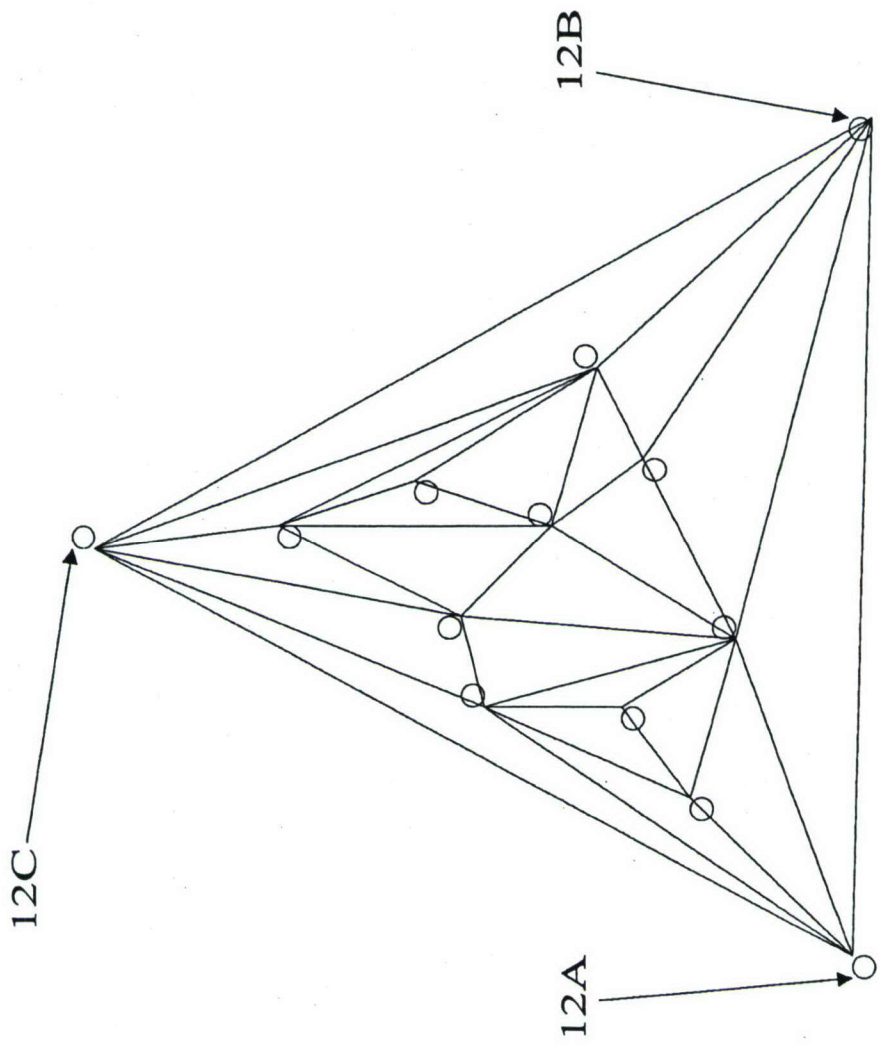


FIG. 12

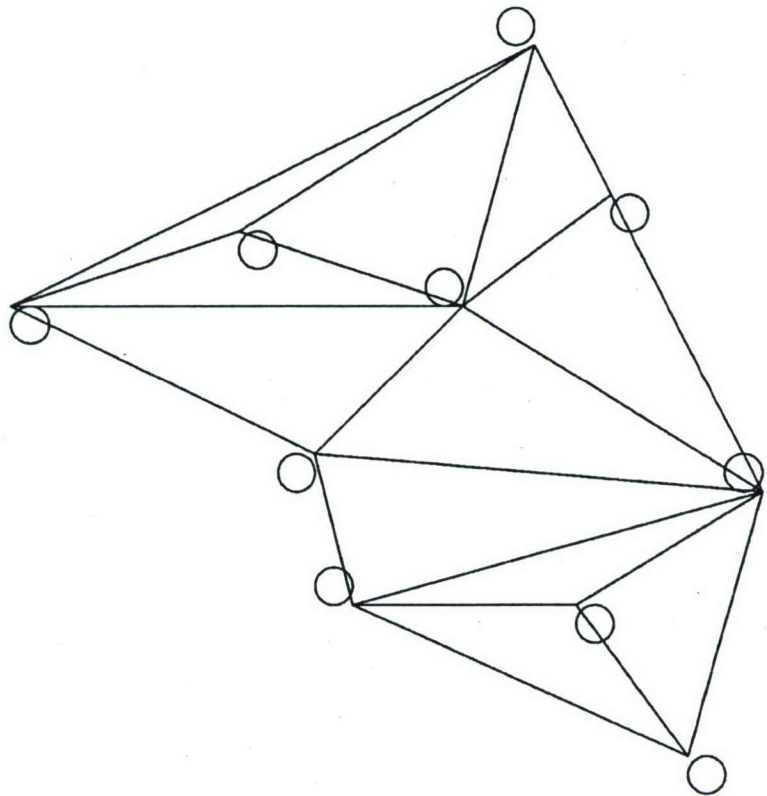


FIG. 13