



US007134233B1

(12) **United States Patent**
Saur

(10) **Patent No.:** **US 7,134,233 B1**
(45) **Date of Patent:** **Nov. 14, 2006**

(54) **ACOUSTICALLY TUNED CARTRIDGE CASING CATCHER**

(75) Inventor: **Thomas W. Saur**, Dearborn, MI (US)

(73) Assignee: **The United States of America as represented by the Secretary of the Army**, Washington, DC (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/345,683**

(22) Filed: **Jan. 30, 2006**

Related U.S. Application Data

(63) Continuation-in-part of application No. 10/946,248, filed on Sep. 21, 2004, now Pat. No. 7,043,863, which is a continuation-in-part of application No. 10/674,599, filed on Oct. 1, 2003, now Pat. No. 6,836,991.

(51) **Int. Cl.**
F41A 15/00 (2006.01)

(52) **U.S. Cl.** **42/98**; 89/33.4; 42/90; 42/106; 206/3; 206/317; 224/0.5

(58) **Field of Classification Search** 42/98, 42/90, 106; 89/33.4; 206/3, 317, 818; 224/183, 224/0.5; 273/410

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

197,398 A *	11/1877	O'Neil	73/167
2,706,574 A *	4/1955	Clement	220/4.22
3,978,602 A *	9/1976	Morrow et al.	42/98
4,028,834 A *	6/1977	Dobson	42/98
4,458,901 A *	7/1984	Wojcinski	273/410

4,512,585 A *	4/1985	Baravaglio	273/410
4,715,141 A *	12/1987	Kohnke	42/98
5,088,741 A *	2/1992	Simonetti	273/410
5,718,434 A *	2/1998	Alward	273/410
6,470,618 B1 *	10/2002	White	42/90
6,836,991 B1 *	1/2005	Saur	42/98
2004/0104533 A1 *	6/2004	Larson et al.	273/404

* cited by examiner

Primary Examiner—Michelle Clement


Assistant Examiner—Stewart T. Knox

(74) *Attorney, Agent, or Firm*—David L. Kuhn; Thomas W. Saur; Luis Miguel Acosta

(57) **ABSTRACT**

A catcher, in combination with a firearm having an ejection port, for receiving and retaining expended magnetically attracted shell casings through the ejection port as the firearm is discharged. The catcher includes a hollow housing having a plurality of rigid walls, and retainers. One of the walls has an opening in communication with the ejection port when the catcher is mounted to the firearm for receiving the shell casings. At least one of the other walls includes a plurality of deflectors and each of the deflectors has a front face that is slanted away from the opening such that the deflectors are capable of deflecting the shell casings away from the opening and a rear face that is perpendicular to the planar surface of the housing or slanted away from the opening. At least one of the deflectors, alone or in combination with one or more other of the deflectors and a respective wall, provide a void and an aperture configured as an acoustic tuner structure tuned to provide reduction of noise emitted at the ejection port. The retainers are disposed at the rear face of the deflectors and are capable of retaining the shell casings when the catcher is in any position. The retainers comprise a permanent magnetic material.

11 Claims, 6 Drawing Sheets

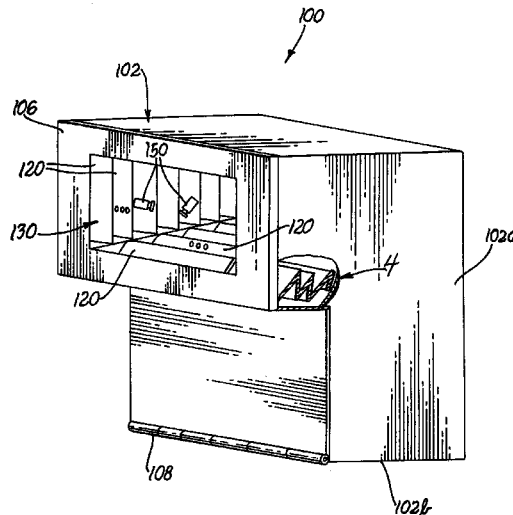

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 14 NOV 2006	2. REPORT TYPE N/A	3. DATES COVERED -	
4. TITLE AND SUBTITLE Acoustically Tuned Cartridge Casing Catcher		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Thomas W. Saur		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000		8. PERFORMING ORGANIZATION REPORT NUMBER 18720	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S) TACOM/TARDEC	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) 18720	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited			
13. SUPPLEMENTARY NOTES United States Patent No.: US 7,134,233 B1			
14. ABSTRACT			
15. SUBJECT TERMS			
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	
19a. NAME OF RESPONSIBLE PERSON			

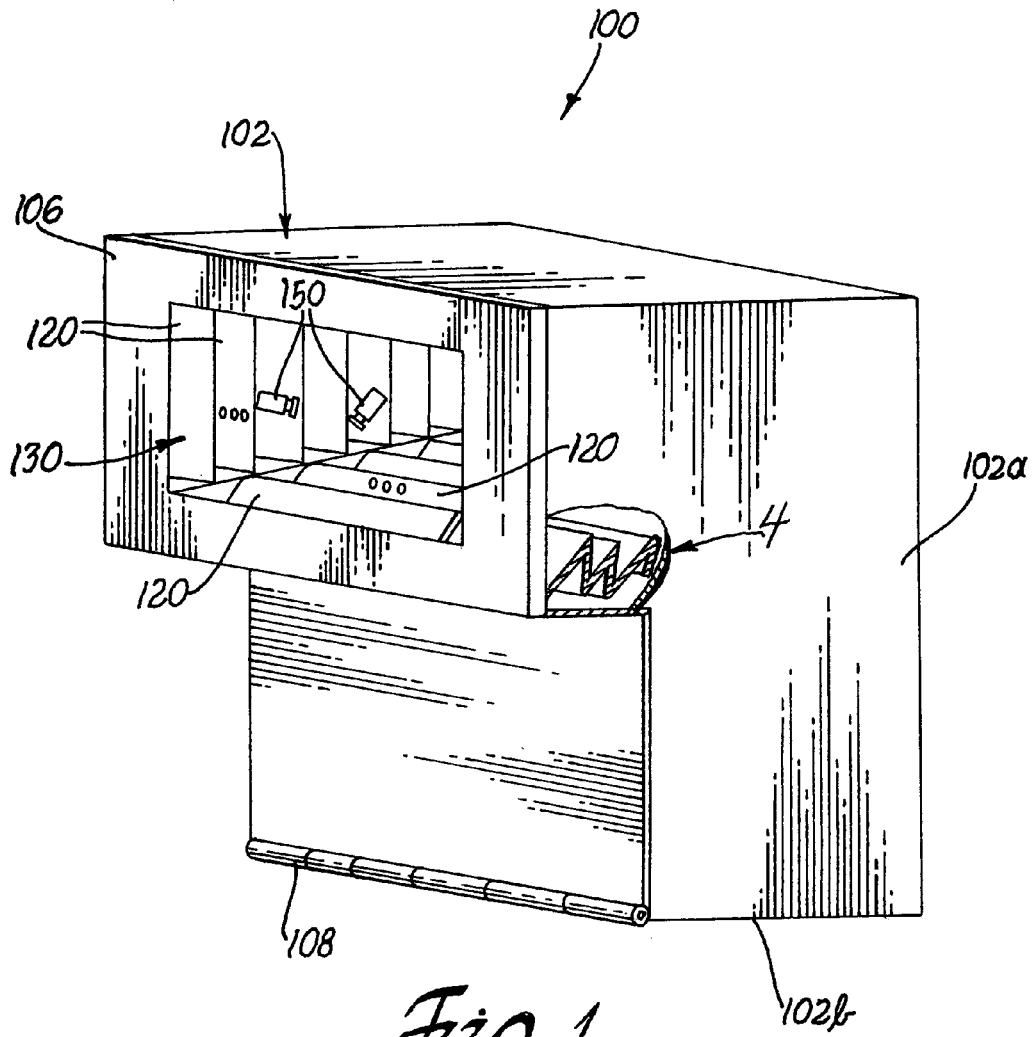
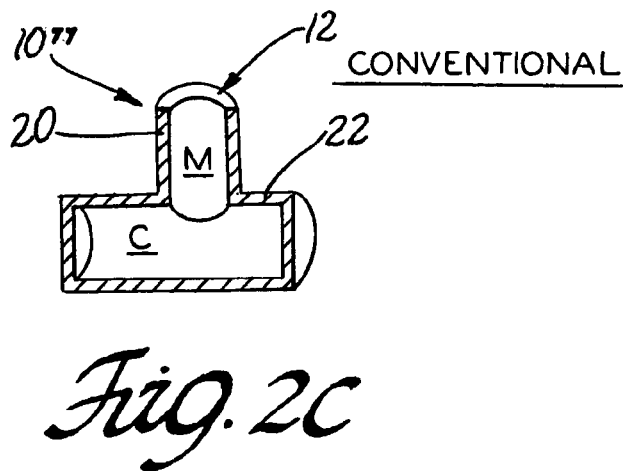
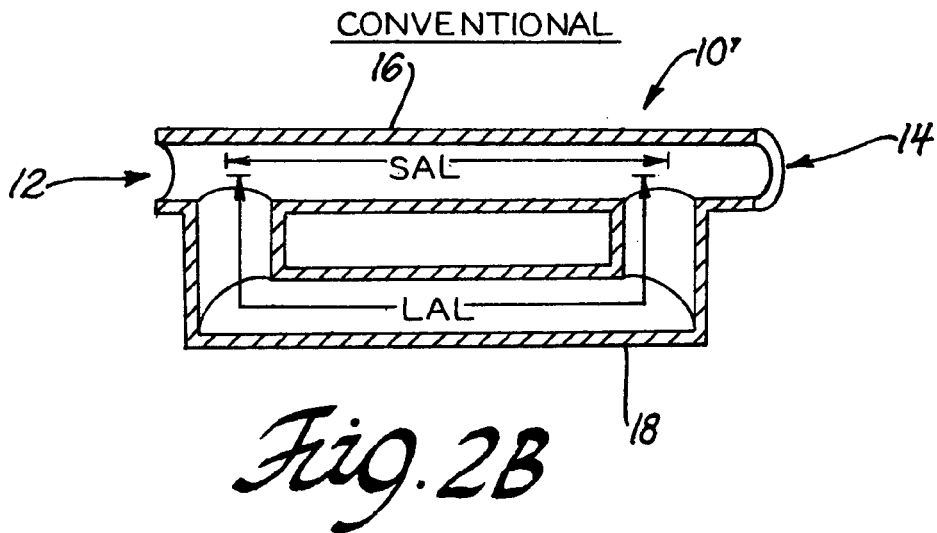
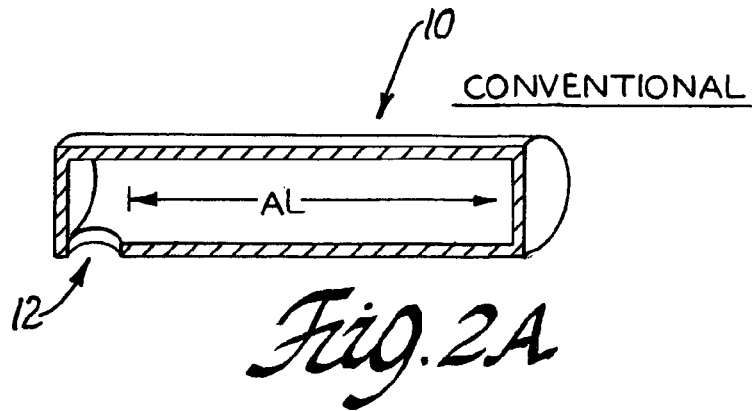


Fig. 1



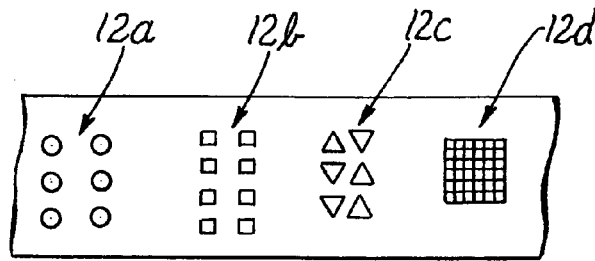


Fig. 3

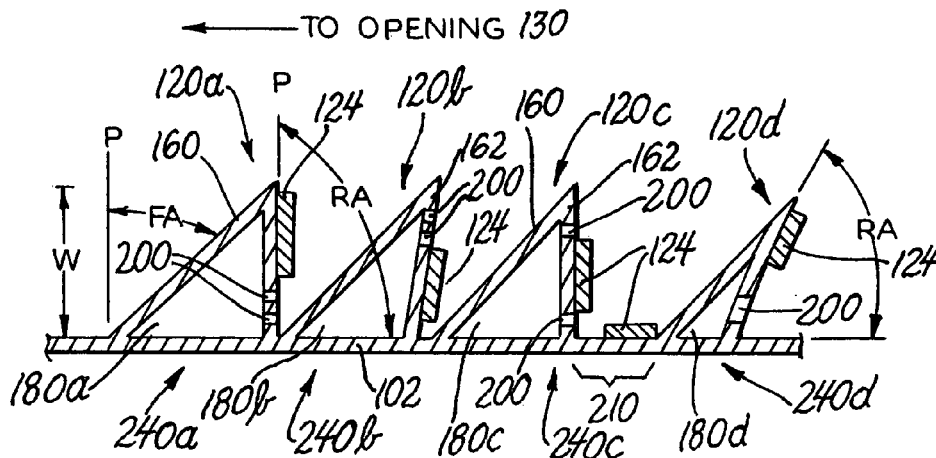


Fig. 4A

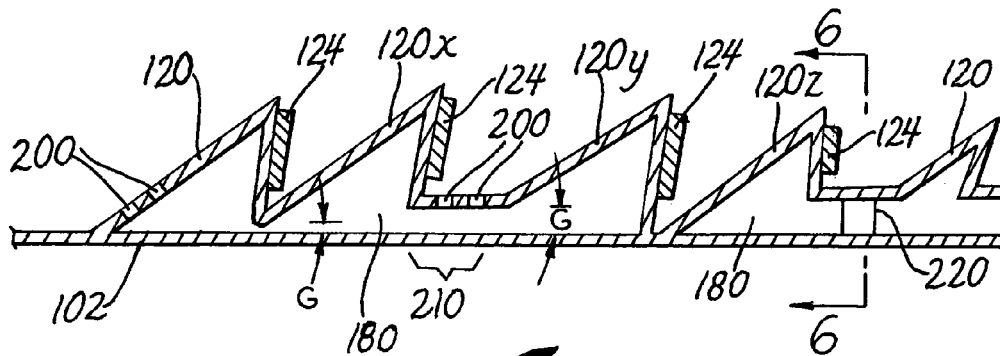
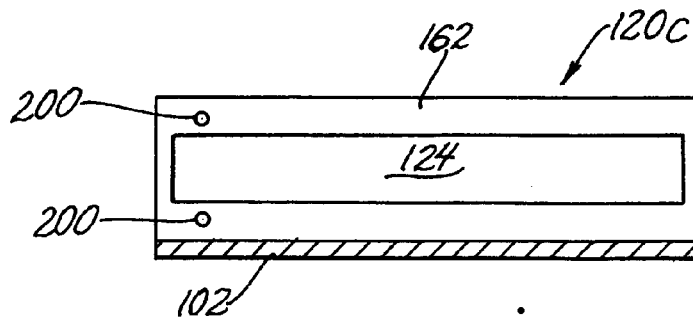
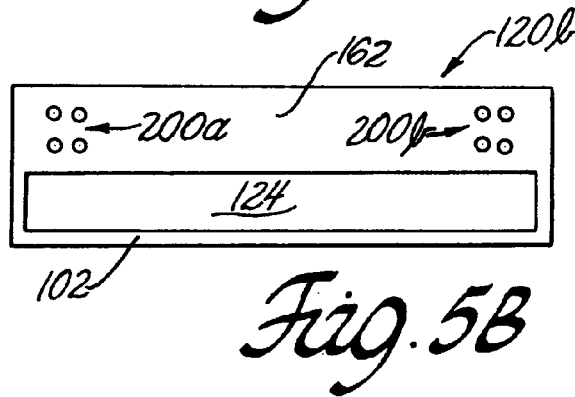
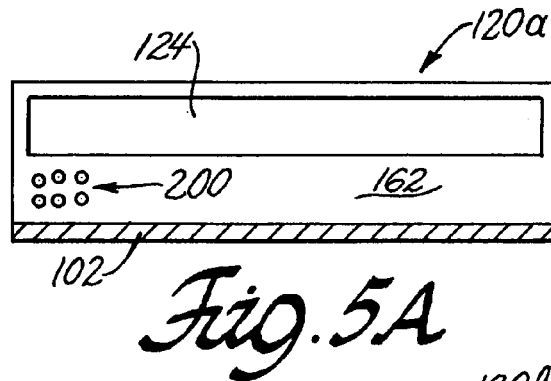
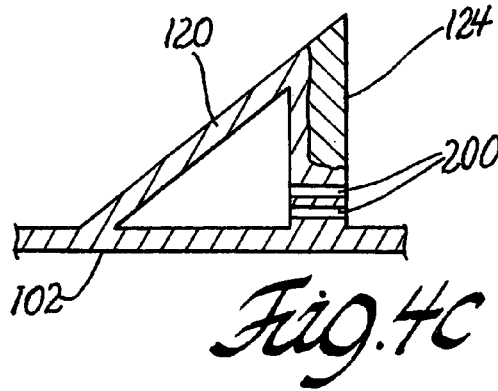


Fig. 4B



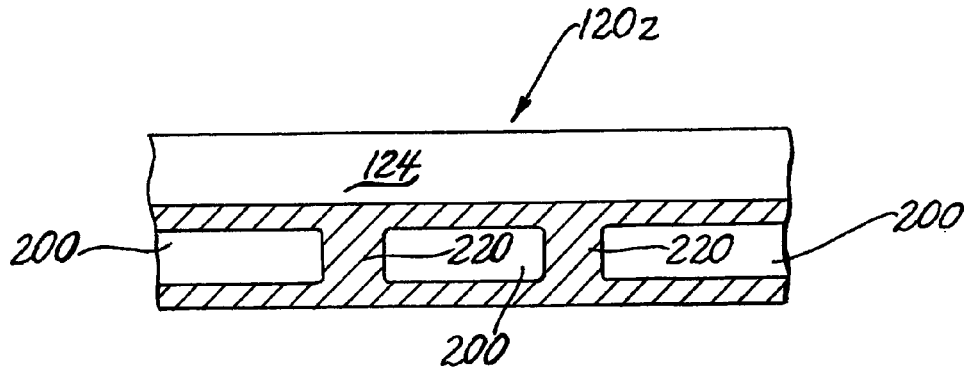


Fig. 6

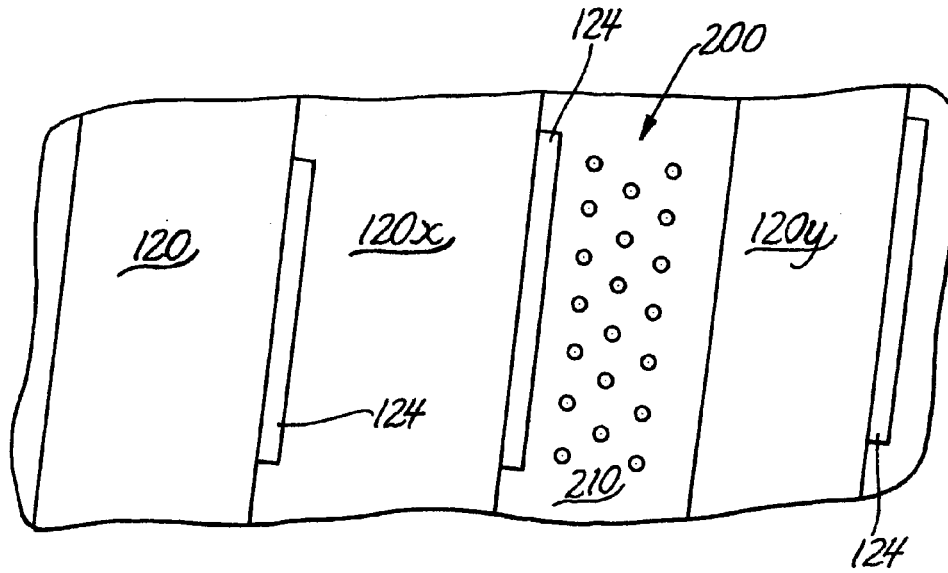


Fig. 7

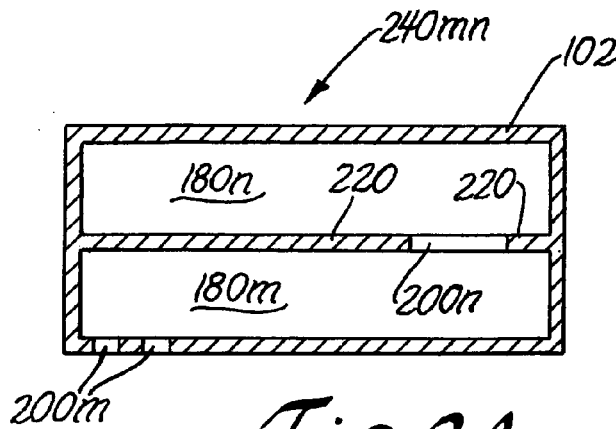


Fig. 8A


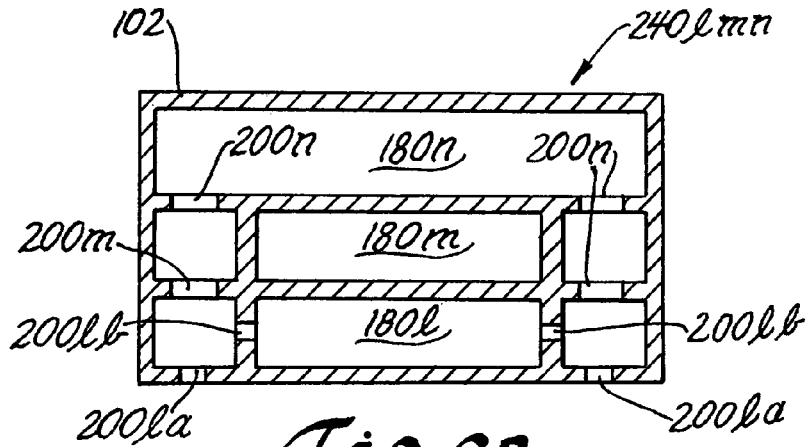


Fig. 8B

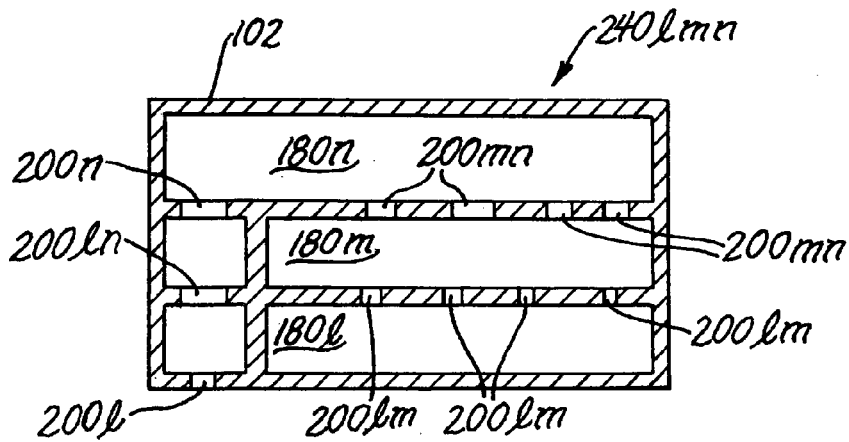

ACOUSTICALLY TUNED CARTRIDGE CASING CATCHER

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part of U.S. application Ser. No. 10/946,248, filed Sep. 21, 2004, now U.S. Pat. No. 7,043,863, which is a continuation-in-part of U.S. application Ser. No. 10/674,599, Oct. 1, 2003, now issued as U.S. Pat. No. 6,836,991.

GOVERNMENT INTEREST

The invention described here may be made, used and licensed by and for the U.S. Government for governmental purposes without paying royalty to me.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to an acoustically tuned spent cartridge casing catcher for a firearm.

2. Background Art

Cartridge casing catchers are mounted adjacent the ejection port of a firearm to catch the spent cartridge casings as the casings are ejected after a round is fired. The spent cartridge casings are generally collected for reloading and to prevent casings from being underfoot which can cause a shooter or observer unstable shooting or movement. The spent cartridge casings may also be collected by a cartridge casing catcher (and container) to reduce the evidence left at the shooting site and to reduce the noise generated during the shooting by eliminating the noise generated when the casings impact the surface (i.e., floor, roof, etc.) where the shooter (i.e., firearm user) is positioned. An example of a conventional spent shell container is shown in U.S. Pat. No. 4,166,333 to Kratzer (Kratzer '333).

Conventional spent cartridge casing catchers such as shown in the Kratzer '333 patent can have a deficiency in that spent cartridges are ejected with a significant force and tend to bounce inside the collection chamber and in some instances, the spent cartridge can bounce back into the firearm ejection port causing the firearm to jam. Such a jam is highly undesirable when the firearm user is involved in a critical mission situation. In any event, clearing jammed firearms is typically a time consuming, annoying, and potentially hazardous task.

Conventional spent cartridge casing catchers such as shown in the Kratzer '333 patent also have a deficiency in that such spent cartridge casing catchers are only effective when the firearm is operated in a normal (typical) design position (i.e., with the weapon trigger grip in a substantially vertical position, and the weapon ejection port in a substantially horizontal position). That is, such conventional approaches only catch and hold spent cartridge casings when gravitational forces cause the spent cartridge casings to drop or move to a location in the catcher that is generally away from the firearm ejection port. As such, when the user operates the firearm in an orientation that is not the orientation for which the spent cartridge casing catcher was designed (typically a normal firearm operation position), the spent cartridge casings are typically not properly captured and held and can readily cause the firearm to jam in many orientations of the firearm.

However, the firearm user can not always fire the weapon from a position from which the conventional spent cartridge

casing catcher was designed to operate, and firearm jams can result. For example, when the shooter desires to obtain a clear shot at a target, to avoid detection, operate the firearm at an oblique angle to provide clearance for a gas mask, operate the firearm "out of position," fire the weapon "around the clock" (i.e., through a full circle of rotation, including when the weapon is upside down, for instance when firing during a rolling maneuver), etc.

Conventional spent cartridge casing catchers such as shown in the Kratzer '333 patent may have additional deficiencies in that the spent cartridges tend to rattle in the catcher collection chamber and thus cause additional undesirable noise.

The muzzle report of blow back operated and closed breech firearms may be reduced by the installation of a so-called "silencer" (more properly called a suppressor) on the muzzle, integral with the barrel of the firearm, or both on the muzzle and integral with the barrel. Examples of some conventional firearms suppressors are shown in U.S. Pat. No. 5,033,356 to Richardson, U.S. Pat. No. 1,018,720 to Maxim, and U.S. Pat. No. 1,229,675 to Thompson. However, significant noise and flash (i.e., blast) are generated and expelled at the breech of the firearm, especially for open-bolt (or blowback) firearms, and from a closed breech weapon, especially from a so-called gas impingement operating firearm such as AR15 and M16 assault rifles to an extent which can be unacceptable for clandestine operations.

For example, well suppressed weapons such as the Heckler & Koch Model HK MP5SD, while having very low muzzle report, still produce noise and flash from the ejection port which presents a blast that may be significant and unacceptable in some situations. Suppressed gas impingement operating firearms such as suppressed AR15 and M16 assault rifles still produce noise and flash from the ejection port also. Open bolt weapons such as the Ingram MAC-10 and Uzi Submachine Gun, even when equipped with a muzzle mounted noise suppressor, still can produce noise (as well as flash) from the breech that is at a level such that the user advisably wears ear protection to reduce the likelihood of hearing loss. Conventional casing catchers such as shown in the Kratzer '333 patent and especially bag type spent cartridge catchers may provide some flash reduction but provide very little reduction of the noise emitted at the firearm port.

Further, the firearm operating mechanism (e.g., bolt actuation), especially in the case of semi-automatic and full-automatic firearms, generates noise that can compromise the location of the firearm user. Such firearm mechanism generated noise is typically not attenuated to any significant level by conventional spent cartridge casing catchers such as shown in the Kratzer '333 patent. Such firearm operating mechanism noise is typically not reduced by conventional muzzle mounted firearms suppressors.

Thus, there exists a need and an opportunity for an improved spent cartridge casing catcher. Such an improved spent cartridge casing catcher may overcome deficiencies of conventional approaches.

SUMMARY OF THE INVENTION

Accordingly, the present invention may provide an improved spent cartridge casing catcher including acoustic tuning. Such an improved spent cartridge casing catcher may provide reduced or eliminated bouncing of the spent cartridges back into the firearm ejection port and so reduce or eliminate jamming caused by the spent cartridge casings bouncing back, reduced or eliminated rattle of collected

spent cartridge casings, and reduced or eliminated firearm ejection port blast noise and firearm mechanism noise when compared to conventional approaches. Such an improved spent cartridge casing catcher may overcome other deficiencies of conventional approaches and provide further advantages when compared to conventional approaches.

According to the present invention, a catcher, in combination with a firearm having an ejection port, for receiving and retaining expended magnetically attracted shell casings through the ejection port as the firearm is discharged is provided. The catcher comprises a hollow housing having a plurality of rigid walls, and retainers. One of the walls has an opening in communication with the ejection port when the catcher is mounted to the firearm for receiving the shell casings. At least one of the other walls comprises a plurality of deflectors and each of the deflectors has a front face that is slanted away from the opening such that the deflectors are capable of deflecting the shell casings away from the opening and a rear face that is perpendicular to the planar surface of the housing or slanted away from the opening, and at least one of the deflectors, alone or in combination with one or more other of the deflectors and a respective wall, comprise a void and an aperture configured as an acoustic tuner structure tuned to provide reduction of noise emitted at the ejection port. The retainers are mounted at the rear face of the deflectors and are capable of retaining the shell casings when the catcher is in any position. The retainers comprise a permanent magnetic material.

The retainers may have a maximum magnetic energy product value that is sufficient to capture and retain the expended shell casings.

A seal may be attached to the housing at the opening. The seal is generally configured to provide a substantially airtight path between the ejection port and the opening.

The seal comprises a resilient, compliant material in a solid, gel-sac, closed-cell foam, or skin covered foam configuration.

The acoustic tuner structure comprises at least one of a quarter wave tuner, a Quincke tuner, and a Helmholtz tuner.

The magnetic material comprises magnetic strips that are affixed to the rear face of respective deflectors.

Each of the deflectors generally has a height that is equal to or greater than the diameter of the shell casings that are captured by the catcher.

The deflectors may be adjacent or may be separated by a gap.

The magnetic material may further comprise magnetic strips that are affixed to the gaps when the deflectors are separated by the gap.

The magnetic material may be embedded into the rear face of respective deflectors.

The magnetic material is generally at least one of steel, Strontium and Barium ferrite, Samarium-Cobalt, Neodymium-Iron-Boron, and Aluminum-Nickel-Cobalt alloy.

The above features, and other features and advantages of the present invention are readily apparent from the following detailed descriptions thereof when taken in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram of a perspective view a spent cartridge casing catcher of the present invention;

FIGS. 2(A-C) are diagrams of sectional views of acoustic tuners;

FIG. 3 is a diagram of some alternative example hole shapes of the present invention;

FIGS. 4(A-C) are diagrams of sectional views of some alternative example deflectors of the present invention;

FIGS. 5(A-C) are diagrams of views of the rear face of some alternative examples of the deflectors of FIGS. (A-C);

FIG. 6 is a diagram of a sectional view of a support structure of the present invention;

FIG. 7 is a diagram of a top view of portion of deflectors illustrating one example hole placement of the present invention; and

FIGS. 8(A-C) are diagrams of sectional top views of some alternative acoustic tuner structures of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

The present invention generally provides an improved cartridge casing catcher. A user of a firearm (i.e., a shooter) may desire to catch the spent cartridge casings as the casings are ejected from the firearm after a round is fired. The spent cartridge casings (i.e., shell casings) may be collected (e.g., using a cartridge casing catcher (and container)) to prevent the casings from being underfoot which can cause the shooter or an observer unstable shooting or movement. The spent cartridge casings may also be collected by a cartridge casing catcher to reduce the evidence left at the shooting site and to reduce the noise generated during the shooting by eliminating the noise generated when the shell casings impact the surface (i.e., floor, roof, etc.) where the shooter is positioned.

Further, the shooter may wish to reduce or eliminate noise generated by rattle of collected spent cartridge casings in the cartridge casing catcher.

Yet, further, the shooter may wish to operate the firearm in a position other than the normal operating position (i.e., other than with the weapon trigger and grip, and sight alignment in a substantially vertical position) such that the shooter can obtain a clear shot at a target, can operate the firearm while wearing a gas mask, to avoid detection, etc. by operating the firearm "out of position." Yet further, the shooter may desire to have a cartridge casing catcher that operates properly when the firearm is fired "around the clock" (i.e., in a normal position and through a full circle of rotation generally along any axis of rotation, including when the weapon is upside down, for instance when the shooter is firing the weapon as well as performing a rolling maneuver on a surface, flipping or twisting in mid-air, and the like).

The user may wish that the noise and flash that are emitted from the ejection port when the firearm is discharged are reduced or eliminated to reduce or eliminate the likelihood of detection.

The user may wish to reduce or eliminate the noise generated by the firearm operating mechanism, especially in the case of semi-automatic and full-automatic firearms. Such firearm mechanism generated noise is typically not attenuated by conventional firearms accessories of any kind.

While a number of cartridge casings are produced from non-magnetically attractive materials such as brass and aluminum, cartridge casings are also commonly made of mild steel. The cartridge casings that are made of mild steel are generally attracted (i.e., pulled towards and held) by a magnet. As such, a magnetic material (e.g., a permanent magnet) with sufficient magnetic force will generally be capable of attracting and holding cartridge casings that are particularly made of mild steel (i.e., steel casings), and cartridge casings that are generally made from any ferromagnetic (or other magnetically attracted) material. The

present invention may be advantageously implemented in connection with cartridge casings that are generally made from such magnetically attracted material.

With reference to the Figures, the preferred embodiments of the present invention will now be described in detail. Generally, the present invention provides an improved spent cartridge casing catcher having acoustical tuning for noise reduction. The spent cartridge casing catcher implemented in connection with the present invention is generally used in combination with a firearm. The spent cartridge casing catcher implemented in connection with the present invention is generally mounted (i.e., fastened, fixed, attached, etc.) adjacent to and covering (i.e., over, in communication with, etc.) an ejection port of a semi-automatic or full-automatic firearm.

In one example, the cartridge casing catcher implemented in connection with the present invention may be advantageously mounted to the firearm via an apparatus similar to the mounting shown in U.S. Pat. No. 4,166,333 to Kratzer (hereinafter Kratzer '333), which is incorporated herein by reference in its entirety, on FIG. 4 of Kratzer '333. In other examples, the spent cartridge casings catcher of the present invention may be mounted to a firearm via clamping apparatuses similar to the mountings shown in U.S. Pat. No. 4,430,820 to Marsh and U.S. Pat. No. 5,651,208 to Benson, which are also incorporated herein by reference in their entirety, on FIGS. 1 and 3 of Marsh '820, and FIG. 7 of Benson '208, respectively. However, the cartridge casing catcher implemented in connection with the present invention may be mounted to the firearm where implemented via any appropriate apparatus as is well known in the art to meet the design criteria of a particular application. As such, for clarity of description, the firearm and the mounting apparatus generally implemented in connection with present invention are not illustrated herein.

The present invention is a continuation-in-part of U.S. application Ser. No. 10/946,248, filed Sep. 21, 2004, now U.S. Patent Application Publication No. 2005/0188599 A1, published Sep. 1, 2005 (hereinafter USPubApp '599), which is a continuation-in-part of U.S. application Ser. No. 10/674,599, filed Oct. 1, 2003, now issued as U.S. Pat. No. 6,836,991, both of which are incorporated herein by reference in their entirety. As such, an understanding of all of the teachings of U.S. Pat. No. 6,836,991 and USPubApp '599 is assumed herein.

Referring to FIG. 1 of the present invention, a diagram illustrating a system (i.e., apparatus, assembly, catcher, receptacle, etc.) **100** in accordance with the present invention is shown. A cut-out sectional view at line **4** is described below in connection with FIGS. 4(A-C). The apparatus **100** generally comprises an acoustically tuned multi-position spent cartridge casing catcher. In one example, the catcher **100** generally comprises a generally hollow housing (i.e., case, box, container, etc.) **102**, and a lip area **106**. In one example, the housing **102** may be implemented having walls configured as a box-on-box structure or shape (i.e., an upper box and a lower box) as illustrated. However the housing **102** may be implemented having any appropriate shape to meet the design criteria of a particular application.

The apparatus **100** is generally implemented (i.e., used) in combination (i.e., in connection) with a firearm. The upper box is generally attached to a firearm (not shown) via an attachment mechanism (not shown) such that an opening **130** into the housing **102** communicates with the ejection port of the firearm and receives spent (or expended) cartridges (i.e., empty shells, casings, etc.) as the shells are ejected from the firearm and the blast that is emitted from the

ejection port when the firearm is discharged (i.e., when the firearm is fired). The lower box may comprise fixed walls **102a**, a lid **102b** having a hinge **108**, and an opposing latch (not shown) that may provide for access to the interior of the shell catcher **100**, for example, for emptying spent cartridges from the catcher **100**.

The housing **102** may be implemented having a structure similar to the spent firearm cartridge catcher taught by USPubApp '599. However, the housing **102** of the present invention may be implemented without the acoustic foam disclosed in USPubApp '599. Further, the case **102** may be implemented having walls of any appropriate general outside shape and configuration to meet the design criteria of a particular application. The housing **102** is generally produced (i.e., manufactured, built, made, implemented, etc.) using a substantially rigid material. Example materials for implementation of the case **102** may include steel, aluminum, rigid plastic, fiber-reinforced plastic, loaded (e.g., filled with a dense material such as lead, clay, or the like) plastic, and the like.

Further referring to USPubApp '599, on FIG. 6 and in the corresponding description in para. [0052], the substantially rigid wall **102** is shown having a convoluted shape that forms the wedges **120** that include the retainers **124** fixed thereon. In particular, a hollow in the wall **102** is shown in connection with the deflector **120y**. Yet further referring to USPubApp '599, on FIG. 7 and in the corresponding para. [0053], the wedges **120** are shown having the retainers **124** integrated into the respective rear surfaces **162**. The present invention generally comprises an implementation of the wall **102** including the deflectors **120** formed in connection with respective hollows in the wall **102**, and having the retainers **124** fixed thereon or integrated into the respective rear surfaces **162**. In particular, the present invention may advantageously implement the hollow (i.e., void, cavity, etc.) provided by the deflector **120** in the wall **102** to form at least one acoustic tuner that reduces or eliminates noise generated by the blast from the ejection port and mechanical noise generated by the firearm actuation during normal firing operation.

In one example, the spent casing catcher taught by USPubApp '599 implements the deflectors **120** using acoustic foam (see, for example USPubApp '599, on FIGS. 2-4, and respective para. [0031]-[0033]). In some implementations (e.g., severe use environments), acoustic foam may be eroded and thus have reduced effectiveness due to the firearm port blast. As such, it may be desirable to implement a firearm spent casing catcher having walls that are made from material that is generally not eroded by the firearm ejection port blast while maintaining reduction of noise that is generated by the firearm ejection port blast and the firearm mechanism actuation. The apparatus **100** of the present invention may provide such a firearm spent casing catcher. Further, as the present invention comprises acoustic noise reduction via acoustic tuners, a broader range of noise frequencies (i.e., a wider acoustic spectrum) may be attenuated and a greater amount of attenuation may be achieved by the present invention than is provided by acoustic foam.

The wedges (or deflectors) **120** are generally configured to deflect ejected cartridge casings **150** away from the opening **130** (i.e., away from the ejection port of the firearm and towards the lower box region of the housing **102** near the lid **102b**) as the firearm where the catcher **100** is implemented (or installed) is discharged. The cartridge casings **150** are generally made from magnetically attracted material (e.g., mild steel, a combination of mild steel and brass (e.g., brass head and steel body, steel head and brass

body, and the like). The retainers **124** generally magnetically attract and hold the ejected cartridge casings **150**.

Referring to the FIGS. **2(A-C)** of the present invention, diagrams illustrating cross sectional views of acoustic tuners **10**, that may be implemented in connection with the present invention are shown. The principles of acoustics in general and acoustic tuners in particular are well known to one of ordinary skill in the art (e.g., the acoustic and sound wave property principles as generally taught in introductory college physics) and will only be described briefly herein to provide a context for the description of the acoustic tuner structures of the present invention.

FIG. **2A** illustrates a quarter wave tuner **10**. The tuner structure **10** is a closed tube (shown as generally cylindrical, however, having any appropriate shape) that has an opening **12** where a sound wave impinges at one end, and an acoustic length, **AL**. When the impinging sound wave has a wavelength that is four times the acoustic length, **AL**, the sound wave will be canceled and the respective sound pressure level of the impinging sound wave (i.e., the amount of noise) will be attenuated.

FIG. **2B** illustrates a Herschel-Quincke (usually simply called Quincke) or interference tuner **10'**. The Quincke tuner structure **10'** includes a tube **16** and a tube **18** that are fluidly (i.e., acoustically) coupled at ends of the tube **18**. The tube **16** has an opening **12** where a sound wave impinges, an outlet **14** where the impinging sound wave exits, and an acoustic length, **SAL** (e.g., a short acoustic length). The tube **18** has an acoustic length, **LAL** (e.g., a long acoustic length), that is greater than the acoustic length, **SAL** (i.e., $LAL > SAL$). When the impinging sound wave has a wavelength that is twice the difference of the acoustic length, **LAL**, minus the acoustic length, **SAL**, (i.e., $LAL - SAL$ equals one half the wavelength of the impinging sound wave) the impinging sound wave will be canceled (i.e., the sound waves will interfere) and the respective sound pressure level of the exiting sound wave (i.e., the amount of noise from outlet **14**) will be attenuated.

FIG. **2C** illustrates a Helmholtz (or "jug") tuner **10"**. The tuner **10"** generally comprises a tube **20** that has an opening **12** where a sound wave impinges at one end, and that is fluidly coupled to a closed cavity (shown as a cylinder, however, having any appropriate shape) **22**. The volume of tube **20** is typically substantially smaller than the volume of the cavity **22**. The interior of the tube **20** is filled with a gas having an acoustic mass, **M**, and the interior of the cavity **22** is filled with a gas having an acoustic compliance, **C**. The Helmholtz tuner structure **10"** has a tuned frequency (i.e., a resonant frequency) that equals 2π times the square root of the acoustic mass, **M**, divided by the acoustic compliance, **C** (i.e., a "spring-mass" resonance frequency that equals $2\pi\sqrt{M/C}$). As such, a sound wave having the tuned frequency of the Helmholtz tuner **10"** that impinges on the opening **12** is attenuated.

Referring to FIG. **3**, a diagram illustrating some example alternative openings **12** is shown. While the opening **12** is shown as a simple hole in FIGS. **2(A-C)**, it is well known to one of ordinary skill in the art that more complex openings such as multiple round holes (e.g., holes **12a**), holes having any appropriate shape (e.g., square openings **12b** and triangular openings **12c**), openings covered by a screen **12d**, openings with relatively rough (i.e., not smooth, such that turbulence is induced, not shown) edges, and the like may be implemented in connection with the acoustic tuners **10**, **10'**, and **10"**. Such alternative opening implementations may provide tuner openings that may be sized to prevent entry and entrapment of objects (e.g., spent firearm

cartridge casings **150**) in the tuners and may also provide acoustic resistance to the flow of the sound wave that impinges on the tuner opening **12**. Such acoustic resistance generally provides tuning and hence noise reduction that is over a broader range of frequencies while at a reduced level when compared to a single, smooth hole opening.

Referring to FIGS. **4(A-C)**, diagrams illustrating sectional views taken at line **4** of FIG. **1** of example alternatives of the wedges **120** (e.g., wedges **120a-120d**, **120x-120z**, and the like) are shown. Each of the wedges **120** may have a face **160** that is oriented toward the opening **130** (also referred to as a front face, hereinafter) and a face **162** that is oriented away from the opening **130** (also referred to as a rear face, hereinafter). The front face **160** is generally slanted away from the opening **130** such that the casings **150** are deflected away from the opening **130** and generally toward the lid **102b**.

The rear face **162** is generally perpendicular the planar surface of the housing **102** or slanted away from the opening **130** such that the casings **150** are resisted from traveling (moving, bouncing, flying, etc.) back toward the opening **130** even when bouncing inside the housing **102**. Each of the deflectors **120** generally has the respective front face **160** that is slanted away from the opening **130**, e.g., at an angle, **FA**, such that the deflectors **120** are capable of deflecting the casings **150** away from the opening **130** and the respective rear face **162** that is perpendicular to the planar surface of the housing or slanted away from the opening **130**, e.g., at an angle, **RA**.

In one example, the deflectors **120** may be substantially adjacent (e.g., the deflectors **120a** and **120b**, and the deflectors **120b** and **120c**). In another example, (e.g., the deflectors **120c** and **120d**), the deflectors **120** may be separated by a gap **210**.

The retainers **124** are generally implemented using a permanent magnet material (i.e., a material that is substantially permanently magnetic). The retainers may comprise at least one of steel, a Strontium and Barium ferrite, Samarium-Cobalt, Neodymium-Iron-Boron, other permanently magnetic rare earth alloys, and Alnico (i.e., Aluminum-Nickel-Cobalt alloy). However, the retainers **124** may be implemented using any appropriate permanently magnet material having a magnetic field strength sufficient to hold the expended magnetically attracted (e.g., steel) casings **150** to meet the design criteria of a particular application.

The present invention generally implements the retainers **124** having a maximum magnetic energy product value (i.e., level, amount, etc.) that is sufficient to capture and retain (catch and hold), for a particular application, expended shell casings **150** that are magnetically attracted. The deflectors **120** are generally capable of deflecting the cartridge casings **150** away from the opening **130**, and the retainers **124** at the rear face of the deflectors **120** are generally capable of retaining the shell casings **150** when the catcher is in (i.e., oriented, held, placed, disposed, etc. in) any position and the firearm where the apparatus **100** is installed is operated in any position.

The retainers **124** may be substantially rectangular shaped. In one example, the retainers **124** may be shaped and sized such that one or more of the retainers **124** are fixed (i.e., fastened, adhered, affixed, mounted, etc.) to respective rear faces **162** (i.e., fixed to faces on the sides of deflectors **120** not facing the opening **130**) and substantially cover the respective surface **162** (e.g., the respective retainers **124** that are implemented in connection with the deflectors **120a-120d**). In another example, the retainers **124** may be shaped and sized to be mounted to the gap **210** between

respective wedges **120** (e.g., the retainer **124** implemented in the space **210** between the wedge **120c** and the wedge **120d**). In yet another example (see, for example, FIG. **4C**), the retainers **124** may be embedded into (or integrated within) the wall **102**.

The wedge **120** may have a height, *W*, that is generally equal to or greater than the diameter of the cartridge casing **150** that is captured (or caught) by the catcher **100**. However, the height *W* may be implemented as any appropriate value (i.e., amount, distance, etc.) to meet the design criteria of a particular application.

The front face **160** is generally at an angle (e.g., *FA*) relative to a line or plane (e.g., *P*) that is perpendicular to the surface of the housing **102**. The angle *FA* is generally in a range of 30 degrees to 75 degrees and preferably in a range of 45 degrees to 60 degrees. The rear face **162** is generally at an angle (e.g., *RA*) relative to line or plane *P*. The angle *RA* is generally in a range of 0 degrees to 35 degrees and preferably in a range of 0 degrees to 25 degrees. The angle *RA* is generally less than the angle *FA*. However, the angles *FA* and *RA* may be implemented at any appropriate angles to meet the design criteria of a particular application.

A void (i.e., cavity, chamber, etc.) **180** (e.g., voids **180a–180d**) is generally formed between the respective faces **160** and **162** of the deflectors **120** and the respective wall **102**. Further, at least one opening (i.e., hole, aperture, etc.) **200** may be implemented to provide fluid communication between the inside of the casing catcher **100** and the void **180**. The configuration of the void **180** and the opening **200** is generally implemented as an acoustic tuner structure **240** (e.g., tuners **240a–240d**) such as a quarter wave tuner, a Quincke tuner, and a Helmholtz resonator similar to the acoustic tuners illustrated in FIGS. **2(A–C)**, respectively. The acoustic tuner structure **240** of the present invention is generally tuned to provide reduction of noise emitted at the firearm ejection port and mechanical noise generated by the operation of the firearm mechanism. Support for the lower front edge of the wedges **120** may be provided by one or more supports **220** that are generally disposed from the lower front edge of the respective deflector **120** and the wall **102**.

The holes **200** may be implemented similar to the holes **12** of FIGS. **2(A–C)**. The apertures **200** may be implemented having a size small enough such that the cartridge casings **150** are not able to enter the void **180** for the design criteria of a particular application. The opening **200** may be implemented having any appropriate shape (e.g., shapes such as round, square, triangular or as screen as shown in FIG. **3**) to meet the design criteria of a particular application.

To provide sufficient volume for the void **180** or to provide an acoustic path or acoustic tuning length, two or more of the deflectors **120** may be separated from the wall **102** via a gap (e.g., *G*). The gap *G* generally provides fluid communication such that an adequate acoustic length, mass, or compliance is formed for the respective acoustic tuner structure.

Referring to FIGS. **5(A–C)**, diagrams illustrating views of the rear faces **162** of the wedges **120a**, **120b**, and **120c**, respectively are shown. The FIGS. **5(A–C)** illustrate example placement of the holes **200**. The placement of the holes **200** in FIGS. **5A** and **5C** may be advantageously implemented in connection with quarter wave tuner and Helmholtz resonator acoustic tuner structures (i.e., various implementations of the tuner **240**). The placement of the holes **200a** and **200b** in FIG. **5B** may be advantageously implemented in connection with a Quincke tuner acoustic tuning structure.

Referring to FIG. **6**, a diagram illustrating a sectional view taken at the line **6–6** of FIG. **4B** is shown. The legs **220** may provide physical support such that the housing **102** may be physically robust for severe operating conditions as may be encountered during military usage. The passages **200** (i.e., channels, ports, openings, holes, apertures, etc.) resulting from the implementation of the legs **220** may be implemented, in one example, as openings for respective acoustic tuning structures, and, in another example, to provide fluid communication such that sufficient acoustic volume and length for tuning path, tuning length, or tuning compliance is formed.

Referring to FIG. **7**, a diagram illustrating a top view of portion of FIG. **4B** is shown. In particular, the openings **200** implemented in the gap **210** between the deflectors **120x** and **120y** are shown.

Referring to FIG. **8A**, a diagram illustrating a top sectional view of one example of an acoustic tuner **240mn** of the present invention is shown. In one example, the acoustic tuner **240mn** may be implemented as a quarter wave tuner having an opening **200m**, and an overall acoustic quarter wave tuning length provided by the length of the void **180m** plus the length of the void **180n** as acoustically coupled via the hole **200n**. While only two of the voids **180** are illustrated as serially coupled to provide an acoustic length, as many of the voids **180** may be fluidly coupled to provide an appropriate acoustic length to meet the design criteria of a particular application.

Referring to FIG. **8B**, a diagram illustrating a top sectional view of one example of an acoustic tuner **2401mn** of the present invention is shown. In one example, the acoustic tuner **2401mn** may be implemented as a Quincke tuner. The void **1801** may be implemented as having the short tuning length (e.g., the acoustic length between the holes **2001b**). The void **180m** may be acoustically isolated and, thus, may not form a part of the tuner structure **2401mn**. The acoustic length of the path between the holes **2001a** (including the length of the void **180n**) may be implemented as the long acoustic tuning length of the Quincke tuner **2401mn**.

Referring to FIG. **8C**, a diagram illustrating a top sectional view of another example of an acoustic tuner **2401mn** of the present invention is shown. In one example, the acoustic tuner **2401mn** may be implemented as a Helmholtz resonator tuner acoustic structure. The acoustic path implemented via the opening **2001**, the opening **2001n**, and the opening **200n** may be implemented as an acoustic mass. The combination of the voids **1801**, **180m**, and **180n** as implemented via the openings **2001m** and **200mn** may be implemented as the respective acoustic compliance of the Helmholtz tuner **2401mn** of the present invention.

The seal **106** generally comprises a resilient, compliant material (e.g., vinyl, butyl, neoprene, etc. in a solid, gel-sac, closed-cell foam, skin covered foam, or other appropriate configuration). The seal **106** is generally fastened to the edge of the housing **102** and liner **104** that about the ejection port region of the firearm. While the housing **102** and the seal **106** are shown having a substantially flat surface that contacts the firearm where the present invention is implemented, the housing **102** at the opening **130** and the seal **106** are generally shaped to substantially match an interfacing surface of the firearm where the catcher **100** is implemented.

When the catcher **100** is mounted to the firearm, the seal **106** generally provides a substantial barrier to noise and flash (e.g., a substantially air-tight or hermetic seal) that is generated during the ejection of a spent cartridge. The seal **106** may also provide mechanical damping to vibration of the firearm where the catcher **100** is implemented such that

noise generated by the firearm action operation as well as the discharge noise at the ejection port may be reduced or eliminated. The seal **106** may be configured to provide a substantially air-tight path between the ejection port and the opening **130**.

As is apparent then from the above detailed description, the present invention may provide an improved multi-position cartridge casing catcher. Such an improved cartridge casing catcher may provide reduced or eliminated noise and flash from a firearm ejection port and so reduce or eliminate jamming caused by the spent cartridges bouncing back, reduced or eliminated rattle of collected shell casings, and reduced or eliminated bouncing of the spent cartridges back into the firearm ejection port as the firearm is operated in any position when compared to conventional approaches.

Various alterations and modifications will become apparent to those skilled in the art without departing from the scope and spirit of this invention and it is understood this invention is limited only by the following claims.

What is claimed is:

1. A catcher, in combination with a firearm having an ejection port, for receiving and retaining expended magnetically attracted shell casings through the ejection port as the firearm is discharged, the catcher comprising:

a hollow housing having a plurality of rigid walls, wherein

one of the walls has an opening in communication with the ejection port when the catcher is mounted to the firearm for receiving the shell casings,

at least one of the other walls comprises a plurality of deflectors and each of the deflectors has a front face that is slanted away from the opening such that the deflectors are capable of deflecting the shell casings away from the opening and a rear face that is perpendicular to the planar surface of the housing or slanted away from the opening, and

at least one of the deflectors, alone or in combination with one or more other of the deflectors and a respective wall, comprise a void and an aperture

configured as an acoustic tuner structure tuned to provide reduction of noise emitted at the ejection port; and

retainers at the rear face of the deflectors capable of retaining the shell casings when the catcher is in any position, wherein the retainers comprise a permanent magnetic material.

2. The catcher of claim 1 wherein the retainers have a maximum magnetic energy product value that is sufficient to capture and retain the expended shell casings.

3. The catcher of claim 1 further comprising a seal attached to the housing at the opening, wherein the seal is configured to provide a substantially air-tight path between the ejection port and the opening.

4. The catcher of claim 3 wherein the seal comprises a resilient, compliant material in a solid, gel-sac, closed-cell foam, or skin covered foam configuration.

5. The catcher of claim 1 wherein the acoustic tuner structure comprises at least one of a quarter wave tuner, a Quincke tuner, and a Helmholtz tuner.

6. The catcher of claim 1 wherein the magnetic material comprises magnetic strips that are affixed to the rear face of respective deflectors.

7. The catcher of claim 1 wherein each of the deflectors has a height that is equal to or greater than the diameter of the shell casings that are captured by the catcher.

8. The catcher of claim 1 wherein the deflectors are adjacent or separated by a gap.

9. The catcher of claim 8 wherein the magnetic material further comprises magnetic strips that are affixed to the gaps when the deflectors are separated by the gap.

10. The catcher of claim 1 wherein the magnetic material is embedded into the rear face of respective deflectors.

11. The catcher of claim 1 wherein the magnetic material is at least one of steel, Strontium and Barium ferrite, Samarium-Cobalt, Neodymium-Iron-Boron, and Aluminum-Nickel-Cobalt alloy.

* * * * *