



US007143867B2

(12) **United States Patent**
Chopra

(10) **Patent No.:** **US 7,143,867 B2**
(45) **Date of Patent:** **Dec. 5, 2006**

(54) **ELECTRONIC OIL LEVEL DETECTION AND REPLACEMENT SYSTEM**

(75) Inventor: **Kewal K. Chopra**, Sterling Heights, MI (US)

(73) Assignee: **The United States of America as represented by the Secretary of the Army**, Washington, DC (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 618 days.

(21) Appl. No.: **10/719,848**

(22) Filed: **Nov. 24, 2003**

(65) **Prior Publication Data**
US 2005/0109561 A1 May 26, 2005

(51) **Int. Cl.**
F01M 11/12 (2006.01)

(52) **U.S. Cl.** **184/103.2**; 184/104.2; 184/105.1

(58) **Field of Classification Search** 184/103.2, 184/6.1, 6.5, 103.1, 104.2, 105.1, 108, 109
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,749,339 A * 5/1998 Graham et al. 123/73 AD

5,881,688 A * 3/1999 Graham et al. 123/73 AD
6,283,082 B1 * 9/2001 Gunshore et al. 123/196 S
6,443,263 B1 * 9/2002 Ito et al. 184/6.5
6,588,393 B1 * 7/2003 Chamberlin et al. 123/196 R
6,644,095 B1 * 11/2003 Van Mullekom et al. 73/10
7,055,486 B1 * 6/2006 Hoff et al. 123/196 R


* cited by examiner

Primary Examiner—David Fenstermacher
(74) *Attorney, Agent, or Firm*—David L. Kuhn; Luis Miguel Acosta; Thomas W. Saur

(57) **ABSTRACT**

An oil level monitoring and replenishment system for use with an internal combustion engine having an oil sump. The system as a sensor which continuously measures the sump level in the reservoir for holding a quantity of oil to be used in replenishment of the sump. A sensor monitors the oil level in the sump and causes replenishment from the reservoir when needed. The reservoir has warning circuit interactive with a reservoir sensor to signal from the reservoir has reached a lower level of oil and requires the filling. The sensor also provides means to signal when the reservoir has been filled to the desired level to prevent overfilling.

8 Claims, 1 Drawing Sheet

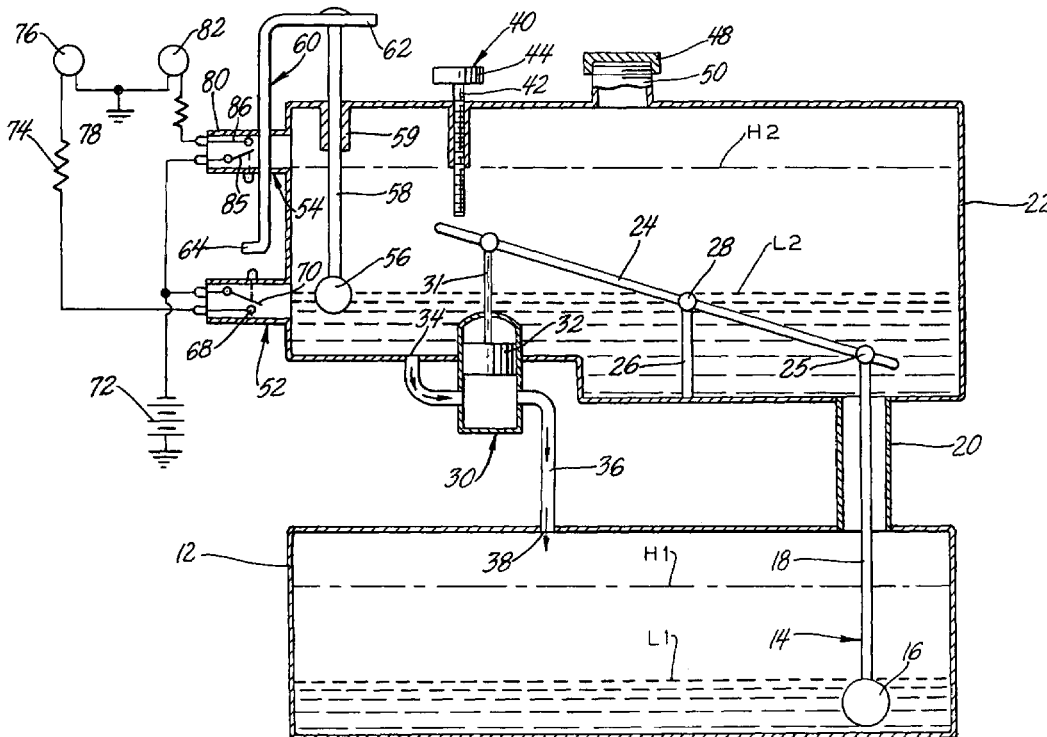


Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 05 DEC 2006	2. REPORT TYPE N/A	3. DATES COVERED -	
4. TITLE AND SUBTITLE Electronic Oil Level Detection and Replacement System		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Kewal K. Chopra		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000		8. PERFORMING ORGANIZATION REPORT NUMBER 18758	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S) TACOM/TARDEC	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) 18758	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited			
13. SUPPLEMENTARY NOTES United States Patent No.: US 7,143,867 B2			
14. ABSTRACT			
15. SUBJECT TERMS			
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	
19a. NAME OF RESPONSIBLE PERSON			

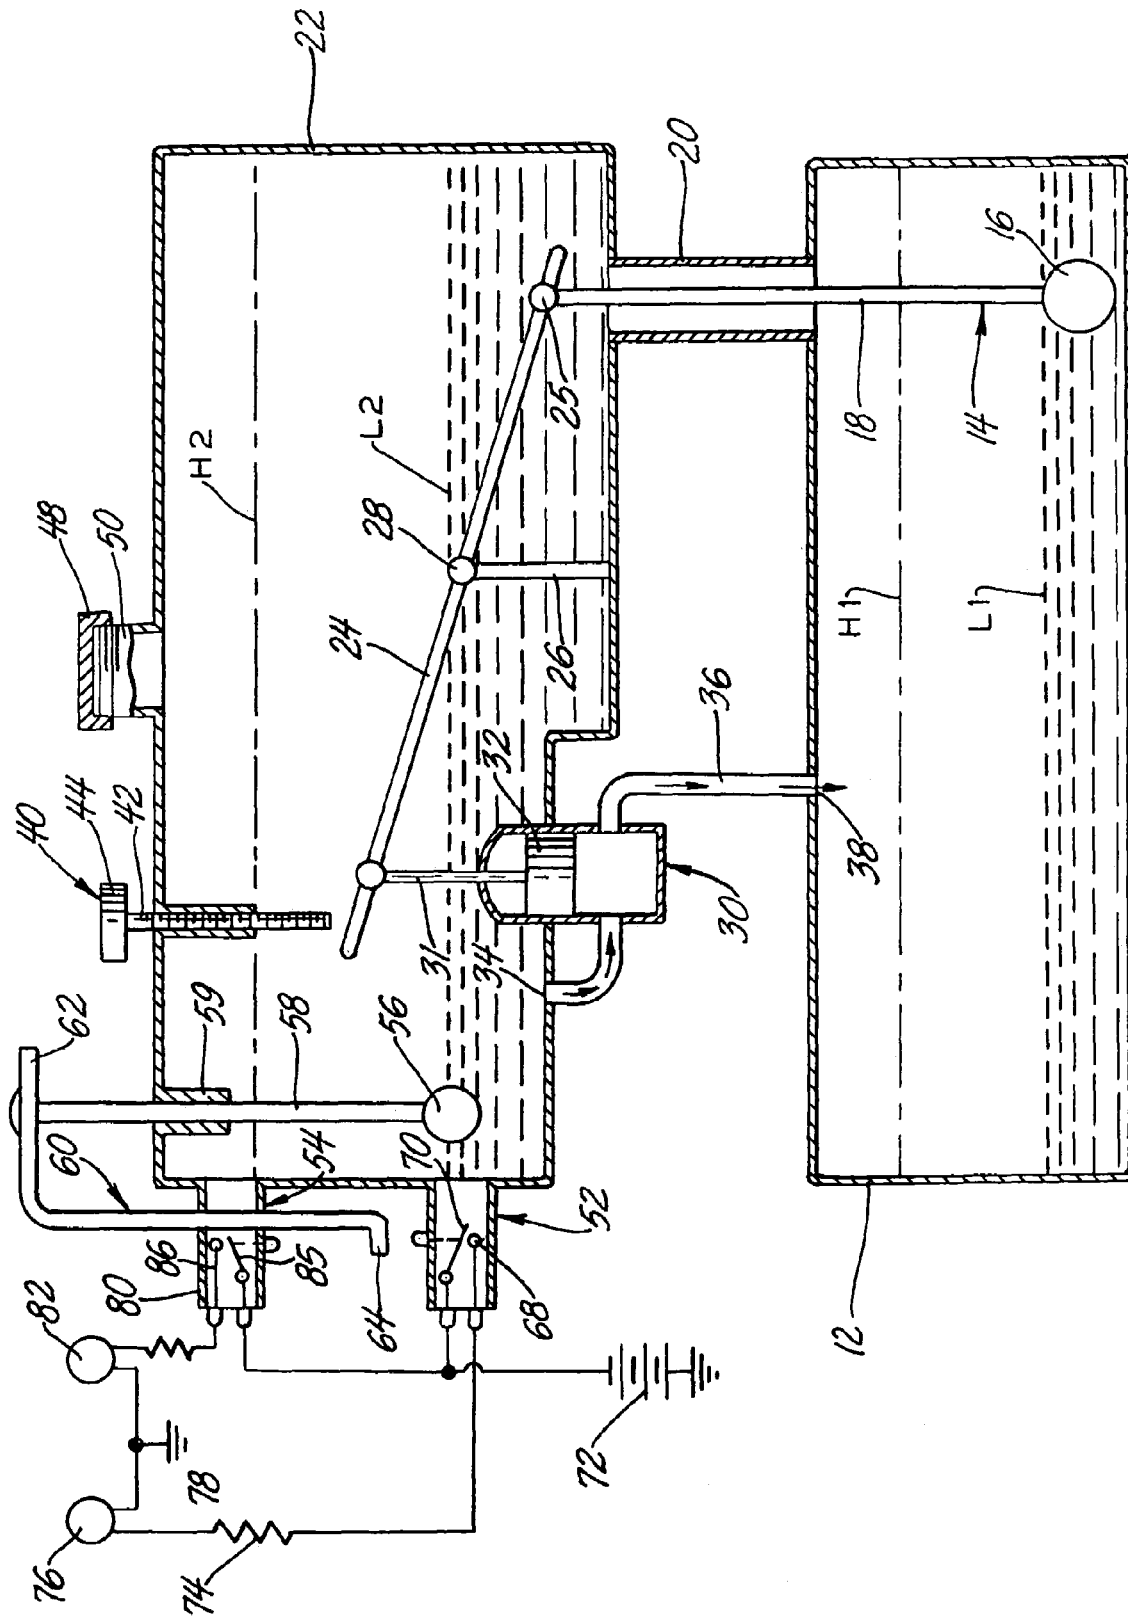

ELECTRONIC OIL LEVEL DETECTION AND REPLACEMENT SYSTEM**GOVERNMENT INTEREST**

The invention described here may be made, used and licensed by and for the United States for governmental purposes without paying me any royalty.

BACKGROUND OF THE INVENTION

In one aspect, this invention relates to a system for replenishing engine lubricant. In a further aspect this invention relates to a replenishment system that has a lubricant level monitor and indicator.

Military vehicles operate under an unusually wide variety of conditions and may be called upon to operate for extended periods without the opportunity to perform routine maintenance. Since the problem times are likely to coincide with a time of combat, it is important that the vehicle continue to operate. One area where a vehicle can face premature failure is a loss of oil pressure caused by low oil levels in the sump. Most vehicles have a low pressure light which warns of a low sump oil level but without the means to replenish the oil, such a warning is of little value.

The present invention provides an oil fill system which can replace consumed oil from a reservoir as needed to maintain an adequate supply of lubricant in the motor sump. The system also has means to signal when the reservoir has been depleted to the extent that it requires replenishment and means to indicate when the reservoir level is properly replenished. This allows the vehicle to operate over a considerable period of time. The system is designed so the oil can be replenished rapidly if necessary even during a break in combat.

SUMMARY OF THE INVENTION

The problems of the prior art are solved by the present invention of an engine oil level monitoring and replenishing system. The system of this invention includes an engine sump which holds a quantity of oil to be used for normal engine lubrication by the engine such systems being known in the art. The sump has an associated sensor which continuously monitors the oil level in the sump and will activate a warning light near the vehicle driver when the oil level reaches a predetermined level. Such sensors normally are activated only when the oil level had reached a critical stage and the vehicle must be turned off in a very short time to avoid permanent damage. Because of the reservoir of this invention, it is believed this will seldom be necessary.

A reservoir is provided for holding a quantity of oil to be used in replenishing the oil level in the sump when it drops below a predetermined level. A valve between the reservoir and the sump will open in response to a low level of oil in the sump to renew the sump lubricant level. In addition, the system has a warning circuit interactive with the reservoir sensor to generate a signal warning the vehicle operator of the need to replenish the oil level in the reservoir. Replenishment of the reservoir when it runs low on oil will generally obviate the low oil level warning and allow the vehicle to continue on an extended tour of duty.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawing:

The FIGURE is a schematic view of one embodiment of the invention.

DETAILED DESCRIPTION

Referring to the accompanying drawing wherein like numerals refer to like parts, one embodiment of the present invention is illustrated. The invention is an engine oil level monitoring and replenishing system designed for use with an internal combustion engine, not shown, having an oil sump. The oil sump is designated generally **12** and is associated with the internal combustion engine in a manner common in the art. A further description of the sump-engine relationship is omitted in the interest of brevity.

A sump sensor **14** is associated with the sump **12** to continuously measure the oil level within the sump. The sump sensor **14** is located within the sump and has a float member **16** attached to an activating arm **18** mounted within a sleeve **20** which extends between the sump **12** and an oil reservoir **22**. As the oil level in the sump **12** varies between **H1** and **L1**, float **16** will move vertically within the sump. When the oil level in sump **12** reaches level **L1**, the sump **12** is considered to be low in oil and replenishment is needed.

The reservoir **22** contains a pivot arm **24** attached to the activating arm **18** at a joint **25** the pivot arm being rotatably mounted on a pintle **26** at joint **28**. The pivot arm **24** moves in response to vertical movement of the activating arm **18** to open and close a valve member **30**. When the oil level in sump **12** reaches the lower-level, **L1**, the pivot arm **24** will raise an arm **31** moving a piston **32**. This opens a connecting channel **36** between an outlet **34** in the reservoir **22** allowing oil to flow through the connecting channel **36** to inlet **38** of sump **12**. When the oil level in sump **12** reaches **H1**, the valve **30** will close until additional lubricant is needed.

The reservoir **22** can be designed to hold sufficient oil to allow the vehicle to function over an expected mission cycle which may include several weeks without the opportunity for routine maintenance. The reservoir **22** will operate between an upper and lower level shown in the figure by dashed lines **H2** and **L2**. The range of motion of piston **32** can be controlled by means of an adjustment member **40**. In the present case, the adjustment member comprises a threaded stem **42** with a knob **44** the threaded stem being mounted in a threaded sleeve **46**. Turning the threaded stem **42** will change the range of motion of activating arm **24**. The adjustment will control the intervals at which oil will be used to replenish the level in the sump **12** so that the levels will vary over the desired range. When the level of oil in the reservoir falls to **L2** additional oil is added to the reservoir by removing a cap **48** and adding oil through an opening **50** provided for this purpose.

The oil reservoir **22** has a low level oil switch **52** and fill level switch **54** to monitoring the reservoir oil level. The switches are activated by use of a reservoir float **56** located within the reservoir, float **56** being attached to a push arm **58** mounted in sleeve **59** so as to move vertically with respect to the reservoir **22**. The push arm **58** is attached to a vertically oriented S shaped member **60** so when the push arm moves it will move arm **62** of the S shaped member **60** vertically reflecting the oil level within the reservoir **22** between the high level, **H2**, and the lower-level **L2**.

When in use, as the oil level in reservoir **22** is depleted, S shaped member **60** will move vertically downward until arm **64** contacts the low level switch **52**. Activation of switch **52** will close contacts **68**, **70** causing current to flow from battery **72** through a resistor **74** to a blinking LED **76**. The blinking LED **76** is permanently connected to ground **78** so that when current flows it will immediately began operation to signal that the reservoir level has reached the point where it should be replenished. The blinking LED **76** is mounted in

the passenger compartment as part of the vehicle driver's instrumentation. Thus, the driver will become aware that lubrication is needed while the sump is full providing a considerable operating margin of safety so that the engine sump does not go below the desired level before a warning is issued to the driver. It is expected, that even when the low level oil light associated with the reservoir is active, the vehicle could still be used. This provides a dual level of protection with a low lubricant warning issued first when the reservoir reaches the replenishment level and second when the sump reaches the replenishment level as indicated by the sump oil indicator normally associated with engines.

When the cap **48** is removed and oil is added through the opening **50**, the float **56** and associated arm **58** will move the S shaped member **60** vertically until arm **64** contacts the full level switch **54**. Activation of the switch will close the contacts **85**, **86** causing current to flow from battery **72** through LED **82**. The LED **82** will be mounted near the opening **50** so that the person adding oil will know when the level in the reservoir **22** has reached the desired level and prevent over filling of the reservoir.

Various alterations and modifications will become apparent to those skilled in the art without departing from the scope and spirit of this invention and it is understood this invention is limited only by the following claims.

What is claimed is:

1. An engine oil level monitoring and replenishment system for use with an internal combustion engine having an oil sump with a sump inlet for adding replenishment oil including:

a float located within the sump the float having an activating arm attached thereto the activating arm being attached to the first end of a pivoting arm, the float being in contact with the oil in the sump and responsive to the oil level to continuously measure the oil level;

a reservoir for holding a quantity of oil for use in replenishing the sump, the reservoir having an opening with a cap and an outlet;

a valve means associated with the reservoir, the valve means having its intake fluidly connected to the reservoir outlet and its output connected to the sump inlet, the valve means being connected to a second end of the pivoting arm so that as the pivoting arm is moved by the action of the float, the valve means opens to allow the oil from the reservoir to enter the valve means and exit into the sump;

a reservoir float located within the reservoir, the reservoir float having a push rod attached thereto the push rod being in contact with a first end of a vertically oriented S-shaped member so that movement of the reservoir float will move the S-shaped member a similar distance, the reservoir float being in contact with the oil in the sump and responsive to the oil level to continuously measure the oil level in the reservoir;

a low level oil switch attached to the reservoir the second end of the S-shaped member being located above said switch so that vertical movement of the S-shaped member will activate the switch in response, the switch

having an associated warning circuit interactive with the switch and responsive to lowered oil level in the reservoir to generate a signal;

a first warning light electrically connected to the warning circuit and responsive to the signal from said circuit to indicate that the oil level has reached a critical level;

a full level switch located above the low level oil switch the full level switch attached to the reservoir above the low level oil switch with the second end of the S-shaped member being located between the low level oil switch and the full level switch above the low level switch so that vertical movement of the S-shaped member will activate the full level switch in response to the addition of oil to the reservoir, the full level switch having an associated circuit interactive with the full level switch and responsive to raised oil level in the reservoir to generate a signal; and

a full level indicator light electrically connected to the interactive circuit associated with the full level switch and responsive to the signal from said circuit to indicate that the oil reservoir has reached the desired fill level.

2. The engine oil level monitoring and replenishment system of claim **1** in which the activating arm attached to the float within the sump is itself mounted within a sleeve extending between the sump and the oil reservoir.

3. The engine oil level monitoring and replenishment system of claim **1** in which the valve means further includes a connecting channel extending between valve means and sump inlet through which reservoir oil exits said valve means and enters through the sump inlet into the sump.

4. The engine oil level monitoring and replenishment system of claim **1** in which the valve means includes a valve member, a piston arm having a piston disposed at one end, said piston within said valve member, said piston arm attached to the pivoting arm, whereby movement of the pivot arm in turn moves the piston arm and the piston to open and close said valve means.

5. The engine oil level monitoring and replenishment system of claim **1** in which the reservoir further comprises an adjustment member operative on the activation arm to change its range of motion, whereby the adjustment member will control the intervals at which oil will replenish the sump.

6. The engine oil level monitoring and replenishment system of claim **5** in which the adjustment member comprises a threaded stem having a knob at a first end and a second end adapted to bear against said activating arm.

7. The engine oil level monitoring and replenishment system of claim **1** in which the warning light connected to the warning circuit of the low level oil switch is located a passenger compartment of a vehicle having said internal combustion engine.

8. The engine oil level monitoring and replenishment system of claim **1** in which the full level indicator light connected to the circuit of the full level switch is located near the opening of said reservoir.

* * * * *