



DEPARTMENT OF THE NAVY
NAVAL UNDERSEA WARFARE CENTER
DIVISION NEWPORT
OFFICE OF COUNSEL
PHONE: (401) 832-3653 FAX: (401) 832-4432
DSN: 432-3653



Attorney Docket No. 96811
Date: 14 May 2008

The below identified patent application is available for licensing. Requests for information should be addressed to:

TECHNOLOGY PARTNERSHIP ENTERPRISE OFFICE
NAVAL UNDERSEA WARFARE CENTER
1176 HOWELL ST.
CODE 07TP, BLDG. 990
NEWPORT, RI 02841

Serial Number 11/829,987
Filing Date 30 July 2007

Inventor Charles Philip Amidon

Address any questions concerning this matter to the Office of Technology Transfer at (401) 832-1511.

DISTRIBUTION STATEMENT
Approved for Public Release
Distribution is unlimited

20080527143

RECOVERABLE OPTICAL FIBER TETHERED BUOY ASSEMBLY

STATEMENT OF GOVERNMENT INTEREST

[0001] The invention described herein may be manufactured and used by or for the Government of the United States of America for governmental purposes without the payment of any royalties thereon or therefore.

BACKGROUND OF THE INVENTION

(1) FIELD OF THE INVENTION

[0002] The present invention is directed to tethered buoys. In particular, the present invention is directed to a recoverable optical fiber tethered buoy for use with underwater vehicles. The invention provides a capability to connect ocean surface visual or radio frequency sensors to an underwater mobile platform with a very high data rate link that is retrievable.

(2) DESCRIPTION OF THE PRIOR ART

[0003] There have been efforts to equip underwater vehicles with buoyant sensors and antennas on a tether that are deployed to the surface for a period of time and then winched back to the underwater vehicle. Prior art winches and buoys are relatively large and cannot be incorporated in the design of next generation underwater vehicles or current underwater vehicles

that are near their maximum weight. What is needed is a smaller winch and buoy system that can be mounted to the aft of the sail of a next generation underwater vehicle to provide the critical capabilities of a recoverable tethered buoyed sensor and antenna.

SUMMARY OF THE INVENTION

[0004] It is a general purpose and object of the present invention to provide a winch and buoy assembly that is small enough to be incorporated into the design of the next generation underwater vehicle and will provide the critical capabilities of a recoverable tethered buoyed antenna or sensor.

[0005] The above object is accomplished with the present invention by a recoverable optical fiber tethered buoy and winch assembly that is mounted to the back of the sail or the back of an aft non-moving surface of an underwater vehicle and is housed in a configuration that causes minimal additional drag to the underwater vehicle.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] A more complete understanding of the invention and many of the attendant advantages thereto will be more readily appreciated by referring to the following detailed description

when considered in conjunction with the accompanying drawings, wherein like reference numerals refer to like parts and wherein:

[0007] FIG. 1 is a cut away view of the buoyant antenna unit, winch, tether and housing mounted to the underwater vehicle;

[0008] FIG. 2 is a cut away view of the fiber optic tether;

[0009] FIG. 3 is an illustration of the optical fiber payout/retrieval system;

[0010] FIG. 4 is an illustration of the deployment, use and retrieval of the buoyant antenna unit.

DETAILED DESCRIPTION

[0011] Referring to FIG. 1 there is illustrated an embodiment of the recoverable optical fiber tethered buoy assembly 10, which consists of a housing 12 mated to an integrated buoy 14 and antenna or sensor 16. The housing 12 contains an optical fiber tether 18 coupled to the antenna or sensor 16, and an optical fiber payout/ retrieval system 20. The recoverable optical fiber tethered buoy assembly 10 has two configurations, a housed configuration as illustrated in FIG. 1 and a deployed configuration as illustrated in FIG. 2. The housing 12 can be made of a light weight carbon fiber material that is both robust and not subject to corrosion in salt water. The housing 12 can be bonded to an underwater vehicle by means of a water proof seal and retaining hardware. The housing 12 is preferably

mounted to an aft non-moving surface of the underwater vehicle such as the sail. When the entire assembly 10 is in the housed configuration, the assembly 10 will provide very little additional drag to the underwater vehicle. The entire assembly 10 is no more than one meter long and weighs approximately thirty pounds. The buoy 14 is buoyant in water and can be filled with air or other gases or it can be made of Styrofoam or other buoyant material. The buoy 14 is cylindrical in shape with one end of the cylinder having a hemispherical shape and the other end having a conical shape. A conical mating system 22 on one end of housing 12 is used during buoy 14 retrieval, whereby the conical end of the buoy 14 fits into the inverse conical end of the housing 12. The conical end of the buoy 14 is weighted so that when it floats in water the hemispherical end clears the water's surface. This ensures that the antenna or sensor 16, which is integrated into the hemispherical end of the buoy 14, is able to transmit and receive radio or optic signals above the water's surface. The buoy 14 is approximately sixteen inches in diameter and about twenty four inches long and weighs approximately one hundred pounds with approximately two hundred forty pounds of buoyancy.

[0012] The optical fiber payout/retrieval system 20 includes the optical fiber tether 18 that is attached at one end to the buoy 14. The other end of the optical fiber tether 18 is

attached to a winch 24. The optical fiber tether 18 has an optical fiber, small gauge wire, and strength member core 26 surrounded by a flexible jacket 28 made of a buoyant water proof polymer. This core 26 provides power to charge energy storage within the buoy, and the signal path from the underwater vehicle to the antenna or sensor 16 integrated with the buoy 14. The cross sectional diameter of the optical fiber tether 18 is approximately three millimeters. The length of the optical fiber tether 18 should be at least 1500 meters. The optical fiber tether 18 spools around the winch 24 in the housed configuration and pays out in the deployed configuration similar to fishing line off of a reel. The winch 24 is equipped with an electronic winch sensor 30 that counts each complete revolution of the winch in order to measure the length of optical fiber tether 18 that pays out. The sensor also provides an indicator when the optical fiber tether 18 is completely unwound. The winch 24 is equipped with an electric motor 32 that will spin the winch 24 in order to reel in the optical fiber tether 18.

[0013] The electronic components of the optical fiber payout/retrieval system 20 such as the optical fiber tether 18 and the winch sensor 30 and the electric motor 32 interact with electronic and power systems on board the underwater vehicle through an electrical connection 34 that passes through a micro-aperture 36 in the hull of the underwater vehicle. The signal

to and from the optical fiber core 26 as well as the signal from winch sensor 30 are directed to a user command component 38 such as a computer that allows on board user control and interface of the assembly 10.

[0014] In the deployed configuration, as illustrated in FIG. 2, the assembly 10 can establish connectivity with the ocean surface as required while the underwater vehicle that it is attached to remains submerged. The buoy 14 will ascend to the surface by virtue of its buoyancy pulling out the optical fiber tether 18 from the winch 24. The winch 24 within the housing 12 keeps a small drag on the optical fiber tether 18 to prevent fouling. As the winch sensor 30 measures the length of remaining spooled optical fiber tether 18 as deployed, the information is relayed back to the user command component 38. When the buoy 14 breaks the surface of the water, it provides the antenna or sensor 16 an aperture for line of sight communications and satellite communications, GPS, a basic radar detection function, or visual imaging or laser communications. The buoy 14 stays essentially in one place relative to the ocean surface while the submerged vehicle can continue to move underwater, paying out the optical fiber tether 18 as it does. On command from the user command component 38, or at the end of the optical fiber tether 18 payout, the winch 24 will start to

reel in the optical fiber tether 18 until the buoy 14 is re-docked into the conical mating system 22 of the housing 12.

[0015] The recoverable antenna buoy assembly 10 offers a weight advantage to next generation underwater vehicles over prior art systems. It is specifically designed for multiple uses over short periods of time and has decreased complexity and cost over prior art systems.

[0016] While it is apparent that the illustrative embodiments of the invention disclosed herein fulfill the objectives of the present invention, it is appreciated that numerous modifications and other embodiments may be devised by those skilled in the art. Additionally, feature(s) and/or element(s) from any embodiment may be used singly or in combination with other embodiment(s). Therefore, it will be understood that the appended claims are intended to cover all such modifications and embodiments, which would come within the spirit and scope of the present invention.

ABSTRACT

The invention as disclosed is a recoverable tethered optical fiber buoy and winch assembly that is mounted to the back of the sail or the back of an aft non-moving surface of an underwater vehicle and housed in a configuration to provide very little additional drag to the underwater vehicle when the assembly is not deployed. The invention provides a capability to connect ocean surface visual or radio frequency sensors to an underwater mobile platform with a very high data rate link that is retrievable.

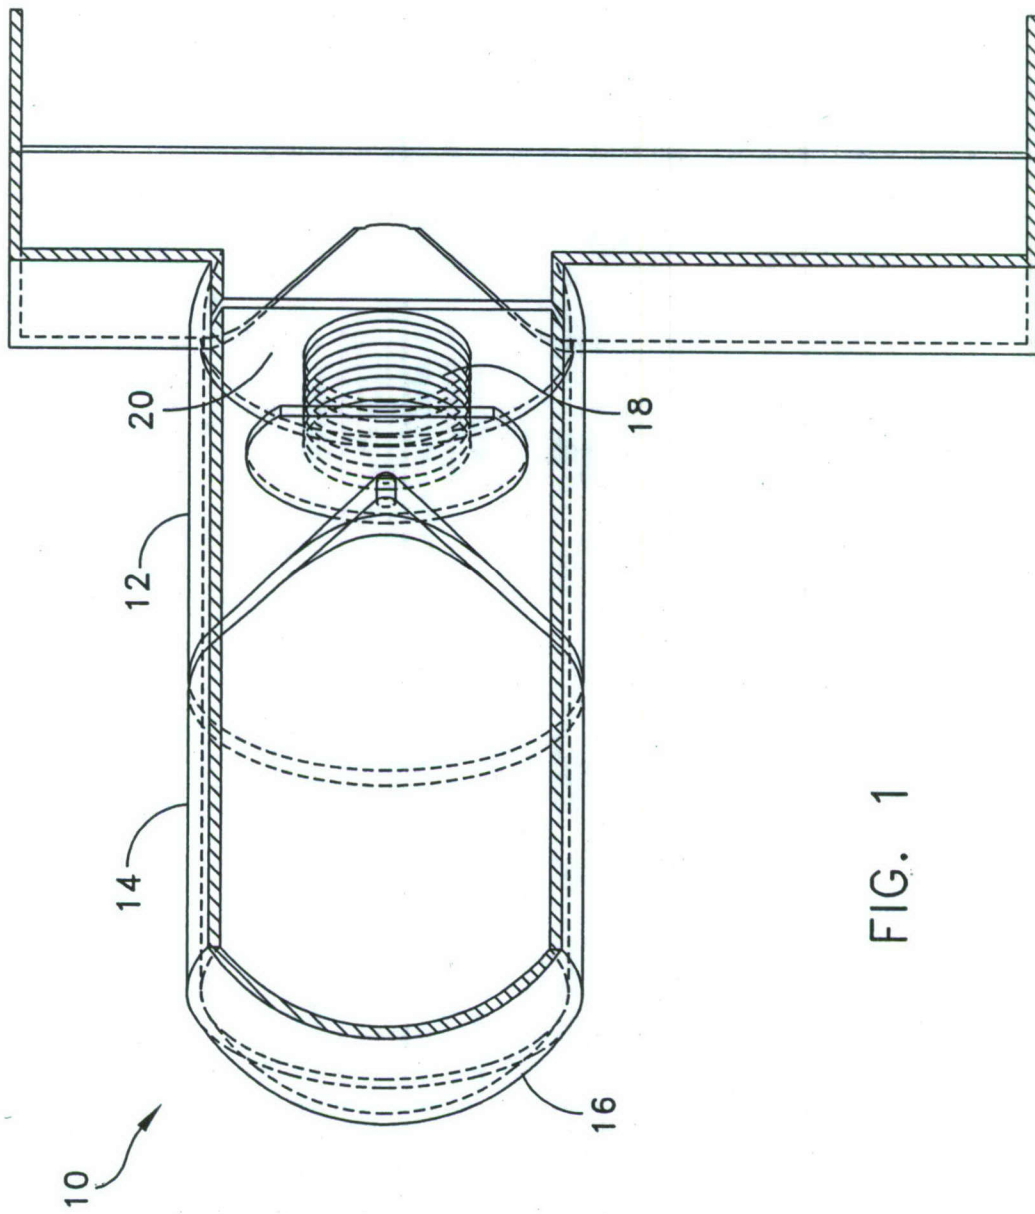


FIG. 1

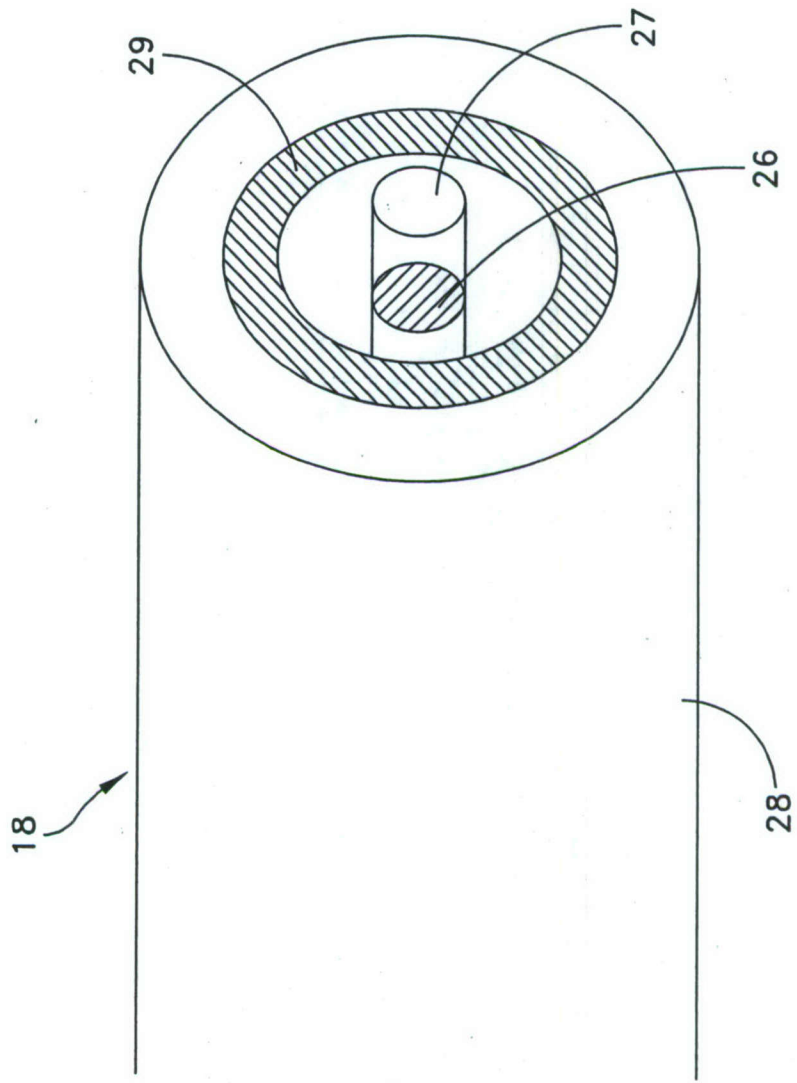


FIG. 2

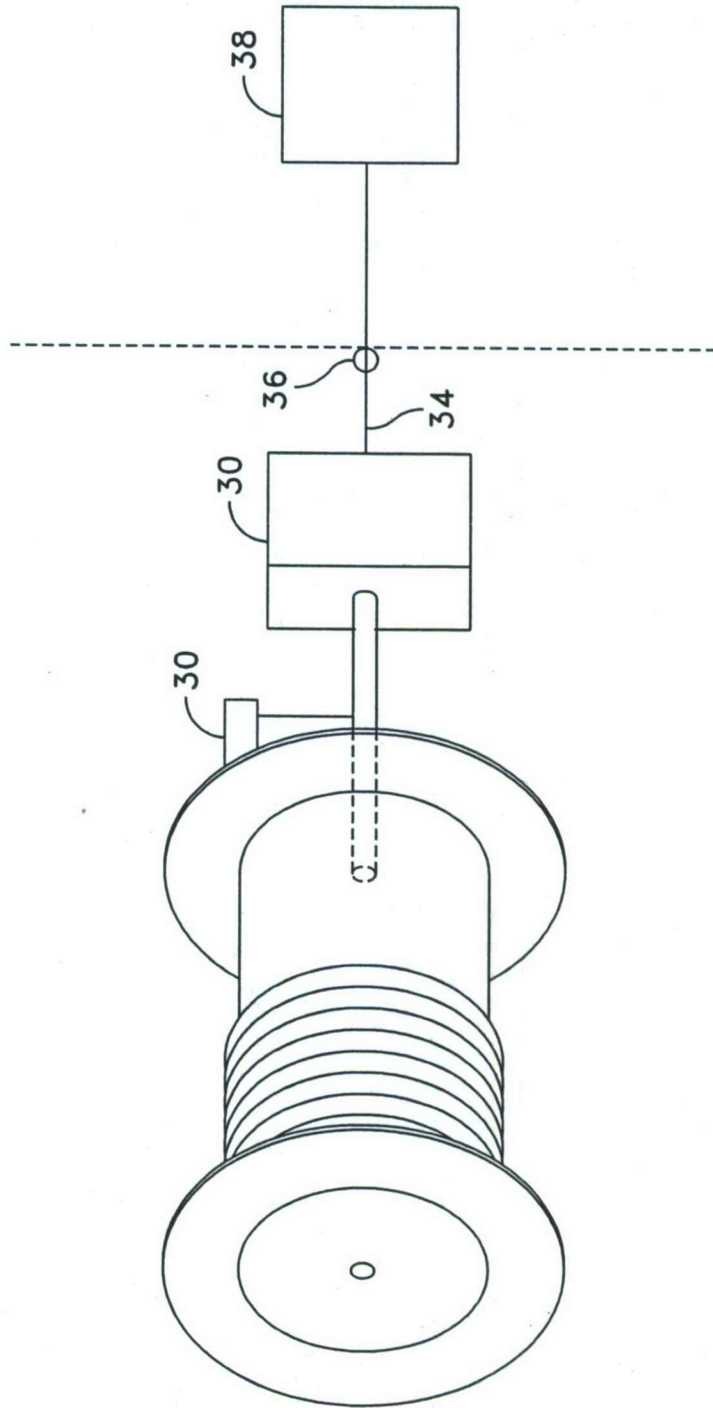


FIG. 3

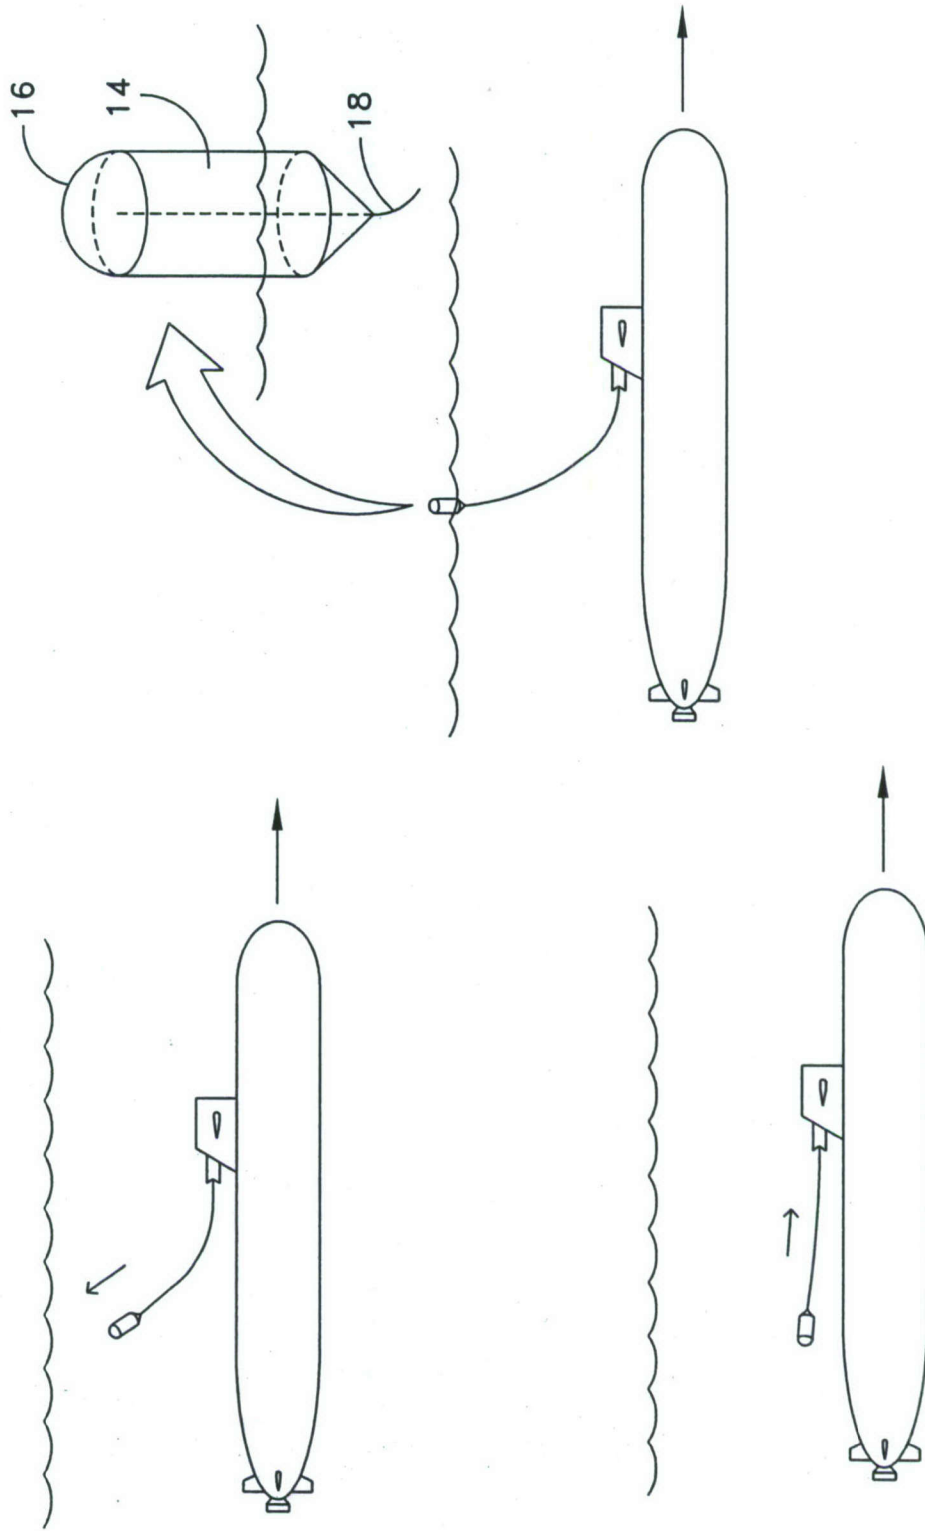


FIG. 4