

Reproduced by the

ARMED SERVICES TECHNICAL INFORMATION AGENCY ARLINGTON HALL STATION ARLINGTON 12, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

63-2-2

AAL-TDR-61-56

0

444

0

2

RED BY ASTIA


FIELD TESTS OF TWO ANTI-EXPOSURE ASSEMBLIES

294 449

Lt. Paul W. Barnett

TECHNICAL DOCUMENTARY REPORT AAL-TDR-61-56

May 1962



ARCTIC AEROMEDICAL LABORATORY AEROSPACE MEDICAL DIVISION AIR FORCE SYSTEMS COMMAND FORT WAINWRIGHT, ALASKA

Project 8242-2

NOTICES

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or any other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

US Government agencies and other qualified ASTIA users may obtain copies of this report from the Armed Services Technical Information Agency, Documents Service Center, Arlington 12, Virginia.

This report has been released to the Office of Technical Services, U. S. Department of Commerce, Washington 25, D. C., for sale to the general public.

	Exposure Protective Clothing Undervater Clothing Pressure Suits Exposure Suits Arctic Regions	Project 8242-2 Paul W. Barnett, 1st Lk., USAF Available from OTS r. In ASTIA collection	 	
	- ମହା କାର୍ଦ୍ର 		ļ	
	Arctic Aeromedical Laboratory, United States Air Force (AFSC), APO 731, Settle, Wash. Rpt. No. AAL-TDR-61-56. FIELD TESTS OF TWO ANTL-EXPOSURE ASSEMBLES, May 1962, 16p. mcl. tables, illus. 8 ref. Unclassified Report	The purpose of this study was to determine the insula- tive value of the Navy MK-5 anti-exposure suit and the Air Force CSU4/P partial pressure suit in wet and dry cold environments. Human subjects were exposed to both environments while wearing each assembly. Re- sults of these exposures are shown in graphs of skin and rectal temperatures. A discussion of the results is presented. The MK-5 and CSU4/P assemblies when used with additional protective equipment may be considered adequate protection for dry still air temper- atures of -30° F. The MK-5 and liner is adequate	protection for water survival in excess of 8 hours. The CSU4/P is adequate water survival protection for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.	\bigcirc
	Arctic Aeromedical Labo Force (AFSO, APO 731, Rpt. No. AAL-TDR-61-5 RhT-EXPOSURE ASSEN MCL EXPOSURE ASSEN mcl. Eables, illus. 8 ref.	The purpose of thi tive value of the Ri Air Force $SU4/F$ Air Force $SU4/F$ cold environments both environments and rectal tempers and rectal tempers is presented. The when used with add considered adequal atures of -30° F.	protection for water survival in ex The CSU4/P is adequate water sur- for periods in excess of two hours, insulation will increase the capabil assembly during water immersion.	 •
1				
	Exposure Protective Clothing Underwater Clothing Pressure Suits Exposure Suits Arctic Regions	Project 8242-2 Paul W. Baznett, 1st Lt., USAF Available from OTS In ASTIA collection] 	
	しょうようら	u di di di	' 1	
	Arctic Aeromedical Laboratory, United States Air Force (AFSC), APO 731, Seattle, Wash. Rpt. No. AAL-TDR.61-56. FIELD TESTS OF TWO ANTL-EXPOSURE ASSEMBLIES. May 1962, 16p. incl. tables, illus. 8 ref. Unclassified Report	The purpose of this study was to determine the insula- tive value of the Navy MK-5 anti-exposure suit and the Air Force CSU4/P partial pressure suit in wet and dry cold environments. Human subjects were exposed to both environments while wearing each assembly. Re- sults of these exposures are shown in graphs of skin and rectal temperatures. A discussion of the results is presented. The MK-5 and CSU4/P assemblies when used with additional protective equipment may be considered adequate protection for dry still air temper- atures of - 30° F. The MK-5 and linkr is adequate	protection for water survival in excess of 8 hours. The CSU4/P is adequate water survival protection for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.	0
	Arctic Astomedical Labo Force (AFSC), APO 731, Rpt. No. AAL-TDR-61-5 ANTI-EXPOSURE ASSEM incl. tables, illus. 8 ref.	The purpose of this study tive value of the Navy MG Air Force CSU4/P partia cold environments. Hum both environments while sults of these exposure : and rectal temperatures. is presented. The MK-5 when used with additional considered adequate prot atures of -30° F. The M	protection for water survival in excess of 8 hou The CSU4/P is adequate water survival protect for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.	

F

ţ

	Exposure Protective Cluthing Underwater Clothing Pressure Suits Exposure Suits Arctic Regions	Project 8242-2 Paul W. Barnett, 1st Lt., USAF Available from OTS In ASTIA collection	,	
	いちょうらい	내려 변호		
	Arctic Aeromedical Laboratory, United States Air Force (AFSC), APO 731, Seattle, Wash. Rpt. No. AAL-TDR-61-56. FIELD TESTS OF TWO ANT-EXPOSURE ASSEMBLIES, May 1962, 16p. incl. tables, illus. 8 ref. Unclassified Report	The purpose of this study was to determine the insula- tive value of the Navy MK-5 anti-exposure suit and the Air Force CSU4/P partial pressure suit in wet and dry cold environments. Human subjects were exposed to both environments while wearing each assembly. Re- sults of these exposures are shown in graphs of skin and rectal temperatures. A discussion of the results is presented. The MK-5 and CSU4/P assemblies when used with additional pretective equipment may be considered adequate protection for dry still air temper- atures of -30° F. The MK-5 and liner is adequate	protection for water survival in excess of 8 hours. The CSU4/P is adequate watur survival protection for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.	\bigcirc
			·	
	Exposure Protective Clothing Underwater Clothing Pressure Suits Exposure Suits Arctic Regions	Project 8242-2 Paul W. Barnett, 1st Lt., USAF Available from OTS In ASTIA collection	 	
	しょうきょうら	аң ңқ	· 	
	Arctic Aeromedical Laboratory, United States Air Force (AFSC) APO 731, Seattle, Wash. Force (AAL-TDR-61-56, FIELD TESTS OF TWO ANTI-EXPOSURE ASSEMBILES, May 1962, 16p. ANTI-EXPOSURE ASSEMBILES, May 1962, 16p. incl. tables, illus. 8 ref. Unclessified Report	The purpose of this study was to determine the insula- tive value of the Navy MK-5 anti-exposure suit and the Air Force CSU4/P partial pressure suit in wet and dry cold environments. Human subjects were exposed to both environments while wearing each assembly. Re- sults of these exposures are shown in graphs of skin and rectal temperatures. A discussion of the results is presented. The MK-5 and CSU4/P assemblies when used with additional protective equipment may be considered adequate protection for dry still air temper- atures of - 30° F. The MK-5 and liner is adequate	protection for water survival in excess of 8 hours. The CSU4/P is adequate water survival protection for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.	\bigcirc
	Arctic Aeromedical Labo Force (AFSC) APO 731, Ept. No. AAL-TDR-61-5 ANTT-EXPOSURE ASSEE, incl. tables, illus. 8 ref.	The purpose of this tive value of the Na Air Force CSU4/P cold environments both environments sults of these enpose and rectal temperal is presented. The when used with addi considered adequati atures of -30° F.	protection for water survival in ex The CSU4/P is adequate water sur- for periods in excess of two hours. insulation will increase the capabil assembly during water immersion.	

•

1

.

1 F

ı

معطيه والمراجع المراجع

ABSTRACT

The purpose of this study was to determine the insulative value of the Navy MK-5 anti-exposure suit and the Air Force CSU4/P partial pressure suit in wet and dry cold environments. Human subjects were exposed to both environments while wearing each assembly. Results of these exposures are shown in graphs of skin and rectal temperatures. A discussion of the results is presented. The MK-5 and CSU4/P assemblies when used with additional protective equipment may be considered adequate protection for dry still air temperatures of -30° F. The MK-5 and liner is adequate protection for water survival in excess of 8 hours. The CSU4/P is adequate water survival protection for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.

PUBLICATION REVIEW

Home 7. Swing

HORACE F. DRURY Director of Research

FIELD TESTS OF TWO ANTI-EXPOSURE ASSEMBLIES

SECTION 1. INTRODUCTION

Aircrews operating in and from the Alaskan Air Command are frequently required to participate in over water flights and are subjected to water survival in the advent of bailout or ditching. A great amount of research has been done in the area of cold water immersion and protective clothing. Alexander (1946) presented work done by the Luftwaffe during the Second World War in his report on the Dachau experiments. In 1946 Molnar devised a graph of predicted survival times without anti-exposure assemblies. In 1950 Benke and Yaglou performed experiments on nude subjects. Hall and Polte (1955) have done considerable work involving clothed subjects. All of this work has emphasized the need for protection during water immersion even though ambient temperatures may be quite tolerable.

Two types of protection normally employed are the "dry suit" and the "wet suit." The dry suit consists of various types of insulation covered by a vapor impermeable layer. The wet suit is made of material which retains a considerable amount of air and restricts water circulation. This principle has been used in protective clothing of underwater demolition personnel by the U. S. Navy.

The purpose of this study was to determine the thermal characteristics of two anti-exposure assemblies. The extremes of ambient temperatures in the Arctic and subarctic make it necessary that any continuous wear assembly be capable of affording dry cold protection to at least -30° F, since crash or bailout over land is highly probable. Therefore, to test the thermal efficiency of these assemblies for use in the Arctic, it was necessary to perform dry-cold as well as immersion tests.

SECTION 2. METHODS

The two assemblies tested were the Navy MK-5 anti-exposure suit, shown in Figure 1, and the Air Force CSU4/P partial pressure suit, shown in Figure 2. The MK-5 is a vapor impermeable garment which may be used with various under garments. The CSU4/P while not designed primarily as an anti-exposure suit did appear to have some anti-exposure qualities, the predominant quality being the restriction of water flow around the body. The CSU4/P can be worn with additional over and/or under garments.

Dry Testing

Prior to dry cold exposures subjects donned the thermistor underwear shown in Figure 3 and the applicable anti-exposure assembly in an uncontrolled heated room. Tests were made outdoors with the subjects at two activity levels. During experiments in which the subjects exercised, eight minutes of rest at seven minute intervals were necessary because of the use of an infrared scanning device in conjunction with another study (Veghte and Solli, 1961). Each subject was also exposed for ninety minutes while standing at rest. Temperatures were recorded using Yellow Springs thermistor probes and telethermometers. Eighteen temperature sites (17 skin and 1 rectal) were used. Temperature measurements were recorded five minutes prior to and at ten minute intervals during exposures.

Immersion Testing

Cold water immersions were made at Valdez, Alaska. Subjects donned the thermistor underwear and the applicable anti-exposure assembly in an uncontrolled heated room. The subjects were then driven by ambulance to the water site. Following inflation of the flotation gear, they entered the water using a ladder.(see Figure 4). Temperatures were recorded at five minute intervals for the first hour and at ten minute intervals for the remainder of the test. Exposures were scheduled to terminate after three hours with the MK-5 assembly and after one hour with the CSU4/P assembly. Subjects in the CSU4/P withdrew prior to this time due to intensive pain. Two MK-5 exposures were prematurely terminated due to illness of the subject. (This illness was not associated with the cold exposures.) Temperature measurements were weighed against their representative surface areas and combined to give mean skin temperatures.



FIGURE 1. MK-5 anti-exposure assembly



FIGURE 2. CSU4/P partial pressure assembly



FIGURE 4. Subject entering Valdez Bay

FIGURE 3. Thermistor underwear

SECTION 3. RESULTS AND DISCUSSION

Dry Testing

Using the AAC flying assembly (see Figure 5), which is adequate for -30° F no wind temperatures, as a standard of comparison for the MK-5 and CSU4/P it was possible to determine the temperatures at which these assemblies afforded adequate protection in a dry cold environment. This information is presented in Graphs 1 and 2. Graph 1 shows the skin and rectal temperatures of subjects at rest in all three assemblies. There is no statistically significant difference in skin or rectal temperatures after 90 minutes, but there is a considerable difference in the ambient temperatures at which these tests were performed. Thus, cooling of subjects wearing the CSU4/P and the MK-5 at 19° and 10° respectively is no more acute than subjects wearing the AAC flying assembly at -22° F.

Graph 2 shows the skin and rectal temperatures of subjects in all three assemblies while exercising. The divergence of the curve representing the AAC flying assembly is misleading. The change in ambient temperatures must be noted. While there is no change in exposure temperatures of subjects wearing the AAC flying assembly, there is a significant change in skin temperatures between resting and exercising states. On the c^{ther} hand, there is no significant change in the skin temperatures of subjects wearing the MK-5 and CSU4/P between activity levels, but there is a significant change between ambient temperatures.

The temperatures at which these assemblies would be adequate dry cold protection are 20° F for the CSU4/P and 10° F for the MK-5. These "use" temperatures could be extended through the use of additional insulation. Although space limitations of modern aircraft restrict the amount of intellation possible, it is within reason to assume the use of the MA 1 flying jacket with hood, pile cap, N2B arctic mittens, CWU1/P flying coveralls or insulated underwear, and the mukluk assembly or thermal boot. With this additional insulation the use temperature of either assembly could be lowered to -30° F. Special emphasis should be placed on the hand and foot gear. Veghte (1961) has shown these areas to be extremely critical.

Other considerations are the heat stress of large amounts of insulation and vapor impermeable materials, and loss of insulative effect due to moisture retention within these materials, discussed by Griffin et al (1944) and Hall (1952).




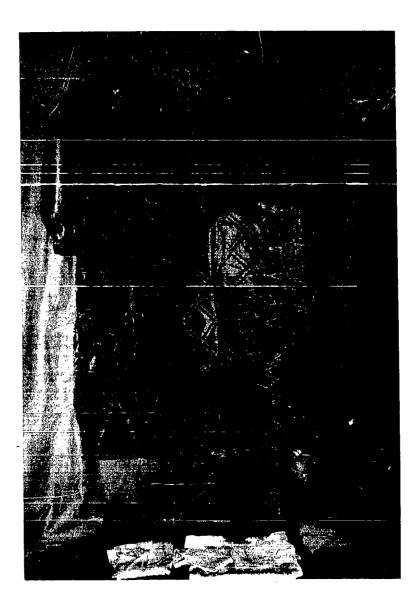


FIGURE 5. AAC flying assembly

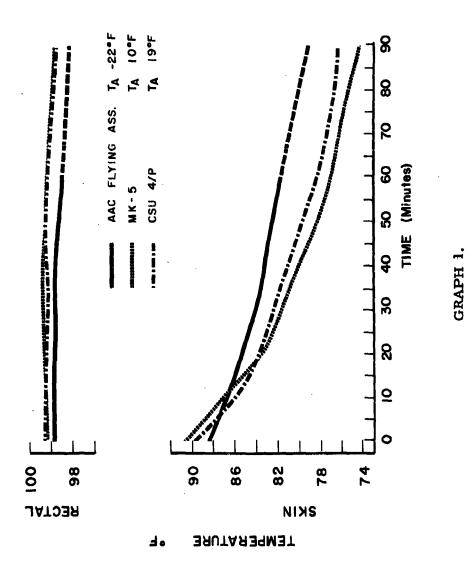



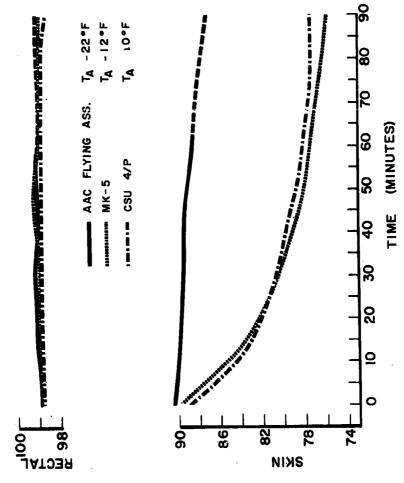

TEMPERATURE "F

Immersion Testing

The R-l anti-exposure assembly, seen in Figure 6, was used as a standard of comparison for wet cold results. This assembly is adequate for cold water immersion in excess of eight hours. Graph 3 shows a comparison of skin and rectal temperatures of subjects immersed wearing the MK-5 and subjects wearing the R-1. Results of immersions wearing the the R-1 were taken from previous work done in this laboratory and work done by Hall and Poulte (1955). There is no statistically significant difference in skin or rectal temperatures at the end of one hour. The MK-5 is adequate for immersions in excess of 8 hours assuming that no water is absorbed by the suit. These results would probably be altered by extreme ambient temperatures $(-40^{\circ} \text{ to } -60^{\circ} \text{ F})$. There is a subtle but not statistically significant difference between resting and exercising states. Extreme difficulty in exercising due to hydrostatic pressure and flotation was encountered by all subjects. Elevated rectal temperatures are probably indicative of the living conditions in the field. Critical foot temperatures (skin temperatures below 40° F) were encountered with the MK-5. This was due to experimental design and the election to wear only one pair of thin socks. Additional protection could be obtained by welding the rubber boot to the exposure suit making it impervious to water.

Results of immersions using the CSU4/P and results of nude immersions in water temperatures of 43° F performed by Benke and Yaglou (1950) are plotted on Graph 4. A comparison of these results shows the value of the CSU4/P. Based on rates of heat loss at the termination of these experiments a two hour "tolerance" or "practical rescue" time is assumed. This is in excess of the nude tolerance predictions of Molnar (see Figure 7) which are currently used as "Rescue Guide Lines." Exercise appeared to shorten this time due to increased convection of the water contained by the suit. Exercise was possible only during the first 15 to 20 minutes due to the extreme cooling of the legs and thighs.

In ambient temperatures above 0° F, "practical rescue" times may be extended through the use of rafts and through the use of additional insulation. Head gear is of utmost importance since the head and upper torso may be exposed to extreme environmental conditions.



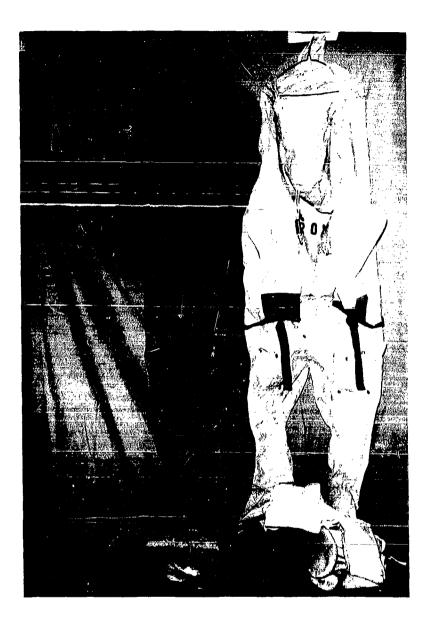


FIGURE 6. R-1 anti-exposure assembly

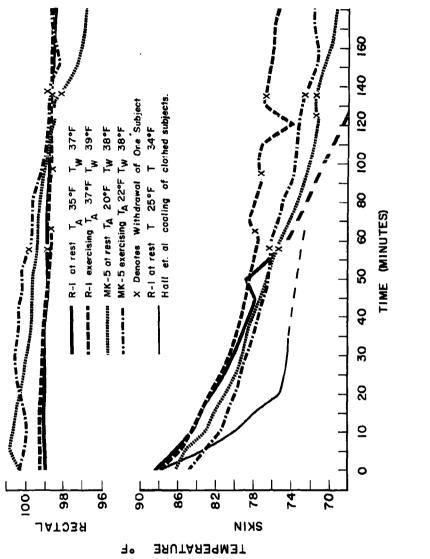

Wet cold exposures of subjects wearing the MK-5 assembly


GRAPH 3.

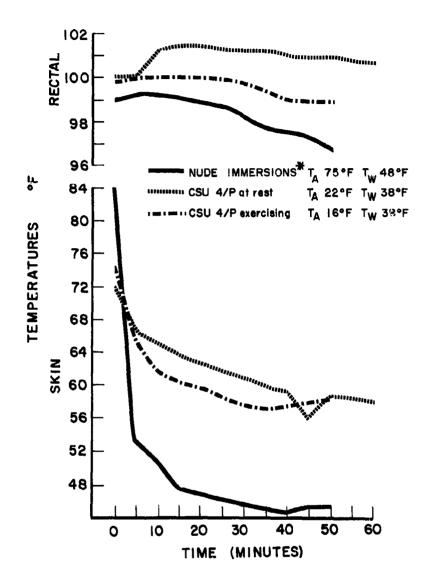



Wet cold exposures of subjects wearing the CSU4/P assembly



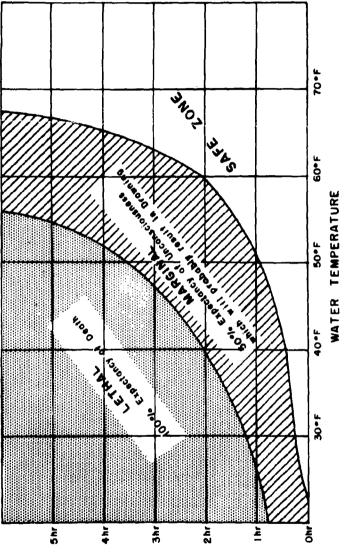



SECTION 4. CONCLUSIONS

The MK-5 and CSU4/P assemblies when used with additional protective equipment may be considered adequate protection for dry still air temperatures of -30° F.

The MK-5 and liner is adequate protection for water survival in excess of 8 hours. The degree of exercise necessary to obtain a significant change in skin and/or rectal temperatures is extremely difficult. The value of exercise is marginal.

The CSU4/P is adequate water survival protection for periods in excess of two hours. Exercise, which is possible for only limited periods due to extreme cooling of the legs, is of no value.

Additional insulation will increase the capability of either assembly during water immersion. Additional insulation of the head is a major consideration.

REFERENCES

- Alexander, L. Treatment of shock from prolonged exposure to cold water. Publication Board No. 250, Dept. of Commerce, Washington, D. C., 1946.
- 2. Benke, A. R. and C. P. Yaglou. Response of man to chilling and rewarming. J. Appl. Physiol. 3:591, 1950.
- 3. Griffin, D. R. et al. Physiological studies of exposure suits in hot and cold environments. Report No. 26, Harvard Fatigue Laboratory, Committee on Medical Research, OSRD, 1944.
- Hall, J. F. Jr. Heat stress imposed by permeable versus impermeable clothing. WADC TN WCRD 52-112, AML, Wright Air Development Center, 1955.
- 5. Hall, J. F. Jr. and J. W. Polte. Effect of water content and compression on thermal insulation of clothing. WADC TR 55-356, Wright Air Development Center, 1955.
- 6. Molnar, G. W. Survival of hypothermia by men immersed in the ocean. J. A. M. A. 131:1046, 1946.
- Veghte, J. H. Human physiological response to extremity and body cooling. AAL TR 61-26, Arctic Aeromedical Laboratory, Fort Wainwright, Alaska, 1961.
- Veghte, J. H. and G. Solli. Determining Arctic clothing design by means of infrared radiometry. AAL TR 61-31, Arctic Aeromedical Laboratory, Fort Wainwright, Alaska, 1961.

16

1211-63

Exposure Protective Clothing Underwater Clothing Pressure Suits Exposure Suits Arctic Regions	Froject 8242-2 Paul W. Barnett, 1st Lt., USAF Available from OTS In ASTIA collection	
พ่งเช่งว่ ง		L
LICTIC Aeromedical Laboratory, United States Air orce (AFSC), APO 731, Seattle, Wash. pt. No. ALI-TDR-61-56. FIELD TESTS OF TWO MYT-EXPOSURE ASSEMBLIES. May 1962, 16p. ncl. tables, illus. 8 ref. Unclassified Report	The purpose of this study was to determine the insula- ive value of the Navy MK-5 anti-exposure suit and the dir Force CSU4/P partial pressure suit in wet and dry old environments. Human subjects were exposed to oth environments while wearing each assembly. Re- ults of these exposures are shown in graphs of skin and rectal temperatures. A discussion of the results is presented. The MK-5 and CSU4/P assemblies hen used with additional protective equipment may be onsidered adequate protection for dry still air temper- nures of - 30 ⁰ F. The MK-5 and liner is adequate	protection for water survival in excess of 8 hours. The CSU4/P is adequate water survival protection for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.
	הטקההמסטשנים 	2.F.4.1.8
 Exposure Protective Clothing Underwater Clothing Pressure Suits Exposure Suits Arctic Regions 	Project 8242-2 Paul W. Barnett, lst Lt., USAF I. Available from OTS V. in ASTIA collection	
	والمحيوما فاستعد بيبيه موافعتها والمسيعة والأطال والمعار ومنافاته والمراجع	
ctic Aeromedical Laboratory, United States Air pre (AFSC), APO 731, Seattle, Wash. pre (AFSC), APO 731, Seattle, Wash. pr. No. AAL-TDR-61-56, FIELD TESTS OF TWO VI EXPOSURE ASSEMBLIES, May 1962, 16p. cl. tables, illus. 8 ref. Unclassified Report	te jurpose of this study was to determine the insula- e value of the Navy MK-5 anti-exposure suit and the r Force CSU4/P partial pressure suit in wet and dry ld environments. Human subjects were exposed to th environments while wearing each assembly. Re- lts of these exposures are shown in graphs of skin d rectal temperatures. A discussion of the results presented. The MK-5 and CSU4/P assemblies ten used with additional protective equipment may be nsidered adequate protection for dry still air temper- arises of - 30° F. The MK-5 and link's is adequate	protection for water survival in excess of 8 hours. The CSU4/P is adequate water survival protection for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.
	I. Exposure Arctic Aeromedical Laboratory, United States Air I. 2. Protective Clothing Force (AFSC), APO 731, Seattle, Wash. 2. 3. Underwater Clothing Rpt. No. AAL-TDR-01-56. XIELD TESTS OF TWO 3. 4. Pressure Suits ArtT-TDR-01-56. XIELD TESTS OF TWO 3. 5. Exposure Suits incl. tables, illus. 8 ref. Unclassified Report 6.	1. Exposure 2. Protective Clothing 2. Protective Clothing 3. Underwater Clothing 4. Protective Clothing 5. Exposure Suits 6. Arctic Regions 1. Project 8242-2 1. Paul W. Barnett, 1. Project 8242-2 1. Project 8242-2

•

,

•

 Arctic Aeromedical Laboratory, United States Air Force (AFSC), APO 731, Seattle, Wash. Force (AFSC), APO 731, Seattle, Wash. Protective Clothing Rpt. No. AAL-TDR-61-56. FIELD TESTS OF TWO Underwater Clothing ANTI-EXPOSURE ASSEMBILES. May 1962, 16p. ANTI-EXPOSURE ASSEMBILES. May 1962, 16p. Exposure Suits incl. tables, illus. 8 ref. Unclassified Report Arctic Regions 	The purpose of this study was to determine the insulative value of the Navy MK-5 anti-exposure suit and the H. Project 8242-2 tive value of the Navy MK-5 anti-exposure suit in wet and dry hir Force CSU4/P partial pressure suit in wet and dry hir Force CSU4/P partial pressure suit in wet and dry hir force CSU4/P partial pressure suit in wet and dry hir force CSU4/P partial pressure suit in wet and dry hir force CSU4/P partial pressure suit in wet and dry hir force CSU4/P partial pressure suit in wet and dry hir force CSU4/P partial pressure suit in wet and dry hir force CSU4/P partial pressure suit in wet and dry hir hord for the results in the more than and receil temperatures. A discussion of the results is presented. The MK-5 and CSU4/P assemblies when used with additional protective equipment may be considered adequate protection for dry still air temperatures of - 30° F. The MK-5 and liner is adequate	protection for water survival in excess of 8 hours. The CSU4/P is adequate water survival protection for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.	\bigcirc
 Exposure Exposure Protective Clothing Underwater Clothing Pressure Suits Exposure Suits Arctic Regions 	 I. Project 8242-2 II. Paul W. Barnett, 1st Lt., USAF III. Available from OTS IV. In ASTIA collection 		
Arctic Aeromedical Laboratory, United States Air Force (AFSC) APO 731, Seattle, Wash, Rot. No. AAL-TDR-61-56. FIELD TESTS OF TWO ANTT-EXPOSURE ASSEMBLIES. May 1962, 16p. incl. tables, illus. 8 ref. Unclassified Report	The purpose of this study was to determine the insula- tive value of the Navy MK-5 anti-exposure suit and the Air Force CSU4/P partial pressure suit in wet and dry cold environments. Human subjects were exposed to both environments while wearing each assembly. Re- sults of these exposures are shown in graphs of skin and rectal temperatures. A discussion of the results is presented. The MK-5 and CSU4/P assemblies when used with additional protective equipment may be considered adequate protection for dry still air temper- atures of -30° F. The MK-5 and liner is adequate	protection for water survival in excess of 8 hours. The CSU4/P is adequate water survival protection for periods in excess of two hours. Additional insulation will increase the capability of either assembly during water immersion.	