

UNCLASSIFIED

| |
|---|
| |
| |
| |
| AD NUMBER |
| AD425650 |
| NEW LIMITATION CHANGE |
| TO Approved for public release, distribution unlimited |
| FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; NOV 1963. Other requests shall be referred to Air Force Flight Test Center, Edwards AFB, CA. |
| AUTHORITY |
| 6510th test wing ltr, 4 apr 1979 |

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

425650

AD

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA




UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

425650

CATALOGED BY DDC

AS



425650


T-38A CATEGORY II PERFORMANCE TEST

LAWRENCE F. MCNAMAR
PROJECT ENGINEER

HENRY C. GORDON
MAJOR, USAF
PROJECT PILOT

**TECHNICAL DOCUMENTARY REPORT NO. 63-27
NOVEMBER 1963**

AFFTC PROJECT DIRECTIVE 59-18



**AIR FORCE FLIGHT TEST CENTER
EDWARDS AIR FORCE BASE, CALIFORNIA
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE**

Qualified requesters may obtain copies of this report from the Defense Documentation Center, Cameron Station, Alexandria, Va. Department of Defense contractors must be established for DDC services, or have "need to know" certified by cognizant military agency of their project or contract.

DDC release to OTS is not authorized.

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Do not return this copy. Retain or destroy.



ABSTRACT....

This report presents the results of the Category II performance test of the T-38A airplane, Serial Number 58-1194. The test was conducted during the period May 1961 - March 1962 at the Air Force Flight Test Center, Edwards Air Force Base, California, and required 58 flights totaling 53 hours.

The T-38 airplane is a two place tandem supersonic trainer manufactured by the Norair Division of the Northrop Corporation. The mission of the airplane is to accomplish all phases of basic pilot training, including: day and night transition, formation, navigation, instrument and acrobatic flying. The airplane is powered by two General Electric J85-GE-5 engines rated at 3850 pounds of thrust each.

The T-38A is an excellent trainer for transition into high performance aircraft. It has excellent handling characteristics, maximum speed is in the low supersonic range, and takeoff and subsonic climb performance is comparable to the latest Century Series fighters.

With maximum power, the airplane can readily takeoff in 2500 feet and clear a 50 foot obstacle in 3200 feet. With military power, the takeoff roll is 3900

feet and a total distance of 5400 feet is required to clear a 50 foot obstacle. This performance is achieved at a gross weight of 12,000 pounds utilizing 45 percent flaps.

The climb performance of this aircraft is excellent. With maximum power, a sea level rate of climb of 30,000 feet per minute is available at a gross weight of 11,000 pounds and the time to climb to 40,000 feet is only 2.5 minutes. The combat ceiling of the aircraft (500 feet per minute rate of climb) is 51,000 feet.

Single engine performance of the aircraft is very good. With maximum power, a rate of climb of 5500 feet per minute is available at sea level and a combat ceiling of 37,000 feet can be attained.

The maximum calculated ferry range of the aircraft is 954 nautical miles. This range is computed in accordance with landing reserves of MIL-C-5011A from level flight speed-power data. This range is available at the optimum cruise conditions of Mach 0.88 and a weight-pressure ratio of 58,000 pounds.

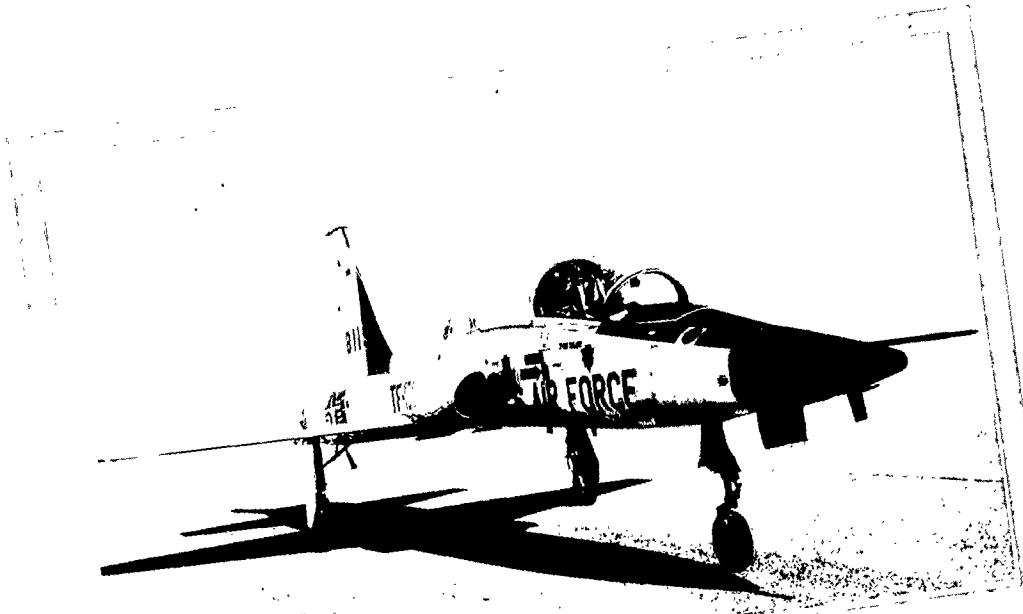



Table of contents.....




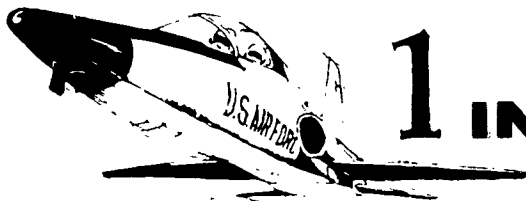
| | Page No. |
|--|----------|
| INTRODUCTION | 1 |
| TEST RESULTS | 2 |
| Preflight, Starting and Ground Handling | 2 |
| Takeoff and Initial Climb | 2 |
| Level Accelerations | 3 |
| Climb Performance | 4 |
| Level Flight Performance | 6 |
| Descents | 6 |
| Landings | 8 |
| Performance Guarantees | 8 |
| Calibrations | 9 |
| CONCLUSIONS | 10 |
| RECOMMENDATIONS | 11 |
| APPENDIX I | 11 |
| Data Analysis Methods | 18 |
| Nomenclature | 20 |
| Performance Plots | 86 |
| APPENDIX II | 86 |
| General Aircraft Information | 86 |
| APPENDIX III* | 86 |
| Test Data Corrected for Instrument Error | 86 |

*NOTE: Due to the limited requirement for the information contained in this Appendix, it has been published in a separate volume. Copies of this Appendix can be obtained by writing to the Defense Documentation Center (see inside cover).

*This report
has been
reviewed
and
approved*

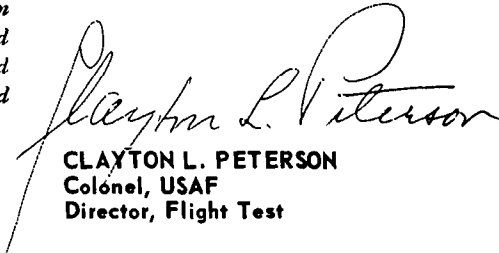
CLAYTON L. PETERSON
Colonel, USAF
Director, Flight Test


IRVING L. BRANCH
Brigadier General, USAF
Commander



1 INTRODUCTION....

This report presents the results of the Air Force Flight Test Center Category II performance tests of T-38A serial number 58-1194. These tests were conducted to obtain quantitative performance data for incorporation into the T-38A Flight Manual.

The test program, which was conducted at the Air Force Flight Test Center, Edwards Air Force Base, California, between 22 May 61 and 12 March 62 consisted of 58 flights totaling 53 flight hours.

The T-38A airplane is a two place tandem trainer manufactured by the Norair Division of the Northrop Corporation. The mission of the airplane is to accomplish all phases of basic pilot training, including: day and night transitions, formation, navigation, instrument and acrobatic flying. The airplane is equipped with J85-GE-5 engines rated at 2500 pounds of thrust at military power and 3850 pounds of thrust with afterburning.

The test aircraft had an average, fully loaded, engine start gross weight of 12,330 pounds. The external configura-

tion of the test aircraft is the same as the production trainer except that the test aircraft was equipped with a test nose boom, interim structural bands in the inlet ducts, and an externally mounted free air temperature probe. As a part of the test program, a production nose boom was installed on the test aircraft and a calibration accomplished. However, it was later determined that, because of manufacturing tolerances, this installation was not representative of the production system; therefore no data for this system is presented in this report.

The test program was conducted under the authority of Headquarters, Air Force Systems Command as directed by AFFTC Project Directive 59-18, dated 18 March 1959. The test data from the program was available to Norair as it was obtained and preliminary copies of the plots contained in Appendix I of this report were sent to Norair in February 1963.



2 TEST RESULTS....

PREFLIGHT, STARTING AND GROUND HANDLING

Discussions of the preflight, starting, taxiing, and ground handling procedures and characteristics, as well as an evaluation of the cockpit have been previously accomplished and results published in AFFTC-TR-61-15, "T-38A Category II Stability and Control Tests," and AFFTC-TR-61-21, "T-38A Category II Systems Evaluation Test."

TAKE-OFF AND INITIAL CLIMB

The takeoff characteristics of the T-38A aircraft are excellent. At 12,000 pounds gross weight with maximum power and 45 percent flaps, the aircraft will lift-off in 2500 feet at the AFFTC recommended speed of 155 knots IAS¹. With military power the distance required is 3900 feet for the same conditions. Normal pilot technique is used to obtain the measured performance takeoff. Military power takeoffs are performed by holding the aircraft with the wheel brakes until throttles are advanced to military power. For maximum power takeoffs, military power is set with brakes held, then the afterburners are lit just as the brakes are released. Light differential braking or nose wheel steering is used for directional control up to about 50 knots IAS where the rudder becomes effective.

Stabilizer effectiveness during takeoff is adequate to rotate the aircraft to the takeoff attitude well before takeoff speed is reached. A comfortable speed of 135-140 knots IAS is recommended for rotation.

The initial climb of the aircraft is rapid for the first few seconds after lift-off and a definite push over is necessary to accomplish a shallow climb out.

Takeoff data corrected to sea level, standard day, no wind conditions is presented in Figure 1, Appendix I.

LEVEL ACCELERATIONS

Level flight accelerations were accomplished at various altitudes from 5,000 to 45,000 feet with maximum power and from 5,000 to 40,000 feet with military power. These data were corrected to standard day conditions at representative climb weights and are presented in Figures 2 and 3, Appendix I, to define optimum climb schedule speeds. Norair's recommended climb schedules are presented as dashed lines on these plots and agree closely with the AFFTC determination of maximum climb potential.

The acceleration data were also corrected to standard day conditions at 10,000 pounds gross weight and presented

¹Indicated airspeeds in this report are for the test nose boom airspeed system.

in terms of thrust available and thrust required for the various altitudes in Figures 19 through 24, Appendix I.

CLIMB PERFORMANCE

The maximum power climb performance of the T-38A is impressive for a trainer and is comparable to the "Century Series" fighter aircraft. For example, the T-38A can takeoff and climb to best cruise altitude (40,000 feet) in 4 minutes.

Climb speed schedules recommended by Norair were utilized to obtain climb performance. These schedules, both maximum and military power, were verified by level flight accelerations. Figures 2 and 3, Appendix I, show the

climb potential of the aircraft at various speeds.

Because the best climb speed with maximum power is quite high at low altitude (.91 Mach number), a modified schedule was suggested by the Air Training Command. This schedule consists of constant 450 knots CAS to 17,500 feet and .91 Mach number above 17,000 feet altitude.

Although the ATC schedule is lower than the optimum climb schedule at altitudes below 17,500 feet, the time and fuel required to accelerate and climb to higher altitudes are not significantly increased.

The following table presents a summary of the climb performance of the T-38A aircraft.

CLIMB PERFORMANCE SUMMARY

| Power | Schedule | Weight at Which Service Ceiling* is Attained-Lbs | Service Ceiling Ft | Time to 40,000 Ft Min | Fuel Used to 40,000 Ft Lb | Distance Travelled to 40,000 Ft NAM |
|-------|----------|--|--------------------|-----------------------|---------------------------|-------------------------------------|
| Max | Norair | 10,900 | 51,500 | 2.5 | 500 | 23 |
| Max | ATC | 10,900 | 51,500 | 2.9 | 612 | 26 |
| Mil | Norair | 11,300 | 43,500 | 10.5 | 545 | 87 |

*Service ceiling is the altitude corresponding to a rate of climb of 100 feet per minute.

Two engine climb performance is presented in Figures 4, 5 and 6, Appendix I.

Single engine climbs were accomplished with both maximum and military power utilizing the Norair recommended climb schedules. Asymmetric power characteristics of the aircraft are excellent. Heading is easily maintained with rudder trim for both maximum and military power. The following table and Figures 7 and 8, Appendix I, present a summary of the single engine climb performance for maximum and military power.

SINGLE ENGINE CLIMB PERFORMANCE SUMMARY

| Power | Service Ceiling-Ft | Time From Sea Level to Service Ceiling-Min | Fuel Used, Sea Level to Service Ceiling-Lb | Distance Travelled from Sea Level to Service Ceiling - NAM |
|-------|--------------------|--|--|--|
| Max | 39,750 | 34 | 2420 | 300 |
| Mil | 18,500 | 30 | 900 | 145 |

LEVEL FLIGHT PERFORMANCE

Maximum ferry range of the T-38A is 954 nautical air miles. This range is achieved by utilizing military power for takeoff and climb to 39,700 feet followed by cruise at a weight-pressure ratio of 58,000 pounds² and .88 Mach number.

The following tables present a comparison of a computed ferry range mission for a typical production aircraft (computed on basis of test data in Appendix I) to an actual range mission obtained with the test aircraft.

COMPUTED FERRY RANGE MISSION

| | |
|--|--------------------|
| Gross Weight at Engine Start | 11,755 lbs |
| Specific Weight of Fuel | 6.5 lbs/gal |
| Total Usable Fuel | 583 gal (3790 lbs) |
| Cruise Speed | .88 Mach number |
| Cruise W/ δ_a | 58,000 lb |
| Fuel Reserve (5 percent of initial fuel plus fuel for 20 minutes loiter) | 805 lbs |

| | Fuel Used Lbs | Distance Travelled NAM | Elapsed Time From Brake Release-Min |
|--|---------------|------------------------|-------------------------------------|
| Takeoff Allowance (fuel for 5 minutes at NRP at sea level) | 350 | - | 2.5 |
| Military Power Climb to 39,700 Feet | 490 | 79 | 12.5 |
| Cruise | 2145 | 875 | 116.5 |
| Totals | 2985 | 954 | 131.5 |

²Weight-pressure ratio (W/δ_a) is defined as $\frac{\text{Aircraft weight} \times 29.92126}{\text{Ambient pressure}}$.

ACTUAL FERRY RANGE MISSION

| | | | |
|---|----------------------|-------------------------------|--|
| Gross Weight at Engine Start | 12,330 Lbs | | |
| Specific Weight of Fuel | 6.26 Lbs/Gal | | |
| Total Usable Fuel | 583 Gals (3650 Lbs) | | |
| Cruise Speed | .89 Mach number | | |
| Fuel Reserve | 938 Lbs | | |
| Cruise W/S _a | 56,000 Lbs | | |
| | Fuel Used Lbs | Distance Travelled NAM | Elapsed Time From Brake Release-Min |
| Start, Taxi, Takeoff, and Acceleration to Climb Schedule | 482 | | |
| Military Power Climb to 38,500 Feet | 427 | 68 | 10.45 |
| Cruise | 1803 | 679 | 81.19 |
| Totals (for 938 lbs fuel remaining) | 2712 | 747 | 91.64 |
| Totals (corrected to 3790 lbs of fuel available, a take-off allowance of 350 lbs and a reserve of 805 lbs and corrected for removal of test nose boom and inlet duct bands) | 2985 | 928 | 111.1 |

Significant factors affecting the test range mission were as follows:

1. The gross weight of the test aircraft was 575 pounds heavier than production aircraft.
2. Fuel available was 3650 pounds (583 gallons at 6.26 pounds/gallon). The computed mission was based on 583 gallons at 6.5 pounds/gallon (3790 pounds).
3. At the start of the test mission an abnormally long delay was experienced before takeoff (due to a local emergency) which resulted in more fuel being used

than is normally required.

4. The test mission was terminated with 938 pounds of fuel remaining.

When the mission was corrected to 3790 pounds of fuel available, 350 pounds allowance for taxi and takeoff, and 805 pounds allowance for reserve and SFC was corrected 2 percent for removal of test nose boom and inlet duct bands, a range of 928 nautical miles resulted. This range is within 3.0 percent of the range of the production aircraft as computed from specific range data in Appendix I.

Level flight speed-power data to define airplane drag and specific range (nautical air miles traveled per pound of fuel used) is presented in Appendix I for the following configuration:

1. Cruise configuration, Figures 10, 11, and 13.
2. Speed brake extended, Figures 12 and 13.
3. Single-engine cruise configuration, Figures 14 and 15.
4. Landing gear extended, 0, 45, and 100 percent flaps Figures 16 and 17.

Maximum level flight speed with military power varies from approximately .94 Mach number at sea level to approximately .96 Mach number at 36,000 feet.

Maximum level flight speed with maximum power varies from approximately .98 Mach number at sea level to slightly greater than 1.2 Mach number at 36,000 feet. However, acceleration is slow at speeds above 1.1 Mach number and considerable fuel is used to realize the maximum speed capability of the aircraft. This data is presented in Figures 19 through 24, Appendix I.

DESCENTS

Idle power descents were accomplished at 220, 260 and 300 knots IAS and at .7, .75, .8 and .85 Mach number to define descent characteristics. The effect of speed brake extension is shown for 220 and 260 knots IAS, and .7 and .85 Mach number descents. Figures 27 through 33, Appendix I, present the descent data for the various conditions tested.

LANDINGS

Landings were accomplished on a dry concrete runway using varying degrees of braking. Data was obtained with flaps retracted and with 45, 60 and 100 percent flaps. All performance landings were accomplished by lowering the nose immediately after touchdown and applying steady braking until the aircraft stopped.

At a gross weight of 9200 pounds, a landing roll of 3000 feet was attained with maximum braking. At this same weight, heavy braking produced ground roll of approximately 3500 feet. This performance was achieved using full flaps and a touchdown speed of 130 knots IAS. Higher touchdown speeds and/or moderate braking resulted in ground roll distances approximately 1000 feet greater than those shown in the Flight Manual.

Test results showed that, in order to achieve stopping distances as shown in the Flight Manual for normal landings, touchdown must be made at the Flight Manual recommended airspeed and heavy braking must be used. The heavy braking required is only slightly less than maximum practical braking and is considerably heavier than would be used for a normal

landing. Tests utilizing maximum practical braking resulted in ground roll distances approximately 300 feet shorter than Flight Manual data for normal landings.

Landing performance is presented in the following table.

LANDING PERFORMANCE

Dry concrete runway, sea level, standard day, no wind conditions.

| True Airspeed at T.D. Knots | Ground Roll Feet | True Airspeed at 50 Ft Height | Total Distance Feet | Gross Weight Lbs | Flaps % | Braking |
|--------------------------------------|------------------------|--|---------------------------|------------------------|------------|-------------------|
| 133 | 4,980 | 163 | 10,010 | 9,350 | 0 | Moderate |
| 143 | 4,410 | 167 | 9,290 | 9,200 | 0 | Moderate |
| 129 | 3,650 | 154 | 7,530 | 9,300 | 45 | Heavy |
| 130 | 4,650 | 146 | 9,540 | 9,750 | 45 | Moderate |
| 128 | 4,110 | 151 | 6,980 | 9,400 | 45 | Moderate |
| 130 | 3,440 | 165 | 9,000 | 9,200 | 45 | Heavy |
| 130 | 4,620 | | | 10,350 | 45 | Moderate |
| 133 | 4,510 | | | 9,350 | 45 | Moderate |
| 134 | 3,430 | 169 | 8,440 | 9,250 | 60 | Heavy |
| 135 | 4,550 | 161 | 8,100 | 9,200 | 60 | Moderate |
| 136 | 4,750 | 162 | 9,170 | 9,450 | 60 | Moderate |
| 136 | 3,790 | 168 | 6,980 | 10,800 | 60 | Maximum Practical |
| 122 | 3,100 | 154 | 5,900 | 9,250 | 100 | Maximum Practical |
| 127 | 3,490 | 147 | 5,650 | 9,350 | 100 | Heavy |
| 144 | 5,560 | 147 | 6,230 | 10,300 | 100 | Maximum Practical |
| 128 | 3,900 | 147 | 7,150 | 9,650 | 100 | Moderate |
| 129 | 3,390 | 155 | 5,950 | 9,100 | 100 | Heavy |
| 129 | 3,970 | 146 | 8,050 | 9,600 | 100 | Moderate |
| 128 | 3,000 | 145 | 6,480 | 9,300 | 100 | Maximum Practical |
| 129 | 5,630 | | | 10,550 | 100 | Moderate |

PERFORMANCE GUARANTEES

The guaranteed performance of the T-38A as specified in Norair Model Specification NS-140C, paragraph 3.1.2 is met in all cases. The performance guarantees and comparable test results are as follows:

| | Guarantee | Test Results |
|--|-----------|--------------------|
| 1. Maximum level flight Mach number at 36,089 feet and at the design gross weight of 9,592 pounds. | 1.2 | Approximately 1.21 |
| 2. Cruising Mach number for long range cruise, not less than | 0.85 | 0.88 |
| 3. Range at cruise Mach number as specified in item (b), using military thrust takeoff and climb, 20 minute sea level loiter and 5% fuel reserve | 880 NAM | 886 NAM |
| 4. Maximum thrust takeoff ground run at sea level at gross weight required to perform item(c). | 2,500 Ft | 2,300 Ft* |

*This ground roll was obtained at a gross weight of 12,000 pounds with a flap setting of 100 % and at the AFFTC recommended takeoff speed of 153 knots TAS.

The above test range includes 5 percent conservatism.

CALIBRATIONS

Airspeed system calibrations were accomplished with a test nose boom installed. The results of these calibrations are presented in Figures 34 and 35, Appendix I.

Installed static thrust and calibrations were accomplished and the results are presented in Figures 37 and 38, Appendix I.



3 CONCLUSIONS....


The T-38A is an excellent trainer for transition into high performance aircraft. It has excellent handling characteristics, maximum speed is in the low supersonic range, and takeoff and subsonic climb performance is comparable to the latest Century Series fighters.

With maximum power, the aircraft can readily takeoff in 2,500 feet at 12,000 pounds gross weight, can climb from sea level to 40,000 feet in 2.5 minutes, and can attain a combat ceiling (500 feet per minute rate of climb) of 51,000 feet.

Single engine performance of the aircraft is also good. With maximum power, a rate of climb of 5,500 feet per minute is available at sea level and the combat ceiling is 37,000 feet.

The maximum ferry range of the aircraft is 954 nautical miles. This range is attained when cruising at a W/δ_a of 58,000 pounds and a Mach number of 0.88³.


³Computed in accordance with landing reserves of MIL-C-5011A from level flight speedpower data.

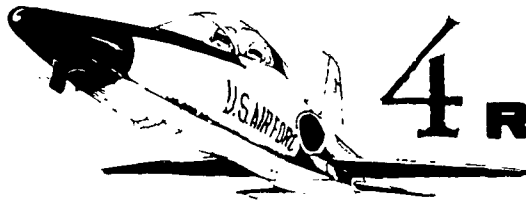

4 RECOMMENDATIONS..

The performance presented in this report should be reflected in the Appendix of the Flight Manual.

This report concurs in the recommendations previously published in AFFTC-TR-61-15 "T-38A Category II Stability and Control Tests" and AFFTC-TR-61-21 "T-38A Category II Systems Evaluation Test." All recommendations generated during the Category II performance tests were included in the above reports and have received System Project Office attention; therefore, they are not repeated in this report.

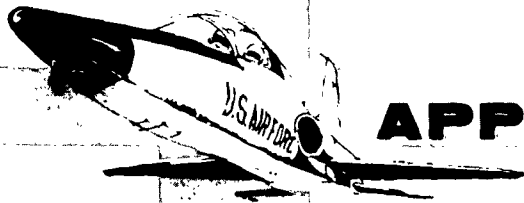

APPENDIX I...

DATA ANALYSIS METHODS

● REFERENCES

1. Air Force Technical Report No. 6273, "Flight Test Engineering Manual."
2. AFFTC-TN-59-22, ASTIA Document No. AD-215865, "AFFTC Performance Flight Test Manual, Part II."
3. AFFTC-TR-59-47, "AFFTC Performance Flight Test Manual I, Part I."
4. "AGARD Flight Test Manual, Volume I, Performance."
5. General Electric S.A.E.D. Report No. 673, J85-5 inflight thrust calculation procedure.
6. Air Force Flight Test Center Technical Note R-12, "Standardization of Take-Off Performance Measurements for Airplanes."
7. FTFE-TM-58-6, AFFTC Technical Memorandum, "Tower Fly-By Facility and Technique for Determining Pitot-Static Position Error."
8. General Electric Company Model Specification E1024-B Engine, Aircraft, Turbojet J85-GE-5.
9. NOR-60-350 "Flight Manual Performance USAF Model T-38A Trainer Airplane with Two J85-GE-5 Engines."

● SPECIFIC ENERGY METHOD

The climb and acceleration data presented in this report were processed in the following manner to obtain rate of change of specific energy under test conditions. Geometric altitude for the pressure altitude increment under consideration was determined utilizing the procedures outlined in Chapter 4, Sections 10 and 11, of Reference 4. The total specific energy based on the first data point of each test was determined by equation 5.702 of Reference 1. It should be understood that the energy obtained by this method is not an exact energy as referenced to a fixed earth system, but a specific energy based on the first point of each individual test. This procedure renders the energy levels incorrect but supplies a valid rate of change of specific energy for subsequent calculation.

The variation of specific energy was determined by considering seven consecutive energy values as a function of time and determining a representative quadratic equation by the method of least squares. Special consideration was necessary for end points and points which did not lie within three standard deviations of the quadratic constructed. Rate of change of specific energy was determined by differentiation of the constructed quadratic equation of each of the time values under consideration.

● STANDARD ATMOSPHERE

The data presented in this report has been corrected to the US Standard Atmosphere as defined in Reference 2.

Takeoff Performance:

The corrections to ground roll and air distance for wind velocity, air density, engine thrust, and aircraft weight were made according to Reference 6.

Because of the fluctuations of nozzle area and related engine parameters immediately after brake release, test thrust for takeoff was arbitrarily measured at 75 knots indicated airspeed. Test thrust/ δ_a was then plotted against ambient temperature to determine thrust variation with ambient temperature. Standard thrust was then defined as that thrust corresponding to standard temperature at sea level (15 degree). However, it should be noted that the thrust values indicated on Figure I were static values rather than the above described dynamic thrust values used for correcting the test data to standard conditions.

● CLIMBS

Continuous climbs were accomplished from an altitude of approximately 5,000 feet to as high an altitude as practical. Data was recorded in approximately one second intervals throughout the climb but was transcribed to digital information as a function of altitude to furnish a suitable sample of information for presentation. Basic relations utilized to determine Mach number, altitude, etc., were found in Reference 2. Rate of change of energy at test conditions was determined as outlined previously in this Appendix under "Specific Energy Method." It was apparent that the reduction as outlined included climb potential that would be available only when following an unaccelerated climb schedule. The corrections to climb potential when following the velocity changes indicated by the climb schedule were determined in the following manner:

The velocity gradient as a function of altitude was determined from the climb schedule. This gradient was then multiplied by the time rate of change of altitude at the point concerned. The time rate of change of altitude was obtained by the method of least squares quadratic curve

fit as explained under "Specific Energy Method." The two functions, velocity gradient versus altitude and time rate of change of altitude, were multiplied to determine velocity change at the point being considered. The result was multiplied by the velocity of the vehicle at test conditions to obtain the climb potential correction to be added to the unaccelerated rate of climb.

The rate of climb thus obtained was that available under test conditions and can be altered to reflect standard atmospheric conditions by multiplication with $\sqrt{T_{as}/T_{at}}$.

The thrust increment determined by the difference between test and standard temperature was obtained as outlined in this Appendix, under "Total Net Thrust Measurement." This increment of thrust was converted to rate of climb by multiplication with the ratio of true airspeed divided by aircraft weight. This rate of climb increment was added to the climb potential available in a standard atmosphere while the vehicle is following the velocity gradient as a function of altitude dictated by the climb schedule. This information is presented as rate of climb in the Test Results section of this report.

It should be noted that the climb data has not been corrected for changes in the following variables: aircraft weight, Mach number, normal acceleration and wind gradient effects.

● MILITARY POWER ACCELERATIONS

Military power accelerations were accomplished at various altitudes from near minimum flying speed to the thrust limited Mach number under test conditions. The thrust available in military power at these altitudes is presented in Figures 19 through 24. The data was obtained by the methods outlined in "Total Net Thrust Measurement" of this Appendix.

● MAXIMUM POWER ACCELERATIONS

Maximum power accelerations were accomplished from near minimum speeds to the maximum speed under test conditions. Data was recorded in approximately one second intervals throughout the acceleration but was transcribed to digital information as a function of Mach number to furnish a suitable sample of information for presentation. Basic relations utilized to determine Mach number, altitude, etc., were found in Reference 2. Rate of change of energy at test conditions was determined as outlined previously in this Appendix under "Specific Energy Method" and converted to rate of change of energy in a standard atmosphere by multiplication $\sqrt{T_{as}/T_{at}}$.

The induced drag correction to rate of climb is:

$$\Delta R/C_3 = \left[\frac{25.33 T_{as}}{P_{as} M b^2 e} \right] \left[\frac{n (W_t^2 \delta a_s - W_s^2)}{\delta a_t W_s} \right]$$

Excess thrust at test conditions was obtained from the following expression:

$$T_{ext} = \frac{R/C_t W_t}{101.333 V_{T_t}}$$

The induced drag was defined as follows:

$$D_i = \frac{(C_{L_t} - \Delta C_L)^2}{\pi A R e} \times \frac{M^2 S \delta a_t}{.000675}$$

ΔC_L is defined in Figure 5, of Reference 10.

The drag correction for change in altitude is expressed utilizing the two previously defined parameters:

$$\Delta R/C = \frac{101.3333 V_{T_s} \Delta D_t - s}{W_s}$$

The thrust increment determined by the difference in thrust between test and standard atmosphere was obtained as outlined in this Appendix under "Total Net Thrust Measurement." This thrust in-

crement, as were all thrust and drag increments, was converted to rate of climb as follows:

$$R/C_{\text{power}} = \frac{\Delta F_{\text{npowers-t}} \times V_{T_s} \times 101.333}{W_s}$$

The resultant rate of climb with the above corrections added was then corrected for change of inertia by multiplying the rate of climb by the ratio of test to standard weight.

The final rate of climb was converted to excess thrust as follows:

$$T_{\text{ex}_s} = \frac{R/C_s W_s}{101.3333 V_{t_s}}$$

The thrust available and thrust required is presented at a gross weight of 10,000 pounds.

It should be noted that the acceleration data is presented at the normal load factor obtained during the particular test.

● CRUISE

Stabilized speed-power data was obtained at a constant weight-pressure ratio by flying successive points at higher altitudes to compensate for the weight reduction with fuel consumed. This minimized the correction of the data obtained.

Basic relations utilized to determine Mach number, altitude, etc., were found in Reference 2.

Thrust was calculated by the methods outlined in Reference 5.

Corrections for being off the desired weight-pressure ratio were made by an increment of lift coefficient and drag coefficient as defined by the drag polars Figures 13, 15, and 17.

Norair has estimated that the interim structural duct bands in early aircraft decrease the specific range of the aircraft approximately one percent (as compared to production aircraft) and that installation of a test nose boom in place of a production nose boom also decreases the specific range one percent. Based on these estimates, the range mission as shown in the body of this report for a typical production aircraft was computed from specific range data that was two percent higher than the data obtained from the test aircraft.

● DESCENTS

Descents were accomplished at several constant calibrated airspeed and constant Mach number schedule from approximately 40,000 feet to 10,000 feet.

The rate of descent data was corrected to standard atmospheric conditions. However, no attempt was made to correct rate of descent for thrust variations from test to standard conditions or for weight variations.

● LANDING PERFORMANCE

Landing data was obtained and processed as outlined in Reference 6. The ground roll distance is presented for a test gross weight as shown and is corrected to sea level standard atmosphere as outlined in Reference.

● COMPRESSOR INLET PRESSURE (P_{t2})

Average compressor inlet total pressure data was obtained from a pressure survey rake located immediately ahead of the compressor on the left engine only. P_{t2} for the right engine was assumed to be the same as the left when engine speeds (air flow) were the same. However, when the right engine was operating at a different power setting than the left, the right P_{t2}/P_{t0} was modified by the following procedure:

$$\left(\frac{W_a \sqrt{0t_2}}{KRN1 \delta t_2} \right)_{\text{inlet}}$$

was computed for both right and left engines.

$$P_{t2}/P_{t0} = f \left(\frac{W_a \sqrt{0t_2}}{KRN1 \delta t_2} \right)_{\text{inlet}}$$

(Figure numbers 42 and 43)

Enter the above curve at the corrected inlet airflow values computed for the left and right engine and extract

$$(P_{t2}/P_{t0})_{\text{left}} \text{ and } (P_{t2}/P_{t0})_{\text{right}}$$

$$\Delta \frac{P_{t2}}{P_{t0L-R}} = (P_{t2}/P_{t0})_L - (P_{t2}/P_{t0})_R$$

$$\Delta P_{t2L-R} = \Delta \left(\frac{P_{t2}}{P_{t0}} \right)_{L-R} \times P_{t0}$$

Then P_{ta} for the right engine, based on P_{t2} measured from the inlet rake, is as follows:

$$P_{t2R} = P_{t2L(\text{inlet rake})} + (\Delta P_{t2})_{L-R}$$

In some cases, when the P_{t2} rake was inoperative, P_{t2}/P_{t0} was obtained from Figures 42 and 43 as a function of corrected inlet air flow.

● TOTAL NET THRUST MEASUREMENT

Total gross and net thrust was obtained by the method outlined in Reference 5.

The nozzle area was measured by instrumenting the nozzle actuating teleflex cable. This area was then corrected for pressure and temperature growth by use of a calibration curve (Appendix III). The resultant area was then assumed to be the true area for subsequent thrust calculations.

Primary and bypass air flow as obtained from curves supplied by the engine and airframe manufacturers which are presented in Figures 41 and 48, respectively.

From the total inlet airflow, total ram drag was computed as follows:

$$F_e = \frac{W_a \times V_{t_t} \times 1.6889}{g}$$

Primary net thrust was obtained by:

$$F_{n_p} = F_g - F_e$$

Secondary thrust was obtained from the manufacturer's supplied curves, Figures 43 through 46.

Total net propulsive thrust was then defined as:

$$F_{n_{test}} = F_{n_p} + F_{n_{sec}}$$

Standard net thrust for maximum and military power was obtained by the following procedure:

1. Enter curves from a GE Specification of F_n versus T_{t_2} with test and standard T_{t_2} and extract corresponding values of F_n .
2. $\Delta F_{n_{s-t}} = F_{n_{std}} - F_{n_t}$ (from curves)
3. Standard $F_{n_s} = F_{n_t}$ (computed) $+ \Delta F_{n_{s-t}}$

The curves of F_n versus T_{t_2} at various attitudes were obtained from Reference 8.

● FUEL FLOW

Fuel flow data was recorded separately for each engine and afterburner on an oscillograph.

Test fuel flow in gallons per hour was obtained by use of calibration curves of gallons per cycle versus cycles per second.

This test fuel flow was then converted to pounds per hour at the appropriate fuel temperatures as measured at the fuel transmitters.

Standard fuel flow for tests using maximum or military power was obtained by the general method used to obtain thrust as described in the paragraph "Total Net Thrust Measurement."

● AMBIENT TEMPERATURE

The ambient air temperature measuring system in the test aircraft was carefully calibrated and compared to rawinsonde temperature measurements of the upper atmosphere. Results of this comparison were plotted in terms of $(T_{i_c}/T_a)^{-1}$ versus $M^2/5$ (where T_{i_c} is the indicated temperature obtained from the test aircraft and T_a is ambient temperature from rawinsonde). Test ambient temperatures were then extracted from T_{i_c} by the following equation:

$$T_a = T_{i_c} \left(1 + .98 \frac{M^2}{5} \right) \quad \text{where } .98 \text{ was the observed average recovery factor of the test system.}$$


● AIRSPEED SYSTEM CALIBRATION

The airspeed system was calibrated using tower fly-by technique as described in Reference 7 and the pacer method as described in Reference 1. Transonic data was obtained by the method described in Section 5.6.3 of Reference 2. Figure 34 presents the results of the test nose boom out-of-ground effect and Figure 35 presents data for the System in ground effect.

● STATIC THRUST RUNS

Static thrust calibrations were obtained with the engine installed in the aircraft. The data was obtained primarily to check standard day manufacturer's guaranteed thrust and to check the validity of the thrust measuring procedures used in flight. Engines serial numbers 230184 and 230185 were used throughout the test programs.

The performance of these engines was essentially impossible to generalize, with the test data obtained because of the inability to define standard nozzle area for any given power setting. For this reason, nozzle area was presented for test conditions only (Figures 37 and 38).

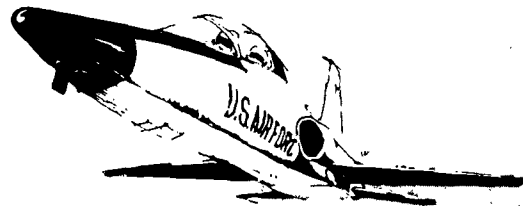


NOMENCLATURE

| | | |
|--------------------|---|--|
| A_8 | exhaust nozzle area | sq in |
| AR | aspect ratio | |
| b | wing span | ft |
| CAS | calibrated airspeed | knots |
| C_D | coefficient of drag | |
| C_L | coefficient of lift | |
| D_i | induced drag | lbs |
| e | airplane efficiency factor | |
| EGT | exhaust gas temperature | °C or °K |
| F_g | gross thrust | lb |
| F_n | net thrust | lb |
| F_e | inlet ram drag | lb |
| $F_{n_{req}}$ | net thrust required for level flight | lb |
| g | acceleration due to gravity | ft/sec/sec |
| M_{ic} | indicated Mach number | |
| M | Mach number, free stream | |
| n | normal load factor | g |
| N | engine speed | rpm |
| NAMPP | nautical air miles travelled per pound of fuel used | mi/lb |
| SFC | specific fuel consumption | $\frac{\text{pounds of fuel/hr}}{\text{pounds of thrust}}$ |
| NAMT | nautical air miles travelled | nautical miles |
| P_{t_5} | turbine exit total pressure | in Hg |
| P_{t_2} | compressor inlet total pressure | in Hg |
| P_{t_0} | free stream total pressure | in Hg |
| P_a | ambient pressure | in Hg |
| $\Delta P/q_{cic}$ | static pressure coefficient for compressible fluid based on q from instrument corrected values only | |
| R/C | rate of climb | ft/min |

| | | |
|---------------|---|----------|
| S | wing area | sq ft |
| T_{ic} | indicated total temperature | °C or °K |
| T_a | ambient temperature | °C or °K |
| T_{t2} | compressor inlet total temperature | °C or °K |
| T_{ex} | excess thrust | lb |
| T. O. | take-off | |
| T_{t5} | turbine exit total temperature | °C or °K |
| V_c (CAS) | calibrated airspeed | knots |
| V_i (IAS) | indicated airspeed | knots |
| V_t | true airspeed | knots |
| W | aircraft gross weight | lb |
| W/δ_a | weight-pressure ratio | lb |
| W_f | fuel flow | lb/hr |
| W_a | engine airflow | lb/sec |
| θ_a | ambient pressure ratio, $P_a/29.92$ | |
| δ_{t2} | inlet pressure ratio, $P_{t2}/29.92$ | |
| α | aircraft angle of attack | deg |
| W_{alB} | compressor bleed airflow | lb/sec |
| ϕ | Sutherlands Viscosity Index | |
| RNI | Reynolds Number Index | |
| K_{RNI} | Reynolds Number correction factor to engine airflow | |
| W_{aBP} | engine by-pass airflow | lb/sec |
| θ_{t2} | $T_{t2}/288$ | |

Subscripts s and t refer to standard and test conditions.

Numerical subscripts applied to temperature and pressure data refer to specific locations on the engine where data is obtained.

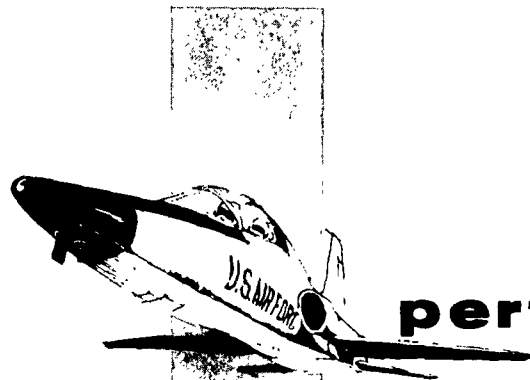

performance plots....


| Figure No. | | Page No. |
|------------|--|----------|
| 1 | Takeoff Performance | 21 |
| 2 | Maximum Power Climb Potential | 21 |
| 3 | Military Power Climb Potential | 23 |
| 4 | Maximum Power Climb Performance | 24 |
| 6 | Military Power Climb Performance | 28 |
| 7 | Single Engine Maximum Power Climb Performance | 30 |
| 8 | Single Engine Military Power Climb Performance | 32 |
| 9 | Level Flight Performance | 34 |
| 18 | Ferry Range Mission | 44 |
| 19 | Thrust Available and Required | 46 |
| 25 | Level Acceleration Performance | 52 |
| 27 | Descents | 54 |
| 34 | Airspeed System Calibration | 68 |
| 37 | Static Thrust Calibration | 72 |
| 39 | Engine Performance Correction Curves | 75 |

FIGURE NO. 1
TAKE-OFF PERFORMANCE
T-38A USAF S/N 58-1194
J85-GE-5 ENGINES
GROSS WEIGHT 12000 LB

- NO FLAPS (0 DEG.)
- △ 45% FLAPS (20 DEG.)
- 60% FLAPS (27 DEG.)
- ☆ 100% FLAPS (45 DEG.)

STANDARD DAY STATIC THRUST:
MAXIMUM POWER 5160 LB.
MILITARY POWER 4080 LB.

GROUND EFFECT
AIR SPEED CALIBRATION
TEST NOSE BDOM
(SEE FIGURE 3.5)



TRUE AIRSPEED ~ KNOTS
SEA LEVEL STANDARD DAY

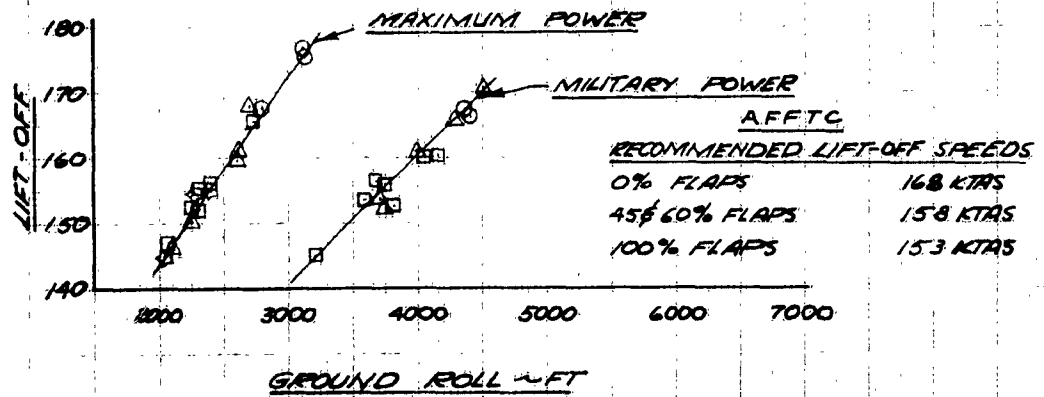
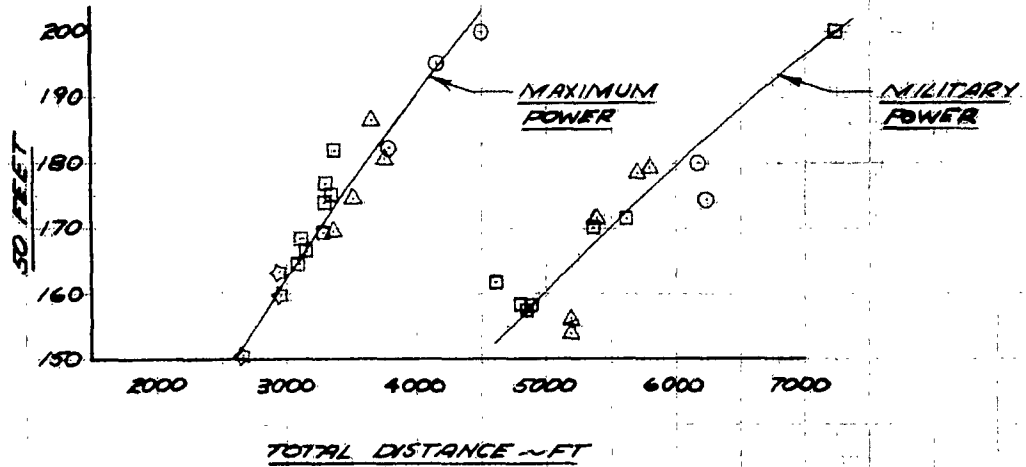


FIGURE No. 2
MAXIMUM POWER CLIMB POTENTIAL
F3BA USAF S/N 58-1194
J85-GE-5 ENGINES S/N'S
230184 AND 230185

| | <u>ALT-FT</u> | <u>FLT</u> | <u>EUN</u> | | <u>ALT-FT</u> | <u>FLT</u> | <u>EUN</u> |
|---|---------------|------------|------------|---|---------------|------------|------------|
| ○ | 3000 | 20 | 4 | △ | 36000 | 18 | 2 |
| ◊ | 5000 | 20 | 3 | △ | 36000 | 18 | 3 |
| ◇ | 15000 | 27 | 5 | △ | 40000 | 15 | 2 |
| ◊ | 15000 | 27 | 4 | △ | 40000 | 15 | 3 |
| △ | 25000 | 8 | 2 | △ | 45000 | 17 | 2 |
| △ | 25000 | 8 | 3 | △ | 45000 | 17 | 3 |

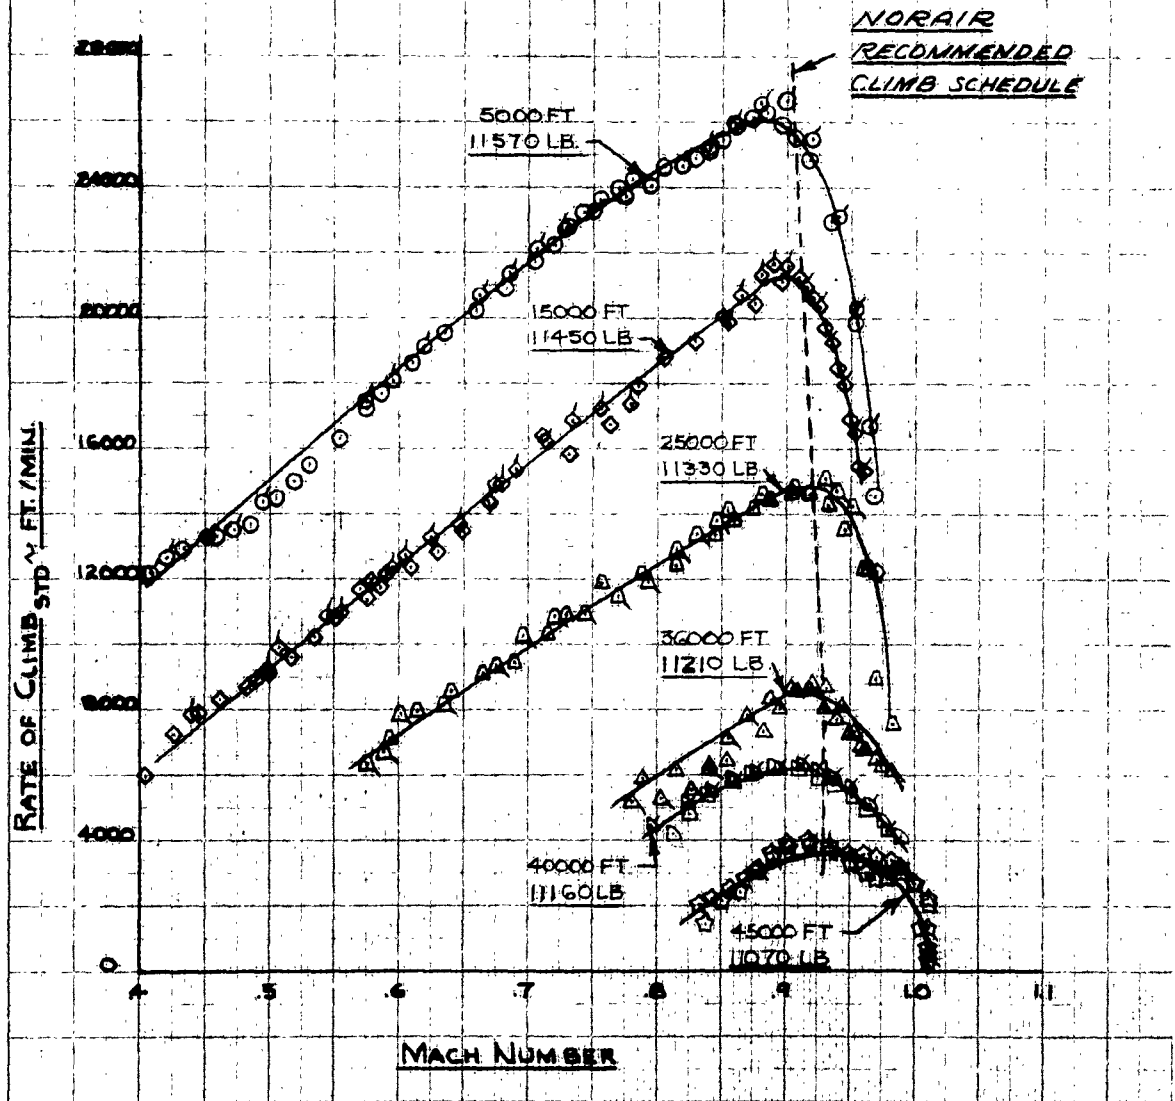


FIGURE NO. 3
MILITARY POWER CLIMB POTENTIAL
T-38A USAF S/N 58-1194
J85-GE-5 ENGINES S/N'S
230184 AND 230185

| | ALT.-FT. | FLT. | RUN | | ALT.-FT. | FLT. | RUN |
|---|----------|------|-----|---|----------|------|-----|
| O | 5000 | 20 | 5 | Δ | 36000 | 24 | 4 |
| Q | 5000 | 20 | 2 | Δ | 36000 | 24 | 2 |
| ◇ | 15000 | 23 | 3 | ▽ | 36000 | 24 | 3 |
| ◇ | 15000 | 23 | 4 | ◇ | 40000 | 14 | 4 |
| Δ | 25000 | 23 | 6 | Δ | 40000 | 14 | 5 |
| Δ | 25000 | 23 | 5 | ▽ | 40000 | 14 | 3 |

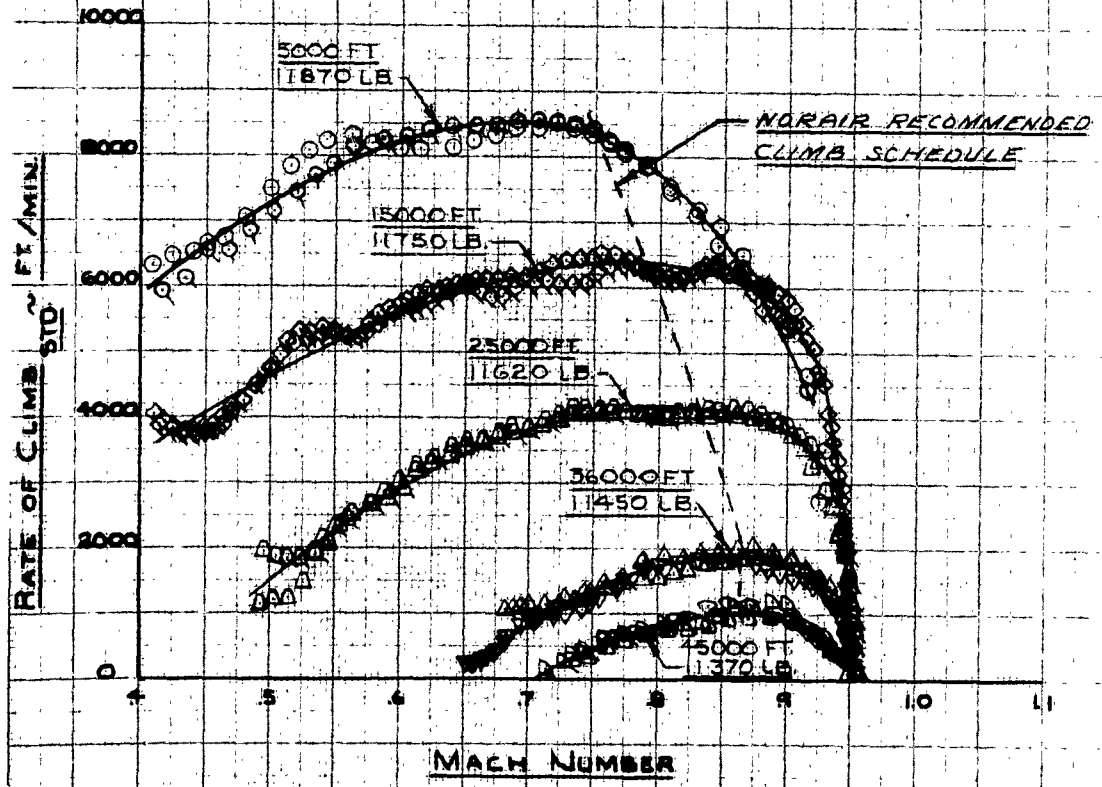


FIGURE NO. 4
MAXIMUM POWER CLIMB PERFORMANCE
T-38A USAF S/N 58-1194
J85-GE-5 ENGINES S/N'S
230184 AND 230185

NOTE:

1. 460 LBS FUEL ARE REQUIRED FOR TAXI, TAKE-OFF AND ACCELERATION TO CLIMB SPEED
2. 1.5 MINUTES ARE REQUIRED TO TAKE-OFF AND ACCELERATE TO CLIMB SPEED

| | <u>FLT</u> | <u>RUN</u> |
|---|------------|------------|
| ▽ | 6 | 4 |
| ○ | 5 | 4 |
| □ | 21 | 3 |

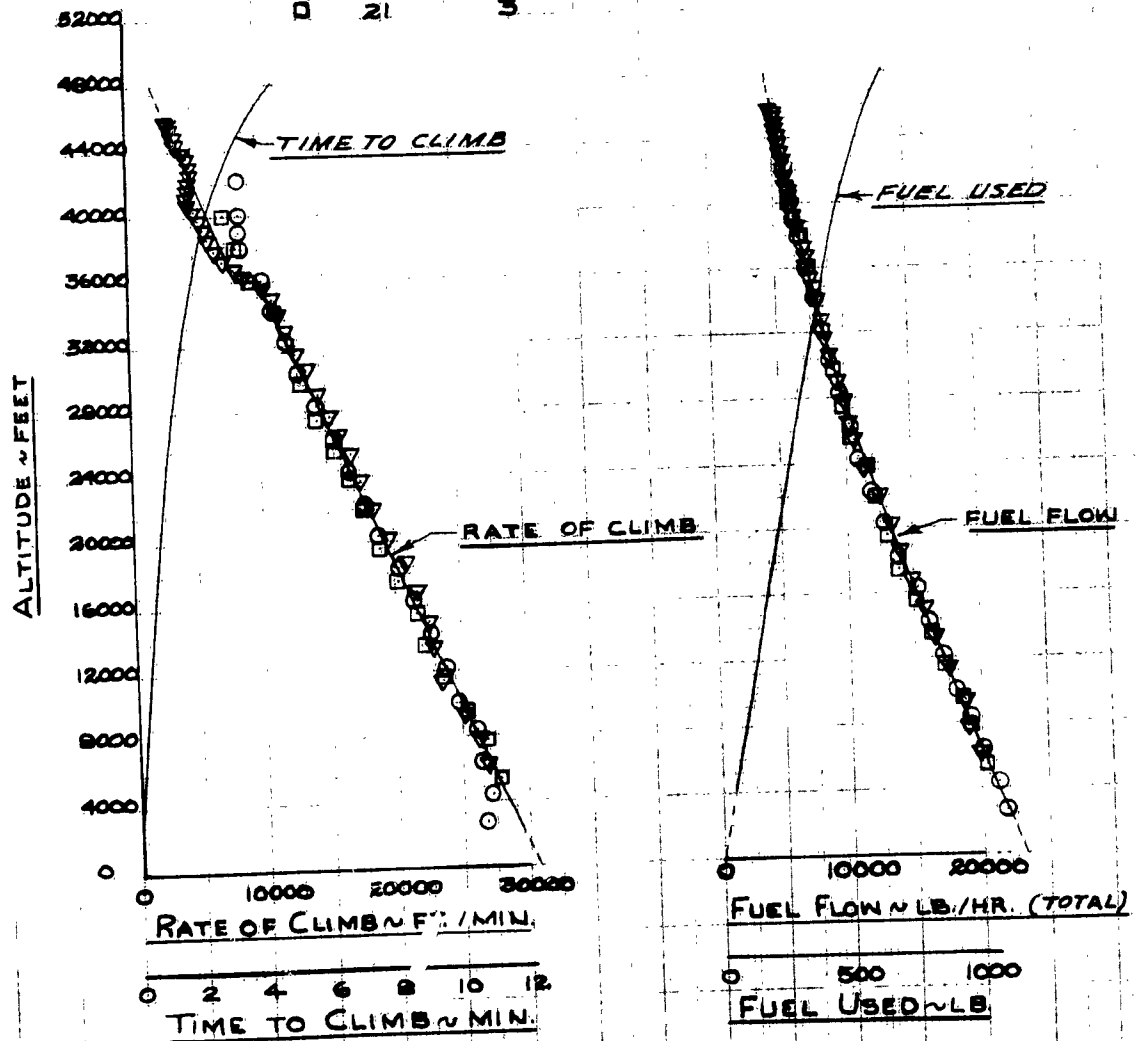


FIGURE No. 4 CONT.
MAXIMUM POWER CLIMB PERFORMANCE
GROSS WEIGHT AT ENGINE START 12530 LB.
NORAIR RECOMMENDED SCHEDULE

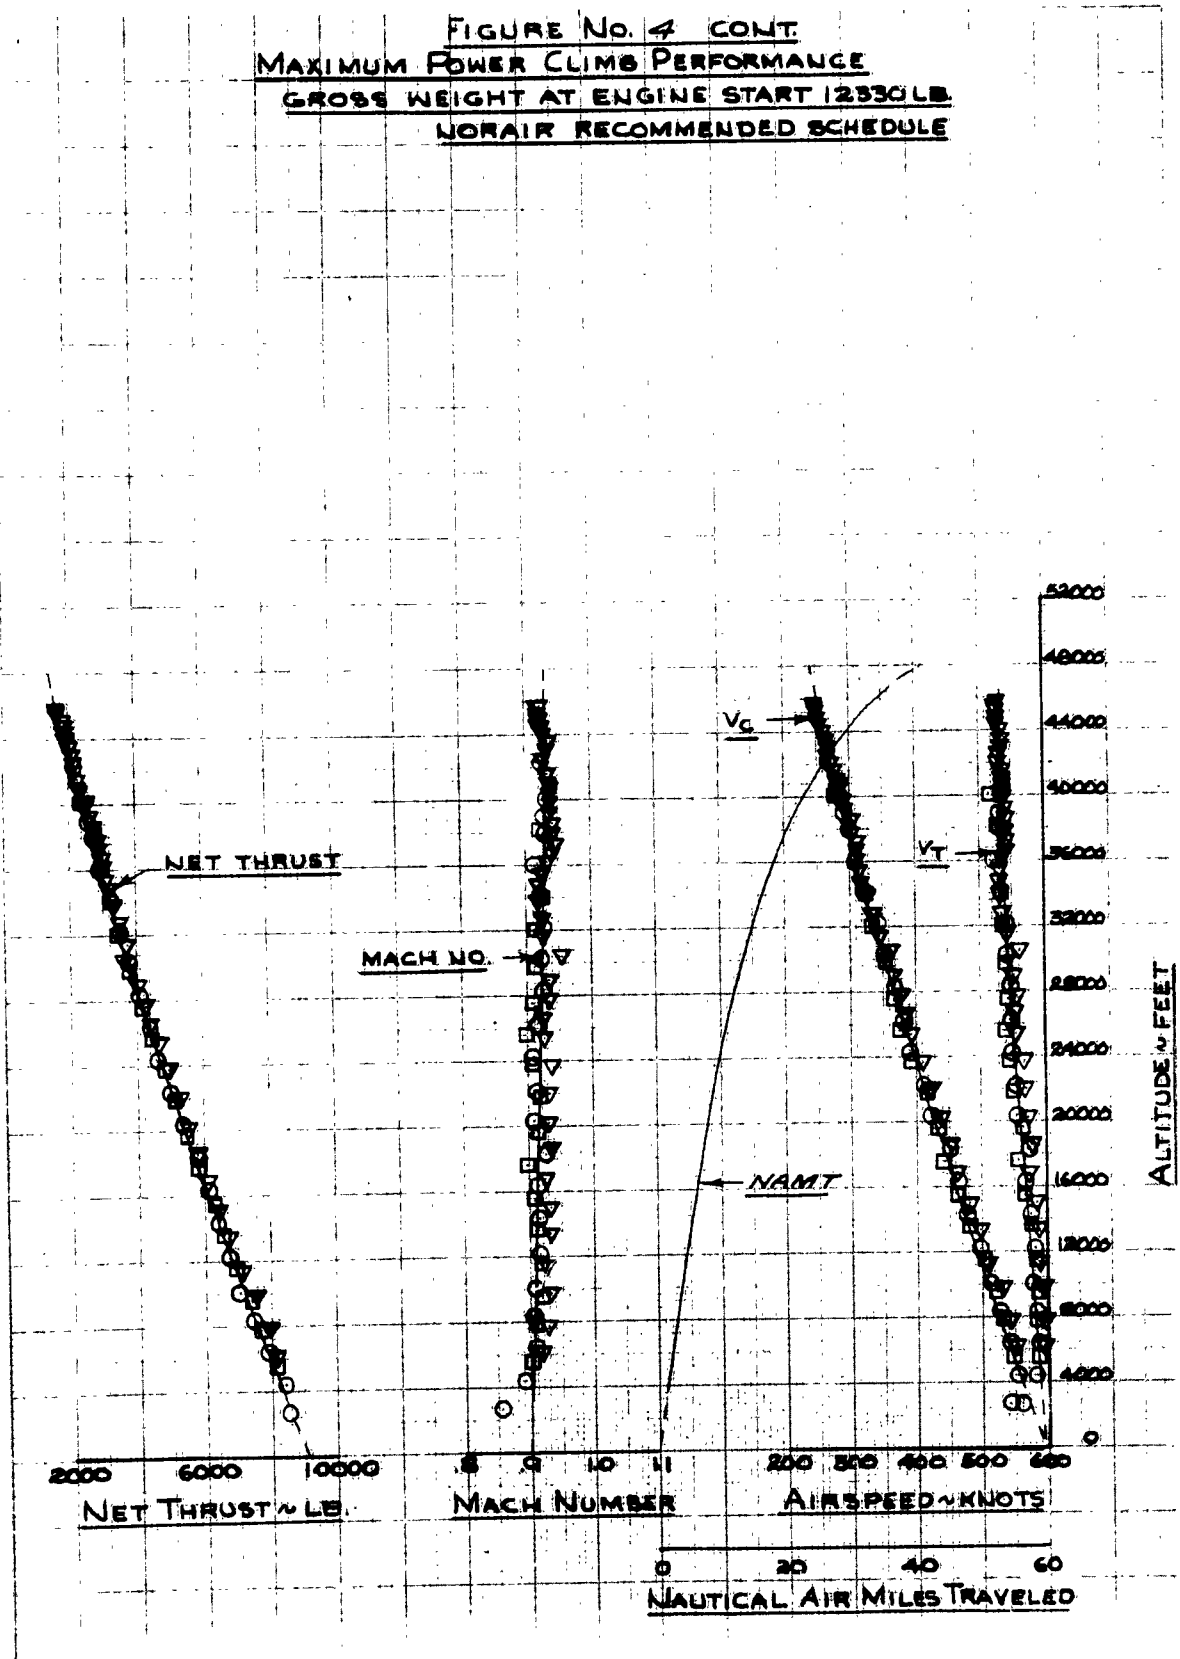


FIGURE NO. 5
MAXIMUM POWER CLIMB PERFORMANCE
T-38A USAF SIN 58-1174
T-85-GE-5 ENGINES SIN'S
210184 AND 230185

NOTE:

1. 360 LBS. OF FUEL ARE REQUIRED FOR TAXI
TAKE-OFF AND ACCELERATION TO CLIMB SPEED.
2. 1.3 MINUTES ARE REQUIRED TO TAKE-OFF
AND ACCELERATE TO CLIMB SPEED.

| <u>FLT</u> | <u>RUN</u> |
|------------|------------|
| ◇ 24 | 9 |
| ◇ 26 | 8 |

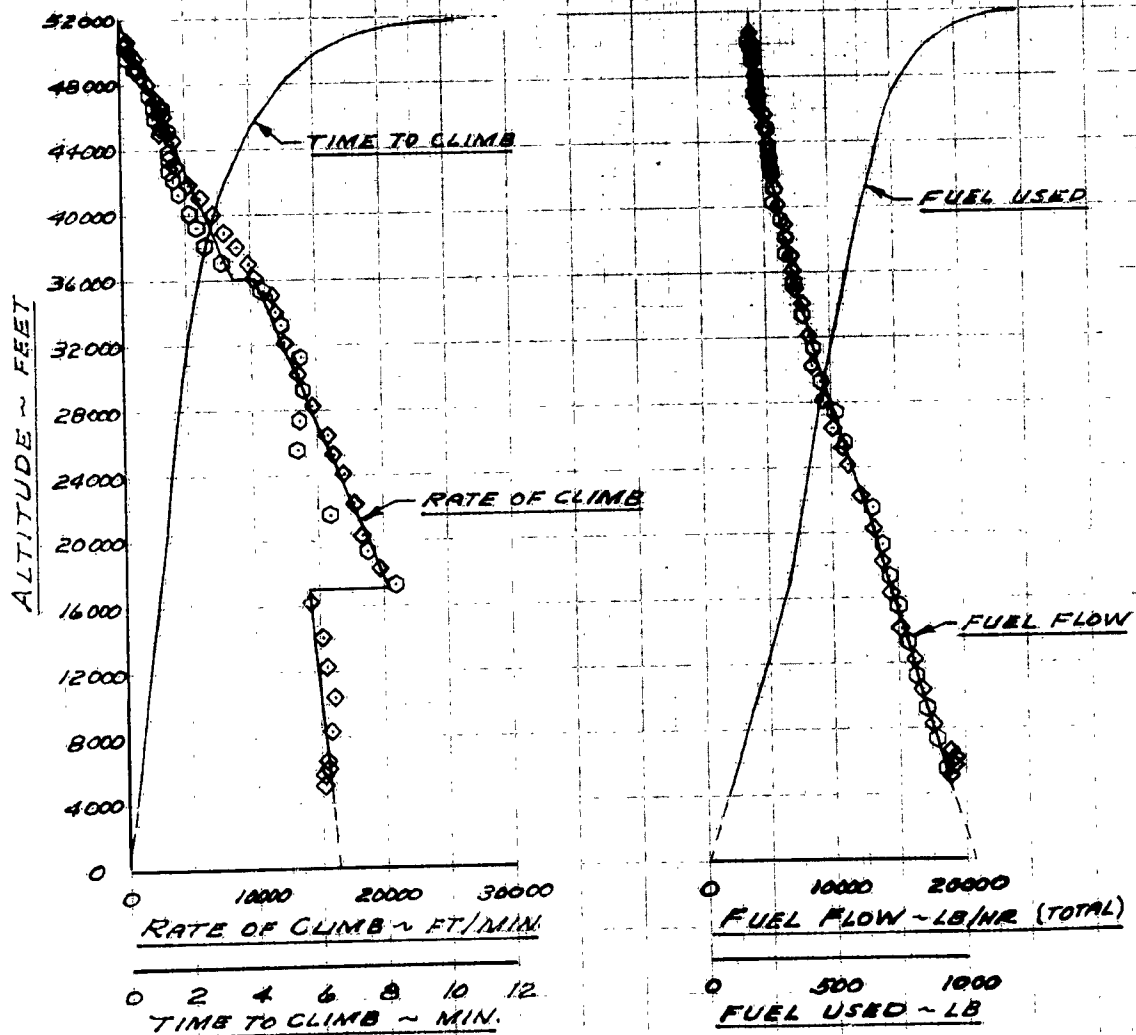


FIGURE No. 5 CONT
MAXIMUM POWER CLIMB PERFORMANCE
GROSS WEIGHT AT ENGINE START 12350 LB.
A.T.C. SUGGESTED SCHEDULE

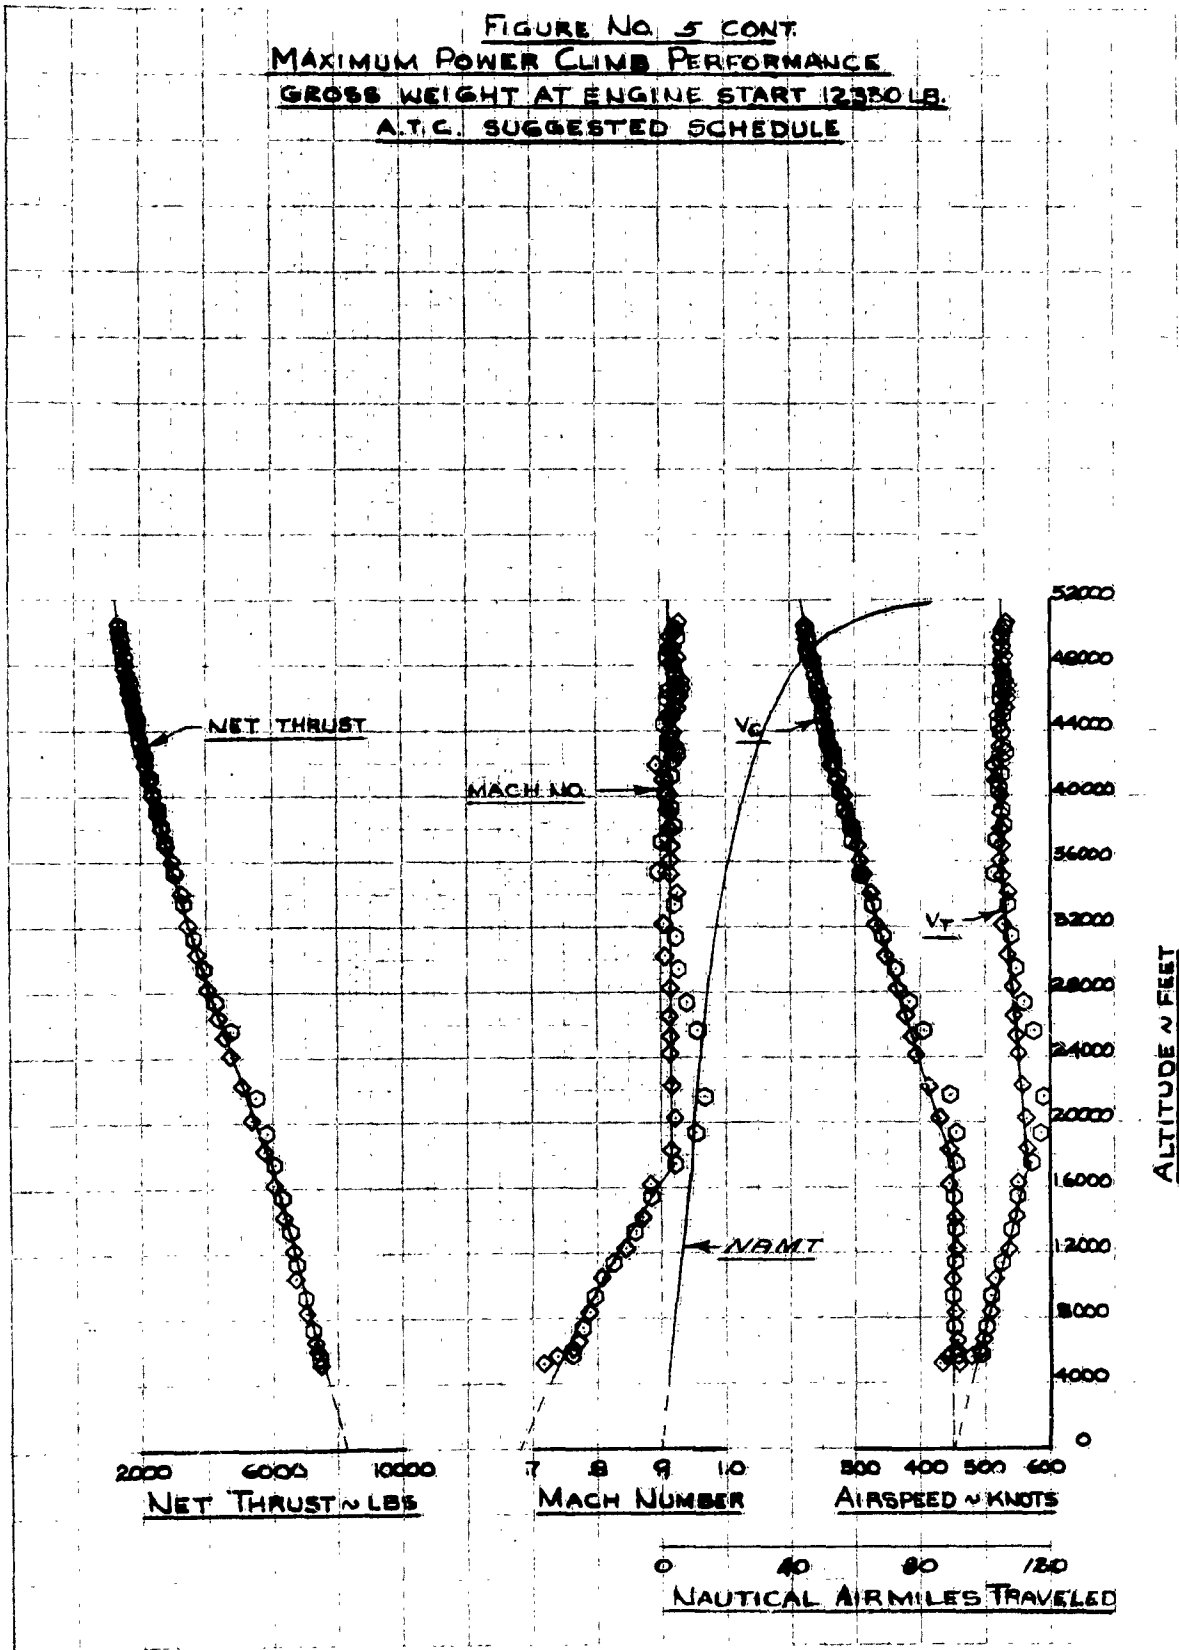


FIGURE No. 6
MILITARY POWER CLIMB PERFORMANCE
T-38A USAF S/N 58-1194
J-85-GE-5 ENGINES S/N'S
230484 AND 230185

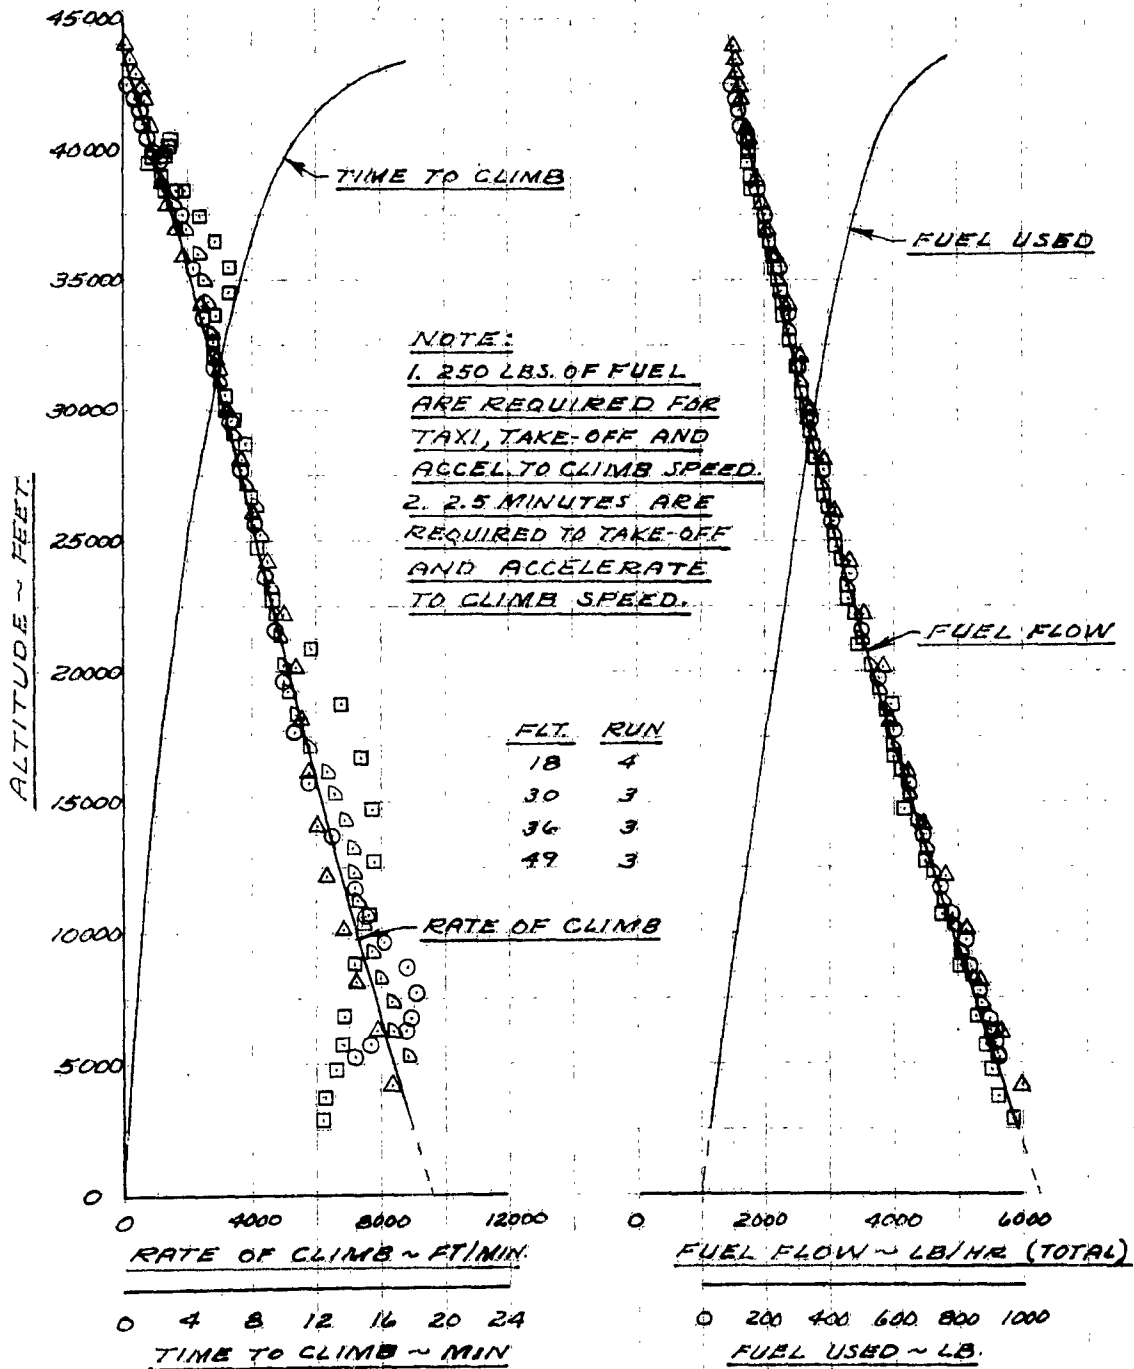


FIGURE NO. 6 CONT.
MILITARY POWER CLIMB PERFORMANCE
GROSS WEIGHT AT ENGINE START 12350 LB.
NOR AIR RECOMMENDED SCHEDULE

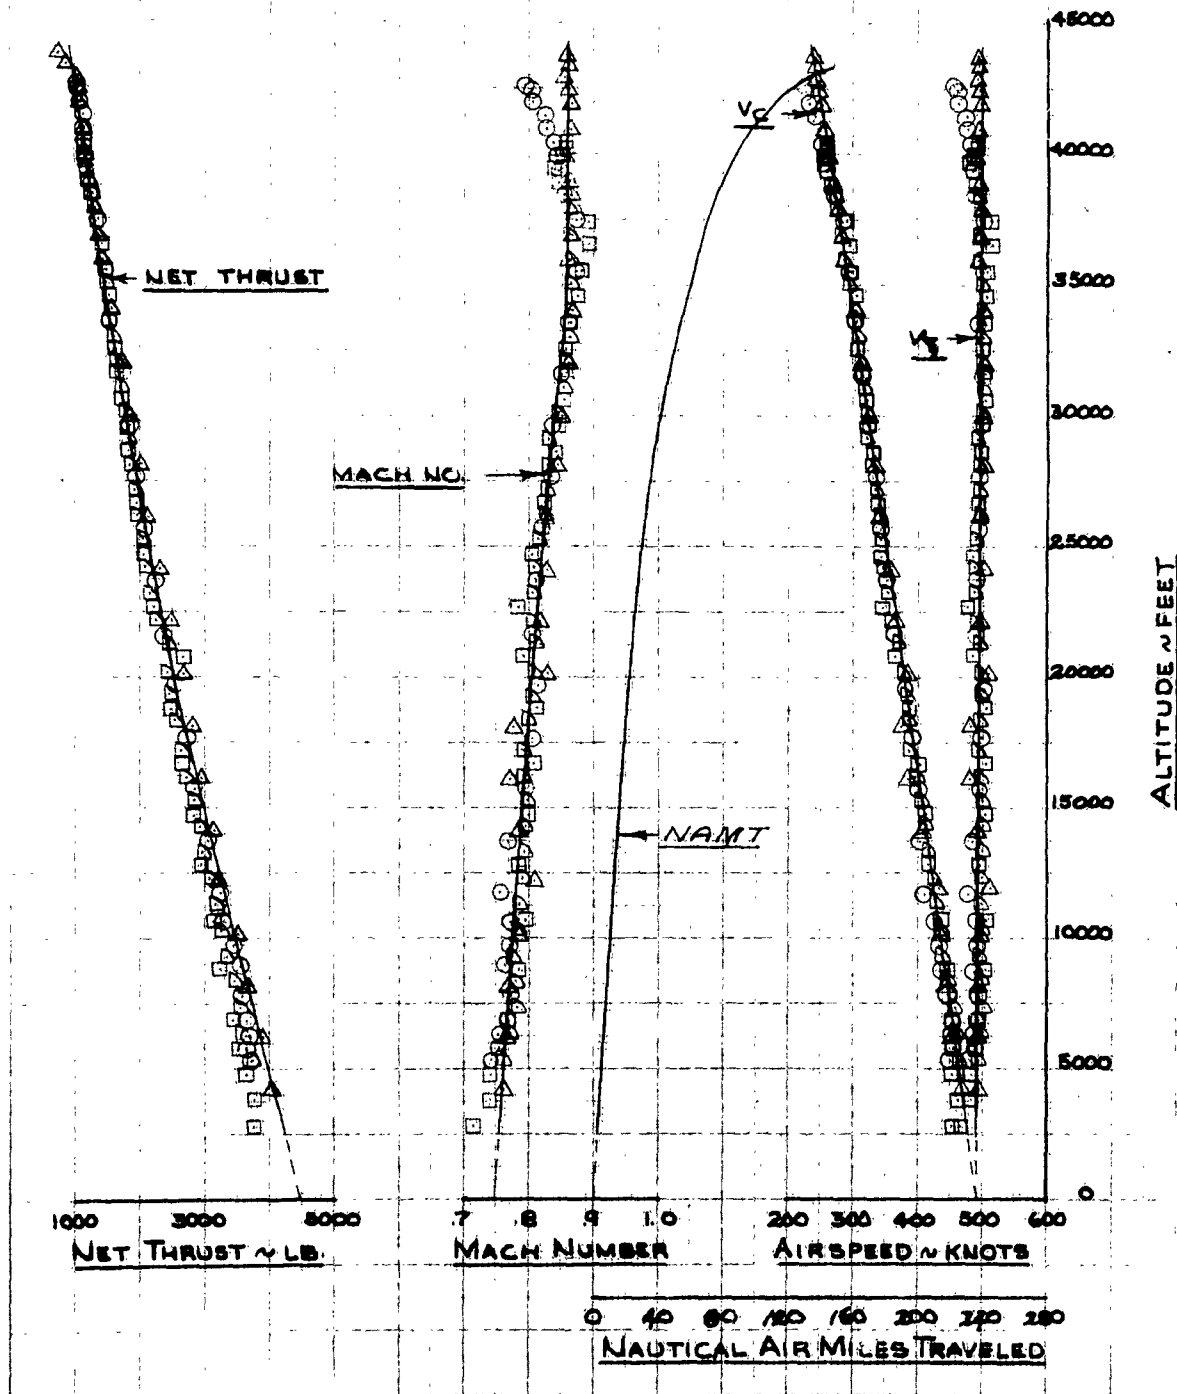


FIGURE No. 7
SINGLE ENGINE MAXIMUM POWER CLIMB
T-38A USAF S/N 58-1194
J-85-58-5 ENGINE S/N 230185

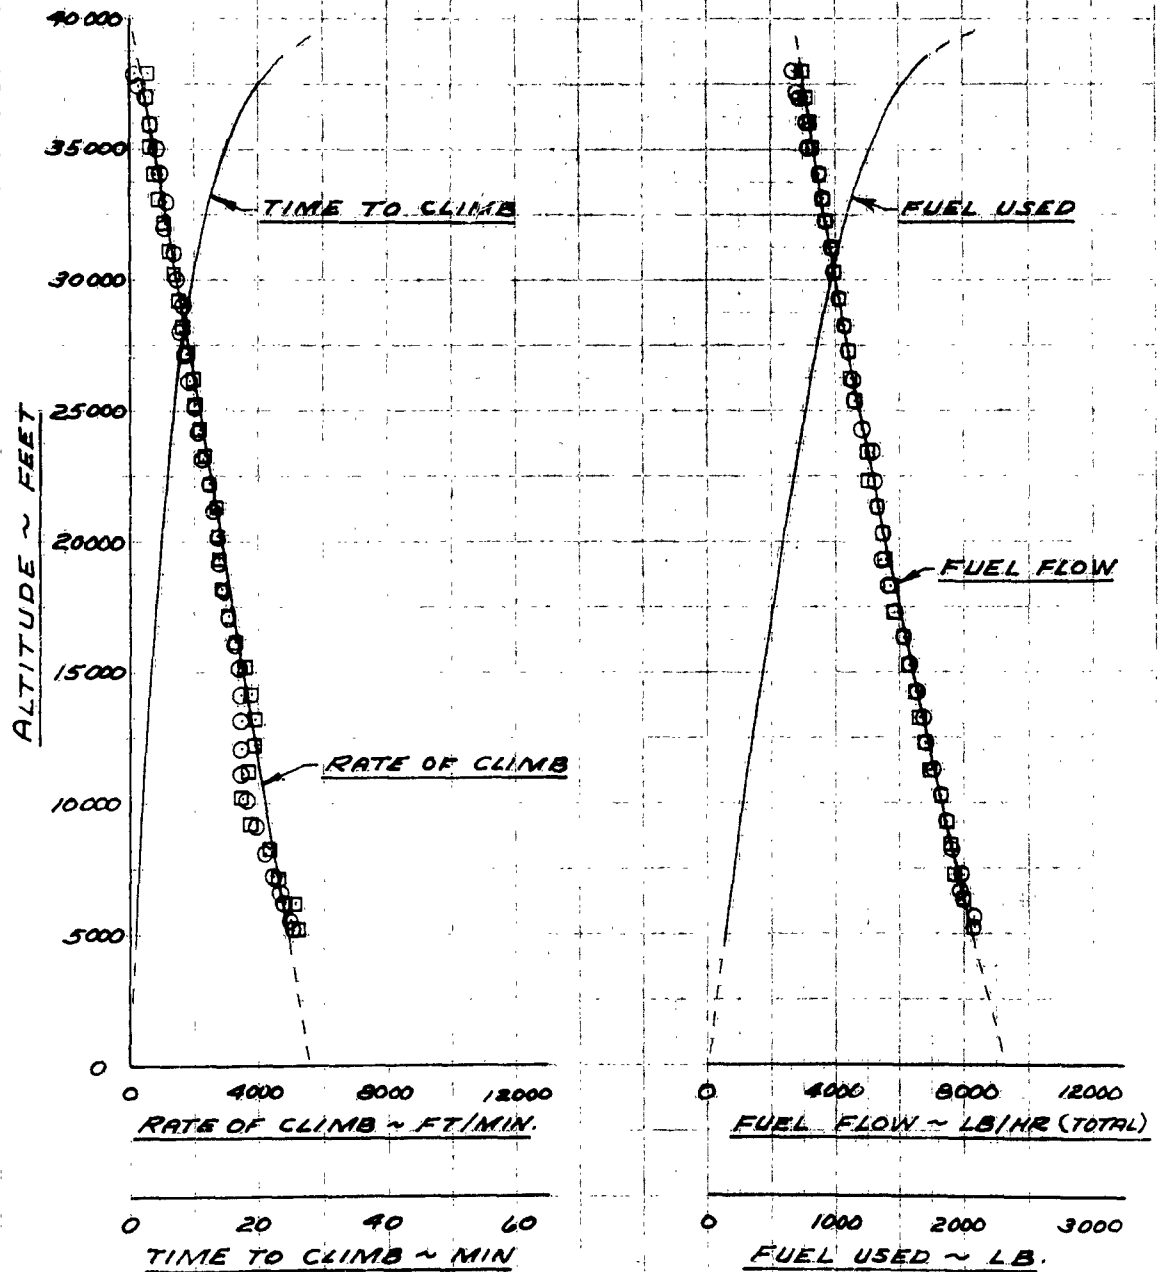


FIGURE NO. 7 CONT.
SINGLE ENGINE MAXIMUM POWER CLIMB
GROSS WEIGHT AT ENGINE START 12330 LB

| | <u>FLT</u> | <u>RUN</u> |
|---|------------|------------|
| ○ | 43 | 3 |
| □ | 42 | 3 |

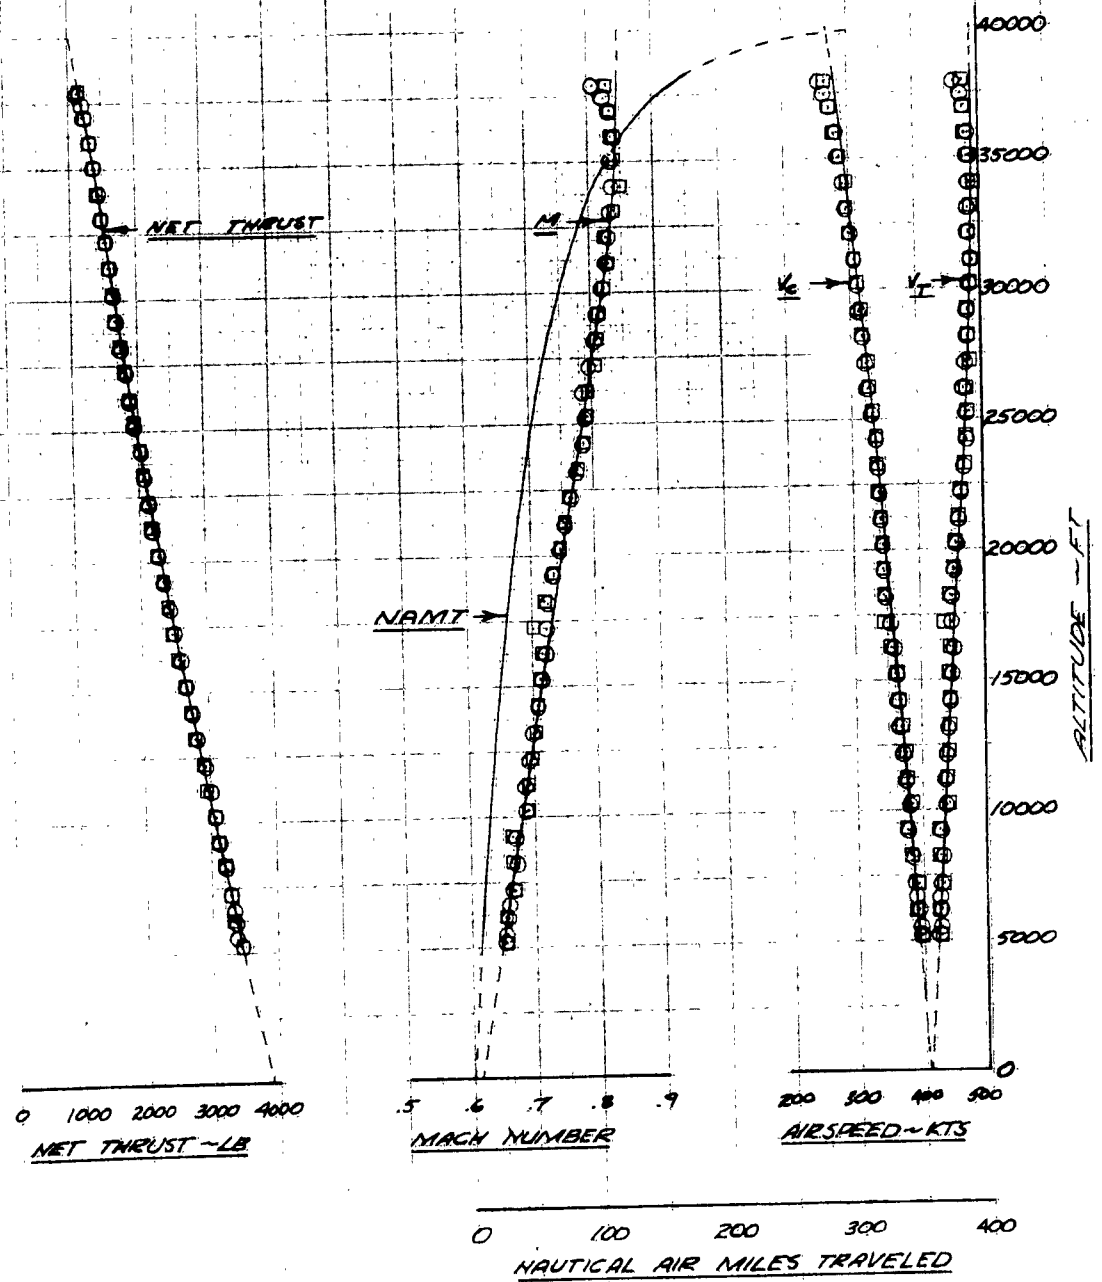


FIGURE No. 8
SINGLE ENGINE MILITARY POWER CLIMB
T-38A USAF S/N 58-1194
J-85-GE-5 ENGINE S/N 230185

| | <u>FLT.</u> | <u>RUN</u> |
|---|-------------|------------|
| △ | 45 | 3 |
| □ | 47 | |

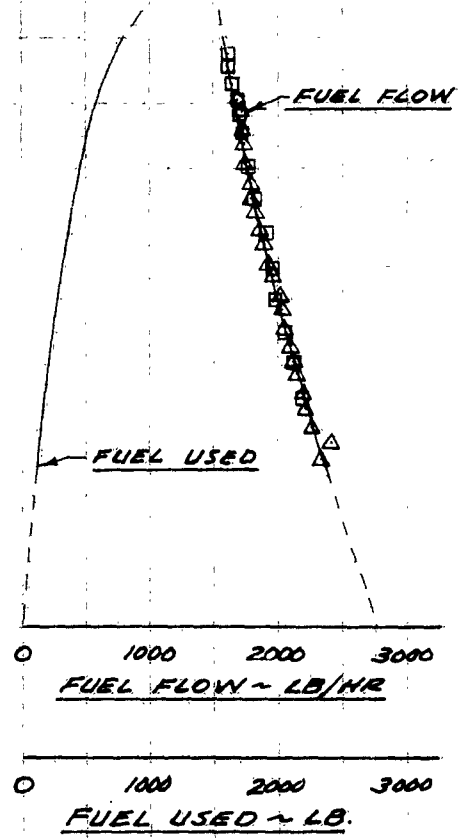
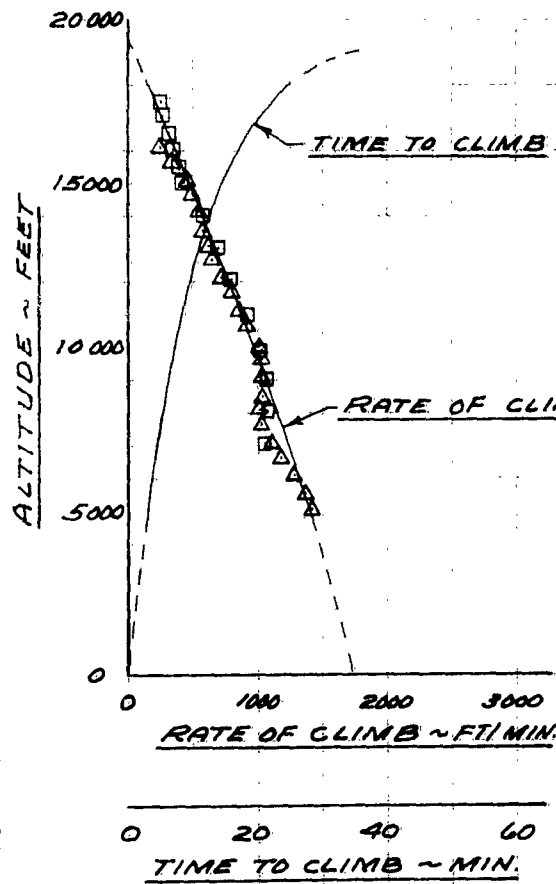


FIGURE NO 8 CONT
SINGLE ENGINE MILITARY POWER CLIMB
GROSS WEIGHT AT ENGINE START 12330 LB.

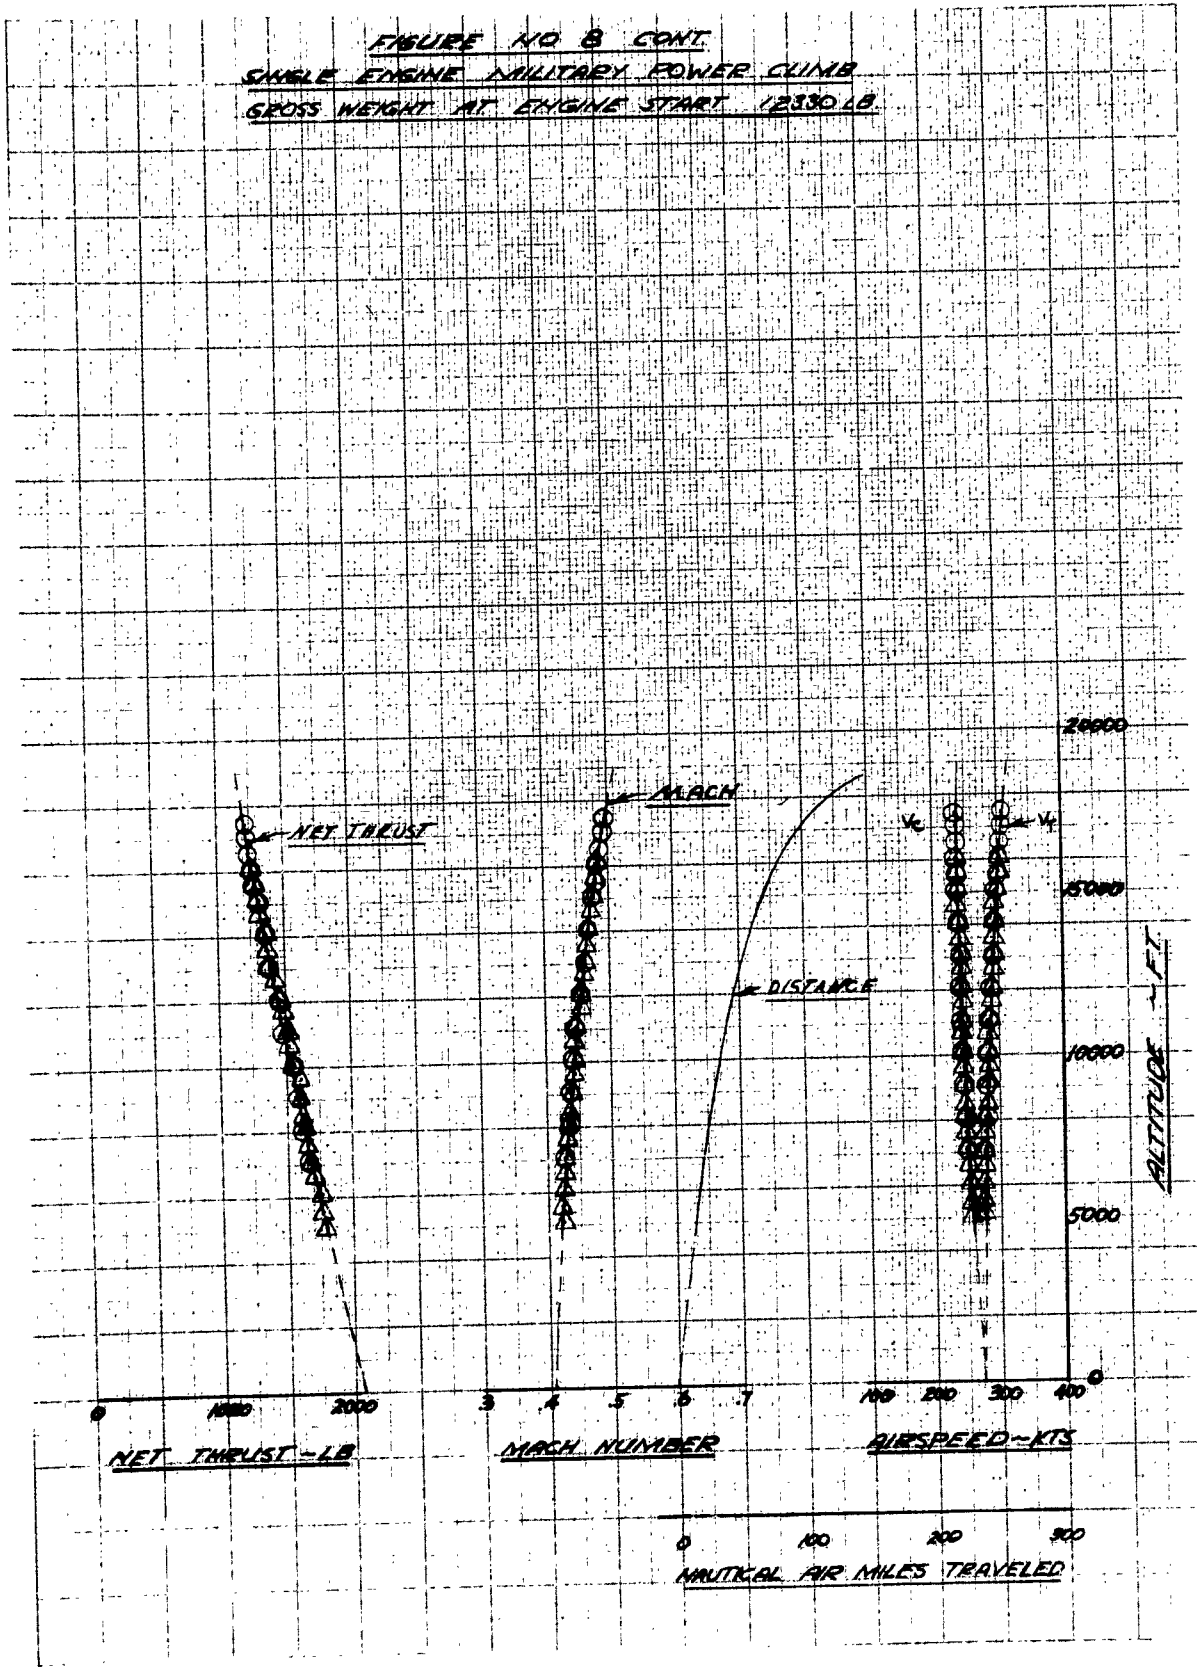


FIGURE NO 9
LEVEL FLIGHT PERFORMANCE
F-38 A USAF S/N 58-1194
J85-GE-5 ENGINES S/N'S
230185 AND 230186
GROSS WEIGHT 10,000 LBS.

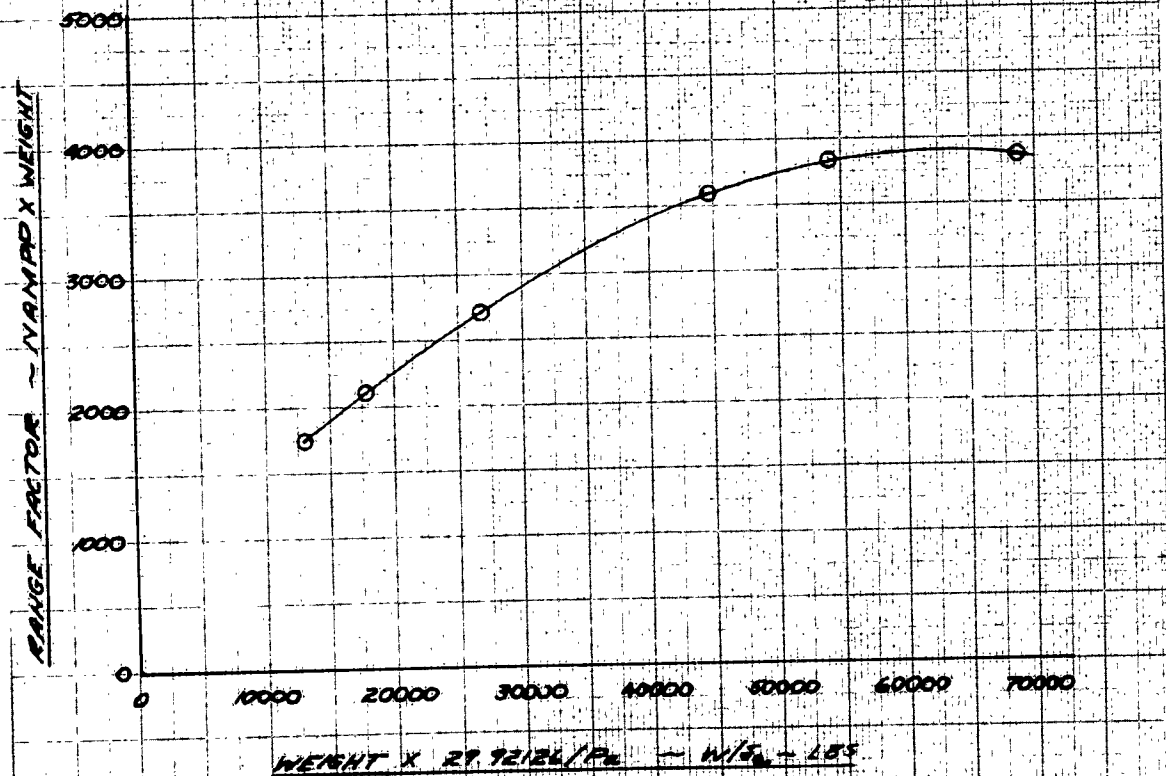
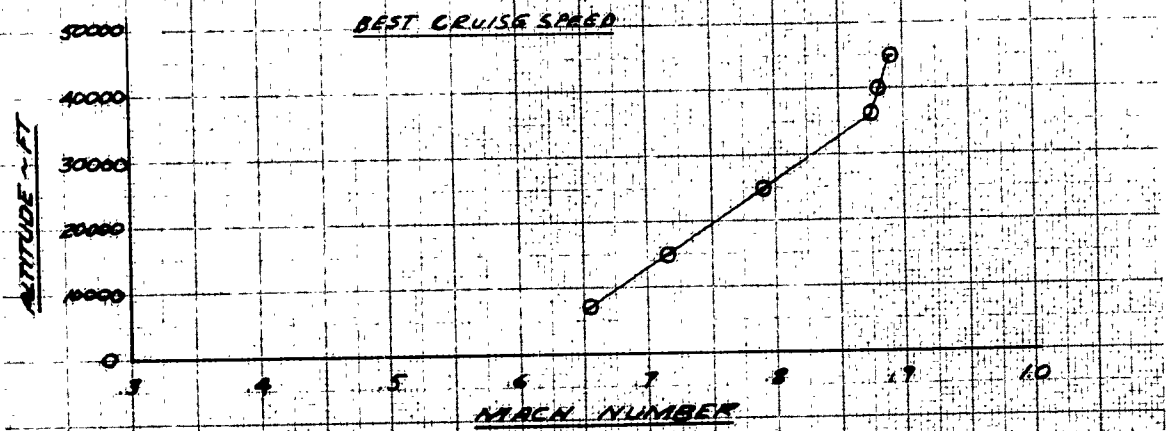


FIGURE NO. 10
NET THRUST REQUIRED
T-38A USAF S/N 58-1194
J85-GE-5 ENGINES S/N'S
230185 AND 230186
WEIGHT 10000 LB

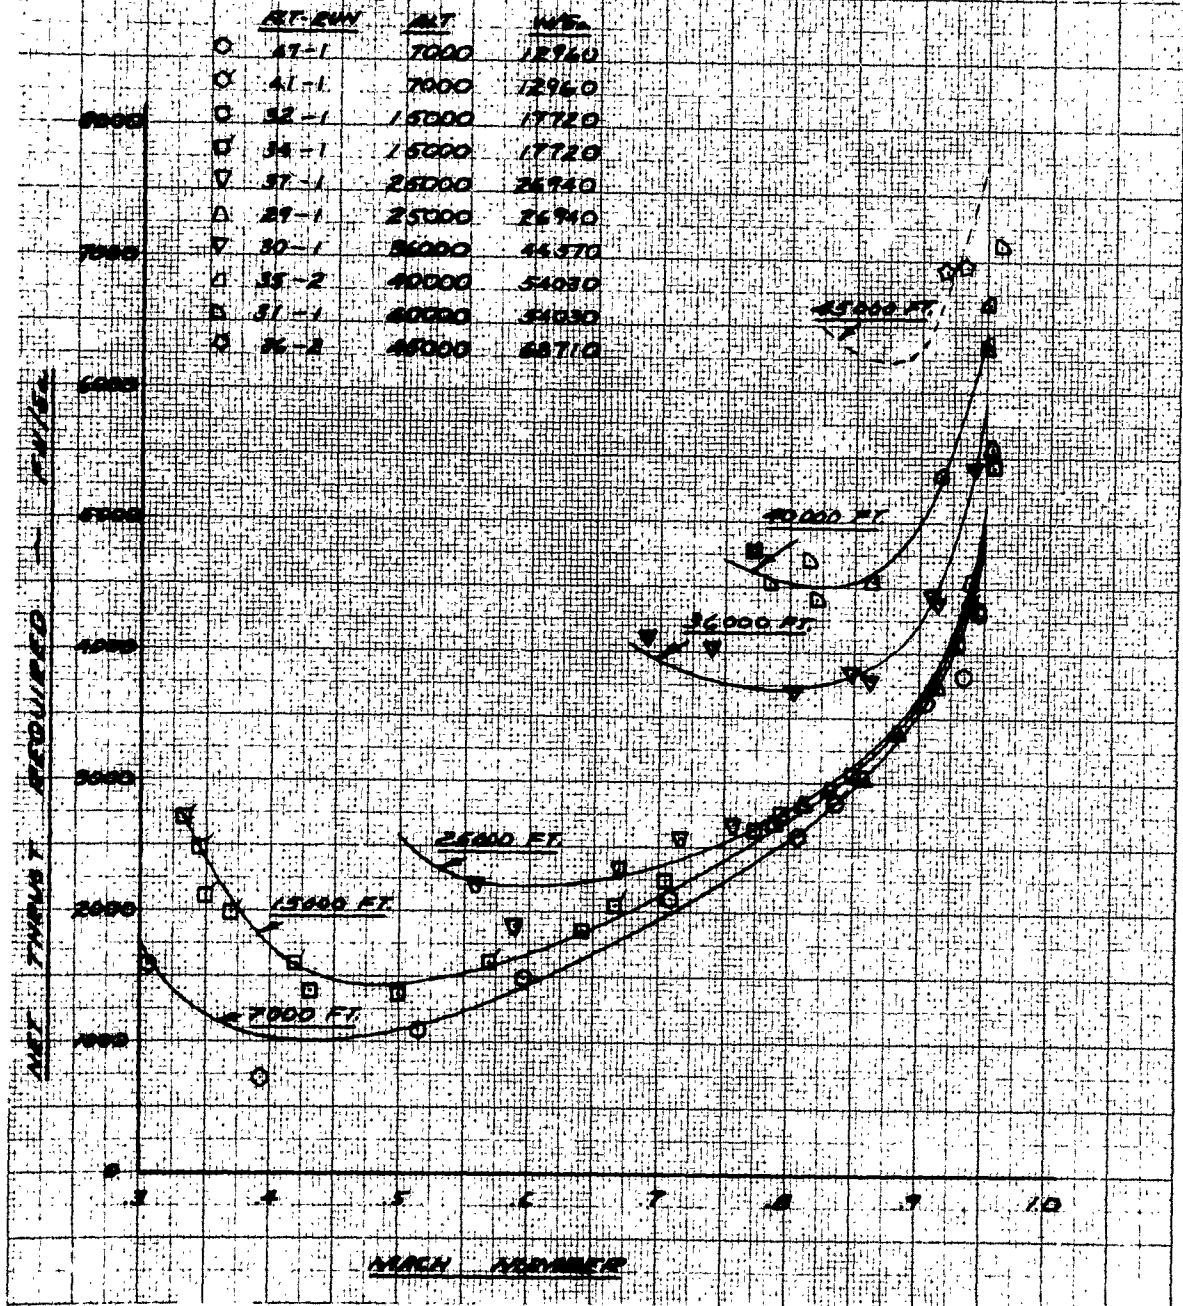


FIGURE NO. 11
SPECIFIC RANGE
F-38A USAF S/N 58-1192
J-85GE-5 ENGINES S/N'S
230185 AND 230186
WEIGHT 10000 LB

| FT-RUN | ALT | W/S ₂ |
|--------|------|------------------|
| ○ | 47-1 | 7000 |
| ○ | 41-1 | 7000 |
| □ | 32-1 | 15000 |
| □ | 34-1 | 15000 |
| ▽ | 37-1 | 25000 |
| △ | 29-1 | 25000 |
| ▽ | 30-1 | 36000 |
| △ | 35-2 | 40000 |
| △ | 31-1 | 40000 |
| ○ | 36-2 | 45000 |

X INDICATES RECOMMENDED
CRUISE MACH NUMBER

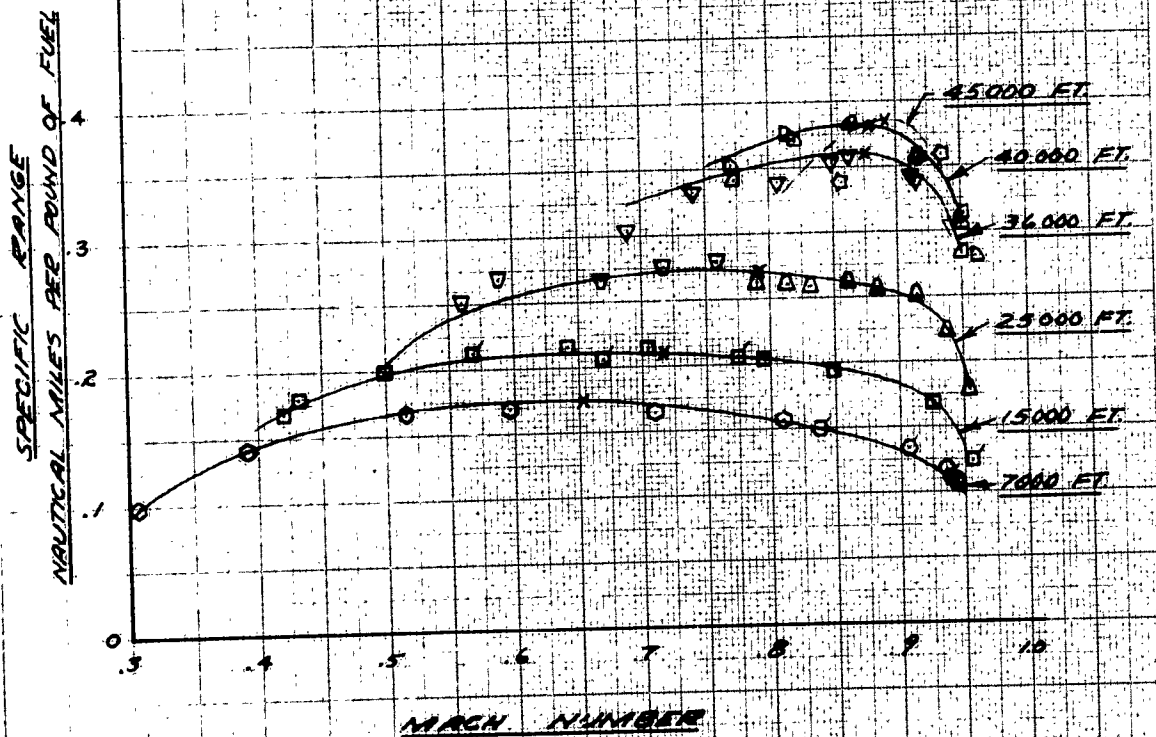


FIGURE NO 12
LEVEL FLIGHT PERFORMANCE
SPEED BRAKE EXTENDED
T-38A USAF S/N 58-1194
J85-GE-5 ENGINES S/N'S
230185 AND 230186
WEIGHT 10000 LB
ALTITUDE 25000 FT

FLIGHT 39, RUN 1

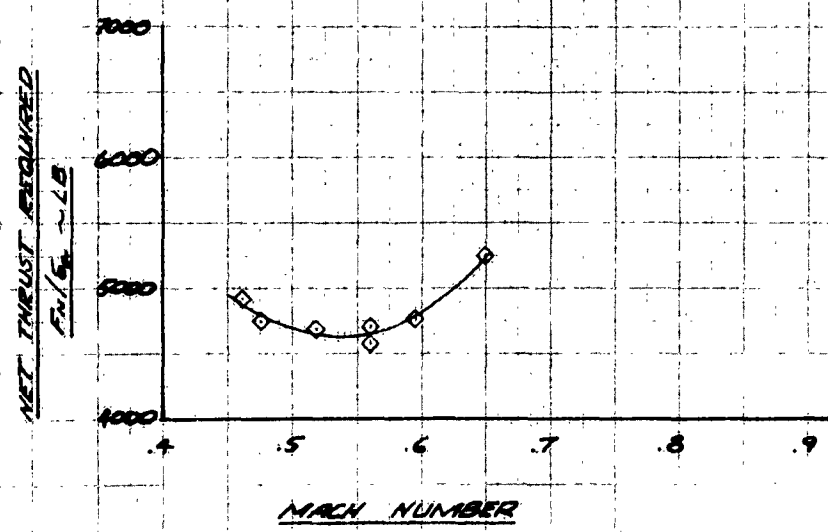
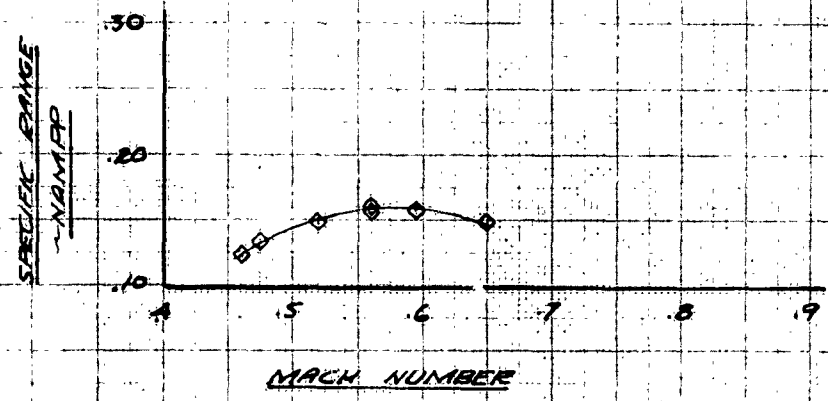


FIGURE NO 13
 LEVEL FLIGHT DRAG POLAR
 F-38A USAF S/N 58-1194
 185-56-5 FINNES S/N'S
 230185 AND 230186
 WEIGHT 10000 LB


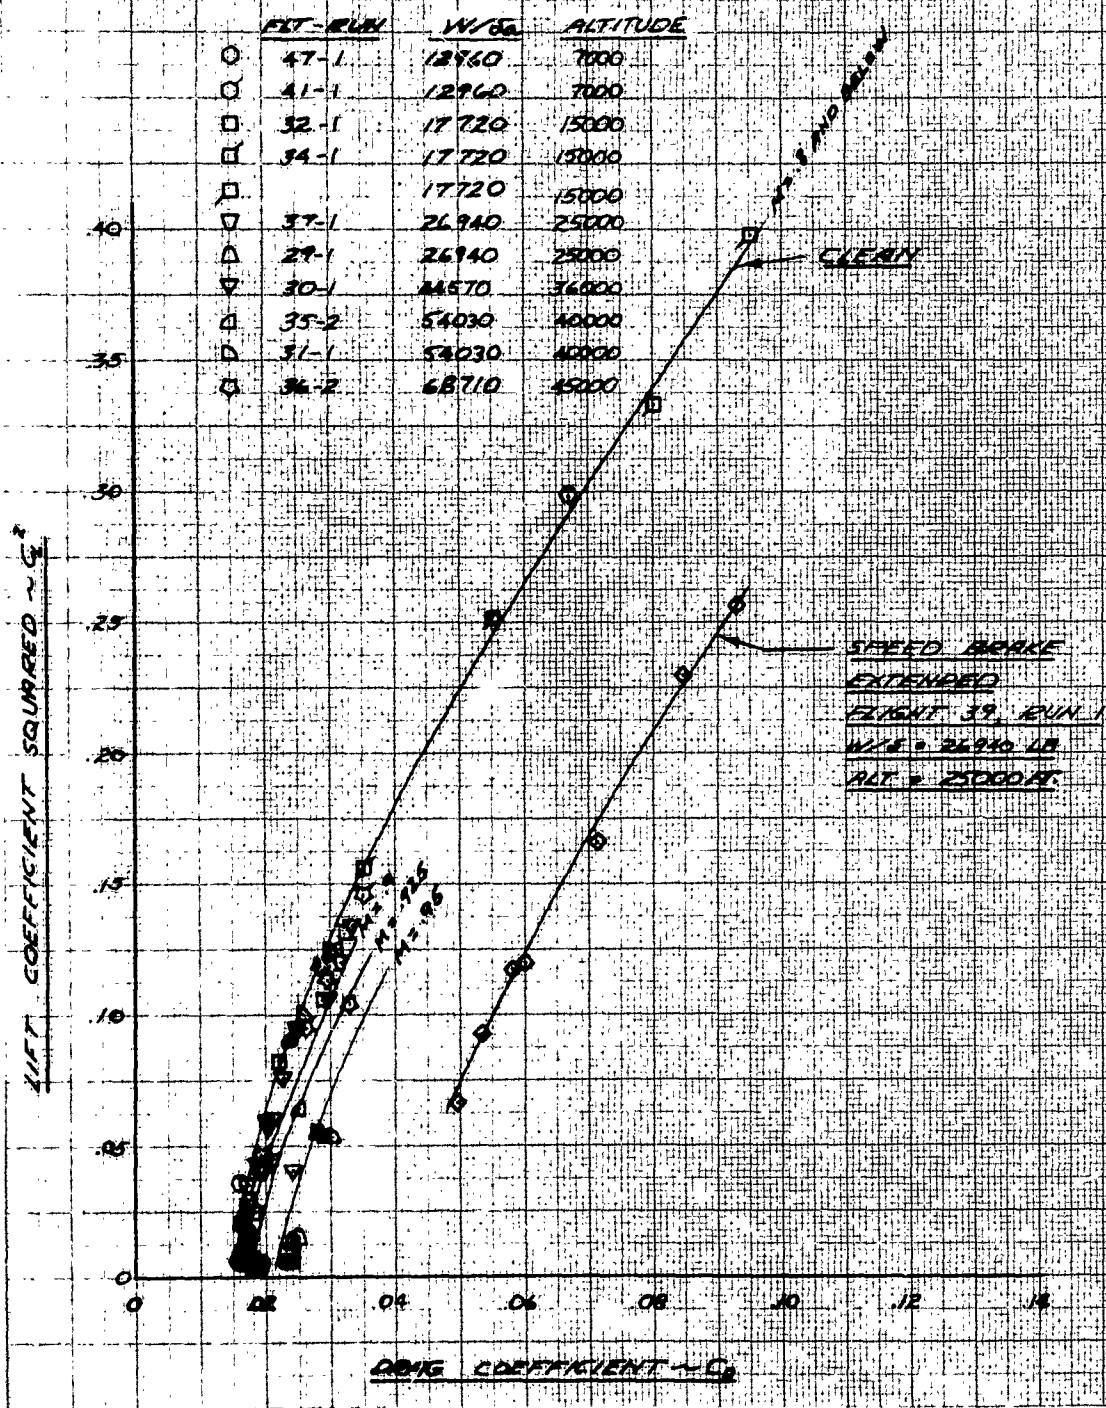


FIGURE NO 14
LEVEL FLIGHT PERFORMANCE
SINGLE ENGINE
T-38A USAF S/N 58-1194
J85-GE-5 ENGINES S/N'S
230185 AND 230186
WEIGHT 10000 LB

| FLT | ENGIN | ALTITUDE | W/S ₀ |
|-----|-------|----------|------------------|
| □ | 43 | 20000 | 21760 |
| ○ | 44 | 7000 | 12960 |
| △ | 45 | 15000 | 17720 |

SPEED/ALTITUDE
 MACH NUMBER

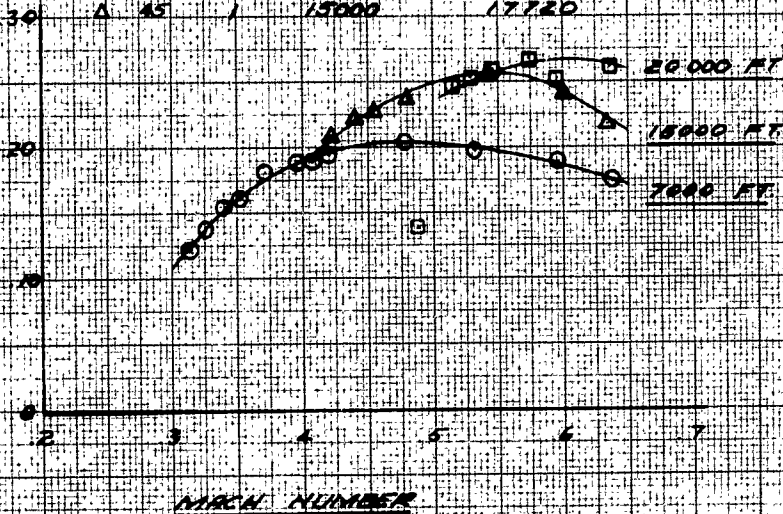

NET THRUST REQUIRED
 ENGIN - LB

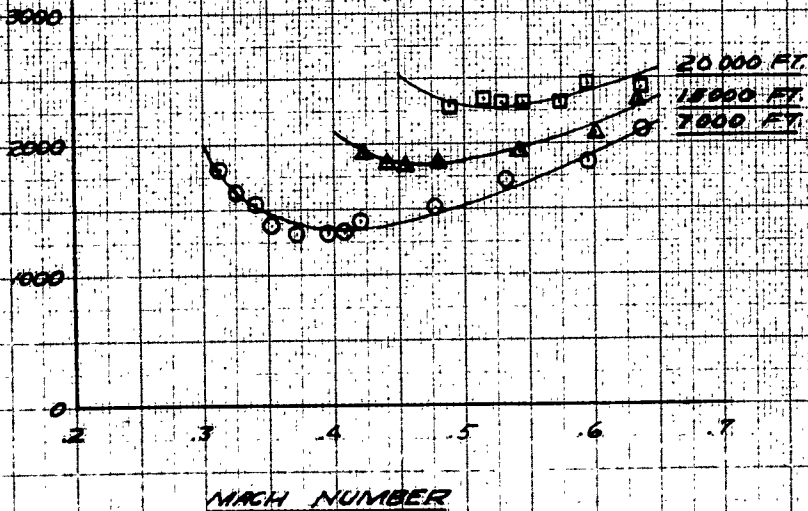


FIGURE NO 15
LEVEL FLIGHT DRAG POLAR
T-38A USAF S/N 58-1174
J85-GE-5 ENGINE S/N 230185

| | <u>FLT</u> | <u>RUN</u> |
|---|------------|------------|
| □ | 43 | 1 |
| ○ | 46 | 1 |
| △ | 45 | 1 |

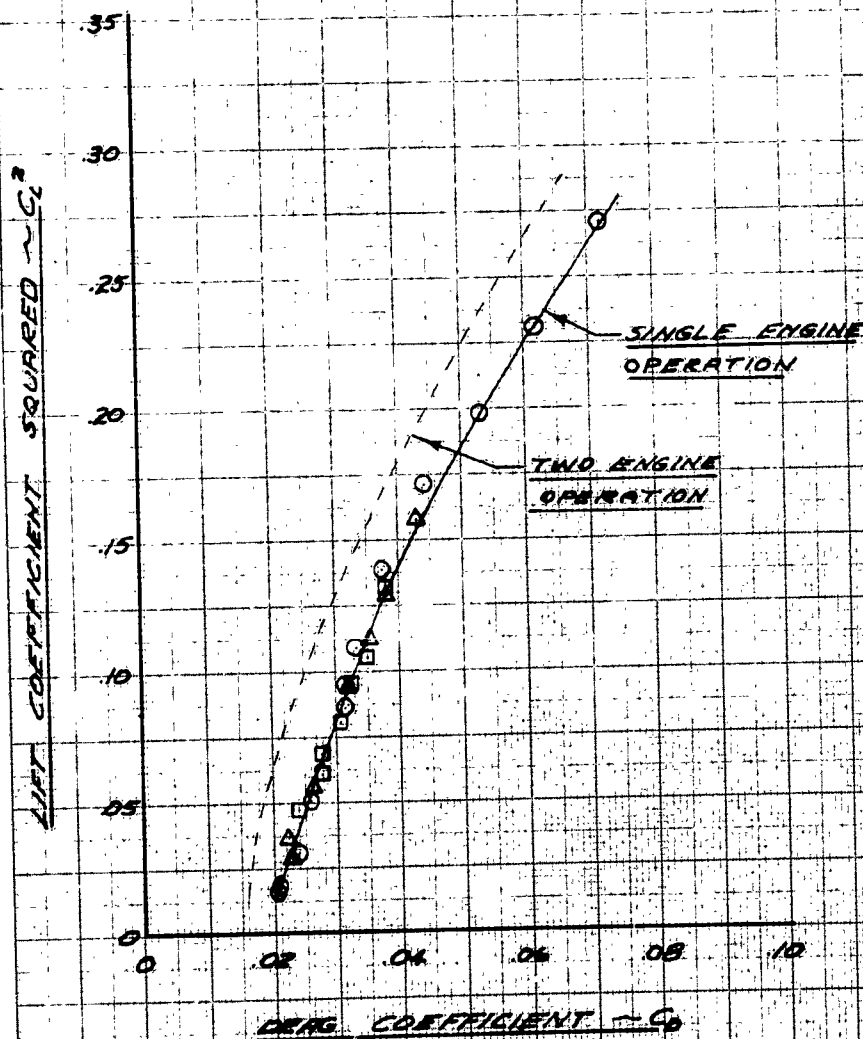


FIGURE NO 16
LEVEL FLIGHT PERFORMANCE
LANDING GEAR EXTENDED
T-38A USAF S/N 58-1194
J85-GE-5 ENGINES S/N'S
2301B5 AND 2301B6
ALTITUDE = 7000 FT
WEIGHT = 10000 LB

ALT. RUN CONDITION

- 47-2 NO FLAPS
- 39-2 NO FLAPS
- 48-2 NO FLAPS
- 48-2 45% FLAPS
- 48-2 100% FLAPS
- 37-2 100% FLAPS



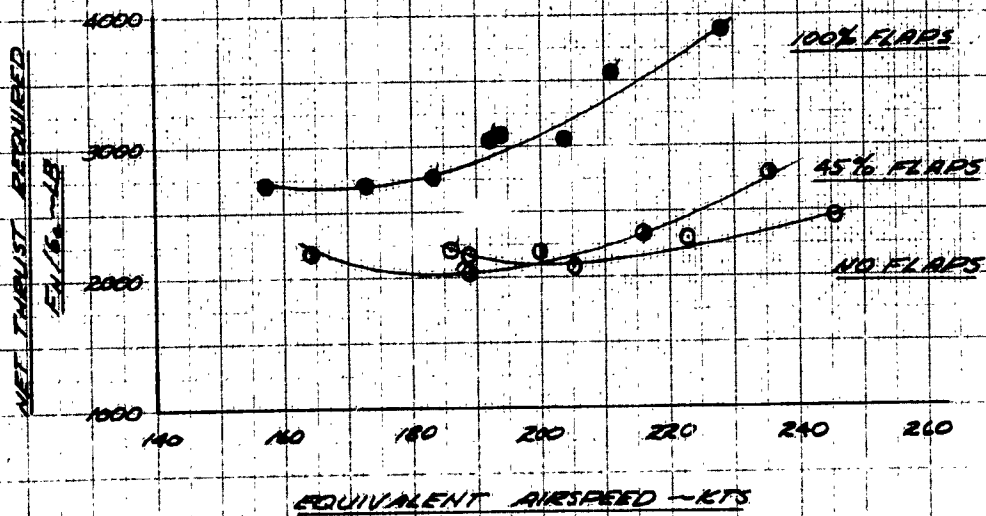


FIGURE NO 17
LEVEL FLIGHT DRAG POLAR
LANDING GEAR EXTENDED
T-38A USAF S/N 58-1194
J85-GE-5 ENGINES S/N'S
230185 AND 230186
7000 FT., W/S = 12,960 LB.

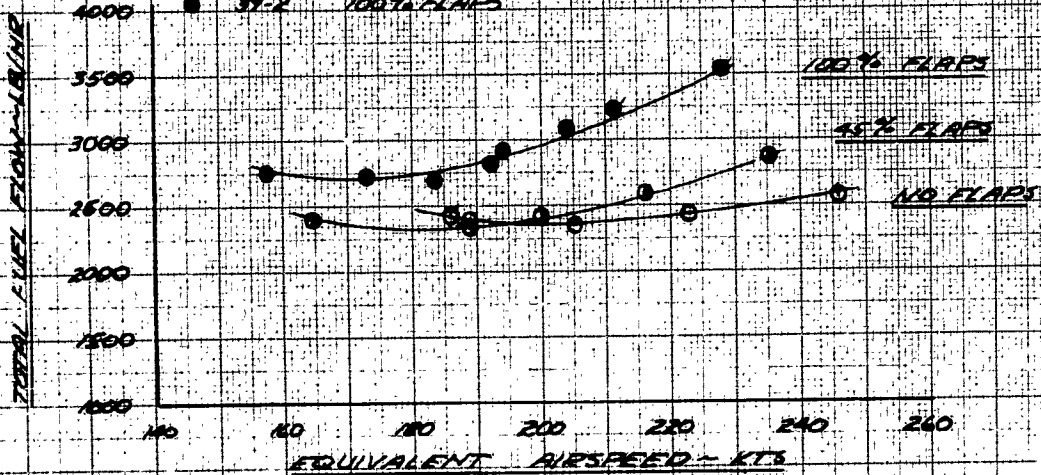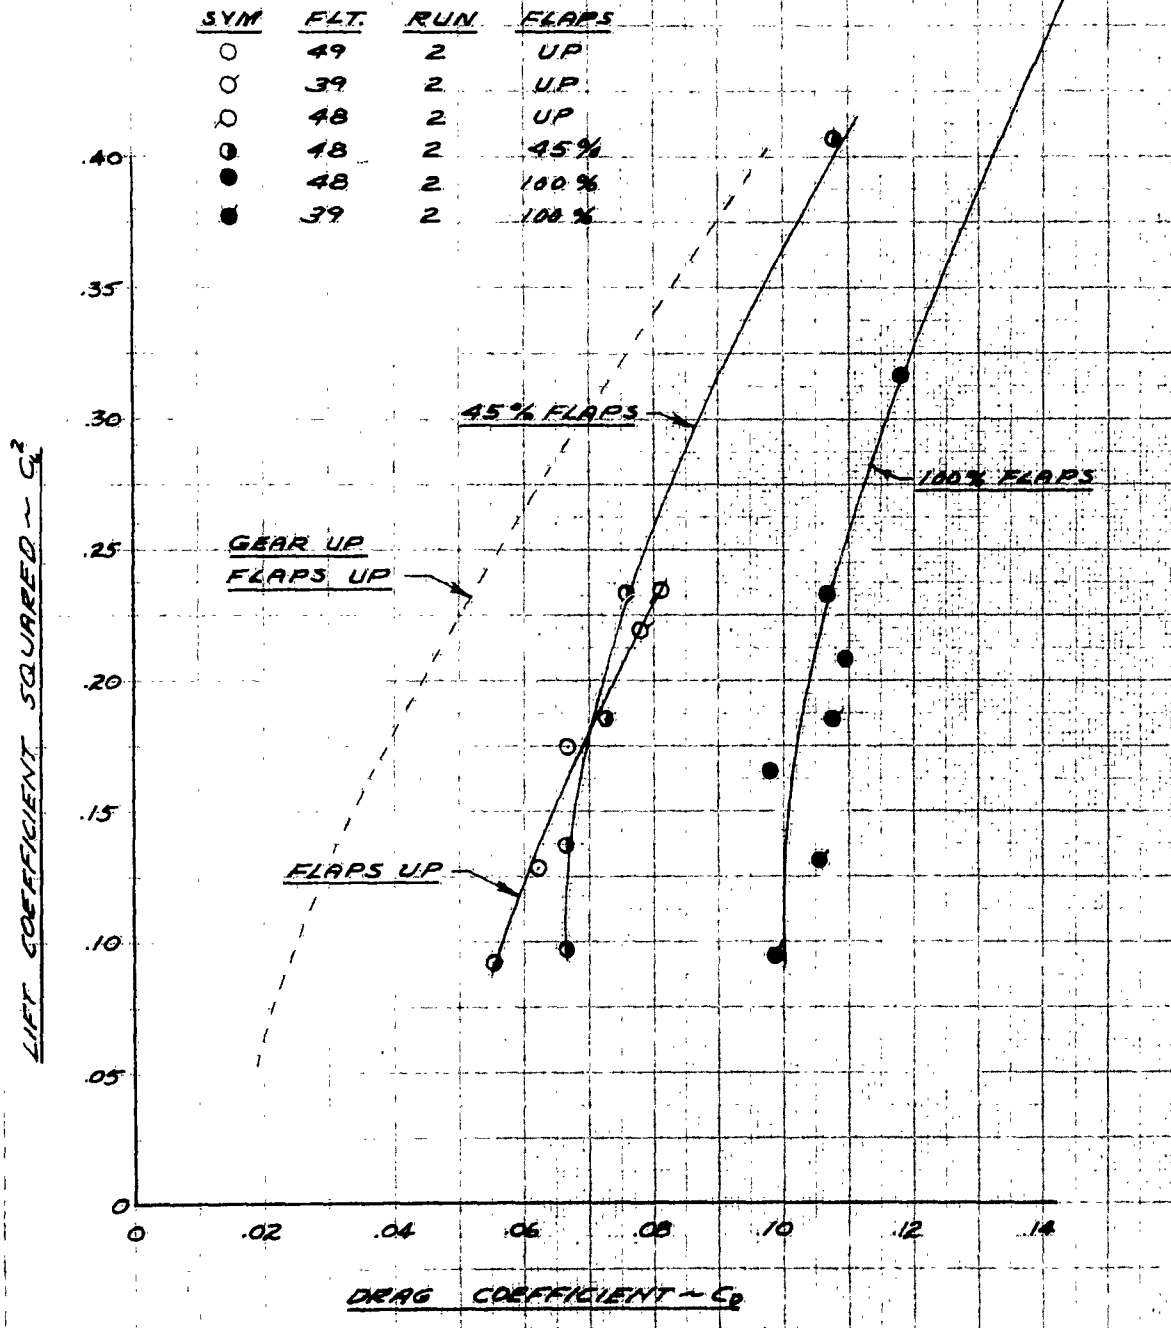

THIS PAGE LEFT BLANK FOR CONVENIENCE OF PRINTER

FIGURE NO. 18
 FERRY RANGE MISSION
 T-38A USAF S/N 88-1194
 J85-GE-5 ENGINES S/N'S 230185 AND 230186
 FLIGHT NO. 47

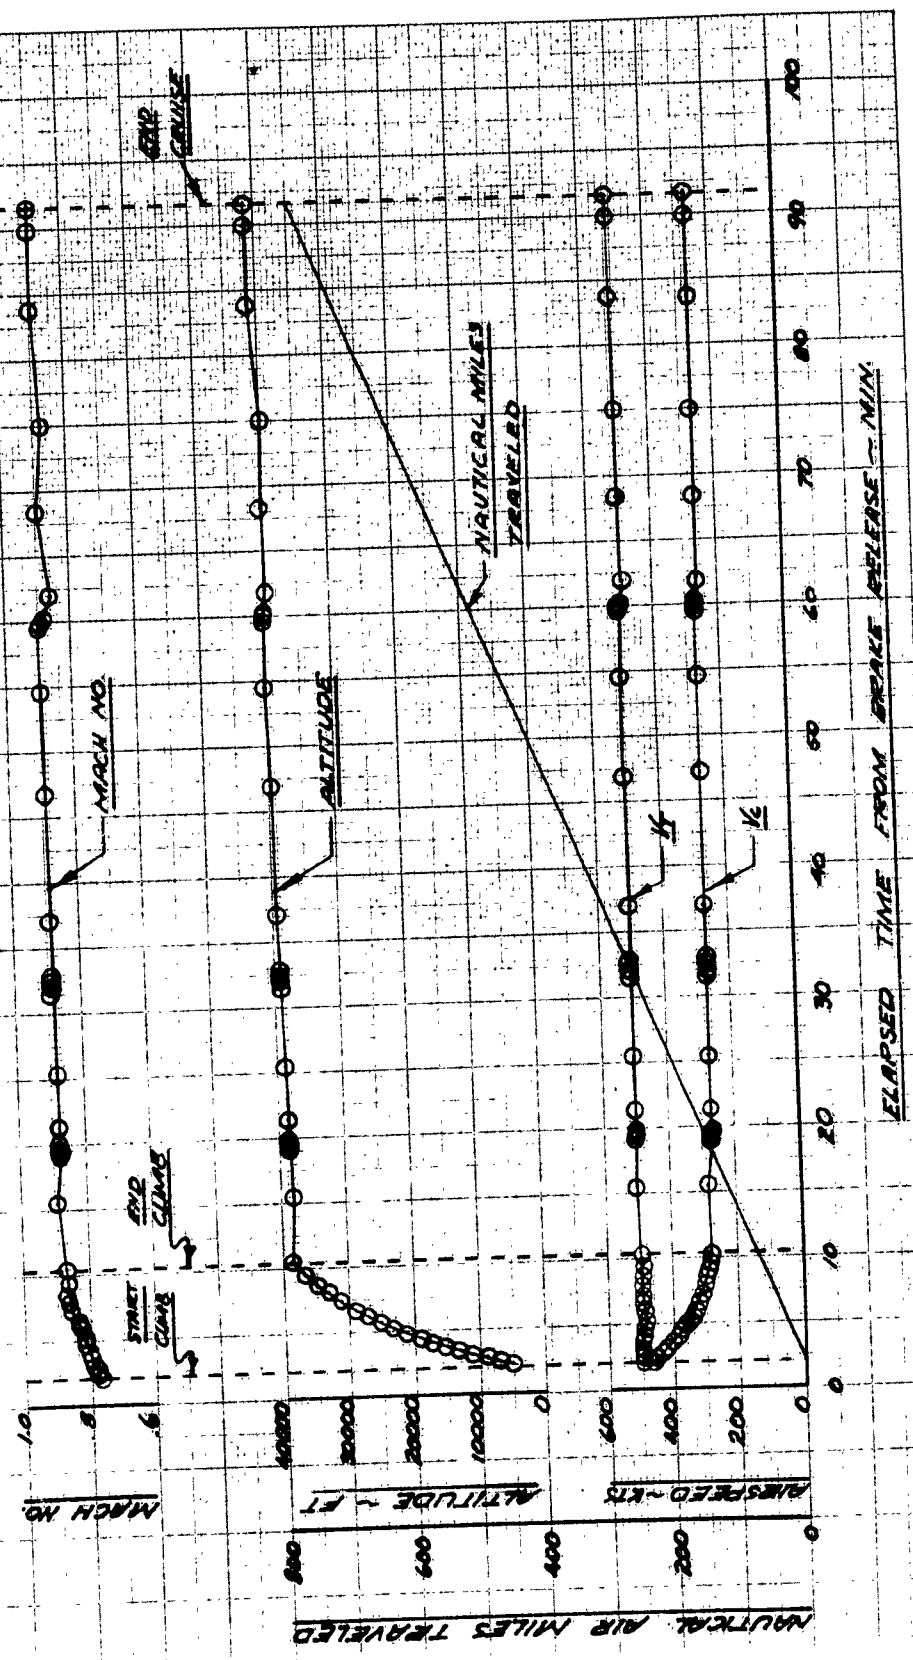


FIGURE NO 10 CONT
 ENERGY RANGE MISSION
 T-38A USAF 5/11/74

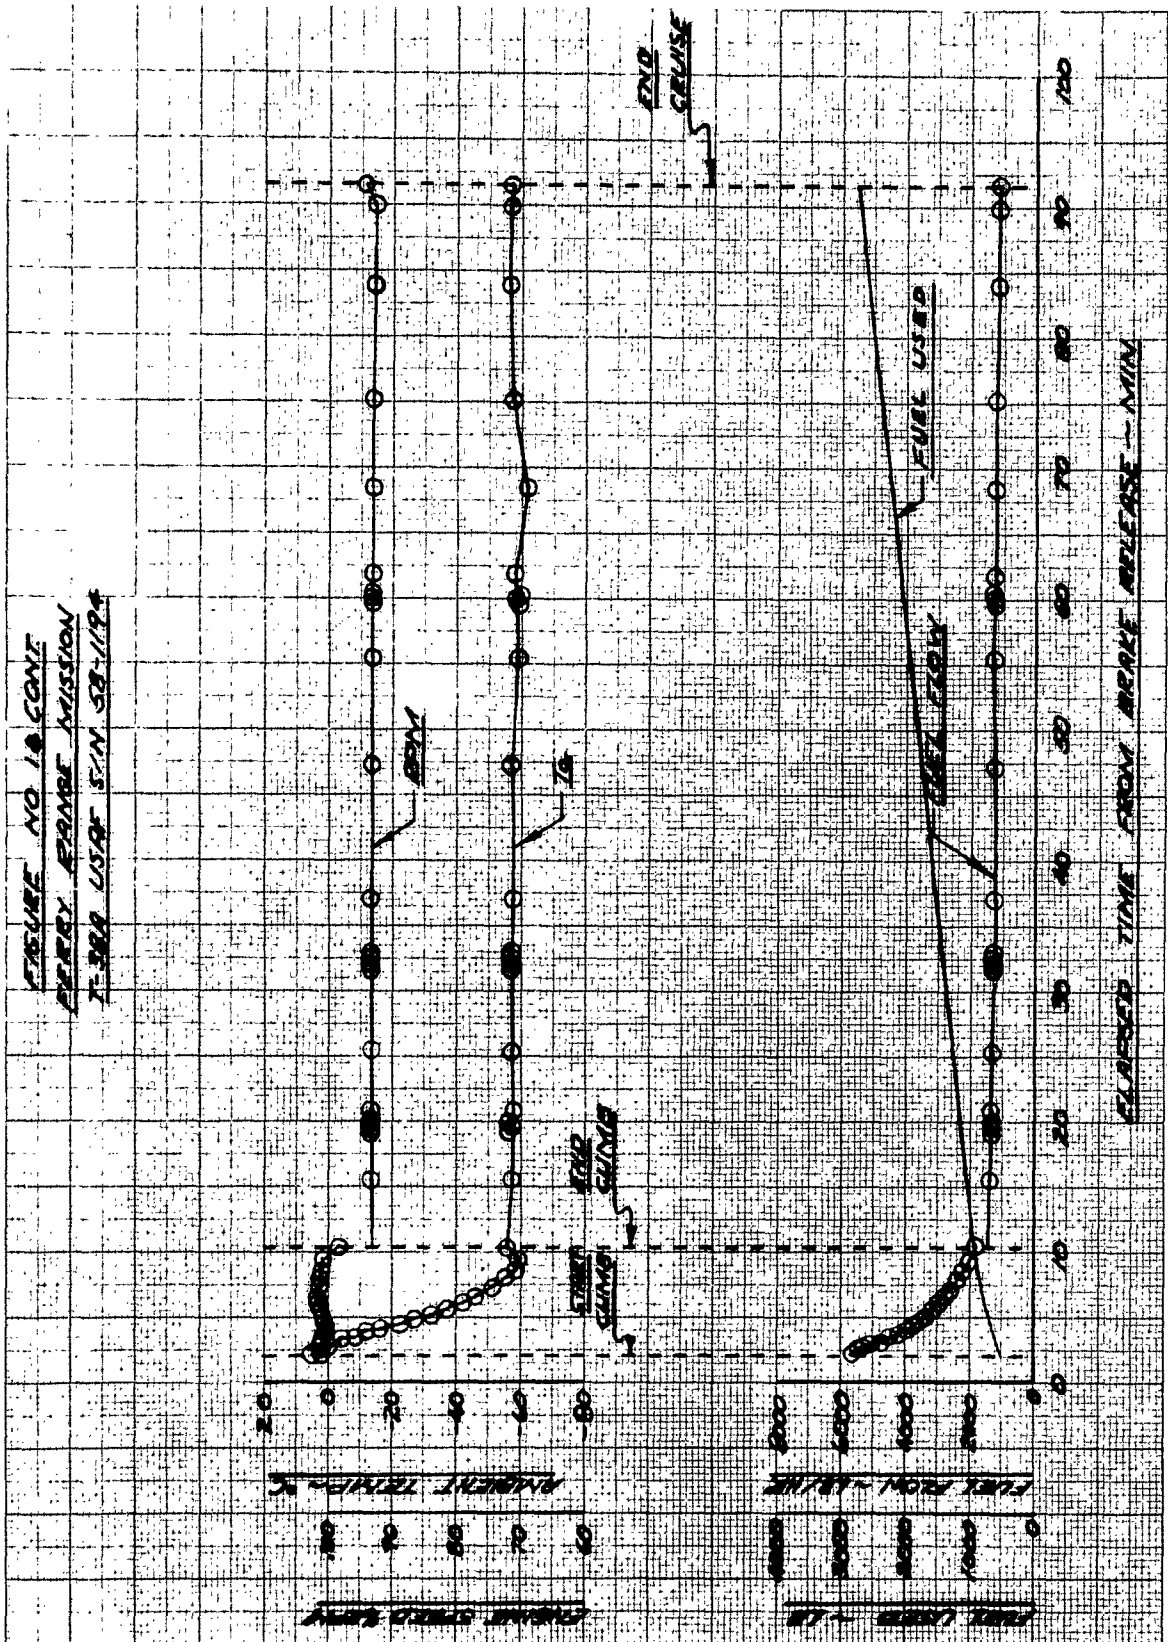


FIGURE NO. 19
THRUST AVAILABLE AND REQUIRED
T-38A USAF SN 67-1178
JTF-8E-C ENGINE SNA
ENGINE AND EXHAUST
ALTITUDE 6000 FT
WEIGHT 18000 LB.

- MAXIMUM POWER
WEIGHT 20 RUNS 3 AND 4
 - MILITARY POWER
WEIGHT 20 RUNS 2 AND 3
- DATA OBTAINED FROM
LEVEL ACCELERATIONS
- THRUST REQUIRED CURVE
WAS OBTAINED FROM
FIGURE NO. 13

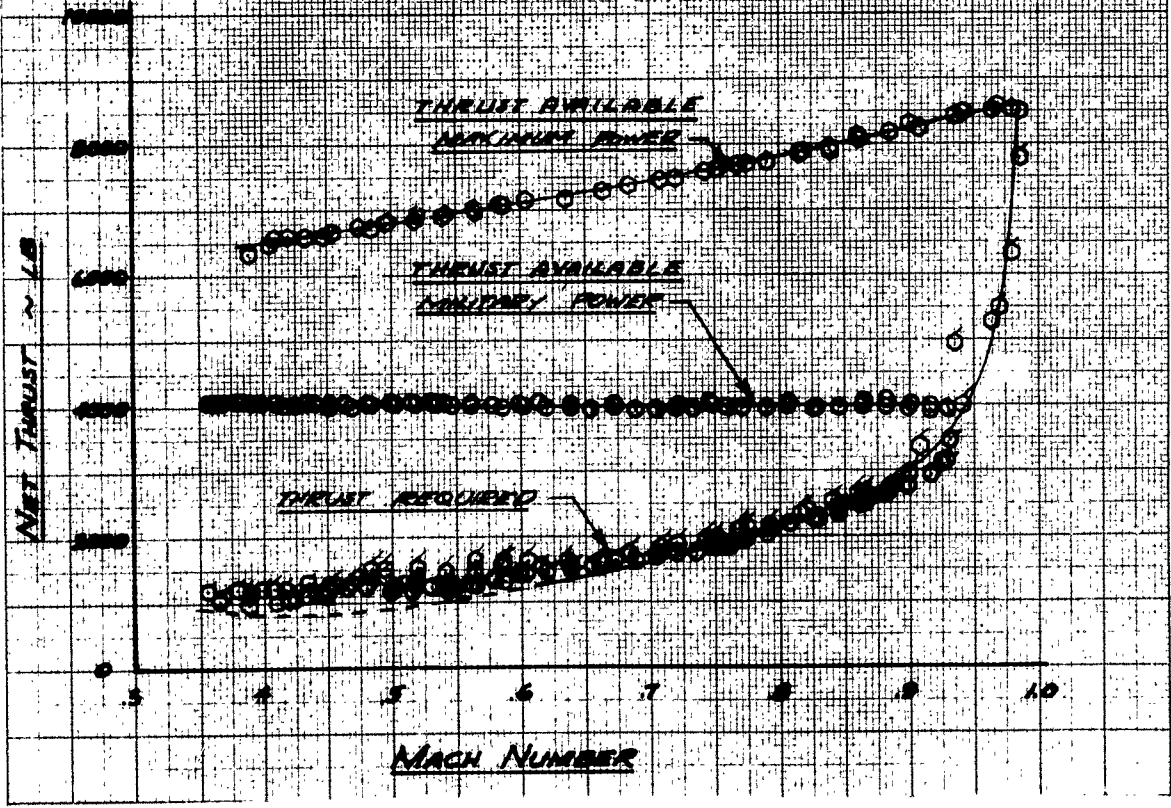


FIGURE NO 20
THRUST AVAILABLE AND REQUIRED
T-38A USAF S/N 62-1194
JRS-GE-5 ENGINES S/N 2
250185 AND 250186
ALTITUDE 15000 FT
WEIGHT 10000 LB.

□ MAXIMUM POWER
FLIGHT 27 RUN 4

◇ MILITARY POWER
FLIGHT 23 RUNS 3 AND 4

DATA OBTAINED FROM
LEVEL ACCELERATIONS

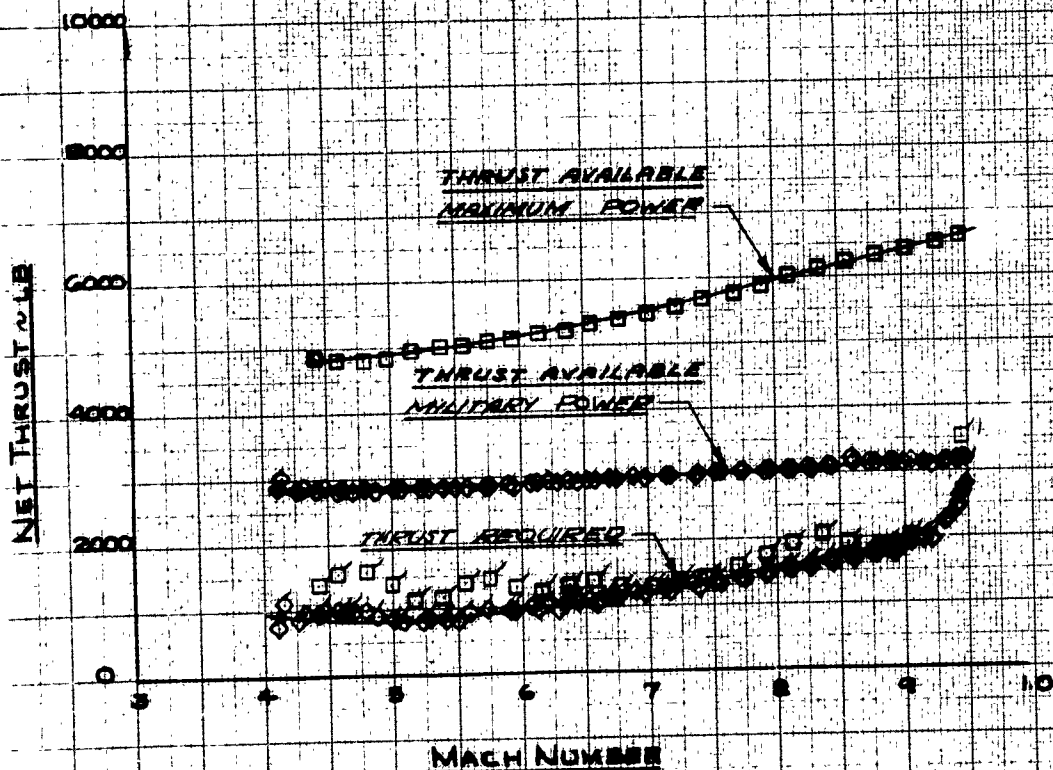


FIGURE NO. 21
THRUST AVAILABLE AND REQUIRED
F-35A USAF SIN 58-1174
J85-GE-5 ENGINES SIN 5
230185 AND 230186
ALTITUDE 25000 FT
WEIGHT 10000 LB

△ MAXIMUM POWER
FLIGHT 8 RUNS 2 AND 3
FLIGHT 19 RUNS 2 AND 3

○ MILITARY POWER
FLIGHT 22 RUNS 5 AND 6

DATA OBTAINED FROM
LEVEL ACCELERATIONS


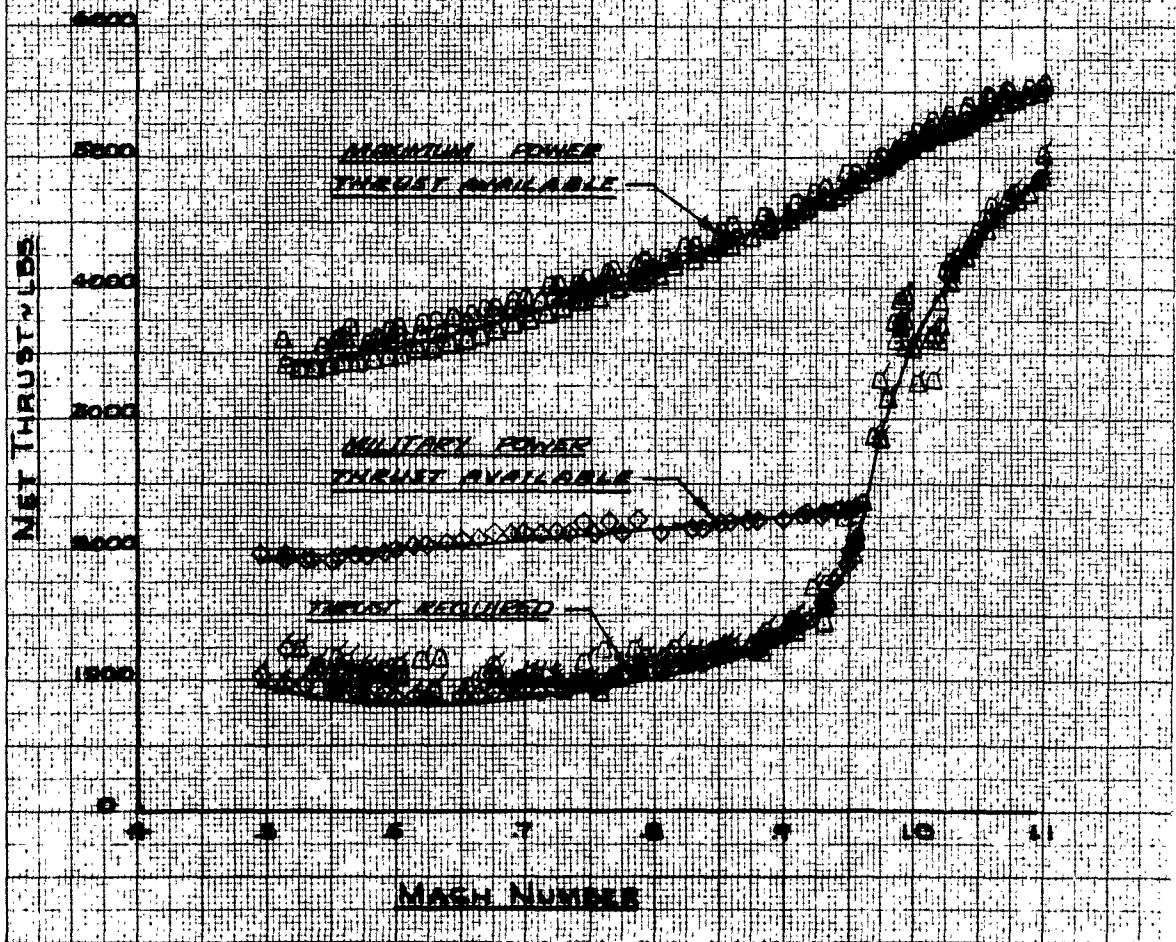



FIGURE NO. 22
THRUST AVAILABLE AND REQUIRED
F-30A USAF SIN 58-1186
T85-GE-5 ENGINES SIN'S
PROPS AND EXCISE
ALTITUDE 36000 FT
WEIGHT 40000 LB

▽ MAXIMUM POWER
FLIGHT 6 RUNS 2 AND 3

△ MILITARY POWER
FLIGHT 14 RUN 2
FLIGHT 24 RUNS 3 AND 4

DATA OBTAINED FROM
LEVEL ACCELERATIONS

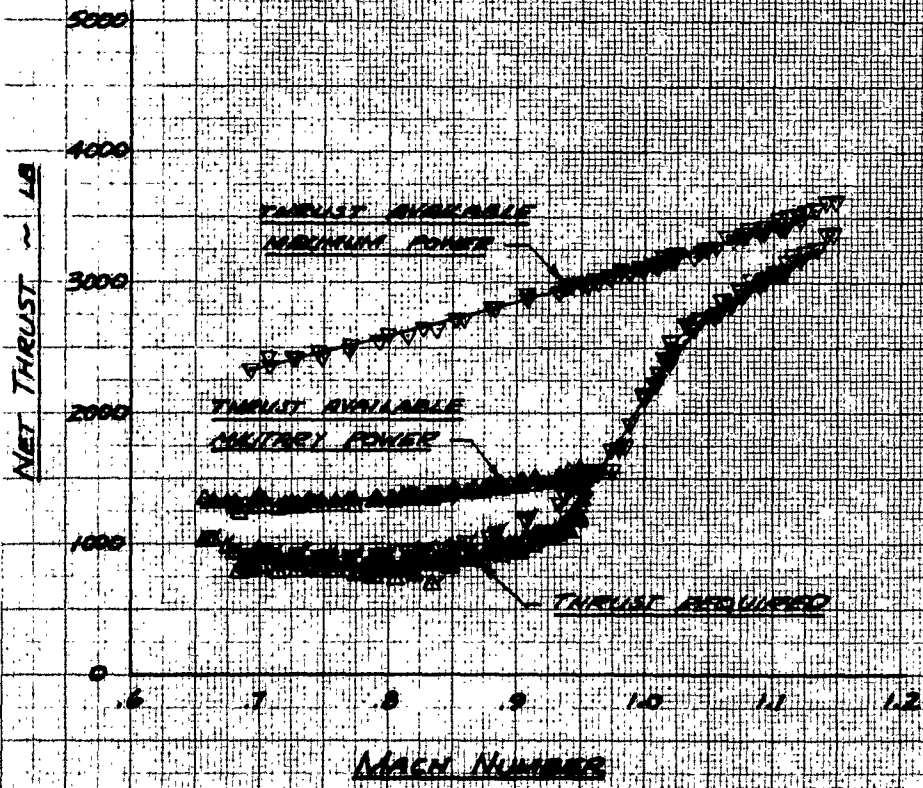

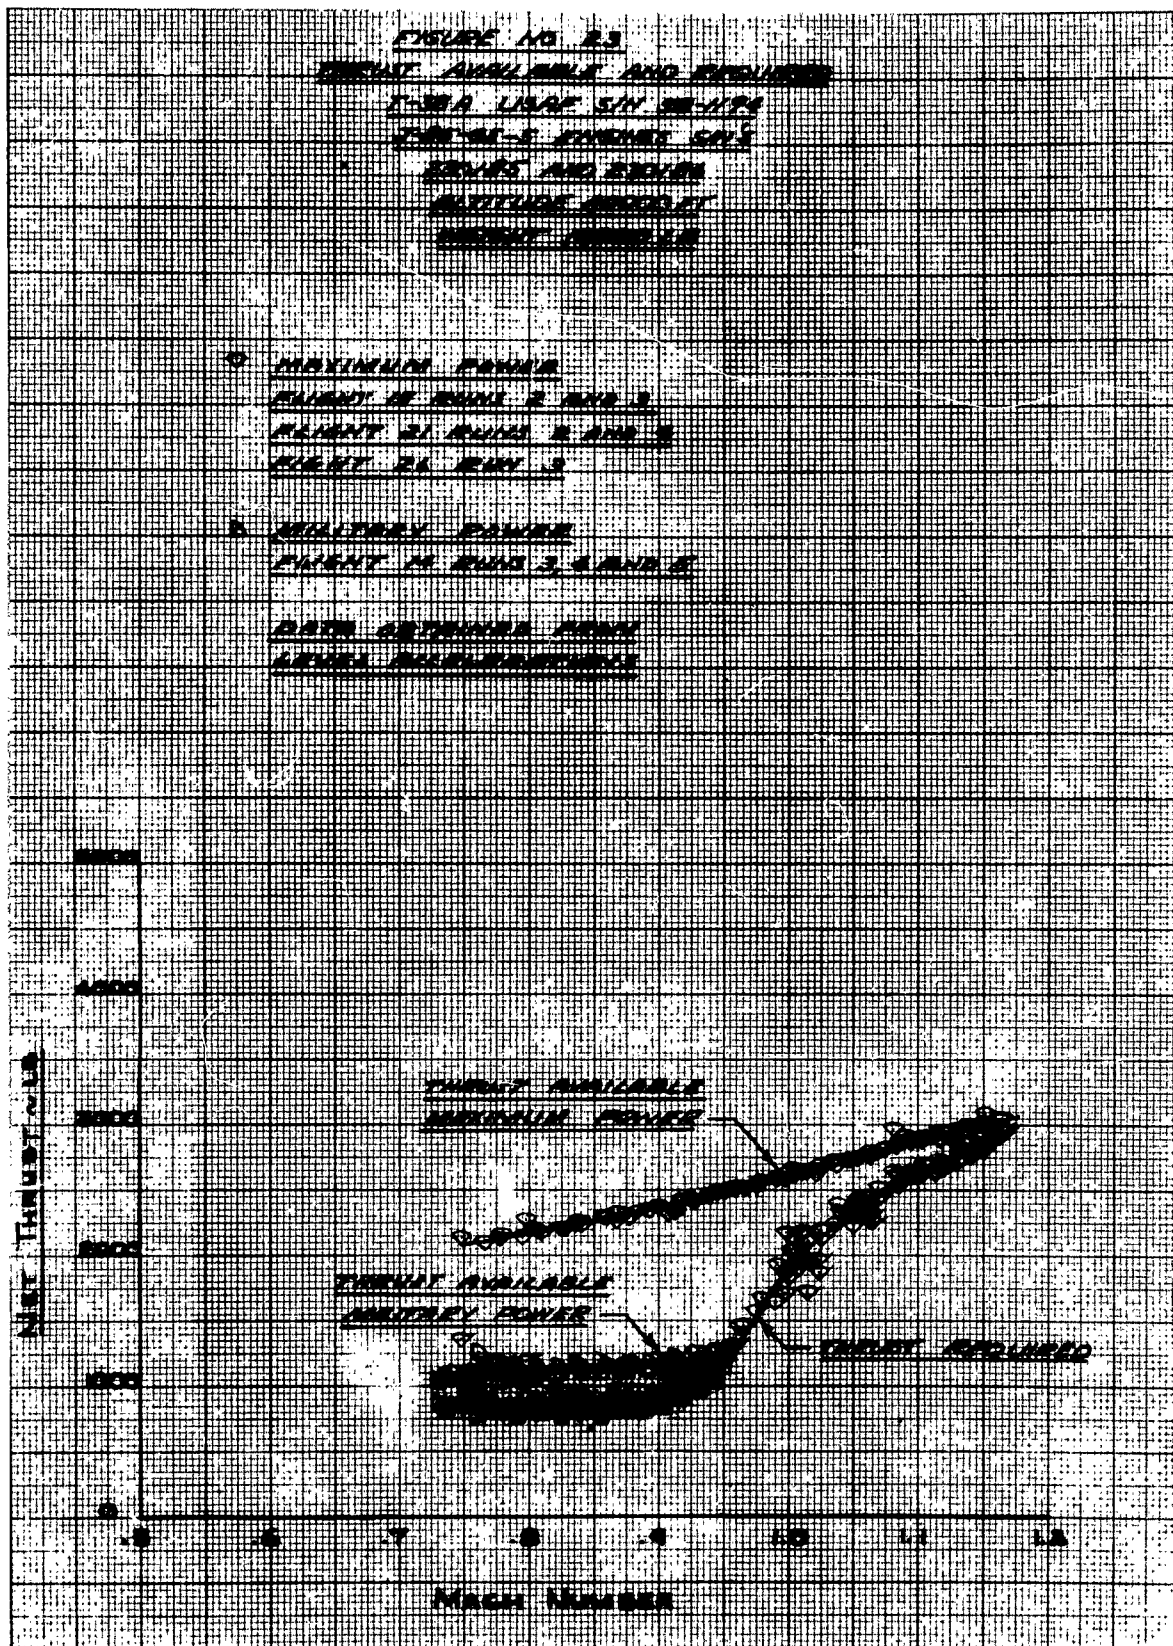

THRUST TO W
THRUST AVAILABLE AND REQUIRED
FOR LIFT 30 ST-114
THE SE-7 ENGINES SWS
ENGINE AND ENGINE
ALTITUDE AND ALT
WINDY 1000 LB

○ MAXIMUM POWER
FLIGHT 7 RUN 2 AND 3
DATA OBTAINED FROM
LEVEL ACCELERATIONS

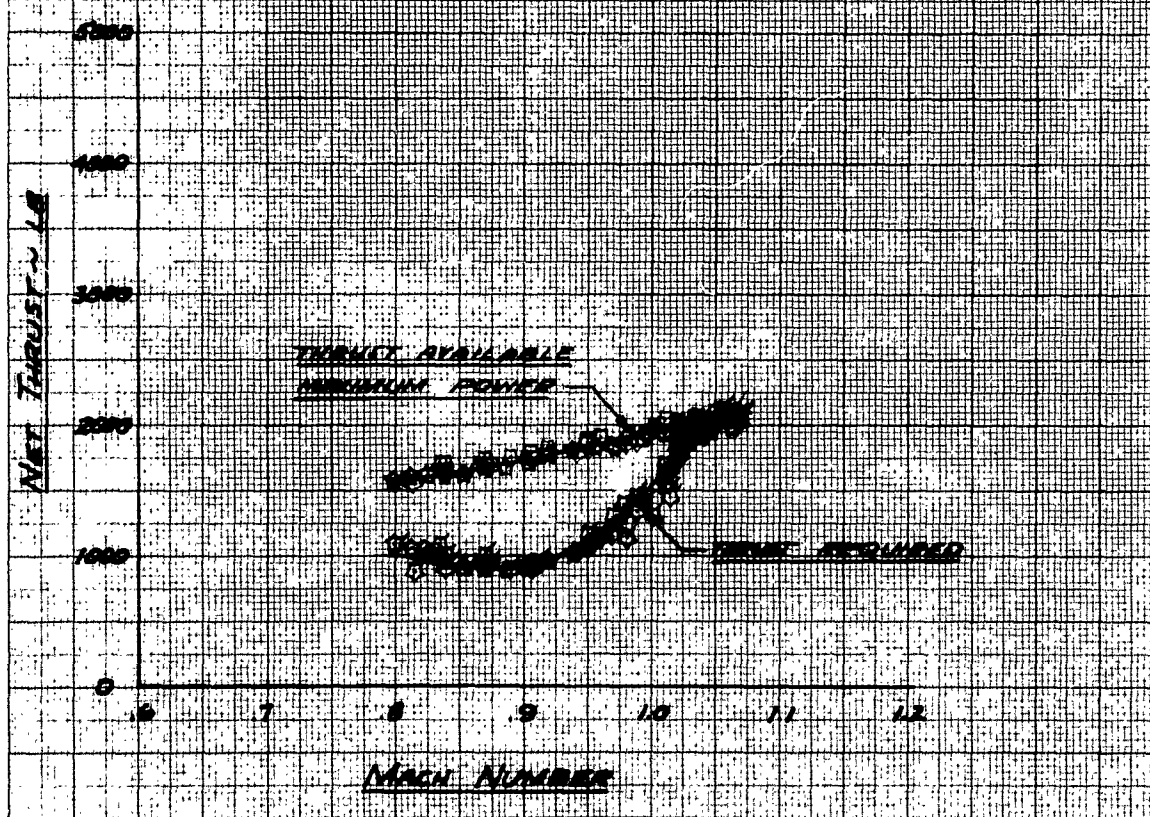


FIGURE NO. 25
MILITARY POWER ACCELERATION
TOTAL FUEL FLOW
T-38A USAF S/N 58-1194
J85-GE-5 ENGINES SINE
PROBES AND 220 LBS

| | <u>ALT.</u> | <u>FLT</u> | <u>RUNS</u> |
|---|-------------|------------|-------------|
| ○ | 5000 | 20 | 2, 5 |
| ○ | 15000 | 23 | 3, 4 |
| △ | 25000 | 23 | 3, 4 |
| △ | 36000 | 14 | 2 |
| △ | 36000 | 24 | 3, 4 |
| □ | 48000 | 14 | 3, 4, 5 |

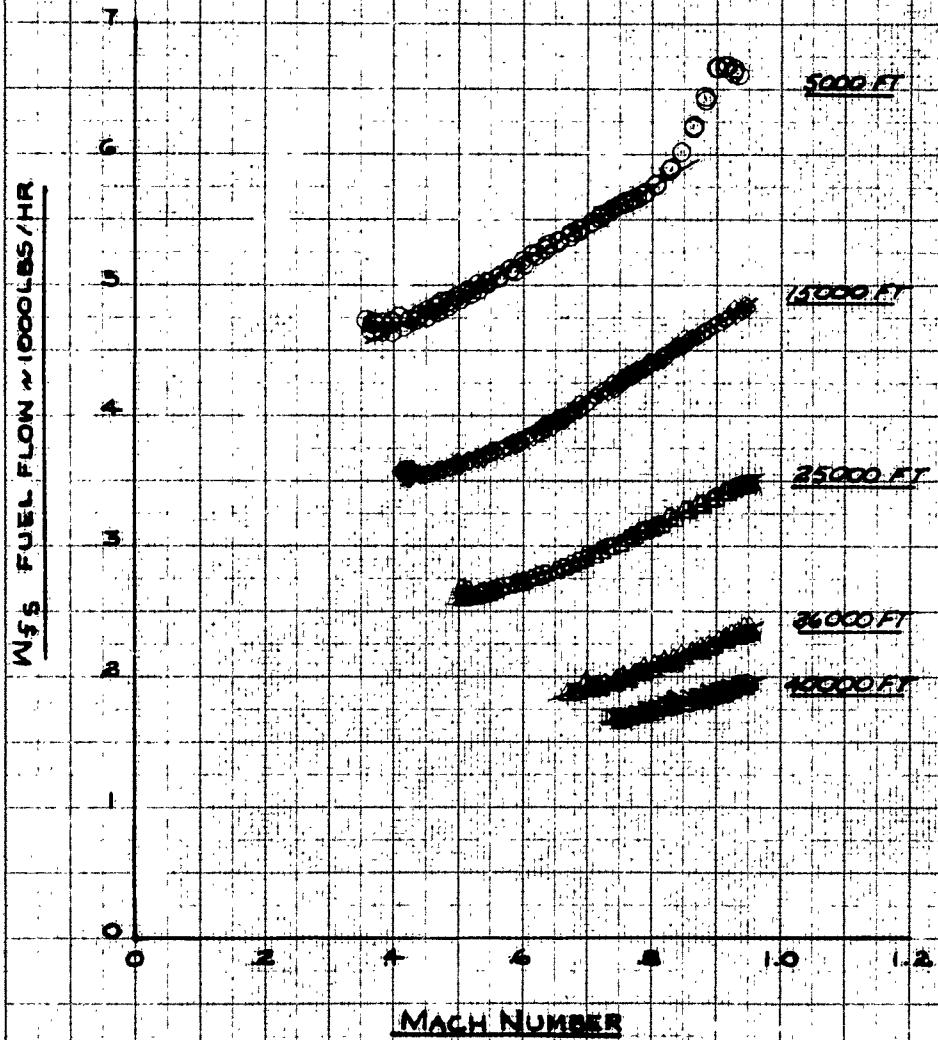


FIGURE NO. 26
MAXIMUM POWER ACCELERATION
TOTAL FUEL FLOW
T-38A 11500 SIN 50-1184
J85-GR-5 ENGINES SIN 14
23016 AND 23016

| | <u>ALT.</u> | <u>FLY.</u> | <u>RUNS</u> |
|---|-------------|-------------|-------------|
| ○ | 5000 | 20 | 3.4 |
| ◇ | 15000 | 27 | 4.5 |
| △ | 25000 | 8 | 2.9 |
| △ | 25000 | 19 | 2.3 |
| △ | 36000 | 6 | 2.3 |
| ◇ | 40000 | 15 | 2.3 |
| ◇ | 40000 | 21 | 2.4 |
| ◇ | 40000 | 26 | 3 |
| ◇ | 45000 | 7 | 2.3 |



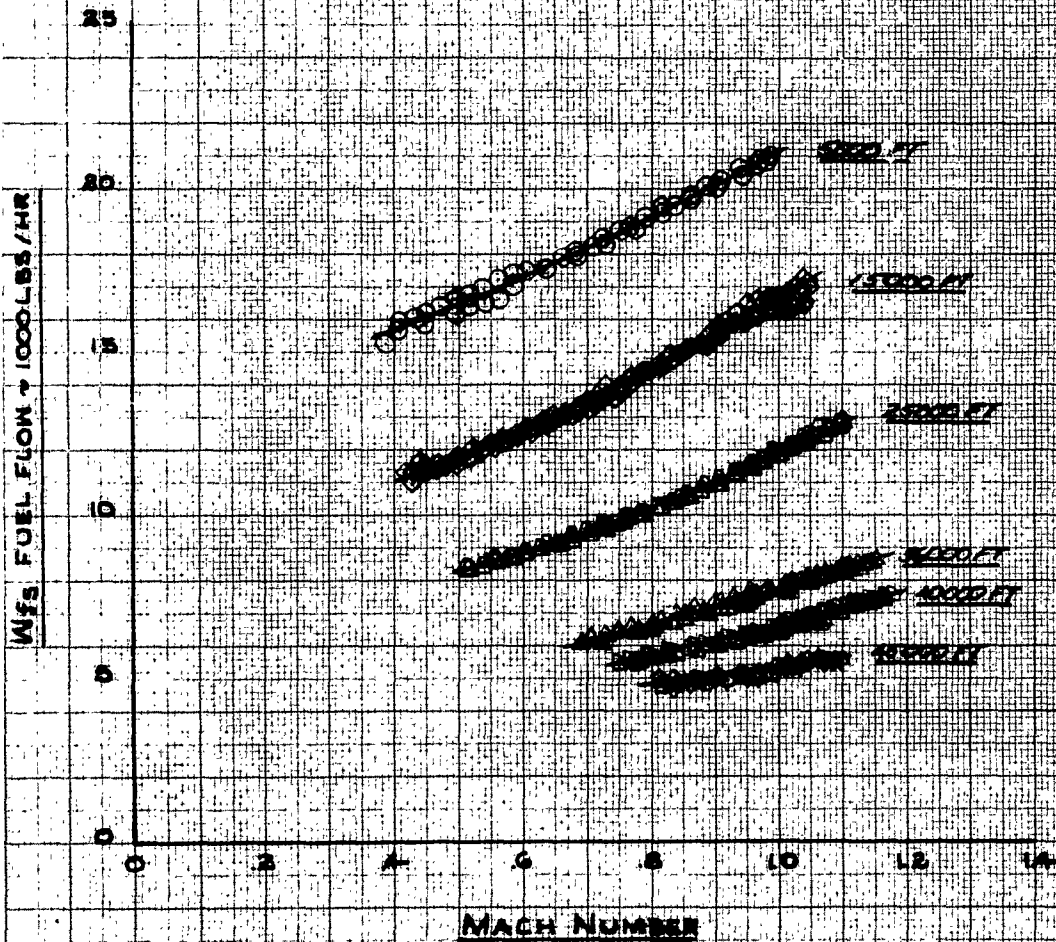


FIGURE 110-27
 ICE-BRINE ACCIDENT
 740 HOURS
 1000 HOURS - 1000 HRS
 1000 HOURS - 1000 HRS
 1000 HOURS - 1000 HRS

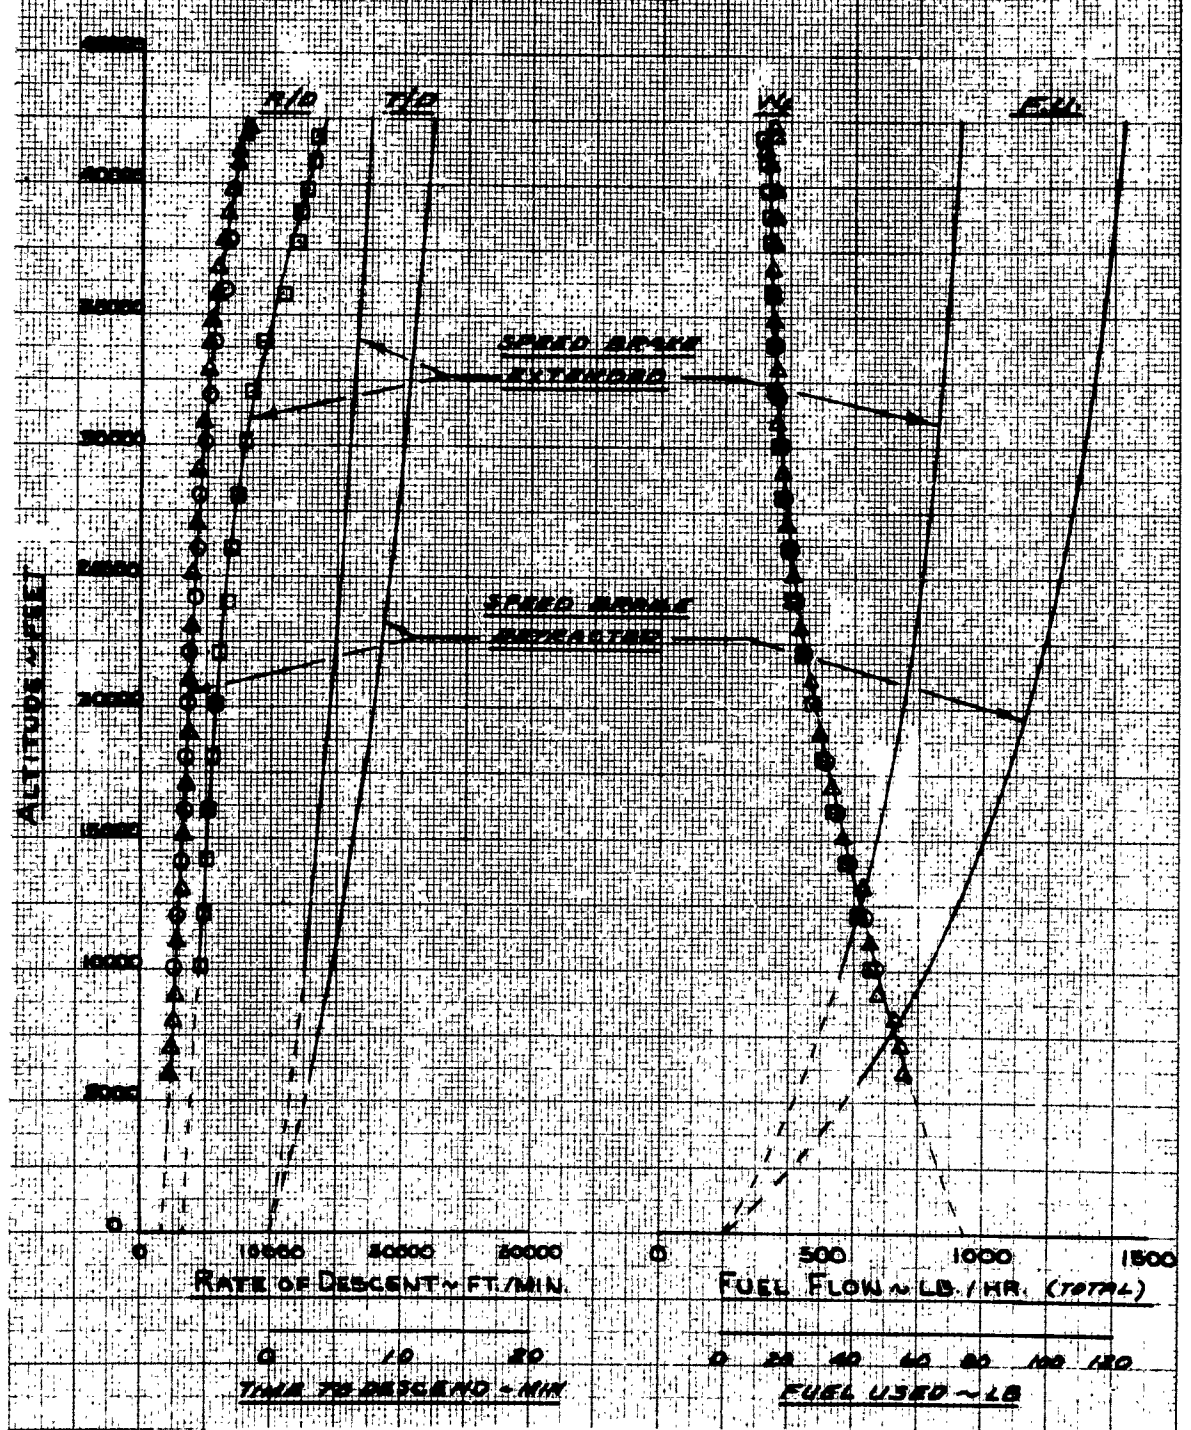

PROFILE NO. 21 CONT.
IDLE POWER DESCENT
220 KNOTS

| SYM | FEET-RUN | AIR WT. |
|-----|----------|-----------|
| O | 5-5 | 9900 LBS. |
| D | 6-5 | 9200 LBS. |
| A | 15-7 | 9140 LBS. |

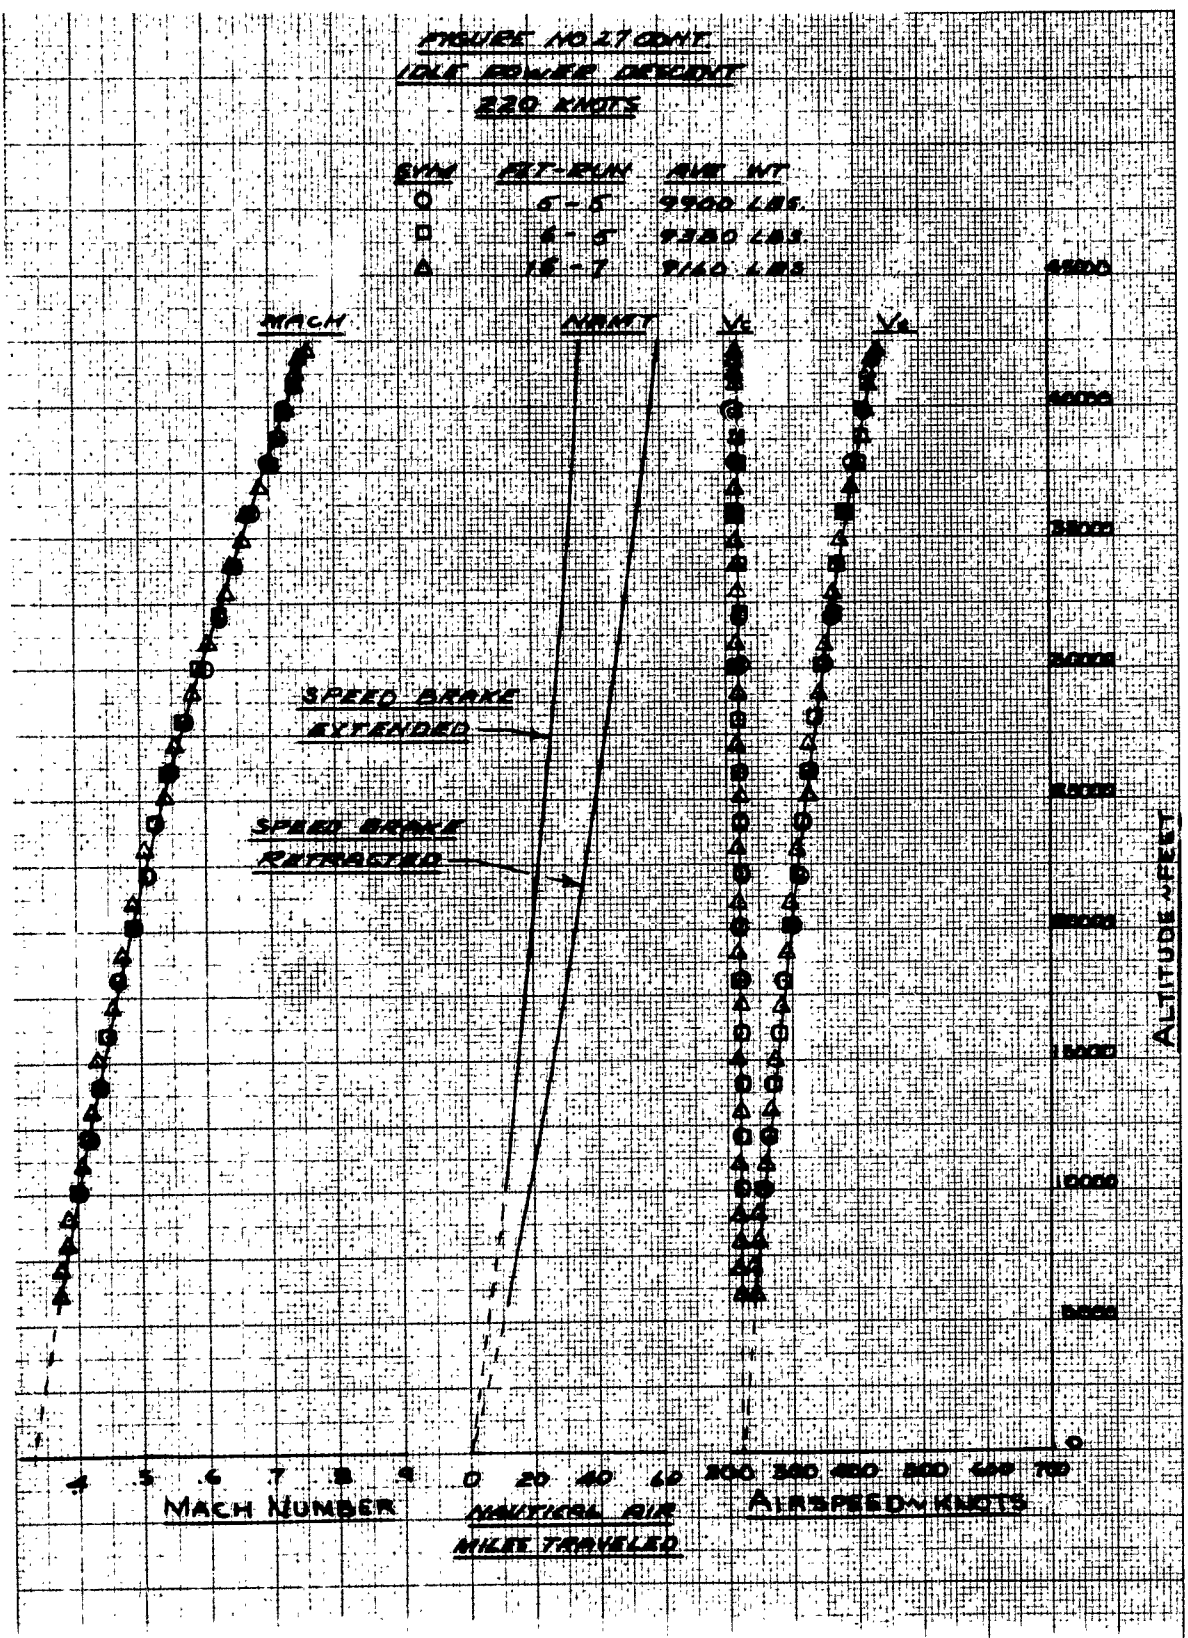

PROFILE NO. 28
 IDLE POWER DESCENT
 250 KNOTS
 TEST UNIT 311 52-1194
 100-11-5 100000 511-5
 100000 511-5

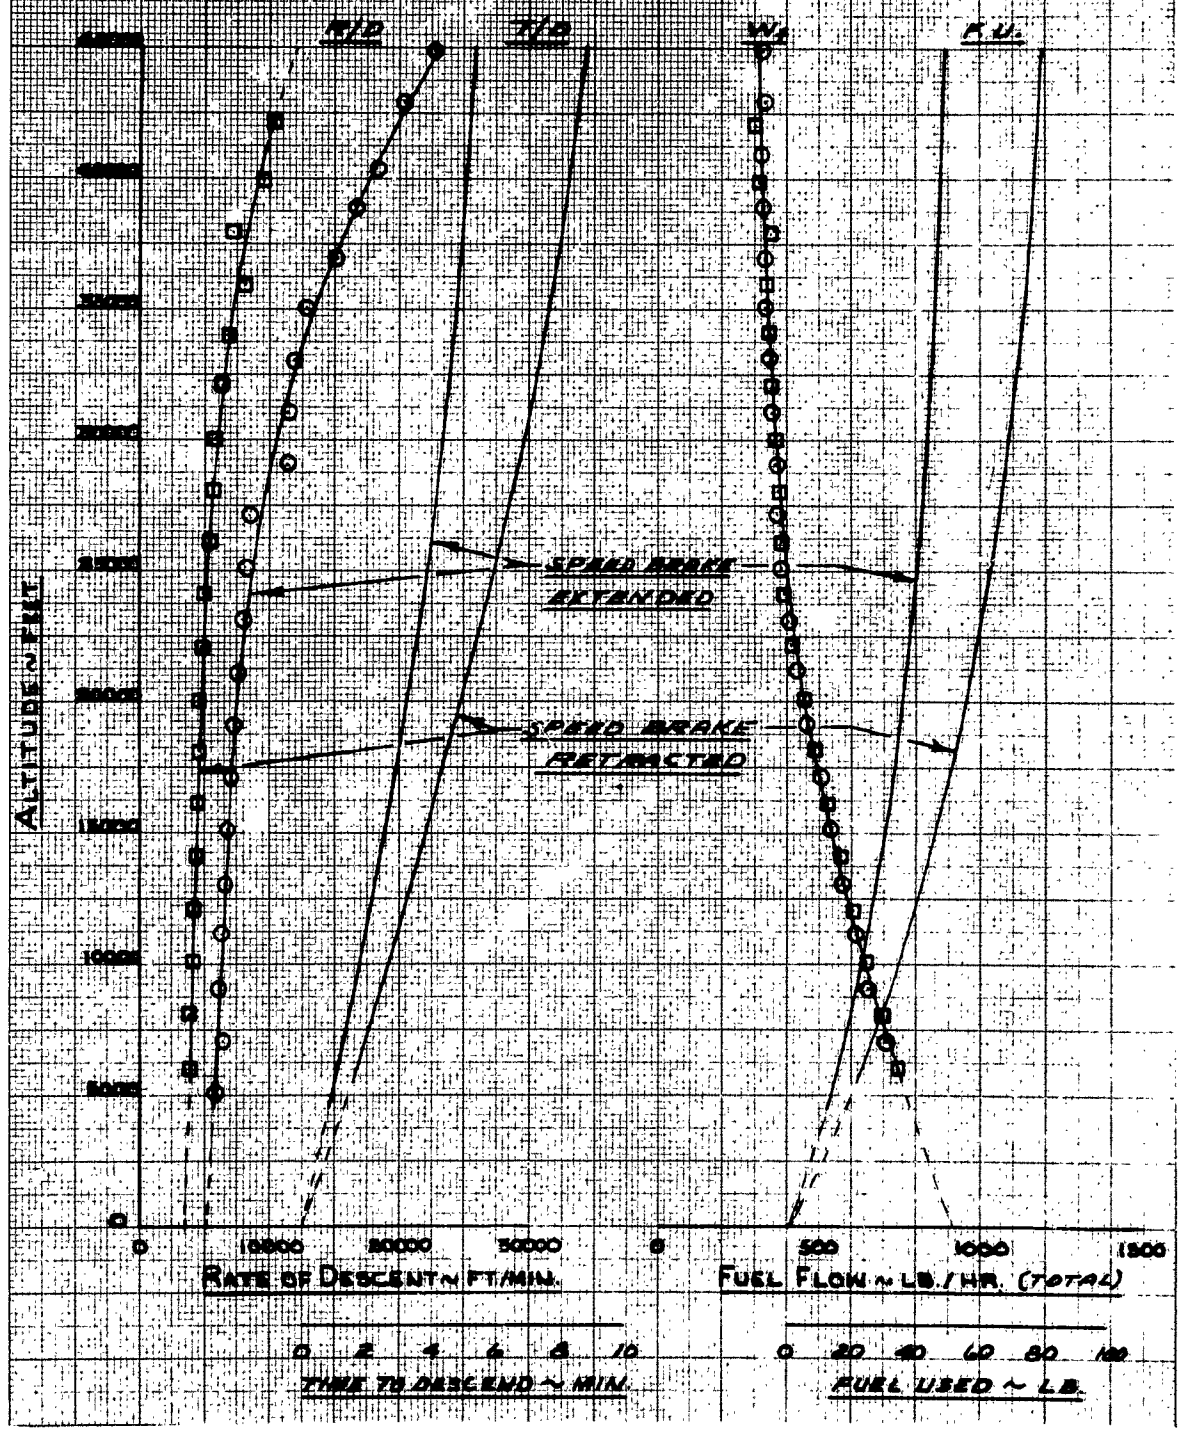


FIGURE NO. 28 CONT.
IDLE POWER DESCENT

260 KNOTS

| <u>SYM</u> | <u>EXT-RUN</u> | <u>WE WT</u> |
|------------|----------------|--------------|
| ○ | 7-5 | 9250 |
| □ | 8-6 | 9170 |

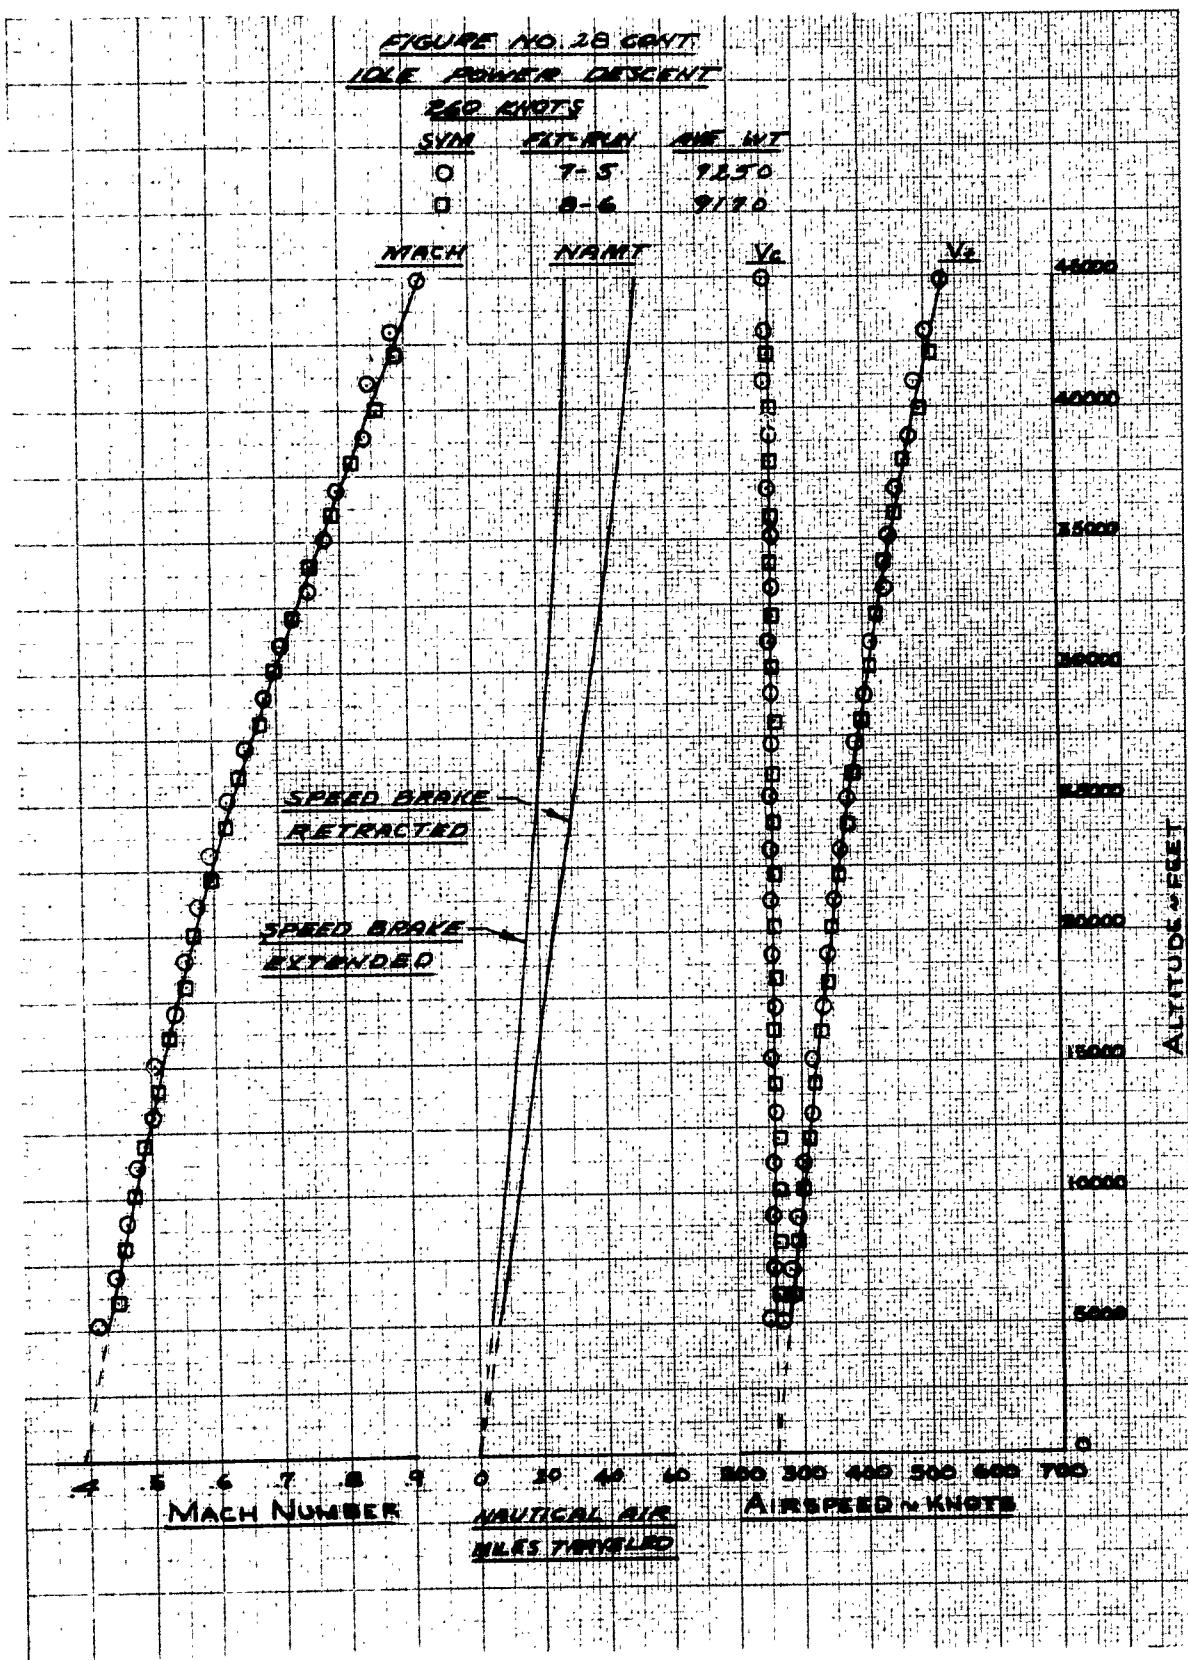


FIGURE 10-21
 10% POWER DESCENT
 500 MPH'S
 100-11000
 100-11000
 100-11000

APPROXIMATE DATA

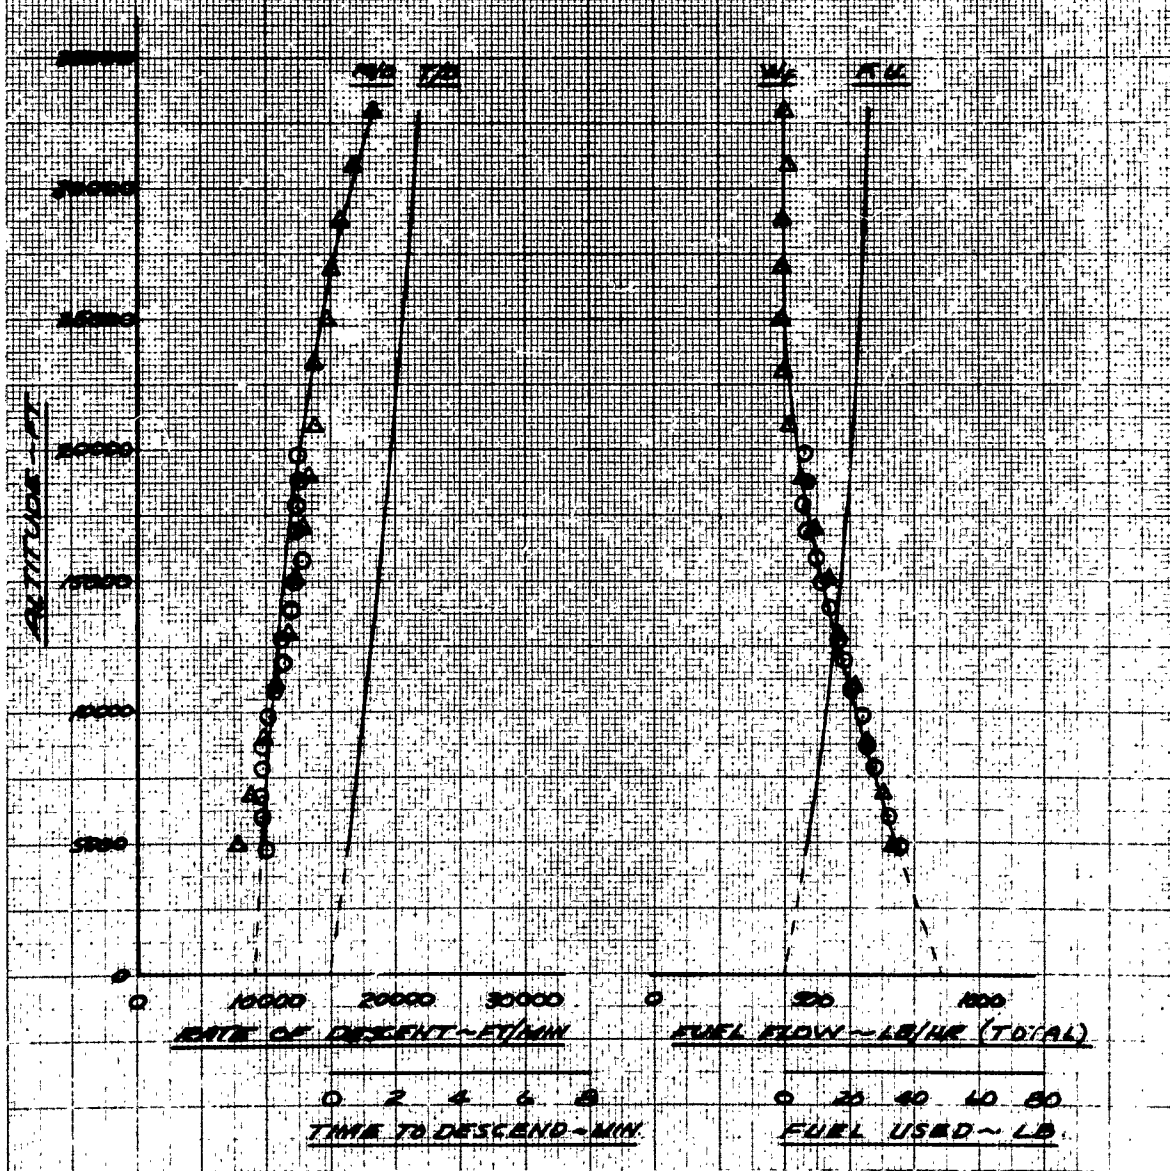


FIGURE 10-29 CONT.
1000 FT. POWER DESCENT
300 KNOTS

| <u>SYM</u> | <u>EST. RUN</u> | <u>AIR WT</u> |
|------------|-----------------|---------------|
| <u>○</u> | <u>14-5</u> | <u>9410</u> |
| <u>△</u> | <u>17-6</u> | <u>9470</u> |

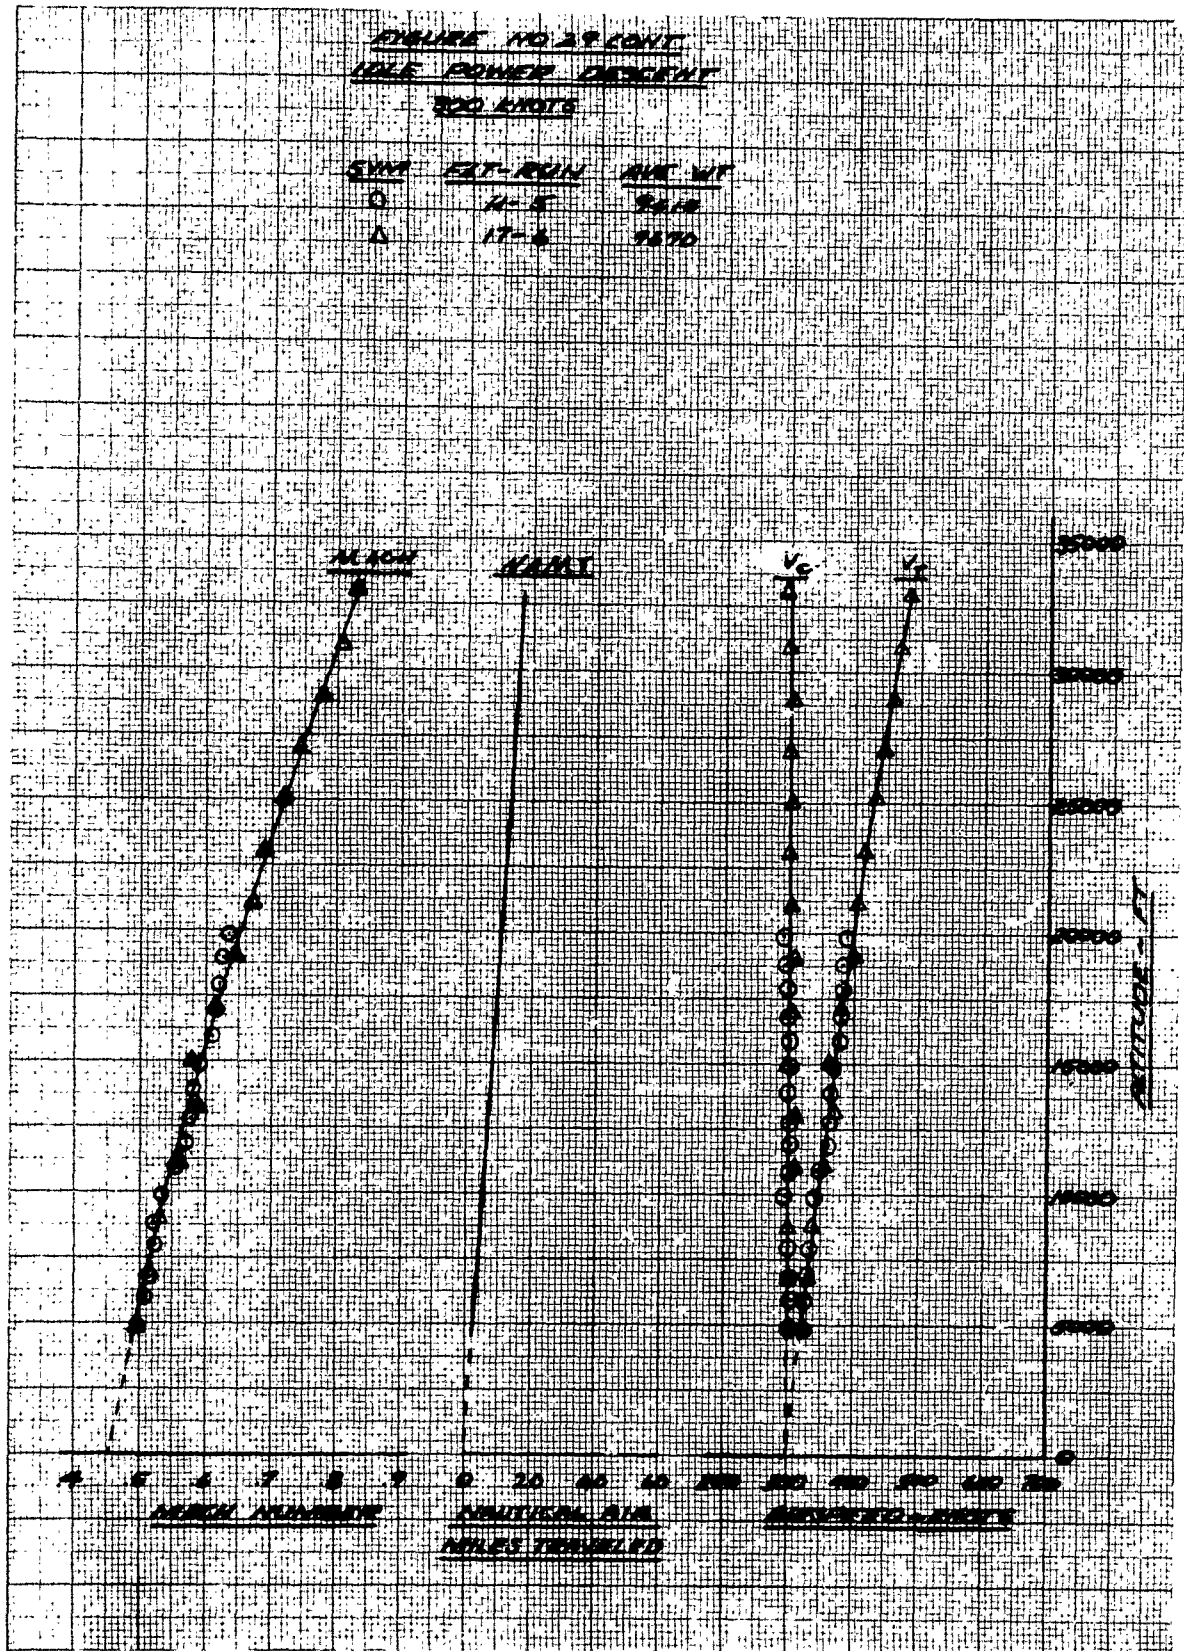


FIGURE NO. 30
MAX. POWER DESCENT
T. HIGH NO.
538 A USAF 511 58-1114
105 GE-5 ENGINES 311'S
ENGINE AND ENGINE

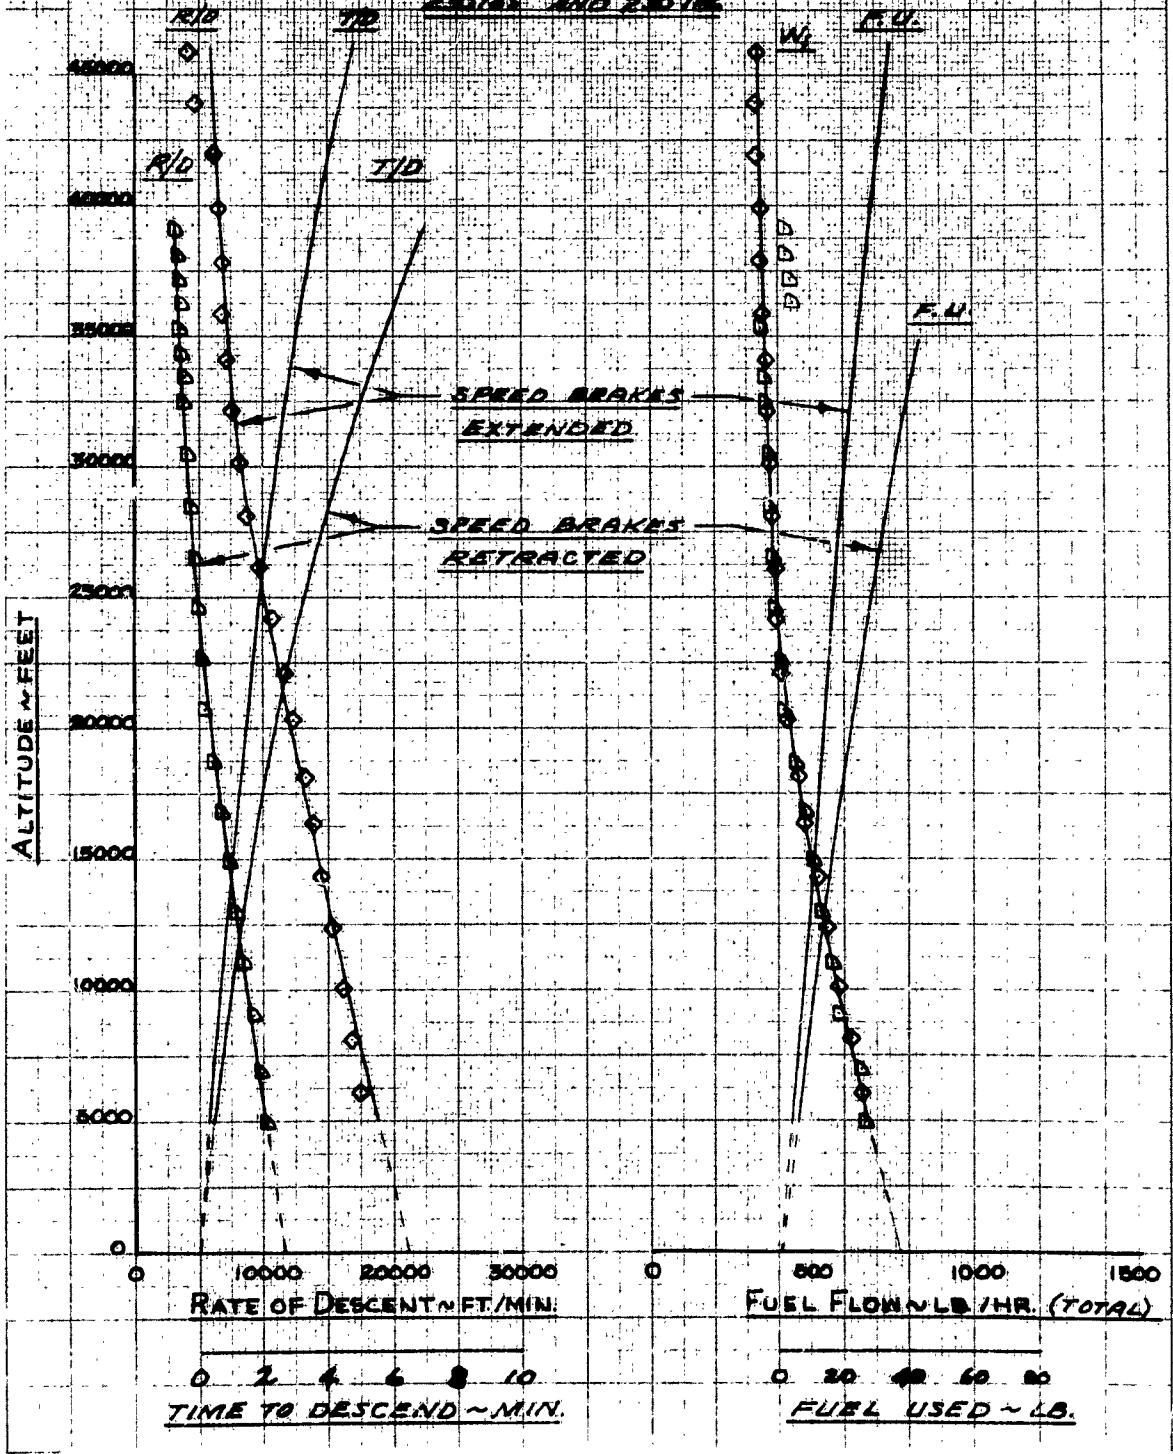


FIGURE NO. 30 CONT
SOLE POWER DESCENT

| J. MARK NO | | |
|------------|-----------|---------|
| SYM | ALT. (FT) | WIND WT |
| ◇ | 18.7 | 2400 |
| ◇ | 17.8 | 2610 |

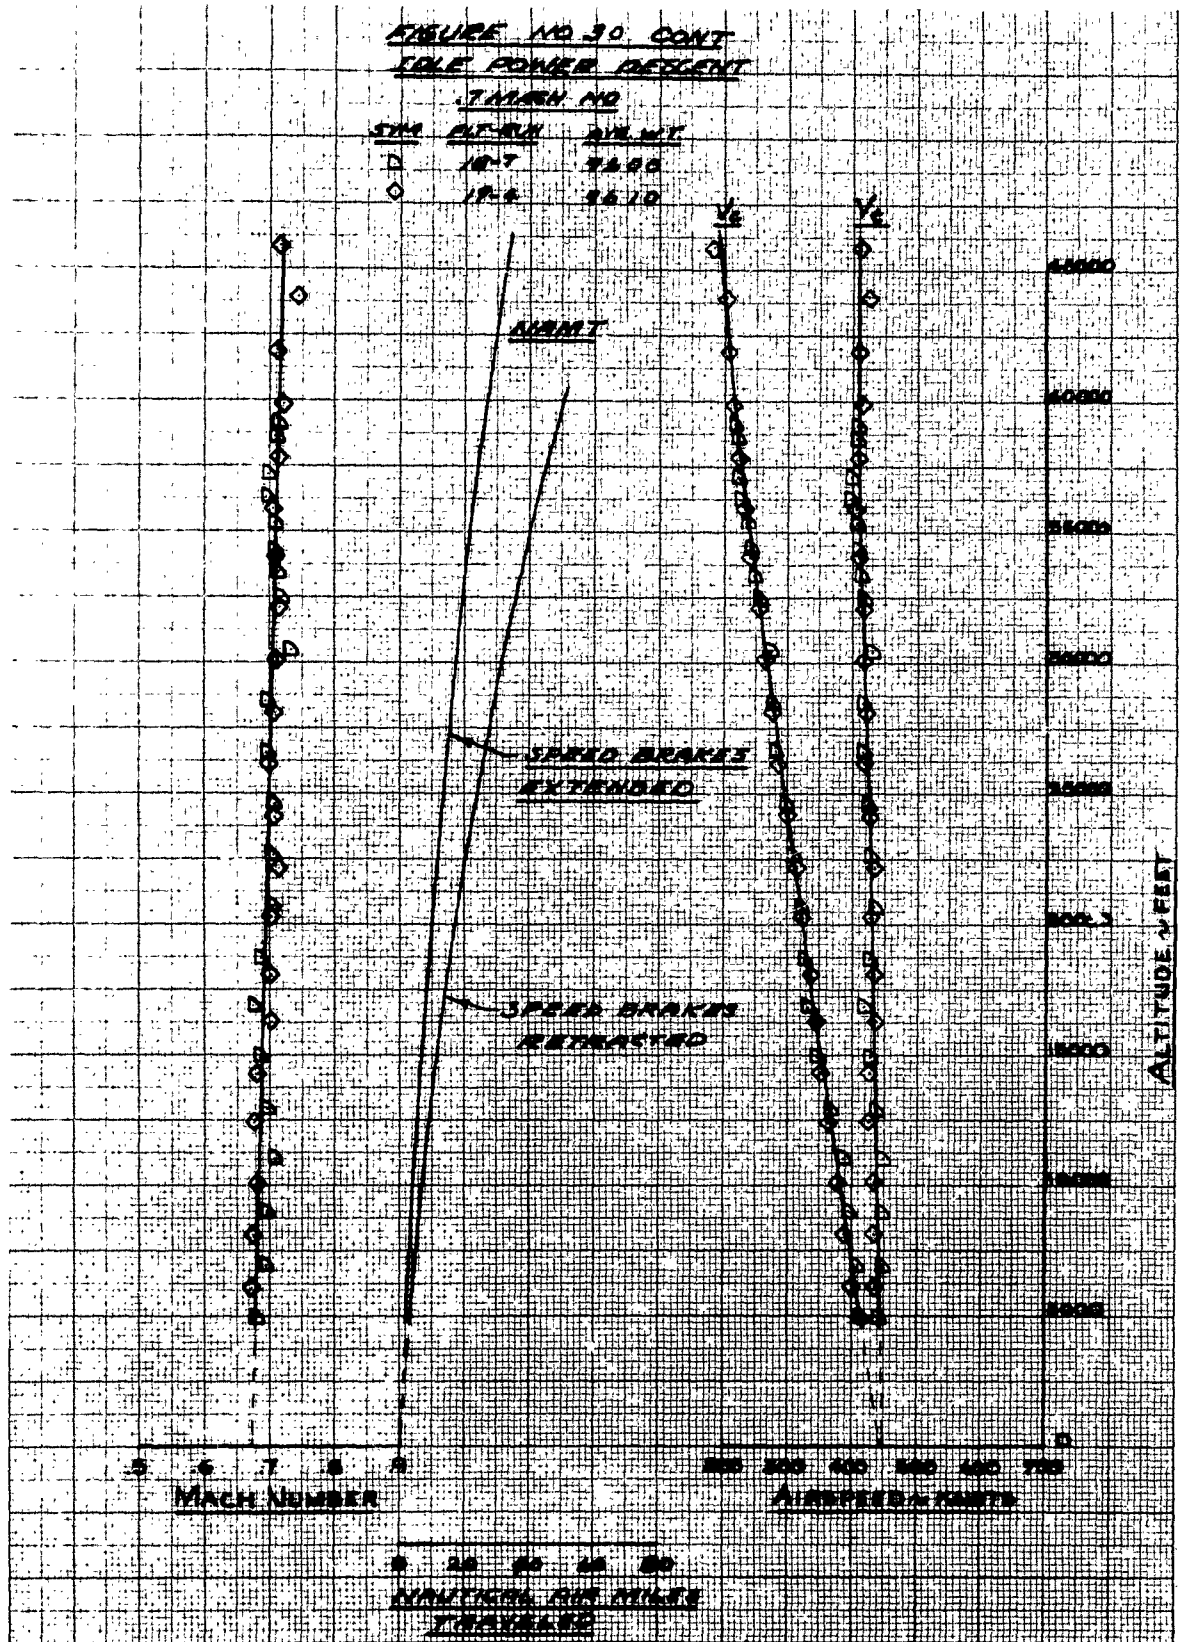


FIGURE NO. 21
IDLE POWER DESCENT
75 MARCH 1954
T-302 USRF 517 50-1134
WREAR'S EXERCISE 541'S
POINT AND POINT

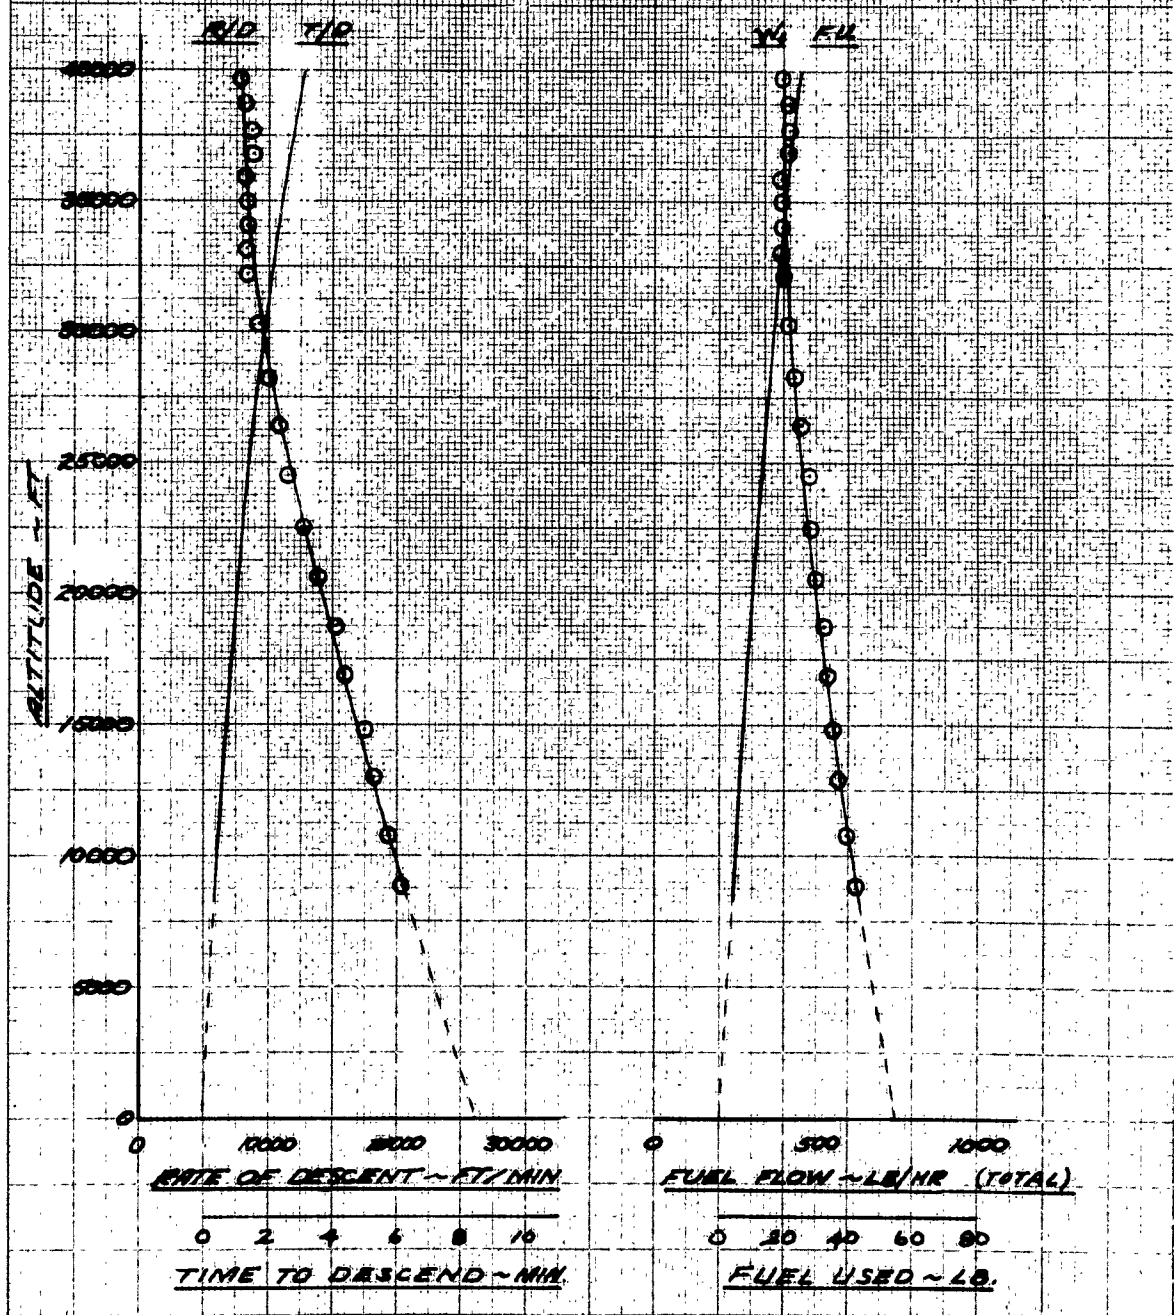


FIGURE 10-31 CONT
100% POWER DESCENT
TR 11657 10

SUN **PL-RUN** **RR WT**
 0 27.7 18850

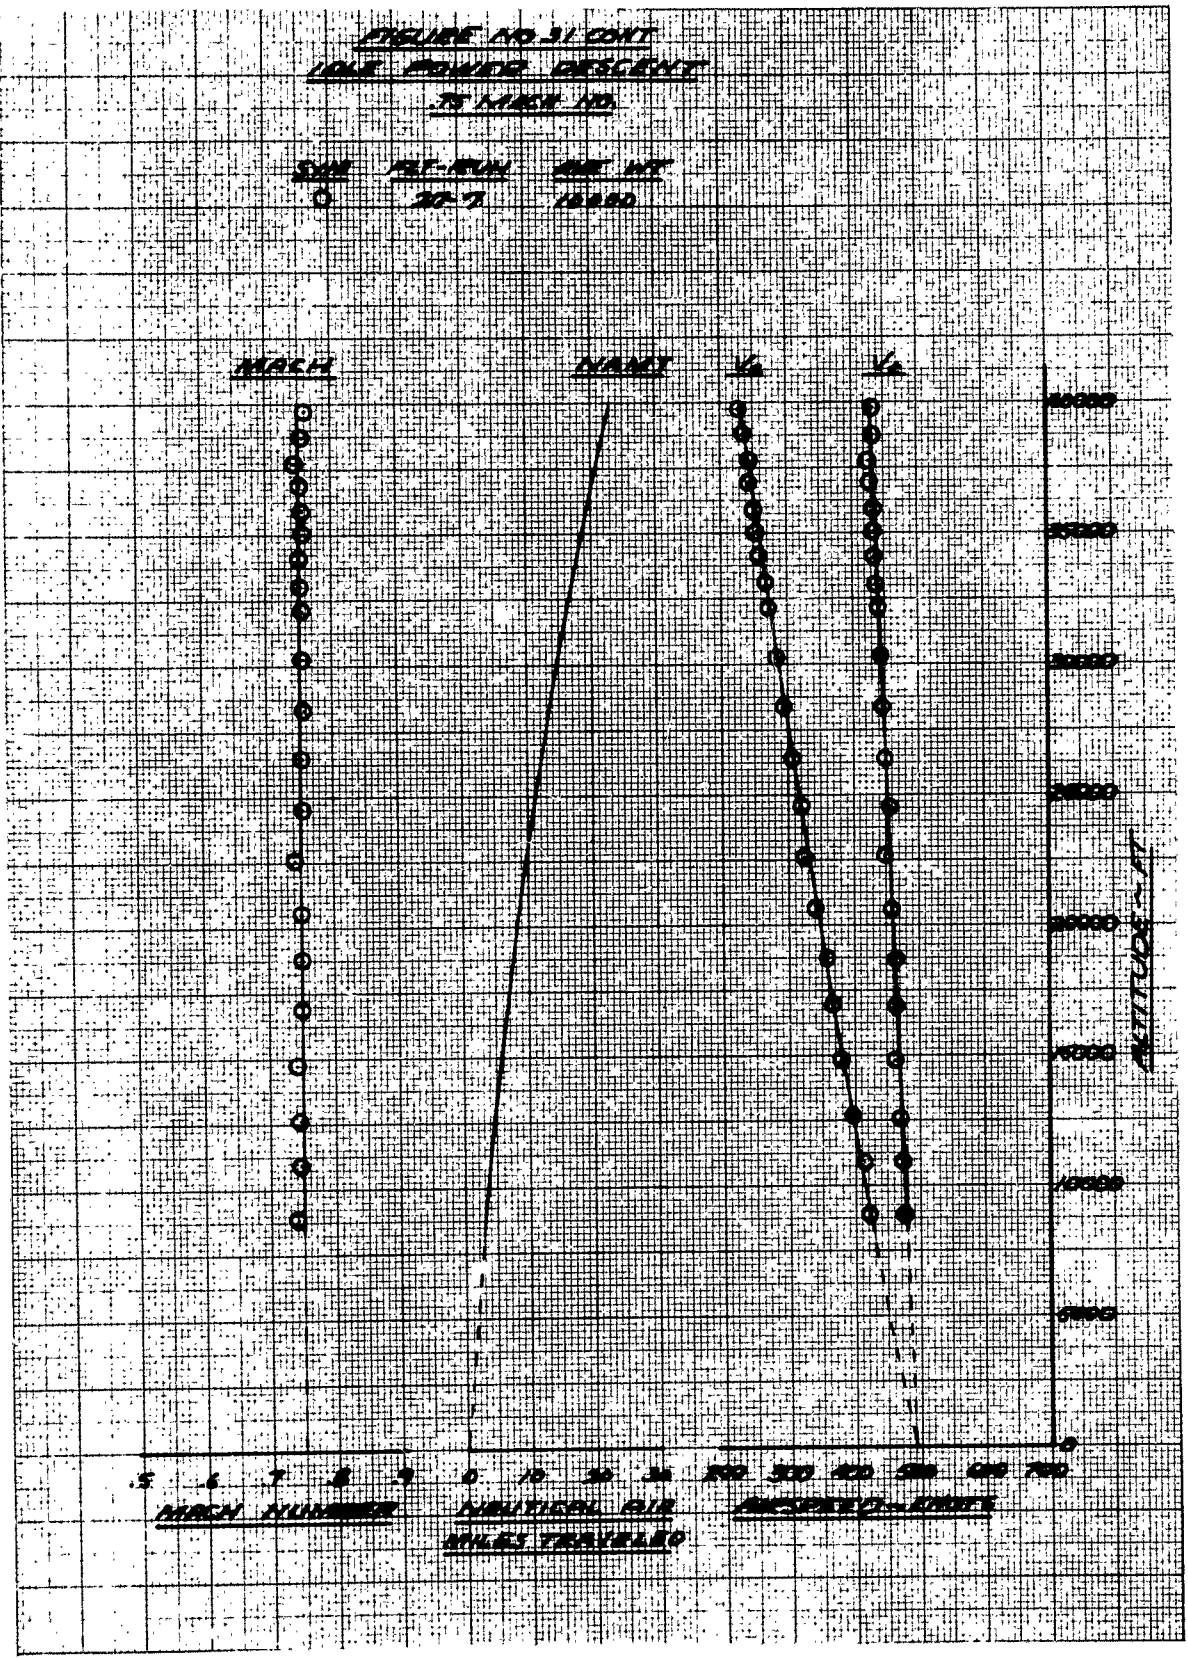


FIGURE 10-35
IDLE POWER DESCENTS
3.1444 L/D
P-30A USMC S/N 58-1194
OS-5E-5 ENGINE 51N-5
ENGINE AND NOISE

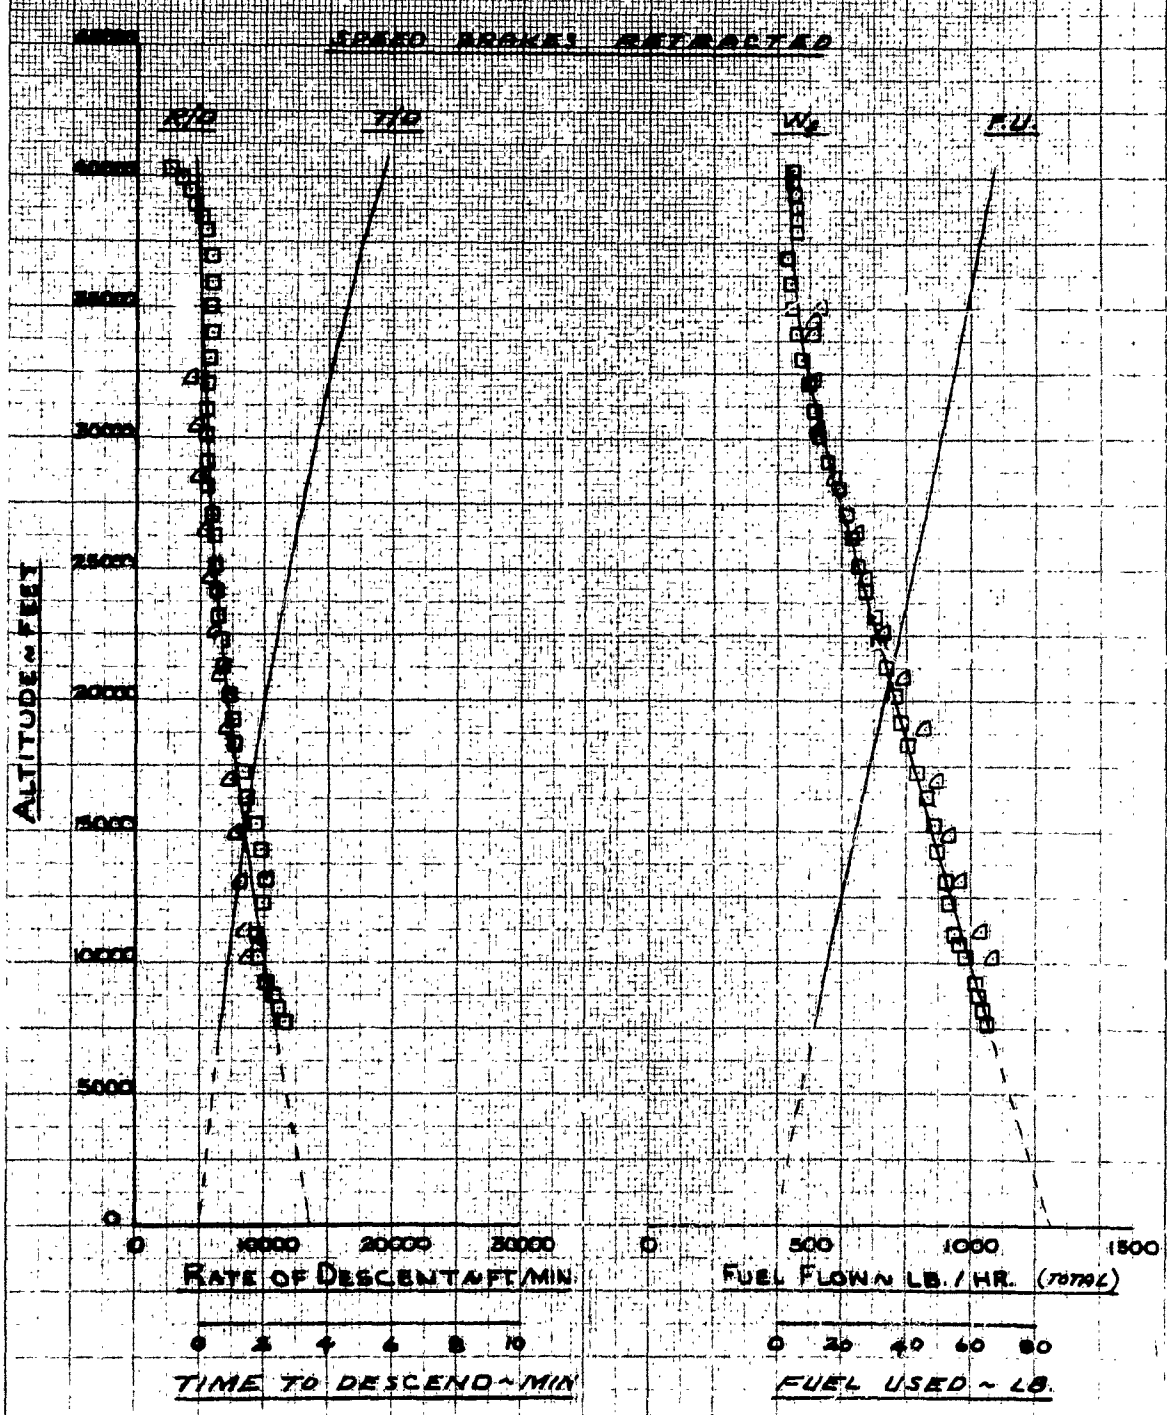


FIGURE NO 32 CONT
IDLE POWER DESCENT
3 MACH NO.

| <u>SYM</u> | <u>FLT-RUN.</u> | <u>AMB. WT.</u> |
|------------|-----------------|-----------------|
| △ | 21-6 | 9170 |
| □ | 24-10 | |

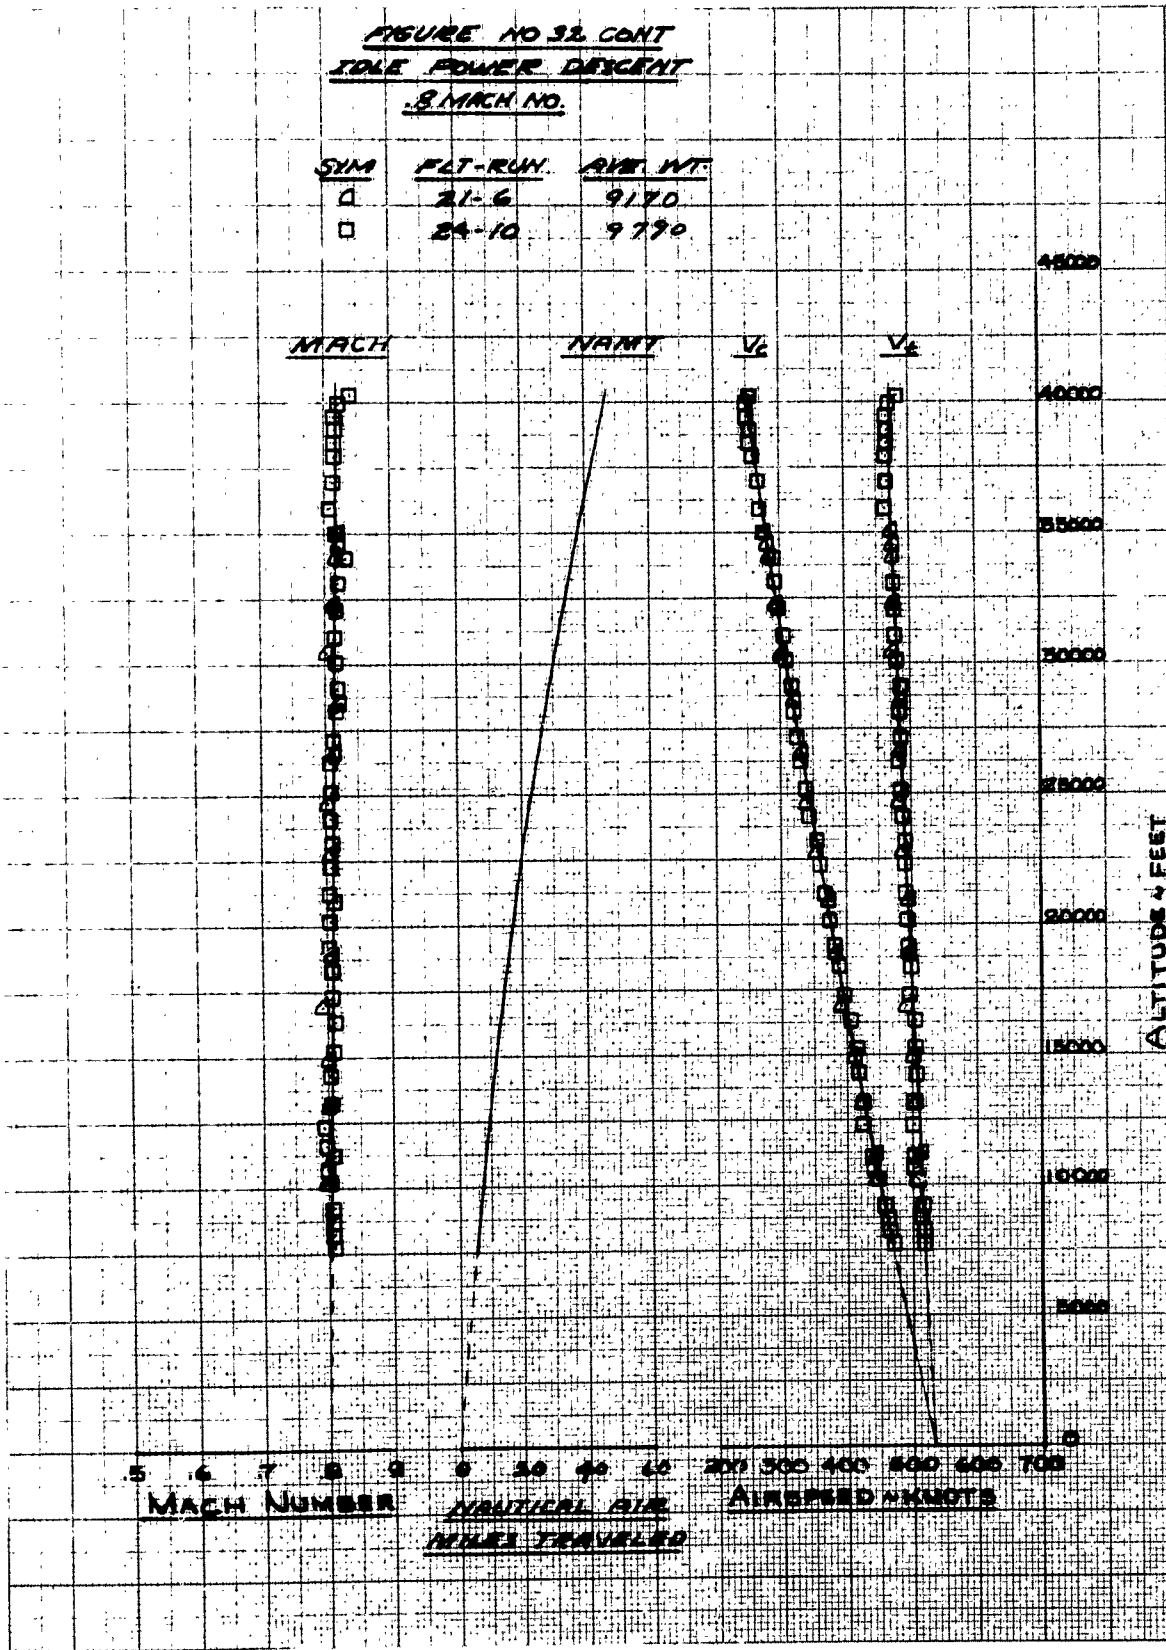


FIGURE NO. 23
IDLE POWER DESCENT
85 MACH NO.
FUEL USAGE 514-51-1174
100% - 100% 5145
100% 100% 5145

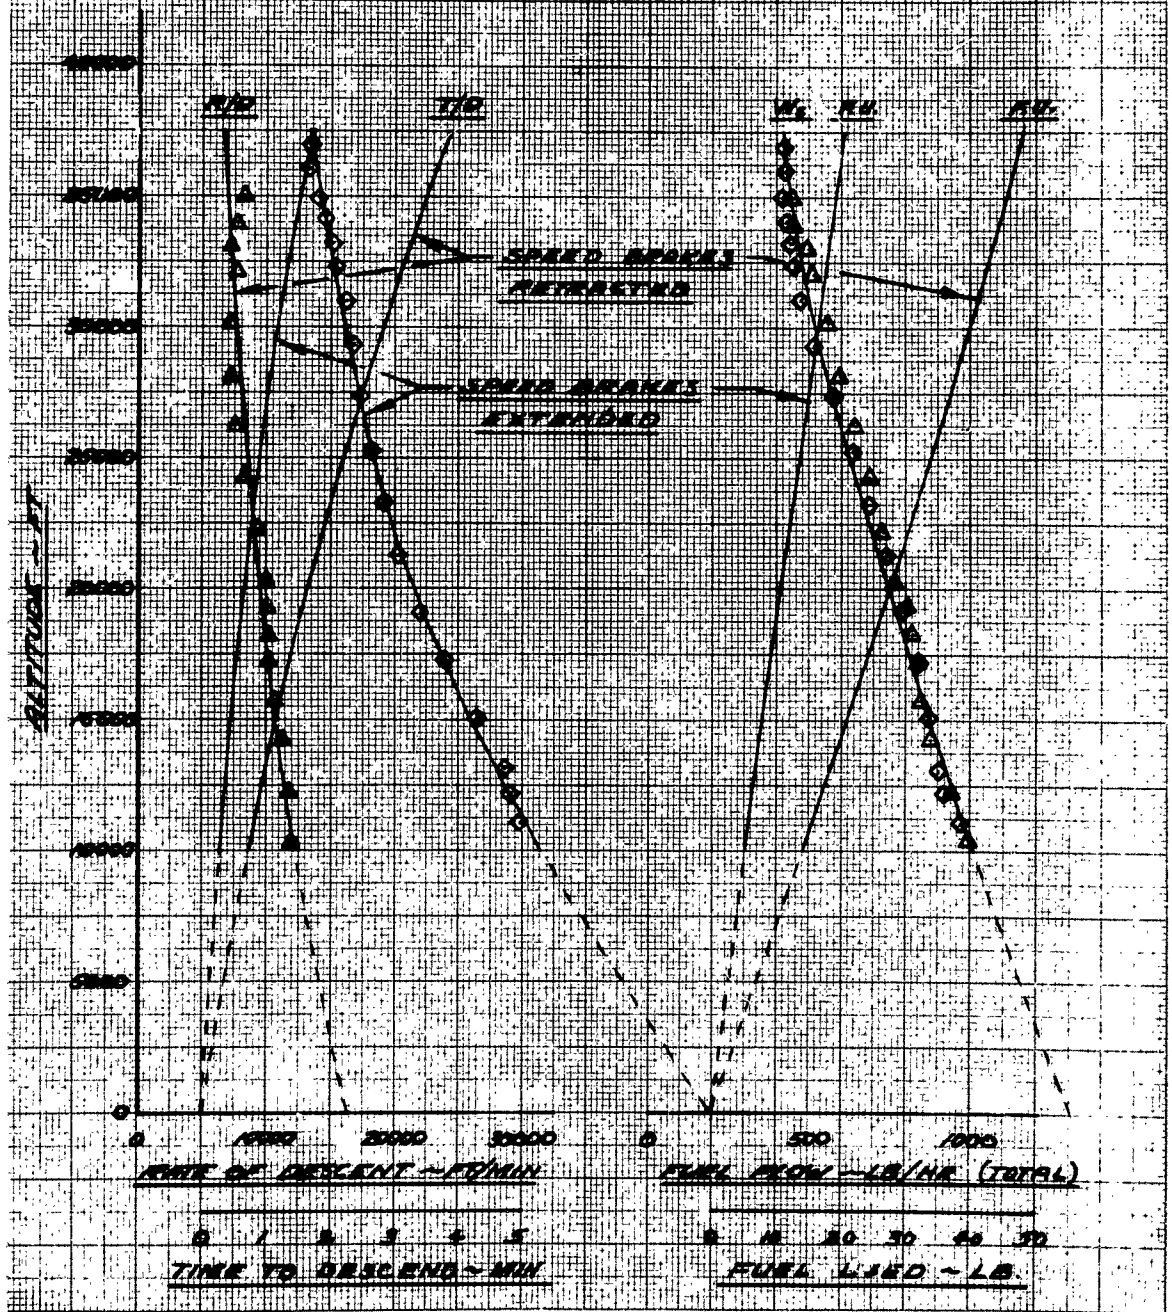
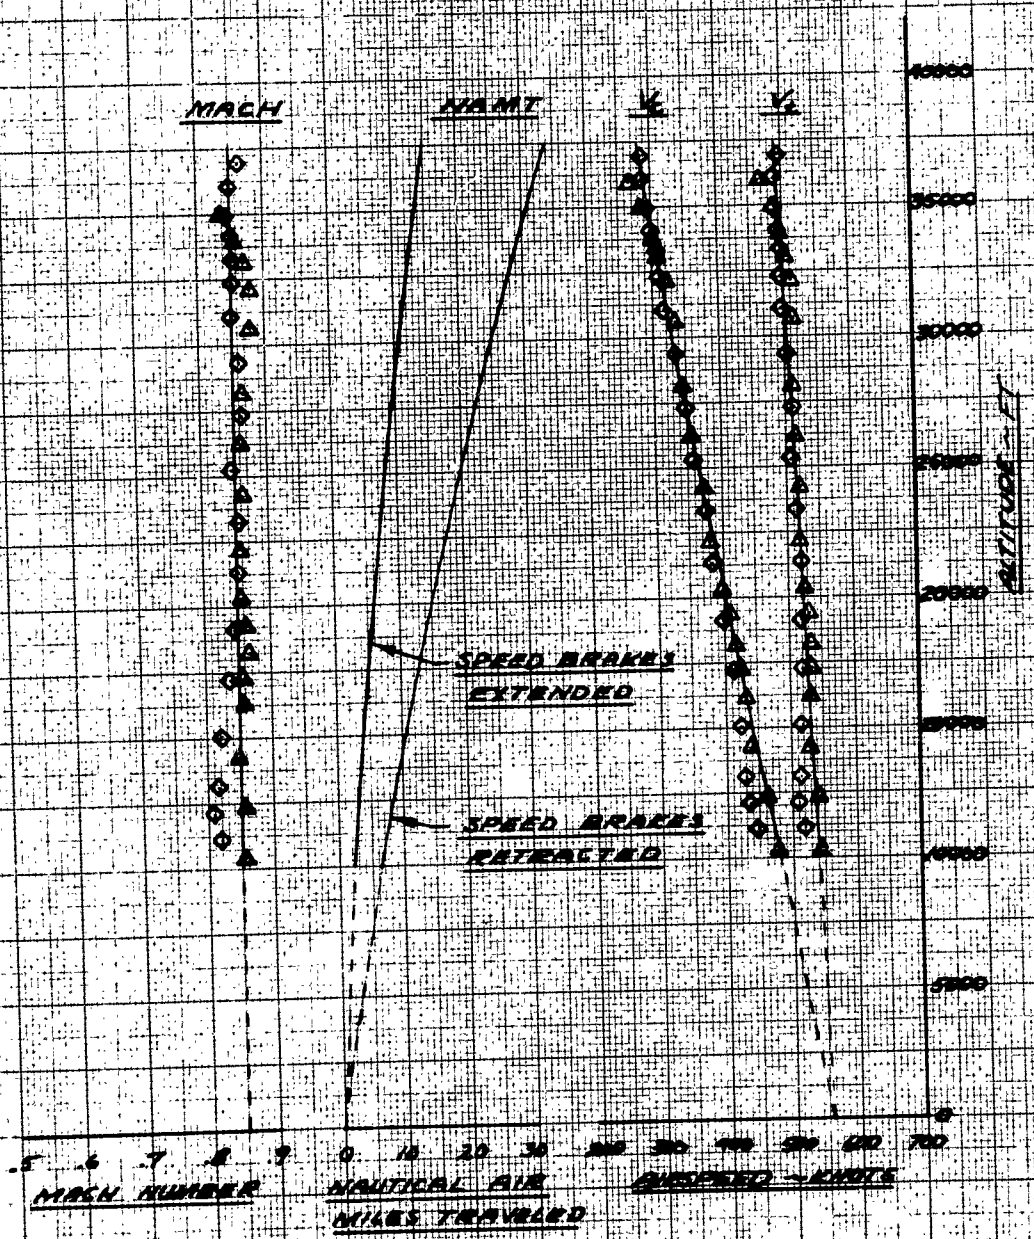


FIGURE 10.3.3. CONT.
TOTAL POWER DEPENDENT
85 MACH NO.

| <u>SYM</u> | <u>PER. RUN</u> | <u>AVE. WT.</u> |
|------------|-----------------|-----------------|
| △ | 31-12 | 9440 |
| ◇ | 35-9 | 9160 |





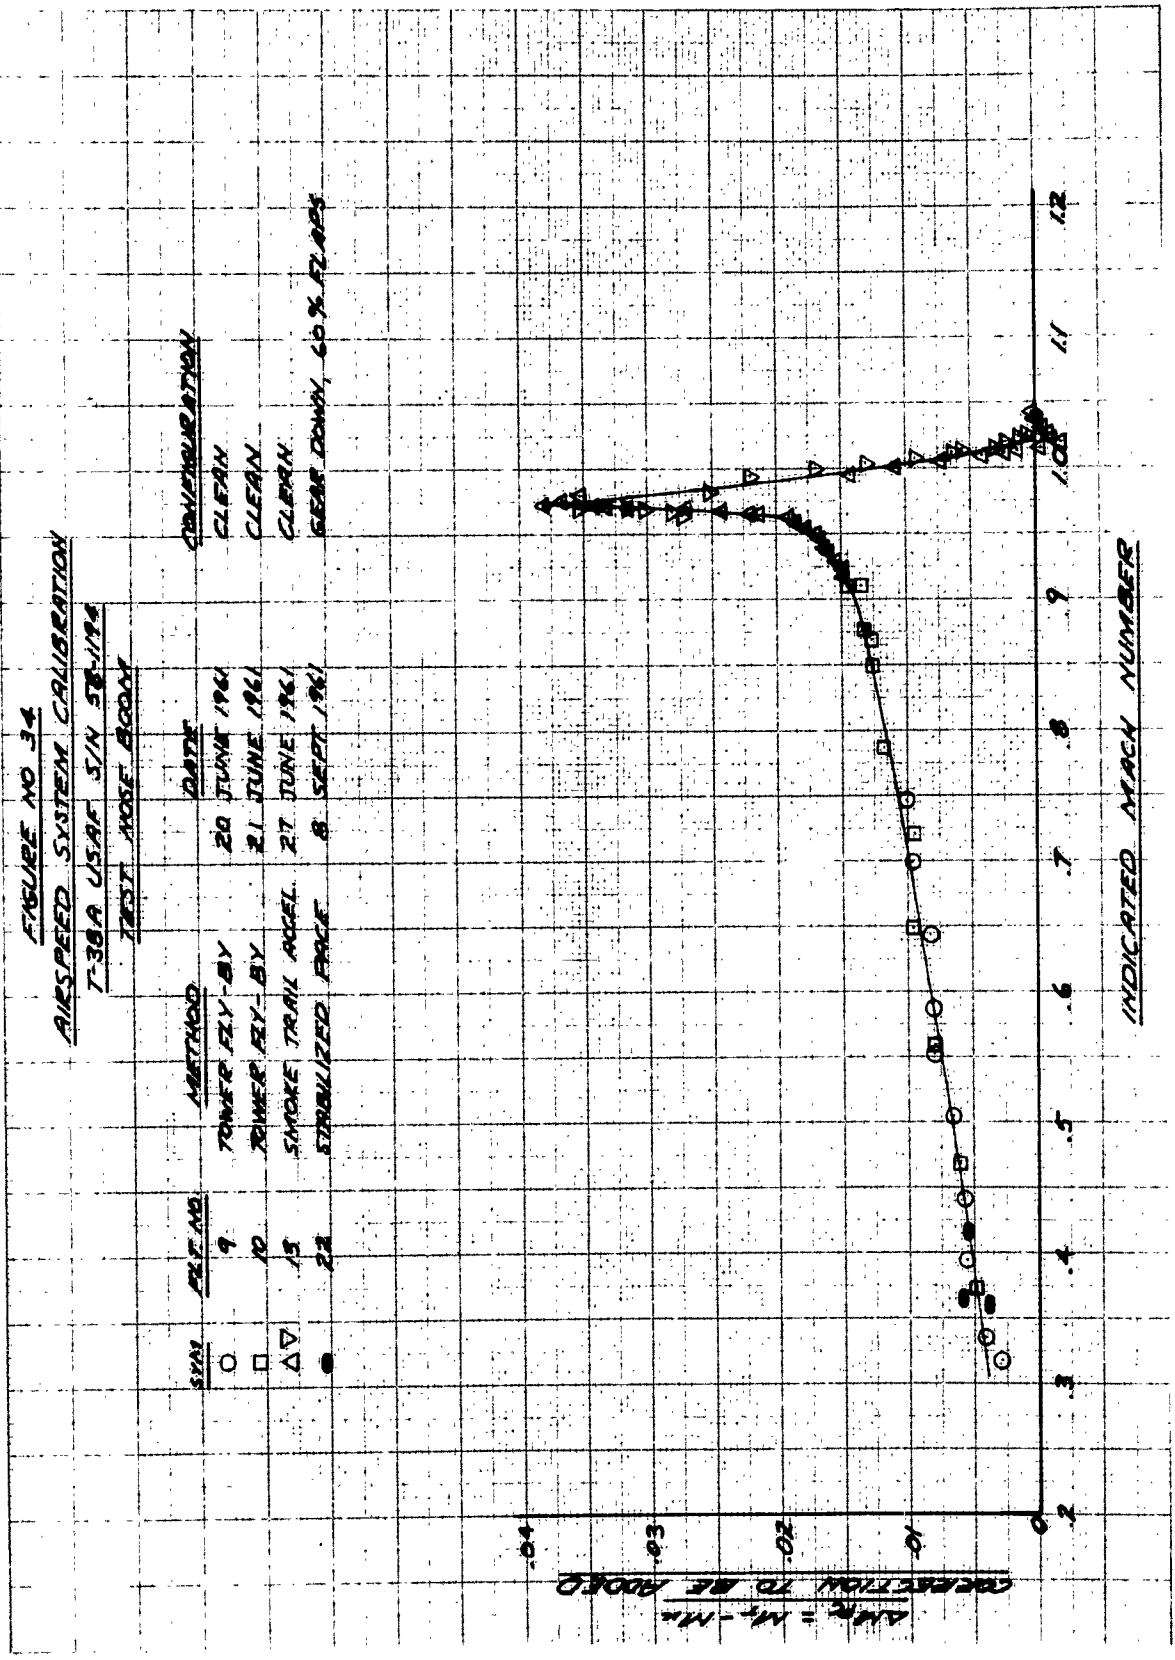


FIGURE NO. 35
 AIRSPEED CALIBRATION W/ SOUND EFFECT
 T-38A USAF 5/11 50-1124
 TEST WIND 800M

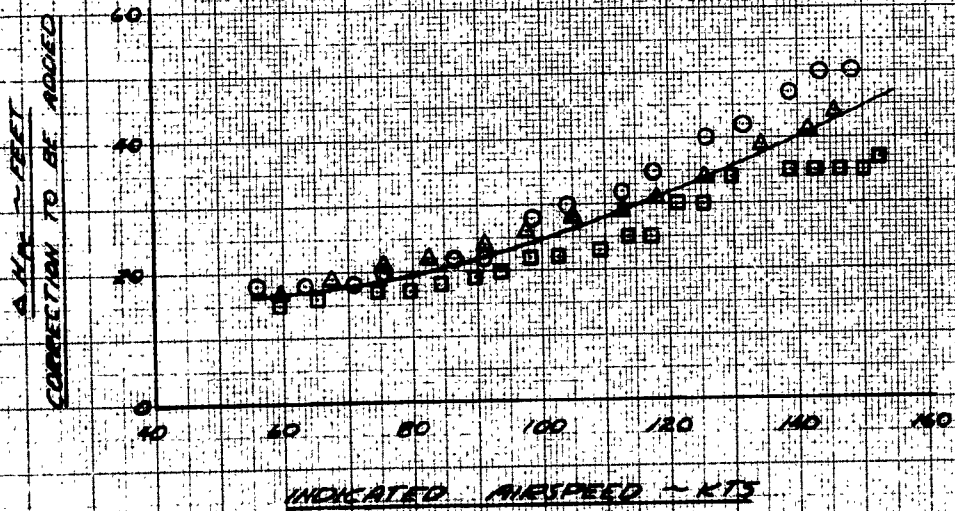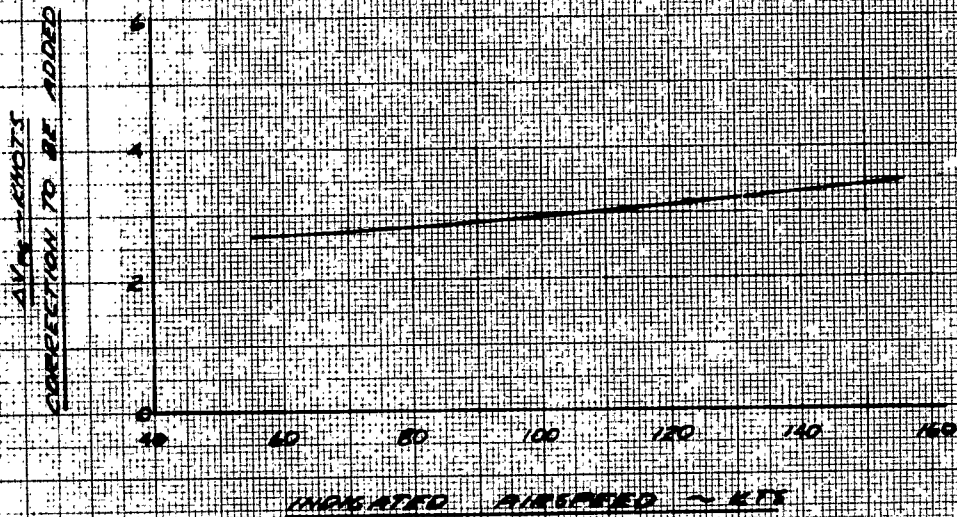

THIS PAGE LEFT BLANK FOR CONVENIENCE OF PRINTER

FIGURE NO 37
STATIC THRUST CALIBRATION
T-38A USAF S/N 58-1194
TRE-GE-5 ENGINES S/N'S
23015 AND 230186

NON-AFTERBURNING

- ○ 22 NOV 61
- □ 25 SEP 61
- △ △ 17 JUN 62

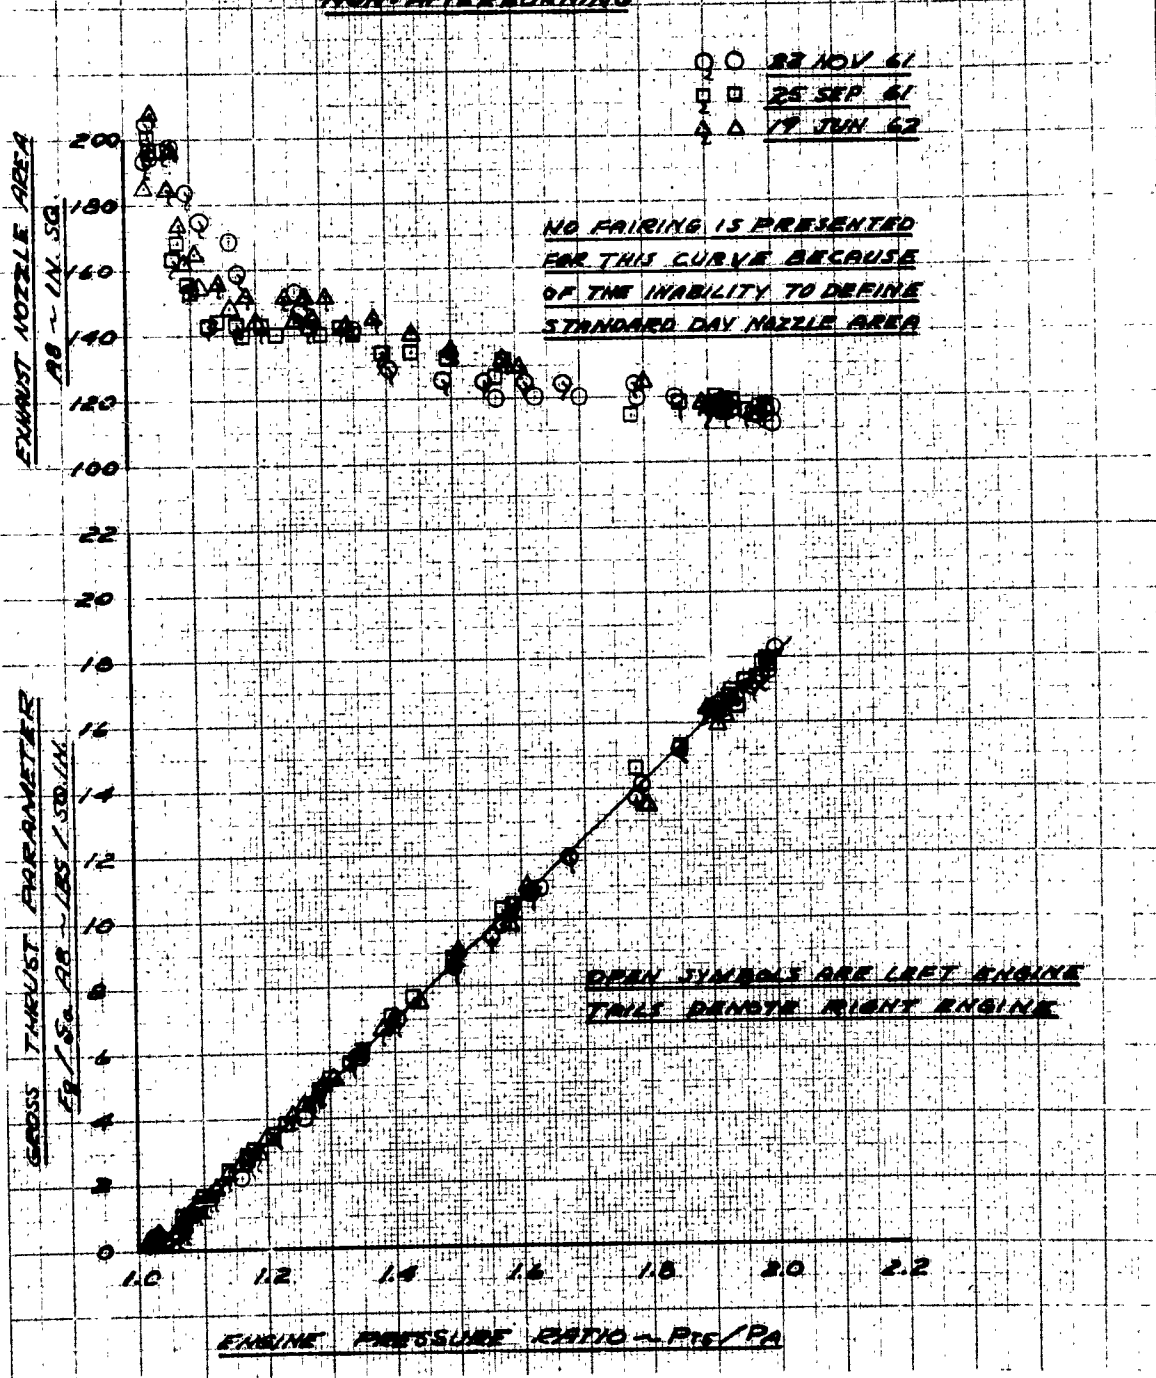


FIGURE NO. 37 CONT.
STATIC THRUST CALIBRATION
T-38A USAF S/N 58-1194
J85-GR-5 ENGINES S/N'S
230185 AND 230186
NON-AFTERBURNING

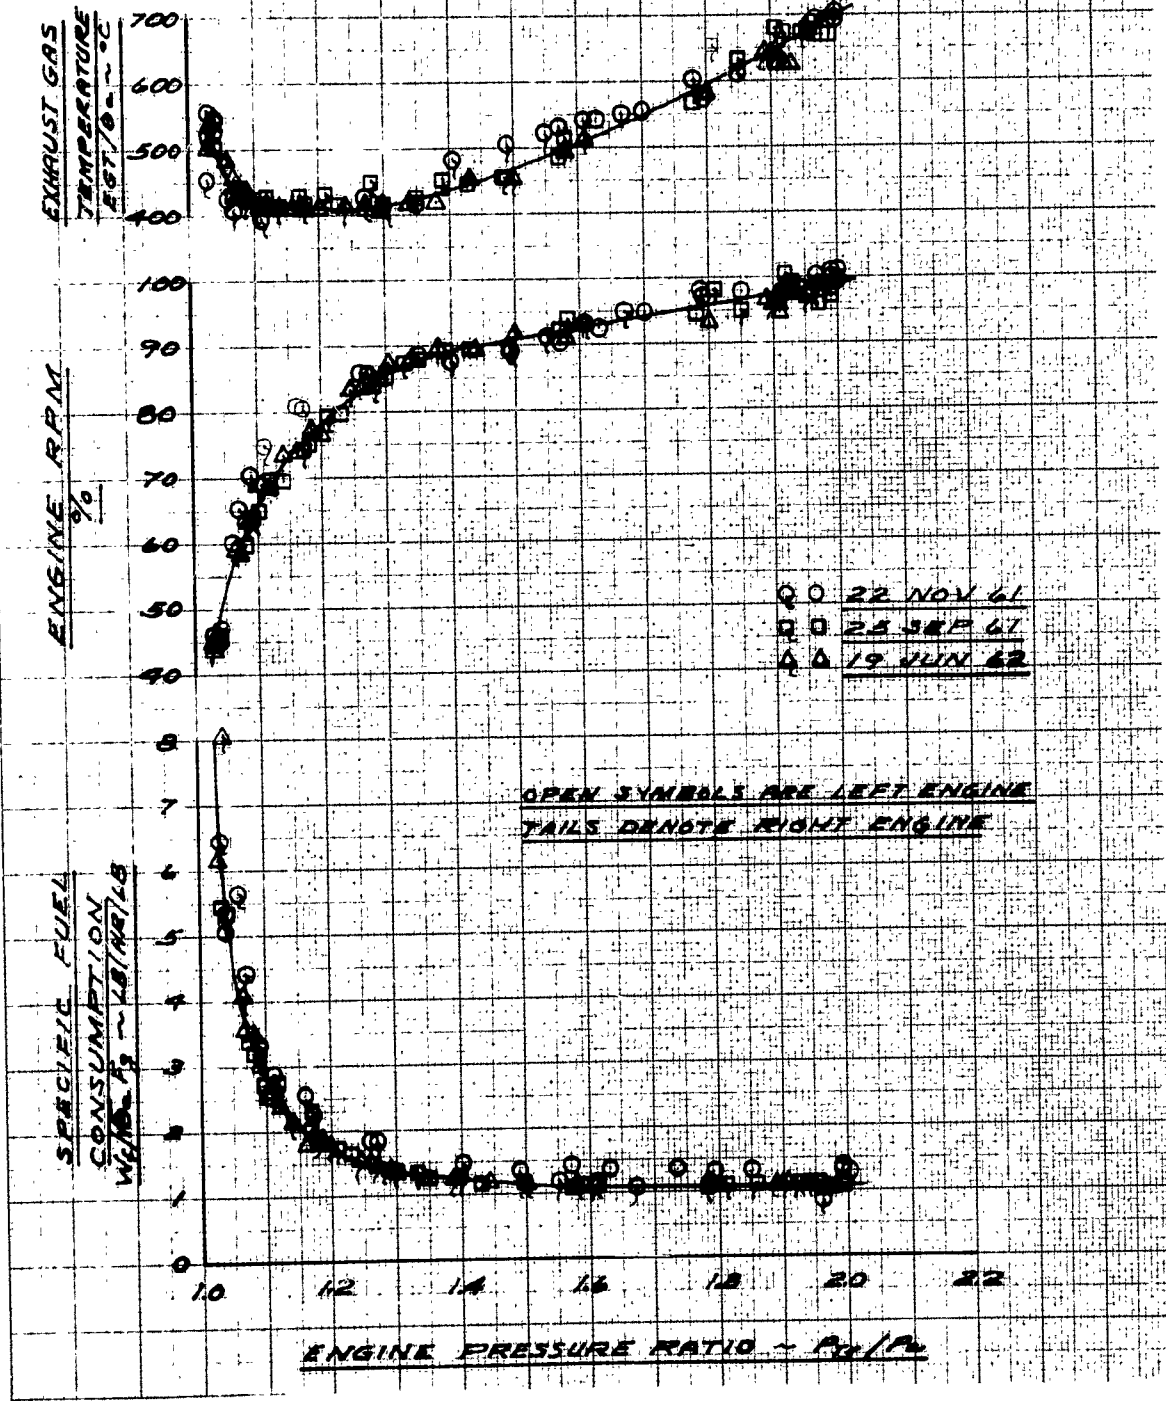


FIGURE NO. 38
STATIC THRUST CALIBRATION
T-38A USAF S/N 58-1194
J65-GE-5 ENGINES S/N'S
230185 AND 230186

RETARDURNING

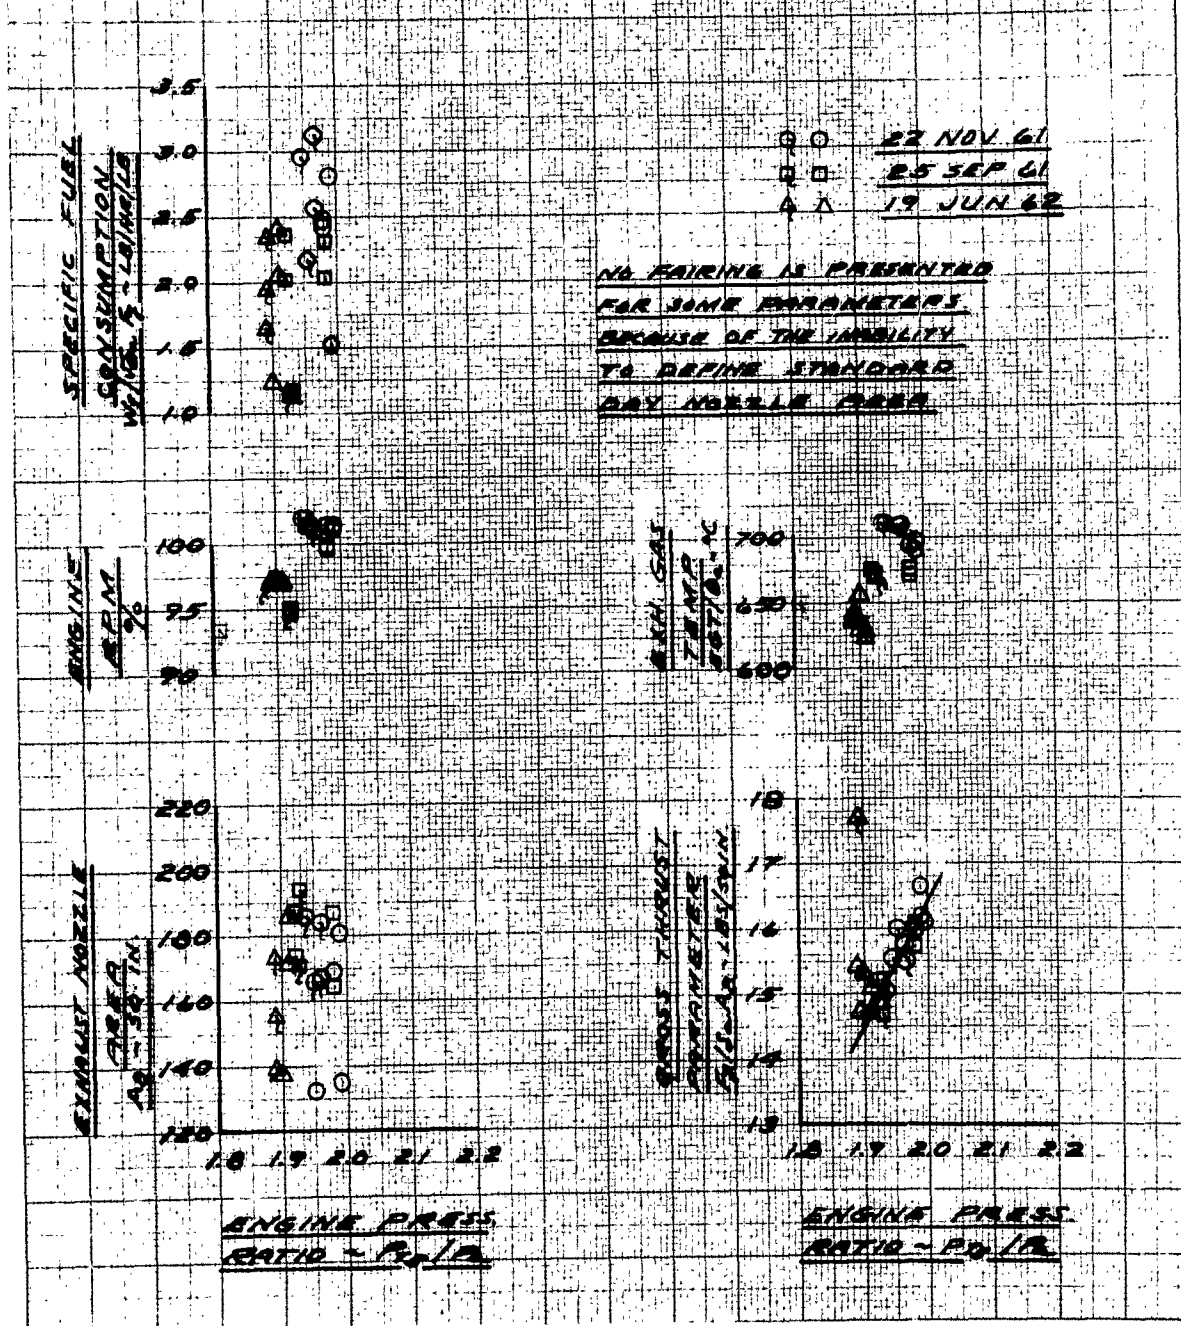
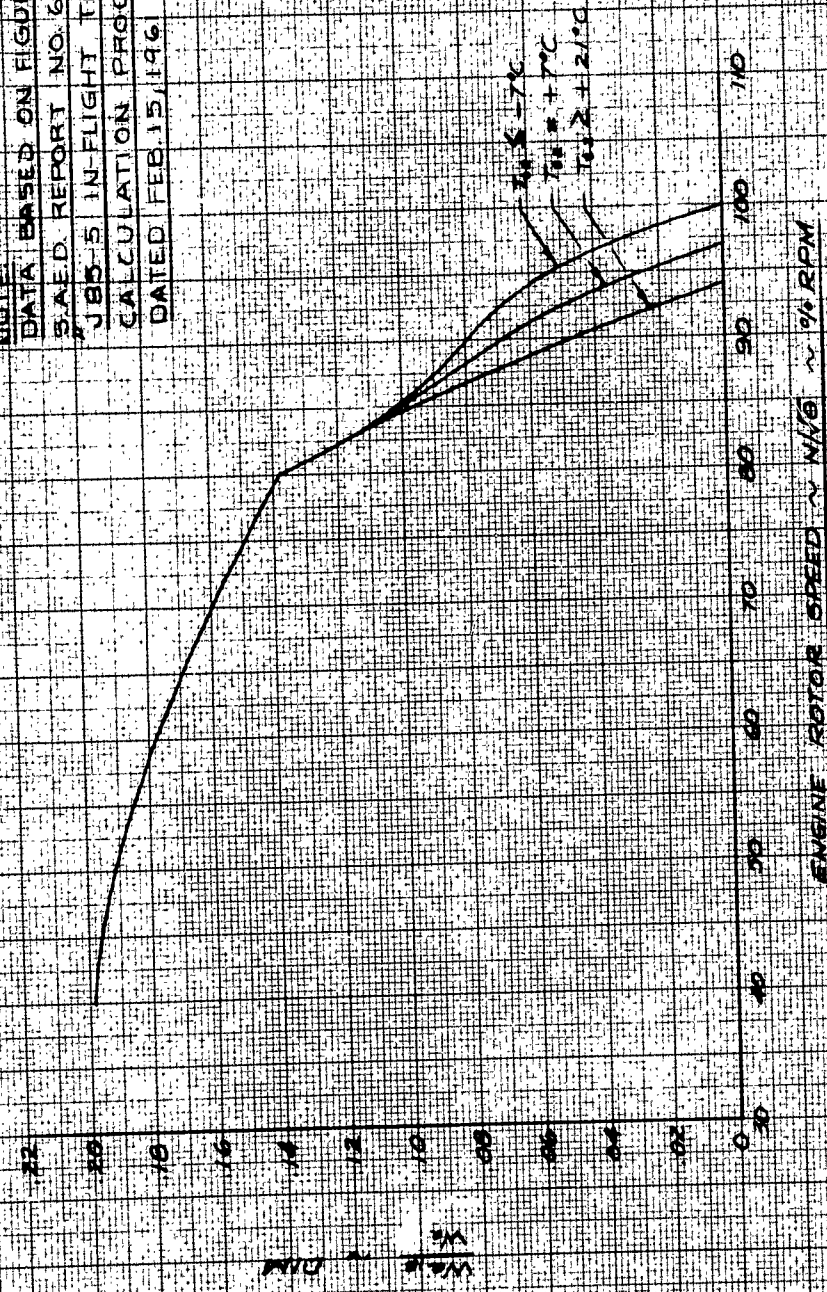


FIGURE No. 39
 INTERSTAGE BLEED AIRFLOW
 J85-GE-5 ENGINE

NOTE:
 DATA BASED ON FIGURE NO. 4
 S.A.E.D. REPORT NO. 673
 J85-5 IN-FLIGHT THRUST
 CALCULATION PROCEDURE
 DATED FEB. 15, 196



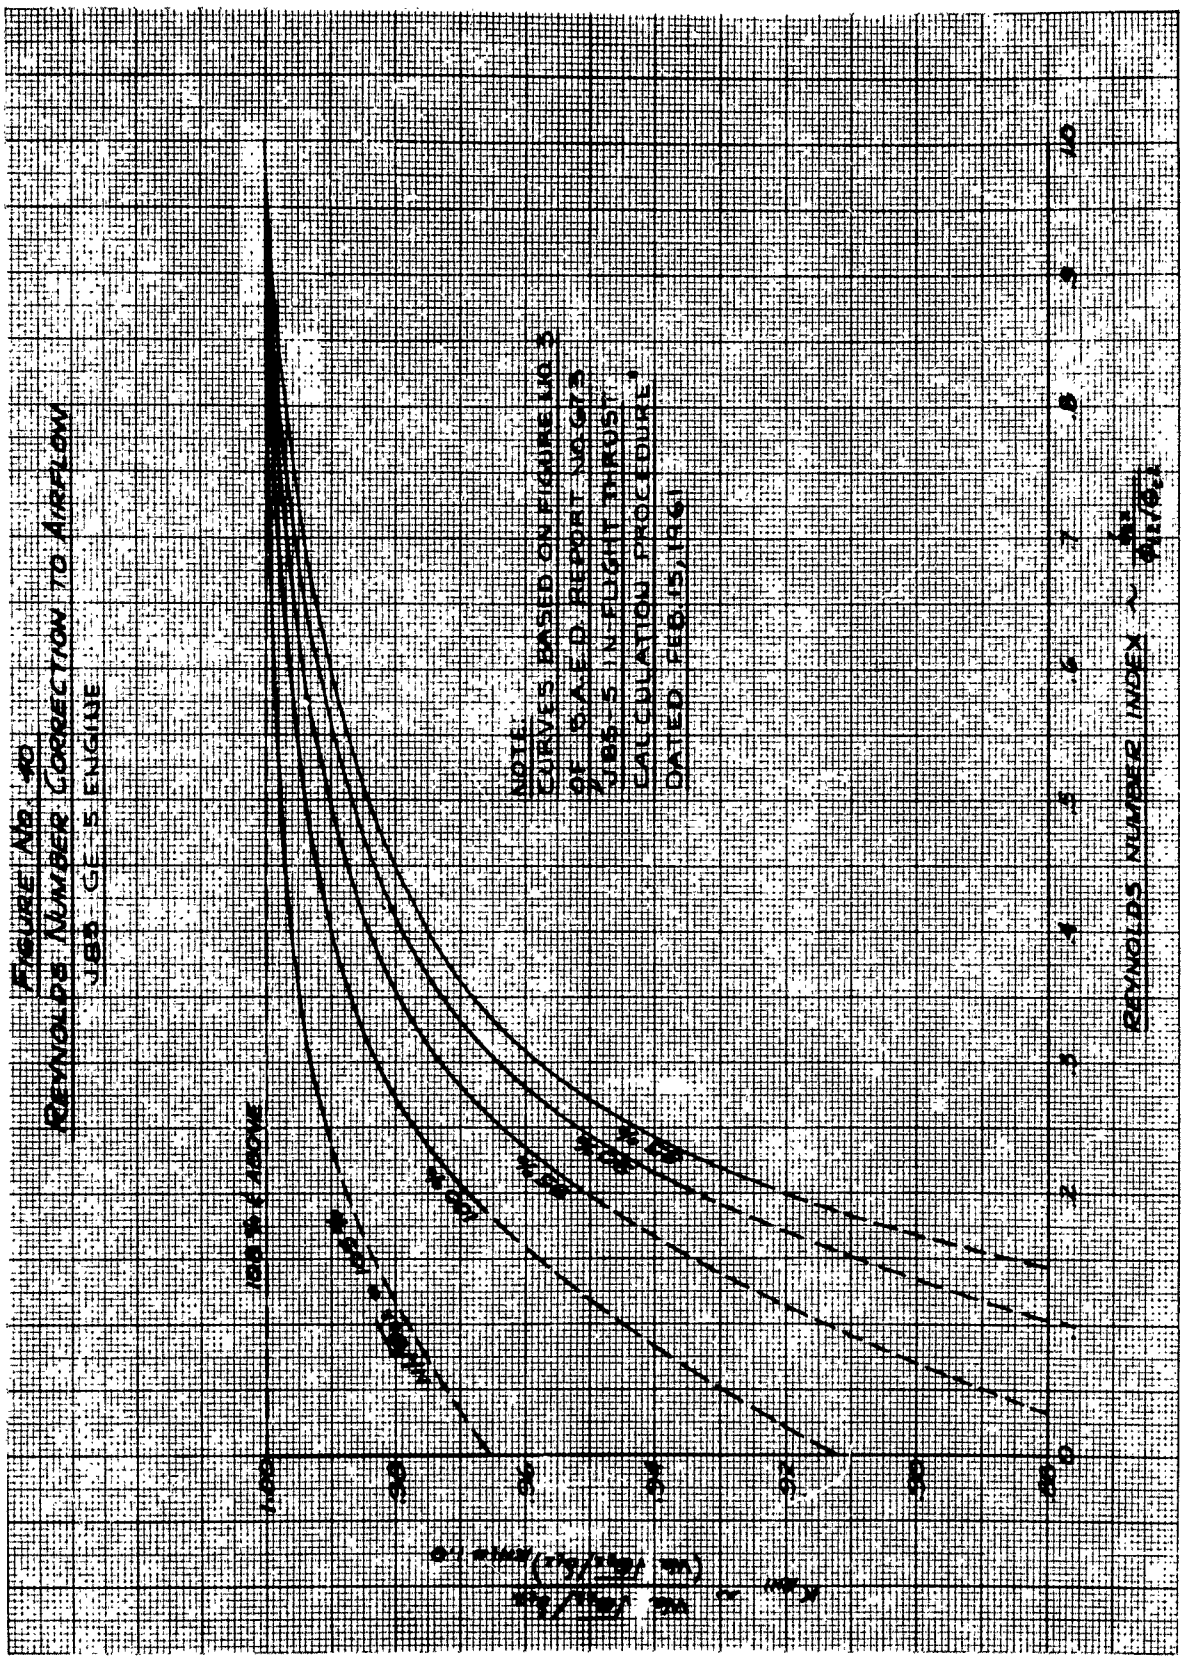
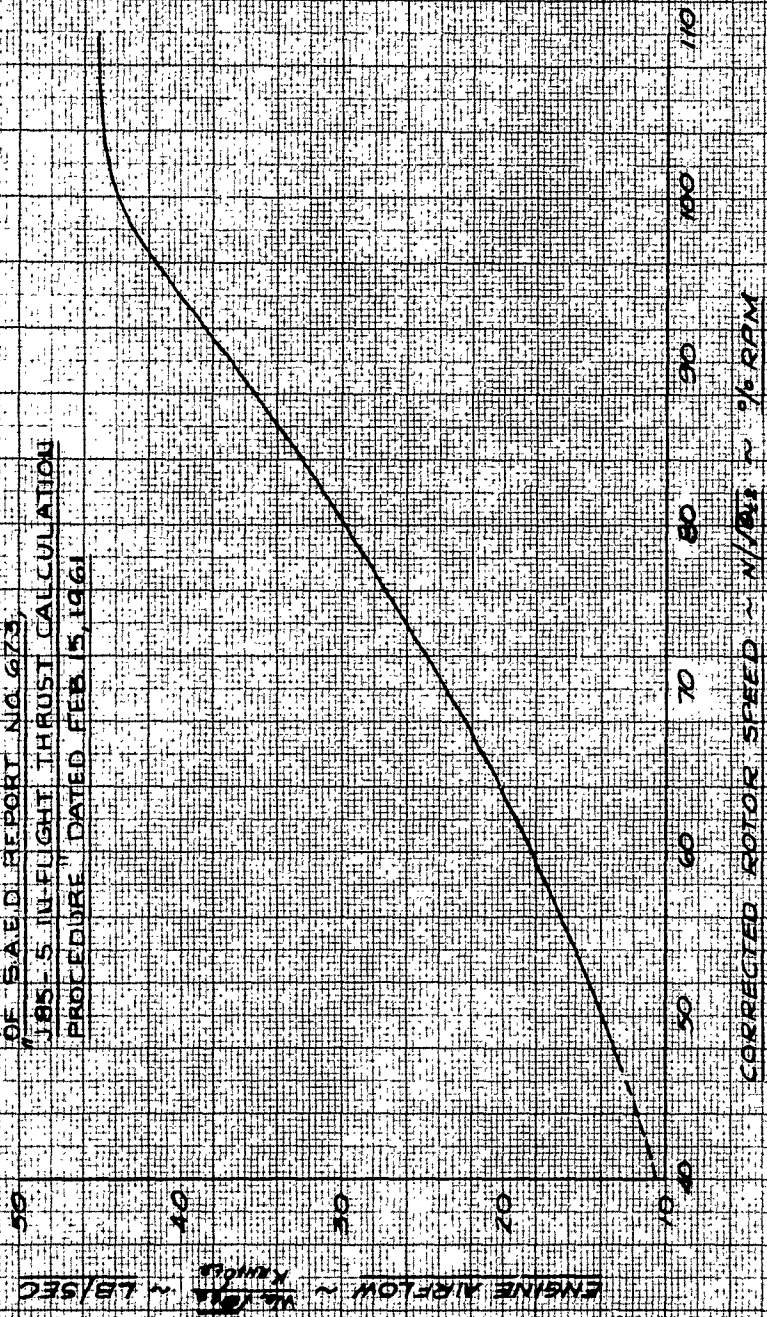
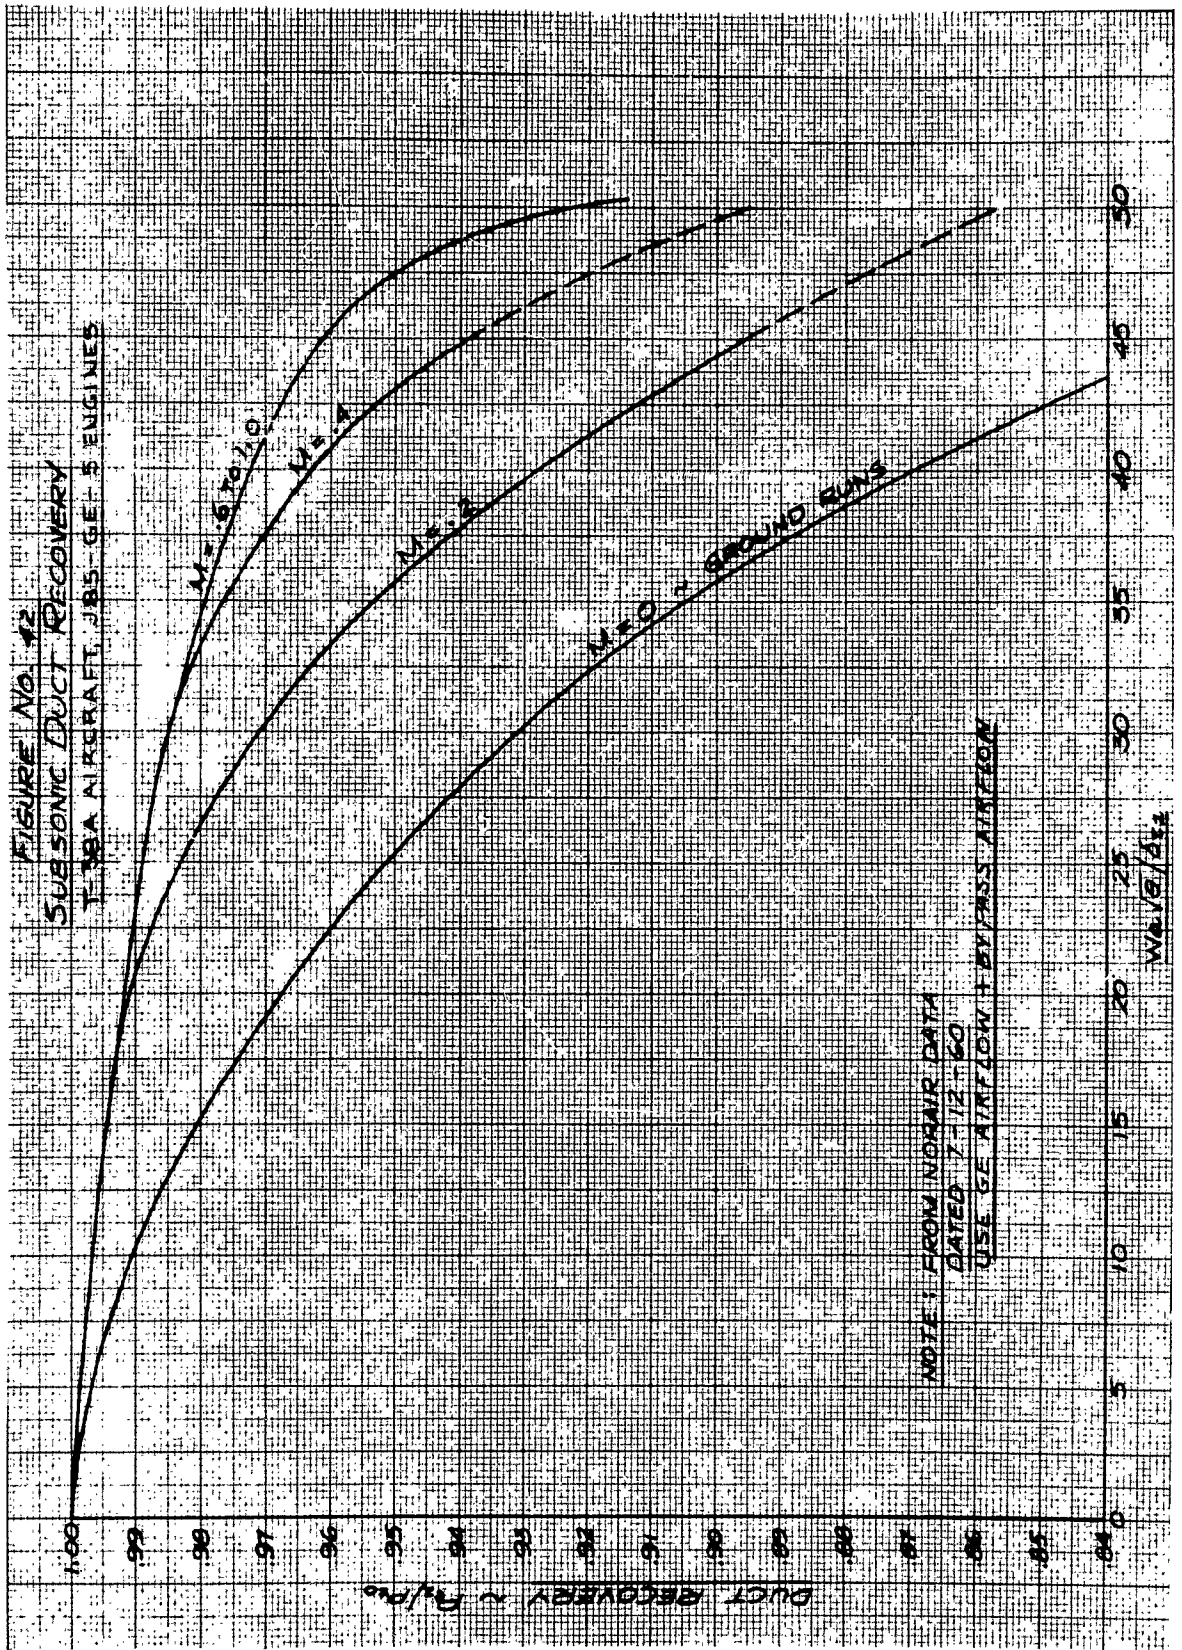


FIGURE NO. 41
 J-85-5 AIRFLOW

NOTE
 CURVE OBTAINED FROM FIGURE 1
 OF S.A.E.D. REPORT NO. 673,
 "J85-5 IN-FLIGHT THRUST CALCULATION
 PROCEDURE" DATED FEB 15, 1961






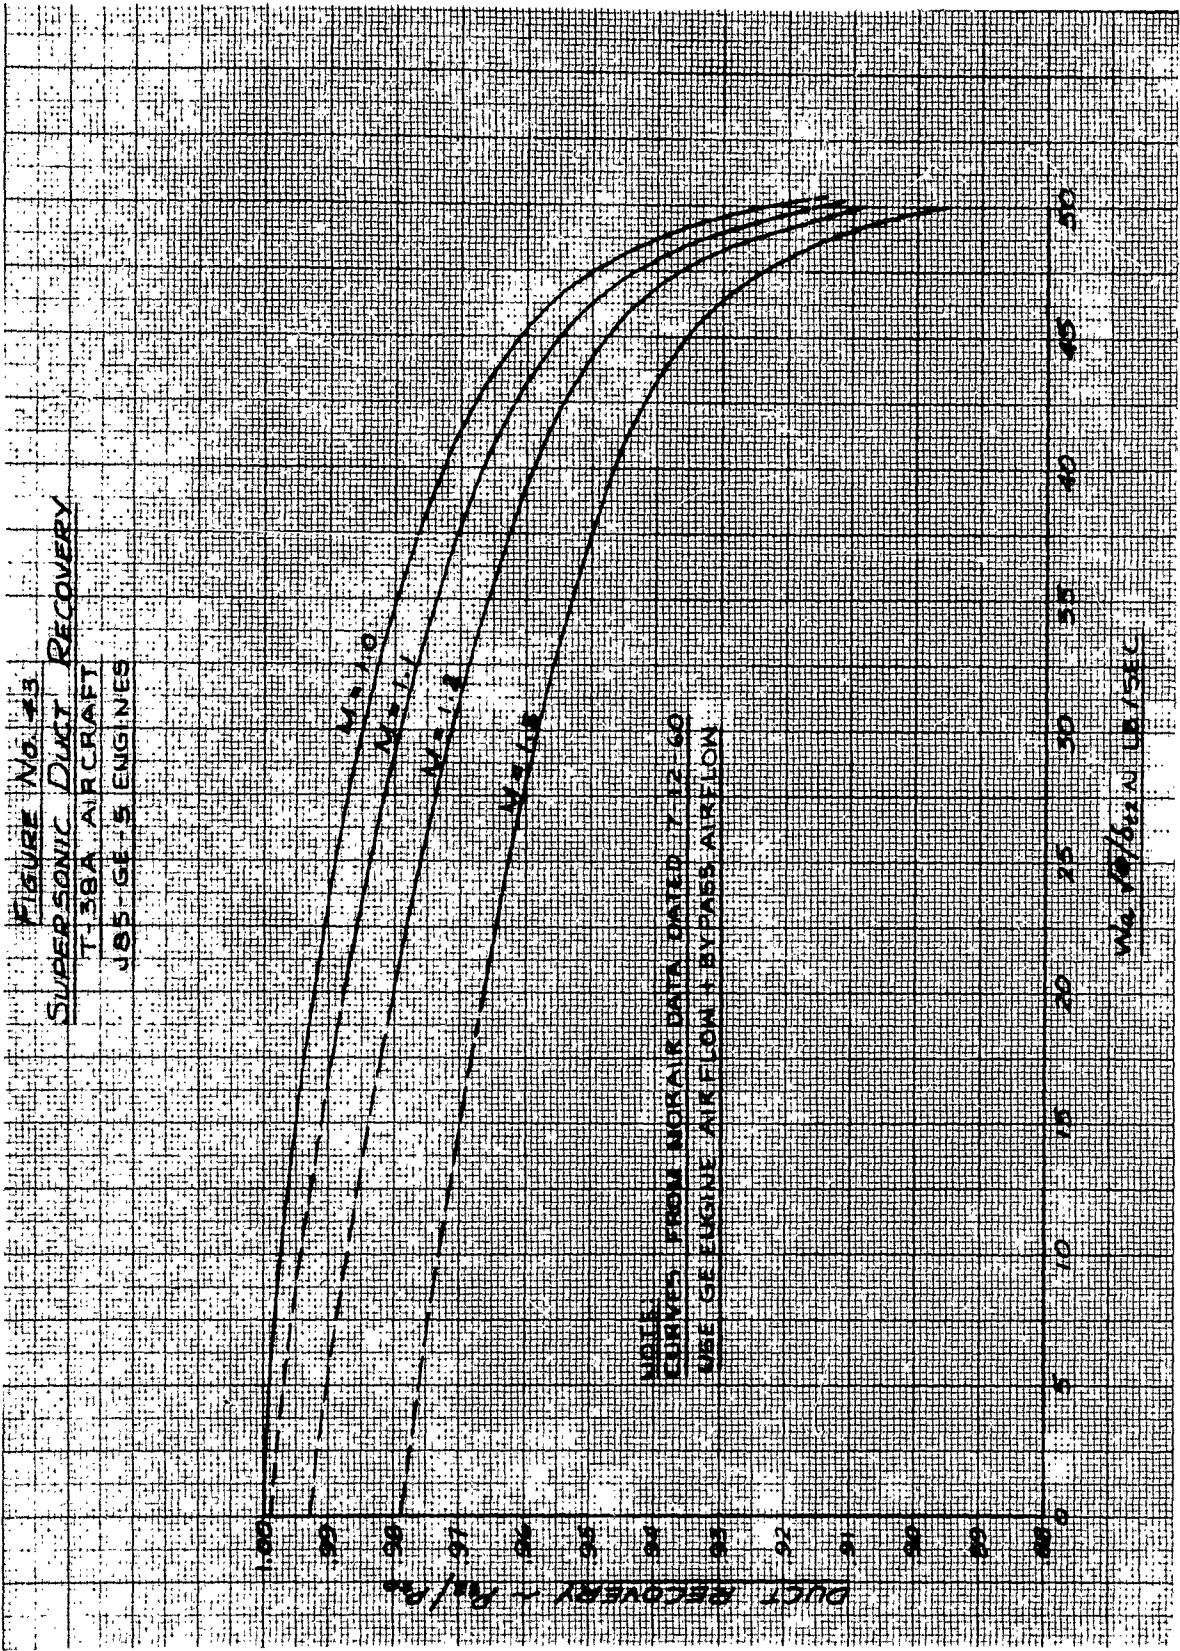


FIGURE No 44
SECONDARY SYSTEM NET THRUST
REDUCED POWER
T-38A AIRCRAFT
J85-GE-5 ENGINES

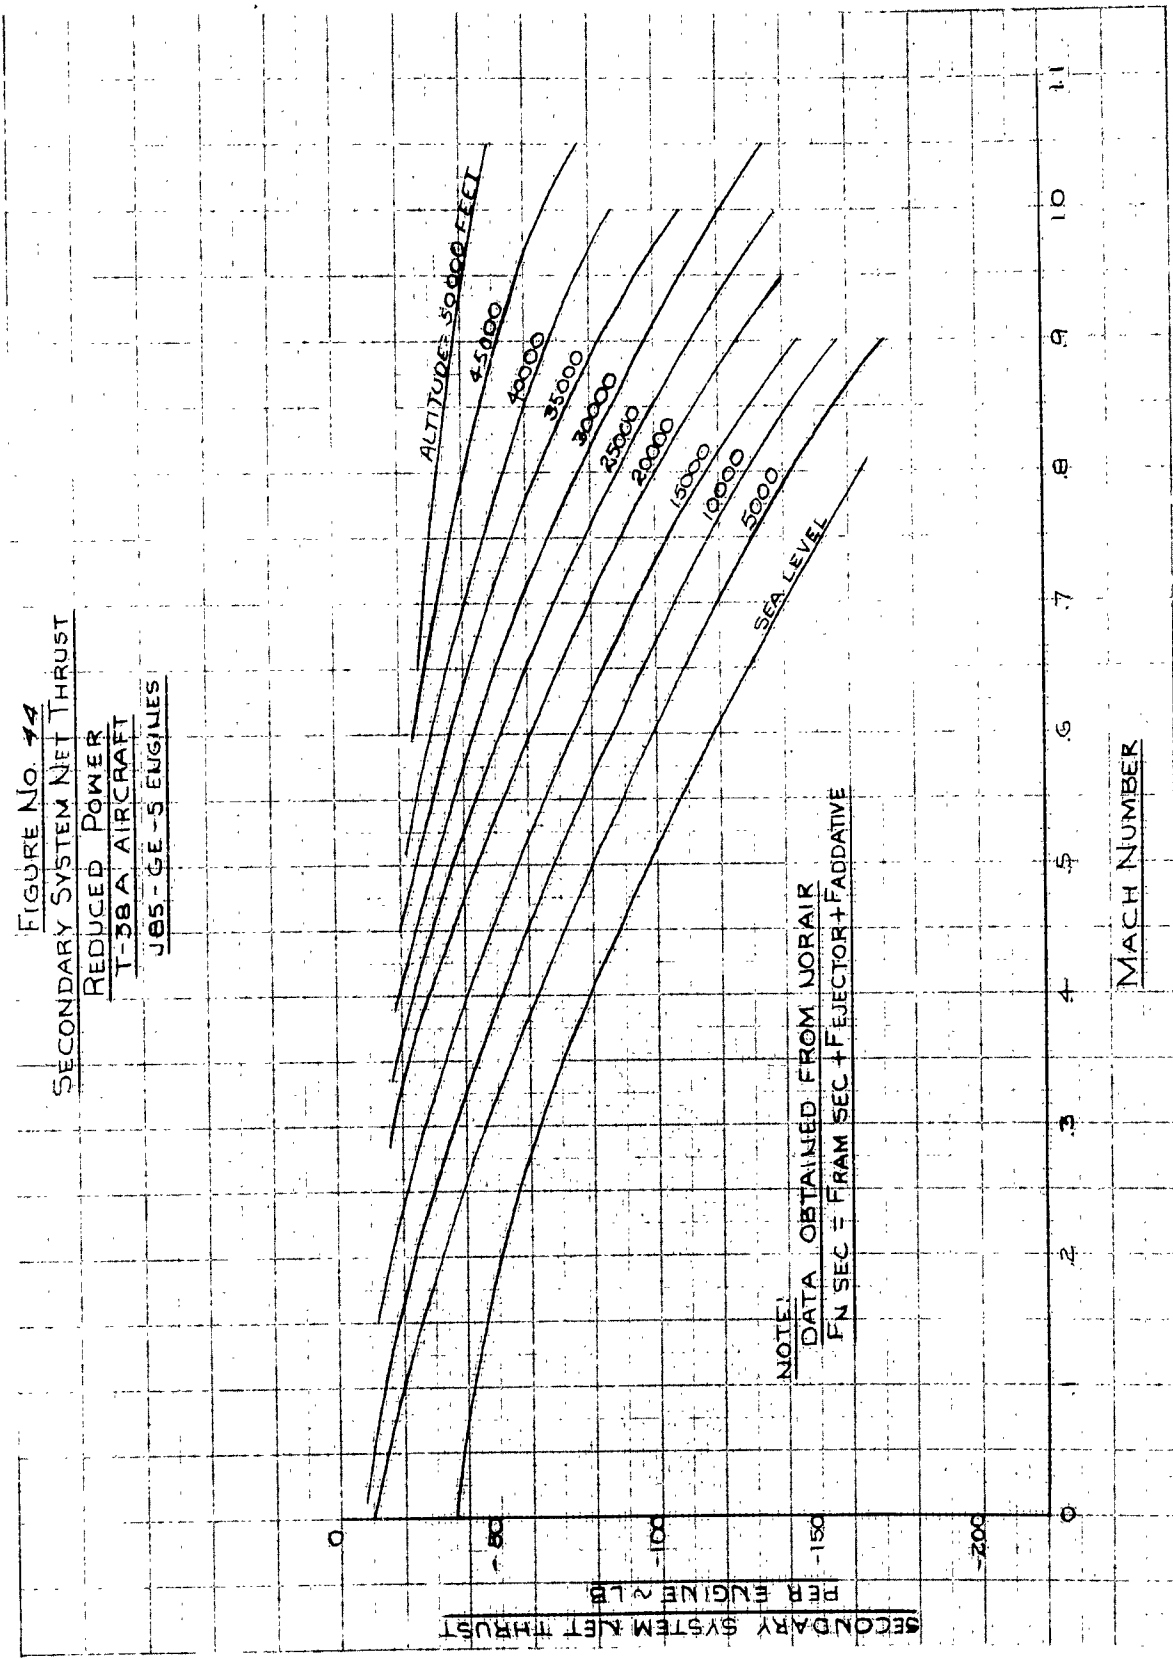

NOTE:
 DATA OBTAINED FROM NORAIR
 $F_N SEC = F_{RAM SEC} + F_{EJECTOR} + F_{ADDITIVE}$

FIGURE No. 45
SECONDARY SYSTEM NET THRUST
MILITARY POWER
T-38A AIRCRAFT
J85-GE-5 ENGINES

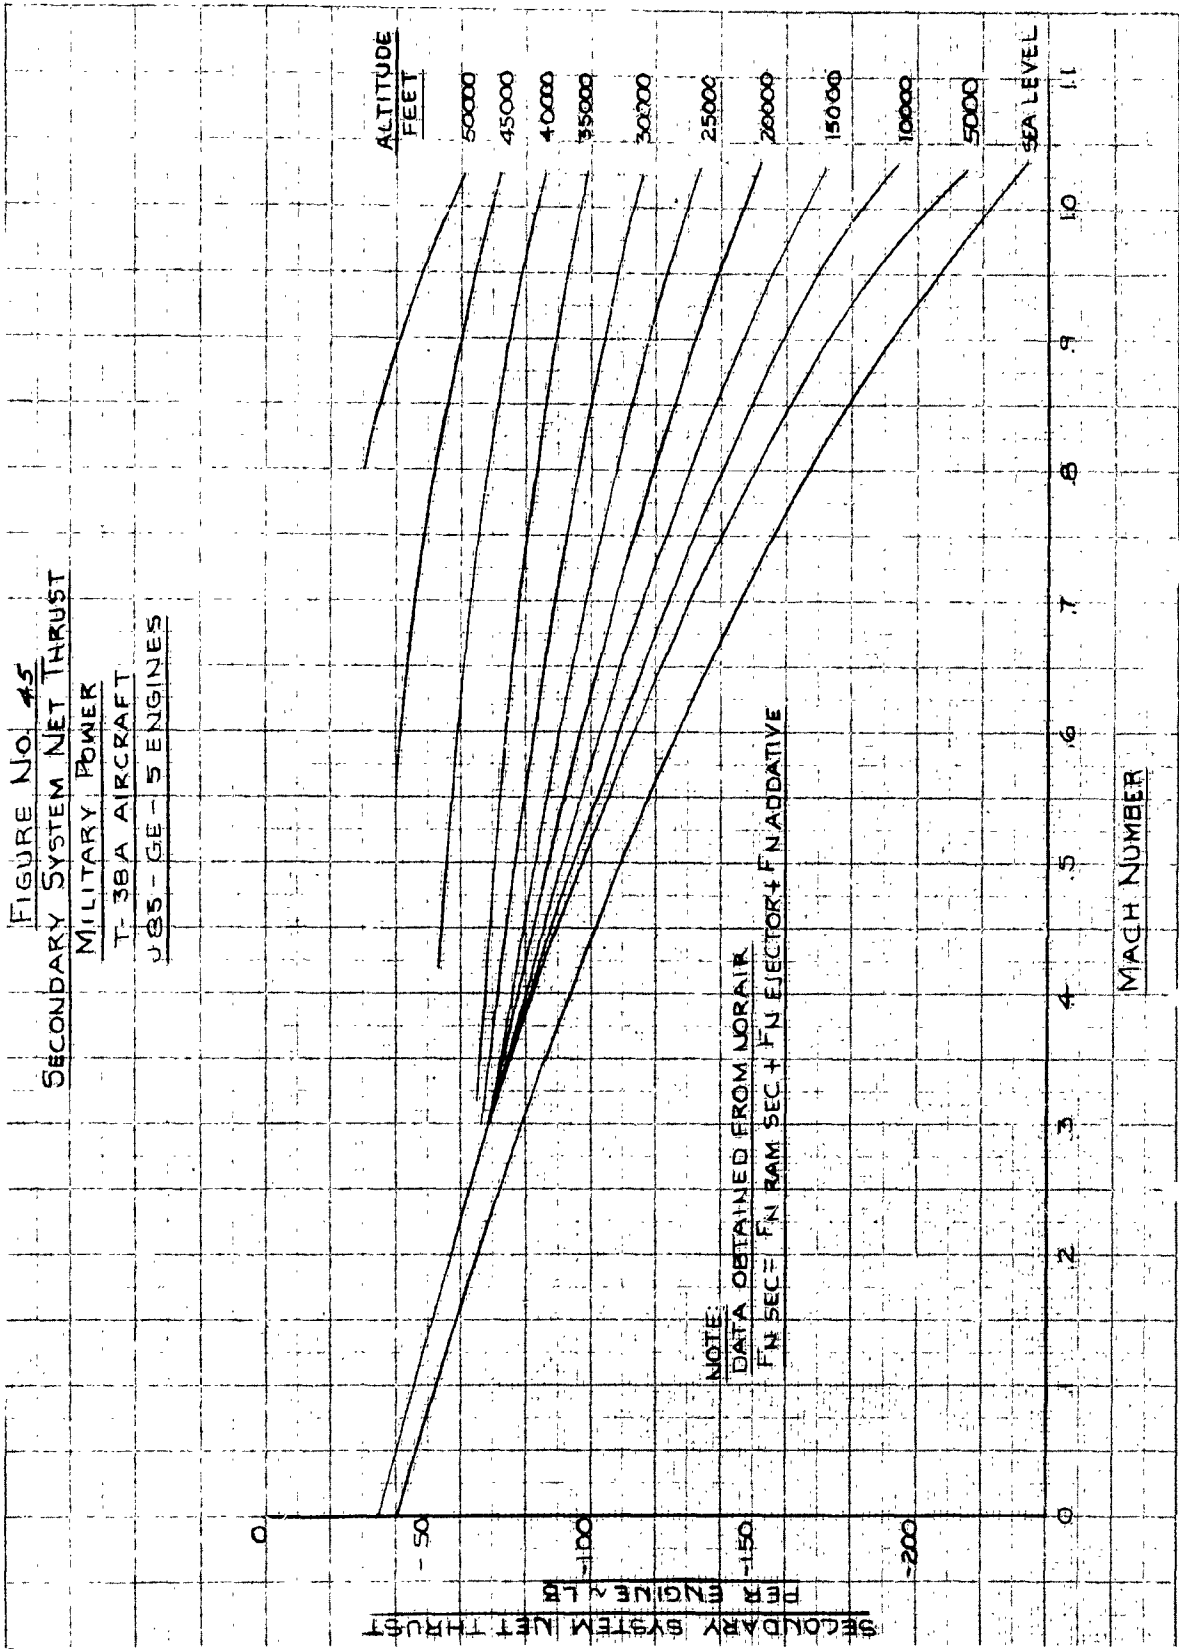


FIGURE NO. 46
SECONDARY SYSTEM NET THRUST
MAXIMUM POWER
T-38A AIRCRAFT
J85-GE-5 ENGINES

NOTE:
DATA OBTAINED FROM JORAIR
FN SECW FN RAM SEC1 FN SELECTORS FN ADDATIVE

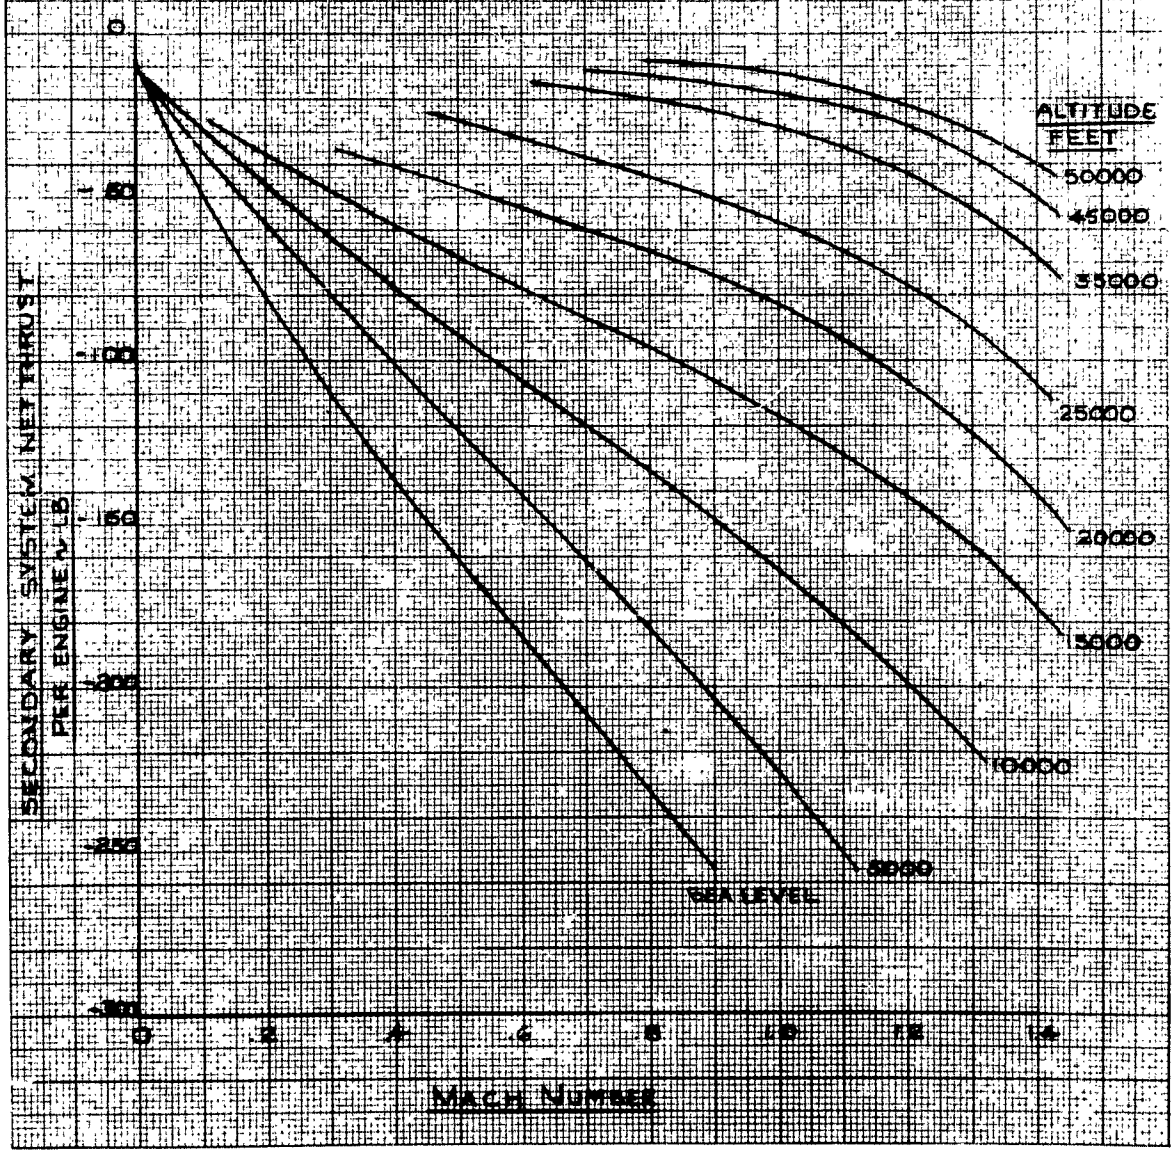


FIGURE NO. 47
SUTHERLANDS VISCOSITY INDEX

NOTE:
DATA BASED ON FIG. 2 OF
S.A.E. D. REPORT NO. G73
UBS-5 IN-FLIGHT THRUST
CALCULATION PROCEDURE
DATED FEB 15, 1961

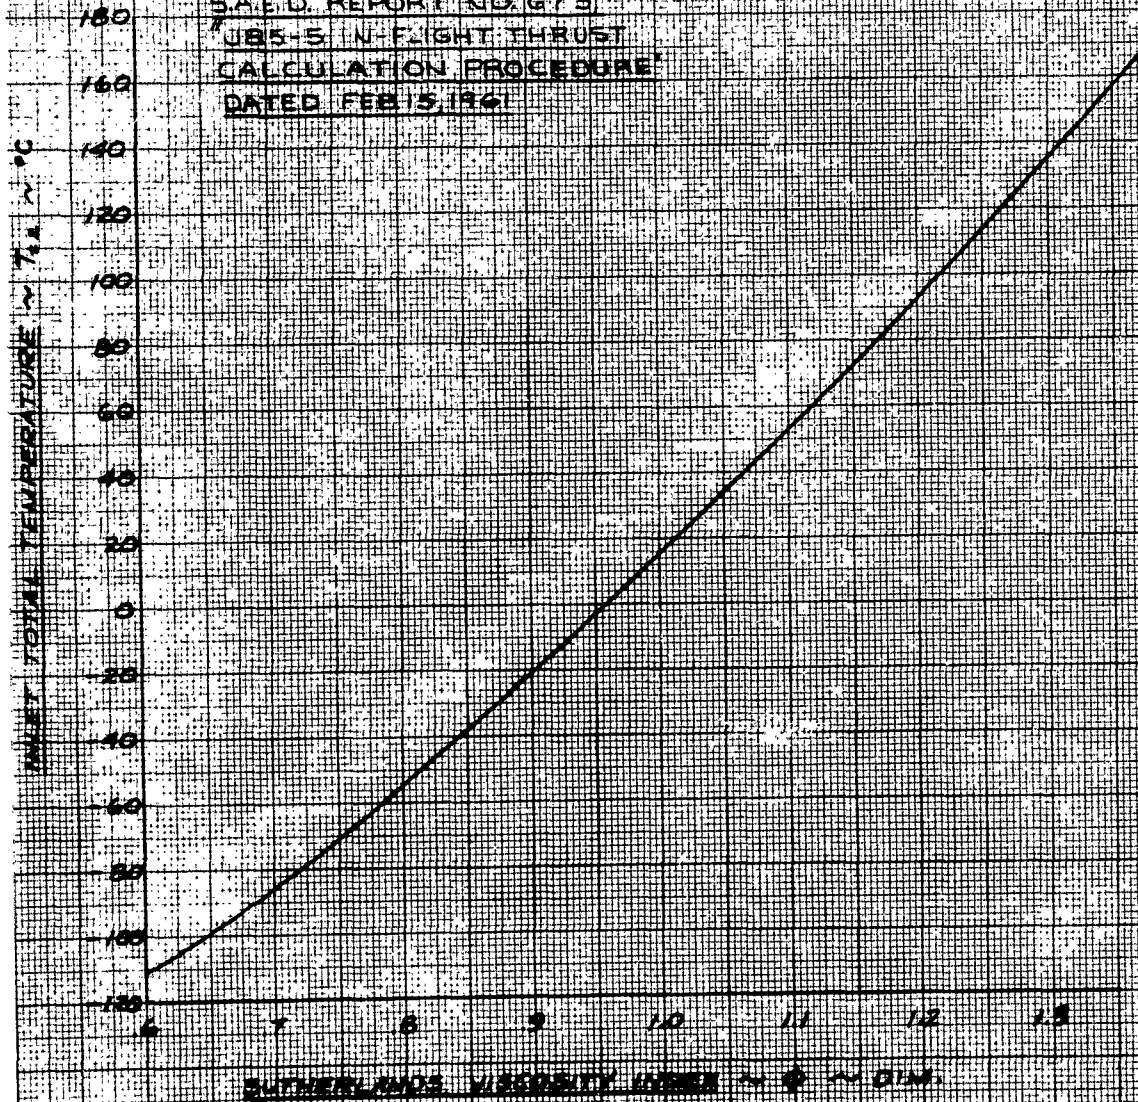


FIGURE NO. 48
T-38A - J85-5 INSTALLATION
INLET BYPASS CHARACTERISTICS
ESTIMATED



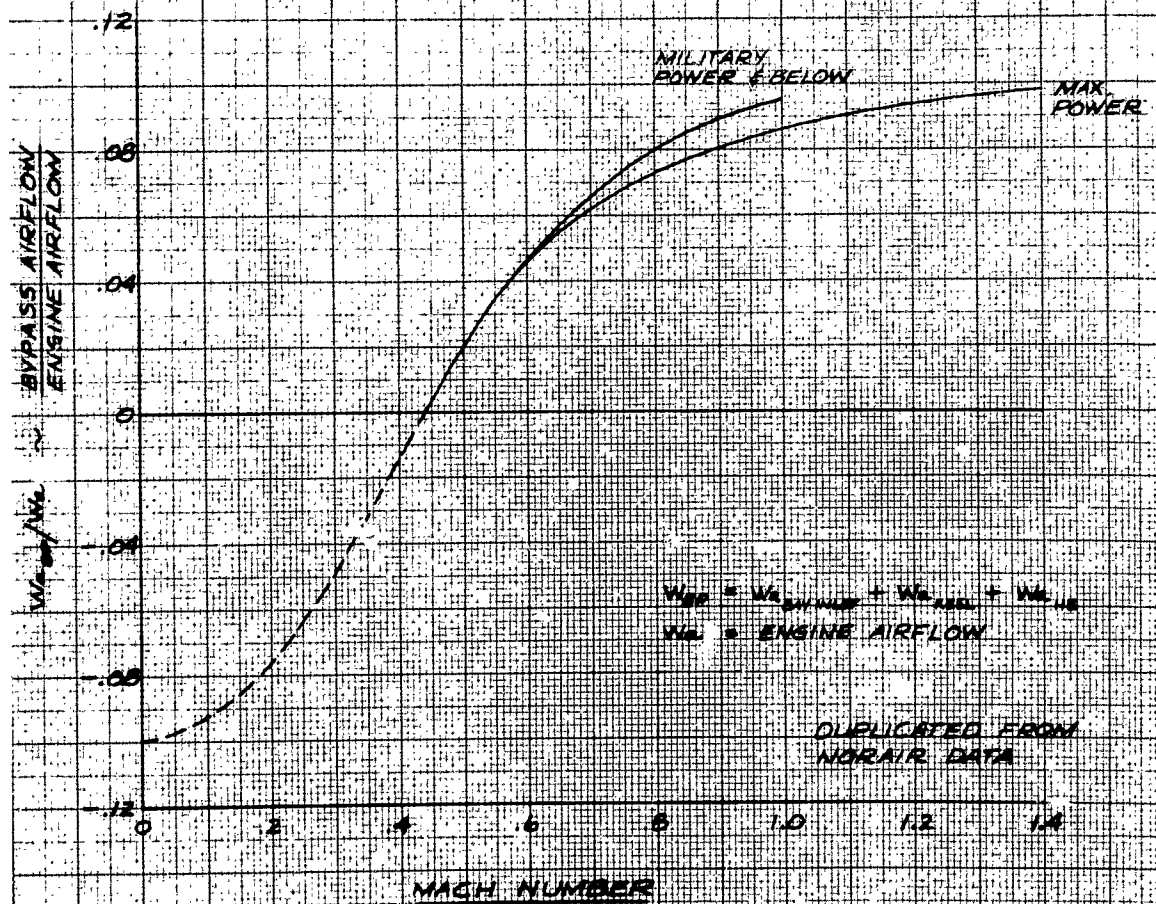


FIGURE No. 49
 ENGINE NOZZLE PERFORMANCE
 J85-GE-5 ENGINE

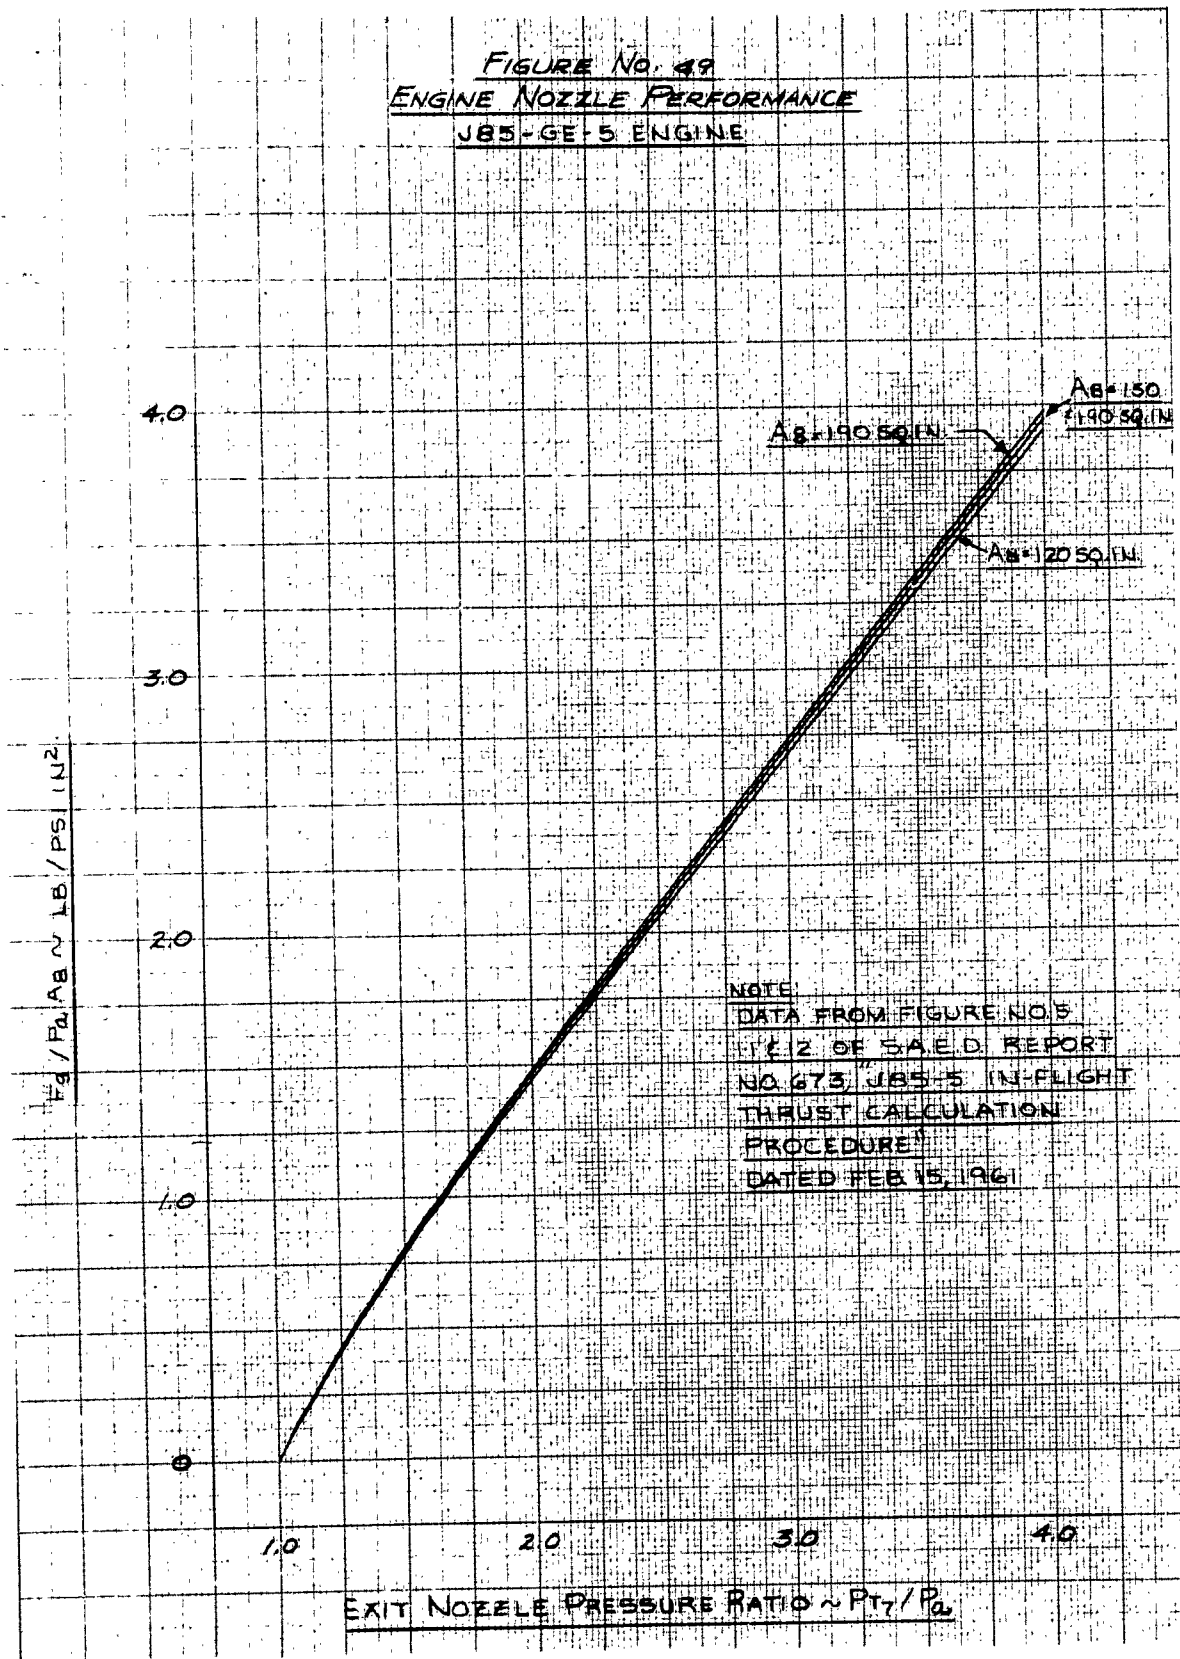

NOTE
 DATA FROM FIGURE NOS
 11 & 12 OF SAILED REPORT
 NO 673, J85-5 IN-FLIGHT
 THRUST CALCULATION
 PROCEDURE
 DATED FEB 15, 1961

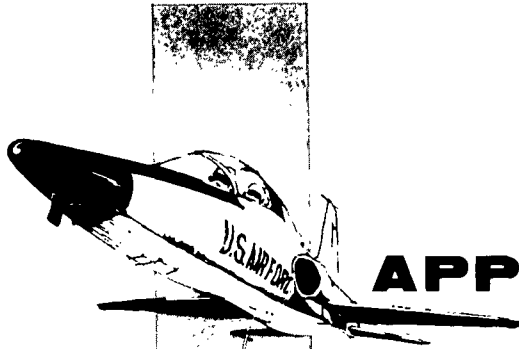

APPENDIX II....

GENERAL AIRCRAFT INFORMATION

● DIMENSION AND DESIGN DATA

Wing:

| | |
|----------------|---|
| Area, total | 170.00 sq ft |
| Taper ratio | .20 |
| Aspect ratio | 3.75 |
| Span/thickness | 51.1 |
| Airfoil | NACA 65A 004.8 modified (.65) 50 camber |
| Span | 25.25 ft |

Horizontal Tail:

| | |
|-------------------------|--------------|
| Area, total | 59.00 sq ft |
| Area, exposed | 33.34 sq ft |
| Taper ratio, exposed | .33 |
| Aspect ratio, exposed | 2.82 |
| Span/thickness, exposed | 58.6 |
| Airfoil | NACA 65A 004 |

Vertical Tail:

| | |
|-----------------------|--------------------------|
| Area, total | 41.42 sq ft |
| Area, exposed | 41.07 sq ft |
| Taper ratio, exposed | .25 |
| Aspect ratio, exposed | 1.21 |
| Span/thickness | 42.2 |
| Airfoil | NACA 65A 004 modified |

● INSTRUMENTATION

The test instrumentation was installed by the contractor and maintained by the AFFTC Instrumentation Branch.

The following parameters were recorded on a photo panel at a rate of one frame per second.

1. Time correlation
2. Time of day
3. Altitude
4. Airspeed
5. Outside air temperature
6. Fuel used totalizer, left engine plus left afterburner
7. Fuel used totalizer, right engine plus right afterburner
8. Fuel used totalizer, left and right afterburner pilot line
9. Left and right engine fuel flow
10. Left and right afterburner fuel flow
11. Left and right compressor discharge pressure
12. Left and right turbine discharge pressure
13. Left and right engine fuel temperature
14. Left and right afterburner fuel temperature
15. Left and right turbine discharge temperature
16. Left and right engine rpm.
17. Photo panel environment temperature

18. Lift-off and pilot event light

The following parameters were recorded on a 50 channel Consolidated Engineering Corporation oscillograph recorder:

1. Pilot lift-off and event correlation
2. Left and right engine inlet guide vane position
3. Left and right wheel brake hydraulic pressure
4. Left and right throttle position
5. Left and right engine nozzle position
6. Longitudinal acceleration at the A/C cg
7. Normal acceleration at the A/C cg
8. Lateral acceleration at the A/C cg
9. Left hand duct static pressure (P_{s2})
10. Left hand duct total pressure (P_{t2})
11. Angle of attack
12. Angle of sideslip
13. Left and right engine fuel flow
14. Left and right afterburner fuel flow
15. Speed brake position
16. Flap position
17. Swinging rake position
18. Swinging rake total pressure
19. Swinging rake static pressure
20. Ejector static pressure

continued overleaf



Test instrumentation available to the pilot included the following:

1. Altimeter
2. Airspeed
3. Left fuel totalizer, engine plus after burner
4. Right fuel totalizer, engine plus after burner
5. Time correlation
6. Photo panel and oscillograph controls

