

UNCLASSIFIED

AD NUMBER
AD456382
LIMITATION CHANGES
TO: Approved for public release; distribution is unlimited.
FROM: Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 30 DEC 1964. Other requests shall be referred to Springfield Armory, Springfield, MA.
AUTHORITY
USASA ltr dtd 17 Aug 1965

THIS PAGE IS UNCLASSIFIED

AD-456 382

RIA-77-U84

USADACS Technical Library



5 0712 01013564 7

TECHNICAL
LIBRARY

NO. SA-TR18-1088

DATE 30 December 1964

Handwritten:
Approved for Release
TOP SECRET
Excluded from automatic
downgrading and
declassification

Test Results of Four Wear-Resistant Coatings

TECHNICAL REPORT

Author

Dr. Francis X. Hassion
Joseph Szanto, P.E. 14217
Earl H. Abbe, P.E. 14390



MASTER FILE
DO NOT REMOVE
SPRINGFIELD ARMORY
Springfield, Mass.

DDC AVAILABILITY NOTICE. Qualified requesters may obtain copies of this report from Defense Documentation Center, Cameron Station, Alexandria, Virginia, 22314.

DISPOSITION INSTRUCTIONS. Destroy this report when it is no longer needed. Do not return it to the originator.

DISCLAIMER. The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

Report: SA-TR18-1088

Date: 30 December 1964

AMCMS Code: 4230.15.6228.20.02

Test Results of Four Wear-Resistant Coatings

TECHNICAL REPORT

Dr. Francis X. Hassion
Joseph Szanto, P.E. 14217
Earl H. Abbe, P.E. 14390

Project Title: Manufacturing Chemistry, Erosion- and Corrosion-Resistant
Coatings

PRON: M1-3-23043-01-M1-M6

Preparing Agency: Springfield Armory, Springfield, Mass.

This TECHNICAL REPORT, to the extent known, does not contain any patentable material, copyrighted and/or copyrightable material, or trade secrets.

ABSTRACT

An evaluation of four steel-substrate coatings of supposed high wear resistance was made in this work. The evaluation indicated the following order of decreasing wear resistance: (1) chromium plate containing dispersed diamonds, (2) nickel plate containing dispersed diamonds, (3) chromium plate, and (4) tungsten-carbide impregnated steel surfaces.

CONTENTS

	<u>Page</u>
Subject	1
Objective	1
Summary of Conclusions	1
Recommendations	1
Introduction	2
Results	2
Discussion	2
Appendices	
A - Tables (3)	4
B - Photographs (2)	8
C - Literature Cited	11
D - Distribution	12

SUBJECT

Test results of four wear-resistant coatings were evaluated.

OBJECTIVES

The purpose of this work was (1) to determine the wear resistance of steel surfaces impregnated with tungsten-carbide and (2) to compare the findings with other coatings for which data are available.

SUMMARY OF CONCLUSIONS

Wear resistance may be rated in the following order of decreasing value:

1. Chromium plate containing dispersed diamonds,
2. Nickel plate containing dispersed diamonds,
3. Chromium plate,
4. Tungsten-carbide (W-C) impregnated steel surfaces.

RECOMMENDATIONS

1. As represented by the samples tested, W-C impregnated surfaces, from the point of view of wear resistance, should not be considered further. However, only three sets of specimens were prepared in a crude experimental setup and these may not represent optimum surface treatment.

2. Additional work on chromium plate containing dispersed diamonds should be considered.

1. INTRODUCTION

The availability of certain new and novel dispersion type coatings has created an interest in the wear-resistance properties characterizing them. One of the methods of achieving these composite structures is by slight alteration of conventional plating techniques. Codeposits of alumina, thoria, zirconia, Teflon, silicon carbide, diamond, and zirconium diboride in nickel and/or chromium have been produced here and at other installations. In this publication, the results, obtained for the wear properties of steel impregnated with tungsten-carbide by means of an arc-fusion process, are presented and compared with those obtained for chromium plate and occlusions of diamond dust in nickel or chromium plate. The tungsten-carbide samples were experimental and perhaps not representative of ultimate capabilities.

2. RESULTS

Falex pins of 3135 steel and chuck jaws of 1137 steel impregnated with tungsten carbide by an arc-fusion process were examined for wear resistance in the Falex lubricant tester by using MIL-L-644 preservative oil.

The results of these tests are presented in Tables I through III. In each of the experiments, listed in these tables, the load slipped considerably and a stable condition was difficult to achieve.

3. DISCUSSION

a. The coefficient of friction values reported in Tables I through III were calculated from the following expression:

$$\text{Coefficient of Friction} = \frac{\text{Torque (in.-lb)}}{\text{Load (lb)} \times \text{Radius of pin (in.)} \times \sin \theta}$$

where $\theta \cong 45^\circ$ ($\sin \theta = .707$) and is one-half the angle subtended by the chuck jaws. The geometric factor accounts for the fact that the applied load must be modified to get the normal, effective load. The coefficient of friction is "effective" only because one-dimensional contact along the length of the pin is made instead of two-dimensional contact over the cylindrical surface area.

b. The results obtained in this work for W-C impregnated steel surfaces do not compare favorably with those obtained for codeposits of diamond in nickel or chromium.^{1,2} In the case of diamond dispersed in nickel, loads as high as 2500 pounds can be sustained for times up to 2500 seconds; also the pin wear is not as severe as in the W-C samples. Standard chromium plate can maintain loads of 1000 pounds for periods up to 1600 seconds. In the case of diamond dust dispersed in chromium plate, loads as high as 4500 pounds have been sustained for periods of 4500 seconds with low torque and coefficient of friction, with little wear, and without failure of any sort.

APPENDICES

**REPORT
SA-TR18-1088**

- A - Tables**
- B - Photographs**
- C - Literature Cited**
- D - Distribution**

Tables (3)

TABLE I

WEAR TEST RESULTS

Sample 1. W-C Impregnated pin with unmodified chuck jaws.

<u>Wt. Chucks</u> <u>Initial</u>	<u>Wt. Chucks</u> <u>Final</u>	<u>Wt. Falex</u> <u>Initial</u>	<u>Wt. Falex</u> <u>Final</u>	<u>Falex, O.D.</u> <u>Initial</u>	<u>Falex O.D.</u> <u>Final</u>
18.7813 gr	18.4347 gr	7.4406 gr	7.2579 gr	0.2507 in.	--
loss 0.3466 gr		loss 0.1827 gr			

<u>Load (lb)</u>	<u>Time (sec)</u>	<u>Coeff. of Fr.</u>	<u>Torque (in.-lb)</u>	<u>Temp (°F)</u>
250	0	0.722 → 1.354	16 → 30	110
250	46	1.354 → 3.16 → 0	30 → 70 → 0	130

The chuck jaws were moderately worn and welded; the Falex pin was heavily gouged and welded.

TABLE II

WEAR TEST RESULTS

Sample 2. W-C impregnated pin with unmodified chuck jaws.

<u>Wt. Chucks</u> <u>Initial</u>	<u>Wt. Chucks</u> <u>Final</u>	<u>Wt. Falex</u> <u>Initial</u>	<u>Wt. Falex</u> <u>Final</u>	<u>Falex, O.D.</u> <u>Initial</u>	<u>Falex O.D.</u> <u>Final</u>
18.7522 gr	18.2429 gr	7.4498 gr	7.1649 gr	0.2505 in.	--
loss 0.5093 gr		loss 0.2849 gr			

<u>Load (lb)</u>	<u>Time (sec)</u>	<u>Coeff. of Fr.</u>	<u>Torque (in.-lb)</u>	<u>Temp (°F)</u>
250	0	0.768	17	100
250	50	3.161→0	70→0	120

The chuck jaws were moderately worn and welded; the Falex pin was heavily gouged and welded.

TABLE III
WEAR TEST RESULTS


Sample 3. W-C impregnated pin and jaws.

<u>Wt. Chucks</u> <u>Initial</u>	<u>Wt. Chucks</u> <u>Final</u>	<u>Wt. Falex</u> <u>Initial</u>	<u>Wt. Falex</u> <u>Final</u>	<u>Falex, O.D.</u> <u>Initial</u>	<u>Falex, O.D.</u> <u>Final</u>
18.8242 gr	--	7.4261 gr	--	0.2506 in.	--


<u>Load (lb)</u>	<u>Time (sec)</u>	<u>Coef. of Fr.</u>	<u>Torque (in.-lb)</u>	<u>Temp(°F)</u>
250	0	0.587	13	90
500	180	0.406→0.903	18→40	115
500	240	0.903→1.58→0	40→70→0	130

The pin, welded to the chuck jaws, appeared heavily gouged.


Photographs

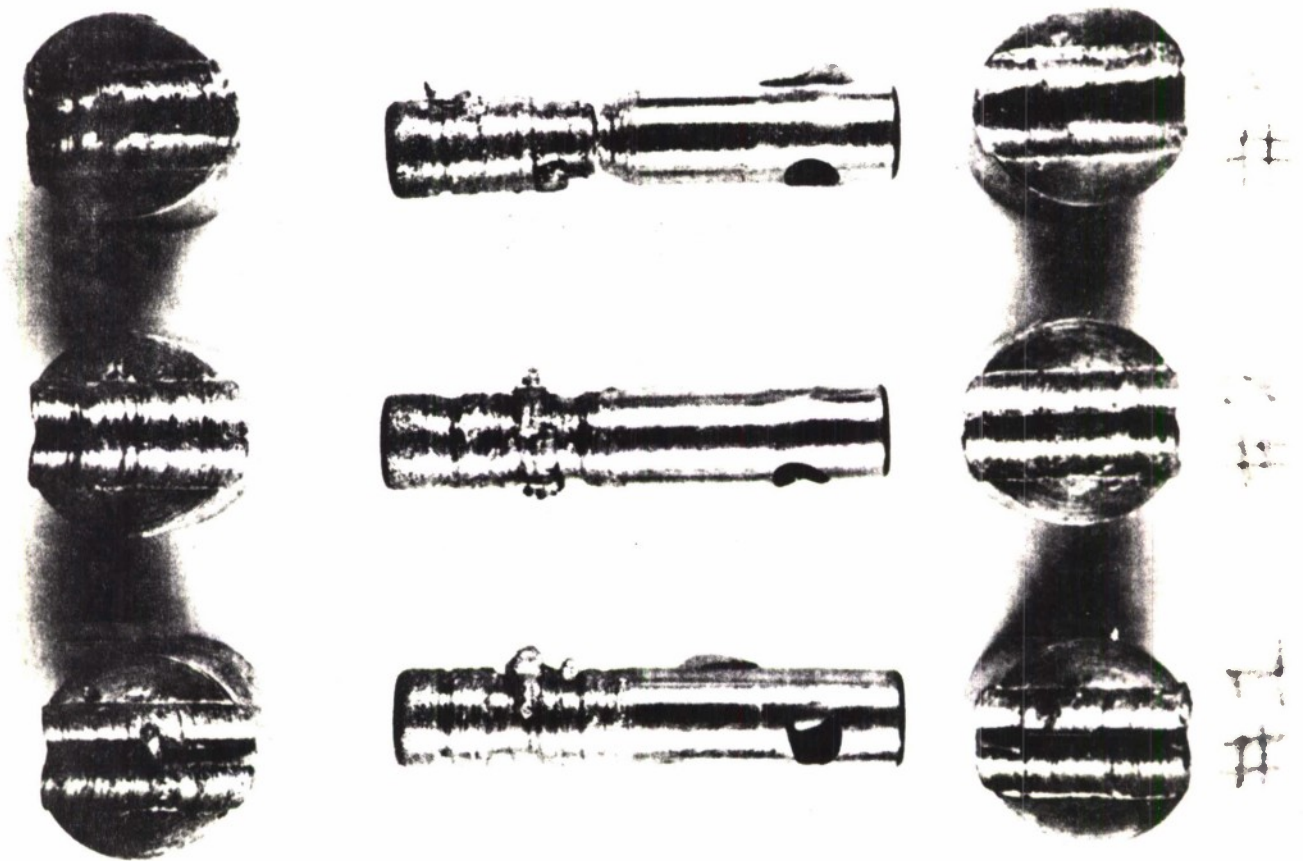

Tungsten Carbide Impregnated Surfaces after Wear Test

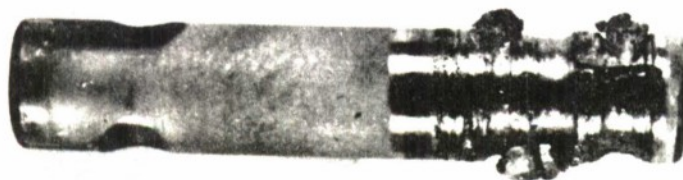

#2

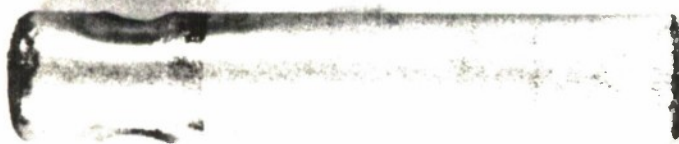

A-50

#2. Standard Chromium Plate after Wear Test

A-50. Diamond Dust Dispersed at High Current Densities
in Chromium Plate after Wear Test

LITERATURE CITED

1. Hassion, Dr. Francis X., "Occlusion of Diamond Dust in Chromium Plating on Steel Substrates," SRB, SA-TR18-1086.
2. Hassion, Dr. Francis X., "Utilization of Occluded Diamonds in Chromium Plate on the SPIW Stripper," SRB, SA-TR18-1087.

REPORT
SA-TR18-1088

APPENDIX D

DISTRIBUTION

<u>Facility</u>	<u>Copies</u>
Commanding General Army Matériel Command Bldg T-7, Rm 817 Department of the Army Washington, D. C. 20315	1
U.S. Army Matériel Command ATTN: AMCRD-RC-M Washington, D. C. 20315	1
Commanding General U.S. Army Weapons Command ATTN: AMSWE-RD (1) AMSWE-RDF3 (1) Rock Island, Illinois 61202	2
Commanding General U.S. Army Natick Laboratories ATTN: Chemical and Plastics Division (3) Mechanical Products Branch (1) Natick, Massachusetts 01760	4
Commanding Officer Rock Island Arsenal ATTN: SWERI - Materials Section, Laboratory Rock Island, Illinois 61202	1
Commander Defense Documentation Center Cameron Station, Bldg. 5 Alexandria, Virginia 22314	20
Commanding Officer U.S. Army Materials Research Agency ATTN: TIC Watertown, Massachusetts 02172	1
Director U.S. Army Research Office Office Chief Research and Development ATTN: Physical Sciences Division Arlington, Virginia	2

DISTRIBUTION - Continued

<u>Facility</u>	<u>Copies</u>
Commanding Officer U.S. Army Research Office Box CM, Duke Station Durham, North Carolina 27706	1
Commanding Officer Frankford Arsenal ATTN: SMUFA-1330 (1) Library - 0270 (1) Philadelphia, Pennsylvania 19137	2
Commanding Officer Picatinny Arsenal ATTN: Plastics and Packaging Laboratory (1) PLASTEC (1) Dover, New Jersey 07801	2
Commanding Officer Watervliet Arsenal ATTN: SWEVW-RD Watervliet, New York 12189	1
Director U.S. Naval Research Laboratory ATTN: Technical Information Officer Anacostia Station Washington, D. C. 20019	1
Commanding Officer U.S. Army Coating and Chemical Laboratory Aberdeen Proving Ground, Maryland 21005	2
Commanding General U.S. Army Ordnance Special Weapons and Ammunition Command Dover, New Jersey 07801	1
Commanding Officer Harry Diamond Laboratories ATTN: AMXDO-TIB Connecticut Avenue and Van Ness Street, N.W. Washington, D. C. 20438	1

DISTRIBUTION - Continued

<u>Facility</u>	<u>Copies</u>
Commanding Officer Engineer Research and Development Laboratory ATTN: STEPR-Materials Branch Ft. Belvoir, Virginia 22060	1
U.S. Atomic Energy Commission Technical Information Service Extension P.O. Box 62 Oak Ridge, Tennessee 37830	1
Commanding General U.S. Army Test and Evaluation Command ATTN: Technical Library, Bldg 313 (2) Director, Infantry Materiel Testing (2) Aberdeen Proving Ground, Maryland 21005	4
Chief, Bureau of Naval Weapons Department of the Navy ATTN: RMMP, Rm 225, Munitions Bldg Washington, D.C. 20360	1
Office of Naval Research Department of the Navy ATTN: Code 423 Washington, D. C. 20360	1
Commander U.S. Naval Ordnance Laboratory ATTN: Code WM White Oak, Silver Spring, Maryland 20900	1
U.S. Air Force Directorate, Research and Development The Pentagon, Room 4D-313 Washington, D. C. 20310	1
Wright Air Development Division ATTN: ASRCEE-1 (1) WWRCO (1) Materials Control (1) Wright-Patterson Air Force Base, Ohio 45433	3
Commander, U.S. Naval Air Experimental Station Building 600 Philadelphia, Pennsylvania 19100	1

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION	
SPRINGFIELD ARMORY		UNCLASSIFIED	
		2b. GROUP	
		None	
3. REPORT TITLE			
Test Results of Four Wear-Resistant Coatings			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
TECHNICAL REPORT			
5. AUTHOR(S) (Last name, first name, initials)			
Hassion, Dr. Francis X. Szanto, Joseph, P.E. 14217 Abbe, Earl H., P.E. 14390			
6. REPORT DATE		7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
30 December 1964		14	None
8a. CONTRACT OR GRANT NO. None		9a. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. M1-3-23043-01-M1-M6			
c. AMCMS Code 4230.15.6228.20.02		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.			
10. AVAILABILITY/LIMITATION NOTICES			
Qualified requesters may obtain copies of this report from Defense Documentation Center, Cameron Station, Alexandria, Virginia, 22314.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY	
		AMC	
13. ABSTRACT			
An evaluation of four steel-substrate coatings of supposed high wear resistance was made in this work. The evaluation indicated the following order of decreasing wear resistance: (1) chromium plate containing dispersed diamonds, (2) nickel plate containing dispersed diamonds, (3) chromium plate, and (4) tungsten-carbide impregnated steel surfaces.			

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
1. Coatings						
2. Metal coatings						
3. Cermet formation						
4. Composite materials						
5. Refractory coatings						
6. Protective treatments						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.