


NPS ARCHIVE
1960
BROWN, C.

UNITED STATES NAVAL POSTGRADUATE SCHOOL



THESIS

VISUAL DETECTION OF VEHICULAR TARGETS FROM
ATTACK AIRCRAFT

by

C. H. Brown

~~This document is subject to special export
controls and each transmittal to foreign govern-
ment or foreign nationals may be made only with
prior approval of the U.S. Naval Postgraduate
School (Code 035).~~

Thesis
B8099

DUDLEY KNOX LIBRARY
NAVAL POSTGRADUATE SCHOOL
MONTEREY CA 93943-5101

Library
U.S. Naval Postgraduate School
Monterey, California 93940

VISUAL DETECTION OF VEHICULAR TARGETS

FROM ATTACK AIRCRAFT

* * * * *

Charles H. Brown

VISUAL DETECTION OF VEHICULAR TARGETS

FROM ATTACK AIRCRAFT

by

Charles H. Brown

//

Lieutenant, United States Navy



Submitted in partial fulfillment of
the requirements for the degree of

MASTER OF SCIENCE

United States Naval Postgraduate School
Monterey, California
1960

DUDLEY KNOX LIBRARY
NAVAL POSTGRADUATE SCHOOL
MONTEREY CA 93943-5101

VISUAL DETECTION OF VEHICULAR TARGETS
FROM ATTACK AIRCRAFT

by

Charles H. Brown

This work is accepted as fulfilling
the thesis requirements for the degree of
MASTER OF SCIENCE

from the

United States Naval Postgraduate School

ABSTRACT

Attack aircraft on interdiction or deep support missions are faced with the problem of detecting their targets by visual means. Much has been written about the general theory of computing detection probabilities associated with visual detection and some experiments have been performed to get estimates of the detection probabilities for small tactical targets observed from the air. Applying the theory to a special case involving the detection of a stationary tank by a relatively high speed aircraft, a lateral range curve of detection probabilities is computed in this paper. This is compared with (1) lateral range curves from an experiment conducted by the University of Michigan in the field and over a terrain simulator and (2) lateral range curves constructed from data taken in an operational experiment conducted with USNPGS personnel in conjunction with a CDEC tactical exercise.

The detection probabilities and maximum sighting ranges observed in the operational experiment are significantly below those predicted by the theory and the Michigan experiment described in this paper. It is recommended that further operational type experiments be conducted to provide accurate data for obtaining detection probabilities and maximum sighting ranges which can be used for operational planning purposes.

PREFACE

This thesis is concerned with the probability of visual detection occurring in the process of search for vehicular tactical targets by attack aircraft. It offers a comparison of the probability predicted by a theory, probabilities predicted and observed in an experiment conducted by the University of Michigan Vision Research Laboratories and probabilities observed in an operational experiment conducted by the writer.

The operational experiment was conducted with the cooperation of the Combat Development Experimental Center of the Army located at Fort Ord, California, the Aviation Department of the U. S. Naval Postgraduate School and the Naval Aviators of the Postgraduate School who volunteered to act as pilot observers for the experimental flights.

I wish to express my appreciation for the encouragement offered by Mr. Norman L. Thoburn of Project Michigan, Mr. Laurier E. Parent, of Stanford Research Institute who are presently working with the research staff of CDEC. I am indebted to Professors W. P. Cunningham and F. F. Sheehan for their guidance and encouragement while acting as faculty advisors.

TABLE OF CONTENTS

Section	Title	Page
1.	Introduction	1
2.	Visual Detection Theory	4
3.	The Michigan Experiment	10
4.	The Operational Experiment	15
5.	Effects of Variables	19
6.	Conclusions	23
7.	Recommendations	26
8.	Bibliography	27
Appendix		
I.	Visual Detection Theory	28
II.	The Michigan Experiment	51
III.	The Operational Experiment	66

LIST OF ILLUSTRATIONS

Figure		Page
1	Maximum Horizontal Range of Detection	6
2	Theoretical Lateral Range Curves	9
3	Data: Recognition Probability as a Function of Slant Range	12
4-5	Recognition Probability as a Function of Slant Range	13
6	Operational Lateral Range Curves	18
7-8	Contrast Values	21, 22
9	Estimates of Maximum Detection Probabilities	24
I-1	Nomograph	44
I-2	Maximum Horizontal Range of Detection	45
I-3	Threshold Off Axis Angle	46
I-4	Detection Cylinder of Revolution	47
I-5	Exponential Integral Values	48
I-6	Theoretical Lateral Range Curves	49
II-1	Log Relative Slant Range	63
II-2	Data: Recognition Probability as a Function of Slant Range	64
II-3-4	Recognition Probability as a Function of Slant Range	65
Table		
I-1	Values of Height Factor	50
II-1	Data from Michigan Experiment	60
II-2	Relative Slant Range	61

LIST OF ILLUSTRATIONS (cont'd)

Table		Page
II-3	Recognition Probability as a Function of Slant Range	62
III-1	Target Vehicles per Range Band	76
III-2	Targets Observed per Range Band	77
III-3	Detection Probabilities	78
III-4	Corrected Detection Probabilities	79
Chart		
1	Hunter Liggett Area and Search Courses	80
2	Sample Target Position Overlay	81

GLOSSARY

B_t	Target luminance(brightness)--Intensity of light per unit area from target
B_t^i	Background luminance(brightness)--Intensity of light per unit area from background
B_m	Sky luminance(brightness)--Intensity of light per unit area from sky
B_m/B_t^i	Sky-ground ratio--Ratio of sky and background luminances
C_o	Inherent contrast--Defined as: $C_o = \frac{B_t - B_t^i}{B_t^i}$, a comparison of target and background luminance
C_r	Apparent contrast--Contrast of target observed at some range from the target where inherent contrast has been reduced by atmospheric effects
C^1	Adjusted inherent contrast--Defined as: $C^1 = C_o / B_m / B_t^i$
C_t	Threshold contrast of the eye--Minimum contrast which can be distinguished by the eye. Varies for individuals
θ	Target's angle off the visual axis(Perception angle)--Angular measurement in degrees of the target's location with respect to the visual axis
	Visual axis--The axis of the line of sight.
θ_f	Foveal off axis angle--Maximum angle off the visual axis at which a target may be detected at maximum range
A	Target area
$\bar{A}$	Effective target area--Target area reduced by atmospheric effects
α	Solid angle subtended by the target at the eye

GLOSSARY (cont'd)

V	Meterological visibility--Generally the maximum distance at which large targets such as mountains or high coastlines can be seen against the sky (Koopman, p. 53)
R	Slant range
$\bar{R}$	Maximum optical slant range--Slant range reduced by atmospheric effects
R_h	Horizontal range
R_m	Maximum horizontal range
h	Observer height
h_o	Atmospheric constant-- 10^4 is the accepted value at the height where the ratio of air molecules to the number at sea level is $1/e$.
H	Height factor--Defined as: $H = h_o/h \left[1 - e^{-h/h_o} \right]$
θ_e	Observer elevation angle relative to the target
τ	Glimpse time--Time required for an observer to become aware of a target that he "sees"
ϕ	Search arc possible to an observer

1. Introduction.

This thesis is a comparison of estimates of detection probabilities associated with the process of visually detecting a stationary vehicle from an attack aircraft. The methods of estimating the probabilities differ widely as do the resulting values determined. It is hoped that this paper will indicate an effective approach for arriving at values of detection probabilities which are accurate enough to be used as operational planning factors.

The weapons system of interest in this paper is the manned attack aircraft. It is presently the main component of the striking force of the navy. With the introduction of Polaris into the fleet the importance of the manned aircraft in a general war will be reduced, but it will remain of prime importance in conducting the strike missions required in limited war.

Assume that in a limited war manned attack aircraft missions will be:

1. Counter air--Attack and destroy or neutralize enemy airfields and associated aircraft
2. Interdiction--a. Attack and destroy points of concentration in the enemy supply and communication network
b. Locate, attack and destroy vehicular traffic along the routes of the above network
3. Direct support of ground forces--a. Close air support with direct control of air strikes by the supported ground forces
b. Deep support--Locate, attack and destroy tactical targets capable of directly affecting friendly forces but with which our forces do not have contact

In conducting the missions of (1) interdicting traffic and (2) deep support, which will be classed together as armed reconnaissance, the attack aircraft must be capable of detecting the targets, vehicles and other tactical targets, as well as destroying them. In both situations it is likely that the targets will be stationary, for the enemy will know of the threat of air strikes and will tend to cease movement during daylight hours.

In order to locate targets various sensing devices are available or are in the process of design, evaluation and installation in aircraft. These include infrared devices, high resolution radar, television, photography and visual detection by the eye. All of these systems are capable of detecting the targets of interest in armed reconnaissance missions with different degrees of effectiveness. However, at present, visual detection of the target by the pilot of an attack aircraft is the only operational system which is of value in locating targets which are capable of motion even though they are stationary at the time of detection. It is the only means which enables the pilot of the attack aircraft to attack immediately after detection, thereby giving the target no chance to move and create a new search problem. However unsophisticated visual detection may be, it is still important.

This paper describes a theoretical method of computing visual detection probabilities, presents a description of a University of Michigan visual experiment which determined detection probabilities and offers data and conclusions obtained from an operational experiment conducted

by the writer to obtain values of visual detection probabilities for tactical targets.

The paper does not include the evaluation of the problem of detection when it is necessary for the observer to report the target positions after returning to base.

2. Visual Detection Theory.

The study of the theory of visual detection must consider the process by which the eye sees objects. Details of the physiology of detection by the eye are presented in references (c) and (d) with a brief sketch of the process being given in Appendix I of this paper. The eye's ability to see an object, the target of interest, is affected by several variables. Laboratory experiments have led to the belief that the primary variables are: (d)

1. Target-background contrast
2. The solid angle subtended by the target
3. The off-axis angle of the target and the eye's perception angle
4. Target shape

Determining the Maximum Horizontal Range of Detection

There is a minimum value of the threshold contrast of the eye necessary for the eye to detect the target. (g) The inherent contrast of the target is the contrast of the target with its background when it is viewed at extreme range, with very little atmosphere between the observer and the target. As the distance between the target and observer is increased the inherent contrast is reduced, due to the reduction of light from the target transmitted through the atmosphere. At some extreme maximum range the contrast of the target reduces to the minimum or threshold contrast of the eye and that range is the maximum range of detection for the target.

An equation may be set up involving the essential variables of the

visual detection process presented above. (c) This equation may be solved for the maximum visual range. This equation considers these variables:

1. Atmospheric conditions
2. Meterological visibility range
3. Luminance levels
4. Size and inherent contrast of the target
5. Height of the observer

The solution of the equation is based on these assumptions: (c)

1. The atmosphere is composed of optically standard stratified layers
2. There is uniform sky illumination
3. The sun's directional effect is ignored
4. All observers are giving optimum performance while searching

Appendix I describes a method of using a nomograph giving solutions of the equation under various conditions. (c) An example is set up for calculations of R_h , which have been made and are presented in Figure 1. The inputs of the calculations of the example were:

1. Assumed targets: Tank and jeep
2. Sky-ground ratio: 2.5 (Forest on a bright day) (c)
3. Inherent target contrast: .125, .25, and .50 (a reasonable range of values)
4. Meterological visibility: 30 miles

Figure 1 indicates that the range of detection is reduced as the target inherent contrast becomes smaller in absolute magnitude. Optimum altitudes for search are also indicated by this theoretical approach

MAXIMUM HORIZONTAL RANGE OF DETECTION

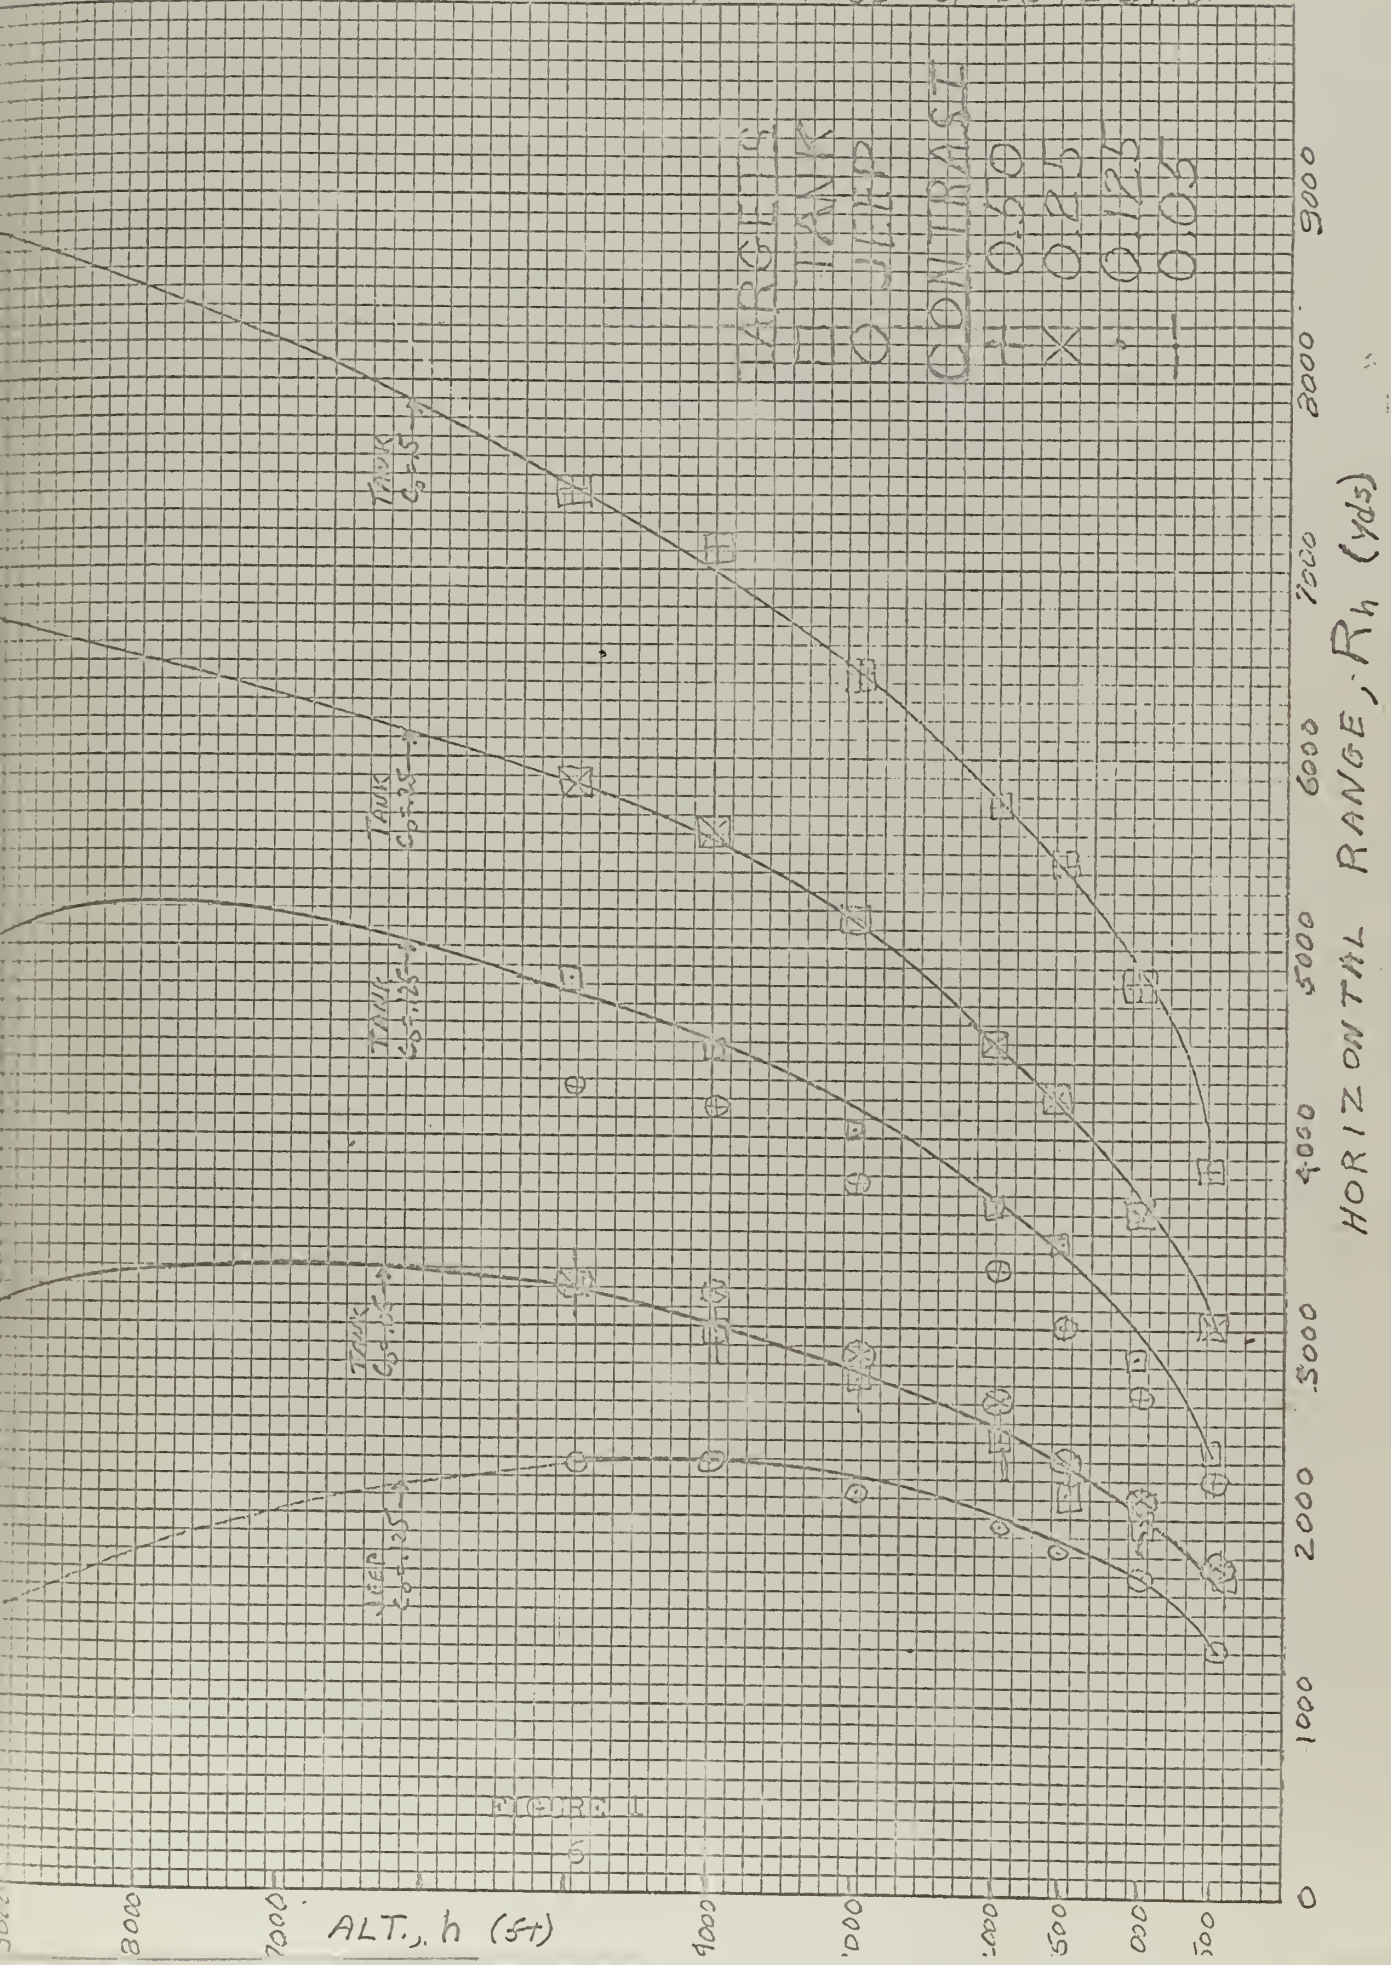


FIGURE 1

for obtaining maximum range of detection. For the target of large contrast value, this maximum falls at heights greater than those plotted.

Determining Detection Probabilities

The visual perception angle of the eye is defined as the maximum angle off the visual axis of the eye at which the eye can see a target. (a) This angle varies with range. Generally, the greater the range the smaller is the angle. This is established in Appendix I. The relationship of the angle and the range is shown in Figure 2. The probability of detection of a target in one glimpse is defined as:

$$g_i = \frac{\theta_i}{H}$$

where, g_i , is the glimpse probability and, H , is the arc of the observer's possible circle of vision. Using this quantity as a basis, it is possible to derive, as is shown in Appendix I, an expression for the probability of detection of a target at any given lateral range. (b)

The expression is in terms of:

1. Maximum horizontal range
2. Observer's speed
3. Glimpse time
4. Visual perception angle

The maximum horizontal range was affected by the height of the observer, the target size, the ratio of range to meteorological visibility and the target contrast so these parameters also affect this expression.

The example presented previously is extended to include these conditions:


1. Target: Tank
2. Inherent contrast: $-.125$
3. Observer height: 1500 and 5000 feet
4. Observer speed: 200 and 400 knots

Figure 2 presents the lateral range curves computed by the method of Appendix I for the above conditions. It is the representation of the final results of the theory showing the probability of detection of a target and indicating the maximum possible range of detection.

THEORETICAL LATERAL RANGE CURVES

FIGURE 2

TOT. AREA: 150.54
 $C_0 = 1/25$

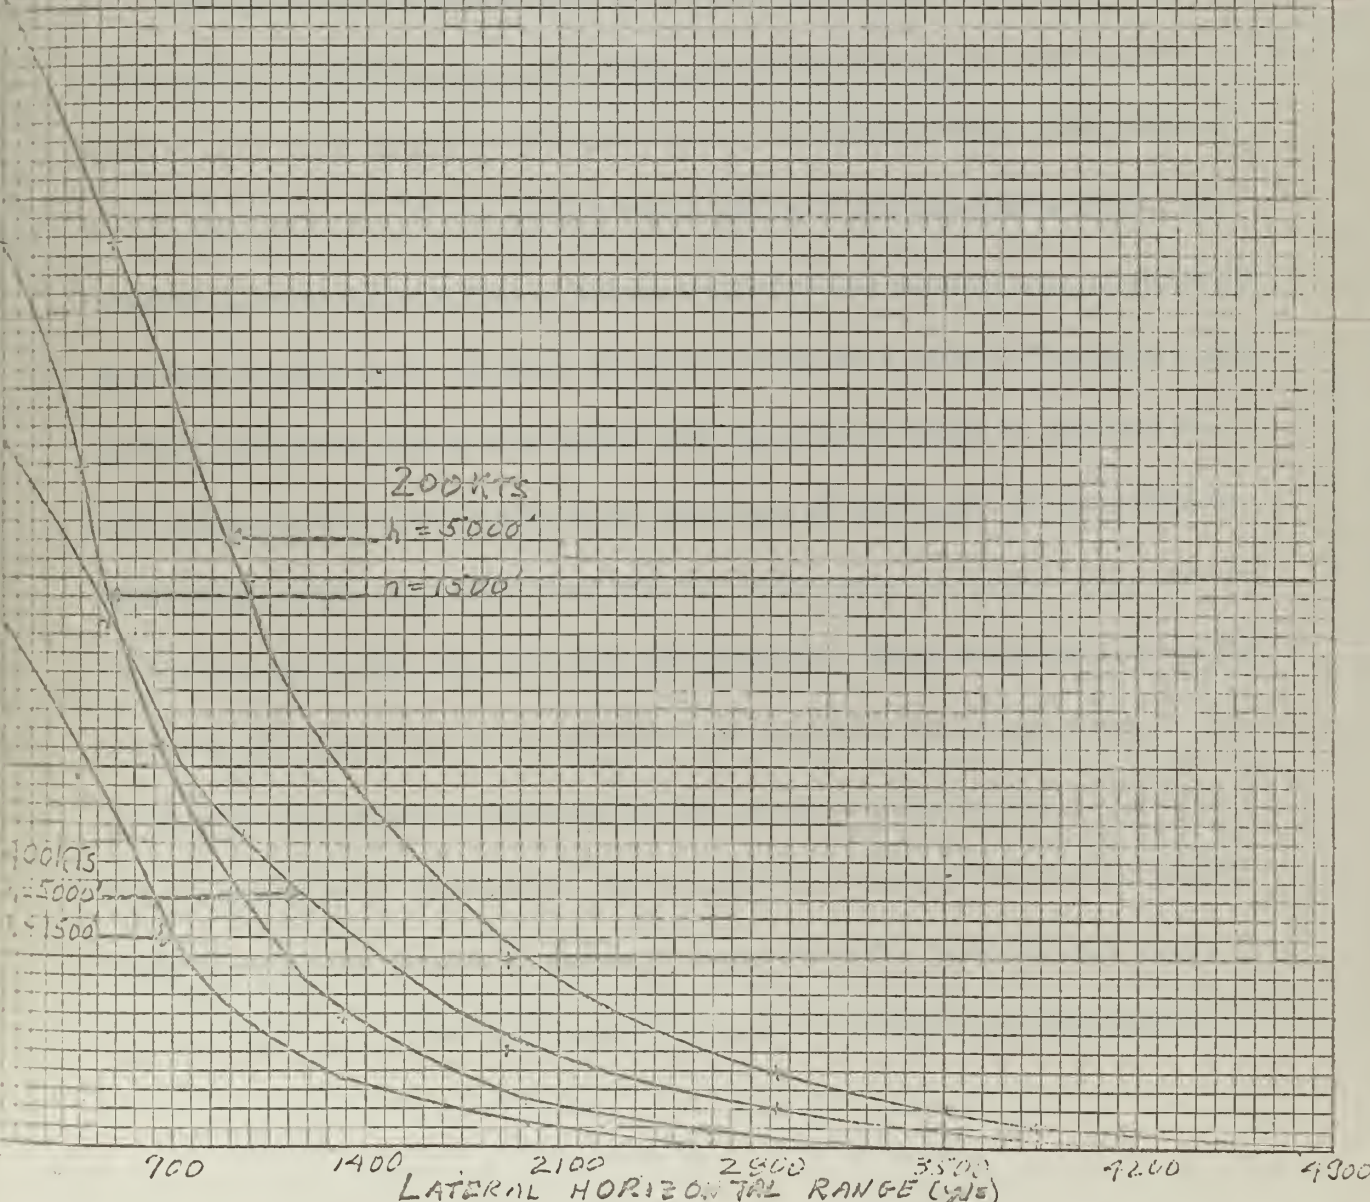

3. The Michigan Experiment ⁽ⁱ⁾

The University of Michigan Research Institute Vision Research Laboratories conducted field and simulator studies of air-to-ground visibility distances and detection probabilities. These studies were reported in December, 1958. This project was conducted for the Navy Bureau of Aeronautics to provide quantitative information on visibility ranges of a vehicular target complex viewed against asphalt, grass and dirt backgrounds from an aircraft, for varying flight altitudes and aircraft flight path attitudes with respect to the sun.

Naval aviators flying SNB-5P aircraft acted as observers in the field tests. The same aviators acted as observers in the later simulator tests. The target in the tests was a vehicle convoy composed of a 1/4 ton jeep, a 1/2 ton pickup truck and a 2 1/2 ton stake truck, all painted standard Navy grey. Before each run the convoy was positioned in a small state park, an area about one mile on a side. The target was parked alongside one of the roads with no attempt made to conceal it. 109 flight passes were made at an airspeed of 130 knots at altitudes of 2000, 4000, 5700, and 7500 feet and for flight path attitudes with respect to the sun of 3, 45, 90, 122 and 177 degrees. After each run the target was moved to another of ten possible positions in the search area. On each pass the observer reported to the target convoy by radio when he felt he recognized the target. At the time of the radio report the pilots photographed the terrain underneath their aircraft. Also at that time, a transit elevation angle was marked making possible the computation of

the slant range of the aircraft from the target. This was checked against the range determined by photo interpretation of the terrain photographs taken at the time of recognition from the aircraft.

Simulation of the experiment was attempted. A model of the search area was produced with which it was possible to duplicate search altitudes and sun position as well as the terrain features and target position. There were 840 simulated passes made at the same altitudes and most of the attitudes as were used in the field tests.


In both the field and simulator passes the observers were briefed on the probable targets and the probable target positions. In fact, it was especially apparent in the simulator tests that the observers searched the known probable target locations almost exclusively.

The recognition ranges and recognition probabilities obtained in the field tests were not as great as those obtained in the simulator. This is shown in Figure 3. This difference is felt to be due to factors existing in the field tests which could not be duplicated in the simulator. One factor was the lack of distractions in the simulator which would occur to the pilot-observer in the aircraft.

By methods described in Appendix II theoretical curves of the detection probabilities as a function of slant range for various flight altitudes and flight path attitudes with respect to the sun were constructed and are shown in Figures 4 and 5.

Conclusions

For a search altitude of 2000 feet the maximum horizontal range for

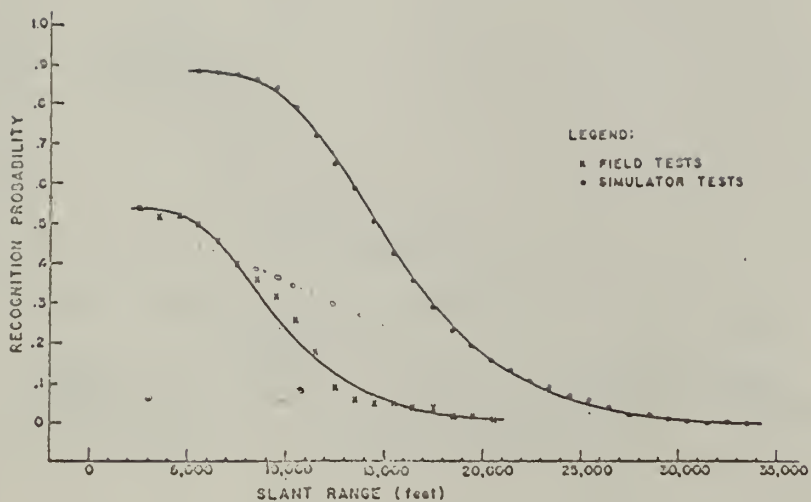

Data: Recognition probability as
a function of slant range: field and
simulator data

FIGURE 3

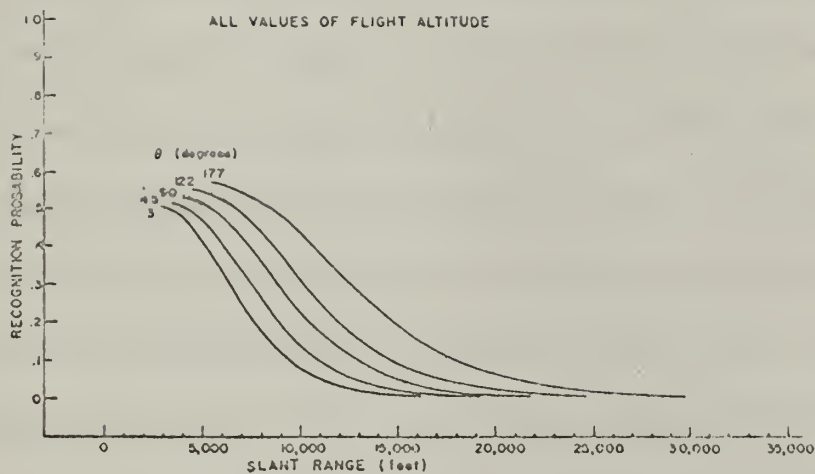


Fig: 4 . Theoretical curves: Recognition probability as a function of slant range: All values of flight altitude.

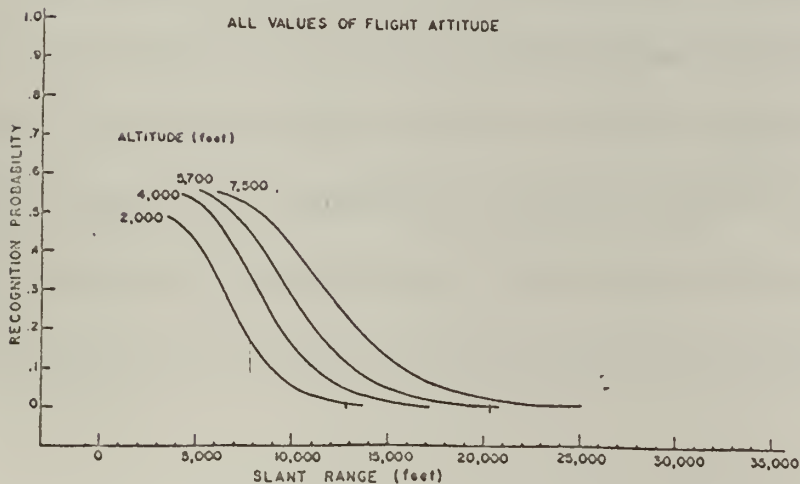


Fig: 5 . Theoretical curves: Recognition probability as a function of slant range: All values of flight attitude.

recognition was found to be 4280 yards. The detection range was somewhat longer. (See Appendix II for explanation of the difference of detection and recognition ranges). For an altitude of 5700 feet the maximum horizontal detection range was slightly over 4170 yards. These ranges are shorter than those predicted by the theory. The detection probability at the search altitude of 2000 feet was 0.49 and at an altitude of 5700 feet the maximum detection probability was 0.58. These probabilities were approximately the same as those predicted by the theory for search airspeed of 200 knots. The probabilities predicted by the theory for a search speed of 130 knots would be approximately 0.70. The effects of the variables which are not accounted for in the theory may be the cause of these differences; however, it is not possible to single out the ones responsible. Note that as the process used to predict detection probabilities approaches the conditions faced by an aviator in an operational situation, the detection probabilities are reduced; field tests results are smaller than simulator, simulator tests results are smaller than theory. It is important to note also that this experiment did not match operational conditions since it was performed with slow aircraft and with observers well briefed on possible target positions.

4. The Operational Experiment

Since there was so little data on detection probabilities of tactical targets by visual search in a tactical environment, it was hoped that an operational experiment could be performed using the men and aircraft available in the Postgraduate School vicinity. Permission was obtained from the Combat Development Experimental Center of the Army for Navy aircraft to overfly the area where an operational field experiment simulating a land battle was being conducted. Data was to be obtained on the number of targets observed from the aircraft. Permission was also obtained to use the ground vehicle position reports which were made for the CDEC experiment so that a comparison could be made of the number of vehicles sighted from the air and the number of vehicles which were actually there.

The flights simulated the mission of a single seat attack aircraft searching an area for vehicular targets such as tanks, personnel carriers and trucks, which would appear as targets of opportunity to an aircraft on an armed reconnaissance mission. The flights were made in T-28 aircraft. The flights were conducted at 200 knots airspeed. The effect of the wind was neglected. An altitude of 1500 feet was maintained by the search aircraft for the first phase flights and 5000 feet was maintained during the second phase. The pilots were assigned to fly the tracks of course I or II as shown on Chart 1 depending on the army's area of activity.

The pilots were not briefed on the possible target locations.

Flight paths were planned to cover the area of army operations. No familiarization flights were flown by the pilots. The pilot of the aircraft was responsible for the search as well as flying the aircraft. The rear seat passenger assisted in data recording. Target's position and observer's position at the time of sighting a target as well as the time and target type were recorded.

The army's field problem placed about 250 vehicles of varying types in the area. Position reports were made by each vehicle in the battle problem area at frequent intervals. These reports were collected and checked for validity through a cross check system in the reporting procedure. The data was assumed to be reasonably accurate. Estimates of the number of vehicles not concealed were made by the field commanders and from photo interpretation of aerial photography coverage of the battle area.

No effort was made to obtain information on the attitude of the flight paths with respect to the sun, the sun elevation angle or the contrast of the targets. Flights were made in both morning and afternoon periods so that a sample of all conditions are probably present in the data.

Analysis

Taking eight flights at random from the first phase and six from the second phase, the vehicle position reports for the time periods of these flights were reconstructed on target position overlays. (See Chart II) A comparison was made of the pilots' reported target positions and the

plotted position reports. It was decided to use the pilots' estimate of distance to the target at time of sighting as the target detection range. These ranges varied from 200 yards to 2000 yards.

Lateral range bands of widths of 500 yards centered on the track line of the aircraft were measured on the overlay. (Chart II) In each range band the probability of detection, p , was computed where $\hat{p}$ is:

$$\hat{p} = \frac{\text{number of targets detected}}{\text{number of targets in the range band}} .$$

In order to get a detection probability not affected by the particular battle tactics which place a percentage of targets under cover hence unavailable for visual detection, the estimate of the percentage of targets concealed was used to arrive at a figure for the number of targets observable. The estimate of the probability of detection now became, $\hat{p}_1$


$$\hat{p}_1 = \frac{\text{number of targets detected}}{\text{number of targets observable in each range band}} .$$

A lateral range curve based on these probabilities is shown in Figure 6. Note that the maximum range of detection and the detection probabilities were less in this operational experiment than in those computed by theory or those obtained in the Michigan experiment.

This experiment indicates that there is a significant amount of degradation of theoretical detection probabilities in the conduct of visual reconnaissance searching for ground vehicle targets from high speed attack aircraft.

OPERATIONAL LATERAL RANGE CURVES

FIGURE 6

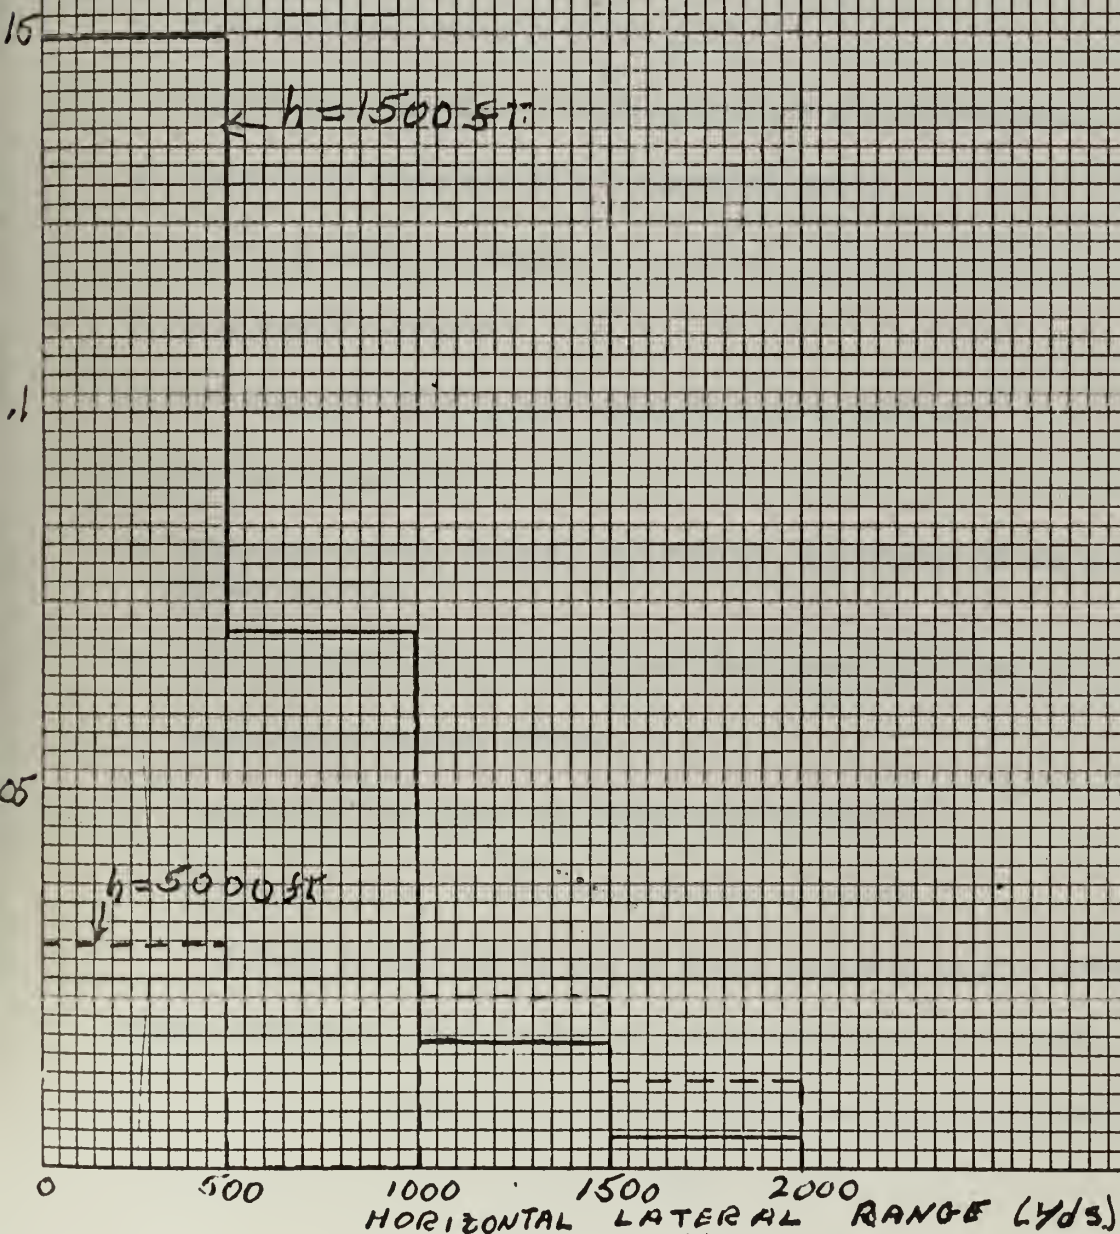

5. Effects of Variables

Determining detection probabilities either by theory or experiment is difficult because of the number of variables which are involved in the detection process. In addition to those variables which are accounted for in the theory described in this paper, D. A. Gordon of the University of Michigan has enumerated many others. (1) The list of detection probability parameters below includes most of the variables which are recognizable. Those marked * are not measurable.

1. Laboratory threshold contrast of the eye
2. Data handling capacity of the mind *
3. Continuous variation of background and sky luminance *
4. Continuous variation of sun elevation angle
5. Target inherent contrast
6. Atmospheric effects
7. Variation of target aspect relative to the observer *
8. Target movement *
9. Observer acuity, fatigue, motivation, knowledge of the probable target location *
10. Time available to make judgment (airspeed, glimpse time)
11. Background textural effects *
12. Target internal contrasts (glints off the target) *
13. Secondary clues leading to detection of target *

Failure to account for any of these variables in any theoretical model will cause errors in the calculated detection probability.

Even the measurable variables of the visibility equation are difficult

to evaluate in any one situation. Dr. Duntley of the Visibility Laboratory of the Scripps Institution of Oceanography has conducted field measurements of the contrast of olive drab targets against various backgrounds. Examples of values obtained are shown in Figures 7 and 8. Contrast is shown as a function of the sun's zenith angle, observer bearing from the sun and the angle of the target with respect to the vertical and the observer. There is a large variation in contrast shown in these curves. It is easy to see that it would be extremely difficult to determine the target contrast applicable to the solution of probability curves for a single search mission.

Results of operational experiments, however, include the effects of all the variables because the actual detection process is carried out. Field experiments varying the operational parameters of observer height, airspeed, target type, aircraft type, overall light conditions and terrain would give information in terms of parameters known to operational commanders, another advantage in the use of operational experiments.

It is interesting to note that the lack of success in constructing a useful theory which can predict the results of trials in the field is not unique to the study of visual detection. It has recently been found that the radar detection theory is not sound because of variables not accounted for in the theory. Sonar detection processes contain an enormous number of variables, both caused by man in the system and those provided by nature. So far, it has been impossible to include all of these in the theories of detection in any of the types mentioned.

10⁻¹

CONTRAST VALUES

Bearing from Sun $\phi = 180^\circ$
Background: Dirt
Target: Olive drab

10⁰

B_m / B_t

10⁻¹


FIGURE 7

ZENITH ANGLE (θ)

10⁻² 120° 140° 160° 180°

CONTRAST

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2

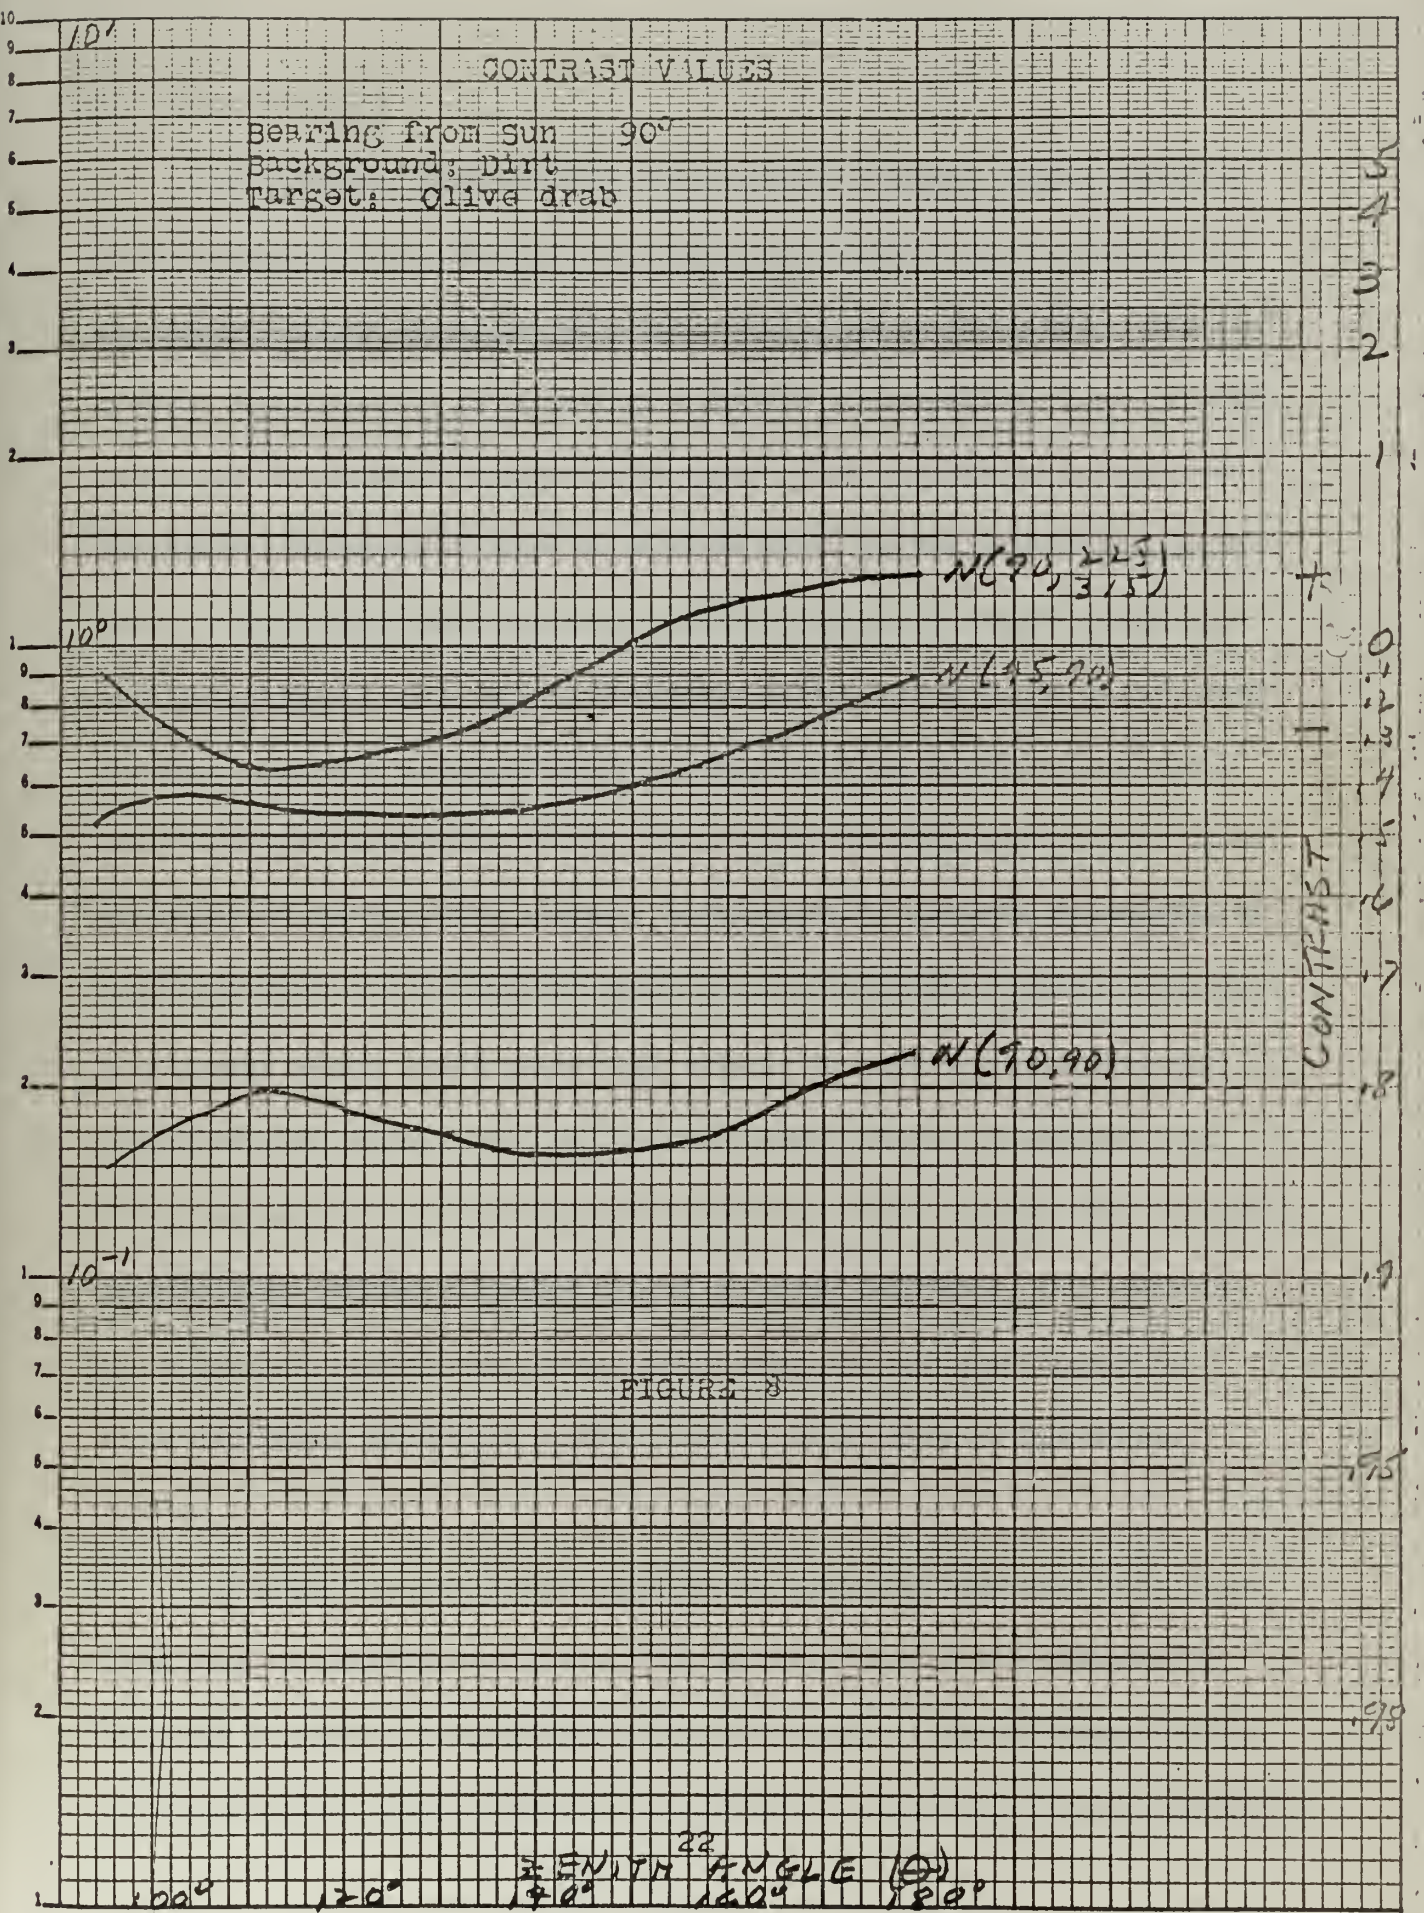


6. Conclusions

The detection probabilities and maximum sighting ranges observed in the operational experiment are significantly below those predicted by the theory and the Michigan experiment described in this paper. Figure 9 gives a comparison of the maximum detection probabilities, i.e., at zero range, for the methods shown in the paper. The conditions acting in an operational environment have an extreme effect on the detection probabilities. In the Michigan experiment under less difficult search conditions and also probably with targets of greater contrast than those in the operational experiment, detection probabilities were not decreased as radically from the theoretical values. Also in the Michigan experiment some variables of the detection process, especially (1) observer knowledge of target position and (2) time available to make judgment, were considered in a manner which would allow their effects to raise the detection probabilities over those resulting from operational work. It appears that the conditions of the operational experiment greatly reduced the detection probabilities and the maximum ranges of target sighting. This reflects the effects of such things as no pilot briefing on possible target positions and higher airspeeds nearly comparable to those of operational aircraft.

Although the operational experiment presented here was conducted under inexact control conditions, the results obtained are sufficiently accurate to warrant comparisons with the results of the Michigan experiment and theory. The operational experiment indicates it is quite possible

Estimates of
Maximum Detection Probabilities

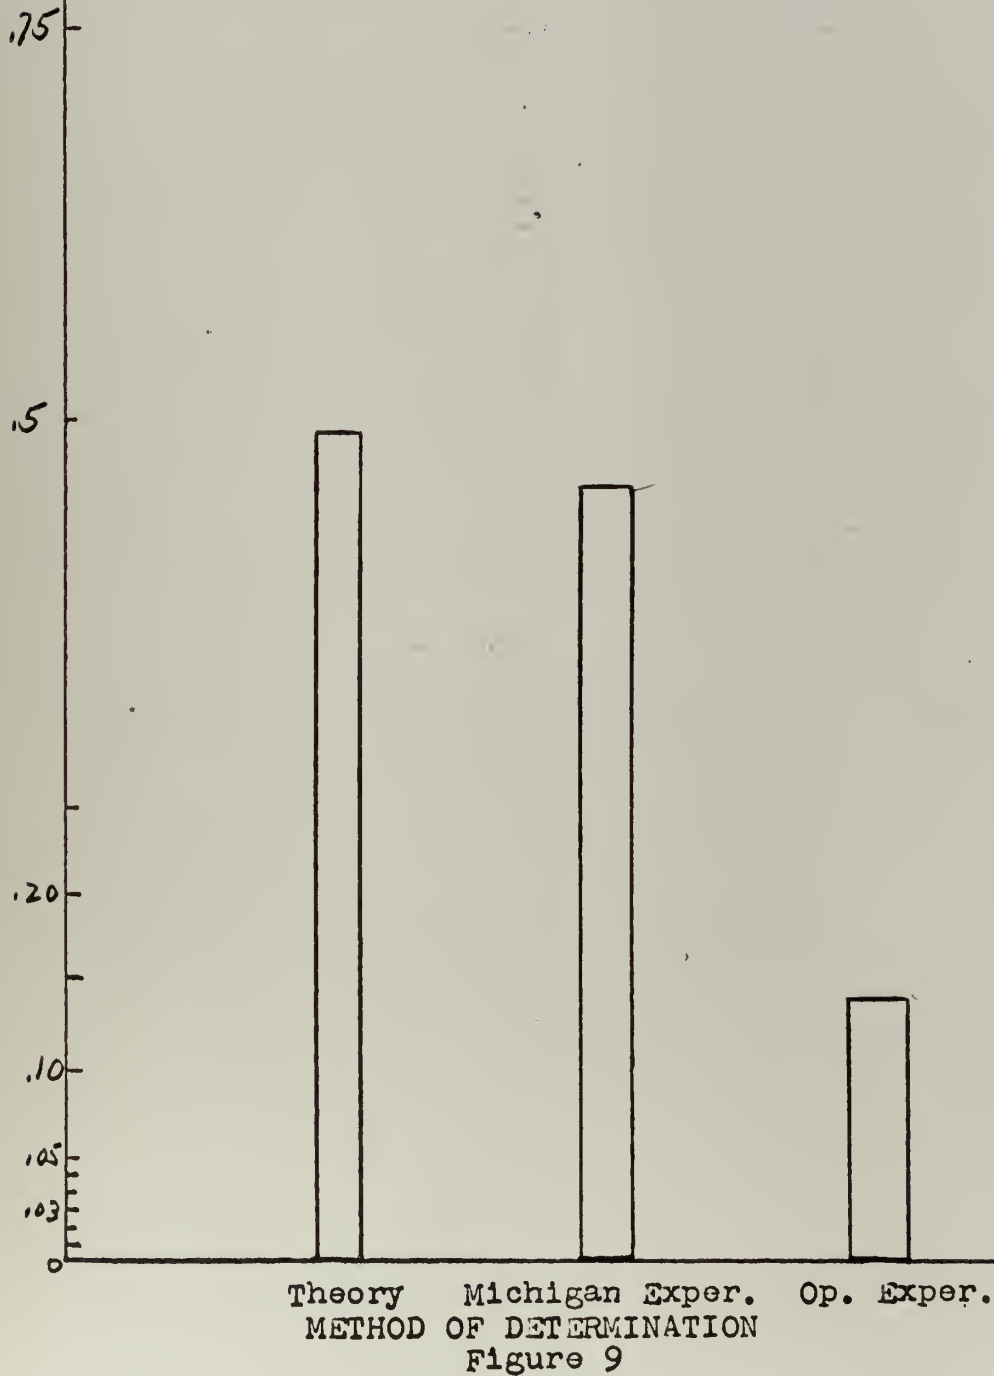

that the maximum sighting ranges and detection probabilities obtained in a tactical environment are sufficiently different from Michigan results to warrant further investigation of the problem before using their figures in planning for attack missions.

7. Recommendations

In order to provide accurate data for obtaining detection probabilities and maximum sighting ranges of vehicular targets likely to be encountered in a limited war, an operational experiment should be designed and conducted utilizing operational attack aircraft, fleet pilots and targets located in a tactical environment.

It would also be interesting to construct a Monte Carlo model of the attack mission using detection probability as one parameter of the model. Detection probability could then be studied for sensitivity. Limits of the detection probability which would change the success of an attack system could be found. Also the amount of change in success for a difference in detection probability could be determined. Then, an experiment of practical precision could be designed to find detection probabilities. The construction of such an attack system model is offered as an idea upon which to base further work in establishing detection probabilities.

BIBLIOGRAPHY

- (a) J. B. Hansen, Application of Visual Detection Theory to Air-Sea Rescue Problems, U. S. N. P. G. S., 1957.
- (b) E. S. Lamar, OEG Study No. 250, Vision in Air-Sea Rescue, February, 1946.
- (c) W. E. K. Middleton, Vision Through the Atmosphere, University of Toronto Press, 1952.
- (d) B. O. Koopman, OEG Report No. 56, Search and Screening, 1946.
- (e) S. Q. Duntley, Reduction of Apparent Contrast by the Atmosphere, Journal of the Optical Society of America, Vol. 38, 1948, p. 179.
- (f) S. Q. Duntley, Visibility of Distant Objects, Journal of the Optical Society of America, Vol. 38, 1948, p. 237.
- (g) H. R. Blackwell, Contrast Thresholds of the Human Eye, Journal of the Optical Society of America, Vol. 36, 1946, p. 624.
- (h) Frances R. Culver, The Visibility of Submerged Objects, Chapter VI, Visibility Laboratory, M. I. T., August, 1952.
- (i) H. R. Blackwell, J. G. Ohmart, E. R. Harcum, Field and Simulator Studies of Air-to-Ground Visibility Distances, University of Michigan Research Institute, December, 1958.
- (j) D. A. Gordon, Visual Detection and Identification: Military Applications, University of Michigan, Willow Run Laboratories, 1959.

APPENDIX I

VISUAL DETECTION THEORY

Before considering the theory of predicting detection probabilities, an explanation of how the eye sees is necessary to introduce the physical concepts of the eye's detecting process. Details of the physiology of detection by the eye are presented in references (c) and (d), however, a brief sketch of the eye's detection process will be given in this paper.

Let a target be defined as an object of interest to the observer, generally differing from the background of the area in which it is situated. To start the detection process the target must generate or reflect some amount of light. The intensity of light from the target per unit area is the target brightness. (c) The intensity per unit area of light given off by the background is background brightness. The eye is stimulated by the light from the target. If the target brightness differs from the background brightness sufficiently the eye will sense that the target is there; that is resolve the target from its background. In addition to the difference in target and background brightness, the target's angle off the visual axis of the eye affects the eye's ability to resolve the target. (a) The visual axis is an imaginary line from the center of the retina of the eye through the center of the lens of the eye and forms the center of the line of sight. The angle off the visual axis of the target is the angular measure of the target's distance from the line of sight. The retina contains the sensing elements, the rods and cones, of the optic nerves. The fovea, which is the small center portion of the retina, contains the densest collection of

these sensing elements. A target at extreme range must make an impression on the foveal sensing elements before it will be detected by the eye. Since the fovea is a small area in the center of the retina, targets must be near the line of sight before they will be detected at extreme ranges, that is, the target's angle off the visual axis must be no more than one or two degrees in magnitude for the target to be detected. This angle is the foveal off axis angle. At shorter ranges the target may be further off the visual axis and still be sensed by the eye. Here the off axis angle is described as the perception angle. The amount of time required for the eye to sense a target, assuming the target is in a position where it can be seen, is also of importance in studying visual detection probabilities. In searching an area the eye looks in a series of fixations of about 0.25 seconds apiece. It is believed that from six to eight of these fixations are needed to see a target. The glimpse time is the time required to make these six to eight fixations. It has been statistically determined that the average glimpse time is 1.63 seconds, (a)

Two different laboratory experiments have led to the conclusion that the eye detection capability is primarily affected by:

1. Target-background contrast
2. The solid angle subtended by the target
3. The off axis angle of the target and the eye's perception angle
4. Target shape

Blackwell in reference (g) has shown the relationship of the minimum target-background contrast (threshold contrast) to the angle subtended

by the target required in order for an observer to detect a target 50% of the time. K. J. W. Craik at Columbia University established a relationship between threshold contrast and the foveal off axis angle. Craik used a value of 0.8° for the foveal off axis angle, θ_f .

Determining the Maximum Horizontal Range of Detection

Contrast is required by the eye in order for the eye to detect a target. The minimum value of this contrast is the threshold contrast. The inherent contrast of the target is the contrast of the target with its background when it is viewed at extreme close range, with very little atmosphere between the observer and the target. As the distance between the target and observer is increased the inherent contrast is reduced, due to the reduction of light from the target transmitted through the atmosphere. At some extreme maximum range the contrast of the target reduces to the minimum or threshold contrast of the eye and that range is the maximum range of detection of the target.

An equation may be set up involving the essential parameters of the visual detection process. This equation may be solved for the maximum visual range. The parameters of the equation for determining maximum range of detection of targets from the air are:

1. Atmospheric conditions
2. Meteorological range of visibility
3. Luminance level
4. Size and inherent contrast of the target
5. Height of the observer

The solution to the equation for determining the maximum range of detection is made with these assumptions:

1. The atmosphere is composed of optically standard stratified layers
2. There is uniform sky illumination
3. The sun's directional effect will be ignored
4. All observers are giving optimum performance in searching

References (e), (f) and (h) report on the method of construction of nomographs which can be used to determine the maximum range of detection. The nomographs were based on equations developed by Duntley and on the experimental work of Blackwell. Blackwell discovered that the threshold contrast of the eye depended on the angle subtended by the target, α .

Let: Range $\equiv R$ (yards)

Apparent target area $\equiv A$ (ft²)

Apparent contrast $\equiv C_r$

Inherent contrast $\equiv C_o$

Inherent luminance of the background $\equiv B_t^i$

Luminance of background sky $\equiv B_m$

Sky-ground ratio $\equiv B_m / B_t^i$

Meteorological visibility $= V$

and let: $\alpha = \frac{129.3 \sqrt{A}}{R}$

Duntley established that:

$$C_r = C_o [1 - B_m / B_t^i (1 - e^{-3.912 R / V})]^{-1} \quad (1)$$

The nomograph of reference (h) which is used in this paper, solves the equation formed by setting equation (1) equal to the minimum threshold contrast. This equation is solved for the quantity, $\overline{AR}$, the product of the maximum optical slant range, $\overline{R}$, and the effective target Area, $\overline{A}$. The optical slant range is different from the true slant range, R , because of the characteristics of the atmosphere. After allowing assumption 1, the following equation is true:

$$\overline{R} = h_0 \csc \theta_e \left[1 - e^{-\frac{R \sin \theta_e}{h_0}} \right] = \frac{R h_0}{h} \left[1 - e^{-h/h_0} \right] \quad (2)$$

where: Elevation angle $\equiv \theta_e$: $\sin \theta_e = h/R$


Observer height = h

Atmospheric constant $\equiv h_0$

Let: Height factor = H

It has been shown that: $\overline{R} = HR$ (a). (3)

Because the optical slant range is usually shorter than the true slant range, the effective target area, $\overline{A}$, is also decreased as shown in the figure below. In the solution for the maximum detection range which follows the target will be assumed to have no vertical development. This is the worst possible case for with observers at low altitudes the effective target area becomes less for this case than for a target with some vertical development. (a)

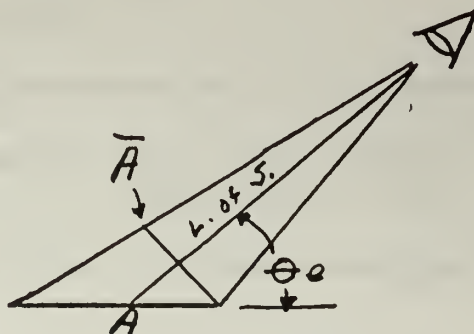

From the figure: $\bar{A} = A \sin \theta_e \bar{R}^2 / R^2 = A h R^2 / R^3$

Then: $\bar{A} R = A h H^3$ (4)

Where: $H = h_0 / h [1 - e^{-h/h_0}]$

Values of the quantities H and hH^3 have been computed and are tabulated in Table I-1.

Using Table I-1, the nomograph and equations (3) and (4) the true slant range, R , may be found using the following procedure. (a)

1. From Table I-1 find H and hH^3 .
2. Then from equation (4) solve for $\bar{A} R$.
3. Enter the nomograph with $\bar{A} R$, the meteorological visibility and the adjusted inherent contrast.
4. From the nomograph find $\bar{R}$.
5. Solve equation (3) for R .
6. Solve for R_h in the equation: $R_h = R \cos \theta_e$.

Since the nomograph was constructed using the threshold contrast for a level of 50% detections, the maximum horizontal range computed by this method is the maximum range for detection of 50% of the targets.

In order to provide a basis for the comparison of visual detection theory and the operational experiment reported in this paper, an example was set up for calculations of R_h which have been made and are presented graphically in Figure I-2.

The inputs to the calculations of the example were:

1. Assumed targets: Tank with $A = 450 \text{ ft}^2$
Jeep with $A = 75 \text{ ft}^2$
2. Sky-ground ratio: 2.5 (Forest in daylight) (c)

3. Inherent target contrast: $\pm .125, \pm .25, \pm .50$
 (For negative contrast, target is darker than background)
4. Meteorological visibility: 30 miles

Craik used another approach to compute the maximum visual range of detection. (d)

Let: Threshold contrast $\equiv C_t$

Angle off the visual axis (perception angle of the eye) $\equiv \theta$

Angle subtended by the target $\equiv \alpha$

Craik established that: $C_t = 1.75 \theta^{1/2} + 19 \theta / \alpha^2$ (5)

It is also demonstrated that for observations from aircraft along a slanting line of sight, by making the proper substitutions:

$$C_t = 1.75 \theta^{1/2} + 2.79(10^5) \theta \frac{R^3}{Ah} \quad (6) \quad (d)$$

With $\theta_f = 0.8^\circ$, the foveal off axis angle, further substitution shows:

$$V/h^{1/3} = 1.49 \left(\frac{R_m}{h^{1/3}} \right) / 109_{10} \left[\frac{C_o A}{2.26 (10^5) (R_m^3/h) + 1.57 A} \right] \quad (7)$$

This equation can be solved for the maximum slant range. The solutions for the maximum slant range by Craik's method and by the nomograph method are very nearly equal.

Determining Detection Probabilities

In the preceding section it was stated that, θ , the visual perception angle varied with range. In the following development of detection probability it is first necessary to describe the relationship between θ and the range between the observer and the target.

The apparent contrast of the target when viewed at some range

through the intervening atmosphere is, C_r , the inherent contrast decreased by the affect of the atmosphere. ^(d) As the range to the target increases the apparent contrast decreases.

$$C_r = C_0 e^{-BR}$$

Where: Extinction coefficient $\equiv B$

Range $\equiv R$

Maximum Range $\equiv R_m$

Meterological Visibility $\equiv V$

Using $R=V$ and experimental values of C_r and C_0 for this condition, B can be evaluated. $B = 3.44/V$

Then: $C_r = C_0 e^{-3.44 R/V}$ (8) ^(d)

Again remembering that the threshold contrast must equal apparent contrast for the eye to detect the target at a maximum range form the equation: ^(d)

$$C_0 e^{-3.44 R/V} = 1.75 \theta^{1/2} + 2.79(10^5) \theta \frac{R^3}{Ah} \quad (9)$$

(Apparent Contrast) = (Threshold contrast)

Solving for θ , as a function of range, visibility and inherent contrast:

$$\theta = F \left(\sqrt{\frac{G}{F} + 1} - 1 \right)^2 \quad (10)$$

where: $F = \frac{0.49 (R_m/R)^6}{(C_0 e^{-3.44 (R_m/V)} - 1.565)^2}$

and: $G = \frac{0.8 C_0 e^{-3.44 (R_m/V)} (R/R_m) (R_m/R)^3}{C_0 e^{-3.44 (R_m/V)} - 1.565}$

Equation (10) gives the relationships of the visual perception angle, the range to the target, the visibility and the target contrast.

Continuing the example of the first section and adding these inputs:

1. $R_m/V = 0.09$, since, $0.0219 < R_m/V < 0.1605$
2. Inherent contrast, $C_o = \pm .125, \pm .25, \pm .50$

After solving equation (10) for θ using the inputs above and those given in section preceding, θ was plotted in Figure I-3 as a function of R/R_m for various values of C_o .

Note that the size of the target area does not affect θ .

To show the detection pattern of the eye in a more descriptive manner Figure I-4 was plotted on polar graph paper with θ again a function of R/R_m . This shows the two dimensional intercept of the cylinder of revolution within which the eye can detect targets. Target detection will occur 50% of the time on the surface of this surface of revolution.

It is next necessary to consider the type of search process which is followed by pilots of attack aircraft in carrying out an armed reconnaissance mission. Air to ground search from an attack aircraft will be assumed to be conducted by the pilot scanning along arcs on the ground at distances out to a maximum visual range from the aircraft. The arc, (H) , is the forward 180° arc of the pilot's possible circle of vision.

There is no search conducted abaft the beam of the pilot's aircraft. In flight it is very difficult for a pilot to maintain a uniform air-ground scan since his attention is split between the ground search, his flight instruments and an air search for possible enemy aircraft. It will be assumed that the pilot's search of the ground is random. It is equally likely that the pilot will observe any spot in the possible area inside the maximum

range and the arc, $\odot$, on each glimpse.

For each range from the aircraft there is an angle, θ , for which the pilot has a .50 probability of detecting the target. Figure I-3 gives the relationship between the angle off the axis and the range. Using the basic definition of probability define the probability of detecting a target in one glimpse as, g_1 , where: (b)

$$g_1 = \theta_s / \odot$$

Let: $g_i = 1 - g_i$

be the probability of failing to see the target in a glimpse. Assume g_1 to be constant over any search path increment of length, L . Then the probability of not seeing the target in path length, L , becomes:

$$g_L = (1 - g_i)^{L/v\tau}$$

where: Airplane speed = v (yd/sec)

$$\text{Glimpse time} = \tau = 1.63 \text{ sec.}$$

Considering the total number of search paths of length, L , in the search area the probability of not seeing the target in the search area becomes:

$$Q_x = \prod_{i=1}^n (1 - g_i)^{L/v\tau}$$

Making appropriate approximations and substitutions:


$$Q_x = e^{-\frac{L}{2v\tau} \odot \sum_{i=1}^n \theta}$$

Let, y , be the distance along the line of flight with $y = 0$ when the target is at range R_m from the search aircraft, then:

$$Q_x = e^{-\frac{1}{2v\tau} \odot \int_0^y \theta dy}$$

with y in units of R_m :

$$Q_x = e^{-\frac{1}{2v\tau} \odot \int_0^{y/R_m} \theta d(y/R_m)}$$

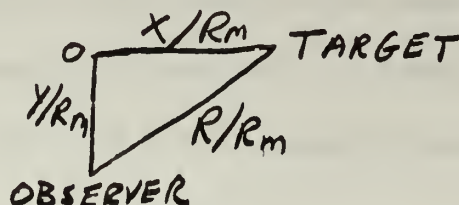

Let x/R_m be the closest distance that the search aircraft comes to the target. Integrating, Θ , graphically from $R/R_m = 1$ to $R/R_m = x/R_m$ on Figure I-3 evaluates the exponential integral. The values of the integral are plotted in Figure I-5.

The probability of detecting the target in the search area is:

$$P_x = 1 - Q_x$$

Lateral range curves showing P_x as a function of x may now be constructed using Figures I-2 and I-5. These curves are for targets of the two sizes in the example, with observer heights from 0 to 10,000 feet and contrast values of $-.125, -.25, -.50$. Any airspeed desired may be used in the final computation for P_x . R/V remains 0.09.

Figure I-6 is a lateral range curve determined for the following conditions:

1. R/V : 0.09
2. Target: Tank with area of 450 ft^2
3. Inherent contrast, C_o : $-.125$
4. Observer height: 1500 and 5000 feet
5. Aircraft speed: 200 and 400 knots.

In this problem the airspeed, 200 knots, was selected for two reasons (1) it was the airspeed flown in the operational experiment to be described and (2) it can be considered a lower limit of jet aircraft search speeds in an operational environment.

Several assumptions of this model of the search process detection probabilities have already been mentioned. In order to remind the reader of these assumptions which led to the probability curves presented in

in Figure I-6 all assumptions will be repeated here.

1. The model is based on a random search.
2. The position of the sun relative to the flight line and the sun elevation angle have been ignored.
3. A sky-ground ratio of 2.5 has been used. Scripps Visibility Institute warns against using a sky-ground ratio of much larger than one with the nomograph. Some error has been introduced with the assumed sky-ground ratio.
4. Contrast values for vehicle and other ground targets are not known accurately. However, the values determined experimentally by Dr. Duntley and given in Figures 7 and 8 are close to the assumed values of contrast in the paper.
5. The target is assumed to have no vertical development.

SAMPLE CALCULATIONS

1. For Table I-1

H = Height factor

$$h_0 = 10^4$$

h = height of observer in yards

$$H = h_0/h [1 - e^{-h/h_0}]$$

Let: $h = 3333$ yards

$$H = 10^4/3333 [1 - e^{-.3333}] = 3 [1 - .714] = 0.858$$

$$hH^3 = (3333)(.632) = 2106$$

2. For Figure I-2

$$A = 450 \text{ ft}^2$$

$$B_m/B_t^1 = 2.5$$

$$C_0 = -.125$$

$$V = 30 \text{ miles}$$

$h = 3333$ yards and 500 yards

$$C^1 = .05$$

Then:

$$H = 0.858 \text{ and } 0.975$$

$$hH^3 = 2106 \text{ and } 464$$

$$\overline{AR} = 948,000 \text{ and } 208,000$$

$$\overline{R} = 5100 \text{ yards and } 3350 \text{ yards}$$

$$R = 5950 \text{ yards and } 3440 \text{ yards}$$

$$R_h = 4980 \text{ yards and } 3400 \text{ yards}$$

3. Calculation of the range of values for C_0

$$B_m = 1000 \text{ ft. lamberts}$$

$$B_t^1 = 400 \text{ ft. lamberts}$$

$$\text{Assume } B_m/B_t^1 = 2.5$$

$$C_0 = \frac{B_t - B_t^1}{B_t^1} = \frac{B_t - 400}{400}$$

B_t	C_0
800	1.0
700	0.75
600	0.50
500	0.25
450	0.125
400	0.0
300	-0.25
200	-0.50
100	-0.75
0	-1.0

4. For Figure I-3 with the same inputs as calculation 2.

$$\text{Let: } R_m/V = 0.09$$

$$\Theta = F \left(\sqrt{\frac{G}{F} + 1} - 1 \right)^2$$

$$F = \frac{(1.49) (R_m/R)^6}{(C_0 e^{-3.44(R_m/V)} - 1.565)^2}$$

$$G = \frac{0.8 C_0 e^{-3.44(R_m/V)} (R/R_m) (R_m/R)^3}{C_0 e^{-3.44(R_m/V)} - 1.565}$$

$$R/R_m = .2 ; R_m/R = 5$$

$$F = \frac{(1.49)(1.563)(10^4)}{(12.5e^{-7.22} - 1.565)^2} = \frac{7.65 \times 10^3}{8,473^2}$$

$$F = 106.6$$

$$G = \frac{(1.8)(12.5)(1.98)(125)}{8.973} = 144.8$$

$$\sqrt{\frac{G}{F} + 1} = \sqrt{\frac{144.8}{106.6} + 1} = 1.539$$

$$\sqrt{\frac{G}{F} + 1} - 1 = 0.539$$

$$\Theta = F(\sqrt{\frac{G}{F} + 1} - 1)^2 = (106.6)(.291) = 30.7$$

Table of Θ values

C_0 R/R_m	.2	.4	.6	.8	1.0	0
.125	29.5	9.4	3.49	1.55	.796	51.4
.25	59.8	11.9	3.85	1.62	.801	
.50	87.5	13.3	4.04	1.64	.803	
-.125	30.7	6.56	2.62	1.14	.583	
-.25	54.6	10.3	3.29	1.37	.670	
-.50	81.6	13.0	3.35	1.51	.733	

5. Table for Figure I-5; $\int_0^{y/R_m} \Theta d(y/R_m)$

From the graphical integration of Figure I-3

x/R_m C_0	-.125	-.25	-.50
0	.227	.402	.496
.2	.086	.138	.185
.4	.025	.029	.037
.6	.009	.010	.012
.8	.003	.003	.004
1.0	0	0	0

6. For Figure I-6

$$P_x = 1 - e^{-\frac{R_n}{2v\gamma h}} \int_0^{\gamma/r_n} \theta d(\gamma/r_n)$$

$$\theta = \pi \text{ RADIANS}$$

$$\gamma = 1.63 \text{ SEC}$$

$$v = 200 \text{ KT} = 112.3' / \text{sec}, 400 \text{ KT} = 224.6' / \text{sec}$$

$$h = 1500 \text{ ft}, 5000 \text{ ft}$$

$$R_n = 3300 \text{ yd}, 4800 \text{ yds}$$

$$P_x = 1 - e^{-2.85 \theta d\gamma/r_n}, 1 - e^{-4.08 \int \theta d\gamma/r_n}$$

Let: $v = 200$ knots

x/R_n	x	$2.8 \int \theta d(\gamma/r_n)$	$e^{-\phi}$	P_x	
.1	3300	.443	.642	.358	$h = 1500$
.1	4800	.645	.525	.475	$h = 5000$

Let: $v = 400$ knots

x/R_n	x	$4.08 \int \theta d(\gamma/r_n)$	$e^{-\phi}$	P_x	
.1	3300	.221	.803	.197	$h = 1500$
.1	4800	.322	.724	.276	$h = 5000$

8. Calculation with target of size used in Michigan experiment

$$A = 975 \text{ ft}^2$$

$$h = 5000 \text{ ft}$$

$$C_o = -.05, -.25, -.50$$


$$hH^3 = 1304$$

$$AhH^3 = 127,200$$


$$R = 5100 \text{ yds}, 10,720 \text{ yds}, 10,850 \text{ yds}$$

$$R_n = 4830 \text{ yds}, 8,650 \text{ yds}, 8,800 \text{ yds}$$

FIGURE I-1

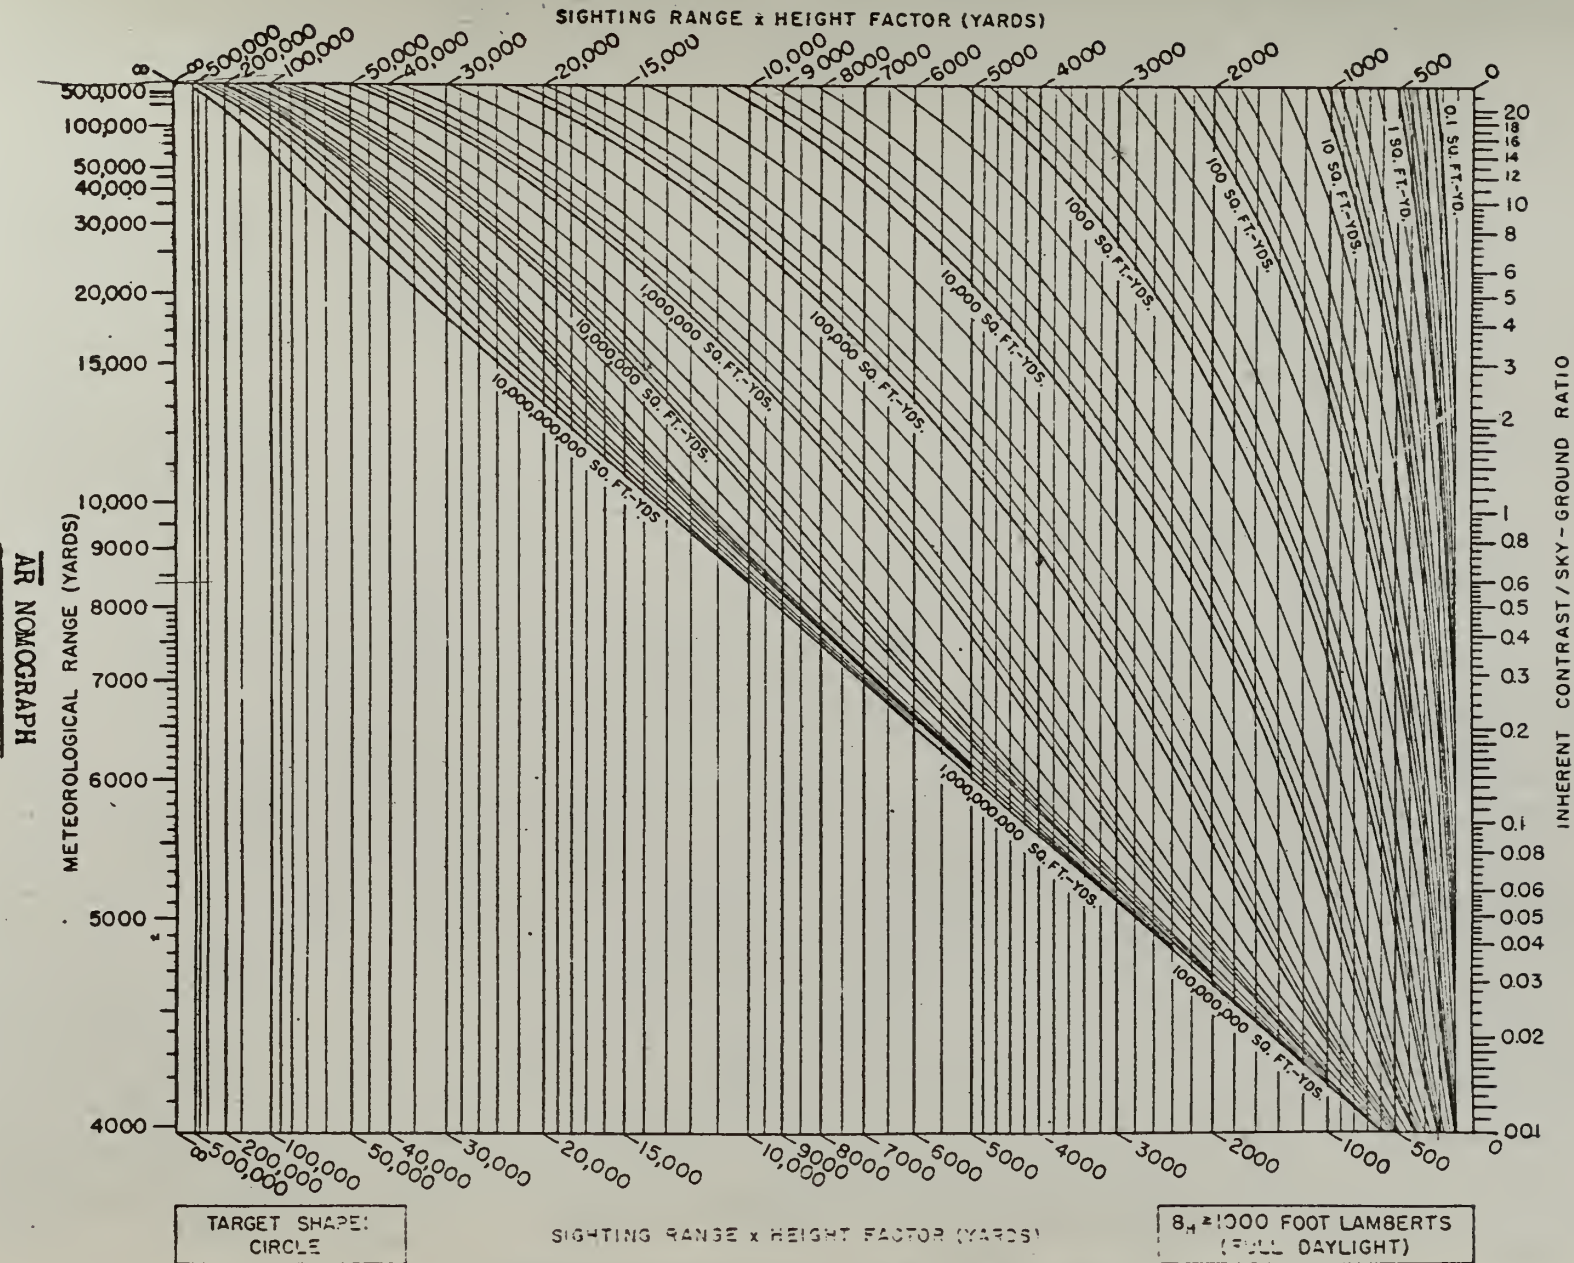



MAXIMUM HORIZONTAL RANGE OF DETECTION

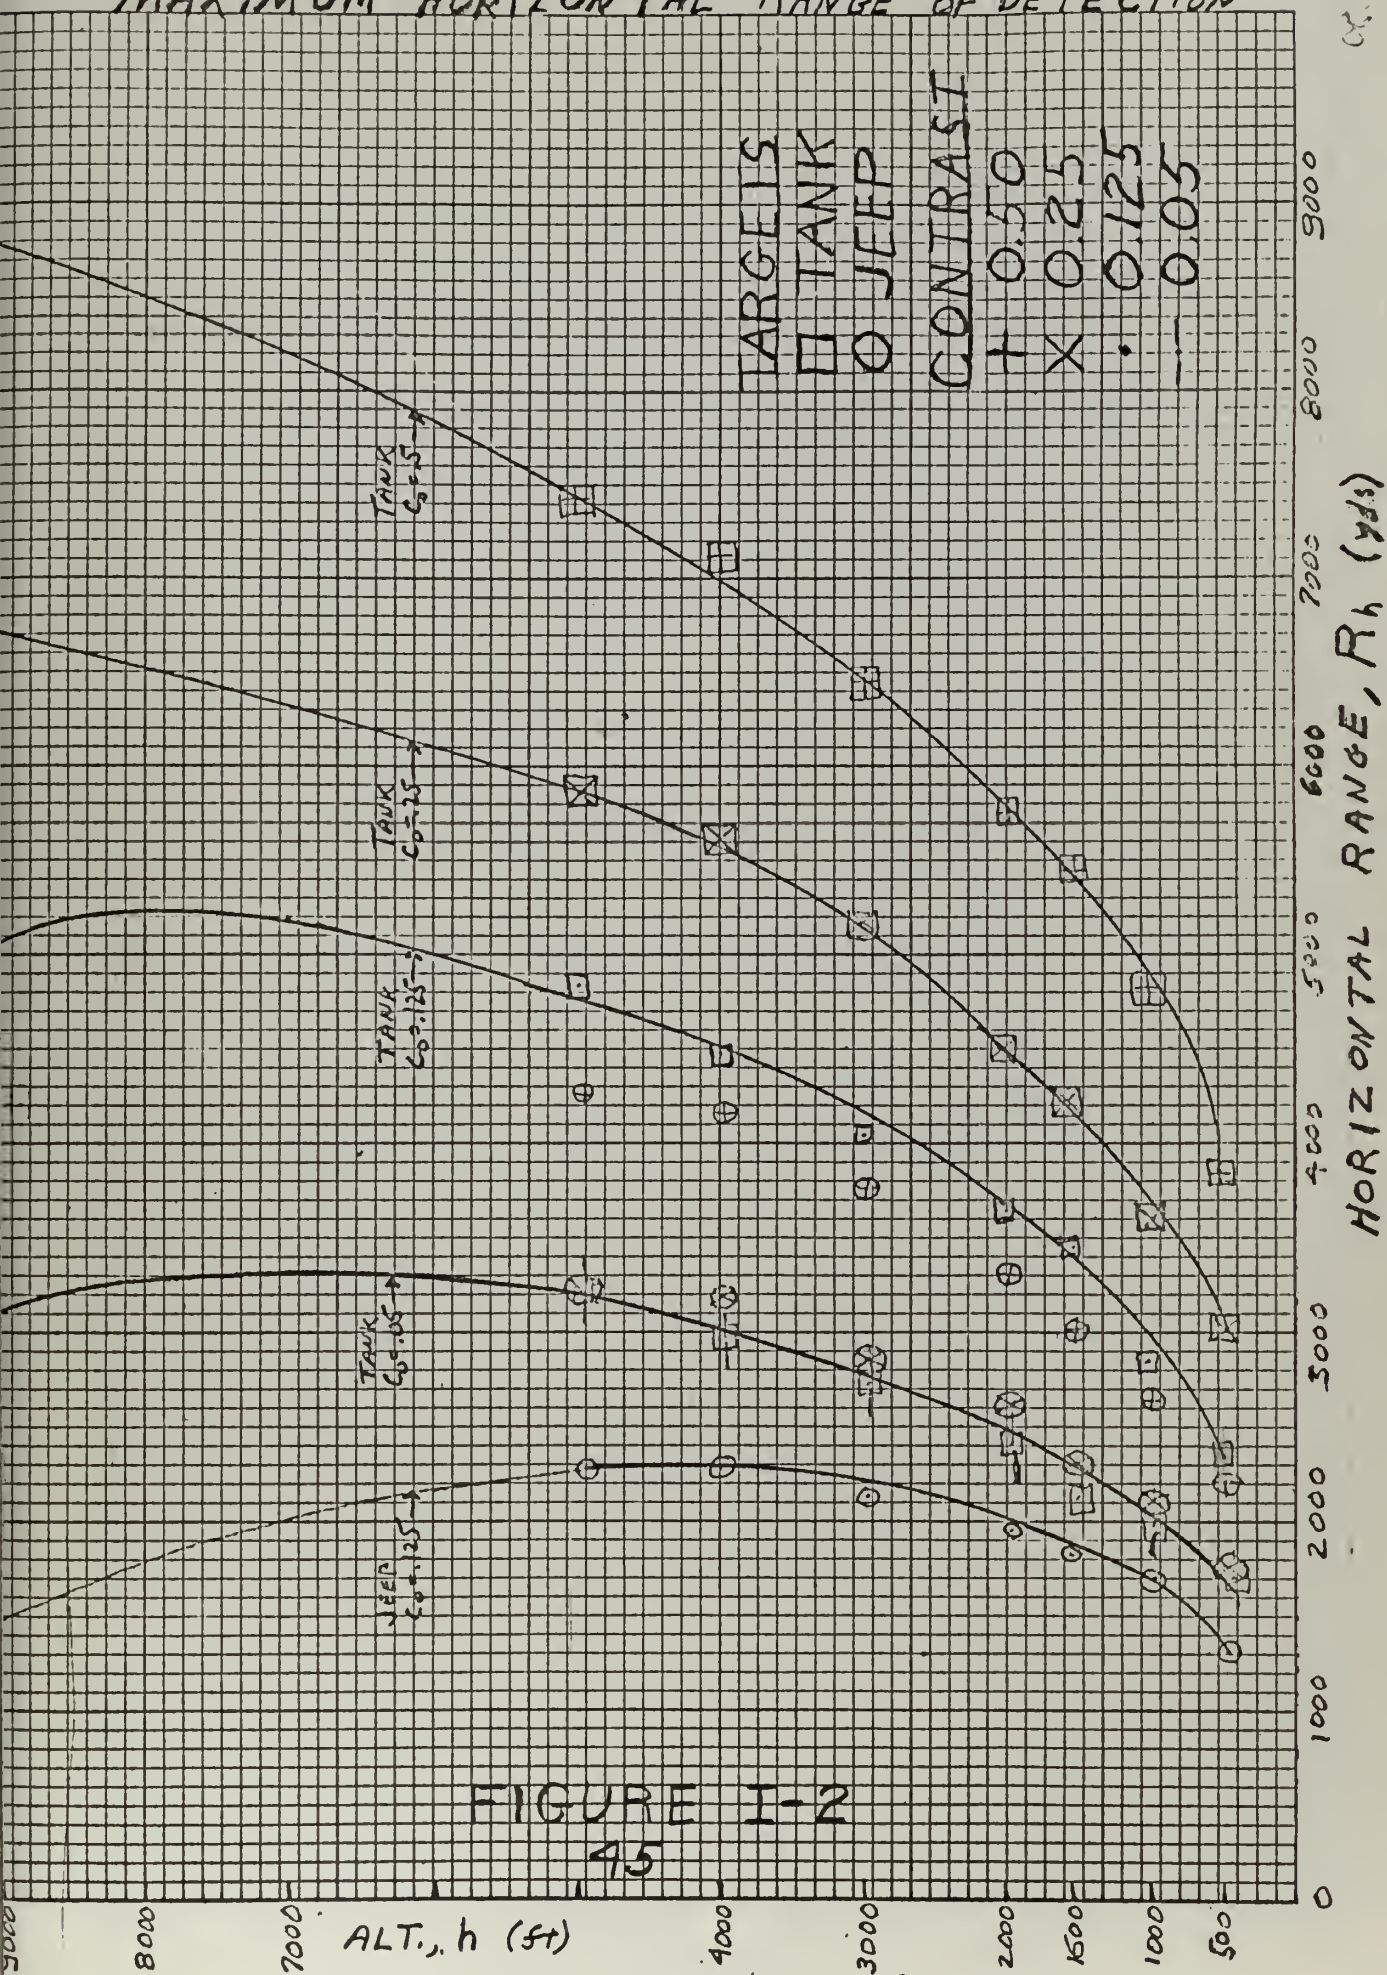

THRESHOLD OFF AXIS ANGLE θ


FIGURE I-3

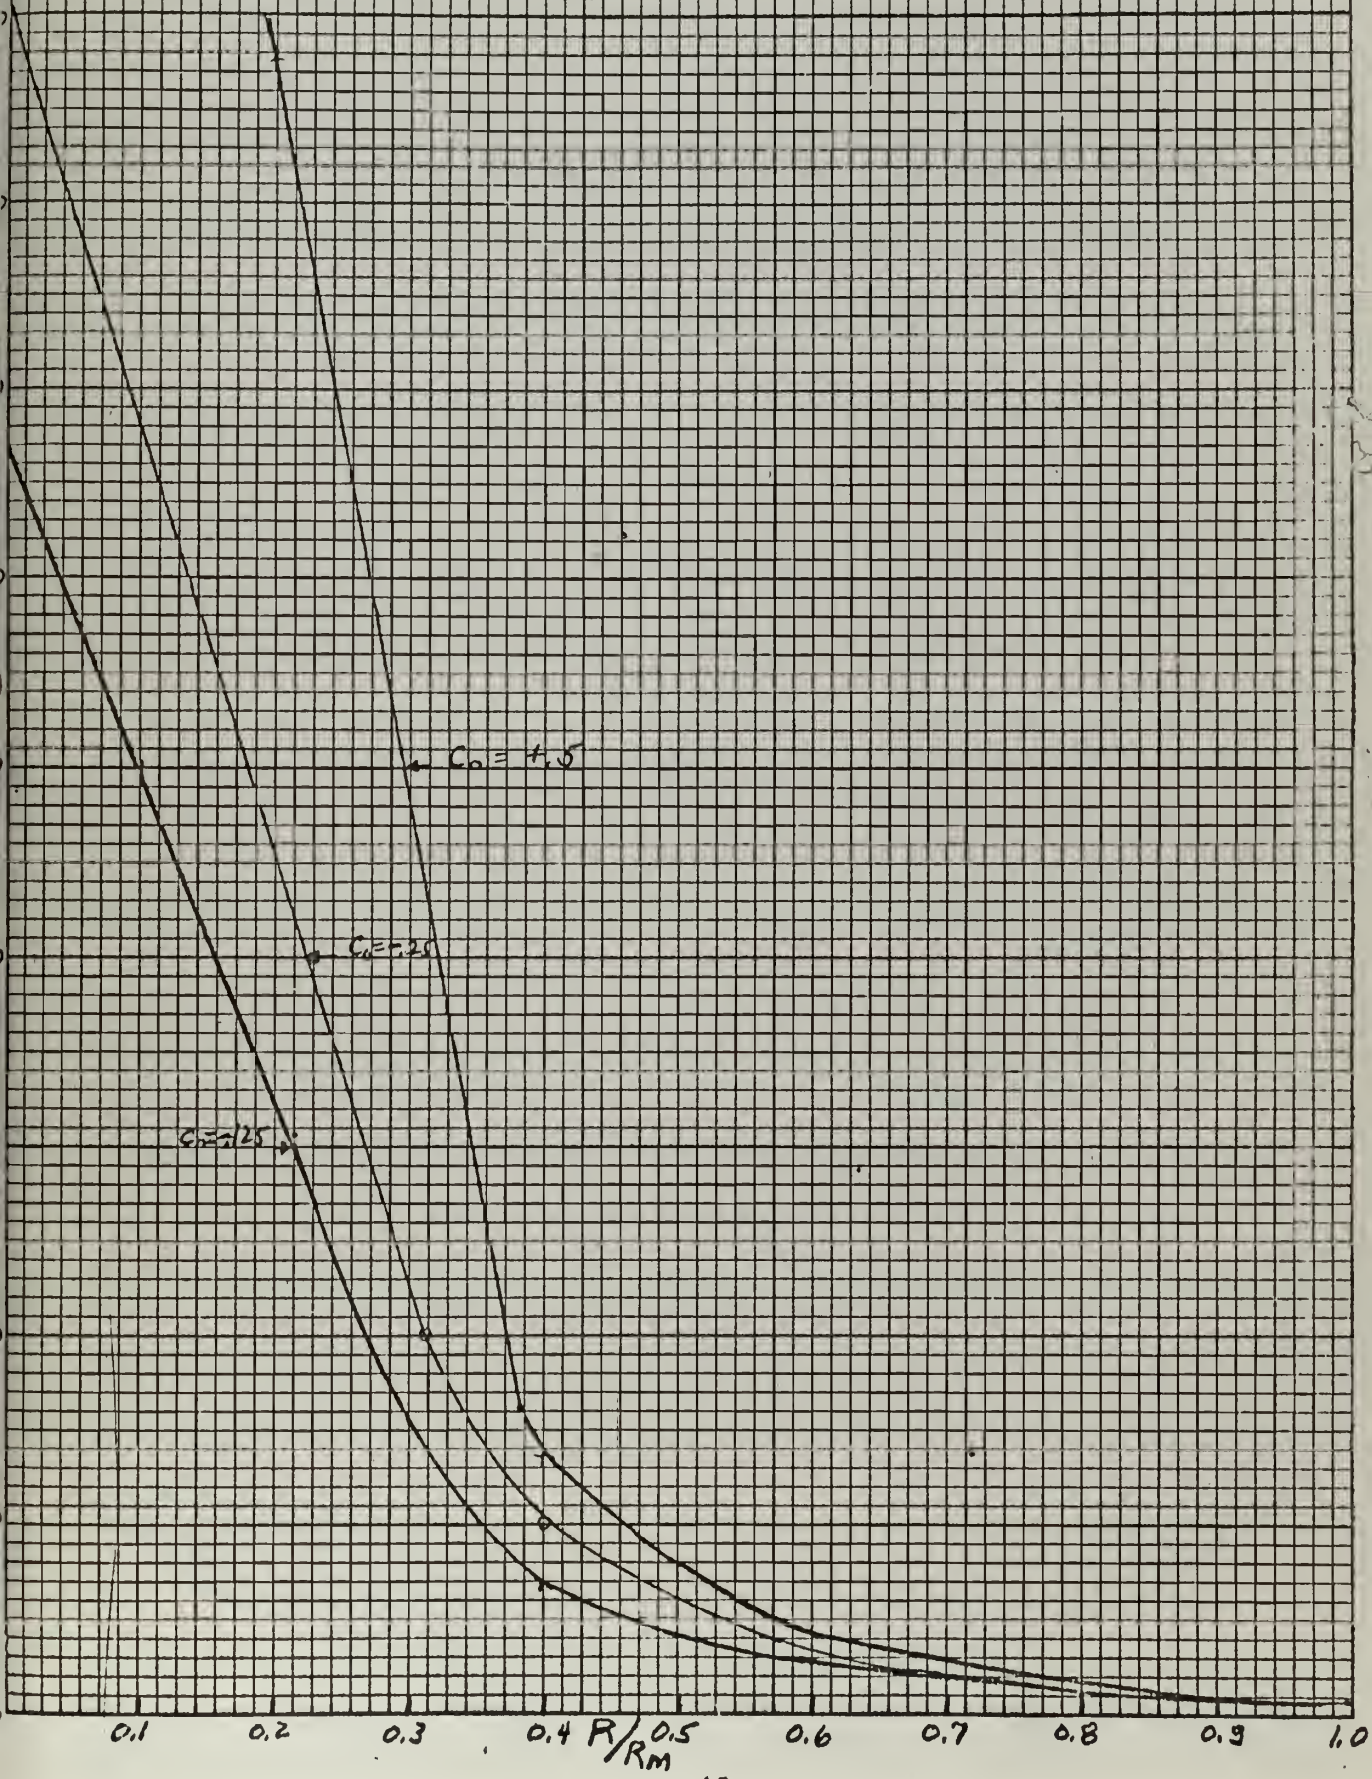

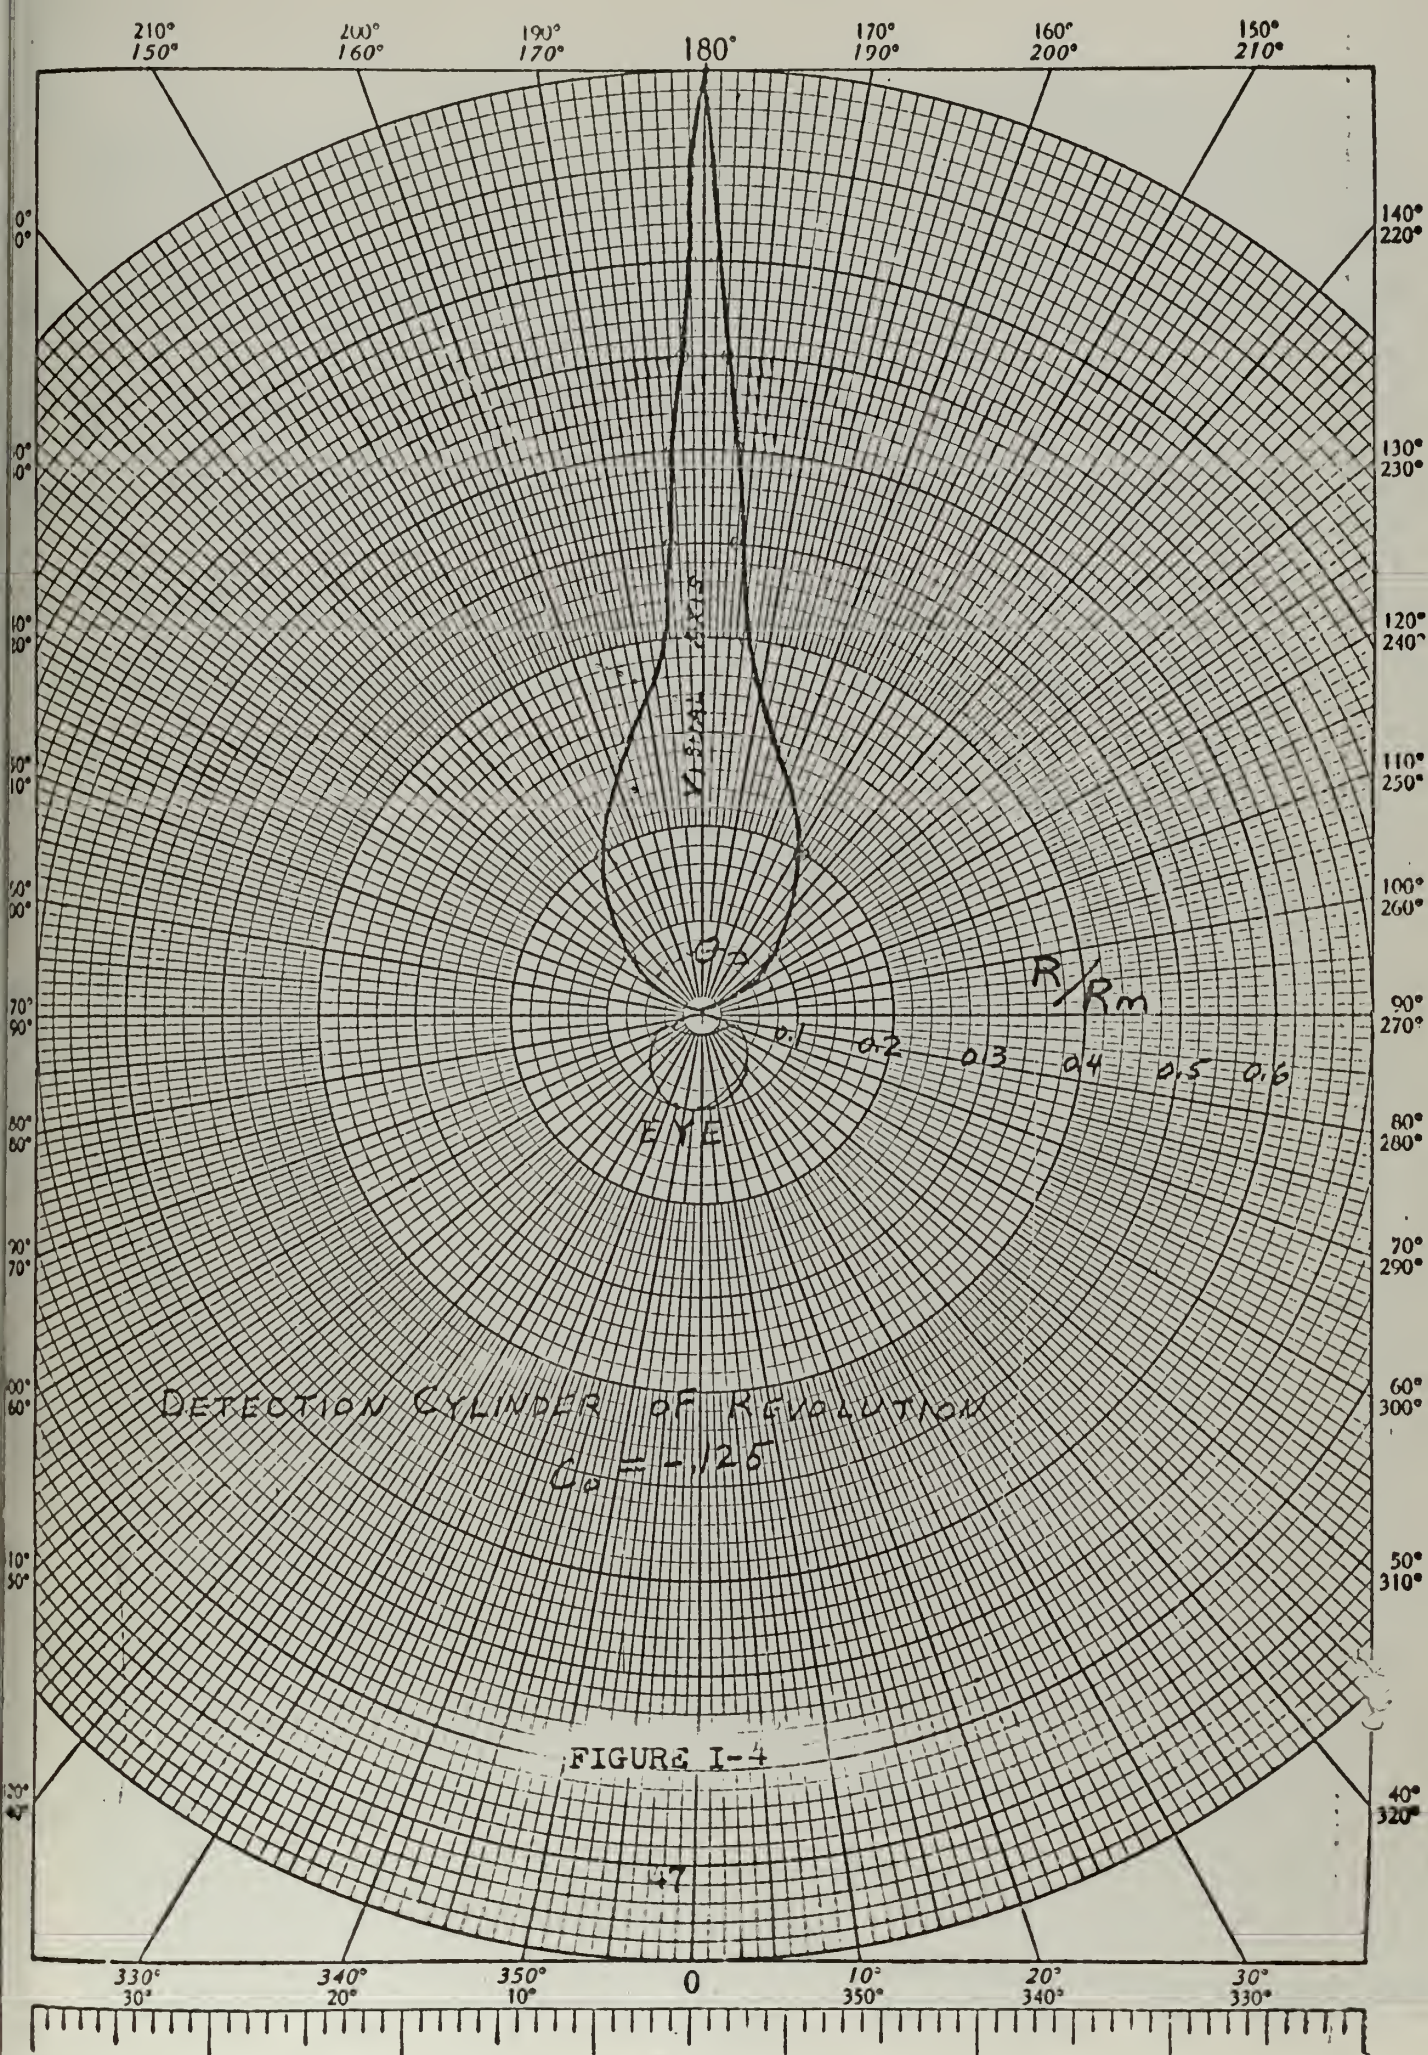

VALUE OF EXPONENTIAL INTEGRAL

FIGURE I-5

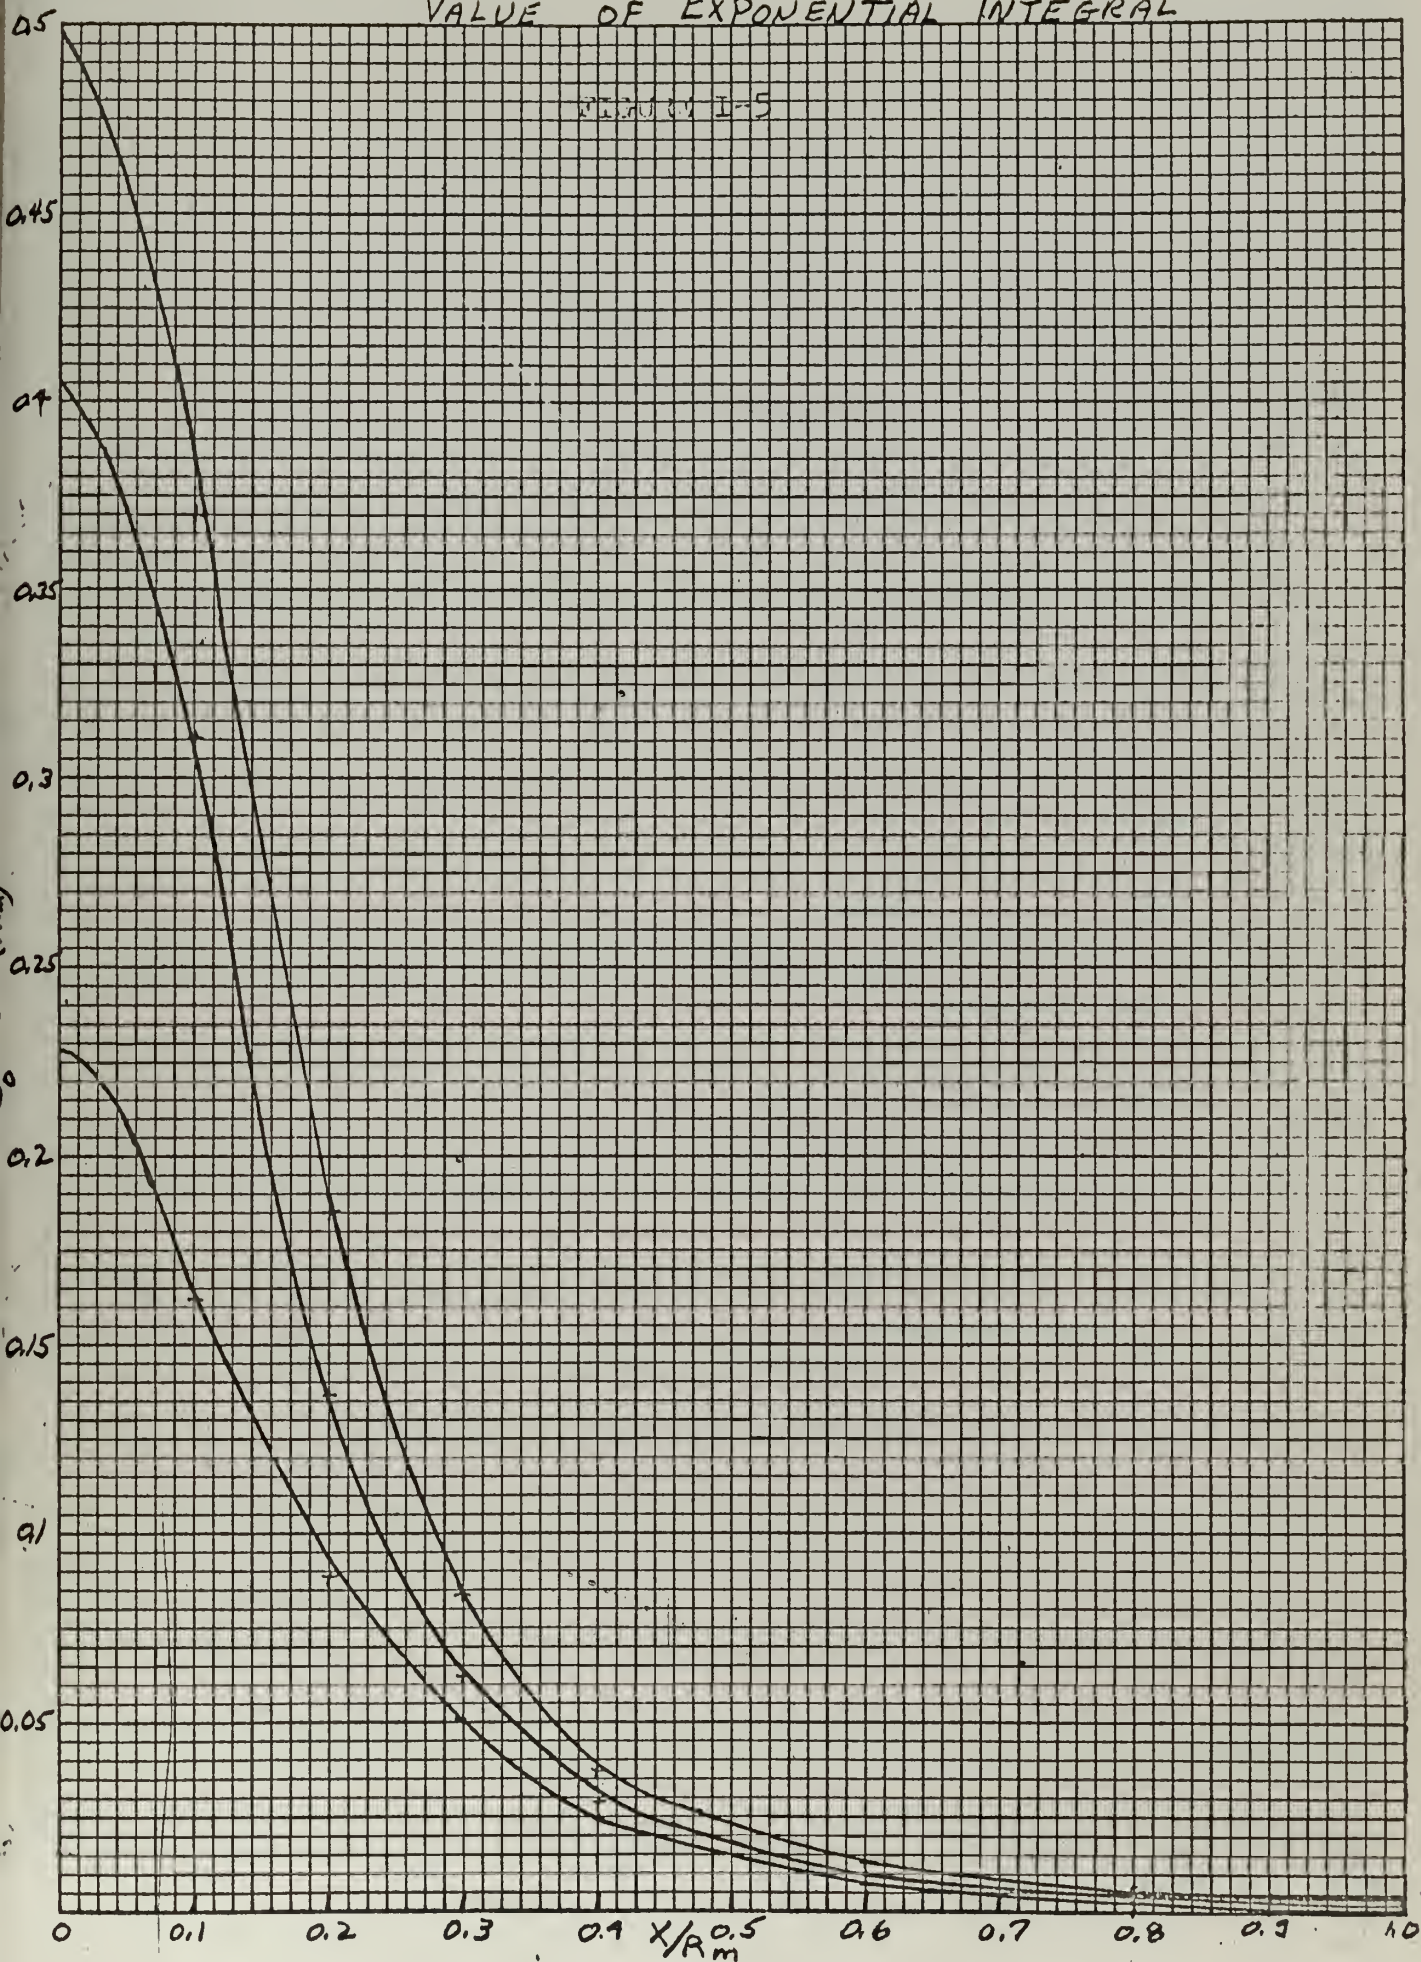

THEORETICAL LATERAL RANGE CURVES

FIGURE I-6

TGT. AREA: 450 ft²

$C_D = .125$

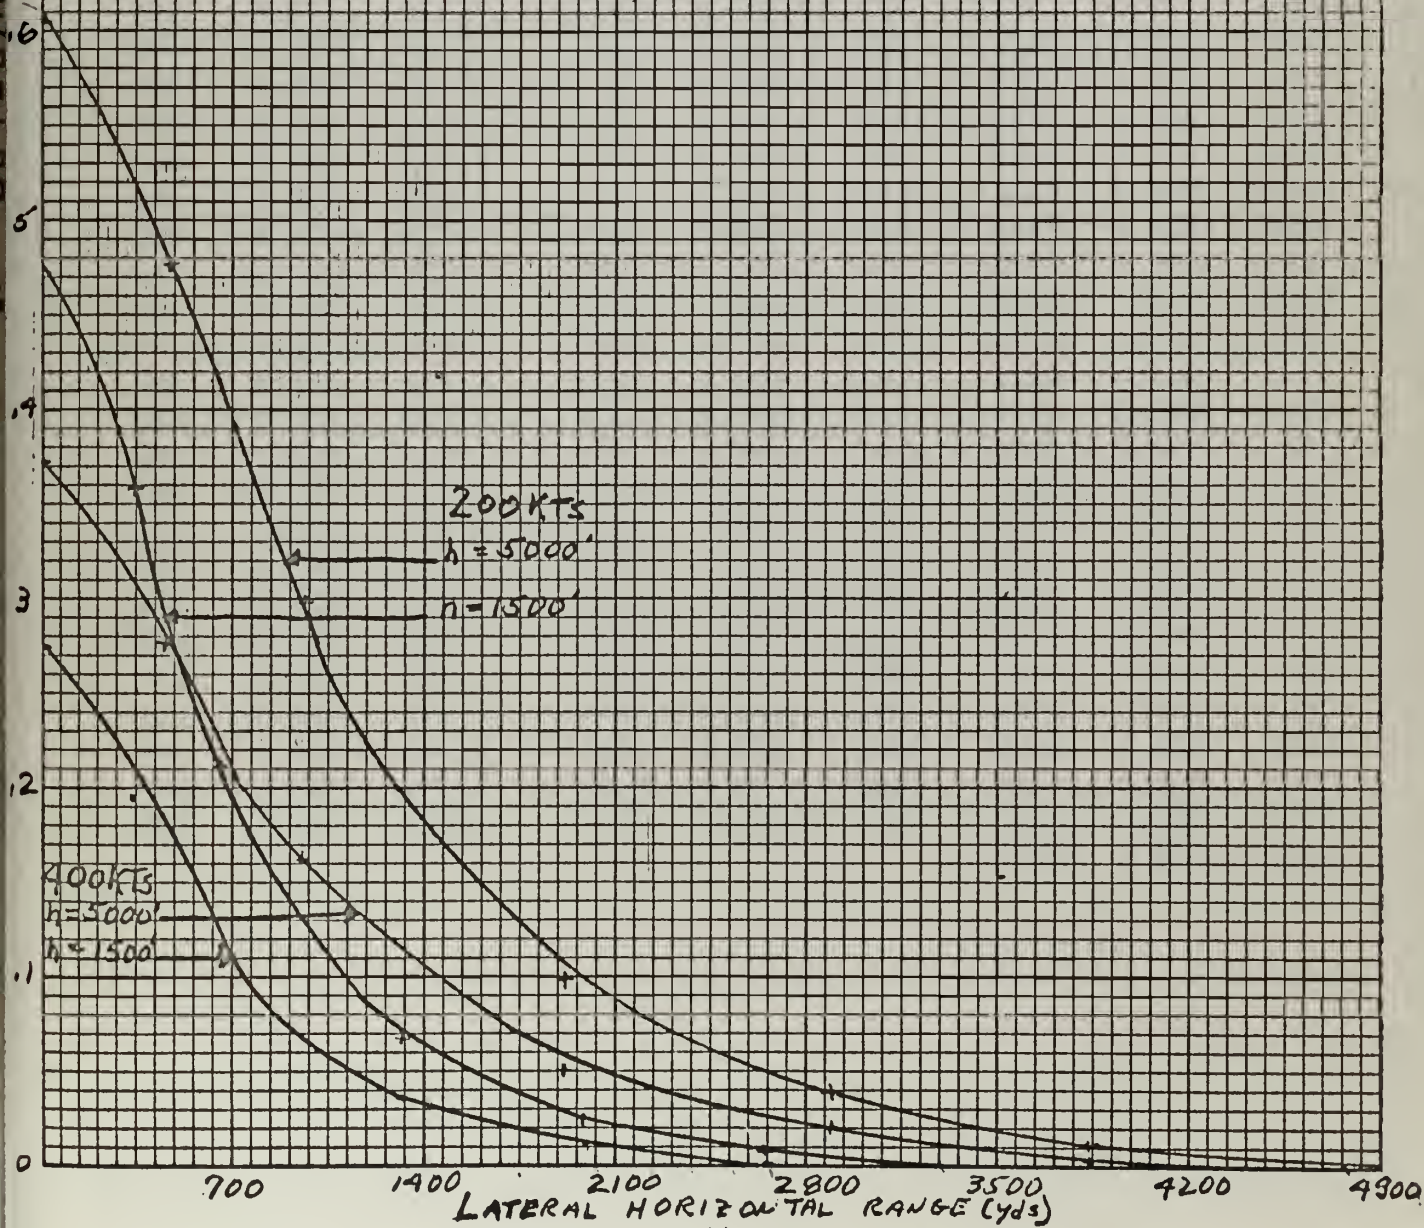


Table I-1

VALUES OF HEIGHT FACTOR (h in yards)

h	H	hH^3	h	H	hH^3	h	H	hH^3
0	1.00	0	825	0.960	730	1650	0.922	1290
25	0.999	24.9	850	0.959	749	1675	0.921	1310
50	0.998	49.6	875	0.958	768	1700	0.919	1320
75	0.996	74.2	900	0.956	787	1725	0.918	1340
100	0.995	98.5	925	0.955	806	1750	0.917	1350
125	0.994	123.0	950	0.954	825	1775	0.916	1370
150	0.993	147.0	975	0.953	843	1800	0.915	1380
175	0.991	171.0	1000	0.952	862	1825	0.914	1390
200	0.990	194.0	1025	0.950	880	1850	0.913	1410
225	0.989	218.0	1050	0.949	898	1875	0.912	1420
250	0.988	241.0	1075	0.948	916	1900	0.911	1430
275	0.987	264.0	1100	0.947	935	1925	0.910	1450
300	0.985	287.0	1125	0.946	952	1950	0.909	1460
325	0.984	310.0	1150	0.945	968	1975	0.908	1480
350	0.983	332.0	1175	0.944	988	2000	0.907	1490
375	0.982	355.0	1200	0.943	1010	2025	0.905	1500
400	0.980	377.0	1225	0.941	1020	2050	0.904	1520
425	0.979	399.0	1250	0.940	1040	2075	0.903	1530
450	0.978	421.0	1275	0.939	1060	2100	0.902	1540
475	0.977	442.0	1300	0.938	1070	2125	0.901	1550
500	0.975	464.0	1325	0.937	1090	2150	0.900	1570
525	0.974	486.0	1350	0.936	1110	2175	0.899	1580
550	0.973	507.0	1375	0.935	1120	2200	0.898	1590
575	0.972	528.0	1400	0.933	1140	2225	0.897	1600
600	0.971	549.0	1425	0.932	1150	2250	0.896	1620
625	0.969	569.0	1450	0.931	1170	2275	0.895	1630
650	0.968	590.0	1475	0.929	1180	2300	0.894	1640
675	0.967	610.0	1500	0.928	1200	2325	0.893	1650
700	0.966	631.0	1525	0.927	1220	2350	0.891	1660
725	0.965	651.0	1550	0.926	1230	2375	0.890	1680
750	0.964	671.0	1575	0.925	1250	2400	0.889	1690
775	0.962	690.0	1600	0.924	1260	2425	0.888	1700
800	0.961	710.0	1625	0.923	1280	2450	0.887	1710
						3333	0.858	2106

APPENDIX II

THE MICHIGAN EXPERIMENT

This appendix is a summary of a report entitled Field and Simulator Studies of Air-to-Ground Visibility Distances by H. Richard Blackwell, James G. Ohmart and E. Rae Harcum of the University of Michigan Research Institute Vision Research Laboratories. This was the final report on a coordinated program of inflight and simulator measurements of target recognition distances and target detection probabilities. This project was conducted for the Navy Bureau of Aeronautics to provide quantitative information on visibility ranges of a vehicular target complex viewed against asphalt, grass and dirt backgrounds from an aircraft for varying flight altitudes and attitudes of the flight path with respect to the sun.

In Flight Measurements

The field search flights were conducted under controlled conditions. The aircraft searched an area for a target while flying at varying altitudes and varying angles of the flight path with respect to the sun. The target was a convoy composed of a 1/4 ton jeep, a 2 1/2 ton stake truck, and a 1/2 ton pickup truck, all painted navy grey.


The target was to be detected in an area of one square mile in a county park located near the Michigan facilities. The terrain was flat and had houses, outbuildings and such features as trees, grass and planted fields. There were several roads in the area. Normal traffic was permitted to continue on the roads during the experimental flight

periods. There was some air traffic over the park. Ten different target positions were selected. Each was in the open alongside a road in the search area. The target vehicles were parked in one of the selected positions with about two to three vehicle lengths between each of them.

The search flights were flown by nine naval aviators in an SNB-5P aircraft. The pilot of the aircraft searched for the target and flew the aircraft. The nine pilots participating in the experimental flights were given considerable pre-briefing on the type of target and the target's probable location. They were permitted to make low level target recognition passes over the search area before conducting a series of search runs for record.

The search flights were flown at an airspeed of 130 knots. The effect of wind on the search pattern was neglected. The flights were flown at altitudes of 2000, 4000, 5700, and 7500 feet.

A clover leaf pattern as shown below was flown over the area on each run. After each pass made on a cardinal heading during the pattern, the target was moved to another position, allowing four different possible detections during the execution of one pattern.

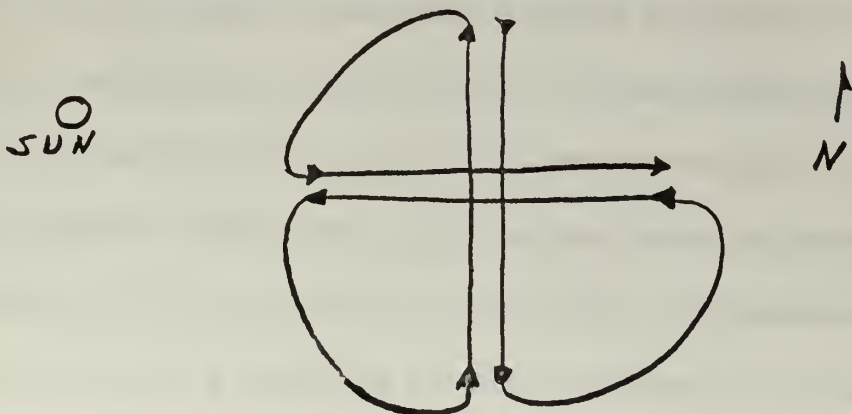

On each pass, at the time he felt that he had recognized the target, the pilot reported by radio to a control station located with the target convoy. In the report, target location and relative position of the vehicles in the convoy were given. At the time of reporting the pilot photographed the terrain beneath his position with a K-17 camera, belly mounted on the SNB. Also at the time of the report personnel with the convoy marked the elevation angle of a transit with which they had been tracking the aircraft. The photographs and the transit elevation angle data were used to compute the slant range of the target from the aircraft at the time of target recognition by the pilot observer.

All flights were made with a meteorological visibility equal to or greater than 15 miles. The average sun elevation angle was 45° and the average sun azimuth angle was 267° .

There were 109 flights flown in the experiment.

Simulator Measurements

Simulation of the experiment was attempted. A model of the terrain of the county park was made with a scale of 1:600. The terrain features, target and non-target vehicles and a simulated sun were included in the model. This provided a reasonably accurate duplication of the terrain and light conditions of the field tests. An observation platform mounted on a track leading to the terrain model was constructed. The eye level of the observer when seated on the platform could be adjusted to scale altitudes of 2000, 4000, 5700, or 7500 feet. The platform was moved along the track at a simulated speed of 134 knots. For a simulated search

pass the observer was seated on the platform with the eye level at the proper altitude. The platform was drawn toward the target area. When he detected the target he pressed a button which lighted a light over a floor distance measuring scale which indicated the distance to the target from the observer. This distance was recorded. Again moving toward the target, when he recognized the target another button was pushed turning on a second light over the scale and this recognition distance was recorded. The platform dolly was then returned to the opposite end of the track. The passes were made in groups of 20 with a change of sun position made between each group to provide different angles of flight path attitude with respect to the sun.

There were 840 simulator passes made.

Detection and Recognition

The process of target detection implied a discrimination between the target and its background while recognition of a target was to mean that the observer could correctly identify the target. The detection distances were hard to determine since different people had a different concept of detection. Detection might occur when the observer decided something he had previously noticed was a target or detection might occur when the observer just noticed a target which was clearly well within the range required to see the target judging by visibility factors alone. Experimenters noticed that every case of failure to see a target on a pass was a failure of search rather than a condition of the target being below the detection threshold of the observer during the entire pass. Since

it seemed that the recognition distance could be checked when the proper vehicle positions in the convoy were reported, this distance was used as the distance to be determined in the experiment.

Limitations of the Experiment

1. The observers knew where the targets might be located and searched those areas almost exclusively.
2. In the simulator the sunlight was not collimated nor was it of high enough intensity.

Comparison of Field and Simulator Data

A. General

Averages of the slant recognition ranges and detection probabilities for field and simulator data are tabulated for the different altitudes and attitudes with respect to the sun. A study of Tables II-1 and II-3 will show:

1. A difference in results of field and simulator trials for both range and detection probabilities.
2. Detection probabilities depend both on altitude and attitude with respect to the sun.

An investigation of these differences with the possibility of determining similarity of field and simulator data was conducted in order to allow the more extensive simulator data to be used properly.

B. Some Causes for Differences Between Field and Simulator Data

1. The process of flying the aircraft caused some diversion from searching. Other physical distractions such as radio transmissions, distortions

of the windscreen, and approach of other aircraft also caused diversion from the search.

2. In the SNB aircraft it was almost impossible to see out of the aircraft except on the pilot's side. This limited the field of view. The field of view was unlimited in the simulator.

C. Analysis of the Effect of Flight Altitude Upon Slant Range

Using the averages of slant recognition ranges and detection probabilities shown in Table II-1 as a basis, the relative slant range was defined as the ratio of each average value tabulated for altitudes and the grand average computed for all altitudes and attitudes. This was done for both the field and simulator data. The relative slant ranges of the field data and the simulator data were shown to be similar. See Table II-2.

D. Analysis of the Effect of Attitude With Respect to the Sun Upon Slant Range

Again the relative slant ranges were computed for the field and simulator tests, this time for each angle, θ , for all altitudes. θ is the angle of the flight path with respect to the sun. In Figure II-1 a plot of θ as a function of the log of the relative slant range showed a linear relation between the two quantities. This relation held for both field and simulator data.

E. Analysis of Detection Probabilities

The computing procedure for determining detection probabilities gave the probability of the target being detected at a slant range equal

to or greater than a given value of slant range. A summary of the probability data for the field and simulator measurements was presented in Table II-3 and Figure II-2. These summary curves should be used when the sun's position relative to the flight path and/or the flight altitude cannot be specified in describing the conditions of detection in planning for an operational situation.

The values of the detection probabilities determined varied between the field and simulator tests and also between various altitudes and attitudes with respect to the sun within the field data and simulator data. In Figure II-2 the difference between the field and simulator data can be seen.

This difference was broken into three classes:

1. Differences in detection probabilities for the same slant range
2. Difference in the maximum detection probability determined in the field and simulator tests
3. Difference in shape of the probability curves of the field and simulator tests.

An analytical model describing the quantitative characteristics of both the field and simulator probability curves was desired in order to explain the differences between the curves.

It was assumed that the probability data represented two processes acting concurrently. The first process depended only on the value of the slant range; the greater the range, the less the detection probability. The second process affecting detection probability was caused by lack

of attention, improper search, or any other factor which could cause a complete failure to see the target on a pass. The second process was assumed to be statistically independent of the first process.

These quantities were defined:

P is the probability obtained from the data

P' is the probability obtained in the absence of the second process

ϕ is the upper asymptotic value of P

Using proper values of ϕ in the equation:

$$P' = P/\phi$$

made it possible to correct out the effect of the second process. Using a value of $\phi = .54$ values of P' for the field test data were computed. With a value of $\phi = .89$ values of P' for the simulator data were also computed. For each set of the data P' was plotted as a function of the log of the slant range. Smooth curves as shown in Figure II-2 were fitted to these plots. The differences in the values of ϕ required for a fit of the field data and the simulator data show the greater weight of the second process felt in the field test.

Conclusions

Based on the similarity of the slant range data of the field and simulator tests, the decision was made to pool the data from the two sources. By using the proper values of ϕ determined for the field and simulator data the theoretical curves in Figure II-3 and II-4 were constructed from the pooled data.

In a supplementary experiment olive drab painted targets were used.

The median slant range increased 7.5% and detection probability increased 2.5%. Against backgrounds of grass and dirt as compared to the asphalt background used initially with grey painted targets the slant range increased 1.2 and 1.34 times. The detection probability differences were negligible. It is interesting to note that the pilots reported that the color of the target made no difference in their ability to see the target but that luminance conditions were different in the two experiments possibly causing the difference in ranges and probabilities obtained.

In order to provide a basis of comparison of the results of this experiment and the theory described in this paper, Figure II-3 was used to determine the maximum slant range. This was about 13,000 feet for a search altitude of 2000 feet and 21,000 feet for an altitude of 5700 feet. Computing the horizontal ranges for each altitude we have

$$R_h = 4280 \text{ yards and}$$

$$R_h = 4170 \text{ yards.}$$

The maximum detection probabilities were 0.49 and 0.58 for 2000 feet and 5700 feet respectively.

These ranges are for conditions:

1. Target size: Approximately 975 ft^2
2. Observer altitudes: 2000 ft. and 5700 ft.
3. Search airspeed: 134 knots
4. Aircraft: SNB
5. Target contrast: Approximately -.5

TABLE II-1

MEAN SLANT RECOGNITION RANGES: FIELD DATA

Altitude (feet)	0 3°	0 90°	0 177°	Average	N
2,000	6,677	6,832	10,980	8,160	44
4,000	7,376	9,767	11,014	9,390	50
5,700	8,273	12,901	16,292	12,490	12
7,500		10,380	17,600	13,990	3
Averages	7,442	9,970	13,972		
		Grand Average	11,008 feet		

MEAN SLANT RECOGNITION RANGES: SIMULATOR DATA

Altitude (feet)	0 45°	0 122°	Average	N
2,000	11,430	12,210	11,820	180
4,000	13,390	15,610	14,500	240
5,700	16,030	17,160	16,600	240
7,500	18,710	22,610	20,600	180
Averages	14,890	16,897		
		Grand Average	15,895 feet	

RECOGNITION PROBABILITIES: SIMULATOR DATA

Altitude (feet)	0 45°	0 122°	Average
2,000	.75	.90	.825
4,000	.91	.94	.925
5,700	.89	.90	.895
7,500	.91	.93	.920
Averages	.865	.918	
		Grand Average	.891

RECOGNITION PROBABILITIES: FIELD DATA

Altitude (feet)	0 3°	0 90°	0 177°	Average
2,000	.45	.54	.64	.543
4,000	.54	.46	.54	.513
5,700	.67	.67	.67	.670
7,500	.00	1.00	1.00	.670
Average	.415	.668	.712	
		Grand Average	.599	

TABLE II-2

VALUES OF RELATIVE SLANT RANGE: ATTITUDE VARIATION

Field	Simulator	Field	Simulator	Field
θ 3°	θ 45°	θ 90°	θ 122°	θ 177°
.75	.94	.97	1.06	1.37


VALUES OF RELATIVE SLANT RANGE: ALTITUDE VARIATION

Altitude (feet)	Field Tests	Simulator Measurements
2,000	.74	.74
4,000	.85	.91
5,700	1.13	1.04
7,500	1.27	1.30


TABLE II-3

RECOGNITION PROBABILITY AS A FUNCTION OF SLANT RANGE:
ALL ALTITUDES AND ATTITUDES COMBINED

Slant Range (feet)	Field Data	Simulation Data
2,500	.54	.89
3,500	.52	.89
4,500	.52	.89
5,500	.50	.89
6,500	.46	.88
7,500	.40	.88
8,500	.36	.87
9,500	.32	.84
10,500	.26	.80
11,500	.18	.73
12,500	.09	.65
13,500	.06	.59
14,500	.05	.51
15,500	.05	.43
16,500	.04	.36
17,500	.04	.29
18,500	.02	.24
19,500	.02	.20
20,500	.01	.16
21,500	.00	.14
22,500	.00	.11
23,500	.00	.10
24,500	.00	.07
25,500	.00	.06
26,500	.00	.04
27,500	.00	.03
28,500	.00	.03
29,500	.00	.02
30,500	.00	.01
31,500	.00	.01
32,500	.00	.01
33,500	.00	.00

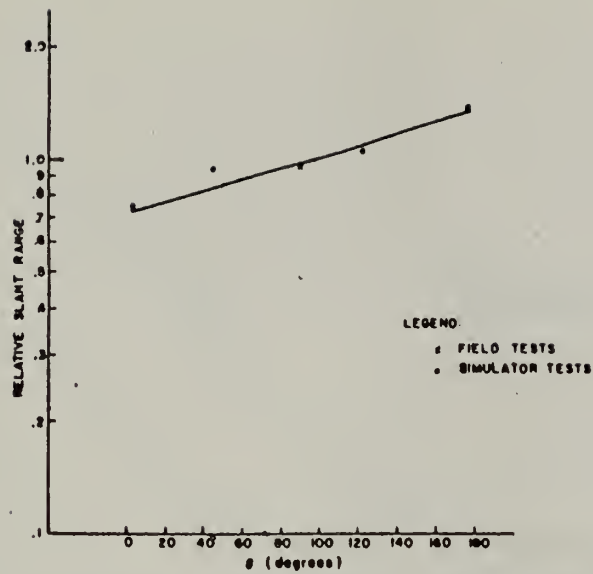


Log relative slant range as a function of flight attitude

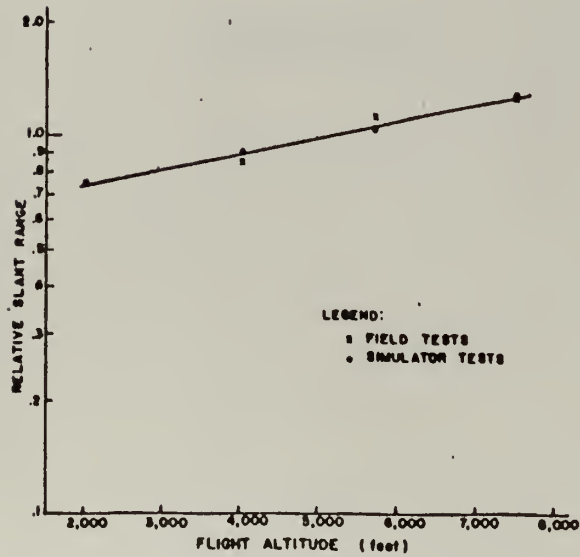

Log relative slant range as a function of flight altitude

FIGURE II-1

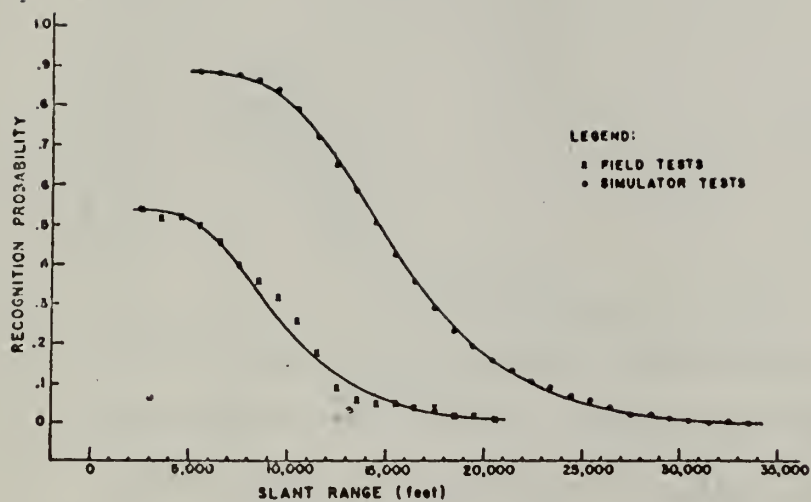

Data: Recognition probability as
a function of slant range: field and
simulator data

FIGURE II-2

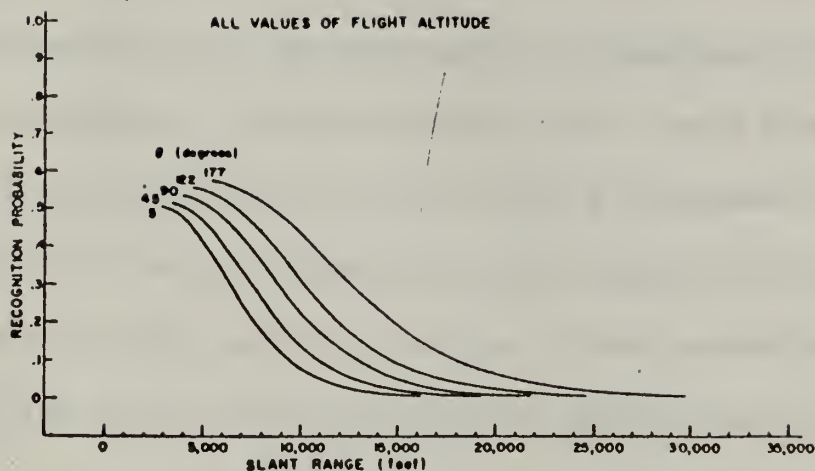


Fig. II-3. Theoretical curves: Recognition probability as a function of slant range: All values of flight altitude

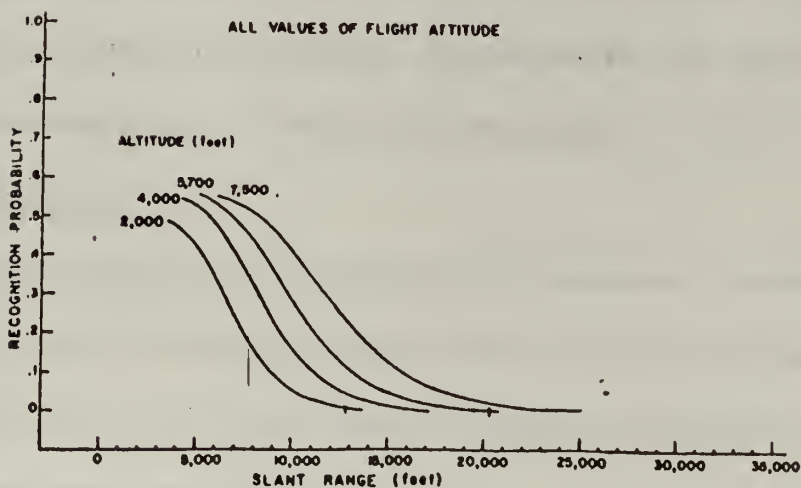


Fig. II-4. Theoretical curves: Recognition probability as a function of slant range: All values of flight attitude

APPENDIX III

THE OPERATIONAL EXPERIMENT

Stimulated by the fact that there was little experimental data on detection probabilities of tactical targets by visual search from the air in an operational environment it was hoped that an experiment to gather such data utilizing the men, material and time already available in the Postgraduate School area would be possible. It was learned during September, 1959 that the Combat Development Experimentation Center at Fort Ord, California would be doing an operational field experiment simulating a land battle in order to evaluate new army tactics. Permission was received from the Commanding General, CDEC, to conduct an air visual reconnaissance experiment in conjunction with their battle problem. The Aviation Department of the Postgraduate School authorized naval aviators to participate in the reconnaissance flights during their scheduled flight proficiency periods. The response to a call for aviator volunteers was adequate to conduct the experiment.

General Description

The flights simulated the mission of a single seat, attack aircraft searching an area for vehicular targets such as tanks, personnel carriers, trucks, etc. which would appear as targets of opportunity to an aircraft on an armed reconnaissance mission.

During the experiment pilots on reconnaissance flights over the CDEC battle area reported (1) the positions of targets observed and (2) their own position at the time of target observation. A comparison of

this data with vehicle position reports taken in the field and compiled by the Project Michigan group at CDEC provided an estimation of the probability of detection of these targets. An analysis of the data was done to construct lateral range detection curves.

The Area

The battle problem was conducted at Hunter Liggett Military Reservation, Jolon, California. Two separate areas each covering about 144 mi². and offering similar terrain features were used at different time periods in the experiment. The terrain was predominantly rolling hills cut by two dry river beds. About three-quarters of the area was covered by sparse woods. The area was very dry causing the terrain to be brown in color. There were three asphalt roads through the area with many "tank trails" cutting across the area. Moving vehicles left dust trails but stationary vehicles painted army olive drab generally blended very well with the terrain. Terrain height varied from 2500 feet at the northern end of the search area to 1200 feet at the southern end. The area of operation is depicted in Chart 1.

Targets

The army's field problem placed about 250 vehicles of varying types, i.e., medium tanks, armored personnel carriers, etc., all of a similar size, in the area. These were the targets for the reconnaissance aircraft.

Flight Conditions

The reconnaissance flights were flown during three two week periods.

Flights were made during both morning and afternoon hours. The sun elevation angle varied for different flights. No effort was made to establish its position. The surface visibility was estimated to be 30 miles on each of the flying days. The pilots reported the same visibility condition. Haze or dust from moving vehicles was not a factor reducing the detection range to a great extent. In fact, dust trails were the cause of many moving target detections. Data was not obtainable on target contrast in the field nor was data taken on sighting direction of targets relative to sun position.

The flights were made in T-28 aircraft, the closest approximation to a single seat operational aircraft available. The cockpit conformation and canopy design are very similar to operational jet aircraft. Downward visibility and handling characteristics are also reasonably comparable to operational aircraft. The second person carried in the T-28 served as a recorder noting information which was required by the experiment but which would not be required by a pilot of an armed reconnaissance aircraft.

Flight Instructions

The reconnaissance searches were flown at 200 knots true air speed. Wind effect was considered negligible. An altitude of 1500 feet above the terrain was maintained by the search aircraft for the first phase of the experiment and an altitude of 5000 feet above the terrain was maintained during the second phase. The pilots were assigned to fly the tracks of Course I or II as shown on Chart 1 depending on the army's area of activity. The pilots were instructed to fly a slight weave about the track

line as is done in operational aircraft to increase the area visible forward of the nose of the aircraft. The pilot of the search aircraft was required to fly the airplane, make target detections and at the time of detection note the position of the target and his own position on a 1:50,000 scale chart which he carried. At the time of a detection he would commence to circle his position until he was through making the required notations. This prevented him from overlooking the area along the track which would have been covered while recording information about the detected target if he had continued on course. At the time of detection he also told the rear seat recorder to note the time of detection and told him the type of target, the target's condition of motion (stopped or moving), and the target's cover (in open or not). Each aircraft flew an individual search, remaining in the search area about 30 minutes. All charts and navigation data were furnished the pilots.

Pilot Background

The pilots flying the reconnaissance search flights had from three to ten years experience in attack squadrons. Five of the eight pilots had Korean combat experience flying the type of mission this experiment attempted to simulate. However, the pilots were currently flying only four to eight hours a month in the T-28. They were not given a refresher course in search procedures and target recognition. Neither were they given familiarization flights over the search area before conducting a reconnaissance flight.

Vehicle Position Reports

The field reports of vehicle position were given by each vehicle in the battle problem area every five minutes. These reports were collected by Project Michigan's representative to CDEC and checked for validity through a cross check system in the reporting procedure. It was found that there were many obvious discrepancies in the vehicle position reports which were easily corrected. It was suspected that other errors might be in the position report data which could not be caught and corrected. However, the data was assumed to be reasonably accurate. No data was available on the concealment status of the vehicles but estimates of the number of vehicles under cover at any one time were obtained from the field commanders and from interpretation of the photographic coverage of some phases of the battle problem done by the CDEC photo interpreters.

Analysis

There were thirteen flights conducted during the first phase of the experiment and six flights conducted during the last phase. Vehicle position reports for the time periods of the flights were constructed on overlays, target position overlays, of the area. The target position overlays were laid over the chart and targets were counted in range bands. The range bands were centered on the track lines and measured 0-500 from the tracks, 500-1000 yards from the tracks, 1000-1500 yards from the tracks and 1500-2000 yards from the tracks. Both stationary and moving target positions were plotted without regard to target size. Table III-1

indicates the number of targets in each range band for each flight studied. The pilot's reported targets were also plotted and a comparison was made of the pilot's reported target positions and the ground vehicle positions. Unfortunately, the match of pilot's position reports and the vehicle position reports was not good. Possible errors from the field vehicle position reports have already been noted. Pilot reporting errors could have stemmed from the fact that without prior familiarization flights over the area position reporting would have been difficult. However, it is felt that the landmarks defining the planned flight tracks were recognized by the pilots. They all reported that they stayed on the planned search tracks.

Using the assumption that the pilots did stay on track, it was decided to use the pilot's estimate of distance, determined from his plotted target position and his plotted position at the time of detection, as the target detection range. The targets detected by the pilots were also sorted into range bands using the pilot's estimate of range of detection to place the target in the range band from the track. It is assumed that pilots did not report targets not actually seen. These results are tabulated in Table III-2.

Assume that each target in a range band can be detected or not detected independently on each pass of the search aircraft along the tracks defining the range bands. The detection or failure of detection of each target, therefore, can be considered to be one sample drawn from a binomial distribution. To get an estimate of the parameter, p , the detection

probability, let us use the ratio:

$$\hat{p} = \frac{\text{number of targets observed in each band}}{\text{number of targets available in each band}}$$

The plotting and counting process was done for eight flights taken at random from the first phase and for four flights taken at random from the second phase. At that time the average number of targets available in each range band was 275. For sample sizes of this order the binomial distribution approaches the normal distribution. The interval estimate for p , the detection probability, was formed in the following manner:

$$\hat{p} - 1.96 \sqrt{\frac{\hat{p}(1-\hat{p})}{275}} < p < \hat{p} + 1.96 \sqrt{\frac{\hat{p}(1-\hat{p})}{275}}$$

where p is the estimated value of p .

Intervals computed in this manner have a .95 probability of including the value of p . These intervals are tabulated below.

First Phase--Altitude 1500 feet

<u>Range Band</u>	<u>Estimate</u>	<u>Confidence Interval</u>
0-500	$\hat{p} = .118$	$.080 < p < .156$
500-1000	$\hat{p} = .036$	$.025 < p < .047$
1000-1500	$\hat{p} = .014$	$.007 < p < .021$
1500-2000	$\hat{p} = .004$	$.000 < p < .007$

Second Phase--Altitude 5000 feet

0-500	$\hat{p} = .023$	$.012 < p < .034$
500-1000	$\hat{p} = .000$	$p = 0$
1000-1500	$\hat{p} = .018$	$.008 < p < .028$
1500-2000	$\hat{p} = .010$	$.003 < p < .017$

It was considered that these confidence intervals were small enough, so the remaining flights were not analyzed.

The probabilities of detection for each range band for each flight are shown in Table III-3.

In order to get a detection probability not affected by the particular battle tactics which placed some percentage of targets under cover, hence unavailable for visual detection, the estimate of the percentage of targets under cover was used to arrive at a figure for the number of targets observable. Then the estimate of the probability of detection, $\hat{p}_1$, was defined as:

$$\hat{p}_1 = \frac{\text{number of targets observed in each band}}{\text{number of targets observable in each band}}$$

These probabilities are shown in Table III-4.

At this point in the analysis conversations with pilots revealed that some pilots had found so many moving targets in the area that they ignored them and searched for and reported only stationary targets. It is felt that this experiment indicates that moving targets have a much higher probability detection than stationary targets but that no quantitative basis for this statement can be made from the data collected in the experiment.

Using the range band detection probabilities, a lateral range curve for visual detection of stationary army vehicles in the open in an operational environment observed from altitudes of 1500 and 5000 feet above the terrain from a single seat aircraft at an airspeed of 200 knots was constructed and is shown in Figure 6, p. 18.

It can be seen from the lateral range curves that:

1. No targets were detected at ranges over 2000 yards from the track of the aircraft.
2. The probability of detection near the track decreased when the search altitude was raised to 5000 feet.

Both of these conclusions are contradictory to the detection probabilities predicted in the visual search theory presented previously. It is felt that this is caused by factors in the operational situation which are not considered in the theory. These are principally (1) lack of familiarity with the terrain (2) necessity for the pilot to divide his time between search and aircraft control (3) obstruction or distortion of vision by the construction of the aircraft and the pilot's helmet. The second factor is felt to be the biggest contributor to the difference in experimental and theoretical results. The theory has been found good for determining detection probabilities for targets at sea with observers who were not required to fly the aircraft as well as conduct the search.

Detection ranges also differed from those reported in the Michigan experiment. There the target was a vehicle convoy, larger than the single targets which were of interest in the battle problem. Also the Michigan pilots were familiar with the terrain and the expected target positions. There was no data on target contrast given in either experiment, but it seems likely that the contrast of olive drab army vehicles against natural terrain would be less than the contrast of Navy grey vehicles against natural terrain. If this condition did exist, the smaller

contrast value in the battle problem would partially explain the shorter detection ranges of the operational experiment.

This experiment indicates that there is a significant amount of degradation of theoretical detection probabilities in the conduct of visual reconnaissance for ground vehicle targets from high speed aircraft. It is felt that the lateral range curves constructed, despite the assumptions of the analysis, give a better estimate of the actual detection probabilities obtained by armed reconnaissance aircraft than the theoretical curves previously computed.

TABLE III-1

NUMBER OF TARGET VEHICLES/RANGE BAND/RUN

All Targets Stationary

First Phase, Altitude of Search 1500 ft.

Range	0-500	500-1000	1000-1500	1500-2000	Total
Run 1	44	84	85	65	358
Run 2 & 3	34	43	62	41	180
Run 4	34	46	75	70	225
Run 5 & 6	62	12	0	20	94
Run 7	9	2	16	4	31
Run 8	88	60	57	87	292
Total	271	247	295	287	1100

Second Phase, Altitude of Search 5000 ft.

Run 9	64	32	53	2	151
Run 10	17	71	54	77	219
Run 11	51	27	48	43	169
Run 12	42	55	67	72	236
Total	174	185	222	194	775

TABLE III-2

NUMBER OF TARGETS OBSERVED/RANGE BAND/RUN

All Targets Stationary

First Phase, Altitude of Search 1500 ft.

Range	0-500	500-1000	1000-1500	1500-2000	Total
Run 1	3	2	0	1	6
Run 2	3	1	2	0	6
Run 3	0	0	1	0	1
Run 4	4	1	1	0	6
Run 5	8	2	0	0	10
Run 6	3	1	0	0	4
Run 7	2	2	0	0	4
Run 8	9	0	0	0	9
Total	32	9	4	1	

Second Phase, Altitude of Search 5000 ft.

Run 9	1	0	0	0	1
Run 10	1	0	0	0	1
Run 11	1	0	4	0	5
Run 12	1	0	0	2	3
Total	4	0	4	2	

TABLE III-3

DETECTION PROBABILITIES

All Targets Stationary; in Open and Concealed

First Phase, Altitude of Search 1500 ft.

Range	0-500	500-1000	1000-1500	1500-2000
Run 1	.068	.0238	.0	.0154
Run 2	.0883	.0232	.0323	.0
Run 3	.0	.0	.0162	.0
Run 4	.1175	.0218	.0133	.0
Run 5	.129	.1665	.0	.0
Run 6	.33	.5	.0	.0
Run 7	.222	1.0	.0	.0
Run 8	.102	.0	.0	.0
Total	.118	.0364	.0135	.0035

Second Phase, Altitude of search 5000 ft.

Run 9	.0156	.0	.0	.0
Run 10	.0588	.0	.0	.0
Run 11	.0196	.0	.0	.0465
Run 12	.0238	.0	.0596	.0
Total	.023	.0	.018	.0103

TABLE III-4

DETECTION PROBABILITIES


All Targets Stationary; in Open Only

First Phase, Altitude of Search 1500 ft.


Range	0-500	500-1000	1000-1500	1500-2000
Run 1	.085	.0298	.0	.0193
Run 2	.1105	.029	.0403	.0
Run 3	.0	.0	.0202	.0
Run 4	.147	.0273	.01416	.0
Run 5	.161	.208	.0	.0
Run 6	.413	.625	.0	.0
Run 7	.278	1.0	.0	.0
Run 8	.1275	.0	.0	.0
Total	.149	.0455	.0168	.00438

Second Phase, Altitude of Search 5000ft.

Run 9	.0195	.0	.0	.0
Run 10	.0738	.0	.0	.0
Run 11	.0245	.0	.0	.0581
Run 12	.0298	.0	.0746	.0
Total	.0288	.0	.0225	.01288

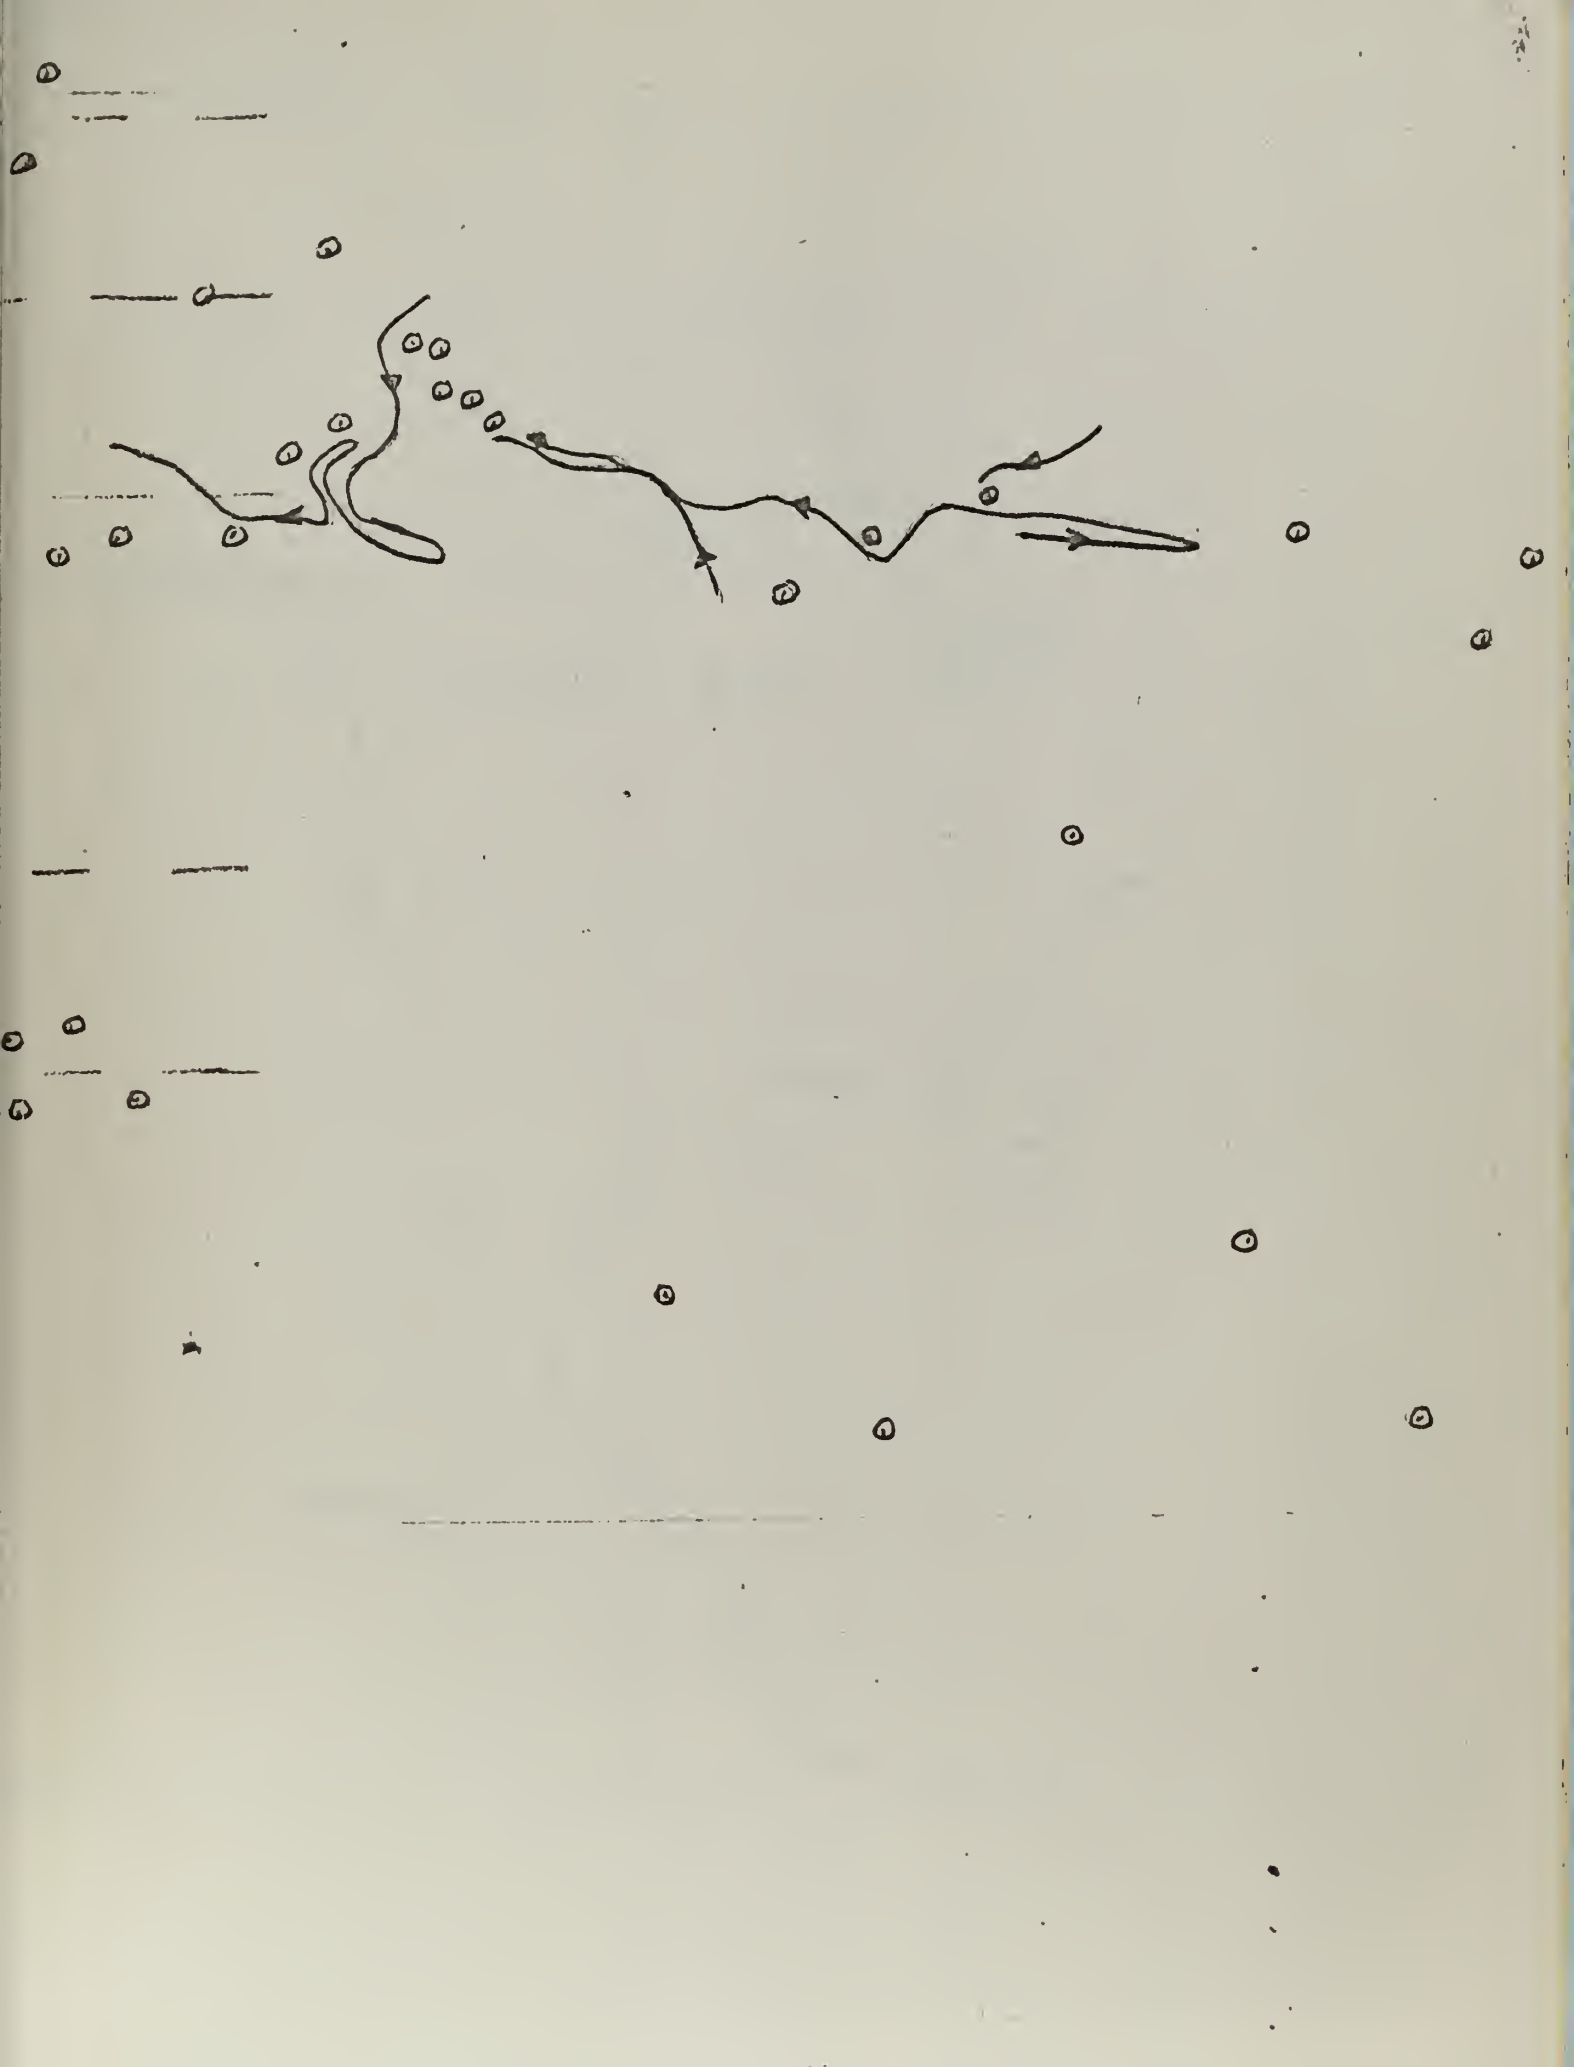

FLIGHT PATH

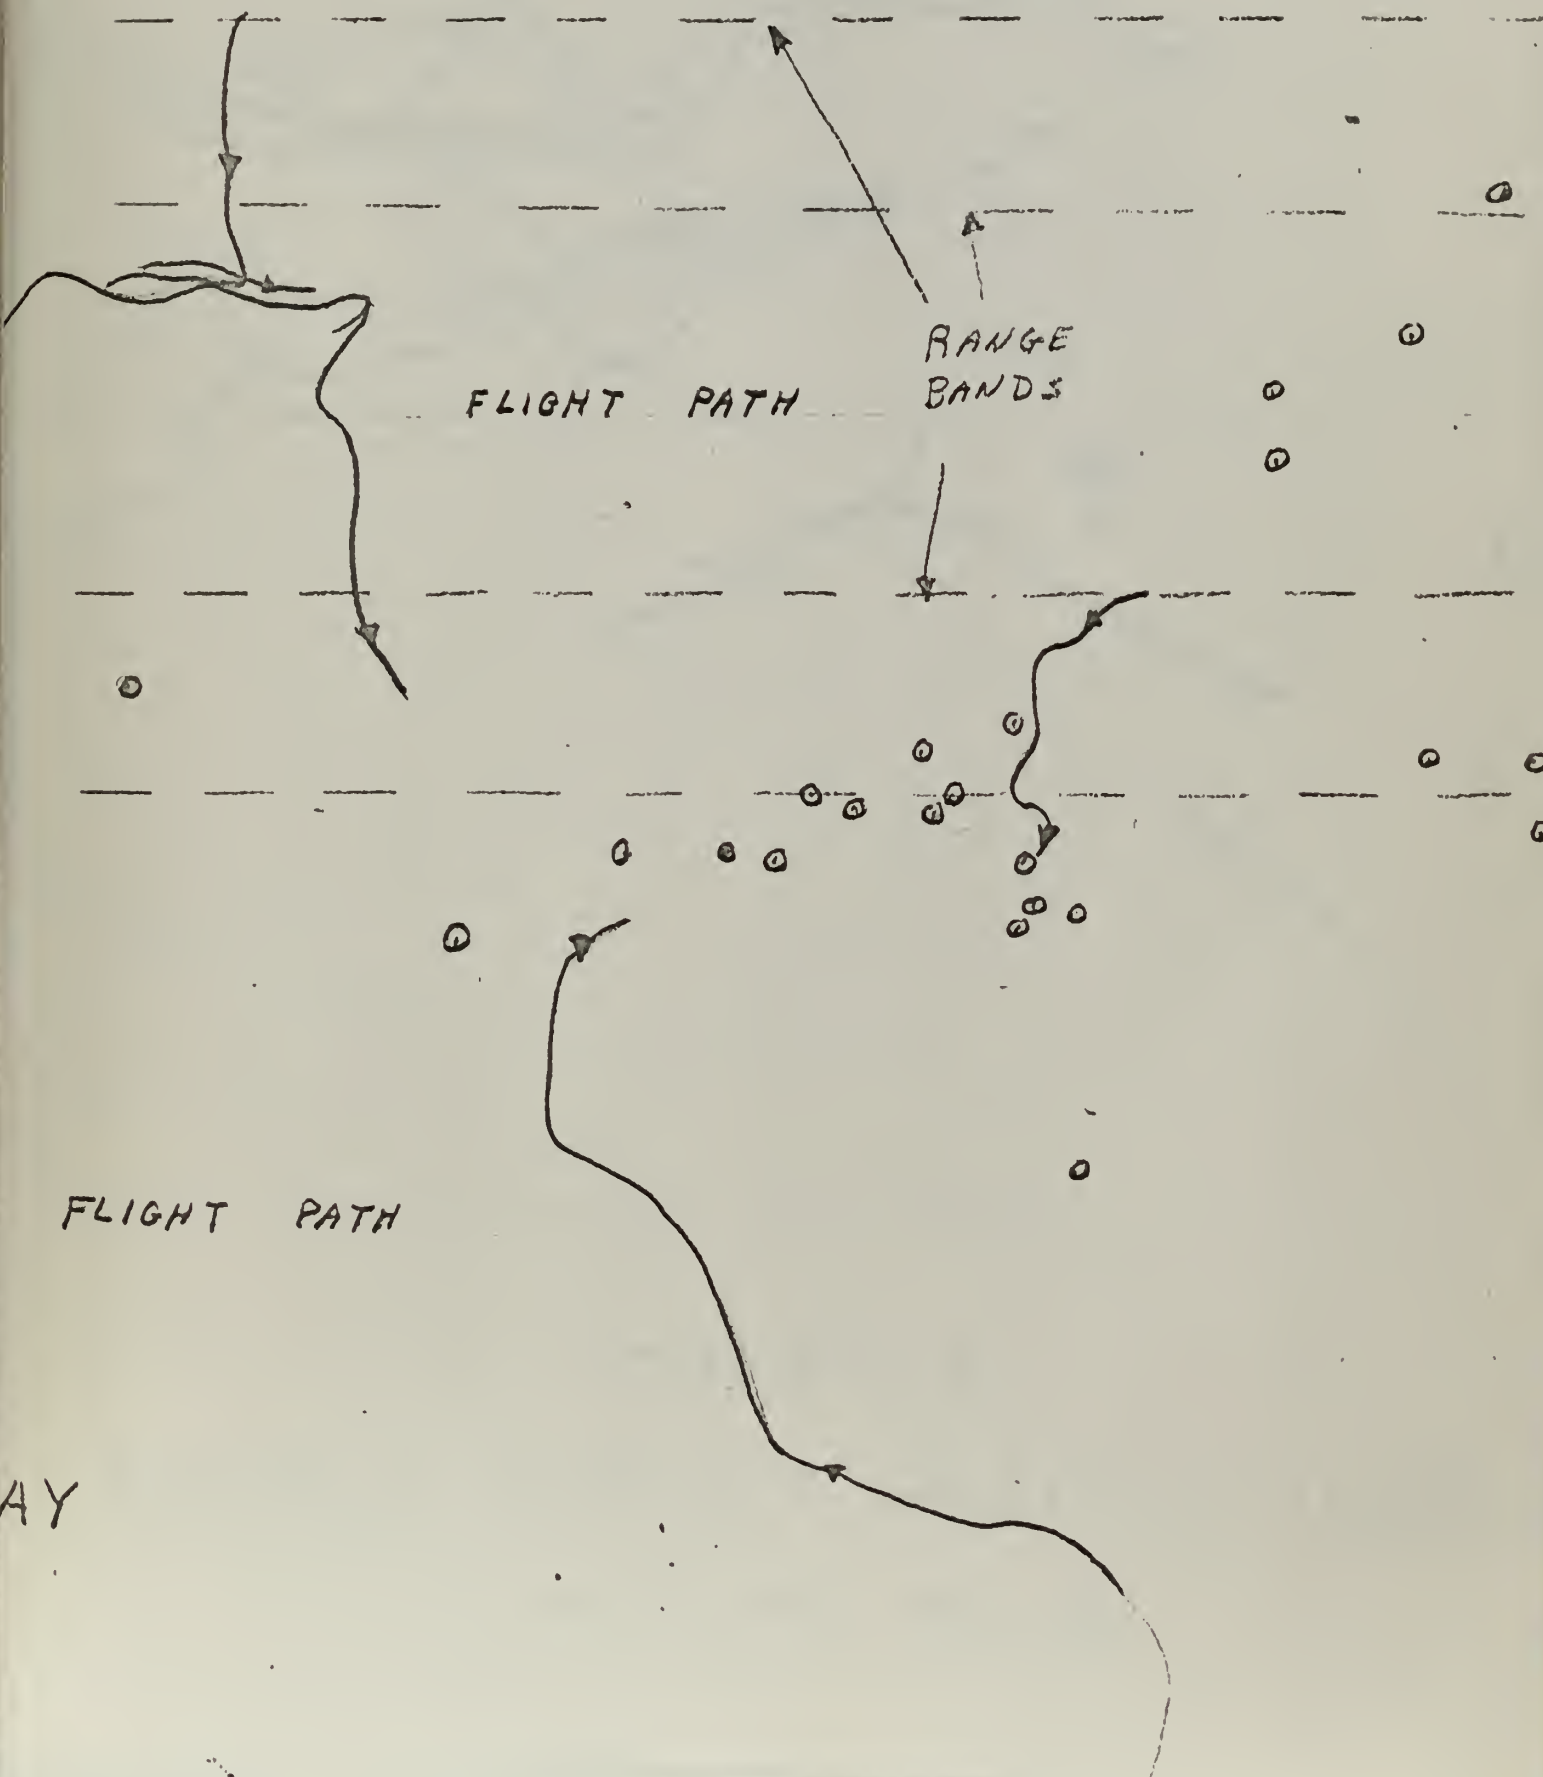

FLIGHT PATH

RANGE
BANDS

FLIGHT PATH

AY

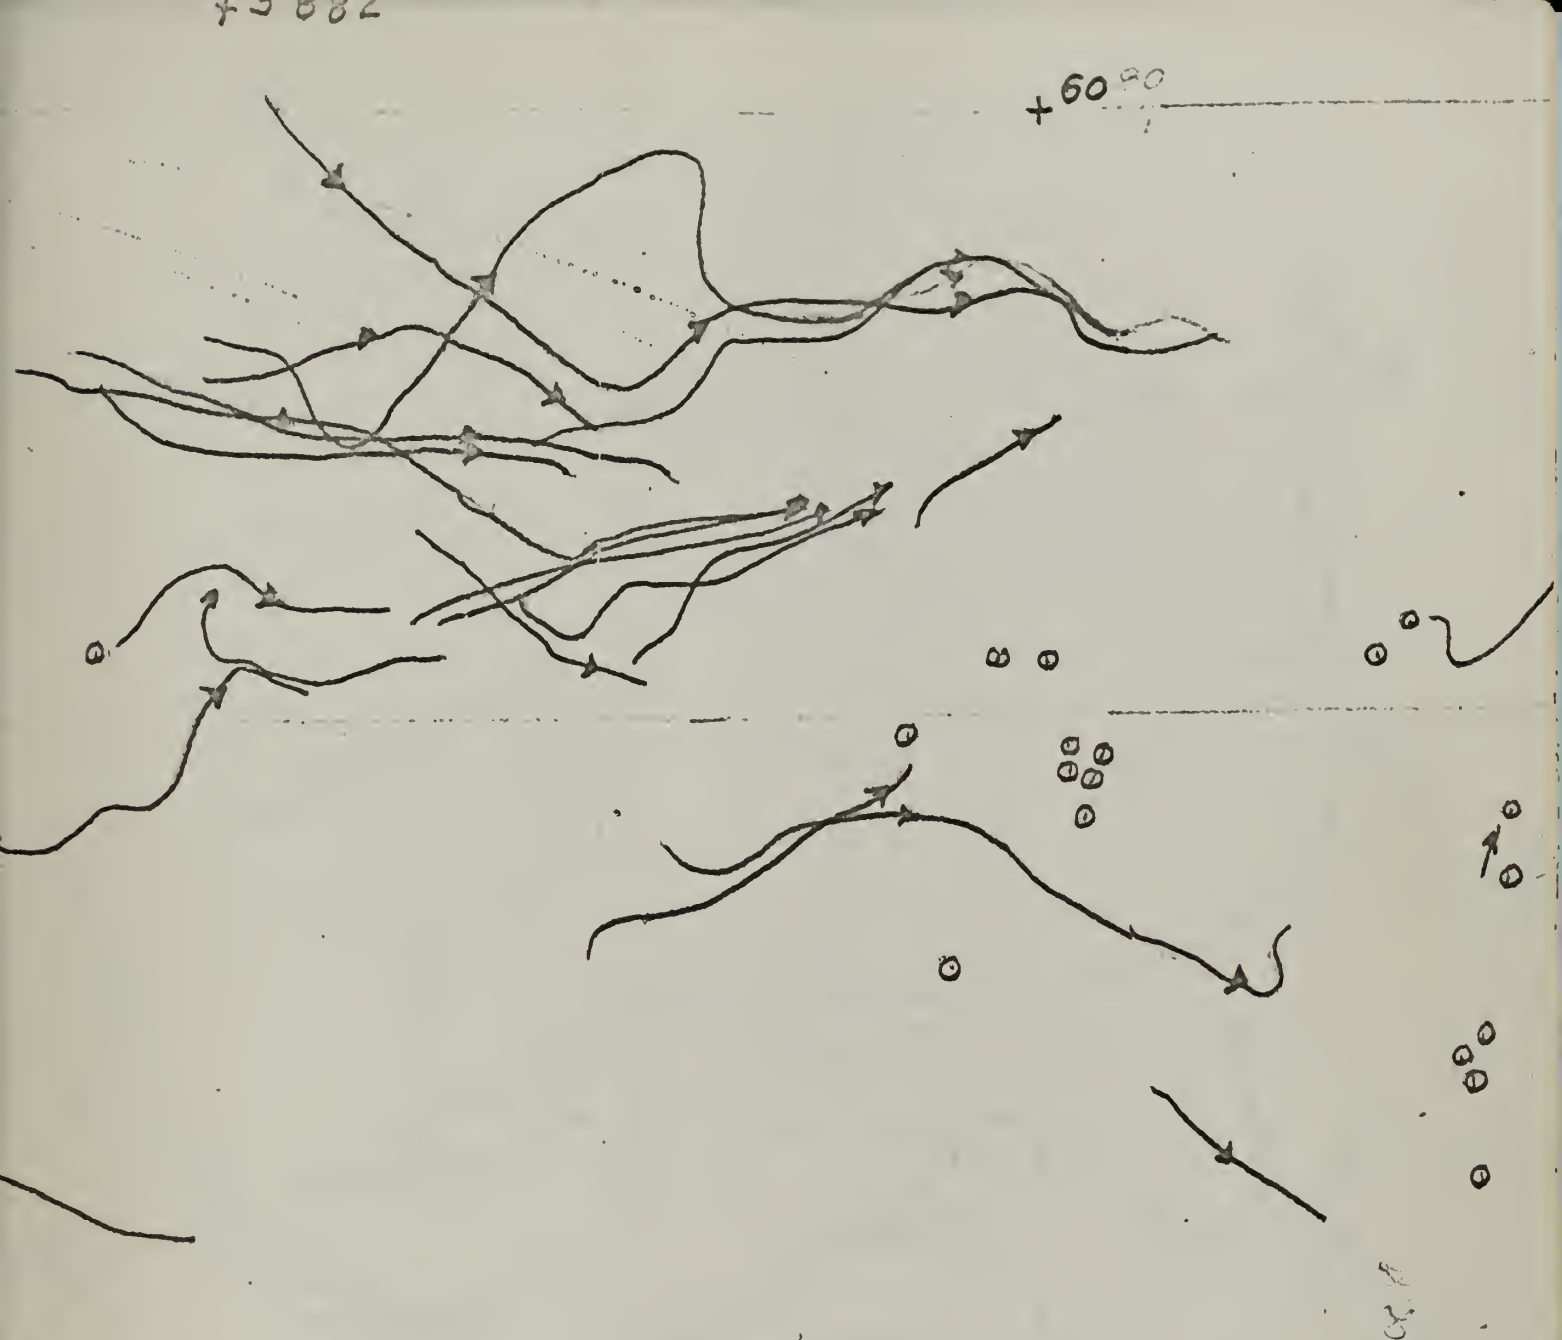


CHART 2

SAMPLE TARGET POSITION OVERLAY

20 OCT. 1959; 1400-1430



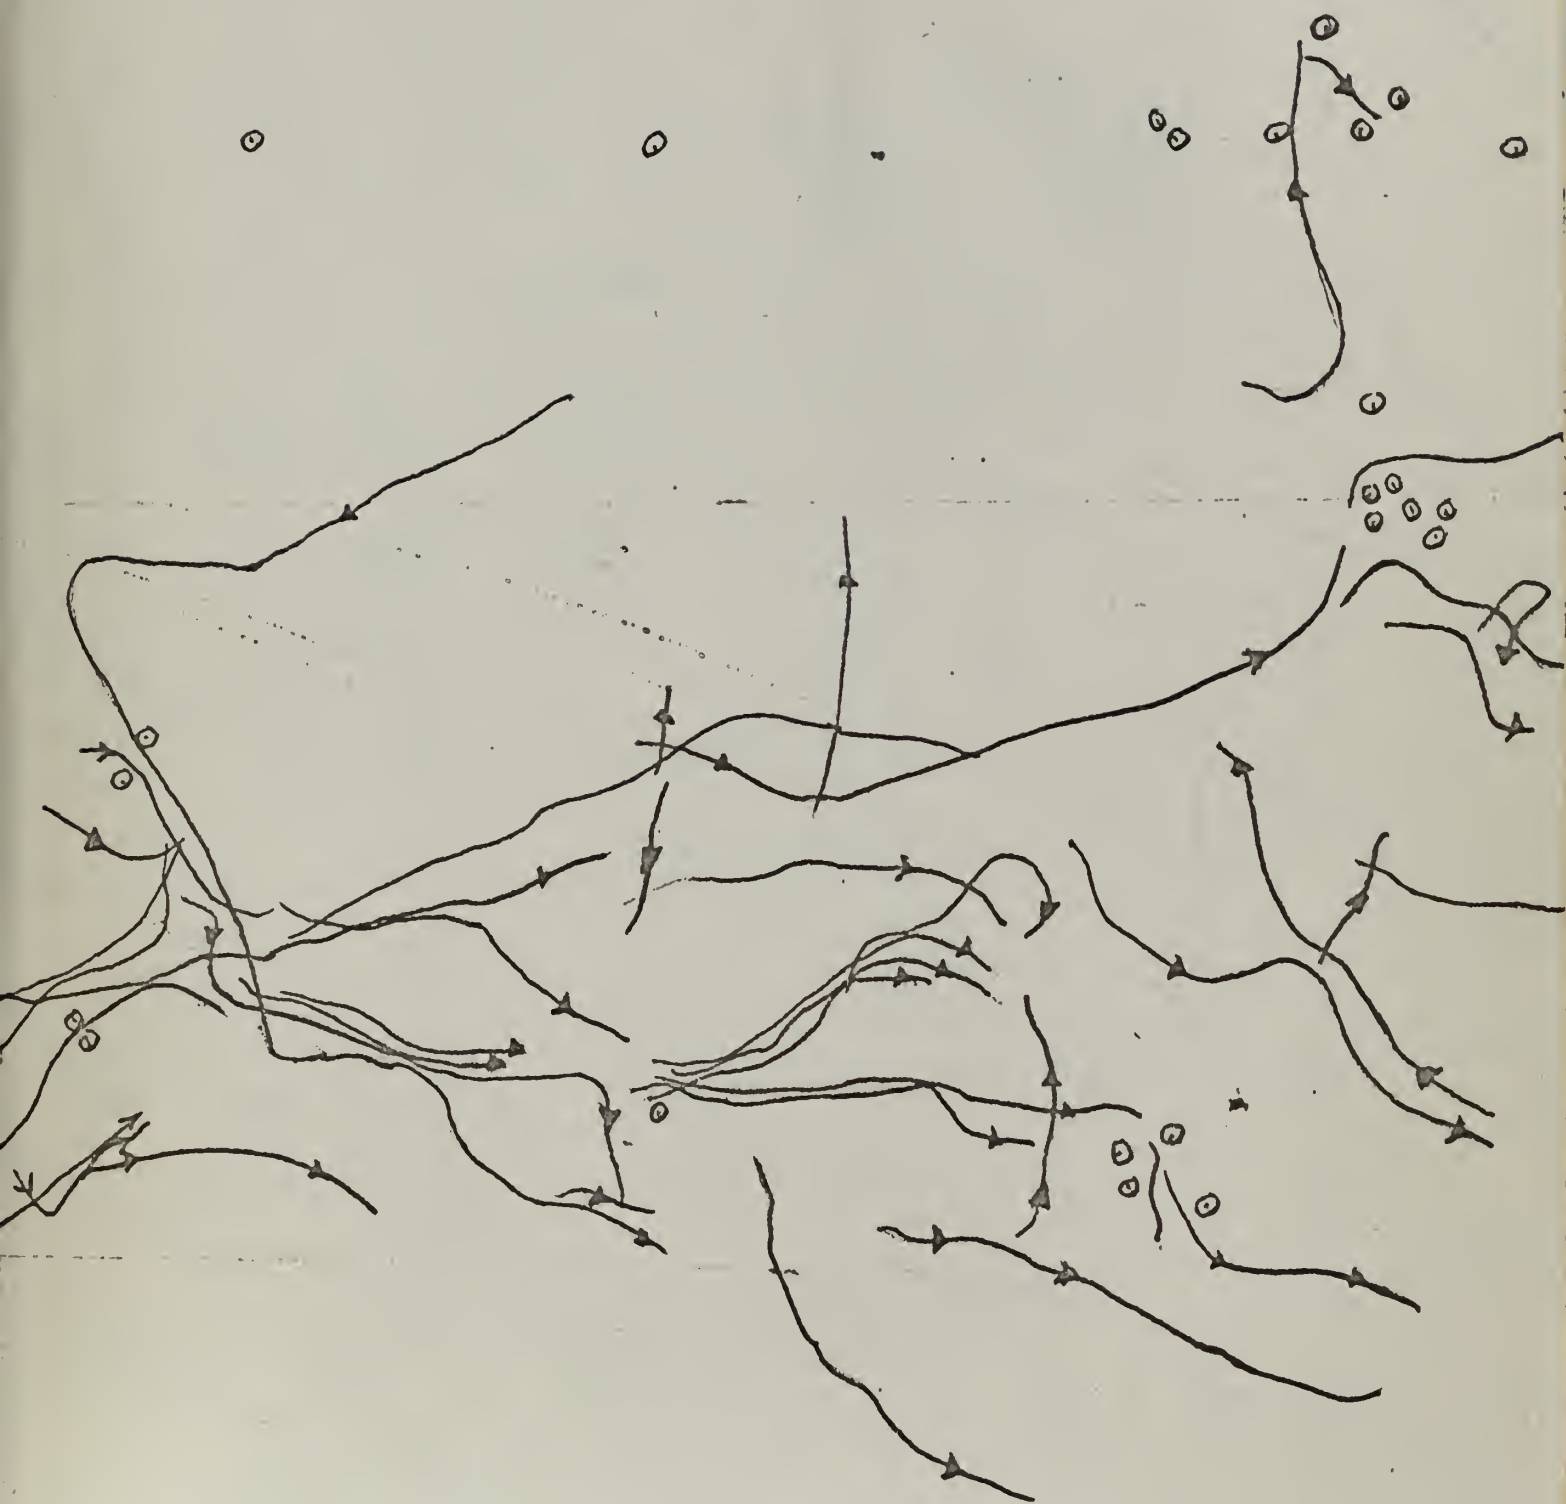




CHART 1: HUNTER LI

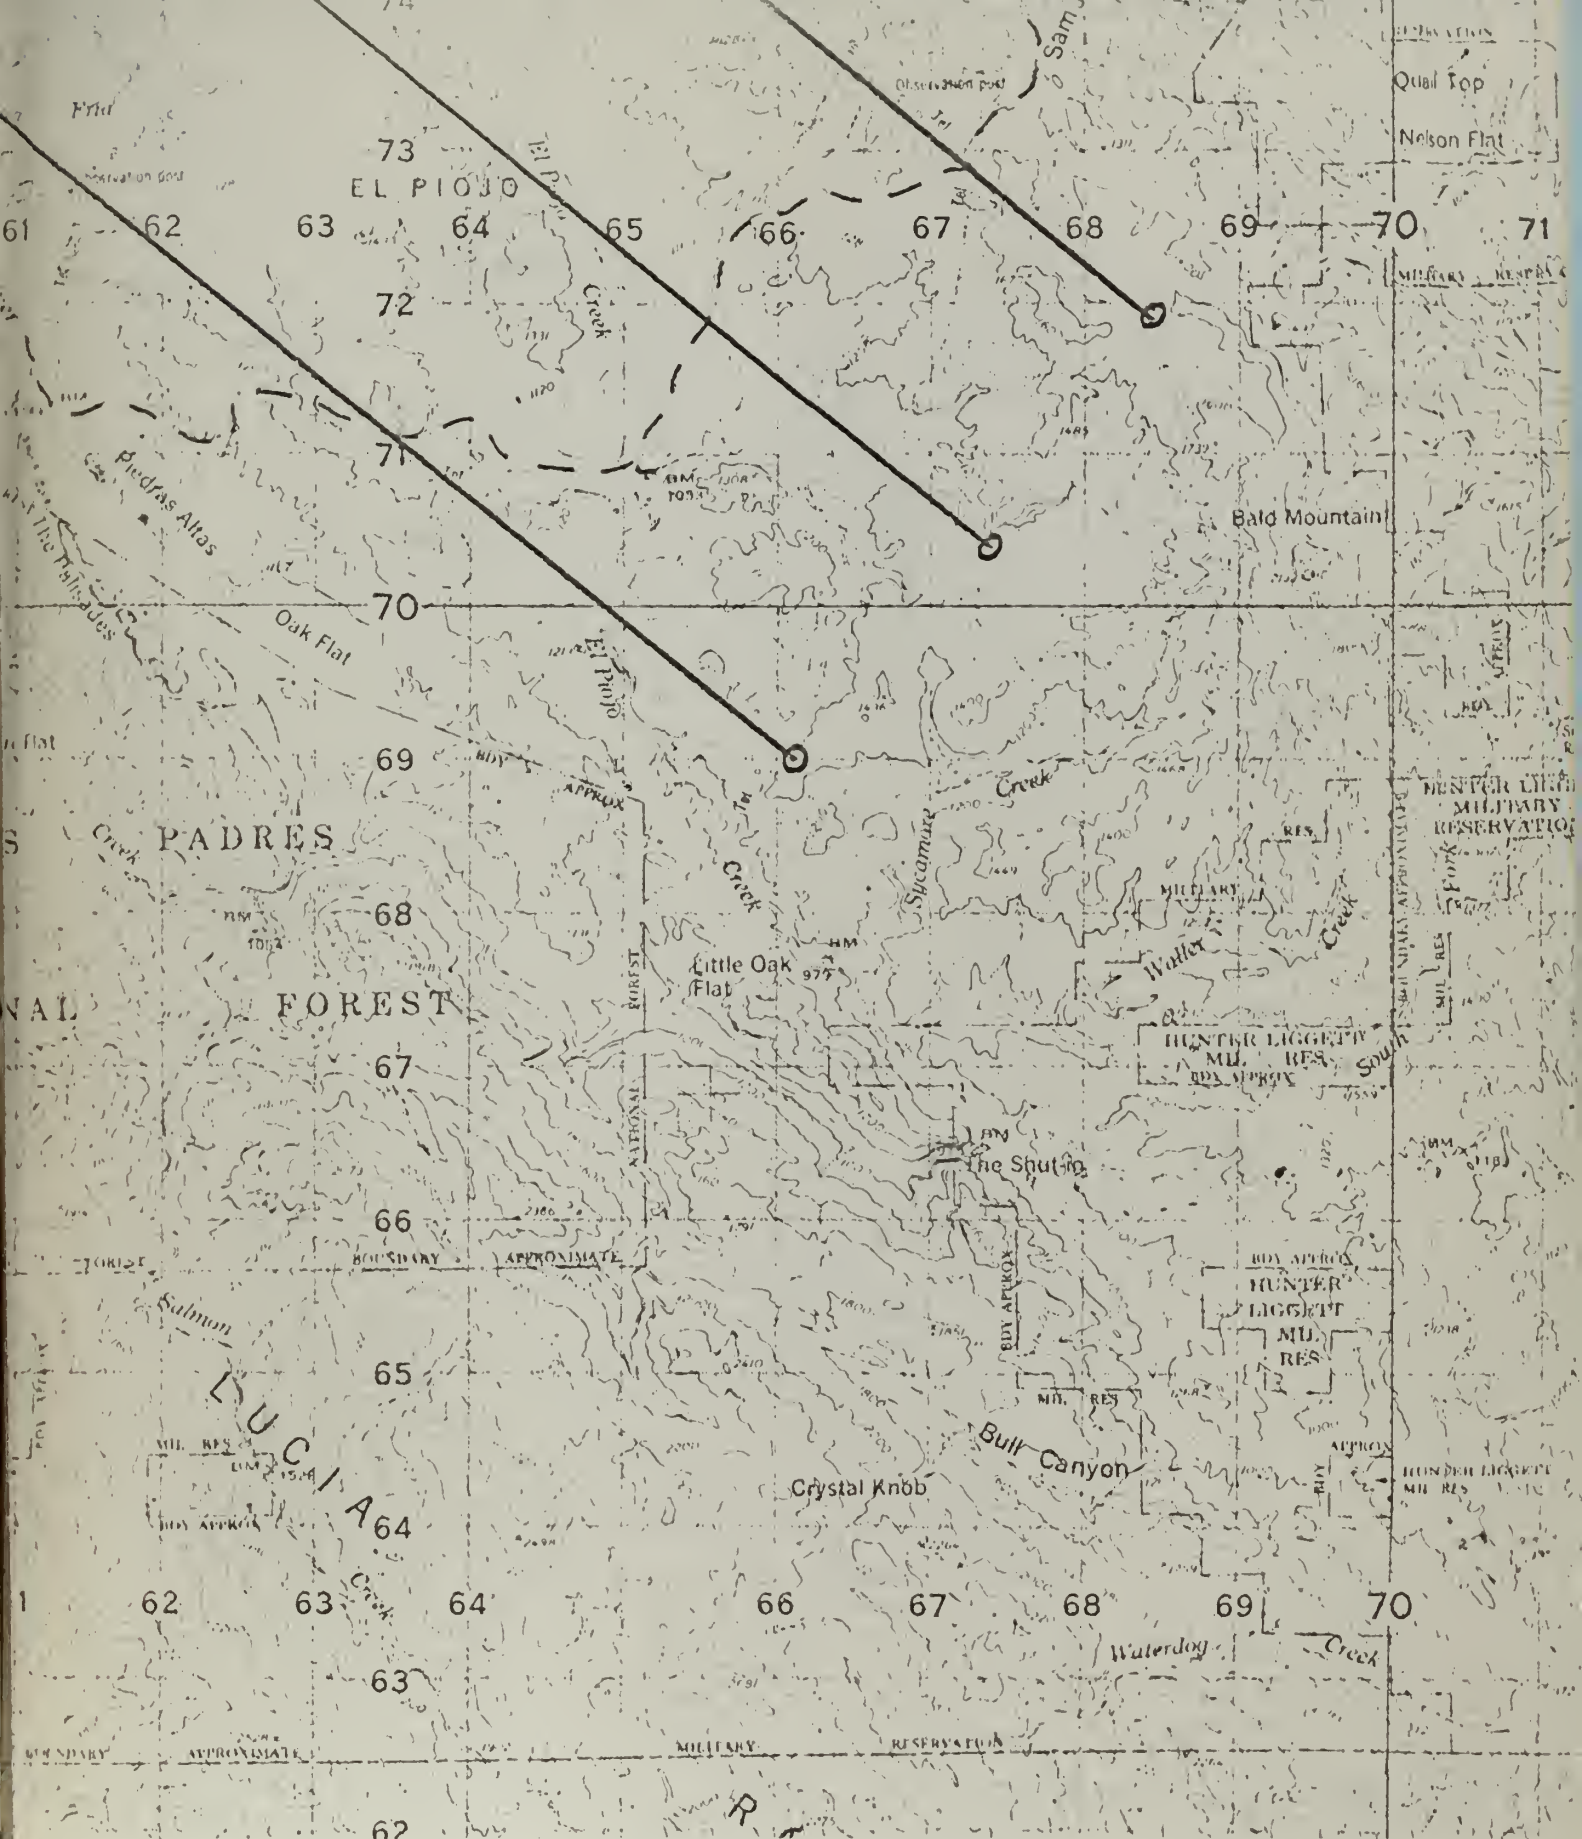

HUNTER LIGGETT AREA

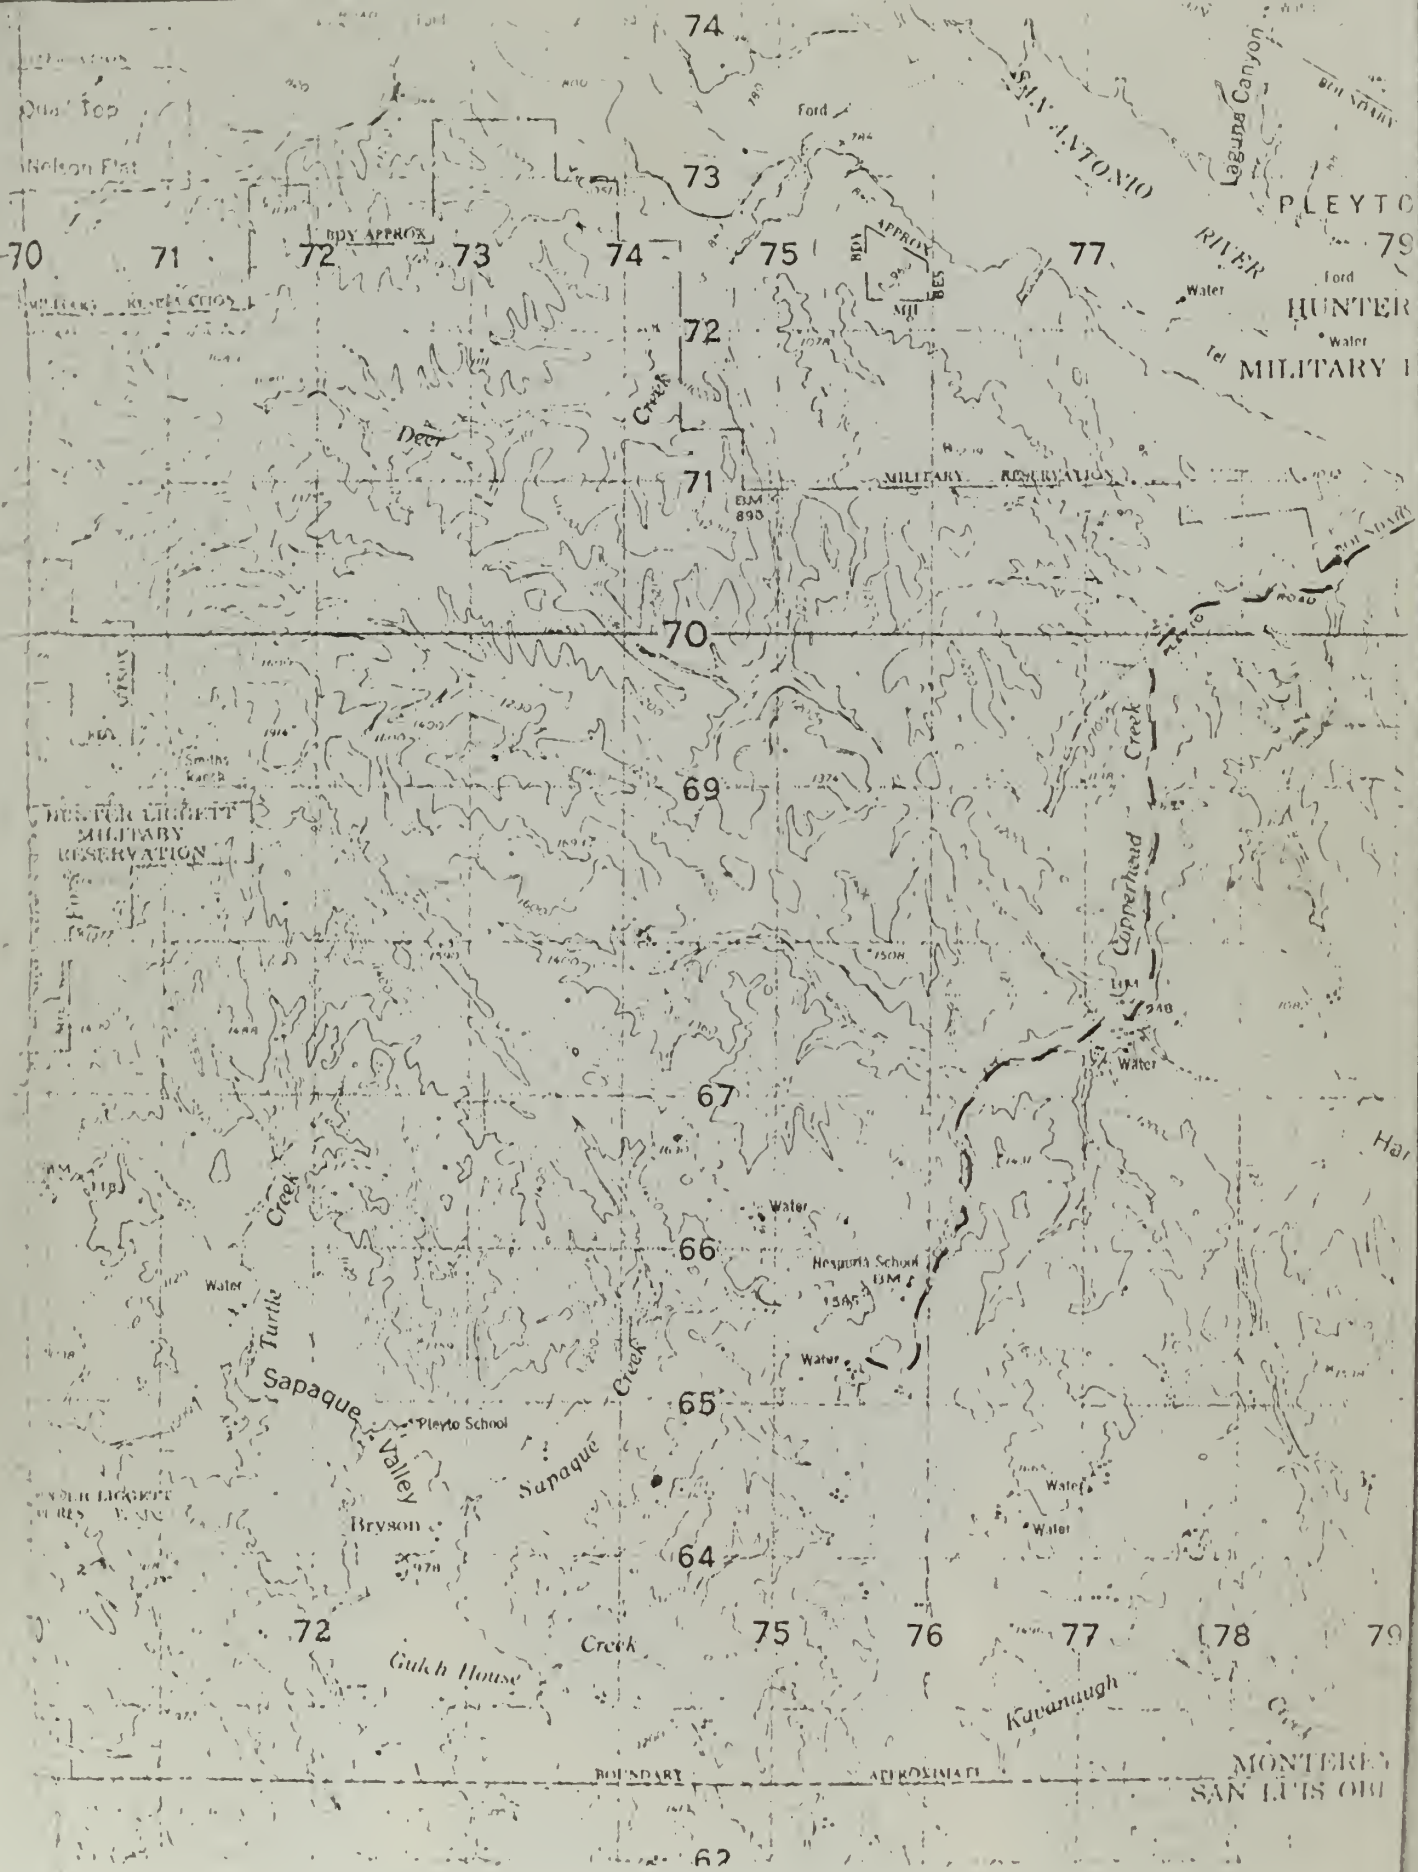

days

~~SECRET~~

1945

100

NO PORT



thesB8099

Visual detection of vehicular targets fr



3 2768 001 01873 2
DUDLEY KNOX LIBRARY