

UNCLASSIFIED

AD NUMBER	
AD501432	
CLASSIFICATION CHANGES	
TO:	UNCLASSIFIED
FROM:	CONFIDENTIAL
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; APR 1969. Other requests shall be referred to Air Force Rocket Propulsion Lab., Attn: Research and Technology Division, RPOR/STINFO, Edwards AFB, CA 93525. This document contains export-controlled technical data.	
AUTHORITY	
30 Apr 1981, Group-4, DoDD 5200.10, per document marking AFRPL ltr dtd 5 Feb 1986	

THIS PAGE IS UNCLASSIFIED

AD 501 432

AUTHORITY:

AFRPL

1rr. 5 Feb 86



SECURITY

MARKING

The classified or limited status of this report applies to each page, unless otherwise marked.

Separate page printouts MUST be marked accordingly.

THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 AND 794. THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U.S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

CONFIDENTIAL

AD501432

2.75-IN. FOLDING FIN AIRCRAFT ROCKET (U)

FINAL REPORT


VOLUME I

Contract F04611-67-C-0114

Report AFRPL-TR-69-90

April 1969

**G. Dolgonas
H. A. Krayenbuhl**

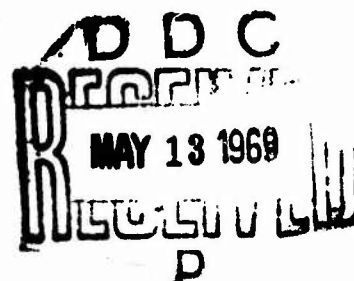

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

2.75-IN. FOLDING FIN AIRCRAFT ROCKET (U)

FINAL REPORT

VOLUME I

Contract F04611-67-C-0114

G. Dolgonas
H. A. Krayenbuhl

~~SECRET~~ ~~1969~~ CLASSIFIED

In addition to security requirements which must be met, this document is subject to special export controls and each transmittal to foreign countries or foreign nationals may be made only with prior approval of "RPOR-STINFO"

~~Prepared for:~~

AIR FORCE ROCKET PROPULSION LABORATORY
Research and Technology Division
Edwards, California. 93523

DOWNGRADED AT 3 YEAR INTERVALS;
DECLASSIFIED AFTER 12 YEARS
DOD DIR 5200.10

GROUP 4

DOWNGRADED AT 3 YEAR INTERVALS; DECLASSIFIED AFTER 12 YEARS

"THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18, U.S.C. SECTIONS 793 AND 794. ITS TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW."

3297

AEROJET GENERAL CORPORATION
A SUBSIDIARY OF THE GENERAL TIRE & RUBBER COMPANY

CONFIDENTIAL

UNCLASSIFIED

Report AFRPL-TR-69-90

CONFIDENTIAL

NOTICES

In addition to security requirements which apply to this document and must be met, each transmittal outside the agencies of the U. S. Government must have prior approval of the Air Force Rocket Propulsion Laboratory.

When U. S. Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Do not return this copy. When not needed, destroy in accordance with pertinent security regulations.

UNCLASSIFIED

CONFIDENTIAL

UNCLASSIFIED

Report AFRPL-TR-69-90

FOREWORD

This report presents the results of the 2.75-inch Folding Fin Aircraft Rocket improvement program conducted for the Air Force Rocket Propulsion Laboratory by the Aerojet-General Corporation at Sacramento, California, under Contract F04611-67-C-0114. The program was administered under the direction of Captain M. P. Konieczny, RPMMA, and Mr. Lee Meyer, RPMMA, Project Officers.

The Aerojet program managers were T. Bowden and G. Dolgonas. The work reported herein was conducted from July 1967 through October 1968. This report contains no classified information extracted from other classified documents, except for performance parameters quoted from the contract statement of work. The Aerojet report number assigned to this document for local identification is 3297-01F. This technical report has been reviewed and approved by C. R. Cooke, Chief, Solid Rocket Division, Air Force Rocket Propulsion Laboratory.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

ABSTRACT

Contract F04611-67-C-0114 covers the design, development, testing and delivery of an improved rocket for the flechette warhead. Work included (1) design, analysis, and component tests; (2) development tests; (3) Preliminary Flight Rating Tests; and (4) delivery of improved rocket motors. Analyses included design trade-off studies, aerodynamics analysis, and manufacturing optimization studies. The improved design was successfully demonstrated through the preliminary flight rating tests and through flight tests, both ground-launched and aircraft-launched. Performance, reliability, and accuracy are within contract requirements.

This final report is in two volumes. Volume I contains the program accomplishments and Volume II contains the Appendixes.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

TABLE OF CONTENTS

	<u>Page</u>
I. Introduction and Summary	1
A. Introduction	1
B. Summary	1
II. Technical Discussion	3
A. Motor Design and Description	3
B. Stability and Control	47
C. Development Test Results	48
D. Preliminary Flight Rating Tests - Phase III	80
E. Hazard Classification Testing	88
F. Manufacturing	89
III. Conclusions and Recommendations	107

APPENDIXES

Stability and Control	A
Stress Analysis	B
Weights and Balance	C
Environmental Test	D

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

FIGURE LIST

	<u>Figure</u>
Improved 2.75 FFAR PFRT Motor	1
Improved 2.75-in. FFAR Rocket Motor Fabrication Drawings	2
Insulation Capability to Maintain Chamber Structural Integrity under +150°F Flight Environment (u)	3
Effect of Release Agents on Bond Strength of Propellant/Liner System to Metal	4
Typical Aft-Closure Erosion and Char Conditions After -65°F Firing	5
Typical Aft-Closure Erosion and Char Conditions After +150°F Firing	6
Changes in Throat Area and Expansion Ratio with Carb-I-Tex Throat Insert	7
Physical Properties of Carb-I-Tex-700	8
Typical Motor Ignition Transients at +70 and -65°F	9
Pressure-vs-Time Curves (u)	10
Thrust-vs-Time Curves (u)	11
Summary of Improved 2.75-in. Motor Characteristics (u)	12
Comparison of Bore Restriction and Ignition Peak Pressure (u)	13
Ballistic and Mechanical Properties of ANB-3241-2 (u)	14
In-Process Control Tests for ANB-3241-2 Propellant	15
Effect of Temperature on Cure Rate of ANB-3241-2 Propellant	16
Arc-Image Furnace Ignitability Data Showing Dependence of Exposure Time on Pressure, Propellant ANB-3241-2	17
Viscosity Profile of ANB-3241-2 Propellant	18
DOT Classification Testing for ANB-3241 Propellant	19
Comparison of 2.75-in. FFAR Motor Insulation and Bond Systems	20
Master Relaxation Curve for ANB-3241-2	21
Time-Temperature Shift Factor for ANB-3241-2	22
Modulus vs Reduced Strain Rate for ANB-3241-2	23
"Smith-Type" Failure Envelope for ANB-3241-2	24
Strain at Maximum Stress vs Reduced Strain Rate for ANB-3241-2	25
Strain at Break vs Reduced Strain Rate for ANB-3241-2	26
Strain Parameter σ_m/E_0 vs Reduced Strain Rate for ANB-3241-2	27
Allowable Incremental Strain for Firing at -65°F, ANB-3241-2/IBS-105-4X	28
Allowable Tensile Stress for Storage of 2.75-in. Motor Propellant-to-Liner Bond	29

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

FIGURE LIST (cont)

	<u>Figure</u>
Allowable Bond Shear Stress for Firing of 2.75-in. Motor Propellant-to-Liner Bonds	30
Maximum True Stress vs Reduced Time to Failure for ANB-3241-2 Propellant	31
Inner Bore Temperature and Calculated Hoop Stress and Strain During First Shock Thermal Cycle	32
Calculated Cumulative Damage at the Inner Bore for Shock Thermal Cycling	33
Propellant/Liner Bond Temperature and Calculated Radial Stress During First Shock Thermal Cycle	34
Calculated Cumulative Damage of the Propellant/Liner Bond During Shock Thermal Cycling	35
Inner Bore Temperature and Calculated Hoop Stress and Strain During First Step-Wise Thermal Cycle	36
Calculated Cumulative Damage at Inner Bore for Step-Wise Thermal Cycling	37
Propellant/Liner Bond Temperature and Calculated Radial Stress During First Step-Wise Thermal Cycle	38
Calculated Cumulative Damage of the Propellant/Liner Bond during Step-Wise Thermal Cycling	39
Effect of Relative Humidity on the Mechanical Properties of ANB-3241-2 Propellant (VBM-1-67-001)	40
Storage Stability of ANB-3241-2 Propellant at 77°F (Batch 68-46)	41
Storage Stability of ANB-3241-2 Propellant at 150°F (Batch 68-46)	42
Storage Stability of ANB-3241-2 Propellant at 180°F (Batch 68-46)	43
Storage Stability of ANB-3241-2 Propellant at 200°F (Batch 68-46)	44
Average Values of Pressure and Time-to-Peak Pressure (Commercial aluminum tube and 7 gm Type 2D-BPN pellet main charge)	45
Summary of Igniter Development Tests	46
2.75 in. FFAR CT Ballistic Data Summary (u)	47
Chamber and Grain Design (Configuration A)	48
Development Aft-Closure Designs	49
Chamber and Grain Design (Configuration B)	50
Forward Head Pressure Tap Configuration	51
Candidate Aft Closure and Throat Insert Designs	52
2.75-in. FFAR Development Ballistic Data Summary (u)	53
Phase-II Test Sequence	54
Chamber and Grain Assembly Design (Configuration C)	55

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

FIGURE LIST (cont)

	<u>Figure</u>
Old Design Aft Joint	56
New Design Aft Joint	57
2.75 in. Chamber and Grain Assembly	58
Improved 2.75-in. FFAR PFRT Motor Test Plan	59
Ballistic Data Summary for -65°F (u)	60
Ballistic Data Summary for +70°F (u)	61
Ballistic Data Summary for +150°F (u)	62
Ballistic Data Summary of Gradient Firings (u)	63
Ballistic Data and Performance Curves, Motor 3 (u)	64
Ballistic Data and Performance Curves, Motor 5 (u)	65
Ballistic Data and Performance Curves, Motor 1 (u)	66
Ballistic Data and Performance Curves, Motor 19 (u)	67
Ballistic Data and Performance Curves, Motor 18 (u)	68
Ballistic Data and Performance Curves, Motor 4 (u)	69
Ballistic Data and Performance Curves, Motor 17 (u)	70
Ballistic Data and Performance Curves, Motor 2 (u)	71
Ballistic Data and Performance Curves, Motor 16 (u)	72
Ballistic Data and Performance Curves, Motor 31 (u)	73
Ballistic Data and Performance Curves, Motor 20 (u)	74
Ballistic Data and Performance Curves, Motor 21 (u)	75
Ballistic Data and Performance Curves, Motor 6 (u)	76
Ballistic Data and Performance Curves, Motor 29 (u)	77
Ballistic Data and Performance Curves, Motor 33 (u)	78
Ballistic Data and Performance Curves, Motor 34 (u)	79
Ballistic Data and Performance Curves, Motor 32 (u)	80
Ballistic Data and Performance Curves, Motor 9 (u)	81
Ballistic Data and Performance Curves, Motor 44 (u)	82
Ballistic Data and Performance Curves, Motor 45 (u)	83
Ballistic Data and Performance Curves, Motor 14 (u)	84
Ballistic Data and Performance Curves, Motor 35 (u)	85
Ballistic Data and Performance Curves, Motor 37 (u)	86
Ballistic Data and Performance Curves, Motor 7 (u)	87

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

FIGURE LIST (cont)

	<u>Figure</u>
Ballistic Data and Performance Curves, Motor 8 (u)	88
Ballistic Data and Performance Curves, Motor 39 (u)	89
Ballistic Data and Performance Curves, Motor 23 (u)	90
Ballistic Data and Performance Curves, Motor 28 (u)	91
Ballistic Data and Performance Curves, Motor 36 (u)	92
Ballistic Data and Performance Curves, Motor 40 (u)	93
Ballistic Data and Performance Curves, Motor 10 (u)	94
Ballistic Data and Performance Curves, Motor 11 (u)	95
Ballistic Data and Performance Curves, Motor 25 (u)	96
Ballistic Data and Performance Curves, Motor 42 (u)	97
Ballistic Data and Performance Curves, Motor 27 (u)	98
Ballistic Data and Performance Curves, Motor 43 (u)	99
Ballistic Data and Performance Curves, Motor 12 (u)	100
Ballistic Data and Performance Curves, Motor 22 (u)	101
Ballistic Data and Performance Curves, Motor 24 (u)	102
Ballistic Data and Performance Curves, Motor 26 (u)	103
Ballistic Data and Performance Curves, Motor 41 (u)	104
Ballistic Data and Performance Curves, Motor 13 (u)	105
Ballistic Data and Performance Curves, Motor 28 (u)	106
Typical PFRT Motor Condition and Test Setup Before Firing	107
Typical PFRT Motor Condition After Firing	108
Cross-Section of Nozzle from Motor 25, Showing Post-Firing Condition	109
Improved 2.75-in. Usable Impulse and Corresponding Velocity and Range Values (u)	110
Cross Section of Nozzle No. 3 S/N 861 Showing the Point of Failure in the MXC 313 Molding Compound	111
Cross Section of Nozzle No. 2 Showing the Fiber Alignment in the Region of the Taper on the Throat Insert	112
Nozzle No. 4 S/N 1203 Showing Carbon Fiber Alignment Patterns of the MXC 313 Molding Compound	113
Nozzle No. 2 S/N 1203 Showing Fiber Alignment Patterns More Randomly Oriented Aft of the Throat Insert	114
Photomicrograph of Fiber Alignment Adjacent to the Opening Between the Sleeve and the Steel Housing, S/N 1203	115
2.75-in. FFAR Tooling List	116

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

I. INTRODUCTION AND SUMMARY

A. INTRODUCTION

This final report is submitted by Aerojet-General Corporation in partial fulfillment of the requirements of Contract FO4611-67-C-0114. The objective of this program was to design, fabricate, and demonstrate an improved 2.75-in. Folding Fin Aircraft Rocket (FFAR) that will meet the performance requirements for a flechette warhead. The program scope included rocket design, aerodynamic stability analysis and wind tunnel testing, propellant adaptation, manufacturing, motor testing through PFRT, and delivery of 580 units to the Air Force.

B. SUMMARY

The improved 2.75-in. FFAR rocket complies with the performance requirements shown in Exhibit A (amended) of the contract. The design criteria for ease of manufacture and assembly, simplicity, overall cost effectiveness, and maximum utilization of existing 2.75-in. FFAR metal parts were met.

A stability and control analysis was conducted and the analytical results were verified in wind tunnel tests as well as in actual flight tests, both from the ground and from an aircraft.

Production studies were conducted to optimize manufacturing processes for quantities of units ranging from 100,000 to 600,000 per month.

A propellant tailoring program was successfully carried out to obtain optimum burning rate, processing characteristics, mechanical and ballistic properties, and aging stability. Explosive hazard tests verified that the propellant is DOT Class B.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

I.B. Summary (cont)

A total of 16 component tests were made, using full-scale motors, to determine igniter, insulation, grain support, and nozzle adequacy. In addition, propellant arc image ignitability tests were conducted to determine ignition requirements, and a total of 66 igniter tests were made in a simulated free-volume chamber to investigate igniter performance.

A total of 36 full-scale development firings were made in accordance with Exhibit A of the contract. Tests conducted on these motors included temperature cycling, vibration, and acceleration/spin tests. Exhibit A of the contract requires testing of three series of 15 motors each. By agreement with the Air Force, the number of motors in series 2 and 3 was reduced to 11 and 6 motors, respectively. In addition, four other development motors were fired.

A 45-motor Preliminary Flight Rating Test program was successfully conducted in accordance with Exhibit A of the contract. Of the 45 motors, 18 were temperature conditioned only firing six each at -65, +70, and +150°F. Twenty of the 45 motors were subjected in sequence to humidity, temperature cycling, vibration, and altitude cycling before firing nine at -65°F, four at +70°F, and seven at +150°F. The remaining seven motors were test fired as follows: three altitude firings; one acceleration firing; one acceleration firing with a temperature gradient across the grain; and three firings with a temperature gradient across the grain. All but one test was successful; this partial failure may have been due in part to improper handling or to a defect in the manufacture of the aft closure.

Forty-four of the 45 PFRT motors were accepted for use in demonstrating that the PFRT motor configuration satisfied the requirement of 95% reliability at a confidence level of 90%. These motors and 14 acceptable R&D motors of the PFRT configuration, together with five flight motors that were recovered, inspected, and accepted for the reliability motor count, totaled

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

I.B. Summary (cont)

64 of the 76 successful firings required to demonstrate the required reliability level. This quantity of motors (76) reflected the effect of the one failure on the number of motors necessary to demonstrate the specified reliability level. The remaining 12 motors for reliability demonstration were later accepted from the 56 motors successfully fired for acceptance of the 580 production deliveries. The latter were completed in October 1968 with the final shipment of 52 motors to Eglin Air Force Base (EAFB).

II. TECHNICAL DISCUSSION

A. MOTOR DESIGN AND DESCRIPTION

1. General

The Improved 2.75-in. Folding Fin Aircraft Rocket (FFAR) motor is shown in Figure 1 and described by the fabrication drawings which are tabulated in Figure 2. The design of the Improved 2.75-in. FFAR motor complies with Exhibit A of Contract F0611-67-C-0114.

The basic design objectives successfully achieved by the Improved 2.75-in. motor include (1) maximum usable impulse for deployment of the flechette warhead; (2) envelope and weight limitations of the existing unit for ready motor interchangeability; (3) maximum use of metal parts from the present 2.75-in. motor to retain existing motor/missile/launcher/aircraft interfaces for simplified logistics as well as to provide economy, short development time, and reduced risk; and (4) maximum cost effectiveness for the lowest possible production unit cost consistent with the specified reliability of 0.95 at a 90% confidence level.

UNCLASSIFIED

Report AFRPL-TR-69-90




Figure 1

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

<u>Component Description</u>	<u>Part No.</u>
Interface Control Envelope - 2.75 FFAR	1146155
Rocket Motor Assembly	1146668-1
Lockwire (GFM Rework)	*1146898-1
O-Ring	*1127114
Igniter and Closure Assembly	1146673-1
Clip Assembly	1146031-1
Shunt Wire	1146336-1
Igniter Assembly	1146693-1
Squib, MK 1, Mod 1	*656714
Chamber, Igniter	1146095-1
End Plug, Igniter	1146096-1
Cap, Insulator	1146370-1
Initiator Charge	1146877-2
Disc	1146876-1
Washer	1146875-1
Fin and Closure Assembly	1146678-1
Cross Head	*456909
Contact Disc	*1253129
Fin Retainer	*1253131
O-Ring	*650950
O-Ring	*650953
Nut	**MS 21044-N3
Pin, Straight	1146056-1
Fin, Blade (GFM Rework)	*1146210-1
Closure Assembly	1146639-4
Plate, Nozzle	1146335-1
Sleeve	1146365-1
Washer	1146613-3
Insert, Throat	1146659-19
Weather Seal	1146913-1
Piston Assy & Wire	1146916-1
Wire	1146915-1
Wire	*1146915-2
Sleeve	1146917-1
Piston	1146932-1
Piston	*9220797
Connector	*9220788
Chamber and Grain Assembly	1146759-1
Chamber, Insulated	1146637-1
Motor Tube	*1569403
Insulator, Released	1146636-1
Insulator, Fwd	1146033-1
Masterline Drawing - 2.75 FFAR	1146103

* GFM

** Government Standard Part

Improved 2.75-in. FFAR Rocket Motor Fabrication Drawings

Figure 2

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

Other requirements in Exhibit A that were successfully met include (1) an ignition interval within 0.100 sec; (2) absence of ejecta; (3) satisfactory safety factor based on empirical data; and (4) capability to withstand the required environmental conditions, either singly or sequentially, followed by successful static firing over the required temperature range of -65 to +150°F.

The approach used in developing the motor was to meet all performance requirements while obtaining the required reliability, maximum producibility, and quality at the lowest possible cost. In achieving this overall objective, the following key design criteria were used:

Maximum structural integrity of the grain through the use of (1) a production propellant with good mechanical properties over the required temperature range and age life; and (2) a grain design and support system that minimizes thermally induced strains, while adequately supporting the grain.

Minimum propellant cost through the use of a well-proven production propellant, which minimizes development costs, and which utilizes low cost materials and processing procedures for minimum production costs.

Simple proven ignition system components to ensure reliable and reproducible ignition at minimum development and production costs.

Nozzle design and materials that provide the required structural and thermal capabilities.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

The Improved 2.75-in. motor, therefore, features design practices and materials that have been proven capable of operating satisfactorily under the required environmental conditions, including aerodynamic heating, vibration, and the high and low temperature conditions.

Detailed descriptions of the major motor components designed and furnished by Aerojet-General, their performance and material selection, are presented in the following sections. Also included are discussions of our understanding of GFM component configuration, present status of the component, and a definition of any changes required for compatibility with the Aerojet Improved 2.75-in. FFAR rocket motor.

Aerodynamic analyses were previously documented in the Stability and Control Report, Volumes I and II, and are included in this report as Appendix A. Included in this report are discussions of the results of the required full-scale wind tunnel tests.

2. Chamber Insulation System

a. Design Description

The internal insulation of the Improved 2.75-in. motor consists of a premolded glass/phenolic insulator that is bonded in place on the forward head and an asbestos-fiber-filled epoxy insulation (IBS-105-4X*) that is sprayed and spun in place on the aft end of the chamber ID. To release the liner from the forward insulator, the internal surface of the forward insulator is coated with Silastic 587 RTV** silicone rubber before installing in the chamber and bonding in place with IBS-105-3*. After suitable cure time for the forward insulator bond and aft-end insulation, the

* IBS-105-3 and IBS-105-4X, Aerojet-General Corporation, Nimbus, California

** Silastic 587 RTV, Dow-Corning Corporation, Corning, New York

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

entire chamber is lined with IBS-105-3 which is sprayed, spun, and cured in place. IBS-105-3 functions as liner/insulation and, except where released from the forward head, provides a continuous bond between propellant and insulation, and propellant and chamber.

The forward insulator has a nominal thickness of 0.060 in. with the exception of the center portion, which has a thickness of 0.275 in. This insulator has a centrally-located cone-shaped cavity for centering the forward end of the propellant casting core.

Local material thickness determinations were made on the basis of exposure time to hot gases at predicted weight flow rates and the effect of spin on material erosion rates. In addition to predicted erosion, sufficient material was added to maintain the base temperature at levels that maintain case structural integrity during powered flight. Subsequent adjustments in material thicknesses were made on the basis of inspections of fired hardware.

b. Performance

The internal insulation described above is required to protect the motor case from heat effects when it is exposed to propellant combustion gases during powered flight. The selected insulation materials are capable of withstanding the required environmental conditions over the operating temperature range of -65 to +150°F. In keeping with the design philosophy of maximum cost effectiveness, the materials are suitable for large volume production, while obtaining the design reliability goal of 0.997.

UNCLASSIFIED

CONFIDENTIAL

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

(U) The performance of the selected internal insulation has proven satisfactory in recent firings. No hot spots or discoloration of any kind were observed on the chambers. Over 40 other firings, in which the motor contained the above forward insulator and IBS-105-3 sidewall liner, but with SRM 81-15* as aft-end insulation, were conducted without any evidence of chamber over-heating. IBS-105-4X was adopted for its better erosion resistance and lower cost.

(C) A thermal analysis was conducted to evaluate the effects of combined internal and aerodynamic heating on the structural integrity of the case. The analysis shows that, under the most severe flight environment (+150°F), the temperature of the case is not affected by internal heat, and that the case wall temperature reaches +340°F at 2.83 sec (after deployment of the warhead) due to aerodynamic heating. At that time, the nominal motor internal pressure has decayed 86%, while the strength of the case material (2014-T6 aluminum alloy) at 340°F has decreased only 25%, as shown in Figure 3.

(U) The +3-sigma motor pressure for a +150°F firing, the temperature of the case material, and the resulting safety factor are plotted versus time in Figure 3. It can be seen that, despite the loss in strength by the aluminum, the safety factor increases with firing time.

c. Material Selection

(U) The case insulation materials were selected on the basis of satisfactory physical and mechanical properties over the temperature range of -65 to +150°F, demonstrated performance under the required motor operating environments, and lowest cost at high volume production.

* SRM 81-15, Stoner Rubber Co., Orange, Calif.

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

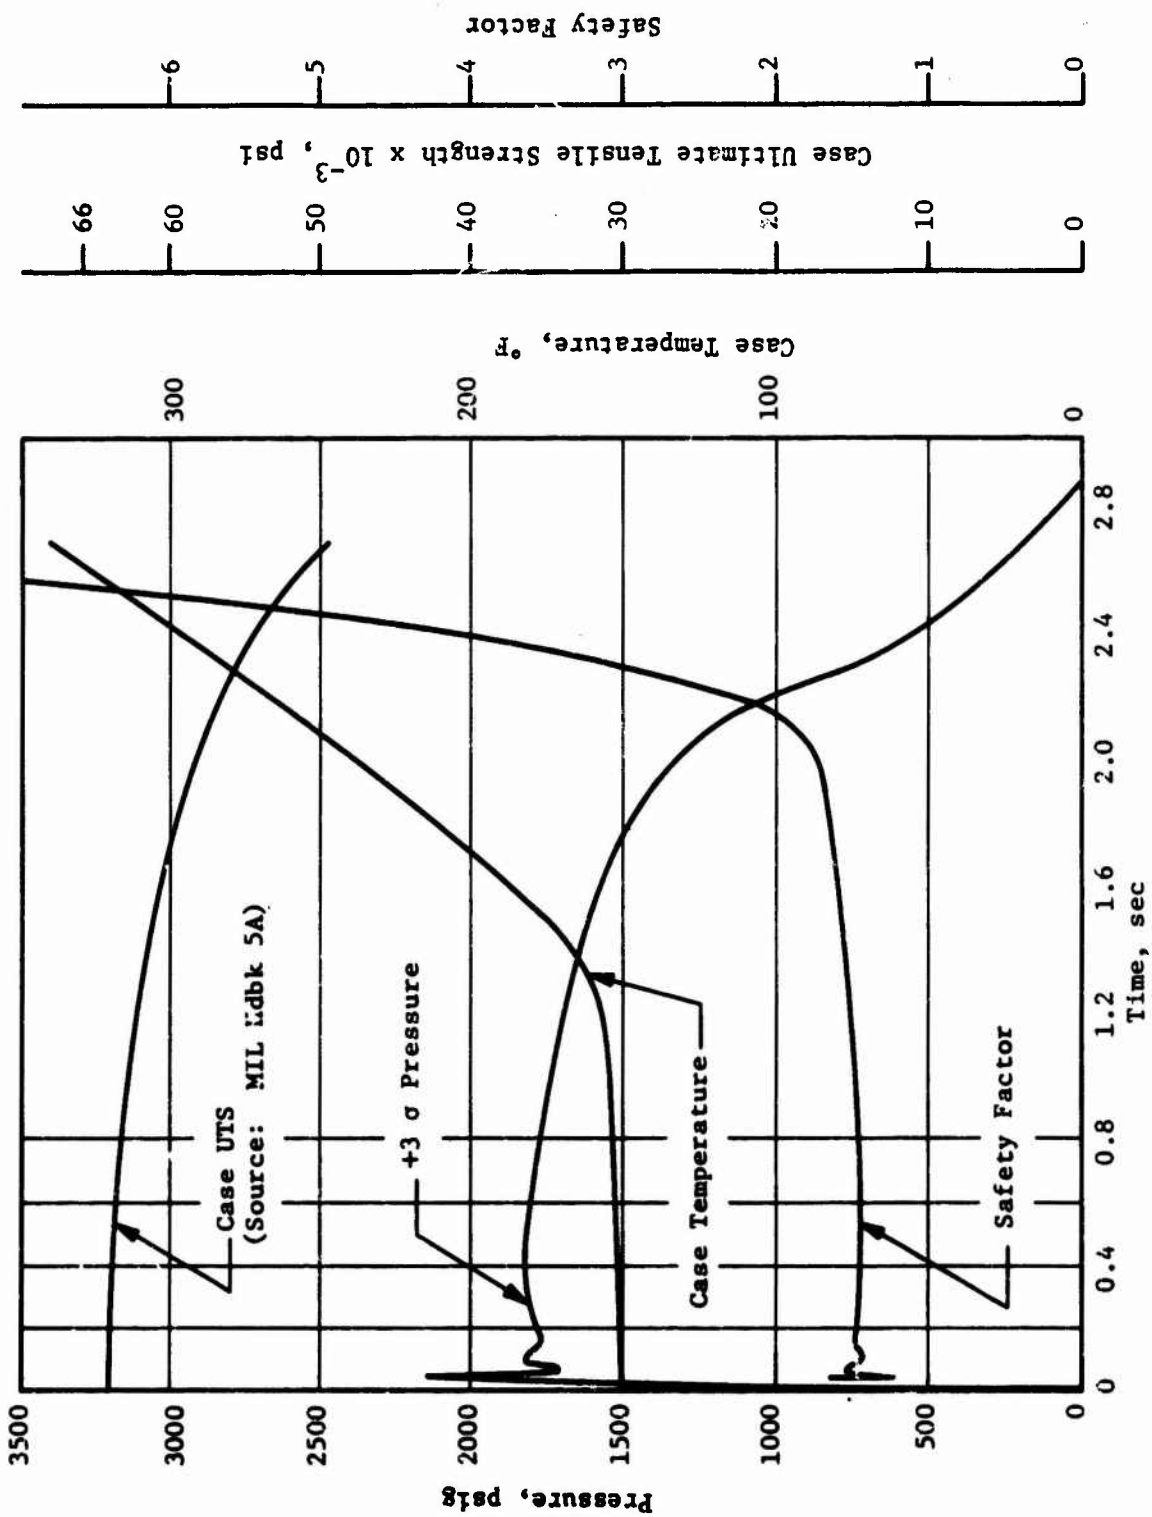


Figure 3

CONFIDENTIAL

Insulation Capability to Maintain Chamber Structural Integrity under +150°F Flight Environment (u)

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

The forward insulator material, chopped glass fabric and phenolic resin, has been successfully used for nozzle entrance sections in other programs. It can be injection molded and cured in short molding cycles. Its thermal and erosion properties are more than adequate for the low gas-flow area at the fore end of the 2.75-in. motor, and its rigidity in the design thickness provides suitable ruggedness to allow the insulator to be used as a positioning device for the casting core.

The liner selected for use in the Improved 2.75-in. motor is designated IBS-105-3 and is compatible with the ANB-3241-2 propellant used in the motor. Tests of the bond strength between IBS-105-3 liner and ANB-3241-2 propellant at -65 and +77°F indicate values of 400 and 80 psi, respectively, which are more than adequate for the motor. In these tests, the characteristic failure mode is cohesive in the propellant. Since IBS-105-3 liner and ANB-3241-2 propellant form a system, a more detailed discussion of liner properties is given as part of the propellant discussion presented in a later section of this report.

For use as aft-end insulation, IBS-105-3 was modified by increasing the asbestos content for improved erosion resistance and the carbon black content was decreased to maintain flow properties for spray application. The modification is designated IBS-105-4X. In PFRT firings of Improved 2.75-in. motors, the performance of IBS-105-4X with respect to erosion resistance was better than the previously used premolded butyl-rubber insulator of SMR-81-15. Additional discussion of IBS-105-4X can be found in a later section of this report.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

Silastic 587-RTV silicone rubber was selected for use as the agent to release the liner from the forward insulator. Prior to its adoption, alternative release agents were evaluated in double plate tensile specimens prepared to simulate motor conditions (metal plate, release agent, liner, propellant, adhesive, metal plate). The evaluation criterion was the tensile strength required to separate the specimens at the release agent interface. The results, shown in Figure 4, indicate that RTV-587 has the lowest tensile value (5 psi).

3. Aft Closure/Nozzle Design

a. Design Description

The aft-closure/nozzle design of the Improved 2.75-in. motor consists of a machined mild-steel closure, four Carb-I-Tex-700⁽¹⁾ throat inserts with consumable Nylon paper⁽²⁾ expansion washers, a molded carbon/phenolic (MXC-313)⁽³⁾ closure insulator with four integral exit cones, and four mild-steel exit cone sleeves. The aft-closure insulator and four exit cones are transfer molded as one piece into the steel closure with the throat inserts, washers, and exit cone sleeves in place. This technique of integrally molding all aft-closure/nozzle components into a single piece in one operation enhances reliability and reproducibility at a substantial cost savings, as compared to more conventional methods of fabrication and assembly.

(1) Carb-I-Tex-700, Carborundum Co., Pittsburgh, Pa.

(2) Nomex 410, Dupont Corp., Wilmington, Del.

(3) MXC-313, Fiberite Corp., Winona, Minn.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

<u>Release Agent</u> ⁽¹⁾⁽²⁾	<u>Tensile Strength Needed for Release, psi at +77°F</u>
Control (no release)	86 ⁽³⁾
Silastic 587-RTV	5
RTV-60	26
Teflon Tape	21
Polyethylene Tape	59 ⁽⁴⁾
TC-522-1	69

-
- (1) Test specimens consisted of steel plate, release, IBS-105-3 liner, ANB-3241-2 propellant, adhesive, steel plate
 - (2) All samples cured 24 hr at 180°F prior to casting with ANB-3241-2 propellant
 - (3) Cohesive failure in propellant
 - (4) Failure between propellant and adhesive used to bond to steel

Effect of Release Agents on Bond Strength of
Propellant/Liner System to Metal

Figure 4

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

The aft-closure shell is similar dimensionally to the present production component, FTS D-2016. However, the Improved 2.75-in. shell has a shallower detent groove, and the fin-lug corner radii are cut back adjacent to the nozzles to allow clearance for the mold used in molding the insulator into the shell.

The configurations of the entrance and exit sections of each nozzle are molded into the aft-closure insulator. The entrance sections are specifically designed to promote smooth entry of the gases into each throat, thus providing minimum insulator erosion and maximum motor performance. The Carb-I-Tex-700 throat inserts are cylindrical on the OD with a conical aft end and have a cylindrical throat diameter of 0.271 in., extending a nominal axial length of 0.10 in. The cylindrical throat best provides ease of manufacture, dimensional control, and minimum throat erosion for this application when compared to a standard radial throat. Each insert has a consumable Nylon washer at the fore end to permit longitudinal thermal expansion during firing, thereby relieving stresses and preventing insert cracking and possible ejection.

The four throats are equally spaced on a 0.760-in. radius around the closure center line. This placement is the maximum radial position compatible with proper operation of the fins and the GFM launcher detent hook. In this design, the hook determines the length of the exit cone since the hook retains the missile in the launch tube by latching into a groove on the aft closure and extending over the aft end of one of the exit cones. The exit cones have a 11.5° half angle and an expansion ratio of 8.6. Their exit diameter (0.797 in.) is limited by the motor envelope and the requirement for sufficient wall thickness to withstand erosion.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

It is our understanding at this time that the shape of the detent hook on future launchers will be changed to accommodate this exit cone design.

The aft closure/nozzle has provisions for mounting the fin assembly, fin actuator piston, and igniter assembly. The resultant aft-closure assembly is attached to the chamber by means of a submerged lockwire and the joint is sealed by an O-ring and IBS-105-4X insulation used as a potting compound. This insulation provides additional protection to the joint and the aft insulator from the erosive effects of gas flow throughout the firing duration.

b. Performance


The integrally molded aft closure insulator of MXC-313 maintains shell structural integrity as evidenced by the absence of hot spots of any minor discoloration during post-firing inspections. The material has successfully undergone over 40 other full-scale motor firings. In these firings, the insulator has shown an average erosion rate of 16 mils/sec and an average char depth of 0.120 in. immediately forward of the throat insert. Figures 5 and 6 illustrate typical erosion and char conditions in sectioned closures. A heat transfer analysis shows that the insulator keeps the temperature of the aft-closure shell well within the required 300°F for adequate material strength.

During the first 11 test firings of the integrally molded aft-closure, cracking and/or ejection of the ATJ graphite throat inserts was encountered. Resolution of the difficulty was accomplished by substituting Carb-I-Tex-700 as the throat insert material, since it has the higher compressive strengths required for use in the integrally molded

UNCLASSIFIED

UNCLASSIFIED


Report AFRPL-TR-69-90

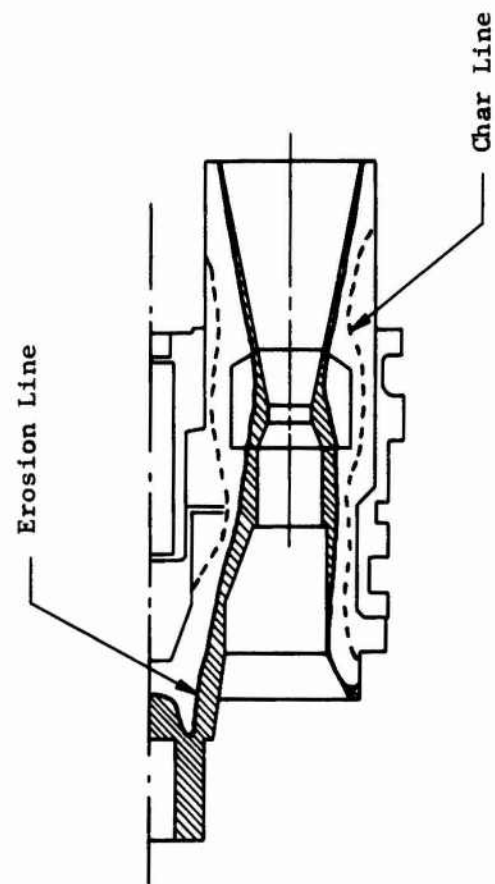

Typical Aft-Closure Erosion and Char Conditions
after -65°F Firing

Figure 5

UNCLASSIFIED

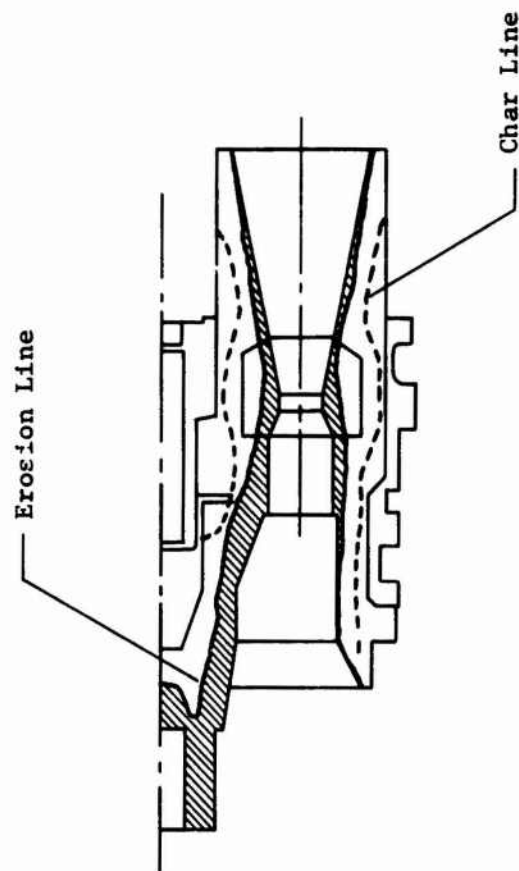

Typical Aft-Closure Erosion and Char Conditions
after +150°F Firing

Figure 6

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

aft-closure design, as discussed in the following section. Based on recent firings with Carb-I-Tex-700 throat inserts, the calculated throat erosion rate is 18 mils/sec, which compares favorably with the 15 mils/sec recorded for ATJ graphite inserts. The individual Carb-I-Tex-700 throat inserts give estimated throat area and expansion ratio changes with time as shown in Figure 7. A structural analysis of the Carb-I-Tex-700 inserts is presented in Appendix B.

c. Material Selection

(1) Aft-Closure Shell or Plate


The selected material for this component is free-machining, low-carbon, cold-drawn steel bar stock, 1117, which is the same material being successfully used in high rate production for the present 2.75-in. FFAR motor. The steel has more than adequate mechanical properties for this application as shown by the positive margins of safety in the inert parts stress analysis in Appendix B. This steel has been successfully used throughout the Aerojet development program and will continue to be used because it best satisfies the requirements for adequate strength, machinability, and low cost in high rate production.

The shell is cadmium plated in accordance with QQ-P-416; Type II, Class 2, to provide the corrosion resistance required for the expected environmental conditions. All finished surfaces are machined in keeping with the intended function and cost effectiveness. In addition, all mating surfaces have sufficient tolerance for required fits, while permitting low-cost machining techniques and minimum inspection.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

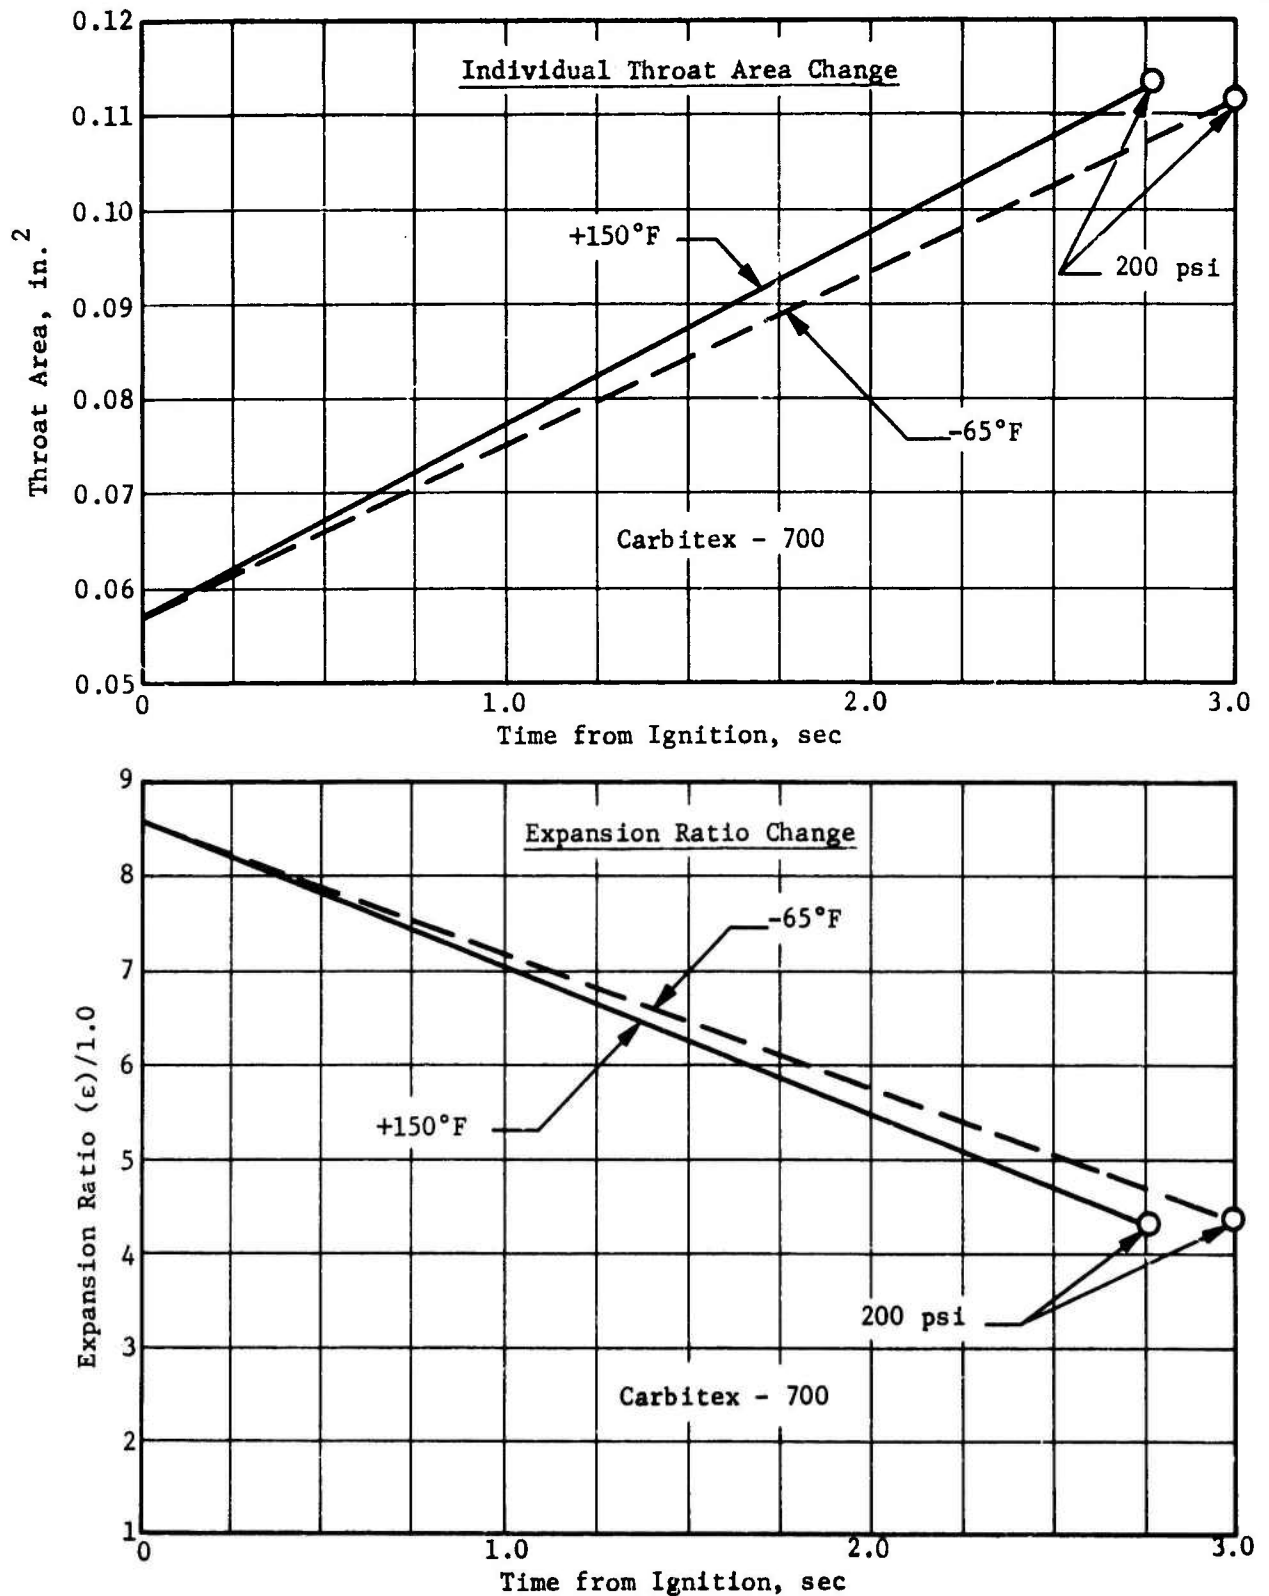

Changes in Throat Area and Expansion Ratio with Carb-I-Tex Throat Insert

Figure 7

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

(2) Aft-Closure and Exit Cones

The aft-closure insulation and exit cone material is MXC-313, an ablative carbon fiber/phenolic that has adequate insulating and erosive properties for this application, as well as the physical properties required for satisfactory transfer molding at the desired high production rates. The MXC-313 material has successfully maintained aft-closure integrity by withstanding the stringent erosive conditions of the four-nozzle configuration, while providing satisfactory thermal protection.

(3) Throat Inserts

Carb-I-Tex-700, a pyrolyzed graphite cloth laminate, was selected for use as the throat insert material. The selection was largely based on its high compressive strength of 21,000 psi across the laminate grain, the plane in which the highest stresses are predicted during firing. In addition, it can readily withstand the 7000 psi molding pressure. The material has a tensile strength of 7600 psi with the laminate grain and 500 psi across the laminate grain. The physical properties of the material are shown in Figure 8 and a structural analysis of the throat inserts is given as part of Appendix B.

Selection of Carb-I-Tex-700 was prompted by the cracking and ejection of ATJ graphite throat inserts that were used in the first firings of the integrally molded aft closure/nozzle. Results of subsequent firings with Carb-I-Tex-700 throat inserts showed that its high strength and inherent toughness eliminated the insert cracking difficulty in integrally molded aft closures.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

Compressive strength, psi	
With grain	9,500
Against grain	21,000
Flexural strength	
With grain	10,300
Against grain	2,000
Tensile strength, psi	
With grain	9,000
Against grain	500
Thermal conductivity, $\frac{\text{Btu-ft}}{\text{hr-ft}^2\text{-}^\circ\text{F}}$	
With grain	35
Against grain	14
Thermal expansion, $\frac{10^{-6} \text{ in.}}{\text{in.-}^\circ\text{F}}$	
With grain	0.8
Against grain	3.0
Modulus of elasticity, 10^6 psi	
With grain	2.2
Density, gr/cm^3	1.43

Physical Properties of Carb-I-Tex-700

Figure 8

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

(4) Expansion Washer

The material selected for this application is Nomex 410 Nylon paper (0.20-in. thick). It is consumed at 700°F to provide a suitable gap for longitudinal thermal expansion of the throat insert during firing. The material has the required properties to withstand the molding temperature of 320°F and the molding pressure of 7000 psi which results in a maximum reduction in thickness of 0.003 in.

Nomex 410 is a combination of two forms of a long chain synthetic polymer, fibrous binder particles and short length (1/4-in.) fibers. After processing on conventional papermaking equipment, the fibrils and short length fibers are permanently bonded to each other by a hot calendering operation.

4. Fins

Four fin blades spaced 90° apart are used to provide missile spin and stability. The fin blades are made of 2014-T6 aluminum alloy, which is the same material used in the chamber. The fin blades utilize the same forged part as the standard GFM fin. To provide the required clockwise spin to the rocket, the fins are canted 0.11° when at the inflight position of 45° to the motor centerline. This fin cant is obtained by machining the mounting faces of the as-forged fin with a 0°9' angle with respect to the fin symmetry plane and drilling the fin bore perpendicular to the mounting faces. To provide the fin cant, tight tolerances are imposed on the fin mounting face, fin bore, fin pin, and fin mounting lugs on the nozzle plate. Clearance between the retracted fins and the nozzle assembly is ensured by maintaining tight tolerances on the nozzle components and nozzle assembly, together with specifying minimum spacing between adjacent nozzles. These close tolerances enable the free fin to maintain a maximum angularity of $\pm 1/8$ of 1 degree.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

The fin cant requirement was determined by aerodynamic analysis, wind tunnel tests, and actual flight tests. The final cant-angle adjustment may be based on results from the flight test program. The fins must rotate freely and fall of their own weight when positioned 60° out from the motor centerline. The fin pins must remain in position under a static load of 20 lb. The fin pins are retained in the fin blade by means of a shrink fit at assembly.

5. Ignition System

a. Design Description

The Improved 2.75-in. igniter is a consumable, aft-end mounted, pellet igniter that reproducibly and reliably ignites the motor well within the required 0.100 sec. The igniter assembly consists of an insulator cap, aluminum-tube chamber, styrofoam end plug, 0.3-gm BPN IP-10 booster charge, 7-gm BPN-2D pellet main charge, and a Mk I Mod 1 squib. The squib firing circuit utilizes the aft-closure plate as a ground and the piston wire lead as the electrical current conductor from the launcher.

The pyrotechnic train is similar to that of larger igniters in that the squib ignites the booster charge which in turn ignites the BPN pellet main charge, thereby extruding the end plug and allowing the ignition gases to ignite the propellant grain. During igniter action, the igniter end plug and chamber are consumed, thus eliminating igniter debris.

In assembling the igniter, the Mk I Mod 1 squib is installed into the carbon/phenolic insulator cap. The squib electrical leads are led through two holes (180° apart) in the cap, and the squib and its leads are then potted in place with Epon 913. The empty igniter chamber is bonded to the insulator cap with Epon 913. The booster and main charges are then

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

inserted into the igniter chamber, the end-plug cemented in place with DC-92-018, and the end of the tube crimped, thus completing igniter assembly. Prior to final motor assembly, the insulator cap of the igniter assembly is bonded to the aft-closure insulator, the squib circuit shunt is removed, and the squib leads are crimped to the appropriate lead of the piston assembly, thus completing the squib circuit for external application of the firing current.

b. Igniter Performance

Figure 9 depicts motor ignition transients at -65 and +70°F when ignited with the igniter described above. It can be seen that motor ignition occurs well within the required 0.100 sec under the most severe environmental conditions of -65°F and 50,000-ft altitude.

c. Material Selection


The insulator cap is formed from MXC-313 molding compound because it has the required strength and erosion resistance for the application. The insulator cap has provisions for mounting the squib, a cavity for the fin-actuating piston and vise, access holes for the ignition wire assembly, and vent holes for pressure flow to the piston.

The igniter chamber is made of drawn 6061-T4 aluminum tubing with a wall thickness of 0.008 in. and an OD of 0.625 in. This type chamber was chosen because it offers ease of igniter manufacture and quality control, provides reproducible igniter performance as compared to other materials, and is rapidly consumed during the ignition transient, thus eliminating ejecta.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

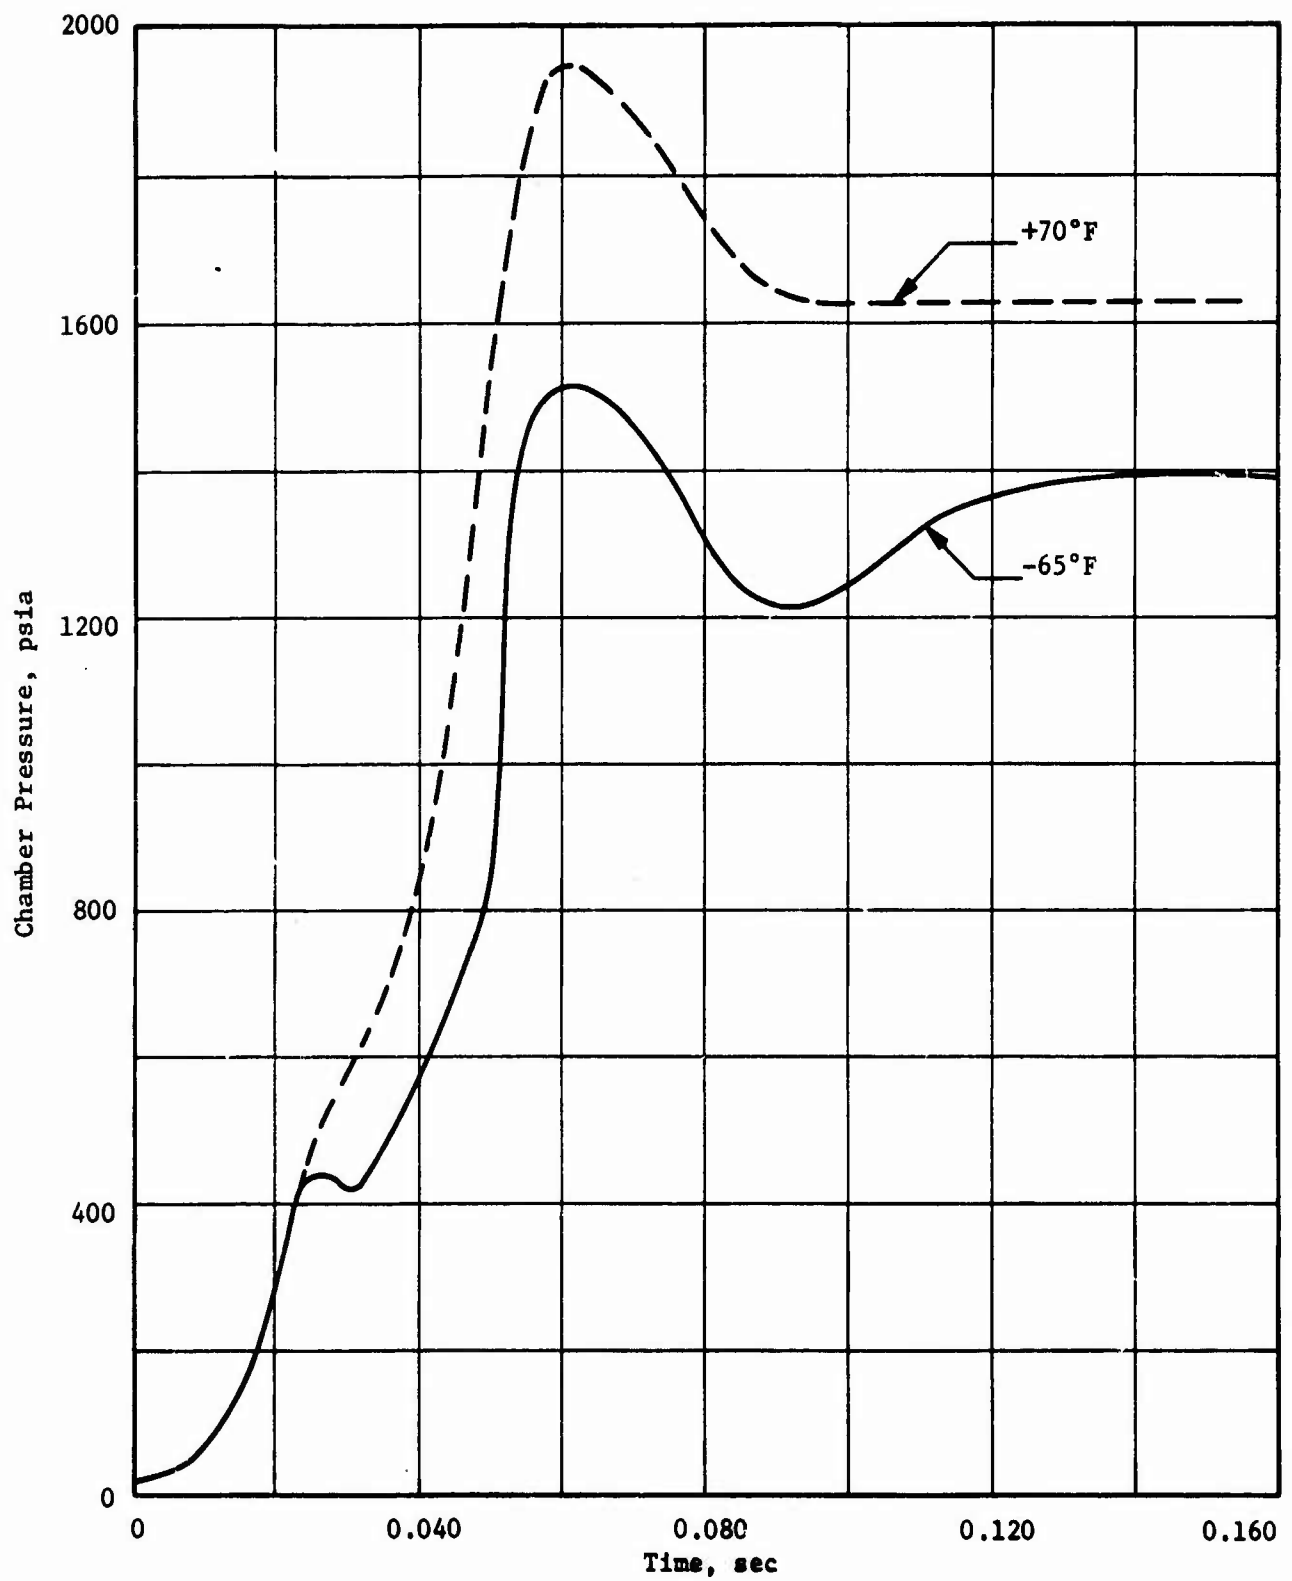

Typical Motor Ignition Transients at +70 and -65°F

Figure 9

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

(U) The end plug is made of rigid polystyrene foam and is bonded into the igniter chamber to retain the igniter pyrotechnic charges.

(U) The electrical clip, used to connect the squib and aft-closure ground circuit, is made of copper or brass sheet. The clip is tin-plated to provide good electrical conductivity.

(U) BPN was selected for the igniter pyrotechnic charges because it has reliable and reproducible ignition characteristics at high altitudes and over a wide temperature range. In addition, BPN is supported by a long history of successful use in the rocket industry.

(U) The Mk I Mod 1 squib is retained for use in the Improved 2.75-in. motor to maintain commonality with the present unit. It meets the requirement for a maximum firing current of 0.5 amp per round.

6. Grain Design

a. Design Description

(U) The grain design of the Improved 2.75-in. motor is an internal-burning cylinder (27.7 in. long and 0.750-in. dia bore). The grain is fully case-bonded to the chamber sidewall and is released from the forward head to provide capability of withstanding temperature-induced stresses, especially at the low temperatures. The aft end of the grain is chamfered on the OD to accommodate the insulator of the aft-closure assembly and is chamfered on the ID to provide a gas flow area around the igniter base approximately equivalent to the flow area upstream. The aft end of the grain and the aft 7.5 to 8.0 in. of the bore are restricted with a 0.010-in.-maximum thickness of IBS-105-3 liner to minimize the initial pressure peak.

UNCLASSIFIED

CONFIDENTIAL

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

(U) This grain design was selected because (a) it best satisfies the overall performance requirements within the specified weight and envelope of the 2.75-in. motor; (b) it provides high inherent design simplicity and ruggedness for withstanding the specified environmental conditions over the required temperature range, and (c) it is readily adaptable to high-rate production techniques for the lowest possible unit production cost. Early in the program, other variations of this basic grain design were investigated and included a larger bore, a partial release pattern, opposing slots on the aft half of the grain for neutrality, or a combination of these approaches. They were discarded because of lower performance and/or higher processing costs.

b. Performance

(1) Interior Ballistics

(U) A slightly regressive pressure-time curve is obtained from the cylindrical grain because its inherent progressivity is modified by erosive burning in the early portion of the firing and by nozzle erosion throughout the firing. The progressive thrust-time curve results from the nozzle erosion. Typical pressure- and thrust-vs-time curves of the 2.75-in. motor at -65, +70, and +150°F are shown in Figures 10 and 11, respectively, and a summary of motor characteristics, similar in content and format to the CPIA Rocket Motor Manual, is shown in Figure 12.

(C) The ballistic performance of the Improved 2.75-in. FFAR motor provides the usable impulse values specified in the technical requirements of Contract Exhibit A, as amended, which requires that the acceptability of motor ballistic performance with respect to missile trajectory performance be based on the usable impulse of the motor at -65, +70, and +150°F.

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

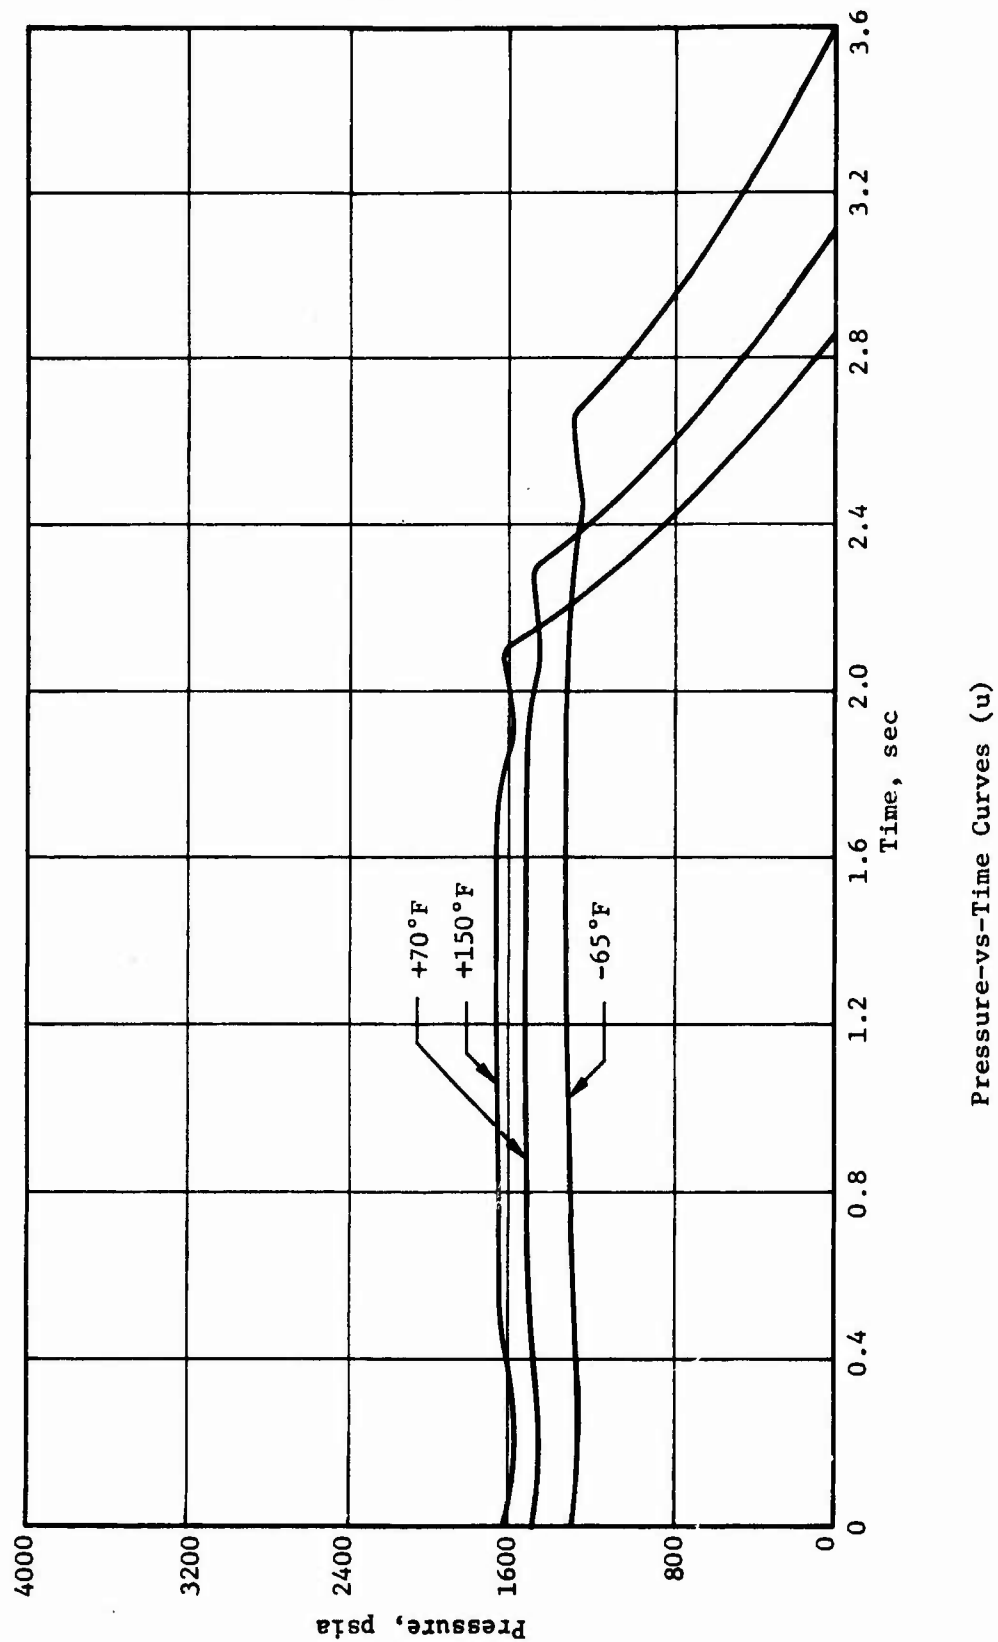


Figure 10

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

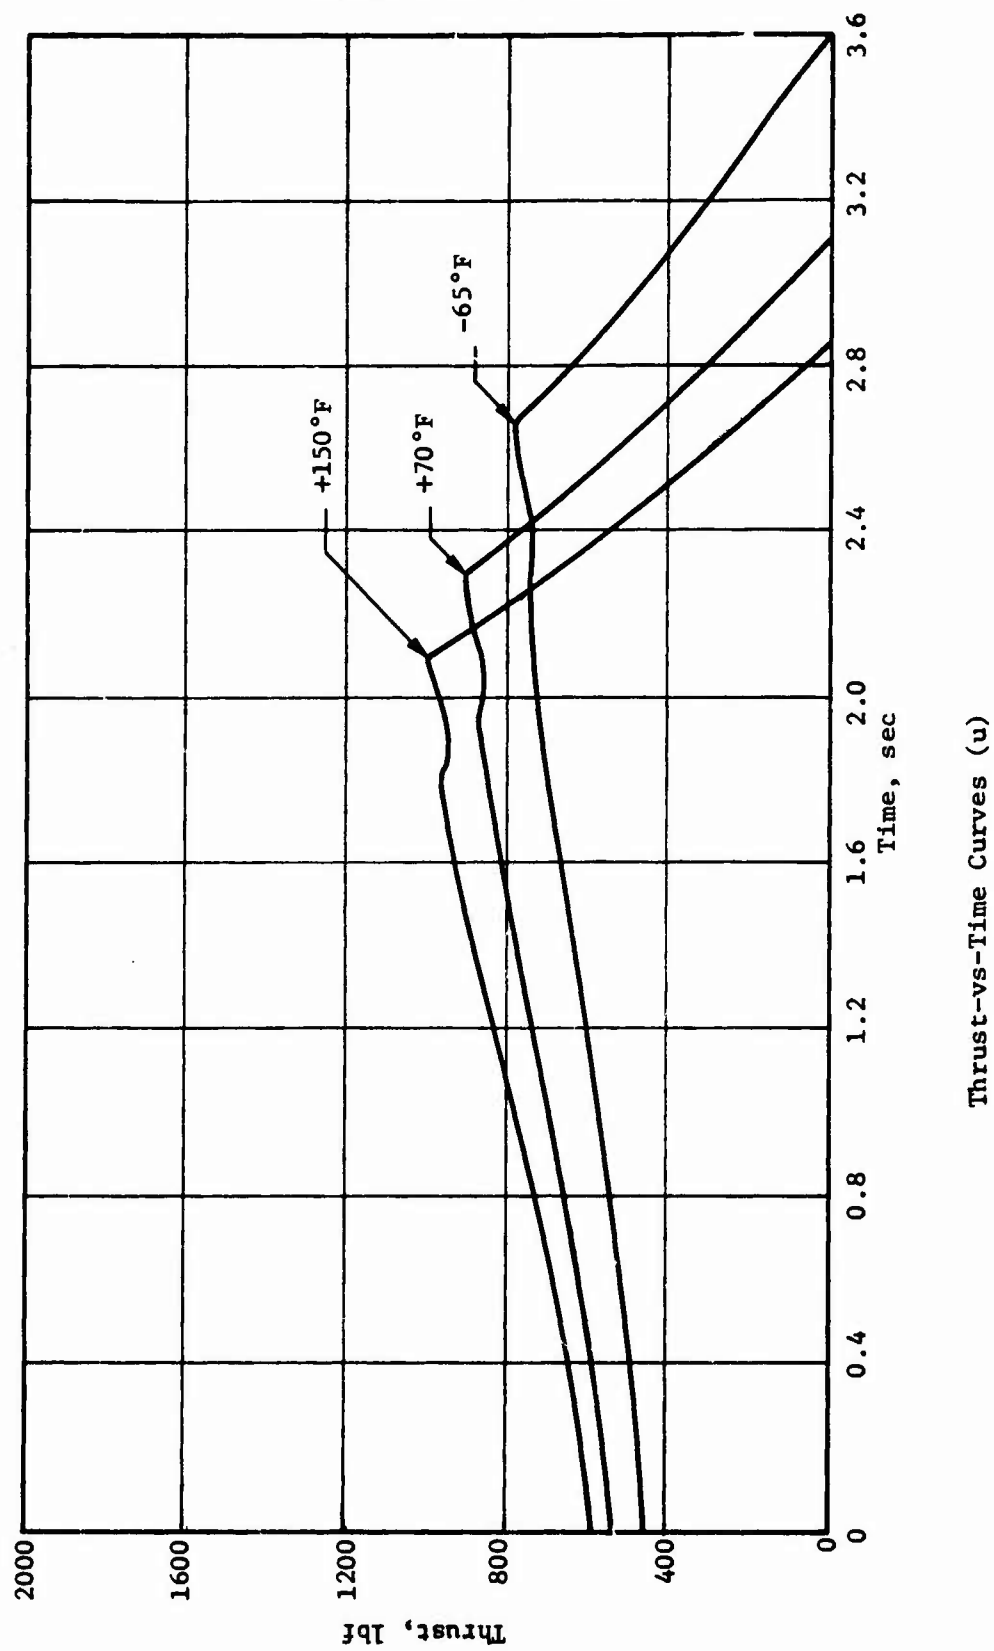


Figure 11

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

Principal Data

Length (including folded fins)	39.34 in.
Diameter	
Principal	2.75 in.
Maximum	2.79 in.
Masses	
Motor tube	2.36 lbm
Closure assembly	1.15 lbm
Fin assembly	0.60 lbm
Insulation and liner	0.48 lbm
Igniter assembly	0.02 lbm
Lockwire and O-ring	0.03 lbm
Total inert masses	4.46 lbm
Propellant masses	8.05 lbm
Total mass	12.69 lbm
Propellant mass fraction	0.63

Nominal Performance (Sea Level)

	<u>-65°F</u>	<u>+70°F</u>	<u>+150°F</u>
Burn time, sec	2.51	2.25	2.13
Action time, sec	3.33	2.96	2.79
Maximum pressure, $P_{\max}$, psia			
Ignition	1697	1879	2047
Steady state	1471	1721	1807
Average pressure, $\bar{P}_b$, burn time, psia	1380	1515	1650
Average pressure, $\bar{P}_a$, action time, psia	1182	1322	1393
Maximum thrust, $\bar{F}_{\max}$, lbf	774	873	922
Average thrust, $\bar{F}_b$, burn time, lbf	624	714	762
Average thrust, $\bar{F}_a$, action time, lbf	572	649	693
Action time impulse, I_a , lbf-sec	1901	1917	1931
Propellant specific impulse, I_{sp} , lbf-sec/lbm	237.7	240.0	242.1

Summary of Improved 2.75-in. Motor Characteristics (u)

Figure 12, Sheet 1 of 3

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

Component Details

Propellant

Designation	ANB-3241-2
Composition	AP/PBAN/AL
Burning rate at 1500 psia and 70°F	0.395 in./sec
Burning rate pressure exponent (n)	0.32
Grain configuration	Cylindrical bore
Method of manufacture	Cast in case
Grain dimensions	
Length	27.60 in.
Diameter	2.56 in.
Web thickness	0.90 in.
Initial port/throat area ratio	1.92

Case

Material	Aluminum alloy 2014-T6
Length	31.684 in.
OD	2.750 in.
Thickness, nominal	0.072 in.
Fabrication method	Impact extrusion
Hydrostatic proof pressure	2000 psia

Nozzles

Exit cone shape	11.5° half angle cone
Throat area, A_t	0.230 in. ²
Expansion ratio	8.65
Insert material	Laminated, fibrous graphite, reinforced (Carb-I-Tex-700)
Other materials	Carbon/phenolic, integrally molded exit cone liner and closure insulator; mild steel sleeve OD reinforcement

Summary of Improved 2.75-in. Motor Characteristics (u)

Figure 12, Sheet 2 of 3

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

Component Details (cont)

Insulations

Liner

Composition PBD (IBS-105-3)

Thickness 0.020 in. min

Restriction

Composition PBD (IBS-105-3)

Location Aft end of propellant and
aft end of bore, forward
to a distance of 9.03 in.
from aft end of motor case

Head end insulation

Composition Glass phenolic
(Fiberite 4030-190 or
Fiberite 8130)

Aft chamber insulation

Composition PBD (IBS-105-4X)

Thickness 0.135 in.

Location Starting 1.065 in. from aft
end of case extending to 3.30
in. from aft end of case

Igniter

Type Boron potassium nitrate (BPN)
pellet system

Description Main charge consists of 7.0 gm
of BPN pellets contained in an
aluminum tube; pellets ignited
by 0.3 gm of BPN powder, heat
is ignited by a MK I, Mod I
electric squib

Ignition delay time 100 msec max

Igniter resistance 1.35 ohms

Min current for reliable ignition 1.35 amps

Summary of Improved 2.75-in. Motor Characteristics (u)

Figure 12, Sheet 3 of 3

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

Further, usable impulse is defined as that delivered by the motor from fire switch to the time at which tailoff thrust drops to 430, 511 and 555 lbf at the temperatures of -65, +70, and +150°F, respectively. These three thrust levels are calculated on the basis of the 15-g requirement for flechette warhead deployment, launch conditions of 4000-ft altitude and negative 30° angle, launch velocity of 750 ft/sec, nominal inert motor weight, and drag values from the Tullahoma wind tunnel tests.

(C) The following table lists the specified minimum (-3 sigma) usable impulses and the thrust cutoff levels specified for the Improved 2.75-in. FFAR rocket motors fired at the three temperatures:

<u>Firing Temperature, °F</u>	<u>Thrust Cutoff, lbf</u>	<u>Usable Impulse, lbf-sec</u>
		<u>Minimum</u>
-65	430	1697
+70	511	1706
+150	555	1709

The 3 sigma variability in usable impulse was obtained from the root-sum-square of the calculated 3 sigma variability in propellant weight and the 3 sigma variability in impulse that were obtained in recent development firings and adjusted to a fixed propellant weight.

(2) Grain Structural Analysis

(U) A structural analysis of the Improved 2.75-in. grain in Appendix B shows that the design has the capability to successfully withstand the following stresses and strains expected to be imposed by the required environmental conditions: grain bore strain of 12.7% versus an

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

allowable greater than 12.7% established by strain cylinder tests; bond shear stress of 413 psi versus the allowable of 560 psi; and bond tensile stress of 32.7 psi versus the allowable of 92 psi. This predicted performance has been verified by the successful PFRT environmental tests, static firings, and flight tests.

(3) Safety Factor

(U) The analyses to determine the safety factors described below are based on worst-on-worst conditions in addition to the very conservative assumptions made throughout the computations here and in Appendix B.

(C) The nominal maximum chamber pressure at +150°F, exclusive of the igniter peak pressure, is 1740 psig, based on three firings at +150°F of motors from three propellant batches. The motors had Carbitex nozzle throat inserts with initial total throat areas of 0.230 in.². The 3 sigma variability in maximum pressure observed in these three firings is 4.65%. MEOP was calculated as:

$$\text{MEOP} = (1740) (1.0465) = 1820 \text{ psig}$$

Since the calculated minimum burst pressure of the chamber at +150°F is 2620 psig (Appendix B), the safety factor is:

$$\text{SF} = \frac{2620}{1820} = 1.44$$

(C) This calculated safety factor is lower than the required 1.5 safety factor based on the ultimate strength of the chamber. However, empirical hydroburst data, as discussed later, indicates that the calculated minimum burst pressure of 2620 psi may well be too conservative.

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

(C) Restriction is used on the aft end of the propellant grain bore to reduce ignition peak pressure. As shown in Figure 13, six motors were fired with varying amounts of aft-end bore restriction to determine the maximum reduction in ignition peak pressure that can be obtained without adversely affecting motor ignition. In light of these data, it was decided to set the length of bore restriction between 7.75 and 8.0 in. for future motors in order to best provide the desired overall ignition performance, together with ease of processing and control.

(C) Extrapolating the data in Figure 13 to the +150°F firing condition, the mean value for an ignition peak pressure with the 8.0 in. bore restriction was calculated to be 1927 psia with a 3-sigma variability of 11.7%. Thus, a maximum ignition peak pressure of 2150 psia is predicted for the maximum bore restriction length of 8.0 in. and a maximum ignition peak pressure of 2180 psia is estimated for the minimum bore restriction length of 7.75 in. These ignition pressures result in the following safety factors:

$$(8 \text{ in.}) \quad SF = \frac{2620}{2150} = 1.24$$


$$(7.75 \text{ in.}) \quad SF = \frac{2620}{2180} = 1.20$$

(U) The conservative results of the above analyses led to an investigation to determine the case strength level as indicated by available empirical data from hydrostatic burst tests. Data from Picatinny Arsenal* shows that the GFM case has a mean hydroburst pressure of 3600 psi, with a high of 3800 psi and a low of 3200 psi. These data are based on hydroburst testing cases. In addition, the grain specification MIL-P-18811 (NORD) for the present

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

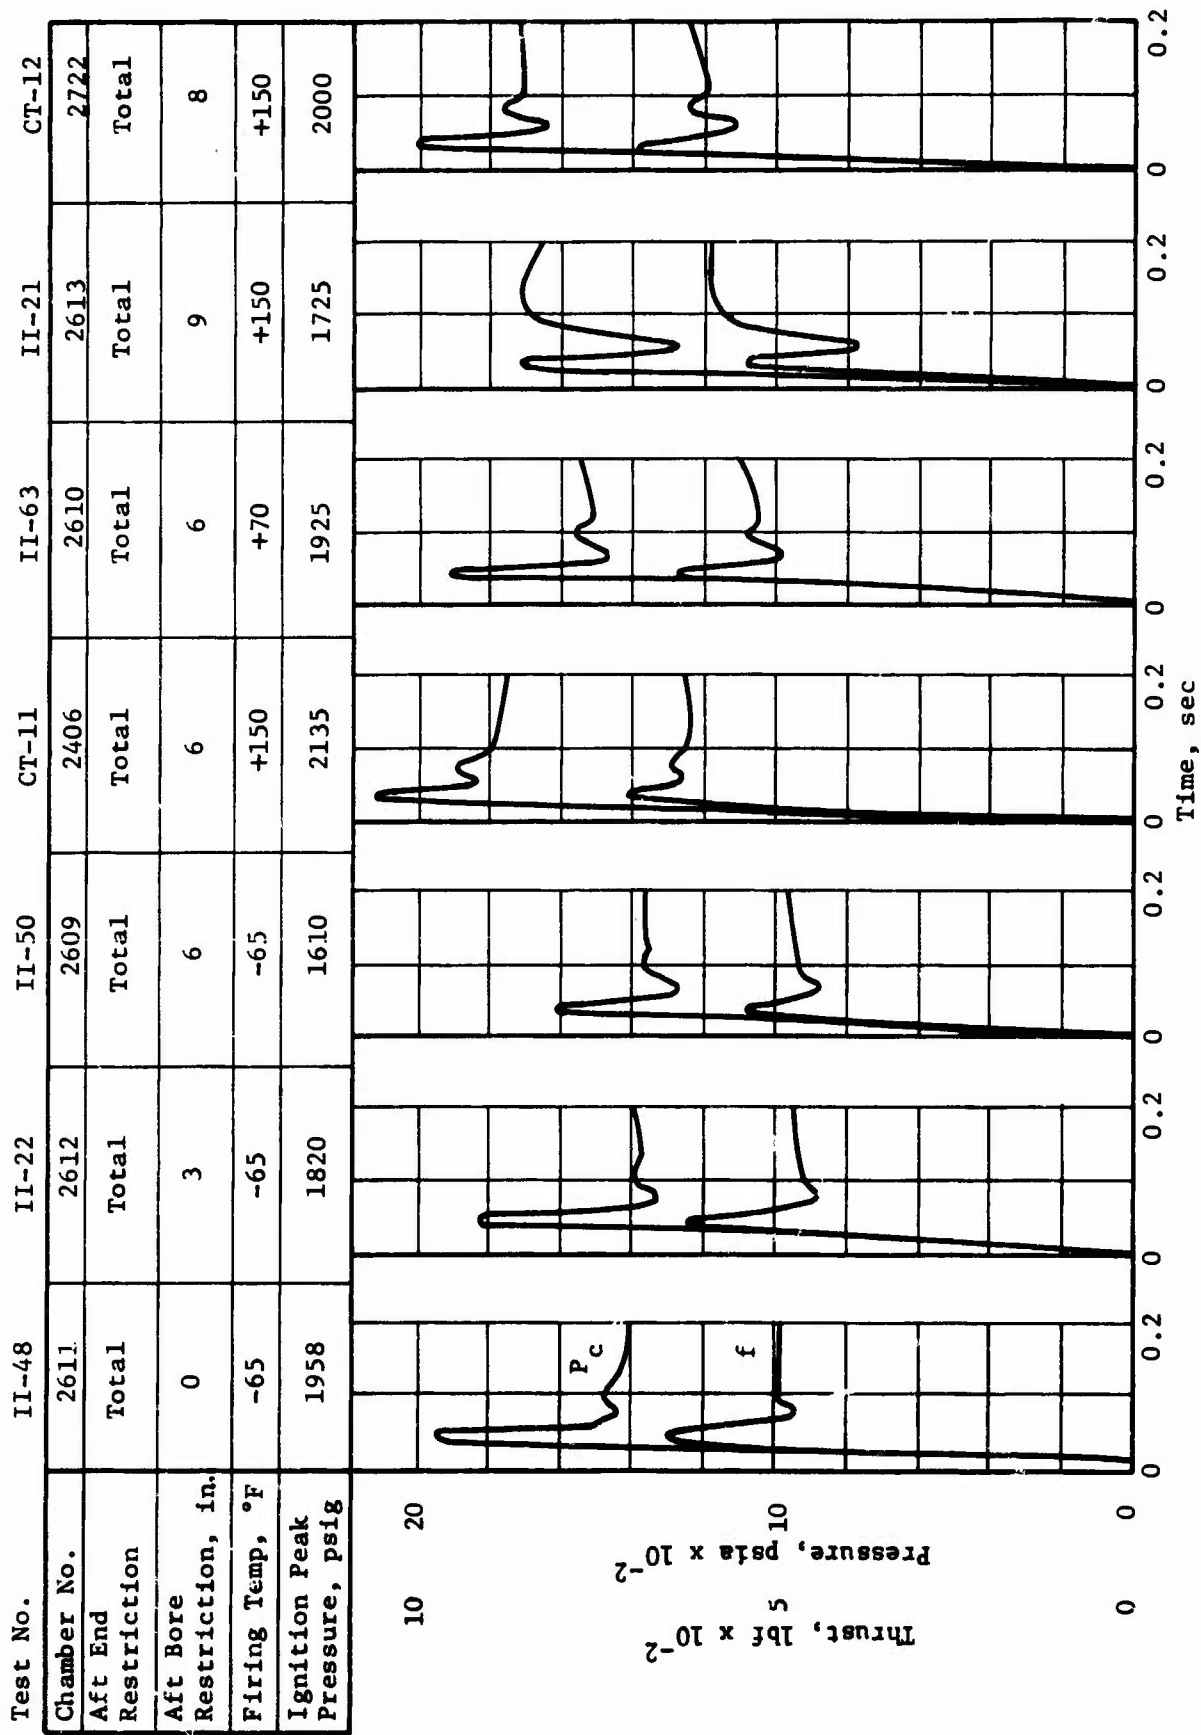

Comparison of Bore Restriction and Ignition Peak Pressure (u)

Figure 13

CONFIDENTIAL

CONFIDENTIAL

Report AFRL-TR-69-90

II.A. Motor Design and Description (cont)

Mk 43 2.75-in. motor permits a maximum operating pressure of 2400 psig at +165°F*. Finally, previous tests conducted at the Pico Rivera Military Plant of Norris Industries** indicate burst pressures to be in excess of 3500 psi.

(U) In light of the above empirical data and the specification maximum pressure, Aerojet believes that the GFM case has a more-than-adequate safety factor when used with the Improved 2.75-in. propellant grain.

7. Propellant and Liner

a. Description

(U) The propellant selection for the Improved 2.75-in. FFAR motor is ANB-3241-2, a polybutadiene-acrylic acid-acrylonitrile terpolymer (PBAN) propellant. This propellant is highly reproducible, satisfies the ballistic and mechanical property requirements of the Improved 2.75-in. motor, exhibits good high-temperature stability, and possesses processing characteristics suited to high-volume production. The specification for ANB-3241-2 propellant is AGC-36550. Acceptance specifications are available for all propellant raw materials. The composition of ANB-3241-2 is shown below and a summary of ballistic properties is presented in Figure 14.

* Letter to SMUPA-ND9, Act'g. Ch, 2.75" Rkt Br. from Robert Bradley, Act'g Ch, Complete Round Section, dated 15 July 1967.

** Aerojet-General Corporation, Attn: S. J. Fine from Norris Industries, Pico Rivera Military Plant, D. R. Keener, dtd 9 October 1967.

CONFIDENTIAL

(This Page is Unclassified)

CONFIDENTIAL

Report AFRPL-TR-69-90

Ballistic Properties

Standard specific impulse, lbf-sec/lbm at 1000 psia	
Theoretical	264*
Measured, ballistic motor	247.2**
Density, lb/in. ³	0.0643
Theoretical chamber flame temperature at 1000 psia, P_c , °F	5895
Theoretical exhaust flame temperature at 1000 psia, F_c , °F	3558
Burning rate, in./sec at 1500 psia	0.395
Pressure exponent	0.32

Mechanical Properties

<u>Temperature</u>	<u>σ_m, psi</u>	<u>ϵ_m, %</u>	<u>ϵ_b, %</u>	<u>E_0, psi</u>
-75°F	687	5	6	25,087
+77°F	71	19	22	481
+150°F	36	16	22	330

* Shifting equilibrium

** Specific impulse measured in ballistic (100-lb grain) motor firings conducted on a precision Aeroscience test stand at a chamber pressure of 1000 psia exhausting to 14.7 psia through a nozzle with 15-degree half-angle and optimum expansion. The comparable value at 0-degree half-angle is 251 lbf-sec/lbm.

Ballistic and Mechanical Properties of ANB-3241-2 (u)

Figure 14

CONFIDENTIAL

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

<u>Ingredient</u>	<u>Wt, %</u>
Ammonium perchlorate	71.00
Aluminum powder	15.00
Binder	<u>13.00</u>
TOTAL	100.00

PBAN propellants have been used extensively in the solid rocket industry. Aerojet has processed and successfully fired PBAN propellants in 44-, 120- (200,000-lb grain), and 260-in.-dia (1,670,000-lb grain) motors. During the 260-Motor Program alone, over 5.5 million lb of PBAN propellants (ANB-3105 and ANB-3254) were processed.

b. Reproducibility

Excellent reproducibility of burning rate and mechanical properties has been achieved with the ANB-3241-2 propellant for the Improved 2.75-in. motor. These desirable characteristics are attributed to the simplicity of the formulation and to the use of mixing procedures and in-process control tests developed and demonstrated for PBAN propellants on the Air Force and NASA 260-in. Motor Programs. The reproducibility of the propellant in-process acceptance tests for seven 450-lb vertical mix batches is shown in Figure 15.

(1) Propellant Burning Rate

The burning rate required for the Improved 2.75-in. motor is achieved through the use of an oxidizer blend containing 80 parts +48 mesh and 20 parts Mikroatomizer ground oxidizer in ANB-3241-2 propellant. Highly reproducible burning rates have been obtained in the 450-lb vertical mix batches processed for the Improved 2.75-in. motor as shown below.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

<u>Propellant Component</u>	<u>Acceptance Limit</u>	<u>$\bar{x}$</u>	<u>s</u>	<u>n</u>
<u>Submit</u>				
Acid Equivalents, eq/100 g	0.0510 ± 0.0015	0.0509	0.00046	6
H ₂ O, wt%	0.20 max	0.065	0.0168	6
<u>Premix</u>				
Liquid Density, g/ml	1.490 ± 0.007	1.489	0.0008	6
<u>Final Fuel</u>				
FeAA, wt%	4.56 ± 0.15	4.52	0.14	5
<u>Uncured Propellant</u>				
Liquid Density, g/ml	1.783 ± 0.007	1.778	0.0019	6
Epoxy Content, wt%	1.05 ± 0.12	1.02	0.033	6
ISRR at 1500 psig, in./sec	0.365 ± 0.010	0.365	0.0034	6

In-Process Control Tests for ANB-3241-2
Propellant

Figure 15

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

	<u>Burning Rate at 1500 psig, +80°F, in./sec</u>	
	<u>Liquid Strand</u>	<u>Cured Strand</u>
$\bar{x}$	0.365	0.305
s	0.0031	0.0051
n	9	8

Liquid strand burning rates are used for acceptance of each propellant batch. The cured strand data were obtained since they agree closely with the burning rate observed in the motor.

(2) Mechanical Properties

The reproducibility of mechanical properties that were observed in the 450-lb vertical batch mixes processed to date provides assurance of highly reliable motor performance. The mechanical properties at +77°F (2.0 in./min strain rate) of five 450-lb batches cured at +135 °F and one 450-lb batch cured at +110°F are summarized below:

<u>Cure Temp, °F</u>		σ_m , <u>psi</u>	ϵ_m , <u>%</u>	ϵ_b , <u>%</u>	E_o , <u>psi</u>
+135	$\bar{x}$	63.4	17.4	25.8	556
	s	4.3	0.89	1.6	30.8
	n	-----5-----			
+110	$\bar{x}$	57.3	15.3	23.5	551
	s	3.5	1.5	3.1	54.8
	n	-----4-----			

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

A propellant cure temperature of +135°F was used for motor cast Lots 1 through 5. To reduce the thermal strain in the motor, all subsequent motors were cured at +110°F. As shown, the propellant properties do not differ for the +135 and +110°F cure. The reduced cure temperature, however, increases the time required for the propellant to reach an equilibrium cure state. Figure 16 shows a cure time of five days at 110°F compared to approximately three days at +135°F.


c. Arc-Image Furnace Ignitability Studies

The threshold-ignition energy requirement of a propellant is defined as the radiant energy required to ignite the propellant with a 0.50 probability as determined by visual observation of consecutive fire and no-fire samples with the narrowest possible range or separation of exposure times. The ignitability of ANB-3241-2 was measured at a surface heat flux of $70 \text{ cal/cm}^2 \text{ - sec}$. The test results are presented in Figure 17. The threshold-ignition energy requirement is approximately 3.5 cal/cm^2 at all atmospheres. This propellant has essentially the same threshold-ignition energy requirement as a similar PBAN propellant, ANP-3105. A typical polybutadiene propellant such as ANB-3066, the Minuteman second-stage propellant, requires 7 to 8 cal/cm^2 at 1 atmosphere. These data also show that the ignitability pressure dependency is small, which is normal for most of the polybutadiene and PBAN propellants tested to date. It is seen that a five-fold increase in pressure decreases the threshold-ignition energy requirement by a factor of only 1.2. Also, these data show that the propellant in a motor at an altitude of 50,000 ft should ignite satisfactorily since the igniter-induced chamber pressure is approximately 8 to 10 atmospheres.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

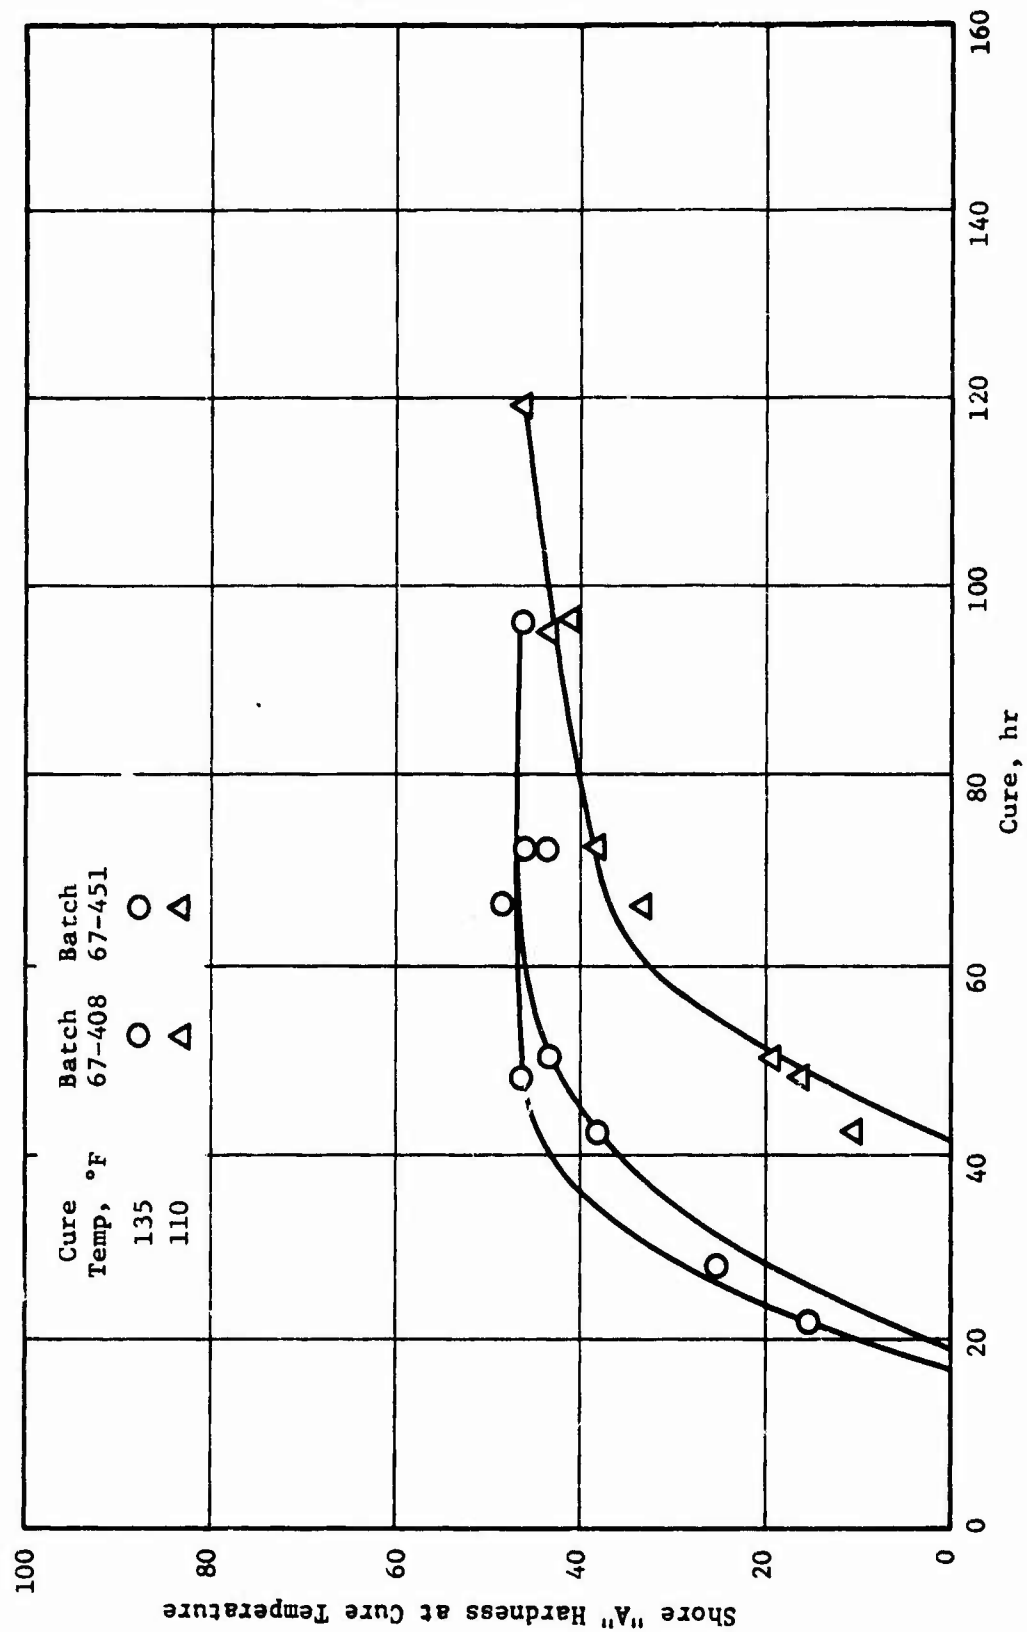

Effect of Temperature on Cure Rate of ANB-3241-2 Propellant

Figure 16

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

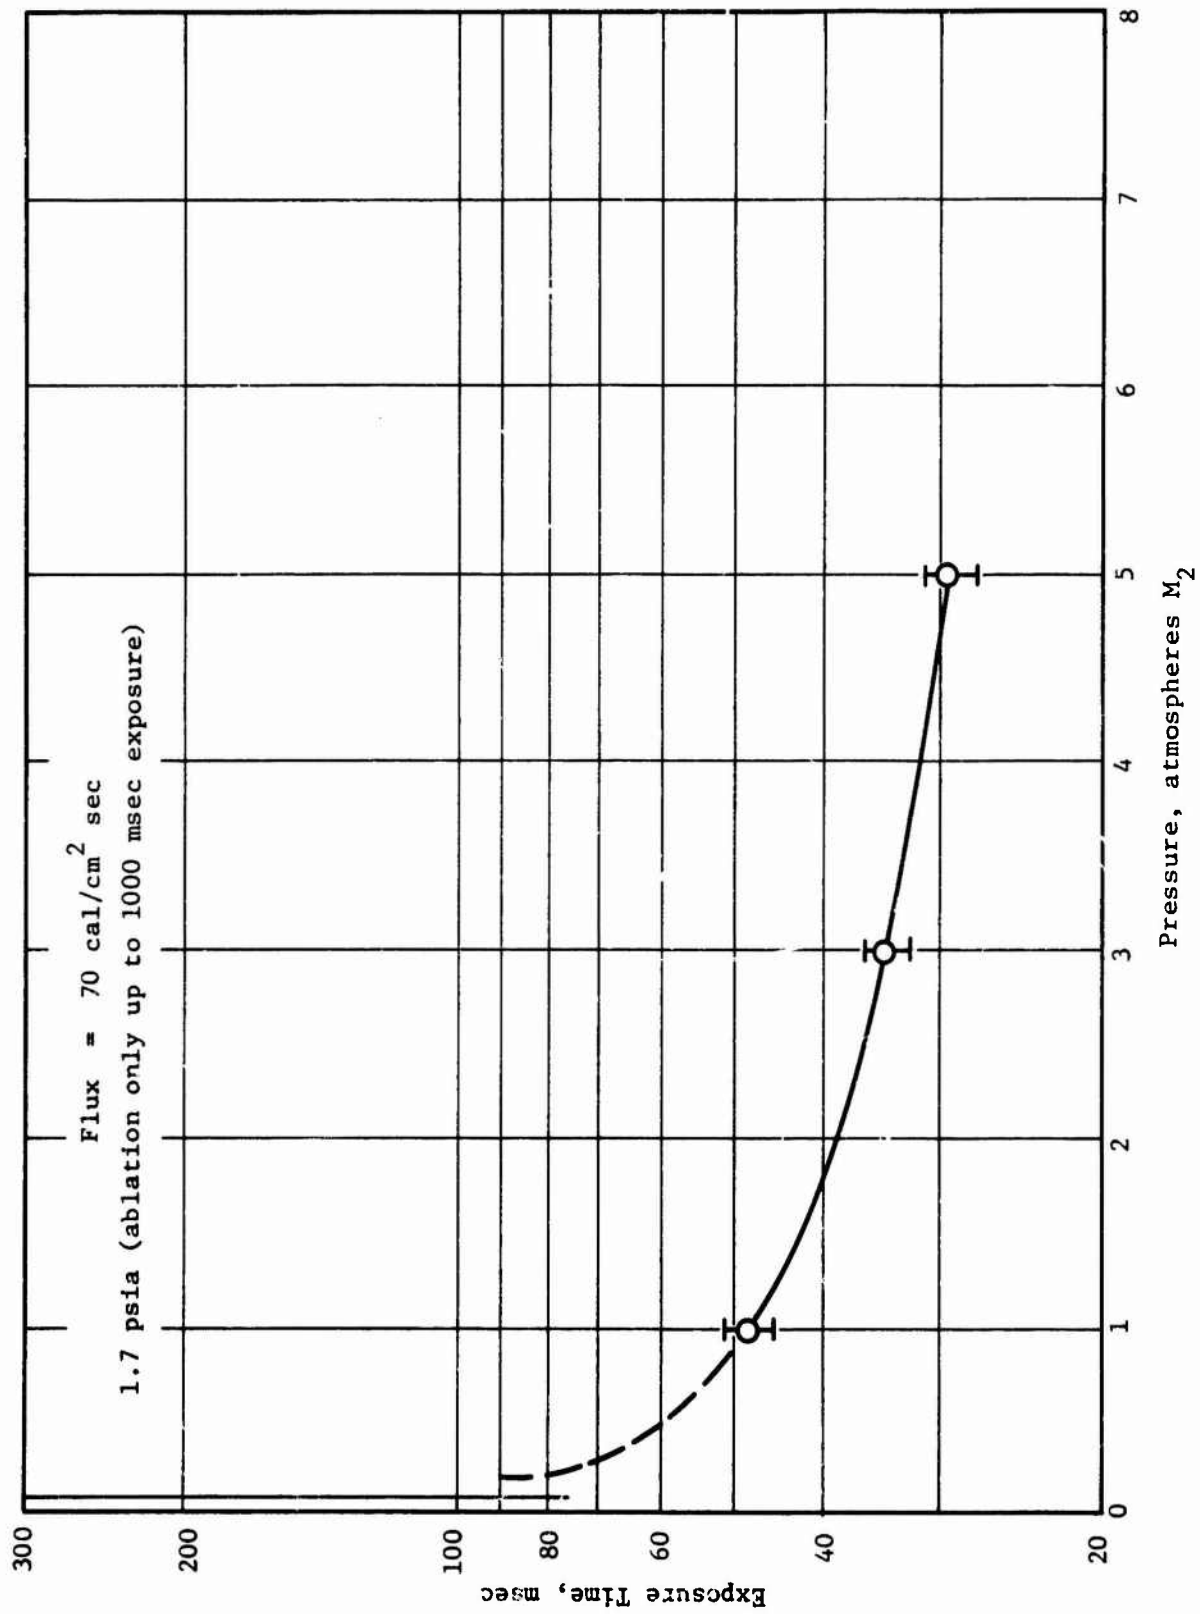


Figure 17

Arc-Image Furnace Ignitability Data Showing Dependence
of Exposure Time on Pressure, Propellant ANB-3241-2

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

d. Propellant Processing Characteristics

The processing characteristics of ANB-3241, as well as other PBAN propellants, make it ideally suited for high-volume production. The flow characteristics of ANB-3241 are excellent; the as-cast viscosity is only 15,000 poise at +135°F. A comparison of the viscosity buildup from +120 to +135°F of batches prepared for the 2.75-in. FFAR motor program is shown in Figure 18. The close agreement among the various batches is another example of the excellent reproducibility of the Aerojet epoxy-cured PBAN propellant systems.

e. Explosive Classification

The hazard classification tests performed at Aerojet on ANB-3241-2 are listed in Figure 19. More extensive motor testing in accordance with Technical Order T.O. 11A-147 was performed as part of the Improved 2.75-in. FFAR program. As expected, the recommended DOT classification remains Class B.


f. Liner and Insulation

Sprayable liner IBS-105-2 (Specification AGC-36552) was selected to line the chamber sidewall, and insulation IBS-105-4X (Specification AGC-36555) was selected to insulate the chamber aft end which is exposed to propellant combustion and gas flow for almost the full duration of motor operation. Both materials are modifications of liner formulation SD-850-2 that was successfully used and characterized on the 260-in. motor program. The formulations for both materials were specifically tailored to provide (a) flow and cure characteristics required for spray application; (b) good low temperature properties; and (c) high bond strength margins with propellant grain and chamber sidewall. For use as the aft-end insulation material, the asbestos content

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

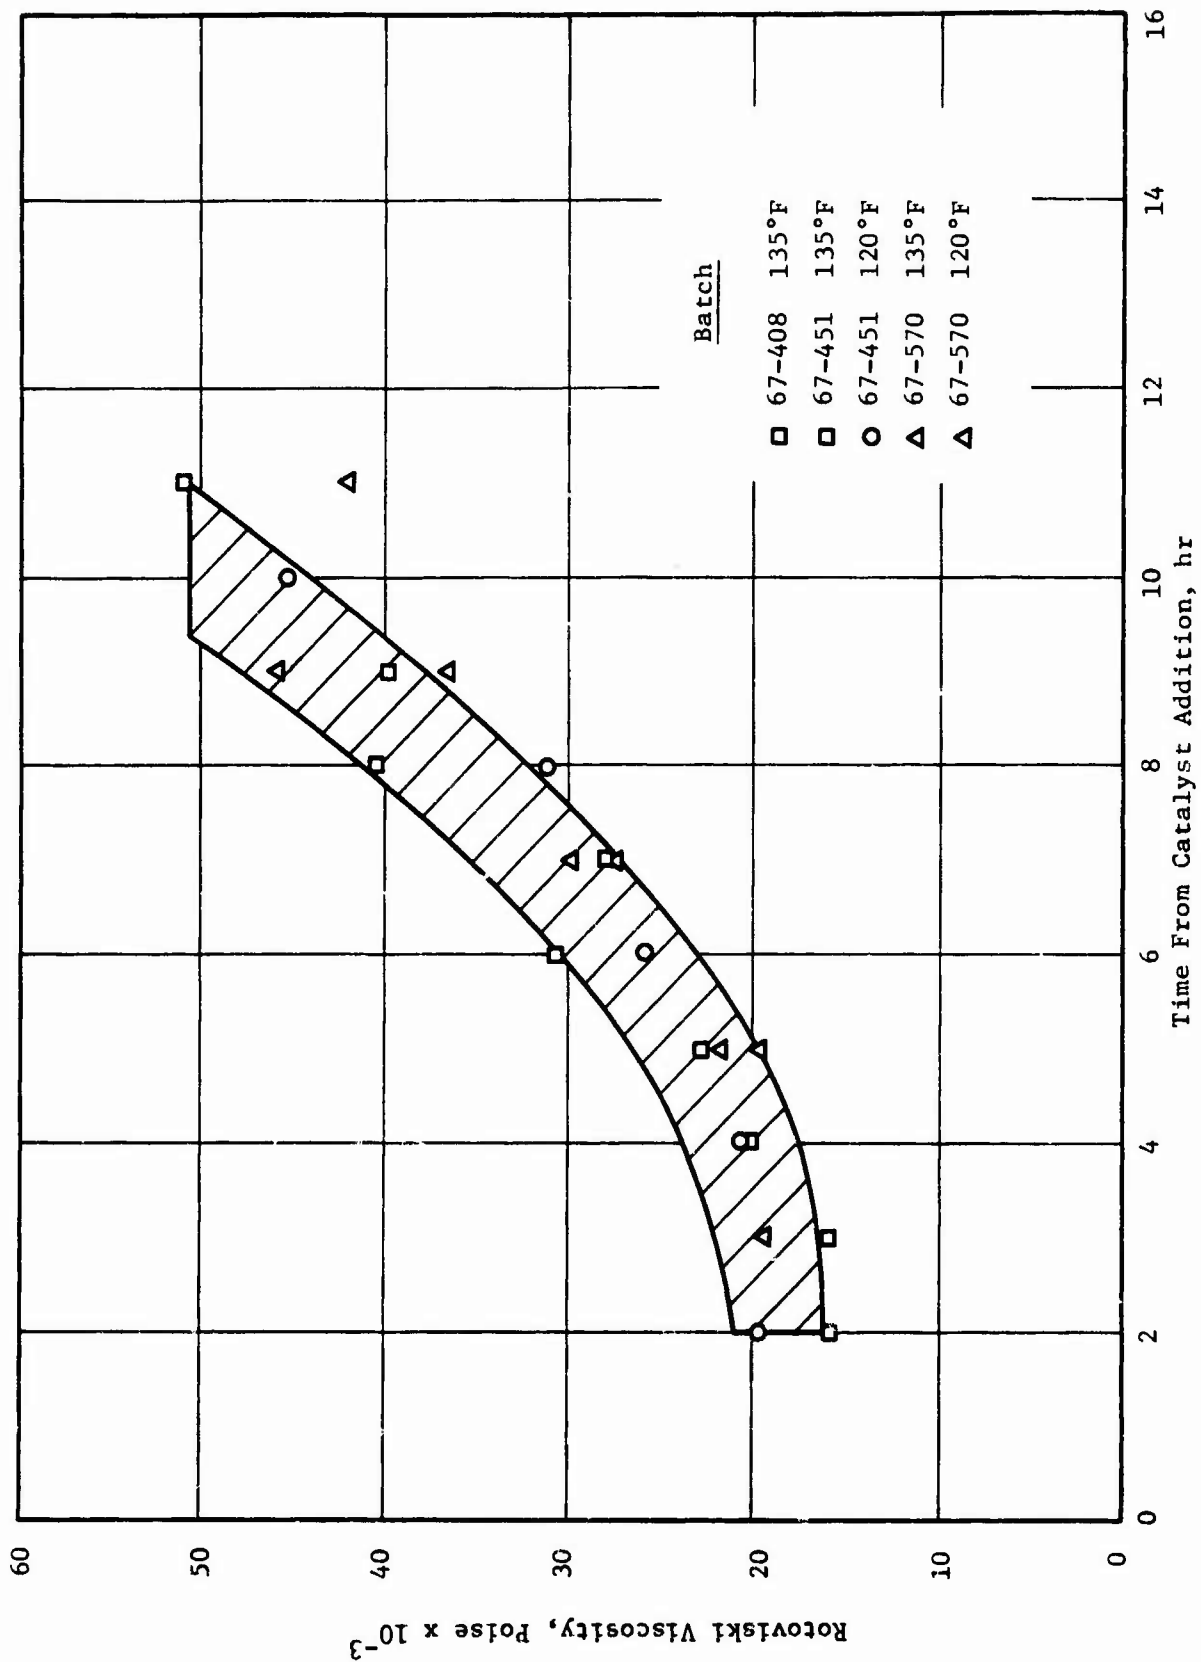

Viscosity Profile of ANB-3241-2 Propellant

Figure 18

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

Item	Test Results
2-in. Cube with No. 8 Blasting Cap (5 tests)	Negative
2-in. Cube with Engineer's Special Blasting Cap (5 tests)	Negative
Ignition and Unconfined Burning Tests	
1-in. cube (1 test)	Burned 8 sec
2-in. cube (2 tests)	Burned 14 sec
4 2-in. cubes (1 test)	Burned 15 sec
Thermal Stability Test (48 hr at 75°C)	
1-in. cube (1 test)	No change
2-in. cube (1 test)	No change
Autoignition Temperature, °F (DTA)	705
Impact Sensitivity, cm/2Kg*	23
NOL Card-Gap Test (6 tests)*	Negative (with no attenuation)

* Not DOT Test

DOT Classification Testing for ANB-3241 Propellant

Figure 19

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

was increased to provide improved erosion resistance and the carbon black level was decreased to maintain flow properties that permit spray application with the centrifugal applied liner (CAL) process. The compositions of the two materials are presented in Figure 20, together with their respective bond strengths. The excellent bond strengths of both insulation materials reflect the type of failure obtained with the PBAN liner systems in that cohesive failure occurred in the propellant in each test. The bond strength allowables were also determined and are discussed later in this section. The mechanical properties of IBS-105-3 at +77 and -65°F are shown below:

<u>Test Temperature, °F</u>	<u>Mechanical Properties</u>			
	<u>σ_m, psi</u>	<u>ϵ_m, %</u>	<u>ϵ_b, %</u>	<u>E_o, psi</u>
+77	183	110	114	383
-65	2966	9	75	58,306

The cure time selected for processing the IBS-105-3 liner is 18 ± 6 hr at +135°F, which is within the acceptable limits for this system.

<u>Liner Cure</u>		<u>Bond Strength</u>	
<u>Time, hr</u>	<u>Temperature, °F</u>	<u>Peel at +77°F, lb/in.</u>	<u>Tensile at +77°F, psi</u>
8	135	31	84
16	135	33	83
24	135	29	84

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

<u>Components</u>	<u>Equivalents Ratio</u>	<u>Composition, wt%</u>	
		<u>IBS-105-3</u>	<u>IBS-105-4X</u>
PBAN	45	50.49	49.04
MNA	45	2.67	2.62
LD-124	10	3.36	3.26
DER-332	110	12.96	12.58
FeAA		0.50	0.50
P-33		10.00	5.00
Sb ₂ O ₃		10.00	10.00
Asbestos		10.00	17.00
Bond Strength at +77°F			
Peel Strength, lb/in.		24	20
Tensile Strength, psi		64	65

Comparison of 2.75-in. FFAR Motor
Insulation and Bond Systems

Figure 20

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

g. Structural Integrity Evaluation of Propellant/Liner System

A laboratory test and analytical program has been completed having as its primary objective the verification of the structural adequacy of the propellant/liner system selected for use in the Improved 2.75-in. motor. The specific objectives were the following:

- (1) Fully characterize the physical and mechanical properties of ANB-3241-2.
- (2) Determine propellant and bond allowables for critical motor operating conditions.
- (3) Conduct cumulative damage analysis for the thermal cycling condition (150 to -65°F).
- (4) Verify analytical prediction by cycling full-scale motors to failure.

Laboratory tests conducted with samples from two propellant batches (68-46 and VBM-1-67-001), and the type of data obtained are summarized below:

Test	Data Obtained
1. Specific volume vs temperature	Coefficient of thermal expansion
2. Stress relaxation	Long term modulus (storage)
3. Broad spectrum constant rate tensile	Modulus, strength and elongation parameters vs rate and temperature
4. Full-scale and analogue motor thermal cycling	Allowable number of motor thermal cycles (-65 to 150°F)
5. Constant rate tensile with pressure	Allowable strain for firing
6. Constant rate bond tension	Allowable tensile stress for storage
7. Constant rate bond shear with pressure	Allowable shear stress for firing

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

In addition, a cumulative damage analysis of the motor cycling condition was conducted to provide analytical support to the experimental observation which indicated that ANB-3241-2 propellant has adequate capability to successfully withstand the required three cycles between the temperature extremes of -65 and 150°F in the full-scale motor configuration.

The results of the constant rate tests, which were remarkably consistent between the two batches, showed that the propellant properties are highly rate and temperature dependent. This characteristic was shown to be the major factor accounting for the successful thermal cycling performance despite low elongations measured at low temperatures at standard test rates.

Comparison of allowable strains and stresses with calculated requirements showed positive safety margins for all motor operating conditions. The validity of this analysis is confirmed by more than 50 static test firings of motors subjected to thermal cycling and vibrational environments and >600 flight tests.

Cumulative damage analyses for both shock and step-wise thermal cycling between the extremes of -65 and 150°F were conducted using recently developed techniques and propellant properties obtained from the laboratory testing. The results indicated no significant difference between the two types of cycle and predicted the earliest failures at about 11 cycles and 50% failures by the 34th cycle. Full-scale motor cycling results were in good agreement with these predictions.

Based on the results of the laboratory and analytical work it is concluded that the propellant and propellant-liner system selected for use in the 2.75-in. FFAR motor will satisfactorily meet all structural requirements.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)


(1) Physical Properties and Response Characterization

(a) Coefficient of Thermal Expansion

The volume coefficient of thermal expansion was determined by means of measurements of propellant density at various temperatures over the range -80 to $+80^{\circ}\text{F}$. The slope of a density - temperature plot provides the desired value. The linear coefficient is taken to be one third of the volumetric. The average linear value for ANB-3241-2 determined from tests of specimens from four batches is $6.0 \times 10^{-5} \text{ }^{\circ}\text{F}^{-1}$.

(b) Response Characterization

Stress relaxation tests were performed with end-bonded uniaxial specimens at -75 , -40 , 0 , 40 , 77 , 110 and 150°F .

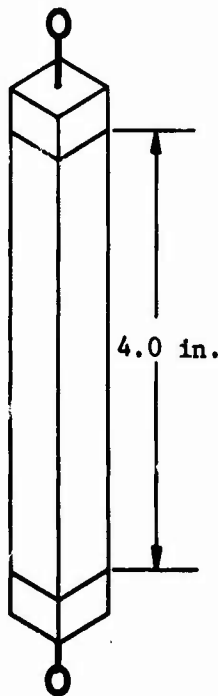

End-Bonded Uniaxial


UNCLASSIFIED

Report AFRPL-TR-69-90


II.A. Motor Design and Description (cont)

Strains of 0.5 - 1.0% were applied at a rate of 0.25 min^{-1} and held for 10 minutes while the decay in stress was measured. The data obtained were plotted in the form of relaxation modulus versus time for each test temperature. Superposition of the data was accomplished by correcting the modulus by the ratio, T_s/T , (T_s = reference temperature = 209°K (77°F), T = test temperature in $^\circ\text{K}$) and manually shifting the curves along the time axis until they superimposed at the reference temperature. The resulting "master curve," shown in Figure 21, provides the modulus data needed for the thermoviscoelastic analysis. The shift factors required to superpose the data are shown in Figure 22.

Constant rate tensile tests of uniaxial and biaxial specimens were conducted under conditions specified by the test plan shown below:

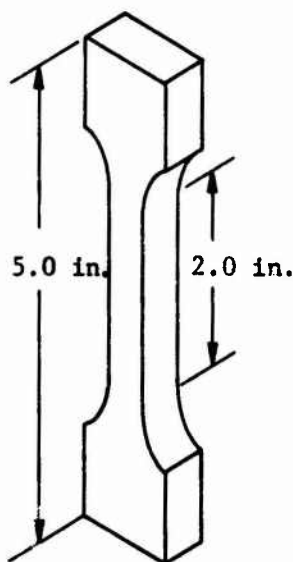


ICRPG Dumbbell

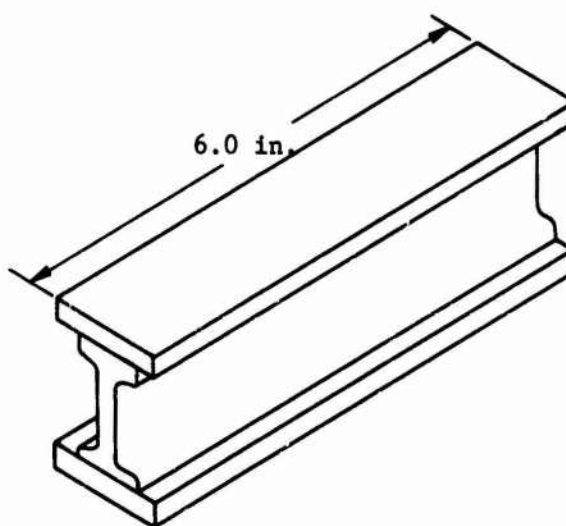

Biaxial Strip

UNCLASSIFIED

Report AFRPL-TR-69-90

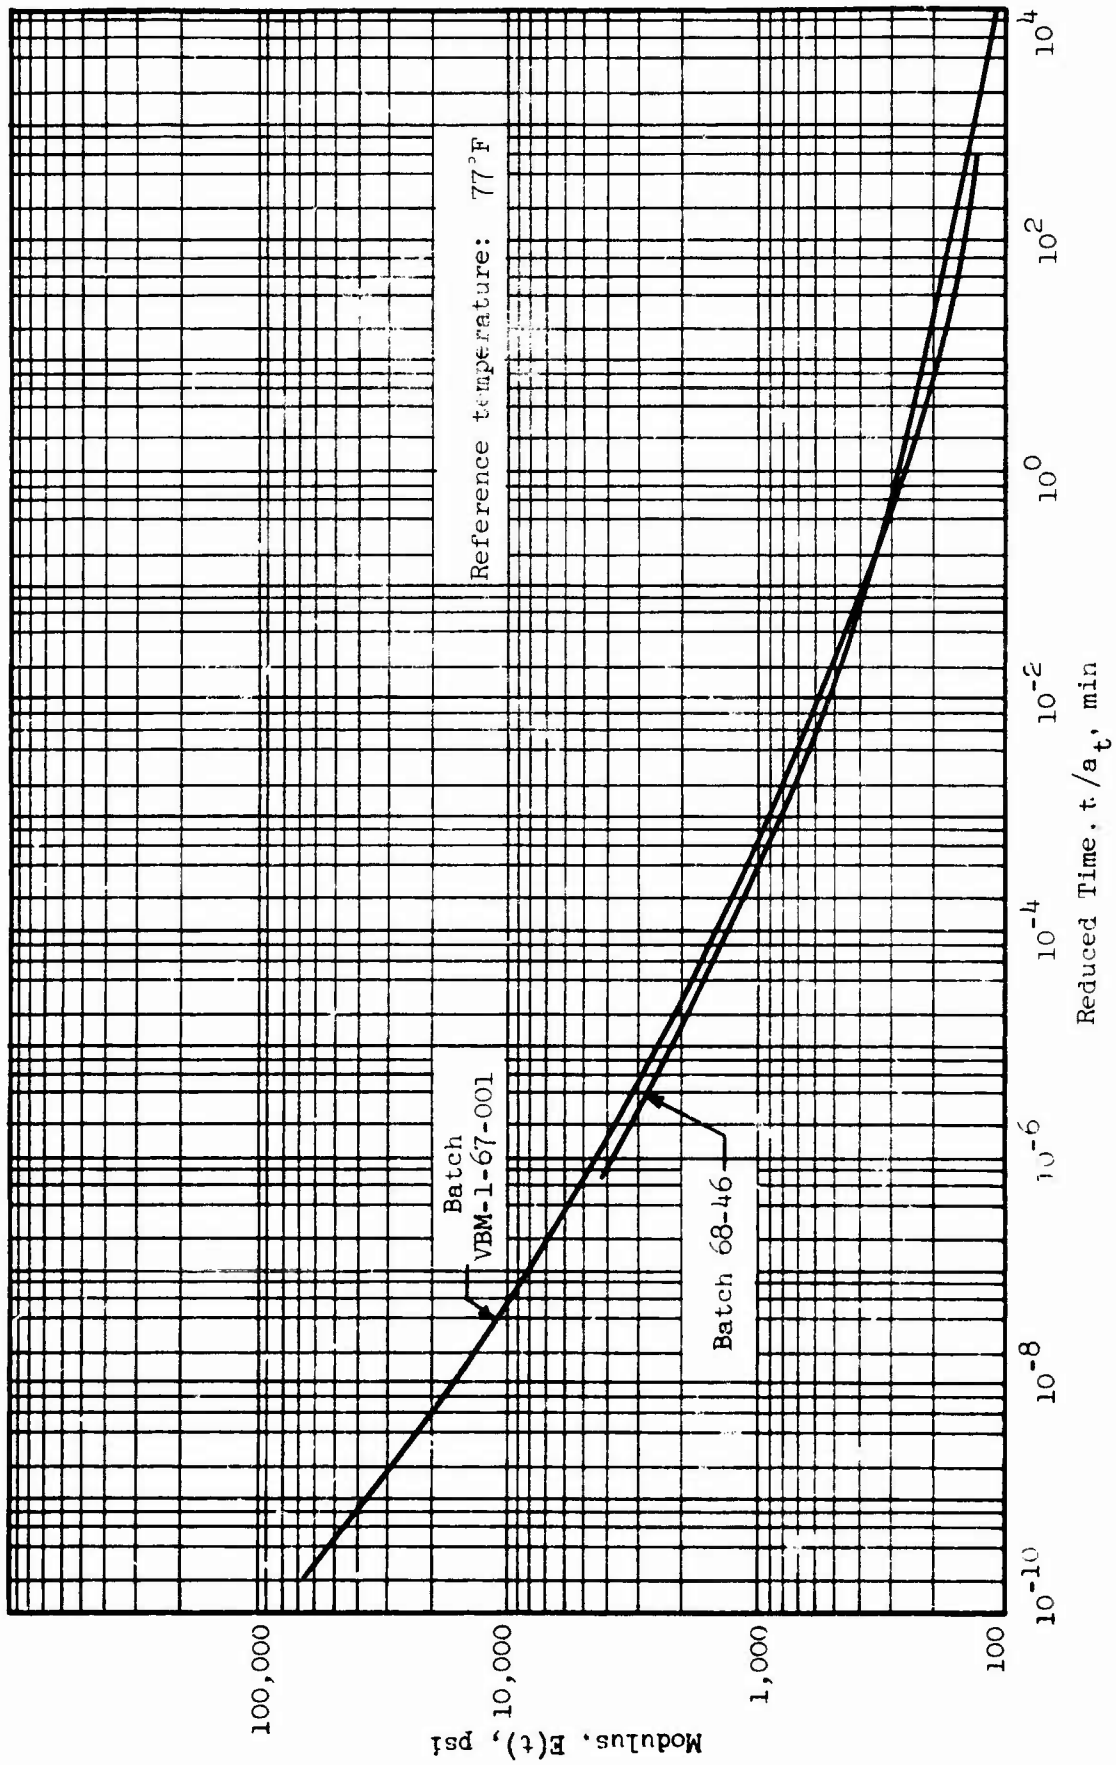


Master Relaxation Curve for ANB-3241-2

Figure 21

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

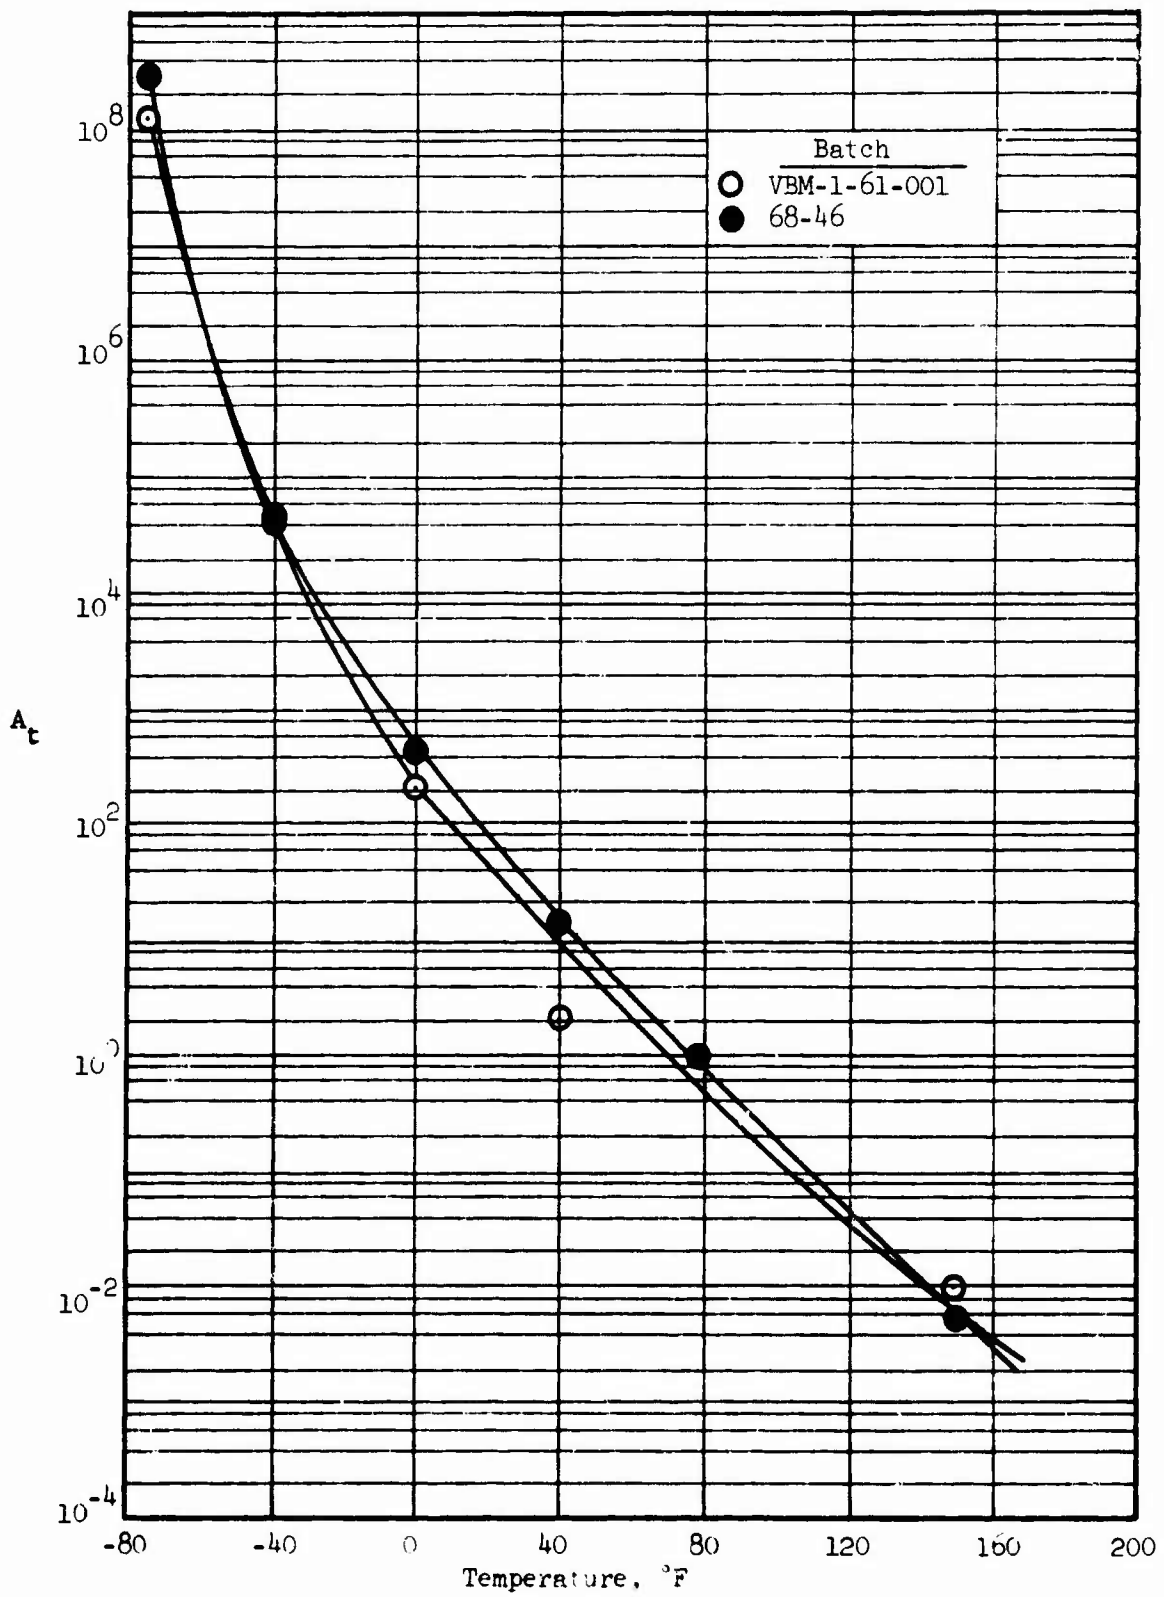

Time-Temperature Shift Factor for ANB-3241-2

Figure 22

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

Rate min^{-1}	-75	-65	-40	0	40	77	110	150
0.00015	X		X	X		X	X	X
0.0074						X ⁽³⁾	X	X ⁽³⁾
0.074						X ⁽³⁾	X ⁽¹⁾	
0.74	X ⁽¹⁾⁽³⁾		X ⁽¹⁾⁽³⁾		X ⁽¹⁾⁽³⁾	X ⁽¹⁾⁽³⁾	X ⁽³⁾	
7.4						X ⁽³⁾		
10		X ⁽²⁾						
100		X ⁽²⁾	X			X		
1000	X	X ⁽²⁾				X		

-
- (1) Indicates conditions for biaxial tests
 - (2) Tests with 1000 psig pressure and 12% pre-strain
 - (3) Uniaxial strains measured by extensometer


This matrix was designed to characterize the tensile behavior over a wide range of rate and temperature. It also includes the testing needed to determine the allowable strain for firing.

Modulus values pertinent to the analysis of high rate loading conditions, such as handling, acceleration and firing, are obtained from a plot of modulus vs reduced strain rate ($\dot{\epsilon} a_T$) as shown in Figure 23 for a reference temperature of 17°F. Moduli for other temperatures can be simply determined from this plot by multiplying the strain rate of interest by the appropriate a_T from Figure 22 and entering the curve of Figure 23 at that point.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

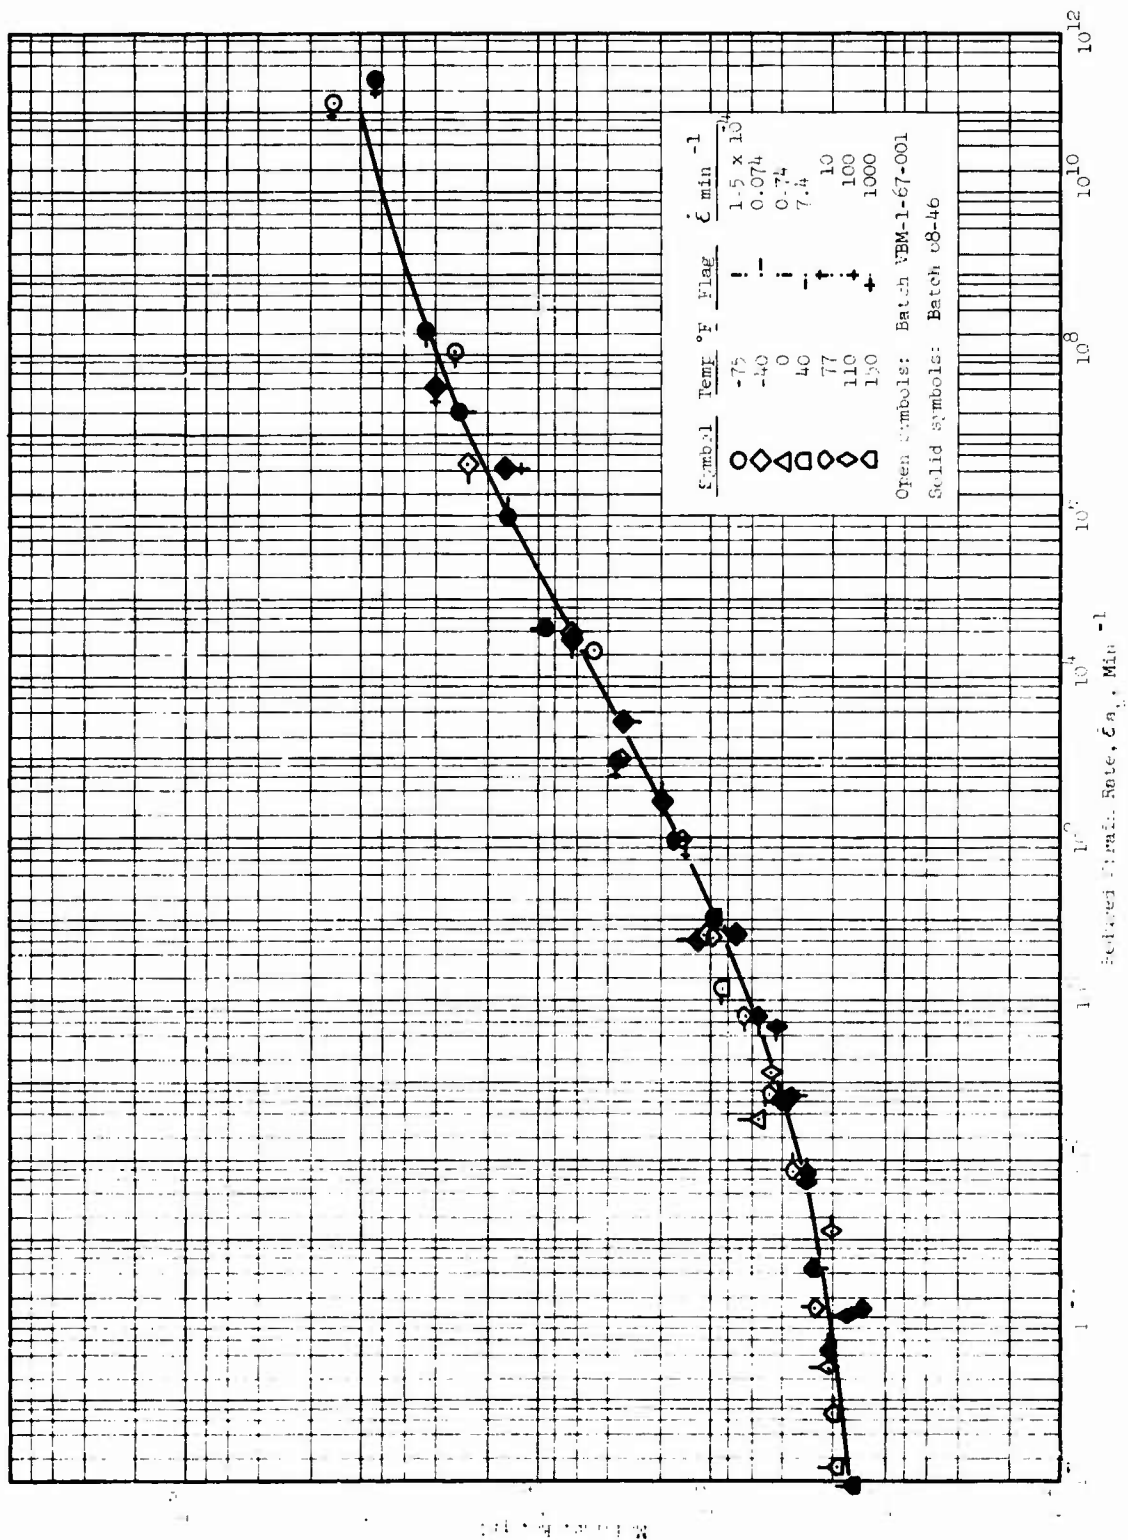

Modulus vs Reduced Strain Rate for ANB-3241-2 Propellant

Figure 23

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

A "Smith-type" failure envelope for ANB-3241-2 is shown plotted in Figure 24 with both the uniaxial and limited biaxial strip data shown. At the lower stress values, corresponding to the lower strain rates and higher temperatures, the biaxial elongations are about 70% of those from the uniaxial tests. At the higher stress values, however, there appears to be no significant difference.

Figures 25, 26, and 27 show the elongation parameters ϵ_m , ϵ_b , and σ_m/E plotted vs reduced strain rate for reference temperatures of 77°F and -65°F. It will be noted that the elongation is quite rate sensitive and passes through a maximum at 77°F at a rate between 10 and 100 min⁻¹. The maximum strain rate application to the cooling of a full-scale 2.75-in. motor from 150 to -65°F can be simply estimated since it is known that the maximum strain at the inner bore at -65°F is 12.7% and the minimum time required to reach thermal equilibrium at -65°F is about 2.5 hours. Thus:

$$\dot{\epsilon} = \frac{0.127}{2.5 \times 60} = 8.5 \times 10^{-4} \text{ min}^{-1}$$


It can be seen from Figure 25, by referring to the strain rate scale representing a reference temperature of -65°F, that the elongation corresponding to the motor strain rate is about 13% compared to about 5% at the standard rate of 0.74 min⁻¹. Further, on that part of the curve any reduction in the rate of cooling would lower the strain rate and result in even higher elongations.

This example is presented to emphasize that elongation values obtained from standard rate tests at low temperatures are not necessarily indicative of the propellant's capability, or lack of same, to perform satisfactorily under a given motor condition. A proper assessment must take into account the rate and temperature dependence of the propellant and relate these to the particular motor condition being analyzed.

UNCLASSIFIED

UNCLASSIFIED


Report AFRPL-TR-69-90

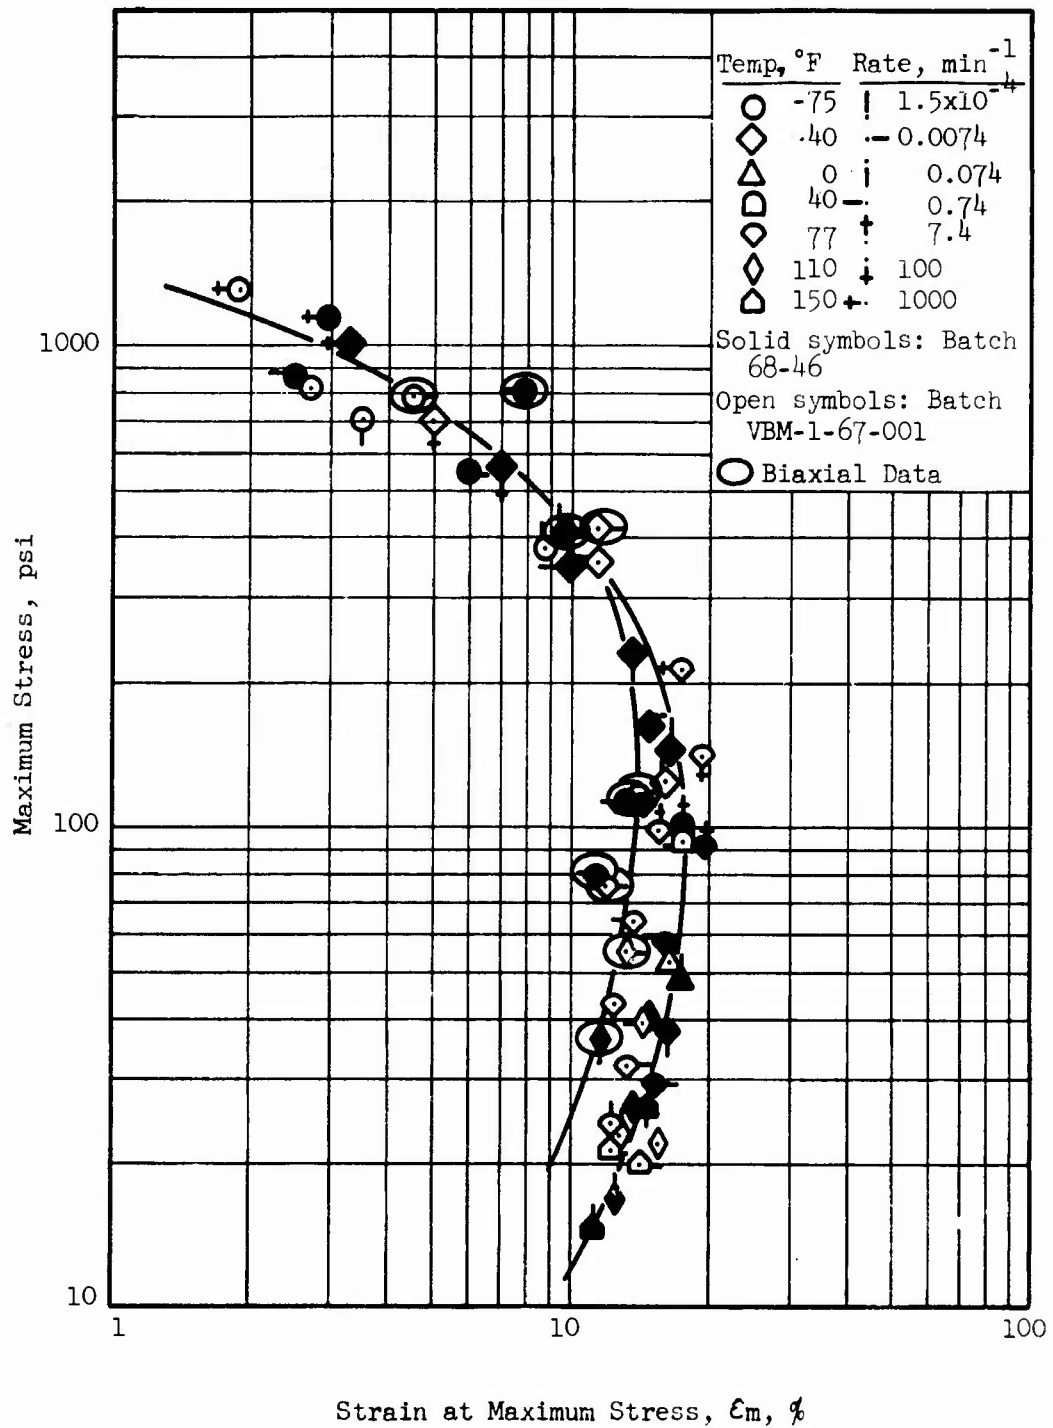

"Smith-Type" Failure Envelope for ANB-3241-2

Figure 24

UNCLASSIFIED

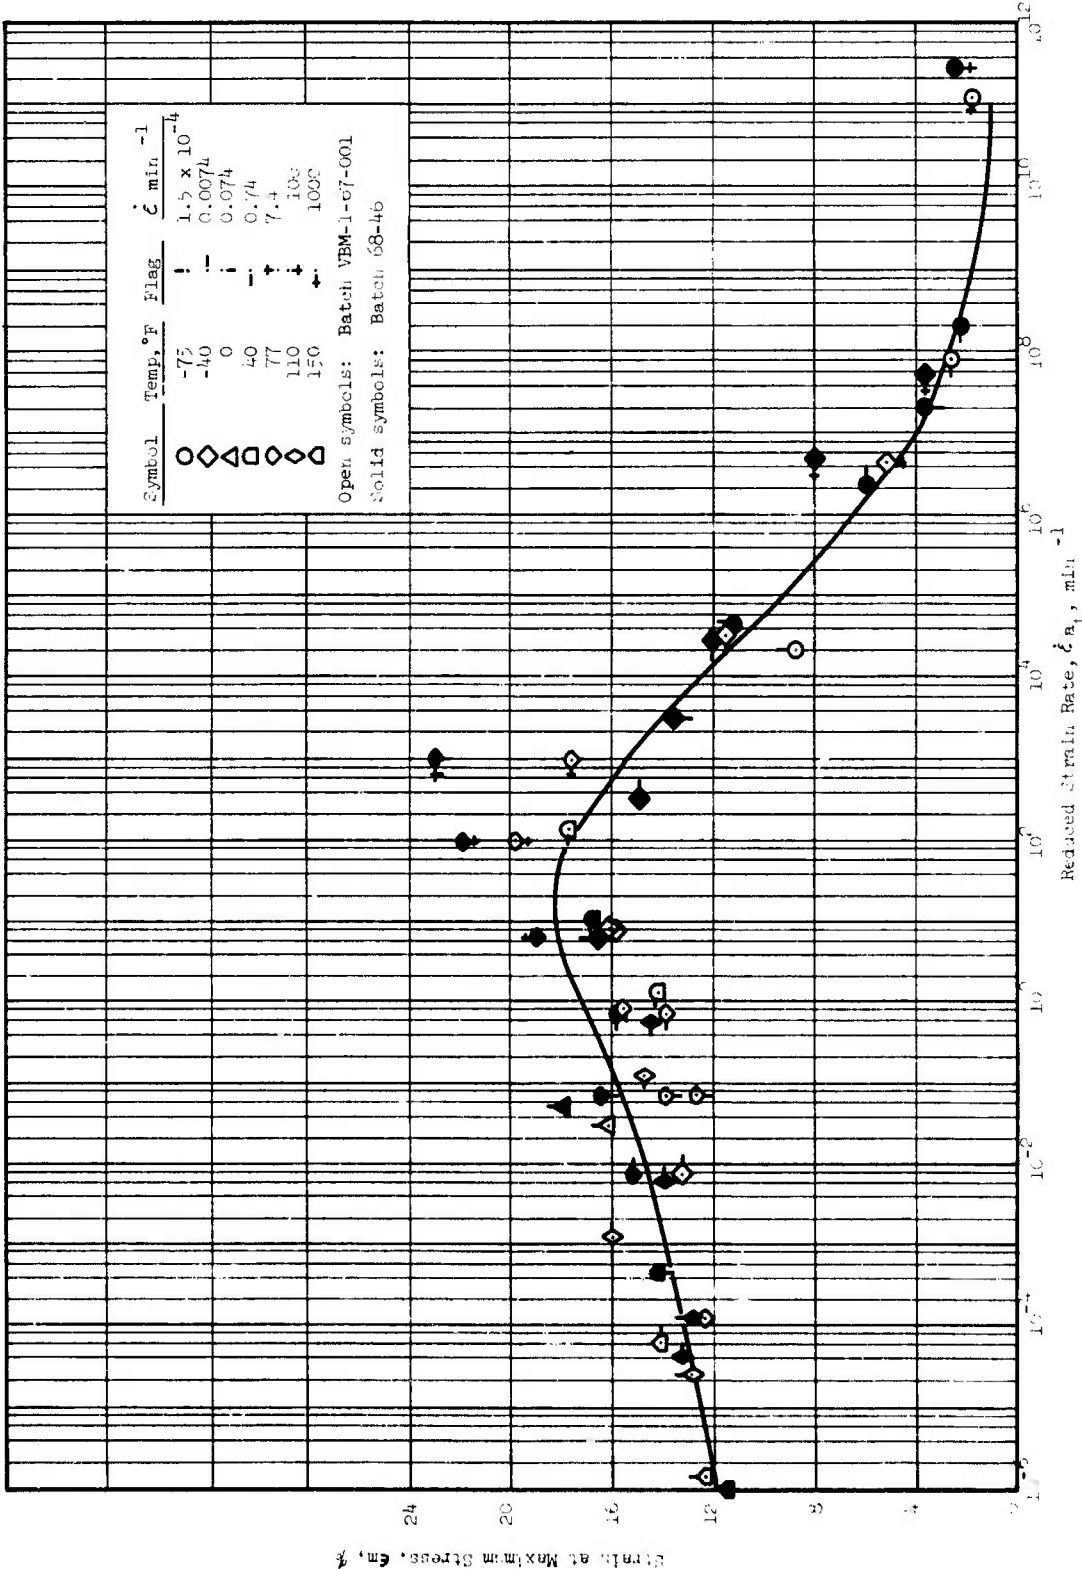


Strain at Maximum Stress vs Reduced Strain Rate for ANB-3241-2 Propellant

Figure 25

UNCLASSIFIED

Report AFRPL-TR-69-90

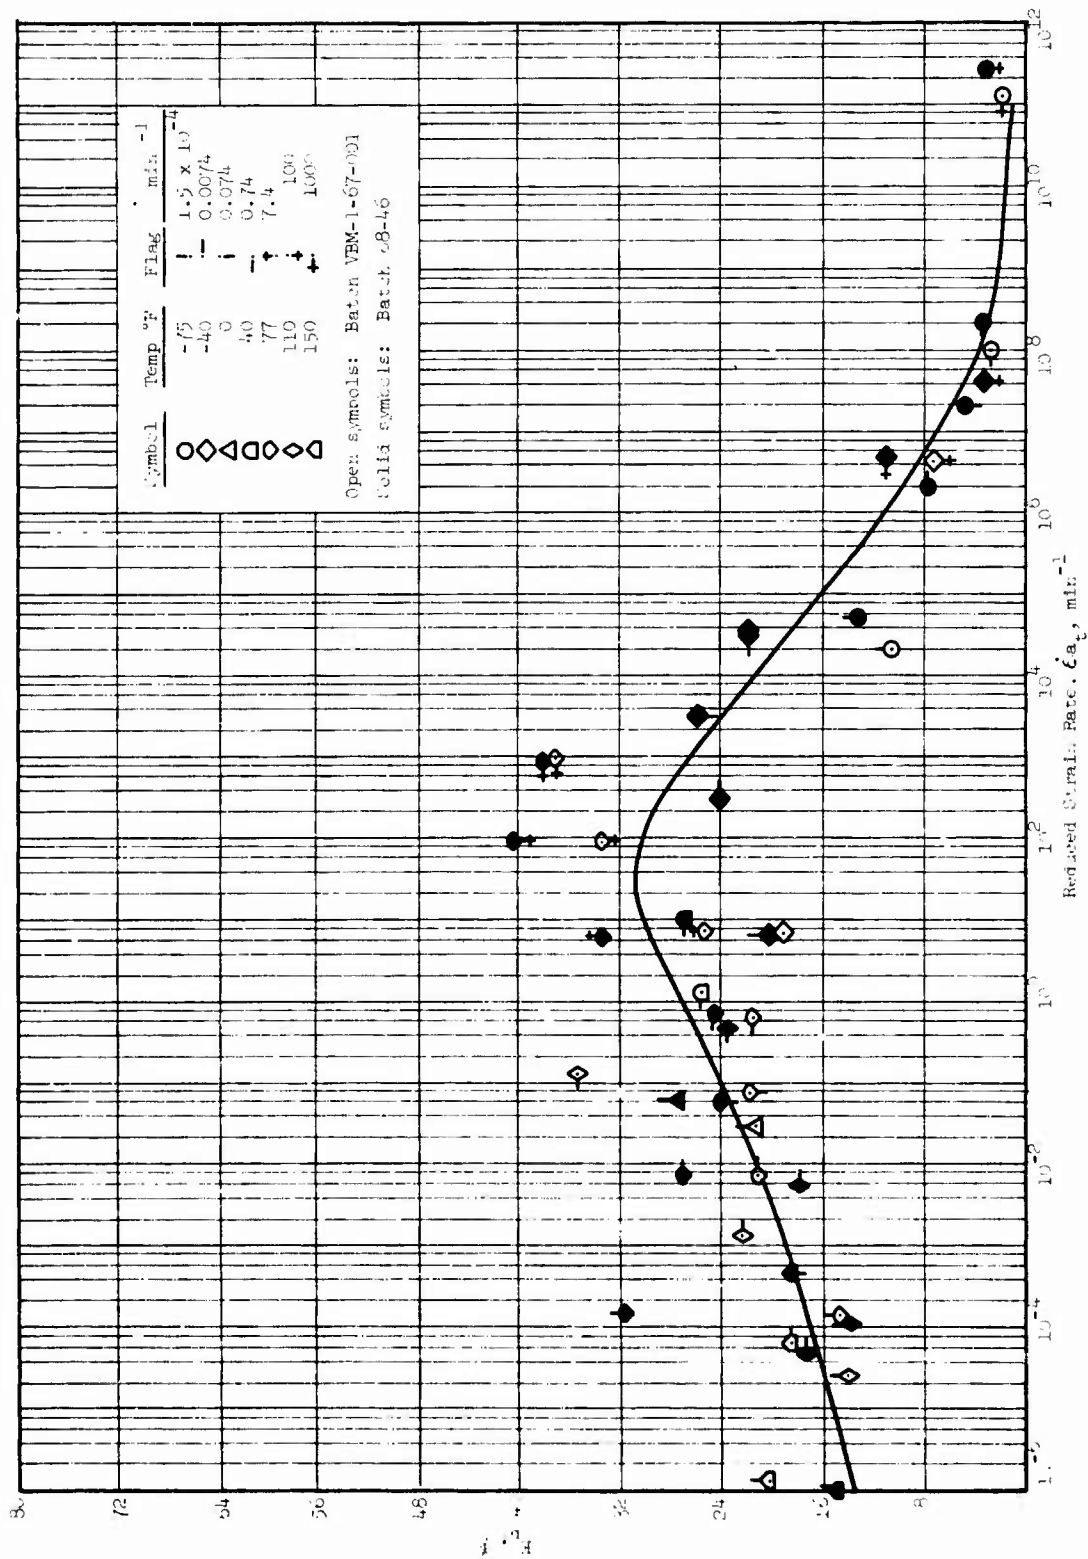


Strain at Break vs Reduced Strain Rate for ANB-3241-2 Propellant

Figure 26

UNCLASSIFIED

UNCLASSIFIED

Report AFRPT-TR-69-90

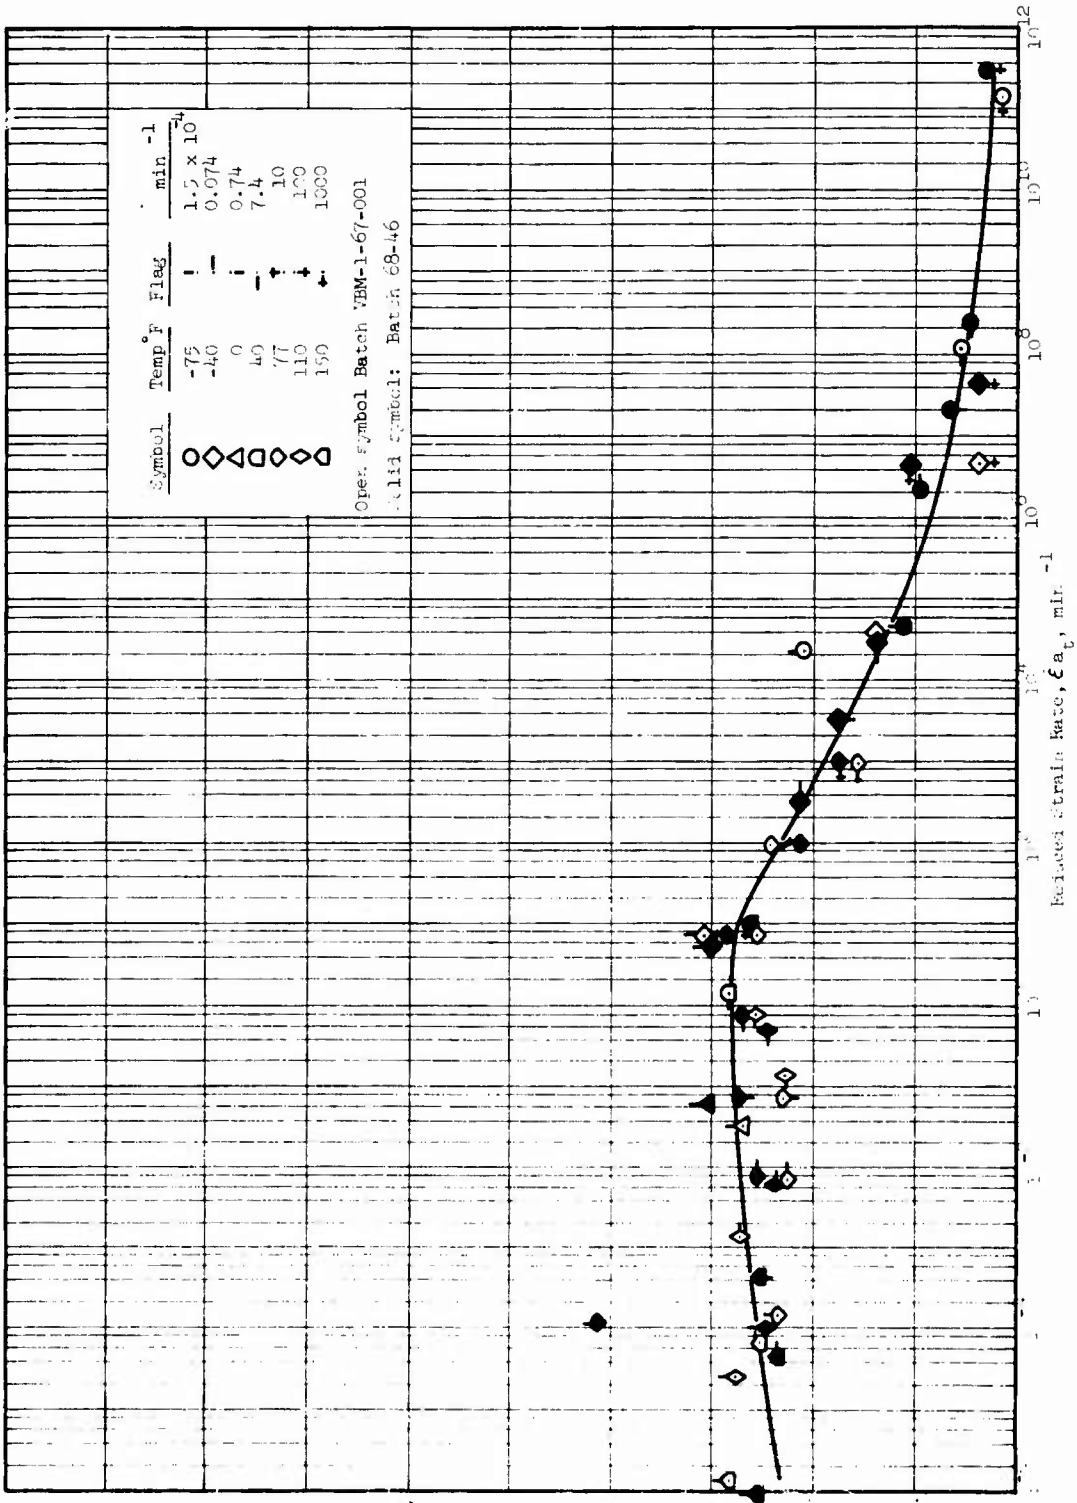

Strain Parameter σ_m / E_0 vs Reduced Strain Rate for ANB-3241-2 Propellant

Figure 27

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

To further demonstrate the path dependency effects two specimens each were strained at 77°F to 5, 7.5, 10, 12.5, and 15% held for 24 hours, then cooled while under strain to -65°F. No failures occurred after six weeks. The specimens were brought up to 77°F, strained an additional 5% and then cooled again to -65°F. No failures occurred after four weeks. Similar tests were conducted with specimens from Batch VBM-1-67-001 at strain levels of 15, 17.5, 20, 22.5, 25 and 30%. All specimens held at the latter three strain levels failed within one day. The rest have resisted failure for six weeks.

(2) Propellant and Bond Allowables

The methods used to estimate the allowable strains and stresses for the propellant and bonds are based on simulating the critical motor conditions in the laboratory, by means of careful specimen design and environmental control, and treating the resulting data to account for the expected variability in properties. The basic relation used in calculating the allowables is given below:

$$X_a = \bar{X} K [1 - (3 + a) V] \quad (1)$$

Where

X_a = allowable stress or strain

$\bar{X}$ = mean measured property obtained under appropriate test conditions

K = stress concentration of multiaxiality correction factor

a = statistical parameter which depends upon number of samples tested and level of confidence required

V = coefficient of variation for property being measured

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

(a) Strain Allowables

1 Thermal Cycling

Because of the complications presented by factors such as path dependency, the evaluation of thermal cycling capability cannot be handled simply using uniaxial or biaxial tests. The best approach has been the use of analogue motors, with cylindrical bores of various sizes, thermally cycled to failure. In the case of the 2.75-in. motor the small size makes it convenient to test the full-scale article. Data for 16 full-scale motors from five different cast lots cycled between 150 and -65°F are presented below.

Cast Lot	Measured Strain, %	Cycles Completed* Without Failure	Remarks
6	12.4	10	Failed
	12.3	27	Failed
	12.4	27	Failed
	12.1	16	Failed
	12.1	28	Failed
7	11.7	20	No failure. Test discontinued
	10.2	20	No failure. Test discontinued
9	11.3	10	No failure. Test discontinued
	10.8	10	No failure. Test discontinued
	10.5	5	Failed (scratch on bore)
10	11.8	4	Failed (scratch on bore)
	10.8	9	Failed
12	13.0	10	No failure. Test discontinued
	12.9	10	No failure. Test discontinued
	12.8	10	No failure. Test discontinued
	12.9	10	No failure. Test discontinued

* - 65 to +150°F


UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

Numerous strain cylinders prepared from half length 2.75-in. motor cases with different bore sizes have been tested.

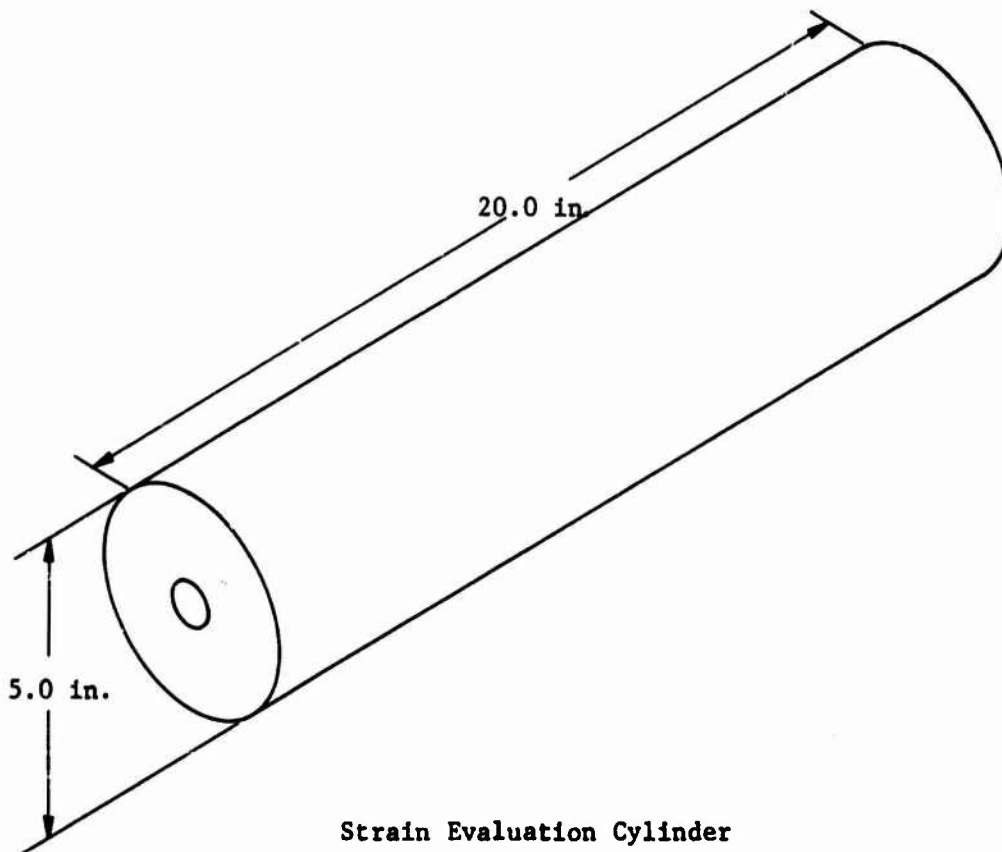

The results from 20 cylinders from four cast lots summarized below indicate a satisfactory safety margin for the specification requirements of three cycles.

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

<u>Cast Lot</u>	<u>Measured Strain, %</u>	<u>Cycles Completed⁽¹⁾ Without Failure</u>	<u>Remarks</u>
6	13.6	5	Failed
	13.9	18	Failed
	13.4	12	Failed
	14.4	6	Failed
8	12.3	17	Failed
	12.0	11	Failed
	12.6	14	Failed
	11.4	21	Failed
	15.7 ⁽²⁾	11	Failed
	15.3 ⁽²⁾	9	Failed
10	12.4	6	Failed
	12.3	9	Failed
	15.7 ⁽²⁾	9	Failed
	15.7 ⁽²⁾	6	Failed
12	12.4	6	Failed
	12.1	10	Failed
	12.2	6	Failed
	11.9	5	Failed
	15.5 ⁽²⁾	5	Failed
	15.4 ⁽²⁾	5	Failed

2 Firing

The allowable inner bore hoop strain for firing at -65°F was estimated from the results of high rate tensile tests of pre-strained specimens. The tests were conducted in a high pressure (1000 psig) environment to simulate the conditions at the inner bore during motor ignition. The pre-strain on the specimens was about 12% corresponding to the

(1) -65 to +150°F

(2) Core size: 0.60-in. diameter; all others 0.70-in. diameter

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)


expected maximum thermal strain at the inner bore at -65°F . Of primary interest for this condition is the propellants' capability to withstand the additional strain, over and above the thermal strain already present, imposed by motor pressurization. These allowable incremental strains, calculated using Equation (1), are shown in Figure 28. A K value of 0.83 was used to correct the uniaxial values to equivalent biaxial elongations.

The allowable obtained for the time corresponding to time to peak ignition pressure (150 msec) would be 3%. This compares with a calculated requirement of 2.7%. Thus, an adequate margin of safety exists for the firing condition.

(b) Bond Stress Allowables

1 Storage

An evaluation of the bond capability for storage was made from the results of constant rate tension tests of poker-chip sandwich specimens. The specimens made from Batch 68-46 used IBS-105-4X

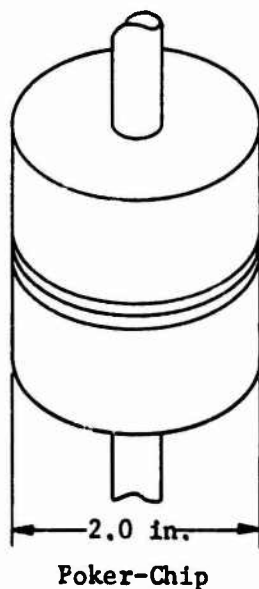

UNCLASSIFIED

Report AFRPL-TR-69-90

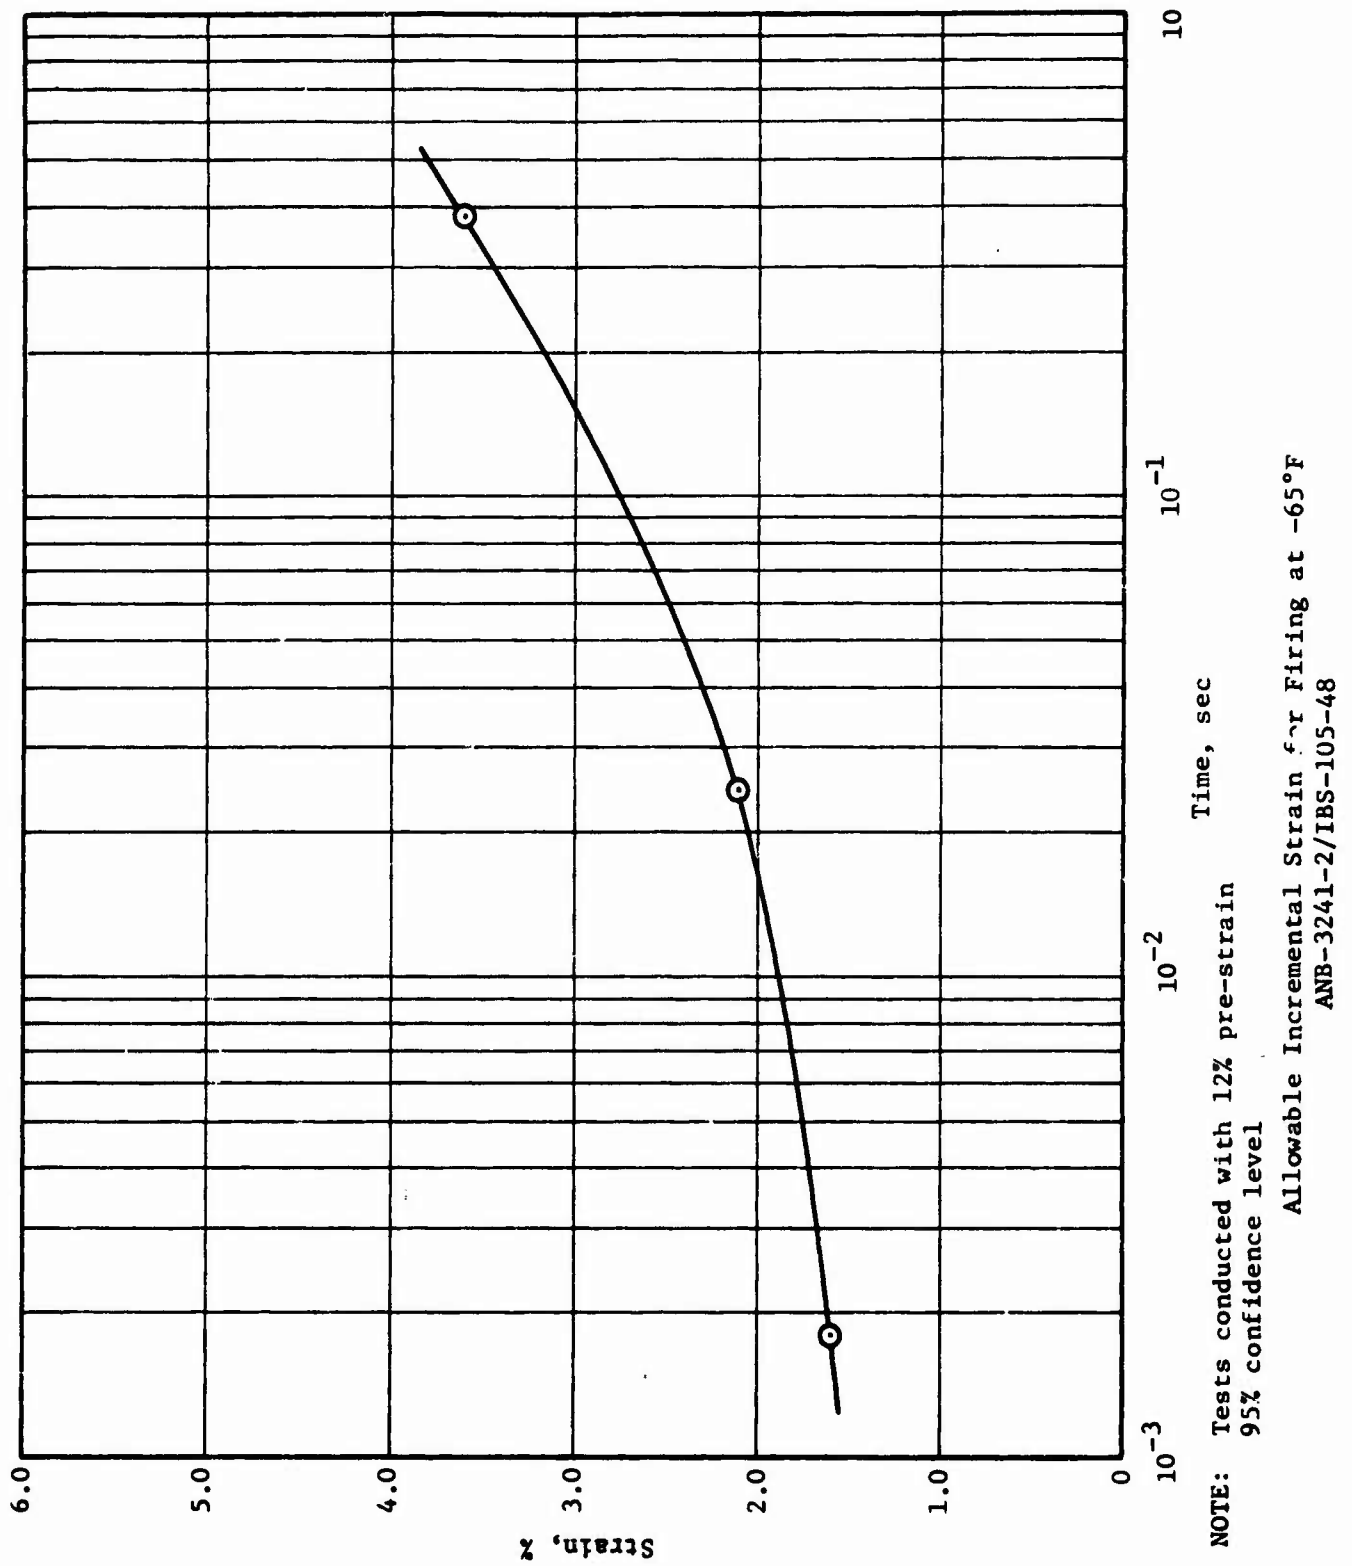


Figure 28

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

insulation while those prepared with propellant from VBM-1-67-001 contained IBS-105-3 insulation. Tests were conducted at crosshead rates of 0.02, 0.2 and 2.0 inches per minute and temperatures of -65, 77 and 150°F. The results plotted in the form of stress vs reduced time to failure for a reference temperature of -65°F are presented in Figure 29. The estimated allowable stress was obtained from these data by use of Equation (1) with K taken to be 1.4. In addition the time values were corrected by a factor $A = 0.1$, to account for the fact that during the constant rate test the maximum stress is not applied to the specimen for the full duration of the test.

Comparison of the allowables thus obtained, out to storage time in excess of one year, indicate large margins of safety.

2 Firing

Poker-chip bond specimens tested in shear at several rates, and with superimposed pressure, provide the data needed for calculation of the allowable bond shear stresses for motor firing. Again Equation (1) was used with a K factor of 1.2. The results for firing temperatures of -65 and 150°F are shown in Figure 30. The calculated requirements for these temperatures are 465 and 10.6 psi, respectively. These compare with allowable values taken at 150 msec of 980 and 110 psi. Again adequate safety margins are indicated.


(3) Cumulative Damage Analysis

The 2.75-in. motor was subjected to analyses of transient heat conduction, thermoviscoelasticity, and cumulative damage using the properties obtained from laboratory tests of propellant ANB-3241-2, Batch 68-46. The pertinent properties used are presented in Figure 31.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

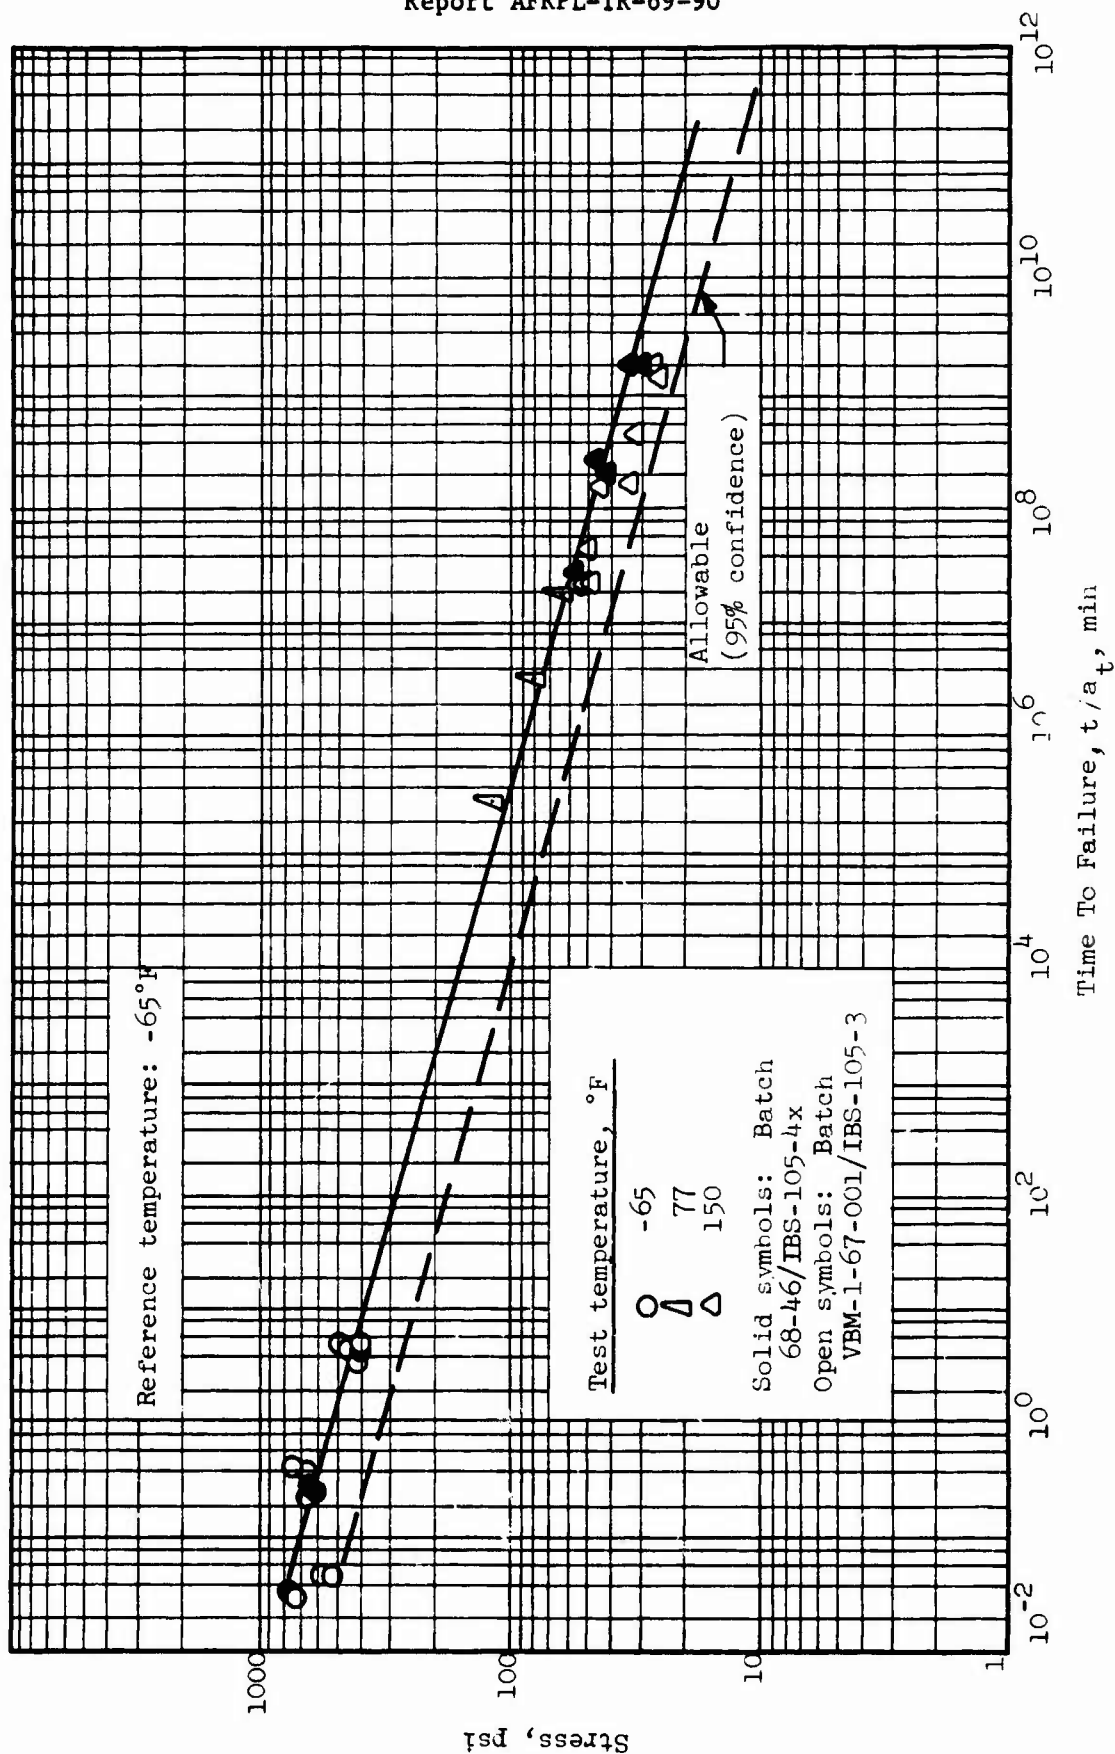


Allowable Tensile Stress for Storage of 2.75-in. Motor Propellant-to-Liner Bond

Figure 29

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

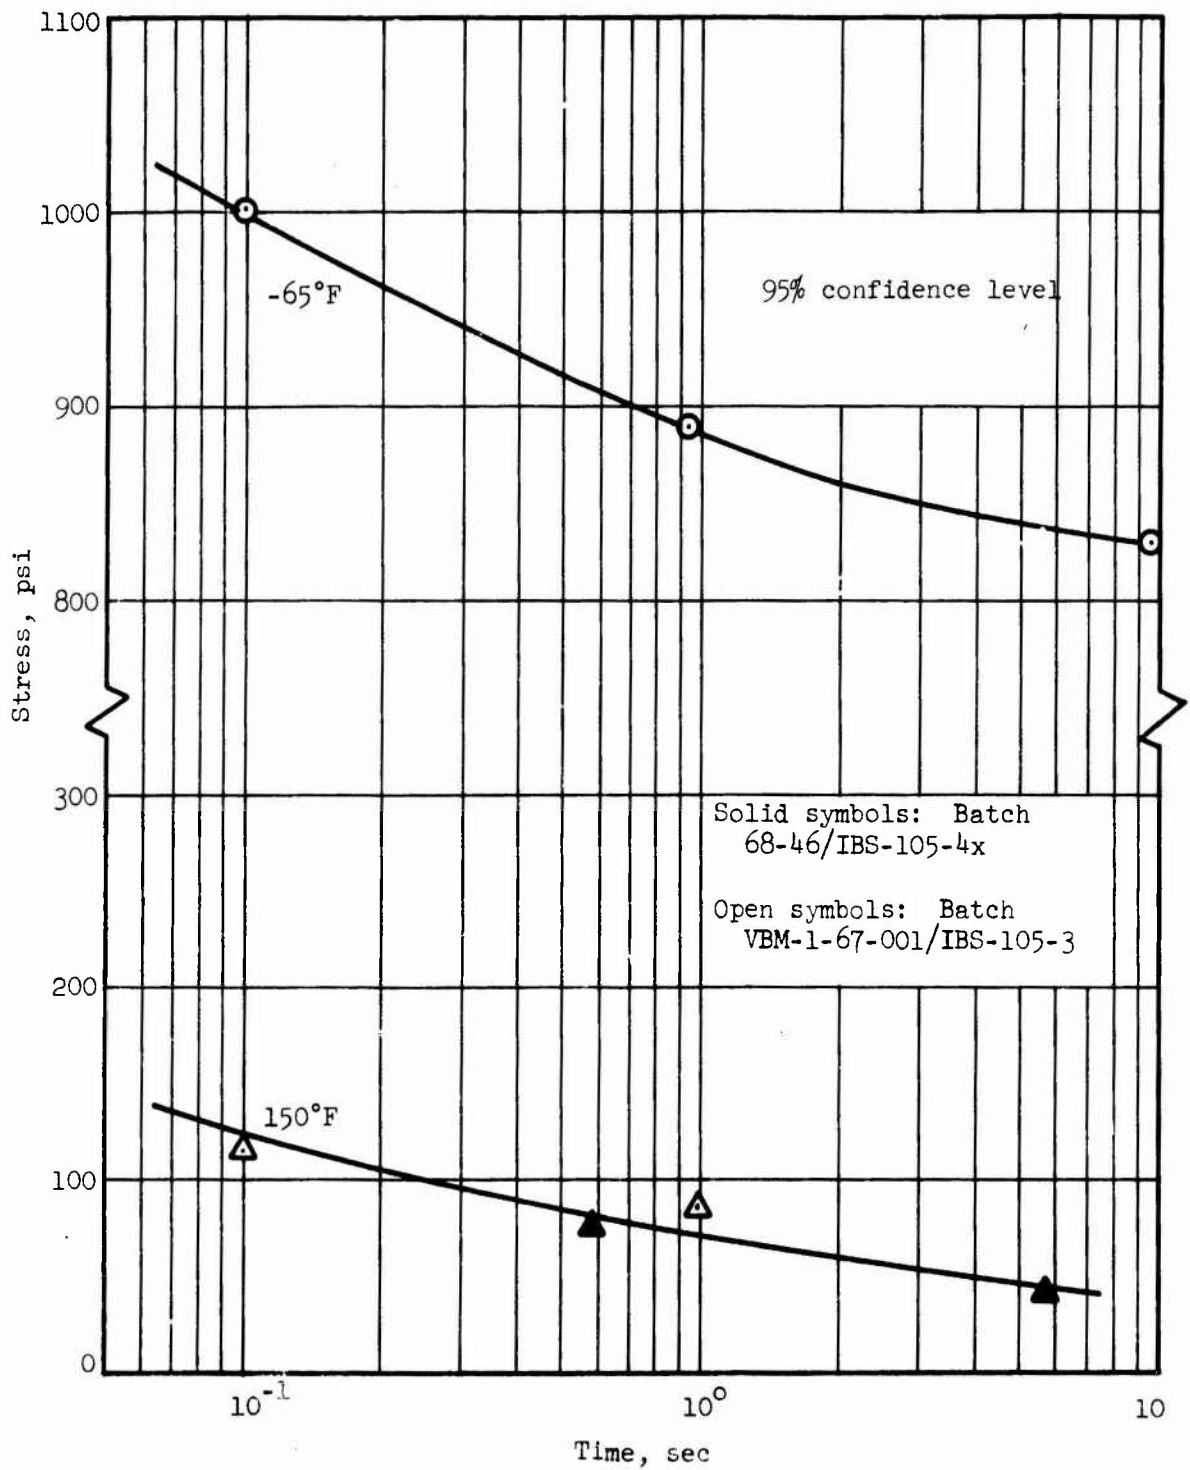

Allowable Bond Shear Stress for Firing
of 2.75-in. Motor Propellant-to-Liner Bonds

Figure 30

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

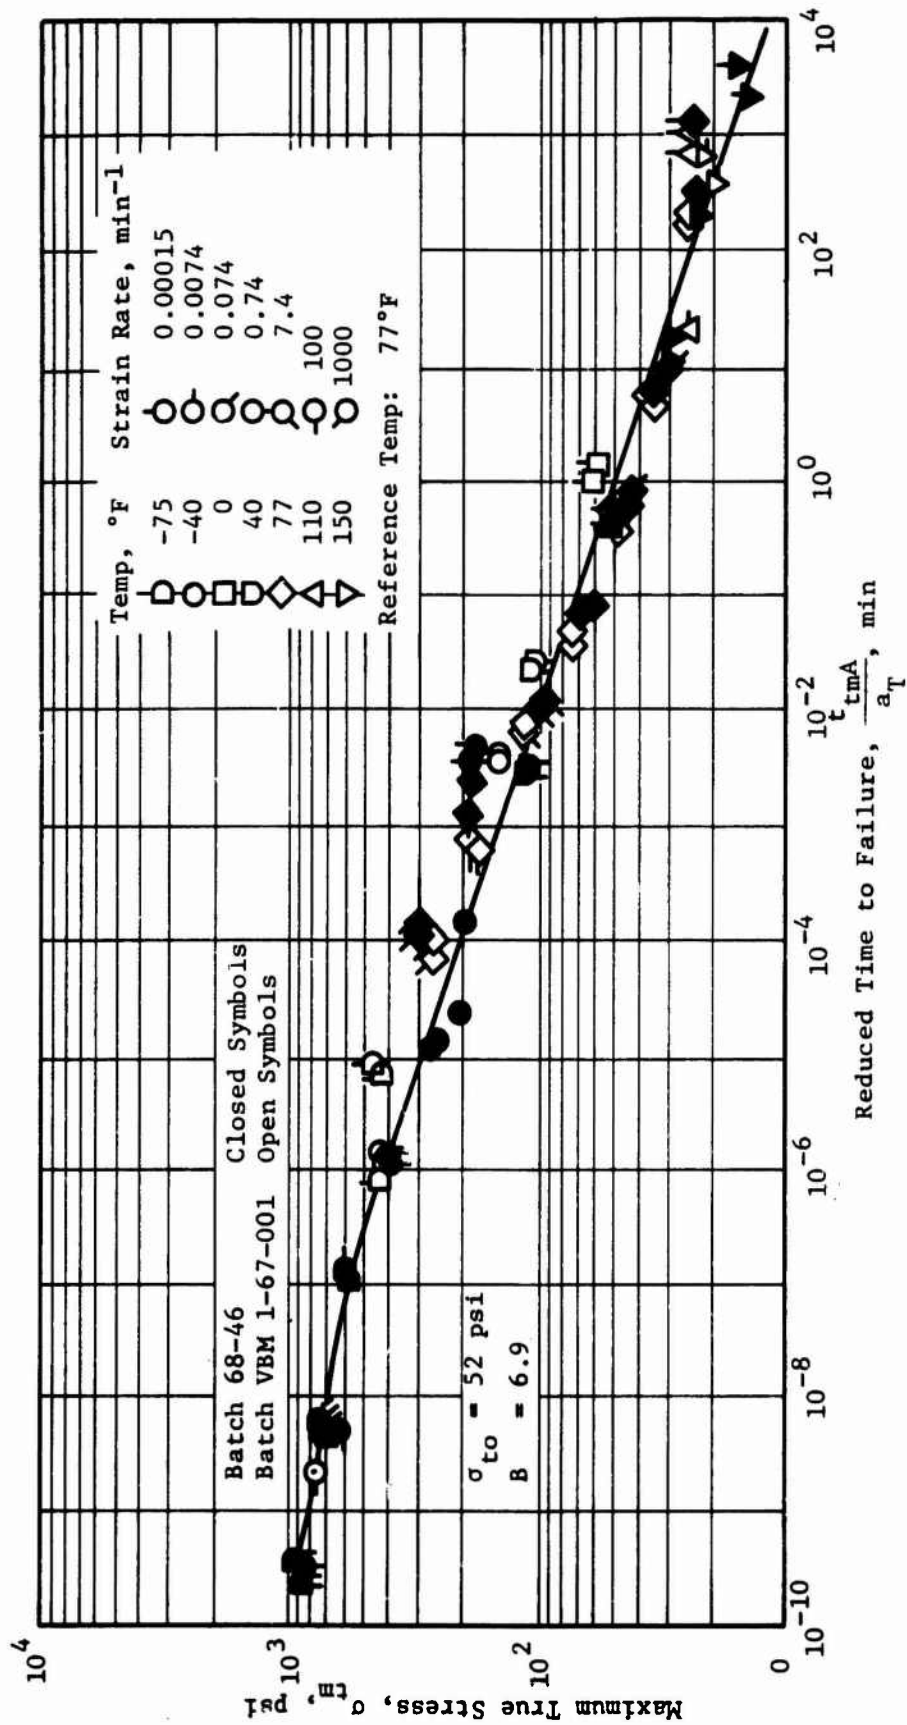


Figure 31

UNCLASSIFIED

Maximum True Stress vs Reduced Time to Failure for
ANB-3241-2 Propellant

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

The three analyses were programed as an integrated computer routine with a relatively simple format for the data print-out. Two thermal histories for the motor were analyzed: (1) for shock thermal cycling, where the motors are transferred rapidly from a hot (+150°F) to a cold (-65°F) conditioning cell, and vice versa; and (2) for step-wise cooling of the motors where they are exposed sequentially to the following temperatures: +110, +77, +40, 0, -40, -65, and +150°F. The analyses involved five shock thermal cycles (Case 1) and three step-wise thermal cycles (Case 2). A 24-hr period was allowed for equilibration of all temperatures.

(a) Case 1 - Shock Thermal Cycling

Temperatures and calculated inner-bore hoop stress and strain, for the first thermal cycle are summarized in Figure 32. No significant stress buildup was observed on subsequent cycles. The cumulative damage analysis for the inner-bore is summarized in Figure 33, which shows that after five cycles a significant margin exists.

The damage fraction* at the end of three cycles is 0.082 and at the end of the fifth cycle is 0.144. Extrapolation of the damage calculations indicates that 50% of the motors from these batches would be expected to fail before the 34th cycle. Also, the lower tolerance limit would be exceeded after about 11 or 12 thermal cycles. Thus, the analytical predictions are consistent with full-scale motor cycling tests.


The radial stress-vs-temperature analyses for the propellant-to-liner bond line are given in Figure 34. The corresponding damage analysis is given in Figure 35. The damage fraction (5.46×10^{-4}) after five cycles falls far short of that required to predict bond failures in these motors.

*The percent of damage that has occurred, compared to the estimated nominal amount of damage required to cause failure.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

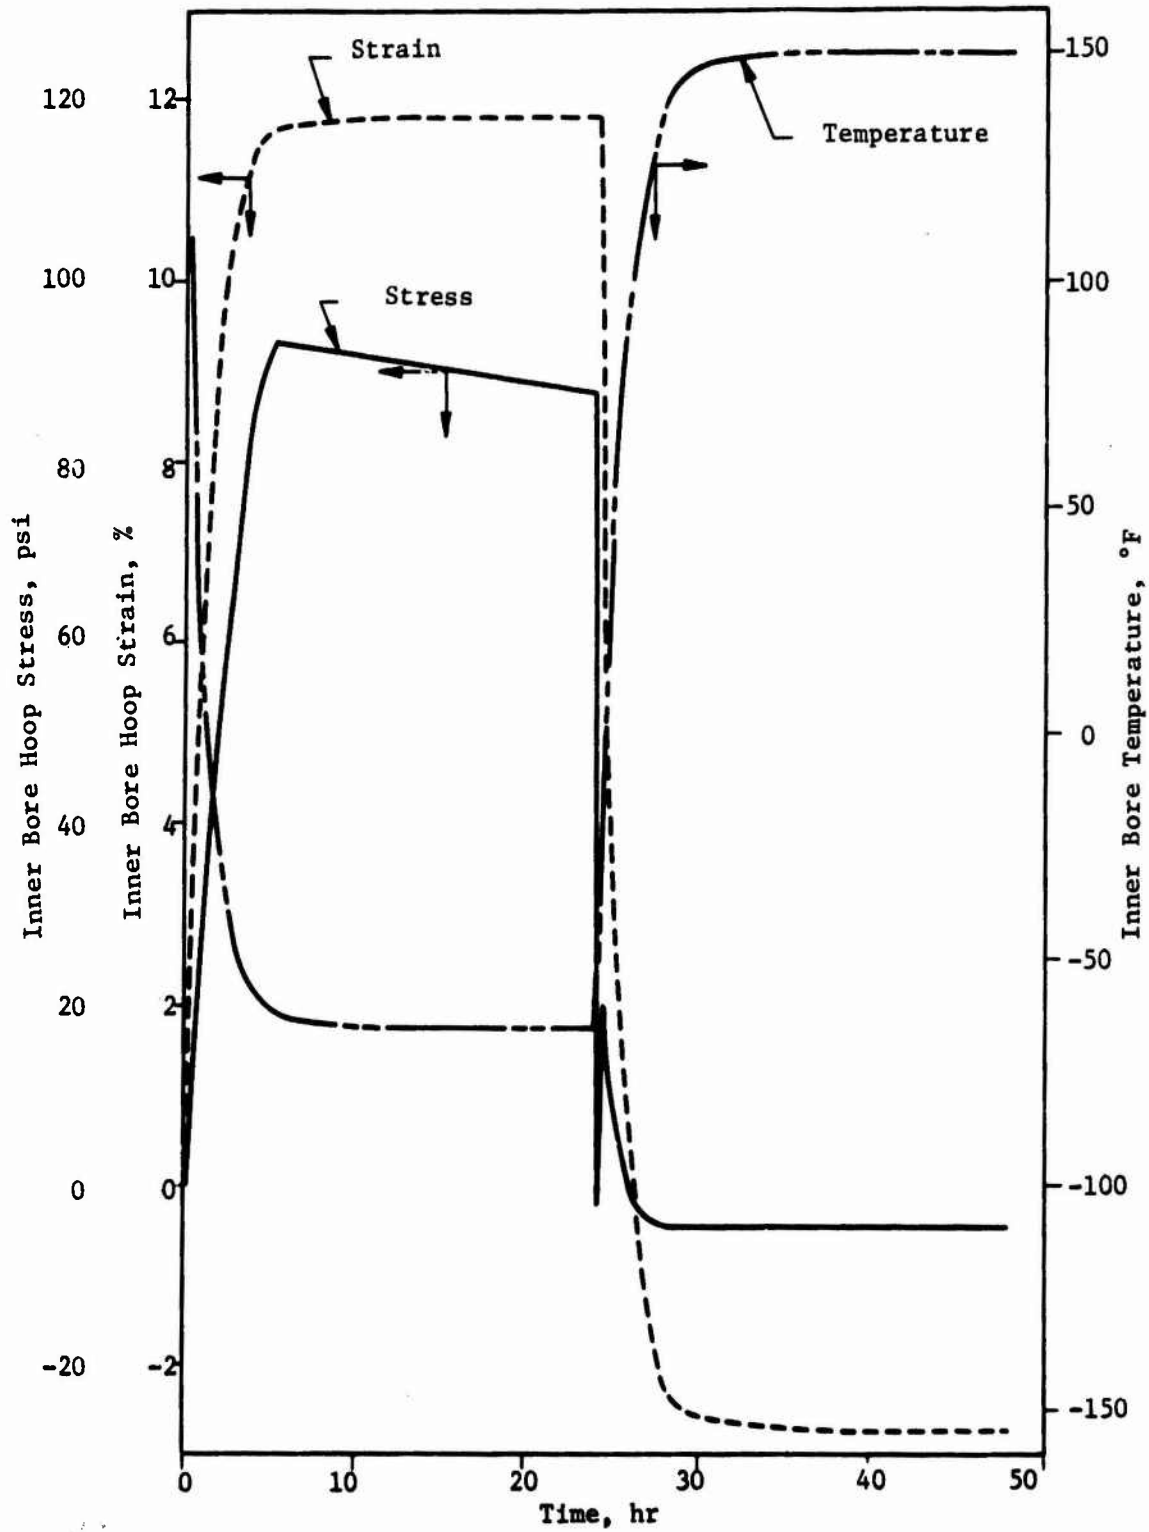


Inner Bore Temperature and Calculated Hoop Stress and Strain During First Shock Thermal Cycle

Figure 32
UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

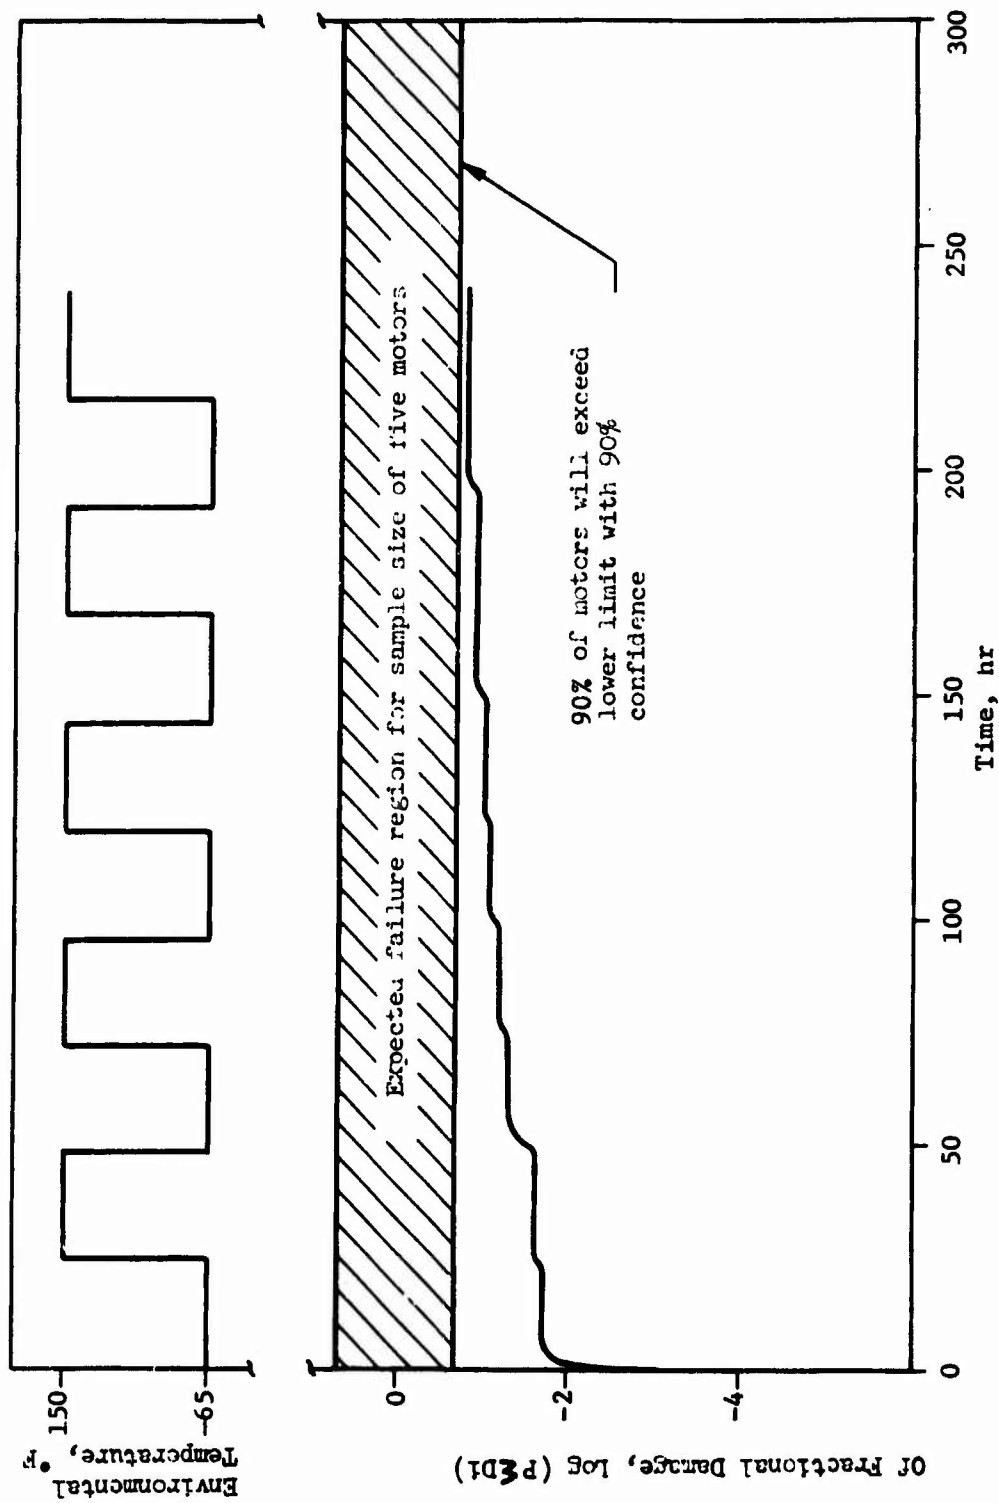


Calculated Cumulative Damage at the Inner Bore for Shock Thermal Cycling

Figure 33

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

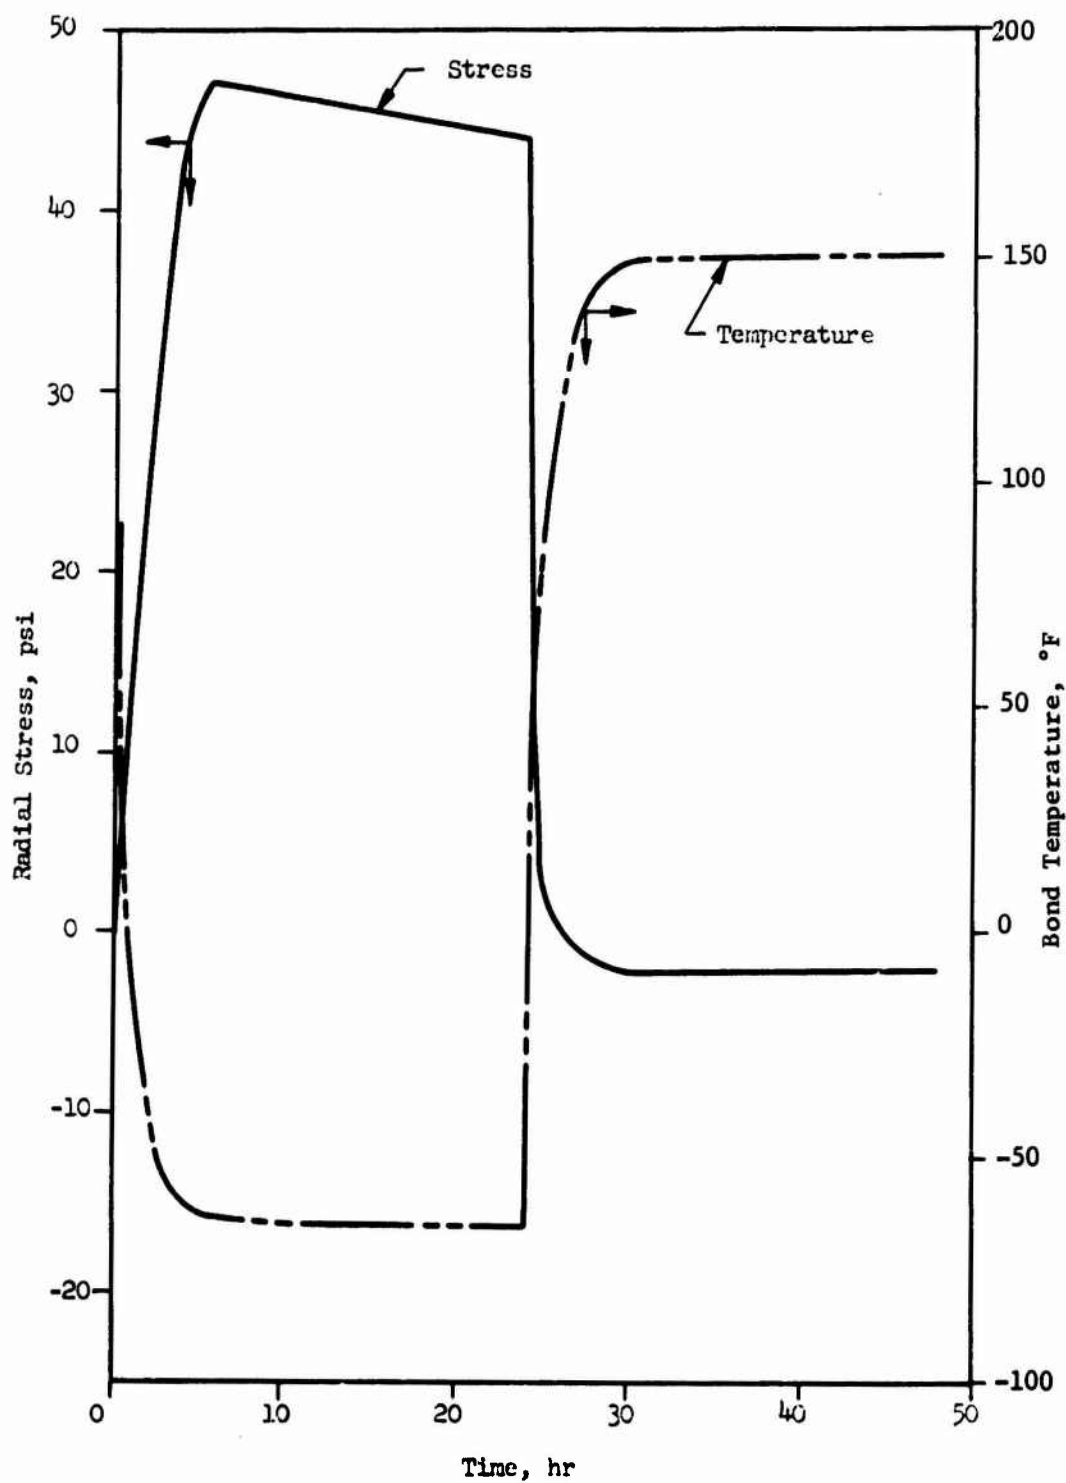


Propellant/Liner Bond Temperature and Calculated Radial Stress During First Shock Thermal Cycle

Figure 34

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

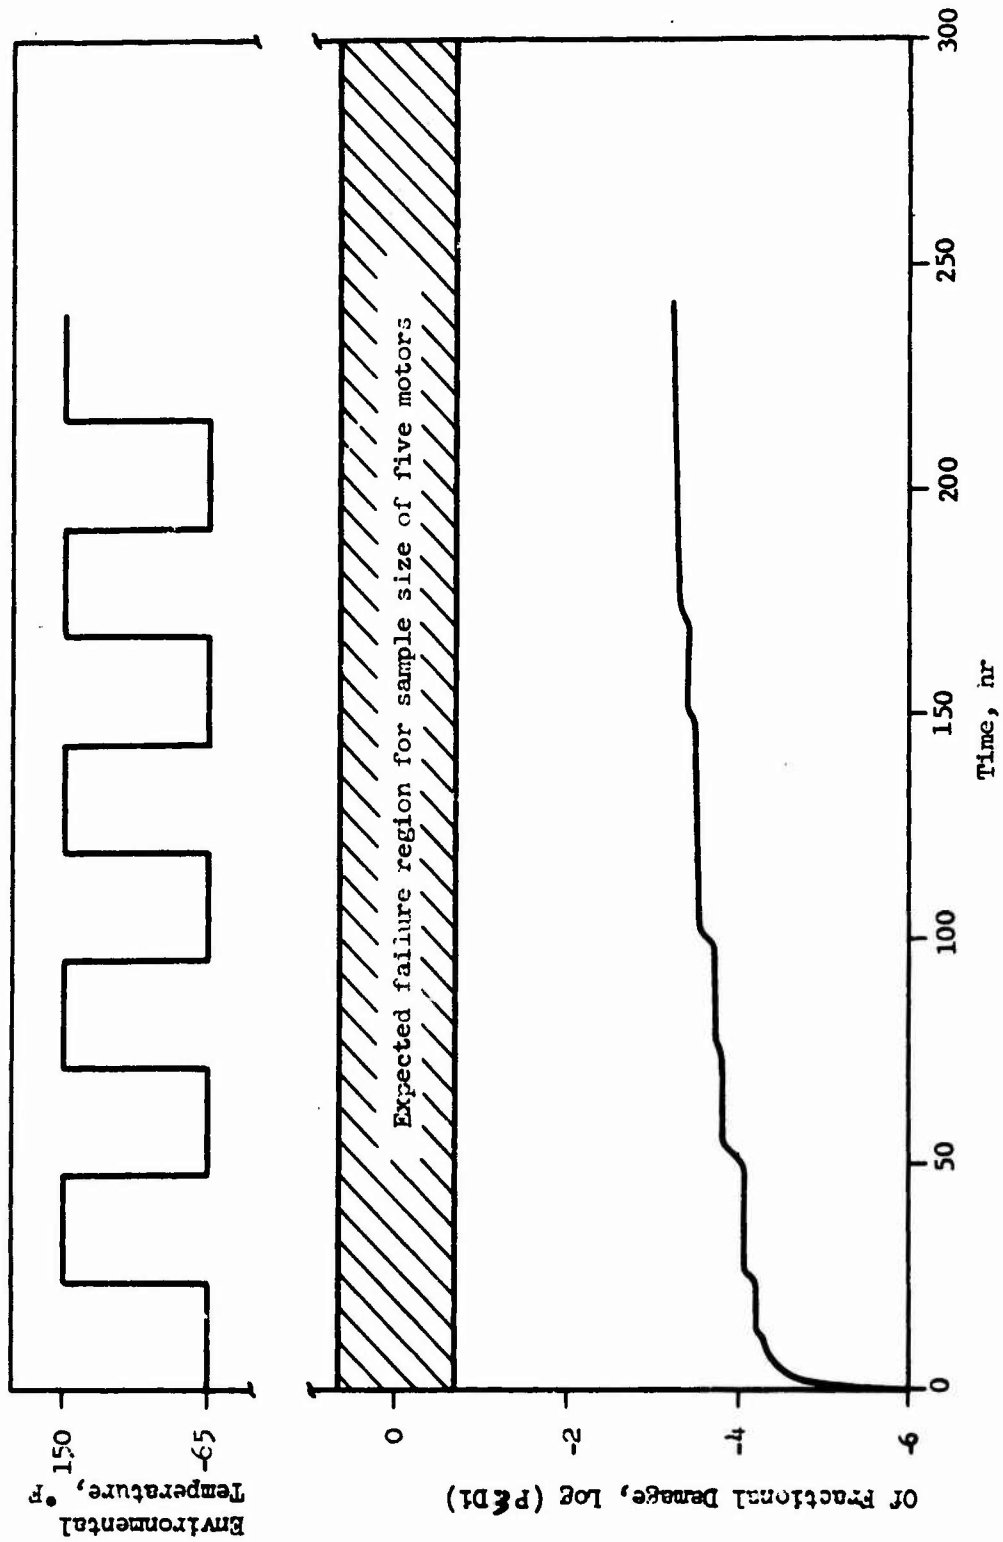

Calculated Cumulative Damage of the Propellant/Liner Bond During Shock Thermal Cycling

Figure 35

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

(b) Case 2 - Step-Wise Thermal Cycling

The bore temperature and calculated inner-bore hoop stress and strain are summarized in Figure 36. Cumulative damage for the first three cycles is summarized in Figure 37. The total damage fraction at the end of the third cycle is 0.089, which compares with the value of 0.082 predicted for the shock thermal cycling. Therefore, it appears that no significant difference would occur in motor failure behavior for the two thermal cycling histories.

The propellant-to-liner bond radial stress analysis and bond temperature are summarized in Figure 38 while the damage analysis is given in Figure 39. As in Case 1, the damage fraction is negligible at the bond (6.42×10^{-4}) at the end of three thermal cycles.

h. Propellant Storage Tests

In compliance with the Contract Work Statement storage tests were conducted to determine the effects of relative humidity exposure and high temperature on the mechanical properties of ANB-3241-2 propellant.


(1) Relative Humidity Storage Tests

The storage tests to determine the effects of long term exposure to various relative humidities on the propellant mechanical properties are not complete at this time. The available test data are shown in Figure 40. Low temperature properties show no change on exposure to 90, 70, 35 and 0 percent relative humidity while the ambient and +150°F test properties show the expected decrease in propellant tensile strength and

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

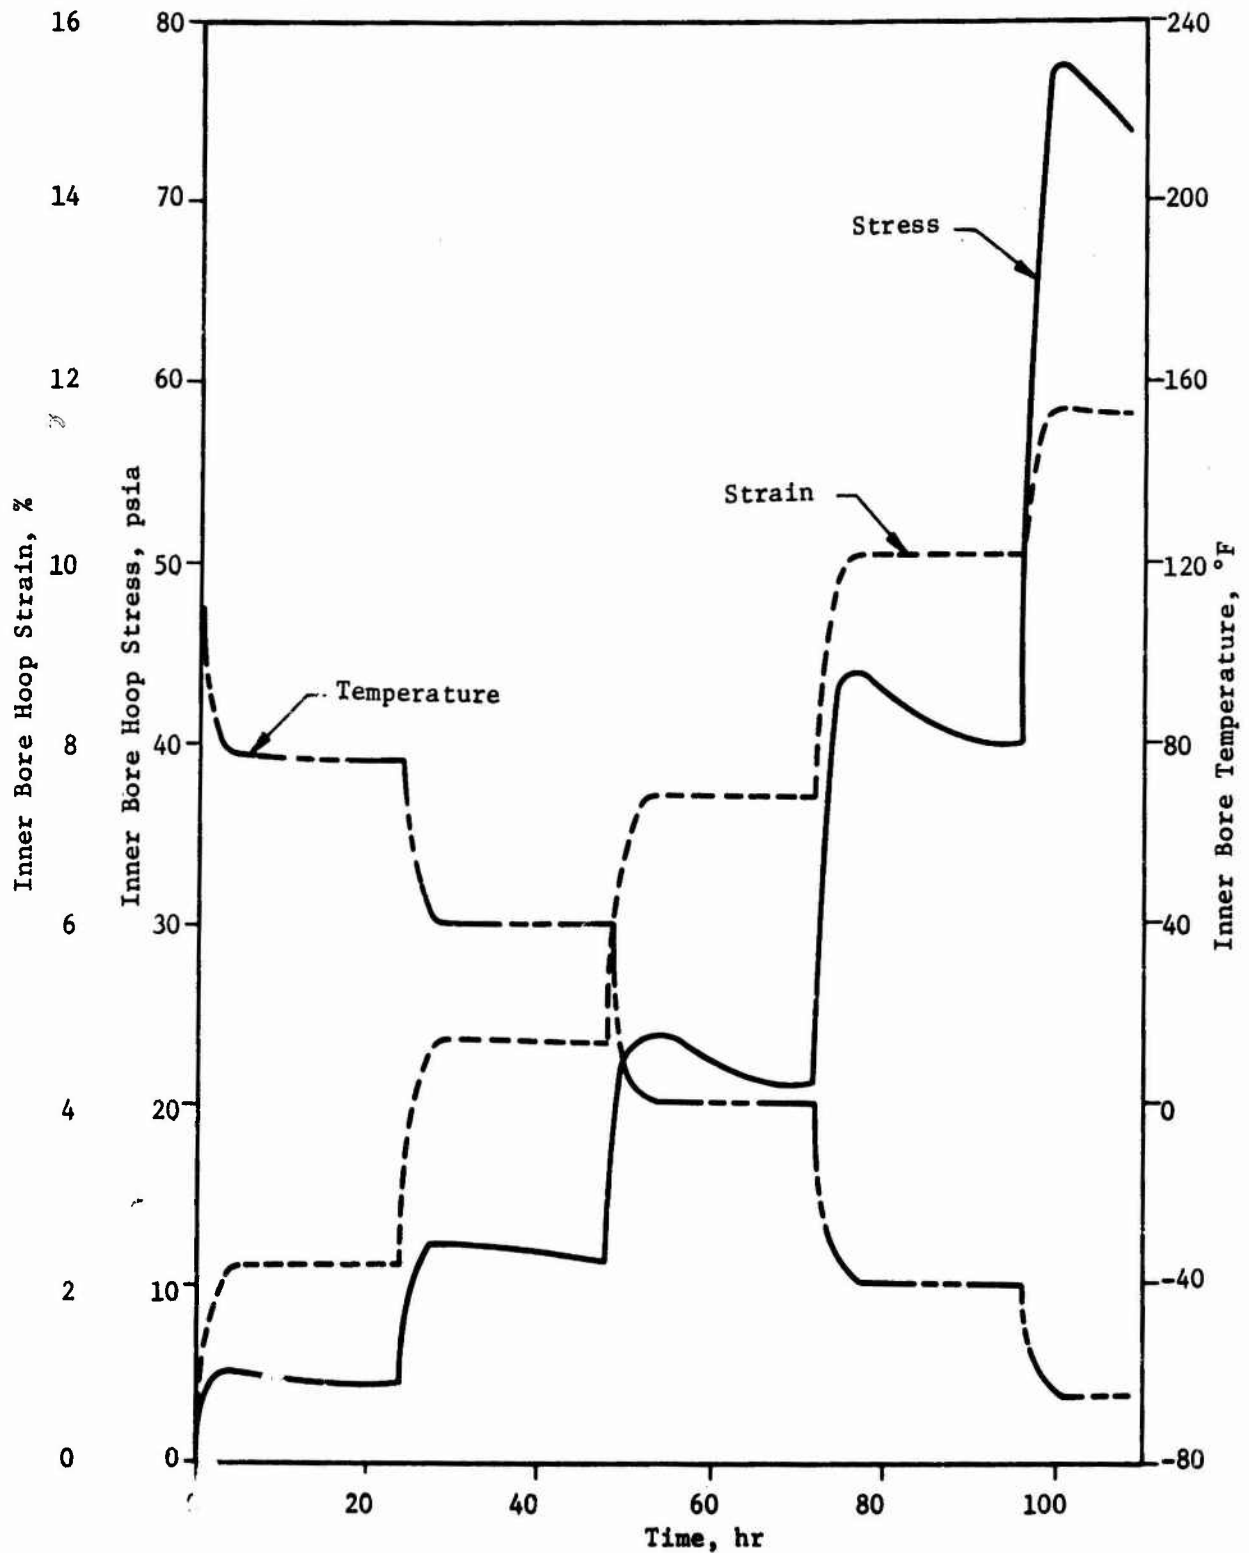

Inner Bore Temperature and Calculated Hoop Stress and Strain During First Step-Wise Thermal Cycle

Figure 36

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

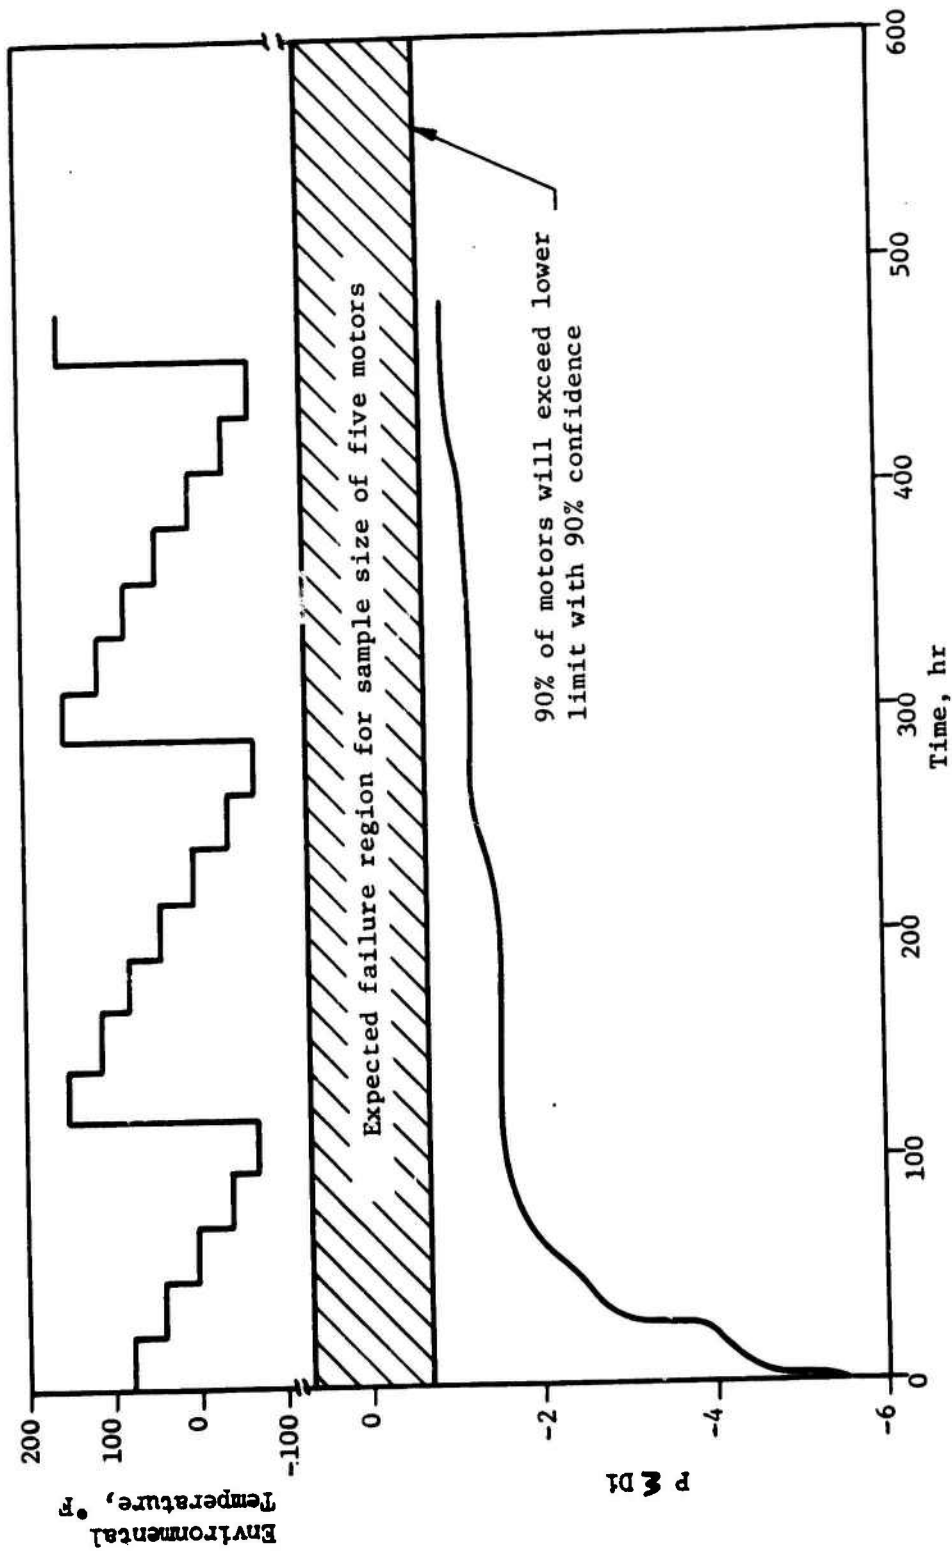



Figure 37

UNCLASSIFIED

Calculated Cumulative Damage at Inner Bore for Step-Wise Thermal Cycling

UNCLASSIFIED

Report AFRPL-TR-69-90

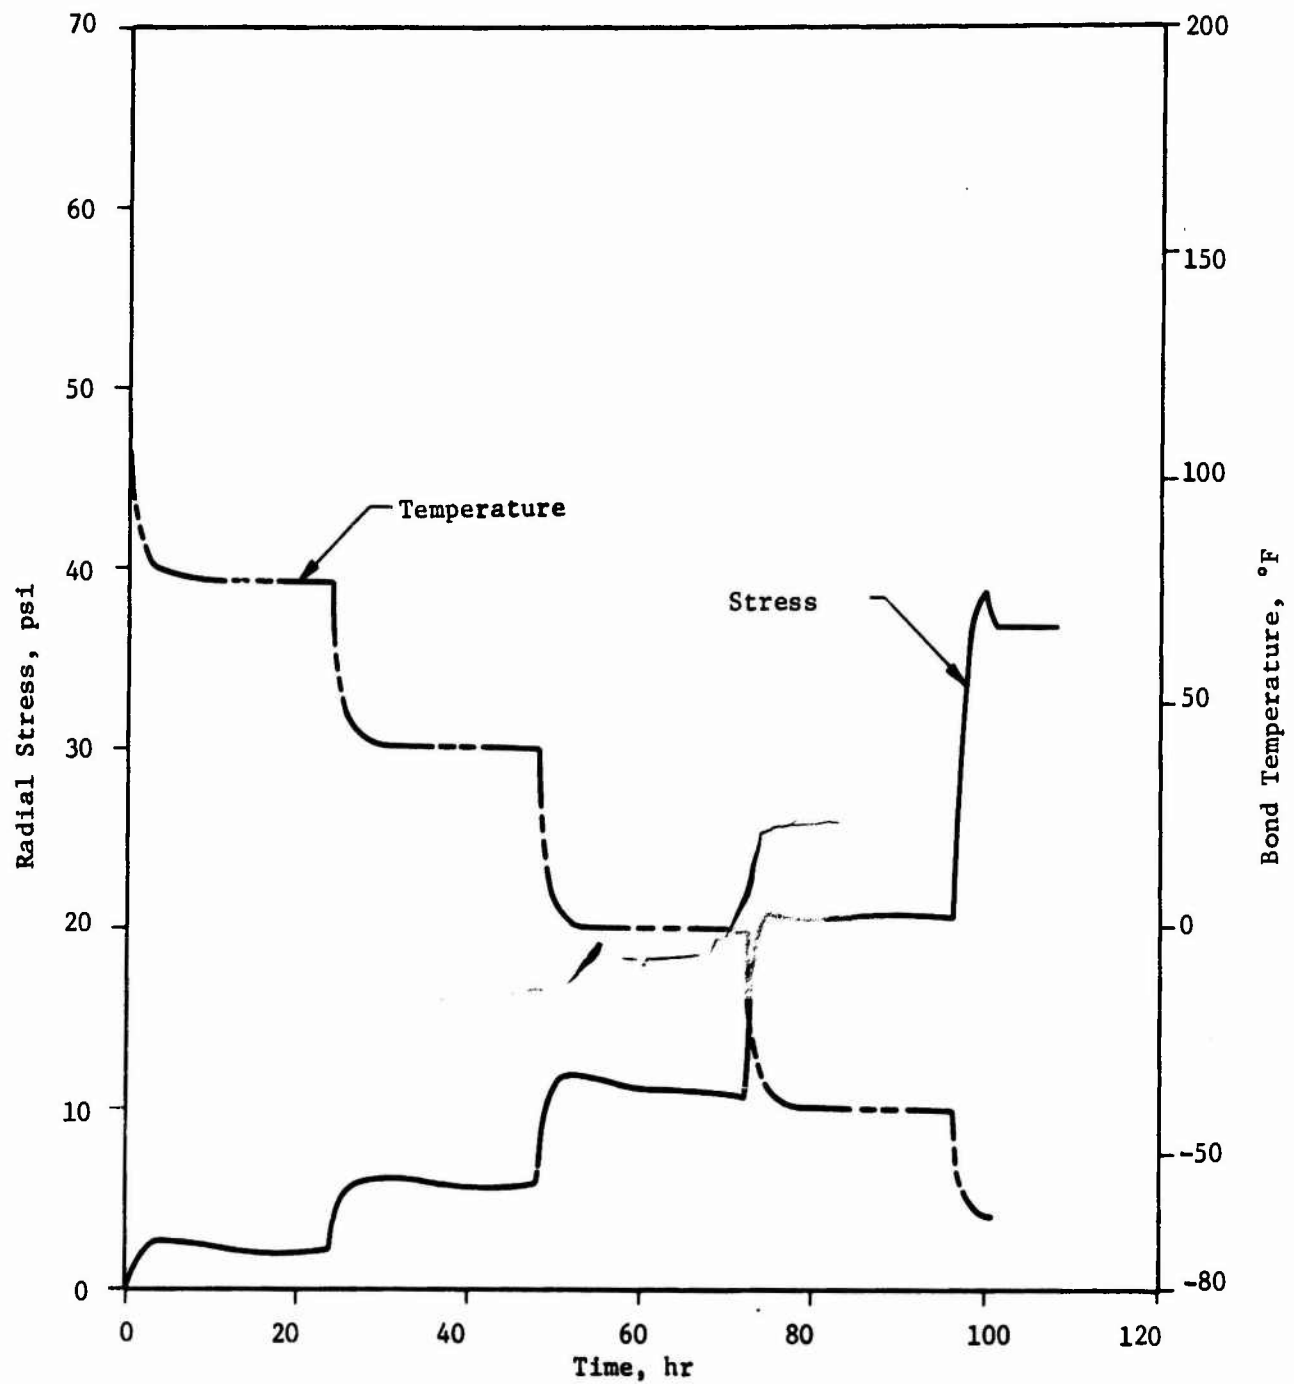


Propellant/Liner Bond Temperature and Calculated Radial Stress During First Step-Wise Thermal Cycle

Figure 38

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

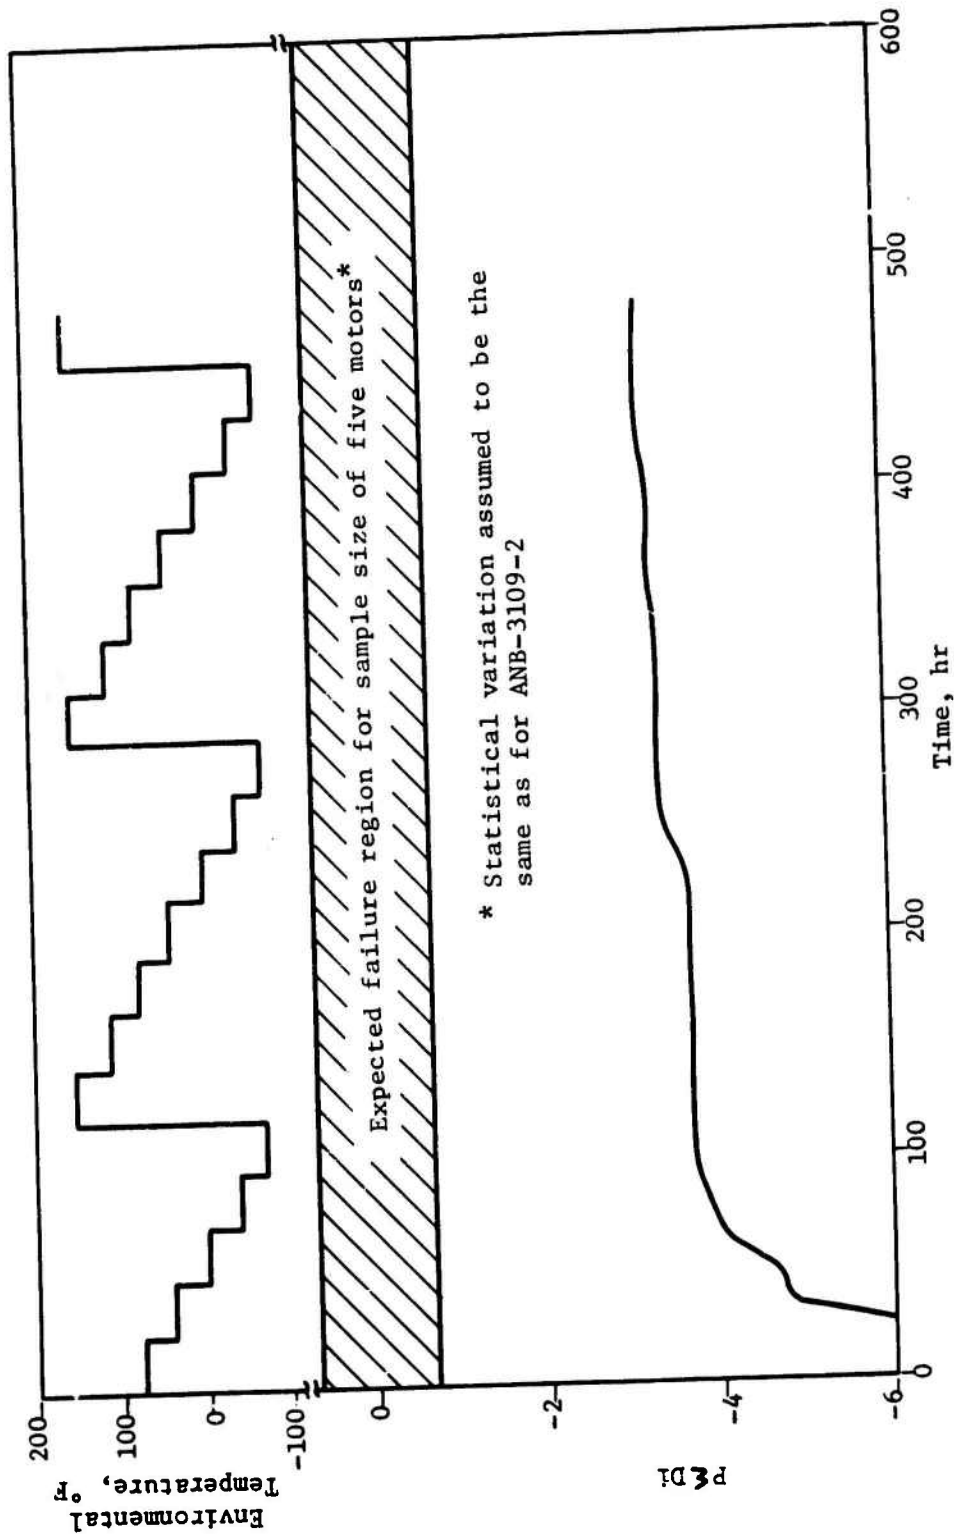

Calculated Cumulative Damage of the Propellant/Liner Bond during Step-Wise Thermal Cycling

Figure 39

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

Relative Humidity, %	Test Temp, °F	Strain Rate min ⁻¹	Ambient Shore "A" Hardness	Mechanical Properties							
				0 Storage Time*				6 Weeks Storage			
				σ_m , psi	ϵ_m , %	ϵ_b , %	E_o , psi	σ_m , psi	ϵ_m , %	ϵ_b , %	E_o , psi
0	+150	0.0074	35	23	12	16	259				
		0.074	56	27	14	21	307				
		0.74	57	39	13	20	430	41	12	18	533
	77	0.0074	58	34	15	19	382				
		0.074	56	45	14	22	483				
		0.74	55	71	15	22	695	84	16	23	800
	-75	0.0074	56	509	7	8	11,836				
		0.074	57	657	4	4	22,427				
		0.74	55	829	3	3	38,892	793	3	4	31,359
35	+150	0.0074	51	20	15	19	204				
		0.074	51	26	12	16	294				
		0.74	47	36	12	16	416	34	12	18	413
	77	0.0074	48	28	13	17	344				
		0.074	51	36	13	21	407				
		0.74	50	52	13	23	555	55	15	25	562
	-75	0.0074	50	529	6	8	13,310				
		0.074	48	643	4	5	21,029				
		0.74	50	778	3	3	34,263	721	4	4	26,642
70	+150	0.0074	36	13	19	25	149				
		0.074	35	15	13	30	175				
		0.74	36	21	13	27	235	20	12	24	254
	77	0.0074	36	17	14	28	192				
		0.074	37	19	14	30	219				
		0.74	39	32	13	28	380	26	12	29	318
	-75	0.0074	37	501	8	10	10,941				
		0.074	35	625	5	5	18,955				
		0.74	40	757	3	3	31,708	692	4	5	25,222
90	+150	0.0074	14	8	33	39	72				
		0.074	14	9	28	43	87				
		0.74	14	11	20	41	93	12	19	32	109
	77	0.0074	12	10	26	46	96				
		0.074	13	11	20	43	104				
		0.74	15	15	17	45	175	16	16	35	198
	-75	0.0074	17	420	7	11	10,198				
		0.074	15	571	5	5	16,597				
		0.74	15	737	3	3	29,634	659	4	5	22,297

* * 20% constant strain held at all humidities

Effect of Relative Humidity on the Mechanical Properties
of ANB-3241-2 Propellant (VBM-1-67-001)

Figure 40

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

modulus with increasing relative humidity. However, constant strain tests conducted at 77°F indicate the propellant will hold 20% strain (highest strain level tested) at each humidity level tested.

(2) High Temperature Storage Tests

Propellant used to prepare the cast Lot 6 motors (the first cast lot with fully case bonded design) were stored at 200, 180, 160, and 77°F for various lengths of time to assess the shelf life of ANB-3241-2. Test data for these storage temperatures are summarized in Figures 41 through 44. Although some hardening of the propellant was observed at storage temperatures of 200 and 180°F; little change in properties of the propellant resulted from 150 and 77°F storage. These data are consistent with other Aerojet PBAN propellant storage experience.

Propellant-liner bond aging tests are in progress but the initial test intervals have not been reached. The data will be provided when available.

8. Motor Assembly

The overall motor assembly conforms to the envelope and interface requirements outlined in the interface control envelope Drawing 1146155, listed as part of the Improved 2.75-in. drawing package in Figure 2. The nominal overall motor assembly length is 39.34 in. which extends from the forward threaded end of the chamber to the aft end of the fin retainer. The maximum OD of the motor, 2.790 in., occurs at the aft closure; the OD of the chamber is a maximum of 2.750 in. along its entire length. The chamber is a GFM component fabricated from 2014-T6 aluminum alloy. The motor assembly is

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

Test Temp, °F	Strain Rate, $\frac{l}{min}$	Storage Time at 77°F, weeks											
		0 (Control)				12				20			
		σ_m , psi	ϵ_m , %	ϵ_b , %	E_o , psi	σ_m , psi	ϵ_m , %	ϵ_b , %	E_o , psi	σ_m , psi	ϵ_m , %	ϵ_b , %	E_o , psi
150	0.0074	21	13	17	219					21	10	13	271
	0.074	27	15	19	265					22	12	18	279
	0.74	33	15	24	348	34	13	16	366	32	12	17	382
77	0.0074	29	15	22	288					30	11	18	372
	0.074	38	17	24	351					39	12	17	481
	0.74	56	16	25	527	56	14	21	570	58	13	19	653
-40	0.0074	164	15	24	1922					173	14	22	2217
	0.074	224	14	26	3178					233	14	24	3538
	0.74	342	10	22	6268					336	12	24	6519
-75	0.0074	554	6	8	14,130					485	8	12	11,618
	0.074	682	4	5	25,740					625	4	6	21,859
	0.74	844	3	3	37,538	756	3	3	36,588	784	3	3	35,944

Storage Stability of ANB-3241-2 Propellant at 77°F (Batch 68-46)

Figure 41

UNCLASSIFIED

Storage Time at 150°F, weeks													
Test Temp, °F	Strain Rate, min ⁻¹	0 (Control)				4				8			
		σ_m , psi	ϵ_m , %	ϵ_b , %	E_o , psi	σ_m , psi	ϵ_m , %	ϵ_b , %	E_c , psi	σ_m , psi	ϵ_m , %	ϵ_b , %	E_o , psi
150	0.0074	21	13	17	219	31	10	14	420	29	11	16	399
	0.074	27	15	19	265								
	0.74	33	15	24	348								
77	0.0074	29	15	22	288	51	13	21	546	55	12	19	645
	0.074	38	17	24	351								
	0.74	56	16	25	527								
-40	0.0074	164	15	24	1922	162	14	23	2108	191	15	28	2594
	0.074	224	14	26	3178								
	0.74	342	10	22	6268								
-75	0.0074	554	6	8	14,130	393	8	13	9008	544	6	10	14,653
	0.074	682	4	5	25,740								
	0.74	844	3	3	37,538								

Storage Stability of ANB-3241-2 Propellant at 150°F (Batch 68-46)

Figure 42

UNCLASSIFIED

Report AFRPL-TR-69-90

Test Temp, °F		Strain Rate, min ⁻¹	Storage Time at 180°F, weeks																					
			0 (Control)			2			6			11			14									
			σ_m , psi	ϵ_m , %	E_o , psi	σ_m , psi	ϵ_m , %	E_o , psi	σ_m , psi	ϵ_m , %	E_o , psi	σ_m , psi	ϵ_m , %	E_o , psi	σ_m , psi	ϵ_m , %	E_o , psi							
150	0.0074	21	13	17	219																			
	0.074	27	15	19	265																			
	0.74	33	15	24	348	29	10	14	408	34	9	13	517	33	8	12	575	35	8	11	629			
77	0.0074	29	15	22	288																			
	0.074	38	17	24	351																			
	0.74	56	16	25	527	47	13	17	572	50	11	17	666	56	10	15	765	60	10	13	822			
-40	0.0074	164	15	24	1922																			
	0.074	224	14	26	3178																			
	0.74	342	10	22	6268																			
-75	0.0074	554	6	8	14,130																			
	0.074	682	4	5	25,740																			
	0.74	844	3	3	37,538	701	3	4	25,201	736	3	4	30,664	825	2	3	41,972	941	2	3	26,521	529	5	7

Storage Stability of ANB-3241-2 Propellant at 180°F (Batch 68-46)

Figure 43

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL--TR-69-90

II.A. Motor Design and Description (cont)

made up of a series of subassemblies for ease of assembly, storage, and handling. The weight and balance data of the various components are given in Appendix C. These subassemblies are final assembled as described in the following paragraphs.

The piston assembly consists of the GFM piston with a wire lead-through that is sealed with a fused glass bead at the exit points from the piston. Each end of the wire lead-through is crimped to an extension electrical lead. The exposed wire and fused glass bead seals are covered with silicone rubber to prevent electrical shorts. All connections and bare wire are covered with an insulating sleeve. This assembly is incorporated into the aft closure assembly as described in the next paragraph.

The aft-closure assembly has four aerodynamic fins assembled to the aft-closure lugs with solid, corrosion-resistant steel pins. The pins have an interference shrink fit with the fins and a minimal clearance fit with the closure lugs to provide a $\pm 1/8^\circ$ maximum angular tolerance conditions to the fin assemblies. After assembly to the closure, the four fins are held in the folded position by a plastic fin retainer, which locks into a slot in the aft end of each fins. The fin retainer also contains the electrical contact disk by which igniter-to-launcher electrical contact is made. The foam weather seals are bonded into the nozzles with Epon 913, and the piston assembly and cross head are installed and retained in the aft closure assembly and the contact disk is then completed by crimping the extended electrical lead to the contact disk and covering the connection with an insulating sleeve.

The igniter assembly is removed from the storage area and bonded to the aft-closure assembly after the grounding clip is installed. Squib wires are connected to the matching ground and contact wires of the grounding clip and piston to complete the igniter-to-launcher circuitry.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

An electrical continuity check is performed between the aft-closure plate ground and the electrical contact disk at the fin ends. The maximum allowable circuit resistance is 1.35 ohms at ambient temperature. Electrical connections are capable of withstanding a 10-lb pull.

Upon completion of chamber insulation and lining, the propellant is cast at +110°F and the grain core is positioned in the chamber, thus displacing the propellant. The propellant is cured at +110°F for 5 days and then trimmed at the aft end. The motors are X-rayed and prepared for final assembly.

During final motor assembly, the O-ring is lubricated and installed in the aft closure groove, and the area of the joint between the aft-closure insulator and the chamber-grain assembly is potted with 12-gm of IBS-105-4X insulation material. This amount is sufficient to completely fill the void between the aft-closure and the aft-end of the grain, thereby providing additional protection to the aft-end of the chamber wall. The aft-closure assembly with the igniter in place is positioned within the motor chamber such that the lockwire grooves are aligned. During this operation, the aft end of the cured IBS-105-4X chamber insulation is compressed by the interference fit at the interface with the closure, thus providing an additional protective seal for the aft joint.

The lockwire is lubricated with silicone lubricant, and the hook end of the lockwire is inserted through the elongated hole in the motor chamber and into the hole of the lockwire groove of the closure. The aft-closure assembly is rotated clockwise until the raised notched end of the lockwire snaps into the elongated hole in the chamber. An electrical shorting clip is installed between the contact disk of the fin retainer and a groove in the nozzle closure. The motor is then placed in an oven to cure the IBS-105-4X insulation used for potting.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

A 2.0 in.-wide circumferential band of brown lacquer is applied 3.0 in. aft of the forward end of the chamber to designate the proper ammunition color coding.

A stencil is applied designating motor part number, code identification, contract number, manufacture date, lot number, firing and storage temperature range and warranty date. A stencil is applied with black ink near the front end with the following designation: "Torque head to 55 to 65 ft/lb."

9. Government-Furnished Material (GFM)

The listing of GFM items is given below, followed by appropriate Aerojet design recommendations to improve performance and/or manufacturability of selected items.

	<u>Component Description</u>	<u>Part No.</u>
1.	Lockwire	1146924-1 or 1146898-1
2.	O-ring	1127114
3.	Shunt Wire	1146336-1
4.	Squib, Mk I, Mod 1	656714
5.	Cross Head	456909
6.	Contact Disk	1253129
7.	Fin Retainer	1253131
8.	O-ring	650950
9.	O-ring	650953
10.	Nut	MS 20365-1032
11.	Pin, Straight	1146056-1
12.	Fin Blade	1146210-1
13.	Plate, Nozzle	1146916-1
14.	Piston Assy	1146721-1
15.	Motor Tube	1569403

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

Our understanding of the configuration, present status of the component, and definition of changes to the above GFM items for compatibility with the Aerojet Improved 2.75-in. motor are discussed in the following paragraphs for the selected items.

Item 1. To meet the requirements for dispersion, it is necessary to spin the rocket. The spin imparted by the fins is transmitted to the rocket through the closure and step-latch design of the lockwire. The current GFM lockwire requires modification to ensure positive retention under these spin-imposed loads, and will be reworked for the current contract to incorporate a reformed shape. This modification is also adaptable to the standard current round where its use would provide additional flight safety.

Item 3. The samples of GFM shunt wire that were received at Aerojet on several furnished closure assemblies were designed to anchor into the end of the fin-attach roll pin. The recommended Aerojet-revised design requires a solid steel pin in order to restrict the fin misalignment to $\pm 1/8$ of a degree; therefore, a modification was made to the shunt wire to provide a spring-tight fit around the aft closure detent groove.

Item 4. The Mk 1 Mod 1 squib meets the specified firing current of 0.5 amp per round and maintains commonality with the present unit. However, to achieve the required high altitude capability, it is necessary to use a pyrotechnic booster charge in conjunction with the squib.

Item 11. The GFM pin was a hollow roll-pin. The new fin-pin design requires very tight tolerances in both the fin and aft-closure mounting lugs. This product improvement design is the result of the request for a $\pm 1/8^\circ$ fin tolerance during assembly to the aft closure.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.A. Motor Design and Description (cont)

Item 12. The current-round fin-blade was modified to provide a 0.11° cant angle to the fins to impart a rotation of less than 7-1/2 rps to the rocket during flight to achieve improved stability and accuracy. The cant angle is slight enough to allow use of the current fin forgings by machining the same width hub at an angle, and drilling a new hole at a right angle to the hub face.

Item 13. Only the interior portion of the aft closure shall require any major modification from the current round. The exterior retains the same lockwire, O-ring groove, closure length, and bearing ring OD with only a small diameter and radius change to the detect retention groove. Spacing is unchanged at the aft-face fin-pin location and fin tab. Other small tool cutter radii and tolerance changes to make up the deviations from the GFM machined part. The interior retains the piston bore, four holed, and the same closure wall thickness; only the cavity, piston sleeves OD, hole size, and location are changed.

Item 15. Although the GFM motor case (1569403) is unchanged for the Improved 2.75-in. motor, minor within-tolerance variations occur from one fabricator to another. These variations vary the motor weight and propellant loading capability. In addition, the current chamber lockwire groove tolerances can allow less than 1.5 factor on yield under the worst-on-worst tolerance buildup.

B. STABILITY AND CONTROL

An investigation was conducted to determine the optimum configuration for the Improved 2.75 FFAR from the standpoint of simultaneously achieving a one-standard-deviation dispersion less than 9.5 mils, minimal probability of pit-roll resonance, minimum change in existing tooling, and no

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.B. Stability and Control (cont)

alteration of existing launchers. This optimum configuration is identical to the present 2.75 FFAR in external configuration, except for the addition of a 0.11° differential fin cant.

A complete description of the analytical and test results of this investigation is presented in Appendix A.

C. DEVELOPMENT TEST RESULTS

1. Igniter Tests

The purpose of the 2.75-in. ignition testing program was to develop an igniter that would function reliably from sea level to 50,000 ft altitude over the temperature range of -65 to 150°F . In addition, the igniter must be simple to manufacture and reliable. Accordingly, igniter testing was conducted with a variety of charge weights, squib-to-pellet initiators, and charge containers. The Mark I squib, used in the current 2.75-in. motor, was used as the primary initiator in all tests.

a. Main Charge

During initial testing early in the program, the main charges were varied from 7 to 9 gm of Type 2D BPN pellets. Based on arc-image furnace propellant ignitability test results, together with results from the ignition simulation test chamber firings, a main charge of 7 gm of Type 2D BPN pellets was selected to provide reliable and reproducible ignition over the specified pressure and temperature ranges.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

b. Pyrotechnic Container

This phase of igniter testing was devoted to igniter container development. Several container materials were evaluated, including cellulose-acetate-butyrate, Kraft paper, aluminum foil, and commercial aluminum tubing. Five tests were conducted using containers of hand-fabricated Kraft paper, five with containers of hand-fabricated aluminum foil, six with cellulose-acetate-butyrate commercially formed tubes, and 41 with commercially-fabricated aluminum tubes. It was found early in the testing program that the commercial aluminum tubing (0.61 in. ID; 0.007 in. wall thickness; 2.35 in long) provided consistently reproducible igniter performance as compared to the other materials and fabrication techniques. For this reason, as well as for its capability to provide ease of igniter manufacture and quality control, the aluminum tube was selected as the main charge container.

c. Igniter Test Firings

The first 18 ignition tests were conducted with the 7-gm main charge and the Mark I squib all housed in the aluminum containers. The tests were made in the ignition simulation chamber over the temperature range of -65 to 150°F and at one atmosphere pressure. Test results showed an average peak pressure of 222 psi and an average time-to-peak pressure of 0.022 sec. Both the average peak pressure and the time-to-peak pressure was considered normal. However, when an additional five tests were conducted at +75°F under simulated altitude conditions of 50,000 feet, extended times-to-peak pressure and complete hangfires were observed. These results indicated that the Mark I squib is not adequate to initiate the main pellet charge at altitude. Accordingly, it was decided to add a booster charge between the squib and main charge to aid in obtaining satisfactory igniter operation at altitude.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

Nine additional igniter tests were conducted in the ignition simulation test chamber at a simulated 50,000-ft altitude, with a booster charge of 0.5 gm of BPN powder (IP-10 granulation or particle size). Three tests each were conducted at -65, +75, and +150°F. In these nine tests, the igniters exhibited peak pressures and times-to-peak pressures that closely approximated the satisfactory performance previously obtained at one atmosphere.

To optimize the granulation size and weight of the BPN booster charge, an additional seven altitude tests were conducted in the ignition simulation chamber. All igniters had the 7-gm BPN pellet main charge, Mark I squib, and aluminum container; only the booster charge was varied in weight and particle size. One igniter contained 0.1 gm of IP-10 granulation, three igniters had 0.2 gm of the same powder, and three igniters had 0.2 gm of 2C granules. Based on test results, it is evident that the granulation of the BPN initiator powder (IP-10 vs 2C) has no effect on performance. Further, at -65°F, a booster charge of 0.1 gm is unacceptable, and a charge of 0.2 gm is marginal.

Nine additional tests were conducted with a 0.3-gm charge at a simulated altitude of 50,000 ft, three each at -65, +70, and +150°F. The results of these tests, when compared with the tests using 0.1, 0.2, and 0.5-gm booster charges, indicate that the 0.3-gm booster charge yields the shortest ignition delay over the temperature range and at altitude and is compatible with the requirement of no significant increase in test chamber pressurization.

A summary of the design, test conditions, and results of all ignition tests conducted are presented in Figure 45. Statistical data are given in Figure 46 for tests with a 7-gm charge in a commercial aluminum charge container, for sea level tests with no booster charge, and for altitude tests with 0.3 and 0.5-gm booster charges. Since obviously poor performance was obtained with 0.1 and 0.2-gm booster charges, no further data reduction from these tests was justified.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-69-90

No. of Tests	Avg. Pres- sure and standard Dev. at -65°F, psia	Avg. Pres- sure and standard Dev. at +70°F, psia	Avg. Pres- sure and standard Dev. at +150°F, psia	Avg. Time to Peak Pressure & Standard Dev. at -65°F, msec	Avg. Time to Peak Pressure & Standard Dev. at +70°F, msec	Avg. Time to Peak Pressure & Standard Dev. at +150°F, msec	
Sea level firings, No booster charge	14	232 - 16.5	232 - 23.1	233 - 31.4	25.2 - 3.86	20.0 - 0	21.6 - 5.2
Altitude (50,000 ft) firings, 0.3 gm BPN booster charge	11	220 - 18.7	253 - 21	253 - 32.6	26.3 - 5.92	21 - 4.95	13.3 - 3.42
Altitude (50,000 ft) firings, 0.5 gm BPN booster charge	9	219 - 12.7	225 - 16.8	360 - 18.5	20.3 - 1.2	15.2 - 1.93	12.2 - 2.22

Average Values of Pressure and Time-to-Peak Pressure
(Commercial aluminum tube and 7 gm
Type 2D-BPN pellet main charge)

Figure 45

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

Run Number and Date Fired	Conditioning Temp, °F	Amb Pressure, mmHg	Squib Delay Time, msec	Time-to- Peak Press, msec	Function Time, msec	Peak Pressure, psia	BNP-Powder Initiation Charge Wt, gm	BNP-2D Charge Wt, gm	Remarks
3460A 12/1/67	+70	760	3	23	82.5	393	0.5-1P-10	9.0	Initiator in soda straw. Cellulose acetate butyrate chamber, tube.
3464 12/4/67	+70		3	23	87	290	none		#850 Mylar over tape over end of CAB tube.
3465 12/4/67	+70		2	28	95	240			#850 Mylar over tape over end of CAB tube.
3467 12/5/67	-65		3	22	84	201		9.0	#850 Mylar over tape over end of CAB tube.
3492 12/13/67	+70		2	26	80	283		7.0	Kraft paper tube, one wrap.
3493 12/13/67	+70		2	26	79	239			Kraft paper tube, one wrap.
3495 12/14/67	-65		2	26	76	225			Kraft paper tube, one wrap.
3501 12/15/67	+150		2	33	83	172			Kraft paper tube, one wrap.
3503 12/18/67	-65		3.5	34	83	140			Kraft paper tube, one wrap.
3543 1/11/68	+70		2	23	76	184			Kraft paper tube, two wraps.
3490 12/12/67	+70		2	24	83	323			Aluminum foil, one wrap, 0.001-in. thick.
3494 12/13/67	-65		2	28	79	229			Aluminum foil, one wrap, 0.001-in. thick.
3502 12/18/67	+150		12	27	79	169			Aluminum foil, one wrap, 0.001-in. thick.
3506 12/20/67	-65		3.5	31	83	122		7.0	Aluminum foil, one wrap, 0.001-in. thick.
3473 12/6/67	+70		2	33	84	251		9.0	Seamless Al tube, 0.007-in. wall.
3476 12/6/67	-65			22.5	78	194		9.0	Seamless Al tube, 0.007-in. wall.
3485 12/11/67	-65			20	80	364		8.0	Seamless Al tube, 0.007-in. wall.
3486 12/11/67	+70			20	80	256		7.0	Seamless Al tube, 0.007-in. wall.
3496 12/14/67	-65			25	80	249			Seamless Al tube, 0.007-in. wall.
3497 12/14/67	+70			20	73.5	212			Seamless Al tube, 0.007-in. wall.
3491 12/14/67	+150			25	72	231			Seamless Al tube, 0.007-in. wall.
3504 12/19/67	+70			20	66	227			Seamless Al tube, 0.007-in. wall.
3505 12/19/67	-65		2	22	76	237			Seamless Al tube, 0.007-in. wall.
3528 1/3/68	+70		2	19	69	264			Seamless Al tube, 0.007-in. wall.
3529 1/3/68	+70		40	51	110	164			Seamless Al tube, 0.007-in. wall, 4 gm CPR 2036 foam over pellets.
3531 1/5/68	+70		2	21.5	69	246			Seamless Al tube, 0.007-in. wall, 4 gm CPR 2036 foam over pellets.
3534 1/8/68	+70		2	30	87	230			Seamless Al tube, 0.007-in. wall, 4 gm CPR 2036 foam over pellets.
3593 2/29/68	-65		3	24	78	261			Seamless Al tube, 0.007-in. wall, Interstices filled with 8 ml CAB-o-Sil.
3598 3/1/68	-65		1	30	82	180			Seamless Al tube, 0.007-in. wall.
3605 3/4/68	+150	760	1	19	66	253			Seamless Al tube, 0.007-in. wall.
3608 3/7/68	+70	84	2	35	80	185	none	7.0	Seamless Al tube, 0.007-in. wall.

Summary of Igniter Development Tests

Figure 46, Sheet 1 of 2

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

Run Number and Date Fired	Conditioning Temp., °F	Amb. Pressure, mmHg	Squib Delay Time, msec	Time-to- Peak Press., msec	Function Time, msec	Peak Pressure, psia	BPN-Powder Initiation Charge Wt., gm	BPN-2D Charge Wt., gm	Remarks
3611 3/7/68		88	1	32	77	184	none	7.0	Seamless Al tube, 0.007-in. wall.
3612 3/8/68		87	1	400	78	137			Seamless Al tube, 0.007-in. wall
3613 3/8/68		88	1	-	-	-			Hang fire.
3614 3/11/68		87	1	32	90	211			Hang fire.
3615 3/11/68		87	1	-	-	-	none		Hang fire.
3617 3/12/68		87	1	15	76	244	0.5 IP-10		Seamless Al tube.
3618 3/12/68		88	2	16	80	208			
3619 3/12/68	+70		1	13	87	229			
3620 3/12/68	-65		1	20	82	229			
3621 3/13/68	-65		19	20	83	201			
3622 3/13/68	-65		1	21	83	227			
3632 3/20/68	+150		2	13	73	360			
3633 3/20/68	+150		1	11	66	366			
3634 3/20/68	+150		1	10	69	375	0.5 IP-10		
3636 3/21/68	+70		1	31	78	360	0.1 IP-10		
3637 3/22/68	+150		1	15	82	247	0.5 IP-10		
3638 3/25/68	+70		1	17	64	226	0.5 IP-10		
3659 3/29/68	+70		1	15	66	291	0.2 IP-10		
3663 4/1/68	+150		2	17	70	311	0.2 IP-10		
3664 4/2/68	+150		1	13	71	294	0.2-2C granules		
3665 4/3/68	+150		1	15	71	276	0.2-2C granules		
3667 4/4/68	-65		1	510	86	96	0.2-2C granules		
3671 4/5/68			1	33	86	167	0.2 IP-10		
3673 4/8/68			1	24	79	208			
3676 4/11/68			1	28	87	266			
3678 4/11/68			1	25	75	268	0.2 IP-10		
3681 4/17/68	-65		1	20	78	229	0.3 IP-10		
3682 4/18/68	+150		6	9	46	291			
3683 4/19/68	+150		1	17	50	251			
3685 4/19/68	+70		1	14	69	281			
3686 4/19/68	+70		1	25	87	221			
3686A 4/19/68	+70		1	24	81	256			
3687 4/22/68	-65		2	34	86	236			
3689 4/22/68	+150		1	14	75	218			
3690 4/23/68	-65	88	1	25	85	196	0.3 IP-10	7.0	Seamless Al tube.

Summary of Igniter Development Tests

Figure 46, Sheet 2 of 2

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

2. Motor Component Tests (Phase I)

Motor component tests were those used to verify component performance without regard to the specific test requirements of Exhibit A to the contract. A total of 16 such tests were made. Ballistic data, test objectives, and results are summarized in Figure 47.

The first four component tests (CT-1 through -4) were made with the chamber and grain assembly in Figure 48 to evaluate grain ballistics and insulation performance. The four-slot grain configuration was adopted in lieu of the two-slot proposal grain design for easier processing and lower cost. The initial burning surface of the four-slot configuration was the same as the two-slot proposal configuration and was achieved by shortening the length of the slots from 14.8 in. to 9.0 in. The grain support system is also shown in Figure 48.

The first two tests were conducted with a single-nozzle heavy-weight test aft closure to expedite early start of the development program. The third and fourth motors incorporated the proposed aft closure with four canted nozzles as shown in Figure 49 as Configuration A. In these four firings, a bag-type igniter installed in the forward end was used to expedite testing.

Based on results from these four firings, the chamber and grain assembly was modified to incorporate a heavy bead of insulation at the grain/aft-closure interface to protect the chamber sidewall at that point, and the four-slot grain configuration in Figure 48 was replaced by a simple tube grain design (ID and aft-end burning) because throat erosion data showed that the inherent progressivity of the tube design was offset by the increase in nozzle throat area during motor operation. Use of the tube grain design

UNCLASSIFIED

CONFIDENTIAL

Report AFRPL-TR-69-90

Test No.	Chamber S/N	Date Fired	Firing Temp, °F	Action Time Total Impulse, lbf-sec	Burn Time Total Impulse, lbf-sec	Specific Impulse lbf-sec/lbm	Max Thrust, lbf	Max Ignition Thrust, lbf	Avg Thrust, lbf
CT-1	2-004	10-5-67	+70	N/A	N/A	N/A	N/A	N/A	N/A
CT-2	2-001	10-9-67	+70	N/A	N/A	N/A	N/A	N/A	N/A
CT-3	2-002	10-12-67	+70	N/A	N/A	N/A	N/A	N/A	N/A
CT-4	2-005	10-18-67	+70	N/A	N/A	N/A	N/A	N/A	N/A
CT-5	2-003	10-18-67	+70	N/A	N/A	N/A	N/A	N/A	N/A
CT-6	2324	12-21-67	-65	N/A	N/A	N/A	N/A	510	N/A
CT-7	2302	1-22-68	+70	N/A	N/A	N/A	N/A	540	N/A
CT-8	2306	1-22-68	+70	N/A	N/A	N/A	N/A	645	N/A
CT-9	2301	1-27-68	+150	N/A	N/A	N/A	N/A	735	N/A
CT-10	2322	1-30-68	+150	N/A	N/A	N/A	N/A	694	N/A
CT-11	2406	4-30-68	+150	1913	1519	240.6	892	712	684
CT-12	2722	5-20-68	+150	1871	1572	-	868	684	680
CT-13	2713	5-24-68	-65	N/A	N/A	N/A	687	425	N/A
CT-14	2711	6-10-68	+150	1897	1619	237.5	904	517	672
CT-15	2712	7-19-68	+70	1915	1547	239.5	908	581	665
CT-16	2703	7-19-68	+150	1925	1578	241.2	958	618	717

2.75-in. FFAR CT Ballistic Data Summary (u)

Figure 47, Sheet 1 of 3

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

Test No.	Max Chamber Pressure, psig		Max Ignition Pressure, psig		Avg Chamber Pressure, psig		Action Time, sec		Burn Time, sec		Ignition Delay, sec		Ignition Rise Time, sec		Propellant Burn Rate, in./sec		Remarks
	psig	psig	psig	psig	psig	psig	sec	sec	sec	sec	sec	sec	sec	sec	in./sec	in./sec	
CT-1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Test objectives: evaluate grain ballistics and insulation performance; single nozzle test aft closure; at 0.15 sec chamber burnthrough at grain/aft closure interface.
CT-2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Test objectives: evaluate grain ballistics and insulation performance; grain/aft-closure interface protected by a heavy bond of IBS-105-4 insulation; pressure taps eroded away; grain/aft-closure interface intact.
CT-3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Test objectives: evaluate grain ballistics and proposed aft-closure with four threaded canted nozzles; aft closure areas at pressure tap and center piston eroded away.
CT-4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Test objectives: evaluate tube grain ballistics and insulation performance; four slots filled with potting material resulting in a tube grain; pressure tap eliminated; carbon phenolic insulator cap over piston; aft-closure insulator intact; all four exit cone insulators ejected. Based on these tests, this chamber-grain assembly was used to start development tests; aft closure was also modified to include additional insulation and exit cone insulator changes to ensure retention; this aft closure design used to start development tests.
CT-5	N/A	1236	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.052	0.033	N/A	N/A	N/A	N/A	Test objectives: demonstrate inadequacy of fore end insulation as cause of burnthrough in development Tests II-08 and -19; chamber burnthrough occurred like Test II-08 and -09 (at aft edge of forward insulator); forward insulator lengthened to provide increased coverage along chamber sidewall.
CT-7	1420	1373	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.038	0.034	N/A	N/A	N/A	N/A	Test objectives: evaluate performance of flattened exit cones fabricated from carbon phenolic; exit cones eroded away; design discarded.
CT-8	1680	1810	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.051	0.022	N/A	N/A	N/A	N/A	Test objectives: evaluate performance of integrally molded aft-closure; molding material was MXC-313 carbon phenolic; all exit cones and three ANJ inserts ejected due to insert thermal expansion causing cracking at junction of inserts and exit cones; 40 mil expansion gap incorporated as solution
CT-9	1580	1680	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.053	0.010	N/A	N/A	N/A	N/A	Test objectives: evaluate integrally molded aft closure with silica phenolic as insulation material; 40 mil expansion gap for ANJ throat inserts; closure burnthrough at expansion gap.
CT-10	1545	1804	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.046	0.024	N/A	N/A	N/A	N/A	Test objectives: evaluate integrally molded aft closure with silica phenolic as insulation material; 40 mil expansion gap filled with potting material; closure burnthrough at expansion gap.

2.75-in. FFAR CT Ballistic Data Summary (u)

Figure 47, Sheet 2 of 3

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90


Test No.	Max Chamber Pressure, psig	Max Ignition Pressure, psig	Avg Chamber Pressure, psig	Action Time, sec	Burn Time, sec	Ignition		Propellant Burn Rate, in./sec	Remarks
						Delay, sec	Rise Time, sec		
CT-11	1748	2135	1360	2.80	2.00	0.005	0.040	0.449	Test objectives: (1) Demonstrate chamber-grain integrity after temperature cycling from -65 to +150°F; (2) Evaluate Carb-I-Tex 700 as throat insert material at +150°F; firing successful; inserts intact; throat erosion acceptable.
CT-12	1762	2040	1314	2.75	2.10	0.004	0.038	N/A	Test objectives: (1) Demonstrate chamber-grain integrity after temperature conditioning at +150°F; (2) Evaluate Carb-I-Tex 700 throat insert material at +150°F; fin actuation piston (GFW, swaged) failed during firing allowing external erosion of the exit cones.
CT-13	1701	1574	N/A	2.71	1.71	0.001	0.029	N/A	Test objectives: (1) Evaluate Durez as an alternate net molding material at -65°F; (2) Evaluate Carb-I-Tex 700 throat insert material at -65°F; one Durez exit cone failed, thereby causing one throat insert to eject.
CT-14	1720	1575	1340	2.82	2.15	0.007	0.030	0.410	Test objectives: (1) Evaluate MXC-313 aft-closure insulation cured for 30 min instead of 60 min; post-fire condition similar to 60-min-cure insulation; (2) Evaluate Carb-I-Tex 700 throat inserts at +150°F; firing successful; all hardware remained intact; throat erosion acceptable.
CT-15	1671	1622	1344	2.80	2.24	0.004	0.027	0.400	Test objectives: (1) Evaluate MXC-313 aft-closure insulation cured for 30 min instead of 60 min; post-fire condition similar to 60-min-cure insulation; (2) Check out PFWT test procedures, test facility, and digital data recording, and computer data reduction system.
CT-16	1770	1780	1423	2.86	2.05	0.005	0.030	0.439	Test objectives: (1) Evaluate MXC-313 aft-closure insulation cured for 30 min instead of 60 min; post-fire condition similar to 60-min-cure insulation; (2) Check out PFWT test procedures, test facility, and digital data recording, and computer data reduction system.

2.75-in. FFAR CT Ballistic Data Summary (u)

Figure 47, Sheet 3 of 3

CONFIDENTIAL

Report AFRPL-TR-69-90



Chamber and Grain Design (Configuration A)


Figure 48

CONFIDENTIAL

CONFIDENTIAL
(This Page is Unclassified)

UNCLASSIFIED

Report AFRPL-TR-69-90

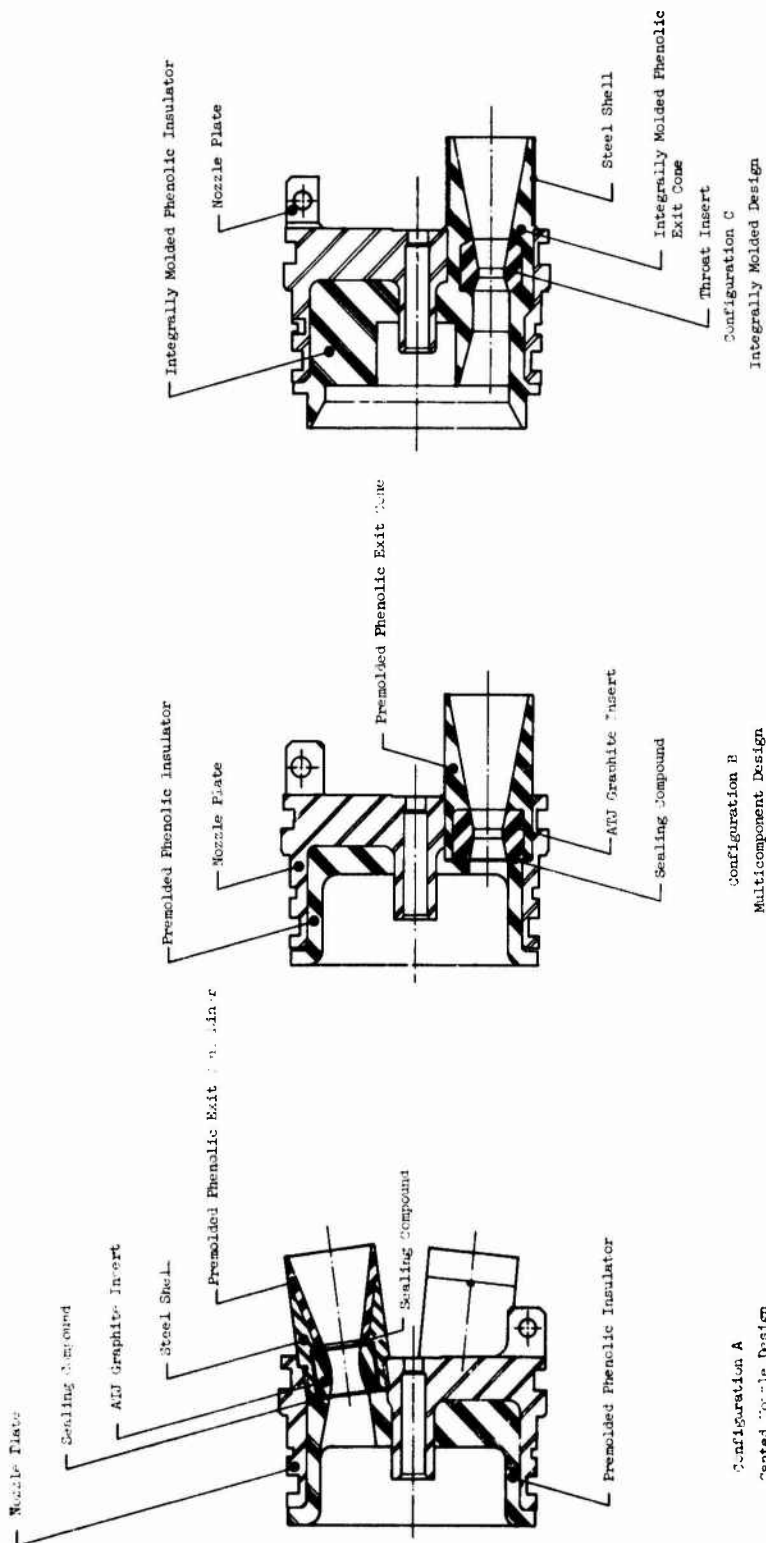

Development Aft Closure Designs

Figure 49

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

also permitted elimination of the extra insulation beneath the slots for additional design simplicity. The circular aft-end portion of the insulator, however, was retained, but with dimensional changes to provide better protection at the grain/aft-closure interface. The grain support system remained unchanged from that shown in Figure 48. The resultant chamber and grain assembly is illustrated in Figure 50.

In addition to the above, the proposal aft closure was modified to incorporate a carbon phenolic insulator installed over the centrally-located piston, the four exit-cone insulators were slightly changed for better retention, and the pressure tap was removed and installed in the forward head, as shown in Figure 51. This location and pressure tap configuration were used in all subsequent component and development test motors. The modified aft-closure assembly and the above chamber and grain assembly were used to initiate the required development testing.

CT-6 was conducted to demonstrate that insufficient insulation at the forward end of the motor caused the burn-through experienced in the firing of development motors in Tests II-08 and -09. As a result, the length of the forward closure insulator along the chamber sidewall was lengthened from 0.61 to 1.12 in. to prevent a recurrence of this type failure.

The remaining component tests (CT-7 through -16) were made primarily as materials evaluation tests for the multicomponent aft-closure design and later the integrally-molded design shown in Figure 49 as configurations B and C, respectively.

UNCLASSIFIED

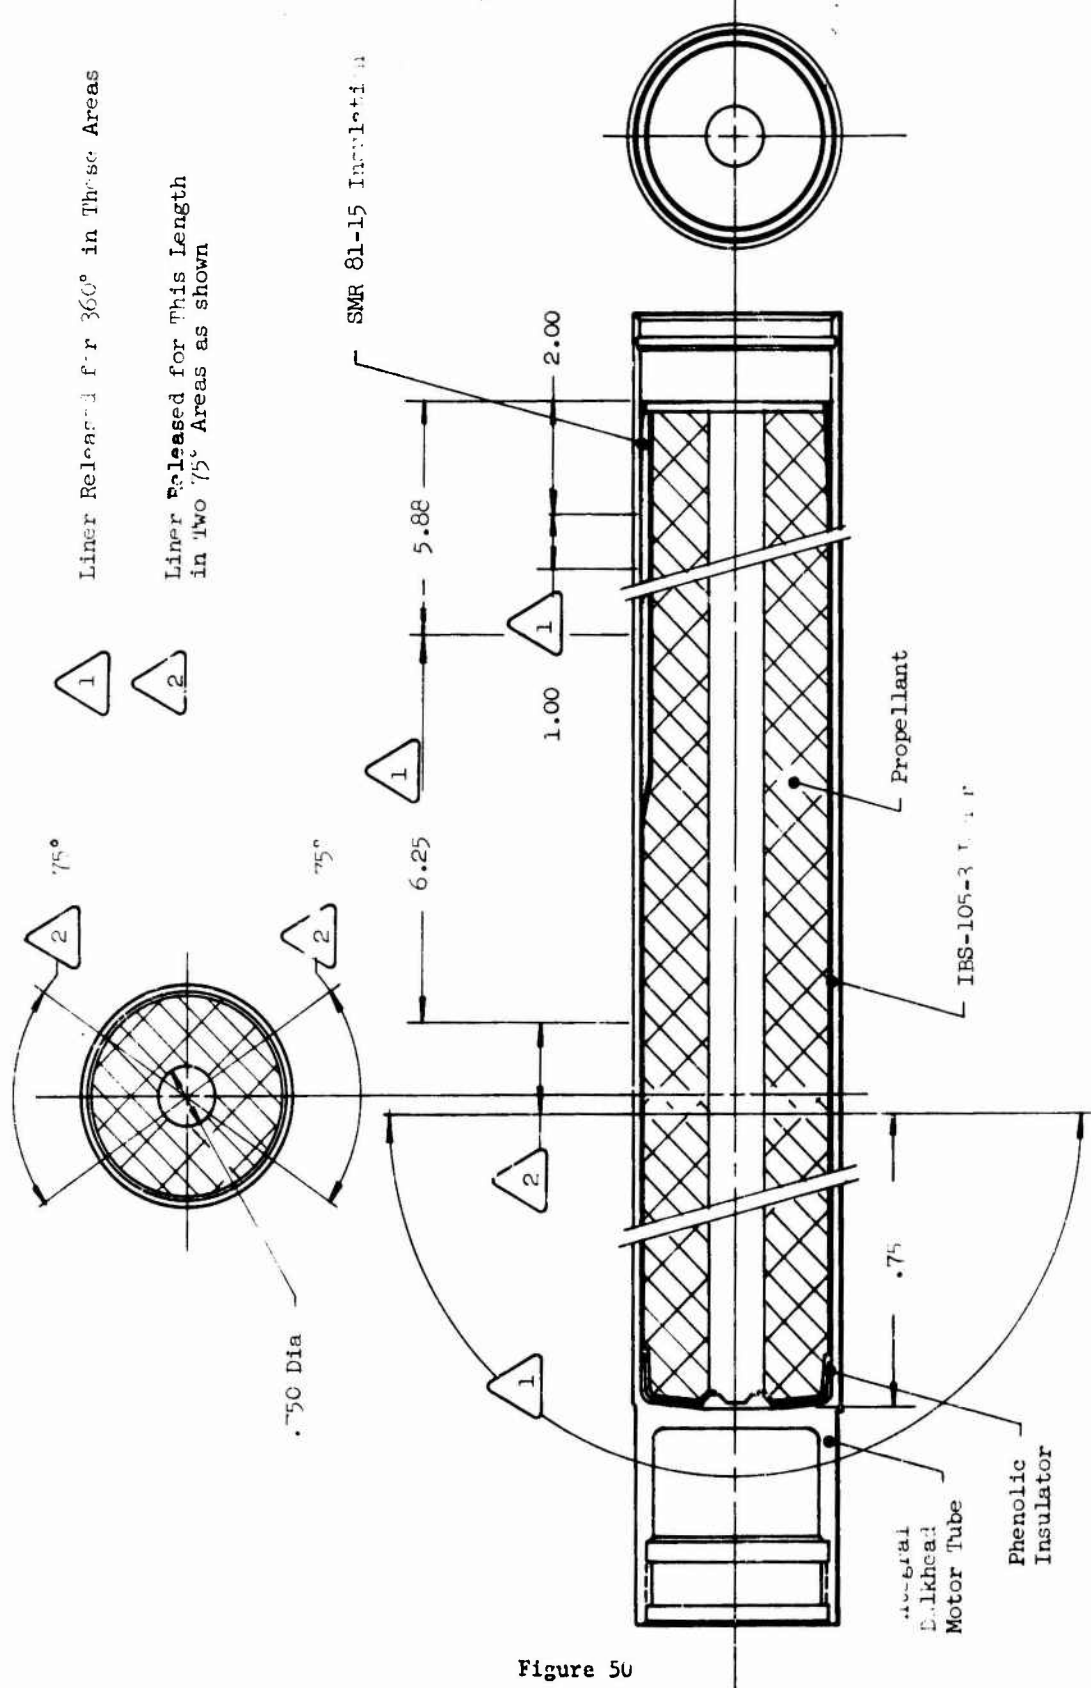



Figure 50

UNCLASSIFIED

Chamber and Grain Design (Configuration B)

UNCLASSIFIED

Report AFRPL-TR-69-90

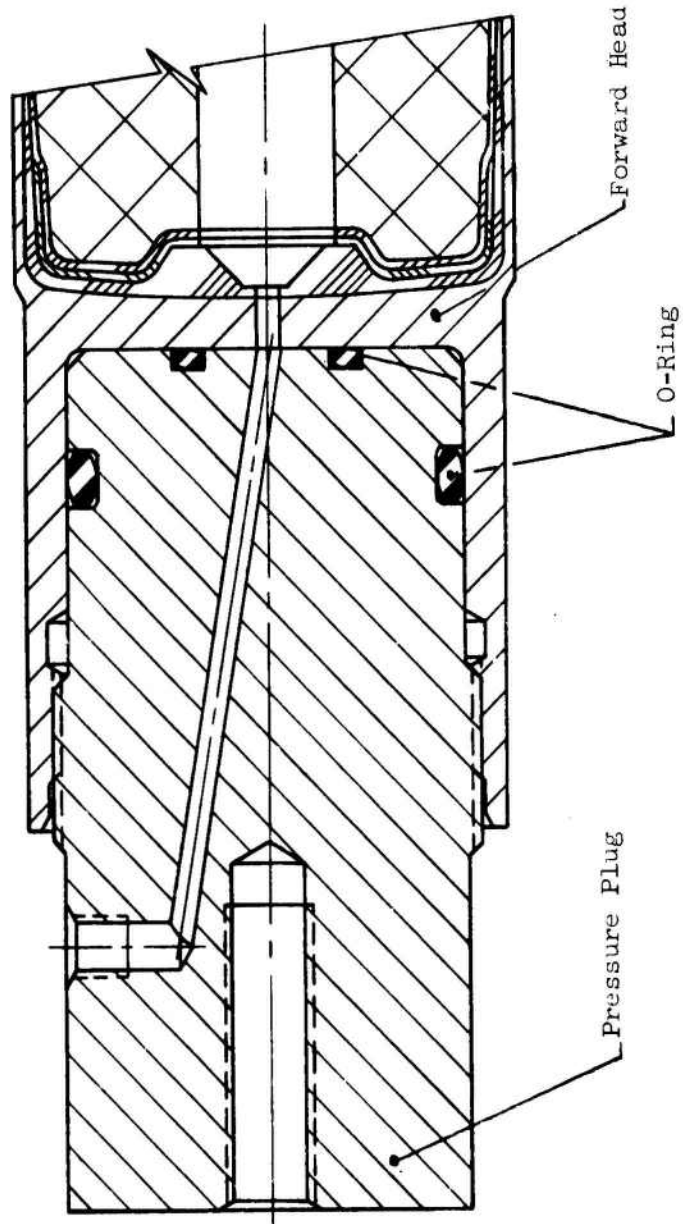

Forward Head Pressure Tap Configuration

Figure 51

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

a. Component Test 1

The test objective was to evaluate grain ballistics and chamber insulation performance. This was the first full-scale motor test in the program and was conducted at ambient. The motor was cast with a four-slot grain configuration. At the bottom of each slot, the chamber side-wall insulation of SMR-18 was increased to 0.090 in. to withstand exposure to the erosive gases for almost the full firing duration. A heavyweight test aft closure with a single nozzle and a bag-type igniter with a charge of 12 gm of BPN pellets were used to expedite early start of component testing.

Upon ignition, a higher-than-anticipated peak pressure of 2800 psi was recorded. At approximately 0.15 sec duration, the erosive gases cut through the chamber at the grain/aft-closure interface and the entire aft-closure assembly and aft-chamber ring were ejected intact. Erosion was also noted on the chamber sidewall in the vicinity of the four propellant slots.

The cause of failure was inadequate insulation at the grain/aft-closure interface. In addition, erosive burning occurred which contributed to the higher-than-anticipated initial pressure.

b. Component Test 2

The motor configuration for this test was virtually the same as CT-1, except that a reduced igniter charge (6 gm) was used and the grain/aft-closure interface was modified. The modification consisted of trimming the aft end of the propellant grain adjacent to the aft-chamber insulation and of molding into the trimmed area a heavy bead of IBS-105-4 insulation to interlock the aft closure and protect the grain/aft-closure interface.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

Upon ignition at ambient, a high initial peak pressure similar to the first test was obtained. At 0.9 and 1.2 sec, respectively, the two pressure instrumentation taps on the aft closure were eroded off causing the burnout of the aft-closure assembly.

These firing results demonstrated the adequacy of the grain/aft-closure interface modification but revealed the inadequacy of the aft pressure-tap port insulation under erosive conditions. The firing results also indicated that the ignition spike was not significantly decreased by a reduction in igniter charge weight from 12 to 6 gm of BPN.

c. Component Test 3

This motor, fired at ambient, was the first to incorporate the proposal four-nozzle aft-closure configuration (Figure 49). The aft closure/grain joint modification was further improved by using a pre-machined insulator ring. The motor was satisfactorily ignited without an excessive ignition peak pressure from the 4-gm bag igniter. After approximately 0.4 sec, the aft closure burned through, first in the pressure tap area, then at the center piston area, eventually eroding out most of the aft closure, except for two nozzles. Again, the aft-closure insulation proved insufficient to withstand the erosive conditions. In addition, it was apparent that obtaining pressure measurements at the aft closure was detrimental to aft-closure integrity.

d. Component Test 4

To reduce the high initial pressures, this motor was reworked to reduce the burning surface by filling the aft-grain slots with a modified IBS-105 liner material, thus resulting in a tube grain configuration.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

Throat erosion data indicated that the progressivity of a tube grain design would be offset by the change in the nozzle area. In addition, the central area of the aft-closure insulation was reinforced by adding a carbon-phenolic insulator over the piston to resist the direct impingement of erosive gases from the motor bore.

The motor was fired at ambient with a 5-gm bag igniter. The aft closure remained intact for approximately 1.9 sec, at which time the center piston assembly area burned out. In addition, the insulators of all four exit cones ejected between 1.5 and 1.7 sec after fire switch. This test confirmed the desirability of eliminating the grain slots and adding more insulation in the central area of the aft closure.

Based on the results of this test, the designs of the aft-closure insulator and the exit cones were modified for future tests. The cylindrical bore grain design was also adopted. Phase II development tests were initiated with this design.

e. Component Test 6

This motor was conditioned and fired at -65°F to demonstrate that the failures of development Tests II-08 and 09 were due to insufficient insulation at the forward end and not from vibration at -65°F . The motor had the same forward insulation and release pattern as the motors from Tests II-08 and -09. Like these two motors, this motor also burned through at the forward end where the forward insulator terminates. As a result, the length of the forward insulator was changed from 0.60 to 1.12 in. to increase its average of the sidewall and, thus, prevent a recurrence of this type failure.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

f. Component Test 7

The motor was fired at +70°F primarily to evaluate the performance of flattened exit cones fabricated from carbon phenolic. Secondary objectives included fin actuation and evaluation of carbon phenolic as an insulation material for the aft closure. The chamber and grain assembly (Figure 50) was like that used in CT-6 above, but with a 3-in. long tapered aft-end insulator of SMR-81-15 (butyl rubber).

During firing, the flattened exit cones of carbon phenolic eroded away resulting in loss of throat insert at 1.17 sec, while the carbon phenolic material as the aft-closure insulator performed satisfactorily. Fins actuated successfully and withstood the exhaust well.

g. Component Test 8

This was the first unit to incorporate an integrally molded aft-closure insulator, nozzle inserts, and exit cones. The throat inserts were cylinders (0.75 in. dia by 0.75 in. long) of ATJ graphite, and, after molding, the throat diameter was machined to 0.28 in. dia.

The motor was fired at 70°F. All four exit cones and three throat inserts were ejected at 0.5 sec duration. The expansion of the graphite throat inserts during firing cracked the exit cones at the weakest point, the junction of the exit cones and plate.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

h. Component Test 9

This test was conducted after development Test II-28 and was made to evaluate silica exit cones assembled with the 40 mil throat insert relief gap potted with silicone rubber. The test firing was conducted at +150°F and lasted 2.5 sec. At that time, the aft closure burned through at the bottom of the exit cone circle at the expansion gap and the closure separated from the motor.

i. Component Test 10

This test motor was fired to evaluate silica phenolic as an insulation material for the integrally molded aft closure. The throat insert and relief gap and potting material were the same as used in Test II-33. When the motor was fired at +150°F, one exit cone was ejected at 0.24 sec with subsequent erosion through closure and chamber at the insert expansion gap.

j. Component Test 11


This firing at +150°F was a materials evaluation test conducted with throat insert material Carbitex-700. The test was prompted by the previous acceptable performance of Carbitex at -65°F in development Test II-22 and the requirement for further verification of its acceptability at the high temperature. Again Design A-2 was used with a Nylon paper washer and uncoated insert (Figure 52). All inserts remained in place and no evidence of cracking was observed. Throat erosion at +150°F showed the same acceptable amount as at -65°F.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90


Design A-1 One Piece Net Molded with
Ablative Throat

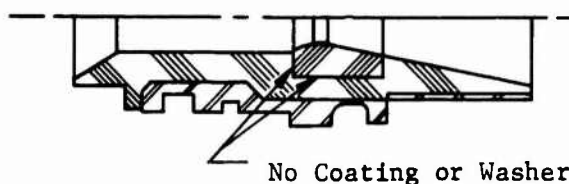

Throat Materials


MX 4926

Design A-2 One Piece Net Molded with
Graphite Inserts

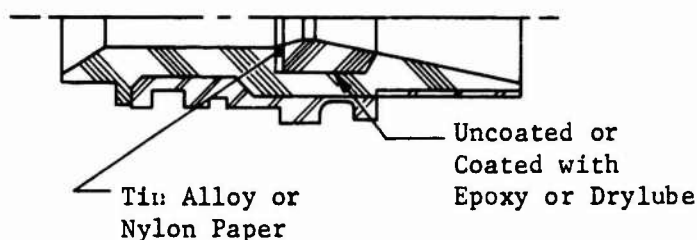


ATJ
(Baseline)
POCO AXF-QB
RVD
G-90
Pyrocarb 458
Carbitex-700
TS 902

Design A-3 One Piece Net Molded with
Pyrolitic Graphite Washer

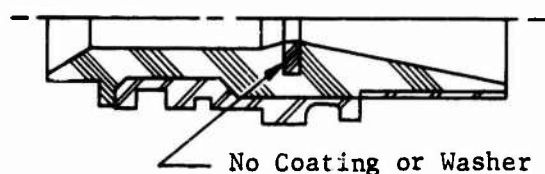


Pyrolitic
Graphite Washer

Design A-4 One Piece Net Molded with
Tungsten and 4926 Inserts

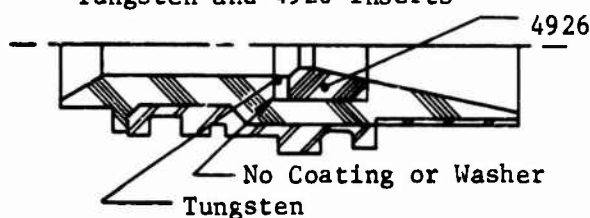

Tungsten Insert and
MX 4926 Insert

Design B-1 Two Piece with Bonded Graphite Inserts

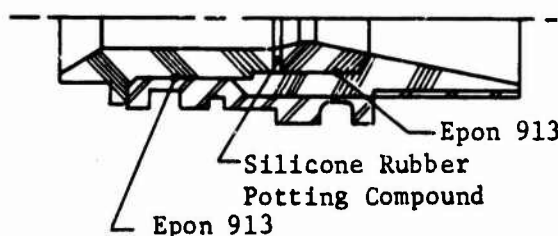

ATJ
POCO AXF-QB
RVD
G-90
Pyrocarb 458
Carbitex
TS 902

Candidate Aft Closure and Throat Insert Designs

Figure 52

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

The chamber and grain assembly, including restriction, was identical to that for development Test II-31. The assembly was temperature conditioned to +150°F before firing. Test data showed that the ignition peak pressure was 2120 psig vs the design peak pressure of 1990 psig. The bore restriction was therefore extended in later motors to reduce the ignition peak pressure to an acceptable level.

For this firing, the aft end of the grain was potted with IBS-105-4X, which replaced the previous potting material, CS-3802 silicone rubber. IBS-105-4X was expected to reduce erosion of the aft-end insulation (SMR 81-15), while providing aft-end grain restriction and closure-joint sealing. Examination of the chamber after firing showed that IBS-105-4X, as an insulation potting material, substantially reduced the amount of erosion on the aft-end insulation.

k. Component Test 12

This firing was a materials evaluation test conducted at +150°F with an integrally-molded aft closure of the same design as used in development Test II-21 below. The GFM fin-actuating piston, however, developed a leak at the seal between the wire and piston, thus causing the center of the aft closure to erode away. To eliminate a recurrence, subsequent aft-closures will use fin-actuating pistons having fused-glass-bead seals where the electrical wire lead enters into and exits from the piston. The average throat erosion was about 19 mils/sec despite the piston burnthrough.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

1. Component Test 13

This firing made with a PFRT configuration was also a materials evaluation test conducted at -65°F with an integrally molded aft closure containing Carbitex-700 throat inserts, but with Durez insulation material instead of MXC-313. The insulator had the same configuration as used in the previous tests. The Durez material was tested in the interest of providing a second material source. During the firing, one Durez exit cone cracked and failed, thereby allowing its throat insert to eject. Inspection of the fired aft closure revealed that material porosity combined with lack of close contact with the aft closure shell had caused the cracking. No further test of this material was performed.

m. Component Test 14

This motor was temperature conditioned to +150°F and then successfully fired as a continuation of the nozzle material evaluation tests. The test objective was to evaluate the performance of MXC-313 aft-closure insulation material when transfer-molded with a cure time of 30 min vs the present cure time of 60 min. In all other respects, the motor was the same as the PFRT design (Figure 1). Postfiring examination of the aft closure indicated that the amount of erosion and the general condition of the insulator were similar to those exhibited by the insulation when cured for 60 min.

n. Component Tests 15 and 16

Two additional motors of the PFRT configuration were conditioned to +70 and +150°F, respectively, and successfully static fired as a continuation of the materials evaluation testing of the MXC-313

UNCLASSIFIED

CONFIDENTIAL

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

aft-closure insulation material. Both motors had aft closures containing MXC-313 transfer-molded with a cure time of 30 min. Postfiring inspection showed that the condition of the aft-closure insulation material cured for 30 min continues to compare well with aft-closure insulation material cured for 60 min. The firings were satisfactory.

In addition to material evaluation, the tests served to check the PFRT test procedures, the Beckman analogue digital computer (ADC) for recording performance data, and its data reduction capability. Results were satisfactory.

3. Motor Development Tests (Phase II)

Exhibit A of the contract specified three series of 15 motors each to be fired in Phase II. By agreement with the Air Force, series 2 was reduced to 11 tests and series 3 was reduced to six tests. Four additional tests were made. Descriptions of the motors and testing are presented below. Tests were in accordance with MIL-R-25535A, as required. Ballistic data, test objectives, and results are summarized in Figure 53. Typical firing curves at -65, +70, and +150°F are shown in Figures 10 and 11.

Thirty-six development motors were test-fired, 12 at -65°F, 10 at +70°F, and 8 at +150°F. The six remaining motors were successfully subjected to spin tests at Langley. As shown in Figure 54, environmental testing included temperature cycling from -65 to +150°F and endurance vibration testing at the temperature extremes prior to firing.

CONFIDENTIAL

(This Page is Unclassified)

CONFIDENTIAL

Report AFRPL-TR-69-90

Test No.	Chamber S/N	Propellant Batch Number	Date Fired	Firing Temp., °F	Action Time Total Impulse, lbf-sec	Burn Time Total Impulse, lbf-sec	Specific Impulse lbf-sec/lbm	Max Thrust, lbf	Max Ignition Thrust, lbf	Average Thrust, lbf
01	2-020	67-506	11-9-67	+70	1775	1160	223.2	810	620	674
02	2-006	67-506	11-14-67	+70	1772	1634	222.9	811	662	542
03	2-007	67-506	11-30-67	+70	N/A	N/A	N/A	N/A	670	N/A
04	2-012	67-506	11-14-67	-65	N/A	N/A	N/A	N/A	620	N/A
05	2-015	67-506	11-21-67	-65	1696	1566	213.3	651	658	575
06	2-013	67-506	11-17-67	+150	1766	1613	222.1	851	753	699
07	2-011	67-506	12-20-67	+150	1788	1645	224.9	905	747	710
08	2-09	67-506	12-14-67	-65	N/A	N/A	N/A	N/A	N/A	N/A
09	2-08	67-506	12-14-67	-65	N/A	N/A	N/A	N/A	N/A	N/A
10	2316	67-570	1-15-68	-65	N/A	N/A	N/A	N/A	N/A	N/A
11	2-017	67-506	1-5-68	+150	1808.9	1679	227.5	905	730	660
12	2-015	67-506	1-8-68	+150	1736	1614	218.4	885	655	633
13	2-019	67-506	1-10-68	+150	1817.7	1678.9	228.6	921	696	611.8
14	2305		1-23-68	+70			Successful spin test at Langley			
15	2315		1-24-68	+70	1760	1627	221.3	834	798	661
16	2-010	67-506	12-7-67	+70	1914	1602	240.7	855	674	667
17	2304		12-12-67	+70	1819.6	1514.5	226.8	707	535	510.4
18	2412	68-1	1-23-68	-65	1809.6	1558.7	227.6	707	530	507.2
19	2411	68-1	1-26-68	-65	1851.6	1677.6	234.1	840	685	614.4
20	2410		1-2-68	+150	1919	1642	241.2	892	543	675
21	2613	68-46	5-13-68	+150	1873	1573	230.3	739	622	551
22	2612	68-46	4-22-68	-65	N/A	N/A	N/A	N/A	N/A	N/A
23	2607	68-46	3-4-68	-65						

2.75-in. FFAR Development Ballistic Data Summary (u)

Figure 53, Sheet 1 of 7

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

Test No. II-	Chamber S/N	Propellant Batch Number	Date Fired	Firing Temp., °F	Action Time Total Ignitance, lbf-sec	Burn Time Total Ignitance, lbf-sec	Specific Impulse, lbf-sec/lbm	Max Thrust, lbf	Max Ignition Thrust, lbf	Average Thrust, lbf
24	2320		1-24-68	+70	N/A	N/A	Successful spin test at Langley	N/A	735	N/A
25	2323		1-24-68	+70	N/A	N/A	Successful spin test at Langley	N/A	700	N/A
26	2309		1-26-68	+70	N/A	N/A	Successful spin test at Langley	N/A	695	676
27	2302	68-21	1-25-68	+70	1912	1607	240.5	896	695	676
28	2303	68-21	1-26-68	+70	1831	1524	230.3	656	657	539
29	2615	68-16	3-11-68	-65	1837	1525	231.0	675	542	540
30	2611	68-16	4-16-68	-65	1888.9	160.15	237.5	895	625	665.6
31	2609	68-16	4-25-68	+70	1921.6	1630.7	241.7	898	710	693.2
32	2310	67-570	1-26-68	+150	1940	1680	244.0	878	610	658
33	2319	67-272	1-27-68	+150	1896	1600	239.6	842	639	643
34	2318	68-1	1-31-68	+70						
35	2404	68-1	1-7-68	+70						
36	2610	68-16	5-8-68	+70						

Figure 53, Sheet 2 of 7

CONFIDENTIAL

2.75-in. FFAR Development Ballistic Data Summary (u)

CONFIDENTIAL

Report AFRFL-TR-69-90

Test No. II-	Max. Chamber Pressure, psig	Max. Ignition Pressure, psig	Avg. Chamber Pressure, psig	Action Time, sec	Burn Time, sec	Ignition Delay, sec	Ignition Rise Time, sec	Remarks
01	1350	1490	1328	3.368	1.721	0.02	0.05	Test objectives: Evaluate (1) basic design of chambers and grain assembly; (2) grain ballistics and insulation performance; (3) four cant-nozzle aft closure (tape-wrapped MX 4925 for insulator and exit cones). Full duration firing; satisfactory ballistics; no hot spots, some delamination of exit cones noted.
02	1437	1593	1232	3.270	2.461	0.014	0.036	Test objectives: Same as above plus evaluate use of steel sleeves to control exit-cone delamination. Full duration firing; no delamination noted.
03	N/A	1610	N/A	N/A	N/A	0.045	0.032	Test objectives: Evaluate (1) ballistic and insulation performance; (2) aft closure with four straight nozzles (WB 4925, Avcon as insulator and silica phenolic exit cones). Aft closure ejected at 0.05 sec due to combination of chamber ovality and shallow lockwire groove; test inconclusive.
04	N/A	1418	N/A	N/A	N/A	0.069	0.007	Test objectives: Evaluate performance of grain, insulation, and cant four nozzle aft closure with tape wrapped MX 4925 insulator and exit cones; steel sleeves on exit cones. Motor malfunctioned at 0.5 sec due to O-ring leak in pressure tap adapter.
05	1580	1560	1107	3.270	2.722	0.037	0.017	Test objectives: Same as above; motor constructed as for Test II-04 above. Motor temperature cycled; full duration firing; regressive curve due to grain cracking; lack of adequate release; additional release agent to be applied in future motors.
06	1515	1709	1246	2.513	2.308	0.029	0.014	Test objectives: Same as above; motor constructed as for Tests II-04 and -05. Good full duration firing; ballistics and insulation performance satisfactory.
07	1530	1652	1318	2.763	2.315	0.030	0.010	Test objectives: Same as above, but under environmental and firing conditions; also evaluate gas flow effects on fins; motor constructed as for Tests II-04, -05, and -06, but with MX 4925 as aft closure insulation and exit cones. Vibrated and cycled; good full duration firing; no adverse effects noted on fins.
08	N/A	1368	N/A	N/A	N/A	0.051	0.037	Test objectives: Same as for Test II-07, but no fins; motor constructed as for Tests II-04 to -07. Vibrated and cycled; chamber sidewall burnthrough at aft edge of forward insulator.

2.75-in. FFAR Development Ballistic Data Summary (u)

Figure 53, Sheet 3 of 7

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

Test No. II-	Max. Chamber Pressure, psig	Max. Ignition Pressure, psig	Avg. Chamber Pressure, psig	Action Time, sec	Burn Time, sec	Ignition Delay, sec	Ignition Rise Time, sec	Remarks
09	N/A	N/A	N/A	N/A	N/A	0.054	0.031	Test objectives: Evaluate motor performance under environmental and firing conditions; motor constructed as for Tests II-04 thru -08. Vibrated; rupture at ignition; cracked grain due to inadequate release area; apply more release agent in future motors.
10	N/A	958	N/A	N/A	N/A	0.051	0.035	Test objectives: Same as above; motor constructed as for Tests II-04 thru -09, but KX 4926 for aft closure insulator and exit cones. Vibrated; chamber burnthrough at 0.5 sec; edge of forward insulator.
11	1640	1765	1471.5	2.739	2.294	0.039	0.013	Test objectives: Same as above; motor constructed as for Tests II-04 thru -10, but with KX 4925 for aft closure insulator and exit cones. Vibrated; good full duration firing; successful simulated launch tube set up.
12	1400	1540	1343.8	2.741	2.491	0.045	0.026	Test objectives: Same as above; motor constructed as for Test II-11. Vibrated; good full duration firing under successful simulated launch tube set up.
13	1700	2130	1464.9	2.832	2.302	0.048	0.023	Test objective: Evaluate grain and chamber assembly; canted nozzle aft closure; insulator and exit cones of silica phenolic. Vibrated; good full duration firing; silica phenolic satisfactory.
14								Test objective: Evaluate motor performance under spin conditions at Langley; motor constructed as for Test II-11. Successful spin test.
15								Test objective: Same as Test II-14. Successful spin test.
16	1561	2114	1345	2.906	2.461	0.025	0.015	Test objectives: Evaluate grain ballistics and insulation performance; evaluate exit cones with short throat inserts and exit cones with long inserts and with and without steel sleeves; exit cones fabricated from silica phenolic and aft closure insulator from KX 4925. Full duration firing; exit cone with long insert and steel sleeve showed excellent post firing condition; remainder fair to poor condition.

Figure 53, Sheet 4 of 7

CONFIDENTIAL

2.75-in. FFAR Development Ballistic Data Summary (u)

Test No.	Max. Chamber Pressure, psi	Max. Ignition Pressure, psi	Avg. Chamber Pressure, psi	Action Time, sec	Burn Time, sec	Ignition Delay, sec	Ignition Rise Time, sec	Remarks
17	1668	1766	1350	2.868	2.184	0.048	0.030	Test objectives: Same as above; motor constructed as for II-16 above, except exit cones fabricated of MX 4925. Full duration firing; exit-cone post-fire condition same as II-16.
18	1170	1325	1088	3.565	2.395	0.051	0.036	Test objectives: Evaluate case-bonded grain design with forward head fully released; aft-closure insulator and exit cones of MX 4926. Temperature cycled; good full duration firing; ballistics and insulator performance good.
19	1155	1312	1067	3.568	2.678	0.054	0.032	Test objectives: Same as II-18 above; motor constructed as for II-18 above. Temperature cycled; good full duration firing; excessive throat erosion.
20	1370	1625	1293.1	3.030	2.270	0.045	0.025	Test objectives: Same as II-18 and -19 above. Temperature cycled; firing normal except for excessive throat erosion.
21	1710	1725	1336	2.84	2.215	0.005	0.035	Test objectives: Evaluate motor performance after vibration and temperature cycling; evaluate MKC-313 as transfer-molding insulation material for integrally molded aft closure; evaluate +150°F +1.5" diameter of Carb-I-Tex 700 as throat insert material in PFMT design; motor of PFMT configuration.
22	1412	1820	1127	3.4	2.58	0.005	0.045	Normal firing; MKC-313 was satisfactory and throat erosion of Carb-I-Tex acceptable. Test objectives: demonstrate chamber-grain integrity after temperature cycling and endurance vibration at -65°F for 60 hr (30 hr each in longitudinal and vertical axes); Carb-I-Tex 700 as throat insert material.
23	N/A	1556	N/A	N/A	N/A	0.028	0.036	Firing successful; inserts intact; throat erosion acceptable. Test objectives: Evaluate grain and chamber performance; evaluate Durez as insulation material for integrally molded aft closure; ATJ throat inserts. One nozzle cracked and ejected at 0.235 sec.
24								Test objectives: Evaluate motor performance under spin conditions at Langley; motor constructed as for Test II-11, except that IBS-105-4X was used as the aft end insulator instead of SBR-Bj-15. Successful spin test.

Figure 53, Sheet 5 of 7

CONFIDENTIAL

2.75-in. FFAR Development Ballistic Data Summary (u)

CONFIDENTIAL

Report AFRPL-TR-69-90

Test No. II-	Max. Chamber Pressure, psig	Max. Ignition Pressure, psig	Avg. Chamber Pressure, psig	Action Time, sec	Burn Time, sec	Ignition Delay, sec	Ignition Rise Time, sec	Remarks
25								Test objectives: Same as for Test II-24; motor was constructed same as for II-24. Successful spin test.
26								Test objectives: Same as for Tests II-24 and -25; motor constructed as for Test II-11. Successful spin test.
27	1312	1600	N/A	3.382	N/A	0.041	0.023	Test objectives: Evaluate ballistic and insulation performance; evaluate performance of aft closure insulator and exit cones of MX 4925, plus aft end insulator of IBS-105-4X; ATU inserts. One insert ejected at 0.55 sec and another at 1.3 sec.
28	1625	1810	N/A	3.20	N/A	0.051	0.014	Test objectives: Same as Test II-27 above; motor constructed same as for Test II-27. Ejected two exit cones at 1 sec.
29	1741	2046	1464	2.829	2.183	0.017	0.018	Test objectives: Evaluate grain and insulation performance; evaluate Durez for integrally molded insulator and exit cones and ATU inserts; chamber and grain assembly of PPRF design. Normal firing for full duration.
30	1466	1958	894	3.4	2.55	0.010	0.036	Test objectives: Demonstrate chamber-grain integrity after temperature cycling from -65 to +150°F; evaluate MX 4926 material for throat insert use. Firing successful; throat inserts intact; throat erosion too high.
31	1370	1610	992	3.4	2.55	0.005	0.045	Test objectives: Same as II-22 above; environmental testing consisted only of temperature cycling; Pyrocarb 948 as throat insert material. Firing successful; inserts intact; throat erosion unacceptable.
32								Test objective: Evaluate motor performance under spin test conditions; motor constructed the same as for Test II-11. Successful spin test.

2.75-in. FFAR Development Ballistic Data Summary (u)

Figure 53, Sheet 6 of 7

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

Test No. II-	Max. Chamber Pressure, psig	Max. Ignition Pressure, psig	Avg. Chamber Pressure, psig	Action Time, sec	Burn Time, sec	Ignition Delay, sec	Ignition Rise Time, sec	Remarks
33	1535	1530	1453.3	2.838	2.163	0.052	0.030	Test objective: Evaluate ballistic and insulation performance; evaluate WB 8517 (carbon phenolic) as transfer-molded aft closure insulator and exit cones plus ATJ inserts; chamber grain assembly like II-11, except for IBS-105-4X as aft end insulator. Vibrated; normal firing; aft-closure insulation satisfactory.
34	1645	1855	1596	2.772	2.117	0.042	0.016	Test objective: Same as for II-33; motor constructed as for II-33, except that MGC-313 was integrally molded insulation material with ATJ graphite inserts and SMI 90K-18 as the aft-end insulator material.
35	1615	1519	1365	2.946	2.323	0.022	0.039	Test objective: Evaluate fully bonded grain performance; evaluate aft closure integrally molded with MGC-313 and ATJ inserts. Full duration firing; inserts in excellent condition probably due to molded entrance section.
36	1622	1925	1293	2.95	2.285	0.005	0.044	Test objective: Evaluate ballistic and insulation performance of PFW design; evaluate MGC-313 as aft-closure insulation and Carb-I-Tex throat inserts; determine igniter peak with 6-in. aft end of bore restriction. Vibrated; temperature cycled; firing successful; igniter pressure too high; 7.75 to 8.0 in. bore restriction set for PFW motors.

2.75-in. PFW Development Ballistic Data Summary (u)

Figure 53, Sheet 7 of 7

CONFIDENTIAL

UNCLASSIFIED

Report AFRPL-TR-69-90

Motor for Test II- No.	Temp. Cycle	Vibrate, °F		Fire, °F		
		-65	+150	-65	+70	+150
1					x	
2					x	
3					x	
4	x			x		
5	x			x		
6	x					x
7	x	x				x
8		x		x		
9		x		x		
10		x		x		
11			x			x
12			x			x
13			x			x
14					x*	
15					x*	
16					x	
17	x				x	
18	x			x		
19	x			x		
20	x			x		
21	x		x			x
22		x		x		
23				x		
24					x*	
25					x*	
26	x				x*	
27					x	
28					x	
29					x	
30	x		x	x		
31	x			x		
32					x*	
33	x	x				x
34						x
35					x	
36	x		x		x	

*Spin Test at Langley

Phase-II Test Sequence

Figure 54

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

The chamber and grain assembly for Tests II-1 through II-17 had a grain support system wherein the forward head was fully released and the sidewall was partially released in two 75 degree strips which led into a 6-in. wide band circumferentially released at the center of the motor as shown in Figure 50. The motor for Test II-18 incorporated a grain support system that consisted of fully bonding the grain to the chamber sidewall and completely releasing the grain from the forward closure. Except for the four motors for the acceleration tests at Langley (Tests II-24 through -26 and II-32) and a fully bonded motor for Test II-36, all remaining development motors had this grain support system. The grain support system was incorporated into the PFRT design shown in Figure 1.


The aft end insulator of SMR-81-15 (ethylene propylene rubber) in 13 development motors (Tests II-1 through -9, II-11 through -13, and II-16) was 10-in. long and was increased from the proposal thickness of 0.10 in. by adding 0.04-in. thick layer of SMR-81-15. In subsequent motors, the insulator was set at 3 in. in length and tapering from an aft end thickness of 0.125 in. to 0.25 in. at the forward end. Two other insulation materials (SMR-90K-18 rubber and sprayed-on IB-105-4X) were tested in this configuration to evaluate alternative aft-end insulation materials. A comparison of the performance of SMR-90K-18 in Tests II-10, -13, and -34; IBS-105-4X in Tests II-24, -25, -29, -31, -33, and -36; and SMR-81-15 in previous tests showed that IBS-104-4X provided improved erosion resistance at lower cost. This material in the above insulator configuration was incorporated into the PFRT motor (Figure 1).

In addition to the above changes to the chamber and grain assembly shown in Figure 50, three other changes were made as illustration in Figure 55. The first consisted of lengthening the forward insulator to provide more coverage along the chamber sidewall. This change resulted from the chamber burn-through at the aft end of the insulator during Test II-08.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

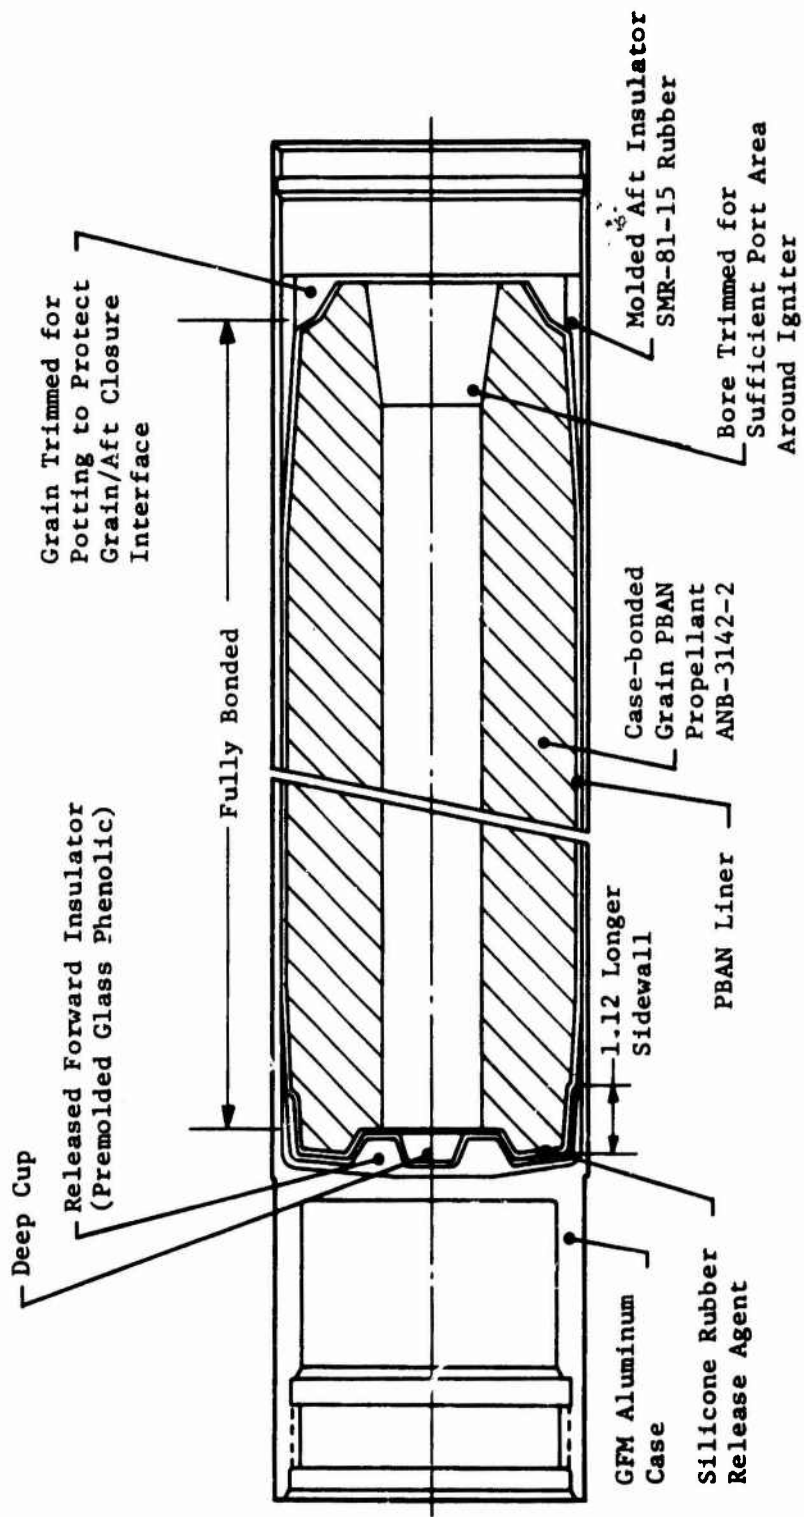

Chamber and Grain Assembly Design
(Configuration C)

Figure 55

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

Inadequacy of the fore-end insulation was confirmed by a similar burn-through in CT-6 previously discussed. Further, the insulator cup was deepened to permit easier and more positive centering of the casting core and the material thickness was increased for added ruggedness.

The other two changes involved the aft-end configuration of the grain. The bore was trimmed to provide adequate post area for gas flow around the aft-end igniter, and the aft-end of the grain O D was trimmed to accept sufficient potting materia to better protect the grain/aft-closure interface, as shown in Figure 55.


As a result of excessive erosion of the aft-end insulator observed in Tests II-22, II-30, and -31, the grain/aft closure interface in Figures 55 and 56 were changed to that shown in Figure 57, the PFRT design, wherein the IBS-105-4X potting compound completely fills the gap between grain and closure to fully protect the grain/aft-closure interface. This configuration was successfully tested in Test II-21 and in 45 PFRT motors, as described later.

During the development firings, the prime insulation candidates for the multicomponent aft-closure (Figure 49, Configuration B) were MX 4926 and MX 4925, with one unsatisfactory test each of WB 8251 and silica phenolic. Exit cone materials included MX 4926, MX 4925, and silica phenolic. When the integrally-molded aft-closure design (Figure 49, Configuration C) was adopted, MXC-313 insulation material was used successfully for transfer molding the aft-closure insulator and exit cones as a unit. Performance of the material in test firings rates highly satisfactory. Other insulation materials for the integrally molded aft closure included WB-8517 in one unsuccessful test firing and Durez in four inconclusive test firings.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

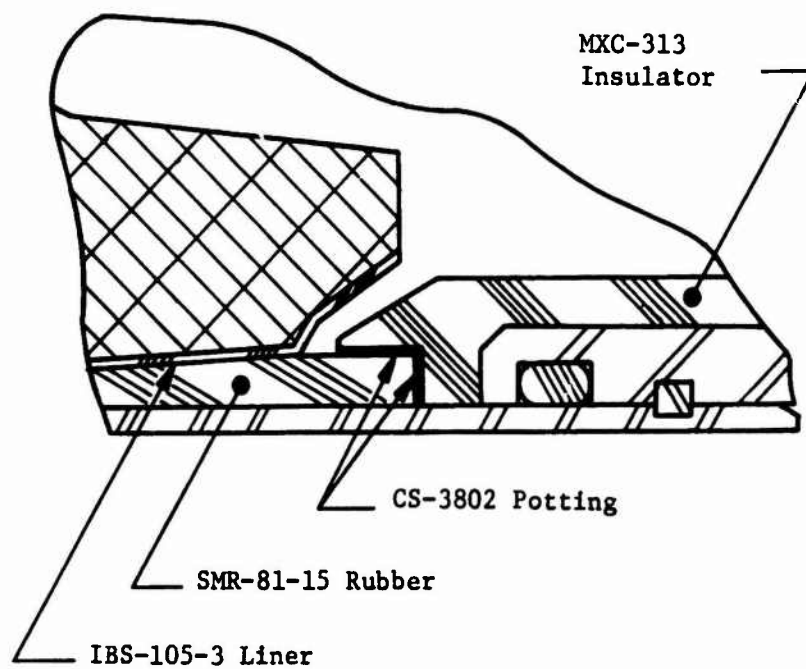


Old Design Aft Joint

Figure 56

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

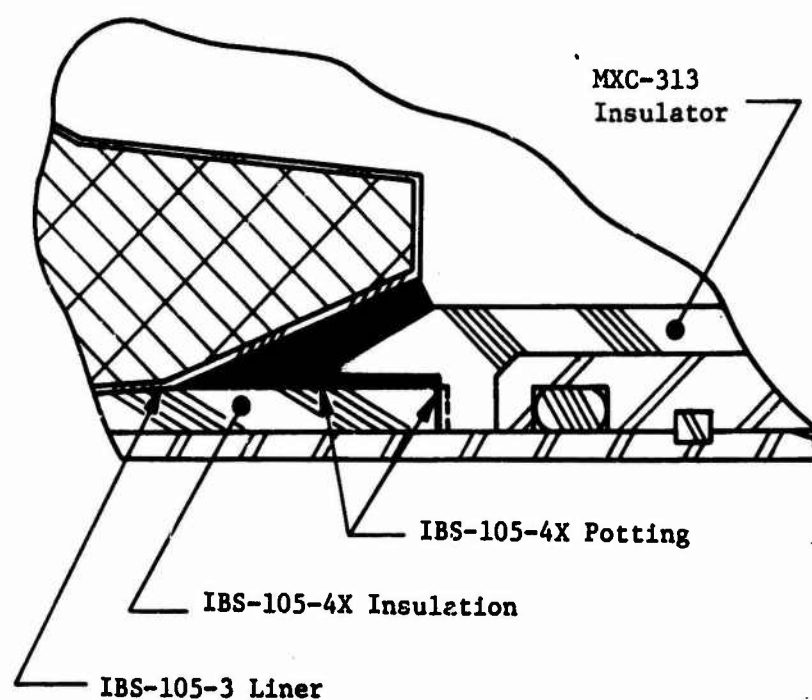

New Design Aft Joint

Figure 57

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

For throat inserts, ATJ graphite was used in both the multi-component and integrally molded aft closure because of its low erosion rate and low cost. In the integrally molded aft closure, its compressive strength, however, was too low to withstand the high pressures of the transfer-molding process, as evidenced by insert cracking and ejection during firing. At that time, various candidate throat insert configurations and materials (Figure 52) were investigated to overcome the insert cracking and ejection difficulty and to obtain a material with satisfactory compressive strength for withstanding the transfer-molding process. Both Pyrocarb and MX 4926 were tested but exhibited unacceptable rates of erosion. Subsequently, Carbitex was selected based on its compressive strength of 21,000 lb and its acceptable rate of erosion (about 18 mils/sec) which compares favorably to ATJ graphite (about 15 mils/sec). The design, shown as Design A2 in Figure 52, was incorporated into the PFRT motor (Figure 1).

Except for the first five firings, wherein a bag-type igniter installed at the fore end of the motor was used to expedite start of testing, all remaining development motors had igniters with the basic aft-end igniter configuration shown in Figure 1 and previously described in Section II. C. 1.

a. Series 1

(1) Ambient Temperature Firings

(a) Test II-01

The motor was fired successfully at ambient temperature to confirm basic component design and ballistic performance. Nozzle exit-cone delamination was noted. A bag igniter was used containing 6 gm of BPN and located in the forward end of the motor.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

The motor was insulated with a forward insulator (Fiberite 4030-190) and an aft-end chamber sidewall insulator (SMR-81-15) rubber modified with an extra layer of SMR 81-15. It was assembled with a closure having four threaded canted nozzles (Figure 49, Configuration A). The chamber and grain assembly for this motor was essentially as shown in Figure 50, but with the thickness of the SMR 81-15 aft-end insulator increased by an extra layer of SMR 81-15.

(b) Test II-02

This motor, fired at ambient, was of the same configuration as used in Test II-01 above, except that a steel sleeve was placed around each exit cone to control the delamination noted above. The motor was successfully fired at ambient to evaluate grain ballistics and insulation performance. The exit-cone delamination was apparently corrected by the steel sleeves.

(c) Test II-03

This motor was the first to incorporate an aft-closure assembly with four straight nozzles (Figure 49, Configuration B). The aft-closure insulator was fabricated from WB 8251 (Avceram) material, the exit cones from silica phenolic, and the throat inserts from ATJ graphite. The igniter was the first aft-end model to be used in this test series. It was bonded to a piston cap made of MX4926 and contained 9 gm of BPN pellets.

The motor was fired at ambient to evaluate grain ballistics and insulation performance. At ignition, the aft closure was ejected at 1500 psi during ignition because of a shallow lockwire groove combined with chamber ovality.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(2) Temperature Cycling Tests

A total of four motors (Figure 50) were temperature cycled. Subsequently, two motors each were fired at -65 and +150°F.

(a) Test II-04

This motor was constructed like the motor for Test II-02 above. It was fired at -65°F and failed shortly after ignition because of a leak at the O-ring in the adapter used for pressure measurement. This motor operated normally for approximately 0.5 sec before loss of the adapter seal and subsequent burn through the forward portion of the chamber and bulkhead.

(b) Test II-05

This motor was tested at the cold temperature (-65°F). Reduced test data showed the test curve to be regressive. This regressivity is believed to have been the result of the grain cracking in the aft end, possibly on initial pressurization. The X-rays taken after temperature cycling had indicated no cracks. However, the grain had not contracted from the chamber wall in the released areas as much as desired. A process change was made to apply more release agent in future motors.

(c) Test II-06

This motor was insulated like the prior motors of this series and assembled with a canted nozzle closure assembly which incorporated steel sleeves on the exit cones (Test II-02 above). It operated well for the full duration at 150°F.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(d) Test II-07

This motor was of the same configuration as the motor for Tests II-08 and II-09, was vibrated with them, and was intended for Test II-10. Based on the firing failures of II-08 and II-09, which occurred prior to this test, it was decided to fire the motor at +150°F after temperature cycling in agreement with the test plan for the motor for Test II-07. Fins attached in the normal open position were tested to evaluate the effect of the exhaust gas stream on the fin blades. The motor fired successfully, with no adverse effects on the fins.

(3) Vibration Tests

Six motors (Figure 50) were subjected to vibration tests, subsequently three were fired at -65°F and three were fired at +150°F.

(a) Test II-08

This motor was assembled like the motor for Test II-17 (see below), except that the nozzles were all the same configuration. The motor was vibrated at -65°F for 60 hr prior to firing at -65°F. The chamber burned through the sidewall after 0.275 sec of burning, at a point where the forward head insulator ends.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(b) Test II-09

This motor was of the same configuration as the motor for Test II-08 and received the same vibration treatment prior to firing at -65°F. The motor chamber ruptured at ignition. Examination of the X-rays taken before firing and of the hardware and unburned propellant indicated that the grain cracked longitudinally during ignition. The cause of failure was assigned to the lack of bond-release at -65°F. A program of laboratory evaluation of various release agents and grain release design was initiated. Component Test 6 (see above) was conducted to verify that the failure of this motor and of the motor for Test II-08 was not due to the vibration to which they were exposed.

(c) Test II-10

The chamber and grain assembly of this motor was the same as that for Tests II-08 and -09 (Figure 50), except that two coats of release material were applied to obtain satisfactory release in the released areas.

(d) Test II-11

This motor was insulated as shown in Figure 50, but with the insulator (10-in. band of SMR 81-15 rubber) modified with an extra layer of 0.04-in.-thick rubber. It was released with one coat of TC-522-1 on the forward end in two 70-degree wide strips in a pattern like that shown in Figure 50. This pattern provides for fore-end venting as well as pressure equilibrium in the vented area. The chamber assembly was vibrated at +150°F.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

The motor was fired at +150°F in a rigid tube to simulate launcher eject. It ran full duration with good ballistic data. The motor had a straight nozzle closure. The aft-closure insulator was made of carbon phenolic and the exit cones of silica phenolic. The igniter was an aft end model which consisted of an aluminum tube plugged with plastic foam on one end, a Mk 1 Mod 1 squib, and 7 gm of BPN pellets. The loaded igniter tube was bonded to a carbon phenolic cap covering the piston. The igniter circuit to the squib was completed through a wired piston. The silica phenolic exit cones remained intact, the piston functioned properly, and the simulated launcher eject made indicated no damage to the launch tube. The igniter was used in all subsequent test motors and was incorporated into the PFRT motor with the added initiator charge as discussed previously.

(e) Test II-12

This motor was of the same chamber and grain design as the motor for Test II-11 and was vibrated at +150°F. It was assembled with the "work horse" aft closure. The closure was built with four threaded canted nozzles, with 0.312-in.-dia throat inserts. The aft-closure insulator and exit cones were of carbon phenolic. It was successfully fired at +150°F and again simulated launch tube ejection was accomplished with no damage to the launch tube.

(f) Test II-13

This chamber was vibrated at +150°F. The motor was fired using straight nozzles. The aft-closure insulator was silica phenolic instead of the previously used carbon phenolic, and the steel nozzle sleeves were reduced from 0.050 to 0.008-in. thick. The silica insulator functioned properly for the full duration as did the silica exit cones with the 0.008 in. sleeves.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(4) Flight Acceleration and Spin Tests

Two motors (Tests II-14 and -15) were temperature cycled and subsequently fired successfully at ambient temperature in the spin fixture at Langley Research Center.

(a) Tests II-14 and -15

The chamber and grain configuration of both motors is shown in Figure 50 with the long aft-end insulator of SMR 81-15 insulation. The aft-closure insulator, exit cones, and piston cap were made of carbon phenolic. The throat inserts were ATJ graphite machined to 0.28 in. ID.

b. Series 2

(1) Ambient Temperature Firings

(a) Test II-16

The chamber and grain assembly for this motor is shown in Figure 50, but with the aft end insulator modified with an extra layer of SMR 81-15. It was assembled with a straight nozzle aft-closure (Figure 49, Configuration B). The aft-closure insulator was made of MX 4925 and the exit cones of silica phenolic. Two of the ATJ graphite throat inserts were 0.5-in. long and two inserts were 0.75-in. long. The steel sleeve was installed on one each of the exit cones containing the short and long inserts. The igniter with 9 gm of BPN pellets was an aft-end model bonded to a piston

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

cap made of MX 4926. The motor operated successfully at +70°F for full duration. The motor hardware remained intact. The one exit cone with a long throat insert and no steel sleeve showed some delamination. However, the short insert with no steel sleeve had burned off.

(b) Test II-17

This motor (Figure 50) was the first to be tested from propellant Cast Lot 3. This motor lot was fabricated with 3-in.-long aft-end insulator in contrast to the previous motor lot which was made with 10-in.-long insulators. As a result of this modification, the characteristic dip plateau in the pressure-time curve of previous tests was eliminated. The igniter charge was reduced to 7 gm for this and subsequent tests. Like motor Test II-16, Test II-17 also had two short and two long nozzle inserts and the same steel sleeve set-up. The exit cones, however, were made of carbon fiber phenolic (MX 4925) instead of silica phenolic. Postfiring examination gave results similar to Test II-16, namely, the long insert plus sleeve combination was best, the short insert plus sleeve was next best, the long insert without sleeve next, while the short insert without sleeve was the least desirable.

(2) Temperature Cycling Tests

Four motors were temperature cycled and fired, two at each temperature extreme.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(a) Test II-18

The chamber and grain assembly for this test is shown in Figure 55. The forward insulator was extended to provide additional sidewall coverage and the cup was made deeper. The aft insulator was molded of SMR-81-15 into a 3-in. wide band 0.125-in. thick at the aft end tapered to 0.025 in. at the forward end. Only the forward insulator was released with RTV 587 Silastic, thus making this unit essentially case bonded, as shown in Figure 55. The motor was assembled with the "work horse" type aft closure. It was temperature cycled from ambient to -65°F three times, followed by cycling from +150 to -65°F three times. The motor was successfully fired at -65°F.

(b) Test II-19

This unit was a duplicate of Test Motor II-18, above, received identical environmental treatment, and was also successfully fired at -65°F. This confirmed the capabilities of the case-bonded design at the low temperature extreme.

(c) Test II-20

This motor had a case-bonded grain and was released only at the forward insulator head. The chamber was insulated with the forward insulator and with an aft insulator molded of SMR 81-15 into a 3-in. wide band 0.125-in. thick at the aft edge tapered to 0.025 in. at the forward edge. It was released at the forward insulator only, using RTV 587.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

The motor was temperature cycled three times from 150 to -65°F in the following 24 hr program: 7 hr up to temperature, 5 hr soak, 7 hr down to the cold extreme, and 5 hr soak cold. The motor was conditioned at +150°F and test fired. The motor ran full duration; however, a nozzle insert in the "work horse" closure with canted nozzles eroded through and the resulting gas flow burned off an adjacent exit cone.

Because of the nozzle failure on this and other motors fired at about the same time an investigation was initiated to improve the nozzle design. Tests of improved nozzle designs were made in component tests described in the previous section. Eight tests were conducted subsequent to this test (II-20). Descriptions of following tests that were conducted prior to this improved nozzle test will be noted.

(d) Test II-21

This motor was temperature cycled from -65 to +150°F and test fired at +150°F in accordance with the original test plan. No grain cracking, unbond, or other propellant abnormalities were observed during visual and X-ray examination subsequent to temperature cycling. This motor was also used as a nozzle materials evaluation test for an integrally molded aft closure. Throat inserts were Carbitex-700 and the insulation was MCX-313 (Design A-2, Figure 52). The throat inserts were not coated and a consumable Nylon paper expansion washer was used. Postfire examination showed no evidence of insert ejection or cracking and erosion (about 19 mils/sec) was considered acceptable.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(3) Vibration Tests

Six motors were originally scheduled for vibration tests. As a result of agreements with the Air Force, this quantity was reduced to two, both tests at -65°F.

(a) Test II-22


The chamber and grain assembly for this firing at -65°F (Figure 58) included restriction (0.01 in. thick) on the aft face of the grain and on 3 in. of the bore ID at the aft end. Sidewall liner, IBS-105-3, was used as the restriction material. Prior to firing, the chamber and grain assembly was temperature cycled from -65 to +150°F and then vibrated at -65°F for 60 hr as follows: 30 hr total in the longitudinal axis (15 hr at each of resonant frequencies of 200 and 20 cps) and 30 hr in the vertical axis (15 hr at each of the resonant frequencies of 200 and 20 cps). Visual and X-ray inspection revealed no bond separations, propellant cracking, or other abnormalities. The test aft-closure was installed; the motor was conditioned to -65°F and successfully fired. Test results showed that an additional reduction in ignition peak pressure was needed when the data was extrapolated to the peak pressure for a +150°F firing.

This motor was also utilized as a materials evaluation test. It used a net-molded aft closure containing Carbitex-700 throat inserts. This aft closure is shown as Design A-2 in Figure 52; the throat inserts were uncoated and a Nylon paper expansion washer was used. Postfiring examination showed no evidence of insert ejection or cracking. Further, the calculated erosion rate was 17 mils/sec which compares favorably with the 15 mils/sec for inserts of ATJ graphite. The calculated loss in velocity is very slight with no apparent loss in range.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

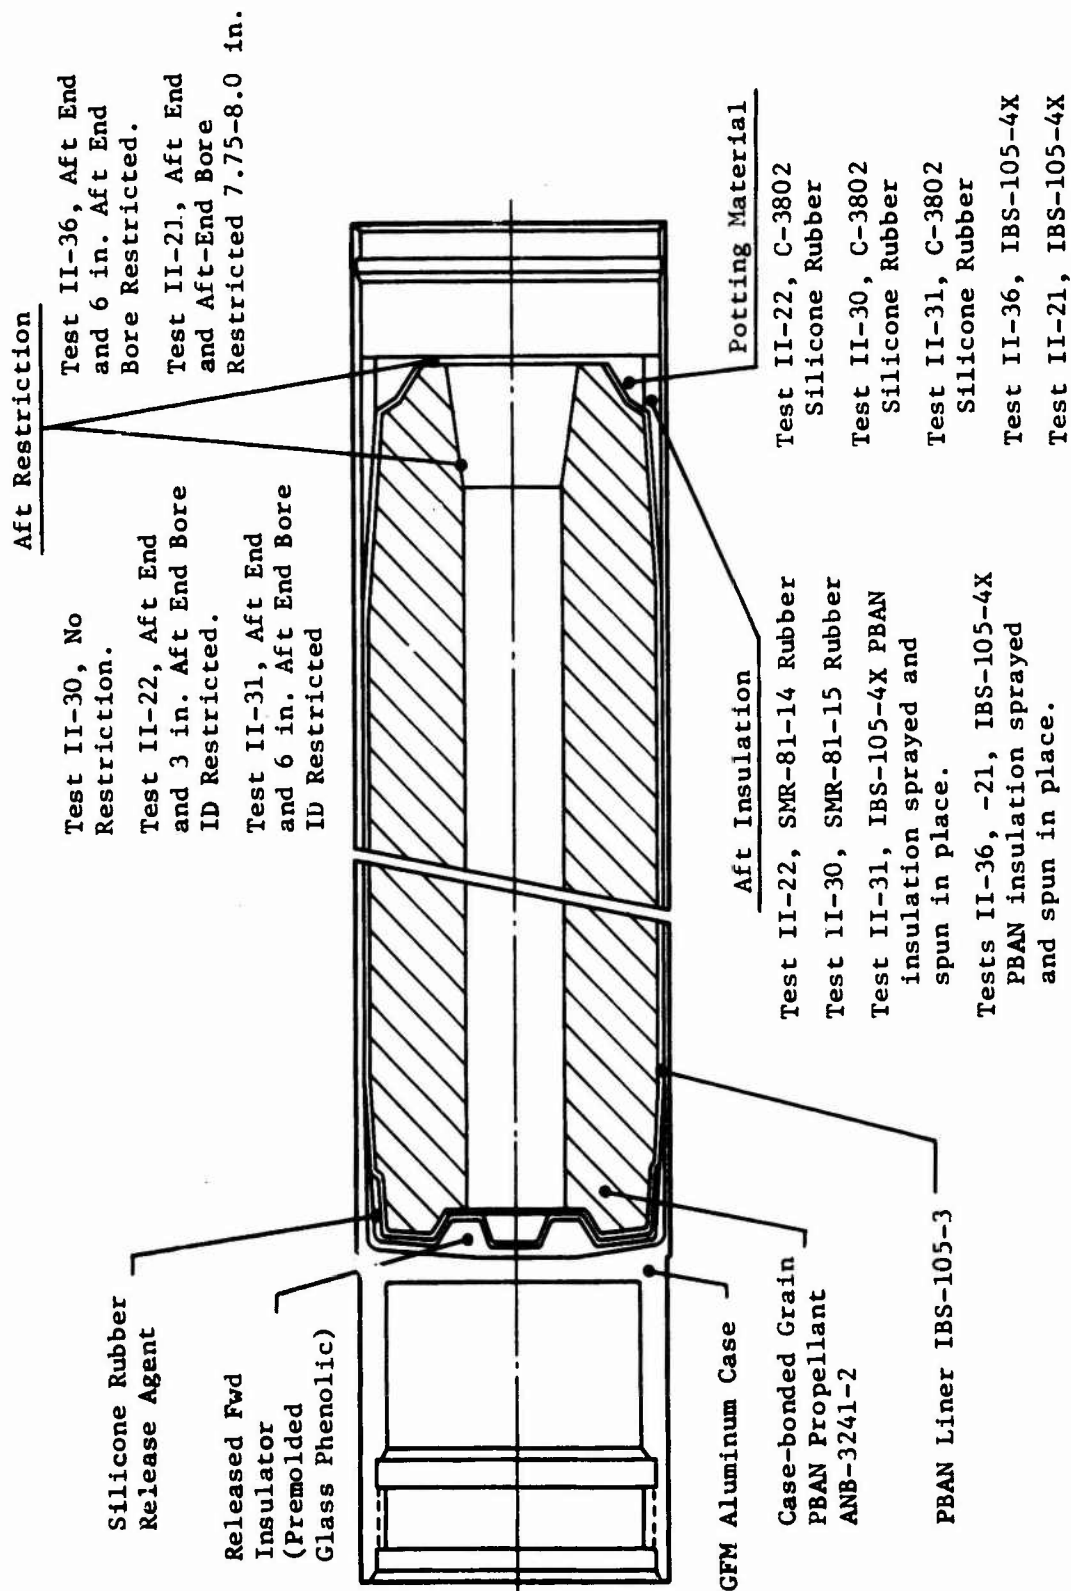

2.75 in. Chamber and Grain Assembly

Figure 58

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(b) Test II-23

During firing of this motor at -65°F the expended squib case came loose from the slotted insulator and was expelled through one of the nozzles at 0.235 seconds after ignition. The nozzle throat insert was ejected at 0.92 seconds apparently as a result of damage caused by the squib case.

(4) Flight Acceleration and Spin Tests

Three motors were fired at ambient temperature in the spin fixture at Langley Research Center. Two were temperature cycled prior to the firing. The chamber and grain assembly for Tests II-28 and -29 was the same as shown in Figure 58, except that the aft end insulator was IBS-105-4X material sprayed in place while the aft-closure configuration was the same as shown in Figure 52 Configuration B. Test II-26 was conducted with the chamber grain assembly shown in Figure 50.

(a) Test II-24

The chamber and grain assembly was the same as shown in Figure 57 except that IBS-105-4X insulation was used on the aft end insulator. It was considered necessary to add a 0.005-in. thick shim to the lock wire, because of chamber ovality. The motor functioned well in the spin fixture.

(b) Test II-25

The test was identical to the one above, including the lock wire shim. The motor was temperature cycled prior to firing.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(c) Test II-26

The chamber and grain configuration was like that shown in Figure 50. This motor was tested in the centrifuge at ambient conditions and performed well. It was also temperature cycled prior to firing.

c. Series 3

(1) Ambient Temperature Firing

(a) Test II-27

This unit was assembled with the longer (1.12 in.) forward insulator (Figure 55). This motor like motor II-18 above, was released on the forward end only, approximately 0.75 in. up the inside of the forward insulator. The motor was fired at +70°F and was intended to be the Batch Acceptance firing of Cast Lot 5 which included the motors for shipment to Eglin. However, on firing, one nozzle was ejected at 0.55 sec and a second at 1.3 sec. Postfiring examination revealed that the carbon phenolic parts and the mating graphite insert were assembled to such a tight tolerance that the expansion of the throat inserts during firing cracked the carbon phenolic parts as in the net molded case cited above.

(b) Test II-28

This motor was assembled the same as for Test II-27 above, except that a 40 mil relief or expansion gap was machined into the carbon phenolic aft-closure insulator abutting the forward face of the throat insert. The relief gap was potted with a soft silicone rubber. This relief was to fix the Eglin aft closures already assembled like that

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

used for Test II-27. On firing at +70°F, however, two exit cones were ejected at 1 sec. The motor continued for a total duration of approximately 3 sec, but at a reduced pressure of 825 psig. Apparently the 40-mil machined gap provided a path for heat transfer sufficient to overcome the insulation barrier. Both carbon phenolic and silica phenolic behaved the same way. (See Component Test 9.)

(c) Test II-29

This motor was fired successfully at 70°F for full duration.

(2) Temperature Cycling Tests

Five motors were originally scheduled for temperature cycling tests, by agreement with the Air Force this quantity was reduced to two, both fired at -65°F.

(a) Test II-30

The chamber and grain assembly (Figure 58) was successfully temperature cycled from -65 to +150°F, then assembled with the test aft closure, and fired at -65°F. Performance of the propellant grain and igniter was generally satisfactory; however, improved tailoff performance and reduction of the ignition peak pressure were considered necessary. A lower ignition peak pressure was required to avoid exceeding the maximum operating pressure (MEOP) of 1990 psig during firing at +150°F.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

This firing was also utilized to evaluate nozzle materials. A net-molded nozzle, Design A-1, with throat inserts of MX 4926 (Figure 52) was used in this with the grain and chamber assembly shown in Figure 58. Early selection and testing were made to demonstrate grain and aft-closure integrity in order to provide flight delivery motors in time to meet critical flight test dates. Examination of the fired aft closure showed that the throat inserts were retained, but that some cracking was evident. As expected, the throat insert material exhibited excessive erosion (about 30 mil/sec compared to 15 mil/sec for ATJ). It was calculated that 30 mil/sec would cause a reduction in burnout velocity of 175 ft/sec, which is not satisfactory from a performance standpoint.

(b) Test II-31

The ID bore restriction for this test motor was increased to 6 in. as a result of the data gained from Test II-22 (Figure 58). The motor was temperature cycled and then fired at -65°F. Ignition peak pressure was deemed satisfactory when extrapolated to the peak pressure for a +150°F firing.

This motor was also used for a materials evaluation test for throat-insert material Pyrocarb 458, which is similar to Carbitex-700. The material was evaluated in the interest of providing a second material source and lower cost. Design A-2 of Figure 52 (Nylon washer and uncoated insert) was used.

(3) Vibration Tests

By agreement with the Air Force, these six tests were deleted.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(4) Flight Acceleration and Spin Tests

(a) Test II-32

This test and motor configuration (Figure 50) was identical to the one used in Test II-26. The trailing sidewall of the chamber on both the motors tested in the centrifuge had a small burn through during tail-off because of the Coriolis force effect of planar rotation. This was a function of the test apparatus and not the insulation design and manufacture.

J. Additional Tests

A total of four additional tests were made to verify performance and evaluate components.

(1) Test II-33

The chamber and grain assembly for this motor is shown in Figure 50, except that the aft insulator was IBS-105-4X sprayed and cured in the chamber. The aft closure was transfer molded of WB 8517 carbon phenolic, with a 0.6 in. diameter tapered graphite insert later machined to a 0.28 in. throat with a 40 mil expansion gap as described before. This was the first closure using tapered inserts. The motor was fired for full duration at +150°F. The hardware remained intact and in good condition.

This design provides more insulation; also the tapered throat inserts have more bearing surface to resist ejection, and cause less load on the shell portion of the nozzle.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.C. Development Test Results (cont)

(2) Test II-34

This motor was like that for Test II-33, except that the carbon phenolic transfer-molding material was MXC-313. It was tested for full duration at +150°F. All hardware was in good condition after firing. This configuration is similar to the candidate for PFRT and gave additional confidence for the motors shipped to Eglin AFB for flight tests.

(3) Test II-35

This chamber was insulated like that shown in Figure 50, but was fully case bonded. It was assembled with a net molded closure. Carbon phenolic, MXC-313, was used. A built-in relief was provided for the graphite throat insert. This was accomplished by painting and curing Epon 913 0.25-in. thick on the forward face of the tapered insert. The motor was fired at ambient condition, ran for full duration, and all hardware remained intact. Postfiring examination showed the throat erosion to be very uniform. This was attributed to the tunnel entrance section leading to the throats.

(4) Test II-36 - Chamber 2610

This was largely a materials evaluation test conducted at +70°F with an integrally-molded aft closure containing Carbitex-700 throat inserts and MXC-313 insulation (Design A-2 of Figure 52). The throat inserts were uncoated and a consumable Nylon paper expansion washer was used. Postfiring examination showed no evidence of insert ejection or cracking. Carbitex-700 exhibited the same acceptable amount of throat erosion (about 18 mils/sec) as previously experienced at -65 and +150°F. Prior to firing, the chamber and grain assembly was temperature cycled from -65 to +150°F.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II. Technical Discussion (cont)

D. PRELIMINARY FLIGHT RATING TESTS - PHASE III

1. General

The test plan shown in Figure 59 is in general accordance with Specification MIL-R-25535 and consists of 45 motors. Of the 45 motors, 18 were only temperature conditioned before firing; six each were fired at -65, +70, and +150°F. Twenty of the 45 motors were sequentially environmentally tested and fired; eight at -65°F, four at +70°F, and eight at +150°F. The remaining seven motors were tested as follows: three altitude firings, one acceleration firing, one acceleration firing with a temperature gradient across the grain, and two firings with a temperature gradient across the grain. Successful completion of this testing demonstrated motor readiness to enter qualification.

Shortly after the start of the PFRT environmental testing, temperature cycling of four other Improved 2.75-in. motors from Cast Lot 7 was initiated as part of the propellant characterization work. Routine inspection of the motors showed that the grains in Motors 2706 and 2707 had cracked at gouges and/or deep scratches on the bore surface after one cycle over the required temperature range of -65 to +150°F. Investigation revealed that the defects were caused by a trim tool, which was inserted into the bore to cut and remove the liner on the forward head insulator exposed to the bore. Liner removal in this area is necessary so that the liner release boot on the forward end of the grain will be pressurized upon motor ignition.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

Motor No.	Temp. Cycle		I-Ray	Vibration		X-Ray	Temp. & Humidity		Altitude Cycle	X-Ray	Static Fire		Altitude Ignition	Acceleration Firing		Gradient Firing
	+150/-05	-05		+150	+70	-05			+150	+70	-05	+150	+70	+150	-05/+150	
1																
2																
3																
4																
5																
6																
7																
8																
9																
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
25																
26																
27																
28																
29																
30																
31																
32																
33																
34																
35																
36																
37																
38																
39																
40																
41																
42																
43																
44																
45																
46																
47																
48																
49																
50																
51																
52																
53																
54																
55																
56																
57																
58																
59																
60																
61																
62																
63																
64																
65																
66																
67																
68																
69																
70																
71																
72																
73																
74																
75																
76																
77																
78																
79																
80																
81																
82																
83																
84																
85																
86																
87																
88																
89																
90																
91																
92																
93																
94																
95																
96																
97																
98																
99																
100																

MT: Letters Denote Sequence of Test.

Figure 59

UNCLASSIFIED

Improved 2.75-in. FFAR PFRT Motor Test Plan

CONFIDENTIAL

Report AFRPL-TR-69-90

II.D. Preliminary Flight Rating Tests - Phase III (cont)

(U) Steps taken to eliminate a recurrence of this difficulty included the design of a new liner trim tool. The design incorporates a protective sleeve to shield the tool edges from the adjacent bore surface during tool insertion, liner cutting, and tool removal. Further, all PFRT motors, including the 20 motors in environmental testing, were bore inspected and replacements were made for the units exhibiting cracks, gouges and/or scratches.

(U) All motor environmental tests and static firings were successful, with the exception of one motor fired at -65°F wherein one integrally molded exit cone separated from the aft-closure and allowed the loss of the Carbitex throat insert. Subsequent investigation indicated that this partial failure may have been partially due to improper handling of the motor or to a defect in the manufacture of the aft closure.

(U) Ballistic data from 40 to the 45 motors provided valid usable impulse values. The remaining five motors were excluded because four were either temperature gradient or acceleration firings, and the fifth motor was invalidated by the exit-cone malfunction. Analysis of the data from the 40 motors shows that the usable impulse comfortably exceeds the specified usable impulse values at -65, +70, and +150°F.

(U) A description of the environmental tests is given in Appendix D. A computer summary of the ballistic data, together with calculated nominal and minus one-sigma values, is given in Figures 60 through 63, and computer printouts of the ballistic tabulations and performance curves of 43 of the 45 motors are presented in Figures 64 through 106. The remaining two motors were acceleration firings at Edwards Air Force Base. Figures 107 through 109 show typical motor conditions before and after firings.

CONFIDENTIAL

(This Page is Unclassified)

CONFIDENTIAL

Report AFRPL-TR-69-90

CHAMBER MOTOR TEST NO.	DATE	DELTA 1A		DELTA 1B		W UOL	Cn	HIGH PEA		PC MAX	PC AVG
		DELTA 1A	DELTA 1A	DELTA 1B	DELTA 1B			PSIA	PSIA		
NO.	3297-801-QA-114PU	SEC	SEC	SEC	SEC	LB/SEC					
10-35	5	002	072504	-014	022	3.422	2.34	00050	1824	1505	1174
12-21	20	011	040404	-021	017	3.427	4.50	000604	1795	1484	1144
12-24	21	012	040404	-023	016	3.433	4.50	000601	1842	1465	1160
12-19	6	013	040404	-020	019	3.421	4.49	000598	1590	1403	1142
12-48	9	018	041504	-014	019	3.204	2.52	000603	1592	1530	1227
12-45	44	019	041504	-024	009	3.199	2.455	000614	1505	1530	1227
12-13	35	022	041504	-014	015	3.224	2.426	000596	1830	1501	1208
12-63	36	024	041504	-020	032	3.240	2.450	000602	1480	1512	1210
11-11	42	034	041704	-021	023	3.427	4.44	000594	1773	1489	1203
11-37	27	032	041704	-020	023	3.300	4.44	000605	1829	1473	1190
11-40	43	037	041704	-024	024	3.352	4.44	000574	1562	1471	1113
10-12	12	038	041704	-014	020	3.302	4.29	000597	1263	1400	1135
10-17	41	042	042704	-014	026	3.301	4.29	000596	1441	1428	1145
10-17	13	043	042704	-024	027	3.405	4.25	000594	1600	1404	1156
10-85	28	044	042704	-015	020	3.459	4.31	000584	1739	1412	1141
PERALLINATIONS 1 1 1 1 1 1 1 1 1 1 1 1											

Legend:

- DELTA TD Ignition delay time
- DELTA TR Ignition rise time
- DELTA TA Action time
- DELTA TB Seb burn time
- W DOT Mass flow rate
- CN Mass flow coefficient
- PC MAX Maximum ignition pressure
- PC MAX Maximum pressure
- PC AVG Average action time pressure

Ballistic Data Summary for -65°F (u)

Figure 60, Sheet 1 of 4

CONFIDENTIAL

CHAMBER NO.	MOTOR TEST NO. 1 124- MO. 3297-801-LB-SLC	1A LB-SLC	1B LB-SLC	1C LB-SLC	1D LB-SLC	1E LB-SLC	1F LB-SLC	1G LB-SLC	1H LB-SLC	1I LB-SLC	1J LB-SLC	1K LB-SLC	1L LB-SLC	1M LB-SLC	1N LB-SLC	1O LB-SLC	1P LB-SLC	1Q LB-SLC	1R LB-SLC	1S LB-SLC	1T LB-SLC	1U LB-SLC	1V LB-SLC	1W LB-SLC	1X LB-SLC	1Y LB-SLC	1Z LB-SLC	1AA LB-SLC	1AB LB-SLC	1AC LB-SLC	1AD LB-SLC	1AE LB-SLC	1AF LB-SLC	1AG LB-SLC	1AH LB-SLC	1AI LB-SLC	1AJ LB-SLC	1AK LB-SLC	1AL LB-SLC	1AM LB-SLC	1AN LB-SLC	1AO LB-SLC	1AP LB-SLC	1AQ LB-SLC	1AR LB-SLC	1AS LB-SLC	1AT LB-SLC	1AU LB-SLC	1AV LB-SLC	1AW LB-SLC	1AX LB-SLC	1AY LB-SLC	1AZ LB-SLC	1BA LB-SLC	1BB LB-SLC	1BC LB-SLC	1BD LB-SLC	1BE LB-SLC	1BF LB-SLC	1BG LB-SLC	1BH LB-SLC	1BI LB-SLC	1BJ LB-SLC	1BK LB-SLC	1BL LB-SLC	1BM LB-SLC	1BN LB-SLC	1BO LB-SLC	1BP LB-SLC	1BQ LB-SLC	1BR LB-SLC	1BS LB-SLC	1BT LB-SLC	1BU LB-SLC	1BV LB-SLC	1BW LB-SLC	1BX LB-SLC	1BY LB-SLC	1BZ LB-SLC	1CA LB-SLC	1CB LB-SLC	1CC LB-SLC	1CD LB-SLC	1CE LB-SLC	1CF LB-SLC	1CG LB-SLC	1CH LB-SLC	1CI LB-SLC	1CJ LB-SLC	1CK LB-SLC	1CL LB-SLC	1CM LB-SLC	1CN LB-SLC	1CO LB-SLC	1CP LB-SLC	1CQ LB-SLC	1CR LB-SLC	1CS LB-SLC	1CT LB-SLC	1CU LB-SLC	1CV LB-SLC	1CW LB-SLC	1CX LB-SLC	1CY LB-SLC	1CZ LB-SLC	1DA LB-SLC	1DB LB-SLC	1DC LB-SLC	1DD LB-SLC	1DE LB-SLC	1DF LB-SLC	1DG LB-SLC	1DH LB-SLC	1DI LB-SLC	1DJ LB-SLC	1DK LB-SLC	1DL LB-SLC	1DM LB-SLC	1DN LB-SLC	1DO LB-SLC	1DP LB-SLC	1DQ LB-SLC	1DR LB-SLC	1DS LB-SLC	1DT LB-SLC	1DU LB-SLC	1DV LB-SLC	1DW LB-SLC	1DX LB-SLC	1DY LB-SLC	1DZ LB-SLC	1EA LB-SLC	1EB LB-SLC	1EC LB-SLC	1ED LB-SLC	1EE LB-SLC	1EF LB-SLC	1EG LB-SLC	1EH LB-SLC	1EI LB-SLC	1EJ LB-SLC	1EK LB-SLC	1EL LB-SLC	1EM LB-SLC	1EN LB-SLC	1EO LB-SLC	1EP LB-SLC	1EQ LB-SLC	1ER LB-SLC	1ES LB-SLC	1ET LB-SLC	1EU LB-SLC	1EV LB-SLC	1EW LB-SLC	1EX LB-SLC	1EY LB-SLC	1EZ LB-SLC	1FA LB-SLC	1FB LB-SLC	1FC LB-SLC	1FD LB-SLC	1FE LB-SLC	1FF LB-SLC	1FG LB-SLC	1FH LB-SLC	1FI LB-SLC	1FJ LB-SLC	1FK LB-SLC	1FL LB-SLC	1FM LB-SLC	1FN LB-SLC	1FO LB-SLC	1FP LB-SLC	1FQ LB-SLC	1FR LB-SLC	1FS LB-SLC	1FT LB-SLC	1FU LB-SLC	1FV LB-SLC	1FW LB-SLC	1FX LB-SLC	1FY LB-SLC	1FZ LB-SLC	1GA LB-SLC	1GB LB-SLC	1GC LB-SLC	1GD LB-SLC	1GE LB-SLC	1GF LB-SLC	1GG LB-SLC	1GH LB-SLC	1GI LB-SLC	1GJ LB-SLC	1GK LB-SLC	1GL LB-SLC	1GM LB-SLC	1GN LB-SLC	1GO LB-SLC	1GP LB-SLC	1GQ LB-SLC	1GR LB-SLC	1GS LB-SLC	1GT LB-SLC	1GU LB-SLC	1GV LB-SLC	1GW LB-SLC	1GX LB-SLC	1GY LB-SLC	1GZ LB-SLC	1HA LB-SLC	1HB LB-SLC	1HC LB-SLC	1HD LB-SLC	1HE LB-SLC	1HF LB-SLC	1HG LB-SLC	1HH LB-SLC	1HI LB-SLC	1HJ LB-SLC	1HK LB-SLC	1HL LB-SLC	1HM LB-SLC	1HN LB-SLC	1HO LB-SLC	1HP LB-SLC	1HQ LB-SLC	1HR LB-SLC	1HS LB-SLC	1HT LB-SLC	1HU LB-SLC	1HV LB-SLC	1HW LB-SLC	1HX LB-SLC	1HY LB-SLC	1HZ LB-SLC	1IA LB-SLC	1IB LB-SLC	1IC LB-SLC	1ID LB-SLC	1IE LB-SLC	1IF LB-SLC	1IG LB-SLC	1IH LB-SLC	1IJ LB-SLC	1IK LB-SLC	1IL LB-SLC	1IM LB-SLC	1IN LB-SLC	1IO LB-SLC	1IP LB-SLC	1IQ LB-SLC	1IR LB-SLC	1IS LB-SLC	1IT LB-SLC	1IU LB-SLC	1IV LB-SLC	1IW LB-SLC	1IX LB-SLC	1IY LB-SLC	1IZ LB-SLC	1JA LB-SLC	1JB LB-SLC	1JC LB-SLC	1JD LB-SLC	1JE LB-SLC	1JF LB-SLC	1JG LB-SLC	1JH LB-SLC	1JI LB-SLC	1JJ LB-SLC	1JK LB-SLC	1JL LB-SLC	1JM LB-SLC	1JN LB-SLC	1JO LB-SLC	1JP LB-SLC	1JQ LB-SLC	1JR LB-SLC	1JS LB-SLC	1JT LB-SLC	1JU LB-SLC	1JV LB-SLC	1JW LB-SLC	1JX LB-SLC	1JY LB-SLC	1JZ LB-SLC	1KA LB-SLC	1KB LB-SLC	1KC LB-SLC	1KD LB-SLC	1KE LB-SLC	1KF LB-SLC	1KG LB-SLC	1KH LB-SLC	1KI LB-SLC	1KJ LB-SLC	1KK LB-SLC	1KL LB-SLC	1KM LB-SLC	1KN LB-SLC	1KO LB-SLC	1KP LB-SLC	1KQ LB-SLC	1KR LB-SLC	1KS LB-SLC	1KT LB-SLC	1KU LB-SLC	1KV LB-SLC	1KW LB-SLC	1KX LB-SLC	1KY LB-SLC	1KZ LB-SLC	1LA LB-SLC	1LB LB-SLC	1LC LB-SLC	1LD LB-SLC	1LE LB-SLC	1LF LB-SLC	1LG LB-SLC	1LH LB-SLC	1LI LB-SLC	1LJ LB-SLC	1LK LB-SLC	1LL LB-SLC	1LM LB-SLC	1LN LB-SLC	1LO LB-SLC	1LP LB-SLC	1LQ LB-SLC	1LR LB-SLC	1LS LB-SLC	1LT LB-SLC	1LU LB-SLC	1LV LB-SLC	1LW LB-SLC	1LX LB-SLC	1LY LB-SLC	1LZ LB-SLC	1MA LB-SLC	1MB LB-SLC	1MC LB-SLC	1MD LB-SLC	1ME LB-SLC	1MF LB-SLC	1MG LB-SLC	1MH LB-SLC	1MI LB-SLC	1MJ LB-SLC	1MK LB-SLC	1ML LB-SLC	1MN LB-SLC	1MO LB-SLC	1MP LB-SLC	1MQ LB-SLC	1MR LB-SLC	1MS LB-SLC	1MT LB-SLC	1MU LB-SLC	1MV LB-SLC	1MW LB-SLC	1MX LB-SLC	1MY LB-SLC	1MZ LB-SLC	1NA LB-SLC	1NB LB-SLC	1NC LB-SLC	1ND LB-SLC	1NE LB-SLC	1NF LB-SLC	1NG LB-SLC	1NH LB-SLC	1NI LB-SLC	1NJ LB-SLC	1NK LB-SLC	1NL LB-SLC	1NM LB-SLC	1NO LB-SLC	1NP LB-SLC	1NQ LB-SLC	1NR LB-SLC	1NS LB-SLC	1NT LB-SLC	1NU LB-SLC	1NV LB-SLC	1NW LB-SLC	1NX LB-SLC	1NY LB-SLC	1NZ LB-SLC	1OA LB-SLC	1OB LB-SLC	1OC LB-SLC	1OD LB-SLC	1OE LB-SLC	1OF LB-SLC	1OG LB-SLC	1OH LB-SLC	1OI LB-SLC	1OJ LB-SLC	1OK LB-SLC	1OL LB-SLC	1OM LB-SLC	1ON LB-SLC	1OO LB-SLC	1OP LB-SLC	1OQ LB-SLC	1OR LB-SLC	1OS LB-SLC	1OT LB-SLC	1OU LB-SLC	1OV LB-SLC	1OW LB-SLC	1OX LB-SLC	1OY LB-SLC	1OZ LB-SLC	1PA LB-SLC	1PB LB-SLC	1PC LB-SLC	1PD LB-SLC	1PE LB-SLC	1PF LB-SLC	1PG LB-SLC	1PH LB-SLC	1PI LB-SLC	1PJ LB-SLC	1PK LB-SLC	1PL LB-SLC	1PM LB-SLC	1PN LB-SLC	1PO LB-SLC	1PP LB-SLC	1PQ LB-SLC	1PR LB-SLC	1PS LB-SLC	1PT LB-SLC	1PU LB-SLC	1PV LB-SLC	1PW LB-SLC	1PX LB-SLC	1PY LB-SLC	1PZ LB-SLC	1QA LB-SLC	1QB LB-SLC	1QC LB-SLC	1QD LB-SLC	1QE LB-SLC	1QF LB-SLC	1QG LB-SLC	1QH LB-SLC	1QI LB-SLC	1QJ LB-SLC	1QK LB-SLC	1QL LB-SLC	1QM LB-SLC	1QN LB-SLC	1QO LB-SLC	1QP LB-SLC	1QQ LB-SLC	1QR LB-SLC	1QS LB-SLC	1QT LB-SLC	1QU LB-SLC	1QV LB-SLC	1QW LB-SLC	1QX LB-SLC	1QY LB-SLC	1QZ LB-SLC	1RA LB-SLC	1RB LB-SLC	1RC LB-SLC	1RD LB-SLC	1RE LB-SLC	1RF LB-SLC	1RG LB-SLC	1RH LB-SLC	1RI LB-SLC	1RJ LB-SLC	1RK LB-SLC	1RL LB-SLC	1RM LB-SLC	1RN LB-SLC	1RO LB-SLC	1RP LB-SLC	1RQ LB-SLC	1RR LB-SLC	1RS LB-SLC	1RT LB-SLC	1RU LB-SLC	1RV LB-SLC	1RW LB-SLC	1RX LB-SLC	1RY LB-SLC	1RZ LB-SLC	1SA LB-SLC	1SB LB-SLC	1SC LB-SLC	1SD LB-SLC	1SE LB-SLC	1SF LB-SLC	1SG LB-SLC	1SH LB-SLC	1SI LB-SLC	1SJ LB-SLC	1SK LB-SLC	1SL LB-SLC	1SM LB-SLC	1SN LB-SLC	1SO LB-SLC	1SP LB-SLC	1SQ LB-SLC	1SR LB-SLC	1SS LB-SLC	1ST LB-SLC	1SU LB-SLC	1SV LB-SLC	1SW LB-SLC	1SX LB-SLC	1SY LB-SLC	1SZ LB-SLC	1TA LB-SLC	1TB LB-SLC	1TC LB-SLC	1TD LB-SLC	1TE LB-SLC	1TF LB-SLC	1TG LB-SLC	1TH LB-SLC	1TI LB-SLC	1TJ LB-SLC	1TK LB-SLC	1TL LB-SLC	1TM LB-SLC	1TN LB-SLC	1TO LB-SLC	1TP LB-SLC	1TQ LB-SLC	1TR LB-SLC	1TS LB-SLC	1TT LB-SLC	1TU LB-SLC	1TV LB-SLC	1TW LB-SLC	1TX LB-SLC	1TY LB-SLC	1TZ LB-SLC	1UA LB-SLC	1UB LB-SLC	1UC LB-SLC	1UD LB-SLC	1UE LB-SLC	1UF LB-SLC	1UG LB-SLC	1UH LB-SLC	1UI LB-SLC	1UJ LB-SLC	1UK LB-SLC	1UL LB-SLC	1UM LB-SLC	1UN LB-SLC	1UO LB-SLC	1UP LB-SLC	1UQ LB-SLC	1UR LB-SLC	1US LB-SLC	1UT LB-SLC	1UU LB-SLC	1UV LB-SLC	1UW LB-SLC	1UX LB-SLC	1UY LB-SLC	1UZ LB-SLC	1VA LB-SLC	1VB LB-SLC	1VC LB-SLC	1VD LB-SLC	1VE LB-SLC	1VF LB-SLC	1VG LB-SLC	1VH LB-SLC	1VI LB-SLC	1VJ LB-SLC	1VK LB-SLC	1VL LB-SLC	1VM LB-SLC	1VN LB-SLC	1VO LB-SLC	1VP LB-SLC	1VQ LB-SLC	1VR LB-SLC	1VS LB-SLC	1VT LB-SLC	1VU LB-SLC	1VV LB-SLC	1VW LB-SLC	1VX LB-SLC	1VY LB-SLC	1VZ LB-SLC	1WA LB-SLC	1WB LB-SLC	1WC LB-SLC	1WD LB-SLC	1WE LB-SLC	1WF LB-SLC	1WG LB-SLC	1WH LB-SLC	1WI LB-SLC	1WJ LB-SLC	1WK LB-SLC	1WL LB-SLC	1WM LB-SLC	1WN LB-SLC	1WO LB-SLC	1WP LB-SLC	1WQ LB-SLC	1WR LB-SLC	1WS LB-SLC	1WT LB-SLC	1WU LB-SLC	1WV LB-SLC	1WW LB-SLC	1WX LB-SLC	1WY LB-SLC	1WZ LB-SLC	1XA LB-SLC	1XB LB-SLC	1XC LB-SLC	1XD LB-SLC	1XE LB-SLC	1XF LB-SLC	1XG LB-SLC	1XH LB-SLC	1XI LB-SLC	1XJ LB-SLC	1XK LB-SLC	1XL LB-SLC	1XM LB-SLC	1XN LB-SLC	1XO LB-SLC	1XP LB-SLC	1XQ LB-SLC	1XR LB-SLC	1XS LB-SLC	1XT LB-SLC	1XU LB-SLC	1XV LB-SLC	1XW LB-SLC	1XX LB-SLC	1XY LB-SLC	1XZ LB-SLC	1YA LB-SLC	1YB LB-SLC	1YC LB-SLC	1YD LB-SLC	1YE LB-SLC	1YF LB-SLC	1YG LB-SLC	1YH LB-SLC	1YI LB-SLC	1YJ LB-SLC	1YK LB-SLC	1YL LB-SLC	1YM LB-SLC	1YN LB-SLC	1YO LB-SLC	1YP LB-SLC	1YQ LB-SLC	1YR LB-SLC	1YS LB-SLC	1YT LB-SLC	1YU LB-SLC	1YV LB-SLC	1YW LB-SLC	1YX LB-SLC	1YY LB-SLC	1YZ LB-SLC	1ZA LB-SLC	1ZB LB-SLC	1ZC LB-SLC	1ZD LB-SLC	1ZE LB-SLC	1ZF LB-SLC	1ZG LB-SLC	1ZH LB-SLC	1ZI LB-SLC	1ZJ LB-SLC	1ZK LB-SLC	1ZL LB-SLC	1ZM LB-SLC	1ZN LB-SLC	1ZO LB-SLC	1ZP LB-SLC	1ZQ LB-SLC	1ZR LB-SLC	1ZS LB-SLC	1ZT LB-SLC	1ZU LB-SLC	1ZV LB-SLC	1ZW LB-SLC	1ZX LB-SLC	1ZY LB-SLC	1ZZ LB-SLC	1AAA LB-SLC	1AAB LB-SLC	1AAC LB-SLC	1AAD LB-SLC	1AAE LB-SLC	1AAF LB-SLC	1AAG LB-SLC	1AAH LB-SLC	1AAI LB-SLC	1AAJ LB-SLC	1AAK LB-SLC	1AAL LB-SLC	1AAM LB-SLC	1AAN LB-SLC	1AAO LB-SLC	1AAP LB-SLC	1AAQ LB-SLC	1AAR LB-SLC	1AAS LB-SLC	1AAT LB-SLC	1AAU LB-SLC	1AAV LB-SLC	1AAW LB-SLC	1AAX LB-SLC	1AAY LB-SLC	1AAZ LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	1AAB LB-SLC	
-------------	--	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	--

Figure 60, Sheet 2 of 4

Ballistic Data Summary for -65°F (u)

CONFIDENTIAL

Report AFRPL-TR-69-90

DELTA TO SEC	SIGMA NUMBER	0-0042 0-0196 15	MINIMUM MAXIMUM	0-0130 0-0260 11-30	022 037	SUM OF SQUARES	0-2940000928440 00 0-600600376510-02	LUC A 2 UPEN 1 LUC B 0
DELTA TM SEC	SIGMA NUMBER	0-0001 0-0214 15	MINIMUM MAXIMUM	0-0040 0-0350 12-05	019 029	SUM OF SQUARES	0-3210001029070 00 0-739300475370-02	LUC A 3 UPEN 1 LUC B 0
DELTA TA SEC	SIGMA NUMBER	0-1103 3-3264 15	MINIMUM MAXIMUM	3-1440 3-5020 12-05	019 038	SUM OF SQUARES	0-4987601230620 02 0-1001033838740 03	LUC A 4 UPEN 1 LUC B 0
DELTA TM SEC	SIGMA NUMBER	0-0734 2-5086 15	MINIMUM MAXIMUM	2-3370 2-6400 12-24	012 044	SUM OF SQUARES	0-3702900733950 02 0-9447155792040 02	LUC A 5 UPEN 1 LUC B 0
OUT LM/SEC	SIGMA NUMBER	0-0443 2-4225 15	MINIMUM MAXIMUM	2-2900 2-5200 10-12	038 018	SUM OF SQUARES	0-3033699798580 02 0-8814923887730 02	LUC A 6 UPEN 1 LUC B 0
CM	SIGMA NUMBER	0-0002 0-0060 15	MINIMUM MAXIMUM	0-0057 0-0006 11-30	037 002	SUM OF SQUARES	0-9029006550300-01 0-5439502247400-03	LUC A 7 UPEN 1 LUC B 0
PLM MAX PSIA	SIGMA NUMBER	137-0770 1070-2000 15	MINIMUM MAXIMUM	1441-0000 1045-0000 10-07	042 012	SUM OF SQUARES	0-2514300000000 05 0-4241000900000 08	LUC A 8 UPEN 1 LUC B 0
PL MJA PSIA	SIGMA NUMBER	95-1755 1471-4607 15	MINIMUM MAXIMUM	1400-0000 1530-0000 10-12	038 018	SUM OF SQUARES	0-2207200000000 05 0-3250431000000 08	LUC A 9 UPEN 1 LUC B 0
PL MV PSIA	SIGMA NUMBER	41-5741 1101-0007 15	MINIMUM MAXIMUM	1135-0000 1227-0000 10-12	038 018	SUM OF SQUARES	0-1772500000000 05 0-2075903500000 08	LUC A 10 UPEN 1 LUC B 0
1 156 LB-SEC	SIGMA NUMBER	14-0550 1795-0000 15	MINIMUM MAXIMUM	1774-0000 1821-0000 10-07	042 002	SUM OF SQUARES	0-2093400000000 05 0-4830545000000 08	LUC A 11 UPEN 1 LUC B 0
1A FM-SEC	SIGMA NUMBER	10-7473 1400-7313 15	MINIMUM MAXIMUM	1080-0000 1930-0000 11-27	035 002	SUM OF SQUARES	0-20201100000000 05 0-5419344390000 08	LUC A 12 UPEN 1 LUC B 0
1U LB-SEC	SIGMA NUMBER	11-2170 1911-5333 15	MINIMUM MAXIMUM	1890-0000 1946-0000 11-30	037 002	SUM OF SQUARES	0-20073000000000 05 0-5481115700000 08	LUC A 13 UPEN 1 LUC B 0
1SP	SIGMA NUMBER	1-0854 237-0534 15	MINIMUM MAXIMUM	235-5000 243-2001 11-37	035 002	SUM OF SQUARES	0-3506800735470 04 0-647237497010 06	LUC A 14 UPEN 1 LUC B 0
1 EXPLOIT	SIGMA NUMBER	0-5599 150-7734 15	MINIMUM MAXIMUM	150-0000 152-0000 10-07	042 002	SUM OF SQUARES	0-2201600387570 04 0-540944763770 06	LUC A 15 UPEN 1 LUC B 0
171	SIGMA NUMBER	10-171 1911-5333 15	MINIMUM MAXIMUM	700-0000 800-0000 10-05	044 019	SUM OF SQUARES	0-1161500000000 05 0-9003009000000 07	LUC A 16 UPEN 1 LUC B 0

Ballistic Data Summary for -65°F (u)

171
1911-5333
15

Figure 60, Sheet 3 of 4

CONFIDENTIAL

FLIGHT MAX LB	SIGMA = 22.5581	MINIMUM = 420.0000	10-07	SUM UF 042	SUM = 0.8138000000000000 04	LUL A 17
	NUMBER = 15	MAXIMUM = 609.0000	12-21	011	SQUAKES = 0.4475520000000000 07	UPLA. 1 LUL C 0
FYA AVG LB	SIGMA = 19.8582	MINIMUM = 541.0000	10-07	042	SUM UF	LUL A 18
	NUMBER = 15	MAXIMUM = 595.0000	12-05	019	SQUAKES = 0.4914425000000000 07	UPLA. 1 LUL B 0
FYB AVG LB	SIGMA = 20.4261	MINIMUM = 590.0000	10-07	042	SUM UF	LUL A 19
	NUMBER = 15	MAXIMUM = 650.0000	12-49	018	SQUAKES = 0.5046480000000000 07	UPLA. 1 LUL B 0
IN/SEC	SIGMA = 0.0102	MINIMUM = 0.3500	10-02	044	SUM UF	LUL A 20
	NUMBER = 15	MAXIMUM = 0.3750	12-24	012	SQUAKES = 0.1921053151180 01	UPLA. 1 LUL B 0

Ballistic Data Summary for -65°F (u)

Figure 60, Sheet 4 of 4

CONFIDENTIAL

Report AFRPL-TR-69-90

CHAMBER MOTOR TEST NO.		2.7% PFAM		+70 DEG.F		M DUT		PC MAX		PL MAX		PL AVG	
NO.	NO. 3597-ROL-04-	DATE	DELTA TD SEC	DELTA TA SEC	DELTA TB SEC	M DUT LB/SEC	CM	PLUM MAX PSIA	PC MAX PSIA	PLUM MAX PSIA	PC MAX PSIA	PL AVG PSIA	
11-10	3	001	012500	010	010	2.205	2.85	2201	1708	1412	1708	1412	
11-06	19	004	000000	014	021	3.044	2.65	1866	1838	1302	1838	1302	
27-24	18	005	000000	015	034	2.908	2.78	1687	1736	1328	1736	1328	
27-27	4	006	000000	009	020	2.896	2.79	2258	1728	1349	1728	1349	
12-25	29	014	001000	014	021	2.880	2.63	1686	1769	1340	1769	1340	
11-31	31	015	001000	014	026	3.078	2.60	1681	1772	1258	1772	1258	
11-43	34	016	001000	014	026	3.074	2.61	1580	1743	1274	1743	1274	
10-31	40	040	001700	034	018	3.027	2.65	1689	1622	1495	1622	1495	
11-31	10	031	001700	012	014	2.890	2.76	2215	1703	1365	1703	1365	
11-34	11	032	001700	012	042	2.920	2.74	1943	1681	1349	1681	1349	
10-03	25	033	001700	014	048	3.036	2.63	1672	1627	1269	1627	1269	
OPERATIONAL LOCATIONS 1 1 1 2 1 3 1 4 1 5 1 6 1 7 1 8 1 9 1 10													
Legend:													
DELTA TD	Ignition delay time												
DELTA TR	Ignition rise time												
DELTA TA	Action time												
DELTA TB	Web burn time												
M DUT	Mass flow rate												
CV	Mass flow coefficient												
PC MAX	Maximum ignition pressure												
PL MAX	Maximum pressure												
PL AVG	Average action time pressure												

Ballistic Data Summary for +70°F (u)

Figure 61, Sheet 1 of 4

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

CHAMBER NO.	MOTOR TEST NO.	I 15C		IA		ID		ISP		ISPUAL		FY MAX		FIGN MAX		FPA AVG		FTD AVG		NO IN/SEL
		LO-SEL	LO-SKE	LO-SKE	LO-SKE	LO-SKE	LO-SKE	LO-SKE	LO-SKE	LO-SKE	LO-SKE	LO	LO	LO	LO	LO	LO	LO	LO	
11-10	3	001	1424	1074	1074	1447	1447	243.4	243.4	152.8	152.8	894	894	740	740	895	895	738	738	407
11-06	19	004	1775	1006	1006	1470	1470	237.4	237.4	151.2	151.2	830	830	561	561	826	826	806	806	403
27-26	18	005	1416	1024	1024	1437	1437	240.1	240.1	152.5	152.5	938	938	506	506	882	882	725	725	395
27-27	4	006	1411	1024	1024	1434	1434	239.4	239.4	152.6	152.6	907	907	584	584	664	664	727	727	397
12-65	29	014	1420	1044	1044	1443	1443	239.9	239.9	153.2	153.2	895	895	524	524	676	676	740	740	407
11-37	31	015	1745	1044	1044	1415	1415	239.8	239.8	150.8	150.8	845	845	540	540	619	619	692	692	395
11-43	34	016	1761	1000	1000	1410	1410	238.2	238.2	150.7	150.7	841	841	551	551	618	618	686	686	410
10-33	40	030	1401	1024	1024	1433	1433	240.7	240.7	152.8	152.8	851	851	554	554	626	626	697	697	376
11-31	10	031	1403	1016	1016	1424	1424	239.4	239.4	152.5	152.5	893	893	728	728	882	882	745	745	407
11-24	11	032	1742	1016	1016	1420	1420	239.9	239.9	152.5	152.5	885	885	650	650	854	854	720	720	406
10-03	25	033	1744	1021	1021	1421	1421	241.5	241.5	152.1	152.1	850	850	545	545	632	632	715	715	386

UPPERATION+LUMATIUMS

Legend:

I 15C	Impulse at 15 g
IA	Action time impulse
ID	Total impulse
ISP	Specific impulse
ISP(DN)	Total impulse
	Motor weight
FY MAX	Maximum thrust
FIGN MAX	Maximum ignition thrust
FPA AVG	Average action time thrust
FTD AVG	Average burn time thrust
RR	Burning rate

Ballistic Data Summary for +70°F (u)

Figure 61, Sheet 2 of 4

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

DELTA TO SEC	SIGMA = XBAR = NUMBER =	0.0007 0.0130 11	MINIMUM = MAXIMUM =	0.0090 0.0340 10-33	006 030	SUM OF SQUARES =	0.1740000508730 00	LUC A 4 UPER. 1 LUC B 0
DELTA TH SEC	SIGMA = XBAR = NUMBER =	0.0000 0.0210 11	MINIMUM = MAXIMUM =	0.0100 0.0340 11-10 27-26	001 005	SUM OF SQUARES =	0.2500000728670 00	LUC A 3 UPER. 1 LUC B 0
DELTA TA SEC	SIGMA = XBAR = NUMBER =	0.1020 2.9540 11	MINIMUM = MAXIMUM =	2.7000 3.0700 11-10 31-37	001 015	SUM OF SQUARES =	0.32501008003380 02	LUC A 4 UPER. 1 LUC B 0
DELTA TM SEC	SIGMA = XBAR = NUMBER =	0.0010 2.2440 11	MINIMUM = MAXIMUM =	2.1750 2.3000 11-43 10-33	010 030	SUM OF SQUARES =	0.2474300479890 02	LUC A 3 UPER. 1 LUC B 0
DELTA TL SEC	SIGMA = XBAR = NUMBER =	0.0000 2.2227 11	MINIMUM = MAXIMUM =	2.0000 2.0900 11-10 11-10	015 001	SUM OF SQUARES =	0.2594999805500 02	LUC A 2 UPER. 1 LUC B 0
CL	SIGMA = XBAR = NUMBER =	0.0001 0.0000 11	MINIMUM = MAXIMUM =	0.0050 0.0001 10-03 11-10	033 001	SUM OF SQUARES =	0.0029002839330 01	LUC A 7 UPER. 1 LUC B 0
PLUM MAX PSIA	SIGMA = XBAR = NUMBER =	257.9993 1801.8304 11	MINIMUM = MAXIMUM =	1900.0000 2258.0000 11-43 27-27	016 006	SUM OF SQUARES =	0.2047800000000 05	LUC A 6 UPER. 1 LUC B 0
PC MAX PSIA	SIGMA = XBAR = NUMBER =	43.4092 1720.0304 11	MINIMUM = MAXIMUM =	1624.0000 1838.0000 10-33 11-06	020 004	SUM OF SQUARES =	0.1892700000000 05	LUC A 7 UPER. 1 LUC B 0
PC AVG PSIA	SIGMA = XBAR = NUMBER =	44.1998 1321.7275 11	MINIMUM = MAXIMUM =	1258.0000 1412.0000 11-37 11-10	015 001	SUM OF SQUARES =	0.1523900000000 05	LUC A 10 UPER. 1 LUC B 0
LA LB-SEC	SIGMA = XBAR = NUMBER =	25.0451 1793.5455 11	MINIMUM = MAXIMUM =	1742.0000 1829.0000 11-37 11-10	015 001	SUM OF SQUARES =	0.1975000000000 05	LUC A 11 UPER. 1 LUC B 0
LA LB-SEC	SIGMA = XBAR = NUMBER =	10.0041 1410.0102 11	MINIMUM = MAXIMUM =	1900.0000 1954.0000 11-43 12-05	010 014	SUM OF SQUARES =	0.2100500000000 05	LUC A 12 UPER. 1 LUC B 0
LA LB-SEC	SIGMA = XBAR = NUMBER =	12.0507 1928.1810 11	MINIMUM = MAXIMUM =	1910.0000 1947.0000 11-43 11-10	010 001	SUM OF SQUARES =	0.2121000000000 05	LUC A 13 UPER. 1 LUC B 0
LA LB-SEC	SIGMA = XBAR = NUMBER =	1.5720 254.9019 11	MINIMUM = MAXIMUM =	237.4001 243.4001 11-06 11-10	004 001	SUM OF SQUARES =	0.2039800000000 04	LUC A 14 UPER. 1 LUC B 0
LA LB-SEC	SIGMA = XBAR = NUMBER =	0.0432 152.0905 11	MINIMUM = MAXIMUM =	150.7000 153.2000 11-43 12-05	010 014	SUM OF SQUARES =	0.1073000000000 04	LUC A 15 UPER. 1 LUC B 0
LA LB-SEC	SIGMA = XBAR = NUMBER =	0.0432 152.0905 11	MINIMUM = MAXIMUM =	150.7000 153.2000 11-43 12-05	010 014	SUM OF SQUARES =	0.2544552974700 06	LUC A 16 UPER. 1 LUC B 0
LA LB-SEC	SIGMA = XBAR = NUMBER =	0.0432 152.0905 11	MINIMUM = MAXIMUM =	150.7000 153.2000 11-43 12-05	010 014	SUM OF SQUARES =	0.4299000000000 04	LUC A 17 UPER. 1 LUC B 0
LA LB-SEC	SIGMA = XBAR = NUMBER =	0.0432 152.0905 11	MINIMUM = MAXIMUM =	150.7000 153.2000 11-43 12-05	010 014	SUM OF SQUARES =	0.0306495500000 07	LUC A 18 UPER. 1 LUC B 0

Ballistic Data Summary for +70°F (u)

Figure 61, Sheet 3 of 4

CONFIDENTIAL

FLIGHT MAX LB	SIGMA = NUMBER =	84-2298 599-0304 11	MINIMUM = MAXIMUM =	200-0000 740-0000	27-60 11-10	005 001	SUM SQUARES =	0.059600000000000000 04 0.402614000000000000 07	LUC A 17 UPEN: 1 LUC E 1
FVA AVG LB	SIGMA = NUMBER =	25-0574 059-4545 11	MINIMUM = MAXIMUM =	618-0000 695-0000	31-43 11-10	016 001	SUM SQUARES =	0.714400000000000000 04 0.464598200000000000 07	LUC A 18 UPEN: 1 LUC B 0
FVA AVG LB	SIGMA = NUMBER =	19-9872 713-9091 11	MINIMUM = MAXIMUM =	688-0000 740-0000	31-06 12-05	004 014	SUM SQUARES =	0.785300000000000000 04 0.561031500000000000 07	LUC A 19 UPEN: 1 LUC B 1
WB IN/SEC	SIGMA = NUMBER =	0-0104 0-3995 11	MINIMUM = MAXIMUM =	0-3700 0-4130	10-33 31-43	030 010	SUM SQUARES =	0.4394001245500000 01 0.1758384967200000 01	LUC A 20 UPEN: 1 LUC B 0

Ballistic Data Summary for +70°F (u)

Figure 61, Sheet 4 of 4

CONFIDENTIAL

Report AFRPL-TR-69-90

CHAMBER NO.	MOTOR TEST NO.	2-7% FFAM		+150 DEG.F		UM	PIUM MAX		PL MAX		PL AVG
		DELTA TD	DELTA TA	DELTA TB	DELTA TC		PSIA	PSIA	PSIA	PSIA	
10-14	1	003	07306	-014	-019	2.829	2.167	2.80	2.0594	2.126	1391
12-07	17	007	06066	-026	-021	2.692	2.027	2.95	2.0602	2.116	1412
12-44	2	008	06066	-015	-010	2.685	2.037	3.00	2.0609	2.152	1431
12-03	16	009	06066	-004	-010	2.678	2.044	3.02	2.0801	2.179	1420
12-14	31	010	06066	-010	-014	2.704	2.045	2.98	2.0600	2.173	1421
12-41	32	017	06146	-027	-038	2.703	2.028	2.96	2.0600	2.173	1427
10-44	37	023	06146	-011	-014	2.609	2.253	2.67	2.0615	2.170	1466
10-44	7	024	06146	-011	-014	2.616	2.192	2.81	2.0597	2.171	139
10-92	8	025	06146	-012	-018	2.648	2.149	2.81	2.0596	2.171	1382
11-25	39	026	06146	-014	-018	2.776	2.110	2.85	2.0615	2.300	1366
11-21	23	027	06146	-017	-011	2.696	2.050	2.97	2.0596	2.293	1457
10-51	38	028	06146	-022	-026	2.647	2.129	2.61	2.0590	2.490	1374
10-04	22	039	06276	-076	-038	2.884	2.212	2.80	2.0600	2.490	1327
10-44	24	040	06276	-021	-018	2.880	2.241	2.78	2.0596	2.503	1354
OPERATION-CALCULATIONS		1	1	1	1	1	1	1	1	1	1

Legend:

DELTA TD	Ignition delay time
DELTA TA	Ignition rise time
DELTA TB	Action time
V DOT	Web burn time
CM	Mass flow rate
FCM MAX	Mass flow coefficient
FC MAX	Maximum ignition pressure
FC MAX	Maximum pressure
FC AVG	Average action time pressure

Ballistic Data Summary for +150°F (u)

Figure 62, Sheet 1 of 4

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

CHAMBER NO.	MOTOR TEST NO.	2.75 444R										+150 JK00.7										NO IN/SEC
		1 124	1A	1D	1D	1D	1D	1D	1D	1D	1D	1SP	1SP	1SP	1SP	1SP	1SP	1SP	1SP	1SP	1SP	
NO.	3297-BOL-0A	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC	1A-SEC
10-18	1	0.33	1.413	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	411
12-07	17	0.07	1.421	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	443
12-44	2	0.04	1.412	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	441
12-03	16	0.05	1.414	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	431
12-34	31	0.10	1.412	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	435
12-41	32	0.17	1.430	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	430
10-44	37	0.23	1.762	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	435
10-44	7	0.24	1.414	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	430
10-47	8	0.25	1.411	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	418
11-35	39	0.26	1.774	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	420
11-21	23	0.27	1.411	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	422
10-51	38	0.28	1.404	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	422
10-04	22	0.39	1.403	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	406
10-44	24	0.40	1.757	1.034	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	1.047	401

OPERATIONAL CONDITIONS

Legend:

I 150	Impulse at 15 g
IA	Action time impulse
ID	Total impulse
ISP	Specific impulse
ISP(MA)	Total impulse
FT MAX	Motor Weight
FTS MAX	Maximum thrust
FTS AVG	Maximum ignition thrust
FTB AVG	Average action time thrust
FB	Average burn time thrust
	Burning rate

Ballistic Data Summary for +150°F (u)

Figure 62, Sheet 2 of 4

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

DELTA TU SEC	SIGMA NUMBER	0.0065 0.0173 13	MINIMUM MAXIMUM	0.0080 0.0270	12-03 10-48	009 023	SUM OF SQUARES	0.2250000648200 00 0.4401002653480-02	LUC A 2 UPPER LUC B 0
DELTA TH SEC	SIGMA NUMBER	0.0087 0.0196 13	MINIMUM MAXIMUM	0.0100 0.0380	12-44 10-48	008 023	SUM OF SQUARES	0.2590000015690 00 0.6059003994230-02	LUC A 2 UPPER LUC B 0
DELTA TA SEC	SIGMA NUMBER	0.0090 2.7876 14	MINIMUM MAXIMUM	2.6780 3.0090	12-03 10-48	009 023	SUM OF SQUARES	0.3902700996400 02 0.1089208326990 03	LUC A 2 UPPER LUC B 0
DELTA TB SEC	SIGMA NUMBER	0.0795 2.1487 14	MINIMUM MAXIMUM	2.0270 2.2530	12-07 10-48	007 023	SUM OF SQUARES	0.2977400588990 02 0.6340287700390 02	LUC A 2 UPPER LUC B 0
W GUT L/SEC	SIGMA NUMBER	0.1095 2.8793 14	MINIMUM MAXIMUM	2.6700 3.0200	10-48 12-03	023 009	SUM OF SQUARES	0.4031000232700 02 0.1162199129460 03	LUC A 2 UPPER LUC B 0
LO	SIGMA NUMBER	0.0001 0.0060 14	MINIMUM MAXIMUM	0.0030 0.0062	10-51 10-48	028 023	SUM OF SQUARES	0.8413004502650-01 0.5056322418996-03	LUC A 2 UPPER LUC B 0
PIGN MAX PSIA	SIGMA NUMBER	323.6132 2066.2892 13	MINIMUM MAXIMUM	1463.0000 2490.0000	10-48 10-51	023 028	SUM OF SQUARES	0.2660800000000 05 0.5571714200000 08	LUC A 2 UPPER LUC B 0
PC MAX PSIA	SIGMA NUMBER	73.7631 1666.9286 14	MINIMUM MAXIMUM	1670.0000 1871.0000	10-48 11-21	023 027	SUM OF SQUARES	0.2529700000000 05 0.4578060500000 08	LUC A 2 UPPER LUC B 0
PL AVG PSIA	SIGMA NUMBER	46.1926 1392.5000 14	MINIMUM MAXIMUM	1268.0000 1457.0000	10-48 11-21	023 027	SUM OF SQUARES	0.1944500000000 05 0.2717453500000 08	LUC A 2 UPPER LUC B 0
LI SEC L/SEC	SIGMA NUMBER	17.6112 1803.6286 14	MINIMUM MAXIMUM	1762.0000 1830.0000	10-48 12-41	023 017	SUM OF SQUARES	0.2526300000000 05 0.4566323300000 08	LUC A 2 UPPER LUC B 0
LA L/SEC	SIGMA NUMBER	11.2410 1530.5000 14	MINIMUM MAXIMUM	1906.0000 1942.0000	10-48 10-44	023 040	SUM OF SQUARES	0.2702700000000 05 0.5217728100000 08	LUC A 2 UPPER LUC B 0
LU L/SEC	SIGMA NUMBER	8.8524 1942.7143 14	MINIMUM MAXIMUM	1922.0000 1956.0000	11-35 10-44	028 040	SUM OF SQUARES	0.2719800000000 05 0.5283896200000 08	LUC A 2 UPPER LUC B 0
LSP	SIGMA NUMBER	1.7337 242.1358 14	MINIMUM MAXIMUM	239.3000 245.6001	11-35 10-16	026 003	SUM OF SQUARES	0.33899000095800 04 0.8206552669910 06	LUC A 2 UPPER LUC B 0
LSP/VAL	SIGMA NUMBER	0.6166 153.2357 14	MINIMUM MAXIMUM	121.9000 156.3000	11-35 10-44	026 040	SUM OF SQUARES	0.2145300399760 04 0.3607410325720 06	LUC A 2 UPPER LUC B 0
LUC A 10 UPPER LUC B 0	SIGMA NUMBER	0.1304400000000 05 0.8216238400000 06	MINIMUM MAXIMUM	901.0000 907.0000	10-48 12-03	023 009	SUM OF SQUARES	0.1304400000000 05 0.8216238400000 06	LUC A 2 UPPER LUC B 0

Ballistic Data Summary for +150°F (u)

476. Federal confidential information affecting national defense within the meaning of the espionage laws of the United States, Title 18, U.S.C. Sec. 793 and 794, and the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

Figure 62, Sheet 3 of 4

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

FLIGHT MAX LB	SIGMA STANDARD NUMBER	110.7621 651.3571 14	MINIMUM = MAXIMUM =	469.0000 791.0000 10-48 10-42	023 025	SUM OF SQUARES =	0.91190000000000 04 0.60992130000000 07	LUL A 17 UPER 1 LUL B 0
FYA AVG LB	SIGMA STANDARD NUMBER	75.5115 693.2057 14	MINIMUM = MAXIMUM =	633.0000 721.0000 10-48 12-03	023 009	SUM OF SQUARES =	0.97060000000000 04 0.67374920000000 07	LUL A 16 UPER 1 LUL B 0
FYA AVG LB	SIGMA STANDARD NUMBER	25.1418 761.5714 14	MINIMUM = MAXIMUM =	708.0000 799.0000 10-48 12-41	023 017	SUM OF SQUARES =	0.10662000000000 05 0.81280920000000 07	LUL A 14 UPER 1 LUL B 0
MB IN/SEC	SIGMA STANDARD NUMBER	0.0155 0.6229 14	MINIMUM = MAXIMUM =	0.3990 0.4430 10-48 12-07	023 007	SUM OF SQUARES =	0.592100191116 01 0.250729661866 01	LUL A 20 UPER 1 LUL B 0

Ballistic Data Summary for +150°F (u)

Figure 62, Sheet 4 of 4

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

MOTOR IDENT NO.		DATE		Fired		2.75 F4A		-05/+150 UN6-F		M DOT		CM		PIGN MAX		PC MAX		PL AVG	
NO.	NO.	3297-801-	QA-	DELTA TD	DELTA TR	DELTA TA	DELTA TB	DELTA TC	DELTA TD	DELTA TE	DELTA TF	DELTA TG	DELTA TH	DELTA TI	DELTA TJ	DELTA TK	DELTA TL	DELTA TM	DELTA TN
12-20	45	020	001500	-014	-019	3.051	2.304	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65
12-25	14	021	001500	-014	-015	3.080	2.330	2.62	2.62	2.62	2.62	2.62	2.62	2.62	2.62	2.62	2.62	2.62	2.62
OPERATIONAL DATA																			
Legend:																			
DELTA TD	Ignition delay time																		
DELTA TR	Ignition rise time																		
DELTA TA	Action time																		
DELTA TB	Web burn time																		
W DOT	Web flow rate																		
CM	Mass flow coefficient																		
PIGN MAX	Maximum Ignition pressure																		
PC MAX	Maximum pressure																		
PL AVG	Average action time pressure																		

Ballistic Data Summary of Gradient Firings (u)

Figure 63, Sheet 1 of 4

CONFIDENTIAL

CHAMBER NO.	MOTOR TEST NO.	-05/0100 0000 f									
		LA	LA-SFC	LA-SFC	LA-SFC	LA-SFC	LA-SFC	LA-SFC	LA-SFC	LA-SFC	LA-SFC
12-40	45	620	1454	1020	1934	290.0	420.0	044	515	604	0300
12-45	14	021	1422	1411	1920	230.4	451.5	330	500	623	0305
AVERAGE		1.11	1.12	1.13	1.14	1.15	1.16	1.17	1.18	1.19	1.20

Legend:

I 150- Impulse at 15 g
LA Action time impulse
ID Total impulse
ISP Specific impulse
ISP(TA) Total impulse
Motor Weight
FY MAX Maximum thrust
FYCH MAX Maximum ignition thrust
FYA AVG Average action time thrust
FYB AVG Average burn time thrust
RB Burning rate

Ballistic Data Summary of Gradient Firings (u)

Figure 63, Sheet 2 of 4

CONFIDENTIAL

Report AFRPL-TR-69-90

DELTA T _U SEC	SIGMA RMS NUMBER	0.0014 0.0170 2	MINIMUM MAXIMUM	0.0100 0.0180	12-45 12-50	U21 U20	SUM OF SQUARES	0.3400001302500-01 0.580000435580-03	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0024 0.0170 2	MINIMUM MAXIMUM	0.0130 0.0190	12-45 12-50	U21 U20	SUM OF SQUARES	0.3400000049630-01 0.58000003187600-03	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0025 0.0055 2	MINIMUM MAXIMUM	0.0010 0.0080	12-45 12-45	U21 U20	SUM OF SQUARES	0.0131001472470-01 0.187950100350-02	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0026 0.0070 2	MINIMUM MAXIMUM	0.0030 0.0090	12-45 12-50	U21 U20	SUM OF SQUARES	0.4694001197810-01 0.1101740100300-02	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0021 0.0050 2	MINIMUM MAXIMUM	0.0020 0.0030	12-45 12-50	U21 U20	SUM OF SQUARES	0.520995500400-01 0.1300005737850-02	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0000 0.0001 2	MINIMUM MAXIMUM	0.0001 0.0001	12-50 12-45	U21 U20	SUM OF SQUARES	0.1213000342250-01 0.7350094150700-04	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0035 0.0050 2	MINIMUM MAXIMUM	0.0030 0.0050	12-50 12-45	U21 U20	SUM OF SQUARES	0.3510000000000-04 0.0303700000000-07	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0042 0.0050 2	MINIMUM MAXIMUM	0.0030 0.0050	12-50 12-45	U21 U20	SUM OF SQUARES	0.3230000000000-04 0.2220305000000-07	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0020 0.0050 2	MINIMUM MAXIMUM	0.0010 0.0050	12-50 12-45	U21 U20	SUM OF SQUARES	0.2550000000000-04 0.3274000000000-07	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0020 0.0050 2	MINIMUM MAXIMUM	0.0010 0.0050	12-50 12-45	U21 U20	SUM OF SQUARES	0.3001000000000-04 0.0701000000000-07	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0040 0.0050 2	MINIMUM MAXIMUM	0.0030 0.0050	12-45 12-50	U21 U20	SUM OF SQUARES	0.3031000000000-04 0.733021000000-07	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0045 0.0050 2	MINIMUM MAXIMUM	0.0030 0.0050	12-45 12-50	U21 U20	SUM OF SQUARES	0.3054000000000-04 0.7207000000000-07	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0043 0.0050 2	MINIMUM MAXIMUM	0.0030 0.0050	12-45 12-50	U21 U20	SUM OF SQUARES	0.477400100700-03 0.1135500000000-07	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0070 0.0050 2	MINIMUM MAXIMUM	0.0030 0.0050	12-45 12-50	U21 U20	SUM OF SQUARES	0.5041000000000-04 0.4023900000000-05	LCL A UPLK LCL B
DELTA T _U SEC	SIGMA RMS NUMBER	0.0070 0.0050 2	MINIMUM MAXIMUM	0.0030 0.0050	12-45 12-50	U21 U20	SUM OF SQUARES	0.1032000000000-04 0.1614500000000-07	LCL A UPLK LCL B

Ballistic Data Summary of Gradient Firings (u)

Figure 63, Sheet 3 of 4

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

FLIGHT MAX IN	SIGMA = ABAR = NUMBER =	3.5335 5/0.25000 2	MINIMUM = MAXIMUM =	508.0000 573.0000	12-45 12-00	U21 U20	SUM OF SQUARES =	0.1141000000000000 04 0.0509530000000000 00	LUL A 14 UPLA 1 LUL B 0
PVA AVG IN	SIGMA = ABAR = NUMBER =	2.2420 620.0000 2	MINIMUM = MAXIMUM =	623.0000 629.0000	12-45 12-00	U21 U20	SUM OF SQUARES =	0.1252000000000000 04 0.7637700000000000 00	LUL A 16 UPLA 1 LUL B 0
PVA AVG IN	SIGMA = ABAR = NUMBER =	3.5335 681.5000 2	MINIMUM = MAXIMUM =	679.0000 684.0000	12-45 12-00	U21 U20	SUM OF SQUARES =	0.1363000000000000 04 0.5288970000000000 00	LUL A 17 UPLA 2 LUL B 0
AVG IN	SIGMA = ABAR = NUMBER =	0.0035 0.3525 2	MINIMUM = MAXIMUM =	0.3800 0.3650	12-00 12-45	U20 U21	SUM OF SQUARES =	0.7650002241150 00 0.2926251714230 00	LUL A 20 UPLA 0 LUL B 0


Ballistic Data Summary of Gradient Firings (u)

Figure 63, Sheet 4 of 4

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

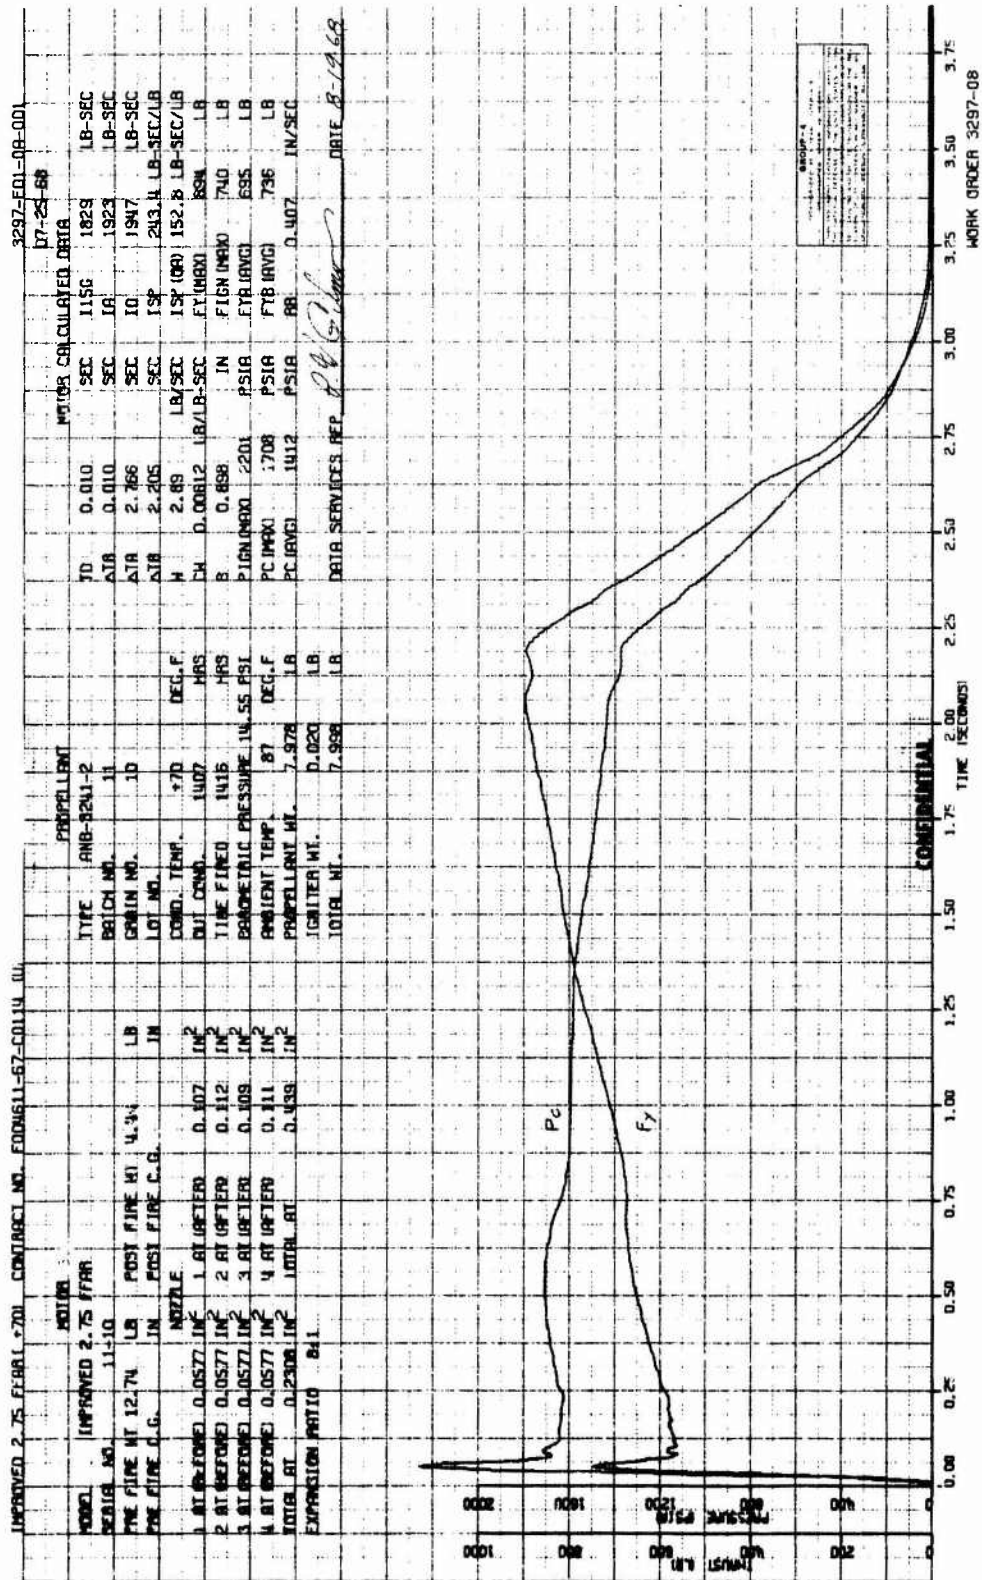


Ballistic Data and Performance Curves, Motor 3 (u)

Figure 64

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

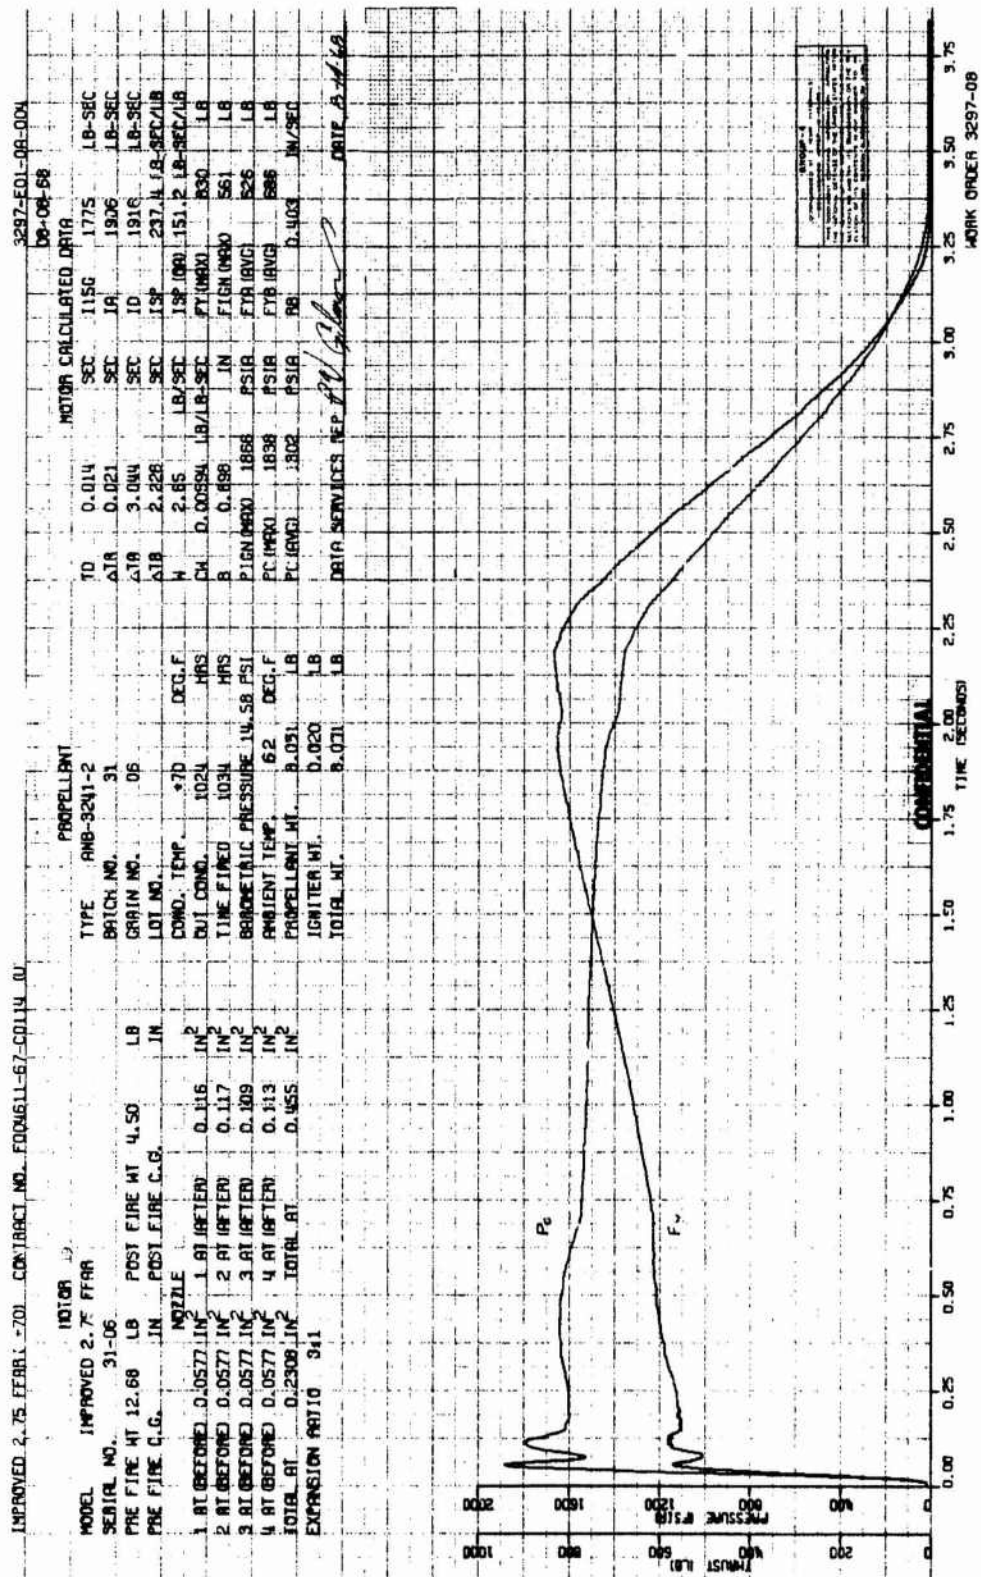

Ballistic Data and Performance Curves, Motor 19 (u)

Figure 67

CONFIDENTIAL

Report AFRPL-TR-69-90

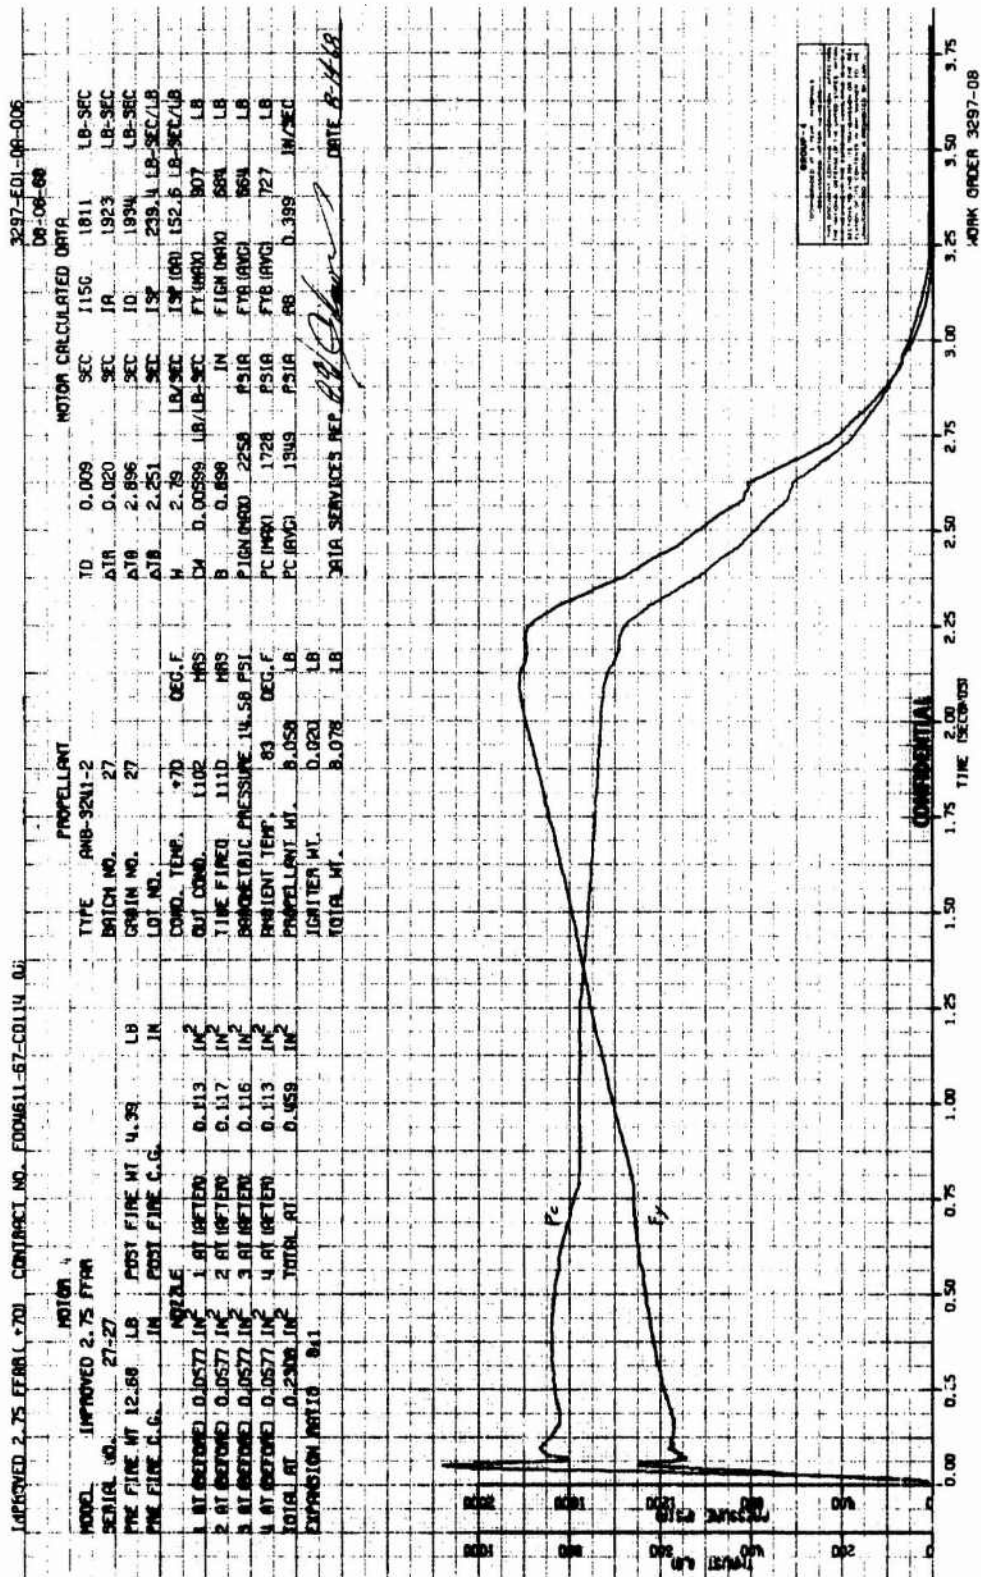


Figure 68

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90




Ballistic Data and Performance Curves, Motor 4 (u)

Figure 69

CONFIDENTIAL

Report AFRPL-TR-69-90

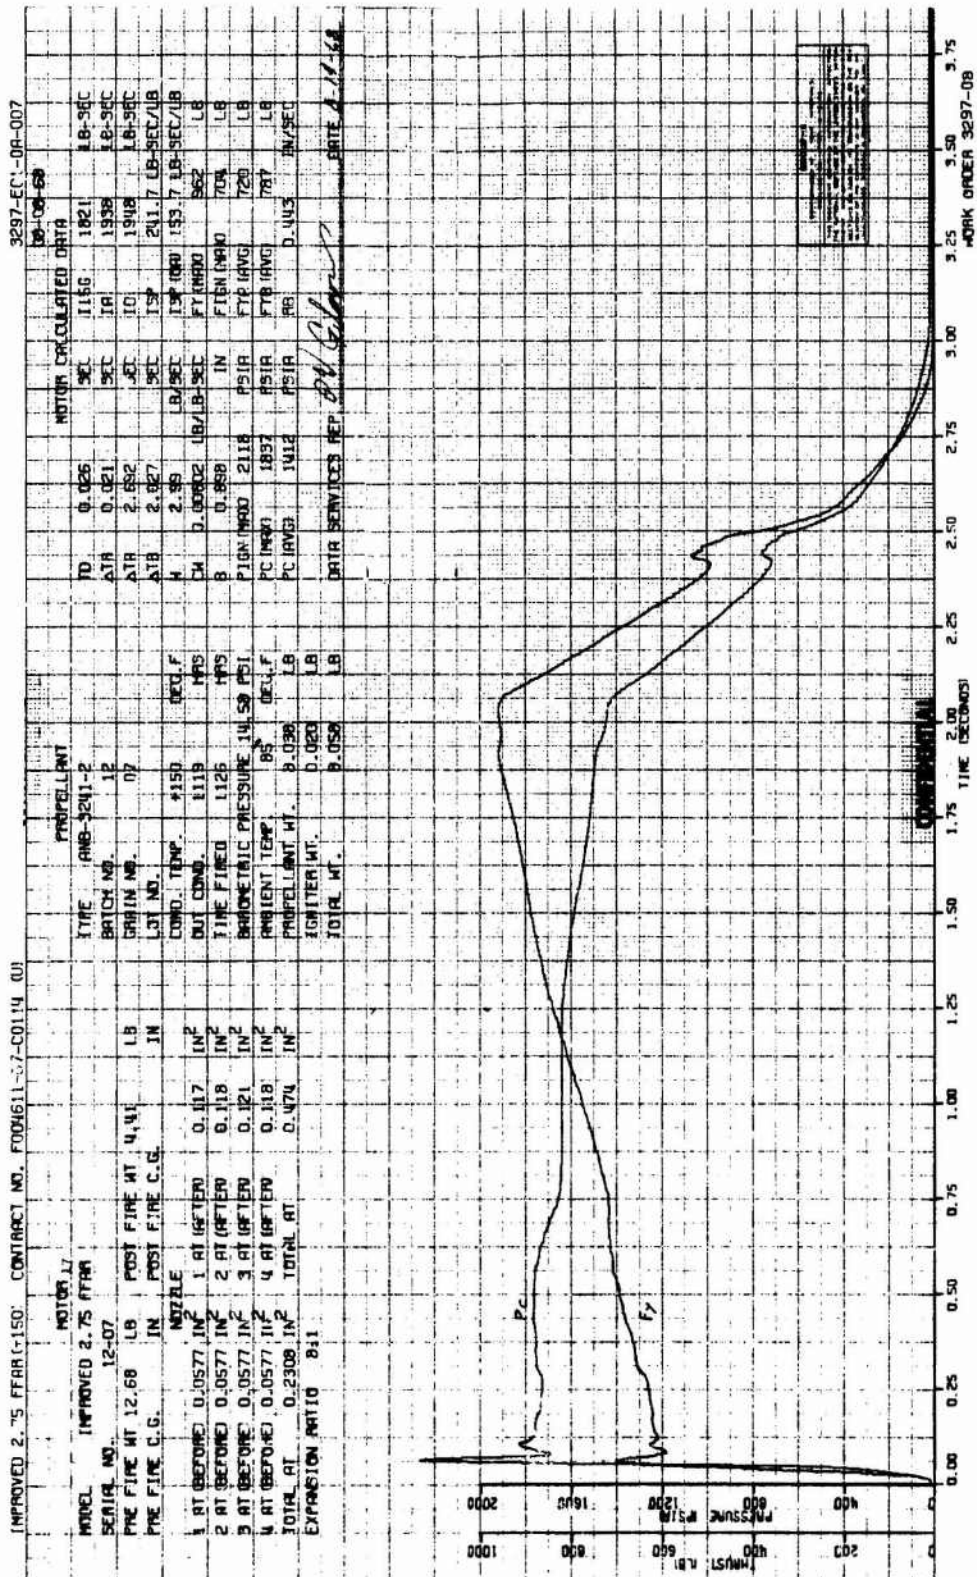


Ballistic Data and Performance Curves, Motor 17 (u)

Figure 70

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

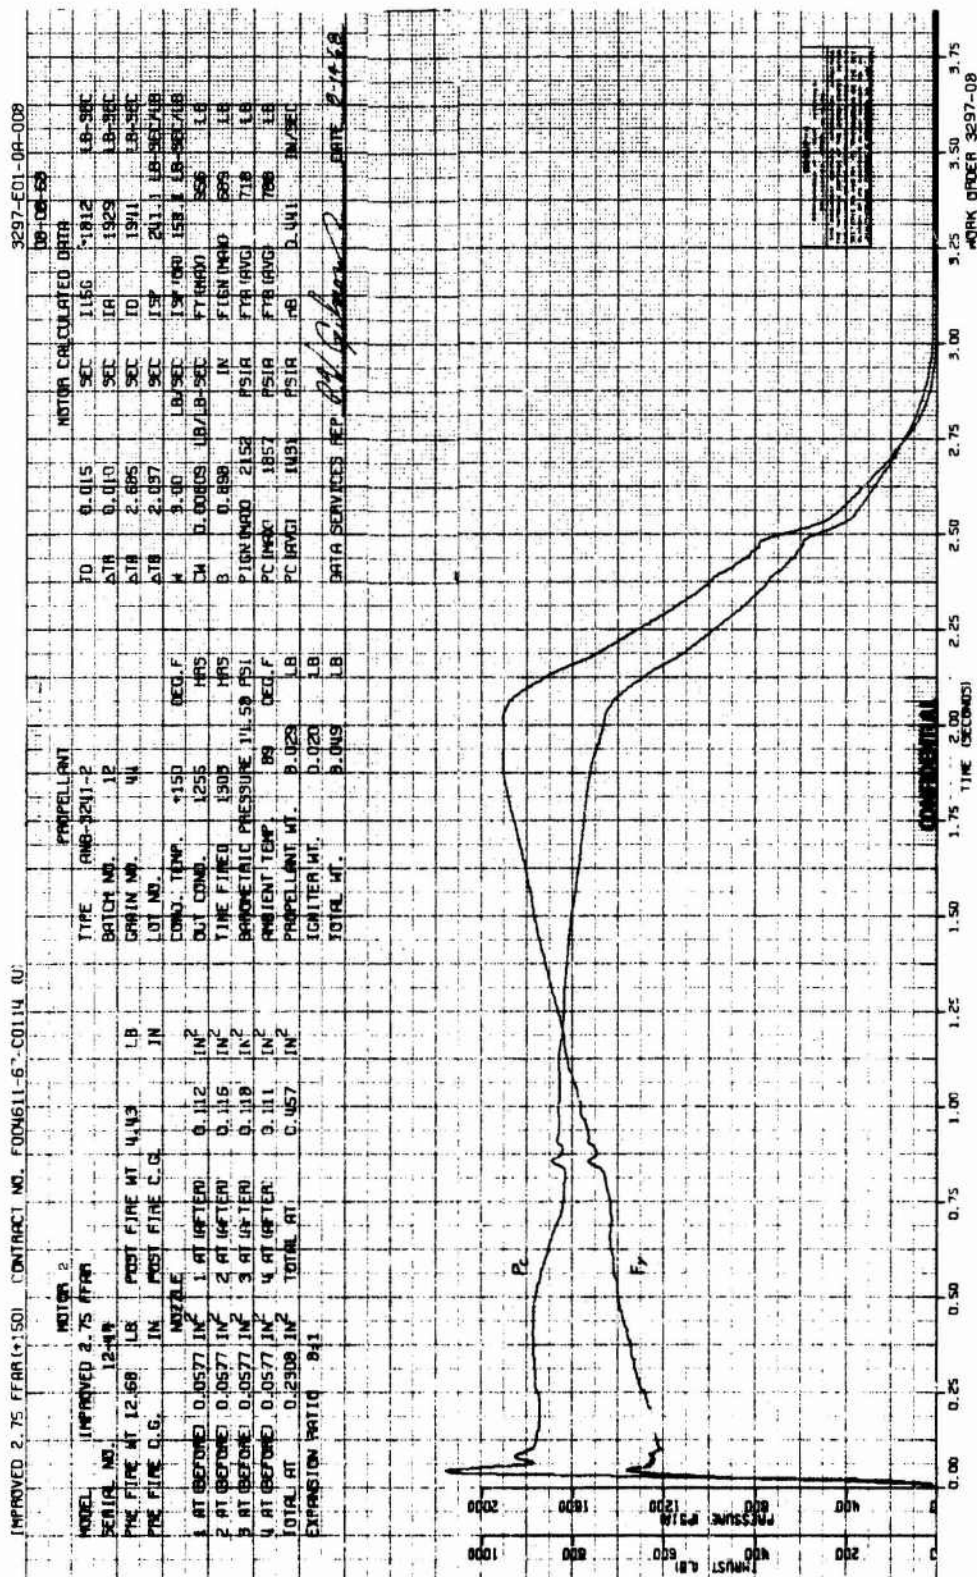

Ballistic Data and Performance Curves, Motor 2 (u)

Figure 71

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90


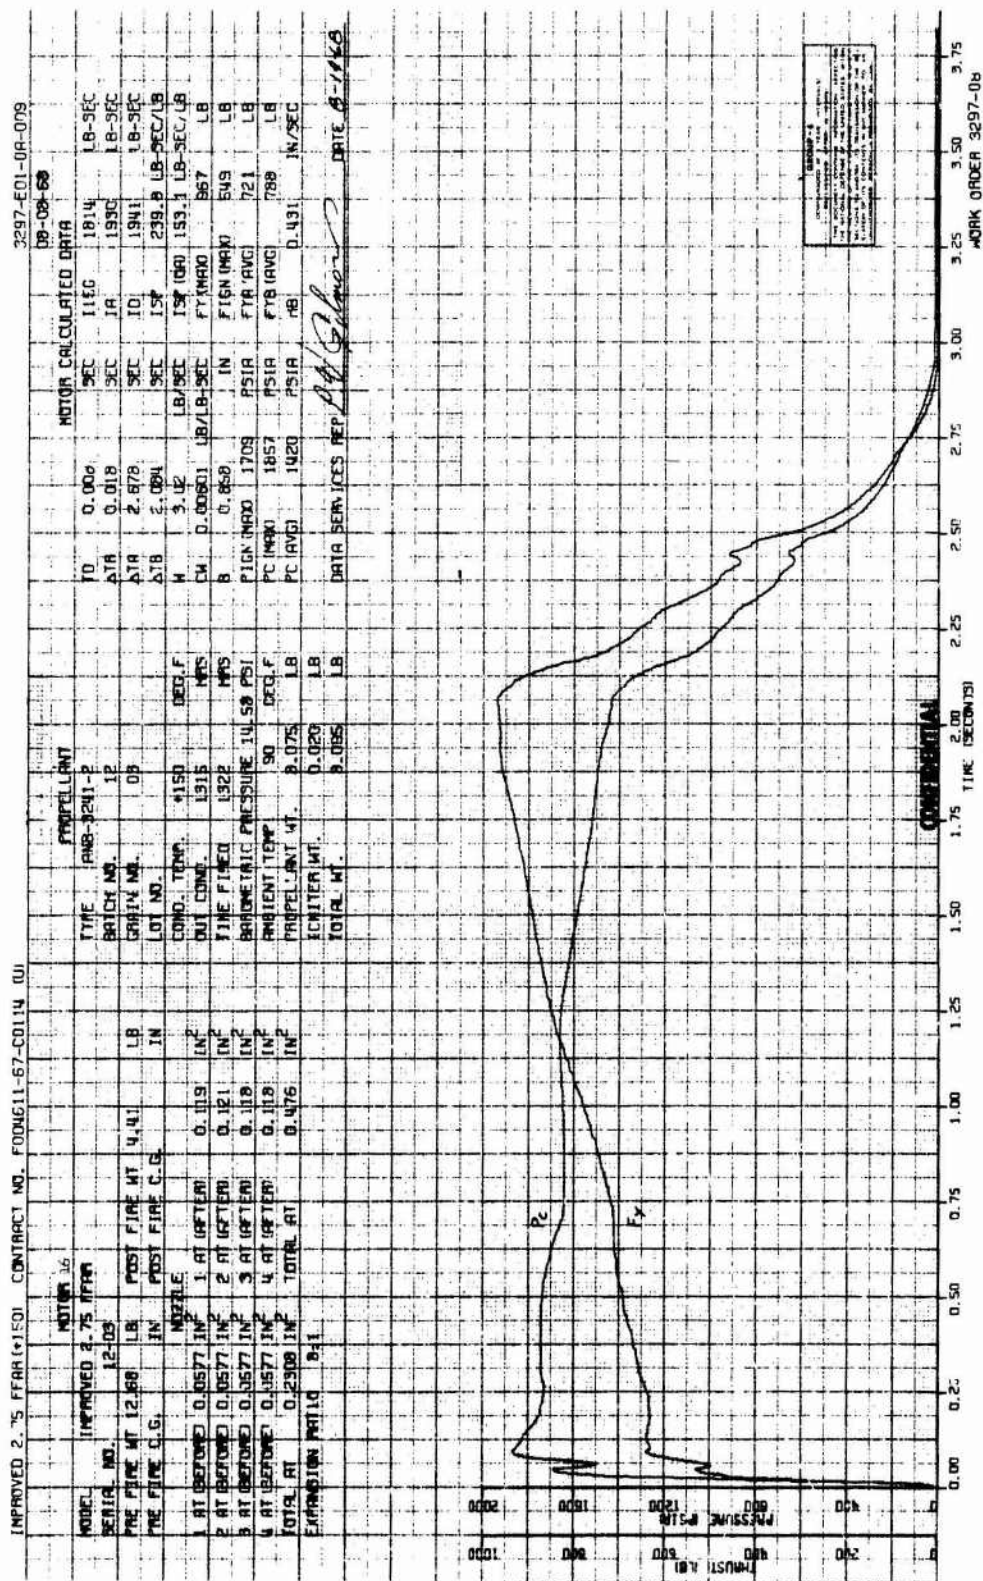


Figure 72

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

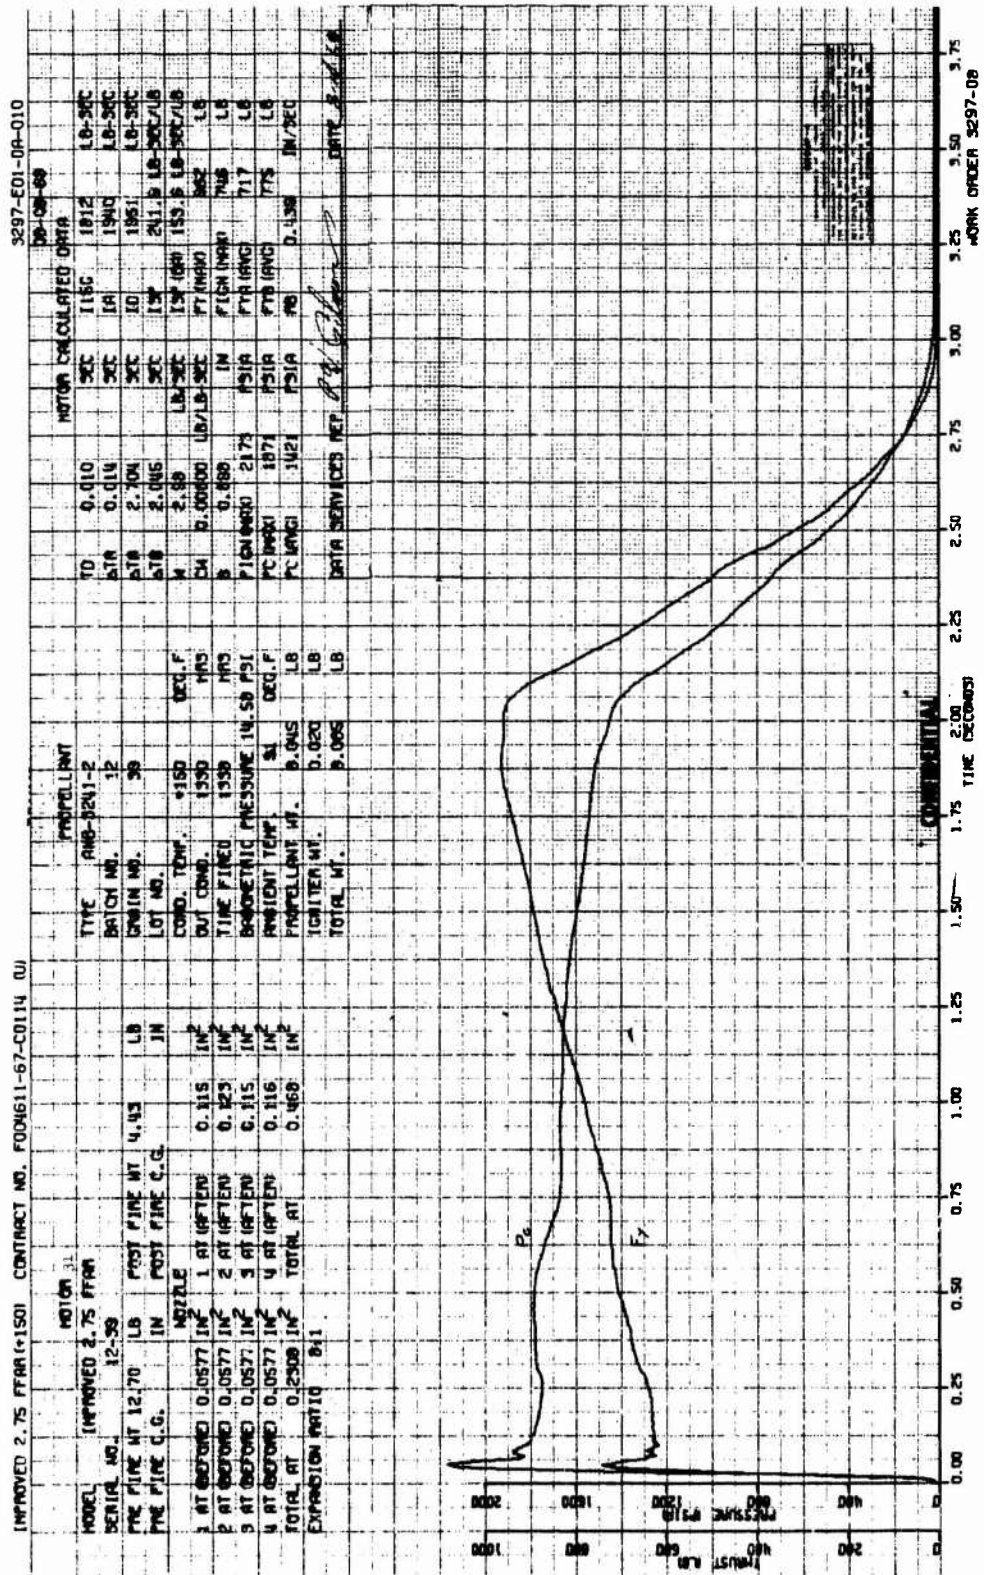


Ballistic Data and Performance Curves, Motor 31 (u)

Figure 73

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

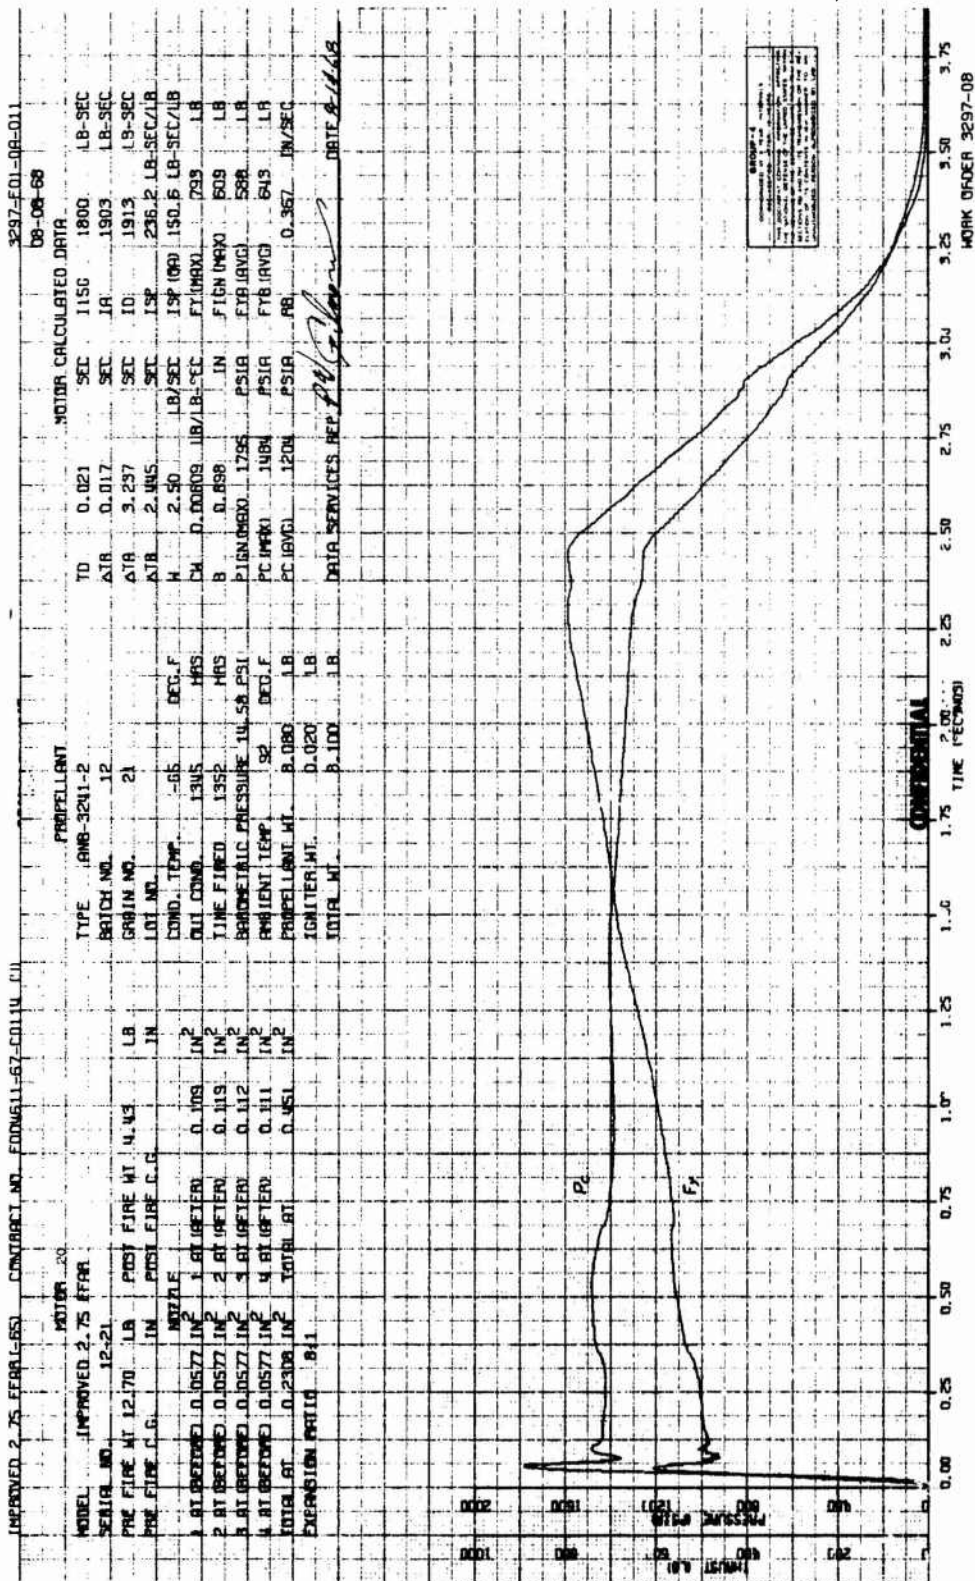


Ballistic Data and Performance Curves, Motor 20 (u)

Figure 74

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

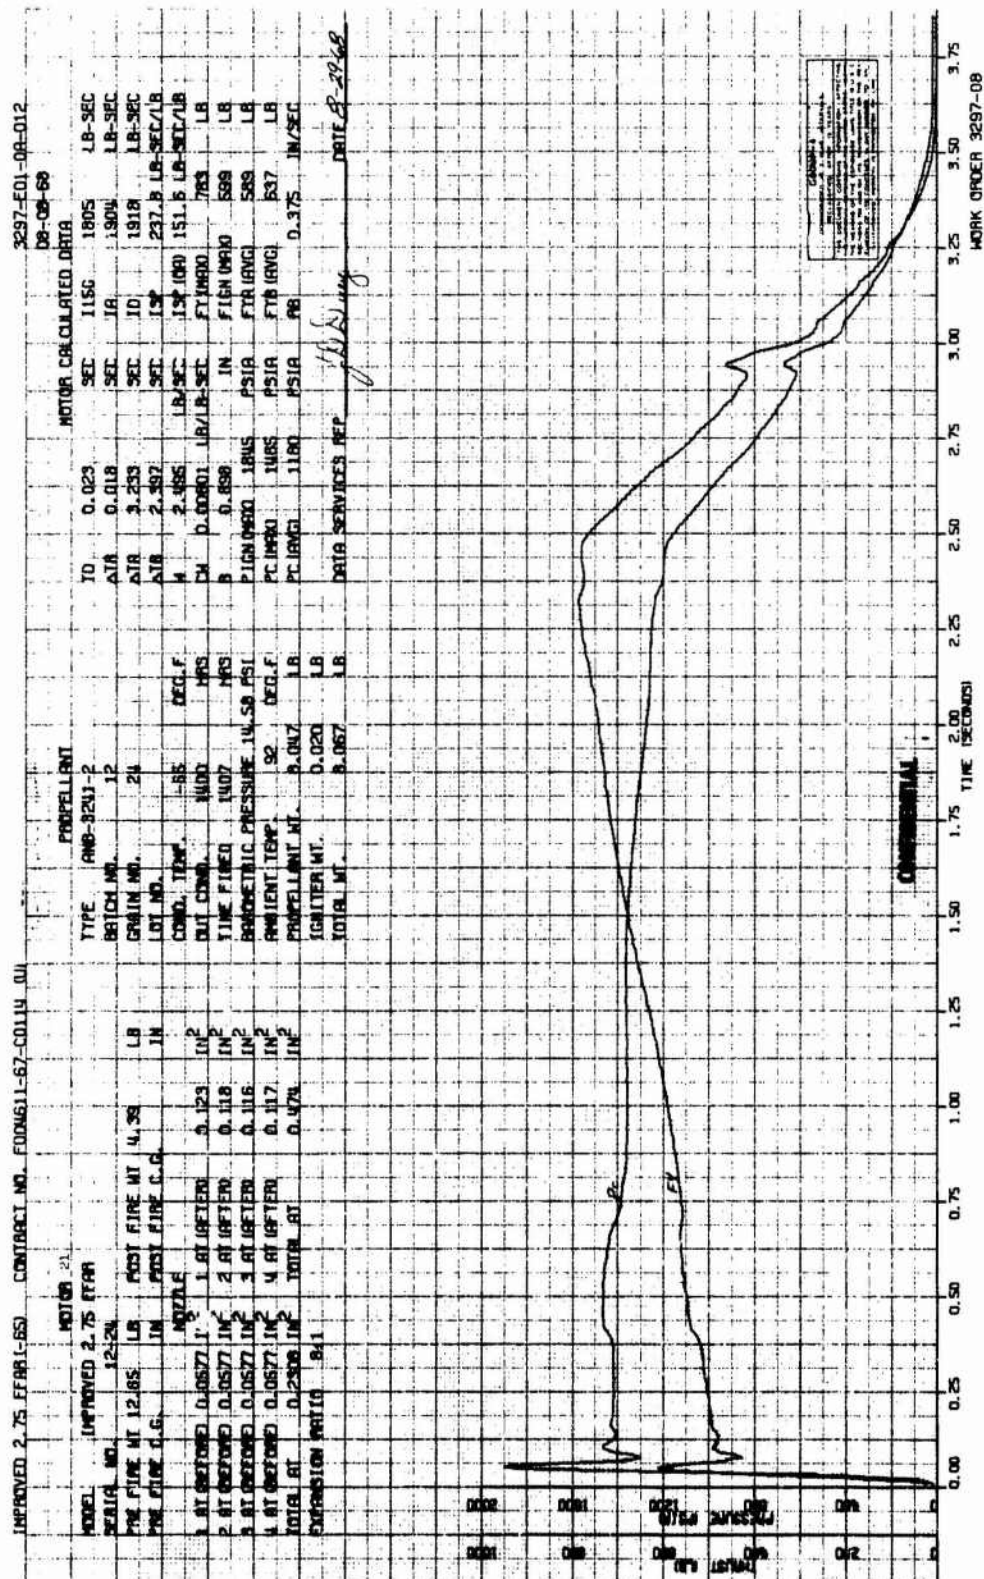


Ballistic Data and Performance Curves, Motor 21(u)

Figure 75

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

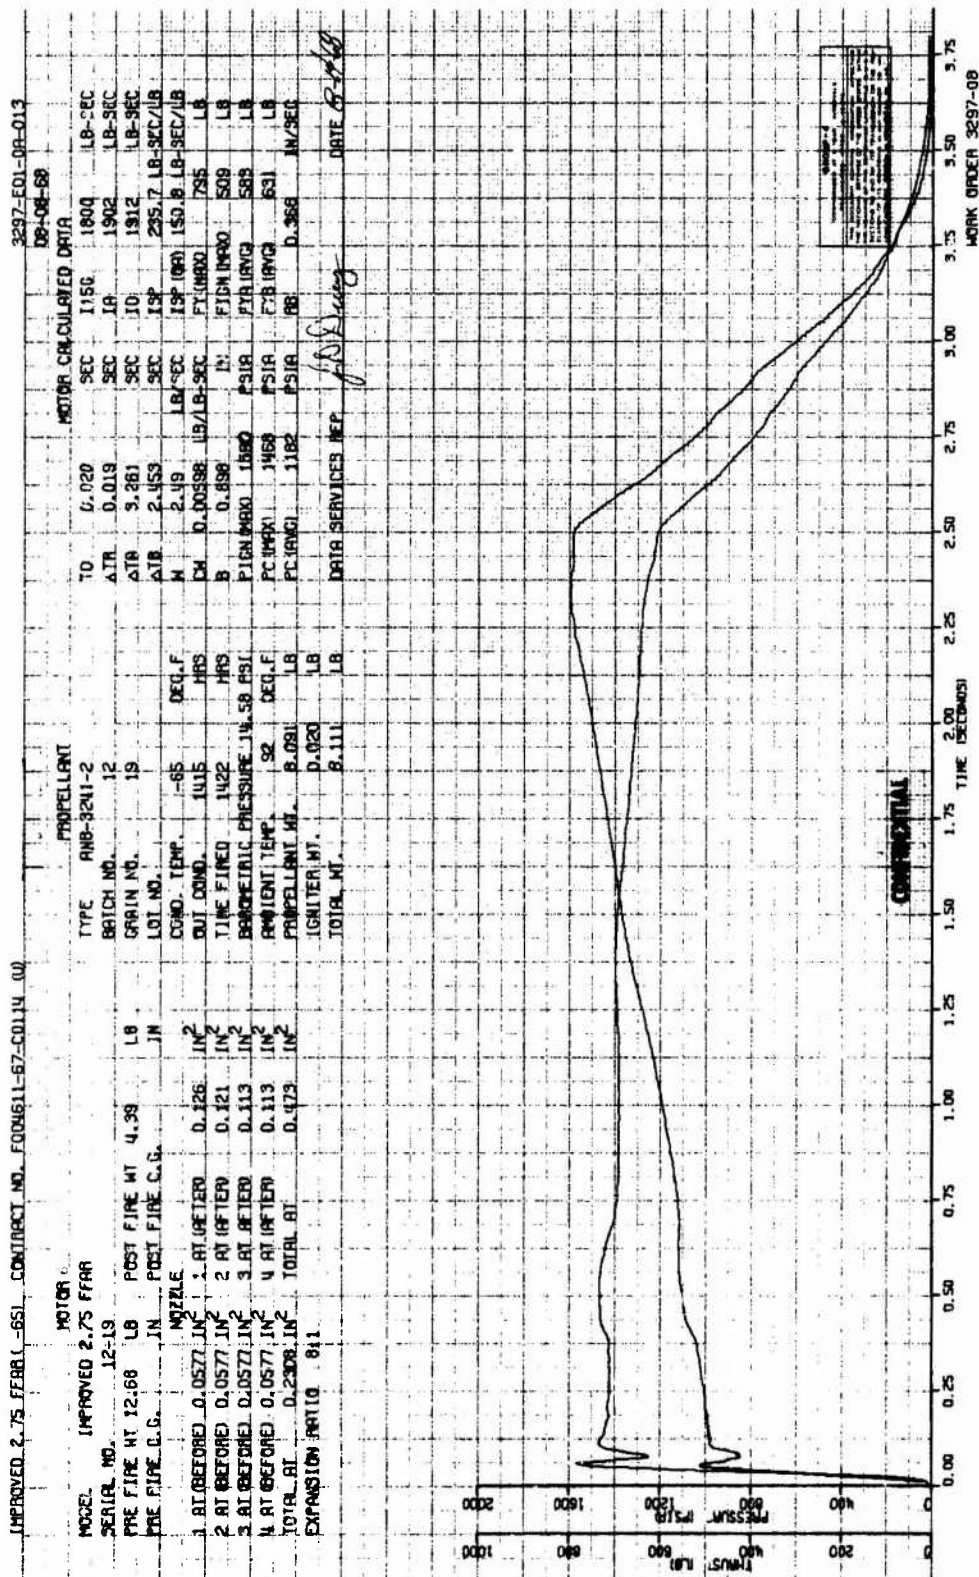

Ballistic Data and Performance Curves, Motor 6 (u)

Figure 76

CONFIDENTIAL

Report AFRPL-TR-69-90

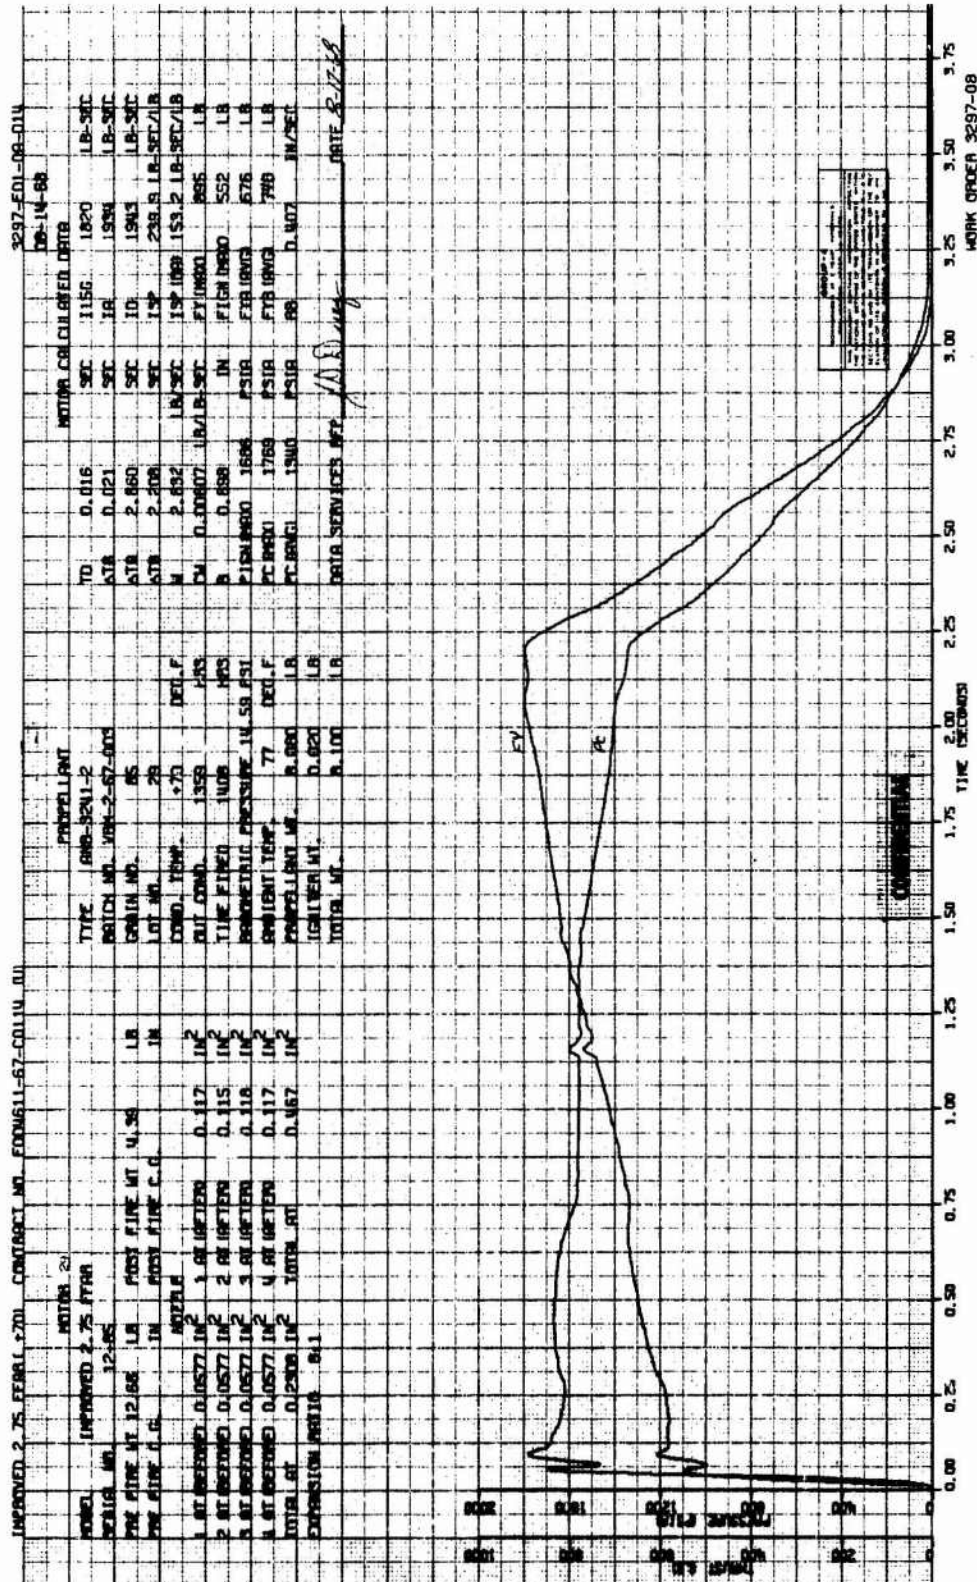



Figure 77

Ballistic Data and Performance Curves, Motor 29 (u)

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

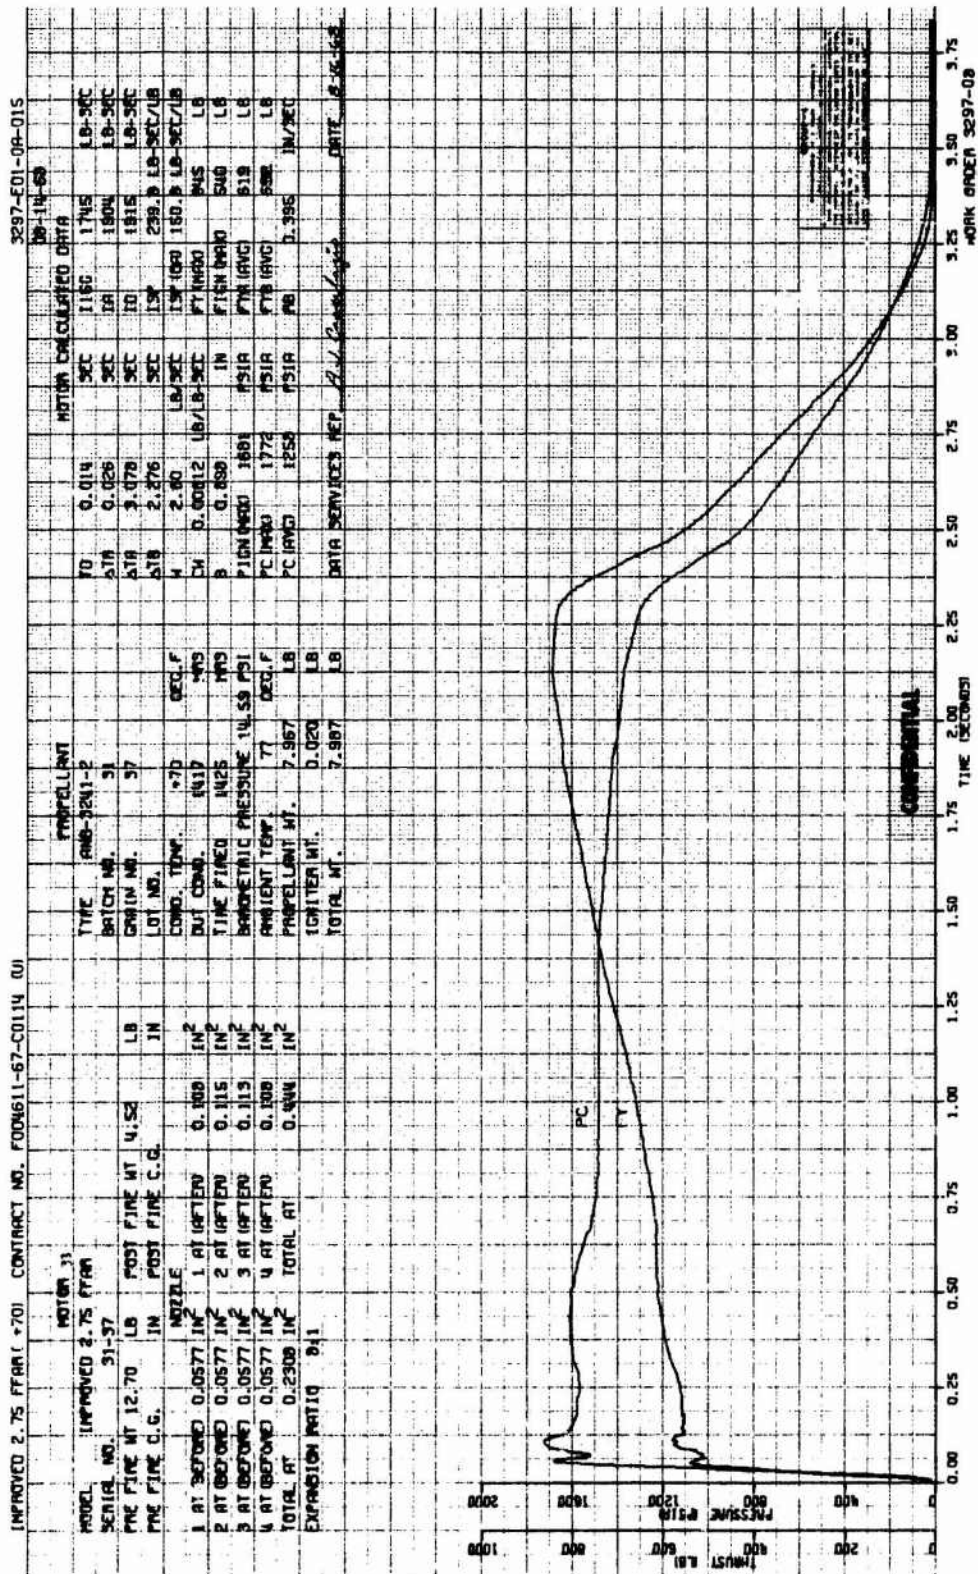


Ballistic Data and Performance Curves, Motor 33 (u)

Figure 78

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90

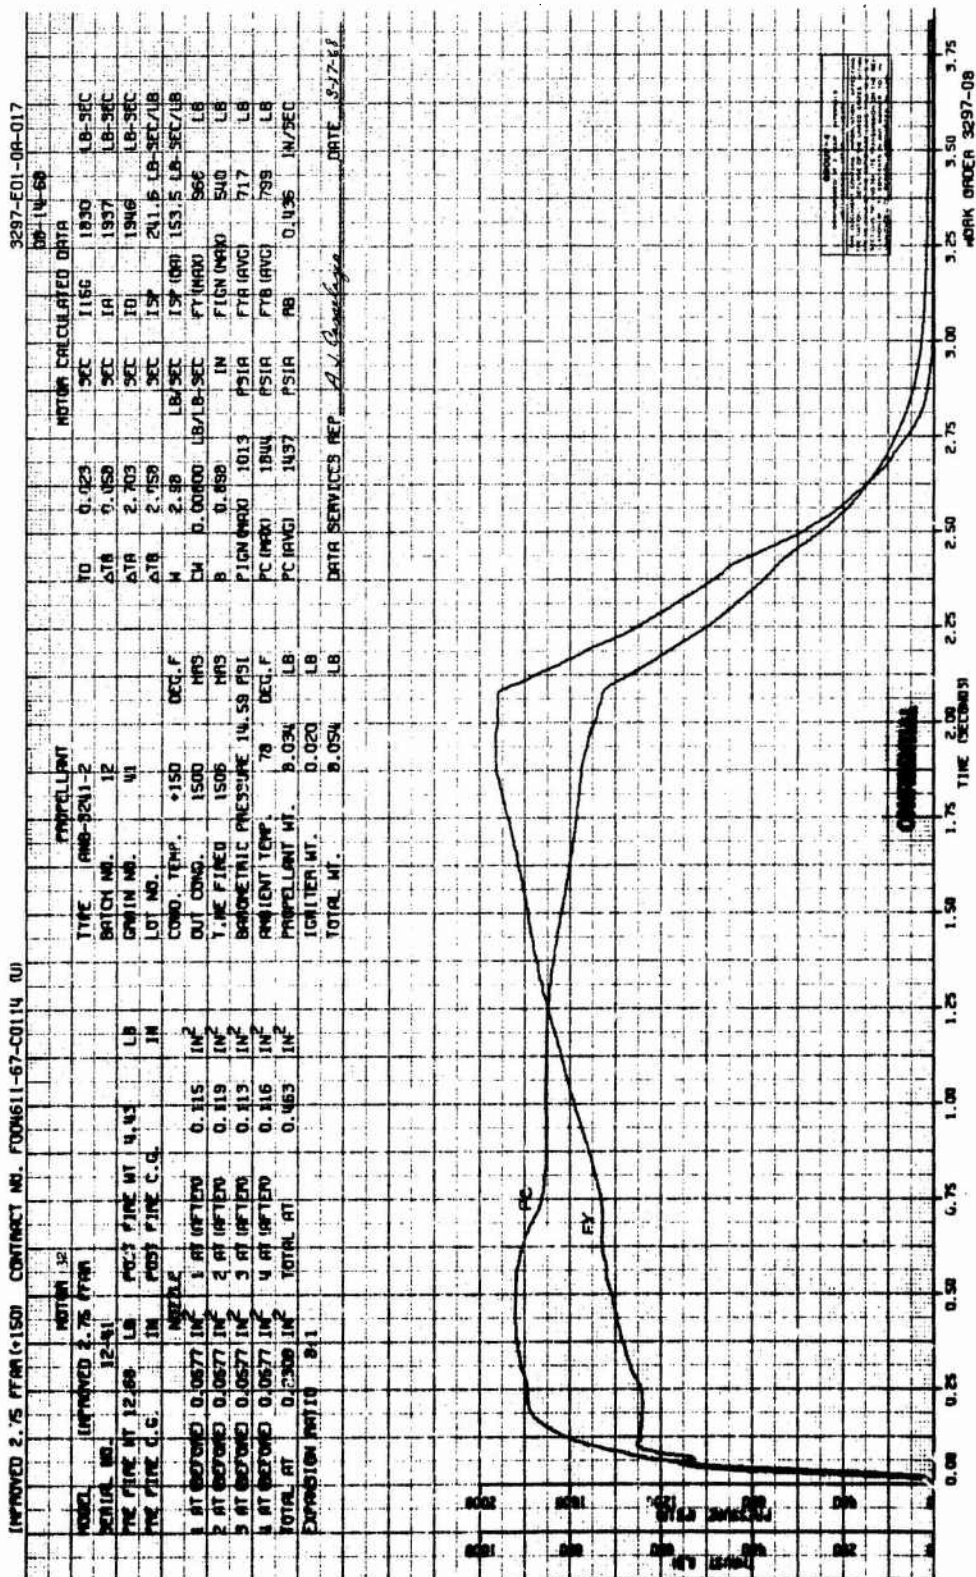


Ballistic Data and Performance Curves, Motor 32 (u)

Figure 80

CONFIDENTIAL

CONFIDENTIAL


Report AFRPL-TR-69-90

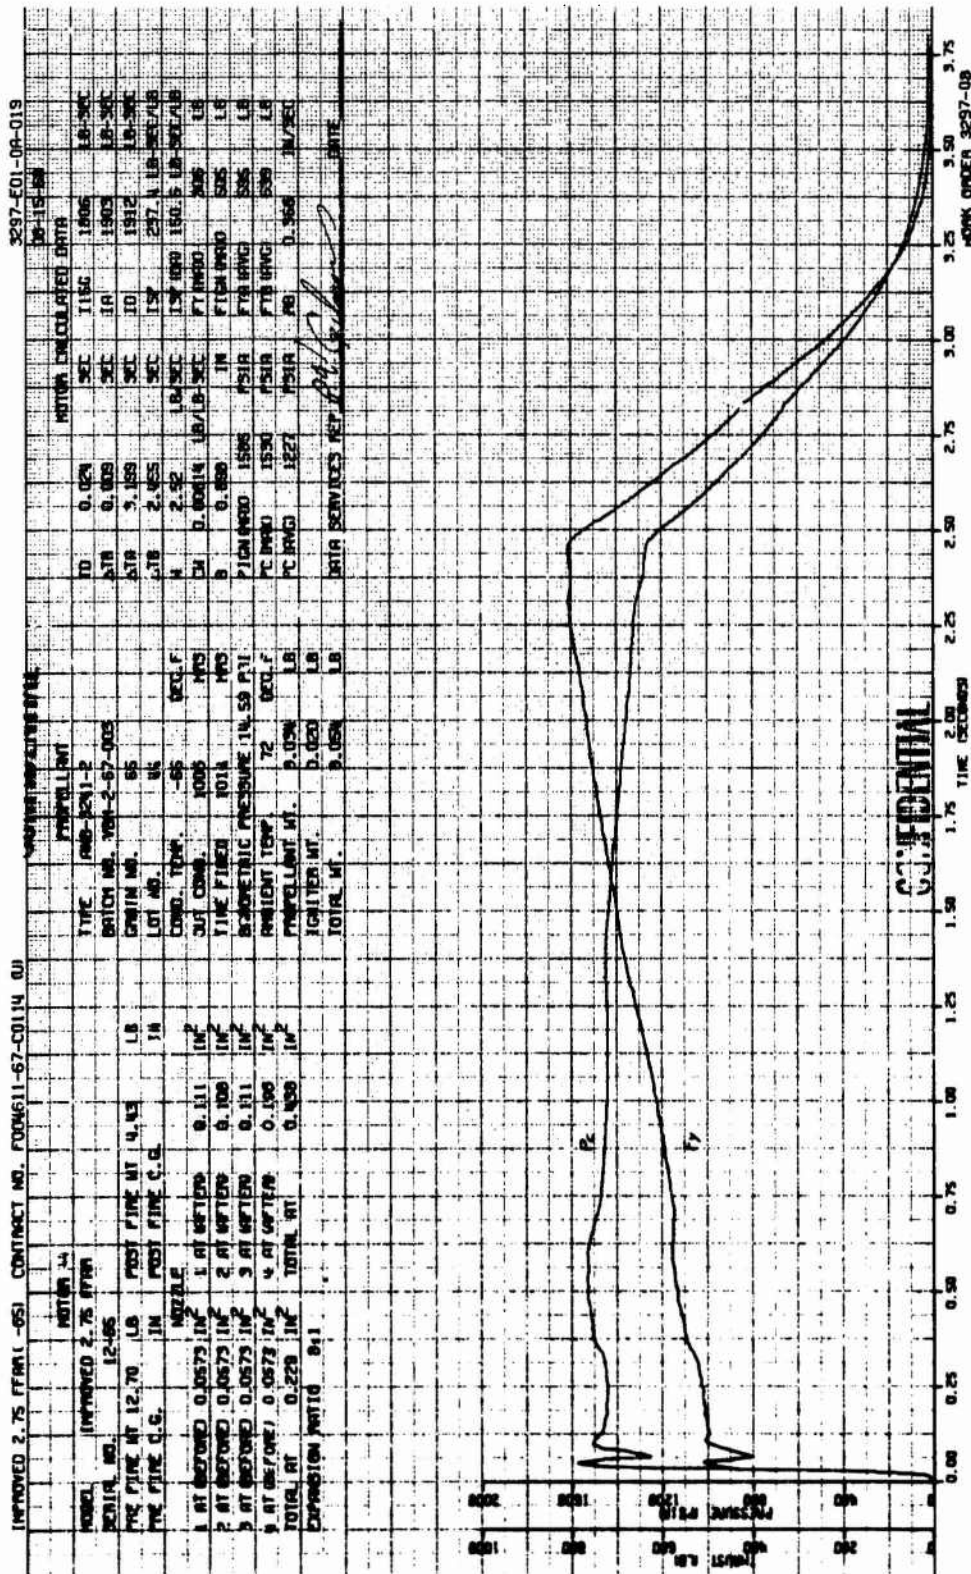

Ballistic Data and Performance Curves, Motor 44 (u)

Figure 82

CONFIDENTIAL

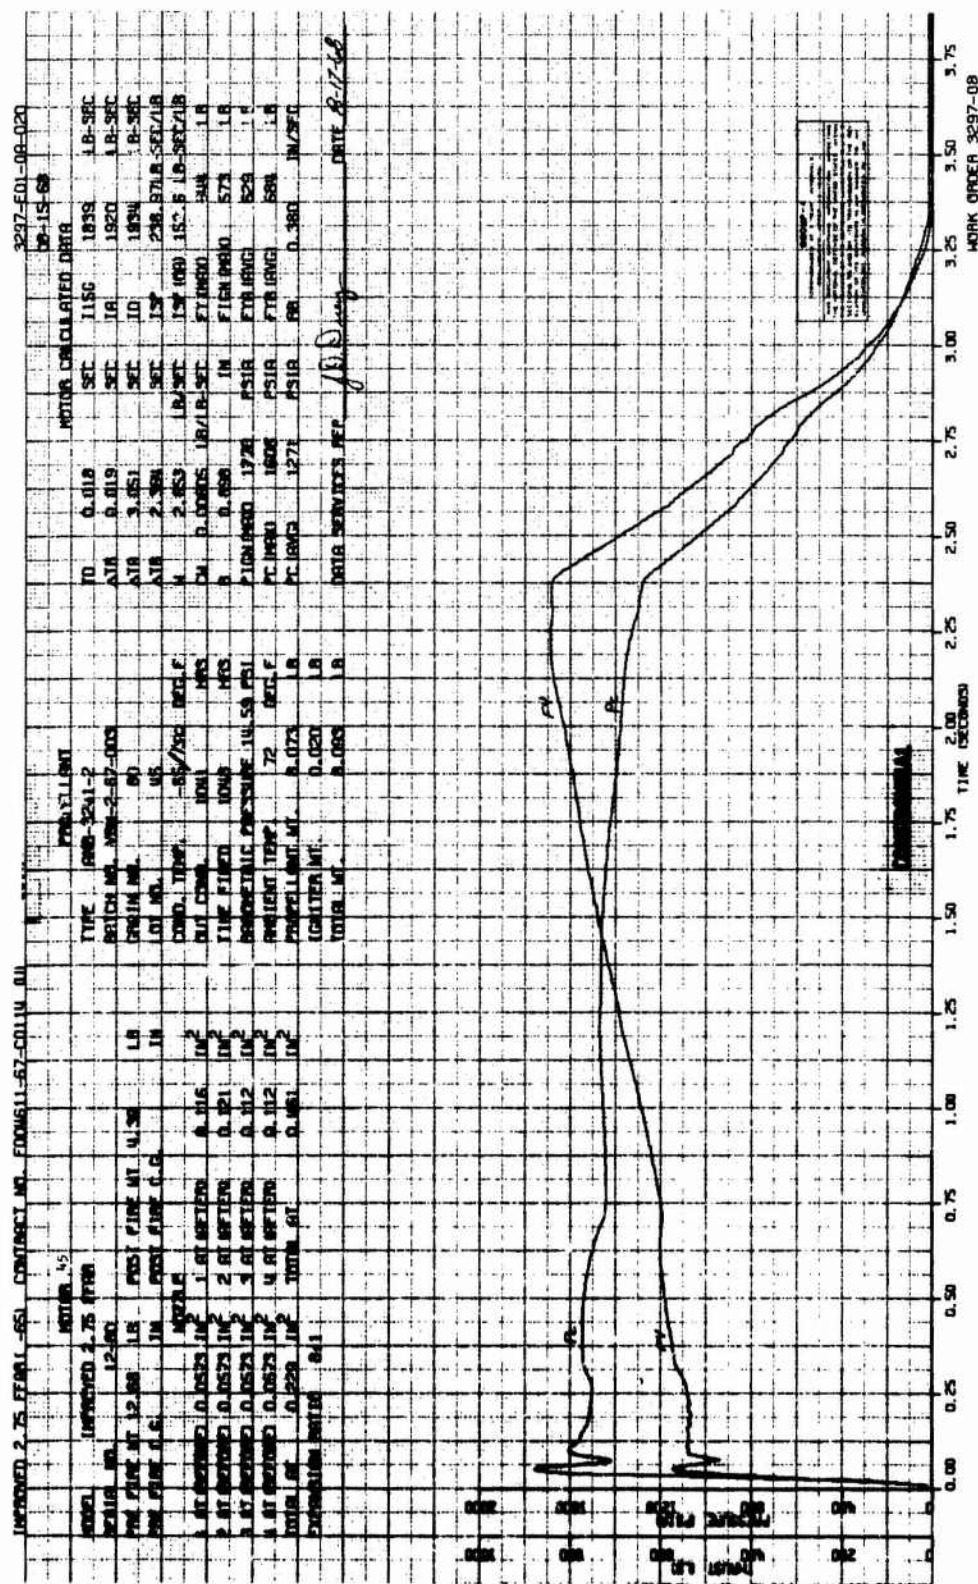

Report AFRPL-TR-69-90



Figure 84

CONFIDENTIAL

Report AFRPL-TR-69-90

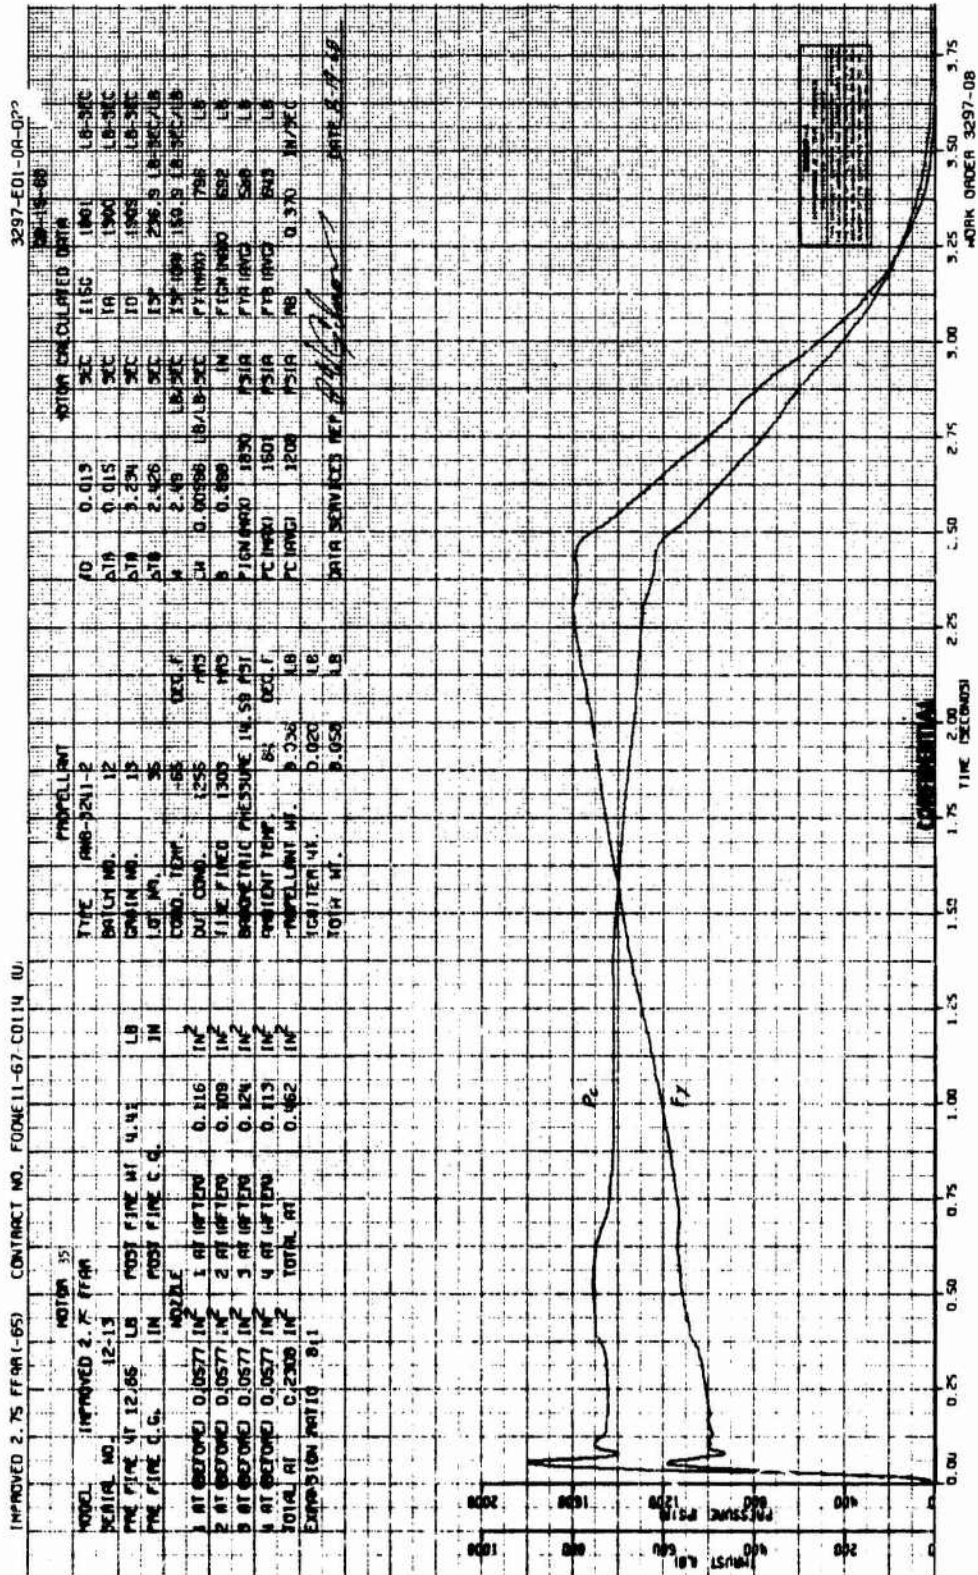


Figure 85

Ballistic Data and Performance Curves, Motor 35 (u)

CONFIDENTIAL

Report AFRPL-TR-69-90

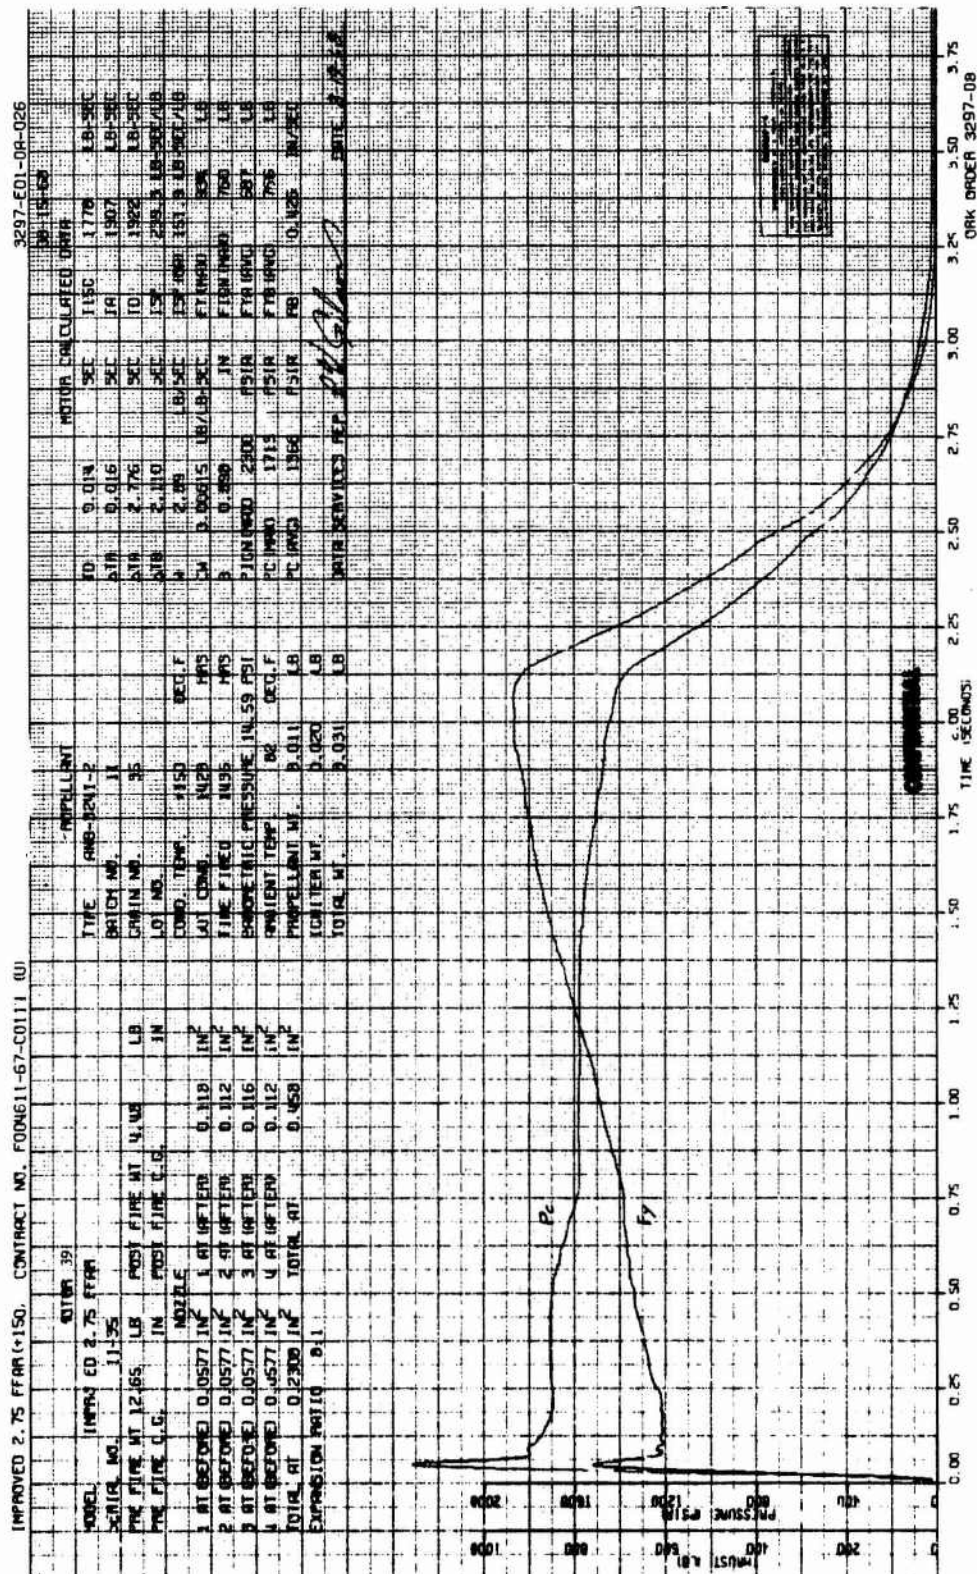


Figure 88

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90



Ballistic Data and Performance Curves, Motor 39 (u)

Figure 89

CONFIDENTIAL

Report AFRPL-TR-69-90



Figure 90

CONFIDENTIAL

Report AFRPL-TR-69-90

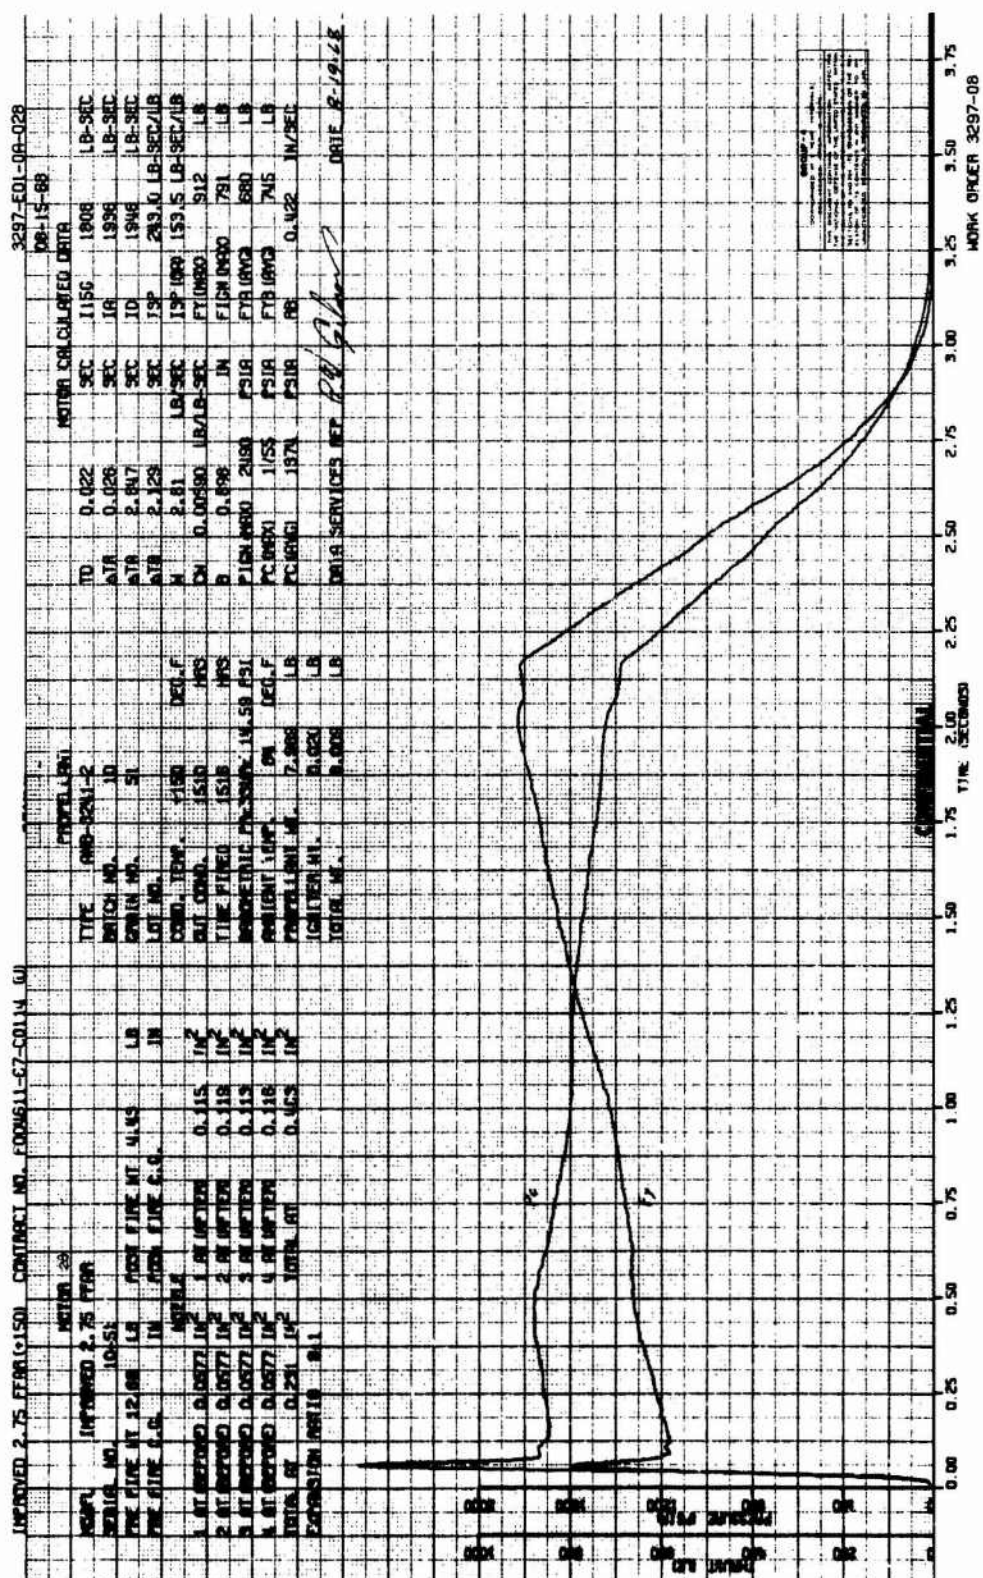


Figure 91

CONFIDENTIAL

Ballistic Data and Performance Curves, Motor 28 (u)

Report AFRPL-TR-69-90

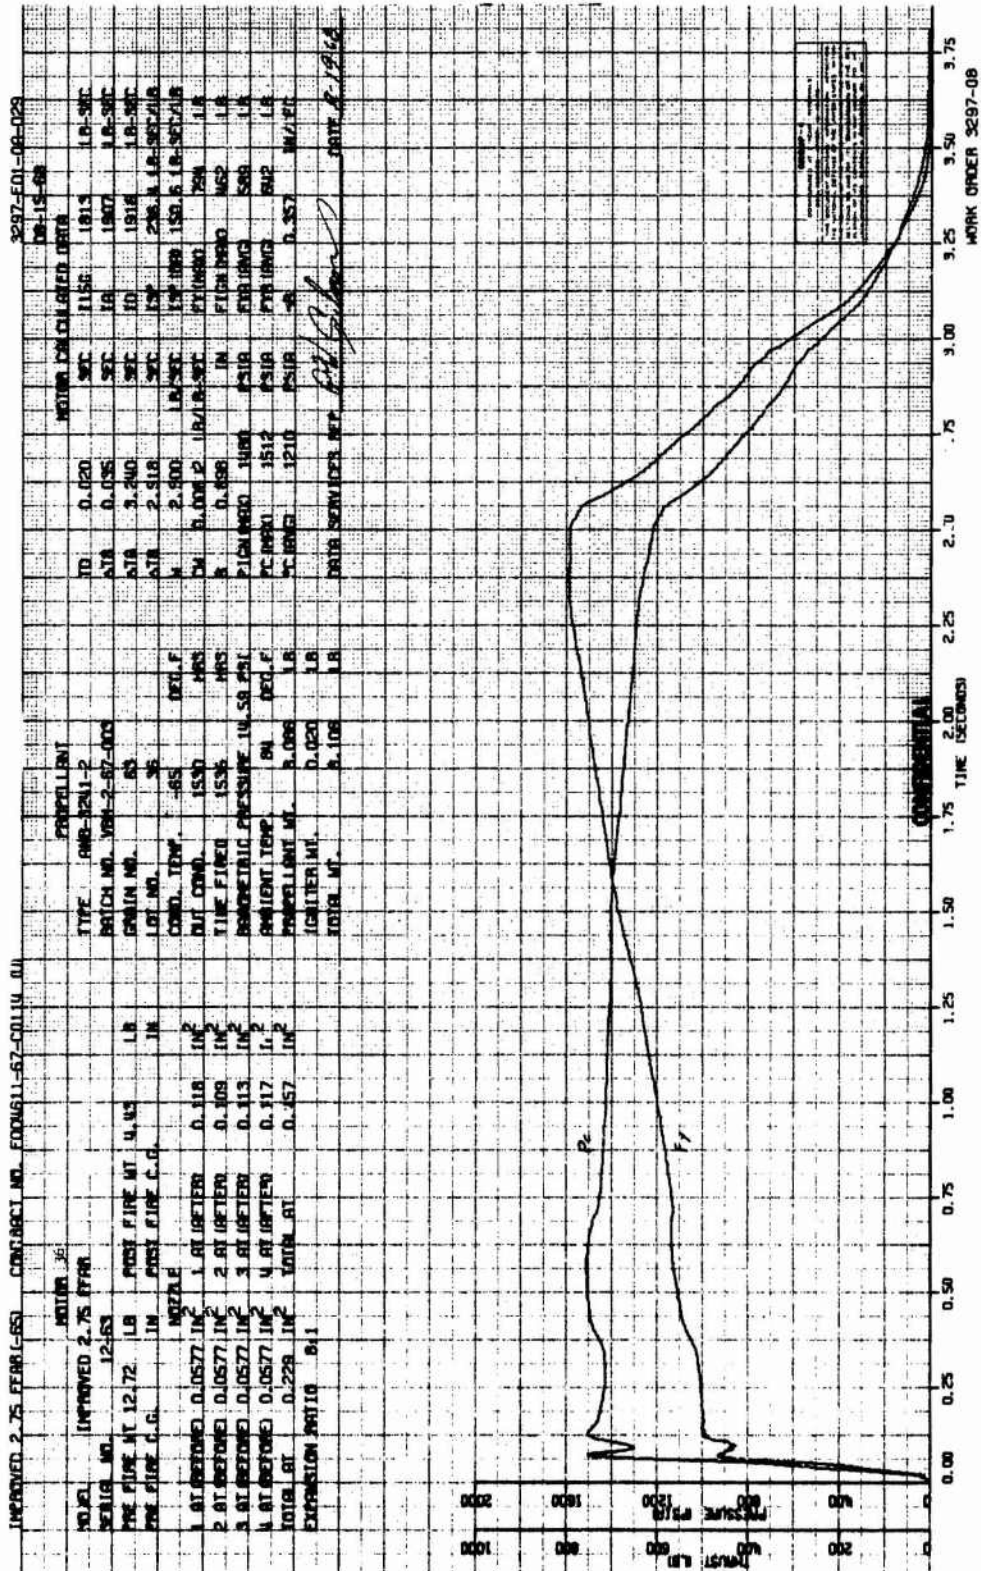


Figure 92

Ballistic Data and Performance Curves, Motor 36 (u)

CONFIDENTIAL

Report AFRPL-TR-69-90



Figure 93

CONFIDENTIAL

CONFIDENTIAL

Report AFRPL-TR-69-90


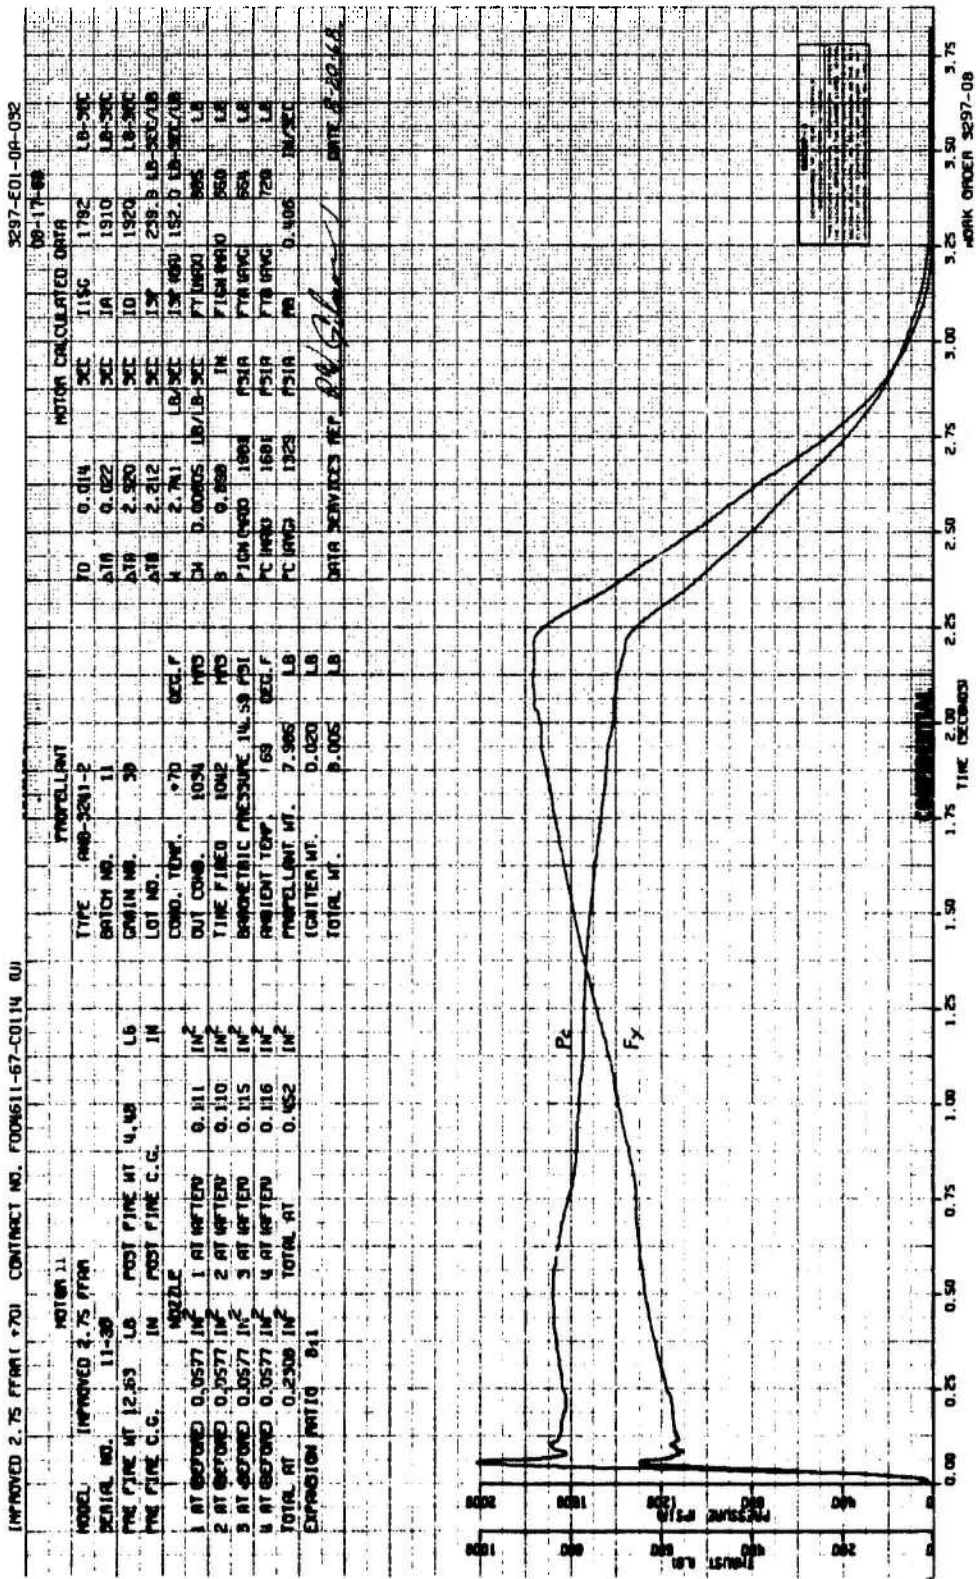


Figure 95

CONFIDENTIAL

Ballistic Data and Performance Curves, Motor 11 (u)

Report AFRPL-TR-69-90

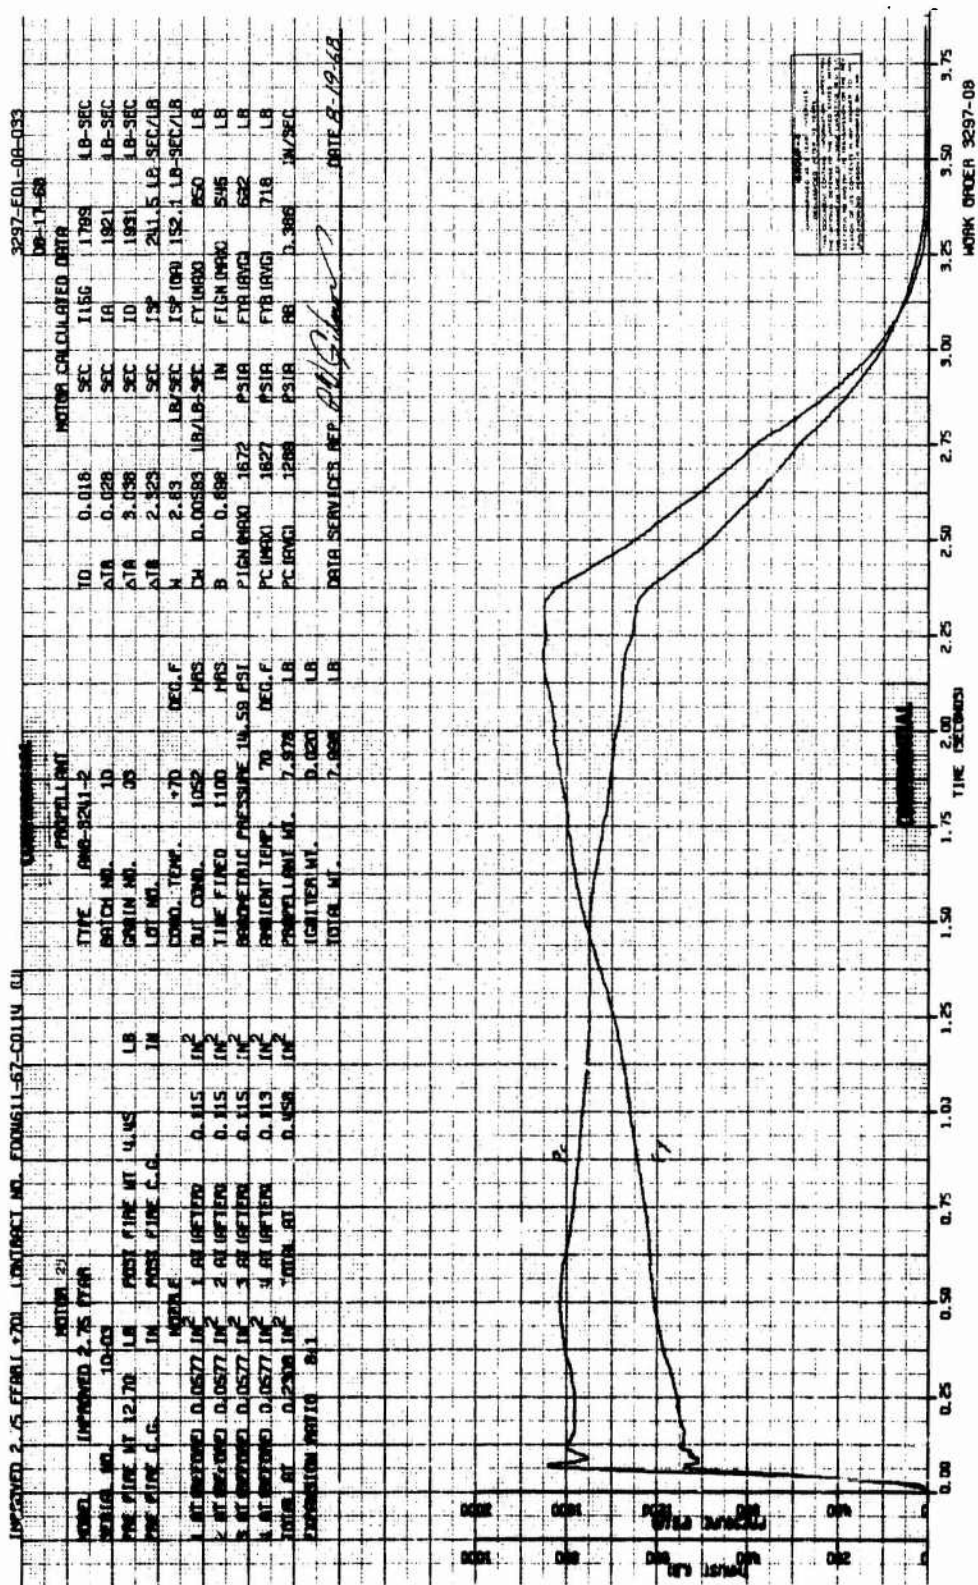


Ballistic Data and Performance Curves, Motor 25 (u)

Figure 96

CONFIDENTIAL


Report AFRPL-TR-69-90

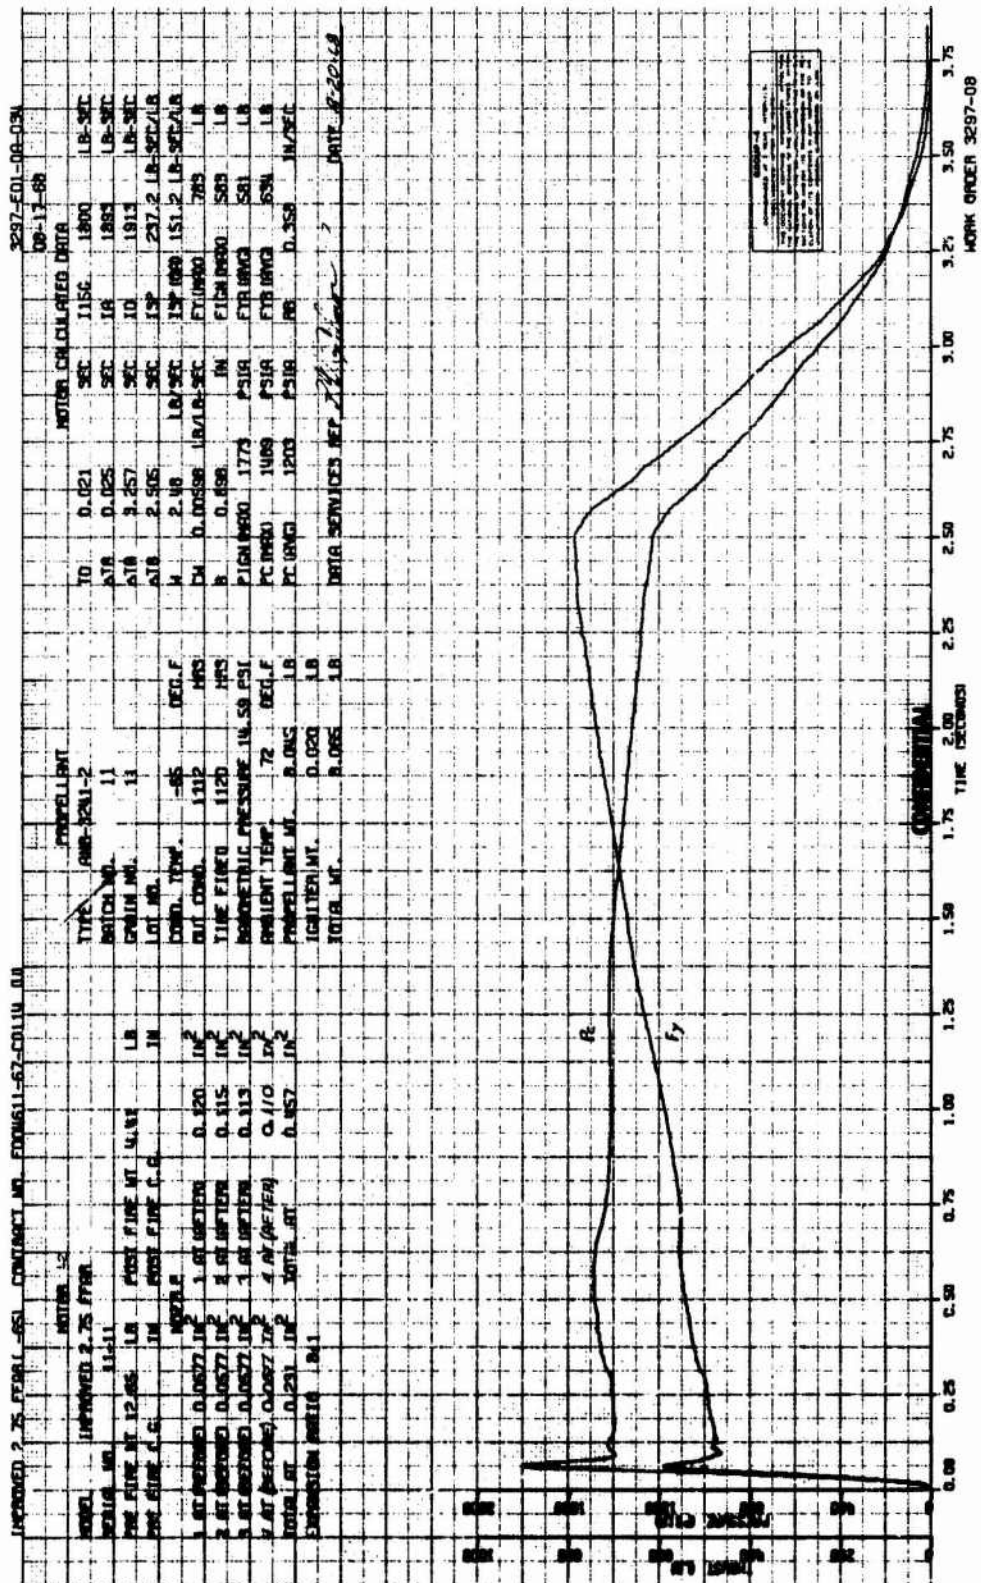

Ballistic Data and Performance Curves, Motor 42 (u)

Figure 97

CONFIDENTIAL

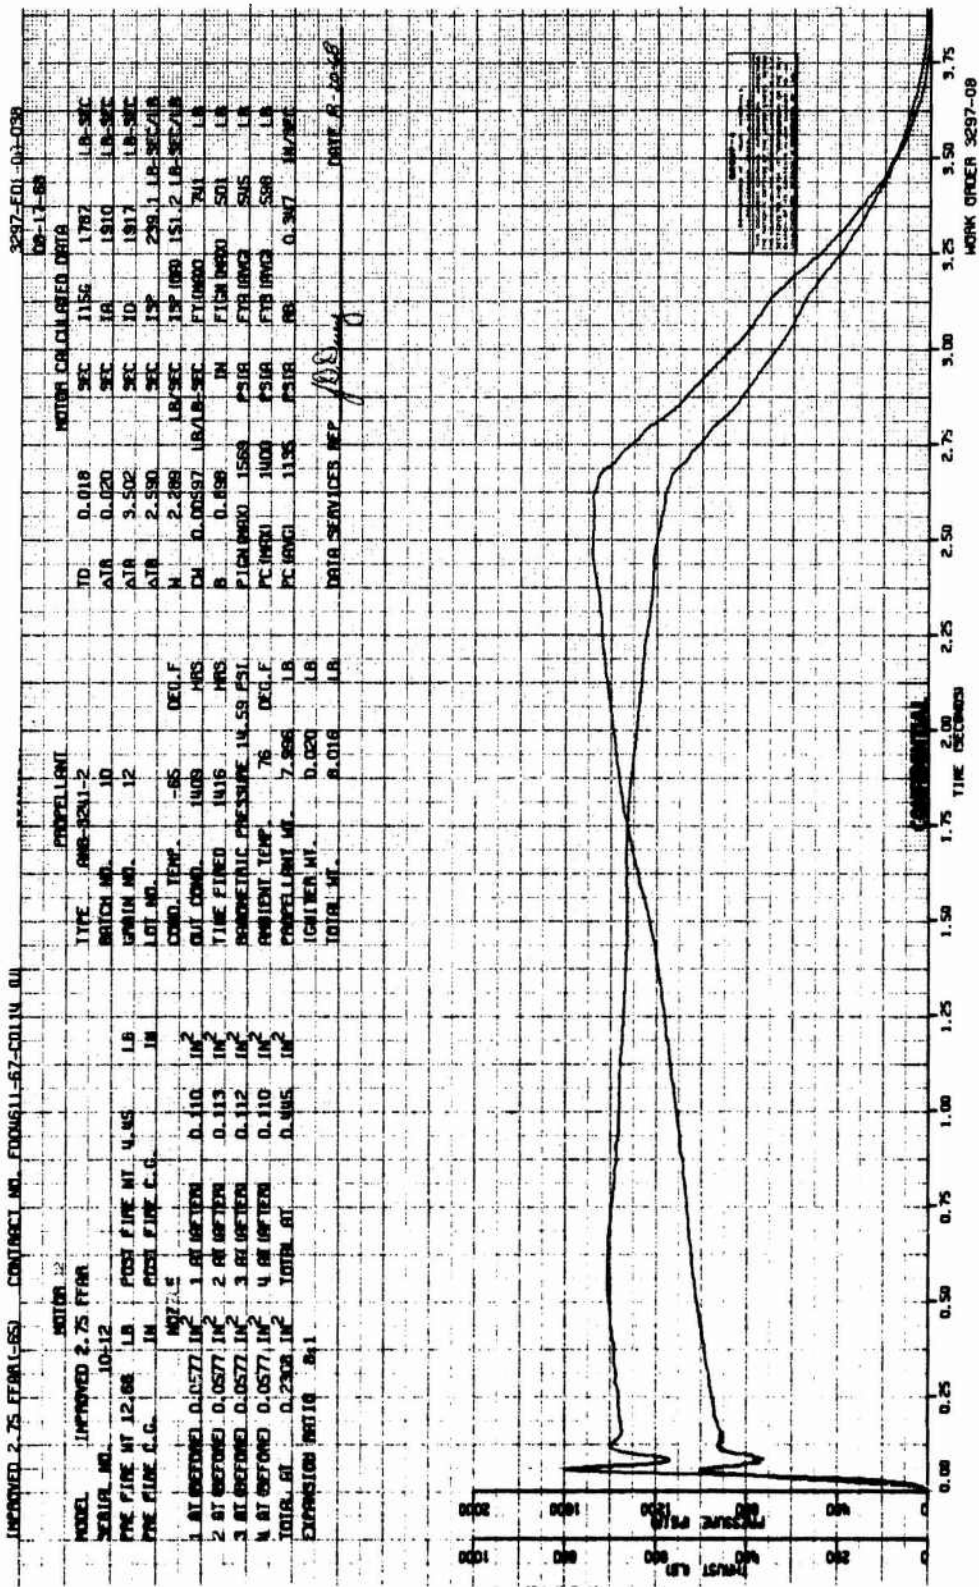

Ballistic Data and Performance Curves, Motor 12 (u)

Figure 100

Report AFRPL-TR-69-90

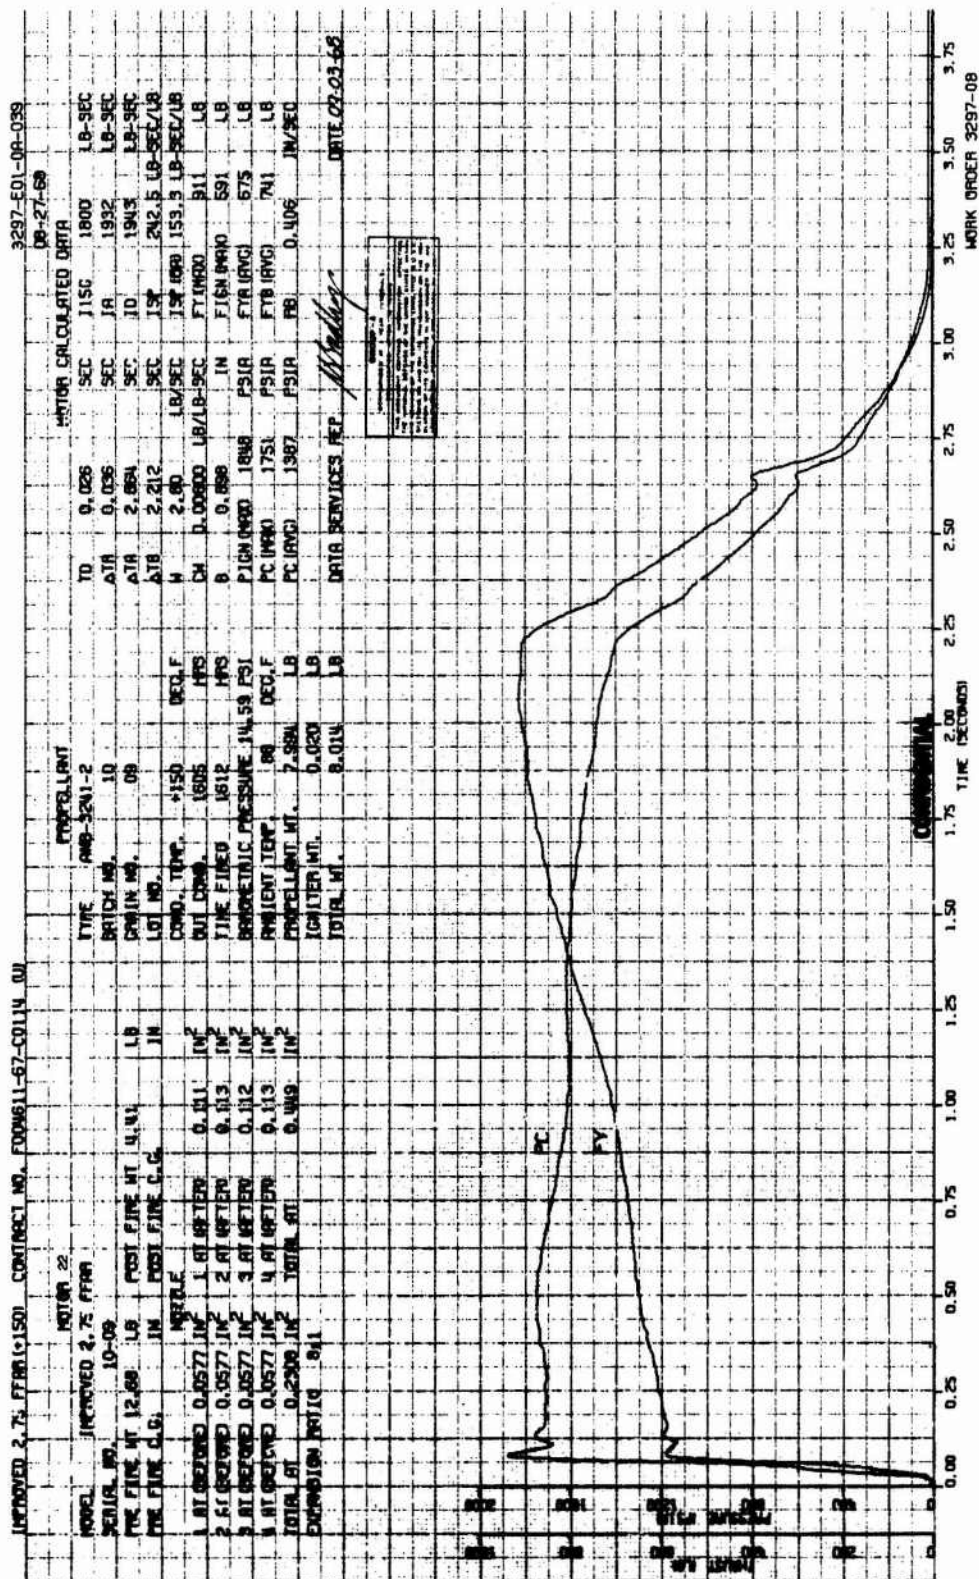


Figure 101

CONFIDENTIAL

Ballistic Data and Performance Curves, Motor 22 (u)

Report AFRPL-TR-69-90



Figure 102

CONFIDENTIAL

Report AFRPL-TR-69-90


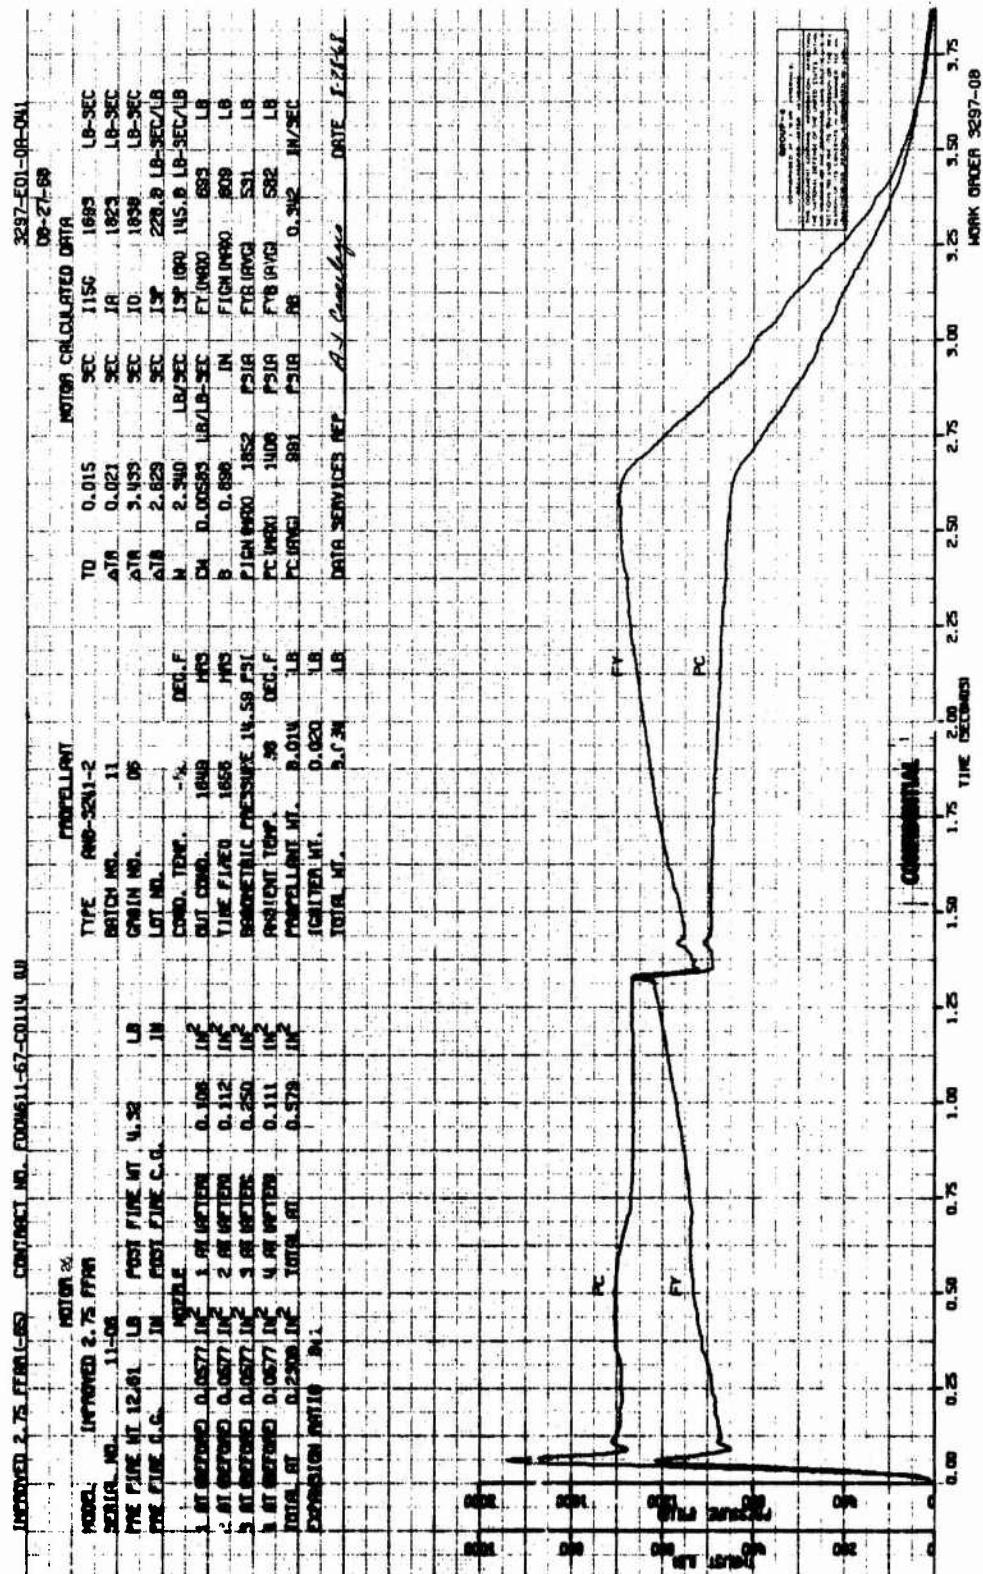


Figure 103

CONFIDENTIAL

Ballistic Data and Performance Curves, Motor 26 (u)

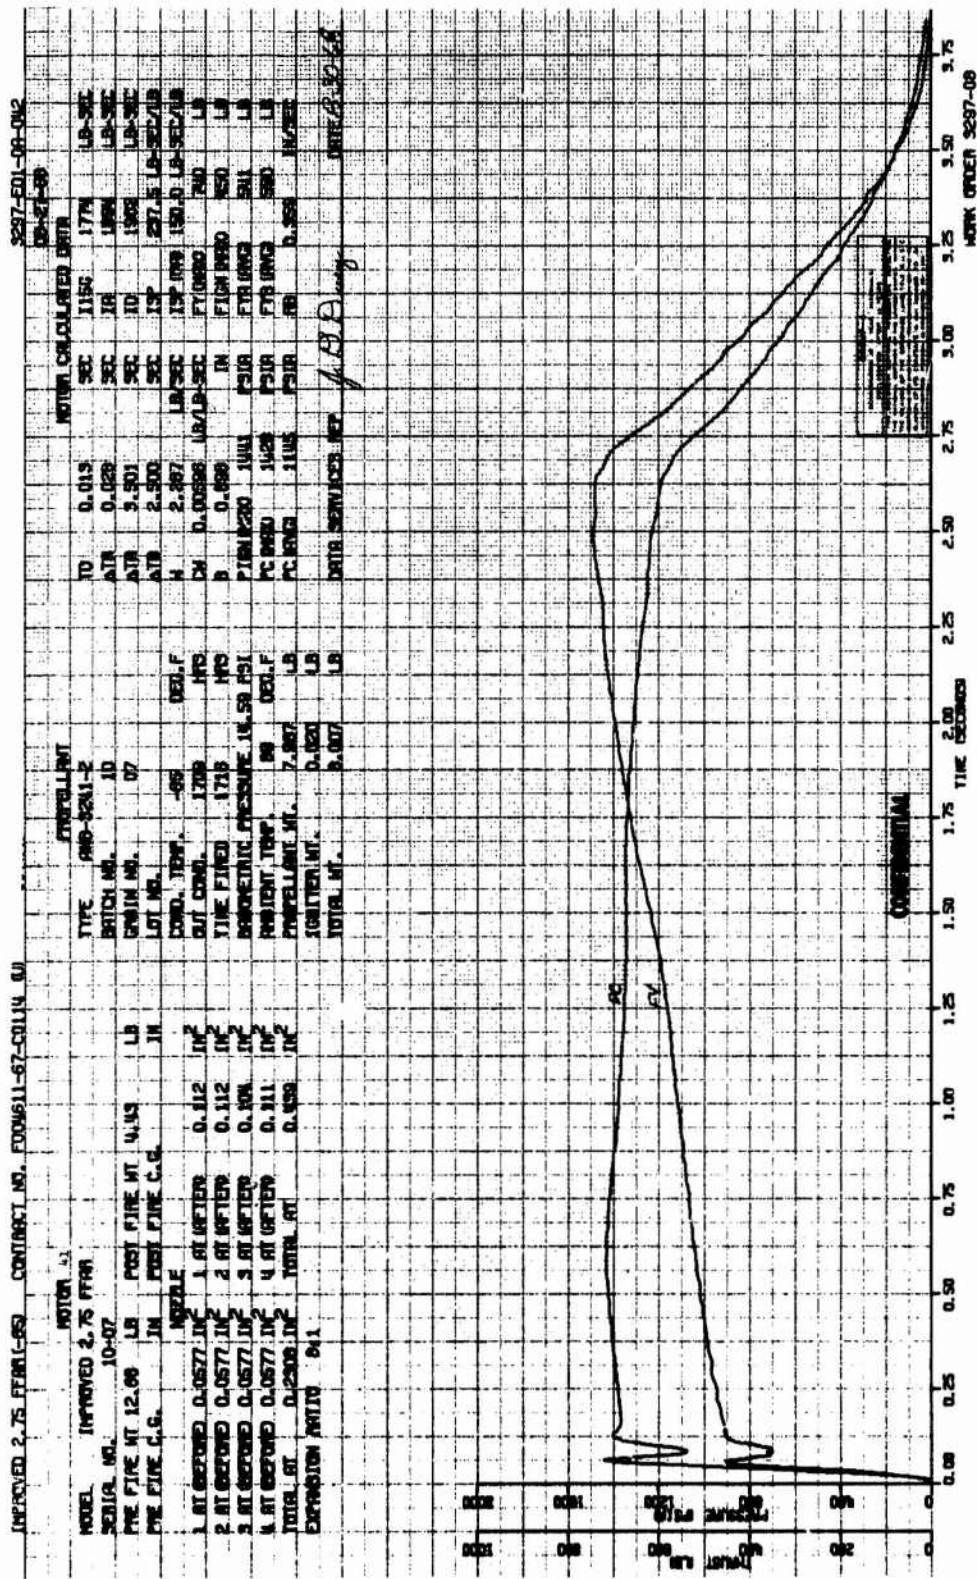

Ballistic Data and Performance Curves, Motor 41 (u)

Figure 104

Report AFRPL-TR-69-90

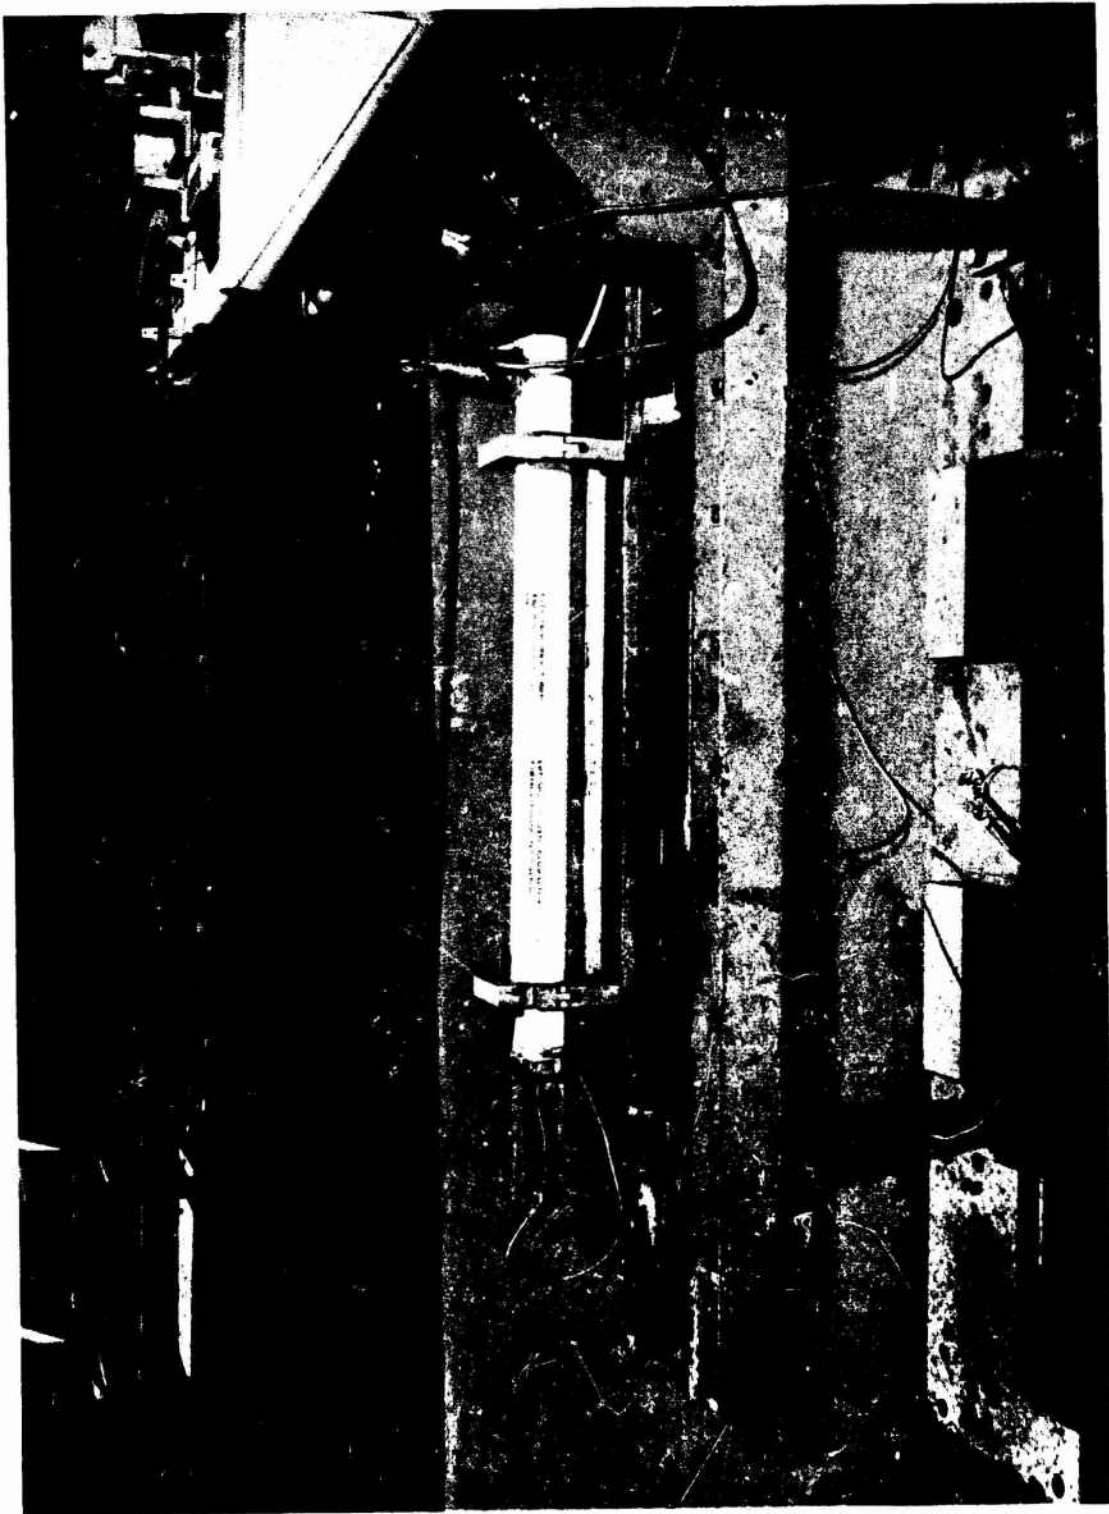


Figure 105

CONFIDENTIAL

UNCLASSIFIED

Report AFRPL-TR-69-90



Typical PFRT Motor Condition and Test Setup Before Firing

Figure 107

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90



Typical PFRT Motor Condition After Firing

Figure 108

UNCLASSIFIED

CONFIDENTIAL

Report AFRPL-TR-69-90



Cross-Section of Nozzle from Motor No. 109
Following Post-Firing Examination

Figure 109

CONFIDENTIAL

(This page UNCLASSIFIED)

CONFIDENTIAL

Report AFRPL-TR-69-90

II.D. Preliminary Flight Rating Tests - Phase III (cont)

2. Ballistic Analyses

(C) The PFRT program resulted in 40 motor firings with valid usable impulse performance (15 at -65°F , 11 at $+70^{\circ}\text{F}$, and 14 at $+150^{\circ}\text{F}$, as shown in Figures 60 through 62). As defined in the Improved 2.75-in. FFAR End Item Detail Specification, CP 30250, usable impulse is the thrust-time integral from the application of igniter current to the time during tailoff when the thrust drops to the values of 430 lbf at $+65^{\circ}\text{F}$; 511 lbf at $+70^{\circ}\text{F}$; and 555 lbf at $+150^{\circ}\text{F}$. Since a minimum velocity is required to be met at $+70^{\circ}\text{F}$ only, these thrust cutoff levels were adjusted to include the same proportion of the thrust-time curve that would have been included had the motors been actually fired at $+70^{\circ}\text{F}$.

(1) A comparison of the nominal and -3 sigma values of usable impulse obtained during the PFRT program and the minimum values of usable impulse allowed by the CEI specification is presented in Figure 110. Also presented for reference are the velocity and slant range at 70°F , which corresponds to the various usable impulse values. These velocities and ranges were determined on an Aerojet trajectory analysis program using the following assumptions:

1. Launch altitude, 4000 ft
2. Launch angle, -30°
3. Payload, 9.1 lb
4. Initial velocity 750 ft/sec
5. Drag - as determined from tests at Tullahoma, Tennessee

CONFIDENTIAL

Report AFRPL-69-90

Firing Temp., °F	Cutoff Thrust, lbf	Usable Impulse, lbf-sec		Calculated Velocity and Range at +70°F			
		Nom.	Obs. (-3σ)	Req. (-3σ)	(based on obs. min.)		
					Nom.	-3σ	-3σ
-65	430	1795	1753	1697	3326 ft/sec	3275 ft/sec	3206 ft/sec
					5050 ft	4888 ft	4670 ft
+70	511	1795	1718	1706	3316 ft/sec	3221 ft/sec	3206 ft/sec
					5020 ft	4715 ft	4670 ft
+150	555	1806	1754	1709	3226 ft/sec	3261 ft/sec	3206 ft/sec
					5050 ft	4845 ft	4670 ft

Improved 2.75-in. Usable Impulse and
Corresponding Velocity and Range Values (u)

Figure 110

CONFIDENTIAL

Report AFRPL-TR-69-90

II.D. Preliminary Flight Rating Tests - Phase III (cont)

(C) Although these calculations indicated that the minimum -3 sigma velocity and range values of the Improved 2.75 Motor would meet the required minimum velocity of 3600 ft/sec and slant range of 5000 ft, respectively, flight tests have indicated that actual performance equals or exceeds these originally required values. In the absence of flight data, it is surmised that the following may be the cause of this discrepancy:

1. Thrust velocity higher than predicted
2. Launch altitude higher than prediction
3. Payload weight lighter than specified
4. Imprecise drag values
5. Possible test inaccuracies

(C) As shown in Figure 60, the 15 firings at -65°F produced a mean value of usable impulse of 1795 lbf-sec with a lower 3-sigma limit of 1753 lbf-sec, which is considerably above the required lower limit of 1697 lbf-sec. The 11 firings at +70°F showed a mean value of usable impulse of 1795 lbf-sec (Figure 61) with a lower 3-sigma limit of 1718 lbf-sec. This is in excess of the minimum requirement of 1706 lbf-sec. The 14 firings at +150°F produced a mean value of usable impulse of 1806 lbf-sec (Figure 62) and a lower 3-sigma limit of 1754 lbf-sec, which is substantially above the required lower limit of 1709 lbf-sec.

(C) As can be seen, the +70°F firings closely approach the lower specification limit. This is due to the larger standard deviation of 25.6 lbf-sec at +70°F as compared to the deviations of 14.0 and 17.4 lbf-sec at -65 and +150°F, respectively. A possible explanation for this larger deviation is that the +70°F motors were selected from five cast lots, whereas the -65 and +150°F motors were selected from three cast lots. Thus, the +70°F motors would be subject to more variability.

CONFIDENTIAL

UNCLASSIFIED

Report AFRPL-TR-69-90

II.D. Preliminary Flight Rating Tests - Phase III (cont)

3. Nozzle Failure Investigation and Analysis

All motors were successfully temperature-conditioned and static-fired, with the exception of Motor 26 (S N 11-06) at -65°F (firing 041, Figure 103). In this unit, one of the integrally molded exit cones separated from the aft-closure, thereby allowing the Carbitex throat insert to be lost at about 1.3 sec after fire switch. Motor ignition and ballistic performance up to the time of throat loss indicate normal motor operation as shown by the performance curves in Figure 103.

A subsequent investigation showed that the aft-closure of Motor 26 had been assembled to the chamber with a strap wrench. This tool, which was used to grasp and rotate the aft closure for inserting the lock wire, was later found to be the cause of exit-cone breakage during disassembly of another aft closure. The strap wrench was replaced by a new tool that eliminated this possible source of exit-cone damage.

Motor 26 was successfully environmentally tested. It was then conditioned to -65°F, transported by truck to the test bay, with its aft end resting on the edge of the crate, and installed on the test stand. The motor did not ignite and was returned to the manufacturing area for disassembly. The aft closure was removed from the motor with the new tool and examination of the igniter showed that the GFM Mark I squib had fired, but could not initiate the igniter pyrotechnic train because the squib did not contain the required black powder initiating charge. The fired squib was removed with a drill press that was manually operated remotely. A new squib and igniter was installed. The aft closure was returned to the manufacturing area, assembled to the chamber with the new tool, and transported to the test area. The motor was then conditioned to -65°F, transported by truck to the

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.D. Preliminary Flight Rating Tests - Phase III (cont)

test bay, with its aft end again resting on the edge of the crate, and installed on the test stand. The motor successfully ignited at fire switch and operated normally until the exit cone separated and the throat insert was lost at about 1.3 sec after the fire switch.

Considering the circumstances discussed above, it was initially believed that the excessive handling of this unit before firing was the sole cause of the exit cone failure. However, investigations of a subsequent nozzle failure indicate that a closure molding problem was very possibly a contributing factor.


Subsequent to completion of the PFRT program, lot qualification motor S N 17-119 lost three exit cones and throat inserts during firing. The closure (S N 86D) was sectioned to ascertain the cause of failure and a photograph of one of the failed nozzles is presented in Figure 111. A cross section of the one remaining intact nozzle is shown in Figure 112. Examination of these photographs shows that the MXC-313 molding compound was a fiber flow pattern which is perpendicular to the nozzle center line in the area of the nozzle-sleeve/steel housing interface. This perpendicular fiber orientation is caused by leakage of the molding compound through the gap between the housing and the sleeve, as evidenced by the buildup of material on the aft face of the housing. The fibers tend to align themselves with the flow direction of the molding compound.

The perpendicular fiber orientation provides little strength and is an area of potential failure. As shown in Figure 111, the failure appears to be perpendicular to the nozzle centerline. The rather straight surface is representative of a failure between fibers, rather than across fibers. The potential failure mode can be seen in Figure 112 by the cracks from the throat insert to the aft end of the steel housing on both the I D and O D. The cracks follow the fiber alignment, which is approximately perpendicular to the nozzle centerline.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

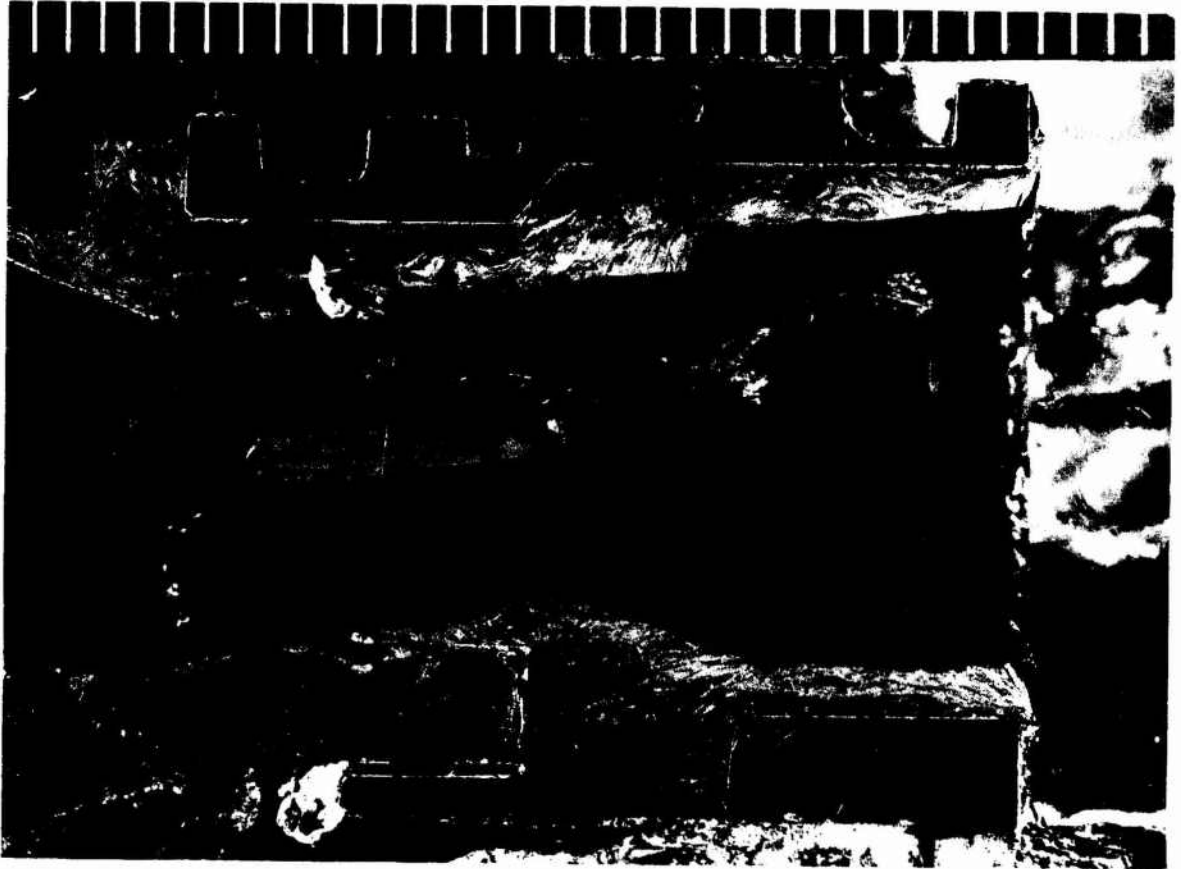

Mag: 3X


Cross Section of Nozzle No. 3 S/N 861 Showing the Point of
Failure in the MXC 313 Molding Compound (Mag: 3X)

Figure 111

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

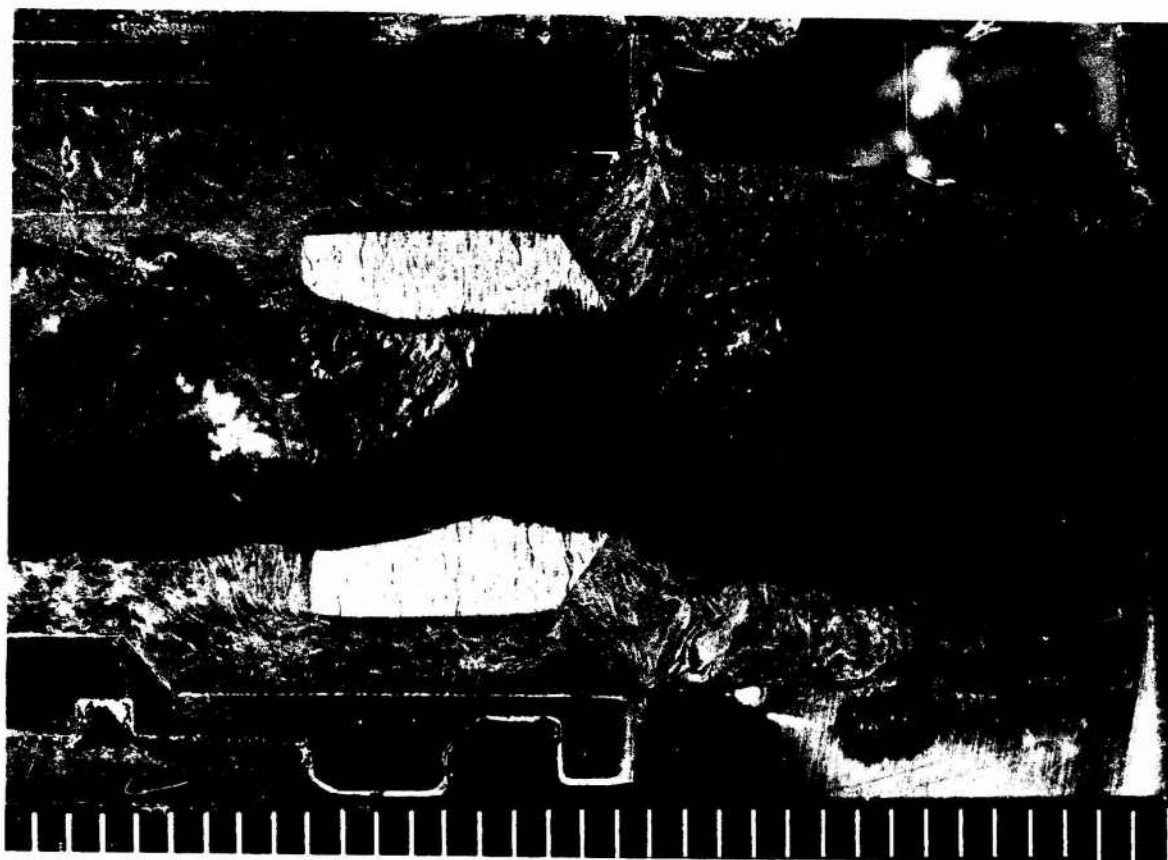

Mag: 3X

Cross Section of Nozzle No. 2 Showing the Fiber Alignment in
the Region of the Taper on the Throat Insert (Mag: 3X)

Figure 112

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.D. Preliminary Flight Rating Tests - Phase III (cont)

To further the investigation, an unfired closure assembly (S N 1203) having a thick buildup of moulding compound on the aft end of the center post was sectioned and photographed. The parts were examined to determine the major fiber alignment pattern in the moulding compound aft of the throat insert and adjacent to the steel housing. Figures 113 and 114 show the difference in fiber alignment for two of the four nozzles.


Figure 113 shows the fiber alignment adjacent to the sleeve/housing interface on the center-post side of the nozzle to be generally perpendicular to the nozzle centerline. The alignment on the O D is generally random, with less tendency to align perpendicularly. Also noted is the fact that the buildup of molding compound on the aft face of the center post is significant (0.025 in.), while the buildup on the O D is minor. The buildup of molding compound on the center post adjacent to the second nozzle (Figure 114) is about 0.012 in. and the fiber alignment is more random. The lower flow did not produce a predominately perpendicular flow pattern. A crack starting at the I D of the nozzle would have to propagate through fibers rather than between them in this nozzle.

Figure 115 clearly shows the cause of the poor fiber alignment. The molding compound has moved through the opening between the steel sleeve and the steel housing. To the right of this opening, the fiber alignment, as shown by the concentration of white lines, is almost parallel to the direction of flow. Also shown in Figure 115, is a line of voids and/or a separation extending at an angle of about 30° from the perpendicular.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

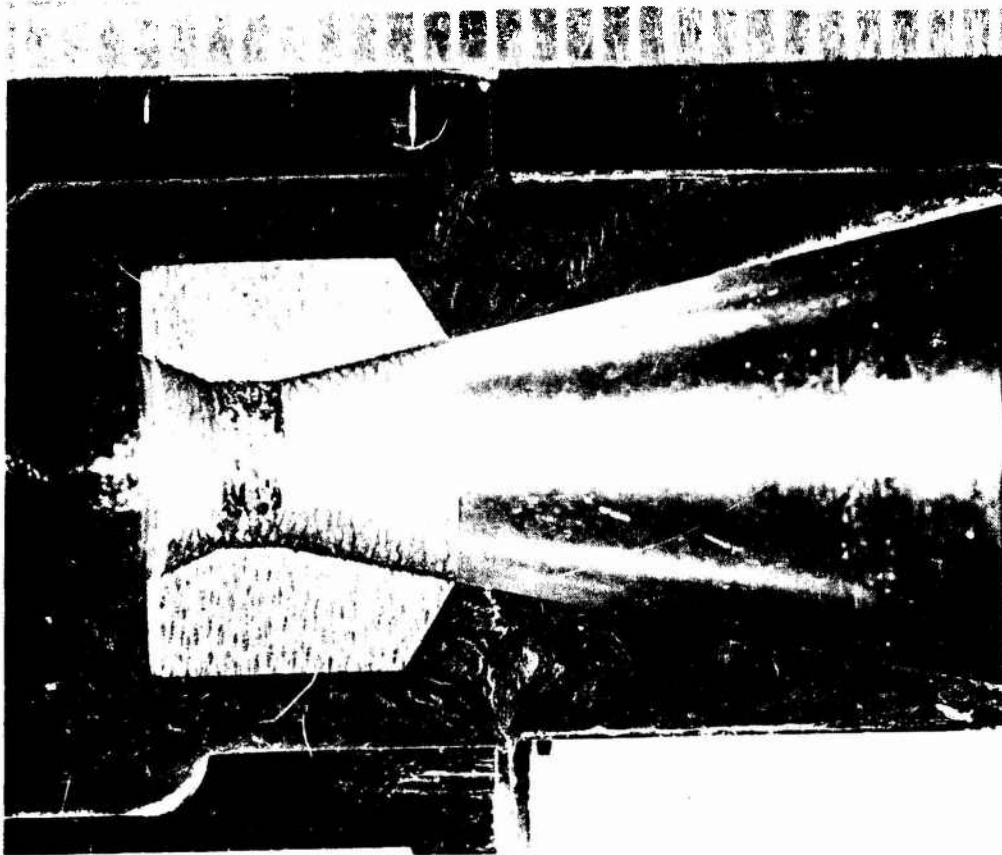

Mag: 3X


Nozzle No. 4 S/N 1203 Showing Carbon Fiber Alignment
Patterns of the MXC 313 Molding Compound (Mag: 3X)

Figure 113

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

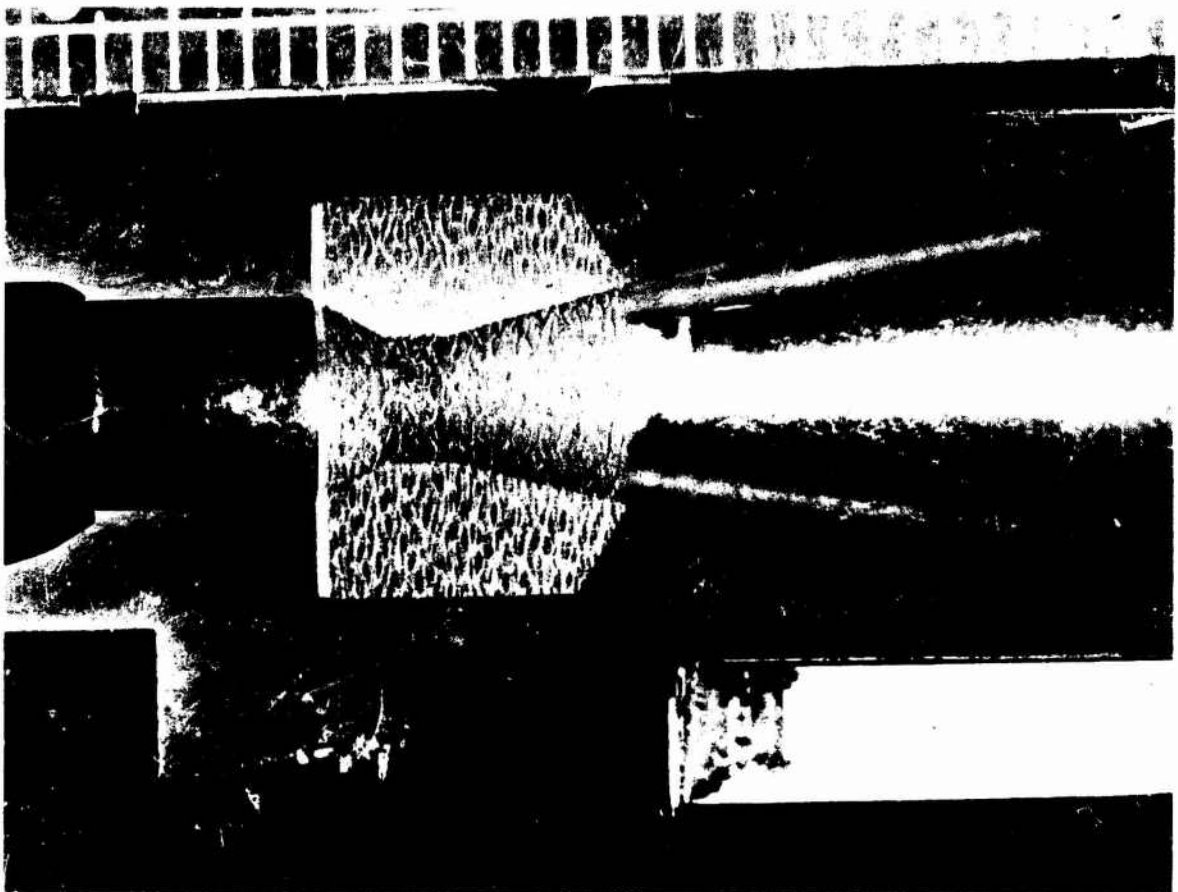

Mag: 3X

Nozzle No. 2 S/N 1203 Showing Fiber Alignment Patterns More
Randomly Oriented Aft of the Throat Insert (Mag: 3X)

Figure 114

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90



Mag: 100X

Photomicrograph of Fiber Alignment Adjacent to the Opening
Between the Sleeve and the Steel Housing, S/N 1203 (Mag: 100X)
(The white area in the top left is the steel centerpost)

Figure 115

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.D. Preliminary Flight Rating Tests - Phase III (cont)

As a result of this investigation it was concluded that improper fiber alignment aft of the throat insert was the primary cause of the failure of three nozzles of motor S N 17-119 and further, that this improper alignment was caused by extrusion of the molding compound between the steel nozzle sleeve and the steel housing during the manufacturing process. It is also possible that this problem was a contributing factor to the failure of one nozzle on PFRT motor 26 (S N 11-06).

To ensure that failures of this type do not reoccur, the aft closure design has been modified by lengthening the steel nozzle sleeve so that it extends into the I D of the hole in the steel housing, thus preventing the extrusion of molding compound between these two parts.

4. Squib Failure Investigation

In addition to the squib failure described above, ignition system difficulties were encountered in five other PFRT motors. The ignition circuits in all five motors showed no continuity when checked prior to firing. In all cases, the grounding clip provided no connection to ground. In one motor, this difficulty was compounded by lack of continuity through the squib, which was subsequently replaced. To provide a positive ground, the ground lead from the igniters in these five motors was soldered to the plate prior to firing. In future motors, the grounding clip will be soldered to the plate to provide a positive ground connection.

5. Resonant Burning Investigation

During six quality assurance firings for Cast Lot 13 delivery motors two of the motors exhibited resonant burning with D C shifts of 790 and 960 psi, respectively. The D C shifts occurred at 0.48 sec in the motor

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.D. Preliminary Flight Rating Tests - Phase III (cont)

fired at -65°F and at 0.46 sec in the motor fired at +70°F. Postfiring examination showed the hardware to be intact and in normal condition, except for excessive erosion of the IBS-105-4X potting material and aft-end insulator at the grain/aft-closure interface. This ballistic anomaly led to assignment of Cast Lot 13 motors to ground-launch tests rather than air-launch tests.

Subsequently, six additional motors from Cast Lot 13 were successfully static fired. No ballistic anomalies were noted nor did postfiring examination reveal any abnormal erosion of the potting material. In these six motors, the potting material was cured for a minimum of 36 hr at +135°F as compared to the previously used minimum cure time of 12 hr. Accordingly, process instructions were changed to require a minimum cure time of 36 hr for all subsequent motors. In addition, particular care was taken to assure that no potting material is deposited in the grain bore nor overlaps the aft end of the bore in any way that might alter the gas flow characteristics. Since that time (mid September), more than 50 static tests have been performed with various lots of motors with the 36-hr potting cure time. No indication of resonant burning was observed.

E. HAZARD CLASSIFICATION TESTING

Hazard classification tests were performed with eight Improved 2.75-in. FFAR rocket motors in accordance with T.O. 11A-1-47. The results confirmed that the Improved 2.75-in. motor properly belongs to the class of explosives that will burn but not detonate.

The eight motors were tested for Aerojet by Ogden Technology Laboratories, Inc., Beaumont, California. The motors were subjected to the following tests:

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.E. Hazard Classification Testing (cont)

1. Two motors were subjected to external heat from burning lumber soaked with JP4 fuel.
2. Two motors were subjected to bullet impact from a 0.50 caliber gun located 100 ft away.
3. Two motors were subjected to Penolite booster charges initiated with engineer's blasting caps.
4. Two motors were dropped from a height of 40 ft onto a concrete pad.

All the above tests were passed satisfactorily. A detailed report of the above tests was submitted as a separate Aerojet-General report.

F. MANUFACTURING

Motor manufacturing operations for Phases I through IV of the Improved 2.75-in. FFAR program were completed in August 1968 after a 13-month program. During this time, adequate information was gained through studies, tests, and operations to prepare for mass production of the motor. All planning from the program inception was directed toward the mass production goal, and manufacturing of motors through the program was performed with equipment adaptable to mass production as much as practical. Figure 116 presents a list of direct tooling together with tooling drawing number, tool title, quantity, and pertinent comments.

This section summarizes the studies and manufacturing operations performed throughout the program.

UNCLASSIFIED

T-Number	Tool Title or Description	Quantity	Comments
10208-6	Pad Insulator Installer	1	
1019765-B	Chamber Handling Fixture	5	
1021247-A	Propellant Core Assy	176	(1) 60 position, (4) 70 positions. 36, 70, 35, 35 (176 total).
1019800-D	Core Displacement Fixture	1	
1019717-A	Chamber Assy Stand	1	
1022137-A	Igniter Assy Stand	2	
1022112-A	Stacking Tool - Igniter	1	
1020639	Cast Rack - Propellant	2	Used with Sophie Cast Bell.
1021111-A	Pad Hd Liner Cutting Tool	1	
1022294	Pad Hd Liner Cutting Tool	1	
1021248-D	Mask and Core Centering Plug	176 + 36	Used with T-1021111-A. Used with T-1021247 (106, 35, 35, = 176), (36 configuration revised; cannot use.) 7/8 dia core shaft. (Not used.)
1021436	Propellant Core Assy	12	
1021524-B	Trim Tool - Mask and Liner	3	
1022223	Pad Insulator Installer - Press	1	
1022051-A	Core Handling Fixture-(110 Posit.)	2	Used with T-1020896.
1022067-A	Trim Fixture - Grain	1	
1022337	Clamp Bracket	4	
1022136	O-ring Insertor	2	
1022139	Shipping Container-Igniter	5	(21) per unit.
1022257	Rotating Wrench-Closure	1	Used for installing and removing closures.
1022295	Alignment Tool - Igniter and Closure	1	
1022325	Core to Chamber Alignment Tool	1	
1022329	Support Blocks	2	Riser blocks for propellant tubes.
1022421-A	Paint Stand	4	Wood stand with (24) pegs.
1022422	View - Anaster Cast Tube	1	View flow of propellant.
1022468	Core Plug Removal Tool	1	Remove plug from chamber after casting and curing.
1022460	Masking Cap - Insulator/Lining	200	Made from caps ordered from Gilbert Plastic, Inc.
1022343	Assy Jig - Piston Torque	1	
1022377	Scraper - Closure Post	2	
GENERAL PURPOSE - TOOLING REQUIREMENTS			
	Propellant Cast Mach.	2	
	Liner Spray Mach.	1	Hydraulic pump borrowed from HAWK Program.

2.75 FFAR Tooling List

Figure 116

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

1. Optimum Manufacturing Technique Trade-Off Studies

Trade-off studies to determine optimum manufacturing techniques for the Improved 2.75-in. FFAR motor commenced early in the program and were maintained current through the development and PFRT phases. As a foundation of the studies, various process and handling methods for the proposed motor were defined which appeared to have potential for adoption to mass production. These methods were then analyzed to determine the most economical production methods for various production rates and a final base method was selected. Sketches of the equipment envisioned for support of the manufacturing method were then made and were maintained current throughout the program as motor design and manufacturing method improvements were made. These sketches have been assembled into a booklet titled Improved 2.75 FFAR Motor Manufacturing Plan, 25,000 to 100,000 Units/Month, which was published in June 1968.

2. Manufacturing Method Studies

Because one of the objectives of this program was to test and prove out concepts for mass production equipment, it was necessary to develop equipment and operating techniques for most of the manufacturing operations. The major studies performed in development of the equipment and techniques are summarized as follows:

a. Release Application

Initial designs of the motor included longitudinal and circumferential band grain release patterns which were applied to the chamber sidewall to provide stress relief of the grain at low temperatures. Since no method for application of the release material in the patterns required

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

was immediately known, studies were performed to determine possible methods and to determine the optimum method of those proven feasible. Results of the studies showed that wiping of the release onto the chamber by use of felt wicks appeared the best of several methods tested and several motors were made early in the development program by this method. Changes in the motor design were subsequently made which eliminated the release pattern requirements, and the studies were abandoned.

b. Liner and Insulation Application

Application of liner and insulation to the chamber interior proved to be one of the largest problems in the manufacturing method studies. Initially, contact was made with several commercial spray equipment companies to determine if the liner and/or insulation materials could be sprayed by commercial equipment. The tests made by these companies all indicated that the material could not be sprayed. It was then assumed that the material could be applied best by trowelling and several motors were produced by this method. However, since spraying of the liner and insulation was believed the optimum production method if equipment could be developed, studies along this line were continued. After approximately 2 months from the start of the program, a mechanism was developed which would spray the material. With this equipment, tests were performed to determine operating parameters for spray application of the liner and insulation materials. The existing production prototype spraying equipment was then designed based on the results of the tests performed. Both the liner and insulation are now sprayed into the chamber, meeting specified dimensions.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

c. Propellant Casting

Volumetric discharge of propellant through a bayonet into an evacuated chamber was the proposed motor casting method and the original casting equipment was fabricated for this method. However, studies performed with this equipment, using inert propellant, showed that the bayonet was not required and that better quality motors could be produced by extruding the propellant into the evacuated chamber through a screen. Modifications were then made to the casting equipment to accommodate the results of these studies and to include hydraulic power for the machine operation. The initial motors cast with live propellant using this fixture were of satisfactory quality and were utilized in Phase II of the program. However, the second group of motors cast with the fixture were of very poor quality. Additional studies were performed on the subsequent lot for determination of optimum operating parameters when using live propellant, and the existing operating limitations were established. Motors of good quality are now consistently produced with this equipment.

3. Value Engineering Studies

A review of the motor design and manufacturing requirements for areas of maximum potential cost reduction was made early in the program. As a result of this review, the following Value Engineering studies were selected and performed:

a. Core Release System

Because of the potential for mass production of the motor, it was imperative that a low total cost core release system be found. Several candidate release materials and systems were studied and tested to

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

determine the lowest cost system compatible with the propellant formulation. The material finally selected as a result of the studies, DC 92009 with a DC-11 dip coat, showed a savings of \$127,000 on a 300,000 unit program over the next best material, fused Teflon with the DC-11 dip coat.

b. ~~Propellant Grain~~ Stress Relief System

This study was performed to determine the lowest cost release material and process for use as grain stress relief in the chamber. Again, several materials were tested and a final material was selected. However, prior to completion of the studies, the motor design was changed whereby the release system was not required. The Value Engineering study was therefore cancelled prior to completion.

c. Chamber Insulation Bonding

The initial 2.75 FTAR motor design required bonding of insulation into the chamber by use of epoxy based adhesives. Because of the costs associated with this adhesive system, this operation was selected as a Value Engineering study. Several alternative materials and processes were tested in this study with the chamber liner material being selected as the least expensive of the acceptable alternatives. As a result of the study, a savings of approximately \$4,900 would be made on a 300,000 unit program.

d. Spraying of Aft Insulation in Chamber

The initial motor design required use of a premolded rubber insulator part in the chamber. Because of the fabrication, handling, and installation costs associated with this design, insulating of the chamber was selected for a Value Engineering study. Several materials and application methods were considered for use in the chamber to minimize the unit cost.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

Of all the materials and processes evaluated, the spraying of insulation appeared the most economical, because spraying operations are readily adaptable to automated processing, and the base material was the least costly. Initially, in the study, the spraying of insulation was not feasible because of the insulation configuration. However, design changes were implemented which made the operation practical. As a result of this study, an estimated savings of \$198,000 can be realized on a program of 300,000 units.

4. Miscellaneous

During this program, chambers have been received from two vendors and significant variations have been noted. Two types of chambers were received from Norris Thermador Corporation, all identified with one lot number, but with very significant variations. One type of chamber was found to be oval shaped and most of these had discrepant lockwire grooves. The other type of chamber was found to be the best of any delivered by either vendor. Alcoa manufactured chambers were found to be somewhat heavier than the Norris chambers, having a greater wall thickness. The propellant weight on motors from these chambers was therefore less, and the inert weight greater, than motors made using the Norris Thermador chambers. Chambers from either vendor were processed interchangeably with no significant problems noted. However, the oval Norris Thermador chambers were not satisfactory in test firings and after a brief period of usage were eliminated from the program.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

5. Motor Manufacturing

a. Phase II Motors

Manufacture of motors on Phase II of the program commenced in September of 1967. The first group of units was insulated with SRM 81-15 rubber and utilized a four-fin core. Test firing of these units revealed an erosive burning problem such that the core fins were not required. The second lot of units was processed with a cylindrical bore. Processing of these units was completed in October of 1967, but radiographic inspection of the units revealed a bond failure problem between the propellant and liner in some of the units. Initial investigation of the problem indicated that inadequate chamber release had been applied; therefore, the application method and amount of release was changed, and motors of Lot 3 were started in November. Radiographic inspection of the Lot 3 units in December indicated all units acceptable.

Concurrent with the manufacture of the Lot 3 motors, firings of the Lot 2 motors indicated a problem with the grain stress relief design. The Lot 4 motors were, therefore, processed without the relief patterns except that three motors had the forward grain face released. After processing, radiographic inspection of the Lot 4 motors in January of 1968 revealed that the fully bonded units had propellant-liner bond failure at the forward end while the grains with the forward face released were acceptable. Two of the acceptable Lot 4 motors were then successfully fired at -65°F during January of 1968.

Based on the results of the Lot 4 motors, the Lot 5 units were manufactured in January 1968 for shipment as flight test units. Following this, processing of the Lot 6 units was started with completion occurring in February 1968.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

After the propellant-liner bond failure noted in the Lot 4 motors, studies were performed to determine effects of liner cure time and temperature on the propellant-liner bond strength. These studies showed that a much stronger bond could be obtained with a lower temperature liner cure for a shorter time. The Lot 6 motors were, therefore, processed with the reduced liner cure. Additionally, the cure temperature of the propellant was reduced to reduce the stresses on the grain at -65°F. Motors from this lot successfully passed up to 34 cycles from -65 to +150°F.

Completion of the Lot 6 units in February basically completed Phase II of the program, and no motors were made during March of 1968 while the PFRT motor design was being finalized.

b. PFRT Motors

Processing of motors for PFRT commenced in April of 1968 with manufacture of the Lot 7 motors. These units were the first cast with the production prototype casting fixture. Most of the units were used as Phase II development motors. The second group of motors, Lot 8, for the PFRT Phase were processed in April and May of 1968. Radiographic inspection of the Lot 8 units revealed a severe grain void problem caused by the casting fixture operating techniques. Lots 9 and 11 were cast in June of 1968 in a vacuum bell to ensure acceptable motors for PFRT testing, while the Lot 10 motors were cast by use of the casting fixture. Tests were made during the casting operation of Lot 10 whereby the casting fixture operating limits were established for use in casting of Lot 12 and subsequent lots.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

Concurrent with inert processing of the Lot 12 motors in June 1968, small grain cracks were discovered in motors of Lot 7 which were being temperature cycled. Borescope inspection of the Lot 7 motors revealed that the cause of the grain cracks was score marks made on the bore surface by defective tooling during cutting of the forward boot. Since the boot cutting operation had been performed, using this tool, on motors of Lots 9, 10, and 11, a large portion of these motors were rejected. Forward boot cutting on the Lot 12 units was performed with new tooling which could not score the grain bore.

Motors for the PFRT program were selected from Lots 7 through 12 during July 1968.

c. Delivery Units

Motors for this phase of the program were selected from Lots 10, 11, 12, 13 and 14. Lot 13 was manufactured in July of 1968 and Lot 14 in August. Each of these two lots contained 175 units which is the current maximum weekly production capacity. No significant problems were encountered in manufacture of the final three lots of motors on the program.

To ensure capability of mixing large batches of the propellant formulation as would be required on a production contract, a 6000-lb propellant batch was mixed for casting of the Lot 13 motors. Two batches of this size would be required per day in producing motors at a rate of 25,000 units/month. The Lot 10, 12, and 14 motors were cast from 2000-lb propellant batches and the Lot 11 motors, as well as most previous lots, were cast from 450-lb batches.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

6. Production Motor Processing

a. Inert Chamber Processing

(1) Forward Insulator and Chamber Preparation

Forward insulators and chambers are injected into the manufacturing process in group quantities consistent with the required weekly production rate. Processing of the units will commence with solvent cleaning of the parts. After cleaning, the chambers are set aside to await insulating and the forward insulators are moved into the processing area for release application.

The release system, consisting of a primer coating and a silastic rubber, is manually applied to the forward insulators. In the first step of the operation, the insulators are masked on the aft interior surface to ensure dimensional control of the primer and release application. Following this, the primer is applied by brush to the interior surface of the insulator and allowed to air-dry. After the primer has dried, the silastic rubber release material is mixed and applied by brush or wiper methods. (Both methods have been used successfully; therefore the method is left optional to the processor.) The release material is allowed to cure at room temperature conditions after application for a minimum period of 4 hr. Following this, the masking is removed and the insulator is forced-dried at approximately 180°F for a period of 6 hr. The released insulators are then moved to the chamber insulation area.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

(2) Chamber Insulating

Prior to installation of the forward insulators into the chambers, the insulators are pre-lined for convenience and for better control of the liner coating quality. In this operation, IBS 105-3 liner is mixed from kitted components and applied to the interior surface of the insulators by either a brush or wiper method (again, optional to the processor). Following this, the liner is cured for approximately 1 hr and then visually inspected for continuity. Any noted discontinuities in the coating are repaired at this time. After inspection and repair as required, the liner cure cycle is completed. The insulators are then returned to the chamber insulating area for installation into the chambers. Serialization of the chambers is performed concurrent with forward insulator preparation.

IBS 105-3 liner is used for bonding the forward insulators into the chambers. After the liner is mixed, it is dispensed in a controlled quantity onto the forward face of each insulator. The insulators are then placed on an installation tool and inserted into the chambers. A hand press is utilized to seat each insulator against the forward head while, at the same time, the installation tool is used to form a feather edge of any excess liner material extruded from around the insulator.

After installation of the forward insulators, masking is applied to the aft chamber sidewall for dimensional control of the aft insulation which is sprayed in place. Upon completion of the masking operation, the chambers are moved to the liner and insulation spray fixture. Here, IBS 105-4X insulation is mixed in kitted ratios, pumped to the spray head, and centrifugally sprayed onto the aft chamber sidewall. The spray-head movement rate in the chamber is controlled to result in an insulation

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

build-up meeting the print requirements. After a 135°F cure cycle, the insulation is manually trimmed to length and the masking is removed. Following this, the insulated chambers are inspected for conformance to print.

(3) Chamber Lining

After inspection of the insulated chambers, IBS 105-3 liner is mixed and a thin coating is manually applied by brush to the forward insulators. This operation ensures a fresh liner coat on the pre-lined insulators to ensure good bonding. Concurrently, the spray fixture is calibrated and additional liner is mixed for the sidewall liner application. Liner is then applied to the chamber sidewall by use of a spray fixture which incorporates a centrifugal type spray head. In operation, the spray head traverses the length of the chamber on a pre-determined, semi-automatic cycle.

Concurrent with application of the sidewall liner, liner is manually applied by brush to release coat the aft liner molding plugs. The plugs are installed in the chambers after the sidewall liner is applied. Upon installation in the chamber, the lined plugs complete the formation of the liner aft Y configuration required by the chamber and grain assembly drawing. The plugs also serve to center the core during propellant cure. Groups of 48 or more chambers are moved into a 135°F cure oven for approximately 18 hr cure after plug installation. Following this, the chambers are sealed in drums and shipped to the propellant casting area for storage prior to propellant casting.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

b. Propellant Grain Processing

(1) Propellant Preparation

Propellant processing for the Improved 2.75-in. motor is performed in three major steps: fuel preparation, oxidizer preparation, and propellant mixing. In the fuel preparation operation, a premix fuel and a final fuel are made. The premix is prepared by dispensing, weighing, and blending all of the liquid and solid ingredients in the propellant formulation, except for the oxidizer and cure chemicals. Final fuel is prepared by dispensing, weighing, and blending the cure chemicals. Oxidizer preparation operations include the dispensing, grinding, and weighing of one portion of the oxidizer required for the batch and dispensing and weighing of a second unground portion which is used "as received".

After the fuel and oxidizer have been prepared, they are transported to a vertical batch mixer. Here, the oxidizer is mixed into the premix fuel in the first mixing step. Following this, the final fuel is added to the mix. A final vacuum mixing cycle completes the mixing process, after which the mix bowl with the propellant is removed and transported to the casting area.

(2) Propellant Casting

The casting equipment, consisting of propellant transfer piping, valves, cast heads, and volumetric displacement pumps, is assembled, inspected and operated prior to receiving propellant. When the propellant in the mixing bowl is delivered to the casting building, the mix bowl is positioned on a support stand and connected to the pre-assembled piping. The chamber casting operation is then started.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

The casting operation is performed in five steps: first, the lined chamber is inserted into a casting head outlet on the casting fixture; second, a vacuum is drawn in the chamber; third, a measured volume of propellant is cast into the chamber at a controlled rate; fourth, the chamber vacuum is released; and fifth, the cast chamber is removed from the cast head. During the vacuum release and chamber removal, the displacement pump re-fills for the next casting cycle.

(3) Core Displacement

After casting, the chamber is moved to the core displacement fixture. Here, release-coated cores are inserted into the cast chamber displacing the propellant to form the grain bore configuration. The forward end of the core centers in the forward insulator, the aft end centers in the aft liner molding plug which was installed during the lining operations. The chamber, grain, and core assemblies (or cored units) are placed in cure/handling crates after completion of the core displacement operations.

(4) Propellant Cure

When a cure crate has been filled with cored units, it is moved into a +110°F cure oven for a minimum period of 5 days. During this time, the propellant polymerizes (or cures). After the propellant has cured to a minimum Shore A hardness of 30, as measured on a sample cast and cured with the chambers, the chambers are moved to the core-stripping area.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

(5) Core Stripping

Core stripping is performed by pulling the core from the grain. The operation is currently performed in the core displacement fixture since the stripping operation is just a reverse of the displacement operation. After the core is stripped from the grain, the aft liner plug is manually removed. The plugs and cores are then delivered to a cleaning and release application area for re-processing, and the chambers are delivered to the propellant grain trimming area.

(6) Propellant Trim

The chamber and grain assembly is secured in a holding fixture for the propellant trimming operation. The aft bore of the grain is manually trimmed to the drawing configuration by use of a shaped-blade cutter. Following this trim, the liner is cut against the forward insulator in the bore area by use of an extended tubular cutter blade. Removal of the liner from the released insulator completes the trim operation. Trimming chips and dusts are then vacuumed from the grain, a cover is placed on the chamber, and the chamber is placed in a handling crate. Filled crates are then moved to the radiographic inspection area.

(7) Radiographic Inspection

Radiographic inspection is performed on all units of total quantity of 1000 or less produced at rates of less than 600 units per month, as has been the practice. This inspection is performed with an existing 150 KV X-ray machine. Two radiographs, each obtained 90 degrees from the other, of each grain are obtained. Discrepant units are marked for culling at the assembly area.

UNCLASSIFIED

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

After the non-destructive inspection operations are completed, the chamber and grain assemblies are returned to the assembly area. Here, any discrepant units are removed from the group, packaged, and delivered to a disposal area. The accepted units are stored as required to await assembly operations.

c. Motor Assembly Operations

(1) Bore Restriction

Liner material, IBS 105-3, is utilized for bore restriction. After mixing the material in kitted ratios, it is manually applied by use of a special brush. The brush handle includes a stop for control of the depth of the restriction in the bore.

(2) Closure-Igniter Assembly Installation

After the bore restriction material is applied, IBS-105-4X insulation material is prepared for potting the closure-chamber joint. The mixed material is dispensed into the Y groove formed by the liner molding plug. Following this, the closure-igniter assembly is removed from its handling container, fitted with an O-ring seal, and then inserted in the chamber. A lubricated lockwire is drawn in position by rotation of the closure with a special wrench.

The motors are placed in a handling container after assembly for transportation to a cure oven. Here, the potting and bore restriction materials are cured at 135°F for approximately 40 hr. When the cure cycle is completed, the motors are delivered to the radiographic inspection area for inspection of the joint integrity. After this inspection they are returned to the assembly facility for final processing.

UNCLASSIFIED

CONFIDENTIAL

UNCLASSIFIED

Report AFRPL-TR-69-90

II.F. Manufacturing (cont)

(3) Final Processing

Final processing operations consist of the installation of weather seals, chamber painting as required, application of ordnance marking, and application of identification stencils. After these operations are completed, the motors are inserted in shipping tubes and packaged six units to a box. The boxed units are then moved to a storage area or, as applicable, to the shipping area where they are palletized and shipped to the customer.

d. Igniter-Closure Assembly Operations

(1) Closure Hardware Installation

Igniter-closure assembly operations commence with the assembly of ground clip, piston, and fin details onto the integrally molded closure. The closure and parts are solvent cleaned as the first step in the operation. Following this, the igniter circuit ground clip is installed on the closure center post and then soldered in place. After the ground clip is installed, a lubricated O-ring is installed onto the piston, the piston is inserted into the closure post, and the cushioning O-ring, cross head, and nut details are secured on the piston aft end. Upon completion of piston installation, the fins are heated to facilitate installation of the hinge pins. The heated fins are positioned, one-at-a-time in the closure lugs and the hinge pins are pressed in place. After the fins are installed and inspected as required, the fin retainer-wire assembly is crimped to the piston wire and the crimp joint is insulated. The fins are then closed and the retainer installed. Following these assembly operations, a release primer and silastic release are manually applied by brush to the closure insulator area which contacts the aft grain area in the chamber. The completed subassemblies are then moved to the igniter fabrication and installation area.

UNCLASSIFIED

CONFIDENTIAL

UNCLASSIFIED

Report AFRPL-TR-69-90

CONFIDENTIAL

II.F. Manufacturing (cont)

(2) Initiator Fabrication

Initiator details for the igniter assembly are fabricated concurrently with aft closure preparation. The operation consists of installing an adhesive coated Mylar disc onto a section of tubular foam material, loading of the resultant cup with a measured quantity of BPN powder, and sealing the powder in the cup by a second adhesive-coated Mylar disk. The completed parts are stored in the igniter assembly area prior to igniter assembly.

(3) Igniter-Closure

The igniter is assembled from its parts onto the closure. In the first step of the operation, adhesive is prepared for the bonding operations. Following this, the squib is installed in the cap insulator and the cap insulator is installed in the closure. The squib wires, piston lead wire, and ground wires are then cut to length, connected, and a crimp connector is installed on each lead. After the connections are completed, a continuity test is performed and the shunt wire is installed on the closure to short-circuit the squib. The igniter chamber is then installed on the insulator cap. Loading of the igniter chamber with the initiator and BPN pellet charges and installation of the foam end-plug completes the igniter fabrication, except for adhesive cure. The closures are installed in an alignment fixture for the cure operation. Cure is accomplished at approximately +160°F for a period of 4 hr. After cure, the closure-igniter assemblies are packaged in handling containers for transport to the motor assembly area.

UNCLASSIFIED

CONFIDENTIAL

UNCLASSIFIED

Report AFRPL-TR-69-90

III. CONCLUSIONS AND RECOMMENDATIONS

A. The improved 2.75-in. FFAR rocket is ready for production, as demonstrated by the successful completion of the Preliminary Flight Rating Tests.

B. Performance dispersion, and reliability requirements of the contract have been met or exceeded.

C. The propellant tailored for this application provides the requisite mechanical and ballistic characteristics, explosive hazard classification, aging stability and resistance to environmental conditions over the required temperature range of -65 to +150°F.

D. For added reliability the nozzle exit cone sleeve will be secured to the aft closure plate for improved strength and insulation fiber orientation control.

E. To accommodate automated assembly, the dimensions of the insulation joint at the aft end of the chamber should be modified. At present, potting is applied to this joint by hand as part of the assembly of the aft closure to the chamber.

F. To reduce the size of the ignition spike, while retaining the rapid ignition response of the motor, the thickness of the bore restriction should be modified.

G. To provide improved processing capability, the chamber insulation and lining should be combined into a single system.

H. The chamber forward release system should be simplified in order to reduce the handling and cure cycle processing time.

CONFIDENTIAL

UNCLASSIFIED