

AD627893

TECHNICAL REPORT

MATHEMATICAL MODELS FOR
NAVIGATION SYSTEMS

PAUL D. THOMAS

Marine Sciences Department

OCTOBER 1965

Code 1



— 1.00 151 PAG
AMERICAN
CODE 1/24

Code 1/24

U. S. NAVAL OCEANOGRAPHIC OFFICE

WASHINGTON, D. C. 20390

Price \$2.00

4

in accessible sources, but many are not readily available. Some are new, such as the expansion of the geodesic to second order in the flattening in both geodetic and parametric latitudes, and conversion formulas between the two forms.

Since the entire treatment is mathematical, an overall summary of the investigation is first presented to allow a quick assay of the topics and accomplishments. This summary is followed by a condensation of the formulas developed or included. The details of the actual development follow in three sections with computational examples in the Appendices.

Paul D. Thomas
Scientific Staff Assistant
Marine Sciences Department
U. S. Naval Oceanographic Office

CONTENTS

	Page
FOREWORD	iii
PREFACE	v
FIGURES AND TABLES	viii
OVERALL SUMMARY OF INVESTIGATIONS	1
COLLECTED FORMULAE	4
DEVELOPMENT	
Section 1. Latitude Formulae	
New formulae	12,4
Standard formulae	22,5
For Clarke 1866 spheroid	22,5
References	22
Section 2. Spherical Rectangular Coordinate System; Loci	
Great circle track formulae	23,5
Parallels to the great circle	27,6
Coordinate system with a great circle as axis	28,6
Spherical hyperbolae and plane equivalents	37,7
References	37
Section 3. Distance Formulae; Azimuths; Associated Quantities	
Normal section azimuths.....	40,7
Great elliptic section azimuths	45,7
Great elliptic arc distance	48,8
Geodesic in terms of great elliptic arc and geodetic latitude with second order terms in f	68,8
Geodesic in terms of great elliptic arc and parametric latitude with second order terms in f	79,9
Form transformations: Geodetic to Parametric – Parametric to Geodetic	90,10
Difference formulae to second order in f	91,11
Chord distance	53,11
Angle of dip	54,11
Maximum separation – chord and arc	55,11
Geographic coordinates of point of maximum separation	55,11
References	96,97
APPENDICES	
No. 1. Computations for intersections of Loran lines of position-plane approximation	99
No. 2. Computations using Andoyer-Lambert first order approximation without conversion to parametric latitude	111
No. 3. Computations using Forsyth-Andoyer-Lambert type second order formulae without conversion to parametric latitude	125

FIGURES AND TABLES

Figure 1. Latitude relationships in the auxiliary sphere-spheroid configuration	13
2. The great circle track configuration	24
3. Parallels at a given distance from a great circle	26
4. Spherical triangles for computation of coordinates along parallels to great circle tracks.....	27
5. Spherical rectangular coordinate system with a great circle base line as an axis	29
6. Reference for derivation of polar equation of spherical hyperbolas with origin at a focus	32
7. Derivation of alternative equation to spherical hyperbolas with origin at a focus	34
8. Corresponding plane hyperbola equivalents	35
9. Polar case of plane equivalent.....	36
10. Corresponding distances on the reference ellipsoid and the auxiliary sphere	39
11. Relationship between arc length, normal section azimuth, chord length, angle of depression of the chord below the horizon, maximum separation of arc and chord	41
12. Relationships relative to the pole on the ellipsoid of reference, of the geodesic, normal sections, and great elliptic section	42
13. The normal section azimuths	43
14. The great elliptic section azimuths	46
15. Elements of the great elliptic section	50
16. Elements of polar spherical triangles	58
17. Computations for distance (great elliptic section approximation), normal section azimuths, chord length, angle of dip, maximum separation of chord and arc	60
18,19. Computations, great elliptic arc distance, geodetic azimuths	62,63
20. Differential triangles, sphere and spheroid	70
21. Distance computing form, Forsyth-Andoyer-Lambert type approximation with second order terms in f	80
22. Distance computing form, Forsyth-Andoyer-Lambert type approximation in terms of parametric latitude and second order terms in f	89
23. Computations, Andoyer-Lambert first order approximation, geodetic azimuths, normal section azimuths, chord, angle of dip, maximum separation chord and arc, geographic coordinates of point of maximum separation	95
24. Two plane hyperbolas with a common focus	102
25. Intersection of plane hyperbolas. Example 1	109
26. Intersection of plane hyperbolas. Example 2	110
 Table 1. Lines computed	65
2. Comparison with true distance and azimuths	66
3. Error summary	67
4. 17 geodetic lines computed from equations (110) and compared with known lengths and azimuths	81

**MATHEMATICAL MODELS
FOR
NAVIGATION SYSTEMS**

OVERALL SUMMARY OF INVESTIGATIONS

Latitude

A loran station positioned on the auxiliary sphere of the ellipsoid of reference has as its geodetic latitude the angle at the equator made by that normal to the meridian which passes through the station of the sphere. Its longitude will remain the same. See Figure 1, page 13. Now this is analogous to the geodetic latitude of a subsatellite point, if the trajectory were confined wholly to the surface of the auxiliary sphere. It is clearly not one of the three commonly associated latitudes as shown in equation (1), page 12. Actually the relationship between geocentric latitude on the sphere and geodetic latitude on the ellipsoid is given by equation (2), page 12. From these one may find the maximum value of the difference, $\Delta\phi$, and the value of ϕ , the geodetic latitude, at which this maximum difference occurs, equations (3) – (6), page 14. The expansions of $\Delta\phi$ in series in terms of ϕ were obtained and are given in equations (7) – (20), pages 15, 16.

For computation of ϕ as a function of θ , the geocentric latitude, it was necessary to employ the Lagrange expansion formula and the resulting expansion and formulas are given in equations (21) – (33), pages 16 to 18. Development of the series expansions for the height, h , of the auxiliary sphere above the ellipsoid is given in equations (43)– (48). See Figure 1, page 13 and pages 19, 20. A summary of latitude formulas and a bibliography of pertinent references are included, pages 21 – 22.

The great circle track as determined by the geographical coordinates of two given points on the auxiliary sphere. Parallels at a given distance from a great circle track.

As shown in figure 2, page 24, the treatment is somewhat different than the usual one in that one works from the vertex of the great circle or the point where the great circle is orthogonal to a meridian. This simplifies computations and provides well balanced triangles from which to compute. It also facilitates the computations for parallels at a given distance from a fixed great circle track as shown in Figures 3 and 4, pages 26 and 27. See also equations (1) – (13), pages 23–27.

A spherical rectangular coordinate system with a great circle base line as an axis.

Figure 5, page 29, shows, pictorially, this coordinate system developed on the great circle base line referenced to the vertex of the great circle base line. The conversion equations are developed in equations (14) to (26), pages 28 to 30.

Derivation of the equations of spherical hyperbolas and their plane equivalents.

Having established a spherical rectangular coordinate system we are in a position to derive the equations of spherical hyperbolas referenced to the system. This is done in both spherical rectangular coordinates and spherical polar form, equations (27) to (50), pages 31 to 34. See also figures 5, 6, and 7, pages 29, 32, 34.

The plane hyperbola equivalents are developed in equations (51) to (59), pages 35 and 36 and a comparison table of the spherical and plane equivalents is given as equation (60), page 37. See also Figures (8) and (9), pages 35 and 36.

An example of computations using the plane hyperbola approximation is given as Appendix 1, pages 99 to 110.

Distance computations and conversions; Azimuths; Associated geometrical quantities.

The classical "inverse" problem of geodesy was considered here since it is inherent in the electronic navigational systems problem. In the "inverse" problem, the latitudes and longitudes of each of two points are given from which the distance between the points and the azimuths at the two given points are to be determined.

The geodesic on the reference ellipsoid, other than meridians and circular equator, is a space curve, and its vertex (the latitude where it is orthogonal to a meridian) is not easily expressible in terms of the geographical coordinates (latitude and longitude) of two points on it. The actual length involves the evaluation of an elliptic integral, whose modulus depends on the latitude of the vertex of the geodesic. Iterative solutions have been devised as Helmert's, based on the earlier work of Bessel.

Approximations based on plane curves which are near the geodesic in length as the normal sections and the great elliptic arc have been devised. An investigation of these was made, including some extensions for instance in the series development for the great elliptic arc approximation. See pages 48 to 51 and Figure 15, page 50. Also their use and expression in terms of common computational parameters with some associated geometrical quantities useful in operational applications as the angle of depression of the chord below the horizon, the maximum separation between the chord and the surface, and the geographic coordinates of the point on the surface where maximum separation occurs.

An investigation of the expansion of the geodesic length in powers of the flattening was made which to first order in the flattening are the well-known, so-called Andoyer-Lambert

approximation formulas, one in terms of parametric latitude, the other in terms of geodetic latitude. Since this Office uses the Andoyer-Lambert form in terms of parametric latitude, in which geographic latitudes must first be converted to parametric, an investigation was made to see if use of the parametric form to first order in the flattening was justified or necessary in terms of operational requirements. This was done in connection with a review of an extensive study by USAF (ACIC) of geodetic lines up to 6000 miles in length where the Andoyer-Lambert approximation was recommended for such tasks as LORAN computing, since the errors in the very near geodetic distances obtained are fairly constant on lines 50 to 6000 miles in length and in all azimuths. The comparisons are given in tables 1 - 3, pages 65 to 67.

Since some of the excursions in the first order form were of the order of 10 meters, the problem of obtaining the expansion of the geodesic to second order terms in the flattening was examined. By introducing two parameters X and Y, in terms of the latitude of the vertex of the great elliptic arc, it was found that the great elliptic arc approximation produced the so-called Andoyer-Lambert first order approximations. (See pages 68 - 69.) Similarly they could be produced by modification of the differential equation to the geodesic (See pages 69 to 74).

In review of an 1895 paper by the British Mathematician, A. R. Forsyth, by identifying his fundamental approximation parameter as the vertex of the great elliptic arc, it was found that he actually had both so-called Andoyer-Lambert first order expansions in the flattening, but it had apparently not been recognized. Furthermore, he had an expansion to second order terms in the flattening and in terms of geodetic latitude but it had two errors in the second order term. After these had been detected and corrected, computations based on the resulting equations give distances within a meter on all lines computed from 50 to 6000 miles. See pages 75 to 81.

Forsyth did not have the expansion to the geodesic in terms of parametric latitude to second order terms in the flattening, so his results were extended to second order terms. See pages 79 to 90. Then transformation equations were developed to convert one form to the other as far as second order terms in the flattening, pages 90 to 92, and finally the difference formulas for the principal parameters, pages 92 to 93. As a result of this study, distance and azimuth formulas are available in terms of easily computed parameters, in terms of either parametric or geodetic latitude which will give distances over all lines within a meter and azimuths within a second which is adequate for any operational requirement. A more detailed summary of the investigations of this section with a bibliography of references is given on pages 93 to 97.

COLLECTED FORMULAE

NEW LATITUDE FORMULAS

If θ is the geocentric latitude of a point $P(a\cos\theta, a\sin\theta)$ on the auxiliary sphere, then the corresponding geodetic latitude ϕ of P at an altitude h above the ellipsoid of reference as shown in Figure 1, is given by

$$\begin{aligned}\sin \Delta\phi &= \sin(\phi - \theta) = (e^2/2a) N \sin 2\phi = (e^2 \sin \phi \cos \phi) / (1 - e^2 \sin^2 \phi)^{1/2} \\ &= c_1 \sin 2\phi - c_2 \sin 4\phi + c_3 \sin 6\phi - c_4 \sin 8\phi, \\ c_1 &= (e^2/2) + (e^4/8) + (15e^6/256) + (35e^8/1024) \\ c_2 &= (e^4/16) + (3e^6/64) + (35e^8/1024), \\ c_3 &= (3e^6/256) + (15e^8/1024), \\ c_4 &= 5e^8/2048\end{aligned}$$

With the same coefficients,

$$\begin{aligned}\phi - \theta &= \Delta\phi \text{ (radians)} = (c_1 + c_1^3/8) \sin 2\phi - (c_2 + c_1^2 c_2/4) \sin 4\phi + (c_3 - c_1^3/24) \sin 6\phi \\ \Delta\phi \text{ (seconds)} &= (206,264.8062) \cdot \Delta\phi \text{ (radians)}.\end{aligned}$$

To express $\Delta\phi$ in terms of θ , we have

$$\begin{aligned}\tan \phi &= \tan \theta + (e^2/a \cos \theta) N \sin \phi \\ &= \tan \theta + (e^2/a \cos \theta) \sin \phi / (1 - e^2 \sin^2 \phi)^{1/2},\end{aligned}$$

which, when expanded by the Lagrange expansion formula gives

$$\begin{aligned}\Delta\phi &= \phi - \theta = c_1 \sin 2\theta + c_2 \sin 4\theta + c_3 \sin 6\theta + c_4 \sin 8\theta \\ c_1 &= (e^2/2) + (e^4/8) + (11e^6/256) + (31e^8/1024) \\ c_2 &= (3e^4/16) + (5e^6/64) + (25e^8/1024) \\ c_3 &= (77e^6/768) + (59e^8/1024), \\ c_4 &= 127e^8/2048\end{aligned}$$

The distance h is given by

$$\begin{aligned}h/a &= \cos \Delta\phi - a/N = \cos \Delta\phi - (1 - e^2 \sin^2 \phi)^{1/2} \\ &\quad - (1 - e^2 \sin^2 \phi)^{-1/2} \{ [1 - e^2 \sin^2 \phi (1 + e^2 \cos^2 \phi)]^{1/2} - 1 + e^2 \sin^2 \phi \} \\ h &= a(d_1 - d_2 \cos 2\phi + d_3 \cos 4\phi - d_4 \cos 6\phi + d_5 \cos 8\phi) \\ d_1 &= (e^2/4) - (e^4/64) - (3e^6/256) - (233e^8/16384) \\ d_2 &= (e^2/1) + (e^4/16) + (7e^6/512) + (3e^8/2048) \\ d_3 &= (5e^4/64) + (11e^6/256) + (115e^8/4096) \\ d_4 &= (9e^6/512) + (37e^8/2048) \\ d_5 &= 53e^8/16384\end{aligned}$$

STANDARD LATITUDE FORMULAS

The three latitudes usually associated with the auxiliary sphere ellipsoid configuration as shown in Figure 1, are the geocentric, parametric, and geodetic represented here by ψ , θ , and ϕ_0 respectively and related through the equations

$$\tan \psi / \tan \theta = \tan \theta / \tan \phi_0 = (1 - e^2)^{1/2},$$

where e is the eccentricity of the meridian ellipse. The parametric latitude, θ , is also called here the geocentric latitude of points on the auxiliary sphere.

LATITUDES FOR CLARKE 1886 SPHEROID

Series representations, accurate to 0.001 second, for the differences in ϕ , ϕ_0 , θ , ψ are:

$$\Delta\phi \text{ (seconds)} = \phi - \theta = 699.2540 \sin 2\phi - 0.5936 \sin 4\phi + 0.0004 \sin 6\phi$$

$$\Delta\phi \text{ (seconds)} = \phi - \theta = 699.2520 \sin 2\theta + 1.7769 \sin 4\theta + 0.0064 \sin 6\theta$$

$$\Delta\theta_0 \text{ (seconds)} = \phi - \phi_0 = 349.0318 \sin 2\theta + 1.4796 \sin 4\theta + 0.0061 \sin 6\theta$$

$$h \text{ (meters)} = 10,788.3852 - 10,811.2646 \cos 2\phi + 22.9147 \cos 4\phi - 0.0350 \cos 6\phi$$

$$\phi_0 - \psi = 700.4385 \sin 2\phi_0 - 1.1893 \sin 4\phi_0 + 0.0027 \sin 6\phi_0$$

$$\phi_0 - \psi = 700.4385 \sin 2\psi + 1.1893 \sin 4\psi + 0.0027 \sin 6\psi$$

$$\phi_0 - \theta = 350.2202 \sin 2\phi_0 - 0.2973 \sin 4\phi_0 + 0.0003 \sin 6\phi_0$$

$$\phi_0 - \theta = 350.2202 \sin 2\theta + 0.2973 \sin 4\theta + 0.0003 \sin 6\theta$$

$$\theta - \psi = 350.2202 \sin 2\theta - 0.2973 \sin 4\theta + 0.0003 \sin 6\theta$$

$$\theta - \psi = 350.2202 \sin 2\psi + 0.2973 \sin 4\psi + 0.0003 \sin 6\psi$$

GREAT CIRCLE TRACK FORMULAS

First compute λ_0 and θ_0 from

$$\tan \lambda_0 = \frac{\tan \theta_2 \cos \lambda_1 - \tan \theta_1 \cos \lambda_2}{\tan \theta_1 \sin \lambda_2 - \tan \theta_2 \sin \lambda_1}$$

$$\cot \theta_0 = \cot \theta_1 \cos (\lambda_0 - \lambda_1) = \cot \theta_2 \cos (\lambda_0 - \lambda_2). \text{ (See Figure 2).}$$

Then compute a_1 and a_2 from

$$\sin a_1 = \frac{\cos \theta_0}{\cos \theta_1}, \quad \sin a_2 = \frac{\cos \theta_0}{\cos \theta_2}$$

Next compute S_1 and S_2 from

$$\tan S_1 = \cos a_1 \cot \theta_1, \quad \tan S_2 = \cos a_2 \cot \theta_2$$

The computations for a_1 , a_2 , S_1 and S_2 are checked by

$$\cos (\lambda_2 - \lambda_1) = \cos a_1 \cos a_2 + \sin a_1 \sin a_2 \cos (S_1 - S_2)$$

For equally spaced intervals along the great circle track, for instance in 100 nautical mile intervals, let $S = S_i \pm 100K$, $K = 1, 2, 3, \dots, n$. With these values of S one computes successively corresponding values of θ' , λ' , and α' from

$\sin \theta' = \sin \theta_0 \cos S$, $\tan (\lambda_0 - \lambda') = \tan S / \cos \theta_0$, $\tan \alpha' = \cot \theta_0 / \sin S$
and checks by means of $\sin \theta' \cdot \tan (\lambda_0 - \lambda') \cdot \tan \alpha' = 1$.

PARALLELS AT A GIVEN DISTANCE FROM THE GREAT CIRCLE TRACK

To compute the coordinates (θ_p, λ_p) and $(\theta_{p'}, \lambda_{p'})$ of points at a given distance s from a given great circle track and symmetric with respect to it one computes (see Figure 3):

$$\begin{aligned}\sin \theta_k &= A \cos S \pm B && \text{when } k = p, \text{ use + sign} \\ \sin (\lambda_0 - \lambda_k) &= C \sin S / \cos \theta_k && \text{k} = p', \text{ use - sign}\end{aligned}$$

S and θ_0 are the same as given under the great circle track formulas above and $A = C \sin \theta_0$, $B = \cos \theta_0 \sin s$, $C = \cos s$. The computations may be checked by

$$\cos 2s = \sin \theta_p \sin \theta_{p'} + \cos \theta_p \cos \theta_{p'} \cos (\lambda_{p'} - \lambda_p).$$

SPHERICAL RECTANGULAR COORDINATE SYSTEM WITH A GREAT CIRCLE BASE LINE AS AN AXIS

It is assumed that the base line has been established, that is the coordinates (θ_0, λ_0) of the vertex of the great circle base line have been computed from the coordinates of two given points $Q_1(\theta_1, \lambda_1)$, $Q_2(\theta_2, \lambda_2)$, see Figures 2 and 5.

Formulas for computing y , S , x from θ and λ

$$\begin{aligned}\sin y &= \cos \theta_0 \sin \theta - \sin \theta_0 \cos \theta \cos (\lambda_0 - \lambda) \\ \tan S &= \frac{\sin \theta_0 \cos \theta \sin (\lambda_0 - \lambda)}{\sin \theta - \cos \theta_0 \sin y} = \frac{\cos \theta \sin (\lambda_0 - \lambda)}{\sin \theta_0 \sin \theta + \cos \theta_0 \cos \theta \cos (\lambda_0 - \lambda)}\end{aligned}$$

$$\sin x = \sin (S - S_i) \cos y$$

Formulas for computing S , θ , λ from x and y

Let $C = \cos y$, $D = \sin y$, $E = \sin x$, $A = C \sin \theta_0$, $B = D \cos \theta_0$, then

$$S = \arcsin(E/C) + S_i$$

$$\theta = \arcsin(A \cos S + B)$$

$$\lambda = \lambda_0 - \arcsin(C \sin S / \cos \theta)$$

SPHERICAL HYPERBOLA FORMULAS AND PLANE EQUIVALENTS

	Spherical	Plane
(1) $\tan^2 r$	$= \frac{\tan^2 a (\sin^2 c - \sin^2 a)}{\sin^2 c \cos^2 a - \sin^2 a}$	$r^2 = \frac{a^2 (c^2 - a^2)}{c^2 \cos^2 a - a^2}$
(2) $\sin^2 x$	$= \frac{\sin^2 a \cos^2 c}{\sin^2 c - \sin^2 a} \sin^2 y + \sin^2 a$	$x^2 = \frac{a^2 y^2}{c^2 - a^2 + a^2}$
(3) $\tan R$	$= \frac{\cos 2c \pm \cos 2a}{\sin 2c \cos \beta \pm \sin 2a}$	$R = \frac{a^2 - c^2}{c \cos \beta - a}$
(4) $\tan^2(\beta/2)$	$= \frac{\sin(c-a) \sin(R+c+a)}{\sin(c+a) \sin(R-c+a)}$	$\tan^2(\beta/2) = \frac{(c-a)(R+c+a)}{(c+a)(R-c+a)}$

In (1) and (2) the origin of coordinates is the midpoint of $Q_1 Q_2$, see Figure 5. Equations (3) and (4) are two polar forms with origin at a focus Q_1 , see Figures (5) and (6). Appendix 1 has computations based on the plane equivalent of (3).

DISTANCE AND AZIMUTH FORMULAS

Normal section azimuths (Geodetic latitude, ϕ)

$$\cot \alpha_{AB} = \frac{[\sin \phi_2 - (N_1/N_2) \sin \phi_1] e^2 \cos \phi_1 \sec \phi_2 + (\sin \phi_1 \cos \Delta\lambda - \tan \phi_2 \cos \phi_1)}{\sin \Delta\lambda}$$

$$\cot \alpha_{BA} = - \frac{[\sin \phi_1 - (N_2/N_1) \sin \phi_2] e^2 \cos \phi_2 \sec \phi_1 + (\sin \phi_2 \cos \Delta\lambda - \tan \phi_1 \cos \phi_2)}{\sin \Delta\lambda}$$

Normal Section Azimuths (parametric latitude θ)

$$\cot \alpha_{AB} = \frac{\sin \theta_1 \cos \Delta\lambda - \cos \theta_1 \tan \theta_2 + e^2 (\sin \theta_2 - \sin \theta_1) \cos \theta_1 \sec \theta_2}{(1 - e^2 \cos^2 \theta_1)^{1/2} \sin \Delta\lambda}$$

$$\cot \alpha_{BA} = - \frac{\sin \theta_2 \cos \Delta\lambda - \cos \theta_2 \tan \theta_1 + e^2 (\sin \theta_1 - \sin \theta_2) \cos \theta_2 \sec \theta_1}{(1 - e^2 \cos^2 \theta_2)^{1/2} \sin \Delta\lambda}$$

Great Elliptic Section Azimuths (Geodetic latitude ϕ)

$$\cot \alpha_{AB} = (1 - e^2) \frac{N_1^2}{a^2} \frac{(\tan \phi_1 \cos \Delta\lambda - \tan \phi_2) \cos \phi_1}{\sin \Delta\lambda}$$

$$\cot \alpha_{BA} = (1 - e^2) \frac{N_2^2}{a^2} \frac{(\tan \phi_1 - \tan \phi_2 \cos \Delta\lambda) \cos \phi_2}{\sin \Delta\lambda}$$

Great Elliptic Section Azimuths (parametric latitude θ)

$$\cot \alpha_{AB} = \frac{(\tan \theta_1 \cos \Delta\lambda - \tan \theta_2) (\cos \theta_1) (1 - e^2 \cos^2 \theta_1)^{1/2}}{\sin \Delta\lambda}$$

$$\cot \alpha_{BA} = \frac{(\tan \theta_1 - \tan \theta_2 \cos \Delta\lambda) (\cos \theta_2) (1 - e^2 \cos^2 \theta_2)^{1/2}}{\sin \Delta\lambda}$$

Great Elliptic Arc Distance

$$\begin{aligned} s/a = & (d_1 + d_2) - \frac{1}{4} k^2 [(d_1 + d_2) - \sin(d_1 + d_2) \cos(d_1 - d_2)] \\ & - (1/128) k^4 [6(d_1 + d_2) - 8 \sin(d_1 + d_2) \cos(d_1 - d_2) + \sin 2(d_1 + d_2) \cos 2(d_1 - d_2)] \\ & - (1/1536) k^6 [30(d_1 + d_2) - 45 \sin(d_1 + d_2) \cos(d_1 - d_2) + 9 \sin 2(d_1 + d_2) \cos 2(d_1 - d_2) \\ & - \sin 3(d_1 + d_2) \cos 3(d_1 - d_2)] \end{aligned}$$

Where in terms of geodetic latitude ϕ ,

$$k = (e\sqrt{1 - e^2}/a) N_0 \sin \phi_0, d_1 = \text{arc cos}(N_1 \sin \phi_1 / N_0 \sin \phi_0),$$

$$d_2 = \text{arc cos}(N_2 \sin \phi_2 / N_0 \sin \phi_0)$$

$$\sin \phi_0 = [J/(J + \sin^2 \Delta\lambda)]^{1/2}, J = \tan^2 \phi_1 + \tan^2 \phi_2 - 2 \tan \phi_1 \tan \phi_2 \cos \Delta\lambda,$$

and in terms of parametric latitude θ

$$k = e \sin \theta_0, d_1 = \text{arc cos}(\sin \theta_1 / \sin \theta_0), d_2 = \text{arc cos}(\sin \theta_2 / \sin \theta_0)$$

$$\sin \theta_0 = [F/(F + \sin^2 \Delta\lambda)]^{1/2}, F = \tan^2 \theta_1 + \tan^2 \theta_2 - 2 \tan \theta_1 \tan \theta_2 \cos \Delta\lambda.$$

Also in terms of parametric latitude θ , great ellipticarc distance

$$s = a \left[d - (e^2/8)(Xd - Y \sin d) - (e^4/512)[(6d - \sin 2d) X^2 - 8(\sin d) XY + 2(\sin 2d) Y^2] - (e^6/12288)[3(10d - 3 \sin 2d) X^3 - 3(15 \sin d - \sin 3d) X^2 Y + 18(\sin 2d) XY^2 - 4(\sin 3d) Y^3] \right]$$

$$\text{where } X = \frac{(\sin \theta_1 + \sin \theta_2)^2}{1 + \cos d} + \frac{(\sin \theta_1 - \sin \theta_2)^2}{1 - \cos d},$$

$$Y = \frac{(\sin \theta_1 + \sin \theta_2)^2}{1 + \cos d} - \frac{(\sin \theta_1 - \sin \theta_2)^2}{1 - \cos d}, d = d_2 - d_1, \text{ where } d_1, d_2 \text{ are spherical distances from } P_1(\theta_1, \lambda_1),$$

$P_2(\theta_2, \lambda_2)$ to the vertex $P_0(\theta_0, \lambda_0)$.

NOTE: If $e^2 \approx 2f$, the higher order terms in f then ignored, this becomes the so-called Andoyer-Lambert approximation in terms of parametric latitude.

GEODESIC IN TERMS OF GREAT ELLIPTIC ARC, IN GEODETIC LATITUDE WITH SECOND ORDER TERMS IN THE FLATTENING

Given the points $P_1(\phi_1, \lambda_1)$, $P_2(\phi_2, \lambda_2)$ on the reference ellipsoid, P_2 west of P_1 , west longitudes considered positive.

With $\phi_m = \frac{1}{2}(\phi_1 + \phi_2)$, $\Delta\phi_m = \frac{1}{2}(\phi_2 - \phi_1)$, $\Delta\lambda = \lambda_2 - \lambda_1$, $\Delta\lambda_m = \frac{1}{2}\Delta\lambda$,

Let $k = \sin \phi_m \cos \Delta\phi_m$, $K = \sin \Delta\phi_m \cos \phi_m$,

$$H = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m$$

$$L = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m = \sin^2(d/2), 1 - L = \cos^2(d/2), \cos d = 1 - 2L,$$

$$t = \sin^2 d = 4L(1 - L), U = 2k^2/(1 - L), V = 2K^2/L; X = U + V, Y = U - V,$$

$$T = d/\sin d = 1 + (t/6) + 3(t^2/40) + 5(t^3/112) + 35(t^4/1152) + 63(t^5/2816) + \dots, \text{ (1 radian} = 206,264.8062 \text{ seconds)}$$

$$E = 30 \cos d, A = 4T(8 + TE/15), D = 4(6 + T^2), B = -2D,$$

$$C = T - \frac{1}{2}(A + E), f/4 = 0.000847518825, f^2/64 = 0.179572039 \times 10^{-6} \text{ (Clarke 1866)}$$

$$S = a \sin d [T - (f/4)(TX - 3Y) + (f^2/64)\{X(A + CX) + Y(B + EY) + DXY\}],$$

$$\sin(a_2 + a_1) = (K \sin \Delta\lambda)/L, \sin(a_2 - a_1) = (k \sin \Delta\lambda)/(1 - L),$$

$$\frac{1}{2}(\delta a_2 + \delta a_1) = -(f/2) H(T + 1) \sin(a_2 + a_1), \frac{1}{2}(\delta a_2 - \delta a_1) = -(f/2) H(T - 1) \sin(a_2 - a_1),$$

$$a_{1-2} = a_1 + \delta a_1, a_{2-1} = a_2 + \delta a_2.$$

Additional check formulae

$$X = \frac{(\sin \phi_1 + \sin \phi_2)^2}{1 + \cos d} + \frac{(\sin \phi_1 - \sin \phi_2)^2}{1 - \cos d} = 2 \sin^2 \phi_0 = 2F/(F + \sin^2 \Delta\lambda)$$

$$Y = \frac{(\sin \phi_1 + \sin \phi_2)^2}{1 + \cos d} - \frac{(\sin \phi_1 - \sin \phi_2)^2}{1 - \cos d} = 2 \sin^2 \phi_0 \cos(d_1 + d_2)$$

$$F = \tan^2 \phi_1 + \tan^2 \phi_2 - 2 \tan \phi_1 \tan \phi_2 \cos \Delta\lambda$$

$$\cos(d_1 + d_2) = Y/X, 1 + \cos d = 8k^2/(X + Y), 1 - \cos d = 8K^2/(X - Y),$$

$$\cos d = 4 \left(\frac{k^2}{X+Y} - \frac{K^2}{X-Y} \right), 4 \left(\frac{k^2}{X+Y} + \frac{K^2}{X-Y} \right) = 1.$$

NOTE: If the second order term is ignored, the resulting equations are the equivalent of the so called Andoyer-Lambert approximation in terms of geodetic latitude.

The quantities H, T, L, k, K enter into both distance and azimuth formulas. Distances are given within a meter and azimuths within a second over all lines in all latitudes and azimuths. Other advantages are (1) no conversion to parametric latitudes, (2) no square root calculations, (3) for desk computers the only tabular data required is a table of the natural trigonometric functions as Peter's eight place tables. (4) the formulas are adaptable to high speed computers. See Table 4 page 81 and Appendix 3, lines 12 through 16, for desk computer sample computations based on these formulas as checked against 5 Coast and Geodetic Survey specially computed lines. The mean difference for the 5 lines between true geodetic lengths and computed values was 0.15 meter with a maximum difference of 0.24 meter. The mean difference between true and computed azimuths was 0.59 second with a maximum difference of 0.93 second.

GEODESIC IN TERMS OF GREAT ELLIPTIC ARC, IN PARAMETRIC LATITUDE WITH SECOND ORDER TERMS IN THE FLATTENING

Given on the reference ellipsoid the points $P_1(\theta_1, \lambda_1)$, $P_2(\theta_2, \lambda_2)$; P_2 west of P_1 , west longitudes considered positive. (Geodetic latitudes are converted to parametric by the relation $\tan \theta = (1 - f) \tan \phi$ or an equivalent formula). With $\theta_m = \frac{1}{2}(\theta_2 + \theta_1)$, $\Delta\theta_m = \frac{1}{2}(\theta_2 - \theta_1)$, $\Delta\lambda = \lambda_2 - \lambda_1$, $\Delta\lambda_m = \Delta\lambda/2$;

let $k = \sin \theta_m \cos \Delta\theta_m$, $K = \sin \Delta\theta_m \cos \theta_m$,
 $H = \cos^2 \Delta\theta_m - \sin^2 \theta_m = \cos^2 \theta_m - \sin^2 \Delta\theta_m$,
 $L = \sin^2 \Delta\theta_m + H \sin^2 \Delta\lambda_m = \sin^2 d/2$, $1-L = \cos^2 d/2$,
 $\cos d = 1 - 2L$, $h = \sin^2 d = 4L(1-L)$, $U = 2k^2/(1-L)$,
 $V = 2K^2/L$, $X = U + V$, $Y = U - V$,
 $T = d/\sin d = 1 + (1/6)h + (3/40)h^2 + (5/112)h^3 + (35/1152)h^4 + (63/2816)h^5 + \dots$,
 $E_0 = -2 \cos d$, $D_0 = 4T^2$, $A_0 = -D_0 E_0$, $B_0 = -2D_0$, $C_0 = T - \frac{1}{2}(A_0 + E_0)$,
 $S = a \sin d [T - (f/4)(TX - Y) + (f^2/64)(A_0 X + B_0 Y + C_0 X^2 + D_0 XY + E_0 Y^2)]$
 $\sin(\alpha_2 + \alpha_1) = (K \sin \Delta\lambda)/L$, $\sin(\alpha_2 - \alpha_1) = (k \sin \Delta\lambda)/(1-L)$
 $\frac{1}{2}(\delta\alpha_2 + \delta\alpha_1) = -(f/2) TH \sin(\alpha_1 + \alpha_2)$
 $\frac{1}{2}(\delta\alpha_2 - \delta\alpha_1) = -(f/2) TH \sin(\alpha_2 - \alpha_1)$
 $\alpha_{i-2} = \alpha_i + \delta\alpha_i$, $\alpha_{2-i} = \alpha_2 + \delta\alpha_2$

Additional check formulae

$$X = \frac{(\sin \theta_1 + \sin \theta_2)^2}{1 + \cos d} + \frac{(\sin \theta_1 - \sin \theta_2)^2}{1 - \cos d} = 2 \sin^2 \theta_0 = 2F/(F + \sin^2 \Delta\lambda)$$

$$Y = \frac{(\sin \theta_1 + \sin \theta_2)^2}{1 + \cos d} - \frac{(\sin \theta_1 - \sin \theta_2)^2}{1 - \cos d} = 2 \sin^2 \theta_0 \cos(d_1 + d_2)$$

$$F = \tan^2 \theta_1 + \tan^2 \theta_2 - 2 \tan \theta_1 \tan \theta_2 \cos \Delta\lambda$$

$$\cos(d_1 + d_2) = Y/X, 1 + \cos d = 8k^2/(X + Y), 1 - \cos d = 8K^2/(X - Y),$$

$$\cos d = 4 \left(\frac{k^2}{X+Y} - \frac{K^2}{X-Y} \right), \quad 4 \left(\frac{k^2}{X+Y} + \frac{K^2}{X-Y} \right) = 1.$$

NOTE: If the second order term is ignored, the resulting equations are the equivalent of the so-called Andoyer-Lambert approximation in terms of parametric latitude.

TRANSFORMATIONS: GEODETIC TO PARAMETRIC — PARAMETRIC TO GEODETIC

If primed quantities denote those in geodetic latitude, then the transformation equations are:

$$d' = d - (f/2) Y \sin d + (f^2/16) [4Y(X-3) \sin d + (2Y^2 - X^2) \sin 2d],$$

$$\sin d' = \sin d - (f/4) Y \sin 2d$$

$$X' = X[1 + f(2 - X)]$$

$$Y' = Y[1 + f(2 - X)] + (f/2)(X^2 - Y^2) \cos d$$

$$d = d' + (f/2) Y' \sin d' + (f^2/16) [4Y'(X'-1) \sin d' + (2Y'^2 - X'^2) \sin 2d']$$

$$\sin d = \sin d' + (f/4) Y' \sin 2d'$$

$$X = X'[1 - f(2 - X')]$$

$$Y = Y'[1 - f(2 - X')] - (f/2)(X'^2 - Y'^2) \cos d'$$

DIFFERENCE FORMULAS TO SECOND ORDER IN THE FLATTENING

$$d' - d = - (f/2) Y \sin d + (f^2/16) [4Y(X-3) \sin d + (2Y^2 - X^2) \sin 2d], \\ = - (f/2) Y' \sin d' - (f^2/16) [4Y'(X'-1) \sin d' + (2Y'^2 - X'^2) \sin 2d'];$$

$$X' - X = fX(2-X)\{1+(f/2)(3-2X)\}, \\ = fX'(2-X')\{1-(f/2)(1-2X')\};$$

$$Y' - Y = fY(2-X) + (f/2)(X^2 - Y^2) \cos d \\ + (f^2/8) \left[4Y(2-X)(3-2X) \right. \\ \left. + (X^2 - Y^2)\{(11-5X) \cos d + Y(1-3 \cos^2 d)\} \right] \\ = fY'(2-X') + (f/2)(X'^2 - Y'^2) \cos d' \\ - (f^2/8) \left[4Y'(2-X')(1-2X') \right. \\ \left. + (X'^2 - Y'^2)\{2(5-3X') \cos d' + Y'(1-3 \cos^2 d')\} \right]$$

CHORD DISTANCE, c

$$c = a \left[\{1 - \cos(d_1 + d_2)\} \{2 - k^2[1 - \cos(d_1 - d_2)]\} \right]^{1/2}$$

Where in terms of geodetic latitude ϕ ,

$$d_1 = \arccos(N_1 \sin \phi_1 / N_0 \sin \phi_0), d_2 = \arccos(N_2 \sin \phi_2 / N_0 \sin \phi_0)$$

$$k^2 = [e^2(1-e^2)/a^2] N_0^2 \sin^2 \phi_0$$

in terms of parametric latitude θ

$$d_1 = \arccos(\sin \theta_1 / \sin \theta_0), d_2 = \arccos(\sin \theta_2 / \sin \theta_0), k^2 = e^2 \sin^2 \theta_0.$$

ANGLE OF DIP OF THE CHORD, β

$$\sin \beta = \left\{ \frac{(1-e^2)[1-\cos(d_1+d_2)]}{[2-k^2\{1-\cos(d_1-d_2)\}(1-e^2+k^2 \cos^2 d_1)]} \right\}^{1/2},$$

with k, d_1, d_2 expressible in terms of either geodetic or parametric latitude as given above.

MAXIMUM SEPARATION OF CHORD AND ELLIPTIC ARC, H_0

$$H_0 = \frac{2abo}{c} \sin \frac{1}{2}(d_1 + d_2) [1 - \cos \frac{1}{2}(d_1 + d_2)],$$

where c is the chord length as given above, $bo = a\sqrt{1-k^2}$; c, k, d_1, d_2 expressible in either parametric or geodetic latitude as given above.

GEOGRAPHIC COORDINATES OF POINT OF MAXIMUM SEPARATION

$$\tan \phi = R/D, \text{ or } \cos 2\phi = (D^2 - R^2)/(D^2 + R^2), \tan \lambda = (\cos \theta_2 \sin \Delta\lambda) / (\cos \theta_1 + \cos \theta_2 \cos \Delta\lambda),$$

$R = \sin \theta_1 + \sin \theta_2$, $D = (0.996609925) (4 \cos^2 \frac{1}{2}d - R^2)^{1/2}$, d is spherical distance between the points $P_1(\theta_1, \lambda_1), P_2(\theta_2, \lambda_2)$ on the ellipsoid, θ is parametric latitude, $\Delta\lambda = \lambda_2 - \lambda_1$. See Figure 23 for sample computation.

DEVELOPMENT

SECTION 1. LATITUDE FORMULAE

The auxiliary sphere, associated with an ellipsoid of reference, is the sphere tangent to the spheroid along the equator. If it is desired to work on this sphere with formulae for conversion to the spheroidal surface, then a correspondence between geocentric latitude θ on the sphere and geodetic latitude ϕ on the ellipsoid is needed. Longitudes will be the same.

Now there are three latitudes in geodetic usage associated with the auxiliary-sphere ellipsoid configuration as shown in Figure 1. The θ as shown, and which we shall call geocentric latitude, is called the reduced or parametric latitude since it is the eccentric angle of the meridian ellipse. The angle ψ , as shown, is called in geodetic nomenclature, the geocentric latitude since it is the angle measured from the center of the ellipsoid to the point R on the meridian from the equator. The angle ϕ_0 , as shown, is a geodetic latitude corresponding to θ . The three latitudes ψ , θ , ϕ_0 , are related through the equations

$$\tan \psi = \sqrt{1 - e^2} \tan \theta = (1 - e^2) \tan \phi_0 \quad (1)$$

$$\text{or } \tan \psi / \tan \theta = \tan \theta / \tan \phi_0 = \sqrt{1 - e^2}.$$

where e is the eccentricity of the meridian ellipse [1].*

However, for working directly on the auxiliary sphere and transferring directly to the ellipsoid, if θ is the geocentric latitude of the point P($a \cos \theta$, $a \sin \theta$) on the auxiliary sphere, then the latitude actually corresponding on the spheroid is that found by dropping a perpendicular upon the meridian ellipse from P meeting the meridian in Q as shown in Figure 1, the normal making the angle ϕ as shown with the equator. The distance PQ = h , and ϕ are needed for the conversion where $0 \leq h \leq a - b$, a and b the semimajor and semiminor axes of the spheroid. We now develop the necessary conversion formulas between ϕ and θ .

The law of sines applied to triangles POT, POK of figure 1, yields

$$\frac{Ne^2 \sin \phi}{\sin \Delta \phi} = \frac{h + N}{\cos \theta} = \frac{a}{\cos \phi}, \quad \frac{Ne^2 \cos \phi}{\sin \Delta \phi} = \frac{h + N(1 - e^2)}{\sin \theta} = \frac{a}{\sin \phi}, \quad (2)$$

where $N = a / \sqrt{1 - e^2 \sin^2 \phi}$; e , a are the eccentricity and equatorial radius of the reference ellipsoid. ($\Delta \phi = \phi - \theta$).

*[1] Bracketed numbers refer to the list of references at the end of the section.

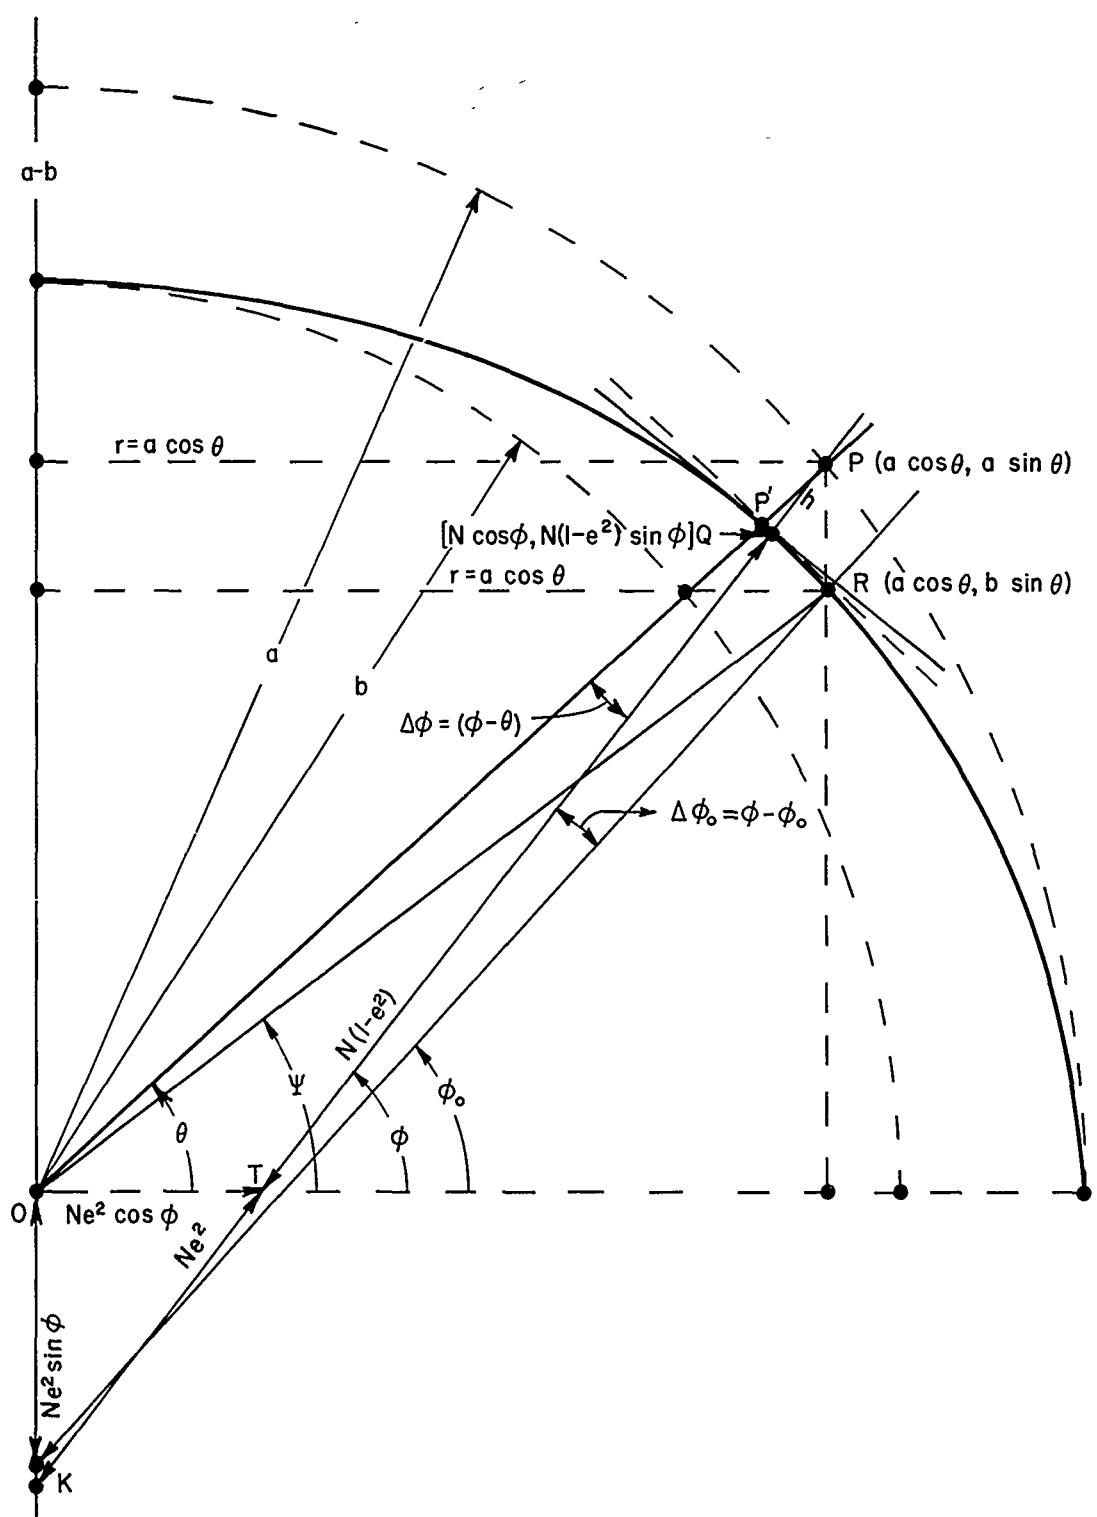


Figure 1. Latitude relationships in the auxiliary sphere-spheroid configuration.

From the first and last of either sets of equations (2) find

$$\sin \Delta\phi = \frac{e^2}{2a} \quad N \sin 2\phi = \frac{e^2 \sin \phi \cos \phi}{\sqrt{1 - e^2 \sin^2 \phi}}. \quad (3)$$

To find the maximum value of $\Delta\phi$ and the value of ϕ at which the maximum occurs, one

differentiates $\Delta\phi = \arcsin \frac{e^2 \sin \phi \cos \phi}{\sqrt{1 - e^2 \sin^2 \phi}}$ to obtain

$$\frac{d\Delta\phi}{d\phi} = e^2 \frac{e^2 \cos^2 2\phi + 2(2-e^2) \cos 2\phi + e^2}{(2-e^2 + e^2 \cos 2\phi) \sqrt{2(2-e^2) - e^4 + 2e^2 \cos 2\phi + e^4 \cos^2 2\phi}}; \quad (4)$$

neither factor of the denominator of (4) is zero for $0 \leq \phi \leq 90^\circ$. Hence to find the maximum from (4), place the numerator equal to zero and solve for $\cos 2\phi$ to obtain

$$\cos 2\phi = 1 + 2(\sqrt{1 - e^2} - 1)/e^2. \quad (5)$$

The flattening, f , of the reference ellipsoid is given by $f = (a-b)/a = 1 - b/a = 1 - \sqrt{1 - e^2}$, whence $e^2 = 2f - f^2$, we can write

$$\cos 2\phi = 1 - 2(1 - \sqrt{1 - e^2})/e^2 = 1 - 2f/(2f - f^2) = -f/(2-f)$$

$$\sin^2 2\phi = 1 - \cos^2 2\phi = 1 - f^2/(2-f)^2 = 4(1-f)/(2-f)^2$$

$$\sin^2 \phi = \frac{1}{2} - \frac{1}{2} \cos 2\phi = \frac{1}{2} + \frac{f}{2(2-f)} = \frac{1}{2-f}.$$

$$1 - e^2 \sin^2 \phi = 1 - f(2-f)/(2-f) = 1 - f.$$

$$\text{from (3)} \quad \sin^2 \Delta\phi = \frac{e^4}{4} \frac{\sin^2 2\phi}{1 - e^2 \sin^2 \phi} = \frac{f^2(2-f)^2}{4} \frac{4(1-f)}{(2-f)^2} \frac{1}{1-f}$$

$$\sin^2 \Delta\phi = f^2$$

hence $\sin \Delta\phi_{\max} = f = 0.0033900753$ (Clarke 1866 ellipsoid).

$$\cos 2\phi = -0.001697914$$

$$\phi = 45^\circ 02'55.106,$$

and $\Delta\phi_{\max} = 0^\circ 11' 39.255$,

$$\theta = \phi - \Delta\phi = 44^\circ 51' 15.851.$$

Now from (3) and $\theta = \phi - \Delta\phi$ a complete table for corresponding latitudes can be computed readily since complete tables for N to 0.001 meter have been computed for most reference ellipsoids. [2]

To develop $\sin \Delta\phi$ is a series for computation without the necessity of tables of N , write (3) in the form $\sin \Delta\phi = e^2 \sin \phi \cos \phi (1 - e^2 \sin^2 \phi)^{-1/2}$, then expand the radical by the binomial formula to get

$$\sin \Delta\phi = e^2 \sin \phi \cos \phi \left(1 + \frac{e^2}{2} \sin^2 \phi + \frac{3}{8} e^4 \sin^4 \phi + \frac{5}{16} e^6 \sin^6 \phi\right)$$

$$= \frac{e^2}{2} \sin 2\phi + \frac{e^4}{2} \sin^3 \phi \cos \phi + \frac{3}{8} e^6 \sin^5 \phi \cos \phi + \frac{5}{16} e^8 \sin^7 \phi \cos \phi. \quad (7)$$

now $\sin^3 \phi \cos \phi = \frac{1}{4} \sin 2\phi - \frac{1}{8} \sin 4\phi$
 $\sin^5 \phi \cos \phi = \frac{5}{32} \sin 2\phi - \frac{1}{8} \sin 4\phi + \frac{1}{32} \sin 6\phi$
 $\sin^7 \phi \cos \phi = \frac{7}{64} \sin 2\phi - \frac{7}{64} \sin 4\phi + \frac{3}{64} \sin 6\phi - \frac{1}{128} \sin 8\phi,$

and the values from (8) placed in (7) give

$$\sin \Delta\phi = c_1 \sin 2\phi - c_2 \sin 4\phi + c_3 \sin 6\phi - c_4 \sin 8\phi;$$

where $c_1 = \frac{e^2}{2} + \frac{e^4}{8} + \frac{15}{256} e^6 + \frac{35}{1024} e^8$, $c_2 = \frac{e^4}{16} + \frac{3}{64} e^6 + \frac{35}{1024} e^8$,
 $c_3 = \frac{3}{256} e^6 + \frac{15}{1024} e^8$, $c_4 = \frac{5}{2048} e^8$ (9)

If $\Delta\phi$ in radians is desired rather than $\sin \Delta\phi$, then in the expansion

$$\text{arc sin } x = x(1 + x^2/6 + \dots) \quad (10)$$

let $x = \sin \Delta\phi$, whence $\text{arc sin } x = \Delta\phi$ and

$$\Delta\phi = \sin \Delta\phi (1 + \frac{\sin^2 \Delta\phi}{6} + \dots). \quad (11)$$

from (9) with $e^2 = 0.006768657997$, find

$$c_1 = 0.003390074081, c_2 = 0.000002878029, \quad (12)$$

$$c_3 = 3.665 \times 10^{-9}, c_4 = 5 \times 10^{-12} \text{ (negligible)}.$$

For estimation purposes the values in (12) may be written

$$c_1 = 3 \times 10^{-3}, c_2 = 3 \times 10^{-6}, c_3 = 4 \times 10^{-9} \quad (13)$$

$$c_1^2 = 9 \times 10^{-6}, c_2^2 = 9 \times 10^{-12}, c_3^2 = 2 \times 10^{-17}.$$

With the value of $\sin \Delta\phi$ from (9) in terms of the estimation coefficients (13) we examine the term $(\sin^3 \Delta\phi)/6$ in (11), and find that (11) may be written $\Delta\phi = \sin \Delta\phi +$

$$\frac{c_1^3}{6} \sin^3 2\phi - \frac{c_1^2 c_2}{2} \sin^2 2\phi \sin 4\phi. \quad (14)$$

since $\sin^3 2\phi = \frac{3}{4} \sin 2\phi - \frac{1}{4} \sin 6\phi$

$$\sin^2 2\phi \sin 4\phi = \frac{1}{2} \sin 4\phi - \frac{1}{8} \sin 8\phi, \quad (15)$$

equation (14) may be written, with the value of $\sin \Delta\phi$ from (9), as

$$\Delta\phi(\text{radians}) = \left(c_1 + \frac{c_1^3}{8} \right) \sin 2\phi - \left(c_2 + \frac{c_1^2 c_2}{4} \right) \sin 4\phi + \left(c_3 - \frac{c_1^3}{24} \right) \sin 6\phi, \quad (16)$$

or

$$\Delta\phi(\text{seconds}) = (206,264.8062) \Delta\phi(\text{radians}),$$

where c_1, c_2, c_3 , are given by the expressions in (9) in terms of the eccentricity of the meridian ellipse.

We now check equations (9) and (17), using again values for the Clarke 1866 spheroid and for the maximum value of $\Delta\phi$.

From (9) and (12) we have

$$\sin \Delta\phi = 3.390074081 \times 10^{-3} \sin 2\phi - 2.878029 \times 10^{-6} \sin 4\phi + 3.665 \times 10^{-9} \sin 6\phi. \quad (18)$$

From (12) and (17) find

$$\Delta\phi \text{ (seconds)} = 699^\circ 2540 \sin 2\phi - 0^\circ 5936 \sin 4\phi + 0^\circ 0004 \sin 6\phi. \quad (19)$$

Now with $\phi = 45^\circ 02' 55'' 106$ from (6), find $\sin 2\phi = +0.99999856$, $\sin 4\phi = -0.00339575$, $\sin 6\phi = -0.99998703$. (20)

The values from (20) placed in (18) give

$$\sin \Delta\phi = 0.0033900753 \text{ which checks the value found before in the 10th place. (See (6)).}$$

The values from (20) placed in (19) give $\Delta\phi \text{ (seconds)} = 699^\circ 2530 + 0^\circ 0020 - 0^\circ 0004 = 699^\circ 2546$, or $11' 39'' 255$ which is the value of $\Delta\phi_{\max}$. (See (6)).

For explicit computation of ϕ as a function of θ , we obtain the following development. From the second and third of each set of equations (2), find

$$h + N = a \cos \theta / \cos \phi = Ne^2 + a \sin \theta / \sin \phi, \text{ whence}$$

$$\tan \phi = \tan \theta + (e^2/a \cos \theta) (N \sin \phi)$$

$$\text{or } \tan \phi = \tan \theta + (e^2 \sqrt{1 + \tan^2 \theta}) (\tan \phi / \sqrt{1 + (1 - e^2) \tan^2 \phi}). \quad (21)$$

(NOTE: Equation (21) also follows directly from (3) by expanding the left hand side and dividing every term by the product $\cos \phi \cos \theta$. $\sin \Delta\phi = \sin \phi \cos \theta - \cos \phi \sin \theta$.)

Now (21) is of the form

$$y = x + h(x) g(y)$$

and the Lagrange expansion formula may be used, [3].

Equation (21) may be written

$$y = x + e^2(1 + x^2)^{1/2} . \quad y[1 + (1 - e^2)y^2]^{-1/2} \quad (22)$$

$$\text{Where } y = \tan \phi, x = \tan \theta, h(x) = e^2(1 + x^2)^{1/2}, g(y) = y[1 + (1 - e^2)y^2]^{-1/2}.$$

By use of the Lagrange expansion formula, a function $f(y)$ which has a power series representation may be written

$$f(y) = f(x) + \sum_{n=1}^{\infty} \frac{\{h(x)\}^n}{n!} \frac{d^{n-1}}{dx^{n-1}} f'(x) \{g(x)\}^n \quad (23)$$

$$\text{With } y = \tan \phi, f(y) = \arctan y = \phi; x = \tan \theta, f(x) = \arctan x = \theta, f'(x) = \frac{1}{1+x^2} = \cos^2 \theta,$$

equation (23) may be written

$$\Delta\phi = \phi - \theta = \sum_{n=1}^{\infty} \frac{e^{2n} \sec^n \theta}{n!} \frac{d^{n-1}}{dx^{n-1}} G(\theta) \quad (24)$$

$$\text{Where } G(\theta) = (\cos^2 \theta) (\tan \theta / \sqrt{1 + (1 - e^2) \tan^2 \theta})^n, \theta = \arctan x.$$

First write $G(\theta)$ in the form

$$G(\theta) = (\cos^2\theta) [\sin \theta (1 - e^2 \sin^2 \theta)^{-1/2}]^n. \quad (25)$$

We wish to retain terms to e^8 , but no higher. Hence we expand the radical in (25) to powers of e^6 since for $n = 1$, equation (25) will be multiplied by e^2 as seen from (24). Using the binomial formula for the expansion we can write (25) as

$$G(\theta) = (\cos^2\theta) (\sin \theta + \frac{1}{2}e^2 \sin^3 \theta + \frac{3}{8}e^4 \sin^5 \theta + \frac{5}{16}e^6 \sin^7 \theta)^n. \quad (26)$$

To retain terms in e^8 we will need the first four terms of the expansion (24) and hence three derivatives of (26). Now $\theta = \arctan x$, $\frac{d\theta}{dx} = \frac{1}{1+x^2} = \cos^2\theta$, $\frac{d^2\theta}{dx^2} = -2 \sin \theta \cos^3\theta$,

$$\frac{d^3\theta}{dx^3} = 2(3 \sin^2 \theta - \cos^2 \theta) \cos^4 \theta.$$

$$\frac{dG}{dx} = \frac{dG}{d\theta} \frac{d\theta}{dx} = \left(\frac{dG}{d\theta} \right) \cos^2\theta \quad (27)$$

$$\begin{aligned} \frac{d^2G}{dx^2} &= \left(\frac{d^2G}{d\theta^2} \right) \left(\frac{d\theta}{dx} \right)^2 + \left(\frac{dG}{d\theta} \right) \left(\frac{d^2\theta}{dx^2} \right) \\ &= \cos^3\theta \left[\left(\frac{d^2G}{d\theta^2} \right) \cos \theta - 2 \left(\frac{dG}{d\theta} \right) \sin \theta \right] \end{aligned} \quad (28)$$

$$\begin{aligned} \frac{d^3G}{dx^3} &= \left(\frac{d^3G}{d\theta^3} \right) \left(\frac{d\theta}{dx} \right)^3 + 3 \left(\frac{d^2G}{d\theta^2} \right) \left(\frac{d\theta}{dx} \right) \left(\frac{d^2\theta}{dx^2} \right) + \left(\frac{dG}{d\theta} \right) \left(\frac{d^3\theta}{dx^3} \right) \\ &= \cos^4\theta \left[\left(\frac{d^3G}{d\theta^3} \right) \cos^2\theta - 6 \left(\frac{d^2G}{d\theta^2} \right) \cos \theta \sin \theta + 2 \left(\frac{dG}{d\theta} \right) (3 \sin^2\theta - \cos^2\theta) \right] \end{aligned} \quad (29)$$

Because of the factor e^{2n} as a multiplier in (24), we can assume the following terms for (26) for $n = 1, 2, 3, 4$:

<u>n</u>	<u>$G(\theta)$</u>
1	$(\cos^2\theta) (\sin \theta + \frac{1}{2}e^2 \sin^3 \theta + \frac{3}{8}e^4 \sin^5 \theta + \frac{5}{16}e^6 \sin^7 \theta)$
2	$(\cos^2\theta) (\sin^2 \theta + e^2 \sin^4 \theta + e^4 \sin^6 \theta)$
3	$(\cos^2\theta) (\sin^3 \theta + \frac{3}{2}e^2 \sin^5 \theta)$
4	$(\cos^2\theta) (\sin^4 \theta)$

The terms of (24) are now formed by finding the derivatives of $G(\theta)$ with respect to θ using the appropriate form of $G(\theta)$ from (30) and finding

$\frac{dG}{dx}$, $\frac{d^2G}{dx^2}$, $\frac{d^3G}{dx^3}$ by means of (27), (28), and (29).

Thus it is found that the first four terms of (24) are

$$\begin{aligned} e^2 \sin \theta \cos \theta + \frac{1}{2}e^4 \sin^3 \theta \cos \theta + (3/8)e^6 \sin^5 \theta \cos \theta + (5/16)e^8 \sin^7 \theta \cos \theta; \\ e^4 \sin \theta \cos \theta + (2e^6 - 2e^4) \sin^3 \theta \cos \theta + (3e^8 - 3e^6) \sin^5 \theta \cos \theta - 4e^3 \sin^7 \theta \cos \theta; \\ e^6 \sin \theta \cos \theta + (5e^8 - \frac{35}{6}e^6) \sin^3 \theta \cos \theta + (\frac{35}{6}e^6 - \frac{77}{4}e^8) \sin^5 \theta \cos \theta + \frac{63}{4}e^8 \sin^7 \theta \cos \theta; \\ e^8 \sin \theta \cos \theta - 12e^8 \sin^3 \theta \cos \theta + 30e^8 \sin^5 \theta \cos \theta - 20e^8 \sin^7 \theta \cos \theta. \end{aligned}$$

Adding corresponding terms of these we have

$$\begin{aligned} \Delta\phi = \phi - \theta = (e^2 + e^4 + e^6 + e^8) \sin \theta \cos \theta - [(3/2)e^4 + (23/6)e^6 + 7e^8] \sin^3 \theta \cos \theta \\ + [(77/24)e^6 + (55/4)e^8] \sin^5 \theta \cos \theta - (127/16)e^8 \sin^7 \theta \cos \theta. \end{aligned} \quad (31)$$

Now $\sin \theta \cos \theta = \frac{1}{2} \sin 2\theta$

$$\begin{aligned} \sin^3 \theta \cos \theta &= \frac{1}{4} \sin 2\theta - (1/8) \sin 4\theta \\ \sin^5 \theta \cos \theta &= (5/32) \sin 2\theta - (1/8) \sin 4\theta + (1/32) \sin 6\theta \\ \sin^7 \theta \cos \theta &= (7/64) \sin 2\theta - (7/64) \sin 4\theta + (3/64) \sin 6\theta - (1/128) \sin 8\theta. \end{aligned} \quad (32)$$

The values from (32) placed in (31) give finally

$$\phi = \phi - \theta = C_1 \sin 2\theta + C_2 \sin 4\theta + C_3 \sin 6\theta + C_4 \sin 8\theta$$

$$\text{where } C_1 = \frac{1}{2}e^2 + (1/8)e^4 + (11/256)e^6 + (31/1024)e^8 \quad (33)$$

$$C_2 = (3/16)e^4 + (5/64)e^6 + (25/1024)e^8$$

$$C_3 = (77/768)e^6 + (59/1024)e^8, C_4 = (127/2048)e^8.$$

Again for the Clarke 1866 spheroid

$$e^2 = 0.006768657997, e^4 = 0.00004581473108, \quad (34)$$

$$e^6 = 0.0000003101042459, e^8 = 0.000000002098989584, \text{ whence from (33)}$$

$$C_1 = 3.390069228 \times 10^{-3}, C_2 = 8.614540216 \times 10^{-6}, \quad (35)$$

$$C_3 = 3.12121 \times 10^{-8}, C_4 = 1.302 \times 10^{-10}.$$

We now check (33) directly from the maximum value of $\Delta\phi$, the assumption being that if it holds for the maximum it will hold for all $\Delta\phi$.

From (6) $\theta = 44^\circ 51' 15'' 851$, whence

$$\sin 2\theta = 0.99998708, \sin 4\theta = 0.01016441, \sin 6\theta = -0.99988377, \sin 8\theta = -0.02032777. \quad (36)$$

With the values from (35) and (36) find

$$C_1 \sin 2\theta = 0.0033900254283 \quad C_3 \sin 6\theta = -0.0000000312085$$

$$\begin{array}{l} C_2 \sin 4\theta = \underline{0.0000000875617} \\ \quad \quad \quad 0.0033901129900 \end{array} \quad \begin{array}{l} C_4 \sin 8\theta = \underline{-0.0000000000026} \\ \quad \quad \quad -0.0000000312111 \end{array}$$

$$\Delta\phi \text{ (radians)} = 0.0033900817789$$

$$\Delta\phi \text{ (seconds)} = (0.0033900817789) (206,264.8062) = 699.2545611,$$

or $\Delta\phi_{\max} = 11' 39'' 255$ which checks (6).

Note that the term $C_4 \sin 8\theta$ does not contribute to the result. Also, only eight place tables of trigonometric natural functions were used, [4].

Hence for geodetic latitude ϕ corresponding to geocentric latitude θ on the auxiliary sphere, the following formulas are sufficient for any spheroid of reference to 0.001 second:

$$\begin{aligned}\Delta\phi \text{ (seconds)} &= \phi - \theta = (206,264.8062) (C_1 \sin 2\theta + C_2 \sin 4\theta + C_3 \sin 6\theta) \\ C_1 &= \frac{1}{2}e^2 + (1/8)e^4 + (11/256)e^6 + (31/1024)e^8, \quad C_2 = (3/16)e^4 + (5/128)e^6 + (25/1024)e^8, \\ C_3 &= -(77/768)e^6 + (59/1024)e^8, e \text{ is eccentricity of the meridian.}\end{aligned}\quad (37)$$

Now we have noted that the geocentric latitude θ as defined here is called the parametric or reduced latitude in geodetic nomenclature and has a corresponding geodetic latitude ϕ_0 as shown in Figure 1. From (1) we see that they are related by the equation $\tan \phi_0 = (\tan \theta)/\sqrt{1 - e^2}$. (38) For instance from (6) for $\theta = 44^\circ 51' 15.851$ find from (38) that $\phi_0 = 44^\circ 57' 06.069$. Also from (6), $\phi = 45^\circ 02' 55.106$, whence for $\theta = 44^\circ 51' 15.851$ we have $\Delta\phi_0 = \phi - \phi_0 = 0^\circ 05' 49.037$. (39)

Using the values from (34), equation (37) may be written for the Clarke 1866 spheroid as

$$\Delta\phi \text{ (seconds)} = \phi - \theta = 699.2520 \sin 2\theta + 1.7769 \sin 4\theta + 0.0064 \sin 6\theta. \quad (40)$$

From G. & G.S. special publication No. 67, [5], find

$$\phi_0 - \theta = 350.2202 \sin 2\theta + 0.2973 \sin 4\theta + 0.0003 \sin 6\theta. \quad (41)$$

Subtracting (41) from (40) one finds

$$\Delta\phi_0 = \phi - \phi_0 = 349.0318 \sin 2\theta + 1.4796 \sin 4\theta + 0.0061 \sin 6\theta. \quad (42)$$

With $\theta = 44^\circ 51' 15.851$ and the values from (28), equation (42) gives

$$\Delta\phi_0 = 5' 49.036 \text{ which is within 0.001 second of (39).}$$

From the second and third members of each set of equations (2) find

$$h = a \sin \theta \csc \phi - (1 - e^2) N = a \cos \theta \sec \phi - N. \quad (43)$$

To develop h in a power series in ϕ , free of N and θ , refer again to Figure 1. If the tangent at Q meets OP in P', then $PP' = a - (a^2/N) \sec \Delta\phi$, $h = PP' \cos \Delta\phi$, whence

$$h/a = \cos \Delta\phi - a/N = \cos \Delta\phi - \sqrt{1 - e^2 \sin^2 \phi} \quad (44)$$

With $\cos \Delta\phi = \sqrt{1 - \sin^2 \Delta\phi}$, and the value of $\sin \Delta\phi$ from (3), (44) may be written

$$h/a = (1 - e^2 \sin^2 \phi)^{-1/2} \{ [1 - e^2 \sin^2 \phi (1 + e^2 \cos^2 \phi)]^{1/2} - 1 + e^2 \sin^2 \phi \}. \quad (45)$$

The relation (45) may also be obtained directly from equation (2) by eliminating θ between the equations $a \cos \theta = (h + N) \cos \phi$ and $a \sin \theta = [h + N(1 - e^2)] \sin \phi$.

Expanding the two radicals by the binomial formula, (45) may be written

$$\begin{aligned}h/a &= (e^2/2 - e^4/2) \sin^2 \phi + [(5/8)e^4 - \frac{1}{2}e^6 - (1/8)e^8] \sin^4 \phi \\ &\quad + [(9/16)e^6 - (1/4)e^8] \sin^6 \phi + (53/128)e^8 \sin^8 \phi\end{aligned}\quad (46)$$

Now $\sin^2 \phi = \frac{1}{2} (1 - \cos 2\phi)$

$$\sin^4 \phi = 3/8 - \frac{1}{2} \cos 2\phi + (1/8) \cos 4\phi$$

$$\sin^6 \phi = 5/16 - (15/32) \cos 2\phi + (3/16) \cos 4\phi - (1/32) \cos 6\phi$$

$$\sin^8 \phi = 35/128 - (7/16) \cos 2\phi + (7/32) \cos 4\phi - (1/16) \cos 6\phi + (1/128) \cos 8\phi$$

and these values placed in (46) give

$$h = a (d_1 - d_2 \cos 2\phi + d_3 \cos 4\phi - d_4 \cos 6\phi + d_5 \cos 8\phi)$$

$$d_1 = e^2/4 - e^4/64 - (3/256)e^6 - (233/16,384)e^8, \quad 0 \leq h \leq a - b \quad (47)$$

$$d_2 = e^2/4 + e^4/16 + 7e^6/512 + 3e^8/2048,$$

$$d_3 = 5e^4/64 + 11e^6/256 + 115e^8/4096$$

$$d_4 = 9e^6/512 + 37e^8/2048, \quad d_5 = 53e^8/16,384$$

a, e are the semimajor axis, eccentricity of the reference ellipsoid.

We now check (47) using the values of a and e for the Clarke 1866 spheroid. From (34) and (47) with $a = 6,378,206.4$ meters one has $h(\text{meters}) = 10,788.3852 - 10,811.2646 \cos 2\phi + 22.9147 \cos 4\phi - 0.0350 \cos 6\phi$. (48)

As a check, equation (48) should give

$$h = a - b = 6,378,206.4 - 6,356,583.8 = 21,622.6 \text{ meters}$$

when $\phi = 90^\circ$. Placing $\phi = 90^\circ$ in (48) gives

$$h = 10,788.3852 + 10,811.2646 + 22.9147 + 0.0350 = 21,622.5995 \text{ meters.}$$

Since we have the values of θ and ϕ for $\Delta\phi_{\max}$ from (6) we now check the value given by (48) against the closed formula (43),

$$h = a \frac{\cos \theta}{\cos \phi} - N(\phi).$$

$$\phi = 45^\circ 02' 55\overset{''}{.}106, \cos \phi = 0.70650624, \cos 2\phi = -0.00169788$$

$$\cos 4\phi = -0.99999423, \cos 6\phi = +0.00509360.$$

$$\theta = 44^\circ 51' 15\overset{''}{.}851, \cos \theta = 0.70890136, N(\phi) = 6,389,045.266.$$

$$h = a \frac{\cos \theta}{\cos \phi} - N(\phi) = (6,378,206.4) (0.70890136) / (0.70650624) - 6,389,045.266 \\ = 6,399,829.094 - 6,389,045.266 = 10,783.828 \text{ meters}$$

Equation (48) gives

$$h = 10,788.3852 + 18.3562 - 22.9146 - 0.0002 = 10,783.827 \text{ meters,}$$

when $\phi = 0, h = 0$ and (48) gives

$$h = 10,788.3852 - 10,811.2646 + 22.9147 - 0.0350 = +0.0003 \text{ meter.}$$

Unless h were required to very high precision it is clear from the above checks that the formula (48) is adequate.

SUMMARY OF LATITUDE FORMULAE

If θ is the geocentric latitude of a point P ($a \cos \theta$, $a \sin \theta$) on the auxiliary sphere, then the corresponding geodetic latitude ϕ of P at an altitude h above the ellipsoid reference, as shown in figure 1, is given by

$$\begin{aligned}\sin \Delta\phi &= \sin(\phi - \theta) = (e^2/2a) N \sin 2\phi = (e^2 \sin \phi \cos \phi) / \sqrt{1 - e^2 \sin^2 \phi} \\ &= c_1 \sin 2\phi - c_2 \sin 4\phi + c_3 \sin 6\phi - c_4 \sin 8\phi, \\ c_1 &= e^2/2 + e^4/8 + 15e^6/256 + 35e^8/1024, \\ c_2 &= e^4/16 + 3e^6/64 + 35e^8/1024 \\ c_3 &= 3e^6/256 + 15e^8/1024, c_4 = 5e^8/2048 \\ e &= \text{eccentricity of the meridian ellipse.}\end{aligned}\tag{49}$$

With the same coefficients as (49), we have

$$\Delta\phi \text{ (radians)} = (c_1 + c_1^3/8) \sin 2\phi - (c_2 + \frac{c_1^2}{4} c_2) \sin 4\phi + (c_3 - \frac{c_1^3}{24}) \sin 6\phi\tag{50}$$

and in seconds

$$\Delta\phi \text{ (seconds)} = (206,264.8062) [(c_1 + c_1^3/8) \sin 2\phi - (c_2 + c_1^2 c_2/4) \sin 4\phi + (c_3 - c_1^3/24) \sin 6\phi].\tag{51}$$

To express $\Delta\phi$ in terms of θ , instead of ϕ , we have the relation

$$\tan \phi = \tan \theta + (e^2/a \cos \theta) N \sin \phi$$

Which may be expanded by use of the Lagrange expansion formula to give

$$\begin{aligned}\Delta\phi &= \phi - \theta = C_1 \sin 2\theta + C_2 \sin 4\theta + C_3 \sin 6\theta + C_4 \sin 8\theta \\ C_1 &= e^2/2 + e^4/8 + 11e^6/256 + 31e^8/1024, \\ C_2 &= 3e^4/16 + 5e^6/64 + 25e^8/1024, \\ C_3 &= 77e^6/768 + 59e^8/1024, C_4 = 127e^8/2048.\end{aligned}\tag{52}$$

For checks within 0.001 second, (52) may be written $\Delta\phi \text{ (seconds)} = (206,264.8062)$

$$(C_1 \sin 2\theta + C_2 \sin 4\theta + C_3 \sin 6\theta)\tag{53}$$

with C_1, C_2, C_3 the same as in (52).

$$h/a = \cos \Delta\phi - a/N = (1 - e^2 \sin^2 \phi)^{-1/2} \{ [1 - e^2 \sin^2 \phi (1 + e^2 \cos^2 \phi)]^{1/2} - 1 + e^2 \sin^2 \phi \}$$

$$h = a(d_1 - d_2 \cos 2\phi + d_3 \cos 4\phi - d_4 \cos 6\phi + d_5 \cos 8\phi)\tag{54}$$

$$d_1 = e^2/4 - e^4/64 - 3e^6/256 - 233e^8/16,384$$

$$d_2 = e^4/16 + 7e^6/512 + 3e^8/2048 \quad 0 \leq h \leq a - b$$

$$d_3 = 5e^6/256 + 11e^8/4096$$

$$d_4 = 9e^8/2048, d_5 = 53e^8/16,384$$

a = radius of the auxiliary sphere (semimajor axis of the reference ellipsoid).

For the Clarke 1866 spheroid of reference we have from the above formulas:

$$\Delta\phi \text{ (seconds)} = \phi - \theta = 699".2540 \sin 2\phi - 0".5936 \sin 4\phi + 0".0004 \sin 6\phi, \quad (55)$$

$$\Delta\phi \text{ (seconds)} = \phi - \theta = 699".2520 \sin 2\theta + 1".7769 \sin 4\theta + 0".0064 \sin 6\theta, \quad (56)$$

$$\Delta\phi_0 \text{ (seconds)} = \phi - \phi_0 = 349".0318 \sin 2\theta + 1".4796 \sin 4\theta + 0".0061 \sin 6\theta, \quad (57)$$

$$h \text{ (meters)} = 10,788.3852 - 10,811.2646 \cos 2\phi + 22.9147 \cos 4\phi - 0.0350 \cos 6\phi. \quad (58)$$

For the Clarke 1866 spheroid, the maximum value of $\Delta\phi$ was found to be $1' 39".255$ at $\phi = 45^\circ 02' 55".106$.

The value of $\Delta\phi_0$, at this maximum of $\Delta\phi$, was found to be $5' 49".037$. Finally (58) was checked at $\phi = 0, 90^\circ$ and $\phi = 45^\circ 02' 55".106$. At $\phi = 90^\circ$, the check was within 0.0005 meter; at $\phi = 0$, it was within 0.0003 meter; at $\phi = 45^\circ 02' 55".106$, it was within 0.001 meter.

The following latitude formulae are from C & G.S. Special Publication No. 67, [5], Where ϕ_0, ψ, θ are shown in figure 1.

$$\psi - \psi = 700".4385 \sin 2\phi_0 - 1".1893 \sin 4\phi_0 + 0".0027 \sin 6\phi_0 \quad (59)$$

$$\phi_0 - \psi = 700".4385 \sin 2\psi + 1".1893 \sin 4\psi + 0".0027 \sin 6\psi \quad (60)$$

$$\phi_0 - \theta = 350".2202 \sin 2\phi_0 - 0".2973 \sin 4\phi_0 + 0".0003 \sin 6\phi_0 \quad (61)$$

$$\phi_0 - \theta = 350".2202 \sin 2\theta + 0".2973 \sin 4\theta + 0".0003 \sin 6\theta \quad (62)$$

$$\theta - \psi = 350".2202 \sin 2\theta - 0".2973 \sin 4\theta + 0".0003 \sin 6\theta \quad (63)$$

$$\theta - \psi = 350".2202 \sin 2\psi + 0".2973 \sin 4\psi + 0".0003 \sin 6\psi \quad (64)$$

The above are the series expansions for the expressions given as equation (1) page 12, that is

$$\tan \psi = \sqrt{1 - e^2} \tan \theta = (1 - e^2) \tan \phi_0. \quad (65)$$

REFERENCES

- [1] Geodesy, Hosmer, Second Edition, John Wiley & Sons, 1930, page 181.
- [2] Army Map Service TM No. 67, Latitude Functions, Hayford Spheroid (International) 1944; AMS TM5-241-18, Latitude Functions, Clarke 1866 Spheroid, December 1960.
- [3] Course in Higher Analysis, Whittaker and Watson, 1962 Edition, page 133, Cambridge University Press.
- [4] Peters, J. Eight-place Tables of Trigonometric Functions, Berlin 1939; Edward Brothers, Inc., Photo-Lithoprint Reproductions, Ann Arbor, Michigan, 1943.
- [5] Latitude Development Connected With Geodesy and Cartography, U.S.C. & G.S. Special Publication No. 67, G.P.O., 1921.

DEVELOPMENT

SECTION 2. SPHERICAL RECTANGULAR COORDINATE SYSTEM; LOCI

THE GREAT CIRCLE TRACK AS DETERMINED BY THE GEOGRAPHICAL COORDINATES OF TWO GIVEN POINTS ON THE AUXILIARY SPHERE

In figure 2, the two given points are $Q_1(\theta_1, \lambda_1)$, $Q_2(\theta_2, \lambda_2)$. The great circle track is then determined from the spherical triangle PQ_1Q_2 . In order to simplify the computations and to have well balanced triangles from which to compute, one finds the point $O(\theta_0, \lambda_0)$ where the great circle Q_1Q_2 is orthogonal to a meridian λ_0 . One then works from the right spherical triangle POQ' by adding or subtracting increments of distance from $S_1 = OQ_1$ to get the distance S . One always has then a strong right triangle POQ' from which to compute the latitude, longitude and azimuth α of the point $Q'(\theta', \lambda')$ on the base line Q_1Q_2 .

DERIVATION OF FORMULAE

From right spherical triangle POQ'

$$\cos(\lambda_0 - \lambda') = \tan\left(\frac{\pi}{2} - \theta_0\right) \cot\left(\frac{\pi}{2} - \theta'\right) = \cot \theta_0 \tan \theta' \quad (1)$$

If the points Q_1 and Q_2 satisfy (1), we have by substituting their coordinates in (1)

$$\cos(\lambda_0 - \lambda_1) = \cot \theta_0 \tan \theta_1, \quad (2)$$

$$\cos(\lambda_0 - \lambda_2) = \cot \theta_0 \tan \theta_2$$

By forming the ratios of (2), expanding $\cos(\lambda_0 - \lambda_1)$ and $\cos(\lambda_0 - \lambda_2)$, dividing the left member numerator and denominator by $\cos \lambda_0$, one derives the formula

$$\tan \lambda_0 = \frac{\tan \theta_2 \cos \lambda_1 - \tan \theta_1 \cos \lambda_2}{\tan \theta_1 \sin \lambda_2 - \tan \theta_2 \sin \lambda_1} \quad (3)$$

Equations (2) may be written as

$$\cot \theta_0 = \cot \theta_1 \cos(\lambda_0 - \lambda_1) = \cot \theta_2 \cos(\lambda_0 - \lambda_2) \quad (4)$$

From right spherical triangle POQ' one has also

$$\sin \alpha' = \frac{\sin\left(\frac{\pi}{2} - \theta_0\right)}{\sin\left(\frac{\pi}{2} - \theta'\right)} = \frac{\cos \theta_0}{\cos \theta'}, \quad (5)$$

$$\cos \alpha' = \frac{\tan S}{\tan\left(\frac{\pi}{2} - \theta'\right)} = \tan S \tan \theta', \quad (6)$$

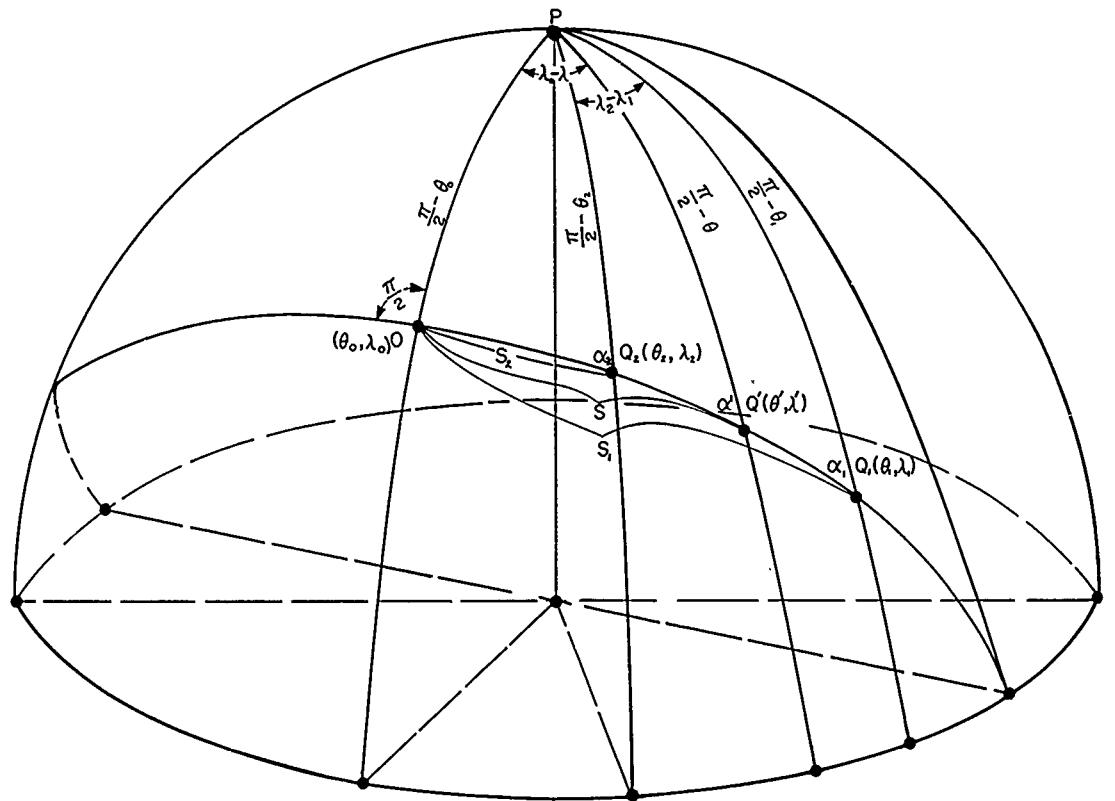


Figure 2. The great circle track configuration.

$$\sin \theta' = \cos S \sin \theta_0, \quad (7)$$

$$\tan(\lambda_0 - \lambda') = \frac{\tan S}{\sin\left(\frac{\pi}{2} - \theta_0\right)} = \frac{\tan S}{\cos \theta_0}, \quad (8)$$

$$\tan \alpha' = \frac{\tan\left(\frac{\pi}{2} - \theta_0\right)}{\sin S} = \frac{\cot \theta_0}{\sin S} \quad (9)$$

$$\sin \theta' = \cot(\lambda_0 - \lambda') \cot \alpha' \text{ or}$$

$$\tan \alpha' \sin \theta' \tan(\lambda_0 - \lambda') = 1 \quad (10)$$

From the oblique spherical triangle PQ_1Q_2 find

$$\begin{aligned} \cos(\lambda_2 - \lambda_1) &= -\cos(\pi - \alpha_2) \cos \alpha_1 + \sin(\pi - \alpha_2) \sin \alpha_1 \cos(S_1 - S_2) \text{ or} \\ \cos(\lambda_2 - \lambda_1) &= \cos \alpha_1 \cos \alpha_2 + \sin \alpha_1 \sin \alpha_2 \cos(S_1 - S_2). \end{aligned} \quad (10.1)$$

Computations from the formulae

First compute λ_0 and θ_0 from (3) and (4).

$$\tan \lambda_0 = \frac{\tan \theta_2 \cos \lambda_1 - \tan \theta_1 \cos \lambda_2}{\tan \theta_1 \sin \lambda_2 - \tan \theta_2 \sin \lambda_1}$$

$$\cot \theta_0 = \cot \theta_1 \cos(\lambda_0 - \lambda_1) = \cot \theta_2 \cos(\lambda_0 - \lambda_2)$$

Next compute α_1 and α_2 from (5),

$$\sin \alpha_1 = \frac{\cos \theta_0}{\cos \theta_1}, \quad \sin \alpha_2 = \frac{\cos \theta_0}{\cos \theta_2}$$

Then S_1 and S_2 from (6)

$$\tan S_1 = \cos \alpha_1 \cot \theta_1, \quad \tan S_2 = \cos \alpha_2 \cot \theta_2$$

The computations for α_1 , α_2 ; S_1 and S_2 are checked by (10.1)

$$\cos(\lambda_2 - \lambda_1) = \cos \alpha_1 \cos \alpha_2 + \sin \alpha_1 \sin \alpha_2 \cos(S_1 - S_2).$$

Now for equally spaced intervals along the great circle track, for instance in 100 nautical mile intervals, let $S = S_1 \pm 100k$.

$$k = 1, 2, 3, \dots, N.$$

With these values of S one computes successively corresponding values of θ' , λ' and α' from equations (7), (8), and (9)

$$\sin \theta' = \sin \theta_0 \cos S, \quad \tan(\lambda_0 - \lambda') = \frac{\tan S}{\cos \theta_0}, \quad \tan \alpha' = \frac{\cot \theta_0}{\sin S}.$$

These last computations are checked by (10)

$$\sin \theta' \cdot \tan(\lambda_0 - \lambda') \cdot \tan \alpha' = 1.$$

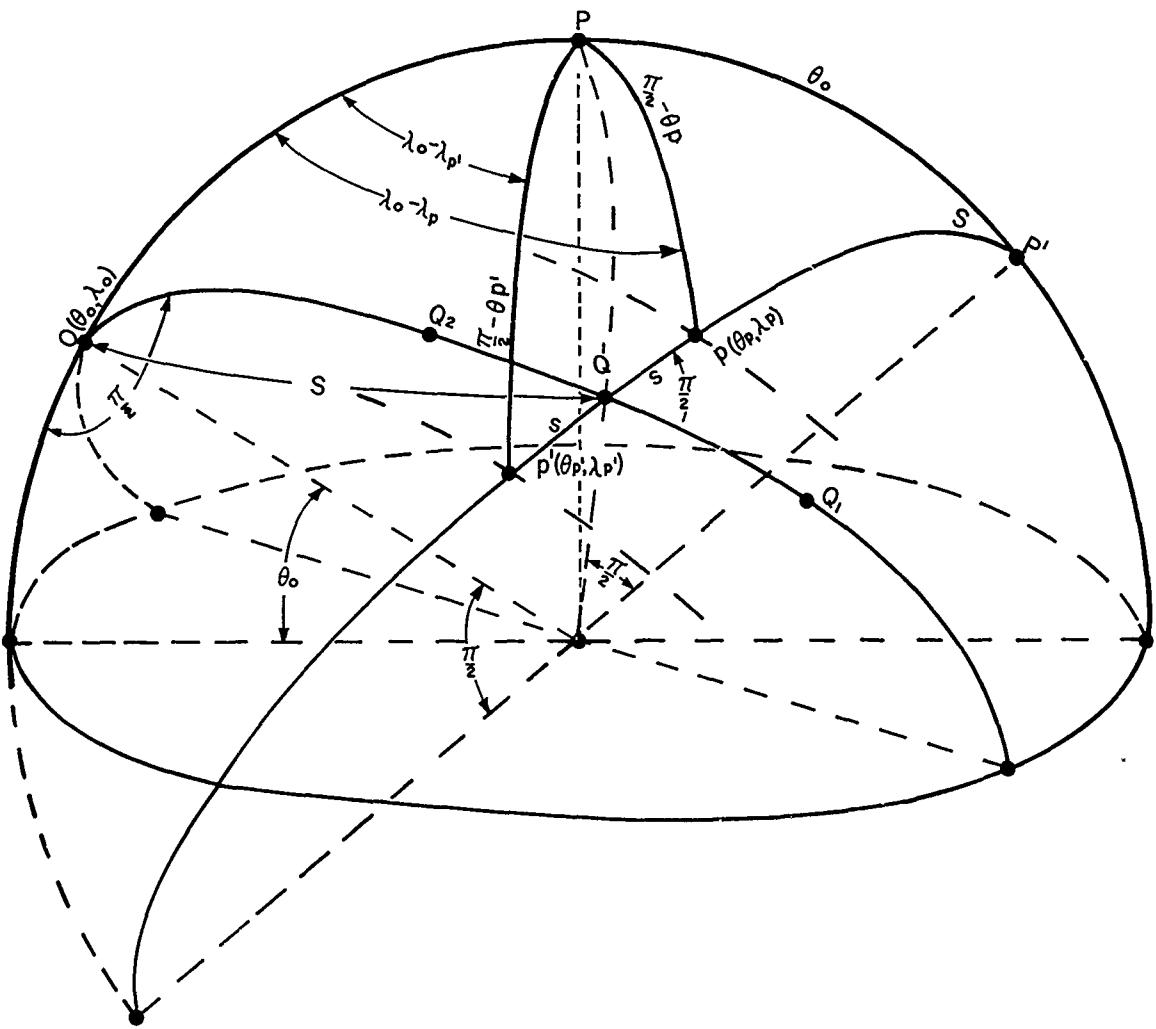


Figure 3. Parallels at a given distance from a great circle track.

PARALLELS AT A GIVEN DISTANCE FROM A GREAT CIRCLE TRACK

In Figure 3, the basic great circle track determined by $Q_1(\theta_1, \lambda_1)$, $Q_2(\theta_2, \lambda_2)$ is the same and the point $O(\theta_0, \lambda_0)$ is the same – (vertex of the great circle track). The point P' is the pole of the great circle determined by Q_1, Q_2 . The angle at P' of the spherical triangle $P'PQ'$ is the distance $S = OQ'$ along the great circle track. If p and p' are points on the parallels at a distance s from the great circle track, then the coordinates of p and p' can be computed from the two spherical triangles $PP'p$, $PP'p'$, (Figure 4).

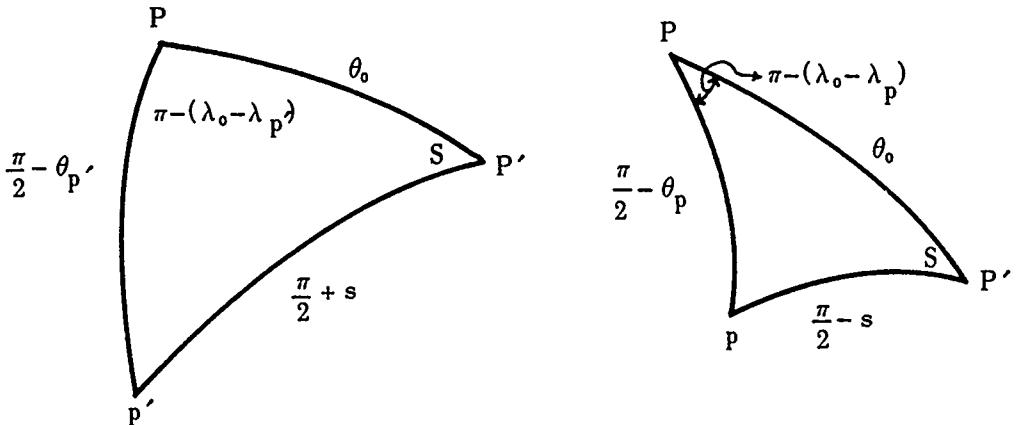


Figure 4

From these triangles one has

$$\begin{aligned}\sin \theta_p &= \cos \theta_0 \sin s + \sin \theta_0 \cos s \cos S \\ \sin \theta_{p'} &= -\cos \theta_0 \sin s + \sin \theta_0 \cos s \cos S\end{aligned}\quad (11)$$

$$\frac{\cos s}{\sin (\lambda_0 - \lambda_p)} = \frac{\cos \theta_p}{\sin S}, \quad \frac{\cos s}{\sin (\lambda_0 - \lambda_{p'})} = \frac{\cos \theta_{p'}}{\sin S} \quad (12)$$

From (11) and (12) one may write

$$\begin{aligned}\sin \theta_k &= A \cos S \pm B \\ \sin (\lambda_0 - \lambda_k) &= C \sin S / \cos \theta_k\end{aligned}\quad (13)$$

where $A = \sin \theta_0 \cos s$, $B = \cos \theta_0 \sin s$, $C = \cos s$.

A, B, C are constants for a given s . When $k = p$, the + sign is used in the first of equations (13). When $k = p'$, the - sign is used.

The computations may be checked as before by means of the equation
 $\cos 2s = \sin \theta_p \sin \theta_{p'} + \cos \theta_p \cos \theta_{p'} \cos (\lambda_{p'} - \lambda_p)$.

A SPHERICAL RECTANGULAR
COORDINATE SYSTEM WITH A GREAT
CIRCLE BASE LINE AS AN AXIS

Figure 5 is a further elaboration of Figures 2 and 3. M is the midpoint of the spherical segment Q_1Q_2 . The section $MP'P''$ is perpendicular to the base line at M. The general point $Q(\theta, \lambda)$ has for the foot of the perpendicular from Q upon the base line, the point $Q'(\theta', \lambda')$ as shown in figure 2. The great circle arc QQ' passes through P' and QQ' is taken for spherical rectangular coordinate y . The great circle perpendicular to the section $MP'P''$ and passing through Q meets $MP'P''$ in T. The distance OQ' is S as shown in Figure 5. Note that the s of Figure 3 in the y of Figure 5. The great circle arc QT is taken for x . That is the spherical rectangular system chosen is $x = QT$, $y = QQ'$. Spherical polar coordinates are then r and α as shown in Figure 5, where $r = MQ$, and α is the angle between r and MQ' .

From the right spherical triangles MQT , MQQ' one finds

$$\begin{aligned} \sin x &= \sin r \cos \alpha \\ \sin y &= \sin r \sin \alpha \end{aligned} \tag{14}$$

whence

$$\begin{aligned} \sin r &= (\sin^2 x + \sin^2 y)^{1/2} \\ \tan \alpha &= \sin y / \sin x, \end{aligned} \tag{15}$$

that is (14) and (15) represent the conversion formulas between the spherical rectangular and spherical polar systems as given.

We now develop the coordinates x and y as functions of S and of θ and λ . Also θ and λ as functions of x and y .

COMPUTATION OF S , x , y , FROM θ AND λ

Assume that the base line has been established, that is the coordinates θ_0, λ_0 of the vertex, 0, of the great circle base line have been computed from the coordinates of the two given points $Q_1(\theta_1, \lambda_1), Q_2(\theta_2, \lambda_2)$ by means of the equations as given on page 23. Then referring to Figure 5, find in spherical triangles:

$$PP'Q: \cos y \sin S = \cos \theta \sin (\lambda_0 - \lambda), \tag{16}$$

$$\therefore \sin y = \cos \theta_0 \sin \theta - \sin \theta_0 \cos \theta \cos (\lambda_0 - \lambda), \tag{17}$$

$$OPQ: \cos f = \sin \theta_0 \sin \theta + \cos \theta_0 \cos \theta \cos (\lambda_0 - \lambda), \tag{18}$$

$$QQ': \cos y \cos S = \cos f, \tag{19}$$

$$TP'Q: \sin x = \sin d \cos y. \tag{20}$$

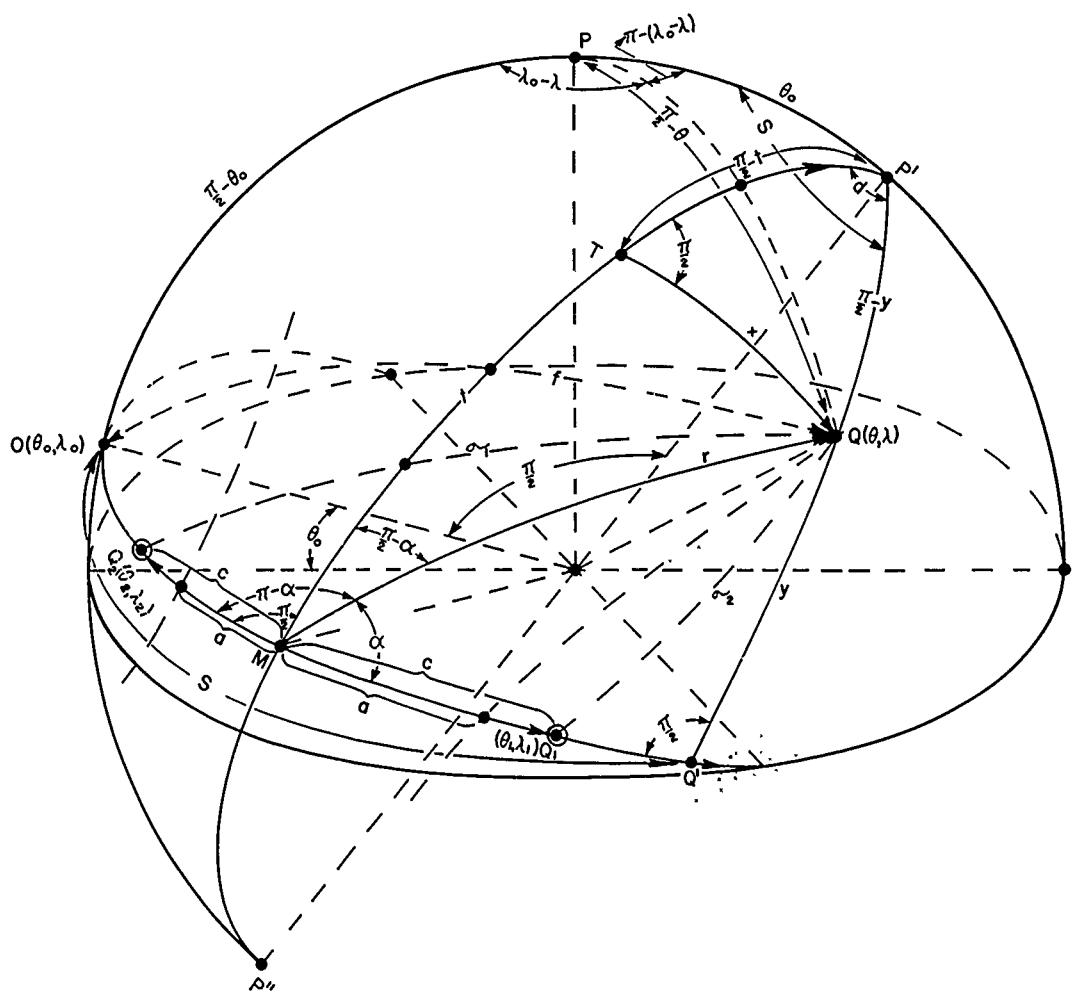


Figure 5. Spherical rectangular coordinate system.

Dividing respective members of (16) and (19) find

$$\tan S = \cos \theta \sin (\lambda_0 - \lambda) / \cos f \quad (21)$$

where $\cos f$ is given by (18).

From (17) and (18) we have $\sin \theta_0 \cos f = \sin \theta - \cos \theta_0 \sin y$ whence (21) may be written

$$\tan S = \frac{\sin \theta_0 \cos \theta \sin (\lambda_0 - \lambda)}{\sin \theta - \cos \theta_0 \sin y} \quad (22)$$

Referring now to Figures 1 and 5, it is seen that $d = MQ' = S - \frac{1}{2}(S_1 + S_2)$, where S_1 and S_2 are the distances from $O(\theta_0, \lambda_0)$ to Q_1 and Q_2 respectively.

Hence given the spherical curvilinear coordinates θ, λ of a point $Q(\theta, \lambda)$, to find S, x and y with $\theta_0, \lambda_0, S_1, S_2$ known, compute y and S from (17) and (21) or (22) and then x from (20), i.e.

$$\sin y = \cos \theta_0 \sin \theta - \sin \theta_0 \cos \theta \cos (\lambda_0 - \lambda)$$

$$\begin{aligned} \tan S &= \frac{\sin \theta_0 \cos \theta \sin (\lambda_0 - \lambda)}{\sin \theta - \cos \theta_0 \sin y} = \frac{\cos \theta \sin (\lambda_0 - \lambda)}{\cos f} \\ &= \frac{\cos \theta \sin (\lambda_0 - \lambda)}{\sin \theta_0 \sin \theta + \cos \theta_0 \cos \theta \cos (\lambda_0 - \lambda)} \end{aligned} \quad (23)$$

$$\sin x = \sin d \cos y = \sin [S - \frac{1}{2}(S_1 + S_2)] (1 - \sin^2 y)^{1/2}$$

COMPUTATION OF S, θ, λ FROM x AND y

From equation (20) one has $\sin d = \sin x / \cos y$ or $\sin [S - \frac{1}{2}(S_1 + S_2)] = \sin x / \cos y$ whence

$$S = \arcsin (\sin x / \cos y) + \frac{1}{2}(S_1 + S_2). \quad (24)$$

From equations (13) page 27,

$$\sin \theta = A \cos S + B \quad (25)$$

$$\sin (\lambda_0 - \lambda) = C \sin S / \cos \theta$$

where $A = C \sin \theta_0$, $B = D \cos \theta_0$, $C = \cos y$, $D = \sin y$

Hence to compute S, θ, λ from x and y , first compute S from (24) and then θ and λ from (25) i.e.:

$$\text{let } C = \cos y, D = \sin y, E = \sin x, A = C \sin \theta_0, B = D \cos \theta_0.$$

Then

$$\begin{aligned} S &= \arcsin (E/C) + \frac{1}{2}(S_1 + S_2) \\ \theta &= \arcsin (A \cos S + B) \\ \lambda &= \lambda_0 - \arcsin (C \sin S / \cos \theta) \end{aligned} \quad (26)$$

DERIVATION OF THE EQUATIONS TO SPHERICAL HYPERBOLAS

Having established a rectangular spherical coordinate system on a great circle base line, we are now in a position to develop the equations of spherical hyperbolas referred to our rectangular system. Referring again to Figure 5, we restrict the point $Q(\theta, \lambda)$ or $Q(x, y)$ to the locus defined by demanding that the distances σ_1 and σ_2 from the points Q_2 and Q_1 respectively satisfy the condition

$$\begin{aligned}\sigma_1 - \sigma_2 &= 2c/e = 2a \\ 2c &= S_1 - S_2,\end{aligned}\tag{27}$$

where as before S_1, S_2 are the distances of Q_1, Q_2 respectively from $O(\theta_0, \lambda_0)$; e is a number such that $e > 1$.

From the spherical triangles MQQ_1, MQQ_2 one has

$$\begin{aligned}\cos \sigma_2 &= \cos r \cos c + \sin r \sin c \cos \alpha \\ \cos \sigma_1 &= \cos r \cos c - \sin r \sin c \cos \alpha\end{aligned}\tag{28}$$

Adding and subtracting respective members of (28) obtain

$$\begin{aligned}\cos \sigma_1 + \cos \sigma_2 &= 2 \cos r \cos c \\ \cos \sigma_1 - \cos \sigma_2 &= -2 \sin r \sin c \cos \alpha\end{aligned}\tag{29}$$

By well known trigonometric identities and condition (27), equations (29) may be written

$$\begin{aligned}\cos \sigma_1 + \cos \sigma_2 &= 2 \cos \frac{1}{2}(\sigma_1 + \sigma_2) \cos \frac{1}{2}(\sigma_1 - \sigma_2) = 2 \cos \frac{1}{2}(\sigma_1 + \sigma_2) \cos a = 2(\cos r)(\cos c), \\ \cos \sigma_1 - \cos \sigma_2 &= 2 \sin \frac{1}{2}(\sigma_1 + \sigma_2) \sin \frac{1}{2}(\sigma_1 - \sigma_2) = 2 \sin \frac{1}{2}(\sigma_1 + \sigma_2) \sin a = -2(\sin r)(\sin c) \cos a, \\ \text{or } \cos \frac{1}{2}(\sigma_1 + \sigma_2) &= \cos r \cos c / \cos a, \\ \sin \frac{1}{2}(\sigma_1 + \sigma_2) &= \sin r \sin c \cos a / \sin a.\end{aligned}\tag{30}$$

Squaring and adding respective members of (30), get

$$(\cos^2 r)(\cos^2 c / \cos^2 a) + (\sin^2 r \cos^2 a)(\sin^2 c / \sin^2 a) = 1.\tag{31}$$

Now in (31) place $\cos^2 r = 1/(1 + \tan^2 r)$,

$\sin^2 r = \tan^2 r / (1 + \tan^2 r)$, whence (31) may be written

$$\tan^2 r = \frac{\tan^2 a (\cos^2 a - \cos^2 c)}{\sin^2 c \cos^2 a - \sin^2 a} = \frac{\tan^2 a (\sin^2 c - \sin^2 a)}{\sin^2 c \cos^2 a - \sin^2 a}\tag{32}$$

Now (32) is the polar form of the equation to the spherical hyperbola.

From conversion formulas (15) we have

$$\begin{aligned}\tan^2 r &= (\sin^2 x + \sin^2 y) / (1 - \sin^2 x - \sin^2 y), \\ \cos^2 a &= \sin^2 x / (\sin^2 x + \sin^2 y)\end{aligned}\tag{33}$$

and substitutions for $\tan^2 r$, $\cos^2 \alpha$ from (33) in (32) give the rectangular equation to the spherical hyperbola

$$\sin^2 x = \frac{\sin^2 a \cos^2 c}{\sin^2 c - \sin^2 a} \cdot \sin^2 y + \sin^2 a. \quad (34)$$

THE POLAR EQUATION OF SPHERICAL HYPERBOLAS WITH ORIGIN AT A FOCUS

If we choose the given point $Q_1(\theta_1, \lambda_1)$ of the great circle base line as origin of coordinates and a focus, then the following figure may be abstracted from Figure 5:

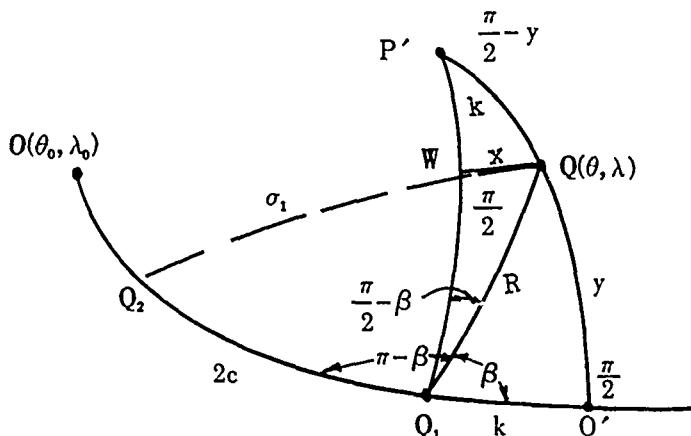


Figure 6.

The polar radius is now $R = \sigma_2$, β is the angle between R and Q_1Q' . $k = Q_1Q' = S - S_1$. From spherical triangle Q_2QQ_1 we find $\cos \sigma_1 = \cos R \cos 2c - \sin R \sin 2c \cos \beta$, and from (27) $\sigma_1 - R = 2a$, whence

$$\cos(\sigma_1 - R) = \cos \sigma_1 \cos R + \sin \sigma_1 \sin R = \cos 2a, \quad (35)$$

$$\sin(\sigma_1 - R) = \cos \sigma_1 \sin R + \sin \sigma_1 \cos R = \sin 2a.$$

Multiply the first of (36) by $\sin R$, the second by $\cos R$ and add respective members to solve for

$$\sin \sigma_1 = \cos 2a \sin R + \sin 2a \cos R. \quad (37)$$

Square and add respective members of (35) and (37) to get

$$(\cos R \cos 2c - \sin R \sin 2c \cos \beta)^2 + (\cos 2a \sin R + \sin 2a \cos R)^2 = 1. \quad (38)$$

Multiply every term of (38) by $\sec^2 R$, whence it may be written

$$(\cos 2c - \tan R \sin 2c \cos \beta)^2 + (\cos 2a \tan R + \sin 2a)^2 = \sec^2 R = 1 + \tan^2 R. \quad (39)$$

Expanding (39) and writing as a quadratic in $\tan R$ find

$$\begin{aligned} & \tan^2 R (\sin^2 2c \cos^2 \beta - \sin^2 2a) + 2\tan R (\sin 2a \cos 2a - \sin 2c \cos 2c \cos \beta) \\ & + \cos^2 2c - \cos^2 2a = 0. \end{aligned} \quad (40)$$

Now equation (40) factors into $[\tan R (\sin 2c \cos \beta + \sin 2a) - (\cos 2c + \cos 2a)]$.

$$[\tan R (\sin 2c \cos \beta - \sin 2a) - (\cos 2c - \cos 2a)] = 0. \quad (41)$$

Whence

$$\tan R = \frac{\cos 2c + \cos 2a}{\sin 2c \cos \beta + \sin 2a}, \tan R = \frac{\cos 2c - \cos 2a}{\sin 2c \cos \beta - \sin 2a}$$

or

$$\tan R = \frac{\cos 2c \pm \cos 2a}{\sin 2c \cos \beta \pm \sin 2a}, \quad (42)$$

where either the (two plus signs) or (two minus) signs are taken together.

Equation (42) is the polar equation to spherical hyperbolas referred to a focus as pole.

We now derive expressions for the spherical rectangular coordinates x, y as functions of the polar coordinates R, β .

From right triangles WPQ, WQQ_1, Q_1QQ' (Figure 6) find

$$\sin x = \sin R \cos \beta,$$

$$\sin y = \sin R \sin \beta. \quad (43)$$

$$\sin x = \sin k \cos y;$$

$$\cos R = \cos k \cos y. \quad (44)$$

Equations (43) are similar to equations (14) and provide the conversions from polar to rectangular coordinates, i.e. from (43)

$$\sin R = (\sin^2 x + \sin^2 y)^{1/2}, \quad (45)$$

$$\tan \beta = \sin y / \sin x.$$

Since moving the origin from M to Q_1 (see Figure 5) is only a translation along the x -axis, there is no change in y , but x is changed. Hence from (44) and the relations (23) and (26) we can write when the origin is at Q_1 , $k = S - S_1$:

FORMULAS FOR COMPUTATION OF S, x, y , FROM θ AND λ

$$\sin y = \cos \theta_0 \sin \theta - \sin \theta_0 \cos \theta \cos (\lambda_0 - \lambda)$$

$$\begin{aligned} \tan S &= \frac{\sin \theta_0 \cos \theta \sin (\lambda_0 - \lambda)}{\sin \theta - \cos \theta_0 \sin y} = \frac{\cos \theta \sin (\lambda_0 - \lambda)}{\cos f} \\ &= \frac{\cos \theta \sin (\lambda_0 - \lambda)}{\sin \theta_0 \sin \theta + \cos \theta_0 \cos \theta \cos (\lambda_0 - \lambda)} \end{aligned} \quad (46)$$

$$\sin x = \sin k \cos y = \sin (S - S_1) \cos y$$

FORMULAS FOR COMPUTATION OF S, θ, λ FROM x AND y

Let $C = \cos y$, $D = \sin y$, $E = \sin x$, $A = C \sin \theta_0$, $B = D \cos \theta_0$, then

$$S = \arcsin (E/C) + S_1$$

$$\theta = \arcsin(A \cos S + B) \quad (47)$$

$$\lambda = \lambda_0 - \arcsin(C \sin S / \cos \theta)$$

AN ALTERNATIVE EQUATION TO THE SPHERICAL HYPERBOLA WITH ORIGIN AT A FOCUS

If $S = \frac{1}{2}(a_0 + b_0 + c_0)$ in the spherical triangle

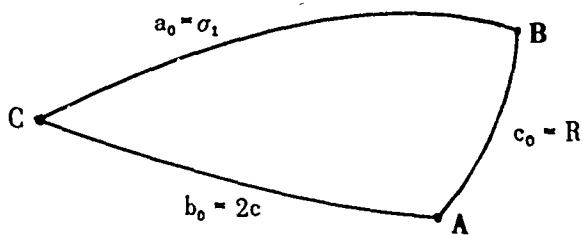


Figure 7.

$$\text{then } \tan^2 \frac{1}{2}A = \frac{\sin(s - b_0) \sin(s - c_0)}{\sin S \sin(s - a_0)}, [6]. \quad (48)$$

Referring to figure 6, $a_0 = \sigma_1$, $b_0 = 2c$, $c_0 = R$; and from (27) we have the conditions

$$\sigma_1 - R = 2a, \sigma_1 + R = 2(R + a).$$

Hence

$$s = \frac{1}{2}(\sigma_1 + R) + c = R + a + c,$$

$$s - a_0 = \frac{1}{2}(R - \sigma_1) + c = c - a, \quad (49)$$

$$s - b_0 = R + a - c, \quad S - c_0 = c + a$$

$$A = \pi - \beta, \tan \frac{1}{2}A = \tan(\pi/2 - \beta/2) = \cot \beta/2$$

With the values from (49) placed in (48) find

$$\tan^2 \beta/2 = \frac{\sin(c - a) \sin(R + c + a)}{\sin(c + a) \sin(R - c + a)}, \quad (50)$$

which is the desired alternative form, [7].

CORRESPONDING PLANE HYPERBOLA EQUIVALENTS

For the plane case and analogous reference system, Figure 5 becomes

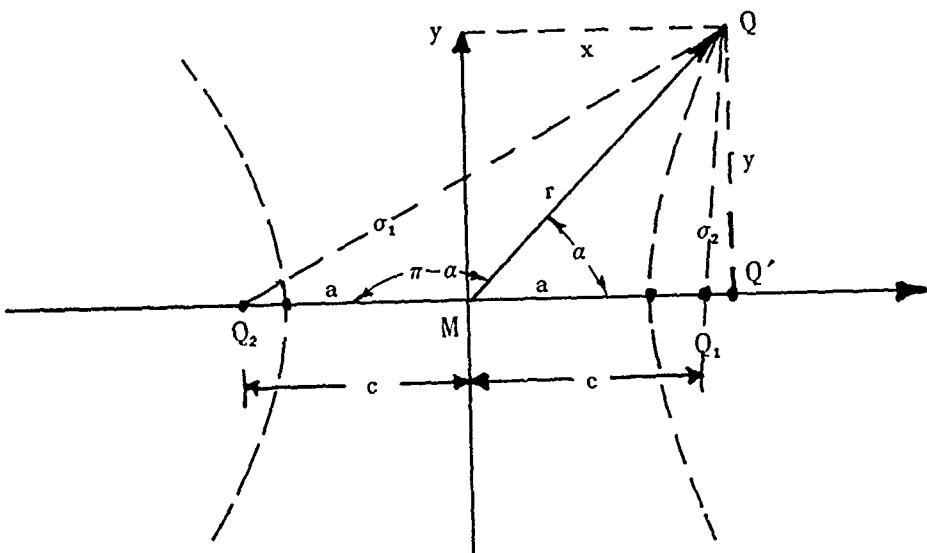


Figure 8.

Given the condition $\sigma_1 - \sigma_2 = 2a$

By the law of cosines applied to triangles MQQ_1 , MQQ_2 ,

$$\sigma_2^2 = r^2 + c^2 - 2rc \cos \alpha, \quad \sigma_1^2 = r^2 + c^2 + 2rc \cos \alpha$$

$$\text{whence } \sigma_1^2 + \sigma_2^2 = 2(r^2 + c^2), \quad \sigma_1^2 - \sigma_2^2 = (r^2 + c^2)^2 - 4r^2 c^2 \cos^2 \alpha \quad (51)$$

Now by squaring both sides of $\sigma_1 - \sigma_2 = 2a$ obtain

$$\sigma_1^2 - 2\sigma_1 \sigma_2 + \sigma_2^2 = 4a^2 \text{ whence}$$

$$(\sigma_1^2 + \sigma_2^2 - 4a^2)^2 = 4\sigma_1^2 \sigma_2^2 \quad (52)$$

With the values of $\sigma_1^2 + \sigma_2^2$, $\sigma_1^2 \sigma_2^2$ from (51) placed in (52) obtain

$$[2(r^2 + c^2) - 4a^2]^2 = 4[(r^2 + c^2)^2 - 4r^2 c^2 \cos^2 \alpha]. \quad (53)$$

Expanding (53) find

$$r^2 c^2 \cos^2 \alpha - a^2 r^2 - a^2 c^2 + a^4 = 0$$

$$\text{or } r^2 = \frac{a^2(c^2 - a^2)}{c^2 \cos^2 \alpha - a^2} \quad (54)$$

To transform to rectangular equation we have $x = r \cos \alpha$, $y = r \sin \alpha$, or $r^2 = x^2 + y^2$,

$\tan \alpha = \frac{y}{x}$, $\cos^2 \alpha = x^2/(x^2 + y^2)$ and these values of r^2 and $\cos^2 \alpha$ placed in (54) give

$$x^2 = \frac{a^2 y^2}{c^2 - a^2} + a^2 \quad (55)$$

as corresponding rectangular equation.

If the focus Q_1 is to be the origin and $\sigma_2 = R$, the radius for polar coordinates, and β the angle which R makes with the positive x -axis, i.e. β is the angle QQ_1Q' , then our plane figure is as follows:

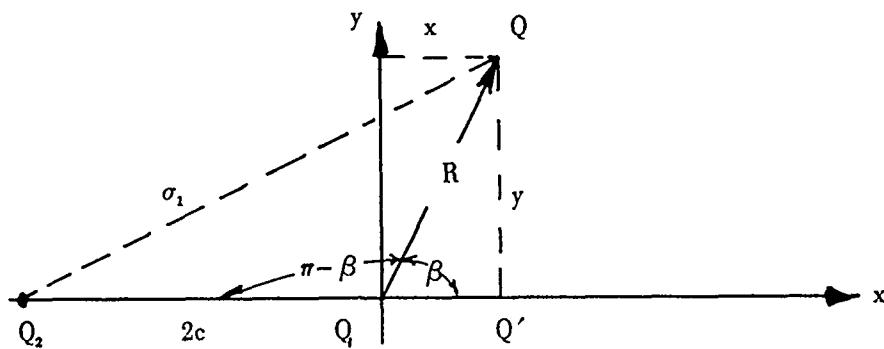


Figure 9.

By the law of cosines in triangle Q_2QQ_1

$$\sigma_1^2 = 4c^2 + R^2 + 4cR \cos \beta \quad (56)$$

From the condition $\sigma_1 - R = 2a$, $\sigma_1 = R + 2a$, and this value of σ_1 placed in (56) gives $(R + 2a)^2 = 4c^2 + R^2 + 4cR \cos \beta$, which when expanded gives

$$R = \frac{a^2 - c^2}{c \cos \beta - a} \quad (57)$$

For the alternative form of (57), we have the well known formula

$$\tan^2 \frac{1}{2}A = \frac{(s - b_0)(s - c_0)}{s(s - a_0)}, \text{ where } 2s = a_0 + b_0 + c_0 \quad (58)$$

Here $a_0 = \sigma_1$, $b_0 = R$, $c_0 = 2c$, $A = \pi - \beta$,

Hence: $s = a + c + R$, $s - a_0 = c - a$, $s - b_0 = a + c$, $s - c_0 = a - c + R$,

$$\text{whence } \tan^2 \frac{1}{2}\beta = \frac{(c - a)(R + c + a)}{(c + a)(R - c + a)}, \quad (59)$$

which is an alternative form of (57).

Now (54), (55), (57) and (59) could have been obtained directly from (32), (34), (42) and (50) by replacing correctly the trigonometric functions of lengths by corresponding lengths, i.e. $\tan a = \sin a = a$, $\cos a = 1$, etc. We place them side by side for direct comparison in the following table which will also serve as a summary for both:

SPHERICAL HYPERBOLA FORMULAS AND PLANE EQUIVALENTS, [7]

SPHERICAL	PLANE	(60)
(1) $\tan^2 r = \frac{\tan^2 a (\sin^2 c - \sin^2 a)}{\sin^2 c \cos^2 a - \sin^2 a}$	$r^2 = \frac{a^2(c^2 - a^2)}{c^2 \cos^2 a - a^2}$	
(2) $\sin^2 x = \frac{\sin^2 a \cos^2 c}{\sin^2 c - \sin^2 a} \sin^2 y + \sin^2 a$	$x^2 = \frac{a^2 y^2}{c^2 - a^2} + a^2$	
(3) $\tan R = \frac{\cos 2c \pm \cos 2a}{\sin^2 c \cos \beta \pm \sin 2a}$	$R = \frac{a^2 - c^2}{c \cos \beta - a}$	
(4) $\tan^2(\beta/2) = \frac{\sin(c-a) \sin(R+c+a)}{\sin(c+a) \sin(R-c+a)}$	$\tan^2(\beta/2) = \frac{(c-a)(R+c+a)}{(c+a)(R-c+a)}$	

In (1) and (2) of equations (60), the origin of coordinates is the midpoint M_1 , of the segment $Q_1 Q_2$, see Figure 5. (3) and (4) are two polar forms with origin at a Focus Q_1 , see Figures (5) and (6).

REFERENCES

- [6] Chauvenet, Plane and Spherical Trigonometry, 1871, page 158.
- [7] Equations (32), (34), (42), (50) to spherical hyperbolas are essentially those given without derivation in LORAN, Pierce, McKenzie, Woodward, McGraw Hill 1948, pages 173, 175.

DEVELOPMENT: DISTANCE FORMULAE;

SECTION 3. DISTANCE COMPUTATIONS AND CONVERSIONS; AZIMUTHS

If we are given two points $P_1(\phi_1, \lambda_1)$, $P_2(\phi_2, \lambda_2)$ on the ellipsoid of reference as shown in Figure 10, we may compute distances and azimuths according to known or given elements. That is we may compute the geographic coordinates of the point $P_2(\phi_2, \lambda_2)$ if we know the geographic coordinates of $P_1(\phi_1, \lambda_1)$ the distance between P_1 and P_2 , and the azimuth from P_1 to P_2 . This is the direct problem and the one most important in Geodesy relative to establishing triangulation control nets. If the coordinates of both P_1 and P_2 are given, the distance between them and the azimuths can be computed. This is the inverse problem, and the one concerned primarily in electronic positioning systems as Loran.

Since there are several possible curves connecting the points P_1 and P_2 on the ellipsoid along which distances would differ very little, for instance – the geodesic, the normal sections, the great elliptic arc, the curve of alinement, etc. – criteria for selection would be simplicity in computations relative to required accuracy. Also to be considered are other useful geometric quantities associated with the configuration and expressible in terms of common computational parameters. (See Figure 11).

The shortest distance is always the geodesic or the geodetic line between P_1 and P_2 . It is usually a space curve (that is it has a first and second curvature at each point). For instance on the reference ellipsoid, the equator and the meridians are the only plane geodesics, [8].

Now in Figure 10, the point $P_0(\phi_0, \lambda_0)$ is the vertex of the great elliptic arc, that is P_0 is the point where the great elliptic arc is orthogonal to a meridian. The geodesic, or geodetic line, between P_1 and P_2 also has a vertex where it is orthogonal to a meridian. Since the geodesic is a space curve and climbs nearer to the ellipsoid pole, T_0 , than any of the other representative curves (if P_1 and P_2 were ends of a diameter of the equator, the geodesic would be the elliptic meridian through P_1 and P_2 since it is shorter than the equator), the vertex of the geodesic is closer to T_0 than is P_0 . Unfortunately the geographic coordinates of the geodesic vertex cannot be expressed simply in terms of the geographic coordinates of P_1 and P_2 , hence an approximation scheme, usually iterative, is used. [9] The computations are usually quite lengthy for long lines. Many schemes and formulae have been devised to approximate the geodesic and studies have been made comparing them. [21] The geodetic line is of most interest to the geodesist proper, since he is primarily concerned with closure on a particular ellipsoid of reference of large arcs and areas of triangulation, hence the geodesic or geodetic line and geodetic azimuths on the ellipsoid are consonant with his mathematical model.

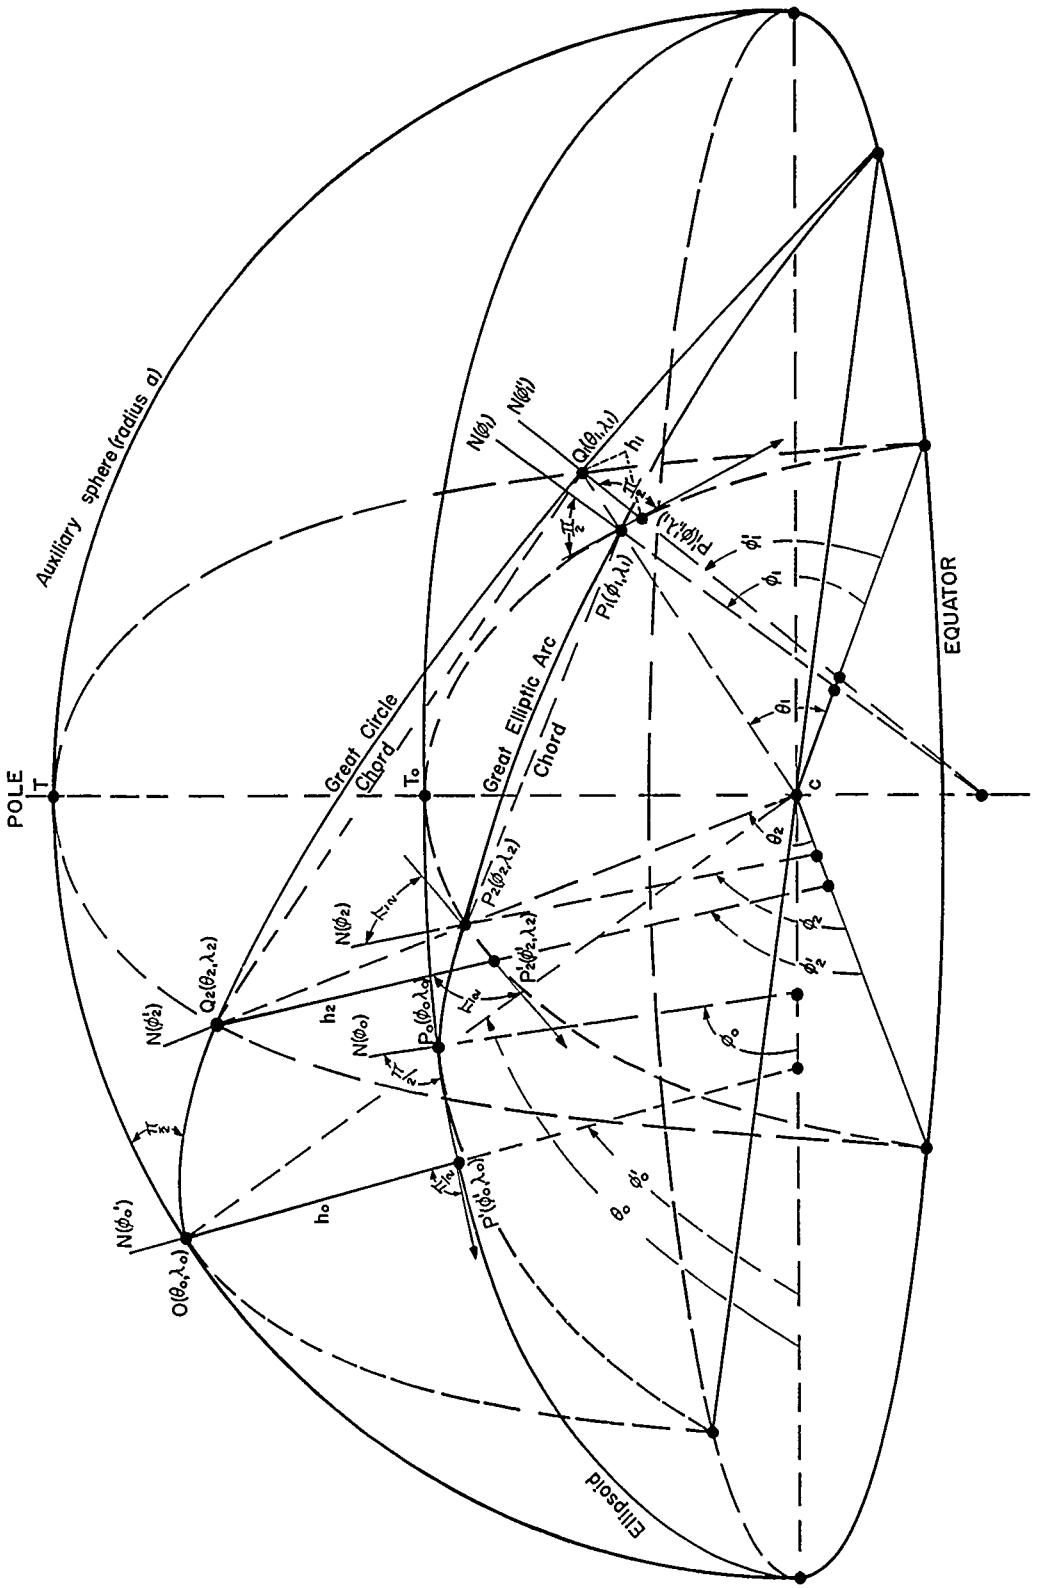


Figure 10. Corresponding distances on the reference ellipsoid and the auxiliary sphere.

OPERATIONAL APPLICATIONS

Requirements, accuracy wise, with respect to geodetic data obviously depend on the particular guidance system employing it. If some guidance, particularly external, is to be provided a missile, its initial launch requirements are not as critical as say for a purely ballistic missile. Since it has yet to be demonstrated that the flight of missiles are geodesic or that the traces of the trajectories upon the ellipsoid of reference are geodesics, distances can be computed by any method which will give results within the capability of the particular system. Since alinement is usually with respect to a local vertical and a "bearing", the normal section azimuth, the angle of depression of the chord below the horizon and the maximum separation between the chord and the surface are all useful associated quantities which can be "integrated" in the computations for distance as will subsequently be shown in the discussion of distance computations along the great elliptic arc. This configuration is shown in Figure 11 as abstracted from Figure 10.


HYPERBOLIC MEASURING SYSTEMS

For Loran systems, the earth must be considered an oblate ellipsoid or spheroid, but the nearest hundred feet is probably close enough particularly on long lines. [7], page 170. Hence a computational system is desirable which provides modifications to spherical elements, i.e. functions of spherical arc lengths so that the auxiliary sphere of the particular spheroid of reference can be used since the hyperbolic propagation of systems as Loran may be worldwide as base lines are added or extended. Also to be considered is the use of such computational systems in local areas as for oceanographic surveying and corresponding adaptation to a local sphere of reference. Azimuth computations should be independent, except for dependence on spherical arc length, so that one can have readily the Normal plane section azimuths as well as geodetic azimuths. Finally the system should be easily adapted to local area work in terms of plane coordinates. This can probably best be accomplished through the series of projections, all conformal; spheroid to aposphere, aposphere to sphere, sphere to plane. [8].

The present investigation will center about the configuration depicted in Figure 12 which shows the relationships, exaggerated; between the Normal sections, The Great Elliptic Section, The Geodesic, and the Chord between two points Q_1, Q_2 on the ellipsoid. We begin by deriving the formulae for the Normal Section Azimuths and the Great Elliptic Arc Azimuths.

NORMAL SECTION AZIMUTHS

The normal section azimuths are shown in Figure 13, as extended from Figure 11. The spheroid has been referred to its center as origin of rectangular coordinates, with the reference plane - xz containing the point $Q_1(\phi_1, \lambda_1)$ as shown. The z -axis is the polar axis of the spheroid

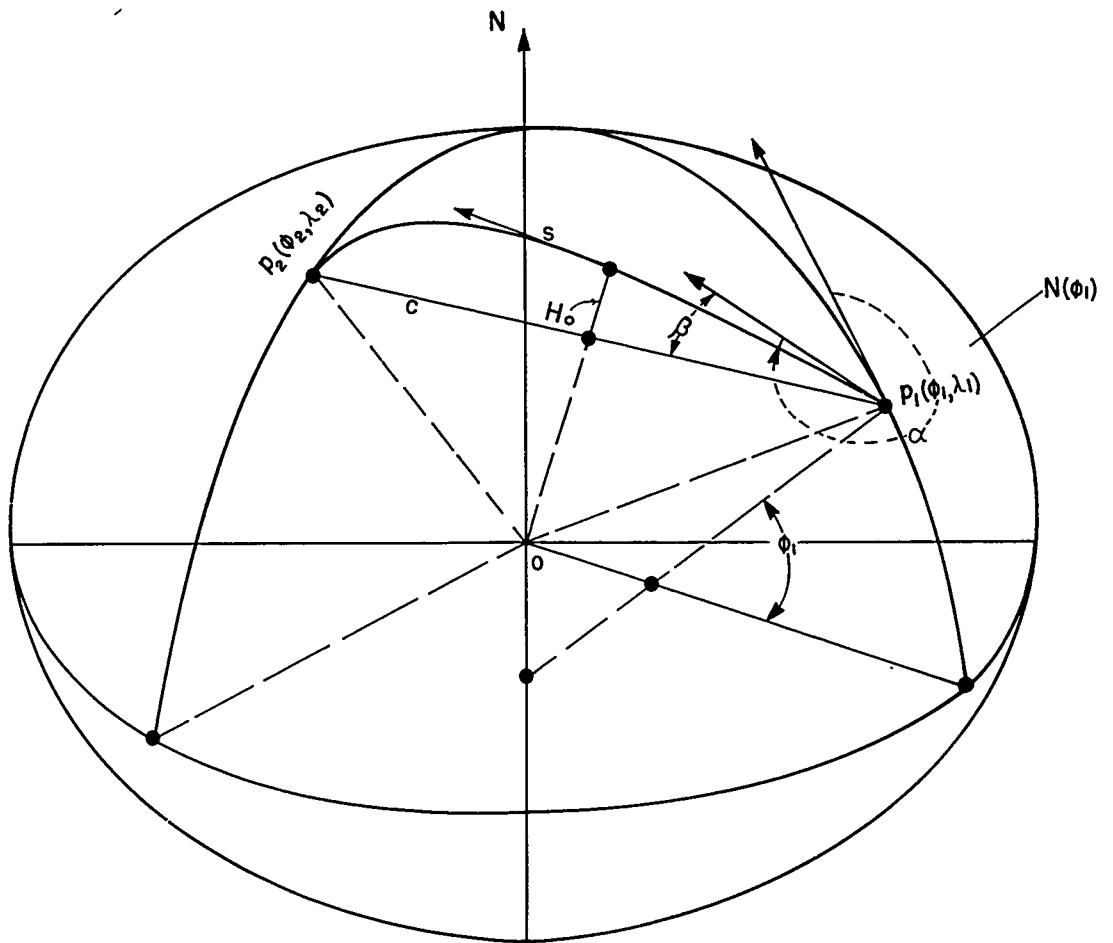

α =Normal Section Azimuth at P_1 (from North)


S =Arc length-Geodetic distance

C =Chord length, $P_1 P_2$

β =Angle of depression of C below horizon at P_1

H_0 =Maximum separation of arc S and chord C

Figure 11. Relationship between arc length, normal section azimuth, chord length, angle of depression of the chord below the horizon, maximum separation of arc and chord.

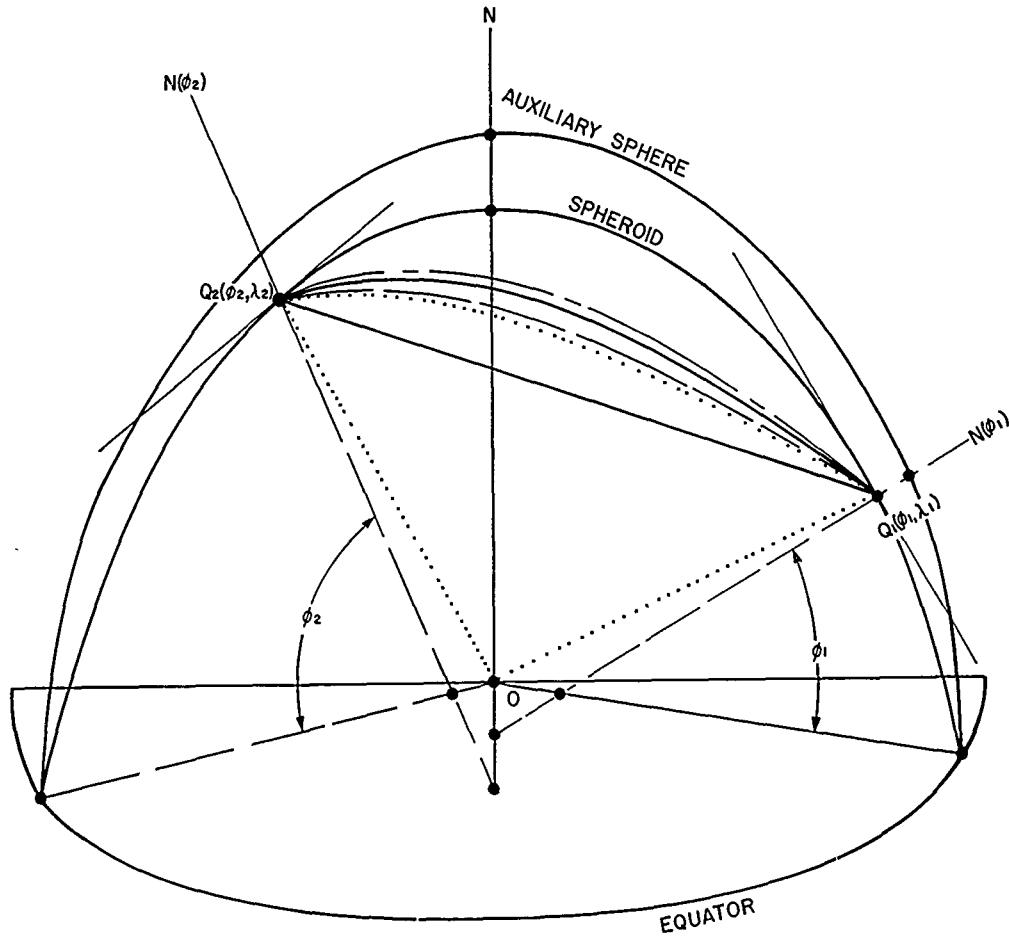

- GEODESIC
- — — NORMAL SECTION [$N(\phi_2)$ and $Q_1(\phi_1, \lambda_1)$]
- — — NORMAL SECTION [$N(\phi_1)$ and $Q_2(\phi_2, \lambda_2)$]
- GREAT ELLIPTIC SECTION

Figure 12. Relationships relative to the pole on the ellipsoid of reference, of the geodesic, normal sections, and great elliptic section.

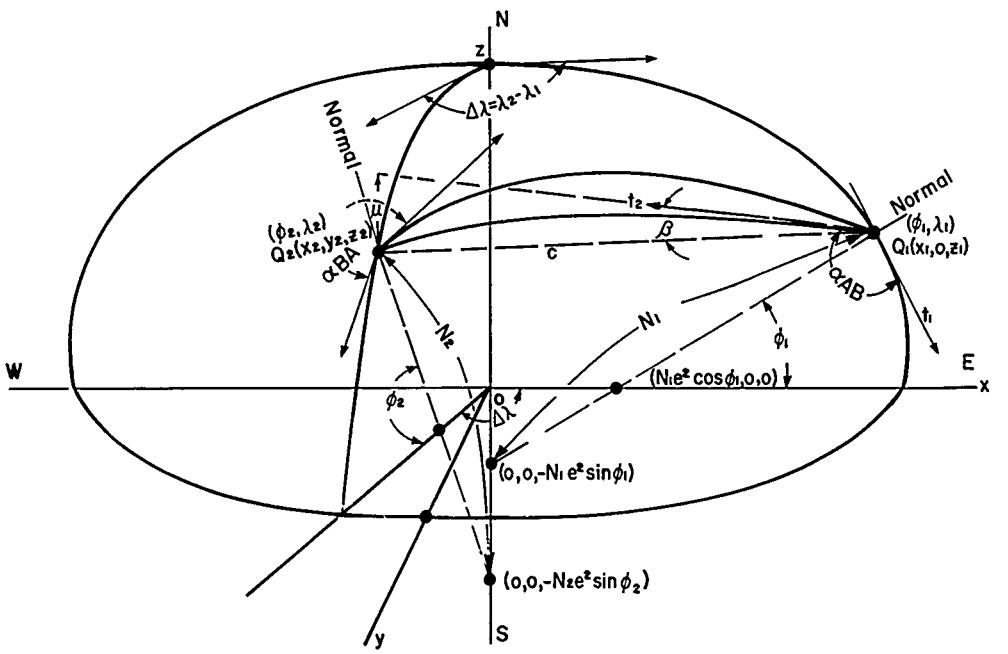


Figure 13. The normal section azimuths.

and the y -axis is then in the plane of the equator — the xy -plane is the equatorial plane of the ellipsoid. In this coordinate system the points $Q_1(\phi_1, \lambda_1)$, $Q_2(\phi_2, \lambda_2)$ have the rectangular coordinates:

$$Q_1: x_1 = N_1 \cos \phi_1$$

$$y_1 = 0$$

$$z_1 = N_1 (1 - e^2) \sin \phi_1$$

$$Q_2: x_2 = N_2 \cos \phi_2 \cos \Delta\lambda$$

$$y_2 = N_2 \cos \phi_2 \sin \Delta\lambda \quad (1)$$

$$z_2 = N_2 (1 - e^2) \sin \phi_2$$

The rectangular equation to the ellipsoid is

$$(1 - e^2)(x^2 + y^2) + z^2 - a^2(1 - e^2) = 0, \quad (2)$$

where a , e are respectively the semimajor axis and eccentricity of the meridian ellipse.

The tangent plane to (2) at any point (x_1, y_1, z_1) is

$$(1 - e^2)(xx_1 + yy_1) + zz_1 - a^2(1 - e^2) = 0. \quad (3)$$

Hence the tangent plane at Q_1 is, from (1) and (3)

$$xN_1 \cos \phi_1 + z N_1 \sin \phi_1 - a^2 = 0. \quad (4)$$

The equation of the plane containing the normal at Q_1 and the point Q_2 is determined by Q_2 and the points $(N_1 e^2 \cos \phi_1, 0, 0)$, $(0, 0, -N_1 e^2 \sin \phi_1)$, see Figure 13. With the coordinates of Q_2 from (1) we can write the equation as

$$\begin{vmatrix} x & y & z & 1 \\ N_2 \cos \phi_2 \cos \Delta\lambda & N_2 \cos \phi_2 \sin \Delta\lambda & N_2 (1 - e^2) \sin \phi_2 & 1 \\ N_1 e^2 \cos \phi_1 & 0 & 0 & 1 \\ 0 & 0 & -N_1 e^2 \sin \phi_1 & 1 \end{vmatrix} = 0,$$

which upon expansion may be written

$$Ax + By - Cz - D = 0$$

$$\text{where } A = N_2 \sin \phi_1 \cos \phi_2 \sin \Delta\lambda \quad (5)$$

$$B = (N_1 \sin \phi_1 - N_2 \sin \phi_2) e^2 \cos \phi_1 + N_2 (\sin \phi_2 \cos \phi_1 - \sin \phi_1 \cos \phi_2 \cos \Delta\lambda)$$

$$C = N_2 \cos \phi_1 \cos \phi_2 \sin \Delta\lambda$$

$$D = N_1 N_2 e^2 \sin \phi_1 \cos \phi_1 \cos \phi_2 \sin \Delta\lambda.$$

Now the direction cosines p, q, r of the intersection of two planes $A_1x + B_1y + C_1z = D_1$, $A_2x + B_2y + C_2z = D_2$ are given by

$$p = (B_1 C_2 - B_2 C_1)/d, \quad q = (C_1 A_2 - A_1 C_2)/d, \quad r = (A_1 B_2 - A_2 B_1)/d \quad (6)$$

$$\text{where } d = [(B_1 C_2 - B_2 C_1)^2 + (C_1 A_2 - A_1 C_2)^2 + (A_1 B_2 - A_2 B_1)^2]^{1/2}.$$

Note from figure 13 that the tangent, t_1 , to the meridian at Q_1 lies in the plane $y = 0$ and that defined by equation (4). To apply (6) to these two planes we have respectively

$A_1 = C_1 = D_1 = 0$, $B_1 = 1$; $A_2 = N_1 \cos \phi_1$, $B_2 = 0$, $C_2 = N_1 \sin \phi_1$, $D_2 = a^2$ and (6) gives the direction cosines of t_1 as $p_1 = \sin \phi_1$, $q_1 = 0$, $r_1 = -\cos \phi_1$. (7)

(These were apparent from inspection of Figure 13 but illustrate the use of (6)).

From Figure 13, the tangent t_2 to the elliptic section lying in the plane (5) is the line of intersection of the planes (4) and (5). From (4) and (5) we have respectively $A_1 = N_1 \cos \phi_1$, $B_1 = 0$, $C_1 = N_1 \sin \phi_1$; $A_2 = A$, $B_2 = B$, $C_2 = -C$ and applying (6) find the direction cosines of t_2 to be

$$P_2 = (-B \sin \phi_1)/d, q_2 = (A \sin \phi_1 + C \cos \phi_1)/d, r_2 = (B \cos \phi_1)/d$$

where $d = [B^2 + (A \sin \phi_1 + C \cos \phi_1)^2]^{1/2}$. (8)

The forward azimuth α_{AB} from Q_1 to Q_2 , as shown in Figure 13, is the angle reckoned clockwise from south between the tangents t_1 and t_2 . Hence from (7) and (8)

$$\cos \alpha_{AB} = p_1 p_2 + q_1 q_2 + r_1 r_2 = -\frac{B}{d} \sin^2 \phi_1 - \frac{B}{d} \cos^2 \phi_1 = -\frac{B}{d}, \quad (9)$$

$$d = [B^2 + (A \sin \phi_1 + C \cos \phi_1)^2]^{1/2}$$

Since $\cot \alpha_{AB} = \cos \alpha_{AB} / (1 - \cos^2 \alpha_{AB})^{1/2}$ we have from (9) that

$$\cot \alpha_{AB} = -B/(d^2 - B^2)^{1/2}, \quad (10)$$

Now $d^2 - B^2 = B^2 + (A \sin \phi_1 + C \cos \phi_1)^2 - B^2 = (A \sin \phi_1 + C \cos \phi_1)^2$,

so $\sqrt{d^2 - B^2} = A \sin \phi_1 + C \cos \phi_1$ and (10) may be written

$$\cot \alpha_{AB} = -B/(A \sin \phi_1 + C \cos \phi_1). \quad (11)$$

With the values of A , B , C from (5), equation (11) may be written as


$$\cot \alpha_{AB} = \frac{[\sin \phi_2 - (N_1/N_2) \sin_1 \phi] e^2 \cos \phi_1 \sec \phi_2 + (\sin \phi_1 \cos \Delta \lambda - \tan \phi_2 \cos \phi_1)}{\sin \Delta \lambda}. \quad (12)$$

Referring again to figure 13, it is seen that from considerations of symmetry, we have only to interchange the subscripts 1 and 2 and change $\Delta \lambda$ to $-\Delta \lambda$ in (12) to obtain $\cot \alpha_{BA}$ (the back azimuth on the other normal section). We thus obtain from (12)

$$\cot \alpha_{BA} = -\frac{[\sin \phi_1 - (N_2/N_1) \sin \phi_2] e^2 \cos \phi_2 \sec \phi_1 + (\sin \phi_2 \cos \Delta \lambda - \tan \phi_1 \cos \phi_2)}{\sin \Delta \lambda} \quad (13)$$

GREAT ELLIPTIC SECTION AZIMUTHS

Figure 14 shows the great elliptic section and azimuths as abstracted from Figure 12. The same coordinate system is used as in Figure 13 so that most of the equations developed with the normal section azimuths can be used. The angle α_{AB} between the tangents t_1 and t_2 is the forward azimuth required. We already have the direction cosines of t_1 see equations (7). The tangent t_2 is the intersection of the great elliptic plane with the tangent plane at Q_1 , equation (4). The equation of the great elliptic plane through Q_1 , Q_2 , using equations (1), is given by the determinant

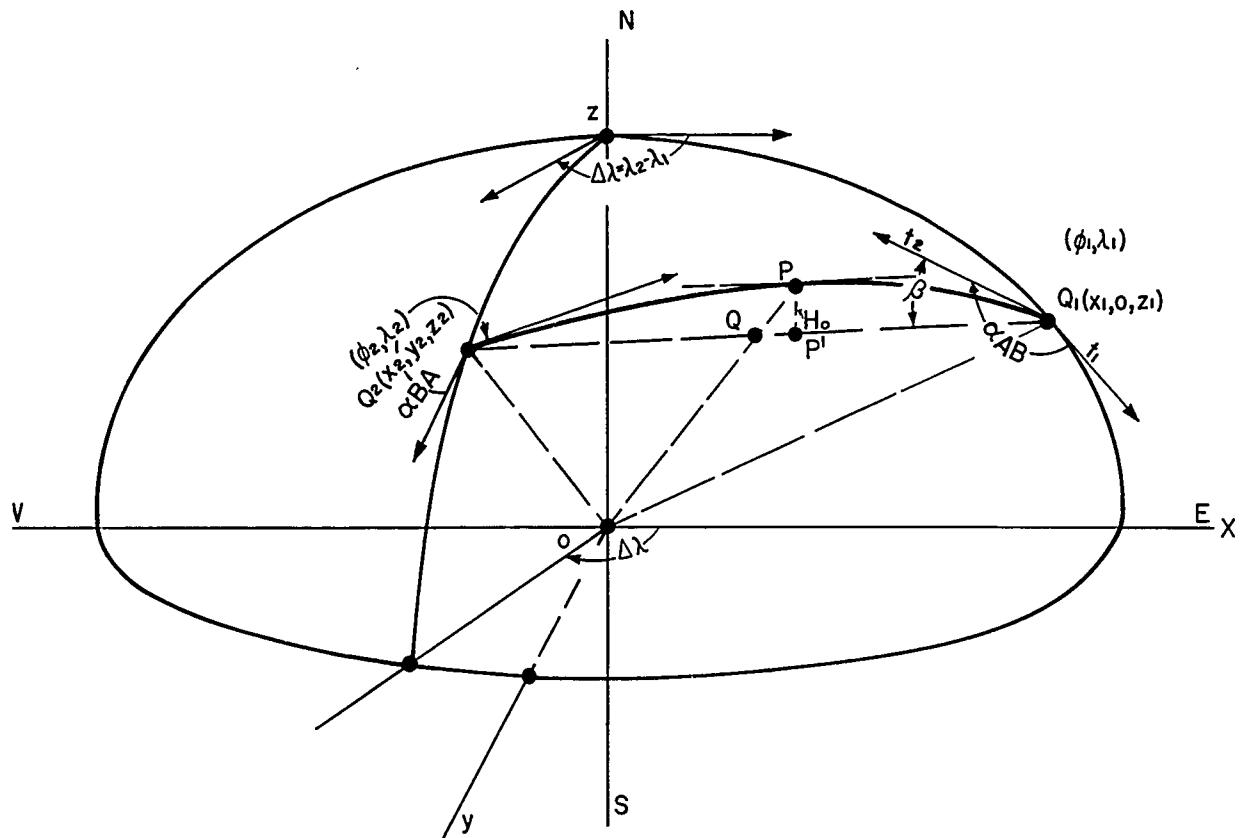

GREAT ELLIPTIC SECTION AZIMUTHS AND ASSOCIATED GEOMETRY

P-point of maximum separation, chord and arc

Ho-maximum separation of chord and arc

Figure 14. The great elliptic section azimuths.

$$\left| \begin{array}{ccc|c} x & y & z & 1 \\ N_1 \cos \phi_1 & 0 & N_1(1 - e^2) \sin \phi_1 & 1 \\ N_2 \cos \phi_2 \cos \Delta \lambda & N_2 \cos \phi_2 \sin \Delta \lambda & N_2(1 - e^2) \sin \phi_2 & 1 \\ 0 & 0 & 0 & 1 \end{array} \right| = 0 ,$$

which when expanded reduces to

$$Ax + By - Cz = 0,$$

$$A = (1 - e^2) \tan \phi_1 \sin \Delta \lambda \quad (\Delta \lambda = \lambda_2 - \lambda_1) \quad (14)$$

$$B = (1 - e^2) (\tan \phi_2 - \tan \phi_1 \cos \Delta \lambda)$$

$$C = \sin \Delta \lambda$$

Since equation (11) was developed for generalized coefficients A, B, C we have only to substitute the values of A, B, C from (14) in (11) to obtain after some algebraic manipulation,

$$\cot \alpha_{AB} = (1 - e^2) \frac{N_1^2}{a^2} \frac{(\tan \phi_1 \cos \Delta \lambda - \tan \phi_2) \cos \phi_1}{\sin \Delta \lambda} \quad (15)$$

By symmetrical interchange of subscripts and replacing $\Delta \lambda$ by $-\Delta \lambda$, we obtain $\cot \alpha_{BA}$ from (15) as

$$\cot \alpha_{BA} = (1 - e^2) \frac{N_2^2}{a^2} \frac{(\tan \phi_1 - \tan \phi_2 \cos \Delta \lambda) \cos \phi_2}{\sin \Delta \lambda} \quad (16)$$

Equations (15) and (16) represent the azimuths of the great elliptic section as shown in Figure 14.

NORMAL SECTION AND GREAT ELLIPTIC SECTION AZIMUTHS IN TERMS OF PARAMETRIC LATITUDE θ

From the transformation equations $\tan \theta = (1 - e^2)^{1/2} \tan \phi$, $\cos \theta = \frac{N}{a} \cos \phi$, $\sin \theta = \frac{(1 - e^2)^{1/2}}{a} N \sin \phi$, $(1 - e^2 \cos^2 \theta)^{1/2} = \frac{(1 - e^2)^{1/2}}{a} N$

applied to equations (12), (13), (15), (16) we have the normal section and great elliptic section azimuths in terms of parametric latitude.

Normal Section Azimuths in terms of θ .

$$\cot \alpha_{AB} = + \frac{\sin \theta_1 \cos \Delta \lambda - \cos \theta_1 \tan \theta_2 + e^2 (\sin \theta_2 - \sin \theta_1) \cos \theta_1 \sec \theta_2}{(1 - e^2 \cos^2 \theta_1)^{1/2} \sin \Delta \lambda} \quad (17)$$

$$\cot \alpha_{BA} = - \frac{\sin \theta_2 \cos \Delta \lambda - \cos \theta_2 \tan \theta_1 + e^2 (\sin \theta_1 - \sin \theta_2) \cos \theta_2 \sec \theta_1}{(1 - e^2 \cos^2 \theta_2)^{1/2} \sin \Delta \lambda}$$

Great Elliptic Section Azimuths in terms of θ

$$\cot \alpha_{AB} = + \frac{(\tan \theta_1 \cos \Delta\lambda - \tan \theta_2) (\cos \theta_1) (1 - e^2 \cos^2 \theta_1)^{1/2}}{\sin \Delta\lambda} \quad (18)$$

$$\cot \alpha_{BA} = + \frac{(\tan \theta_1 - \tan \theta_2 \cos \Delta\lambda) (\cos \theta_2) (1 - e^2 \cos^2 \theta_2)^{1/2}}{\sin \Delta\lambda}$$

GREAT ELLIPTIC ARC DISTANCE

Referring to Figure 9, it is seen that the great elliptic arc is orthogonal to a meridian at a point $P_0(\phi_0, \lambda_0)$ which is the vertex of the great elliptic arc determined by the points $P_1(\phi_1, \lambda_1), P_2(\phi_2, \lambda_2)$ on the ellipsoid. The equation of the great elliptic plane through P_1 and P_2 is given by equations (14). Now a meridional plane orthogonal to (14) has an equation of the form $Bx - Ay = 0$ and the rectangular coordinates of $P_0(\phi_0, \lambda_0)$ must satisfy both planes. From (1), the rectangular coordinates of $P_0(\phi_0, \lambda_0)$ are $x_0 = N_0 \cos \phi_0 \cos \Delta\lambda_0$, $y_0 = N_0 \cos \phi_0 \sin \Delta\lambda_0$, $z = N_0(1 - e^2) \sin \phi_0$ and these placed in $Bx - Ay = 0$ and (14) give

$$B \cos \Delta\lambda_0 - A \sin \Delta\lambda_0 = 0, \quad (19)$$

$$A \cos \Delta\lambda_0 + B \sin \Delta\lambda_0 = C(1 - e^2) \tan \phi_0.$$

From the first of (19) find $\tan \Delta\lambda_0 = B/A$, whence $\sin \Delta\lambda_0 = B/(A^2 + B^2)^{1/2}$ and these values placed in the second of (19) give $\tan \phi_0 = (A^2 + B^2)^{1/2}/C(1 - e^2)$,

$$\sin \phi_0 = \tan \phi_0 / (1 + \tan^2 \phi_0)^{1/2} = \left(\frac{A^2 + B^2}{A^2 + B^2 + C^2(1 - e^2)^2} \right)^{1/2}, \quad (20)$$

$$\tan \Delta\lambda_0 = B/A.$$

With the values of A, B, C from (14), equations (20) may be written

$$\sin \phi_0 = \left(\frac{\tan^2 \phi_1 - 2 \tan \phi_1 \tan \phi_2 \cos \Delta\lambda + \tan^2 \phi_2}{\tan^2 \phi_1 - 2 \tan \phi_1 \tan \phi_2 \cos \Delta\lambda + \tan^2 \phi_2 + \sin^2 \Delta\lambda} \right)^{1/2}, \quad (21)$$

$$\tan \Delta\lambda_0 = (\cot \phi_1 \tan \phi_2 - \cos \Delta\lambda) / \sin \Delta\lambda,$$

$$\tan \phi_0 = (\tan^2 \phi_1 + \tan^2 \phi_2 - 2 \tan \phi_1 \tan \phi_2 \cos \Delta\lambda)^{1/2} / \sin \Delta\lambda.$$

From the second of equations (19), dropping the subscript zero and differentiating we obtain

$$(-A \sin \Delta\lambda + B \cos \Delta\lambda) (d \Delta\lambda) = C(1 - e^2) \sec^2 \phi d \phi. \quad (22)$$

By solving $A \cos \Delta\lambda + B \sin \Delta\lambda = C(1 - e^2) \tan \phi$ with the identity $\sin^2 \Delta\lambda + \cos^2 \Delta\lambda = 1$, find

$$\sin \Delta\lambda = - \frac{BC(1 - e^2) \tan \phi + A[(A^2 + B^2) - C^2(1 - e^2)^2 \tan^2 \phi]^{1/2}}{A^2 + B^2}, \quad (23)$$

$$\cos \Delta\lambda = \frac{-AC(1 - e^2) \tan \phi + B[(A^2 + B^2) - C^2(1 - e^2)^2 \tan^2 \phi]^{1/2}}{A^2 + B^2}.$$

From (23) one has then

$-A \sin \Delta\lambda + B \cos \Delta\lambda = [(A^2 + B^2) - C^2(1 - e^2)^2 \tan^2 \phi]^{1/2}$ and this value placed in (22) gives

$$(d\Delta\lambda) = \frac{C(1 - e^2) \sec^2 \phi d\phi}{[(A^2 + B^2) - C^2(1 - e^2)^2 \tan^2 \phi]^{1/2}} \quad (24)$$

whence, by means of relations (20) and trigonometric identities,

$$\begin{aligned} (d\Delta\lambda)^2 &= \frac{C^2(1 - e^2)^2 \sec^4 \phi d\phi^2}{A^2 + B^2 - C^2(1 - e^2)^2 \tan^2 \phi} = \frac{\sec^4 \phi d\phi^2}{\frac{A^2 + B^2}{C^2(1 - e^2)^2} - \tan^2 \phi} \\ &= \frac{\sec^4 \phi d\phi^2}{\frac{\tan^2 \phi_0 - \tan^2 \phi}{\sec^2 \phi_0 - \sec^2 \phi}} = \frac{\sec^4 \phi d\phi^2}{\sec^2 \phi_0 - \sec^2 \phi}. \end{aligned} \quad (25)$$

Now the linear element of the spheroid is, [8] page 62,

$$ds^2 = \left[\sec^2 \phi d\phi^2 + \left(\frac{N}{R} \right)^2 (d\Delta\lambda)^2 \right] R^2 \cos^2 \phi, \quad (26)$$

where $R = a(1 - e^2)/(1 - e^2 \sin^2 \phi)^{3/2} = \frac{1 - e^2}{a^2} N^3$; $N = a/(1 - e^2 \sin^2 \phi)^{1/2}$

Now from (25) and (26) it is seen that we will be able to express the quantity in brackets in terms of $\sec \phi$ and $\sec \phi_0$ since

$$\left(\frac{N}{R} \right)^2 = \frac{(1 - e^2 \sin^2 \phi)^2}{(1 - e^2)^2} = \frac{[(1 - e^2) \sec^2 \phi + e^2]^2}{(1 - e^2)^2 \sec^4 \phi} \quad (27)$$

With the values of $(d\Delta\lambda)^2$ and $\left(\frac{N}{R} \right)^2$ from (25) and (27), the linear element (26) may be

be written

$$ds^2 = \left[\sec^2 \phi + \frac{[(1 - e^2) \sec^2 \phi + e^2]^2}{(1 - e^2)^2 (\sec^2 \phi_0 - \sec^2 \phi)} \right] (R^2 \cos^2 \phi d\phi^2). \quad (28)$$


If the quantity in brackets is given a common denominator, then (28) may be written as

$$ds^2 = \frac{(1 - e^2) \sec^2 \phi [(1 - e^2) \sec^2 \phi_0 + 2e^2] + e^4}{(1 - e^2)^2 (\sec^2 \phi_0 - \sec^2 \phi)} (R^2 \cos^2 \phi d\phi^2). \quad (29)$$

To bring (29) into manageable form we place $k = \frac{e \sqrt{1 - e^2}}{a} N_0 \sin \phi_0$, and

$$\cos d = \frac{N \sin \phi}{N_0 \sin \phi_0}.$$

(Note that $k = e_0$, is the eccentricity of the great elliptic arc. See Figure 15.)

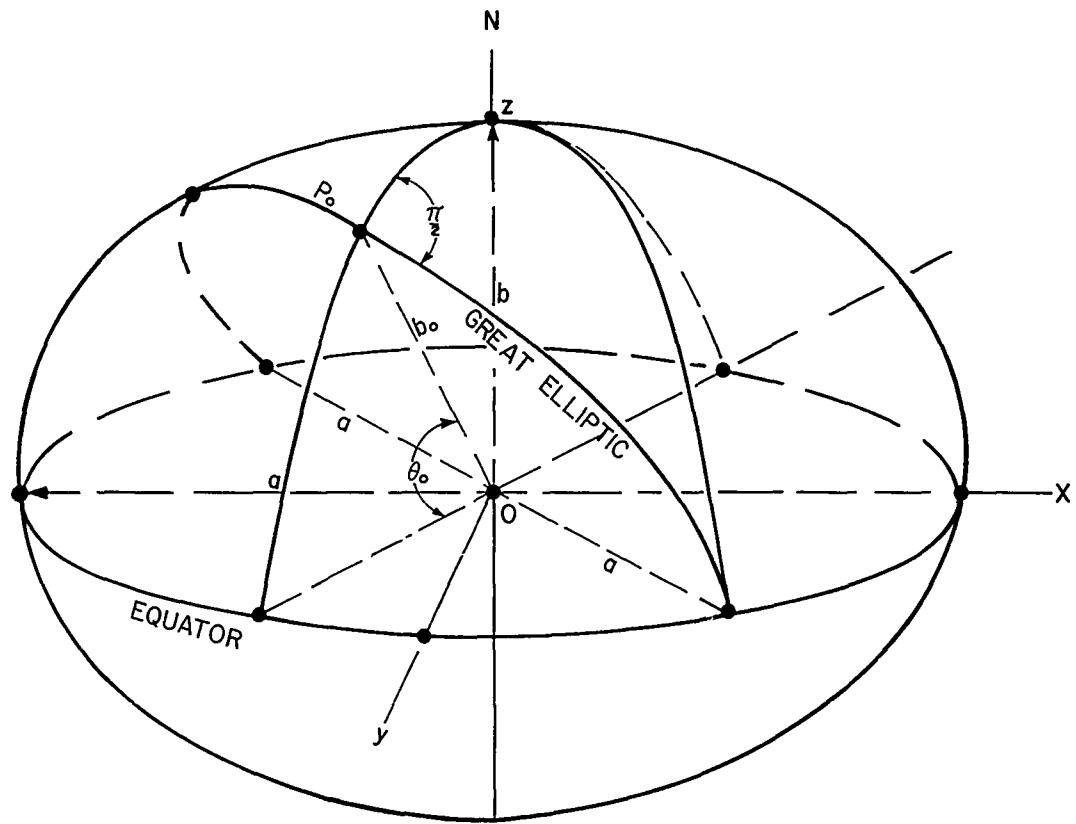

GREAT ELLIPTIC SECTION

Major semiaxis is a

Minor semiaxis is $b_0 = a\sqrt{1-e^2 \sin^2 \theta_0}$

a, e are semimajor axis and eccentricity of the ellipsoidal meridian

θ_0 is the geocentric latitude of the vertex P_0 of the Great Elliptic Section

e_0 is the eccentricity of the Great Elliptic

$$e_0 = \frac{(a^2 b_0^2)^{\frac{1}{2}}}{a} = e \sin \theta_0 = (\sqrt{1-e^2}/a) N_0 \sin \phi_0$$

Coordinates of P_0 are $P_0 (a \cos \theta_0 \cos \lambda_0, a \cos \theta_0 \sin \lambda_0, b \sin \theta_0)$ or in terms of geodetic latitude ϕ_0

$$P_0 (N_0 \cos \phi_0 \cos \lambda_0, N_0 \cos \phi_0 \sin \lambda_0, N_0 (1-e^2) \sin \phi_0)$$

Figure 15. Elements of the great elliptic section.

From the first of (30), placing $N_0 = a/(1 - e^2 \sin^2 \phi_0)^{1/2}$ and solving for $\sec^2 \phi_0$ find

$$\sec^2 \phi_0 = (1 - e^2 + k^2)/(1 - e^2) (1 - k^2/e^2). \quad (31)$$

With the value of $N_0 \sin \phi_0$ from the first of (30) placed in the second find

$N \sin \phi = (ak/e\sqrt{1-e^2}) \cos d$ and with $N = a/\sqrt{1-e^2 \sin^2 \phi}$, solving for $\sec^2 \phi$ find

$$\sec^2 \phi = \frac{1 - e^2 + k^2 \cos^2 d}{(1 - e^2)[1 - (k^2/e^2) \cos^2 d]} . \quad (32)$$

By differentiating $N \sin \phi = (ak/e\sqrt{1-e^2}) \cos d$ obtain

$$(N \sin \phi)' d\phi = -(ak/e\sqrt{1-e^2}) \sin d \delta d \quad (33)$$

Since $(N \sin \phi)' = \frac{R \cos \phi}{1 - e^2}$, equation (33) may be written

$$\frac{R \cos \phi}{1 - e^2} d\phi = -(ak/e\sqrt{1-e^2}) \sin d \delta d \text{ or finally}$$

$$(R^2 \cos^2 \phi d\phi^2) = (1 - e^2) a^2 (k^2/e^2) \sin^2 d \delta d^2. \quad (34)$$

Now from (31) and (32) find

$$\sec^2 \phi_0 - \sec^2 \phi = \frac{(k^2/e^2) \sin^2 d}{(1 - e^2)(1 - k^2/e^2)[1 - (k^2/e^2) \cos^2 d]}, \quad (35)$$

and the numerator of (29) becomes

$$(1 - e^2) \sec^2 \phi [(1 - e^2) \sec^2 \phi_0 + 2e^2] + e^4 = \frac{1 - k^2 + k^2 \cos^2 d}{(1 - k^2/e^2)[1 - k^2/e^2] \cos^2 d}. \quad (36)$$

With the values from (34), (35), (36) the linear element (29) becomes

$$ds^2 = \frac{1 - k^2 + k^2 \cos^2 d}{(1 - k^2/e^2)[1 - (k^2/e^2) \cos^2 d]} \cdot \frac{(1 - e^2)(1 - k^2/e^2)[1 - (k^2/e^2) \cos^2 d]}{(k^2/e^2) \sin^2 d (1 - e^2)^2} \cdot (1 - e^2) \\ a^2(k^2/e^2) \sin^2 d \delta d^2 = a^2(1 - k^2 + k^2 \cos^2 d) \delta d^2, \\ ds^2 = a^2(1 - k^2 \sin^2 d) \delta d^2. \quad (37)$$

Now equation (37) is the usual elliptic integral form with modulus k , and we write

$$s = a \left[\int_0^{d_1} + \int_0^{d_2} \right] (1 - k^2 \sin^2 d)^{1/2} \delta d, \quad (38)$$

where $k = (e\sqrt{1-e^2}/a) N_0 \sin \phi_0$, the modulus of the elliptic integral, and

$d_1 = \cos^{-1}(N_1 \sin \phi_1 / N_0 \sin \phi_0)$, $d_2 = \cos^{-1}(N_2 \sin \phi_2 / N_0 \sin \phi_0)$. (k is equal to e_0 the eccentricity of the great elliptic arc – see Figure 15).

The integrand of (38) may be expanded by the binomial formula and integrated term by term to obtain an approximation formula for direct computation. To 6th order terms in k : $(1 - k^2 \sin^2 d)^{1/2} = 1 - \frac{1}{2}k^2 \sin^2 d - (1/8)k^4 \sin^4 d - (1/16)k^6 \sin^6 d -$

(39)

Making the identity substitutions

$$\sin^2 d = \frac{1}{2} - \frac{1}{2} \cos 2d, \sin^4 d = (3/8) - \frac{1}{2} \cos 2d + (\cos 4d)/8$$

$\sin^6 d = (5/16) - (15/32) \cos 2d + (3/16) \cos 4d - (1/32) \cos 6d$, in (39) and integrating term by term according to (38) one obtains

$$\begin{aligned} s/a &= (d_1 + d_2) - \frac{1}{2}k^2 [\frac{1}{2}(d_1 + d_2) - \frac{1}{4}(\sin 2d_1 + \sin 2d_2)] - (1/8)k^4 [(3/8)(d_1 + d_2) - \\ &\quad \frac{1}{4}(\sin 2d_1 + \sin 2d_2) + (1/32)(\sin 4d_1 + \sin 4d_2)] - (1/16)k^6 [(5/16)(d_1 + d_2) - \\ &\quad (15/64)(\sin 2d_1 + \sin 2d_2) + (3/64)(\sin 4d_1 + \sin 4d_2) - (1/192)(\sin 6d_1 + \sin 6d_2)]. \end{aligned} \quad (40)$$

By means of the identity $\sin x + \sin y =$

$2 \sin \frac{1}{2}(x+y) \cos \frac{1}{2}(x-y)$, equation (40) may be written finally as

$$\begin{aligned} s/a &= (d_1 + d_2) - \frac{1}{4}k^2 [(d_1 + d_2) - \sin(d_1 + d_2) \cos(d_1 - d_2)] \\ &\quad - (1/128)k^4 [6(d_1 + d_2) - 8 \sin(d_1 + d_2) \cos(d_1 - d_2) + \sin 2(d_1 + d_2) \cos 2(d_1 - d_2)] \quad (41) \\ &\quad - (1/1536)k^6 [30(d_1 + d_2) - 45 \sin(d_1 + d_2) \cos(d_1 - d_2) + 9 \sin 2(d_1 + d_2) \cos 2(d_1 - d_2) \\ &\quad - \sin 3(d_1 + d_2) \cos 3(d_1 - d_2)], \end{aligned}$$

a and e are semimajor axis and eccentricity of the meridian ellipse, $k = (e \sqrt{1-e^2}/a) N_0 \sin \phi_0$ ($k = e_0$, the eccentricity of the great elliptic arc), ϕ_0 is the vertex of the great elliptic arc as given by (21). $d_1 = \text{arc cos } (N_1 \sin \phi_1 / N_0 \sin \phi_0)$, $d_2 = \text{arc cos } (N_2 \sin \phi_2 / N_0 \sin \phi_0)$. When $\phi_0 = 90^\circ$; equation (41) gives a meridian arc of the spheroid. When $\phi_0 = 0$, an arc of the equator or circle of radius a is given. Formula (41) thus consists of a circular arc and successive corrective terms.

To examine the contribution of the terms in (41) take the case $\phi_1 = \phi_2 = 0$, $\phi_0 = 45^\circ$, $d_1 = d_2 = 90^\circ$ which will give the semilength of the great ellipse making an angle of 45° with the equator. For the Clarke 1866 spheroid, $e^2 = 6.768657997 \times 10^{-3}$, $a = 6,378,206.4$ meters.

From (41) we have then

$$1\text{st term } a \times (d_1 + d_2) = 20,037,773 \text{ meters}$$

$$2\text{nd term } -a \times 2.65804 \times 10^{-3} = -16,954 \text{ meters}$$

$$3\text{rd term } -a \times 0.17 \times 10^{-5} = -11 \text{ meters}$$

$$4\text{th term } -a \times 0.24 \times 10^{-8} = -0.015 \text{ meters}$$

When $\phi_0 = 90^\circ$, $\phi_1 = \phi_2 = 0$, $d_1 + d_2 = \pi$, and (41) reduces to the usual formula for length of the semimeridian from equator to equator through the pole $s = a \pi [1 - \frac{1}{4}e^2 - (3/64)e^2 - (5/256)e^6 - \dots]$.

GREAT ELLIPTIC ARC LENGTH IN TERMS OF PARAMETRIC LATITUDE θ

Equation (41) gives the arc length, but the modulus k , d_1 and d_2 , and vertex ϕ_0 must be expressed in terms of parametric latitude, θ , if the geographic latitudes ϕ_1, ϕ_2 of the given points P_1, P_2 have been first converted to parametric latitudes θ_1, θ_2 .

The relationships $\tan \phi = \frac{\tan \theta}{(1-e^2)^{1/2}}$, $N \sin \phi = \frac{a}{(1-e^2)^{1/2}} \sin \theta$, applied to

$$k = (e \sqrt{1-e^2}/a) N_0 \sin \phi_0,$$

$d_1 = \text{arc cos}(N_1 \sin \phi_1 / N_0 \sin \phi_0)$, $d_2 = \text{arc cos}(N_2 \sin \phi_2 / N_0 \sin \phi_0)$, and the last of equations (21) give

$$e_0 = k = e \sin \theta_0, d_1 = \text{arc cos}(\sin \theta_1 / \sin \theta_0), d_2 = \text{arc cos}(\sin \theta_2 / \sin \theta_0),$$

$$\tan \theta_0 = (\tan^2 \theta_1 + \tan^2 \theta_2 - 2 \tan \theta_1 \tan \theta_2 \cos \Delta \lambda)^{1/2} / \sin \Delta \lambda,$$

whence

$$\sin \theta_0 = \tan \theta_0 / (1 + \tan^2 \theta_0)^{1/2}, \quad (42)$$

$$\sin \theta_0 = \left(\frac{\tan^2 \theta_1 + \tan^2 \theta_2 - 2 \tan \theta_1 \tan \theta_2 \cos \Delta \lambda}{\tan^2 \theta_1 + \tan^2 \theta_2 - 2 \tan \theta_1 \tan \theta_2 \cos \Delta \lambda + \sin^2 \Delta \lambda} \right)^{1/2}.$$

Equations (41) and (42) give then the arc length along the great elliptic arc when geographic latitudes have been converted to parametric latitudes.

THE CHORD DISTANCE

The chord distance between the points $Q_1(x_1, 0, z_1)$, $Q_2(x_2, y_2, z_2)$ as shown in Figures (13) and (14) is given by the usual distance formula where the coordinates may be expressed in terms of either ϕ or θ , that is from (1)

$$x_1 = N_1 \cos \phi_1, y_1 = 0, z_1 = N_1(1-e^2) \sin \phi_1 \text{ (in terms of } \phi)$$

$$x_2 = N_2 \cos \phi_2 \cos \Delta \lambda, y_2 = N_2 \cos \phi_2 \sin \Delta \lambda, z_2 = N_2(1-e^2) \sin \phi_2, \quad (43)$$

or $x_1 = a \cos \theta_1, y_1 = 0, z_1 = a \sqrt{1-e^2} \sin \theta_1 \text{ (in terms of } \theta)$

$$x_2 = a \cos \theta_2 \cos \Delta \lambda, y_2 = a \cos \theta_2 \sin \Delta \lambda, z_2 = a \sqrt{1-e^2} \sin \theta_2.$$

Applying the distance formula to each set of formulas in (43) for coordinates one obtains

$$C = [(N_1 \cos \phi_1 - N_2 \cos \phi_2 \cos \Delta \lambda)^2 + N_2^2 \cos^2 \phi_2 \sin^2 \Delta \lambda + (1-e^2)^2 (N_1 \sin \phi_1 - N_2 \sin \phi_2)^2]^{1/2} \quad (44)$$

and in terms of θ

$$C = a [(\cos \theta_2 \cos \Delta \lambda - \cos \theta_1)^2 + \cos^2 \theta_2 \sin^2 \Delta \lambda + (1-e^2)(\sin \theta_2 - \sin \theta_1)^2]^{1/2} \quad (45)$$

In (45), expand the quantities in the brackets combining terms to obtain

$$C = a [2 - 2(\sin \theta_1 \sin \theta_2 + \cos \theta_1 \cos \theta_2 \cos \Delta \lambda) - e^2 (\sin \theta_2 - \sin \theta_1)^2]^{1/2}. \quad (46)$$

Now $\cos(d_1 + d_2) = \sin \theta_1 \sin \theta_2 + \cos \theta_1 \cos \theta_2 \cos \Delta \lambda$ and with $\sin \theta_i = \sin \theta_0 \cos d_i$,

$\sin \theta_2 = \sin \theta_0 \cos d_2$, $k^2 = e^2 \sin^2 \theta_0$ from (42), equation (46) can be written

$$C = a [2\{1 - \cos(d_1 + d_2)\} - k^2 (\cos d_1 - \cos d_2)^2]^{1/2}. \quad (47)$$

With the identity $(\cos d_1 - \cos d_2)^2 = [1 - \cos(d_1 + d_2)][1 - \cos(d_1 - d_2)]$,

we can write (47) finally as

$$C = a \left[\{1 - \cos(d_1 + d_2)\} \{2 - k^2[1 - \cos(d_1 - d_2)]\} \right]^{1/2}. \quad (48)$$

Now (48) gives the chord length no matter which latitude is used, ϕ or θ , since for ϕ :

$$d_1 = \text{arc cos}(N_1 \sin \phi_1 / N_0 \sin \phi_0), \quad d_2 = \text{arc cos}(N_2 \sin \phi_2 / N_0 \sin \phi_0),$$

$$k^2 = [e^2(1 - e^2)/a^2] N_0^2 \sin^2 \phi_0; \text{ while for } \theta:$$

$d_1 = \text{arc cos}(\sin \theta_1 / \sin \theta_0), \quad d_2 = \text{arc cos}(\sin \theta_2 / \sin \theta_0), \quad k^2 = e^2 \sin^2 \theta_0$. Also (41) and (48) make it possible to prepare a computing form in terms of either ϕ or θ with corresponding azimuth forms from equations (12), (13), (15), (16), (17), (18).

THE ANGLE BETWEEN THE CHORD AND THE HORIZON AT A GIVEN POINT OF THE ELLIPSOID

Referring to Figure 13, it is seen that the angle β is determined by a perpendicular, u , from Q_2 upon the tangent at Q_1 and the chord c . That is $\sin B = u/c$.

Now the length of u is obtained by normalizing the equation of the tangent plane at Q_1 , equation (4), and substituting the coordinates of the point Q_2 from (1):

$$u = \frac{1}{N_1} [a^2 - N_1 N_2 \cos \phi_1 \cos \phi_2 \cos \Delta \lambda - (1 - e^2) N_1 N_2 \sin \phi_1 \sin \phi_2]. \quad (49)$$

We can express u in parametric latitude, θ , since $(1 - e^2) N_1 N_2 \sin \phi_1 \sin \phi_2 = a^2 \sin \theta_1 \sin \theta_2, N_1 N_2 \cos \phi_1 \cos \phi_2 = a^2 \cos \theta_1 \cos \theta_2, N_1 = (a/\sqrt{1 - e^2}) \sqrt{1 - e^2 \cos^2 \theta_1}$, i.e.

$$u = a \sqrt{1 - e^2} \frac{1 - (\sin \theta_1 \sin \theta_2 + \cos \theta_1 \cos \theta_2 \cos \Delta \lambda)}{\sqrt{1 - e^2 \cos^2 \theta_1}} \quad (50)$$

Referring to equation (46) and the discussion there,

$$\cos(d_1 + d_2) = \sin \theta_1 \sin \theta_2 + \cos \theta_1 \cos \theta_2 \cos \Delta \lambda,$$

$\sin \theta_1 = \sin \theta_0 \cos d_1, k = e \sin \theta_0$ and (50) can be written in the form

$$u = b \frac{1 - \cos(d_1 + d_2)}{(1 - e^2 + k^2 \cos^2 d_1)^{1/2}}, \quad (51)$$

Where $b = a \sqrt{1 - e^2}$ is the minor semiaxis of the reference ellipsoid. From (48) and (51) we have then

$$\sin \beta = \frac{u}{c} = \left\{ \frac{(1 - e^2)[1 - \cos(d_1 + d_2)]}{[2 - k^2\{1 - \cos(d_1 - d_2)\}](1 - e^2 + k^2 \cos^2 d_1)} \right\}^{1/2} \quad (52)$$

and thus $\sin \beta$ is expressed in the same quantities as the distance and chord lengths; see equations (41) and (48).

MAXIMUM SEPARATION OF CHORD AND ELLIPTIC ARC

In Figure 14, H_0 is the maximum separation between the great elliptic arc and the chord. As shown, this occurs when the tangent to the ellipse is parallel to the chord. Also when this occurs the center of the ellipse, the midpoint of the chord, and the point P on the curve are collinear, [10]. Hence the geographic coordinates of the point P can be found from the intersection of the meridian through Q and the plane of the great elliptic section.

The coordinates of Q, the midpoint of the chord Q_1Q_2 , are

$$Q \left\{ \begin{array}{l} (a/2)(\cos \theta_2 \cos \Delta \lambda + \cos \theta_1) \\ (a/2)(\cos \theta_2 \sin \Delta \lambda) \\ (b/2)(\sin \theta_1 + \sin \theta_2) \end{array} \right.$$

and the meridian through Q has the equation $(\cos \theta_2 \sin \Delta \lambda)x - (\cos \theta_1 + \cos \theta_2 \cos \Delta \lambda)y = 0$. (53)

The equation to the plane of the great elliptic arc in terms of parametric latitude is

$$Ax + By + Cz = 0, \quad (54)$$

$$A = b \tan \theta_1 \sin \Delta \lambda, \quad B = b(\tan \theta_2 - \tan \theta_1 \cos \Delta \lambda), \quad C = -a \sin \Delta \lambda$$

(Compare equation (14), where it is in terms of geodetic latitude ϕ). Now the point P ($a \cos \theta \cos \lambda, a \cos \theta \sin \lambda, b \sin \theta$) on the ellipsoid must satisfy both equations (53) and (54) if it is to be the required point P on the great elliptic arc. This leads to the equations $\cos \theta_2 \sin \Delta \lambda \cos \lambda - (\cos \theta_1 + \cos \theta_2 \cos \Delta \lambda) \sin \lambda = 0$,

$$A \cos \lambda + B \sin \lambda + C \tan \theta = 0, \quad (55)$$

where A, B, C are those of equation (54).

Solving (55) for λ and θ find,

$$P \left\{ \begin{array}{l} \lambda = \arctan [(\cos \theta_2 \sin \Delta \lambda) / (\cos \theta_2 \cos \Delta \lambda + \cos \theta_1)], \\ \theta = \arctan \left[\frac{(\tan \theta_1 \sin \Delta \lambda) \cos \lambda + (\tan \theta_2 - \tan \theta_1 \cos \Delta \lambda) \sin \lambda}{\sin \Delta \lambda} \right], \\ \theta = \arctan \left[\frac{\tan \theta_2 \sin \lambda + \tan \theta_1 \sin (\Delta \lambda - \lambda)}{\sin \Delta \lambda} \right] \\ \theta = \arctan [(\sin \theta_1 + \sin \theta_2) / (\cos^2 \theta_1 + \cos^2 \theta_2 + 2 \cos \theta_1 \cos \theta_2 \cos \Delta \lambda)^{1/2}] . \end{array} \right. \quad (56)$$

We have seen that

$$\begin{aligned} \cos(d_1 + d_2) &= \sin \theta_1 \sin \theta_2 + \cos \theta_1 \cos \theta_2 \cos \Delta \lambda \\ \sin \theta_1 &= \sin \theta_0 \cos d_1, \quad \sin \theta_2 = \sin \theta_0 \cos d_2 \end{aligned} \quad (57)$$

whence we can express

$$\begin{aligned} \cos^2 \theta_1 + \cos^2 \theta_2 + 2 \cos \theta_1 \cos \theta_2 \cos \Delta \lambda &= [1 + \cos(d_1 + d_2)][2 - \sin^2 \theta_0 \{1 + \cos(d_1 - d_2)\}], \\ (\sin \theta_1 + \sin \theta_2)^2 &= \sin^2 \theta_0 [1 + \cos(d_1 + d_2)][1 + \cos(d_1 - d_2)] \end{aligned}$$

and the last equation of (56) may be written

$$\theta = \arctan \frac{\sin \theta_0 \sqrt{1 + \cos(d_1 - d_2)}}{\sqrt{2 - \sin^2 \theta_0 [1 + \cos(d_1 - d_2)]}}. \quad (58)$$

It is known that $H_0^2 = PP'^2$ will be given by $H_0^2 = [(y - y_1)r - (z - z_1)q]^2 + [(z - z_1)p - (x - x_1)r]^2 + [(x - x_1)q - (y - y_1)p]^2$, where x, y, z , are coordinates of P ; x_1, y_1, z_1 are coordinates of Q_1 and p, q, r are direction cosines of the chord $c = Q_1Q_2$, [11]. See Figure 14.

From (56) and (58) we can express the rectangular coordinates of P as

$$\begin{aligned} P: \quad x &= a \cos \theta \cos \lambda = \frac{a}{\sqrt{2}} \frac{\cos \theta_1 + \cos \theta_2 \cos \Delta \lambda}{\sqrt{1 + \cos(d_1 + d_2)}} \\ y &= a \cos \theta \sin \lambda = \frac{a}{\sqrt{2}} \frac{\cos \theta_2 \sin \Delta \lambda}{\sqrt{1 + \cos(d_1 + d_2)}} \\ z &= b \sin \theta = \frac{b}{\sqrt{2}} \frac{\sin \theta_1 + \sin \theta_2}{\sqrt{1 + \cos(d_1 + d_2)}} \end{aligned} \quad (60)$$

If the coordinates from (1) are converted to parametric latitude they will be $Q_1(a \cos \theta_1, 0, b \sin \theta_1)$; $Q_2(a \cos \theta_2 \cos \Delta \lambda, a \cos \theta_2 \sin \Delta \lambda, b \sin \theta_2)$ whence the direction cosines of the chord $c = Q_1Q_2$ are

$$\begin{aligned} p &= \frac{a}{c} (\cos \theta_2 \cos \Delta \lambda - \cos \theta_1) \\ q &= \frac{a}{c} \cos \theta_2 \sin \Delta \lambda \\ r &= \frac{b}{c} (\sin \theta_2 - \sin \theta_1) \end{aligned} \quad (61)$$

From (60) and the coordinates of $Q_1(a \cos \theta_1, 0, b \sin \theta_1)$ we have

$$\begin{aligned} x - x_1 &= \frac{a}{\sqrt{2} R_0} (\cos \theta_1 + \cos \theta_2 \cos \Delta \lambda) - a \cos \theta_1 \\ y - y_1 &= (a \cos \theta_2 \sin \Delta \lambda) / \sqrt{2} R_0 \\ z - z_1 &= \frac{b}{\sqrt{2} R_0} (\sin \theta_1 + \sin \theta_2) - b \sin \theta_1 \end{aligned} \quad (62)$$

$$\text{Where } R_0 = \sqrt{1 + \cos(d_1 + d_2)} = \sqrt{2} \cos \frac{1}{2}(d_1 + d_2).$$

With the values from (61) and (62) the expression (59) is formed to give

$$H_0^2 = \frac{a^2(\sqrt{2} - R_0)^2}{c^2 R_0^2} \cos^2 \theta_1 \cos^2 \theta_2 [b^2(\tan^2 \theta_1 + \tan^2 \theta_2 - 2 \tan \theta_1 \tan \theta_2 \cos \Delta \lambda) + a^2 \sin^2 \Delta \lambda] \quad (63)$$

Where $R_0 = [1 + \cos(d_1 + d_2)]^{1/2} = \sqrt{2} \cos \frac{1}{2}(d_1 + d_2)$.

Using the relationships (42), (48), (57) equation (63) can be solved for H_0 in any of the following several forms:

$$\begin{aligned} H_0 &= \frac{b_0 (\sqrt{2} - \sqrt{1 + \cos(d_1 + d_2)})}{\sqrt{2 - k^2 \{1 - \cos(d_1 - d_2)\}}} , \\ &= \frac{ab_0}{c} \left(\frac{(\sqrt{2})}{R_0} - 1 \right) \sin(d_1 + d_2) , \\ &= \frac{2ab_0}{c} \sin \frac{1}{2}(d_1 + d_2) [1 - \cos \frac{1}{2}(d_1 + d_2)] , \end{aligned} \quad (64)$$

Where $R_0 = \sqrt{1 + \cos(d_1 + d_2)} = \sqrt{2} \cos \frac{1}{2}(d_1 + d_2)$

$b_0 = \sqrt{1 - k^2} = a\sqrt{1 - e_0^2}$ = minor semiaxis of the great elliptic arc – see Figure 15. Thus H_0 is also expressed in quantities common with other elements of the great elliptic arc – see equations (41), (48), and (52).

A COMPUTING FORM FOR GREAT ELLIPTIC ARC LENGTH AND ASSOCIATED ELEMENTS

Since the computations to be discussed with the great elliptic arc approximation and the Andoyer-Lambert approximation both involve corrections to spherical elements, the basic spherical approximation is reviewed in Figure 16, and basic spherical formulae listed.

Now from (42) write

$$\sin^2 \theta_0 = K/(K + 1),$$

$$K = (A \tan \theta_1 + B \tan \theta_2) / \sin^2 \Delta \lambda \quad (65)$$

$$A = \tan \theta_1 - \tan \theta_2 \cos \Delta \lambda, B = \tan \theta_2 - \tan \theta_1 \cos \Delta \lambda. \quad (66)$$

Azimuth equations (17) become

$$\cot \alpha_{AB} = D_1 (R_1 - B), \cot \alpha_{BA} = D_2 (A - R_2)$$

$$D_1 = \cos \theta_1 / T_1 \sin \Delta \lambda, D_2 = \cos \theta_2 / T_2 \sin \Delta \lambda \quad (67)$$

$$R_1 = C / \cos \theta_2, R_2 = -C / \cos \theta_1$$

$$C = e^2 (\sin \theta_2 - \sin \theta_1)$$

$$T_1 = (1 - e^2 \cos^2 \theta_1)^{1/2}, T_2 = (1 - e^2 \cos^2 \theta_2)^{1/2}$$


Equation (41) becomes

$$s = a (H + U_1 + U_2 + U_3) \quad (68)$$

$$\text{where } U_1 = -N_1 (H - Q_1), U_2 = -N_2 (6H - 8Q_1 + Q_2),$$

$$U_3 = -N_3 (30H - 45Q_1 + 9Q_2 - Q_3)$$

$$k^2 = e^2 \sin^2 \theta_0 = e_0^2 \text{ (eccentricity of the great elliptic arc).}$$

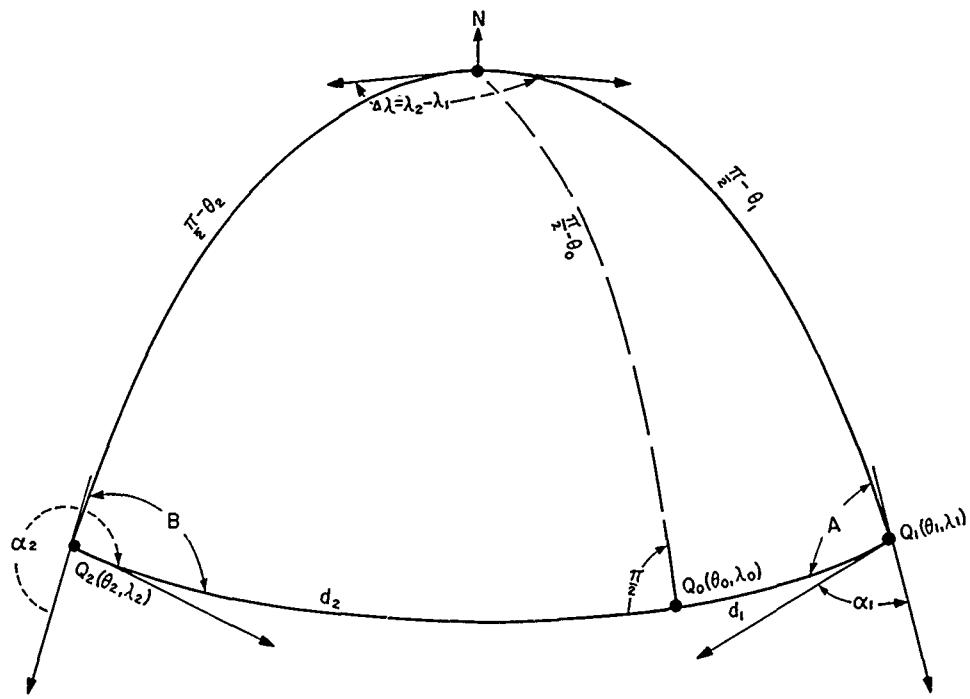

$$\cot A = \frac{\cos \theta_1 \tan \theta_2 - \sin \theta_1 \cos \Delta \lambda}{\sin \Delta \lambda}$$

$$\cot B = \frac{\cos \theta_2 \tan \theta_1 - \sin \theta_2 \cos \Delta \lambda}{\sin \Delta \lambda}$$

$$\cos(d_1 + d_2) = \sin \theta_1 \sin \theta_2 + \cos \theta_1 \cos \theta_2 \cos \Delta \lambda$$

$$\sin(d_1 + d_2) = (\cos \theta_1 \sin \Delta \lambda) / \sin B = (\cos \theta_2 \sin \Delta \lambda) / \sin A$$

$$\sin \theta_1 = \sin \theta_0 \cos d_1, \quad \sin \theta_2 = \sin \theta_0 \cos d_2$$

NOTE: Q_0 may be external to Q_1Q_2 , i.e. if either

A or B is greater than 90°

Figure 16. Elements of polar spherical triangles.

$$N_1 = k^2/4, N_2 = k^4/128 = 1/8N_1^2, N_3 = k^6/1536 = (1/3)N_1N_2,$$

$$Q_1 = \sin H \cos P, Q_2 = \sin 2H \cos 2P, Q_3 = \sin 3H \cos 3P, H = d_1 + d_2, P = d_1 - d_2,$$

d_1 and d_2 are computed from

$$\begin{aligned} \cos 2d_1 &= 2(1 - \cos^2\theta_1)/\sin^2\theta_0 - 1 \\ \cos 2d_2 &= 2(1 - \cos^2\theta_2)/\sin^2\theta_0 - 1 \end{aligned} \quad (69)$$

since $\cos^2\theta_1$ and $\cos^2\theta_2$ are already needed for T_1 and T_2 , (67) above, and the use of $\sin^2\theta_0$ eliminates the computation of the square root of $K/(K+1)$. A check is provided by $\sin(d_1 + d_2) = \sin\theta_1 \sin\theta_2 + \cos\theta_1 \cos\theta_2 \cos\Delta\lambda$.

From (48) the equation of the chord may be written

$$c = a(VW)^{1/2}, V = (1 - \cos H), W = 2 - k^2R, R = (1 - \cos P). \quad (70)$$

From (51) and (52) in terms of the symbols used above find

$$u = bV/T_1, \sin\beta = bV/cT_1 = \frac{b}{T_1} \sqrt{\frac{V}{W}}. \quad (71)$$

$$\text{From (64) in terms of the above symbols find } H_0 = \frac{2ab_0}{c} (\sin \frac{1}{2}H) (1 - \cos \frac{1}{2}H), \quad (72)$$

$$b_0 = a\sqrt{1 - k^2}, k^2 = e^2 \sin^2\theta_0.$$

Figure 17, shows equations (65) through (72) arranged for computing and a computation performed on the line Moscow to Cape of Good Hope. On the form find the geodetic distance, the normal section azimuths, the chord distance, the angle between the chord and the horizon at P_1 , and the maximum separation of the chord and surface. The following table lists these values and gives a comparison with the distances computed by the rigorous Helmert method and the Andoyer-Lambert Approximation. Note that the geographic coordinates of the point $P(\phi, \lambda)$ where the maximum chord separation from the surface occurs may be computed from (56), (58), and already computed quantities in Figure (17).

MOSCOW TO CAPE OF GOOD HOPE

DISTANCE			AZIMUTHS		
Meters	n.m.	Method	Forward	Back	Type
10,102,069.91	5454.6814	Great Elliptic	15° 46' 56".744	190° 39' 27".350	Great Elliptic Section
			15° 49' 57".607	190° 41' 29".799	Normal Section
10,102,069.06	5454.6809	Helmert	15° 48' 17".674	190° 39' 32".208	Geodetic
10,102,065.28	5454.6789	Andoyer-Lambert	15° 48' 17".518	190° 39' 32".110	Geodetic
			meters	n.m.	
CHORD DISTANCE			9,068,419.05	4896.5546	
(MAXIMUM CHORD SEPARATION)			1,906,854.55	1029.6191	
CHORD DEPRESSION ANGLE			45° 32' 37".462.		

Computations for distance, Normal Section Azimuths, Chord length, Angle of Depression of the Chord Maximum Separation distance of chord and arc. Based on Great Elliptic

Section Approximation to geodesic. Clarke 1866 Spheroid.

$$a = 6,378,206.4 \text{ meters}, b = 6,356,583.8 \text{ meters}, e^2 = 6.7686580 \times 10^{-3}, 1 \text{ radian} = 206,264.8062 \text{ sec.}$$

Figure 17.

Figures 18 and 19 show the great elliptic arc formulae for distance arranged with geodetic azimuth formulae and the computations for distance and azimuth over the two lines

(1) MOSCOW TO CAPE OF GOOD HOPE and (2) RAMEY AFB to MOUNTAIN HOME AFB.

No square roots are involved and only eight place tables of trigonometric functions, as Peters, are needed in addition to the constants for a particular spheroid of reference. The comparison with the Helmert rigorous and Andoyer-Lambert approximation is:

Line	Distance(meters)	Method	Forward Az.	Back Az.
(1)	10,102,069.91	Great Elliptic Arc	15° 48' 17".519	190° 39' 32".109
	10,102,069.06	Helmert	15° 48' 17".674	190° 39' 32".208
	10,102,065.28	Andoyer-Lambert	15° 48' 17".518	190° 39' 32".110
(2)	5,304,035.439	Great Elliptic Arc	131° 52' 34".985	285° 10' 06".870
	5,304,032.437	Helmert	131° 52' 35".29	285° 10' 06".65
	5,304,030.844	Andoyer-Lambert	131° 52' 35".043	285° 10' 06".869

REVIEW OF FORMER STUDIES

The Air Force Aeronautical Charting and Information Center made an extensive study of the Inverse Problem of Geodesy (1956-1957), over lines 50 to 6000 miles, [12]. A review of this study indicates favorably the use of the so called Andoyer-Lambert Formulae relative to requirements for Hyperbolic Electronic Systems since (1) they give very nearly geodetic distance with about the same error over all lines from 50 to at least 6000 miles, (2) azimuths are within about a second of true geodetic azimuths over all lines, (3) no tabular data for a particular spheroid is needed, (4) the only table of mathematical functions required is a table of the natural trigonometric functions as Peters eight place tables, (5) no root extraction is involved in the computations. The formulae are thus quite adaptable to small electric desk calculators or larger high speed digital machines. However, in review it seemed unnecessary to convert geographic coordinates to parametric before making the computations, hence a series of computations were made over the ACIC chosen lines for direct comparison. A representative group from 50 to 6000 miles was selected and additional comparisons were made against two lines whose true geodetic lengths and azimuths were known. No lines of 0° azimuth (meridional sections) were used because this is the trivial or limiting case and extensive tables of meridional distances for all reference ellipsoids are available or quite simple computation formulae are available for computing meridional arcs. The spherical formulae used are:

COMPUTATIONS, DISTANCE, AZIMUTHS

Great Elliptic Arc, Geodetic Azimuths

Clarke 1866 Ellipsoid; $a = 6,378,206.4$ meters, $e^2 = 6.6786580 \times 10^{-3}$,
 $f/2 = 0.00169503765$, 1 radian = 206,264.8062 seconds, 1852 meters = 1 n. m.

ϕ_1	45°	19.500	1. (A)	MOSSOW	λ_1	-32°	34°	"
ϕ_2	33°	56°	2. (B)	Cape of Good Hope	λ_2	-18°	28°	$41,400$
$\tan \phi_1$	$+1.468$	9.5500	2.	Always west of 1.	$\Delta \lambda = \lambda_2 - \lambda_1$	$+19.05^\circ$	34.05°	
$\tan \phi_2$	-0.672	841.57			$\sin \Delta \lambda$	$+0.329$	0.9901	
$\tan \theta_1$	$+1.464$	0.1523	$\tan \theta_2 = 0.67056057$		$\cos \Delta \lambda$	$+0.944$	0.9009	
$\sin \theta_1$	$+0.25752446$		$\sin \theta_2 = 0.55565219$		$\sin^2 \Delta \lambda$	$+0.106$	0.92376	
$\cos \theta_1$	$+0.56403269$		$\cos \theta_2 = +0.83055461$		$A = \tan \theta_1 - \tan \theta_2 \cos \Delta \lambda$	$+2.09768833$		
$\cos^2 \theta_1$	$.318$	$.3288$	$\cos^2 \theta_2 = +0.68982096$		$B = \tan \theta_2 - \tan \theta_1 \cos \Delta \lambda$	-2.05404044		
$K = (A \tan \theta_1 + B \tan \theta_2) / \sin^2 \Delta \lambda$	$+41.596$	3146.3			$V_0 = \sin^2 \theta_0 = K / (K + 1)$	$+0.916$	0.71276	
$\cos 2d_1 = 2(1 - \cos^2 \theta_1) / V_0 - 1$	$+0.296$	5534.99			$\cos 2d_2 = 2(1 - \cos^2 \theta_2) / V_0 - 1$	-0.364772093		
$H = d_1 + d_2$	$+20.59$	$0.6235H_r$ (radians)	$\pm 1.58799994.2$	$P = d_1 - d_2 = 45.7$	$\frac{37.26}{"}$	$k^2 = e^2 V_0$	6.0096809×10^{-3}	
$\sin H$	± 0.9985203		$\cos P = 0.92470502$	$Q_1 = \sin H \cos P$	$\frac{-0.92456824}{"}$	$N_1 = k^2/4$	$+1.65242X10^{-3}$	
$\sin 2H = -0.03439942$			$\cos 2P = 0.024422905$	$Q_2 = \sin 2H \cos 2P$	$\frac{0.024422905}{"}$	$N_2 = N_1^2/8$	$+3.4131X10^{-7}$	
$\sin 3H = 0.29846853$			$\cos 3P = -0.388672002$	$Q_3 = \sin 3H \cos 3P$	$\frac{-0.388672002}{"}$	$N_3 = NN_2/3$	$+7.055X10^{-11}$	
$U_1 = -N_r(H_r - Q_1) - 4.15182X10^{-3}$			$U_2 = -N_r(6H_r - 8Q_1 + Q_2) - 5.277X10^{-6}$			$N_4 = -N_3(30H_r - 45Q_1 + 9Q_2 - Q_3) - 6.3X10^{-9}$		
$\Sigma = H_r + U_1 + U_2 + U_3$	$+1.583$	8418	$s = a \sum \frac{f}{H''} \frac{1029}{1029} \frac{069}{069} \frac{91}{91}$			$\text{meters } \frac{545454}{545454} \frac{6814}{6814} \frac{6814}{6814}$	$n. m.$	
$\cot A_0 = B \cos \theta_1 / \sin \Delta \lambda$	-3.5418916		$P_0'' = \frac{f}{2} \cdot \frac{H''}{\sin H}$	$\frac{555555}{555555} \frac{289}{289}$	$\cot B_0 = A \cos \theta_2 / \sin \Delta \lambda$	$+3.226$	3528	
A_0	14°	01.416	$\sin 2A_0 = .552298282$	$\sin 2B_0 = .36270662$	B_0	1°	37°	"
$\delta A_0 \neq$	0.2	18.835	$\delta A_0'' = P_0'' \cos^2 \theta_2 \sin 2B_0$	$+138.935$	δB_0	0°	59.1221	
$-(A_0 - \delta A_0) =$	-164°	$11.462.481$	$\delta B_0'' = P_0'' \cos^2 \theta_1 \sin 2A_0$	$+92.388$	$B_0 - \delta B_0$	10°	$52.2.368$	
$\alpha_{AB} = 180^\circ - (A_0 - \delta A_0)$	155°	$48.171.519$				0°	3.9	32.109

Figure 18.

COMPUTATIONS, DISTANCE, AZIMUTHS

Great Elliptic Arc, Geodetic Azimuths

Clark 1866 Ellipsoid: $a = 6,378,206.4$ meters, $e^2 = 6.7686580 \times 10^{-3}$
 $f/2 = 0.00169503765$, 1 radian = 206,264.8062 seconds, 1852 meters = 1 n. m.

ϕ_1	$1^{\circ} 29'$	52.9	1 (A) Ramey Air Force Base	λ_1	67°	$07'$	"	30.3
ϕ_2	$43^{\circ} 43'$	19.6	2 (B) Mountain Home AFB	λ_2	115°	52	"	54.7
$\tan \phi_1$	$+ 0.334$	58.400	2. Always west of 1.	$\Delta \lambda = \lambda_2 - \lambda_1$	48°	$45'$	"	24.4
$\tan \phi_2$	$+ 0.934$	32.590	$\tan \theta = 0.986609825$	$\sin \Delta \lambda$	$+ 0.751$	91780		
$\tan \theta_1$	$+ 0.333$	44.994	$\tan \theta_1 + 0.93115847$	$\cos \Delta \lambda$	$+ 0.659$	25687		
$\sin \theta_1$	$+ 0.316$	32.716	$\sin \theta_2 + 0.68146713$	$\sin^2 \Delta \lambda$	$+ 0.565$	38038		
$\cos \theta_1$	$+ 0.949$	4.5017	$\cos \theta_2 + 0.931848922$	$M = \tan \theta_2 - \tan \theta_1 \cos \Delta \lambda$	$+ 0.711$	52944		
$\cos^2 \theta_1$	$- 0.899$	93.915	$\cos \theta_2 + 0.931848922$	$N = \tan \theta_1 - \tan \theta_2 \cos \Delta \lambda$	$- 0.280$	42288		
$K = (N \tan \theta_1 + M \tan \theta_2) / \sin^2 \Delta \lambda + 0.006$	142.96	$V_0 = \sin^2 \theta_0 = K/(K+1)$	± 0.550153104					
$\cos (d_1 + d_2) = \sin \theta_1 \sin \theta_2 + \cos \theta_1 \cos \theta_2 \cos \Delta \lambda + 0.0326228$		$\cot A = M \cos \theta_1 / \sin \Delta \lambda \pm 0.899$	44234					
$\sin (d_1 + d_2) = \cos \theta_1 \sin \Delta \lambda / \sin B = \cos \theta_2 \sin \Delta \lambda / \sin A \pm 73.939275$		$\cot B = N \cos \theta_2 / \sin \Delta \lambda - 0.272$	93825					
$\cos 2d_1 = 2 \sin^2 \theta_1 / V_0 - 1 \mp 6.0097037$		$\cos 2d_2 = 2 \sin^2 \theta_2 / V_0 - 1 \pm 0.85191208$	$A \frac{48^{\circ}}{48^{\circ}} \frac{05^{\circ}}{05^{\circ}}$					
d_1 and d_2 are always in the first or second quadrant. If $A > 90^\circ$, $ d_1 > d_2 $, $d_1 > 0$, $d_2 < 0$. If $B > 90^\circ$, $ d_1 > d_2 $, $d_1 > 0$, $d_2 < 0$.								
$2d_1$	56°	$21.9382d_2 - 3.1$	$24^{\circ} 44.329$	$H = d_1 + d_2$	$40^{\circ} 40' 50''$	$P = d_1 - d_2$	$29^{\circ} 15'$	33.139
$\sin H$	$+ 0.39$	3.9895	$\cos P \pm 0.36618$	$Q_1 = \sin H \cos P$	$+ 0.130$	29.92	H_F (radians)	0.83217687
$\sin 2H$	$+ 0.72$	7.0	$\cos 2P \mp 0.93053528$	$Q_2 = \sin 2H \cos 2P \mp 0.92646577$	46.577	$k^2 = e^2 V_0$	$3.374692110 - 3$	
$\sin 3H$	$+ 0.2480.3$	$cos 3P \mp 0.533320682$	$Q_3 = \sin 3H \cos 3P \mp 0.320584555$	$N_1 = k^2/4$	$1.84867303X10^{-3}$			
$U_1 = -N_1(H_F - Q_1) \mp 0.58929984X10^{-3}$		$U_2 = -N_2(6H_F - 8Q_2) \mp 0.2669X10 - 6$		$N_2 = N_1/8$	$9.1.003X10 - 8$			
$U_3 = -N_3(30H_F - 45Q_1 + 9Q_2 - Q_3) \mp 0.274X10 - 9$				$N_3 = N_2/32.555$	$X10 - 11$			
$T = (1/2) H'' / \sin H$	$3^{\circ} 43.497$	$\sin 2A \pm 0.9410$	$55.304035.439$	meters	286.3	9500	n.m.	
A	48°	"	$\delta A'' = T \cos^2 \theta_2 \sin^2 B \pm 10.7^{\circ} 130'$		0°	3061	"	
δA	05°	32.885	$\delta B'' = T \cos^2 \theta_1 \sin 2A \pm 352.059$		B	125	15°	58.929
$(A - \delta A)$	07°	25.018	$8B$		125	$5^{\circ} 2.055$		$(B - \delta B)$
$\alpha_{AB} = 180^\circ - (A - \delta A)$	121°	52.2	24.985		10	06.870		10

Figure 19.

Spherical Formulae (see Figure 16)

$$\begin{aligned}
 \cos d &= \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda \\
 \sin A &= (\cos \phi_2 \sin \Delta\lambda) / \sin d, \quad \sin B = (\cos \phi_1 \sin \Delta\lambda) / \sin d \\
 \cot A &= (\cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda) / \sin \Delta\lambda \\
 \cot B &= (\cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda) / \sin \Delta\lambda \\
 \sin d &= (\cos \phi_1 \sin \Delta\lambda) / \sin B = (\cos \phi_2 \sin \Delta\lambda) / \sin A.
 \end{aligned} \tag{73}$$

The Andoyer-Lambert correction [13] for distance is:

$$\delta d = -\frac{f}{4} \left[\frac{d + 3 \sin d}{1 - \cos d} (\sin \phi_1 - \sin \phi_2)^2 + \frac{d - 3 \sin d}{1 + \cos d} (\sin \phi_1 + \sin \phi_2)^2 \right], \tag{74}$$

where d is spherical distance from (73) and $s = a(d + \delta d)$, f is the flattening, $f = (a - b)/a$, where a, b are the semiaxes of the reference ellipsoid (a is the radius of the auxiliary sphere).

Now (73) and (74) are essentially the same as used for several years in Loran computations except for the conversion to parametric latitudes which is not required with these formulas. The only difference in the appearance of the formulas is in the term $3 \sin d$ in (74) which is simply $\sin d$ in the formulae for parametric latitude, [14].

The corrections to the spherical angles A and B as given by (73) to get geodesic azimuths are, [13]:

$$\begin{aligned}
 \delta A &= \frac{f}{2} \left[\frac{d}{\sin d} \cos^2 \phi_2 \sin 2B - \cos^2 \phi_1 \sin 2A \right], \\
 \delta B &= \frac{f}{2} \left[\cos^2 \phi_2 \sin 2B - \frac{d}{\sin d} \cos^2 \phi_1 \sin 2A \right],
 \end{aligned} \tag{75}$$

the geodetic azimuths being then

$$\alpha_{AB} = 180^\circ - A + \delta A, \quad \alpha_{BA} = 180^\circ + B + \delta B.$$

The formulae as given by (73), (74), (75) were arranged in computing forms to make the check computations of the ACIC chosen lines. Note that the azimuths as given in the ACIC publications differ by 180° from the usual geodetic azimuths and the forward and back azimuths are interchanged from the conventions used in the check computations. The lines chosen are shown in TABLE 1, the comparisons are given in TABLES 2 and 3, while the actual computations are in Appendix 2.

TABLE 1

LINES COMPUTED

Line No.	Az. °	Terminus		Origin						Distance Miles
		Lat. °	Long. °	Lat. °	Long. °	Lat. "	Long. "	Lat. "	Long. "	
1	45	40	18	40	30	37.757	17	19	43.280	50
2	90	10	18	9	59	48.349	16	31	55.877	100
3	90	70	18	69	48	05.701	9	37	28.637	200
4	45	10	18	13	04	12.564	14	51	13.283	300
5	45	70	18	73	35	09.206	3	26	35.101	400
6	90	40	18	39	37	06.613	8	36	43.276	500
7	45	40	18	44	54	28.507	10	47	43.883	500
8	45	70N	18W	76	00	26.603N	28	42	03.567E	1000
9	90	40N	18W	27	49	42.130N	32	54	12.997E	3000
10	45	40N	18W	35	18	45.644N	102	02	29.370E	6000
11	50	43 03 19.6	115 52 54.7	18	29	57.9	67	07	30.3	3000 n.m.
12	10	33 56 03.5S	18 28 41.4E	55	45	19.5N	37	34	15.450E	5500 n.m.

1-10 From ACIC Reports 59 (page 39), 80 (page 23).

11 Ramey AFB to Mountain Home AFB, AFAC-TN-57-53, Astia Document 135972, 1957

12 Cape of Good Hope to Moscow

TABLE 2
Comparison With True Distances and Azimuths

Line No.	Computed Distance S_c meters	True Distance S_t meters	$S_c - S_t = \Delta S$ meters	Computed α_{AB}^c	True α_{AB}^t	$\alpha_{AB}^c - \alpha_{AB}^t = \Delta \alpha_{AB}$	Computed α_{BA}^c	True α_{BA}^t	$\alpha_{BA}^c - \alpha_{BA}^t = \Delta \alpha_{BA}$
1	80,467.388	80,466.490	+0.898	45 26 00.443	45 26 01.692	-1.249	244 59 58.759	244 59 59.997	-1.238
2	160,935.945	160,932.956	+2.989	90 15 17.506	90 15 17.480	+0.026	270 00 00.023	270 00 00.000	+0.023
3	321,862.977	321,866.796	-3.819	97 52 01.112	97 52 01.063	+0.049	270 00 00.026	269 59 59.950	+0.076
4	482,794.743	482,798.163	-3.420	45 37 44.972	45 37 46.111	-1.139	224 59 58.629	224 59 59.732	-1.103
5	643,728.709	643,732.429	-3.720	58 50 30.885	58 50 31.600	-0.715	224 59 59.601	225 00 00.154	-0.553
6	804,664.697	804,664.762	-0.065	96 01 06.689	96 01 06.640	+0.049	270 00 00.073	270 00 00.001	+0.072
7	804,666.623	804,664.771	+1.861	49 52 14.352	49 52 15.528	-1.176	224 59 58.828	224 59 59.994	-1.166
8	1,609,315.609	1,609,329.060	-13.451	89 55 22.643	89 55 22.833	-0.190	224 59 59.834	224 59 59.958	-0.124
9	4,827,983.105	4,827,984.247	-1.142	119 54 41.396	119 54 41.260	+0.136	269 59 59.612	270 00 00.121	-0.509
10	9,655,972.218	9,655,969.751	+2.467	138 23 42.394	138 23 42.755	-0.361	225 00 00.674	225 00 00.276	+0.398
11	5,304,028.110	5,304,032.437	-4.327	131 52 35.913	131 52 35.290	+0.623	285 10 07.272	285 10 06.650	+0.622
12	10,102,057.97	10,102,069.06	-11.09	15 48 16.939	15 48 17.674	-0.735	190 39 31.445	190 39 32.208	-0.753

TABLE 3

Error Summary

Line No.	Azimuth degrees	Terminal Latitude degrees	S = distance meters ΔS_m	ΔS meters feet	Relative distance error $\Delta S_m/S_m$	$\Delta a_{AB} = \Delta a_{1-2}$ seconds	$\Delta a_{BA} = \Delta a_{2-1}$ seconds
1	45	40N	80,466	43.5 + 0.9	+ 3.0	89,407 - 1.25 **	- 1.24 **
2	90	10N	160,933	86.9 + 3.0	+ 10.0	53,644 + 0.03	+ 0.02
3	90	70N	321,867	173.8 - 3.8	+ 12.5	84,702 + 0.05	+ 0.08
4	45	10N	482,798	260.7 - 3.4	- 11.2	141,899 - 1.14	- 1.10
5	45	70N	643,732	347.6 - 3.7	- 12.2	173,982 - 0.72	- 0.55
6	90	40N	804,665	434.5 - 0.07	- 0.2	11,495,214 + 0.05	+ 0.07
7	45	40N	804,667	434.5 + 1.9	+ 6.0	423,509 - 1.18	- 1.17
8	45	70N	1,609,329	869.0 - 13.5 *	- 44.6	119,210 - 0.19	- 0.12
9	90	40N	4,827,984	2606.9 - 1.1	- 3.6	4,389,076 + 0.14	- 0.51
10	45	40N	9,655,970	5213.8 + 2.5	+ 8.2	3,862,388 - 0.36	+ 0.40
11	50	43N	5,304,032	2863.9 - 4.3	- 14.2	1,233,496 + 0.62	+ 0.62
12	10	34S	10,102,069	5454.7 - 11.1	- 36.6	910,096 - 0.74	- 0.75

* Maximum distance error

** Maximum azimuth errors

INVESTIGATION OF HIGHER ORDER TERMS
IN ANDOYER-LAMBERT APPROXIMATION

While either form of Andoyer-Lambert approximation is probably satisfactory in the "state of the art" in hyperbolic navigational systems development, the question arises as to the higher order terms in the flattening of the Andoyer-Lambert approximation and the possibility of a single set of formulae which will give distance within one meter and azimuth within one second over all geodetic lines on the spheroid. This would be a practical operational system particularly if it maintained the several attributes of the Andoyer-Lambert first order approximation.

HISTORICAL

Now Lambert, [13], never published his derivation but had equivalent formulae for a first order approximation several years before the publication posthumously in 1932 of Andoyer's sketch, [15], of the derivation of the form as given in equation (74). Andoyer's derivation employs a differential oblique spherical triangle and it is not clear how one would proceed to higher order terms in the flattening. It is believed that Andoyer's derivation is the only recognized published one in existence.

DERIVATION FROM THE GREAT ELLIPTIC ARC

Independent derivations of the Andoyer-Lambert approximations were sought in the hopes of discovering a simple method of arriving at higher order terms in the flattening. It was noticed that the computations using the Andoyer-Lambert approximations; the ratios $(d - \sin d)/(1 + \cos d)$, $(d + \sin d)/(1 - \cos d)$ were being used in forming computational parameters, [16]. It was decided to try the ratios

$$(\sin \theta_1 + \sin \theta_2)^2/(1 + \cos d), (\sin \theta_1 - \sin \theta_2)^2/(1 - \cos d) \quad (76)$$

with the hope of relating these to other parameters and identification of the Andoyer-Lambert approximations in some other extant series expansion as the great elliptic arc approximation. See equations (19) through (42).

From equations (42) we have

$$\sin \theta_1 = \sin \theta_0 \cos d_1, \sin \theta_2 = \sin \theta_0 \cos d_2. \quad (77)$$

From (77), by simple algebraic operations and trigonometric identities, we may express (76) as

$$\begin{aligned} (\sin \theta_1 + \sin \theta_2)^2/(1 + \cos d) &= 2 \sin^2 \theta_0 \cos^2 \frac{1}{2}(d_1 + d_2) \\ (\sin \theta_1 - \sin \theta_2)^2/(1 - \cos d) &= 2 \sin^2 \theta_0 \sin^2 \frac{1}{2}(d_1 + d_2), \end{aligned} \quad (78)$$

where $d = d_2 - d_1$.

From (78) by adding and subtracting respective members, we write

$$X = \frac{(\sin \theta_1 + \sin \theta_2)^2}{1 + \cos d} + \frac{(\sin \theta_1 - \sin \theta_2)^2}{1 - \cos d} = 2 [\sin^2 \theta_0] \quad (79)$$

$$Y = \frac{(\sin \theta_1 + \sin \theta_2)^2}{1 + \cos d} - \frac{(\sin \theta_1 - \sin \theta_2)^2}{1 - \cos d} = 2 [\sin^2 \theta_0 \cos (d_1 + d_2)],$$

where $d = d_2 - d_1$.

The Andoyer-Lambert forms can now be written in terms of X and Y of (79) as

$$S = a[d - (f/4)(Xd - Y \sin d)],$$

$$S = a[d - (f/4)(Xd - 3Y \sin d)], \quad (80)$$

where in the second equation, the geodetic latitude, ϕ , is used in forming the X and Y of (79).

If in the expansion of the great elliptic arc, equation (41), we place d_1 to $-d_1$, and then $d = d_2 - d_1$, $k = e \sin \theta_0$, we obtain as far as sixth order terms in e :

$$S = a \left[\begin{array}{l} \bar{d} - \frac{1}{4} e^2 \sin^2 \theta_0 [d - \sin d \cos (d_1 + d_2)] \\ - (1/128)e^4 \sin^4 \theta_0 [6d - 8 \sin d \cos (d_1 + d_2) + \sin 2d \cos 2(d_1 + d_2)] \\ - (1/1536)e^6 \sin^6 \theta_0 [30d - 45 \sin d \cos (d_1 + d_2) + 9 \sin 2d \cos 2(d_1 + d_2) \\ \quad - \sin 3d \cos 3(d_1 + d_2)] \end{array} \right] \quad (81)$$

Using relations (79), equation (81) can be written:

$$S = a \left[\begin{array}{l} \bar{d} - (e^2/8)(Xd - Y \sin d) \\ - (e^4/512)[(6d - \sin 2d) X^2 - 8(\sin d) XY + 2(\sin 2d) Y^2] \\ - (e^6/12,288)[3(10d - 3 \sin 2d) X^3 - 3(15 \sin d - \sin 3d) X^2 Y \\ \quad + 18(\sin 2d) XY^2 - 4(\sin 3d) Y^3] \end{array} \right] \quad (82)$$

Note in (82) that if all terms above the first power in f are ignored ($e^2 = 2f$) equation (82) reduces directly to the Andoyer-Lambert form as given by the first of (80). Now it is known that the difference in lengths of the great elliptic arc and the geodesic is of 4th order in e , [17], but the 6th order term will be useful for comparison later in the investigation.

DERIVATION FROM MODIFIED DIFFERENTIAL EQUATIONS

The corresponding differential triangles, auxiliary sphere, spheroid, where geodetic latitude has been converted to parametric are, as abstracted from Figure (20):



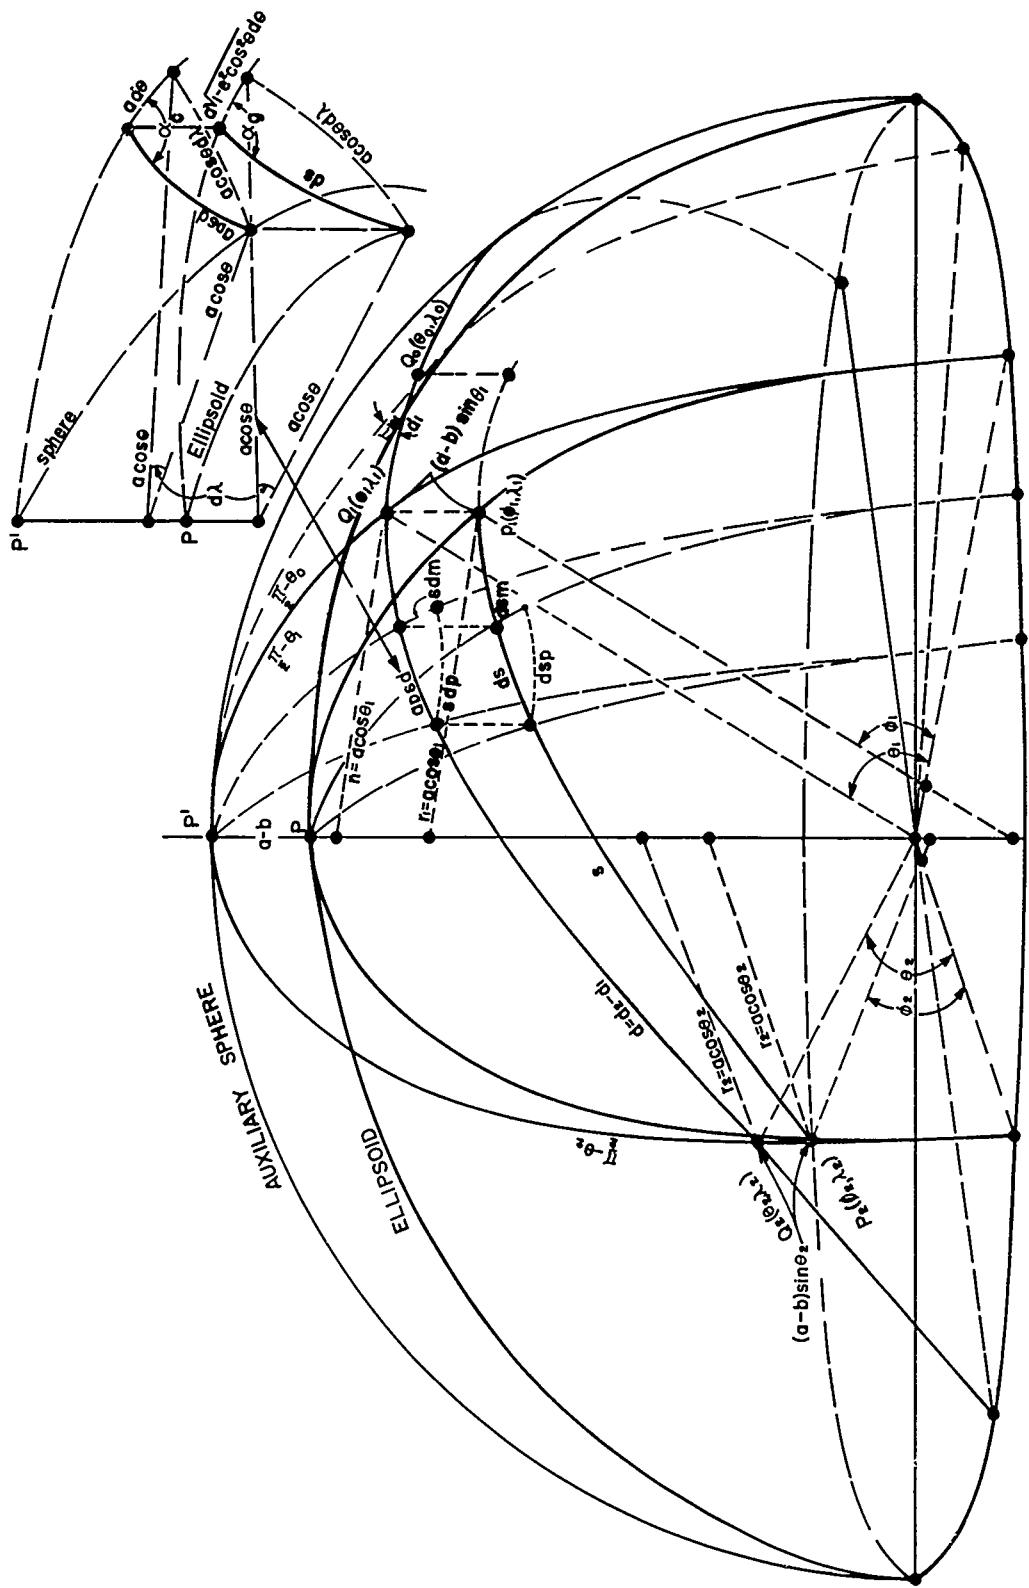


Figure 20. Differential triangles, sphere and spheroid.

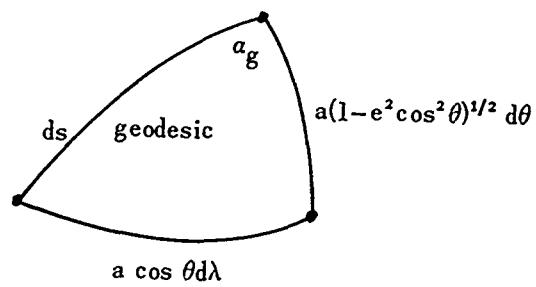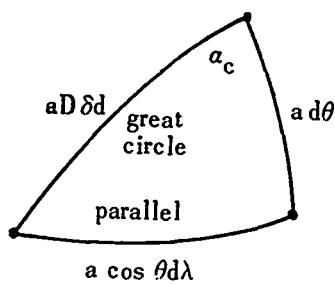

and since $\alpha_c = \alpha_g$ (property of geodesics on surfaces of revolution, i.e. $r \sin \alpha_c = r \sin \alpha_g$,

$r = a \cos \theta$), $ds/aD\delta d = a(1 - e^2 \cos^2 \theta)^{1/2} d\theta/ad\theta = (1 - e^2 \cos^2 \theta)^{1/2}$, which may be written

$$S = a(d + \delta d) = a \left[d + \int_{d_1}^{d_2} [(1 - e^2 \cos^2 \theta)^{1/2} - 1] D\delta d \right]. \quad (83)$$

If (83) also represents the equator, then $\delta d = 0$, when $\theta = \theta_0 = 0$. Hence we add to the integrand $1 - (1 - e^2 \cos^2 \theta_0)^{1/2}$ to get

$$S = a(d + \delta d) = a \left[d + \int_{d_1}^{d_2} [(1 - e^2 \cos^2 \theta)^{1/2} - (1 - e^2 \cos^2 \theta_0)^{1/2}] D\delta d \right], \quad (84)$$

and we note that when $\theta = \theta_0 = 0$, $\delta d = 0$; when $\theta = \theta_0$, $s = d = \delta d = 0$; when $\theta_0 = \pi/2$, $d_1 = \theta_1$, $d_2 = \theta_2$, $D\delta d = d\theta$, $d = \theta_2 - \theta_1$ then (84) represents the meridian.

Expanding (84) to 6th order terms in e , find

$$S = a \left[d - (e^2/2) (1 + e^2/2 + 3e^4/8) \int_{d_1}^{d_2} (\sin^2 \theta_0 - \sin^2 \theta) D\delta d + (e^4/8) (1 + 3e^2/2) \int_{d_1}^{d_2} (\sin^4 \theta_0 - \sin^4 \theta) D\delta d - (e^6/16) \int_{d_1}^{d_2} (\sin^6 \theta_0 - \sin^6 \theta) D\delta d \right] \quad (85)$$

Now from (77), $\sin \theta = \sin \theta_0 \cos d$,


$$\sin^2 \theta = \sin^2 \theta_0 \cos^2 d = \frac{\sin^2 \theta_0}{2} (1 + \cos 2d). \quad (86)$$

The value of $\sin^2 \theta$ from (86) placed in (85) and the resulting integrations performed with respect to d , leads to expressions in powers of the right hand quantities in (79) so that (85) may be written finally as

$$S = a \left[d - \frac{(e^2/8)(1 + e^2/2 + 3e^4/8)(Xd - Y \sin d)}{-(e^4/512)(1 + 3e^2/2) \left[-(10d + \sin 2d) X^2 + 8(\sin d) XY \right]} \right. \\ \left. + 2(\sin 2d) Y^2 \right] \\ - \frac{(e^6/12,288) \left[3(22d + 3 \sin 2d) X^3 - 3(15 \sin d - \sin 3d) X^2 Y \right]}{-18(\sin 2d) XY^2 - 4(\sin 3d) Y^3} \quad (87)$$

Again if all terms above first order in f ($e^2 = 2f$) in (87) are ignored then the first two terms of (87) represent the Andoyer-Lambert form as given by the first of equations (80).

For the case where geographic latitudes, ϕ , are not first converted to parametric, but are considered spherical, the corresponding differential right triangles are:

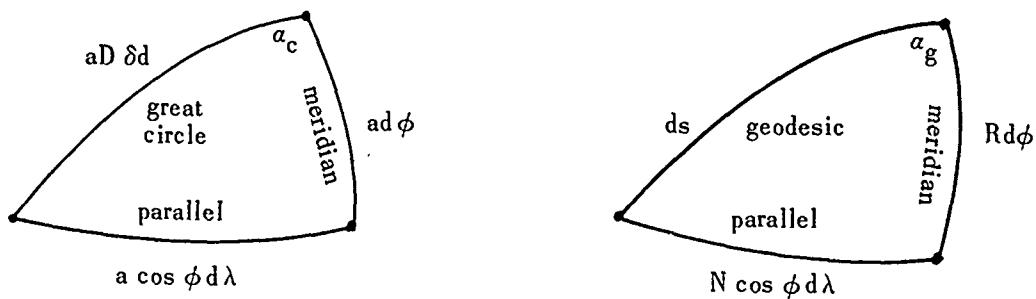

We have for the approximation

$$Rd\phi = ds \cos \alpha_g$$

$$\text{or } Rd\phi = ds \frac{d\phi}{D\delta d}, \text{ placing } \cos \alpha_g = \cos \alpha_c = \frac{d\phi}{D\delta d}.$$

$$ds = R D\delta d = a(1 - e^2)(1 - e^2 \sin^2 \phi)^{-1/2} D\delta d. \quad (88)$$

If (88) represents the equator, then when $\phi = 0$, $ds = aD\delta d$. Hence add $e^2 \cos^2 \phi_0$ to the integrand of (88), to obtain

$$(ds/a) = [1 - e^2](1 - e^2 \sin^2 \phi)^{-1/2} + e^2 \cos^2 \phi_0] D\delta d. \quad (89)$$

Note the following for (89): When $\phi = \phi_0 = 0$, $ds = aD\delta d$; when $\phi_0 = \pi/2$, $D\delta d = d\phi$, equation (89) will represent the meridian.

Expanding (89) to 6th order terms in e get

$$(ds/a) = \left[1 + \frac{3}{2}e^2 \sin^2 \phi + \frac{15}{8}e^4 \sin^4 \phi + \frac{35}{16}e^6 \sin^6 \phi \right] D\delta d \\ - e^2 [1 + \frac{3}{2}e^2 \sin^2 \phi + \frac{15}{8}e^4 \sin^4 \phi] + e^2(1 - \sin^2 \phi_0) \quad (90)$$

which may be written in the integral form

$$S = a \left[d - \left(e^2/2 \right) \int_{d_1}^{d_2} (2 \sin^2 \phi_0 - 3 \sin^2 \phi) D\delta d \right. \\ \left. - (3e^4/8) \int_{d_1}^{d_2} \sin^2 \phi (4 - 5 \sin^2 \phi) D\delta d \right. \\ \left. - (5e^6/16) \int_{d_1}^{d_2} \sin^4 \phi (6 - 7 \sin^2 \phi) D\delta d \right] \quad (91)$$

From (77), with θ replaced by ϕ , we have $\sin^2 \phi = \frac{\sin^2 \phi_0}{2} (1 + \cos 2d)$, and with the aid of

trigonometric identities we can find expressions for $\sin^4 \phi$ and $\sin^6 \phi$, i.e.

$$\begin{aligned} \sin^2 \phi &= \frac{\sin^2 \phi_0}{2} (1 + \cos 2d), \\ \sin^4 \phi &= \frac{\sin^4 \phi_0}{8} (3 + 4 \cos 2d + \cos 4d), \\ \sin^6 \phi &= \frac{\sin^6 \phi_0}{32} (10 + 15 \cos 2d + 6 \cos 4d + \cos 6d). \end{aligned} \quad (92)$$

The values of $\sin^2 \phi$, $\sin^4 \phi$, $\sin^6 \phi$ from (92) placed in (91) give

$$S = a \left[d - \left(e^2/4 \right) \sin^2 \phi_0 \int_{d_1}^{d_2} (1 - 3 \cos 2d) D\delta d \right. \\ \left. - (3e^4/64) \sin^2 \phi_0 \int_{d_1}^{d_2} \left[(16 - 15 \sin^2 \phi_0) + (16 - 20 \sin^2 \phi_0) \cos 2d \right. \right. \\ \left. \left. - 5 \sin^2 \phi_0 \cos 4d \right] D\delta d \right. \\ \left. - (5e^6/512) \sin^4 \phi_0 \int_{d_1}^{d_2} \left[(72 - 70 \sin^2 \phi_0) + (96 - 105 \sin^2 \phi_0) \cos 2d \right. \right. \\ \left. \left. + (24 - 42 \sin^2 \phi_0) \cos 4d \right. \right. \\ \left. \left. - 7 \sin^2 \phi_0 \cos 6d \right] D\delta d \right] \quad (93)$$

Integration of (93) with respect to d leads to:

$$S = a \left[d - \left(e^2/4 \right) \{ d [\sin^2 \phi_0] - 3 \sin d [\sin^2 \phi_0 \cos (d_1 + d_2)] \} \right. \\ \left. - (3e^4/128) \left[32d [\sin^2 \phi_0] - 30d [\sin^2 \phi_0]^2 + 32 \sin d [\sin^2 \phi_0 \cos (d_1 + d_2)] \right. \right. \\ \left. \left. - 40 \sin d [\sin^2 \phi_0] [\sin^2 \phi_0 \cos (d_1 + d_2)] \right. \right. \\ \left. \left. - 10 \sin 2d [\sin^2 \phi_0 \cos (d_1 + d_2)]^2 + 5 \sin 2d [\sin^2 \phi_0]^2 \right] \right. \\ \left. - (5e^6/1536) \left[216d [\sin^2 \phi_0]^2 - 210d [\sin^2 \phi_0]^3 + 288 \sin d [\sin^2 \phi_0] [\sin^2 \phi_0 \cos (d_1 + d_2)] \right. \right. \\ \left. \left. - 315 \sin d [\sin^2 \phi_0]^2 [\sin^2 \phi_0 \cos (d_1 + d_2)] + 72 \sin 2d [\sin^2 \phi_0 \cos (d_1 + d_2)]^2 \right. \right. \\ \left. \left. - 126 \sin 2d [\sin^2 \phi_0] [\sin^2 \phi_0 \cos (d_1 + d_2)]^2 - 36 \sin 2d [\sin^2 \phi_0]^2 \right. \right. \\ \left. \left. + 63 \sin 2d [\sin^2 \phi_0]^3 - 28 \sin 3d [\sin^2 \phi_0 \cos (d_1 + d_2)]^3 \right. \right. \\ \left. \left. + 21 \sin 3d [\sin^2 \phi_0]^2 [\sin^2 \phi_0 \cos (d_1 + d_2)] \right] \right] \quad (94)$$

From (79), with θ replaced by ϕ , we have

$$X = \frac{(\sin \phi_1 + \sin \phi_2)^2}{1 + \cos d} + \frac{(\sin \phi_1 - \sin \phi_2)^2}{1 - \cos d} = 2[\sin^2 \phi_0], \quad (95)$$

$$Y = \frac{(\sin \phi_0 + \sin \phi_2)^2}{1 + \cos d} - \frac{(\sin \phi_1 - \sin \phi_2)^2}{1 - \cos d} = 2[\sin^2 \phi_0 \cos(d_1 + d_2)].$$

Substituting from (95) in (94) we obtain finally

$$S = a \left[\begin{array}{l} d - (e^2/8)(Xd - 3Y \sin d) \\ - (3e^4/512) \left[64(Xd + Y \sin d) + (5 \sin 2d - 30d) X^2 \right. \right. \\ \left. \left. - 40(\sin d) XY - 10(\sin 2d) Y^2 \right] \right. \\ \left. - (5e^6/12,288) \left[(432d - 72 \sin 2d) X^2 + 576(\sin d) XY - 144(\sin 2d) Y^2 \right. \right. \\ \left. \left. + (63 \sin 2d - 210d) X^3 + (21 \sin 3d - 315 \sin d) X^2 Y \right] \right. \\ \left. - 126(\sin 2d) XY^2 - 28(\sin 3d) Y^3 \right] \end{array} \right] \quad (96)$$

If, in (96), we place $e^2 = 2f$, ignoring all terms above first order in f , one obtains the second of equations (80), or the Andoyer-Lambert approximation in terms of geodetic latitude, ϕ .

Now the Andoyer-Lambert forms can be obtained from other modifications of differential equations. For instance if the differential for arc length along the geodesic is taken in the form, [8] page 64,

$$ds = (N^2 \cos^2 \phi / N_0 \cos \phi_0) d\lambda, \quad N = a / (1 - e^2 \sin^2 \phi)^{1/2}, \quad (97)$$

if the differential of arc length from (84), after converting to geodetic latitude is written

$$ds = [(1 - e^2 \sin^2 \phi)^{-1/2} - (1 - e^2 \sin^2 \phi_0)^{-1/2}] D\delta d; \quad (98)$$

and if (97) and (98) are combined with the relationship $d\lambda = (\sin \alpha_c / \cos \phi) D\delta d = (\cos \phi_0 / \cos^2 \phi) D\delta d$ from the differential right triangles above with θ replaced by ϕ , one can write

$$(ds/a) = D\delta d + \left[(1 - e^2 \sin^2 \phi)^{-1} (1 - e^2 \sin^2 \phi_0)^{1/2} - 1 \right. \\ \left. + (1 - e^2)^{1/2} \{(1 - e^2 \sin^2 \phi)^{-1/2} - (1 - e^2 \sin^2 \phi_0)^{-1/2}\} \right] D\delta d. \quad (99)$$

Expanding the expressions in (99) to first order terms in f , $e^2 = 2f$, equation (99) can be written in the integral form

$$S = a \left[d - f \int_{d_1}^{d_2} (2 \sin^2 \phi_0 - 3 \sin^2 \phi) D\delta d \right]. \quad (100)$$

Comparison of equations (100) and (91) (with $e^2 = 2f$) shows that (100) will again give the second of equations (80) or the Andoyer-Lambert Approximation in terms of geodetic latitude.

DERIVATIONS FROM EXPANSIONS OF FORSYTH

In reviewing the literature on geodetic computation one finds that A. R. Forsyth, [18], as early as 1895 had given some series expansions for geodetic arc length in terms of the flattening and certain spherical and elliptic parameters. On page 120 of his treatise one finds the expression

$$S_{12}/a = \nu'_2 - \nu'_1 - \frac{1}{4}c(\nu'_2 - \nu'_1) + (1/8)c(\sin 2\nu'_2 - \sin 2\nu'_1). \quad (101)$$

Now the correspondences between the parameters as used by Forsyth in deriving (101) and those used above in this investigation are to first order in f :

$$\nu'_2 = d_2, \nu'_1 = d_1, \nu'_2 - \nu'_1 = d_2 - d_1 = d, c = 2f \sin^2 \theta_0,$$

$$\sin 2\nu'_2 - \sin 2\nu'_1 = \sin 2d_2 - \sin 2d_1 = 2 \sin(d_2 - d_1) \cos(d_1 + d_2) = 2 \sin d \cos(d_1 + d_2)$$

so that equation (101) becomes equivalently

$$S = a[d - (f/2)\{d[\sin^2 \theta_0] - \sin d [\sin^2 \theta_0 \cos(d_1 + d_2)]\}],$$

which in turn by means of relations (79) can be written $S = a[d - (f/4)(Xd - Y \sin d)]$, and identified as the first Andoyer-Lambert form of equations (80).

On page 116 of Forsyth's treatise one finds the expression

$$\begin{aligned} S_{12}/a = & \nu_2 - \nu_1 + \xi \{(3/4) \cos^2 \alpha_0 (\sin 2\nu_2 - \sin 2\nu_1) - (1/2)(\nu_2 - \nu_1) \cos^2 \alpha_0\} \\ & + \xi^2 \left[\begin{aligned} & (1/2)(\nu_2 - \nu_1)^2 \cos^2 \alpha_0 \sin^3 \alpha_0 \sin \phi'_1 \sin \phi'_2 / \sin 2\phi_0 \\ & + (\nu_2 - \nu_1)[(1/16) \cos^4 \alpha_0 + \cos^2 \alpha_0 \sin^2 \alpha_0] \\ *2 & + (3/8) \sin^3 \alpha_0 \cos^2 \alpha_0 (\sin 2\phi'_2 - \sin 2\phi'_1) \\ & - (3/4) \cos^2 \alpha_0 \sin^2 \alpha_0 (\sin 2\nu_2 - \sin 2\nu_1) \\ *1 & + (23/64) \cos^4 \alpha_0 (\sin 4\nu_2 - \sin 4\nu_1) \end{aligned} \right] \end{aligned} \quad (102)$$

Now the equivalent relationships between Forsyth's parameters as used in (102) and the ones used in this investigation are:

$$\nu_1 = d_1, \nu_2 = d_2, \nu_2 - \nu_1 = d_2 - d_1 = d, \xi = f, l_1 = \phi_1, l_2 = \phi_2,$$

$$2\phi_0 = \phi'_2 - \phi'_1 = \phi_2 - \phi_1 = \lambda_2 - \lambda_1 = \Delta\lambda, \cos \phi'_1 = \cot \phi_0 \tan \phi_1 = \cos \phi_0 \cos d_1 \sec \phi_1$$

$$\sin \phi'_1 = \sin d_1 \sec \phi_1, \cos \phi'_2 = \cot \phi_0 \tan \phi_2 = \cos \phi_0 \cos d_2 \sec \phi_2 \quad (103)$$

$$\sin \phi'_2 = \sin d_2 \sec \phi_2, \cos \nu_1 = \cos d_1 = \sin \phi_1 / \sin \phi_0,$$

$$\cos \nu_2 = \cos d_2 = \sin \phi_2 / \sin \phi_0, \alpha_0 = \frac{\pi}{2} - \phi_0, \text{ the relationship } \sin \alpha_0 \sin(\nu_2 - \nu_1)$$

$$= \cos l_1 \cos l_2 \sin 2\phi_0 \text{ given on pages 106, 121 of Forsyth, [18]},$$

becomes $\cos \phi_0 \sin d = \cos \phi_1 \cos \phi_2 \sin \Delta\lambda$ in the notation of this investigation.

Assurance that Forsyth's α_0 is the complement of the geodetic latitude, ϕ_0 , of the great elliptic arc is found from his expression, [18] page 106, which is

$$\tan \alpha_0 = \sin 2 \phi_0 / \{(\tan l_1 + \tan l_2)^2 - 4 \tan l_1 \tan l_2 \cos^2 \phi_0\}^{1/2}.$$

With equivalent substitutions from (103) and some trigonometric identities it will transform into

$$\tan \phi_0 = (\tan^2 \phi_1 + \tan^2 \phi_2 - 2 \tan \phi_1 \tan \phi_2 \cos \Delta \lambda)^{1/2} / \sin \Delta \lambda$$

which defines the vertex of the great elliptic arc. See equations (21) of this investigation.

A cursory check of the equations just preceding (102) in Forsyth's treatise revealed that the numerical coefficient of the second order term *1 in (102) should be 15/64 instead of 23/64. Then by use of relations (103) and (95) it was found that (102) could be written as

$$S = a \left[d - (f/4)(Xd - 3Y \sin d) + (f^2/128)(AX - BY - CX^2 + DY^2 + EXY + FX^2Y + GX^3) \right] \quad (104)$$

where $A = 64d + 16d^2 \cot d$, $B = 96 \sin d + 16 d^2 \csc d - 48 \sin^2 \Delta \lambda \csc d$, $C = 30d + 15 \sin 2d + 8d^2 \cot d + 12 \sin^2 \Delta \lambda \cot d$, $D = 30 \sin 2d$, $E = 48 \sin d + 8d^2 \csc d - 36 \sin^2 \Delta \lambda \csc d$, $F = 6 \sin^2 \Delta \lambda \csc d$, $G = 6 \sin^2 \Delta \lambda \cot d$.

Note that the first two terms of (104) are exactly the Andoyer-Lambert form given by the second of equations (80). But we apparently also have the second order term in the flattening. Thus, Forsyth had both so-called Andoyer-Lambert approximation forms as early as 1895 but they had not been recognized as such.

Equation (104) was used to compute several lines of known lengths. On those in which the term *2 of (102) was small, an improvement would be obtained by including the second order terms. On others, the error introduced would outweigh the first order correction, which could mean, since equation (104) is a power series in f , that the coefficient of the second order term in f is erroneous. Now examination of the second order terms of equations (82) and (96) shows no cubic terms in X and Y as are found in the second order term of (104). Hence Forsyth's paper [18], was reworked from the beginning and it was found that indeed the term *2 in (102) actually vanishes and reaffirmation was also made that the numerical coefficient of the term *1 of (102) should be 15/64 rather than 23/64. These errors are the result of carrying throughout the derivation the numerical factor 9/32 in the last term of the expression for δ , [18], section 17, page 98, when it should be 3/32. This affects the approximation equation for $\tan \Phi$, section 22, page 104. In the last term, the factor $-7 \sin^2 \alpha$ should be $+5 \sin^2 \alpha$. This continues to be reflected through section 27, pages 111 to 115, until the term is actually seen to vanish in collecting the terms together on page 115. Also on page 115, omission of a factor $1/2$ in use of a trigonometric identity in the third line from the bottom gave the printed value $1/4$ for the numerical coefficient of

$\cos^4 \alpha_0 \sin 4\nu$ when it should be 1/8. This leads in turn to the printed value 23/64 as given on page 116 when it should be 15/64.

After the two errors in Forsyth's second order term in f had been detected, two papers were found which are concerned with the Forsyth derivation, Wassef 1948, [19], and Gougenheim 1950, [20]. Wassef purports to give the corrected version of Forsyth's second order term but he includes the term *2 in (102) and he gives 15/23 for the numerical coefficient of *1 in (102). Hence Wassef's results are erroneous and useless. Gougenheim, unaware of Forsyth's work, had developed his formulae independently and he has the term *2 in (102) missing in his derivation and the correct numerical coefficient 15/64 for *1 of (102). His formula for the second order term is (in the notation of Forsyth)

$$+ \xi^2 \left[-(1/2) \frac{(\nu_2 - \nu_1)^2}{\cot \nu_2 - \cot \nu_1} \cos^2 \alpha_0 \sin^2 \alpha_0 + (1/16) (\nu_2 - \nu_1) (\cos^2 \alpha_0 + 15 \cos^2 \alpha_0 \sin^2 \alpha_0) \right. \\ \left. - (3/4) \cos^2 \alpha_0 \sin^2 \alpha_0 (\sin 2\nu_2 - \sin 2\nu_1) \right. \\ \left. + (15/64) \cos^4 \alpha_0 (\sin 4\nu_2 - \sin 4\nu_1) \right] \quad (105)$$

Since the last two terms of (105) are the same as the last two of (102), as corrected, we have only to show that

$$(1/16) \cos^4 \alpha_0 + \cos^2 \alpha_0 \sin^2 \alpha_0 \equiv (1/16) (\cos^2 \alpha_0 + 15 \cos^2 \alpha_0 \sin^2 \alpha_0), \\ 1/(\cot \nu_1 - \cot \nu_2) \equiv (\sin \alpha_0 \sin \phi'_1 \sin \phi'_2) / \sin 2\phi_0. \quad (106)$$

Writing the right member of the first of (106) as

$$(1/16) \cos^2 \alpha_0 + (15/16) \cos^2 \alpha_0 \sin^2 \alpha_0 + (1/16) \cos^4 \alpha_0 - (1/16) \cos^2 \alpha_0 (1 - \sin^2 \alpha_0) \\ \equiv (1/16) \cos^4 \alpha_0 + (1/16) \cos^2 \alpha_0 + (15/16) \cos^2 \alpha_0 \sin^2 \alpha_0 \\ - (1/16) \cos^2 \alpha_0 + (1/16) \cos^2 \alpha_0 \sin^2 \alpha_0 \\ \equiv (1/16) \cos^4 \alpha_0 + \cos^2 \alpha_0 \sin^2 \alpha_0.$$

From relations (103) we have

$$\sin \alpha_0 \sin (\nu_2 - \nu_1) = \cos l_1 \cos l_2 \sin 2\phi_0 \quad \text{or}$$

$$\frac{\sin \alpha_0}{\sin 2\phi_0} = \frac{\cos l_1 \cos l_2}{\sin (\nu_2 - \nu_1)} \quad (107)$$

$$\frac{\sin \alpha_0 \sin \phi'_1 \sin \phi'_2}{\sin 2\phi_0} = \frac{\cos l_1 \sin \phi'_1 \cdot \cos l_2 \sin \phi'_2}{\sin \nu_2 \cos \nu_1 - \cos \nu_2 \sin \nu_1} = \frac{\frac{\cos l_1 \sin \phi'_1}{\sin \nu_1} \cdot \frac{\cos l_2 \sin \phi'_2}{\sin \nu_2}}{\cot \nu_1 - \cot \nu_2}$$

From pages 111, 117 of Forsyth find:

$$\tan \phi'_1 \sin \alpha_0 = \tan \nu_1, \cos \phi'_1 = \tan \alpha_0 \tan l_1, \cos \nu_1 \cos \alpha_0 = \sin l_1,$$

$$\tan \phi'_2 \sin \alpha_0 = \tan \nu_2, \cos \phi'_2 = \tan \alpha_0 \tan l_2, \cos \nu_2 \cos \alpha_0 = \sin l_2,$$

whence

$$\frac{\cos l_1 \sin \phi'_1}{\sin \nu_1} = \frac{\sin l_1}{\cos \nu_1 \cos \alpha_0} = 1, \quad (108)$$

$$\frac{\cos l_2 \sin \phi'_2}{\sin \nu_2} = \frac{\sin l_2}{\cos \nu_2 \cos \alpha_0} = 1.$$

The values from (108) placed in (107) prove the second of (106) and thus Gougenheim's paper provides an independent check of the corrections given here to Forsyth's second order term. Gougenheim also gave formulae for azimuths, convergence of the meridians, and difference in longitude between the spheroidal and spherical (elliptical) vertices of geodesics in terms of the same variables. The importance of Gougenheim's work has not been recognized. He has had a correct expansion including the second order term in the flattening, in print since 1950.

THE FORSYTH-ANDOYER-LAMBERT TYPE APPROXIMATION IN GEODETIC LATITUDE WITH SECOND ORDER TERMS

With the corrections to (102), i.e. with the numerical coefficient of *1 as 15/64 and the term *2 omitted, equation (102) may be written, with relations (103) and (95), as

$$S = a[d - (f/4)(X_d - 3Y \sin d) + (f^2/128)(AX + BY + CX^2 + DXY + EY^2)], \quad (109)$$

where a, f are the semimajor axis and flattening of the reference ellipsoid; d is the spherical distance between the points $P_1(\phi_1, \lambda_1)$, $P_2(\phi_2, \lambda_2)$ on the ellipsoid given by some spherical formula as $\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$; ϕ is geodetic latitude, λ is longitude, $\Delta\lambda = \lambda_2 - \lambda_1$; $A = 64d + 16d^2 \cot d$, $D = 48 \sin d + 8d^2 \csc d$, $B = -2D$, $E = 30 \sin 2d$,

$$C = -(30d + 8d^2 \cot d + E/2), \quad X = \frac{(\sin \phi_1 + \sin \phi_2)^2}{1 + \cos d} + \frac{(\sin \phi_1 - \sin \phi_2)^2}{1 - \cos d},$$

$$Y = \frac{(\sin \phi_1 + \sin \phi_2)^2}{1 + \cos d} - \frac{(\sin \phi_1 - \sin \phi_2)^2}{1 - \cos d}; \quad d = d_2 - d_1, \quad \text{here } d_1 \text{ and } d_2 \text{ are spherical distances}$$

from the vertex of the great elliptic arc to the points $P_1(\phi_1, \lambda_1)$, $P_2(\phi_2, \lambda_2)$.

Now by factoring $\sin d$ out of every term of (109) and using the azimuth formulae as given by Lambert, [13], we can, by means of trigonometric identities, arrange equations (109) in a form more convenient for computing as follows:

Given on the reference ellipsoid the points $P_1(\phi_1, \lambda_1)$, $P_2(\phi_2, \lambda_2)$, ϕ is geodetic latitude, λ is longitude, P_2 is west of P_1 with west longitudes considered positive.

With $\phi_m = (1/2)(\phi_1 + \phi_2)$, $\Delta\phi_m = (1/2)(\phi_2 - \phi_1)$, $\Delta\lambda = \lambda_2 - \lambda_1$, $\Delta\lambda_m = (1/2)\Delta\lambda$;

Let: $k = \sin \phi_m \cos \Delta\phi_m$, $K = \sin \Delta\phi_m \cos \phi_m$,

$$H = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m,$$

$$L = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m = \sin^2(d/2), 1 - L = \cos^2(d/2), \cos d = 1 - 2L, t = \sin^2 d = 4L(1-L),$$

$$U = 2k^2/(1 - L), V = 2K^2/L, X = U + V, Y = U - V,$$

$$T = d/\sin d = 1 + (t/6) + 3(t^2/40) + 5(t^3/112) + 35(t^4/1152) + 63(t^5/2816) + \dots,$$

$$E = 30 \cos d, A = 4T(8 + TE/15), D = 4(6 + T^2), B = -2D, C = T - \frac{1}{2}(A + E), \quad (110)$$

$$S = a \sin d [T - (f/4)(TX - 3Y) + (f^2/64)\{X(A + CX) + Y(B + EY) + DXY\}];$$

$$\sin(a_2 + a_1) = (K \sin \Delta\lambda)/L, \sin(a_2 - a_1) = (k \sin \Delta\lambda)/(1 - L)$$

$$(\frac{1}{2})(\delta a_2 + \delta a_1) = -(f/2)H(T+1)\sin(a_2 + a_1), (\frac{1}{2})(\delta a_2 - \delta a_1) = -(f/2)H(T-1)\sin(a_2 - a_1),$$

$$a_{1-2} = a_1 + \delta a_1, a_{2-1} = a_2 + \delta a_2.$$

Note that the quantities H , T , L , k , K enter into both distance and azimuth formulas.

Figure (21) shows an arrangement of equations (110) for desk computing using an ordinary ten bank electric desk calculator and Peters eight place tables of trigonometric functions. It is arranged to show the contribution of both the first and second order terms in the flattening.

Table 4 summarizes the results of computations over 17 lines of known lengths and azimuths. The computations are given in Appendix 3. Part of these lines were used in the computations of Appendix 2. The first 11 lines are from two ACIC publications [12], lines 12 through 17 are Coast and Geodetic Survey specially computed lines, [22].

Note that all distances are within one meter and azimuths are within one second which was the objective since this is adequate for any operational requirement. Other advantages are (1) no conversion to parametric latitudes, (2) no square root calculation, (3) for desk computers the only tabular data required is a table of the natural trigonometric functions as Peters eight place tables, (4) the formulas are adaptable to high speed computers, (5) about the same accuracy is obtained over all lines in all azimuths and latitudes.

EXPANSION TO SECOND ORDER TERMS IN f USING PARAMETRIC LATITUDE

Forsyth [18], gave an expansion of the geodesic to first order in the elliptic modulus $c = (e^2 \cos^2 \alpha)/(1 - e^2 \sin^2 \alpha)$ where α is the complement of the parametric latitude of the vertex of the geodesic. (See pages 118–120 of his treatise). We will follow the Forsyth method and

DISTANCE COMPUTING FORM, FORSYTH-ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/64 = 0.1795720390 \times 10^{-6}$

1 radian = 206,264.8062 seconds

ϕ_1	8 58 25.0	1. PANAMA	λ_1	79 34 24.0
ϕ_2	21 26 06.0	2. HAWAII	λ_2	158 01 33.0
$\phi_m = \frac{1}{2}(\phi_1 + \phi_2)$	25 12 15.5	2. Always west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	78 27 09.0
$\Delta\phi_m = \frac{1}{2}(\phi_2 - \phi_1)$	6 13 50.5		$\Delta\lambda_m = \frac{1}{2}\Delta\lambda$	39 13 34.5
$\sin \phi_m$	+ .26226170	$\sin \Delta\phi_m$	$\sin \Delta\lambda$	+ .97975909
$\cos \phi_m$	+ .96499679	$\cos \Delta\phi_m$	$\sin \Delta\lambda_m$	+ .63238428
$k = \sin \phi_m \cos \Delta\phi_m$	+ .260712512	$K = \sin \Delta\phi_m \cos \phi_m$	+ .104732963	
$H = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m$	+ .919439630	$1 - L$	+ .62052783	
$L = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m$	+ .37947217	$\cos d = 1 - 2L$	+ .24105566	
$d + 1.327342885$	sin d + .97051129	$T = d / \sin d +$	1.367673822	
$U = 2k^2 / (1-L)$	+ .219074828	$V = 2K^2 / L$	+ .0578118469	$E = 30 \cos d +$ 7.2316698
$X = U + V$	+ .276886675	$Y = U - V$	+ .161262981	$D = 4(6 + T^2) +$ 31.48212675
$A = 4T(8 + ET/15) + 47.3727803$	C = $T - \frac{1}{2}(A+E)$ - 25.93455125	$B = -2D$	- 62.9642535	
$X(A + CX) + 11.128587321$	$Y(B + EY) - 9.96573823$	$DXY + 1.405726406$		
$(TX - 3Y) - 1050.93286$	$\delta f = -(f/4)(TX - 3Y) + 8.90728 \times 10^{-5}$			
$T + \delta f + 1.36776290$	$S_1 = a \sin d(T + \delta f)$ 8,466,618.26	meters		
$\Sigma = X(A + CX) + Y(B + EY) + DXY + 2.5685755$	$\delta f^2 = +(f^2/64)\Sigma + 4.6124 \times 10^{-7}$			
$T + \delta f + \delta f^2 + 1.36776336$	$S_2 = a \sin d(T + \delta f + \delta f^2)$ 8,466,621.11	meters		
$\sin(a_2 + a_1) = (K \sin \Delta\lambda) / L$	+ .27041001	$a_2 + a_1$	375° 41' 19.197	
$\sin(a_2 - a_1) = (k \sin \Delta\lambda) / (1 - L)$	+ .41164222	$a_2 - a_1$	155 41 31.161	
$\frac{1}{2}(\delta a_1 + \delta a_2) = -(f/2)H(T+1) \sin(a_2 + a_1)$	- 9.97808513 $\times 10^{-4}$	δa_1	- .761931734 $\times 10^{-3}$	
$\frac{1}{2}(\delta a_2 - \delta a_1) = -(f/2)H(T-1) \sin(a_2 - a_1)$	- 2.35876779 $\times 10^{-4}$	δa_2	- 1.233685292 $\times 10^{-3}$	
a_1	109 59 54.018	a_2	265 41 25.179	
δa_1	- 2 31.160	δa_2	- 4 14.466	
a_{1-2}	109 57 16.858	a_{2-1}	265 37 10.713	

$$a_{1-2} = a_1 + \delta a_1$$

$$a_{2-1} = a_2 + \delta a_2$$

Figure 21.

TABLE 4
Summary of Computations

Approx. No.	Lat. °	Az. °	True Length S(Meters)	Computed Length				True Azimuths ° ′ ″	Computed Azimuths ° ′ ″
				S ₁ (δf) Meters	S ₂ (δf ²) Meters	S ₁ - S Meters	S ₂ - S Meters		
1	40	45	80,466.49	67.25	67.02	+ 0.76	+ 0.53	45 26 01.69	00.44
								224 59 59.997	58.76
2	10	90	160,932.96	32.99	32.96	+ 0.03	0.0	90 15 17.48	17.51
								270 0 0	00.02
3	70	90	321,865.91	62.98	65.64	- 2.93	- 0.27	97 52 01.06	01.11
								269 59 59.95	270 00 00.03
4	10	45	482,798.87	94.74	99.23	- 4.13	+ 0.36	45 37 46.11	44.97
								224 59 59.73	58.63
5	70	45	643,732.43	27.96	32.44	- 4.47	+ 0.01	58 50 31.60	31.30
								225 00 00.15	224 59 59.86
6	10	90	804,664.78	65.22	65.10	+ 0.44	+ 0.32	91 16 14.93	14.87
								49 52 15.53	14.35
7	40	45	804,664.77	66.62	64.75	+ 1.95	- 0.02	224 59 59.99	58.83
								89 55 22.83	22.64
8	70	45	1,609,329.06	15.61	29.04	-13.45	- 0.02	224 59 59.96	59.83
								119 54 41.26	41.40
9	40	90	4,827,984.25	83.17	85.09	- 1.08	+ 0.84	270 00 00.12	269 59 59.61
								138 23 42.76	42.39
10	40	45	9,655,969.75	72.49	70.13	+ 2.74	+ 0.38	225 00 00.28	00.67
								159 54 37.21	37.78
11	70	90	9,655,977.15	63.63	77.01	-13.52	- 0.14	270 00 00.02	00.81
								260 17 09.79	09.78
12	70	95	600,000.00	995.26	000.24	- 4.74	+ 0.24	95 0 0	94 59 59.93
								50 0 0	49 59 59.20
13	60	50	900,000.00	000.56	000.23	+ 0.56	+ 0.23	221 03 33.54	32.73
								128 33 08.34	09.17
14	25	50	979,251.25	247.67	251.45	- 3.58	+ 0.20	305 38 13.25	14.18
								35 16 34.25	33.34
15	60	35	1,232,647.21	652.17	647.21	+ 4.96	0.0	207 08 33.82	32.91
								109 57 17.41	16.86
16	20	70	8,466,621.01	618.26	621.11	- 2.75	+ 0.10	265 37 10.59	10.71
								15 48 17.67	16.94
17	55	15	10,102,069.06	057.93	069.86	-11.13	+ 0.80	190 39 32.21	31.45

extend the results to second order in c and subsequently to second order in f since c can be expressed as a series in f .

The quantities needed to achieve the approximation are found in or derived from the results of Forsyth's work, pages 86, 97–105. We list them here for reference in the development.

$$\Phi = \phi + \frac{c}{2} u' \sec \alpha \tan \alpha [1 + \frac{c}{8}(1 - 6 \tan^2 \alpha)] \quad 111a$$

$$u' = \nu' + c U + c^2 V \quad 111b$$

$$\phi = \phi' + c \Omega + c^2 \Psi \quad 111c$$

$$\alpha = \alpha_0 + c A \cot \alpha_0 + c^2 B \quad 111d$$

$$\operatorname{cn} u = \cos u' \left\{ 1 - \frac{1}{4} c \sin^2 u' - \frac{c^2}{64} \sin^2 u' (7 + 4 \cos^2 u') \right\} \quad 111e$$

$$c = (e^2 \cos^2 \alpha) / (1 - e^2 \sin^2 \alpha), \quad e^2 = 2f - f^2, \quad e^4 = 4f^2$$

$$c = 2f \cos^2 \alpha + f^2 \cos^2 \alpha (3 - 4 \cos^2 \alpha) \quad 111f$$

$$\cos \theta = \operatorname{cn} u \cos \alpha \quad 111g$$

$$\tan \Phi = \tan u' \csc \alpha [1 + \frac{1}{4} c + (1/64) c^2 (9 - 2 \sin^2 \nu' - 4 \tan^2 \alpha_0)] \quad 111h$$

$$\frac{s}{a} = (1 - e^2 \sin^2 \alpha)^{1/2} E(u) \\ = u' + \frac{c}{4} [\sin 2u' - (1 + 2 \tan^2 \alpha) u'] \quad 111i$$

$$+ \frac{c^2}{64} [\sin 4u' + 4 \sin 2u' (1 - 2 \tan^2 \alpha) + \{ 8 \tan^2 \alpha (1 + 3 \tan^2 \alpha) - 3 \} u']$$

$$\sin \alpha = \sin \alpha_0 [1 + c A \cot^2 \alpha_0 + c^2 \cot \alpha_0 (B - \frac{1}{2} A^2 \cot \alpha_0)] \quad 111j$$

$$\cos \alpha = \cos \alpha_0 [1 - c A - c^2 \tan \alpha_0 (B + \frac{1}{2} A^2 \cot^3 \alpha_0)] \quad 111k$$

$$\tan \alpha = \tan \alpha_0 [1 + c A \csc^2 \alpha_0 + c^2 \csc^2 \alpha_0 (A^2 + B \tan \alpha_0)] \quad 111l$$

$$\sec \alpha = \sec \alpha_0 [1 + c A + c^2 \tan \alpha_0 (B + A^2 \cot \alpha_0 \{ 1 + \frac{1}{2} \cot^2 \alpha_0 \})] \quad 111m$$

$$\csc \alpha = \csc \alpha_0 [1 - c A \cot^2 \alpha_0 - c^2 \cot \alpha_0 \{ B - \frac{1}{2} A^2 \cot \alpha_0 (1 + 2 \cot^2 \alpha_0) \}] \quad 111n$$

$$\sin u' = \sin \nu' [1 + c U \cot \nu' + c^2 (V \cot \nu' - U^2/2)] \quad 111o$$

$$\cos u' = \cos \nu' [1 - c U \tan \nu' - c^2 (V \tan \nu' + U^2/2)] \quad 111p$$

$$\tan u' = \tan \nu' + c U \sec^2 \nu' + c^2 \sec^2 \nu' (V + U^2 \tan \nu') \quad 111q$$

$$\sin 2u' = \sin 2\nu' (1 + 2c U \cot 2\nu') \text{ (to first order in } c)$$

$$\tan \phi' = \tan \nu' \csc \alpha_0, \quad 1 + \tan^2 \nu' \csc^2 \alpha_0 = \sec^2 \phi' \quad 111r$$

$$U = -(A \cot \nu' + (1/8) \sin 2\nu'), \quad A = -(\nu'/2) \tan^2 \alpha_0 \tan \nu' \quad 111s$$

$$\Omega + (\nu'/2) \sin \alpha_0 \sec^2 \alpha_0 = -A \csc^2 \alpha_0 \cot \phi' \quad 111t$$

In these formulas, α_0 is the complement of the parametric latitude of the vertex of the great elliptic arc. To see this, find on page 119 of Forsyth, the expression

$$\sin \alpha_0 = (\tan \phi_0) / [(p \sec^2 \phi_0 - 1)(p' \sec^2 \phi_0 + 1)]^{1/2},$$

where $p = \sin^2 \frac{1}{2}(\theta_1 + \theta_2) / \sin \theta_1 \sin \theta_2$ (112)

$$p' = \cos^2 \frac{1}{2}(\theta_1 + \theta_2) / \sin \theta_1 \sin \theta_2$$

Now replace Forsyth's θ_1 and θ_2 by $90 - \theta_1$, $90 - \theta_2$ respectively and his ϕ_0 by $\Delta\lambda/2$.

Then find:

$$\tan \phi_0 = \tan (\Delta\lambda/2) = (1 - \cos \Delta\lambda) / \sin \Delta\lambda$$

$$p \sec^2 \phi_0 - 1 = [(1 - \cos \Delta\lambda) / \sin^2 \Delta\lambda] (1 + \sec \theta_1 \sec \theta_2 - \tan \theta_1 \tan \theta_2) - 1 \quad (113)$$

$$p' \sec^2 \phi_0 + 1 = [(1 - \cos \Delta\lambda) / \sin^2 \Delta\lambda] (-1 + \sec \theta_1 \sec \theta_2 + \tan \theta_1 \tan \theta_2) + 1$$

The values from (113) placed in (112) give

$$\sin \alpha_0 = \sin \Delta\lambda / (\tan^2 \theta_1 + \tan^2 \theta_2 - 2 \tan \theta_1 \tan \theta_2 \cos \Delta\lambda + \sin^2 \Delta\lambda)^{1/2} \quad (114)$$

Now the right member of (114) is $\cos \theta_0$ where θ_0 is the parametric latitude of the vertex of the great elliptic arc [17]. (See also GEODESICS AND PLANE ARCS ON AN OBLATE SPHEROID, L. E. Ward, American Mathematical Monthly, Aug.-Sept., 1943 page 427).

From 111a, 111b, 111c, 111m, 111n we have, retaining terms to c^2 inclusive:

$$\Phi = \phi' + c \left(\Omega + \frac{\nu'}{2} \sec \alpha_0 \tan \alpha_0 \right) \quad (115)$$

$$+ c^2 [\Psi + \frac{1}{2} \sec \alpha_0 \tan \alpha_0 \{U + A\nu'(1 + \csc^2 \alpha_0) + (1/8) \nu'(1 - 6 \tan^2 \alpha_0)\}]$$

If R, S are the coefficients respectively of c and c^2 in (115), then

$$\tan \Phi = \tan \phi' + c \sec^2 \phi' R + c^2 \sec^2 \phi' (S + R^2 \tan \phi') \quad (116)$$

With the values of R and S from (115) and the values of $\Omega + (\nu'/2) \sec \alpha_0 \tan \alpha_0$ and U from 111t, $\cot \phi'$ from 111s, we can write (116) as

$$\tan \Phi = \tan \phi' - c \cot \nu' \csc \alpha_0 \sec^2 \phi' \quad (117)$$

$$+ c^2 \sec^2 \phi' \left[\begin{aligned} & \left[\Psi + A^2 \cot \nu' \csc^3 \alpha_0 \right. \\ & \left. + \frac{1}{2} \sin \alpha_0 \sec^2 \alpha_0 \left[A[\nu'(1 + \csc^2 \alpha_0) - \cot \nu'] \right. \right. \\ & \left. \left. - (1/8) \sin 2\nu' + \frac{\nu'}{8} (1 - 6 \tan^2 \alpha_0) \right] \right] \end{aligned} \right]$$

From 111h, 111o, 111r we write a second formula for $\tan \Phi$:

$$\begin{aligned} \tan \Phi = & \tan \nu' \csc a_0 - cA (\csc^2 \nu' + \cot^2 a_0) \tan \nu' \csc a_0 \\ & + c^2 \tan \nu' \csc a_0 \left[V \sec \nu' \csc \nu' - B \cot a_0 + (9/64) + (1/32) \sin^2 \nu' \right. \\ & \left. + \frac{A}{4} (2 - \csc^2 \nu') - (1/16) \sec^2 a_0 \right. \\ & \left. + A^2 (\csc^2 \nu' \csc^2 a_0 + \cot^4 a_0 + \frac{1}{2} \cot^2 a_0) \right] \end{aligned} \quad (118)$$

From 111g, 111e, 111k, 111p, 111q, 111t we can write:

$$\begin{aligned} \cos \theta = & \cos a_0 \cos \nu' + c \cdot 0 \\ & + c^2 \cos a_0 \cos \nu' \left(\frac{A}{4} \cos 2\nu' - V \tan \nu' - (5/64) \sin^2 \nu' - (3/32) \sin^4 \nu' \right. \\ & \left. - B \tan a_0 - A^2 (1 + \frac{1}{2} \cot^2 a_0 + \frac{1}{2} \cot^2 \nu') \right) \end{aligned} \quad (119)$$

Now in (119), the coefficient of c was zero as it should be and the coefficient of c^2 must be zero since $\cos \theta = \cos a_0 \cos \nu'$. Placing the coefficient of c^2 in (119) equal to zero find:

$$\begin{aligned} -B \cot a_0 = & A^2 (1 + \frac{1}{2} \cot^2 a_0 + \frac{1}{2} \cot^2 \nu') \cot^2 a_0 - \frac{A}{4} \cos 2\nu' \cot^2 a_0 \\ & + V \tan \nu' \cot^2 a_0 + (5/64) \sin^2 \nu' \cot^2 a_0 + (3/32) \sin^4 \nu' \cot^2 a_0 \end{aligned} \quad (120)$$

With the value of $-B \cot a_0$ from (120) placed in the second order term of (118) and with some manipulation through the identities 111s, we can write (118) as:

$$\begin{aligned} \tan \Phi = & \tan \nu' \csc a_0 - c A \cot \nu' \csc a_0 \sec^2 \phi' \\ & + c^2 \csc a_0 \sec^2 \phi' \left(A^2 \cot \nu' (1 + (3/2) \cot^2 a_0) + V \right. \\ & \left. + \frac{A}{4} (\sin 2\nu' - \cot \nu') + (1/16) \sin 2\nu' \right. \\ & \left. - (3/256) \sin 4\nu' - (1/32) \sin 2\nu' \tan^2 a_0 \right) \end{aligned} \quad (121)$$

From (117) and (121), since $\tan \phi' = \tan \nu' \csc a_0$ from 111s, the coefficients of the terms in c and c^2 must be respectively equal. Equating the second order terms in (117) and (121) and solving for V we find:

$$\begin{aligned} V = & \Psi \sin a_0 - \frac{1}{2} A^2 \cot \nu' \cot^2 a_0 \\ & + \frac{A}{4} [2\nu' \tan^2 a_0 (1 + \csc^2 a_0) - \sin 2\nu' + \cot \nu' (1 - 2 \tan^2 a_0)] \\ & + \frac{\nu'}{16} \tan^2 a_0 (1 - 6 \tan^2 a_0) - \frac{\sin 2\nu'}{16} + \frac{3 \sin 4\nu'}{256} - \frac{\tan^2 a_0 \sin 2\nu'}{32} \end{aligned} \quad (122)$$

From 111i, 111b, 111m, 111p, 111q, the value of U in terms of A from 111t, and V from (122) we may write:

$$\frac{S}{a} = \nu' + c \left[(1/8) \sin 2\nu' - A \cot \nu' - \frac{\nu'}{4} (1 + 2 \tan^2 a_0) \right] \quad (123)$$

$$+ c^2 \left[\Psi \sin a_0 - \frac{1}{2} A^2 \cot^2 a_0 \cot \nu' + \frac{A}{4} (\sin 2\nu' - 2\nu') \right. \\ \left. + (1/256) [8 \sin 2\nu' (1 - 3 \tan^2 a_0) - \sin 4\nu'] + (3/64) \nu' (4 \tan^2 a_0 - 1) \right]$$

Referring (123) to the end points of the geodesic arc we have:

$$\frac{S}{a} = (\nu'_2 - \nu'_1) + c \left[(1/8) (\sin 2\nu'_2 - \sin 2\nu'_1) - A (\cot \nu'_2 - \cot \nu'_1) - \frac{1}{4} (\nu'_2 - \nu'_1) (1 + 2 \tan^2 a_0) \right] \\ + c^2 \left[-\frac{1}{2} A^2 \cot^2 a_0 (\cot \nu'_2 - \cot \nu'_1) + \frac{A}{4} [(\sin 2\nu'_2 - \sin 2\nu'_1) - 2(\nu'_2 - \nu'_1)] \right. \\ \left. + (1/256) [8 (1 - 3 \tan^2 a_0) (\sin 2\nu'_2 - \sin 2\nu'_1) - (\sin 4\nu'_2 - \sin 4\nu'_1)] \right. \\ \left. + (3/64) (\nu'_2 - \nu'_1) (4 \tan^2 a_0 - 1) \right] \quad (124)$$

Note that the term $\Psi \sin a_0$ vanishes in (124).

From 111t we have from the expression for A that:

$$-A (\cot \nu'_2 - \cot \nu'_1) = \frac{\tan^2 a_0}{2} (\nu'_2 - \nu'_1), \quad (125)$$

$$A = \frac{1}{4} (\nu'_2 - \nu'_1) \tan^2 a_0 [\cot (\nu'_2 - \nu'_1) - \csc (\nu'_2 - \nu'_1) \cos (\nu'_1 + \nu'_2)]$$

We list also for reference the identities:

$$\sin 2\nu'_2 - \sin 2\nu'_1 = 2 \sin (\nu'_2 - \nu'_1) \cos (\nu'_1 + \nu'_2), \quad (126)$$

$$\sin 4\nu'_2 - \sin 4\nu'_1 = 2 \sin 2(\nu'_2 - \nu'_1) [2 \cos^2 (\nu'_1 + \nu'_2) - 1]$$

Applying (125) and (126) to (124) we obtain:

$$\frac{S}{a} = (\nu'_2 - \nu'_1) - (c/4) [(\nu'_2 - \nu'_1) - \sin (\nu'_2 - \nu'_1) \cos (\nu'_1 + \nu'_2)] \quad (127) \\ + c^2 \left[\frac{A}{2} \sin (\nu'_2 - \nu'_1) \cos (\nu'_1 + \nu'_2) - \frac{A}{4} (\nu'_2 - \nu'_1) + (3/64) (\nu'_2 - \nu'_1) (4 \tan^2 a_0 - 1) \right. \\ \left. + (1/16) (1 - 3 \tan^2 a_0) \sin (\nu'_2 - \nu'_1) \cos (\nu'_1 + \nu'_2) \right. \\ \left. - (1/128) \sin 2(\nu'_2 - \nu'_1) [2 \cos^2 (\nu'_1 + \nu'_2) - 1] \right]$$

Note that the first two terms of (127) are equivalent to Forsyth's equation, page 120 of his treatise.

Now for the value of c, we find on page 97 of Forsyth, that for approximations involving f^2 (second order in the flattening) a value of a that is accurate up to f inclusive must be substituted in the first term of c. Hence from 111d, 111f, 111k we have

$$c = 2f \cos^2 a_0 + 3f^2 \cos^2 a_0 - 4f^2 \cos^4 a_0 (1 + 2A). \quad (128)$$

This value of c placed in (127) with the value of A from (125) gives:

$$\frac{S}{a} = (\nu'_2 - \nu'_1) - (f/2) \cos^2 \alpha_0 [(\nu'_2 - \nu'_1) - \sin(\nu'_2 - \nu'_1) \cos(\nu'_1 + \nu'_2)] \quad (129)$$

$$+ f^2 \left[\begin{array}{l} \frac{1}{4}(\nu'_2 - \nu'_1)^2 \cot(\nu'_2 - \nu'_1) \cos^2 \alpha_0 - \frac{1}{4}(\nu'_2 - \nu'_1)^2 \cot(\nu'_2 - \nu'_1) \cos^4 \alpha_0 \\ - \frac{1}{4}(\nu'_2 - \nu'_1)^2 \csc(\nu'_2 - \nu'_1) \cos^2 \alpha_0 \cos(\nu'_1 + \nu'_2) \\ + \frac{1}{4}(\nu'_2 - \nu'_1)^2 \csc(\nu'_2 - \nu'_1) \cos^4 \alpha_0 \cos(\nu'_1 + \nu'_2) \\ - (1/16) \sin 2(\nu'_2 - \nu'_1) \cos^4 \alpha_0 \cos^2(\nu'_1 + \nu'_2) \\ + (1/16) (\nu'_2 - \nu'_1) \cos^4 \alpha_0 + (1/32) \sin 2(\nu'_2 - \nu'_1) \cos^4 \alpha_0 \end{array} \right]$$

Now in (129) let $\alpha_0 = 90^\circ - \theta_0$, $d_1 = \nu'_1$, $d_2 = \nu'_2$, $d = d_2 - d_1 = \nu'_2 - \nu'_1$ and the equation becomes:

$$\frac{S}{a} = d - (f/2) [d \sin^2 \theta_0 - \sin d \sin^2 \theta_0 \cos(d_1 + d_2)] \quad (130)$$

$$+ f^2 \left[\begin{array}{l} \frac{1}{4} d^2 \cot d \sin^2 \theta_0 - \frac{1}{4} d^2 \cot d \sin^4 \theta_0 \\ - \frac{1}{4} d^2 \csc d \sin^2 \theta_0 \cos(d_1 + d_2) \\ + \frac{1}{4} d^2 \csc d \sin^4 \theta_0 \cos(d_1 + d_2) \\ - (1/16) \sin 2d \sin^4 \theta_0 \cos^2(d_1 + d_2) + (1/16) d \sin^4 \theta_0 + (1/32) \sin 2d \sin^4 \theta_0 \end{array} \right]$$

Since θ_0 is the parametric latitude of the vertex of the Great elliptic arc, we have (or may place)

$$X = \frac{(\sin \theta_1 + \sin \theta_2)^2}{1 + \cos d} + \frac{(\sin \theta_1 - \sin \theta_2)^2}{1 - \cos d} = 2 \sin^2 \theta_0, \quad (131)$$

$$Y = \frac{(\sin \theta_1 + \sin \theta_2)^2}{1 + \cos d} - \frac{(\sin \theta_1 - \sin \theta_2)^2}{1 - \cos d} = 2 \sin^2 \theta_0 \cos(d_1 + d_2)$$

From (131) $\sin^2 \theta_0 = X/2$, $\sin^2 \theta_0 \cos(d_1 + d_2) = Y/2$, and we can write (130) in the form:

$$\frac{S}{a} = d - (f/4) (Xd - Y \sin d) \quad (132)$$

$$+ (f^2/128) \left[\begin{array}{l} (16d^2 \cot d) X - (16d^2 \csc d) Y \\ + (2d + \sin 2d - 8d^2 \cot d) X^2 \\ + (8d^2 \csc d) XY - (2 \sin 2d) Y^2 \end{array} \right]$$

If we factor $\sin d$ out of every term of (132), we can write:

$$S = a \sin d [T - (f/4)(TX - Y) + (f^2/64)(A_0 X + B_0 Y + C_0 X^2 + D_0 XY + E_0 Y^2)]$$

$$T = d/\sin d, E_0 = -2 \cos d, A_0 = -D_0 E_0, C_0 = T - \frac{1}{2}(A_0 + E_0), \quad (133)$$

$D_0 = 4T^2$, $B_0 = -2 D_0$, d is the spherical distance between the points $P_1(\theta_1, \lambda_1)$ and $P_2(\theta_2, \lambda_2)$ given by some spherical formula as

$$\cos d = \sin \theta_1 \sin \theta_2 + \cos \theta_1 \cos \theta_2 \cos \Delta \lambda, \Delta \lambda = \lambda_2 - \lambda_1.$$

COMPARISON WITH AN EXISTING EXPANSION

On page 8, GIMRADA Research Note No. 11, E. M. Sodano, April 1963 [23] one finds the following formula:

$$\begin{aligned}
 \frac{S}{b_0} = & (1+f+f^2) \phi + a[(f+f^2) \sin \phi - (f^2/2) \phi^2 \csc \phi] \\
 & + m \left(-\frac{f+f^2}{2} \phi - \frac{f+f^2}{2} \sin \phi \cos \phi + \frac{f^2}{2} \phi^2 \cot \phi \right) \\
 & + m^2 \left(\frac{f^2}{16} \phi + \frac{f^2}{16} \sin \phi \cos \phi - \frac{f^2}{2} \phi^2 \cot \phi - \frac{f^2}{8} \sin \phi \cos^3 \phi \right) \\
 & + am \left(\frac{f^2}{2} \phi^2 \csc \phi + \frac{f^2}{2} \sin \phi \cos^2 \phi \right) - a^2 (f^2/2) \sin \phi \cos \phi
 \end{aligned} \tag{134}$$

Now the correspondence between the parameters as used in (133) and those of Sodano are:

$$m(\text{Sodano}) = X/2, a(\text{Sodano}) = \frac{1}{4}(Y + X \cos d), \phi(\text{Sodano}) = d, b_0(\text{Sodano}) = a(1-f) \quad (135)$$

(a is equatorial radius, f the flattening).

If we substitute from (135) into (134), retaining terms to f^2 inclusive, we can write (134) as

$$\begin{aligned}
 \frac{S}{a} = & d - (f/4)(Xd - Y \sin d) \\
 & + (f^2/128) \left[(16d^2 \cot d) X - (16d^2 \csc d) Y \right. \\
 & \quad \left. + (2d + \sin 2d - 8d^2 \cot d) X^2 \right. \\
 & \quad \left. + (8d^2 \csc d) XY - (2 \sin 2d) Y^2 \right]
 \end{aligned} \tag{136}$$

Now comparing (132) and (136) find that the equations are identical which gives an independent check of Sodano's inverse formula.

COMPUTING FORM IN TERMS OF PARAMETRIC LATITUDE

Given on the reference ellipsoid the points $P_1(\theta_1, \lambda_1)$, $P_2(\theta_2, \lambda_2)$; P_2 west of P_1 , west longitudes considered positive. (Geodetic latitudes are converted to parametric by $\tan \theta = (1-f)$, $\tan \phi$ or an equivalent formula). Formulas (133) may be used as follows:

With $\theta_m = \frac{1}{2}(\theta_1 + \theta_2)$, $\Delta\theta_m = \frac{1}{2}(\theta_2 - \theta_1)$, $\Delta\lambda = \lambda_2 - \lambda_1$, $\Delta\lambda_m = \frac{\Delta\lambda}{2}$

let $k = \sin \theta_m \cos \Delta\theta_m$, $K = \sin \Delta\theta_m \cos \theta_m$,

$$H = \cos^2 \Delta\theta_m - \sin^2 \theta_m = \cos^2 \theta_m - \sin^2 \Delta\theta_m,$$

$$L = \sin^2 \Delta\theta_m + H \sin^2 \Delta\lambda_m = \sin^2 d/2, 1 - L = \cos^2 d/2,$$

$$\begin{aligned}
\cos d &= 1 - 2L, h = \sin^2 d = 4L(1 - L), U = 2k^2/(1 - L), \\
V &= 2K^2/L, X = U + V, Y = U - V \\
T &= (d/\sin d) = 1 + (1/6)h + (3/40)h^2 + (5/112)h^3 + (35/1152)h^4 + (63/2816)h^5 + \dots \\
E_0 &= -2 \cos d, A_0 = -D_0 E_0 = -4E_0 T^2, D_0 = 4T^2, B_0 = -2D_0, C_0 = T - \frac{1}{2}(A_0 + E_0) \quad (137) \\
S &= a \sin d [T - (f/4)(TX - Y) + (f^2/64)(A_0 X + B_0 Y + C_0 X^2 + D_0 XY + E_0 Y^2)] \\
\sin(a_2 + a_1) &= (K \sin \Delta \lambda)/L, \sin(a_2 - a_1) = (k \sin \Delta \lambda)/(1 - L) \\
\frac{1}{2}(\delta a_2 + \delta a_1) &= -(f/2) TH \sin(a_1 + a_2) \\
\frac{1}{2}(\delta a_2 - \delta a_1) &= -(f/2) TH \sin(a_2 - a_1) \\
a_{1-2} &= a_1 + \delta a_1, a_{2-1} = a_2 + \delta a_2.
\end{aligned}$$

The azimuth formulas of (137) are obtained by manipulation of expressions given on pages 126-128 of THE DISTANCE BETWEEN TWO WIDELY SEPARATED POINTS ON THE SURFACE OF THE EARTH, W. D. Lambert, Journal of the Washington Academy of Sciences, Vol. 32, No. 5, May 15, 1942, [13]. Note that in the distance and azimuth formulas of (137), the same quantities H, T, L, k, K are used.

Figure 22 is an example of the arrangements of equations (137) and computations for comparison with those of Figure 21, page 80. The results are:

True distance meters	Geodetic Latitude		Parametric Latitude	
	δf	Fig. 21 δf^2	δf	Fig. 22 δf^2
8,466,621.01	618.26	621.11	622.30	621.08
True Azimuths				
109° 57' 17".41		16".86		16".68
265° 37' 10".59		10".71		11".37

As was to be expected both approximations are adequate within any operational requirements. The coefficients A_0 , B_0 , C_0 , D_0 , E_0 of the parametric latitude form, Figure 22, are slightly less complicated than those of the geodetic form, Figure 21. But no conversion to parametric latitudes needs to be made for Figure 21. For purely geodetic computations further investigation needs to be made and it is suggested that computations be made using both forms against the computed lines contained in the revised issues of ACIC Reports 59 and 80, Sept. 1960 and December 1959. [12]

DISTANCE COMPUTING FORM, FORSYTH-ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

$$\tan \theta = 0.996609925 \tan \phi$$

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/64 = 0.1795720390 \times 10^{-6}$$

1 radian = 206,264.8062 seconds

ϕ_1 8 58 25.0

ϕ_2 21 26 06.0

$\theta_m = \frac{1}{2}(\theta_1 + \theta_2)$ 15° 09' 22".644

$\Delta\theta_m = \frac{1}{2}(\theta_2 - \theta_1)$ 6 12 45.386

$\sin \theta_m$ + 0.26145290

$\cos \theta_m$ + 0.96521623

$k = \sin \theta_m \cos \Delta\theta_m$ + 0.25991743

$H = \cos^2 \Delta\theta_m - \sin^2 \theta_m = \cos^2 \theta_m - \sin^2 \Delta\theta_m$ + 0.91993122

$L = \sin^2 \Delta\theta_m + H \sin^2 \Delta\lambda_m$ + 0.37960074

d + 1.3276078324

$U = 2k^2/(1 - L)$ + 0.2177857865

$X = U + V$ + 0.2752704532

$A = DE = -4ET^2$ + 3.604334620

$X(A + CX)$ + 0.977503686

$(TX - Y)$ + 0.216229457

$T + \delta f$ + 1.367673597

$\Sigma = X(A + CX) + Y(B + EY) + DXY$ - 1.10405442

$T + \delta f + \delta f^2$ + 1.367673399

$\sin(a_2 + a_1) = (K \sin \Delta\lambda)/L$ + 0.26959808

$\sin(a_2 - a_1) = (k \sin \Delta\lambda)/(1 - L)$ + 0.41047190

$\frac{1}{2}(\delta a_1 + \delta a_2) = -(f/2) H T \sin(a_2 + a_1)$ - 5.75032185 × 10⁻⁴

$\frac{1}{2}(\delta a_2 - \delta a_1) = -(f/2) HT \sin(a_2 - a_1)$ - 8.75505321 × 10⁻⁴

a_1 109 56 14.701

δa_1 + 1 01.977

a_{1-2} 109 57 16.678

$$a_{1-2} = a_1 + \delta a_1$$

λ_1 74 34 24.0

λ_2 158 01 33.0

$\Delta\lambda = \lambda_2 - \lambda_1$ 78° 27' 09".0

$\Delta\lambda_m = \frac{1}{2}\Delta\lambda$ 39 13 34.5

$\sin \Delta\theta_m$ + 0.10821810

$\cos \Delta\theta_m$ + 0.99412718

$K = \sin \Delta\theta_m \cos \theta_m$ + 0.10445387

$H = \cos^2 \Delta\theta_m - \sin^2 \theta_m = \cos^2 \theta_m - \sin^2 \Delta\theta_m$ + 0.91993122

$L = \sin^2 \Delta\theta_m + H \sin^2 \Delta\lambda_m$ + 0.37960074

d + 1.3276078324

$\sin d$ + 0.97057512

$V = 2K^2/L$ + 0.0574846667

$Y = U - V$ + 0.1603011198

$C = T - \frac{1}{2}(A + E)$ - 0.19351193

$Y(B + EY)$ - 2.411804017

DXY + 0.330245911

$\delta f = -(f/4)(TX - Y)$ - 1.83259 × 10⁻⁴

$S_1 = a \sin d (T + \delta f)$ 8,466,622.30 meters

$\delta f^2 = +(f^2/64) \Sigma$ - 1.9826 × 10⁻⁷

$S_2 = a \sin d (T + \delta f + \delta f^2)$ 8,466,621.08 meters

$\circ \quad ' \quad "$

$a_1 + a_2$ 375 38 25.266

$a_2 - a_1$ 155 45 55.864

$\delta a_1 +$ 0.300473136 × 10⁻³

$\delta a_2 -$ 1.450537506 × 10⁻³

$\circ \quad ' \quad "$

a_2 265 42 10.565

δa_2 - 4 59.195

a_{2-1} 265 37 11.370

$$a_{2-1} = a_2 + \delta a_2$$

Figure 22

TRANSFORMATION FROM SECOND ORDER FORM IN GEODETIC LATITUDE
TO SECOND ORDER IN PARAMETRIC

In terms of geodetic latitude, the equations corresponding to (132) are:

$$\begin{aligned} \frac{s}{a} &= d' - (f/4) (X'd' - 3Y'\sin d') \\ &\quad + (f^2/128) (AX' + BY' + CX'^2 + DX'Y' + EY'^2) \\ A &= 64d' + 16d'^2 \cot d', B = -96 \sin d' - 16d'^2 \csc d', \\ C &= -30d' - 15 \sin 2d' - 8d'^2 \cot d', \\ D &= 48 \sin d' + 8d'^2 \csc d', E = 30 \sin 2d' \end{aligned} \tag{138}$$

(See Equation (109), page 78.

Equation (132) is written here in the form:

$$\begin{aligned} \frac{s}{a} &= d - (f/4) (Xd - Y \sin d) \\ &\quad + (f^2/128) (A_0X + B_0Y + C_0X^2 + D_0XY + E_0Y^2) \\ A_0 &= 16d^2 \cot d, B_0 = -16d^2 \csc d, C_0 = 2d + \sin 2d - 8d^2 \cot d, \\ D_0 &= 8d^2 \csc d, E_0 = -2 \sin 2d \end{aligned} \tag{139}$$

Now we should be able to find transformation equations of the form:

$$d' = d'(d, X, Y), X' = X'(X, Y, d), Y' = Y'(Y, X, d) \tag{140}$$

which when substituted in (138) should produce equations (139).

The definitions of X' , Y' and X , Y are:

$$\begin{aligned} X' &= 2 \sin^2 \phi_0, X = 2 \sin^2 \theta_0 \\ Y' &= 2 \sin^2 \phi_0 \cos(d_1 + d_2), Y = 2 \sin^2 \theta_0 \cos(d_1 + d_2) \end{aligned} \tag{141}$$

where ϕ_0 , θ_0 are respectively geodetic, parametric latitude of the vertex of the great elliptic arc. From the equation $\tan \theta = (1-f) \tan \phi$, or equivalent, we find:

$$\phi_0 = \theta_0 + f \sin \theta_0 \cos \theta_0 (1 + f \cos^2 \theta_0). \tag{142}$$

From the values indicated by Forsyth on page 120, of his treatise, to first order in f , extending the results to second order in f we find:

$$d' = d - (f/2) Y \sin d + (f^2/16) [4Y(X-3) \sin d + (2Y^2 - X^2) \sin 2d] \tag{143}$$

and to first order in f ,

$$\cos(d_1 + d_2) = \cos(d_1 + d_2) + f \cos d \sin^2 \theta_0 - f \cos d \sin^2 \theta_0 \cos^2(d_1 + d_2). \tag{144}$$

From (142), to first order in f , find

$$2 \sin^2 \phi_0 = 2 \sin^2 \theta_0 (1 + 2f \cos^2 \theta_0). \tag{145}$$

From (143), to first order in f , find

$$\sin d' = \sin d - (f/4) Y \sin 2d \quad (146)$$

From (141), (144), and (145) find

$$\begin{aligned} X' &= X + 2fX - fX^2 \\ Y' &= Y + 2fY - fXY + (f/2)(X^2 - Y^2) \cos d. \end{aligned} \quad (147)$$

Hence the transformations (140) are from (143), (146), and (147) the following:

$$\left\{ \begin{array}{l} d' = d - (f/2) Y \sin d + (f^2/16) [4Y(X-3) \sin d + (2Y^2 - X^2) \sin 2d] \\ \sin d' = \sin d - (f/4) Y \sin 2d \\ X' = X + 2fX - fX^2 \\ Y' = Y + 2fY - fXY + (f/2)(X^2 - Y^2) \cos d \end{array} \right. \quad (148)$$

Substitution of the relations (148) into (138) produces equations (139); providing a second check of Sodano's formula for the inverse solution

The inverse of the transformations (148) which will carry (139) into (138) are:

$$\left\{ \begin{array}{l} d = d' + (f/2) Y' \sin d' + (f^2/16) [4Y'(X'-1) \sin d' + (2Y'^2 - X'^2) \sin 2d'] \\ \sin d = \sin d' + (f/4) Y' \sin 2d' \\ X = X' - 2fX' + fX'^2 \\ Y = Y' - 2fY' + fX'Y' + (f/2)(Y'^2 - X'^2) \cos d'. \end{array} \right. \quad (149)$$

DIFFERENCE FORMULAE FOR THE TWO SECOND ORDER FORMS

From equation (142) to second order in f , find

$$2 \sin^2 \phi_0 = 2 \sin^2 \theta_0 (1 + 2f - 2f \sin^2 \theta_0 + 3f^2 - 7f^2 \sin^2 \theta_0 + 4f^2 \sin^4 \theta_0), \quad (150)$$

and extending (144) to second order in f

$$\begin{aligned} \cos(d'_1 + d'_2) &= \cos(d_1 + d_2) + f \sin^2 \theta_0 \cos d \sin^2(d_1 + d_2) \\ &\quad - (f^2/2) \sin^2 \theta_0 \sin^2(d_1 + d_2) \left[\frac{1}{2} \sin^2 \theta_0 \cos(d_1 + d_2) \right. \\ &\quad \left. + \sin^2 \theta_0 \cos d - (3/2) \cos d \right. \\ &\quad \left. + (3/2) \sin^2 \theta_0 \cos 2d \cos(d_1 + d_2) \right] \end{aligned} \quad (151)$$

From equations (148), by factoring $\sin d$ out of every term of the expression for d' , we can write:

$$d' = \sin d \{ T - (f/2) Y + (f^2/8) [2Y(X-3) + (2Y^2 - X^2) \cos d] \} \quad (152)$$

Since we can write $X' = 2 \sin^2 \phi_0$, $X = 2 \sin^2 \theta_0$, $Y' = 2 \sin^2 \phi_0 \cos(d'_1 + d'_2)$, $Y = 2 \sin^2 \theta_0 \cos(d_1 + d_2)$ we have from (150) and then combining (150) and (151) (multiplying respective members together)

$$X' = X [1 + f(2 - X) \{1 + (f/2)(3 - 2X)\}] \quad (153)$$

$$Y' = Y [1 + f(2 - X)] + (f/2)(X^2 - Y^2) \cos d \quad (154)$$

$$+ (f^2/8) \left[4Y(2 - X)(3 - 2X) \right. \\ \left. + (X^2 - Y^2) \{(11 - 5X) \cos d + Y(1 - 3 \cos^2 d)\} \right]$$

From Figure 22 we have

$$\begin{aligned} X &= 0.2752704532, Y = 0.1603011198, \\ \sin d &= 0.97057512, \cos d = 0.24079852, \\ T &= 1.367856856, f = 0.0033900753, \\ f/2 &= 0.00169503765, f^2/8 = 1.436576317 \times 10^{-6} \end{aligned} \quad (155)$$

Using the values from (155) to compute d' , X' , Y' from (152), (153), (154) find:

$$\begin{aligned} d' &= (0.97057512)(1.367856856 - 2.717164 \times 10^{-4} - 1.2634 \times 10^{-6}) \\ &= (0.97057512)(1.367583876) = 1.327342885; \\ X' &= (0.2752704532)(1.005871239) = 0.27688663; \\ Y' &= 0.160301120 + 9.37275 \times 10^{-4} + 2.0440 \times 10^{-5} + 4.068 \times 10^{-6} = 0.16126290. \end{aligned} \quad (156)$$

From Figure 21, $d' = 1.327342885$, $X' = 0.27688668$, $Y' = 0.16126298$ and comparing with the values from (156), we have a "flat" check for d' , 5 in the eighth place for X' and 8 in the eighth place for Y' . Now the first significant figure of f^2 is 1 in the 5th decimal place and of f^3 is 4 in the 8th decimal place. If seven place tables are used, terms in f^2 are sufficient. If eight figure tables are used, as Peters trigonometric functions, there is some uncertainty in the 8th place of decimals.

Now the corresponding formulas for d , X , Y in the terms of d' , X' , Y' are found similarly to be, to second order terms in f inclusive;

$$\begin{aligned} d &= \sin d' \{T' + (f/2)Y' + (f^2/8)[2Y'(X' - 1) + (2Y'^2 - X'^2)\cos d']\} \\ X &= X'[1 + f(X' - 2)\{1 + (f/2)(2X' - 1)\}] \\ Y &= Y'[1 - f(2 - X')] - (f/2)(X'^2 - Y'^2)\cos d' \\ &\quad + (f^2/8) \left[4Y'(2 - X')(1 - 2X') \right. \\ &\quad \left. + (X'^2 - Y'^2)\{(5 - 3X')2\cos d' + Y'(1 - 3\cos^2 d')\} \right] \end{aligned} \quad (157)$$

From Figure 21 we have

$$\begin{aligned} X' &= 0.276886675, Y' = 0.161262981, \\ \sin d' &= 0.97051129, \cos d' = 0.24105566 \\ T' &= 1.367673822. \end{aligned} \quad (158)$$

With the values of X' , Y' , $\sin d'$, $\cos d'$, T' from (158) and of f , $f/2$, $f^2/8$ from (155)

we find from (157) that

$$d = (0.97051129) (1.367673822 + 2.73347 \times 10^{-4} - 3.44 \times 10^{-7})$$

$$d = (0.97051129) (1.36794682) = 1.327607833$$

$$X = (0.276886675) (0.994162934) = 0.27527047 \quad (159)$$

$$Y = 0.161262981 - 9.42015 \times 10^{-4} - 2.0700 \times 10^{-5} + 8.68 \times 10^{-7} = 0.16030113.$$

From (155). $X = 0.27527045$, $Y = 0.16030112$, and from Figure 22, $d = 1.327607832$.

Comparing with (159) we have a difference in d of 1 in the 9th decimal place; in X and Y of 2 and 1 in the 8th decimal place respectively, which is within the computational uncertainties.

From (152), (153), (154), and (157) we can express the differences as functions of either set of variables:

$$\begin{aligned} \Delta d &= d' - d = - (f/2) Y \sin d + (f^2/16) [4Y(X-3) \sin d + (2Y^2 - X^2) \sin 2d], \\ &= - (f/2) Y' \sin d' - (f^2/16) [4Y'(X'-1) \sin d' + (2Y'^2 - X'^2) \sin 2d'], \\ \Delta X &= X' - X = fX(2-X) \{1 + (f/2)(3-2X)\}, \\ &= fX'(2-X') \{1 - (f/2)(1-2X')\}; \end{aligned} \quad (160)$$

$$\begin{aligned} \Delta Y &= Y' - Y = fY(2-X) + (f/2)(X^2 - Y^2) \cos d \\ &\quad + (f^2/8) \left[4Y(2-X)(3-2X) \right. \\ &\quad \left. + (X^2 - Y^2) \{(11 - 5X) \cos d + Y(1 - 3 \cos^2 d)\} \right], \\ &= fY'(2-X') + (f/2)(X'^2 - Y'^2) \cos d' \\ &\quad - (f^2/8) \left[4Y'(2-X')(1-2X') \right. \\ &\quad \left. + (X'^2 - Y'^2) \{2(5 - 3X') \cos d' + Y'(1 - 3 \cos^2 d')\} \right]. \end{aligned}$$

SUMMARY OF DISTANCE COMPUTATIONS INVESTIGATION

As long as accuracy requirements remain within the range of the capabilities of the Andoyer-Lambert formulae, as exhibited in TABLE 3, they are quite adequate and it makes no difference if geographic latitudes are transformed to parametric latitudes first as far as accuracy requirements are concerned relative to hyperbolic electronic measuring systems. However, the formulae for geodetic azimuths are slightly more complicated in terms of geodetic latitude and some of the auxiliary quantities as chord length, dip of the chord, etc. are slightly less difficult to compute when expressed in terms of parametric latitude.

In order to arrange the computing in conformance with the Andoyer-Lambert formulae, equations (17), (48), (52), 56)), and (64) have been rearranged as follows to be expressible in common computational parameters:

The spherical length, d , is determined from formulae as given with Figure 16,
 $(d = d_1 + d_2)$;

$$\cot A = (\cos \theta_1 \tan \theta_2 - \sin \theta_1 \cos \Delta\lambda) / \sin \Delta\lambda$$

$$\cot B = (\cos \theta_2 \tan \theta_1 - \sin \theta_2 \cos \Delta\lambda) / \sin \Delta\lambda$$

$$\sin d = \cos \theta_1 \sin \Delta\lambda / \sin B = \cos \theta_2 \sin \Delta\lambda / \sin A;$$

these will compensate for any unfavorable triangle geometry.

The Andoyer-Lambert Formulae are taken in the form [13]

$$\delta d_r = -(f/8) (VQ^2/\sin^2 \frac{1}{2}d + UR^2/\cos^2 \frac{1}{2}d)$$

$$(1) \quad s = a(d_r + \delta d_r), \quad Q = \sin \theta_2 - \sin \theta_1, \quad R = \sin \theta_1 + \sin \theta_2.$$

$$V = d_r + \sin d, \quad U = d_r - \sin d,$$

With corresponding geodetic azimuths computed from

$$T = (f/2) d''/\sin d, \quad \delta A'' = T \cos^2 \theta_2 \sin 2B,$$

$$(2) \quad \delta B'' = T \cos^2 \theta_1 \sin 2A; \quad g\alpha_{AB} = 180^\circ - A + \delta A; \quad g\alpha_{BA} = 180^\circ + B - \delta B$$

The Normal Section Azimuths may be written

$$(3) \quad \cot_n \alpha_{AB} = -(\cot A)/T_1 + (e^2 Q \cos \theta_1) / (\sin \Delta\lambda) T_1 \cos \theta_2$$

$$\cot_n \alpha_{BA} = (\cot B/T_2 + (e^2 Q \cos \theta_2) / (\sin \Delta\lambda) T_2 \cos \theta_1$$

$$T_1 = (1 - e^2 \cos^2 \theta_1)^{1/2} \quad T_2 = (1 - e^2 \cos^2 \theta_2)^{1/2}$$

The chord length becomes

$$(4) \quad c = a (4 \sin^2 d/2 - e^2 Q^2)^{1/2}$$

The angle of dip of the chord may be written

$$(5) \quad \beta = \arcsin [2b (\sin^2 d/2) / c T_1]$$

$$b = \text{semiminor axis of ellipsoid}, \quad c = \text{chord length}, \quad T_1 = (1 - e^2 \cos^2 \theta_1)^{1/2}.$$

The maximum separation of chord and arc becomes

$$(6) \quad H = (a^2/c) (1 - \cos \frac{1}{2}d) [4 \sin^2 d/2 (\cos^2 d/2 - M) - e^2 Q^2]^{1/2} / \cos \frac{1}{2}d$$

$$a = \text{the semimajor axis of ellipsoid}, \quad c = \text{chord length}, \quad M = e^2 \sin \theta_1 \sin \theta_2,$$

$$Q = \sin \theta_2 - \sin \theta_1, \quad e = \text{eccentricity of the spheroid}.$$

The geographic coordinates of the point where maximum separation of chord and arc occurs

$$(7) \quad \tan \lambda = (\cos \theta_2 \sin \Delta\lambda) / (\cos \theta_1 + \cos \theta_2 \cos \Delta\lambda)$$

$$\tan \phi = R / (0.996609925) \sqrt{4 \cos^2 \frac{1}{2}d - R^2}$$

$$\text{where } R = \sin \theta_1 + \sin \theta_2.$$

Figure 23, shows the above formulae arranged in a computing form and the computations done over the line MOSCOW TO CAPE OF GOOD HOPE. See line No. 12, TABLE 1, and Figure 17.

COMPUTATIONS: GEODETIC DISTANCE AND AZIMUTHS, NORMAL
SECTION AZIMUTHS, CHORD, ANGLE OF DIP, MAXIMUM SEPARATION,
GEOGRAPHIC COORDINATES OF POINT OF MAXIMUM SEPARATION

Clarke 1866 Ellipsoid: $a = 6,378,206.4$ meters, $b = 6,356,583.8$ meters, $e^2 = 6.7686580 \times 10^{-3}$
 $f/2 = 1.69503765 \times 10^{-3}$, $f/8 = 4.237594 \times 10^{-4}$, 1 radian = 206,264.8062 seconds

° " ° " ° " ° " ° " ° " ° "

$\phi_1 + .555$	$.45$	19.526	$1 (A)$	$MOSCOW$	λ_1	-37	34	37	15.450		
$\phi_2 - .33$	$.56$	03.500	$2 (B)$	<u>CAPE OF GOOD HOPE</u>	λ_2	-18	28	41.460			
$\tan \phi_1 + 1.468$	9.9522		2. Always West of 1.		$\Delta\lambda = \lambda_2 - \lambda_1$	$+19$	05	34.050			
$\tan \phi_2 - 0.672$	8.4157		$\tan \theta = 0.9966098255$	$\tan \phi$	$\sin \Delta\lambda$	$+0.327$	09901				
$\tan \theta_1 + 1.464$	0.1523		$\tan \theta_2 - 0.670$	$.56059$	$\cos \Delta\lambda$	$+0.944$	99002				
$\sin \theta_1 + 0.825$	25.246		$\sin \theta_2 - 0.556$	93.719	$T_1 = (1 - e^2 \cos^2 \theta_1)^{1/2} \theta_2$	998	922735				
$\cos \theta_1 + 0.564$	0.3269		$\cos \theta_2 + 0.830$	$.555461$	$T_2 = (1 - e^2 \cos^2 \theta_2)^{1/2} \theta_2$	997	46269				
$\cos^2 \theta_1 + 0.318$	$.3288$	$\cos^2 \theta_2 + 0.689$	$.82096$	A	16.4	$"$	0.442	B	-10	37	-5.2
$\cot A = (\cos \theta_1 \tan \theta_2 - \sin \theta_1 \cos \Delta\lambda) / \sin \Delta\lambda$	-3.54118856	$\sin A$	± 27.76380					$\sin B$	1.54	5.2	18.4
$\cot B = (\cos \theta_2 \tan \theta_1 - \sin \theta_2 \cos \Delta\lambda) / \sin \Delta\lambda$	3.26352155	$\sin 2A$	$-.52278282$					$\sin 2B$	1.362	70.661	
$\sin d = \cos \theta_1 \sin \Delta\lambda / \sin B = \cos \theta_2 \sin \Delta\lambda / \sin A$	$+.99985202$	d	$.52828549$					$\sin d$	$.538800018$		
$\cos d = -0.01720200$	$U = d_r - \sin d$	± 2.58785220	$V = d_t + \sin d$	± 2.58785220	θ_r (radians)	± 2.58785220					
$M = e^2 \sin \theta_1 \sin \theta_2 - 3.1128524810^3 Q = \sin \theta_2 - \sin \theta_1 - 1.33248965$			$R = \sin \theta_1 + \sin \theta_2 + 0.26881529 \cos \frac{1}{2}d$	± 200.99822							
$\delta d_r = -(f/8)(VQ^2 / \sin^2 \gamma_d + UR^2 / \cos^2 \gamma_d) - 0.04155887$			$(1) S = a(d_r + \delta d_r) \approx 122.066$	$.280$							
$T = (f/2) d'' / \sin d$	$\delta A'' = T \cos^2 \theta_2 \sin 2B$	$\pm 1.38.11.9355$	$\delta B'' = T \cos^2 \theta_1 \sin 2A - 92.1.3855$								
$n^{AB} = \text{arc cot} [-(\cot A)/T_1 + (e^2 Q \cos \theta_1) / (\sin \Delta\lambda) T_1 \cos \theta_2]$			$(2) \text{ Geodetic Azimuths}$	$\begin{cases} g^{AB} = 180 - \lambda + \delta \lambda \\ g^{BA} = 180 + B - \delta B \end{cases}$	45	48	12.519				
$n^{BA} = \text{arc cot} [(\cot B)/T_2 + (e^2 Q \cos \theta_2) / (\sin \Delta\lambda) T_2 \cos \theta_1]$			$(3) \text{ Normal Section}$	$\begin{cases} n^{AB} \\ n^{BA} \end{cases}$	1.92	1.1	29.805	Azimuths	2.2	27.558	
$\text{Angle of dip of the chord}$	$(5) \beta = \text{arc sin} [2b (\sin^2 d/2) / c T_1]$		$(4) \text{ Chord: } c = a(4 \sin^2 \frac{1}{2}d - e^2 Q^2)^{1/2} \sqrt{268.422.241/m}$								

Maximum separation of chord — arc:H = $(a^2/c) (1 - \cos \frac{1}{2}d) [4 \sin^2 d/2 (\cos^2 d/2 - M) - e^2 Q^2]^{1/2} / \cos \frac{1}{2}d$
 Geographic coordinates of point where maximum separation occurs:
 (7) $\tan \lambda = (\cos \theta_2 \sin \Delta\lambda) / (\cos \theta_1 + \cos \theta_2 \cos \Delta\lambda)$

$$\tan \phi = R/(0.996609925) \sqrt{4 \cos^2 \frac{1}{2}d - R^2}$$

Andoyer-Lambert Approximation (Parametric latitude)

Figure 23.

Note in Figure 23 that two values of longitude are given, λ and λ_g . λ is the longitude associated with the point where maximum separation of chord and arc occurs but corresponding to the rectangular coordinate system as defined in say Figure 14. λ_g is the true geodetic longitude of the same point and is of course obtained by adding λ to λ_1 since λ_1 is negative.

While a continuous system based on either the great elliptic section as depicted by Figure 17, or the Forsyth-Andoyer-Lambert approximation, Figure 23, will provide all the information as indicated and accurate enough for hyperbolic electronic systems and any present operational requirements, the Forsyth-Andoyer-Lambert is probably to be preferred because of computational simplicity and existence of programs already operating for high speed computers. Should the need arise for accuracy of the order of 1 meter in distance and 1 second in azimuth over the ellipsoid, the extension to second order terms in the flattening provided by equations (110) or (137), will suffice.


Many formulae are available for geodetic lines and differential corrections are available for transforming elements such as geodetic azimuths to normal section azimuths, etc. [24]. Usually these are complicated, involve tabular material for a particular spheroid of reference, require extensive root computation, and accuracy depends on line length. For instance, Bomford says Rudoe's formulae for the reverse problem, are "Unnecessarily complex for general use," [21], page 108. Also they give "Normal Section" distances — not geodetic. The difference between the geodesic and the Normal Section distance is of 4th order in the eccentricity of the meridian ellipse [24].

Finally this investigation has raised the question as to whether either Andoyer or Lambert should share any credit for the first order approximation formula in terms of parametric latitude recognizable intact in Forsyth's 1895 paper. While Forsyth had an erroneous second order term to the same expansion in terms of geodetic latitude, his first order term was correct and he thus had both so-called Andoyer-Lambert formulae. Gougenheim apparently had in 1950 the first correct expansion in print in terms of geodetic latitude which included the second order terms in the flattening.

REFERENCES (Distance Investigation)

- [8] Conformal Projections, P. D. Thomas, C. & G. S. Special Publication No. 251, G.P.O. 1952, pages 63, 72.
- [9] Helmert, F. R. Die mathematischen und physikalischen Theorieen der Höheren Geodäsie 1, chapters 5 and 7, Leipzig, 1880.
- [10] Conic Sections, C. Smith, MacMillan 1930, page 164.

- [11] Coordinate Geometry of Three Dimensions, R.J.T. Bell, MacMillan, 1937, page 24.
- [12] ACIC, Technical Reports Nos. 59 and 80; Geodetic distance and azimuth computations for lines under 500 miles, Geodetic distance and azimuth computations for lines over 500 miles; June 1956, August 1957. Revisions, Sept. 1960 and Dec. 1959.
- [13] The distance between two widely separated points on the surface of the Earth, W. D. Lambert, Journal of the Washington Academy of Sciences, Vol. 32, No. 5, May 15, 1942.
- [14] H.O. Publication No. 223, Auxiliary tables for Loran computation, 1953 reprint.
- [15] Andoyer, H. Formule donnant la longueur de la géodésique, joignant 2 points de l'ellipsoïde données par leurs coordonnées géographiques, Bulletin Géodésique, No. 34, 77-81, 1932.
- [16] Hershey, A.V., Hershey, E.J. Techniques for computing Loran maps, U.S. Naval Weapons Laboratory Report No. 1902, January 1964.
- [17] Thomas, P.D., Inverse computation for long lines, Transactions AGU, Vol. 29, No. 6, 763-766, 1948.
- [18] Forsyth, A.R., Geodesics on an oblate spheroid, Messenger of Mathematics, Vol. XXV, 81-124, 1895.
- [19] Wassef, A.M., Note on Forsyth method of direct computation of geodetic distances on an oblate spheroid, Bulletin Géodésique, No. 10, 353-355, 1948.
- [20] Gougenheim, A., Note sur la méthode de Forsyth, Bulletin Géodésique, No. 15, 69-70, 1950.
- [21] Bomford, G., Geodesy, Second Edition, Oxford at the Clarendon Press, 1962.
- [22] Personal Communication, B.K. Meade, Chief of Geodetic Computations, Coast & Geodetic Survey, Dec. 1964.
- [23] Sodano, E.M., General non-iterative solution of the inverse and direct geodetic problems, GIMRADA, Fort Belvoir, April 1963; also published as GIMRADA Research Note 11.
- [24] Geodesy, W.M. Tobey, Geodetic Survey of Canada Publication No. 11, Ottawa, 1928.

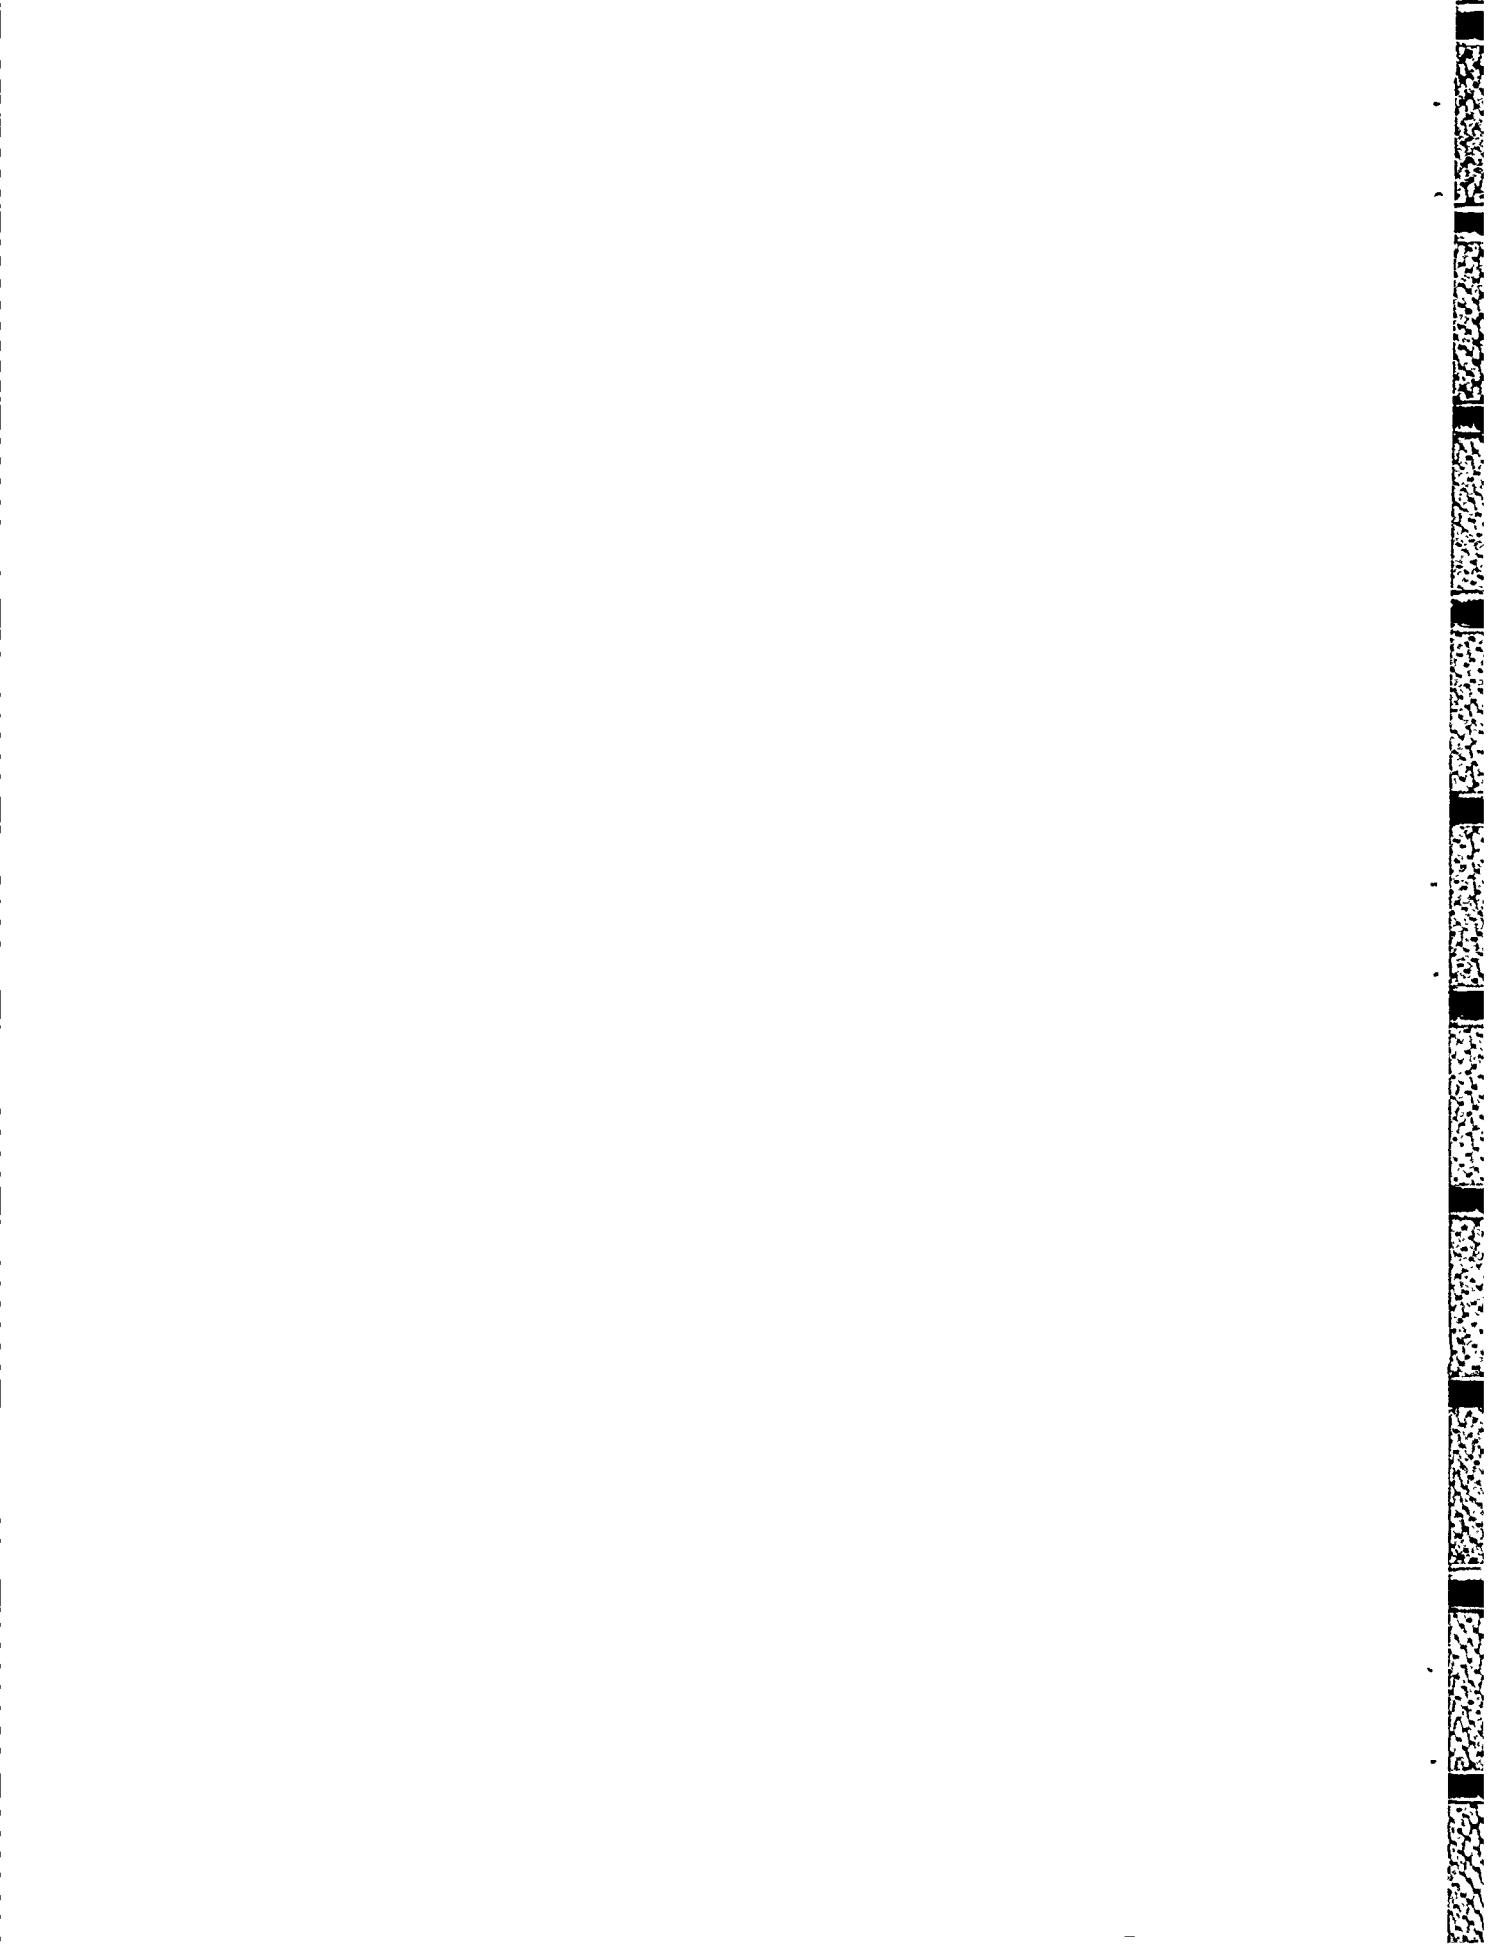

APPENDIX 1

Example of
Computations of Loran Lines
of Position (Plane Approximation)

Intersections of Loran Lines of Position

(Plane Approximation)

P. D. Thomas, Mathematician

Consider the hyperbolic system as shown in Figure 24. The hyperbolic locus with foci F, F' has for equation

$$(c^2 - a^2)x^2 - a^2y^2 = a^2(c^2 - a^2), \quad (e = \frac{c}{a} > 1) \quad (1)$$

As a varies ($a < c$) all the hyperbolas with the fixed foci F, F' (which are $2c$ apart) are generated.

The hyperbolic locus with the fixed foci F, F'' when referred to the same coordinate system as (1), has for equation

$$Ax^2 + Bxy + Cy^2 + Dx + Ey + F = 0, \quad (e = d/b > 1). \quad (2)$$

where one may first compute $r = b^2 - d^2$, $\mu = d \cos \alpha$, $\nu = d \sin \alpha$, $S = r - c\mu$, and then

$$A = \mu^2 - b^2, \quad B = 2\mu\nu, \quad C = \nu^2 - b^2, \quad D = 2(r\mu - cA), \quad E = 2S\nu, \quad F = S^2 - b^2c^2.$$

As b varies ($b < d$) all the hyperbolas with the fixed foci F, F'' (which are $2d$ apart) are generated.

The respective pairs of constants c, a ; d, b for each hyperbola are related to the fundamental constants of a Loran line by

$$c = kB_1/2, \quad a = kV_1/2; \quad d = kB_2/2, \quad b = kV_2/2 \quad (2.1)$$

where $v_i = t_i$, t_i is the time difference, v_i is the difference of light microseconds, B_i is the length (measured in light microseconds) of the direct line (baseline) between two Loran stations. k is the length of a light microsecond in the linear units in which x and y are expressed.¹

Since five distinct points determine a conic uniquely, two conics can have at most four points in common. For the hyperbolas (1) and (2) there will always be four real points of intersection except when F', F, F'' are collinear ($\alpha = 0$) and then there will be two.

ALGEBRAIC SOLUTIONS

I. If equations (1) and (2) are solved simultaneously for x one obtains the quartic equation

$$x^4 + Hx^3 + Jx^2 + Mx + N = 0 \quad (3)$$

where one may first compute $G = c^2 - a^2$, $\beta_0 = CG + Aa^2$, $\omega = F - CG$, $\delta = BEG$, $\gamma = a^2B^2 - E^2$, $L = \beta_0^2 - G B^2a^2$, and then $H = 2a^2(D\beta_0 - \delta)/L$, $J = a^2(a^2D^2 + 2\beta_0\omega + Gy)/L$,

¹Loran; Pierce, McKenzie, Woodward; McGraw Hill, 1948, pages 52, 53, 174.

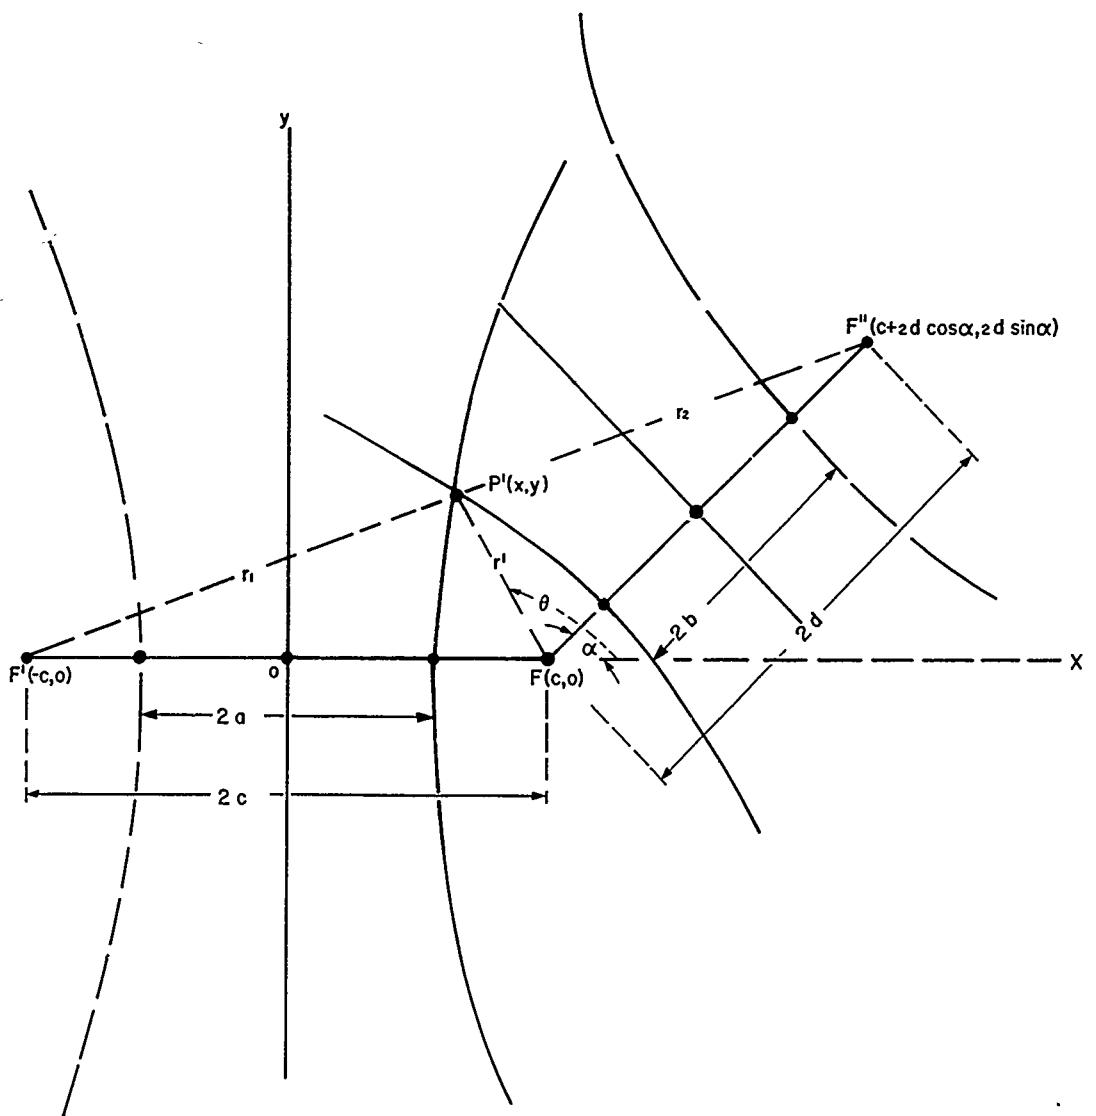


Figure 24. Two plane hyperbolas with a common focus.

$M = 2a^4(D\omega + \delta)/L$, $N = a^4(\omega^2 + GE^2)/L$. The corresponding values of y are then given by
 $y = \pm [G(x^2 - a^2)]^{1/2}/a$.

Equation (3) may be solved by the standard algebraic method² or by any of a number of numerical techniques.³

II. Again, if equations (1) and (2) are written in the forms $x^2 - Qy^2 = a^2$, $x^2 + Uxy + Vy^2 + Wx + Ry + T = 0$, where $Q = a^2/(c^2 - a^2)$, $U = B/A$, $V = C/A$, $W = D/A$, $R = E/A$, $T = F/A$ and these forms of the equations solved simultaneously with the line of slope m through the common focus $F(c,0)$ whose equation is $y = m(x - c)$, one obtains the two equations:

$$(Qm^2 - 1)x^2 - 2cQm^2x + (a^2 + c^2Qm^2) = 0, \quad (4)$$

$$(1 + Um + Vm^2)x^2 + [W + (R - cU)m - 2cVm^2]x + (c^2Vm^2 - cRm + T) = 0.$$

The resultant of the quadratic equations (4) is the condition that they have the same solutions or correspondingly that the parameter m will be restricted to those values for the points common to the hyperbolas (1) and (2).⁴

The resultant of the quadratics $a_0x^2 + a_1x + a_2 = 0$, $b_0x^2 + b_1x + b_2 = 0$ is given by

$$(a_0b_2 - b_0a_2)^2 + (b_1a_2 - a_1b_2)(a_0b_1 - a_1b_0) = 0. \quad (5)$$

From (4) $a_0 = Qm^2 - 1$, $a_1 = -2cQm^2$, $a_2 = a^2 + c^2Qm^2$, $b_0 = 1 + Um + Vm^2$, $b_1 = [W + (R - cU)m - 2cVm^2]$, $b_2 = c^2Vm^2 - cRm + T$, and these values placed in (5) lead to the quartic equation

$$k_1m^4 + k_2m^3 + k_3m^2 + k_4m + k_5 = 0, \quad (6)$$

where with $G = c^2 - a^2$, $\Omega = (a^2 + c^2)V + O(c^2 - T)$, $\theta_0 = R + cU$, $\phi = c^2 + cW + T$, $\eta = R - cU$, $\xi = a^2U - cR$, $\rho = a^2 - T$, $\rho' = a^2 + T$ one finds: $k_1 = (GV + \phi Q)^2 - a^2\theta_0^2$, $k_2 = 2[\xi\Omega + 2\eta ca^2V + a^2RQ \cdot (W + 2c) + c^2QU(cW + 2T)]$, $k_3 = \xi^2 - a^2\eta^2 + 2\rho'\Omega + W[4a^2cV + 2c\rho Q - a^2W]$, $k_4 = 2(\rho'\xi - a^2W\eta)$, $k_5 = \rho'^2 - a^2W^2$.

Again the solutions of (6) may be found by well known algebraic or numerical methods. The values of m obtained are of course the slopes of the lines through $F(c,0)$ and the points of intersection of the hyperbolas (1) and (2).

²College Algebra, H. B. Fine, Page 486.

³Numerical Mathematical Analysis, J. B. Scarborough, Second Edition, 1950, Pages 62-72.
 (The Johns Hopkins Press, Baltimore)

⁴College Algebra, H. B. Fine, Page 512.

POLAR SOLUTION

The following procedure involves tables of the trigonometric functions but no root extraction. First express the equations of (1) and (2) in polar form both referred to the common focus $F(c,0)$, and the corresponding rectangular coordinates in terms of the polar parameters. Find for equation (1)

$$r_a = \frac{c^2 - a^2}{\pm a - c \cos \theta} \quad (c > a) \quad (\text{see equation (3) PLANE, page 37 with } R = r_a, \beta = \theta)$$

$$x = c + r_a \cos \theta, y = r_a \sin \theta \quad (7)$$

and for equation (2)

$$r_b = \frac{(d^2 - b^2) [d \cos(\theta - \alpha) \pm b]}{d^2 \cos^2(\theta - \alpha) - b^2} \quad (d > b)$$

$$x = c + r_b \cos \theta, y = r_b \sin \theta \quad (8)$$

Since (7) and (8) express the two hyperbolae in polar form with respect to the same pole $F(c,0)$, a common focus of the two loci, it is clear (see Figure 24) that at a point of intersection $P'(x,y)$ the two values r_a and r_b are equal to a common value r' for a common value of θ and the distances to P' from F' and F'' are then given by $r_1 = r' + 2a$, $r_2 = r' + 2b$.

Equating the values of r_a , r_b from (7) and (8) one obtains

$$r' = \frac{c^2 - a^2}{\pm a - c \cos \theta} = \frac{d^2 - b^2}{d \cos(\theta - \alpha) \pm b} \quad (9)$$

and since c , d , α are constants, (9) is a relation between the parameters a , b , and θ . That is given any two of the three the third may be found from (9).

Consider a and b given. First write (9) in the form

$$\frac{d \cos(\theta - \alpha) \mp b}{\pm a - c \cos \theta} = \frac{d^2 - b^2}{c^2 - a^2} = K, \text{ whence}$$

$$(d \cos \alpha + cK) \cos \theta + (d \sin \alpha) \sin \theta = \pm aK \pm b. \quad (10)$$

The solution of the trigonometric equation (10) is

$$\theta_i = \beta + \gamma_i$$

$$\tan \beta = (d \sin \alpha) / (d \cos \alpha + cK) \quad (i = 1, 2, 3, 4)$$

$$\cos \gamma_i = (\pm aK \pm b) \sin \beta / d \sin \alpha. \quad (11)$$

From (11) it is seen that in general there will be four angles (γ_i), and thus four values

$$\text{of } \theta_i, \text{ four values of } r'_i \text{ from (9) and four sets of rectangular coordinates from } x_i = c + r'_i \cos \theta_i, \\ y_i = r'_i \sin \theta_i \quad (i = 1, 2, 3, 4) \quad (12)$$

and for each point of intersection two of the additional distances

$$r_i = r'_i \pm 2b, r_{i+4} = r'_i \pm 2a \quad (i = 1, 2, 3, 4). \quad (13)$$

A procedure for using equations (9) through (13) will be described and used for two examples. Since a, b, c, d, α will be given, first compute $K = (d^2 - b^2)/(c^2 - a^2)$, $\mu = d \cos \alpha$, $\nu = d \sin \alpha$, $\tan \beta = \nu / (\mu + cK)$.

From $\tan \beta$, using tables, find β and $\sin \beta$. Then compute

$$\cos \gamma_i = (\pm aK \pm b) \sin \beta / \nu \quad (i = 1, 2, 3, 4), \text{ and}$$

$$\theta_i = \beta + \gamma_i \quad (i = 1, 2, 3, 4). \text{ Next compute}$$

$$r'_i = \frac{c^2 - a^2}{\pm a - c \cos \theta_i} = \frac{d^2 - b^2}{d \cos(\theta_i - \alpha) \pm b} \quad i = 1, 2, 3, 4$$

choosing the proper value (with respect to sign) of $\pm a$, $\pm b$ in each member which will make them equal and positive for each value of θ_i . Now the rectangular coordinates may be computed from $x_i = c + r'_i \cos \theta_i$, $y_i = r'_i \sin \theta_i$. Useful checks are provided at this point by the relations $(x_i - c)^2 + y_i^2 = r'^2$ and by $\sum x_i = -H$ from equation (3). $H = 2a^2(D\beta_0 - \delta)/L$, $\beta_0 = CG + Aa^2$, $\delta = BEG$, $L = \beta_0^2 - GB^2a^2$, $G = c^2 - a^2$, $A = \mu^2 - b^2$, $B = 2\mu\nu$, $C = \nu^2 - b^2$, $D = 2(r\mu - cA)$, $E = 2S\nu$, $r = b^2 - d^2$, $S = r - c\mu$. Finally compute the additional distances $r_i = r'_i \pm 2b$, $r_{i+4} = r'_i \pm 2a$. ($i = 1, 2, 3, 4$).

Example 1. Let $c = d = 2$, $a = b = 1$, $\alpha = 45^\circ$. $\sin \alpha = \cos \alpha = \sqrt{2}/2$.

$$K = (d^2 - b^2)/(c^2 - a^2) = 1. \quad \nu = \mu = 2 (0.70710678) = 1.41421356.$$

$$\tan \beta = \nu / (\mu + cK) = (1.41421356) / (3.41421356) = 0.41421356.$$

$$\beta = 22^\circ 30', \sin \beta = 0.38268343.$$

$$\cos \gamma_i = (\pm aK \pm b) (\sin \beta / \nu) = (\pm 1 \pm 1) (0.27059805) = \pm (0.54119610), 0.$$

$$0 < \gamma_i < 2\pi.$$

$$y_i = 57^\circ 14' 05".666, 90^\circ, 122^\circ 45' 54".334, 270^\circ$$

$$\theta_i = \beta + \gamma_i, \theta_1 = 79^\circ 44' 05".666, \theta_2 = 112^\circ 30', \theta_3 = 145^\circ 15' 54".334, \theta_4 = 292^\circ 30'$$

$$r'_i = \frac{3}{\pm 1 - 2 \cos \theta_i} = \frac{3}{2 \cos(\theta_i - 45) \pm 1} . \text{ (Choose the proper value of } \pm 1 \text{ in each member which}$$

will make them equal and positive for each value of θ_i . If this cannot be done the values of θ_i may be in error.) The work may be arranged in table form as follows:

Table 1.

θ_i	$\theta_i - 45$	$\sin \theta_i$	$\cos \theta_i$	$\cos(\theta_i - 45)$	r_i'
79° 44' 05.666	34° 44' 05.666	0.98399379	0.17820275	0.82179706	4.6613215
112° 30'	67° 30'	0.92387953	-0.38268343	0.38268343	1.6993635
145° 15' 54.334	100° 15' 54.334	0.56978031	-0.82179706	-0.17820275	4.6613215
292° 30'	247° 30'	-0.92387953	0.38268343	-0.38268343	12.785918

$x_i = 2 + r_i' \cos \theta_i$	$y_i = r_i' \sin \theta_i$	$r_i = r_i' \pm 2$	$r_{i+4} = r_i' \pm 2$
2.8306603	4.5867114	$r_1 = 2.6613215$	$r_5 = 6.6613215$
1.3496817	1.5700072	$r_2 = 3.6993635$	$r_6 = 3.6993635$
-1.8306603	2.6559292	$r_3 = 6.6613215$	$r_7 = 2.6613215$
6.8929590	-11.812648	$r_4 = 14.785918$	$r_8 = 14.785918$

Checks were computed but are not shown here. Figure 25 shows the results of Table 1 graphically.

Example 2. Let $c = 3$, $a = d = 2$, $b = 1$, $\alpha = 30^\circ$. $\sin \alpha = \frac{1}{2}$, $\cos \alpha = \sqrt{3}/2$

$$K = 0.6, \tan \beta = 1/(\sqrt{3} + 1.8) = 1/(3.5320508) = 0.28312164, \nu = 1, \mu = \sqrt{3}.$$

$$\beta = 15^\circ 48' 28.676. \sin \beta = 0.27241402, \cos \gamma_i = \frac{(\pm 1.2 \pm 1)}{2} (0.54482804)$$

$$\cos \gamma_i = \pm (1.1) (0.54482804), \pm (0.1) (0.54482804)$$

$$\cos \gamma_i = \pm 0.59931084, \pm 0.054482804$$

$$\gamma_1 = 53^\circ 10' 46''000, 86^\circ 52' 36''550, 126^\circ 49' 14''000, 273^\circ 07' 23''450$$

$$\theta_1 = \beta + \gamma_1, \theta_1 = 68^\circ 59' 14''676, \theta_2 = 102^\circ 41' 05''226, \theta_3 = 142^\circ 37' 42''676$$

$$\theta_4 = 288^\circ 55' 52''126. r_i' = \frac{5}{\pm 2 - 3 \cos \theta_i} = \frac{3}{2 \cos (\theta_i - 30) \pm 1}. \text{The work is arranged in the}$$

following table:

Table 2

θ_i	$\theta_i - 30$	$\sin \theta_i$	$\cos \theta_i$	$\cos(\theta_i - 30)$	r'_i
68 59 14.676	38 59 14.676	0.93350166	0.35857308	0.77728423	5.40961166
102 41 05.226	72 41 05.226	0.97559289	-0.21958714	0.29762840	1.88057496
142 37 42.676	112 37 42.676	0.60698032	-0.79471687	-0.38475484	13.015729
288 55 52.126	258 55 52.126	-0.94590914	0.32443167	-0.19198850	4.86994806

$x_i = 3 + r'_i \cos \theta_i$	$y_i = r'_i \sin \theta_i$	$r_i = r'_i \pm 2$	$r_i + 4 = r'_i \pm 4$	$\tan \theta_i$
4.93974111	5.04988146	$r_1 = 3.40961166$	$r_5 = 9.40961161$	2.60337906
2.58704992	1.83467556	$r_2 = 3.88057496$	$r_6 = 5.88057496$	- 4.4428508
- 7.34381941	7.90029135	$r_3 = 15.015729$	$r_7 = 9.015729$	- 0.76376927
4.57996538	- 4.60652838	$r_4 = 6.86994806$	$r_8 = 8.86994806$	- 2.91558822

Checks of the computations of Table 2 were made as follows:

1. Using $(x_i - 3)^2 + y_i^2 = r_i^2$ and values from Table 2:

$(x_i - 3)^2$	y_i^2	$(x_i - 3)^2 + y_i^2$	r_i^2
3.762 59557	25.501 30276	29.263 89833	29.263 89831
0.170 52777	3.366 03441	3.536 56218	3.536 56218
106.994 59999	26.414 60341	169.409 20340	169.409 20140
2.496 29060	21.220 10372	23.716 39432	23.716 39410

2. From the formulas of (2) and (3) find $A = 2$, $B = 2\sqrt{3}$, $C = 0$, $D = -6(\sqrt{3} + 2)$, $E = -6(\sqrt{3} + 1)$, $F = 9(2\sqrt{3} + 3)$, $\delta = BEG = -60(\sqrt{3} + 3)$, $\beta_0 = a^2 A + CG = 8$, $L = \beta_0^2 - a^2 GB^2 = -11 \times 2^4$, $H = -2^3[-48(\sqrt{3} + 2) + 60(\sqrt{3} + 3)]/11 \times 2^4 = \mp(2/11)[26.1961524] = -4.76293680$.

From Table 2, $\sum x_i = 4.76293700 = -H = 4.76293680$. Again computing N from equations (3), find $N = -429.826515$. From Table 2 find $\prod x_i = -429.826494$ and $\prod x_i = N$.

3. From equation (6), compute the quantities:

$$\begin{aligned} U &= B/A = \sqrt{3}, V = C/A = 0, W = D/A = -3(\sqrt{3} + 2), R = E/A = -3(\sqrt{3} + 1), T = F/A \\ &= 9(2\sqrt{3} + 3)/2, \phi = c^2 + cW + T = 9/2, \theta_0 = R + cU = -3, \rho' = a^2 + T = \frac{1}{2}(18\sqrt{3} + 35), \\ Q &= a^2/(c^2 - a^2) = 4/5, k_1 = (GV + \phi Q)^2 - a^2 \theta_0^2 = -2^6 3^2/5^2, k_5 = \rho'^2 - a^2 W^2 = +(1189 + 684\sqrt{3})/2^2. \end{aligned}$$

Now from equation (6), $\prod m_i = \prod \tan \theta_i = k_5/k_1 = -5^2(1189 + 684\sqrt{3})/2^6 3^2 = -25.756540$.

Now forming $\prod \tan \theta_i$ from the values in Table 2, find

$$\prod \tan \theta_i = -25.756539.$$

Figure (26) depicts the solution graphically.

SUMMARY REMARKS (Plane Approximation)

While the formulas (9) through (13) are convenient for hand computing, since no root extraction is involved, the use of trigonometric tables may make it unsuitable for larger machine coding and computation, and it may be better to use the algebraic solution, equation (3). If the algebraic solution is to be used, the number of significant figures to be retained in the coefficients of the resulting quartic, equation (3), will have to be considered relative to the number of significant figures required in the rectangular coordinates of the intersections points.

If solutions only above the base line, $F' F''$, are desired (see Figure 24), then in the trigonometric solution, equations (9) – (13), θ should be limited to $\pi > \theta > \alpha$.

Note that the parameters a and b of the two families of confocal hyperbolas are related to the fundamental constants of a Loran line by the relations (2.1).

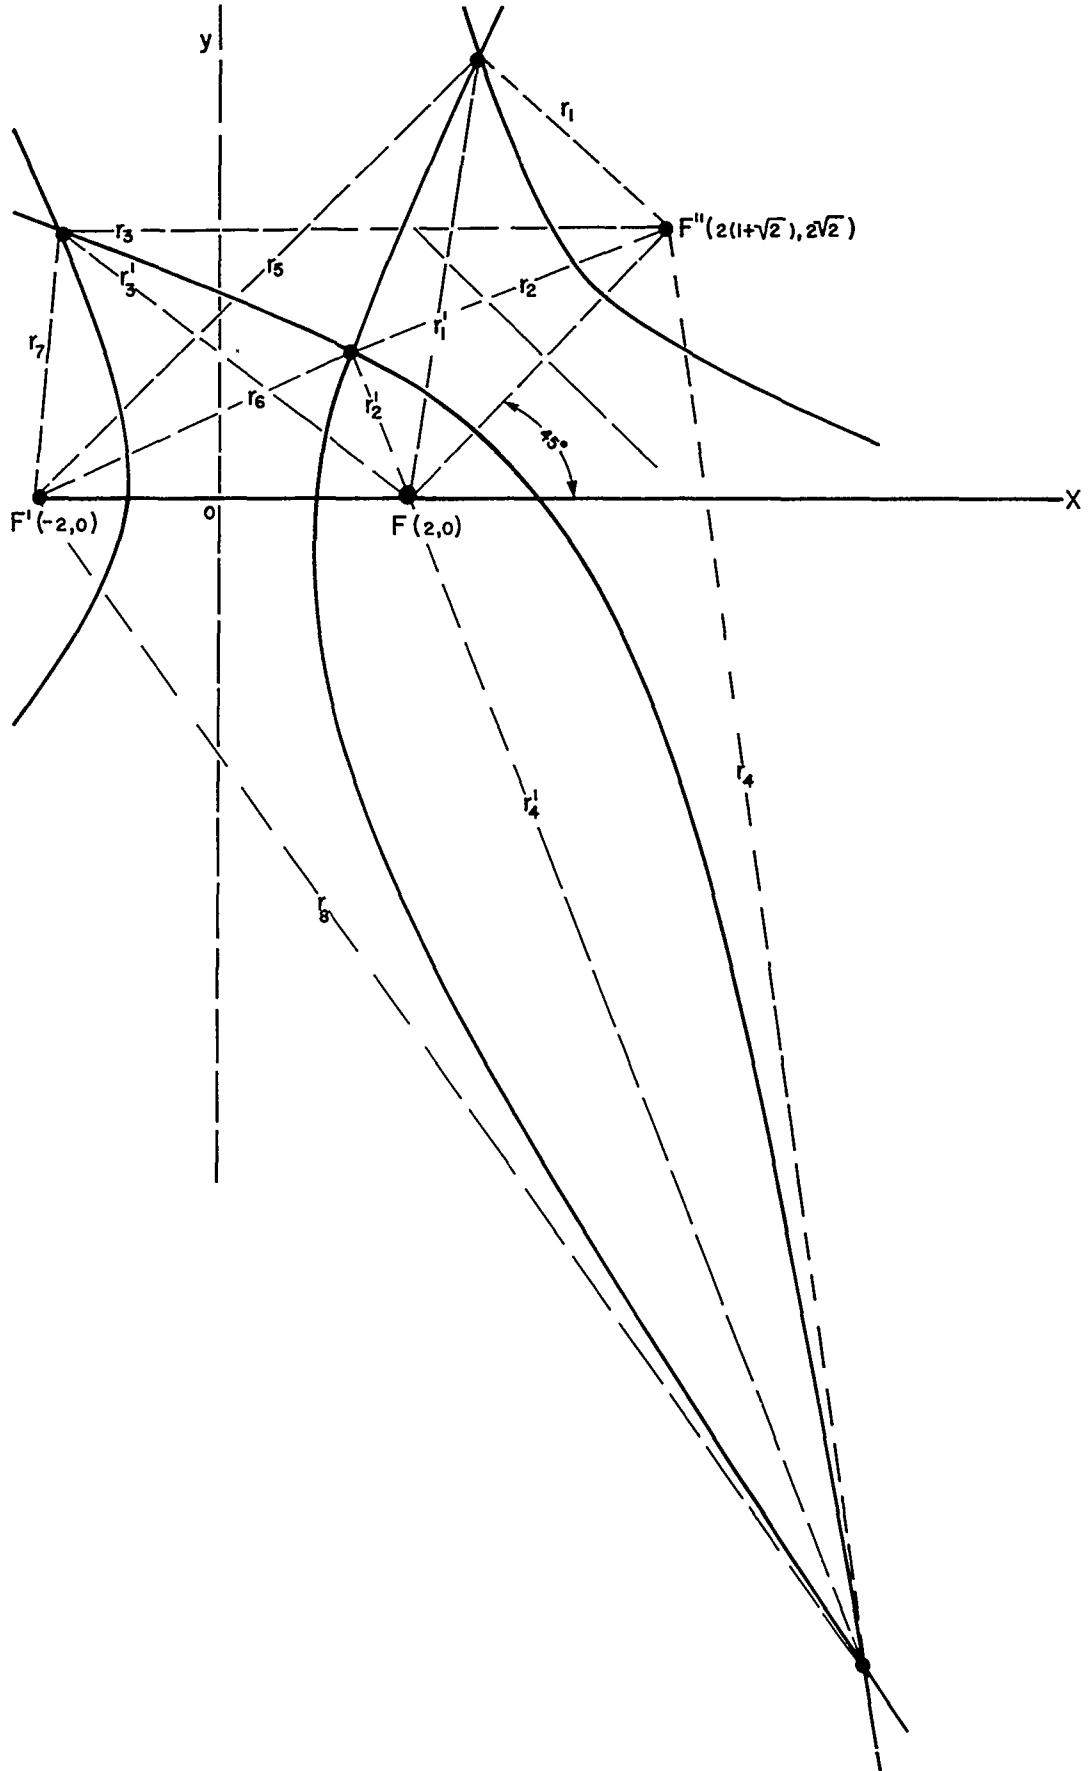


Figure 25. Intersection of plane hyperbolas. Example 1.

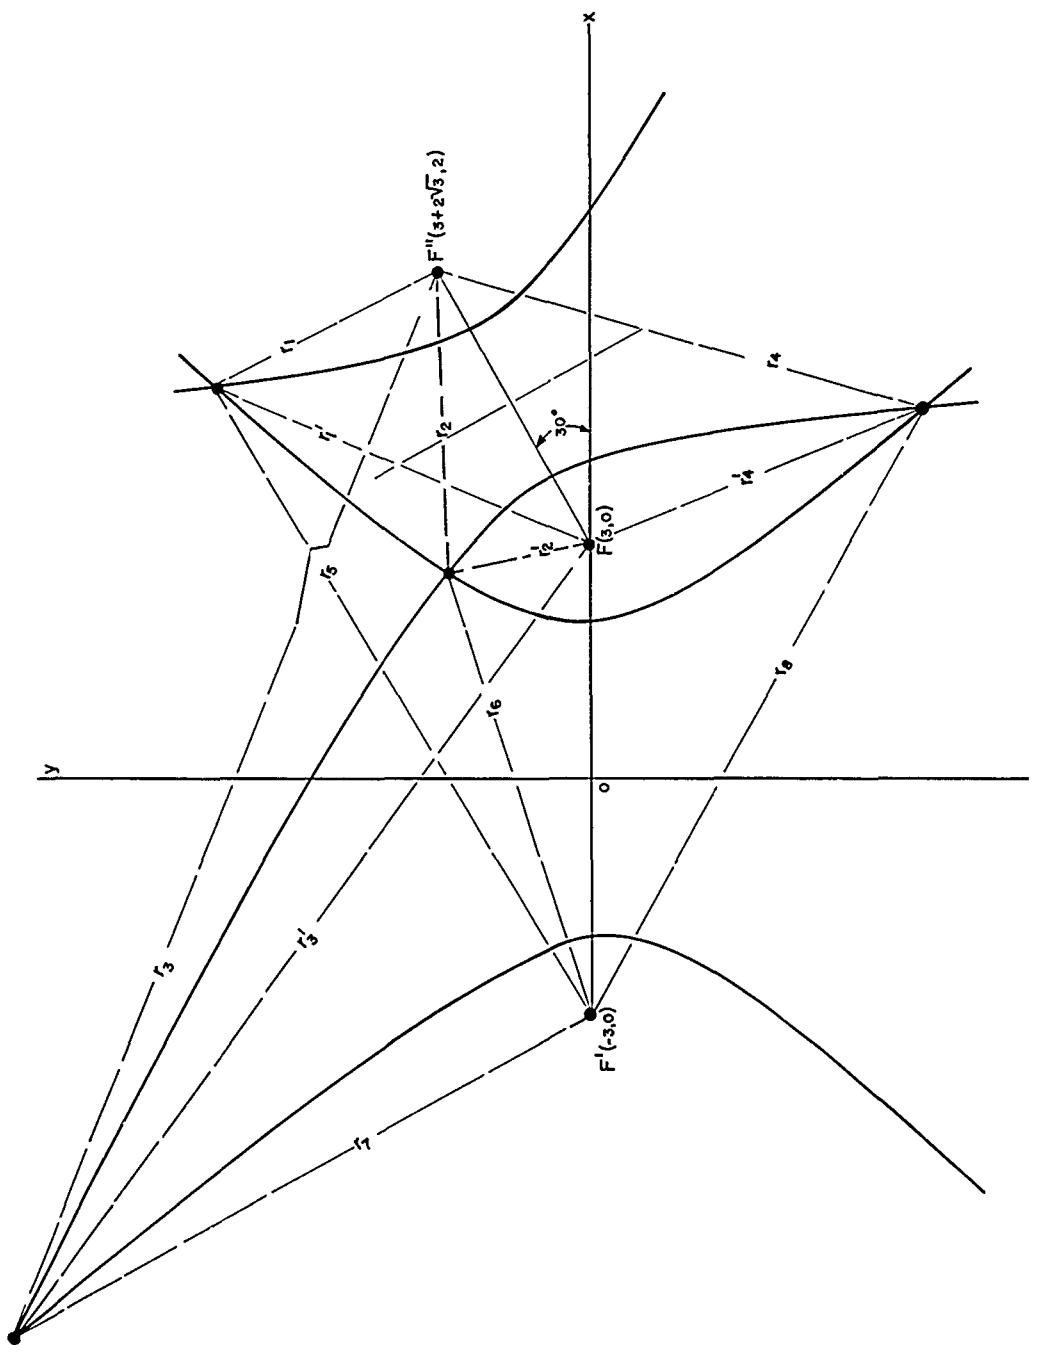


Figure 26. Intersection of plane hyperbolas. Example 2.

APPENDIX 2

Computations

Using Andoyer-Lambert

First Order Formulae Without Conversion

to Parametric Latitude

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT APPROXIMATION

(No conversion to parametric latitudes)

Clarke Spheroid 1866 $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1	40° 30' 37.757"	1.	Origin	λ_1	17° 19' 43.280"
ϕ_2	40° 00' 00.000"	2.	Terminus	λ_2	18° 00' 00.000"
$\sin \phi_1$.64958723	2. West of 1.		$\Delta\lambda = \lambda_2 - \lambda_1 =$	40° 16.720"
$\cos \phi_1$	- .76028707	$\sin \phi_2$.64278761	$\sin \Delta\lambda$.01171632
$\tan \phi_1$.85439731	$\cos \phi_2$.76604444	$\cos \Delta\lambda$.99993136
$\tan \phi_2$.83909963	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$.99992033		
$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	-.01158604	$\cot A = \frac{M}{\sin \Delta\lambda}$			-.98888047
$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	+.01176282	$\cot B = \frac{N}{\sin \Delta\lambda}$			+1.00396882
$\sin d = \frac{\cos \phi_1 \sin \Delta\lambda}{\sin B}$.01262251	$\sin A$.71104900	A	134° 40' 46.816"
$= \frac{\cos \phi_2 \sin \Delta\lambda}{\sin A}$.01262251	$\sin B$.70570498	B	44° 53' 11.497"
$K = (\sin \phi_1 - \sin \phi_2)^2$	4.62 $\times 10^{-5}$	H	(d + 3 sin d) / (1 - cos d)	633.744947	
$L = (\sin \phi_1 + \sin \phi_2)^2$	1.67023273	G	(d - 3 sin d) / (1 + cos d)	-.012628028	
$\delta d = -(f/4)(HK + GL)$	-6.9463 $\times 10^{-6}$	s = a (d + δd)	80,467.388	meters	
d (radians)	.01262293382	s	43.4489	n.m.	
d + δd (rad)	.01261599	T = d / sin d	1.000033576		
2A	26° 21' 33.632"	2B	89° 46' 22.994"		
$\sin 2A$	-.99993749	$\sin 2B$.99999216		
$U = (f/2) \cos^2 \phi_1 \sin 2A$	-9.79732265 $\times 10^{-4}$	V	(f/2) $\cos^2 \phi_2 \sin 2B$	+9.94681111 $\times 10^{-4}$	
VT	+9.947145 $\times 10^{-4}$	UT	-9.7976516 $\times 10^{-4}$		
$\delta A = VT - U$	+.0019744468	$\delta B = -UT + V$	+.0019744627		
$+\delta A$	+ 6° 47.259"	$+\delta B$	+ 6° 47.262"		
- A	-134° 40' 46.816"	+ B	+44° 53' 11.497"		
+ 180°		+ 180°			
a_{1-2}	45° 26' 00.443"	a_{2-1}	224° 59' 58.759"		
$a_{1-2} = a_{AB} = 180^\circ - A + \delta A$		$a_{2-1} = a_{BA} = 180^\circ + B + \delta B$			

Line No. 1 (See Tables 1,2 - pages 65,66)

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT APPROXIMATION

(No conversion to parametric latitudes)

Clarke Spheroid 1866 $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1 9° 59' 48.349" 1. Origin λ_1 16° 31' 55.891"

ϕ_2 10° 00' 00.000" 2. Terminus λ_2 18° 00' 00.000"

$\sin \phi_1$ -19359255 2. West of 1. $\Delta\lambda = \lambda_2 - \lambda_1 =$ 1° 28' 04.123

$\cos \phi_1$ -98481756 $\sin \phi_2$ -19364818 $\sin \Delta\lambda$ -02561535

$\tan \phi_1$ -17626874 $\cos \phi_2$ -98490975 $\cos \Delta\lambda$ -99967188

$\tan \phi_2$ -17632698 $\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$ -99968177

$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$ +00011432 $\cot A = \frac{M}{\sin \Delta\lambda}$ +004° 46.295

$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$ -000000038 $\cot B = \frac{N}{\sin \Delta\lambda}$ -000001483

$\sin d = \frac{\cos \phi_1 \sin \Delta\lambda}{\sin B}$.02522645 $\sin A$.99999004 A 89° 44' 39.457

$= \frac{\cos \phi_2 \sin \Delta\lambda}{\sin A}$.00532645 $\sin B$ 1.00000000 B 90° 00' 03.060

$K = (\sin \phi_1 - \sin \phi_2)^2$ 3.1 X 10^-9 $H = (d + 3 \sin d) / (1 - \cos d)$ 317-092888

$L = (\sin \phi_1 + \sin \phi_2)^2$.12057612 $G = (d - 3 \sin d) / (1 + \cos d)$ -025229129

$\delta d = -(f/4)(HK + GL)$ +3.0410 X 10^-6 $s = a(d + \delta d)$ 160,935.945 meters

d (radians) .0252291222 s 86.8984 n.m.

$d + \delta d$ (rad) .0252321632 $T = d / \sin d$ 1.000105928

$2A$ 179° 29' 18.914" $2B$ 180° 00' 06.120"

$\sin 2A$ +00893572 $\sin 2B$ -000001967

$U = (f/2) \cos^2 \phi_1 \sin 2A$ +1.467352 X 10^-5 $V = (f/2) \cos^2 \phi_2 \sin 2B$ -4.878 X 10^-8

VT -4.878 X 10^-8

$\delta A = VT - U$ -1.4722 X 10^-5

$+ \delta A$ 03.037

$- A$ -89° 44' 39.457

UT +1.46751 X 10^-5

$\delta B = -UT + V$ -1.4724 X 10^-5

$+ \delta B$ 03.037

$+ B$ +90° 00' 03.060

a_{1-2} +180° 90° 15' 17.506" a_{2-1} +180° 270° 00' 00.023"

$a_{1-2} = a_{AB} = 180° - A + \delta A$

$a_{2-1} = a_{BA} = 180° + B + \delta B$

Line No. 2 (See Tables 1,2 - pages 65,66)

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT APPROXIMATION

(No conversion to parametric latitudes)

Clarke Spheroid 1866 $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1	69	48	05.701	1.	Origin	λ_1	9	39	28.637
ϕ_2	70	00	00.000	2.	Terminus	λ_2	18	00	00.000
$\sin \phi_1$	-938.50257			2. West of 1.		$\Delta\lambda = \lambda_2 - \lambda_1 =$	8	22	31.363
$\cos \phi_1$.345272226			$\sin \phi_2$.93969262	$\sin \Delta\lambda$.145	65790	
$\tan \phi_1$	2.91815224			$\cos \phi_2$.34202014	$\cos \Delta\lambda$.98933502		
$\tan \phi_2$	2.94749742			$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	- .99873458				
$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	+ .02013428			$\cot A = \frac{M}{\sin \Delta\lambda}$	T.13822992				
$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	- .000000801			$\cot B = \frac{N}{\sin \Delta\lambda}$	- .000005499				
$\sin d = \frac{\cos \phi_1 \sin \Delta\lambda}{\sin B} \frac{+.05029163}{\sin A} \frac{\sin A}{+.99058101}$	A	82	07	47.577					
$= \frac{\cos \phi_2 \sin \Delta\lambda}{\sin A} \frac{+.05029163}{\sin B} \frac{\sin B}{+.000000000}$	B	90	00	11.342					
$K = (\sin \phi_1 - \sin \phi_2)^2$	+ 1.41632 $\times 10^{-6}$			d	2	52	59.950		
$L = (\sin \phi_1 + \sin \phi_2)^2$	+ 3.52761717			H	= (d + 3 sin d) / (1 - cos d)	+ 158.988826			
$\delta d = (f/4)(HK + GL)$	+ .0001501717			G	= (d - 3 sin d) / (1 + cos d)	- .050294892			
d (radians)	+ .050312952			s	= a (d + δd)	321.862.999	meters		
$d + \delta d$ (rad)	+ .050462929			s	193.7921		n.m.		
$2A$	164	15	35.154	2B	180	00	22.684		
$\sin 2A$	+ .27127641			$\sin 2B$	- .000	10998			
$U = (f/2) \cos^2 \phi_1 \sin 2A$	+ 5.48169 $\times 10^{-5}$			V	= (f/2) $\cos^2 \phi_2 \sin 2B$	- 2.181 $\times 10^{-8}$			
VT	- 2.182 $\times 10^{-8}$			UT	+ 5.4840 $\times 10^{-5}$				
$\delta A = VT - U$	- 5.4839 $\times 10^{-5}$			$\delta B = - UT + V$	- 5.4862 $\times 10^{-5}$				
$+ \delta A$				$+ \delta B$		11.316"			
$- A$	82	07	47.577	$+ B$	+ 90	00	11.342		
a_{1-2}	+ 180	0		$+ 180$	0	00	00.026		
$a_{1-2} = a_{AB} = 180^\circ - A + \delta A$	97	52	01.112						

Line No. 3 (See Tables 1,2 - pages 65,66)

COMPUTING FORM, ANDOYER-LAMBERT

(No conversion to parametric latitudes)

Clarke Spheroid, 1866 $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1	$13^{\circ} 04' 12.564''$	1. Origin			
ϕ_2	$10^{\circ} 00' 00.000$	2. Terminus			
$\sin \phi_2$.173 64818	2. West of 1.			
$\cos \phi_2$.984 80775	$\sin \phi_1$.226 14397	$\sin \Delta\lambda$.054 88588
$\cos^2 \phi_2$.969 84630	$\cos \phi_1$.974 09389	$\cos \Delta\lambda$.998 49263
$\cos^2 \phi_1$.948 85891	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$.997 11869		
$K = (\sin \phi_1 - \sin \phi_2)^2$	+ .00275581	d	$4^{\circ} 21' 01.722''$		
$L = (\sin \phi_1 + \sin \phi_2)^2$.159 83376	d (radians)	.075 930171		
$H = (d + 3 \sin d) / (1 - \cos d)$	+ 105.33468	$\sin d$.075 85723		
$G = (d - 3 \sin d) / (1 + \cos d)$	- .07593015	$s = a(d + \delta d)$	482,794.743 meters		
$\delta d = -f(HK + GL)/4$	- 2.35734 $\times 10^{-4}$	s	260.6883 n.m.		
$R = \sin \Delta\lambda / \sin d$	- 723 54184	$T = d / \sin d$	1.000 9616		
$\sin A = R \cos \phi_2$.71254961	$\sin B = R \cos \phi_1$.704 79769		
A	$134^{\circ} 33' 26.138''$	B	$44^{\circ} 48' 47.526''$		
2A	$269^{\circ} 06' 52.276''$	2B	$89^{\circ} 37' 35.052''$		
$\sin 2A$	- .99988058	$\sin 2B$	+ .999 97874		
U		V			
VT	+ .0016454718	UT	- 001609706		
$\delta A = VT - U$	+ $^{\circ} + 11' 11.110''$	$\delta B = -UT + V$	+ $^{\circ} 11' 11.103''$		
$\alpha_{AB} = 180^{\circ} - A + \delta A$	$45^{\circ} 37' 44.912''$	$\alpha_{BA} = 180^{\circ} + B + \delta B$	$224^{\circ} 59' 58.629''$		

Line No. 4 (See Tables 1,2 - pages 65,66)

COMPUTING FORM, ANDOYER-LAMBERT

(No conversion to parametric latitudes)

Clarke Spheroid, 1866 $a = 6,378,206.4$ meters $f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1	73° 35' 09.206	1. Origin	λ_1	3° 26' 35.101"	
ϕ_2	70° 00' 00.000	2. Terminus	λ_2	18° 00' 00.000	
$\sin \phi_2$.93969262	2. West of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	14° 33' 24.899	
$\cos \phi_2$.34202014	$\sin \phi_1$.95924441	$\sin \Delta\lambda$.25134162
$\cos^2 \phi_2$.11697778	$\cos \phi_1$.28257768	$\cos \Delta\lambda$.96789844
$\cos^2 \phi_1$.07985015	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$.99493962		
$K = (\sin \phi_1 - \sin \phi_2)^2$.000382272	d	5° 45' 59.408		
$L = (\sin \phi_1 + \sin \phi_2)^2$	3.60596184	d (radians)	.10064445		
$H = (d + 3 \sin d) / (1 - \cos d)$	+79.4541793	$\sin d$.10047463		
$G = (d - 3 \sin d) / (1 + \cos d)$	-100644369	$s = a(d + \delta d)$	643,728.709	meters	
$\delta d = -f(HK + GL)/4$	+.00028184	s	347.5857	n.m.	
$R = \sin \Delta\lambda / \sin d$	2.501543125	$T = d / \sin d$	1.0016902		
$\sin A = R \cos \phi_2$.85557813	$\sin B = R \cos \phi_1$.70688025		
A	121° 10' 34.813"	B	44° 58' 53.930"		
2A	242° 21' 09.626"	2B	89° 57' 47.860"		
$\sin 2A$	-88582060	$\sin 2B$	+.99999980		
$U = (f/2) \cos^2 \phi_1 \sin 2A$		V			
U (rad)	-1.19895×10^{-4}	$V = (f/2) \cos^2 \phi_2 \sin 2B$			
U		V (rad)	$+1.98282 \times 10^{-4}$		
VT	$+1.98617 \times 10^{-4}$	UT	-1.20098×10^{-4}		
$\delta A = VT - U$	+ 0° 0' 05.698"	$\delta B = -UT + V$	+ 0° 0' 05.671"		
$\alpha_{AB} = 180^\circ - A + \delta A$	58° 50' 30.385"	$\alpha_{BA} = 180^\circ + B + \delta B$	224° 59' 59.601"		

Line No. 5 (See Tables 1,2 - pages 65,66)

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT APPROXIMATION

(No conversion to parametric latitudes)

Clarke Spheroid 1866 $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1	39° 37' 06.613"	1.	Origin	λ_1	8° 36' 43.296"
ϕ_2	40° 00' 00.000	2.	Terminus	λ_2	18° 00' 00.000

$\sin \phi_1$.637 692 79	2. West of 1.	$\Delta\lambda = \lambda_2 - \lambda_1 =$	9° 23' 16.734"
---------------	-------------	---------------	---	----------------

$\cos \phi_1$.770 30 735	$\sin \phi_2$.642 78761	$\sin \Delta\lambda$.163 11897
---------------	-------------	---------------	------------	----------------------	------------

$\tan \phi_1$.827 81605	$\cos \phi_2$.766 04444	$\cos \Delta\lambda$.986 60641
---------------	------------	---------------	------------	----------------------	------------

$\tan \phi_2$.839 09963	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	+ .992 07441
---------------	------------	---	--------------

$$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda \quad + .017 23255 \quad \cot A = \frac{M}{\sin \Delta\lambda} \quad + .105 64406$$

$$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda \quad - .00003450 \quad \cot B = \frac{N}{\sin \Delta\lambda} \quad - .000 21150$$

$$\sin d = \frac{\cos \phi_1 \sin \Delta\lambda}{\sin B} \quad .125 65194 \quad \sin A \quad .0994 46595 \quad A \quad 83° 58' 09.874''$$

$$= \frac{\cos \phi_2 \sin \Delta\lambda}{\sin A} \quad .125 65194 \quad \sin B \quad .99999998 \quad B \quad 90° 00' 43.625''$$

$$K = (\sin \phi_1 - \sin \phi_2)^2 \quad + 2.616 1384 \times 10^{-5} \quad H = (d + 3 \sin d) / (1 - \cos d) \quad 63.4577577'$$

$$L = (\sin \phi_1 + \sin \phi_2)^2 \quad 1.639 5788 \quad G = (d - 3 \sin d) / (1 + \cos d) \quad - .125 98454$$

$$\delta d = (f/4)(HK + GL) \quad + .000 17366 \quad s = a(d + \delta d) \quad 804,664.697 \text{ meters}$$

$$d \text{ (radians)} \quad + .125 98480 \quad s \quad 434.4842 \text{ n.m.}$$

$$d + \delta d \text{ (rad)} \quad + .126 15846 \quad T = d / \sin d \quad 1.002 65066$$

2A	16° 56' 19.748	2B	18° 01' 29.250
----	----------------	----	----------------

$\sin 2A$	+ .208 95 605	$\sin 2B$	- .000 42300
-----------	---------------	-----------	--------------

$U = (f/2) \cos^2 \phi_1 \sin 2A$	+ .0002 10166	$V = (f/2) \cos^2 \phi_2 \sin 2B$	- 4.21 $\times 10^{-7}$
-----------------------------------	---------------	-----------------------------------	-------------------------

VT	- 4.22 $\times 10^{-7}$	UT	+ .000.210 723
------	-------------------------	------	----------------

$\delta A = VT - U$	- .0002 10588	$\delta B = - UT + V$	- .000 2 11144
---------------------	---------------	-----------------------	----------------

$+ \delta A$	0° 1' 43.437	$+ \delta B$	0° - 43.552
--------------	--------------	--------------	-------------

$- A$	83° 58' 09.874	$+ B$	+ 90° 00' 43.625
-------	----------------	-------	------------------

$+ 180^\circ$	96° 01' 06.689	$+ 180^\circ$	170° 00' 00.073
---------------	----------------	---------------	-----------------

$a_{1-2} = a_{AB} = 180^\circ - A + \delta A$	$a_{2-1} = a_{BA} = 180^\circ + B + \delta B$
---	---

Line No. 6 (See Tables 1,2 - pages 65,66)

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT APPROXIMATION

(No conversion to parametric latitudes)

Clarke Spheroid 1866 $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1	44° 54' 28.507"	1.	Origin	λ_1	10° 47' 43.883"
ϕ_2	40° 00' 00.000"	2.	TERMINUS	λ_2	18° 00' 00.000"
$\sin \phi_1$	0.705 969 46	2. West of 1.		$\Delta\lambda = \lambda_2 - \lambda_1$	7° 12' 16.117"
$\cos \phi_1$	0.708 24 228	$\sin \phi_2$	0.642 787 61	$\sin \Delta\lambda$	0.125 410 75
$\tan \phi_1$	0.996 79 091	$\cos \phi_2$	0.766 0 44 44	$\cos \Delta\lambda$	0.992 104 91
$\tan \phi_2$	0.839 099 63	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$			0.992 050 04
$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	- .106 109 93	$\cot A = \frac{M}{\sin \Delta\lambda}$			- .846 0 9916
$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	+ .125 873 39	$\cot B = \frac{N}{\sin \Delta\lambda}$			+ 1.003 68 900
$\sin d = \frac{\cos \phi_1 \sin \Delta\lambda}{\sin B}$.125 844 04	$\sin A$.763 406 87	A	130° 14' 04.316"
$= \frac{\cos \phi_2 \sin \Delta\lambda}{\sin A}$.125 844 04	$\sin B$	0.705 803 93	B	44° 53' 40.346"
$K = (\sin \phi_1 - \sin \phi_2)^2$	3.991 946 $\times 10^{-3}$	$H = (d + 3 \sin d) / (1 - \cos d)$		d	7° 13' 46.202"
$L = (\sin \phi_1 + \sin \phi_2)^2$	1.819 145 63	$G = (d - 3 \sin d) / (1 + \cos d)$			+ 63.360 156 5
$\delta d = -(f/4)(HK + GL)$	- .000 019 826	$s = a(d + \delta d)$	804,666.623		136 198 331
d (radians)	- 126 17 858 8	s	434.485 2		n.m.
$d + \delta d$ (rad)	.126 158 762	$T = d / \sin d$	1.002 658 433		
2A	260° 28' 08.632"	2B	89° 47' 20.492"		
$\sin 2A$	- .986 196 33	$\sin 2B$.999 993 22		
$U = (f/2) \cos^2 \phi_1 \sin 2A$	- 8.385 065 $\times 10^{-4}$	$V = (f/2) \cos^2 \phi_2 \sin 2B$	+ 9.946 832 $\times 10^{-4}$		
VT	+ 9.913 265 $\times 10^{-4}$	UT	- 8.407 356 $\times 10^{-4}$		
$\delta A = VT - U$	+ 18.358 33 $\times 10^{-4}$	$\delta B = - UT + V$	- 18.354 178 $\times 10^{-4}$		
$+ \delta A$	+ 0° 6' 18.668"	$+ \delta B$	+ 0° 6' 18.582"		
- A	- 130° 14' 04.316"	+ B	44° 53' 40.346"		
$+ 180^\circ$		$+ 180^\circ$			
a_{1-2}	49° 52' 14.352"	a_{2-1}	224° 59' 58.828"		
$a_{1-2} = a_{AB} = 180^\circ - A + \delta A$		$a_{2-1} = a_{BA} = 180^\circ + B + \delta B$			

Line No. 7 (See Tables 1,2 - pages 65,66)

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT APPROXIMATION

(No conversion to parametric latitudes)

Clarke Spheroid 1866 $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

$\phi_1 + 76^{\circ} 00' 26.603N$	1.	<u>Origin</u>	$\lambda_1 - 28^{\circ} 42' 03.567E$
$\phi_2 + 70^{\circ} 00' 00.000N$	2.	<u>Terminus</u>	$\lambda_2 - 18^{\circ} 00' 00.000W$

$\sin \phi_1 . 970\ 326\ 92$	2. West of 1.	$\Delta\lambda = \lambda_2 - \lambda_1 = 46^{\circ} 42' 03.567$
------------------------------	---------------	---

$\cos \phi_1 . 241\ 796\ 95$	$\sin \phi_2 . 939\ 692\ 62$	$\sin \Delta\lambda . 727\ 784\ 62$
------------------------------	------------------------------	-------------------------------------

$\tan \phi_1 . 4.0129858$	$\cos \phi_2 . 342\ 02014$	$\cos \Delta\lambda . 685\ 805\ 77$
---------------------------	----------------------------	-------------------------------------

$\tan \phi_2 . 2.74747742$	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda . 968\ 53\ 475$
----------------------------	--

$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda . -0.00112469$	$\cot A = \frac{M}{\sin \Delta\lambda} . 00154536$
--	--

$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda . +.72807535$	$\cot B = \frac{N}{\sin \Delta\lambda} . +1.00039947$
---	---

$\sin d = \frac{\cos \phi_1 \sin \Delta\lambda . 24891930}{\sin B} \sin A . 999999880$	$A . 90^{\circ} 05' 18.753$
--	-----------------------------

$= \frac{\cos \phi_2 \sin \Delta\lambda . 24891930}{\sin A} \sin B . 706\ 96\ 556$	$B . 44^{\circ} 59' 18.810$
--	-----------------------------

$K = (\sin \phi_1 - \sin \phi_2)^2 . 93846034 \times 10^{-4}$	$H = (d + 3 \sin d) / (1 - \cos d) . 31.7174323$
---	--

$L = (\sin \phi_1 + \sin \phi_2)^2 . 3.648\ 19464$	$G = (d - 3 \sin d) / (1 + \cos d) . -251553703$
--	--

$\delta d = (f/4)(HK + GL) . +0.0007525512$	$s = a(d + \delta d) . 1,609,315.609$ meters
---	--

d (radians) $.2515622076$	$s . 868.9608$ n.m.
-----------------------------	---------------------

$d + \delta d$ (rad) $.2523147588$	$T = d / \sin d . 1.010625647$
------------------------------------	--------------------------------

$2A . 180^{\circ} 10' 37.506$	$2B . 89^{\circ} 58' 37.620$
-------------------------------	------------------------------

$\sin 2A . -0.00309071$	$\sin 2B . +.99999992$
-------------------------	------------------------

$U = (f/2) \cos^2 \phi_1 \sin 2A . -3.0629403 \times 10^{-7}$	$V = (f/2) \cos^2 \phi_2 \sin 2B . +1.98281725 \times 10^{-4}$
---	--

$VT . +2.0038860 \times 10^{-4}$	$UT . -3.0954860 \times 10^{-7}$
----------------------------------	----------------------------------

$\delta A = VT - U . +2.0069489 \times 10^{-4}$	$\delta B = -UT + V . +1.98892322 \times 10^{-4}$
---	---

$+ \delta A . +41.396$	$+ \delta B . +41.024$
------------------------	------------------------

$- A . -90^{\circ} 05' 18.753$	$+ B . +44^{\circ} 59' 18.810$
--------------------------------	--------------------------------

$+ 180^{\circ}$	$+ 180^{\circ}$
-----------------	-----------------

$a_{1-2} . 89^{\circ} 55' 22.643$	$a_{2-1} . 224^{\circ} 59' 54.834$
-----------------------------------	------------------------------------

$a_{1-2} = a_{AB} = 180^{\circ} - A + \delta A$	$a_{2-1} = a_{BA} = 180^{\circ} + B + \delta B$
---	---

Line No. 8 (See Tables 1,2 - pages 65,66)

COMPUTING FORM, ANDOYER-LAMBERT

(No conversion to parametric latitudes)

Clarke Spheroid, 1866 $a = 6,378,206.4$ meters $f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1	$27^{\circ} 49' 42.130N$	1. Origin	λ_1	$32^{\circ} 54' 12.997E$	
ϕ_2	$40^{\circ} 00' 00.000N$	2. Terminus	λ_2	$18^{\circ} 00' 00.000W$	
$\sin \phi_2$	<u>-642 78761</u>	2. West of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	<u>50' 54" 12.997</u>	
$\cos \phi_2$	<u>-7660 4444</u>	$\sin \phi_1$	<u>.466 82458</u>	$\sin \Delta\lambda$	<u>.776 08614</u>
$\cos^2 \phi_2$	<u>.5868 2408</u>	$\cos \phi_1$	<u>.89434 994</u>	$\cos \Delta\lambda$	<u>.630 62691</u>
$\cos^2 \phi_1$	<u>.78207 482</u>	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	<u>.727 28811</u>		
$K = (\sin \phi_1 - \sin \phi_2)^2$	<u>.03096 2988</u>	d	<u>43' 20" 25.706</u>		
$L = (\sin \phi_1 + \sin \phi_2)^2$	<u>1.2312 3921</u>	d (radians)	<u>.756433 968</u>		
$H = (d + 3 \sin d) / (1 - \cos d)$	<u>+10.323 8286</u>	$\sin d$	<u>.686 33228</u>		
$G = (d - 3 \sin d) / (1 + \cos d)$	<u>-.75410 8629</u>	$s = a(d + \delta d)$	<u>4827, 983.105</u>	meters	
$\delta d = -f(HK + GL)/4$	<u>+ .00051 5996</u>	s	<u>2606. 9023</u>	n.m.	
$R = \sin \Delta\lambda / \sin d$	<u>1.13077 3187</u>	$T = d / \sin d$	<u>1.10213 9575</u>		
$\sin A = R \cos \phi_2$	<u>.866 22251</u>	$\sin B = R \cos \phi_1$	<u>.999999 920</u>		
A	<u>60' 01" 21.339</u>	B	<u>90' 04" 21.000</u>		
2A	<u>120' 02" 42.678</u>	2B	<u>180' 08" 42.000</u>		
$\sin 2A$	<u>.86563 079</u>	$\sin 2B$	<u>-.002 53072</u>		
$U = (f/2) \cos^2 \phi_1 \sin 2A$		V	$(f/2) \cos^2 \phi_2 \sin 2B$		
U (rad)	<u>.00114 752022</u>	V (rad)	<u>-2.517279 \times 10^{-6}</u>		
U	<u>0' 3' 56.693</u>	V	<u>0' 0" 00.519</u>		
VT	<u>0' 0" 00.572</u>	UT	<u>1' 4' 20.869</u>		
$\delta A = VT - U$	<u>0' 3' 57.265</u>	$\delta B = -UT + V$	<u>0' 4' 21.388</u>		
$\alpha_{AB} = 180^\circ - A + \delta A$	<u>119' 54" 41.396</u>	$\alpha_{BA} = 180^\circ + B + \delta B$	<u>269' 59" 59.612</u>		

Line No. 9 (See Tables 1,2 - pages 65,66)

COMPUTING FORM, ANDOYER-LAMBERT

(No conversion to parametric latitudes)

Clarke Spheroid, 1866 $a = 6,378,206.4$ meters $f/2 = 0.00169503765$, $f/4 \approx 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1	35	18	45.644 N	1.	Origin	λ_1	102	02	29.310 E
ϕ_2	40	00	00.000 N	2.	Terminus	λ_2	18	00	00.000 W
$\sin \phi_2$.64278761			2.	West of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	120	02	29.310
$\cos \phi_2$.76604444			$\sin \phi_1$.57803821	$\sin \Delta\lambda$	0.86566309		
$\cos^2 \phi_2$.58682408			$\cos \phi_1$.81600970	$\cos \Delta\lambda$	0.50062701		
$\cos^2 \phi_1$.66587183			$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$.05861401		
K = $(\sin \phi_1 - \sin \phi_2)^2$.0041924848			d	86	38	23.060		
L = $(\sin \phi_1 + \sin \phi_2)^2$	1.49041568			d (radians)	1.51214871				
H = $(d + 3 \sin d) / (1 - \cos d)$	4.78761188			sin d	0.99828068				
G = $(d - 3 \sin d) / (1 + \cos d)$	-1.40059863			s = a(d + δd)	9,655,912.218			meters	
$\delta d = -f(HK + GL)/4$	+.00175216			s	5213.8079			n.m.	
R = $\sin \Delta\lambda / \sin d$	+.867154005			T = d/sin d	1.51475305				
$\sin A = R \cos \phi_2$	+.66427850			$\sin B = R \cos \phi_1$	+.70760611				
A	41	37	37.191	B	45	02	25.708		
2A	83	15	14.382	2B	90	04	51.416		
$\sin 2A$	+.99307665			sin 2B	+.99999900				
$U = (f/2) \cos^2 \phi_1 \sin 2A$				V = $(f/2) \cos^2 \phi_2 \sin 2B$					
U (rad)	.001120864			V (rad)	.0009946879				
U	3	51.195	"	V	3	25.169	"		
VT	5	10.780	"	UT	5	50.203	"		
$\delta A = VT - U$	1	19.585	"	$\delta B = -UT + V$	-2	25.034	"		
$a_{AB} = 180^\circ - A + \delta A$	138	23	42.394	$a_{BA} = 180^\circ + B + \delta B$	225	00	00.674		

Line No. 10 (See Tables 1,2 - pages 65,66)

INVERSE COMPUTATION
(Andoyer-Lambert Formula)
Clarke 1866 Ellipsoid
40-50-6000 Line

ϕ_1 40° 00' 00".000N	1. Point of Origin	λ_1 18° 00' 00".000W
ϕ_2 35 18 45.644N	2. Terminal Point	λ_2 102 02 29.370E
	Point 1 should be west of point 2	$\Delta\lambda$ 120° 02' 29".370
$\tan \beta = b/a \tan \phi$		$\sin \Delta\lambda$ 0.86566309
$\tan \phi_1$ 0.83909963		$\cos \Delta\lambda$ -0.50062701
$\tan \phi_2$ 0.70837174		
β_1 0.83625502	angle	\sin
	39° 54' 15".203	0.64150618
β_2 0.70597031		0.76711787
	35 13 15.443	0.57673115
		0.81693401
$\cot A = \frac{\cos \beta_1 \tan \beta_2 - \sin \beta_1 \cos \Delta\lambda}{\sin \Delta\lambda}$	$\cot B = \frac{\cos \beta_2 \tan \beta_1 - \sin \beta_2 \cos \Delta\lambda}{\sin \Delta\lambda}$	
A 0.99659760	angle	\sin
	45° 05' 51".495	0.70831073
$\tan B$ 0.89069853		0.705901
	41 41 29.068	0.66511838
		0.746738
$\sin \sigma = \frac{\cos \beta_1 \sin \Delta\lambda}{\sin B} = \frac{\cos \beta_2 \sin \Delta\lambda}{\sin A}$		$\cos (5 \text{ places})$
$\cos \sigma = \sin \beta_1 \sin \beta_2 + \cos \beta_1 \cos \beta_2 \cos \Delta\lambda$		
$M = (\sin \beta_1 + \sin \beta_2)^2$	M 1.48410219	$\sin \sigma$ 0.99841720
$N = (\sin \beta_1 - \sin \beta_2)^2$	U 0.48862709	$\cos \sigma$ 0.05624132
$U = \frac{\sigma - \sin \sigma}{1 + \cos \sigma}$	N 0.00419580	σ 86° 46' 33".271
$V = \frac{\sigma + \sin \sigma}{1 - \cos \sigma}$	V 2.66269606	σ'' 312393.271
	$\frac{f\sigma''}{\sin \sigma}$ 1060.7155	σ 1.51452532 radians
		$s = \alpha\sigma - H(MU + NV)$
		$\alpha\sigma$ 9659955.089
		$- H(MU + NV) - 3980.422$
		s 9 655 974 .667 meters
$\delta A'' = - \cos^2 \beta_2 \sin B \cos B \left(\frac{f\sigma''}{\sin \sigma} \right)$	$\delta A''$	- 351.593
$\delta B'' = - \cos^2 \beta_1 \sin A \cos A \left(\frac{f\sigma''}{\sin \sigma} \right)$	$\delta B''$	- 312.098
A 45° 05' 51".495	B 41° 41' 29".068	
$\delta A =$ 05 51.593	$\delta B =$ 5 12.098	
A_f 44 59 59.902	B_f 41 36 16.970	
$a_1 = 180^\circ + A_f$ 224° 59' 59".902	$a_2 = 180^\circ - B_f$ 138° 23' 43".030	

Line No. 10 as computed by ACIC, converting to parametric latitude.

(From Page 39 of the ACIC Technical Report No. 80 – August 1957)

COMPUTING FORM, ANDOYER-LAMBERT

(No conversion to parametric latitudes)

Clarke Spheroid, 1866 $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

ϕ_1 18° 29' 57.900 1. Origin

ϕ_2 43° 03' 19.600 2. Terminus

$\sin \phi_2$.682 70576 2. West of 1.

$\cos \phi_2$.730 69339 $\sin \phi_1$ -317 19500

$\cos^2 \phi_2$.533 91283 $\cos \phi_1$ -948 32688

$\cos^2 \phi_1$.899 32387 $\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$ -673 44206

$K = (\sin \phi_1 - \sin \phi_2)^2$.133 52502

$L = (\sin \phi_1 + \sin \phi_2)^2$ 1.00000152

$H = (d + 3 \sin d) / (1 - \cos d)$ +9.338 80575

$G = (d - 3 \sin d) / (1 + \cos d)$ -828 100908

$\delta d = -f(HK + GL)/4$ -3.5499347 X 10^-4

$R = \sin \Delta\lambda / \sin d$ 1.017149761

$\sin A = R \cos \phi_2$.943 22461

A 48° 00' 24.496

$2A$ 96° 00' 48.992

$\sin 2A$.994 49704

$U = (f/2) \cos^2 \phi_1 \sin 2A$ _____

U (rad) 1.515 9992 X 10^-3

U _____

VT -5.182 34 X 10^-4

$\delta A = VT - U$ -6 59.591

$\alpha_{AB} = 180^\circ - A + \delta A$ 131° 52' 35.913

$\alpha_{BA} = 180^\circ + B + \delta B$ 285° 10' 09.272

λ_1 67° 07' 30.300

λ_2 115° 52' 54.700

$\Delta\lambda = \lambda_2 - \lambda_1$ 48° 45' 24.400

$\sin \Delta\lambda$.751 91980

$\cos \Delta\lambda$.659 25687

$\cos d$ -673 44206

d 47° 40' 00.179

d (radians) .831 941144

$\sin d$.739 24001

$s = a(d + \delta d)$ 5.304028.110 meters

s 2863.9461 n.m.

$T = d / \sin d$ 1.125 40059

$\sin B = R \cos \phi_1$ -964 59046

B 105° 17' 34.164

$2B$ 210° 35' 08.328

$\sin 2B$ -588 82577

$V = (f/2) \cos^2 \phi_2 \sin 2B$ _____

V (rad) -4.6048852 X 10^-4

V _____

UT 1.706106 X 10^-3

$\delta B = -UT + V$ -7 26.892

Line No. 11 (See Tables 1,2 - pages 65,66)

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT APPROXIMATION

(No conversion to parametric latitudes)

Clarke Spheroid 1866 $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$

1 radian = 206,264.8062 seconds

$$\begin{array}{lll}
 \phi_1 \underline{55}^{\circ} \underline{45}' \underline{19.5}''(N) 1. \underline{\text{Moscow}} & \lambda_1 \underline{-37}^{\circ} \underline{34}' \underline{15.450}(E) \\
 \phi_2 \underline{-33}^{\circ} \underline{56}' \underline{03.5}(S) 2. \underline{\text{Cape of Good Hope}} & \lambda_2 \underline{-18}^{\circ} \underline{28}' \underline{41.400}(E) \\
 \sin \phi_1 \underline{+1.836} \underline{643} \underline{95} & 2. \text{West of 1.} \quad \Delta\lambda = \lambda_2 - \lambda_1 = \underline{+19}^{\circ} \underline{05}' \underline{34.050} \\
 \cos \phi_1 \underline{+0.562} \underline{726} \underline{78} & \sin \phi_2 \underline{-0.558} \underline{241} \underline{98} \quad \sin \Delta\lambda \underline{+7.327} \underline{09901} \\
 \tan \phi_1 \underline{1.468} \underline{995} \underline{22} & \cos \phi_2 \underline{+1.839} \underline{678} \underline{19} \quad \cos \Delta\lambda \underline{+1.944} \underline{99007} \\
 \tan \phi_2 \underline{-0.672} \underline{841} \underline{57} & \cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda \underline{-0.620} \underline{267} \underline{82} \\
 M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda \underline{-1.159} \underline{795} \underline{35} & \cot A = \frac{M}{\sin \Delta\lambda} \underline{-3.545} \underline{701} \underline{19} \\
 N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda \underline{+1.746} \underline{326} \underline{43} & \cot B = \frac{N}{\sin \Delta\lambda} \underline{+5.338} \underline{831} \underline{29} \\
 \sin d = \frac{\cos \phi_1 \sin \Delta\lambda}{\sin B} \cdot \underline{.99979454} \sin A \underline{+1.271} \underline{442} \underline{67} & A \underline{164}^{\circ} \underline{14}' \underline{59.524} \\
 & = \frac{\cos \phi_2 \sin \Delta\lambda}{\sin A} \cdot \underline{.99979454} \sin B \underline{+1.184} \underline{105} \underline{19} \quad B \underline{10}^{\circ} \underline{36}' \underline{32.283} \\
 K = (\sin \phi_1 - \sin \phi_2)^2 \underline{+1.917} \underline{906} \underline{27} & d \underline{91}^{\circ} \underline{09}' \underline{40.825} \\
 L = (\sin \phi_1 + \sin \phi_2)^2 \underline{+0.072} \underline{039} \underline{081} & H = (d + 3 \sin d)/(1 - \cos d) \underline{+4.499259135} \\
 \delta d = (f/4)(HK + GL) \underline{-0.007225610} & G = (d - 3 \sin d)/(1 + \cos d) \underline{-1.43745225} \\
 d \text{ (radians)} \underline{+1.591} \underline{0655} \underline{38} & s = a(d + \delta d) \underline{10,102,057.965} \text{ meters} \\
 d + \delta d \text{ (rad)} \underline{+1.583839928} & s \underline{5454.6749} \text{ n.m.} \\
 2A \underline{32}^{\circ} \underline{29}' \underline{59.048} & T = d/\sin d \underline{1.59139242} \\
 \sin 2A \underline{-0.522} \underline{502} \underline{50} & 2B \underline{21}^{\circ} \underline{13}' \underline{04.566} \\
 U = (f/2) \cos^2 \phi_1 \sin 2A \underline{-2.804548 \times 10^{-4}} & \sin 2B \underline{+1.361} \underline{916} \underline{39} \\
 VT \underline{+6.72023} \underline{15} \times 10^{-4} & V = (f/2) \cos^2 \phi_2 \sin 2B \underline{+4.2228626 \times 10^{-4}} \\
 \delta A = VT - U \underline{+9.524} \underline{78} \times 10^{-4} & UT \underline{-4.463} \underline{1364} \times 10^{-4} \\
 + \delta A \underline{+3'16.463} & \delta B = -UT + V \underline{+8.685} \underline{999} \times 10^{-4} \\
 - A \underline{-164}^{\circ} \underline{14}' \underline{59.524} & + \delta B \underline{+2'59.162} \\
 & + B \underline{+10}^{\circ} \underline{36}' \underline{33.283} \\
 a_{1-2} \underline{+180}^{\circ} \underline{15}^{\circ} \underline{48}' \underline{16.939} & a_{2-1} \underline{+180}^{\circ} \underline{190}^{\circ} \underline{39}' \underline{31.445} \\
 a_{1-2} = a_{AB} = 180^{\circ} - A + \delta A & a_{2-1} = a_{BA} = 180^{\circ} + B + \delta B
 \end{array}$$

Line No. 12 (See Tables 1,2 - pages 65,66)

APPENDIX 3

Computations

Using Forsyth-Andoyer-Lambert Type

Second Order Formulae

Without Conversion to Parametric Latitude

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	40	30	37.957	1.	ORIGIN	λ_1	17	19	43.280
ϕ_2	40	00	00.000	2.	TERMINUS	λ_2	18	00	00.000
$\sin \phi_1$	7.649	58423			2. west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	40'	16	.720
$\cos \phi_1$	+.760	28907			$\sin \phi_2$	7.642	78761	sin $\Delta\lambda$.011 71632
$\tan \phi_1$	+.854	39731			$\cos \phi_2$	+.766	04444	cos $\Delta\lambda$.999 93136
$\tan \phi_2$	+.839	09963			cos d = $\sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	+.999	97033		
M = $\cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	-0.011	58604			cot u = M/sin $\Delta\lambda$	-	488 58047		
N = $\cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$.011	76282			cot v = N/sin $\Delta\lambda$	+1.003	96882		
$\sin d = \cos \phi_1 \sin \Delta\lambda / \sin v = \cos \phi_2 \sin \Delta\lambda / \sin u$	+.012	62251			u	134	40	46.816	
$\csc d$	+7.922	35458			v	44	53	11.497	
$1 + \cos d$	+1.9999	2033			$\cot d$	+7.921	72341		
$(\sin \phi_1 + \sin \phi_2)^2$	+1.670	23193			1-cos d	+.0000	7967	sin u	+.711 04900
$K_1 = (\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d)$	+7.8351	49633			$\sin v$	+.705	70448		
X = $K_1 + K_2 + 1.4154$	78892				K ₂ = $(\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d)$	+7.5803	29259		
X ²	+2.00358	0494			XY	+3606	92861		
A = $64d_r + 16d_r^2 \cot d$	+7.8280	635278			X ²	+7.00015933846			
B = $-2D - 1.23195834$	E = 30 sin 2d	+7.95929030			d _r	+7.0001593382	d _r ²	+7.00015933846	
C = $-(30d_r + 8d_r^2 \cot d + E/2) - .7674310463$					A	= 64d _r + 16d _r ² cot d	+7.8280635278	D = 48 sin d + 8d _r ² csc d	+7.615 97917
BY	-313928085				X	= 48 sin d + 8d _r ² csc d	+7.615 97917	E = 30 sin 2d	+7.025 24301
EY ²	+049 193 4514				AX	+1.172 106445			
$\Sigma = AX + BY + CX^2 + DXY + EY^2$	-	40807 8774			CX ²	-1.537609875	DXY	+7.2221792891	
$\delta d_f = -(f/4)(X_d_r - 3Y \sin d)$	-6.964 98 X 10 ⁻⁶				EY ²	+7.049 193 4514			
$\delta d_r + \delta d_f$	-0.012 61596 884				$\delta d_f^2 = +(f^2/128)\Sigma$	-3.66398 X 10 ⁻⁸			
S(δd_f) = a($d_r + \delta d_f$)	80,467.253	m			δd_r	+0.012 615 93220			
					S(δd_f^2) = a($d_r + \delta d_f + \delta d_f^2$)	80,467.020	m		

2u	269	51	33.632	T = d/sin d	1.0000 33576				
sin 2u	--.999	93749		2v	89°	46'	22.994		
U = $(f/2) \cos^2 \phi_1 \sin 2u$	-9.79732365 X 10 ⁻⁴			sin 2v	+.999	99216			
VT	+9.949145 X 10 ⁻⁴			V = $(f/2) \cos^2 \phi_2 \sin 2v$	+9.94681111 X 10 ⁻⁴				
$\delta u = VT - U$	+0.0019 944468			UT	-9.7976516 X 10 ⁻⁴				
+ δu	+ 6	47.259		$\delta v = -UT + V$	+0.00197 44627				
- u	134	40	46.816	+ δv	+ 6	47.262			
$\alpha_{1-2} = \alpha_{uv} = 180^\circ - u + \delta u$	+180°	26'	00.443	+ v	44	53	11.497		
					+180°	224°	59'	58.759	

Line No. 1, See Tables 1 and 2. True distance 80,466.490 meters.

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	9° 59' 48.349	1. ORIGIN	λ_1	16° 31' 55.897
ϕ_2	10° 00' 00.000	2. TERMINUS	λ_2	18° 00' 00.000
$\sin \phi_1$	+1.193 59355	2. west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	-1° 28' 04.123
$\cos \phi_1$	+1.99481956	$\sin \phi_2$	+1.193 64818	$\sin \Delta\lambda$
$\tan \phi_1$	+1.196 26874	$\cos \phi_2$	+1.98480975	$\cos \Delta\lambda$
$\tan \phi_2$	+1.196 32698	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	+1.999 68127	
M = $\cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	+1.000 11432	$\cot u = M / \sin \Delta\lambda$	+1.004 46295	
N = $\cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	-0.000 00038	$\cot v = N / \sin \Delta\lambda$	-0.000 01483	
$\sin d = \cos \phi_1 \sin \Delta\lambda / \sin v = \cos \phi_2 \sin \Delta\lambda / \sin u$	+1.025 22645	u	89° 44' 39.457	
csc d	+39.640 9324	cot d	+39.62831 95	v
1 + cos d	+1.999 68177	1 - cos d	+1.000 31823	sin u
$(\sin \phi_1 + \sin \phi_2)^2$	+1.12057612	$(\sin \phi_1 - \sin \phi_2)^2$	3.1 × 10 ⁻⁹	sin v
K ₁ = $(\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d)$	+1.06024916542	K ₂ = $(\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d)$	+1.94138 × 10 ⁻⁶	
X = K ₁ + K ₂	+1.0603093956	Y = K ₁ - K ₂	+1.0602899128	XY
X ²	+0.00363698196	Y ²	+0.00363463243	d _r
A = 64d _r + 16d _r ² cot d	+2.01824 4063	D = 48 sin d + 8d _r ² csc d	+1.412 723957	
B = -2D - 2.825 447914	E = 30 sin 2d + 1.513 1052	sin 2d	+1.050 43684	
C = -(30d _r + 8d _r ² cot d + E/2)	-1.715 21638	AX	+10.121 715 043	
BY	-1.703 40357	CX ²	-0.006 238211	DXY
EY ²	+1.0054995812	$\Sigma = AX + BY + CX^2 + DXY + EY^2$	-0.044 227 552	
$\delta d_f = -(f/4)(Xd_r - 3Y \sin d)$	+2.599345 × 10 ⁻⁶	$\delta d_f^2 = +(f^2/128) \Sigma$	-3.97102 × 10 ⁻⁹	
$d_r + \delta d_f$	+1.025 2316 995	$d_r + \delta d_f + \delta d_f^2$	+1.025 2316 955	
S(δd_f) = a(d _r + δd_f)	160,932. 987	S(δd_f^2) = a(d _r + $\delta d_f + \delta d_f^2$)	160,932. 962	m

2u	179° 29' 18.914	T = d/sin d	+1.000 105928
$\sin 2u$	+1.008 92572	2v	180° 00' 06.120
U = $(f/2) \cos^2 \phi_1 \sin 2u$	+1.469352 × 10 ⁻⁵	$\sin 2v$	-0.000 02967
VT	-4.878 × 10 ⁻⁸	V = $(f/2) \cos^2 \phi_2 \sin 2v$	-4.878 × 10 ⁻⁸
$\delta u = VT - U$	-1.4722 × 10 ⁻⁵	UT	+1.46951 × 10 ⁻⁵
+ δu	03.037	$\delta v = -UT + V$	-1.4724 × 10 ⁻⁵
- u	89° 44' 39.457	+ δv	03.037
+180°	90° 15' 17.506	+ v	+90° 00' 03.060
$a_{1-2} = a_{uv} = 180° - u + \delta u$		+180°	-170° 00' 00.023
$a_{2-1} = a_{vu} = 180° + v + \delta v$			

Line No. 2, See Tables 1 and 2. True distance 160,932. 956 meters.

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	69	48	05.701	1.	Origin	λ_1	9	37	28.637
ϕ_2	70	00	00.000	2.	TERMINUS	λ_2	18	00	00.000
$\sin \phi_1$.938	50257		2. west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	8	32	31.363	
$\cos \phi_1$.345	39226		$\sin \phi_2$.93969362	$\sin \Delta\lambda$	7.145	65790	
$\tan \phi_1$	2.718	15225		$\cos \phi_2$.34202014	$\cos \Delta\lambda$	7.989	33502	
$\tan \phi_2$	2.747	49944		$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$.99873458				
$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	0.20	134286		$\cot u = M / \sin \Delta\lambda$	t.13822996				
$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	-0.000	00.8004		$\cot v = N / \sin \Delta\lambda$	-0.0000549507				
$\sin d = \cos \phi_1 \sin \Delta\lambda / \sin u$	t.050	29153	u		82 09 47.569				
$\csc d$	t.19	88402443		$\cot d$	t.19.8588637	v	90 00 11.342		
$1 + \cos d$	t.1	99873458		$1 - \cos d$	t.00126542	$\sin u$	t.99058100		
$(\sin \phi_1 + \sin \phi_2)^2$	t.3.52961917	$(\sin \phi_1 - \sin \phi_2)^2$	1.41622×10^{-6}	$\sin v$	-1.00000000				
$K_1 = (\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d)$	t1.76492527	$K_2 = (\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d)$	t.00111917						
$X = K_1 + K_2$	+1.76604444	$Y = K_1 - K_2$	t1.76380610	XY	t3.11495996				
X^2	t3.11891396	Y^2	t3.11101196	d_r	t.050312953	d_r^2	t.002531393		
$A = 64d_r + 16d_r^2 \cot d$	t4.02433915	$D = 48 \sin d + 8d_r^2 \csc d$	t2.81666930						
$B = -2D$	-5.6333386	$E = 30 \sin 2d$	t3.0136944	$\sin 2d$	t.10045598				
$C = -(30d_r + 8d_r^2 \cot d + E/2)$	-3.41838397	AX	t7.10716178						
BY	-9.93611699	CX^2	-10.66164144	DXY	t8.99381209				
EY^2	t9.39559266	$\Sigma = AX + BY + CX^2 + DXY + EY^2$	t4.65880810						
$\delta d_f = -(f/4)(Xd_r - 3Y \sin d)$	t.0001501977	$\delta d_f^2 = +(f^2/128) \Sigma$	t.0000000418						
$d_r + \delta d_f$	t.050462929	$d_r + \delta d_f + \delta d_f^2$	t.050463347						
$S(\delta d_f) = a(d_r + \delta d_f)$	321,862,977	$S(\delta d_f^2) = a(d_r + \delta d_f + \delta d_f^2)$	321,865.641	m					

$$T = d / \sin d \quad 1.00042$$

$2u$	164	15	35.154	$2v$	180	00	22.684
$\sin 2u$	t.271	276	41	$\sin 2v$	-0.000	10998	
$U = (f/2) \cos^2 \phi_1 \sin 2u$	t5.48169	$\times 10^{-5}$	$V = (f/2) \cos^2 \phi_2 \sin 2v$	-2.181	$\times 10^{-8}$		
VT	-2.182	$\times 10^{-8}$	UT	t5.484	$\times 10^{-5}$		
$\delta u = VT - U$	-5.4839	$\times 10^{-5}$	$\delta v = -UT + V$	-5.4862	$\times 10^{-5}$		
$+ \delta u$	-	11.311	$+ \delta v$	-	11.316		
$- u$	-82	07	$+ v$	+90	00	11.342	
$+180$			$+180$				
a_{1-2}		97	52	a_{2-1}	290	00	00.026
$a_{1-2} = a_{uv} = 180^\circ - u + \delta u$			$a_{2-1} = a_{vu} = 180^\circ + v + \delta v$				

Line No. 3, See Tables 1 and 2. True distance 321,866.796 meters.

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	13° 04' 12.584"	1.	Origin	λ_1	14° 51' 13.283"
ϕ_2	10° 00' 00.000"	2.	TERMINUS	λ_2	18° 00' 00.000"
$\sin \phi_1$	+.226 14397	2. west of 1.		$\Delta\lambda = \lambda_2 - \lambda_1$	3° 08' 46.711"
$\cos \phi_1$.7974 09389	$\sin \phi_2$.19364818	$\sin \Delta\lambda$.054 88588
$\tan \phi_1$.232 15829	$\cos \phi_2$.98480995	$\cos \Delta\lambda$.998 49263
$\tan \phi_2$.176 32698	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$.997 11869		
$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	-.054 044 053	$\cot u = M / \sin \Delta\lambda$	-.984 66223		
$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$.055 244 855	$\cot v = N / \sin \Delta\lambda$.100654038		
$\sin d = \cos \phi_1 \sin \Delta\lambda / \sin v$.095 85 9115	u	134° 33' 25.986		
$\csc d$	+13.182 66 86	$\cot d$	+13.1446 85 25	v	44° 48' 49.676
$1 + \cos d$	+1.997 11869	$1 - \cos d$	+1.00288131	$\sin u$.712 55013
$(\sin \phi_1 + \sin \phi_2)^2$	+159 833 96	$(\sin \phi_1 - \sin \phi_2)^2$	+1.00275581	$\sin v$.704 99821
$K_1 = (\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d)$	+1.000331989	$K_2 = (\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d)$	+1.956443433		
$X = K_1 + K_2$	+1.036 425602	$Y = K_1 - K_2$	-.876411244	XY	-.908 378872
X^2	+1.074 281674	Y^2	+1.7680966 69	d_r	.095 930171
$A = 64d_r + 16d_r^2 \cot d$	+6.072 078 92	$D = 48 \sin d + 8d_r^2 \csc d$	+4.249 17030		
$B = -2D$	-8.498 34060	$E = 30 \sin 2d$	+4.538 31630	$\sin 2d$	+151 277 21
$C = -(30d_r + 8d_r^2 \cot d + E/2)$	-5.153 33 927	AX	+6.293 561 654		
BY	+7.448041257	CX^2	-5.536 135 789	DXY	-3.859 856524
EY^2	+3.485865633	$\Sigma = AX + BY + CX^2 + DXY + EY^2$	+7.831 476 231		
$\delta d_f = -(f/4)(X_d_r - 3Y \sin d)$	-.0002357 3398	$\delta d_f^2 = +(f^2/128) \Sigma$	+7.03157 $\times 10^{-7}$		
$d_r + \delta d_f$	+1.095 694 437	$d_r + \delta d_f + \delta d_f^2$	+1.095 695 140		
$S(\delta d_f) = a(d_r + \delta d_f)$	482,794.743	m	$S(\delta d_f^2) = a(d_r + \delta d_f + \delta d_f^2)$	482,799.226	m

$2u$	269° 06' 51.972"	$T = d / \sin d$	+1.00096 2282	0
$\sin 2u$	-0.998 88056	$2v$	89° 37' 35.352"	"
$U = (f/2) \cos^2 \phi_1 \sin 2u$	-.001606 5511	$\sin 2v$	+.999 97875	
VT	+1.001645 4730	$V = (f/2) \cos^2 \phi_2 \sin 2v$	+1.00164 38911	
$\delta u = VT - U$	+1.003252 0241	UT	-.0016080 971	
$+ \delta u$	+11° 10.778	$\delta v = -UT + V$	+1.00325 19882	
$- u$	-134° 33' 25.986	$+ \delta v$	+11° 10.771	
$+180$	45° 37' 44.792"	$+ v$	+44° 48' 49.676	
a_{1-2}		$+180$		
$a_{1-2} = a_{uv} = 180^\circ - u + \delta u$		a_{2-1}	224° 57' 58.447"	
$a_{2-1} = a_{vu} = 180^\circ + v + \delta v$				

Line No. 4, See Tables 1 and 2. True distance 482,798.163 meters.

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	23° 35' 09.206"	1.	Origin	λ_1	3° 36' 35.101"
ϕ_2	70° 00' 00.000"	2.	TERMINUS	λ_2	18° 00' 00.000"
$\sin \phi_1$	-0.959 24441	2. west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	14° 33' 24.899"	
$\cos \phi_1$.282 57768	$\sin \phi_2$	-0.93969262	sin $\Delta\lambda$	-0.251 34162"
$\tan \phi_1$	+3.394 62200	$\cos \phi_2$	-0.342020146	cos $\Delta\lambda$	-0.967 89844"
$\tan \phi_2$	+2.147 47744	cos d = $\sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	+ -0.99493963		
M = $\cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	-0.152 07537	cot u = M/sin $\Delta\lambda$	-0.605 05449"		
N = $\cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	+0.251 50207	cot v = N/sin $\Delta\lambda$	+1.00063837"		
sin d = $\cos \phi_1 \sin \Delta\lambda / \sin v = \cos \phi_2 \sin \Delta\lambda / \sin u$	+0.100 47451	u	121° 10' 34.402"		
csc d	+9.952 77310	cot d	+9.902 408382	v	14° 58' 54.185"
1 + cos d	+1.994 93963	1-cos d	+0.005 06037	sin u	+7.885 57916"
(sin $\phi_1 + \sin \phi_2)^2$	3.605 96184	(sin $\phi_1 - \sin \phi_2)^2$.000382372	sin v	+7.706 88112"
K ₁ = $(\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d)$	+1.80755437	K ₂ = $(\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d)$	+0.9755423032		
X = K ₁ + K ₂	+1.88309667	Y = K ₁ - K ₂	+1.73201307	XY	+3.36154616
X ²	+3.546 05307	Y ²	+2.99986581	d _r	+0.10129283
A = 64d _r + 16d _r ² cot d	+8.046 10597	D = 48 sin d + 8d _r ² csc d	+5.629 29304		
B = -2D	-11.25858408	E = 30 sin 2d	+5.997 96450	sin 2d	+7.19993314
C = -(30d _r + 8d _r ² cot d + E/2)	-6.82074642	AX	+15.15159536		
BY	-19.500 00352	CX ²	-24.18672878	DXY	+18.36019584
EY ²	+17.99308773	$\Sigma = AX + BY + CX^2 + DXY + EY^2$	+7.81814 663		
$\delta d_f = -(f/4)(Xd_r - 3Y \sin d)$	+0.0002818391	$\delta d_f^2 = +(f^2/128) \sum$	+0.00000070196		
$d_r + \delta d_f$	+0.100 926193	d _r + $\delta d_f + \delta d_f^2$	+0.100 926825		
S(δd_f) = a(d _r + δd_f)	643, 732, 440	m	S(δd_f^2) = a(d _r + $\delta d_f + \delta d_f^2$)	643, 732, 440	m

$2u$	242° 21' 08.804"	$T = d / \sin d$	1.001 69022
$\sin 2u$	-0.885 81874	$2v$	89° 57' 48.370"
U = $(f/2) \cos^2 \phi_1 \sin 2u$	-1.19895 X 10 ⁻⁴	$\sin 2v$	+7.999 99980
VT	+1.986 17 X 10 ⁻⁴	V = $(f/2) \cos^2 \phi_2 \sin 2v$	+1.98282 X 10 ⁻⁴
δu	+3.18512 X 10 ⁻⁴	UT	-1.20098 X 10 ⁻⁴
+ δu	+0° 01' 05.698"	δv	+3.18380 X 10 ⁻⁴
- u	-121° 10' 34.402"	+ δv	+0° 01' 05.671"
+180°	58° 50' 31.296"	+ v	+44° 58' 54.185"
a_{1-2}		a_{2-1}	+180° 224° 59' 59.856"
$a_{1-2} = a_{uv} = 180^\circ - u + \delta u$		$a_{2-1} = a_{vu} = 180^\circ + v + \delta v$	

Line No. 5, See Tables 1 and 2. True distance 643,732.429 meters.

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$

1 radian = 206,264.8062 seconds

ϕ_1	9	55	09.138	1. Origin	λ_1	10	39	43.554
ϕ_2	10	0	0	2. Terminus	λ_2	18	0	0
$\phi_m = \frac{1}{2}(\phi_1 + \phi_2)$	9	57	34.569	2. Always west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	7	20	16.446
$\Delta\phi_m = \frac{1}{2}(\phi_2 - \phi_1)$	2	25.431		$\Delta\lambda_m = \frac{1}{2}\Delta\lambda$	3	40	08.223	
$\sin \phi_m$	+ 0.17295377			$\sin \Delta\lambda$	+ 0.12772073			
$\cos \phi_m$	+ 0.98492994			$\sin \Delta\lambda_m$	+ 0.06399152			
$k = \sin \phi_m \cos \Delta\phi_m + 0.17295373$				$K = \sin \Delta\phi_m \cos \phi_m + 0.00069444$				
$H = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m + 0.97008649$				$1 - L$	0.99602708			
$L = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m + 0.00397292$				$\cos d = 1 - 2L$	0.99205416			
$d + 0.1261458534$			$\sin d + 0.12581156$	$T = d/\sin d$	+ 1.00265710			
$U = 2k^2/(1 - L) + 0.060064618$			$V = 2K^2/L + 0.000242767$	$E = 60 \cos d$	+ 59.52324960			
$X = U + V + 0.060307385$			$Y = U - V + 0.059821851$	$D = 8(6 + T^2)$	+ 56.04257008			
$A = 4T(16 + ET/15) + 80.12738460$			$C = 2T - \frac{1}{2}(A + E) - 67.82000290$	$B = -2D$	- 112.08514016			
$X(A + CX) + 4.58561299$			$Y(B + EY) - 6.49212745$	DXY	+ 0.20218475			
$(TX - 3Y) - 0.118997925$			$\delta f = -(f/4)(TX - 3Y) + 1.00853 \times 10^{-4}$					
$T + \delta f + 1.00275795$			$S_1 = a \sin d (T + \delta f) 804,665.223$ meters					
$\Sigma = X(A + CX) + Y(B + EY) + DXY \sim 1.70432971$			$\delta f^2 = +(f^2/128)\Sigma - 1.53 \times 10^{-7}$					
$T + \delta f + \delta f^2 + 1.00275780$			$S_2 = a \sin d (T + \delta f + \delta f^2) 804,665.102$ meters					
$\sin(\alpha_2 + \alpha_1) = (K \sin \Delta\lambda)/L + 0.02232473$								
$\sin(\alpha_2 - \alpha_1) = (k \sin \Delta\lambda)/(1 - L) + 0.02217789$								
$\frac{1}{2}(\delta\alpha_1 + \delta\alpha_2) = -(f/2)H(T + 1) \sin(\alpha_2 + \alpha_1) - 7.351613 \times 10^{-5}$								
$\frac{1}{2}(\delta\alpha_2 - \delta\alpha_1) = -(f/2)H(T - 1) \sin(\alpha_2 - \alpha_1) - 0.000969006 \times 10^{-5}$								
α_1	91	16	30.040					
$\delta\alpha_1$			- 15.162					
α_{1-2}	91	16	14.878					
$\alpha_{1-2} = \alpha_1 + \delta\alpha_1$								
$d = 7^\circ 13' 39".450$								
α_2	270	00	15.147					
$\delta\alpha_2$			- 15.166					
α_{2-1}	269	59	59.981					
$\alpha_{2-1} = \alpha_2 + \delta\alpha_2$								

$$d = 7^\circ 13' 39".450$$

Line No. 6, see Tables 1 and 2. (Pages 65,66)

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	44	54	28.509	1.	Origin	λ_1	10	47	43.883
ϕ_2	40	00	00.000	2.	TERMINUS	λ_2	18	00	00.000
$\sin \phi_1$	7.705	96946		2. west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	7	12	16.117	
$\cos \phi_1$	7.708	24238		$\sin \phi_2$	7.642	78961	$\sin \Delta\lambda$	70.125	41095
$\tan \phi_1$	7.996	79091		$\cos \phi_2$	7.766	04444	$\cos \Delta\lambda$	70.992	10491
$\tan \phi_2$	7.839	09963		$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	7.992	05004			
$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	-106	10993		$\cot u = M / \sin \Delta\lambda$	-846	09916			
$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	7.125	89339		$\cot v = N / \sin \Delta\lambda$	+1.00368900				
$\sin d = \cos \phi_1 \sin \Delta\lambda / \sin v = \cos \phi_2 \sin \Delta\lambda / \sin u$	7.125	84404		u	130	14	04.316		
$\csc d$	7.946	3437444		v	44	53	40.246		
$1 + \cos d$	+1.99205004			$\cot d$	7.883	170629			
$(\sin \phi_1 + \sin \phi_2)^2 + 1.81914563$	($\sin \phi_1 - \sin \phi_2)^2 + 3.991946 \times 10^{-3}$			$\sin u$	7.763	40687			
$K_1 = (\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d)$	+1.913202777			$\sin v$	7.705	80393			
$X = K_1 + K_2 + 1.415336875$	$K_2 = (\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d)$			$\cot u$	7.502	134098			
$X^2 + 2.003198490$	$Y^2 + 7.168999459$			XY	7.581800660				
X^2	Y^2			d_r	7.126	178588	$d_r^2 + 7.015921036$		
$A = 64d_r + 16d_r^2 \cot d$	+10.083561536			$D = 48 \sin d + 8d_r^2 \csc d$	+7.052626119				
$B = -2D - 14.105252238$	$E = 30 \sin 2d$	+7.49061510		$\sin 2d$	7.24968717				
$C = -(30d_r + 8d_r^2 \cot d + E/2) - 8.534931134$				AX	+14.271636465				
BY	-5.798327405			CX^2	-17.096589653		DXY	+4.103222531	
$EY^2 + 1.265745106$				$\Sigma = AX + BY + CX^2 + DXY + EY^2$	-3.254212958				
$\delta d_f = -(f/4)(Xd_r - 3Y \sin d)$	-1.98265 $\times 10^{-5}$			$\delta d_f^2 = +(f^2/128)\Sigma - 2.9218 \times 10^{-7}$					
$d_r + \delta d_f$	+1.26158762			$d_r + \delta d_f + \delta d_f^2$	+1.26158469				
$S(\delta d_f) = a(d_r + \delta d_f)$	804,666.623			$S(\delta d_f^2) = a(d_r + \delta d_f + \delta d_f^2)$	804,664.754				

$T = d / \sin d$	1.002	658433	
$2u$	260	28	08.632
$\sin 2u$	--	986	19633
$U = (f/2) \cos^2 \phi_1 \sin 2u$	-8.385065 $\times 10^{-4}$		
VT	+9.973265 $\times 10^{-4}$		
$\delta u = VT - U$	+18.35833 $\times 10^{-4}$		
$+ \delta u$	+6	18.668	
$- u$	-130	14	04.316
$+180$	49	52	14.352
a_{1-2}			
$a_{1-2} = a_{uv} = 180^\circ - u + \delta u$			

$$a_{2-1} = a_{vu} = 180^\circ + v + \delta v$$

Line No. 7, See Tables 1 and 2. True distance 804,664.771 meters.

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	+ 76	00	26.803 N	1.	Origin	λ_1	28	42	03.567 E
ϕ_2	+ 70	00	00.000 N	2.	TERMINUS	λ_2	18	00	00.000 W
$\sin \phi_1$	+ .990	326.92		2. west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	46	42	03.567	
$\cos \phi_1$	+ .241	796.75		$\sin \phi_2$	+ .93969262	$\sin \Delta\lambda$	+ .727	784.62	
$\tan \phi_1$	+ 4.012	985.8		$\cos \phi_2$	+ .34203014	$\cos \Delta\lambda$	+ .685	805.77	
$\tan \phi_2$	+ 2.74747742			$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	+ .96852475				
$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	- .00112469			$\cot u = M / \sin \Delta\lambda$	- .00154536				
$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	+ .728 09535			$\cot v = N / \sin \Delta\lambda$	+ 1.00039941				
$\sin d = \cos \phi_1 \sin \Delta\lambda / \sin v = \cos \phi_2 \sin \Delta\lambda / \sin u$	+ .248 91930			u	90° 05' 18.753				
$csc d + 4.01739855$				v	44 59 18.810				
$1 + \cos d + 1.96852475$				$\sin u$	+ .999 99.880				
$(\sin \phi_1 + \sin \phi_2)^2 3.64817464$				$\sin v$	+ .70696556				
$K_1 = (\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d) + 1.85325312$				$K_2 = (\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d) + 0.2981582$					
$X = K_1 + K_2 + 1.883 06894$				$Y = K_1 - K_2 + 1.823431.30 XY + 3.433 65814$					
$X^2 + 3.545 94865 Y^2 + 3.324 92359$				$d_r = 2515 632076$	$d_r^2 = 632835443$				
$A = 64d_r + 16d_r^2 \cot d + 20.03971093$				$D = 48 \sin d + 8d_r^2 \csc d + 13.981 91215$					
$B = -2D - 27.963 83430$				$E = 30 \sin 2d + 14.464 95396$	$\sin 2d$	+ .482 165 132			
$C = -(30d_r + 8d_r^2 \cot d + E/2) - 16.749 20803$				$AX + 37.936 15772$					
$BY - 50.990 28028$				$CX^2 - 59.391 83127$	$DXY + 48.009 10647$				
$EY^2 + 48.09486665$				$\Sigma = AX + BY + CX^2 + DXY + EY^2 + 23.45801879$					
$\delta d_f = -(f/4)(Xd_r - 3Y \sin d) + 0.0007525512$				$\delta d_f^2 = +(f^2/128) \Sigma + 2.1062021 \times 10^{-6}$					
$d_r + \delta d_f + 252.3147588$				$d_r + \delta d_f + \delta d_f^2 + 252.31685$					
$S(\delta d_f) = a(d_r + \delta d_f) / 1,609,315.609$				$S(\delta d_f) = a(d_r + \delta d_f + \delta d_f^2) / 1,609,329.043$					

$$T = d / \sin d \quad 1.0106255647$$

$2u$	180	10	37.506	$2v$	89°	58'	37.620
$\sin 2u$	- .003	090.71	$\sin 2v$	+ .989	989.82		
$U = (f/2) \cos^2 \phi_1 \sin 2u - 3.062 9403 \times 10^{-4}$			$V = (f/2) \cos^2 \phi_2 \sin 2v + 1.98281925 \times 10^{-4}$				
$VT + 2.0038860 \times 10^{-4}$			$UT - 3.095 4860 \times 10^{-4}$				
$\delta u = VT - U + 2.006 9489 \times 10^{-4}$			$\delta v = -UT + V + 1.988 92322 \times 10^{-4}$				
$+ \delta u$	+ 41.396		$+ \delta v$	+ 41.024			
$- u$	- 90	05	$+ v$	59 18.810			
$+180$			$+180$				
a_{1-2}	89°	55'	a_{2-1}	524	59"	59.834	
$a_{1-2} = a_{uv} = 180^\circ - u + \delta u$			$a_{2-1} = a_{vu} = 180^\circ + v + \delta v$				

Line No. 8, See Tables 1 and 2. True distance 1,609 329.060 meters.

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	27 49 42.130	1. Origin.	λ_1	32 54 12.991 E
ϕ_2	40 00 00.000	2. TERMINUS	λ_2	18 00 00.000 W
$\sin \phi_1$	+ 466 82458	2. west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	50 54 12.997
$\cos \phi_1$	- 884 34994	$\sin \phi_2$	+ 642 98761	$\sin \Delta\lambda$
$\tan \phi_1$	+ 537 87314	$\cos \phi_2$	+ 766 04444	$\cos \Delta\lambda$
$\tan \phi_2$	+ 839 09963	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	+ 630 63691	+ 727 28811
$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	+ 447 66557	$\cot u = M / \sin \Delta\lambda$	+ 576 82459	
$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	- 000 984 88	$\cot v = N / \sin \Delta\lambda$	- 001 26903	
$\sin d = \cos \phi_1 \sin \Delta\lambda / \sin v = \cos \phi_2 \sin \Delta\lambda / \sin u$	+ 686 33229	u	60 01 21.339	
$\csc d$	+ 1.45702018	$\cot d$	+ 1.059 69346	v 70 04 31.758
$1 + \cos d$	+ 1.72728811	$1 - \cos d$	+ 2.272 71189	$\sin u$
$(\sin \phi_1 + \sin \phi_2)^2$	+ 1.23123921	$(\sin \phi_1 - \sin \phi_2)^2$	+ 0.3096299	$\sin v$
$K_1 = (\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d)$	+ 712 816352	$K_2 = (\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d)$	+ 1.113 537360	
$X = K_1 + K_2$	+ 826 35371	$Y = K_1 - K_2$	+ 599 27899 XY	+ 495 21642
X^2	+ 682 86045	Y^2	+ 359 13531	d_r
$A = 64d_r + 16d_r^2 \cot d$	+ 58.113 16931	$D = 48 \sin d + 8d_r^2 \csc d$	+ 37.531 4889	
$B = -2D$	- 75.042 9994	$E = 30 \sin 2d$	+ 29.949 6783	$\sin 2d$
$C = -(30d_r + 8d_r^2 \cot d + E/2)$	- 42.51855 485	AX	+ 48.02203141	
BY	- 44.971 67970	CX^2	- 29.034 23950	DXY
EY^2	+ 10.755 98700	$\Sigma = AX + BY + CX^2 + DXY + EY^2$	+ 3.353 35652	
$\delta d_f = -(f/4)(Xd_r - 3Y \sin d)$	+ 000515 9962	$\delta d_f^2 = +(f^2/128) \Sigma$	+ 0000003011	
$d_r \div \delta d_f$	+ 256 949974	$d_r + \delta d_f + \delta d_f^2$	+ 756 9502 75	
$S(\delta d_f) = a(d_r + \delta d_f)$	1,827,983.169	$S(\delta d_f) = a(d_r + \delta d_f + \delta d_f^2)$	4,827,985.088	m

$T = d / \sin d$	1.102 139574	$2v$	180 08 43.516
$2u$	120 02 42.678	$\sin 2v$	- 002 53807
$\sin 2u$	+ 865 63079	$V = (f/2) \cos^2 \phi_1 \sin 2u$	- 00000 298245
$U = (f/2) \cos^2 \phi_1 \sin 2u$.00114 753022	$V = (f/2) \cos^2 \phi_2 \sin 2v$	- 2.52459 X 10^-6
VT	- 00000 298245	UT	+ 00126 472 745
$\delta u = VT - U$	- 00115030267	$\delta v = -UT + V$	- 00126 7252 04
$+ \delta u$	- 3 57.267	$+ \delta v$	- 4 20.869
$- u$	- 60 01 21.339	$+ v$	+ 90 04 21.758
$+ 180$	19 54 41.394	$+ 180$	290 00 00.889
$a_{1-2} = a_{uv} = 180^\circ - u + \delta u$		$a_{2-1} = a_{vu} = 180^\circ + v + \delta v$	

Line No. 9, See Tables 1 and 2. True distance 4,827,984.247 meters.

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	75	18	45.644 N	1. Origin.	λ_1	102	02	29.370 E
ϕ_2	40	00	00.000 N	2. TERMINUS	λ_2	18	00	00.000 N
$\sin \phi_1$	0.7578	03821		2. west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	120	02	29.370
$\cos \phi_1$	0.816	00990		$\sin \phi_2$	0.642	78961	$\sin \Delta\lambda$	0.865 66309
$\tan \phi_1$	0.708	37 194		$\cos \phi_2$	0.766	04444	$\cos \Delta\lambda$	-0.50063701
$\tan \phi_2$	0.839	09964		$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	0.586	61401		
M	=	$\cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	0.974 094 9862	$\cot u = M / \sin \Delta\lambda$	+1.	12525 877		
N	=	$\cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	0.864 4410 922	$\cot v = N / \sin \Delta\lambda$	+1.	998588344		
$\sin d = \cos \phi_1 \sin \Delta\lambda / \sin v = \cos \phi_2 \sin \Delta\lambda / \sin u$	0.99828072		u	41° 37' 37.186				
$\csc d$	+1.00192224		$\cot d$	0.058 91496	v	45 02 25.691		
$1 + \cos d$	+1.058 61401		$1 - \cos d$	0.941 385 99	$\sin u$	0.664 27848		
$(\sin \phi_1 + \sin \phi_2)^2$	+1.49041568		$(\sin \phi_1 - \sin \phi_2)^2$	0.004 1924848	$\sin v$	0.707 60605		
$K_1 = (\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d)$	+1.407 893402		$K_2 = (\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d)$	+1.004453524				
X = $K_1 + K_2$	+1.412 346926		Y = $K_1 - K_2$	+1.403 439898	XY	+1.982 143998		
X^2	+1.994 923839		Y^2	+1.969643491	d_r	+1.512 148751	d_r^2	+3.286593845
A = $64d_r + 16d_r^2 \cot d$	+198.925 636 322		D = $48 \sin d + 8d_r^2 \csc d$	+66.24192983				
B = $-2D - 132.48345966$	E = $30 \sin 2d + 3.510 794 166$		$\sin 2d$	+1.117 026 472				
C = $-(30d_r + 8d_r^2 \cot d + E/2)$	-48.19381774		AX	+139.717318359				
BY	-185.932 57052		CX	-96.133357138	DXY	+131.300 64730		
EY	+6.915 0128977		$\Sigma = AX + BY + CX^2 + DXY + EY^2$	-4.132 94922				
$\delta d_f = -(f/4)(Xd_r - 3Y \sin d)$	+0.001752 162		$\delta d_f^2 = (f^2/128) \Sigma$	-0.000000.3711				
$d_r + \delta d_f$	+1.513 900 913		$d_r + \delta d_f + \delta d_f^2$	+1.513 900 542				
$S(\delta d_f) = a(d_r + \delta d_f)$	9,655,992.492	m	$S(\delta d_f^2) = a(d_r + \delta d_f + \delta d_f^2)$	9,655,990.126	m			

0	,	T = $d / \sin d$	+1.514 95305				
2u	83	15	14.382	2v	90° 04'	51.416	"
$\sin 2u$	0.993	09665		$\sin 2v$	0.999	99900	
U = $(f/2) \cos^2 \phi_1 \sin 2u$	+1.00112 0864		V = $(f/2) \cos^2 \phi_2 \sin 2v$	+1.000 9946879			
VT	5'	10.980	UT	5'	50.203		
$\delta u = VT - U$	1'	19.585	$\delta v = -UT + V$	2'	25.034		
+ δu	+	1' 19.585	+ δv	2'	25.034		
- u	- 41	57 37.191	+ v	+45	02 25.708		
+180			+180				
a_{1-2}	138	23	a_{2-1}	335	00	00.674	"
$a_{1-2} = a_{uv} = 180^\circ - u + \delta u$			$a_{2-1} = a_{vu} = 180^\circ + v + \delta v$				

Line No.10, See Tables 1 and 2. True distance 9,655,969.751 meters.

DISTANCE COMPUTING FORM — ANDOYER-LAMBERT
TYPE APPROXIMATION WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

ϕ_1	2 55 17.425(R)	Origin	λ_1	70 50 04.869 E			
ϕ_2	70 00 00.000 (N)	TERMINUS	λ_2	18 00 00.000 N			
$\sin \phi_1$	+.050 96783	2. west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	+88 50 04.869			
$\cos \phi_1$.998 70029	$\sin \phi_2$	$t \cdot 93969262$	$\sin \Delta\lambda$	$t \cdot 999 79318$		
$\tan \phi_1$	-051 13416	$\cos \phi_2$	$t \cdot 342 02014$	$\cos \Delta\lambda$	$t \cdot 020 33717$		
$\tan \phi_2$	-0.747 47742	$\cos d = \sin \phi_1 \sin \phi_2 + \cos \phi_1 \cos \phi_2 \cos \Delta\lambda$	$t \cdot 05484078$				
$M = \cos \phi_1 \tan \phi_2 - \sin \phi_1 \cos \Delta\lambda$	$t \cdot 2.742869955$	$\cot u = M / \sin \Delta\lambda$	$t \cdot 2.943437352$				
$N = \cos \phi_2 \tan \phi_1 - \sin \phi_2 \cos \Delta\lambda$	$-001 6559781$	$\cot v = N / \sin \Delta\lambda$	-0.001656321				
$\sin d = \cos \phi_1 \sin \Delta\lambda / \sin v = \cos \phi_2 \sin \Delta\lambda / \sin u$	$t \cdot 99849511$	u	20 01 37.607				
$\csc d$	$t \cdot 1.00150716$	$\cot d$	$t \cdot 05492343$	v	90 05 41.640		
$1 + \cos d$	$t \cdot 1.05484078$	$1 - \cos d$	$t \cdot 94515932$	$\sin u$	$t \cdot 34248478$		
$(\sin \phi_1 + \sin \phi_2)^2$	$t \cdot 981408127$	$(\sin \phi_1 - \sin \phi_2)^2$	$t \cdot 989831952$	$\sin v$	$t \cdot 99999863$		
$K_1 = (\sin \phi_1 + \sin \phi_2)^2 / (1 + \cos d)$	$t \cdot 930385083$	$K_2 = (\sin \phi_1 - \sin \phi_2)^2 / (1 - \cos d)$	$t \cdot 835659998$				
$X = K_1 + K_2$	$t \cdot 1.766045081$	$Y = K_1 - K_2$	$t \cdot 094725085$	XY	$t \cdot 16928877$		
X^2	$t \cdot 3.11891513$	Y^2	$t \cdot 0089928417$	d_r	1555928018	d_r^2	$t \cdot 2.29803776$
$A = 64d_r + 16d_r^2 \cot d$	$t \cdot 99.038851009$	$D = 48 \sin d + 8d_r^2 \csc d$	$t \cdot 66.33977544$				
$B = -2D$	-132.69955088	$E = 30 \sin 2d$	$t \cdot 7.2854950$	$\sin 2d$	$t \cdot 10951650$		
$C = -(30d_r + 8d_r^2 \cot d + E/2)$	$-48 -130.31697$	AX	$t \cdot 194.907075654$				
BY	-12.568081737	CX^2	-150.114378622	DXY	$t \cdot 11.097899435$		
EY^2	$t \cdot 029480257$	$\Sigma = AX + BY + CX^2 + DXY + EY^2$	$t \cdot 23.35799496$				
$\delta d_f = -(f/4)(Xd_r - 3Y \sin d)$	-0.0020284936	$\delta d_f^2 = +(f^2/128) \Sigma$	$t \cdot 00000209668$				
$d_r + \delta d_f$	$t \cdot 1.513899524$	$d_r + \delta d_f + \delta d_f^2$	$t \cdot 1.513901621$				
$S(\delta d_f) = a(d_r + \delta d_f)$	$9,655,963.633$	m	$S(\delta d_f) = a(d_r + \delta d_f + \delta d_f^2)$	$9,655,977,008$	m		

$T = d / \sin d$	$t \cdot 1.51821276$		
$2u$	40 03 15.214	$2v$	180 11 -23.280
$\sin 2u$	+.643 51232	$\sin 2v$	-0.00331263
$U = (f/2) \cos^2 \phi_1 \sin 2u$	$t \cdot 1.087944 \times 10^{-3}$	$V = (f/2) \cos^2 \phi_2 \sin 2v$	-6.56834×10^{-7}
VT	$-9,972138 \times 10^{-7}$	UT	$t \cdot 1.6517306 \times 10^{-3}$
$\delta u = VT - U$	-0.001088941	$\delta v = -UT + V$	-0.0016523874
$+ \delta u$	03 44.610	$+ \delta v$	05 40.829
$- u$	-20 01 37.607	$+ v$	90 05 41.640
$+180$		$+180$	
a_{1-2}	159 54 37.783	a_{2-1}	270 00 00.811
$a_{1-2} = a_{uv} = 180^\circ - u + \delta u$		$a_{2-1} = a_{vu} = 180^\circ + v + \delta v$	
Line No.11, See Tables 1 and 2. True distance <u>9,655,977,148</u> meters.			

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT TYPE APPROXIMATION
WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

1 radian = 206,264.8062 seconds

ϕ_1	$70^{\circ} 00' 00.0''$	1.	Origin	λ_1
ϕ_2	$69^{\circ} 46' 36.574''$	2.	TERMINUS	λ_2
$\phi_m = \frac{1}{2}(\phi_1 + \phi_2)$	$69^{\circ} 53' 18.287''$	2.	Always west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$
$\Delta\phi_m = \frac{1}{2}(\phi_2 - \phi_1) =$	$6^{\circ} 41.713''$			$\Delta\lambda_m = \frac{1}{2}\Delta\lambda$
$\sin \phi_m$	$+ .93903474$	$\sin \Delta\phi_m = .00194756$		$\sin \Delta\lambda = + .26989234$
$\cos \phi_m$	$+ .34384960$	$\cos \Delta\phi_m = .99999810$		$\sin \Delta\lambda_m = + .13621582$
$k = \sin \phi_m \cos \Delta\phi_m$	$+ .939022956$	$K = \sin \Delta\phi_m \cos \phi_m = -.0006696677277$		
$H = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m$	$+ .118228745$	$1 - L = + .997802502$		
$L = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m$	$- .002197498$		$\cos d = 1 - 2L = + .995605004$	
$d = .0937893593$	$\sin d = .09365191$		$T = d / \sin d = 1.001467661$	
$U = 2k^2/(1-L)$	$+ 1.767412109$	$V = 2K^2/L$	$+ .0004081504$	
$X = U + V$	$+ 1.767820259$	$Y = U - V$	$+ 1.767003959$	$XY = + 3.123745396$
X^2	$+ 3.125188468$	Y^2	$+ 3.122302991$	$E = 60 \cos d = + 59.73630024$
$A = 4[16T + (E/15)T^2]$	$+ 80.07040344$	$D = 8(6 + T^2)$	$+ 56.023499808$	
$B = -2D$	$- 11.2046999616$	$C = 2T - \frac{1}{2}(A+E)$	$- 67.90041652$	
AX	$+ 141.550081348$	BY	$- 197.989491887$	$CX^2 = - 212.201598681$
DXY	$+ 195.003149599$	EY^2	$+ 186.514828911$	$\delta_f = -(f/4)(TX - 3Y) = - 0.00299224747$
$T + \delta_f$	$+ 1.004459909$	$S_1 = a \sin d (T + \delta_f)$	$599.995.255$	m
$\delta_{f2} = + (f^2/128)(AX + BY + CX^2 + DXY + EY^2)$	$+ 8.33923 \times 10^{-6}$			
$T + \delta_f + \delta_{f2}$	$+ 1.004468248$	$S_2 = a \sin d (T + \delta_f + \delta_{f2})$	$600,000.236$	m
$\sin(a_2 + a_1) = (K \sin \Delta\lambda)/L$	$- .08224926$	$a_2 + a_1$	$355^{\circ} 16' 56.099''$	
$\sin(a_2 - a_1) = (k \sin \Delta\lambda)/(1-L)$	$+ 25399325$	$a_2 - a_1$	$16.5^{\circ} 17' 09.821''$	
$\frac{1}{2}(\delta a_1 + \delta a_2) = -(f/2)H(T+1) \sin(a_1 + a_2)$	$+ 3.298925 \times 10^{-4}$	δa_1	$+ 330.6396 \times 10^{-4}$	
$\frac{1}{2}(\delta a_2 - \delta a_1) = -(f/2)H(T-1) \sin(a_2 - a_1)$	$- .0007471 \times 10^{-4}$	δa_2	$+ 329.1454 \times 10^{-4}$	
a_1	$260^{\circ} 17' 02.960''$	a_2	$94^{\circ} 59' 53.139''$	
δa_1	$+ 00^{\circ} 06.820''$	δa_2	$+ 00^{\circ} 06.789''$	
a_{1-2}	$+ 260^{\circ} 17' 09.780''$	a_{2-1}	$- 94^{\circ} 59' 59.918''$	
$a_{1-2} = + a_1 + \delta a_1$		$a_{2-1} = + a_2 + \delta a_2$		
$d = 5^{\circ} 22' 25.444''$		True distance	$600,000.00$	meters
True Azimuths	$260^{\circ} 17' 09.79$		$95^{\circ} 00' 00.000$	

Line No. 12

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT TYPE APPROXIMATION
WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

1 radian = 206,264.8062 seconds

ϕ_1	<u>60 00 00.000</u>	<u>1.</u>	<u>Origin</u>	<u>λ_1</u>		
ϕ_2	<u>54 18 59.319</u>	<u>2.</u>	<u>TERMINUS</u>	<u>λ_2</u>		
$\phi_m = \frac{1}{2}(\phi_1 + \phi_2)$	<u>57°09'19.659</u>	<u>2.</u>	Always west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1 + 10.37 10.172$		
$\Delta\phi_m = \frac{1}{2}(\phi_2 - \phi_1)$	<u>-2°50' 30.340</u>			$\Delta\lambda_m = \frac{1}{2}\Delta\lambda + 5 18 35.086$		
$\sin \phi_m$	<u>+.840 19154</u>		$\sin \Delta\phi_m$	<u>- .049 57776</u>	$\sin \Delta\lambda$	<u>+.184 28574</u>
$\cos \phi_m$	<u>+.542 32073</u>		$\cos \Delta\phi_m$	<u>+.998 99027</u>	$\sin \Delta\lambda_m$	<u>+.092 53996</u>
$k = \sin \phi_m \cos \Delta\phi_m$	<u>+.839 138356</u>				$K = \sin \Delta\phi_m \cos \phi_m$	<u>- .026887047</u>
$H = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m$	<u>+.29165383</u>				$1 - L$	<u>+.995 0444426</u>
$L = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m$	<u>+.004 95557392</u>				$\cos d = 1 - 2L$	<u>+.990 0888532</u>
$d + 140 9083457$			$\sin d + 140 44242$		$T = d/\sin d + 1.0053 16.844$	
$U = 2k^2/(1-L)$	<u>+1.41531 008</u>					
$V = 2K^2/L$						
$X = U + V$	<u>+1.707 077728</u>		$Y = U - V$	<u>+1.123 562432</u>	XY	<u>+1.918 008404</u>
X^2	<u>+2.914 114.369</u>		Y^2	<u>+1.262 392539</u>	$E = 60 \cos d$	<u>+59.405 33112</u>
$A = 4[16T + (E/15)T^2]$	<u>+80.158 96096</u>				$D = 8(6 + T^2)$	<u>+56.053157 512</u>
$B = -2D$	<u>-112.106 315024</u>				$C = 2T - \frac{1}{2}(A+E)$	<u>-67.775 512.35</u>
AX	<u>+136.837576954</u>		BY	<u>-125.958 443934</u>	CX^2	<u>-197.505594405</u>
DXY	<u>+107.510 427175</u>		EY^2	<u>+74.992 84683</u>	$\delta_f = -(f/4)(TX - 3Y)$	<u>+001405142</u>
$T + \delta_f$	<u>+1.004 921616</u>				$S_1 = a \sin d (T + \delta_f)$	<u>900,000.559</u>
$\delta_{f2} = + (f^2/128)(AX + BY + CX^2 + DXY + EY^2)$	<u>- .370205 X 10^-6</u>					
$T + \delta_f + \delta_{f2}$	<u>+1.004 921616</u>				$S_2 = a \sin d (T + \delta_f + \delta_{f2})$	<u>900,000.328</u>
$\sin(a_2 + a_1) = (K \sin \Delta\lambda)/L$	<u>- .99986388</u>		$a_2 + a_1$	<u>270 56 43.429</u>		
$\sin(a_2 - a_1) = (k \sin \Delta\lambda)/(1-L)$	<u>+1.5541139</u>		$a_2 - a_1$	<u>171 03 33.636</u>		
$\frac{1}{2}(\delta a_1 + \delta a_2) = -(f/2)H(T+1) \sin(a_1 + a_2)$	<u>+9.902 33366 X 10^-4</u>		δa_1	<u>+9.90488199 X 10^-4</u>		
$\frac{1}{2}(\delta a_2 - \delta a_1) = -(f/2)H(T-1) \sin(a_2 - a_1)$	<u>-0.00254833 X 10^-4</u>		δa_2	<u>+9.899 78533 X 10^-4</u>		
a_1	<u>49 56 34.896</u>		a_2	<u>231 00 08.532</u>		
δa_1	<u>+ 03 24.303</u>		δa_2	<u>+ 03 24.198</u>		
a_{1-2}	<u>49 59 59.199</u>		a_{2-1}	<u>231 03 32.730</u>		
$a_{1-2} = + a_1 + \delta a_1$			$a_{2-1} = + a_2 + \delta a_2$			
$d =$	<u>8.14 54.412</u>		True distance	<u>900,000.00</u>	meters	
True Azimuths	<u>50° 00' 00.000</u>			<u>121° 03' 33.54</u>		

Line No. 13

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT TYPE APPROXIMATION
WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

1 radian = 206,264.8062 seconds

ϕ_1	<u>19 51 31.432</u>	<u>1.</u>	<u>ORIGIN</u>	<u>λ_1</u>		
ϕ_2	<u>25 12 03.231</u>	<u>2.</u>	<u>TERMINUS</u>	<u>λ_2</u>		
$\phi_m = \frac{1}{2}(\phi_1 + \phi_2)$	<u>22 31 49.332</u>		2. Always west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	<u>7 35 26.397</u>	
$\Delta\phi_m = \frac{1}{2}(\phi_2 - \phi_1)$	<u>2 40 15.899</u>			$\Delta\lambda_m = \frac{1}{2}\Delta\lambda$	<u>3 47 43.188</u>	
$\sin \phi_m$	<u>+.78316413</u>		$\sin \Delta\phi_m$	<u>+.04660231</u>	$\sin \Delta\lambda$	<u>+.13209481</u>
$\cos \phi_m$	<u>.92368037</u>		$\cos \Delta\phi_m$	<u>+.99891352</u>	$\sin \Delta\lambda_m$	<u>+.06619257</u>
$k = \sin \phi_m \cos \Delta\phi_m$	<u>+.382747830</u>		K = $\sin \Delta\phi_m \cos \phi_m$	<u>+.043045634</u>		
$H = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m$	<u>+.85101347</u>		1-L	<u>+.994099547</u>		
$L = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m$	<u>+.005900453</u>		cos d = 1-2L	<u>+.98819909</u>		
$d = -1537803447$			$d = \sin d +$	<u>-15317496</u>	$T = d/\sin d +$	<u>1.003952243</u>
$U = 2k^2/(1-L)$	<u>+.294930848</u>		V = $2K^2/L$	<u>+.628062491</u>		
X = U + V	<u>+.922793339</u>	Y = U - V	<u>-.333331643</u>	XY	<u>-.307596220</u>	
X^2	<u>+.851547547</u>	Y^2	<u>+.111109984</u>	E = 60 cos d	<u>+59.291945400</u>	
A = $4[16T + (E/15)T^2]$	<u>+80.189355264</u>	D = $8(6+T^2)$	<u>+56.063360848</u>			
B = -2D	<u>-112.12672170</u>	C = $2T - \frac{1}{2}(A+E)$	<u>-67.732745846</u>			
AX	<u>+73.998202893</u>	BY	<u>+37.375384256</u>	CX ²	<u>-57.677653580</u>	
DXY	<u>-17.244877878</u>	EY ²	<u>+6.587927105</u>	$\delta_f = -(f/4)(TX - 3Y) = -.0016326902$		
$T + \delta_f$	<u>+1.002319553</u>		S ₁ = a sin d (T + δ_f)	<u>979.247.671</u>	m	
$\delta_f^2 = +(f^2/128)(AX + BY + CX^2 + DXY + EY^2)$	<u>+3.8643 \times 10^{-6}</u>					
$T + \delta_f + \delta_f^2$	<u>1.002323417</u>	S ₂ = a sin d (T + $\delta_f + \delta_f^2$)	<u>979.251.446</u>	m		
$\sin(a_2 + a_1) = (K \sin \Delta\lambda)/L$	<u>+.96367259</u>	$a_2 + a_1$	<u>434 30 32.531</u>			
$\sin(a_2 - a_1) = (k \sin \Delta\lambda)/(1-L)$	<u>+.05085909</u>	$a_2 - a_1$	<u>177 05 05.131</u>			
$\frac{1}{2}(\delta a_1 + \delta a_2) = -(f/2)H(T+1) \sin(a_1 + a_2)$	<u>-2.78568918 \times 10^{-3}</u>	δa_1	<u>-2.78539923 \times 10^{-3}</u>			
$\frac{1}{2}(\delta a_2 - \delta a_1) = -(f/2)H(T-1) \sin(a_2 - a_1)$	<u>-.00028995 \times 10^{-3}</u>	δa_2	<u>-2.78597913 \times 10^{-3}</u>			
a_1	<u>128 42 43.700</u>	a_2	<u>305 47 48.831</u>			
δa_1	<u>0 9 34.530</u>	δa_2	<u>9 34.649</u>			
a_{1-2}	<u>128 33 09.170</u>	a_{2-1}	<u>305 38 14.182</u>			
$a_{1-2} = +a_1 + \delta a_1$		$a_{2-1} = +a_2 + \delta a_2$				
$d =$	<u>8 48 39.473</u>	True distance	<u>979.251.25</u>	meters		

True Azimuths 128 33 08.34

305 38 13.25

Line No. 14

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT TYPE APPROXIMATION
WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$f/2 = 0.00169503765$, $f/4 = 0.000847518825$, $f^2/128 = 0.0897860195 \times 10^{-6}$

1 radian = 206,264.8062 seconds

ϕ_1	$59^{\circ} 30' 12.0''$	<u>1. Origin</u>	λ_1		
ϕ_2	$50^{\circ} 00' 03.8''$	<u>2. TERMINUS</u>	λ_2		
$\phi_m = \frac{1}{2}(\phi_1 + \phi_2)$	$+ 54^{\circ} 45' 07.9''$	2. Always west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	$9^{\circ} 55' 01.000''$	
$\Delta\phi_m = \frac{1}{2}(\phi_2 - \phi_1)$	$- 4^{\circ} 45' 04.1''$		$\Delta\lambda_m = \frac{1}{2}\Delta\lambda$	$4^{\circ} 57' 30.500''$	
$\sin \phi_m$	$+ 0.816 66 366$	$\sin \Delta\phi_m$	$- 0.828 2801$	$\sin \Delta\lambda$	$+ 1.192 220 43$
$\cos \phi_m$	$+ 0.577 113 92$	$\cos \Delta\phi_m$	$+ .996 56 386$	$\sin \Delta\lambda_m$	$+ 1.086 43 369$
$k = \sin \phi_m \cos \Delta\phi_m$	$+ .813 857 489$	$K = \sin \Delta\phi_m \cos \phi_m$	$- .047 80 1198$		
$H = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m$	$+ 1.326 199 9955$	$1 - L$	$+ 1.990 702 55715$		
$L = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m$	$+ 1.009 297 4485$	$\cos d = 1 - 2L$	$+ .981 405 103$		
$d + .193 146 6435$	$\sin d + .191 947 97$	$T = d / \sin d + 1.006 244 783$			
$U = 2k^2 / (1 - L)$	$+ 1.337 160 2024$	$V = 2K^2 / L$	$+ .491 522 922 65$		
$X = U + V$	$+ 1.828 683 125$	$Y = U - V$	$+ 1.845 637 279 88$	$+ 1.546 402 623$	
X^2	$+ 3.344 081 972$	Y^2	$+ 7.115 102 4090$	$E = 60 \cos d + 158.884 306 18$	
$A = 4[16T + (E/15)T^2]$	$+ 80.298 877 292$	$D = 8(6 + T^2)$	$+ 56.100 238 504$		
$B = -2D$	$- 112.200 457 008$	$C = 2T - \frac{1}{2}(A + E)$	$- 67.579 102 190$		
AX	$+ 146.841 201 857$	BY	$- 94.880 889 334$	CX^2	$- 225.990 057 251$
DXY	$+ 86.753 540 503$	EY^2	$+ 42.108 309 208$	$\delta_f = -(f/4)(TX - 3Y)$	$+ 1.000 590 559$
$T + \delta_f$	$+ 1.006 835 342$	$S_1 = a \sin d (T + \delta_f)$	$+ 1.232, 652, 169$	m	
$\delta_{f^2} = + (f^2/128)(AX + BY + CX^2 + DXY + EY^2)$	$- 4.053 4455 \times 10^{-6}$				
$T + \delta_f + \delta_{f^2}$	$1.006 831 287$	$S_2 = a \sin d (T + \delta_f + \delta_{f^2})$	$+ 1.232, 647, 205$	m	
$\sin(a_2 + a_1) = (K \sin \Delta\lambda) / L$	$- .885 44 108$	$a_2 + a_1$	$+ 242 18 31.056$		
$\sin(a_2 - a_1) = (k \sin \Delta\lambda) / (1 - L)$	$+ 141 478 28$	$a_2 - a_1$	$+ 171 51 59.771$		
$\frac{1}{2}(\delta a_1 + \delta a_2) = -(f/2)H(T+1) \sin(a_1 + a_2)$	$+ 9.822 157 \times 10^{-4}$	δa_1	$+ 9.827 042 \times 10^{-4}$		
$\frac{1}{2}(\delta a_2 - \delta a_1) = -(f/2)H(T-1) \sin(a_2 - a_1)$	$- .004 885 \times 10^{-4}$	δa_2	$+ 9.819 272 \times 10^{-4}$		
a_1	$35^{\circ} 13' 10.643''$	a_2	$207^{\circ} 05' 10.414''$		
δa_1	$+ 3 22.697$	δa_2	$+ 3 22.496$		
a_{1-2}	$35^{\circ} 16' 33.340''$	a_{2-1}	$207^{\circ} 08' 32.910''$		
$a_{1-2} = + a_1 + \delta a_1$		$a_{2-1} = + a_2 + \delta a_2$			
$d = 11^{\circ} 59.355''$		True distance	$1,232,647.21$	meters	
True Azimuths	$35^{\circ} 16' 34.25''$		$207^{\circ} 08' 33.82''$		

Line No. 15

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT TYPE APPROXIMATION
WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

1 radian = 206,264.8062 seconds

ϕ_1	8 58 25.0	1. PANAMA	λ_1	79 34 04.0
ϕ_2	21 26 06.0	2. HAWAII	λ_2	158 01 33.0
$\phi_m = \frac{1}{2}(\phi_1 + \phi_2)$	15 12 15.5	2. Always west of 1.	$\Delta\lambda = \lambda_2 - \lambda_1$	78 27 09.0
$\Delta\phi_m = \frac{1}{2}(\phi_2 - \phi_1)$	6 13 50.5		$\Delta\lambda_m = \frac{1}{2}\Delta\lambda$	39 13 34.5
$\sin \phi_m$	t. 26226190	$\sin \Delta\phi_m$	$\sin \Delta\lambda$	t. 10853193
$\cos \phi_m$	t. 964 99679	$\cos \Delta\phi_m$	$\sin \Delta\lambda_m$	t. 994 09297
$k = \sin \phi_m \cos \Delta\phi_m$	t. 260712512	$K = \sin \Delta\phi_m \cos \phi_m$	$\sin \Delta\lambda$	t. 104732 96.3
$H = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m$	t. 919 439 630	$1 - L$	$t. 620527830$	
$L = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m$	t. 379 472 170		$\cos d = 1 - 2L$	t. 241055 660
$d + 1.327342885$	$\sin d + t. 970 51129$		$T = d/\sin d + 1.367 673 822$	
$U = 2k^2/(1-L)$	t. 219 074 8283	$V = 2K^2/L$	t. 057 818 469	
$X = U + V$	t. 276 886 6752	$Y = U - V$	t. 161262 9814	XY t. 044651 571
X^2	t. 076666 2309	Y^2	t. 026005 7492	$E = 60 \cos d$ t. 114.46333 96
$A = 4[16T + (E/15)T^2]$	t. 94. 745 56060	$D = 8(6 + T^2)$	t. 62. 964 253 464	
$B = -2D$	-125. 928506 928	$C = 2T - \frac{1}{2}(A+E)$	-51. 869 102 456	
AX	t. 26. 233783264	BY	-20. 307606 466	CX^2 t. 3. 976 608 586
DXY	t. 2. 811452 821	EY^2	t. 0. 376129982	$\delta_f = -(f/4)(TX - 3Y)$ t. 8. 90728 $\times 10^{-5}$
$T + \delta_f$	t. 367762 895		$S_1 = a \sin d (T + \delta_f)$	t. 8. 466, 621. 112 m
$\delta_f^2 = + (f^2/128)(AX + BY + CX^2 + DXY + EY^2)$	+ 4. 6124 $\times 10^{-7}$			
$T + \delta_f + \delta_f^2$	t. 367763356	$S_2 = a \sin d (T + \delta_f + \delta_f^2)$	t. 8. 466, 621. 112	m
$\sin(a_2 + a_1) = (K \sin \Delta\lambda)/L$	t. 270 41001	$a_2 + a_1$	375 41 19. 197	
$\sin(a_2 - a_1) = (k \sin \Delta\lambda)/(1-L)$	t. 411 64222	$a_2 - a_1$	155 41 31. 161	
$\frac{1}{2}(\delta a_1 + \delta a_2) = -(f/2)H(T+1) \sin(a_1 + a_2)$	- . 000 99 7808513	δa_1	- . 761 931 734 $\times 10^{-3}$	
$\frac{1}{2}(\delta a_2 - \delta a_1) = -(f/2)H(T-1) \sin(a_2 - a_1)$	- . 000 235876 779	δa_2	- 1. 2336 852 92 $\times 10^{-3}$	
a_1	109 59 54. 018	a_2	265 41 25. 179	
δa_1	2 37. 160	δa_2	4 14. 466	
a_{1-2}	109 57 16. 858	a_{2-1}	265 37 10. 713	
$a_{1-2} = + a_1 + \delta a_1$		$a_{2-1} = + a_2 + \delta a_2$		
$d =$.	True distance	8, 466, 621. 01	meters
True Azimuths	109 57 17. 41		265 37 10. 59	

Line No. 16

DISTANCE COMPUTING FORM, ANDOYER-LAMBERT TYPE APPROXIMATION
WITH SECOND ORDER TERMS

(No conversion to parametric latitudes)

Clarke Spheroid 1866, $a = 6,378,206.4$ meters

$$f/2 = 0.00169503765, f/4 = 0.000847518825, f^2/128 = 0.0897860195 \times 10^{-6}$$

1 radian = 206,264.8062 seconds

$$\begin{aligned}
 \phi_1 & 55^\circ 45' 19.5'' (N) & 1. MOSCOW & \lambda_1 & -37^\circ 34' 15.450'' (E) \\
 \phi_2 & -33^\circ 56' 03.5'' (S) & 2. CAPE OF GOOD HOPE & \lambda_2 & -18^\circ 28' 41.400'' (E) \\
 \phi_m & = \frac{1}{2}(\phi_1 + \phi_2) & +10^\circ 54' 38.0'' & 2. Always west of 1. & \Delta\lambda = \lambda_2 - \lambda_1 & +19^\circ 05' 34.050'' \\
 \Delta\phi_m & = \frac{1}{2}(\phi_2 - \phi_1) & -44^\circ 50' 41.5'' & & \Delta\lambda_m & = \frac{1}{2}\Delta\lambda & +9^\circ 32' 47.025'' \\
 \sin \phi_m & T.189-276.35 & \sin \Delta\phi_m & -705-189.57 & \sin \Delta\lambda & T.327 099.01 \\
 \cos \phi_m & T.98192386 & \cos \Delta\phi_m & T.709 018.81 & \sin \Delta\lambda_m & T.165 846.31 \\
 k & = \sin \phi_m \cos \Delta\phi_m & +1.134 200.49 & K = \sin \Delta\phi_m \cos \phi_m & -6.92 445.46 \\
 H & = \cos^2 \Delta\phi_m - \sin^2 \phi_m = \cos^2 \phi_m - \sin^2 \Delta\phi_m & +1.466 882.14 & 1-L & +1.489 866.09 \\
 L & = \sin^2 \Delta\phi_m + H \sin^2 \Delta\lambda_m & +1.510 133.91 & \cos d & = 1-2L & -0.2026782 \\
 d & + 1.591065338 & \sin d & + 0.99979459 & T = d/\sin d & +1.59139242 \\
 U = 2k^2/(1-L) & +1.073529368 & V = 2K^2/L & +1.879806657 \\
 X = U + V & +1.953836025 & Y = U - V & -1.806277289 & XY & -3.528266500 \\
 X^2 & +3.8155216.27 & Y^2 & +3.2626376.45 & E = 60 \cos d & -1.216069200 \\
 A = 4[16T + (E/15)T^2] & +101.027853152 & D = 8(6+T^2) & +68.260238672 \\
 B = -2D & -136.52047734 & C = 2T - \frac{1}{2}(A+E) & -46.72310712 \\
 AX & +197.341345184 & BY & +246.59383763 & CX^2 & -178.273025697 \\
 DXY & -240.840313381 & EY^2 & -3.967593151 & \delta_f = -(f/4)(TX - 3Y) & -0.007237095 \\
 T + \delta_f & +1.584165325 & S_1 = a \sin d (T + \delta_f) & 10,102,057.925 & m \\
 \delta_{f2} & = +(f^2/128)(AX + BY + CX^2 + DXY + EY^2) & +1.89242 \times 10^{-6} \\
 T + \delta_f + \delta_{f2} & +1.584167197 & S_2 = a \sin d (T + \delta_f + \delta_{f2}) & 10,102,069.863 & m \\
 \sin(a_2 + a_1) & = (K \sin \Delta\lambda)/L & -443.99566 & a_2 + a_1 & 206^\circ 21' 32.759'' \\
 \sin(a_2 - a_1) & = (k \sin \Delta\lambda)/(1-L) & +089.60989 & a_2 - a_1 & 174^\circ 51' 31.807'' \\
 \frac{1}{2}(\delta a_1 + \delta a_2) & = -(f/2)H(T+1) \sin(a_1 + a_2) & +9.105389.3 \times 10^{-4} & \delta a_1 & +9.524779 \times 10^{-4} \\
 \frac{1}{2}(\delta a_2 - \delta a_1) & = -(f/2)H(T-1) \sin(a_2 - a_1) & -419.3902 \times 10^{-4} & \delta a_2 & +8.685999 \times 10^{-4} \\
 a_1 & 15^\circ 45' 00.476'' & & a_2 & 190^\circ 36' 32.283'' \\
 \delta a_1 & + 3^\circ 16.46.3 & & \delta a_2 & + 3^\circ 59.16.3 \\
 a_{1-2} & 15^\circ 48' 16.939'' & & a_{2-1} & 190^\circ 39' 31.445 \\
 a_{1-2} & = + a_1 + \delta a_1 & & a_{2-1} & = + a_2 + \delta a_2 \\
 d & = & & & \\
 \text{True Azimuths} & 15^\circ 48' 17.674 & & \text{True distance} & 10,102,069.06 \text{ meters}
 \end{aligned}$$

Line No. 17

1 ORIGINATING ACTIVITY (Corporate author) U. S. Naval Oceanographic Office Washington, D. C. 20390	2a. REPORT SECURITY CLASSIFICATION Unclassified
	2b. GROUP

3. REPORT TITLE

MATHEMATICAL MODELS FOR NAVIGATION SYSTEMS (U)

4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Technical Report

5. AUTHOR(S) (Last name, first name, initial) THOMAS, Paul D.

6. REPORT DATE October 1965	7a. TOTAL NO. OF PAGES 142	7b. NO. OF REFS 25
8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S) Technical Report (TR)-182	
b. PROJECT NO. HF-103-04-02		
c. F31-36-ANB	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		
10. AVAILABILITY/LIMITATION NOTICES All distribution of this publication is controlled. Qualified DDC users shall submit requests for copies to the: Commander, U. S. Naval Oceanographic Office, Washington, D. C. 20390, ATTN: Code 4000		
11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY U. S. Naval Oceanographic Office Washington, D. C. 20390	

13. ABSTRACT

The principal objective of this study was an evaluation of the formulas basic to the geodetic inverse solution for distance computations used by the U. S. Naval Oceanographic Office in loran-type charting. The adequacy of the formulas for past requirements was verified but, in anticipation of future requirements, they were modified to give geodesic distances and azimuths between any two points on the reference ellipsoid to uncertainties of less than a meter and a second respectively.

During the study, associated geometrical configurations were developed or studied: latitudes associated with the auxiliary sphere-spheroid configuration; a spherical rectangular coordinate system on the auxiliary sphere with hyperbolic loci referenced to it; and geometrical quantities associated with arc distance, such as chord length, dip of the chord, maximum separation of chord and arc, and the geographical position of the point of maximum separation. The formulas with their derivations are presented. (U)

Unclassified
Security Classification

14.	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
	Geodetic distance inverse solution Andoyer-Lambert formulae generalization Forsyth method for geodesics(Corrected) Geodetic formulae(latitude, distance, azimuths) Geodesic approximations(spheroid)						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantees, Department of Defense activity or other organization (corporate author) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.

U. S. Naval Oceanographic Office
MATHEMATICAL MODELS FOR NAVIGATION
SYSTEMS, by P. D. Thomas, October 1965, 142 p.
Including figures and tables. (TR-182)

An evaluation is given of the inverse distance
solution as used in loran-type charting with exten-
sions of formulae to give distance and azimuths on
the reference ellipsoid within a meter and a second
respectively. Also developed or studied were
latitudes and geometric quantities referenced to the
auxiliary sphere-spheroid configuration.

1. Geodesy
 2. Loran
 3. Distance Computation
 4. Sphere-Spheroidal Geometry
- i. title: Mathematical models for navigation
 - ii. author: P. D. Thomas
 - iii. TR-182

U. S. Naval Oceanographic Office
MATHEMATICAL MODELS FOR NAVIGATION
SYSTEMS, by P. D. Thomas, October 1965, 142 p.
Including figures and tables. (TR-182)

An evaluation is given of the inverse distance
solution as used in loran-type charting with exten-
sions of formulae to give distance and azimuths on
the reference ellipsoid within a meter and a second
respectively. Also developed or studied were
latitudes and geometric quantities referenced to the
auxiliary sphere-spheroid configuration.

1. Geodesy
 2. Loran
 3. Distance Computation
 4. Sphere-Spheroidal Geometry
- i. title: Mathematical models for navigation
 - ii. author: P. D. Thomas
 - iii. TR-182

U. S. Naval Oceanographic Office
MATHEMATICAL MODELS FOR NAVIGATION
SYSTEMS, by P. D. Thomas, October 1965, 142 p.
Including figures and tables. (TR-182)

An evaluation is given of the inverse distance
solution as used in loran-type charting with exten-
sions of formulae to give distance and azimuths on
the reference ellipsoid within a meter and a second
respectively. Also developed or studied were
latitudes and geometric quantities referenced to the
auxiliary sphere-spheroid configuration.

1. Geodesy
 2. Loran
 3. Distance Computation
 4. Sphere-Spheroidal Geometry
- i. title: Mathematical models for navigation
 - ii. author: P. D. Thomas
 - iii. TR-182

U. S. Naval Oceanographic Office
MATHEMATICAL MODELS FOR NAVIGATION
SYSTEMS, by P. D. Thomas, October 1965, 142 p.
Including figures and tables. (TR-182)

An evaluation is given of the inverse distance
solution as used in loran-type charting with exten-
sions of formulae to give distance and azimuths on
the reference ellipsoid within a meter and a second
respectively. Also developed or studied were
latitudes and geometric quantities referenced to the
auxiliary sphere-spheroid configuration.

1. Geodesy
 2. Loran
 3. Distance Computation
 4. Sphere-Spheroidal Geometry
- i. title: Mathematical models for navigation
 - ii. author: P. D. Thomas
 - iii. TR-182