

ESD-TR-66-87

MTR-67

ESD RECORD COPY

RETURN TO
SCIENTIFIC & TECHNICAL INFORMATION DIVISION
(ESTI), BUILDING 1211

ESD ACCESSION LIST
ESTI Call No. **AL 50772**
Copy No. _____ of _____ cys.

THE RELATIVE MOTION BETWEEN A RADAR AND A SATELLITE OBJECT

MAY 1966

S. H. Bickel

Prepared for

SPACE DEFENSE SYSTEM PROGRAM OFFICE (496L/474L)

ELECTRONIC SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
L. G. Hanscom Field, Bedford, Massachusetts



Distribution of this document is unlimited.

Project 4966

Prepared by

THE MITRE CORPORATION
Bedford, Massachusetts
Contract AF19(628)-5165

AD0633054

ESSX

This document may be reproduced to satisfy official needs of U.S. Government agencies. No other reproduction authorized except with permission of Hq. Electronic Systems Division, ATTN: ESTI.

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Do not return this copy. Retain or destroy.

THE RELATIVE MOTION BETWEEN A RADAR
AND A SATELLITE OBJECT

MAY 1966

S. H. Bickel

Prepared for

SPACE DEFENSE SYSTEM PROGRAM OFFICE (496L/474L)

ELECTRONIC SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
L. G. Hanscom Field, Bedford, Massachusetts



Distribution of this document is unlimited.

Project 4966

Prepared by

THE MITRE CORPORATION

Bedford, Massachusetts

Contract AF19(628)-5165

ABSTRACT

The relative motion between an earth-based radar and a satellite object is of interest for radar-tracking studies, signature simulation studies, and for developing inverse scattering techniques. Here, the motion analysis is accomplished with elementary vector algebra. This approach results in considerable simplification of the final equations and relationships.

REVIEW AND APPROVAL

This technical report has been reviewed and is approved.

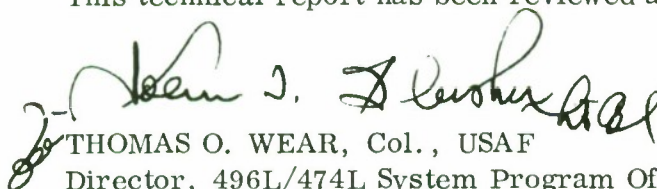

THOMAS O. WEAR, Col., USAF
Director, 496L/474L System Program Office
Deputy for Surveillance and Control Systems

TABLE OF CONTENTS

	<u>Page</u>
SECTION I INTRODUCTION	1
SECTION II ORBITAL MOTION	3
SECTION III SITE ORIENTATION AND RADAR-TRACKING MOTION	8
SECTION IV TARGET MOTION	13
BIBLIOGRAPHY	17

LIST OF ILLUSTRATIONS

<u>Figure Number</u>		<u>Page</u>
1	Orbital Element Geometry	4
2	Basic Ellipse Orbit	6
3	Earth-Orbital Orientation	7
4	Site-Earth Geometry	8
5	Region of Satellite Visibility	11
6	Euler Angle Geometry	13

SECTION I

INTRODUCTION

The relative motion between an earth-based radar and a satellite object is of interest for radar-tracking studies, signature simulation studies, and for developing inverse scattering techniques. This relative motion can be decomposed into two component motions: the radar-tracking motion; and the rotation of the satellite about its center of mass. The radar-tracking motion is, in turn, caused by the relative motion between the satellite in its orbit and the radar site fixed on the surface of a rotating earth.

The equations and relations required in consideration of overall motion can be considered in terms of products of rotation matrices which transform from one coordinate system to another. *† The approach here is to examine each of the component motions separately and to form the final combination with elementary vector manipulations.

The purpose of this report is to study the gross effects of the relative motion on radar observations, and consequently only first-order orbit perturbations are considered. The advantages of considering higher order perturbations are not great enough to justify the complications which they introduce.

* J. F. A. Ormsby, Motion Simulation of Ground Observed Earth Satellites, The MITRE Corporation, W-7289, Bedford, Mass., 4 September 1964.

† J. F. A. Ormsby and S. H. Bickel, A Generalized Radar Output Simulation, The MITRE Corporation, W-7346, Bedford, Mass., 19 October 1964.

Both stabilized and torque-free motion of the satellite about its center of mass are considered. In all cases, expressions for the relative orientation angles between the body and an earth-based radar are developed.

SECTION II

ORBITAL MOTION

There are four different motions of a satellite in orbit:

- (1) the motion of the satellite which is restricted to move in an elliptical path due to the inverse square law for radial force;
- (2) the slipping motion of the perigee point within the plane of this ellipse;
- (3) the twisting motion of the plane regressing westward; and
- (4) the change in the size and shape of the ellipse due to atmospheric drag.

Effects (2) and (3) above are caused by the bulge of the earth at the equator. Five orbital elements (see Figure 1) are necessary to define these motions:

- (1) the perigee height h , which is the distance between the center of the earth and the closest point on the ellipse.
- (2) the inclination angle δ , which is the angle that the orbital plane makes with the equator;
- (3) the right ascension of the orbit, which takes the form

$$\alpha = \alpha_o + \omega_n t, \quad (1)$$

where α_o is the right ascension at time, $t = 0$, and ω_n is the rate of change in the westward direction of the right ascension due to the earth bulge;

- (4) the time of the ascending node, which takes the form

$$t = t_o + Tn + D_1 n^2 + D_2 n^3, \quad (2)$$

where n is the revolution number, T is the satellite period, and D_1 and D_2 are drag coefficients; and

(5) the argument of perigee, which takes the form

$$\varphi = \varphi_0 + k_2 \left(\frac{4}{5} - \sin^2 \delta \right) t, \quad (3)$$

where k_2 is a constant which specifies the rate of change in the argument of perigee due to the earth's bulge. At $\sin^2 \delta = 4/5$, or at an inclination of approximately 63.4 degrees, this rate of change is zero. At this inclination, a crossover exists where the rate of change shifts from positive to negative.

The inverse square law for the radial force field from the center of the earth results in an elliptical orbit for the satellite object with the earth's center at one focal point. Let $\hat{e}_1, \hat{e}_2, \hat{e}_3$ be an orthonormal set of vectors in

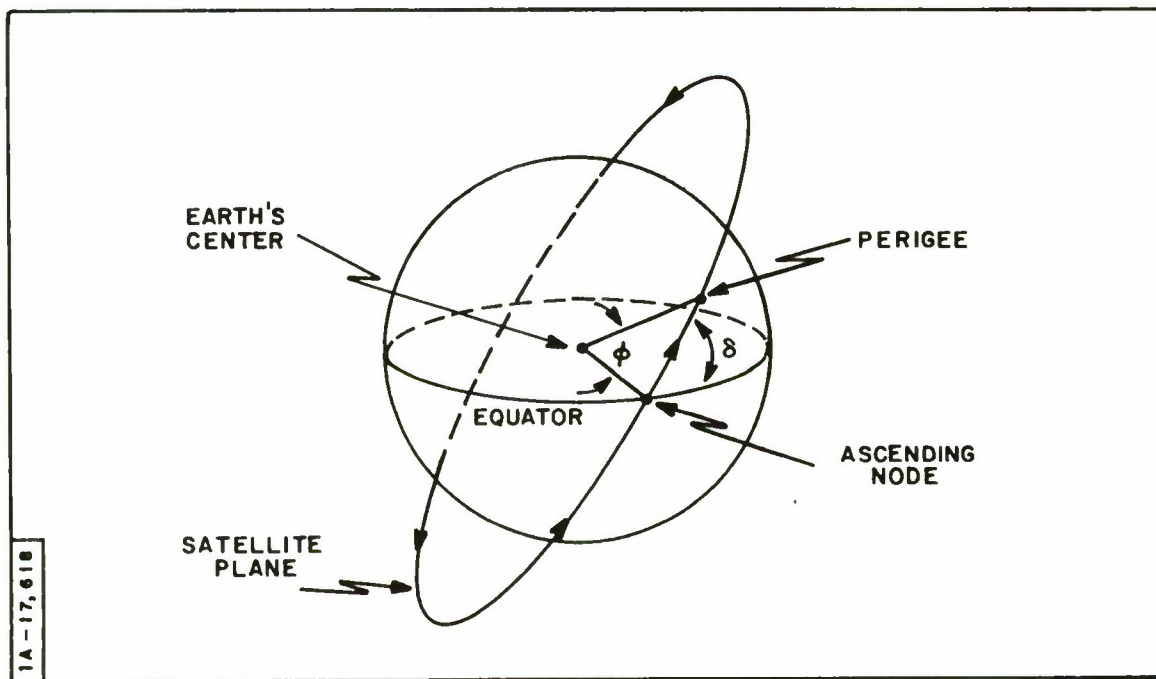


Figure 1. Orbital Element Geometry

an inertial coordinate system with the origin at the center of the earth. Let $\hat{e}_1$ point in the direction of vernal equinox, $\hat{e}_3$ in the direction of the north pole, and $\hat{e}_2$ in the direction of $\hat{e}_3 \times \hat{e}_1$. In this coordinate system, the vector equation for an ellipse becomes

$$0 = \sum_{i=1}^3 \hat{e}_i \left[(\bar{a} \cdot \hat{a}_i) (\cos E - e) + (\bar{b} \cdot \hat{e}_i) \sin E \right], \quad (4)$$

where e is the eccentricity of the orbit, and the vectors $\bar{a}$ and $\bar{b}$ have the length of point along the semi-major and semi-minor axes of the ellipse, respectively. (Note: $\bar{a}$ points in the direction of perigee.) The eccentric anomaly, * which is related to time in Kepler's equation, is E .

$$t - t_0 = \left(\frac{a^3}{d} \right)^{1/2} (E - e \sin E) = \frac{T}{2\pi} (E - e \sin E), \quad (5)$$

where t_0 is the time of perigee crossing, d is the gravitational constant, and a is the length of $\bar{a}$. Substituting for d in Equation (5), the major semi-axis of any satellite is given in terms of its period by

$$a = 205.82 T^{2/3}, \quad (6)$$

where T is the period in minutes. The ellipticity of the orbit is given in terms of the semi-major axis, and the perigee height by

$$e = 1 - h/a. \quad (7)$$

The semi-minor axis is given by

$$b = a \left(1 - e^2 \right)^{1/2}. \quad (8)$$

* See page 1, first reference.

From (4) it follows that the length of the vector $\vec{O}$ is given by

$$|\vec{O}| = a|1 - e \cos E|. \quad (9)$$

Figure 2 illustrates the geometrical relationships between these orbital elements.

In order to complete the description of the orbit, the vector dot products indicated by (4) must be represented in terms of the inclination angle and the argument of perigee. Let α be the angle between ascending node $\hat{A}$ and the unit vector $\hat{e}_1$ (see Figures 1 and 3).

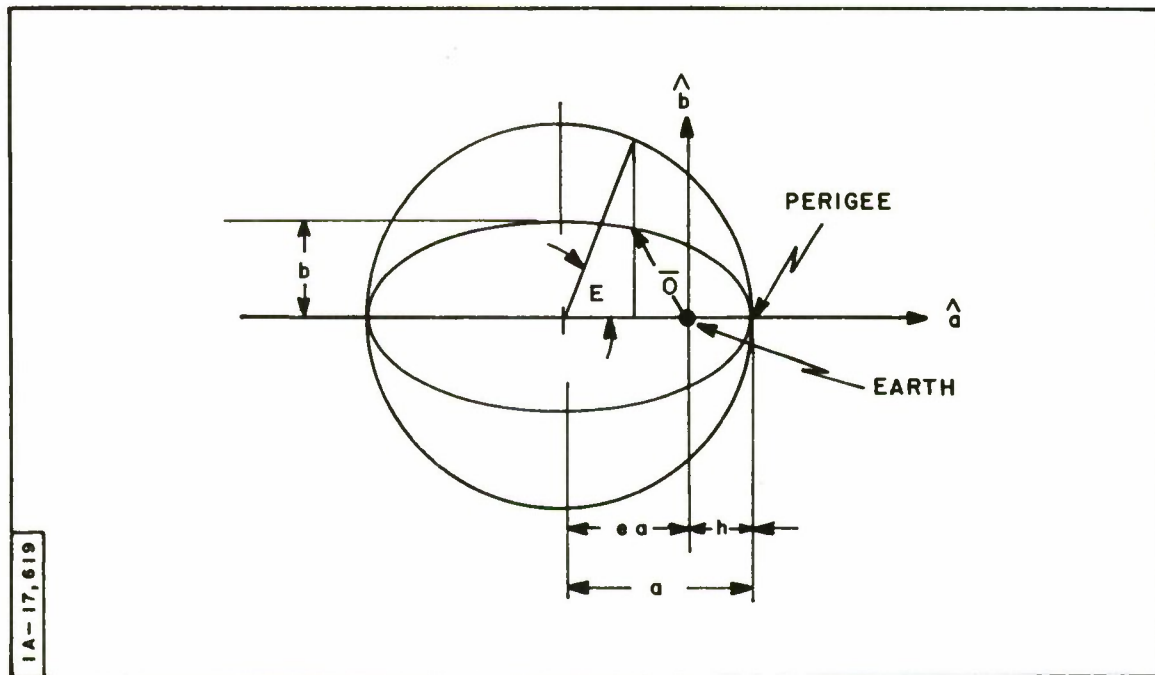


Figure 2. Basic Ellipse Orbit

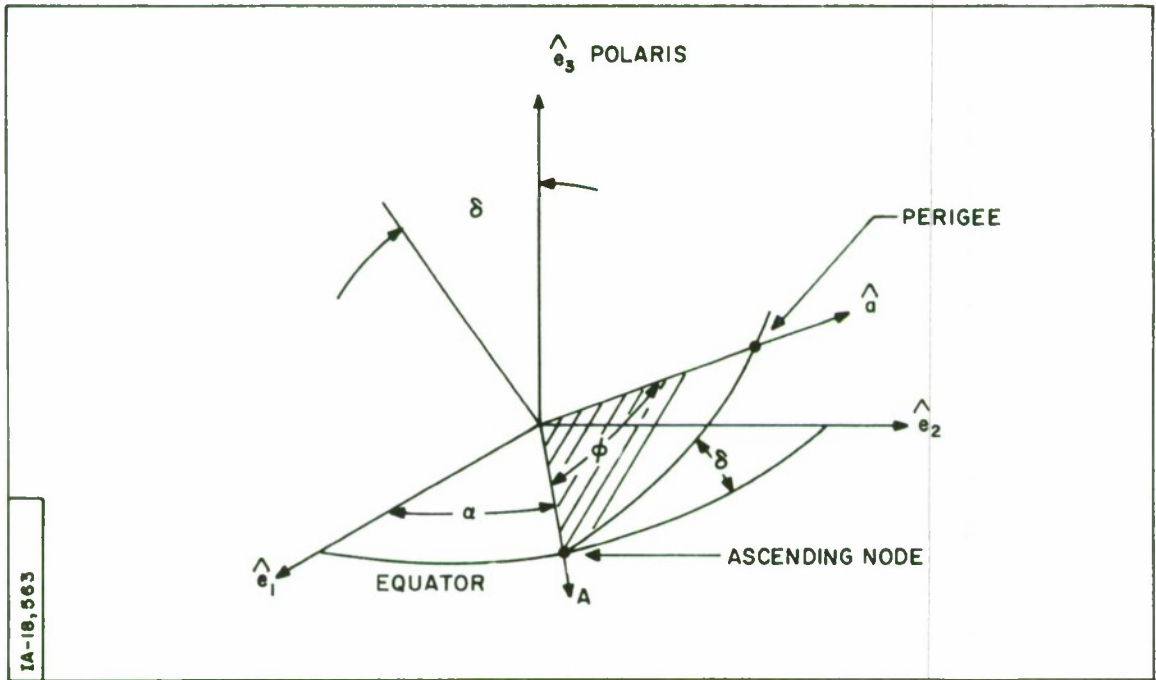


Figure 3. Earth-Orbital Orientation

From the geometry of Figure 3, it follows that:

$$(\hat{a} \cdot \hat{e}_1) = \cos \alpha \cos \varphi - \sin \varphi \sin \alpha \cos \delta; \quad (10)$$

$$(\hat{a} \cdot \hat{e}_2) = \sin \alpha \cos \varphi + \sin \varphi \cos \alpha \cos \delta; \quad (11)$$

$$(\hat{a} \cdot \hat{e}_3) = \sin \delta \sin \varphi. \quad (12)$$

Since $\hat{b}$ is perpendicular to $\hat{a}$, it is only necessary to replace φ by $\varphi + \pi/2$ in order to develop the corresponding equations for $\hat{b}$.

SECTION III

SITE ORIENTATION AND RADAR-TRACKING MOTION

Let λ_s be the latitude of the site and α_s the right ascension of the site (i. e., the angle between the site longitude and the vernal equinox. This angle is time varying due to the earth's rotation). The unit vectors in the direction of the zenith, east, and north as measured at the site are given by:

$$\hat{Z} = \cos \lambda_s (e_1 \cos \alpha_s + \hat{e}_2 \sin \alpha_s) + \sin \lambda_s \hat{e}_3; \quad (13)$$

$$\hat{E} = -\hat{e}_1 \sin \alpha_s + \hat{e}_2 \cos \alpha_s; \quad (14)$$

$$\hat{N} = -\sin \lambda_s (\hat{e}_1 \sin \alpha_s + \hat{e}_2 \sin \alpha_s) + \cos \lambda_s \hat{e}_3 \quad (15)$$

(see Figure 4 for a description of the geometry involved).

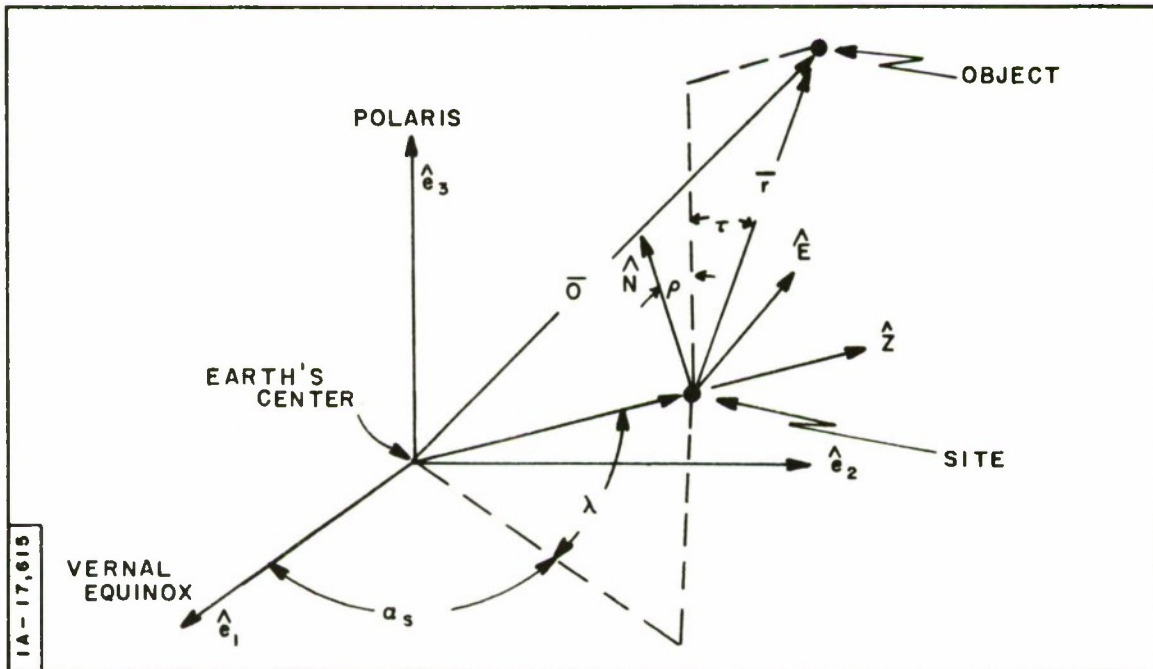


Figure 4. Site-Earth Geometry

The vector from the site to the object is given by

$$\bar{r} = \bar{0} - r_e \hat{Z}, \quad (16)$$

where r_e is the radius of the earth. From Equation (16), it follows that the distance or radar range from the site to the object is

$$r = \sqrt{|\bar{0}|^2 - 2r_e(\bar{0} \cdot \hat{Z}) + r_e^2}. \quad (17)$$

The elevation and azimuth angles of the radar (i. e., the angle which the target makes with the horizon measured at the site and the angle between due north and the target measured in a clockwise direction when looking down on the earth) are given by:

$$\tan \tau = \frac{(\bar{0} \cdot \hat{Z}) - r_e}{[|\bar{0}|^2 - (\bar{0} \cdot \hat{Z})^2]^{1/2}} - \frac{\pi}{2} \leq \tau \leq \frac{\pi}{2}; \quad (18)$$

$$\tan \rho = \frac{\bar{0} \cdot \hat{E}}{\bar{0} \cdot \hat{N}}, \quad 0 \leq \rho \leq 2\pi. \quad (19)$$

A simple and useful acquisition scheme would be to test for the zero elevation angle. Positive angles indicate that the satellite is above the horizon and visible, while the satellite is below the horizon for negative elevations. From Equation (4), $\bar{0} \cdot \hat{Z}$ can be written as

$$\bar{0} \cdot \hat{Z} = OZ \cos (E - EZ) - e(\bar{a} \cdot \hat{Z}), \quad (20)$$

where

$$OZ = \sqrt{(\bar{a} \cdot \hat{Z})^2 + (\bar{b} \cdot \hat{Z})^2}, \quad \tan EZ = \frac{\bar{b} \cdot \hat{Z}}{\bar{a} \cdot \hat{Z}}. \quad (21)$$

Thus, it follows from setting the numerator of (18) equal to zero that the horizon plane (i. e. , the plane tangent to the earth at the site) intersects the orbit when E is given by either

$$E_1 = EZ + EC \quad (22)$$

or by

$$E_2 = EZ + 2\pi - EC, \quad (23)$$

where

$$EC = \cos^{-1} \left(\frac{r_e + e(\bar{a} \cdot \hat{Z})}{OZ} \right). \quad (24)$$

The first solution, E_1 , indicates the last point where the satellite is visible before it sinks below the horizon, while E_2 indicates the first point where the satellite becomes visible above the horizon (see Figure 5).

The dot product between $\bar{0}$ and any general vector $\bar{V}$ is given by (20) and (21), where $\hat{Z}$ is now replaced by $\bar{V}$. Hence, in order to complete the description of range, elevation, and azimuth, it is necessary to find the vector dot products between the set $\hat{Z}$, $\hat{N}$, $\hat{E}$, and the orbit axes $\bar{a}$ and $\bar{b}$. After combining (10), (11), and (12) with (13), (14), and (15), the desired products for $\bar{a}$ become

$$\bar{a} \cdot \hat{Z} = C_1 \cos \lambda_s \cos \alpha + a \sin \lambda_s \sin \delta \sin \varphi, \quad (25)$$

$$\bar{a} \cdot \hat{E} = -C_1 \sin \alpha, \quad (26)$$

$$\bar{a} \cdot \hat{N} = -C_1 \sin \lambda_s \cos \alpha + \cos \lambda_s \sin \delta \sin \varphi, \quad (27)$$

where

$$\alpha = (\omega_e + \omega_n) t + \alpha_1 - \alpha_n - \tan^{-1} (\cos \delta \tan \varphi);$$

ω_e = angular velocity of the earth;

ω_n = rate of change of the right ascension of the ascending node due to earth's bulge;

α_1 = right ascension of the site at $t = 0$;

α_n = right ascension of the ascending node at $t = 0$;

δ = inclination of the orbital plane;

φ = argument of perigee;

λ_s = latitude of site; and

$$C_1 = a \sqrt{\cos^2 \varphi + \sin^2 \varphi \cos^2 \delta}.$$

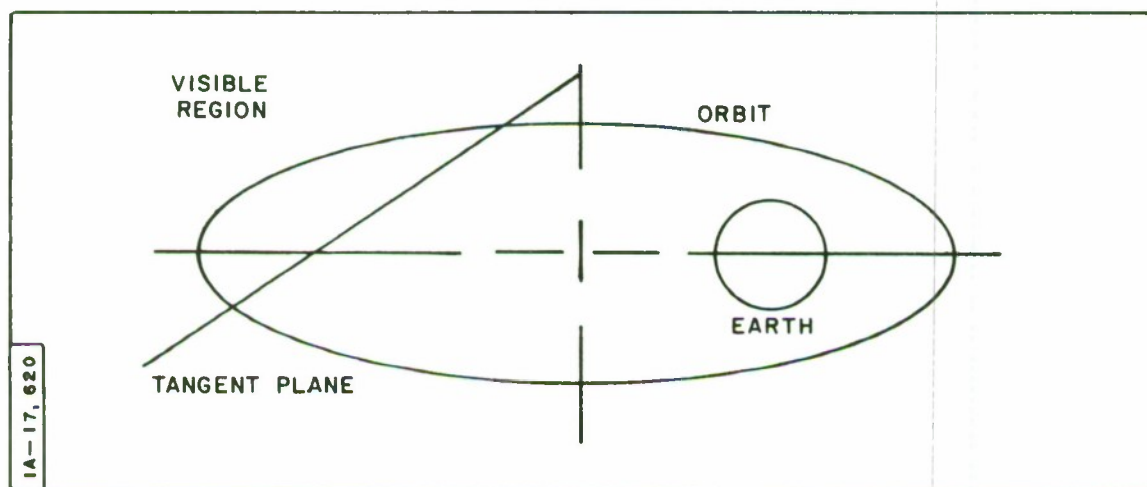


Figure 5. Region of Satellite Visibility

The corresponding equations for b can be developed by replacing φ by $\varphi + \pi/2$ in the above equations.

In order to relate the radar orientation to the target orientation, it is convenient to relate the radar to the $\hat{e}_1, \hat{e}_2, \hat{e}_3$ coordinate system or, more specifically, to specify the latitude and right ascension of unit vectors in the radar range direction $\hat{r}$, the radar horizontal $\hat{H}$, and the radar vertical $\hat{V}$. From inspection of Figure 4, the unit vector in the radar range direction is given by

$$\hat{r} = \sin \tau \hat{z} + \cos \tau (\cos \rho \hat{N} + \sin \rho \hat{E}). \quad (28)$$

From Equations (13), (14), and (15), it follows that the latitude of $\hat{r}$ is given by

$$\sin \lambda_r = \hat{r} \cdot \hat{e}_3 = \sin \tau \sin \lambda_s + \cos \tau \cos \lambda_s \cos \rho, \quad (29)$$

and the right ascension by

$$\tan \alpha_r = \frac{\sin \tau \sin \alpha_s \cos \lambda_s + \cos \tau (\sin \rho \cos \alpha_s - \sin \lambda_s \cos \rho \sin \alpha_s)}{\sin \tau \cos \alpha_s \cos \lambda_s - \cos \tau (\sin \rho \sin \alpha_s + \sin \lambda_s \cos \rho \cos \alpha_s)}. \quad (30)$$

The latitude and right ascension of the radar vertical vector can be found by replacing τ by $\tau + \pi/2$ in (29) and (30), while the horizontal vector is defined by letting $\tau = 0$ and $\rho = \rho + \pi/2$. In this case, the vectors $\hat{r}$, $\hat{V}$, and $\hat{H}$ form a right-handed system.

SECTION IV

TARGET MOTION

In general, three Eulerian angles are necessary to specify the orientation of an earth-based radar with respect to the satellite. They are:

- (1) aspect angle, the angle between an axis fixed in the satellite (satellite axis) and the radar line-of-sight;
- (2) polarization angle, the angle which the projection of the satellite axis on the plane normal to the radar line-of-sight makes with the radar horizontal polarization axis; and
- (3) roll angle, the angle which denotes rotation about the satellite axis.

These angles are labeled θ , β , and ξ , respectively, in Figure 6.

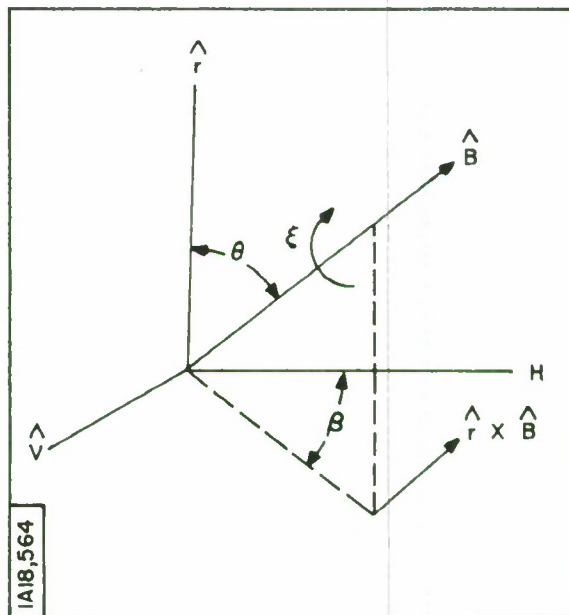


Figure 6. Euler Angle Geometry

$\hat{B}$ points in the direction of the satellite axis, and ξ is referenced from a unit vector in the $\hat{r} \times \hat{B}$ direction to a fixed axis $\hat{B}_x$ in the body perpendicular to $\hat{B}$. The horizontal axis $\hat{H}$ is taken in the $\hat{r} \times \hat{V}$ direction (i. e. , $\hat{H}$ is pointing east when the radar is pointing north). It follows from the geometry of Figure 6 that these angles are given by:

$$\cos \theta = \hat{r} \cdot \hat{B}, \quad 0 \leq \theta \leq \pi ; \quad (31)$$

$$\tan \beta = \frac{\hat{B} \cdot \hat{V}}{\hat{B} \cdot \hat{H}}, \quad 0 \leq \beta \leq 2\pi ; \quad (32)$$

$$\tan \xi = \frac{\hat{B}_x \cdot \hat{r}}{\hat{B} \times \hat{B}_x \cdot \hat{r}}, \quad 0 \leq \xi \leq 2\pi . \quad (33)$$

In order to work out these relationships explicitly, the satellite motion about its center of gravity must be studied. The principal types of stabilized and unstabilized motion are summarized herein.

The six principal types of satellite stabilization are:

- (1) spin, the satellite is fixed in inertial space;
- (2) earth center, one axis of the satellite points toward the center of the earth;
- (3) earth horizon, the satellite is stabilized with respect to the local horizon;
- (4) magnetic, an axis of the satellite points along the lines of magnetic force (often the magnetic field is used for damping for earth center stabilization); and

- (5) inertial guidance, the satellite orientation is governed by some predetermined program or by signals from ground-based transmitters.

The four principal types of unstabilized motion are:

- (1) tumbling,
- (2) spin,
- (3) precession, and
- (4) precession with nutation.

By combining Equations (31) through (33) with the body motion equations for a particular satellite, the three orientation angles (aspect, polarization, roll) can be found explicitly. For example, consider an earth-centered stabilized body. In this case, the vector $\hat{B}$ points along $\bar{0}$ and consequently

$$\cos \theta = \frac{1}{r} \left(|\bar{0}| - r_e \sin \tau \right) \quad (34)$$

$$\beta = \frac{\pi}{2}. \quad (35)$$

The roll angle will depend upon the type of stabilization assumed for $\hat{B}_x$. One possibility for earth center stabilization would be to take $\hat{B}_x$ in the direction to the unit vector normal to the orbital plane. In this case, from Equation (33)

$$\tan \xi = \frac{\hat{n} \cdot \hat{Z}}{(\bar{0} \cdot \hat{a}) (\hat{b} \cdot \hat{Z}) - (\bar{0} \cdot \hat{b}) (\hat{a} \cdot \hat{Z})}, \quad (36)$$

where $\hat{n} = \hat{a} \times \hat{b}$. Explicit formulas for the dot products indicated in (36) were presented earlier.

Another common method of stabilization is spin-stabilization. Here, the $\hat{B}$ axis is considered as fixed in space. Taking λ_p and α_p as the

latitude and the right ascension of the body axis, respectively (which corresponds to the angular momentum vector for spin-stabilized bodies), the aspect angle is given by

$$\cos \theta_{pr} = \sin \lambda_p \sin \lambda_r + \cos \lambda_p \cos (\alpha_r - \alpha_p). \quad (37)$$

Hence, λ_r and α_r correspond to the latitude and right ascension of the radar in inertial coordinates.* Similarly, the dot products in (32) for the angle β may be determined from (37) by replacing λ_r and α_r by the corresponding latitudes and right ascension for the radar horizontal and vertical vectors.

Since the angular momentum vector is fixed in space for torque-free motion, the θ_{pr} given by (37) is the angle between the radar and the angular momentum vector. Torque-free motion of an axially symmetric body results in precession about this vector. If we take θ_p and $\dot{\phi}$ as the precession cone angle and precession rate, respectively, then the radar aspect angle becomes

$$\cos \theta = \hat{B} \cdot \hat{r} = \cos \theta_{pr} \cos \theta_p + \sin \theta_{pr} \sin \theta_p \cos (\dot{\phi}t + \phi_0 - \phi_1), \quad (38)$$

where

$$\tan \phi_1 = \frac{\sin \lambda_r \cos \lambda_p - \cos \lambda_r \sin \lambda_p \cos (\alpha_r - \alpha_p)}{\cos \lambda_y \sin (\alpha_r - \alpha_p)} \quad (39)$$

and ϕ_0 is the initial location at time $t = 0$ of the body axis on the precession cone. The particular cases of spin-stabilized or tumbling motion may be obtained by setting the precession angle equal to 0 or $\pi/2$, respectively.

* See Equations (29) and (30).

- (5) inertial guidance, the satellite orientation is governed by some predetermined program or by signals from ground-based transmitters.

The four principal types of unstabilized motion are:

- (1) tumbling,
- (2) spin,
- (3) precession, and
- (4) precession with nutation.

By combining Equations (31) through (33) with the body motion equations for a particular satellite, the three orientation angles (aspect, polarization, roll) can be found explicitly. For example, consider an earth-centered stabilized body. In this case, the vector $\hat{B}$ points along $\bar{0}$ and consequently

$$\cos \theta = \frac{1}{r} \left(|\bar{0}| - r_e \sin \tau \right) \quad (34)$$

$$\beta = \frac{\pi}{2}. \quad (35)$$

The roll angle will depend upon the type of stabilization assumed for $\hat{B}_x$. One possibility for earth center stabilization would be to take $\hat{B}_x$ in the direction to the unit vector normal to the orbital plane. In this case, from Equation (33)

$$\tan \xi = \frac{\hat{n} \cdot \hat{Z}}{(\bar{0} \cdot \hat{a})(\hat{b} \cdot \hat{Z}) - (\bar{0} \cdot \hat{b})(\hat{a} \cdot \hat{Z})}, \quad (36)$$

where $\hat{n} = \hat{a} \times \hat{b}$. Explicit formulas for the dot products indicated in (36) were presented earlier.

Another common method of stabilization is spin-stabilization. Here, the $\hat{B}$ axis is considered as fixed in space. Taking λ_p and α_p as the

latitude and the right ascension of the body axis, respectively (which corresponds to the angular momentum vector for spin-stabilized bodies), the aspect angle is given by

$$\cos \theta_{pr} = \sin \lambda_p \sin \lambda_r + \cos \lambda_p \cos (\alpha_r - \alpha_p). \quad (37)$$

Hence, λ_r and α_r correspond to the latitude and right ascension of the radar in inertial coordinates.* Similarly, the dot products in (32) for the angle β may be determined from (37) by replacing λ_r and α_r by the corresponding latitudes and right ascension for the radar horizontal and vertical vectors.

Since the angular momentum vector is fixed in space for torque-free motion, the θ_{pr} given by (37) is the angle between the radar and the angular momentum vector. Torque-free motion of an axially symmetric body results in precession about this vector. If we take θ_p and $\dot{\phi}$ as the precession cone angle and precession rate, respectively, then the radar aspect angle becomes

$$\cos \theta = \hat{B} \cdot \hat{r} = \cos \theta_{pr} \cos \theta_p + \sin \theta_{pr} \sin \theta_p \cos (\dot{\phi}t + \phi_0 - \phi_1), \quad (38)$$

where

$$\tan \phi_1 = \frac{\sin \lambda_r \cos \lambda_p - \cos \lambda_r \sin \lambda_p \cos (\alpha_r - \alpha_p)}{\cos \lambda_y \sin (\alpha_r - \alpha_p)} \quad (39)$$

and ϕ_0 is the initial location at time $t = 0$ of the body axis on the precession cone. The particular cases of spin-stabilized or tumbling motion may be obtained by setting the precession angle equal to 0 or $\pi/2$, respectively.

* See Equations (29) and (30).

BIBLIOGRAPHY

Bickel, S. H. , Carey, M. J. , and Derderian, M. , Radar Simulation Operation Manual, The MITRE Corporation, WP-65, Bedford, Mass. , 30 July 1965.

Macko, S. J. , Satellite Tracking, John F. Rider, New York, 1962.

Whittaker, E. T. , Treatise on Analytical Dynamics of Particles and Rigid Bodies, Cambridge University Press, England, 1959.

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) The MITRE Corporation Bedford, Massachusetts		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP
3. REPORT TITLE The Relative Motion between a Radar and a Satellite Object		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) N/A		
5. AUTHOR(S) (Last name, first name, initial) Bickel, S. H.		
6. REPORT DATE May 1966	7a. TOTAL NO. OF PAGES 19	7b. NO. OF REFS 5
8a. CONTRACT OR GRANT NO. AF 19(628)-5165	9a. ORIGINATOR'S REPORT NUMBER(S) ESD-TR-66-87	
b. PROJECT NO. 4966		
c.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.	MTR-67	
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited		
11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY Space Defense System Program Office (496L/474L), Electronic Systems Division, L. G. Hanscom Field, Bedford, Massachusetts	
13. ABSTRACT The relative motion between an earth-based radar and a satellite object is of interest for radar-tracking studies, signature simulation studies, and for developing inverse scattering techniques. Here, the motion analysis is accomplished with elementary vector algebra. This approach results in considerable simplification of the final equations and relationships.		

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
RADAR TECHNIQUES Tracking, Satellites Earth-Based Radar, Relative Motion vs Satellite MATHEMATICS Algebra, Vector Motion Analyses, Earth-Based Radar vs Satellite						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system number, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.