



AD

Reports Control Symbol
OSD-1366

RESEARCH AND DEVELOPMENT TECHNICAL REPORT
ECOM-5427

**STATISTICAL PREDICTION OF IMPACT
DISPLACEMENT DUE TO THE WIND EFFECT
ON AN UNGUIDED ARTILLERY ROCKET DURING
POWERED FLIGHT**

By

Abel J. Blanco

Larry E. Traylor

March 1972



Approved for public release; distribution unlimited.

ECOM

Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
Springfield, Va. 22151

UNITED STATES ARMY ELECTRONICS COMMAND - FORT MONMOUTH, NEW JERSEY

AD743458

31

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government endorsement or approval of commercial products or services referenced herein.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

ACCESSION IN		
CPSTI	WHITE SECTION	☒
DOC	DIFF SECTION	☐
UNANNOUNCED		☐
JUSTIFICATION		
BY		
DISTRIBUTION/AVAILABILITY CODES		
DOC.	AVAIL. CODE/IF	SPECIAL
A		

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author)		3a. REPORT SECURITY CLASSIFICATION	
Atmospheric Sciences Laboratory White Sands Missile Range, New Mexico		Unclassified	
2. REPORT TITLE		3b. GROUP	
STATISTICAL PREDICTION OF IMPACT DISPLACEMENT DUE TO THE WIND EFFECT ON AN UNGUIDED ARTILLERY ROCKET DURING POWERED FLIGHT			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
5. AUTHOR(S) (Last name, middle initial, first name)			
Abel J. Blanco, Larry E. Traylor			
6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS	
March 1972	23	2	
8a. CONTRACT OR GRANT NO.	8b. ORIGINATOR'S REPORT NUMBER(S)		
8. PROJECT NO.	ECOM-5427		
9. DA Task No. IT061102B53A-17	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)		
4			
10. DISTRIBUTION STATEMENT			
Approved for public release; distribution unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY	
		U. S. Army Electronics Command Fort Monmouth, New Jersey	
13. ABSTRACT			
The merits of two new statistical wind displacement estimators are tested against a ballistic-meteorological estimator similar to that currently utilized for predicting the impact displacement due to the wind effect on an unguided artillery rocket (M50) during powered flight. Computations of the statistical estimators, based on simulated rocket trajectories using actual wind profiles, are presented for the 200, 400, and 800 mil trajectories. Reductions in impact dispersion ranging from 22 to 56% are afforded by these new estimators over the one currently used. Seasonal stability of the statistical estimators is investigated for data gathered over a flat desert area of White Sands Missile Range, New Mexico. Seasonal stability was good during daytime hours but more questionable during nighttime hours. A comparison of estimator curves calculated from data collected at WSMR and foothill terrain at Green River, Utah, revealed small variations.			

DD FORM 1473

REPLACES DD FORM 1473, 1 JAN 64, WHICH IS OBSOLETE FOR ARMY USE.

UNCLASSIFIED

Security Classification

UNCLASSIFIED
Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
1. Ballistics 2. Impact Prediction 3. Unguided Rockets 4. Statistics						

UNCLASSIFIED
Security Classification

Reports Control Symbol
OSD-1366

Technical Report ECOM-5427

STATISTICAL PREDICTION OF IMPACT DISPLACEMENT DUE TO
THE WIND EFFECT ON AN UNGUIDED ARTILLERY ROCKET
DURING POWERED FLIGHT

By

Abel J. Blanco

Larry E. Traylor

Atmospheric Sciences Laboratory
White Sands Missile Range, New Mexico

March 1972

DA Task No. IT061102B53A-17

Approved for public release; distribution unlimited.

U. S. Army Electronics Command
Fort Monmouth, New Jersey

ABSTRACT

The merits of two new statistical wind displacement estimators are tested against a ballistic-meteorological estimator similar to that currently utilized for predicting the impact displacement due to the wind effect on an unguided artillery rocket (M50) during powered flight. Computations of the statistical estimators, based on simulated rocket trajectories using actual wind profiles, are presented for the 200, 400, and 800 mil trajectories. Reductions in impact dispersion ranging from 22 to 56% are afforded by these new estimators over the one currently used. Seasonal stability of the statistical estimators is investigated for data gathered over a flat desert area of White Sands Missile Range, New Mexico. Seasonal stability was good during daytime hours but more questionable during nighttime hours. A comparison of estimator curves calculated from data collected at WSMR and foothill terrain at Green River, Utah, revealed small variations.

CONTENTS

	Page
INTRODUCTION	1
IMPACT DEFLECTION ESTIMATORS	2
EXPERIMENTAL PROCEDURE	5
COMPUTATIONAL RESULTS	7
SUMMARY AND CONCLUSIONS	18

INTRODUCTION

During the last two years, efforts have been made to reduce the meteorologically induced impact dispersion of tactical unguided projectiles without increasing computational complexity of the manual field prediction techniques. The compensation errors involved in predicting the impact point of a specific trajectory are categorized as follows: hardware, environmental, and aiming errors. The meteorological parameters in the environmental compensation error make a large contribution to the error budget for the M50 unguided rocket; for this reason, individual studies of the meteorological parameters affecting the impact deflection of an unguided projectile have been in progress at Atmospheric Sciences Laboratory (ASL). Extensive statistical studies of the wind effect on the impact of unguided rockets have already been completed. Effects from atmospheric pressure and temperature are presently under investigation.

The current technique used in compensating for the wind effect during powered flight on the impact of an M50 rocket assumes a functional form for the low-level wind in its prediction procedures. Some statistical aspects of this assumed functional form of the wind versus height were studied by Miller, et al¹. Results indicated that the wind follows a power law form with respect to height, but the power value in the expression varies considerably with time. This raises the possibility that the prediction of the impact deflection due to wind during powered flight could be improved by a least-squares technique applied to impact data. This led to the development of new estimators² to reduce the existing dispersion in the predicted impact produced by the current technique.

This study presents computational results of two statistical estimators derived in an earlier study² to reduce the impact dispersion of the M50 unguided rocket due to the low-level wind. For completeness, a brief treatment of the ballistic technique currently in use and the two statistical techniques is also presented. To insure valid comparisons between the statistical and ballistic estimators, all computations were performed by the ASL five-degree-of-freedom trajectory simulator.

¹Miller, W. B., L. E. Traylor, and A. J. Blanco, 1970, "Some Statistical Aspects of Power Law Profiles," Technical Report ECOM-5303, Atmospheric Sciences Laboratory, U.S. Army Electronics Command, White Sands Missile Range, New Mexico.

²Miller, W. B., A. J. Blanco, and L. E. Traylor, 1970, "Impact Deflection Estimators from Single Wind Measurements," Technical Report ECOM-5328, Atmospheric Sciences Laboratory, U. S. Army Electronics Command, White Sands Missile Range, New Mexico.

A total of 1289 wind profiles collected from a relatively flat desert area at White Sands Missile Range (WSMR), New Mexico (1230m MSL) in the spring of 1969 was used to compute the value and to check the stability of the derived statistical estimators. Values for the estimators tested are presented for three quadrant elevation (QE) angles (200, 400, and 800 mils) representative of typical M50 trajectories. Reductions of 56% in the range component and 44% in the cross component of the impact dispersion for a 200 mil trajectory were the highest afforded by the new estimators. One hundred summer and 60 winter wind profiles collected at WSMR in 1967 are used to investigate the behavior of the statistical estimator's stability as compared to the 1969 spring data. Finally, 112 fall of 1967 and 54 summer of 1969 wind profiles collected from foothill terrain at Green River, Utah (1360m MSL and about 800 km to the NW of WSMR), are used to check terrain effects on the value of the new estimators as compared to the WSMR data.

IMPACT DEFLECTION ESTIMATORS

Only the basic development of the cross component for the three estimators tested in this study is presented; for complete details see References 1 and 2. The powered flight wind correction technique as used with the Honest John M50 rocket involves two steps. First, a power law profile for the low-level wind is assumed; from a single wind measurement the current technique then predicts a wind profile from the following expression:

$$U(Z) = U_r \left(\frac{Z}{Z_r} \right)^p$$

where $U(Z)$ is the wind speed at height Z , U_r is the single wind speed measurement at Z_r (the reference height), and p takes on particular values for daytime and nighttime conditions. Secondly, with the wind predicted up to 183 meters by this power law and assumed constant above 183 meters to the motor burnout altitude of the M50, a ballistic weighting technique is utilized to estimate the impact deflection D as

$$D = \delta \int \omega'(Z) U(Z) dZ$$

$$D = \delta \int_{Z_0}^{183} \omega'(Z) \left(\frac{Z}{Z_r} \right)^p dZ + [\omega(Z_b) - \omega(183)] \left(\frac{183}{Z_r} \right)^p U_r$$

$$D = A U_r$$

where

$$A = \delta \left\{ \int_{Z_0}^{183} \omega'(Z) \left(\frac{Z}{Z_r} \right)^P dZ + [\omega(Z_b) - \omega(183)] \left(\frac{183}{Z_r} \right)^P \right\},$$

δ is the unit wind effect, $\omega'(Z)$ is the derivative of the cumulative ballistic weighting curve with respect to height, and

$$U_r \left(\frac{Z}{Z_r} \right)^P$$

is the predicted wind profile. The impact displacement due to the low-level wind can now be expressed as the product of the values for the current estimator A and the single wind measurement U_r . A is a function of quadrant elevation, of course. This concept is incorporated into firing tables so that the artilleryman need only measure the wind at Z_r (currently chosen at 15.2 meters) and obtain launcher settings for compensation for the effect of the low-level wind.

The statistical techniques follow the same form as the ballistic technique in predicting the impact point for an unguided projectile, i.e., $D = \alpha U_r$. The artilleryman would go through the same mechanics in acquiring the launcher settings from a firing table containing the computational results of the new technique. These new estimators do not assume either a functional form of the wind with respect to height or any knowledge of a weighting curve. Actual wind profiles are used to calculate simulated impacts; in turn, these impacts, together with a single wind measurement at 15.2 meters from the corresponding profiles, are used to compute an optimal value for the estimator α in the least-squares sense. These new estimators differ from prior ones in that their construction utilizes statistical rather than physical properties, and they possess certain optimal features. The availability of a ballistic simulator permits a purely statistical approach to estimation of impact deflection due solely to wind during powered flight.

The predicted impacts are represented componentwise by the statistical technique as the sum of the no-wind impact I_0 and an impact deflection. The approximation of the actual impact I_a by this sum is then developed by the method of least squares to compute the value of the estimator that will best predict the actual impact for all the profiles in the set of data utilized. For the actual cross impact given by one profile one has

$$I_a \approx I_0 + \alpha U_r$$

$$R = I_a - (I_0 + \alpha U_r)$$

where R is the residual. The values of the statistical estimators are obtained as follows (treating specifically the cross component):

$$\text{let } D_i = I_{ai} - I_{oi}, \text{ for the } i\text{th profile,}$$

$$\text{then } R_i = D_i - \alpha U_{ri}.$$

Requiring that

$$\frac{\partial \sum R_i^2}{\partial \alpha} = 0$$

gives

$$\alpha = \frac{\sum D_i U_{ri}}{\sum U_{ri}^2},$$

and similarly for the range estimator β . Together, α and β comprise statistical estimator #1.

In a similar manner, the second statistical estimator is derived. This time the influence of cross wind on range impact displacement and range wind on cross impact displacement is considered. Let U_r and V_r be the cross and range components of the wind speed at the reference height. The approximation of the actual impact is now represented as

$$I_a \approx I_o + \alpha_1 U_r + \alpha_2 V_r$$

$$R = I_a - (I_o + \alpha_1 U_r + \alpha_2 V_r).$$

The value of the statistical estimator with correlation (statistical estimator #2) is computed by minimizing the sum of the squares of the residuals with respect to both cross and range estimators. The derived optimal estimators for the cross component take the form

$$\frac{\partial}{\partial \alpha_1} [\sum (D_i - \alpha_1 U_{ri} - \alpha_2 V_{ri})^2] = 0$$

$$\frac{\partial}{\partial \alpha_2} [\sum (D_i - \alpha_1 U_{ri} - \alpha_2 V_{ri})^2] = 0$$

$$\alpha_1 = \frac{\sum D_i U_{ri} \sum V_{ri}^2 - \sum D_i V_{ri} \sum V_{ri} U_{ri}}{\sum U_{ri}^2 \sum V_{ri}^2 - (\sum U_{ri} V_{ri})^2}$$

$$\alpha_2 = \frac{\sum U_{ri}^2 \sum D_i V_{ri} - \sum U_{ri} V_{ri} \sum D_i U_{ri}}{\sum U_{ri}^2 \sum V_{ri}^2 - (\sum U_{ri} V_{ri})^2},$$

and similarly the range component β_1 and β_2 are derived. In summary, the three low-level estimators of impact displacement considered are of the following form:

- | | | |
|-----|--|----------------|
| (1) | (AU_r, BV_r) | Ballistic |
| (2) | $(\alpha U_r, BV_r)$ | Statistical #1 |
| (3) | $(\alpha_1 U_r + \alpha_2 V_r, \beta_1 V_r + \beta_2 U_r)$ | Statistical #2 |

EXPERIMENTAL PROCEDURE

Data utilized in this study consisted of ~~met~~ tower data and pilot balloon (pibal) data obtained from T-9 radar tracks. The tower data were taken from the Atmospheric Sciences Laboratory 152.4m meteorological research tower (instrumented at eight levels) located in a relatively flat desert area at White Sands Missile Range, New Mexico, and from a similar met tower located in a foothill area at Green River, Utah. Table 1 identifies all the reduced tower wind profiles taken from both locations.

At WSMR, wind speed and direction were measured simultaneously at heights of 7.6, 15.2, 38.1, 53.3, 68.6, 91.4, 121.9, and 152.4 meters, converted electronically to component form, oriented with respect to true North, and transmitted analog to a NAVCOR A/D converter, where the data flow was sampled at one-second intervals. The data were then passed through the Kineplex data modem and transmitted through range communications to a station where the data were taped and compressed ready for input to a UNIVAC 1108. The data were collected at WSMR over certain two-hour periods: 0930-1130, 1330-1530 local daytime and 0300-0500, 1900-2100 local nighttime during March and early April 1969. These spring data, after being subjected to a visual editing technique, were averaged over 1-, 2-, or 5-minute intervals (each interval being a profile) to conform to the electronic average obtained by the AN/MMQ-1B. The AN/MMQ-1B is the windset used for measuring the wind (in component form U_r, V_r) to supply the single wind measurement for the low-level wind correction of the M50. Tower profiles were also collected during June, July, and December 1967, but this time they were reduced visually from strip charts and averaged over one-minute intervals. The data were collected

TABLE 1

DATES, TIMES AND NUMBER OF TOWER WIND PROFILES FOR WSMR-GREEN RIVER COMPARISON

		WSMR, NEW MEXICO, NUMBER OF PROFILES (901)																		
		MARCH 69										APR 69								
MONTH	DATE	10	11	12	14	17	18	19	20	21	24	25	26	1	3	6	7	10	19	20
TIME : 0300-0500		10		24		12	15	16	15	15		14	9		5	2				30
LST : 0930-1130		16	16	28		15	15	15	15	17		14	21		5	20	20	20		
1330-1530		5		27	19	19	16	14	16	16	16	15	22	7		20	20			
1900-3100		7	9	15	8	14	15	15	15	8	14	15	8	3						30

		GREEN RIVER, UTAH, NUMBER OF PROFILES (166)																		
		AUG 67										OCT 67								
MONTH	DATE	24	25	7	8	9	10	14	25	28	29	11	5	6	19	23	26			
TIME : 0000-0300			2		8	16			3	10	11	21	8		11	12				
LST : 1900-2400		14		12								7	13	6	6	12				

at identical heights except for the second level which was set at 22.9 instead of 15.2 meters.

At Green River, wind tower data were reduced in a similar manner as the Spring 1969 WSMR data; however, these measurements were collected from heights of 12.5, 21.0, 32.9, 46.3, 63.1, 85.9, 112.2, and 139.3 meters on the Green River meteorological tower. All Green River data were collected during nighttime conditions in support of the Athena Project for firings during August, September, and October 1967 and June 1969 and were averaged over one-minute intervals.

For testing the new estimators at higher quadrant elevation angles, pilot balloons were released at approximately 10-minute intervals throughout each two-hour period sampled at WSMR during the Spring of 1969. The pibals were tracked by a T-9 radar to obtain a profile from 152.4 meters to burnout altitude of the M50 launched at the higher quadrant elevations. Wind data were sampled at one-second intervals and stored on magnetic tape, transformed to a true-north-oriented cartesian coordinate system identical to that used by the tower data, and averaged over three-second intervals giving approximately 15-meter layers. Table II shows the total number of tower and pibal wind profiles matched to cover the high Q.E. burnout altitudes.

COMPUTATIONAL RESULTS

Comparison of the impact dispersion for the three estimators tested was accomplished by means of the ASL simulator. The ballistic weighting functions together with the value of p used to compute M50 firing table corrections, 0.2 daytime and 0.4 nighttime, were employed to tabulate the estimator (A,B). Measured wind profiles were used as input to the simulator to calculate the actual impacts; these impacts, together with the corresponding wind speed at 15.2 meters, were utilized to compute the value of the statistical estimators (α, β) and $(\alpha_1, \alpha_2; \beta_1, \beta_2)$.

M50 trajectories were computed for 200, 400, and 800 mils quadrant elevations at WSMR, New Mexico (1230.5 meters MSL). All simulated impacts were computed using the MSL elevation from the area of wind profile collection as the launcher MSL position and with firing azimuth due North. The estimator values computed for WSMR are illustrated in Table III. It should be emphasized that these values do not include the low-level wind effect from the surface to 7.6 meters, the height of the first level on the met tower. The 90 five-minute averaged daytime (0930-1130) wind profiles were extrapolated to include the missing 7.6 meters of wind data; the computed values for the three estimators increased as a result of the added wind included in the calculation of the simulated impacts. The values for the 400 mils ballistic (A,B) and statistical (α, β) estimators were as follows:

TABLE 11

DATES, TIMES AND NUMBERS OF TOWER + T-9 PIBAL
WIND PROFILES FOR WSMR, NEW MEXICO 1969

		Averaging Interval (minutes)			
		A	5	B	A 2 & B
NO. OF	DAYTIME	90	94		26
PROFILES	NIGHTTIME	78	62		26
					45
					20

NUMBER OF PROFILES

MONTH DATE	5-Minute Average														2-Minute Average				1-Minute Average			
	MARCH														MARCH		APRIL		MARCH		APRIL	
	10	11	12	14	17	18	19	20	21	24	25				26	2	1	3	10	12	26	1
TIME 0300-0500	2		9		5	8	11	10	9		8				2			2		9	2	
LST 0930-1130	9	11	12		10	10	9	10	12		7				10		5			11		5
1330-1530			11	12	12	11	9	9	11	11	8				11		7		5	11	11	
1900-2100		2	11	1	9	12	10	11	1	10	11				8		3		7		8	

A - daytime, 0930-1130; nighttime, 1900-2100.

B - daytime, 1330-1530; nighttime, 0300-0500.

TABLE III

IMPACT DEFLECTION ESTIMATOR VALUES FOR DIFFERENT Q.E. AT WSMR, NEW MEXICO, SPRING (m/MPH)

DAYTIME (184 PROFILES)				NIGHTTIME (140 PROFILES)				
QE (Mils)	BALLISTIC		#1	#2	BALLISTIC		#1	#2
	A		α	α_1 α_2	CROSS	A	α	α_1 α_2
200	25.15		22.94	22.80 - 0.68	RANGE	30.22	26.36	26.18 - 0.59
400	62.47		53.63	53.23 - 1.90		82.90	67.80	67.51 - 0.93
800	141.61		119.61	119.06 - 7.91		199.88	149.21	151.43 - 7.18
	B		β	β_1 β_2		B	β	β_1 β_2
200	-19.35*		-16.93	0.61-16.78		-22.78*	-17.79	0.83-17.35
400	-33.53*		-28.09	1.00-27.83		-44.43*	-29.62	1.81-28.65
800	-42.14*		-31.94	2.96-31.19		-59.88*	-32.08	3.55-30.19

*Estimators for Head and Tail Averaged.

	(A,B)	(α,β)
from 7.6 meters	(62,-33)	(54,-28)
from surface	(69,-37)	(61,-32)

Since the type of extrapolation applied to the actual wind profiles may also contribute to the increase in estimator value, to avoid data contamination the principal part of this study was performed with the low-level wind effect beginning from the first height on the WSMR tower (7.6m) to burnout altitude.

The standard deviation of impact and mean miss distance given by the new estimators were then compared to those from the ballistic estimators. Table IV presents the reduction in rms miss distance afforded by the new estimators, and the statistical quantities are listed in Table V. As expected, the statistical estimator with correlation ($\alpha_1, \alpha_2; \beta_1, \beta_2$) shows the smallest impact dispersion, but only slightly. Attention will therefore be focused on the less complex linear estimator (α, β). This estimator was checked for stability by dividing the data into sets and computing the estimator value. The results shown in Table VI indicate that the estimator retains its approximate value from data set to data set with only slight dependence on the data. The nighttime conditions illustrate the largest variation in estimator values. For the 200 mils trajectory, comparing the estimator value for the total 240 profiles and the last 50-profile set, there is a variation of 5% in both the cross and range components. For the 800 mils trajectory, a similar comparison between the 140 profiles and the 62 profiles yields a variation of 26% in the cross and 6% in the range component. Even with this maximum spread in estimator value between the different wind profile sets, the new statistical estimator produces a smaller impact dispersion than the ballistic theory - p profile estimator. By reviewing Table III and recalling that the predicted impacts are calculated from the sum of the no-wind impact and the product of the reference wind speed and the estimator value, one can show that if (α, β) are the optimal estimators calculated by the least-squares method, then variation from (α, β) will produce an increase in the rms miss distance, and the ballistic values for nighttime, 800 mils, are considerably different from any of the statistical estimators.

The next phase was to investigate seasonal variability of the linear statistical estimator. The statistical estimators computed from the 184 daytime and 140 nighttime profiles collected during the Spring of 1969 at WSMR were compared with estimators computed from 100 daytime Summer of 1967 and 60 nighttime Winter of 1967 profiles collected from the same location. In acquiring the different data it was impossible to obtain data collected at the same heights on the meteorological tower. Since the summer and winter data did not have a wind measurement at 15.2 meters,

TABLE IV

PERCENT REDUCTION OF IMPACT DISPERSION AFFORDED BY THE STATISTICAL CORRECTION TECHNIQUES

BALLISTIC TECHNIQUE TAKEN AS STANDARD						
QE (Mils)	DAYTIME 184 PROFILES		NIGHTTIME 140 PROFILES		CROSS	RANGE
	#1	#2	#1	#2		
200	40	44	22	22	22 22 25	41 39 41
400	38	40	22	22		
800	27	28	24	24		
200	51	56	39	39	36 41 36	41 39 41
400	41	43	38	38		
800	36	41	39	39		

TABLE V

MEAN MISS DISTANCE (m) AND STANDARD DEVIATION(m)

	DAYTIME (184 Profiles)				NIGHTTIME (140 Profiles)			
	CROSS		RANGE		CROSS		RANGE	
	MEAN MISS DISTANCE	STANDARD DEVIATION	MEAN MISS DISTANCE	STANDARD DEVIATION	MEAN MISS DISTANCE	STANDARD DEVIATION	MEAN MISS DISTANCE	STANDARD DEVIATION
BALLISTIC #1 #2	200 MILS							
	4.71	17.92	-11.20	15.54	0.12	45.21	-19.36	32.63
	2.79	10.72	- 1.28	9.26	3.87	35.00	- 1.20	23.11
BALLISTIC #1 #2	400 MILS							
	9.83	75.09	-18.41	38.95	-20.56	175.00	-56.94	93.51
	2.18	47.04	1.48	25.18	- 5.87	137.96	- 7.11	67.71
BALLISTIC #1 #2	800 MILS							
	-4.49	45.50	3.19	24.16	- 8.55	137.73	- 5.81	66.74
	-0.32	215.47	-31.14	70.51	-152.84	547.68	-112.37	154.69
BALLISTIC #1 #2	-19.37	155.76	- 0.53	49.34	-103.56	416.86	- 28.19	112.58
	-28.49	153.58	4.52	45.17	- 82.97	419.84	- 25.64	110.66

TABLE VI

STATISTICAL IMPACT DEFLECTION ESTIMATOR STABILITY (m/MPH)

DAYTIME			NIGHTTIME		
# of Profiles	Cross	Range	# of Profiles	Cross	Range
200 MILS					
90	23.09	-16.88	78	26.36	-17.58
94	22.86	-17.00	62	26.34	-18.04
90 + 94 = 184	22.94	-16.93	78 + 62 = 140	26.36	-17.79
50	22.99	-16.57	50	26.22	-17.79
50	22.76	-16.61	50	25.00	-18.96
50 + 50 = 100	22.86	-16.59	50 + 50 = 100	26.04	-18.19
184 + 100 = 284	22.91	-16.80	140 + 100 = 240	26.23	-18.02
400 MILS					
90	53.56	-27.85	78	69.22	-28.73
94	53.67	-28.43	62	59.94	-30.73
90 + 94 = 184	53.63	-28.09	78 + 62 = 140	67.80	-29.63
71	53.52	-27.01	46	64.72	-28.33
800 MILS					
90	117.78	-31.07	78	156.22	-30.55
94	120.57	-33.23	62	110.51	-33.99
90 + 94 = 184	119.61	-31.94	78 + 62 = 140	149.21	-32.08

estimator values were computed for the first three levels on the met tower. Figures 1 and 2 present the behavior of ballistic and statistical estimators for the 200 mil trajectory as a function of height in both daytime and nighttime conditions. The reference height becomes an important parameter because in the ballistic technique (if p remains constant) the estimator value becomes a simple power function of the reference height

$$A = \frac{\delta}{Z_r^p} \int \omega'(Z) Z^p dZ.$$

In the statistical technique the estimator value depends on the characteristics of the wind speed at the selected reference height

$$\alpha = \frac{\sum D_i U_{ri}}{\sum U_{ri}^2}.$$

Figure 3 shows the estimator values at 7.6, 15.2, and 38.1 meters for the 184 daytime spring wind profiles versus the values at 7.6, 22.9, and 38.1 meters for the 100 daytime summer wind profiles. For nighttime conditions the estimator values for the 140 spring wind profiles and 60 winter wind profiles are similarly compared. The statistical estimator values for spring and summer were virtually identical in daytime conditions at the relatively flat desert area. For nighttime conditions, the estimator values for spring and winter were somewhat different, which may be due in part to the small sample of winter profiles and the quality of the 60 wind profiles. By comparing Figures 1 and 3, one can see the seasonal variance of the statistical estimator curves versus the constant (with season) ballistic estimator curves. The statistical estimator for the daytime conditions shows merit for it indicates that the ballistic estimator is overestimating in both seasons.

Another investigation concerned the behavior of the statistical estimator with respect to terrain. The flat desert area statistical estimator curves were compared to estimator curves from a rough semi-mountainous terrain at Green River, Utah. All Green River tower wind profiles were collected during nighttime conditions and at different heights than those on the WSMR met tower. The first level on the Green River met tower was set at 12.5 meters above the surface. To compare the estimator curves from the different terrains, 4.9 meters of wind profile were needed for the Green River profiles to include the low-level wind effect from 7.6 meters above the surface to burnout altitude. Linear extrapolation of the Green River wind profiles down to 7.6 meters above the surface was performed. The extra low-level wind effect was then added to the impact calculation from the ASL simulator, and the statistical estimator values for the first three (12.5, 21.0, and 33.9 meters) levels on the Green

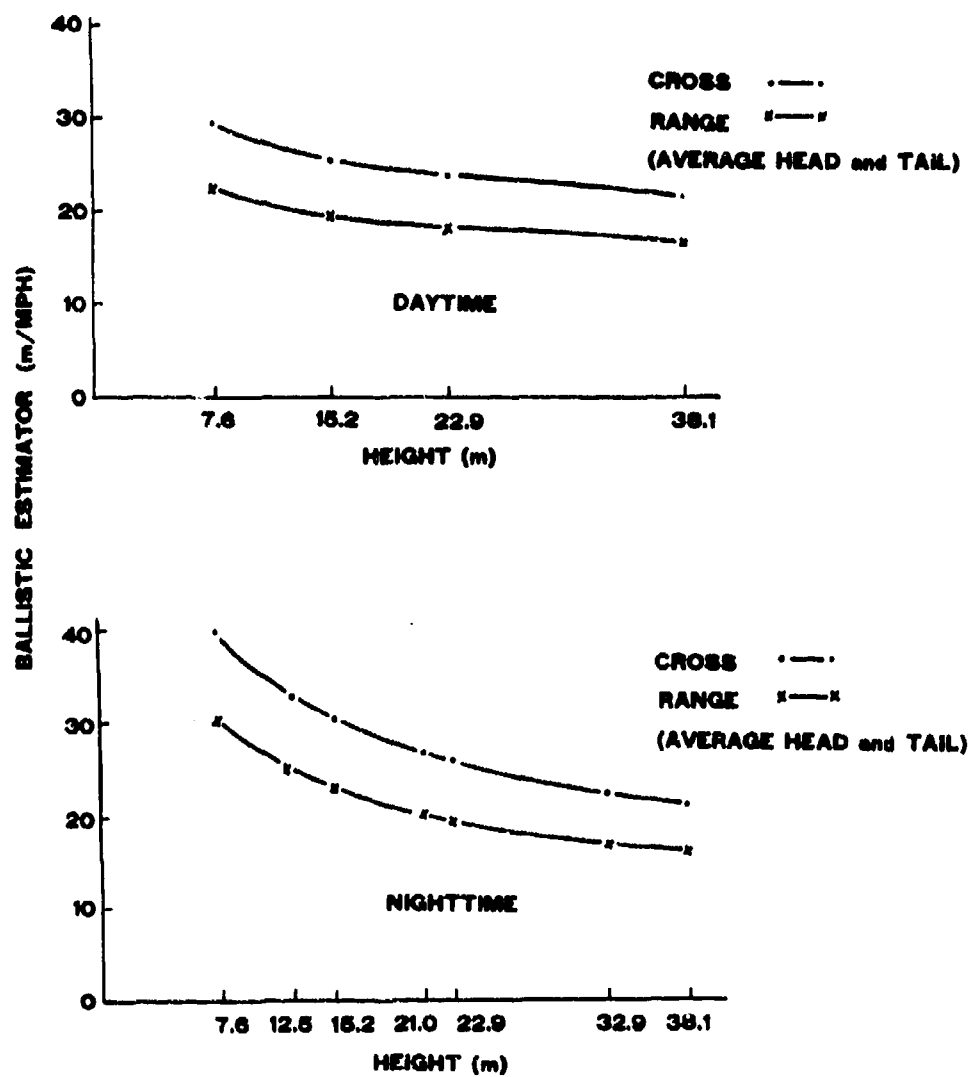


FIGURE 1. WSMR 200 MILS G.E., BALLISTIC ESTIMATOR VERSUS HEIGHT.

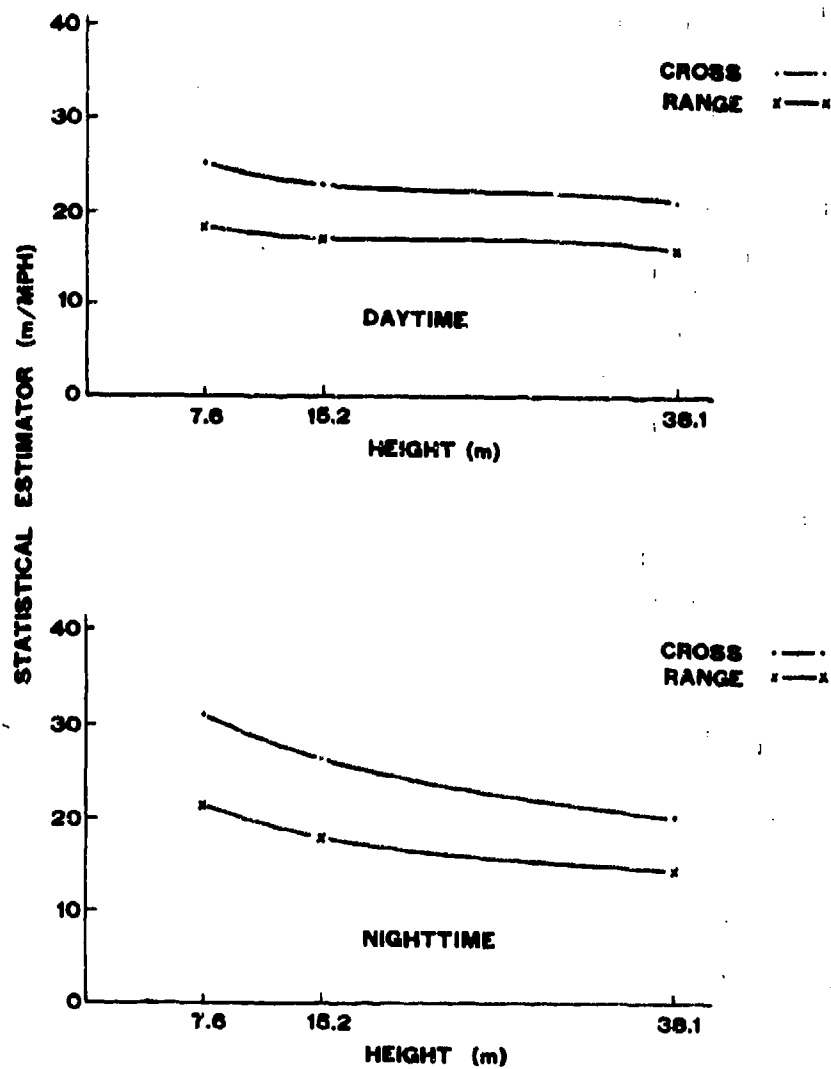


FIGURE 2. WSMR 200 MILS G.E., STATISTICAL ESTIMATOR VERSUS HEIGHT;
 VALID FOR SPRING 1969 DATA—
 184 DAYTIME AND 140 NIGHTTIME WIND PROFILES.

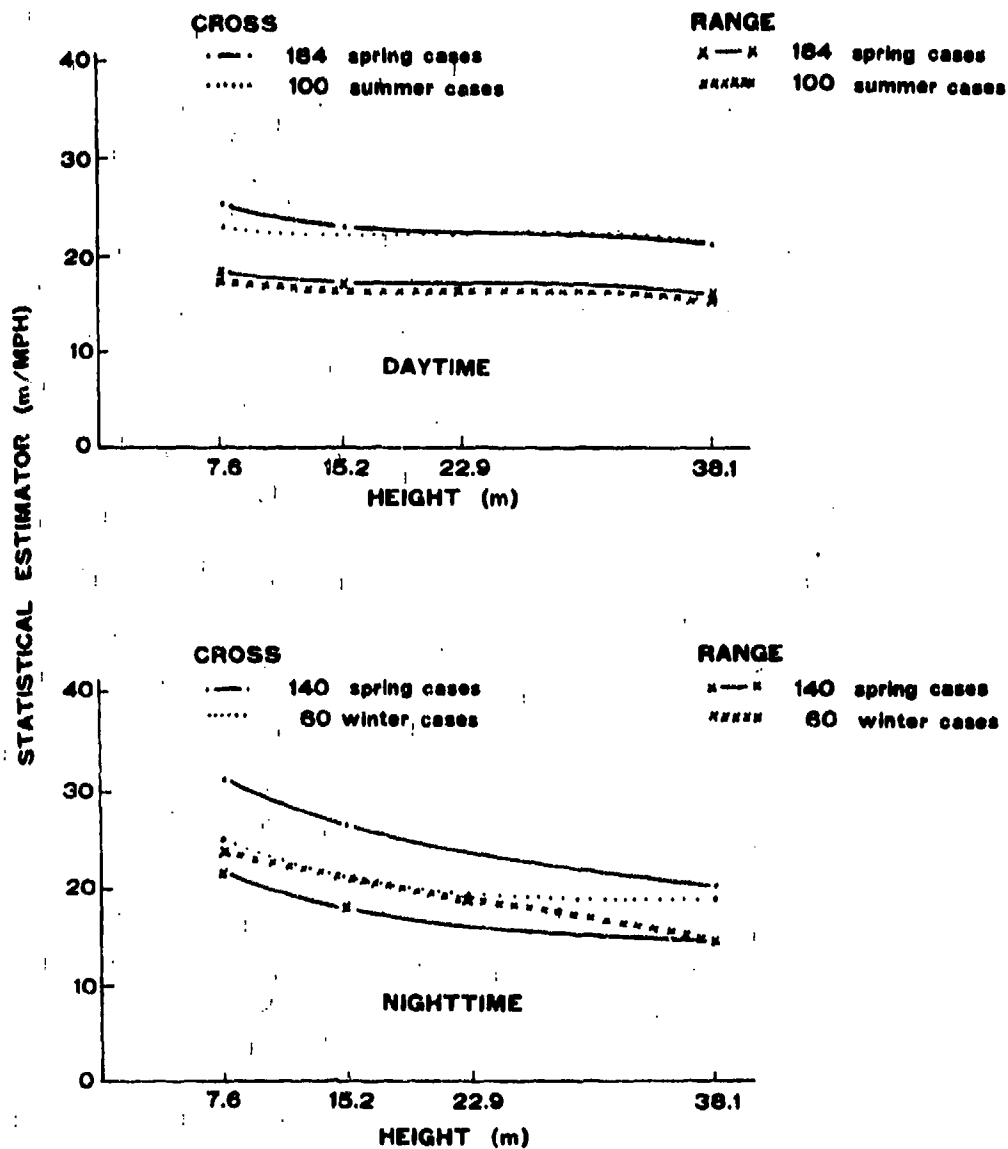


FIGURE 3. WSMR 200 MILS Q.E., STATISTICAL ESTIMATOR COMPARED SEASONALLY; 184 AND 140 MARCH 1969 WIND PROFILES AGAINST 100 JUNE-JULY 1967 AND 60 DECEMBER 1967 WIND PROFILES.

River tower were computed. Figure 4 illustrates the statistical estimator curves for a flat desert area and a semi-mountainous terrain at different seasons. The change in MSL elevation between the two sites has little effect in changing estimator values because the unit wind effects for the two sites are virtually identical. The variance in estimator curves may be due to difference in terrain, small number of wind profiles from Green River, and the different seasons in which the profiles are collected. The range estimator curves in Figure 4 indicate a strong possibility that there may not be an estimator difference from terrain effects. By comparing the fall and summer estimator curves for the semi-mountainous terrain, one can see seasonal variance of the estimator values similar to spring and winter estimator curves for the flat desert area.

SUMMARY AND CONCLUSIONS

Reductions in impact dispersion (rms miss distance) due to wind during powered flight ranging from 22 to 56% were afforded by the new statistical estimators developed for the 200, 400, and 800 mils M50 trajectories. The maximum percentage reduction occurred in the 200 mil short range trajectory. Figures 5 through 7 summarize the improvement presented by the statistical estimator in the reduction of both the mean miss distance and impact standard deviation. The new estimator derived from measured low-level wind profiles appears to be stable between different independent sets of profiles in the same season for the same terrain. The pilot study in seasonal stability indicated that spring and summer estimators may be identical, while spring and winter estimators may differ. The results from investigating the terrain effects on the estimator revealed some variation but also indicated a possibility that the estimators may be stable between the relatively flat desert and foothills terrain by the close agreement between the range estimator statistical curve from the 54 summer Green River wind profiles and the analogous curve from the 140 spring WSMR wind profiles. Overall, the statistical estimator curves were always below the ballistic estimator curve, indicating the presence of a bias.

The percent reduction in rms miss distance due to low-level winds is significant. For the range impact deflection, the low-level wind has a minor effect as compared to the other atmospheric parameters. In the intermediate range (400 mils) and daytime cases, about 11% of the total range probable error is due to the low-level wind. Results from this study indicate a reduction of 7% in the total probable error. For the cross impact deflection, however, the low-level wind has a major effect, contributing 56% of the total probable error. The statistical technique has afforded a 29% reduction in the total cross probable error. With this in mind, a more complete study of terrain and season estimator variation is needed to ascertain more accurately the degree of stability exhibited


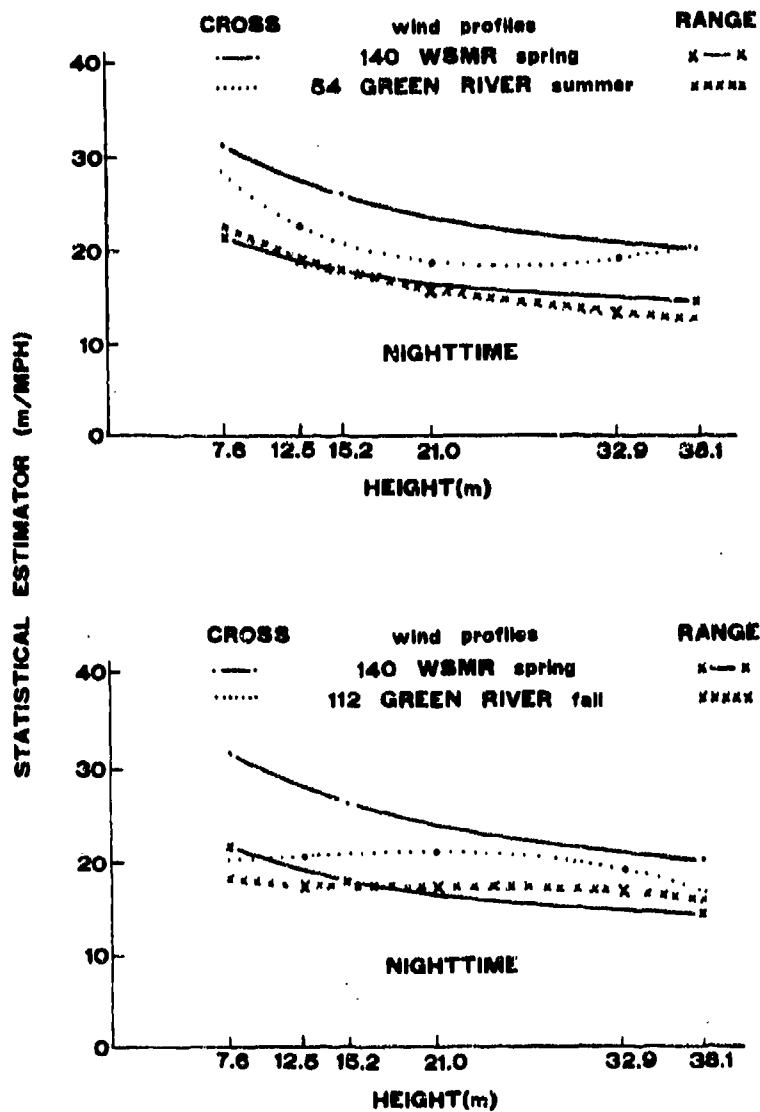


FIGURE 4. WSMR AND GREEN RIVER 200 MILS G.E., STATISTICAL ESTIMATOR COMPARISON; WSMR 140 MARCH 1969 WIND PROFILES AND GREEN RIVER 54 JUNE 1969 AND 112 AUGUST, SEPTEMBER, AND OCTOBER 1967 WIND PROFILES.

ballistic technique —
statistical technique - - -

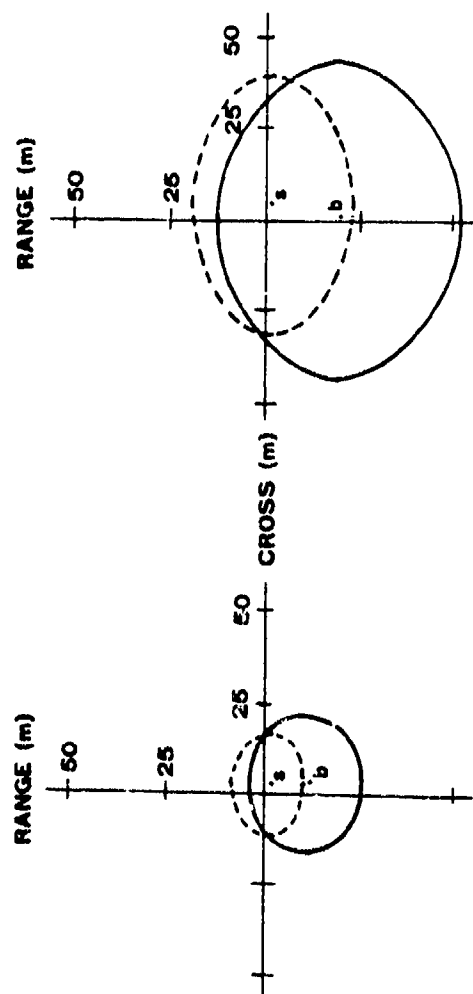

DAYTIME 194 PROFILES

NIGHTTIME 140 PROFILES

FIGURE 5. MEAN MISS DISTANCE AND STANDARD DEVIATION OF IMPACTS COMPUTED BY THE BALLISTIC AND STATISTICAL LOW-LEVEL WIND CORRECTION TECHNIQUES FOR THE HONEST JOHN ROCKET AT 200 MILS Q.E.


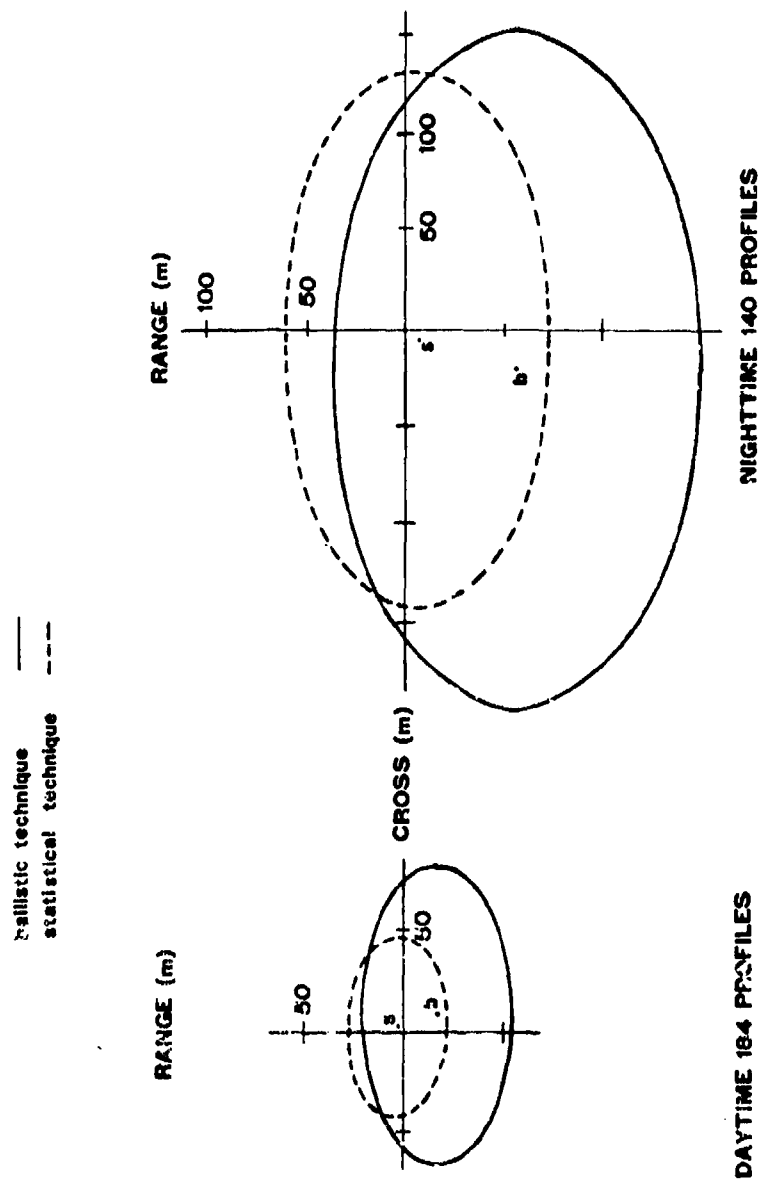


FIGURE 6. MEAN MISS DISTANCE AND STANDARD DEVIATION OF IMPACTS COMPUTED BY THE BALLISTIC AND STATISTICAL LOW-LEVEL WIND CORRECTION TECHNIQUES FOR THE HONEST JOHN ROCKET AT 400 MILS Q.E.

ballistic technique
 statistical technique

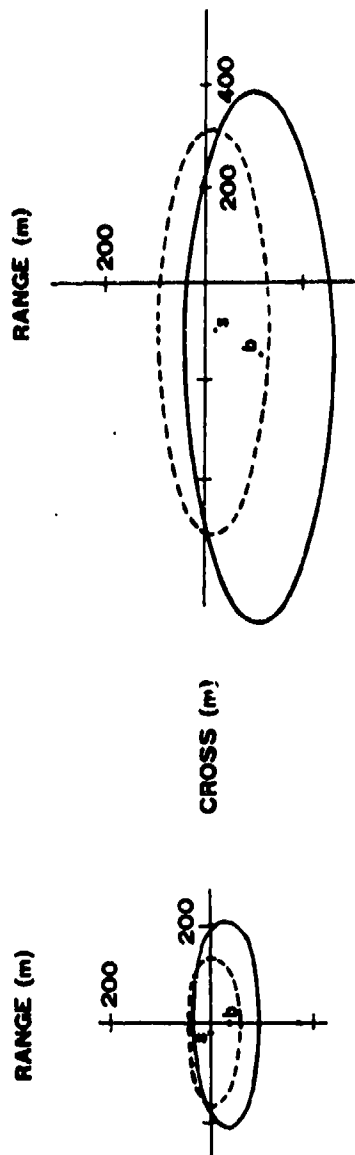

DAYTIME '84 PROFILES

NIGHTTIME 140 PROFILES

FIGURE 7. MEAN MISS DISTANCE AND STANDARD DEVIATION OF IMPACTS COMPUTED BY THE BALLISTIC AND STATISTICAL LOW-LEVEL WIND CORRECTION TECHNIQUES FOR THE HONEST JOHN ROCKET AT 800 MILS Q.E.

by the statistical estimators. If the estimators are not stable, they could be classified as to general terrain and season. On the other hand, if they are proven to be nearly constant, no changes in field operational methods are necessary to acquire the significant reduction in impact dispersion.

ATMOSPHERIC SCIENCES RESEARCH PAPERS

1. Miers, B. T., and J. E. Morris, Mesospheric Winds Over Ascension Island in January, July 1970, ECOM-5312, AD 711851.
2. Webb, W. L., Electrical Structure of the D- and E-Region, July 1970, ECOM-5313, AD 714365.
3. Campbell, G. S., F. V. Hansen and R. A. Diss, Turbulence Data Derived from Measurements on the 32-Meter Tower Facility, White Sands Missile Range, New Mexico, July 1970, ECOM-5314, AD 711852.
4. Pries, T. H., Strong Surface Wind Gusts at Holloman AFB (March-May), July 1970, ECOM-5315, AD 711853.
5. D'Arcy, E. M., and B. F. Engebos, Wind Effects on Unguided Rockets Fired Near Maximum Range, July 1970, ECOM-5317, AD 711854.
6. Matonis, K., Evaluation of Tower Antenna Pedestal for Weather Radar Set AN/TPS-41, July 1970, ECOM-3317, AD 711520.
7. Monahan, H. H., and M. Armendariz, Gust Factor Variations with Height and Atmospheric Stability, August 1970, ECOM-5320, AD 711855.
8. Stenmark, E. B., and L. D. Drury, Micrometeorological Field Data from Davis, California; 1966-67 Runs Under Non-Advection Conditions, August 1970, ECOM-6051, AD 726390.
9. Stenmark, E. B., and L. D. Drury, Micrometeorological Field Data from Davis, California; 1966-67 Runs Under Advection Conditions, August 1970, ECOM-6052, AD 724612.
10. Stenmark, E. B., and L. D. Drury, Micrometeorological Field Data from Davis, California; 1967 Cooperative Field Experiment Runs, August 1970, ECOM-6053, AD 724613.
11. Rider, L. J., and M. Armendariz, Nocturnal Maximum Winds in the Planetary Boundary Layer at WSMR, August 1970, ECOM-5321, AD 712325.
12. Hansen, F. V., A Technique for Determining Vertical Gradients of Wind and Temperature for the Surface Boundary Layer, August 1970, ECOM-5324, AD 714366.
13. Hansen, F. V., An Examination of the Exponential Power Law in the Surface Boundary Layer, September 1970, ECOM-5326, AD 715349.
14. Miller, W. B., A. J. Blanco and L. E. Traylor, Impact Deflection Estimators from Single Wind Measurements, September 1970, ECOM-5328, AD 716993.
15. Duncan, L. D., and R. K. Walters, Editing Radiosonde Angular Data, September 1970, ECOM-5330, AD 715351.
16. Duncan, L. D., and W. J. Vechione, Vacuum Tube Launchers and Boosters, September 1970, ECOM-5331, AD 715350.
17. Stenmark, E. B., A Computer Method for Retrieving Information on Articles, Reports and Presentations, September 1970, ECOM-6050, AD 724611.
18. Hudlow, M., Weather Radar Investigation on the BOMEX, September 1970, ECOM-3329, AD 714191.
19. Combs, A., Analysis of Low-Level Winds Over Vietnam, September 1970, ECOM-3346, AD 876935.
20. Rinehart, G. S., Humidity Generating Apparatus and Microscope Chamber for Use with Flowing Gas Atmospheres, October 1970, ECOM-5332, AD 716994.
21. Miers, B. T., R. O. Olsen, and E. P. Avara, Short Time Period Atmospheric Density Variations and a Determination of Density Errors from Selected Rocket-sonde Sensors, October 1970, ECOM-5335.
22. Rinehart, G. S., Sulfates and Other Water Solubles Larger than 0.15μ Radius in a Continental Nonurban Atmosphere, October 1970, ECOM-5336, AD 716999.
23. Lindberg, J. D., The Uncertainty Principle: A Limitation on Meteor Trail Radar Wind Measurements, October 1970, ECOM-5337, AD 716996.
24. Randhawa, J. S., Technical Data Package for Rocket-Borne Ozone-Temperature Sensor, October 1970, ECOM-5338, AD 716997.

25. Devine, J. C., The Fort Huachuca Climate Calendar, October 1970, ECOM-6054.
26. Allen, J. T., Meteorological Support to US Army RDT&E Activities, Fiscal Year 1970 Annual Report, November 1970, ECOM-6055.
27. Shinn, J. H., An Introduction to the Hyperbolic Diffusion Equation, November 1970, ECOM-5341, AD 718616.
28. Avara, E. P., and M. Kays., Some Aspects of the Harmonic Analysis of Irregularly Spaced Data, November 1970, ECOM-5344, AD 720198.
29. Fabrici, J., Inv. of Isotopic Emitter for Nuclear Barometer, November 1970, ECOM-3349, AD 876461.
30. Levine, J. R., Summer Mesoscale Wind Study in the Republic of Vietnam, December 1970, ECOM-3375, AD 721585.
31. Petriw, A., Directional Ion Anemometer, December 1970, ECOM-3379, AD 720573.
32. Randhawa, J. S., B. H. Williams, and M. D. Kays, Meteorological Influence of a Solar Eclipse on the Stratosphere, December 1970, ECOM-5345, AD 720199.
33. Nordquist, Walter S., Jr., and N. L. Johnson, One-Dimensional Quasi-Time-Dependent Numerical Model of Cumulus Cloud Activity, December 1970, ECOM-5350, AD 722216.
34. Avara, E. P., The Analysis of Variance of Time Series Data Part I: One-Way Layout, January 1971, ECOM-5352, AD 721594.
35. Avara, E. P., The Analysis of Variance of Time Series Data Part II: Two-Way Layout, January 1971, ECOM-5353.
36. Avara, E. P., and M. Kays., The Effect of Interpolation of Data Upon the Harmonic Coefficients, January 1971, ECOM-5354, AD 721593.
37. Randhawa, J. S., Stratopause Diurnal Ozone Variation, January 1971, ECOM-5355, AD 721309.
38. Low, R. D. H., A Comprehensive Report on Nineteen Condensation Nuclei (Part II), January 1971, ECOM-5358.
39. Armendariz, M., L. J. Rider, G. Campbell, D. Favier and J. Serna, Turbulence Measurements from a T-Array of Sensors, February 1971, ECOM-5362, AD 726390.
40. Maynard, H., A Radix-2 Fourier Transform Program, February 1971, ECOM-5363, AD 726389.
41. Devine, J. C., Snowfalls at Fort Huachuca, Arizona, February 1971, ECOM-6056.
42. Devine, J. C., The Fort Huachuca, Arizona 15 Year Base Climate Calendar (1956-1970), February 1971, ECOM-6057.
43. Levine, J. R., Reduced Ceilings and Visibilities in Korea and Southeast Asia, March 1971, ECOM-3403, AD 722735.
44. Gerber, H., et al., Some Size Distribution Measurements of AgI Nuclei with an Aerosol Spectrometer, March 1971, ECOM-3414, AD 729331.
45. Engebos, B. F., and L. J. Rider, Vertical Wind Effects on the 2.75-inch Rocket, March 1971, ECOM-5365, AD 726321.
46. Rinehart, G. S., Evidence for Sulfate as a Major Condensation Nucleus Constituent in Nonurban Fog, March 1971, ECOM-5366.
47. Kennedy, B. W., E. P. Avara, and B. T. Miers, Data Reduction Program for Rocketsonde Temperatures, March 1971, ECOM-5367.
48. Hatch, W. H., A Study of Cloud Dynamics Utilizing Stereoscopic Photogrammetry, March 1971, ECOM-5368.
49. Williamson, L. E., Project Gun Probe Captive Impact Test Range, March 1971, ECOM-5369.
50. Henley, D. C., and G. B. Hoidale, Attenuation and Dispersion of Acoustic Energy by Atmospheric Dust, March 1971, ECOM-5370, AD 728103.
51. Cionco, R. M., Application of the Ideal Canopy Flow Concept to Natural and Artificial Roughness Elements, April 1971, ECOM-5372, AD 730638.
52. Randhawa, J. S., The Vertical Distribution of Ozone Near the Equator, April 1971, ECOM-5373.
53. Ethridge, G. A., A Method for Evaluating Model Parameters by Numerical Inversion, April 1971, ECOM-5374.

54. Collett, E., Stokes Parameters for Quantum Systems, April 1971, ECOM-3415, AD 729347.
55. Shinn, J. H., Steady-State Two-Dimensional Air Flow in Forests and the Disturbance of Surface Layer Flow by a Forest Wall, May 1971, ECOM-5383, AD 730681.
56. Miller, W. B., On Approximation of Mean and Variance-Covariance Matrices of Transformations of Joint Random Variables, May 1971, ECOM-5384, AD 730302.
57. Duncan, L. D., A Statistical Model for Estimation of Variability Variances from Noisy Data, May 1971, ECOM-5385.
58. Pries, T. H., and G. S. Campbell, Spectral Analyses of High-Frequency Atmospheric Temperature Fluctuations, May 1971, ECOM-5387.
59. Miller, W. B., A. J. Blanco, and L. E. Traylor, A Least-Squares Weighted-Layer Technique for Prediction of Upper Wind Effects on Unguided Rockets, June 1971, ECOM-5388, AD 729792.
60. Rubio, R., J. Smith and D. Maxwell, A Capacitance Electron Density Probe, June 1971, ECOM-5390.
61. Duncan, L. D., Redundant Measurements in Atmospheric Variability Experiments, June 1971, ECOM-5391.
62. Engebos, B. F., Comparisons of Coordinate Systems and Transformations for Trajectory Simulations, July 1971, ECOM-5397.
63. Hudlow, M. D., Weather Radar Investigations on an Artillery Test Conducted in the Panama Canal Zone, July 1971, ECOM-5411.
64. White, K. O., E. H. Holt, S. A. Schleusener, and R. F. Calfee, Erbium Laser Propagation in Simulated Atmospheres II. High Resolution Measurement Method, August 1971, ECOM-5398.
65. Waite, R., Field Comparison Between Sling Psychrometer and Meteorological Measuring Set AN/TMQ-22, August 1971, ECOM-5399.
66. Duncan, L. D., Time Series Editing By Generalized Differences, August 1971, ECOM-5400.
67. Reynolds, R. D., Ozone: A Synopsis of its Measurements and Use as an Atmospheric Tracer, August 1971, ECOM-5401.
68. Avara, E. P., and B. T. Miers, Noise Characteristics of Selected Wind and Temperature Data from 30-65 km, August 1971, ECOM-5402.
69. Avara, E. P., and B. T. Miers, Comparison of Linear Trends in Time Series Data Using Regression Analysis, August 1971, ECOM-5403.
70. Miller, W. B., Contributions of Mathematical Structure to the Error Behavior of Rawinsonde Measurements, August 1971, ECOM-5404.
71. Collett, E., Mueller Stokes Matrix Formulation of Fresnel's Equations, August 1971, ECOM-5480.
72. Armendariz, M., and L. J. Rider, Time and Space Correlation and Coherence in the Surface Boundary Layer, September 1971, ECOM-5407.
73. Avara, E. P., Some Effects of Randomization in Hypothesis Testing with Correlated Data, October 1971, ECOM-5408.
74. Randhawa, J. S., Ozone and Temperature Change in the Winter Stratosphere, November 1971, ECOM-5414.
75. Miller, W. B., On Approximation of Mean and Variance-Covariance Matrices of Transformations of Multivariate Random Variables, November 1971, ECOM-5413.
76. Horn, J. D., G. S. Campbell, A. L. Wallis (Capt., USAF), and R. G. McIntyre, Wind Tunnel Simulation and Prototype Studies of Barrier Flow Phenomena, December 1971, ECOM-5416.
77. Dickson, David H., and James R. Oden, Fog Dissipation Techniques for Emergency Use, January 1972, ECOM-5420.
78. Ballard, H. N., N. J. Beyers, B. T. Miers, M. Izquierdo, and J. Whitacre, Atmospheric Tidal Measurements at 50 km from a Constant-Altitude Balloon, December 1971, ECOM-5417.
79. Miller, Walter B., On Calculation of Dynamic Error Parameters for the Rawinsonde and Related Systems, January 1972, ECOM-5422.

80. Richter, Thomas J., Rawin Radar Targets, February 1972, ECOM-5424.
81. Pena, Ricardo, L. J. Rider, and Manuel Armendariz, Turbulence Characteristics at Heights of 1.5, 4.0, and 16.0 Meters at White Sands Missile Range, New Mexico, January 1972, ECOM-5421.
82. Blanco, Abel J., and L. E. Traylor, Statistical Prediction of Impact Displacement due to the Wind Effect on an Unguided Artillery Rocket During Powered Flight, March 1972, ECOM-5427.