

AD 746987

AD

REPORT NUMBER 4931.05.4140.1

ADVANCE PRODUCTION ENGINEERING  
OF LAW SUBCALIBER TRAINER

FINAL REPORT

W. A. Clayton  
R. E. Gross  
H. E. Thomas

May 1972



PICATINNY ARSENAL,  
DOVER, NEW JERSEY 07801

CONTRACT NO. DAAA21-70-C-0477

Reproduced by  
NATIONAL TECHNICAL  
INFORMATION SERVICE  
U S Department of Commerce  
Springfield VA 22151

DISTRIBUTION STATEMENT A

Approved for public release;  
Distribution Unlimited

MARTIN MARIETTA ALUMINUM INC.  
19200 South Western Avenue  
Torrance, California 90509

Distribution of this document is unlimited

Distribution of this document is unlimited.

Destroy this report when no longer needed. Do not return to originator.

The findings in this report are not to be construed as an official Department of the Army position.

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Martin Marietta Aluminum Inc. (Formerly Harvey Aluminum) 19200 S. Western Ave., Torrance, Ca. 90509		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP	
3. REPORT TITLE ADVANCE PRODUCTION ENGINEERING OF LAW SUBCALIBER TRAINER			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final Report April 1969 - May 1972			
5. AUTHOR(S) (First name, middle initial, last name) William A. Clayton Raymond E. Gross Harold E. Thomas			
6. REPORT DATE May 1972	7a. TOTAL NO. OF PAGES 161	7b. NO. OF REFS 4	
8a. CONTRACT OR GRANT NO. DAAA21-70-C-0477	9a. ORIGINATOR'S REPORT NUMBER(S) HA-2548		
b. PROJECT NO. 4931.05.4140.1	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)		
c.			
d.			
10. DISTRIBUTION STATEMENT Distribution of this document is unlimited			
11. SUPPLEMENTARY NOTES TH		12. SPONSORING MILITARY ACTIVITY Picatinny Arsenal Dover, New Jersey	
13. ABSTRACT Report is of a study to reduce cost and increase manufacturing base for Rocket, Practice 35mm Subcaliber M73 and Modification Kit for M190 Launcher. Program concentrated on items which promised greatest improvement in cost and performance; e.g., Launcher Inner Tube Assembly and Rear Door Assembly; and Rocket Motor Case Warhead and Igniter. Significant contributions were made both to the production cost picture and to the performance of the weapon itself. The rocket motor is fabricated from a slug of carbon steel by the hot cup-cold draw method. The warhead is made of high-impact plastic with end item mixing, while the igniter is made of a polyethylene cup with a zinc die-cast primer housing thus eliminating the need of molding in the presence of explosives.			

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Production Engineering						
LAW Trainer						
Training Rocket						
Rocket						
Subcaliber Rocket						
Launcher						
Launcher Kit						
Motor, Rocket						
Flash Warhead						
Fuze						
Finned Rocket						
Igniter, Rocket						
Percussion ignition						
Shoulder Fired Training Rocket						
M73 Rocket						
M190 Launcher						

REPORT NUMBER 4931.05.4140.1

ADVANCE PRODUCTION ENGINEERING  
OF LAW SUBCALIBER TRAINER

FINAL REPORT

W. A. Clayton  
R. E. Gross  
H. E. Thomas

May 1972

PICATINNY ARSENAL  
DOVER, NEW JERSEY 07801

CONTRACT NO. DAAA21-70-C-0477

MARTIN MARIETTA ALUMINUM INC.  
19200 South Western Avenue  
Torrance, California 90509

## SUMMARY

The purpose of this program was to re-engineer the Rocket, Practice, 35mm Subcaliber: M73 and Launcher Kit for the M190 Rocket Launcher to make more readily producible and economical items. This was to be accomplished without changing the military characteristics and without any sacrifice in performance. Improved performance in certain areas (accuracy) would indeed be welcomed. The Research & Development version of the M73 Subcaliber Rocket and Launcher Kit was developed by Redstone Arsenal and its contractor. It had passed its TECOM proving ground tests with only minor deficiencies.

A study of the Rocket and Launcher Kit was made and those areas which offered the greater cost saving and production advantage were those concentrated on by Martin Marietta Aluminum. Briefly, these were: (1) head design to permit less expensive parts and end item mixing; (2) fuze subassembly to permit elimination of X-ray; (3) rocket motor fabrication from 1035 steel slug; (4) separately molded fin, and (5) two-piece igniter, eliminating need for molding with explosives in the molded item. Launcher Kit: (1) simplified tube assembly, and (2) rear door that remains on launcher. In addition, many less (cost) significant changes were incorporated.

Three thousand Rockets and 100 Launcher Kits were produced in two lots. The first lot consisted of 150 Rockets and 10 Launcher Kits for testing by Martin Marietta Aluminum for Picatinny Arsenal. The second lot of 2850 Rockets and 90 Launcher Kits were delivered to Aberdeen Proving Grounds and Picatinny Arsenal for Army testing.

All objectives were accomplished. In the firing tests, the APE units proved to be not only equal but superior to the R&D version. The superiority was especially pronounced in the accuracy of the round which exhibited a dispersion of approximately 60% of the R&D version.

In cost reduction (production), it has been estimated that the Launcher Kit will be approximately 60% that of the previous design and the Rocket will also cost approximately 70% of the R&D version.

## FOREWORD

This Advanced Production Engineering Study was authorized under Contract DAAA21-70-C-0477 (AMCMS Code No. 4931.05.4140.1).

The redesign study was more or less a continuation of work accomplished by Redstone Arsenal and its contractor. Full use was made of the ballistic and performance data generated by these agencies as well as by Aberdeen Proving Grounds in its engineering tests of the R&D hardware. In addition, advice and direction was obtained from personnel at several government establishments including Picatinny Arsenal, Radford Arsenal, Army Missile Command and Aberdeen Proving Grounds.

Within the Martin Marietta Aluminum organization, the authors were only part of a team which is too numerous to include. However, acknowledgement is extended to Messrs. J. M. Estrada and H. S. Waters for their contributions. Mr. Estrada contributed substantially to the motor development under Mr. R. E. Gross while Mr. Waters contributed to the overall production studies.

## TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
I	DISCUSSION	1
	1. LAUNCHER KIT	2
	2. ROCKET	9
	3. ROCKET TESTING	62
II	ESTIMATED COST FOR MASS PRODUCTION	79
	1. LAUNCHER KIT	79
	2. ROCKET	80
III	DRAWINGS AND SPECIFICATIONS	82
	1. DRAWINGS	82
	2. SPECIFICATIONS	82
IV.	MANUFACTURE	86
V.	ABERDEEN PROVING GROUNDS (TECOM) TESTS	87
VI.	CONCLUSIONS AND RECOMMENDATIONS	89
APPENDICES		
A.	Inner Tube Assembly Drawing	90
B.	Warhead and Fuze Drawings	92
C.	Cost Data on Motor Production and Drawings	100
D.	Drawings of Igniters	115
E.	Drawings and Specifications	121



LIST OF ILLUSTRATIONS (contd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
1	Removable Spacers for Firing Without Subcaliber Tube	3
2	Rocket-Launcher Alignment	4
3	Modified Firing Pin Housing Cover	5
4	Modification of the Primer Housing Door	7
5	New Two-piece Inner Tube Assembly	8
6	Proposed Head Assembly Loaded (Design No. 1)	11
7	Proposed Head Assembly Loaded (Design No. 2)	12
8	Loaded Head Assembly	13
9	Head with Integral Primer Holder	16
10	Fuzeless Warhead - Concept 1	19
11	Fuzeless Warhead - Concept 2	20
12	Body for Flash Initiation Tests	22
13	One-piece Motor and Closure	26
14	Motor Case Cost in Mass Production	28
15	Weight Distribution per 1000 Units - Lot 1	34
16	Fin Assembly Die	35
17	Motor Case Material-vs-Low Carbon Steel	37
18	Motor Case Cost in Mass Production	38
19	Fin and Motor Case Assembly	41

LIST OF ILLUSTRATIONS (concluded)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
20	Igniter Assembly 1	42
21	Igniter Assembly 2	43
22	Typical Pressure-Time Traces for $-10^{\circ}\text{F}$ Temperature	47
23	Typical Pressure-Time Traces for $135^{\circ}\text{F}$ Temperature	47
24	Typical Pressure-Time Traces for $-10^{\circ}\text{F}$ Temperature Igniter Tests	48
25	Typical Pressure-Time Traces for $135^{\circ}\text{F}$ Temperature Igniter Tests	48
26	Typical Pressure-Time Curve (Round 1, Table V)	54
27	Typical Pressure-Time Curve (Round No. 4)	61
28	Test Setup in Tunnel - $64$ -deg. Impact Test	69
29	Target Comparison at 200 Meters	74
30	Comparative Production Cost Estimates	81

LIST OF TABLES (contd)

<u>Table</u>	<u>Title</u>	<u>Page</u>
I	Head Material Candidates	14
II	Tests on Fuzeless Heads	23
III	Motor Case Mass Production Cost (1,000,000 units/year)	39
IV	Igniter Tests	46
V	Rocket Igniter Tests	51
VI	Igniter Tests - Blowout Pressure	52, 53
VII	Averages of Small Samples Tested	55
VIII	Igniter Tests with Controlled Venting - 29 Sept 1970	56
IX	Igniter Tests with Controlled Venting	57
X	Igniter Tests - Cold Temperature Integrity	58
XI	Static Rocket Motor Igniter Tests	59
XII	Prototype Igniter Intact Tests	60
XIII	Velocity Test	64
XIV	Corrected Velocity	65
XV	Impact Tests - Five-foot Drop	67
XVI	Impact Tests for Setback and 64-deg. Impact	70
XVII	Velocity Test to Establish APE Propellant Charge	71
XVIII	Accuracy and Flash Test - APE	73

LIST OF TABLES (concluded)

<u>Table</u>	<u>Title</u>	<u>Page</u>
XIX	Accuracy and Flash Tests - R&D	75
XX	Accuracy of LAW Rounds	75
XXI	Unit Cost Breakdown for APE M190 Launcher Kit	79

## I. DISCUSSION

The Research and Development Department of Harvey Aluminum (now Martin Marietta Aluminum) commenced work on the Advanced Production Engineering program 1 April 1970.

The prime objective of this task was to production engineer the rocket and launcher (kit) designs (including inspection techniques, specifications and drawings) to permit a broad base and the most economical production (in quantities of one million a year for the rocket, and five thousand a year for the launcher kits). Obviously, because the rocket involves the greater quantities, it was given the greatest consideration.

If improved performance was to be obtained as a result of the APE program, this also was to be incorporated if it could be obtained without a significant increase in cost factor.

Prior to contract award, Picatinny Arsenal decided to supply the contractor with plate and stud and propellant assemblies from Radford Arsenal. Radford Arsenal has equipment and substantial experience in assembling these and LAW propellant charges.

Very early in the program, all available reports of the work conducted in the R&D phase were carefully reviewed to ascertain performance and design characteristics, as well as to avoid any duplication.

The contractor's approach during the first phase of this contract (first two months) was to start with the concepts and plans submitted in the proposal, to develop these in greater detail, and to generate others so that all possible avenues were covered. These concepts were weighed against each other and the R&D designs first on the basis of satisfactory performance and then, if equivalent, on cost.

Some areas of the R&D design appeared to offer little opportunity for cost improvement; consequently, only a cursory effort was spent in those areas so that more effort could be spent in the more fruitful tasks. Among the areas that saw little or no change were: (1) the thread sealant application, (2) the flash mix formula, (3) the ITL and Black Powder proportions, (4) the safety clip design, (5) the finishes and (6) the packaging and marking.

Once the designs of the components were selected they were detailed, fabricated and tested at the contractor's test site. Upon satisfactory performance of all components, the first quantities (10 launcher kits and 150 rockets) were fabricated and tested followed by the manufacture of the remaining quantities. Army drawings and specifications were also prepared with the first production. These items will be discussed in detail in the following text.

## 1. LAUNCHER KIT


### a. Elimination of Entire Subcaliber Tube

No product engineering and value engineering study would be complete without consideration of a design that would eliminate the necessity of launcher modification. One such approach is illustrated in Figure 1. Here, the small rear fins are replaced by three full-sized fins (i.e., 2.532-inch fins), and the forward bearing area is brought up to caliber via jettisonable plastic spacers. The problem then resolves into two questions: (1) what is the cost trade-off between this method and the tube insert? and (2) can comparable accuracy be achieved by this technique without any changes to the launcher?

Examination of the latter shows that without additional launcher modification, the accuracy would be unacceptable. Figure 2 indicates the possible orientation of the rocket in the forward tube. This represents a possible undesirable orientation in the launcher and not necessarily the desired accuracy. However, a possible deviation of  $\frac{.135}{20} = 7.2$  mils in any direction could result. Inasmuch as this would be excessive, any modification to the launcher would negate the advantages of such an approach. This design consideration was eliminated without cost trade-offs.

### b. Rear Door (sub group)

The first consideration for the rear door design is shown in Figure 3. This uses a modified rear door of the LAW launcher with cuts to allow it to pivot on one of the screws. The door was held in the closed position by a leaf spring. This configuration worked well except on firing the primer would expand and push against the primer housing so as to tend to wedge the door tight. To open the door, either the screws would have to be loosened or the door would have to be pried open with a screw driver (or similar tool). Therefore this design was discarded and a modification to the primer housing door was needed to permit easy opening under all circumstances including those experienced by expansion of the primer. As a result, a

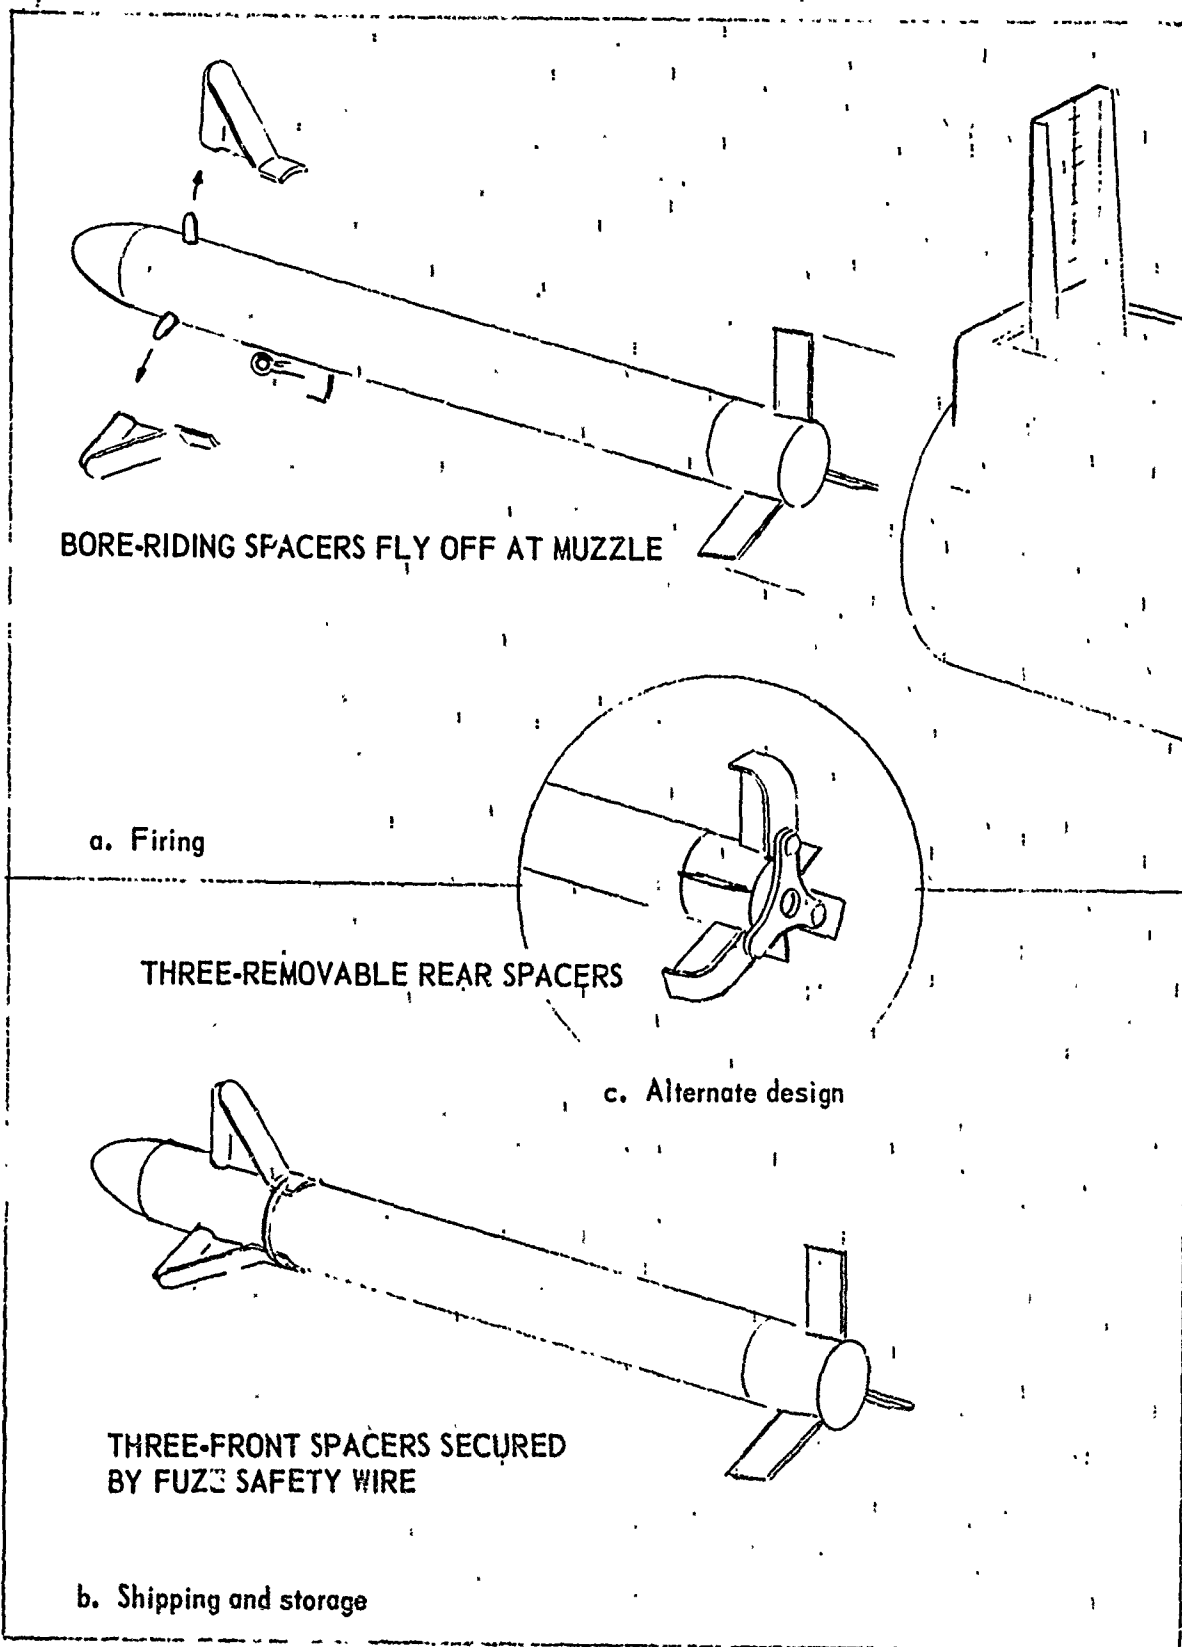

BORE-RIDING SPACERS FLY OFF AT MUZZLE

a. Firing

THREE-REMOVABLE REAR SPACERS

c. Alternate design

THREE-FRONT SPACERS SECURED BY FUZE SAFETY WIRE

b. Shipping and storage

Figure 1. Removable Spacers for Firing Without Subcaliber Tube

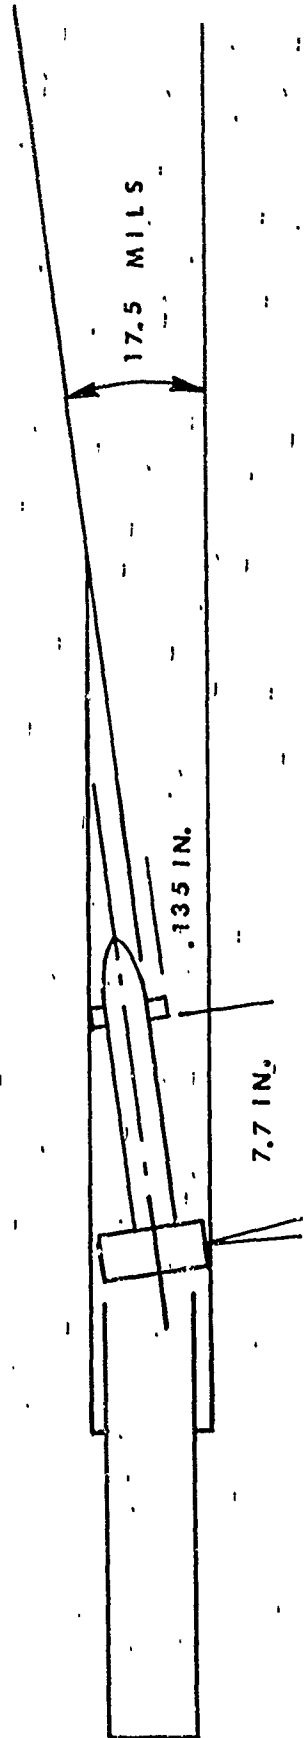
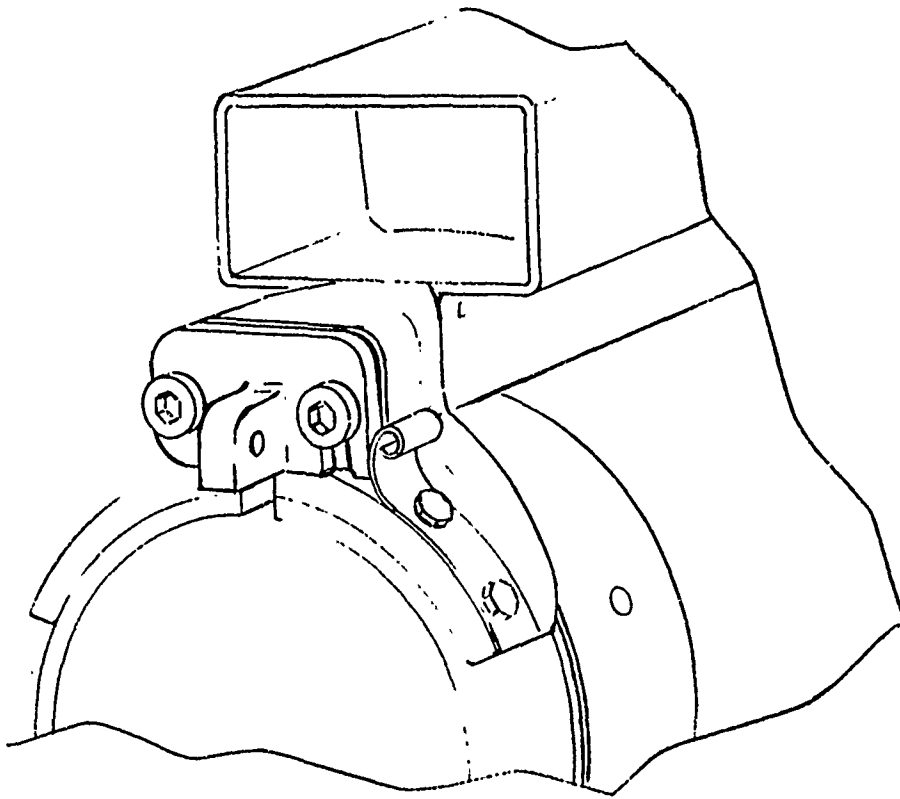


Figure 2. Rocket-Launcher Alignment





**Figure 3. Modified Firing Pin Housing Cover**

modification was made as illustrated in Figure 4. This door assembly is a hybrid between the previous door and that of the R&D version. The door pivots on one screw as in the old design, but is held snug via a pivoting spring wire pin similar to that used in the R&D launcher. The pin is attached to the launcher by a cord, so there will be no loose parts on the launcher. This design was used throughout the Camp Pendleton and Aberdeen Proving Ground testing with excellent results.

c. Inner Tube Assembly

Several combinations for the inner tube assembly were considered. Figure 5 illustrates a double-wall aluminum extrusion assembly which would have fewer pieces than the R&D design. However, an extrusion with double walls of the length required (approximately 25 inches) would present a difficult task, nor could the assembly be made as economically as the recommended design.

A design made of an aluminum impact extrusion (or extrusions), wherein the bulkhead is integral with the wall, loses its advantage in the cost of material. In the recommended design, the rear bulkhead (which brings the unit up to weight) is made of inexpensive low carbon steel.

Further, in the quantities of 5000 per year, the cost of impact extrusions would be higher than the recommended design. This would be true of the double-wall extrusion or two single-wall extrusions. (No drawing was made of the latter design, but it would look very much like that shown in Figure 5 except the center tube and rear bulkhead would be one impact extruded piece, and the outer tube and front bulkhead would be another piece. Attachment of the two pieces could be by mechanical means.)

The selected design is much simpler, and by using a lower priced steel for most of the weight and center of gravity control, the above concepts could not compete in costs.

d. Selected Inner Tube Design  
Drawing 9256067, Appendix A

The inner tube assembly was redesigned to the simplest form to minimize cost and reduce assembly time in the field. The weight and center of gravity were changed to more nearly duplicate the feel of the loaded LAW launcher. The inner tube assembly is manufactured as a pre-assembled four-piece unit consisting of a subcaliber tube with three


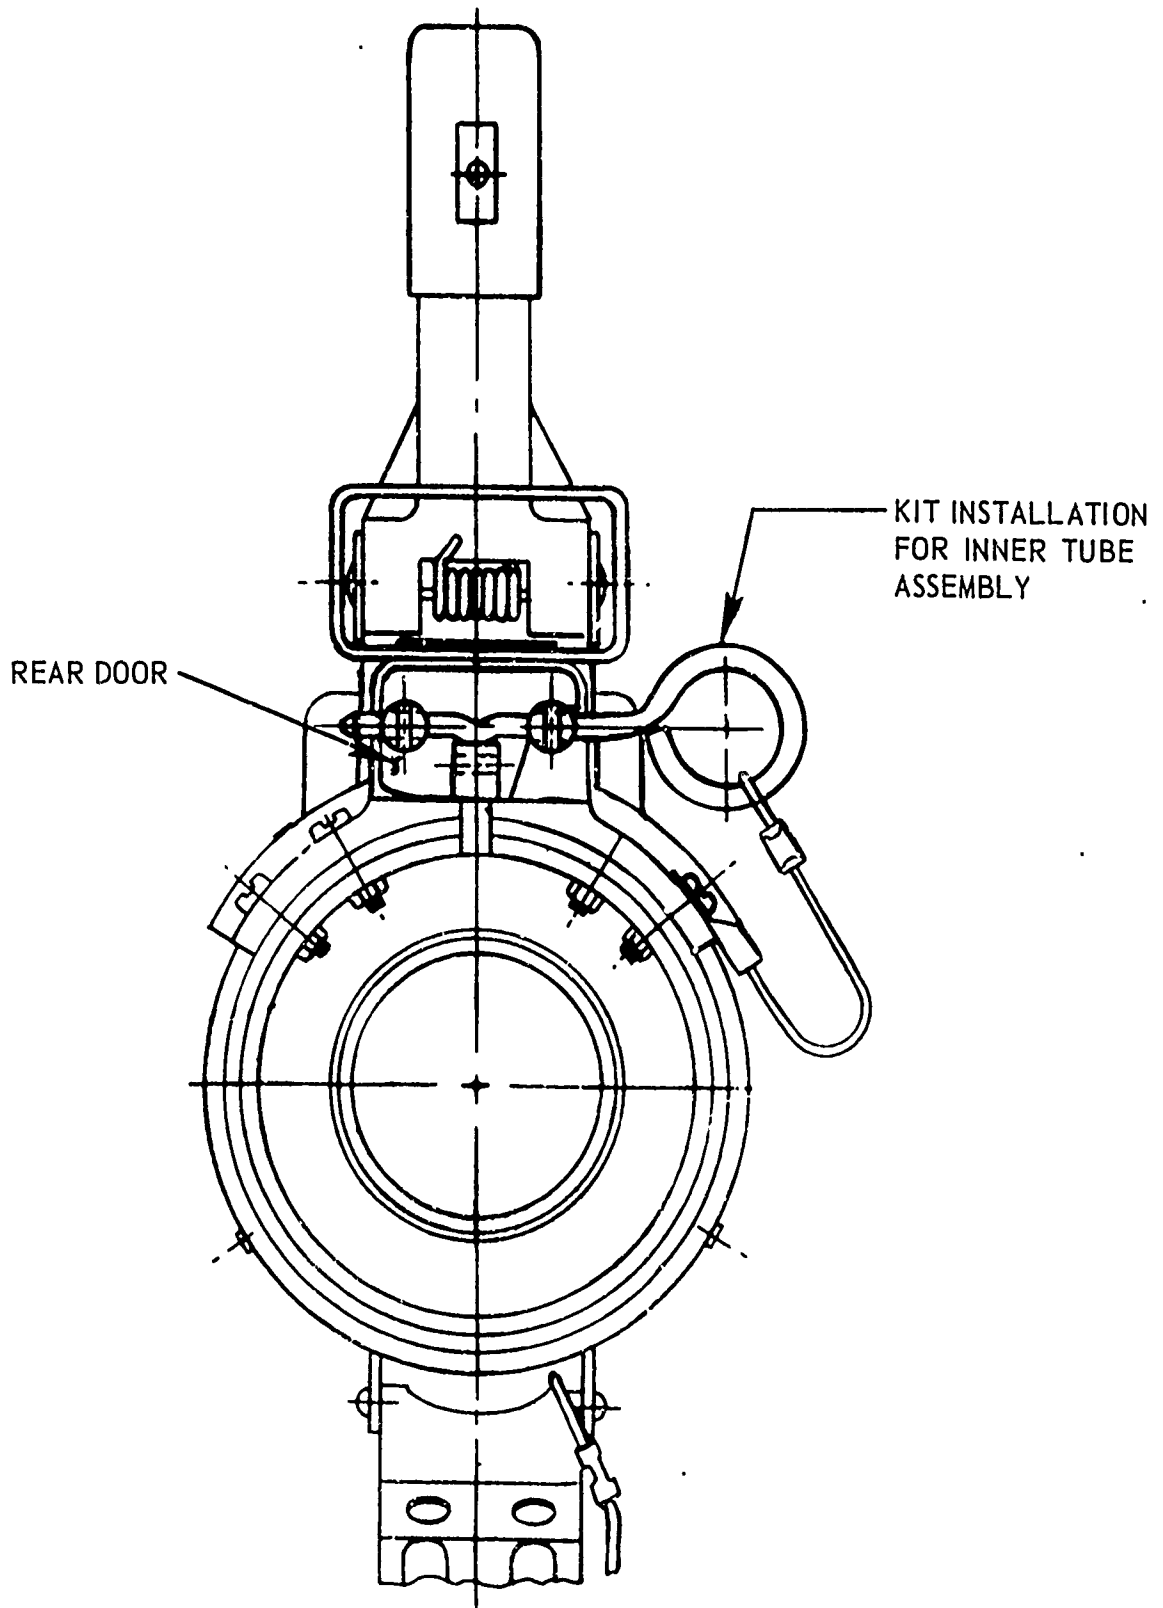


Figure 4. Modification of the Primer Housing Door

SWAGE AFTER ASSEMBLY  
TO CONFIGURATION  
SHOWN

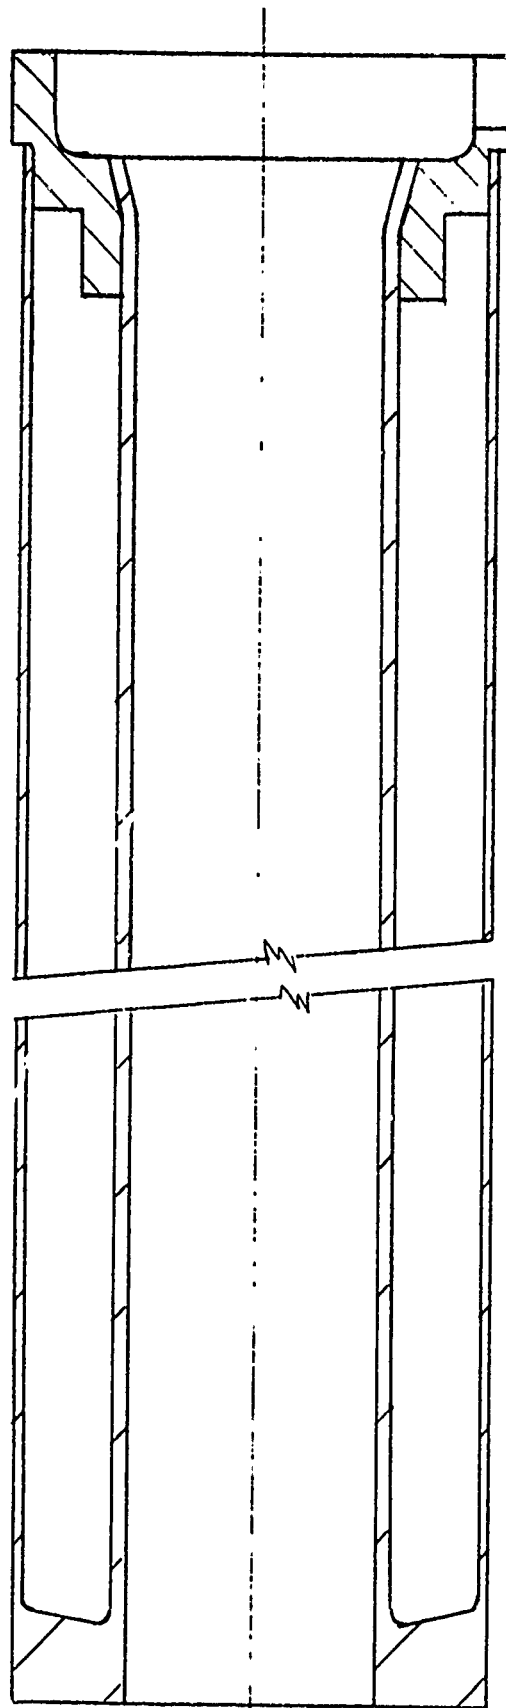

REAR CLOSURE  
(REDESIGNED)

Figure 5. New Two-piece Inner Tube Assembly

supports: front, center and rear. The center support could be eliminated but then the two sliding launch tubes of the basic LAW launcher permits excessive angular movement in the extended position. The center support was added to insure accurate alignment between the subcaliber launch tube and the LAW sight base.

The inner tube assembly is inserted into the standard LAW launcher after removal of four rivets in the rear closure. An additional one-inch was added to the inner tube length to use all available space in the stowed position. This will provide a longer guided contact with the subcaliber LAW on firing to provide for greater accuracy.

The field assembly will be as follows:

- Punch out the four rivets in the launcher, inserting temporary pins to maintain alignment.
- Insert the subcaliber inner tube assembly.
- Line up the rivet holes and insert four screws with rear door pin assembly attached to right hand screw (Figure 4).
- Apply nuts.

This configuration represents the optimum in inexpensive parts and simplicity of launcher field modification and therefore reflects the floor in cost and operation. The R&D designs are obviously more expensive to manufacture due solely to the fact that they basically incorporate the recommended design plus additional components and assemblies. The modified kit utilizing the four-piece inner tube assembly, with screws and nuts to fasten the tube to the LAW launcher and the rear door assembly, together with the spring pin's special screws to hold it in place, was the recommended final design and the one used in all Camp Pendleton firings (Dec. 1970) and Aberdeen Proving Ground firing tests (Feb. 1972) with excellent results.

## 2. ROCKET

### a. Head

#### (1) Warhead Design and Loading

At the Picatinny meeting held early in the program, Arsenal personnel emphasized the hazard of loading the mix used in this rocket warhead and very strongly recommended an "end item mixing technique."

As a result, the procedure on the warhead was reoriented to this end. A few of the early approaches are shown in Figures 6 through 8. In all designs, the flash mix would be loaded into the head in separate components, then the chamber would be closed with a second piece which closes the chamber but not fully seated. After the mixing process, which would be accomplished in a fixture, the components would be seated and sealed. Figures 6, 7, and 8 show various geometries for the assembly. Figures 6 and 7 have no allowance for relief of the entrapped air, but Figure 8 partially solves this problem.


Drawing 9256053 (Appendix B) shows the preferred warhead design. It too, follows the tenet set down by the Arsenal of end item mixing. This design is considered superior to those described above for its simplicity and cost. All designs contained two basic plastic parts, and these would have equivalent cost pictures. Design 9256053 has two features which give it a cost advantage over others: (1) the primer plate is incorporated in the head, therefore, this piece unit cost and assembly has been eliminated; (2) the unit assembly (loaded and sealed) is completed prior to mixing thereby eliminating subsequent operations. The small (possible) void left in the mix cavity was not considered to be a significant problem; however, to test if hazardous condition existed, 10 rounds were fired at 140°F to exaggerate the launch condition and no undesirable effects were observed. In this test, precaution was taken to insure that the flash material was as far forward as possible to accentuate the effects of the acceleration forces.

In addition, it was planned to change the location of the three struts to the rear as shown in the illustrations to save on both die and molding costs. The struts have the shape as shown in Figure 8 to facilitate molding and also to increase the strength without affecting flight characteristics. A check on the effects on drag revealed that the drag coefficient ( $C_D$ ) on a cylindrical strut is 1.17 for Reynolds number between  $10^4$  and  $10^6$ , while for a semicircular shape such as proposed, the  $C_D$  would be 1.16 for the strut (1). The Reynolds number for the strut on the rocket at 500 fps would be  $2.57 \times 10^4$ ; therefore, the values are valid for this consideration. Likewise, the effects on lift on this small section should be negligible.

With this final design, one additional change to the flash mixing procedure was incorporated; i.e., the fuels were bulk pre-mixed, and as a result, only two components were measured (weighed) for each head loading, in lieu of the previous four. Thus, the loading operation was reduced from


---

(1) Sighard F. Hoerner, Fluid Dynamic Drag, Midland Park, N. J., 1958

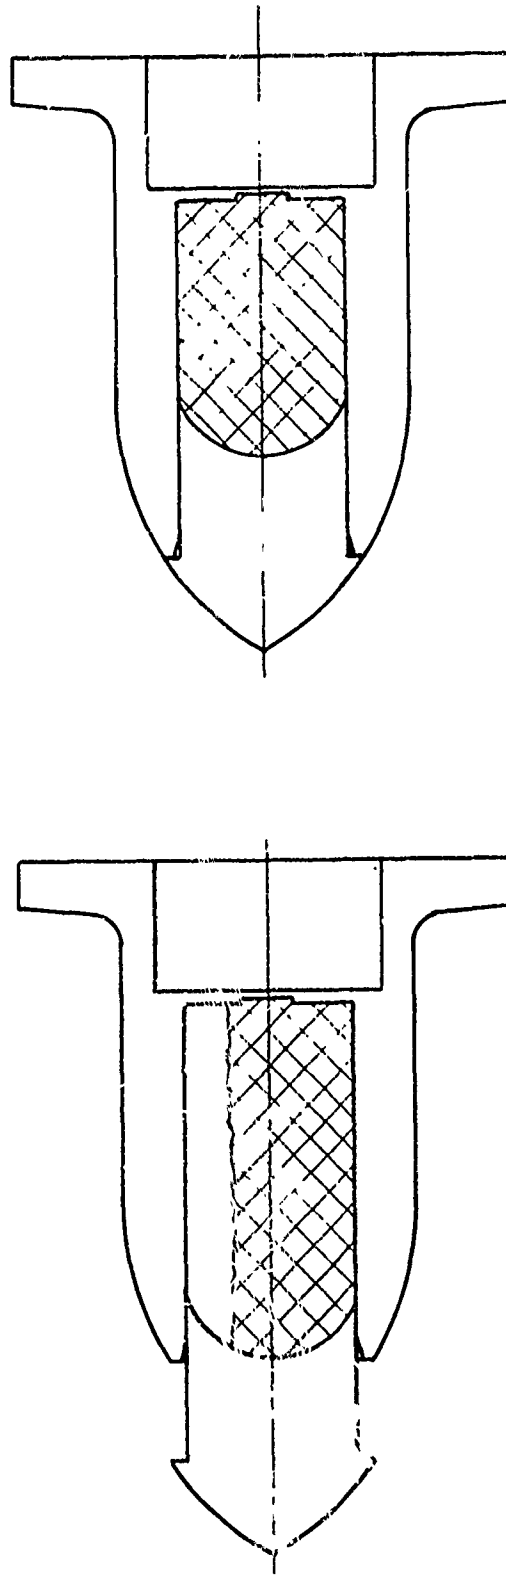

1. PLACE POWDER COMPONENTS IN HEAD
2. INSERT NOSE PLUG
3. PLACE IN SHAKE FIXTURE AND MIX POWDER
4. APPLY SOLVENT TO INTERFACE AND PRESS CLOSED

Figure 6. Proposed Head Assembly Loaded (Design No. 1)

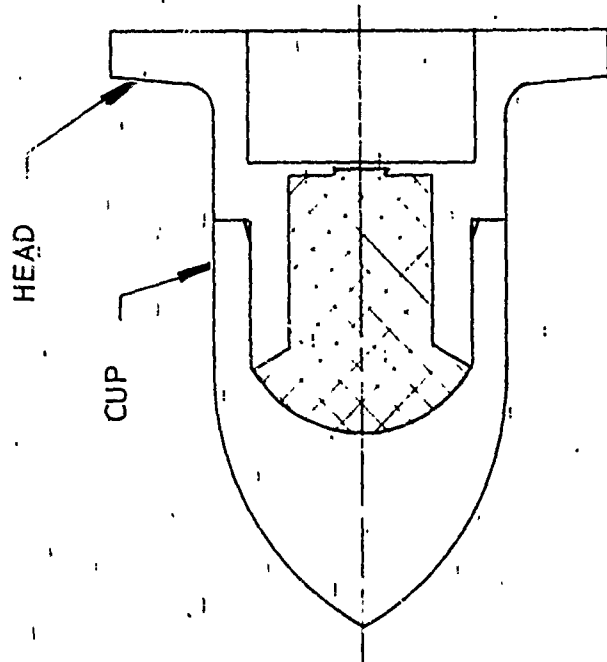

1. PLACE POWDER COMPONENTS IN CUP
2. INSERT HEAD
3. PLACE IN SHAKE FIXTURE AND MIX POWDER
4. APPLY SOLVENT TO INTERFACE AND PRESS CLOSED

Figure 7. Proposed Head Assembly Loaded (Design No. 2)



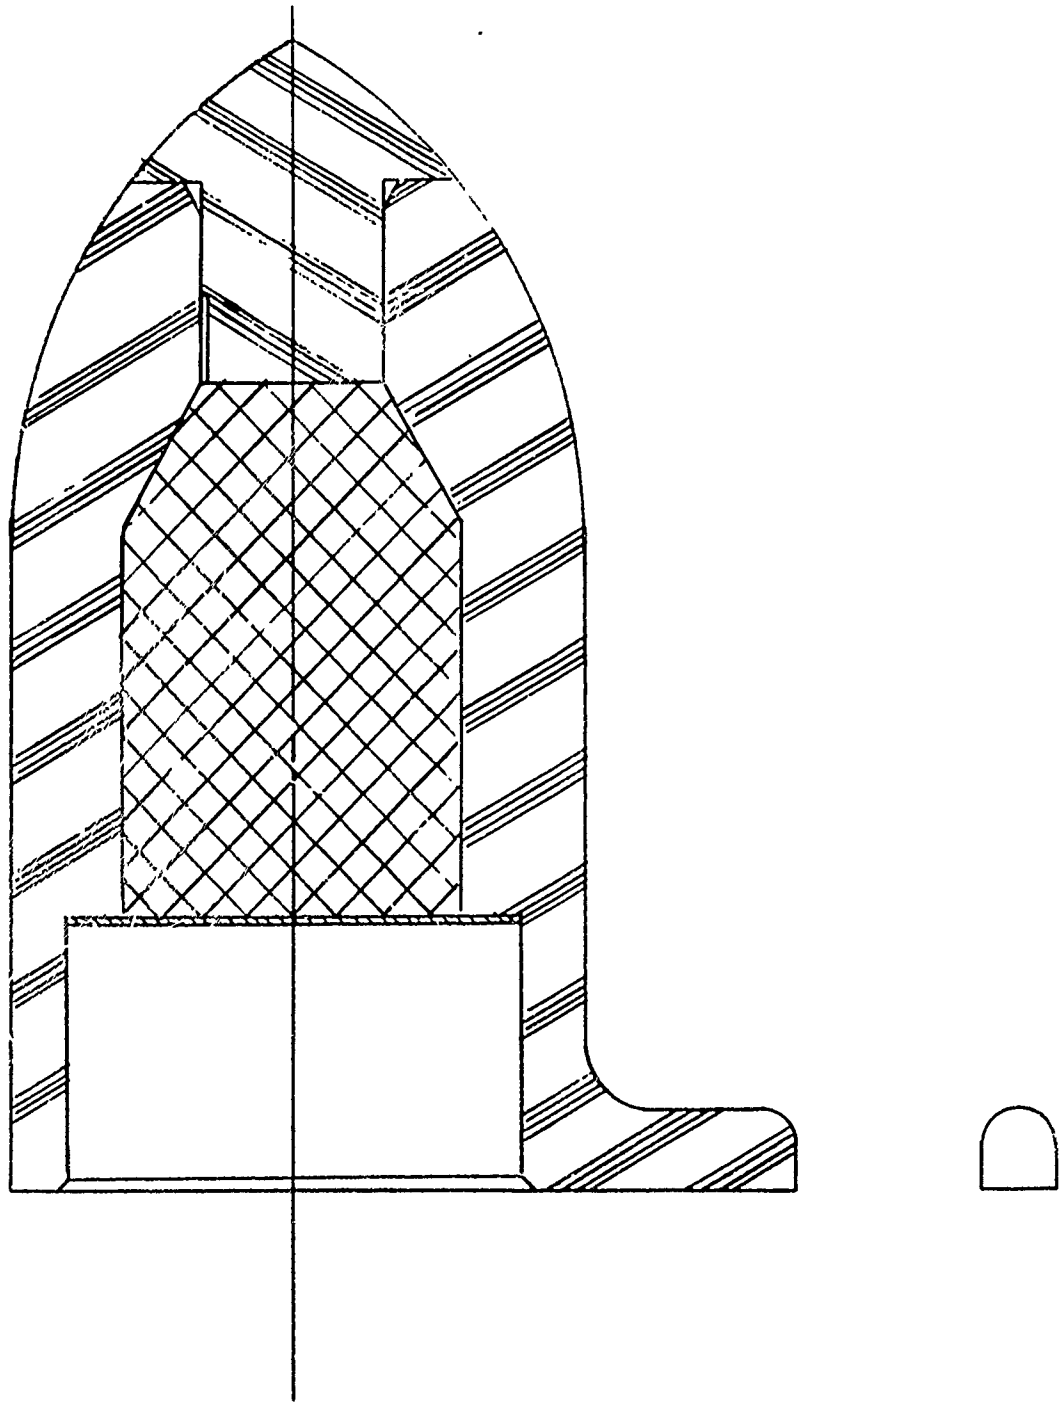


Figure 8. Loaded Head Assembly

four measurements to two which achieved additional economies. The mixing cycle was established as two minutes at  $65 \pm 10$  cps with a .19-inch orbital motion perpendicular to the axis of the head.

(2) Material

The material used for the warhead of the R&D Subcaliber Rocket was Nylon, Type 6/6. This material required a tempering operation in boiling water subsequent to molding. A survey was made of all available molding materials that may be equal or better in performance and also offer a cost advantage. Several plastics were found that would be better. The pertinent characteristics of the most promising of those together with Nylon are listed in Table I.

TABLE I. Head Material Candidates

	Material	Impact Strength Izod	Tensile (psi)	Flexural Yield Strength	Cost \$/lb
R&D	Nylon-Type 6/6	1.0	7-10,900	8-13,800	1.26
	ABS-H	6.3	4700	7600	.33
APE	Cellulose-Acetate-Buterate-MH	6.1	3900	5900	.43
Candi- dates	ABS-Polycarbonate	10	8200	14,300	.67
	Polycarbonate	16	9500	13,500	.75

The reasons for change consideration, in the order of importance, are: (1) better bonding qualities than nylon; therefore, reduced assembly costs; (2) increased impact strengths, and (3) cost of molding material (approximately half with the exception of polycarbonate and ABS-polycarbonate which would be only slightly less). A survey of available information indicated that with the possible exception of the polycarbonates, the materials will be compatible with the mix. This was checked further by Picatinny Arsenal for both ABS and cellulose acetate buterate and they were found to be compatible.

The rocket head is submitted to rather severe impact forces while the launching loads place only modest tensile, compression and flexural stresses on the parts. Consequently, impact strength is the more important mechanical property that should be considered for the warhead. In this regard, the polycarbonates are best but the ABS and cellulose acetate butyrate were superior to nylon by a factor of 6. In that nylon apparently performed satisfactorily in this regard, and as all listed candidates are superior, the choice among these was then made on the basis of cost. The materials selected were ABS and cellulose acetate butyrate. Subsequently, the cellulose acetate butyrate exhibited slightly better molding qualities and this material was used in the contractor production.

b. Fuze

Considerable effort was expended to modify the general fuze design to simplify design, improve safety and inspection, and insure greater reliability (e.g., a symmetrical setback weight should categorically improve consistency and reliability) at the various impact modes. Each approach in this effort tends to defeat the purpose of the contract; i.e., to make the design more economical with fewer and simpler pieces. Consequently, the major effort on the fuze was concentrated in two channels: (1) improve the functionability and cost picture of each component, and (2) eliminate the fuze entirely. This latter task, although proven feasible, would have extended the contract beyond prescribed limits to demonstrate functioning and reliability. For a discussion of the fuzeless warhead see Subsection c.

One avenue to reduce the cost was the elimination of the necessity of 100% radiographic inspection. The configuration in Figure 9 illustrates attempts to eliminate the requirement for the 100% X-ray to insure that the fuze is unarmed. The rear section of the warhead would be made of a clear plastic so that the presence of the spring would be visible (the motor closure would have a slot as indicated). Added features shown are:

The primer block is integral with the head, saving the cost of a primer block.

The setback spring-firing pin assembly is assembled as a component of the head assembly; therefore it will move inside a very smooth finished, low-friction housing surface attainable at no additional cost.

However, this design also has objectionable features, among which is the overriding fact that the user does not want a window whereby the recruit could see the mechanism as this might have psychological effects in training. As a result, this approach was abandoned.

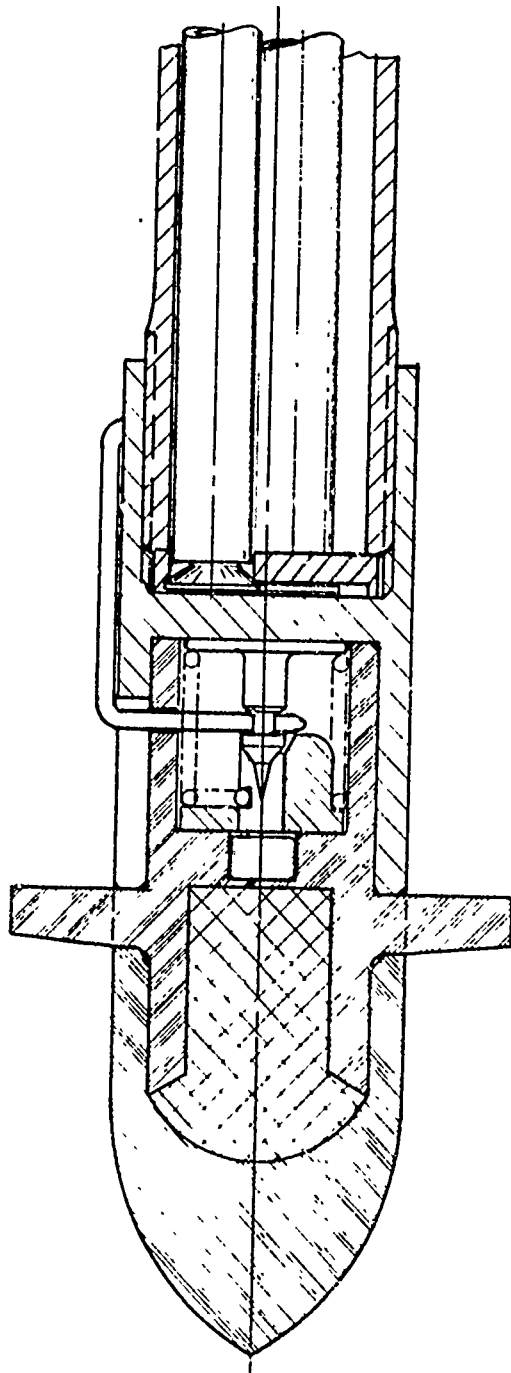


Figure 9. Head with Integral Primer Holder

Mr. J. Howison of MICON, Redstone Arsenal, suggested the possibility of utilizing the safety pin as a means of checking for proper assembly of the fuze. Expanding on this idea, the contractor made the inertia weight, spring and firing pin into a subassembly as shown in Drawing 9256062, (see Appendix B). The spring grips both the weight and the pin; therefore, only one unit (this subassembly) is inserted into the closure at assembly. This prevents the possibility of omitting the weight or the spring. If the assembly is inserted into the cavity backwards, the safety pin will not fit into place; consequently, the unit will have to be correct or it will be rejected. To accomplish this subassembly, minor changes were incorporated in the inertia weight, firing pin and spring as shown in Drawings 9256048, 9256050 and 9256059 (see Appendix B).

#### (1) Fuze Components

Prior to establishing the final configuration as discussed above, cost improvement studies were made on the fabrication of the components. The results of analysis generated were incorporated in the final design.

##### (a) Firing Pin

Drawing 9256050, Appendix B, illustrates an aluminum firing pin. This pin has a shoulder of .057-inch added; therefore it is much longer in overall length. This pin will have the same weight as the present steel pin. Furthermore, some of the weight that was eliminated by the omission of the steel primer block would be utilized in making the fuze cavity longer to accommodate this length. The added shoulder incorporates a groove that facilitates locking to the spring. Otherwise, the firing pin is essentially the same.

A second candidate firing pin is the steel pin of the R&D version shown in U. S. Army Drawing 10242745 with the fillet changed. A third version is this pin made in two pieces as shown in Drawing 9-47755, Appendix B.

Of these pins, the preferred design is the aluminum pin shown in Drawing 9256050, Appendix B, and the selection is made on the basis of cost in the one million per year quantity; the lowest piece price obtained for the steel pin (ref. Ordnance Part No. 10242745) was \$.9558; for the two-piece: \$.0448, and for the aluminum pin: \$.0210.

##### (b) Spring

The spring remains as in the R&D version but with coils and an inward spiraling end to grip the firing pin (Drawing 9256059, Appendix B).

(c) Inertia Weight

The inertia weight was modified as illustrated in Drawing 9256048, Appendix B. The basic changes are rearrangement of the removed material from the cylinder and the 30-deg. slope to give better fit with the firing pin (complete encirclement).

Three modes of manufacture were considered: (1) machine from bar stock, (2) powder metallurgy and (3) zinc die cast. The unit costs at the rate of one million determined the recommended procedure which was (1) machine from bar stock.

(d) Safety Clip

No changes were made in the safety clip except a slight change in length to accommodate the change in dimension in the closure.

c. Fuzeless Warhead

As stated, the emphasis on the fuze is to consider the production of the fuze components or to eliminate the fuze entirely. In the latter case, certain tests at Redstone Arsenal<sup>(2)</sup> indicate the possibility of the warhead functioning without a fuze. In the Redstone test, 100% functioning up to 35 degrees from normal and 70% at 45 degrees was obtained. Figures 10 and 11 illustrate concepts designed to increase this function down to a very low graze angle and permit function on all ground impacts. The ogive is frangible and separates upon impact. The plug is shaped to bite into the target and subject the mix to high local impact pressures or to a heat or spark. Safety is secured by a strong pin through the ogive that prevents crush. The flash mixture cavity is completely sealed, and there is no channel open to the sensitive parts.

Should it be possible to eliminate the fuze, about \$.23 per unit will be saved in quantity production - or \$230,000 on a production run of one million rounds. Further, the waterproofing of the fuze warhead assembly will be vastly improved.

(2) W. M. Riddle, T. B. Farris, Engineer Design Test Program for Training Device for 66-mm Light Antitank Weapon (LAW) M72E1, Report No. RT-TR-20, AD 861845, p. 105, Table XXV, U.S. Army Missile Command, Redstone Arsenal, Ala., May 1969 (U).

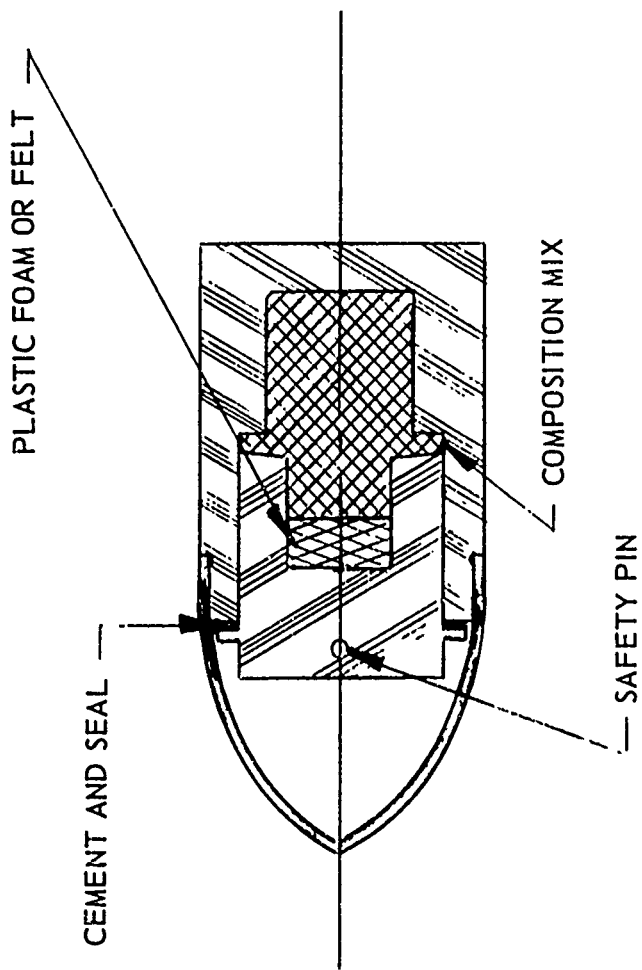


Figure 10. Fuzeless Warhead – Concept 1

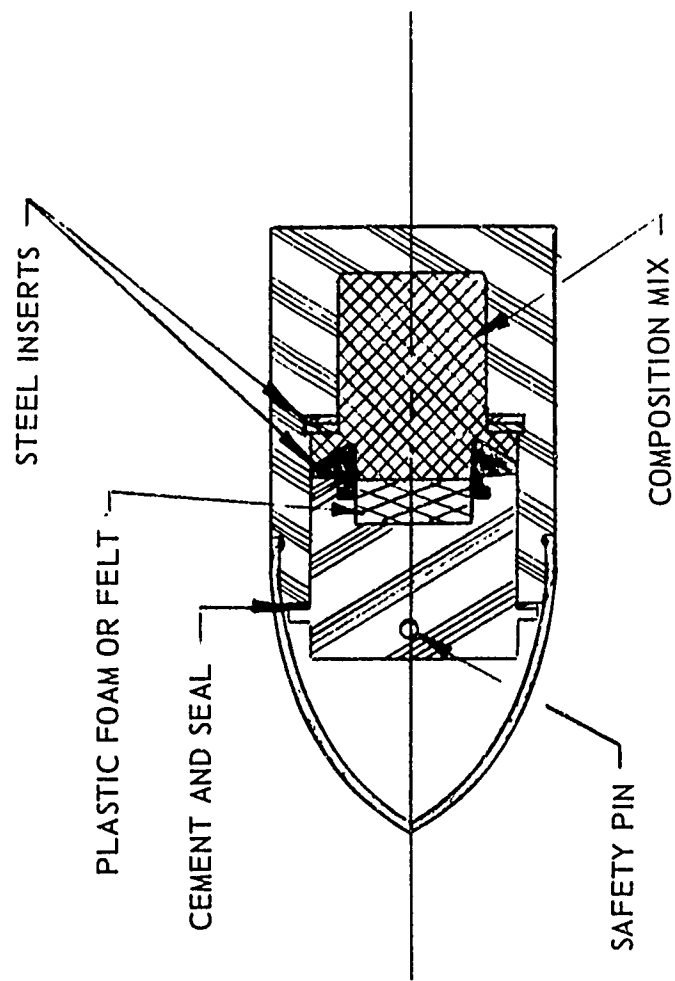


Figure 11. Fuzeless Warhead – Concept 2



A test head was designed and test samples were fabricated to determine if it would be possible to eliminate the fuze. Figure 12 shows these test heads.

Heads of this design, but without the steel washers, were loaded and tested. The results, while encouraging, were not considered satisfactory; that is, one functioned on 3/4-inch plywood while one did not. The design also functioned on the steel plate.

Two other modifications were tested (one round each) with poor results. One had a rubber cushion on the front while the other had steel faces on the crushing surfaces.

The final design (ref. figure 12) was tested. This design has a flat washer in the head and a chamfered washer in the nose. It also permits about 1/8-inch movement in the pinching action.

In firing tests this design gave four out of four functionings on the face of the 3/4-inch plywood. This is a better ratio than the fuze R&D design, which gave twelve functionings on the face, seven functionings behind the plywood, and one dud.

In tests for insensitivity, three out of four did not function on 1/4-inch plywood. The results of these firing tests are listed in Table II.

These tests were extremely encouraging; for one thing, the 1/4-inch plywood was an arbitrary criteria and may be too rigid. For another, the tactical design would have an ogive on the front which would also help in penetrating the 1/4-inch plywood. In any event, the design has many parameters that would permit adjustment if necessary.

There can be no question about the feasibility of eliminating the fuze; however, additional tests are required to establish all performance parameters over a wide variety of circumstances, and it would be extremely fortunate if the current design would meet all requirements without further refinement.

At the time of the completion of the above testing, both the schedule and funding demanded that a decision be made on whether to pursue the fuzeless type or incorporate the fuze described in the preceding subsection b. Because there were too many facets to be explored and tested within the time frame and funds available, the fuzeless approach was abandoned in favor of the more conventional approach. However, the contractor was convinced that the fuzeless head was not only more economical but also safer and more fool-proof; and an unsolicited proposal was submitted to Picatinny Arsenal to develop such a head and incorporate it into the subcaliber at a later date.

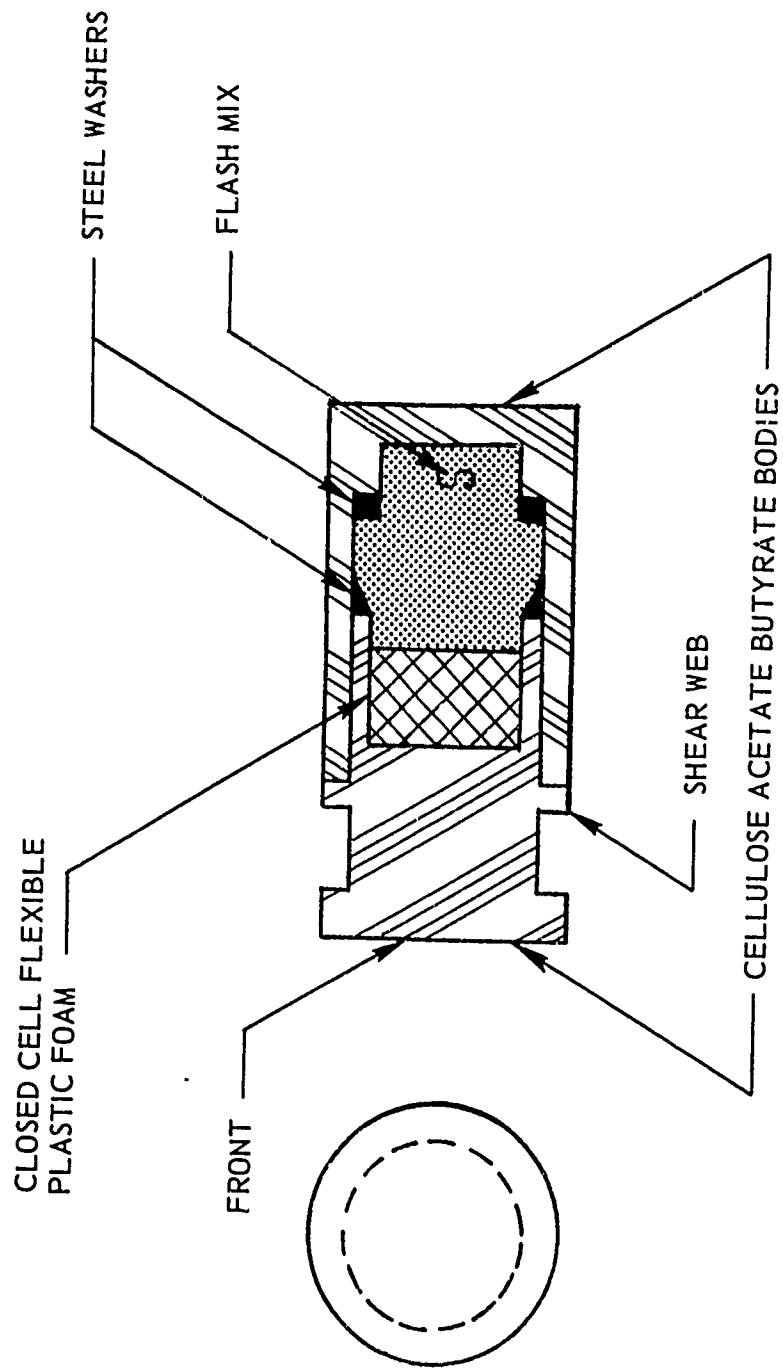


Figure 12. Body for Flash Initiation Tests

TABLE II. Tests on Fuzeless Heads  
(impact normal to target)

Round	Date	Temp. (°F)	Type of Head	Prop. Wt. (grams)	Target	Results
1	7/13/70	80	Type I with .2 rubber	10.65	3/4" plywood	Dud
2	7/13/70	80	Type I, Dwg. 9-47757	10.66	3/4" plywood	Functioned
3	7/13/70	80	Type I, Dwg. 9-47757	10.61	3/4" plywood	Dud
4	7/13/70	80	Type I, Dwg. 9-47757	10.92	1/4" steel plate	Functioned
5	7/16/70	81	Type II, Dwg. 9-47757-EC1*	10.50	3/4" plywood	Functioned
6	7/16/70	83	Type II, flat washers	10.66	3/4" plywood	Dud
7	7/16/72	85	Type II, Dwg. 9-47757-EC1*	10.60	3/4" plywood	Functioned
8	7/16/70	85	Type II, Dwg. 9-47757-EC1*	10.64	3/4" plywood	Functioned
9	7/24/70	83	Type II, Dwg. 9-47757-EC1*	8.95	1/4" plywood	Dud
10	7/24/70	83	Type II, Dwg. 9-47757-EC1*	9.27	1/4" plywood	Functioned
11	7/24/70	83	Type II with .2 rubber	8.96	1/4" plywood	Dud
12	7/24/70	83	Type II with .2 rubber	9.09	3/4" plywood	Dud
13	7/24/70	83	Type II, Dwg. 9-47757-EC1*	9.00	1/4" plywood	Dud
14	7/24/70	83	Type II, Dwg. 9-47757-EC1*	9.10	1/4" plywood	Dud

\*The most successful design configuration referred to in the text.

Instrumentation: 500 frame per second camera.

#### d. Motor Closure

A detailed review of the motor closure design was made to determine the optimum method for mass production. The cost for machining this part from solid bar stock will be lower than the total cost of a machined impact extrusion.

The motor closure would be run in multiple-spindle screw machines. In the first machine, one end of the part would be machined complete and the other end parted off and then finished complete in a multi-spindle chucking-type screw machine.

The impact extrusion method requires preparing the slug in a multi-spindle bar-type screw machine, processing it through a lube line followed by impact extruding. Two machining operations are then required to finish the part. The small size of this part is such that there is no appreciable saving in material through utilization of the impact extrusion process as would be the case with a larger part, and the machining operations are not fast enough to offset the cost of the more costly extrusion.

The recommended design differs little from the R&D design. Changes have been made to accommodate the APE head configuration and the fuze assembly. Also, the threaded joint has been reduced by .175-inch to give a saving in material of about 11% as well as machining and assembly time on this piece and the rocket motor.

#### e. Motor Case

The motor case design and method of manufacture were given very early attention because of the great potential for future mass production cost savings.

The required basic approach to analyze producibility of a production design motor case necessitated development of a "master tool layout" to clearly show the metal working steps and their mathematical relation to each other. The metalworking engineer's experience and knowledge of engineering materials were used to evolve a plan wherein empirical data was used to mathematically determine the sequentially related reduction in area, reduction in diameter, and degree of cold work required to develop the item. Initially, four major plans were developed:

##### (1) Plan 1

This plan was developed to evaluate feasibility of forming the motor case from precision alloy steel tubing. The relative simplicity of this method was, to a degree, offset by the premium price of the initial

Material, but the detailed plan was evaluated in competition with the other methods to facilitate selection of the optimum lowest cost method (including anticipated tool maintenance costs).

(2) Plan 2

This plan evolved to investigate the feasibility of utilizing hot rolled bar stock as the raw material. The low yield strength required to match the weight of the original motor case does not require use of the more costly (and more critical) alloy steel. AISI 1035 steel bar is available from mills at one-half the cost of AISI 4140 bar. Cold working the medium carbon steel to the desired yield strength over heat treating would be desirable. The very small diameter of the motor case created extremely marginal strength in the ironing punches because it is ironed to the final diameter on .545-inch diameter punches approximately 10 inches long. Column strength of the punches during the ironing stroke in the draw press, and tensile strength during the return stripping stroke, may be too marginal. Tool steel heated to hardness above Rockwell C-60 cannot withstand numerous high tensile shock loads.


The obvious feature favoring this procedure is the simple, very straightforward approach that would provide very low production costs. The bar stock is sheared to slug lengths, tumble-deburred, and hot impact extruded into a cup. Subsequent operations reduce the diameter and iron the sidewall to final size with sufficient cold work performed to provide the desired yield strength.

(3) Plan 3

This plan was developed to evaluate the possibility of ironing the sidewall on larger diameter punches and subsequently redrawing the diameter to final size after cold work properties have been achieved.

(4) Plan 4

To complete the consideration of motor-closure fabrication, a combination of these two pieces was considered, as shown in Figure 13. This lends itself nicely to the impact extrusion technique. Here, the closure and motor are one-piece. The nozzle threads into the aft end and holds the plastic fins in place. This concept does ease the igniter problem somewhat in that it allows the completion of the igniter assembly with only the small nozzle piece attached. However, the suspension plate assembly is so complicated that this alone outweighs all advantages gained. With the current stud and propellant configuration, the best solution for holding the suspension

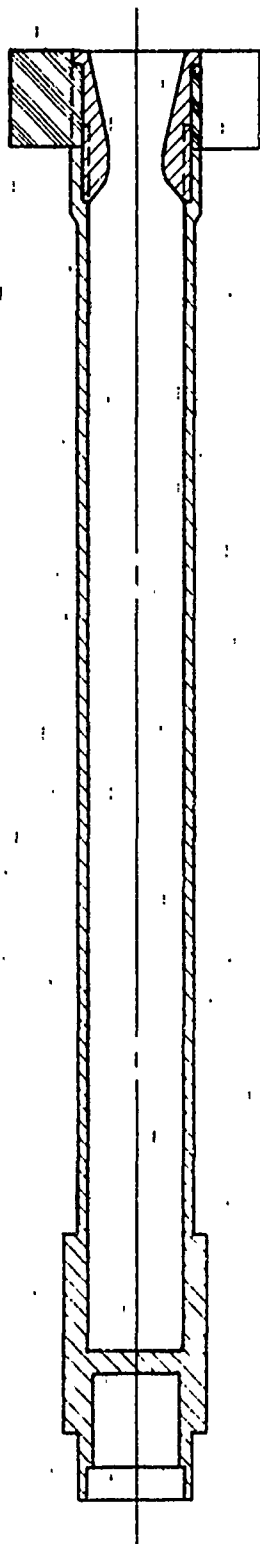

FIN IS HELD IN PLACE BY NOZZLE

Figure 13. One-piece Motor and Closure

plate involves at least two additional pieces and complicates machining and assembly techniques. The fastening could be accomplished either by a female thread in the forward bulkhead or a snap-ring assembly in the thickened forward wall (not shown).

Obviously, many variations and combinations of the four procedures were possible. It can be readily seen that the method of manufacture was a factor in determination of the motor case design.

To insure that the motor case fabrication would be the most economical and practical approach, the study was expanded to cover (in depth) the four basic types that were the best candidates. These four candidates are: (1) one-piece hot cup-cold draw design; (2) two-piece tubing design; (3) one-piece tubing design, and (4) one-piece aluminum impact design. Detailed investigation into various designs and manufacturing methods for mass-producing each of these resulted in selection of the recommended design and method of manufacture.

The lowest-cost design for each of the four basic types is shown in the graph of Figure 14. Curves enable determination of future procurement costs when the contractor's selling price for an hour of labor is known (assuming his efficiency is 100% of the estimated net production rate). Cost breakdowns for each are contained in Appendix C. The steeper curves on the graph have the greatest potential for further cost reduction through improvement of manufacturing efficiency (productivity-per-man hour is a major part of total cost). The manufacturing plants with the higher labor rates most generally have a greater potential for increasing productivity-per-man hour than the small lower-cost shops. Efficiency can be improved by automating operations and using equipment more ideally matched to the job. Oversize machines are slower and more expensive to operate; under-size machines produce substandard quality and possess the potential of frequent breakdowns with resultant schedule delays.

The lowest curve shown on the graph is for the hot cup-cold draw, one-piece, AISI 1035 steel cold-worked, motor case. The low raw material cost provides an opportunity for further cost reduction by improving productivity-per-man hour. Contractors competing for the program will be more likely to base the cost on their efficiency and general capabilities.

The basic types and various methods of manufacturing will be briefly discussed.

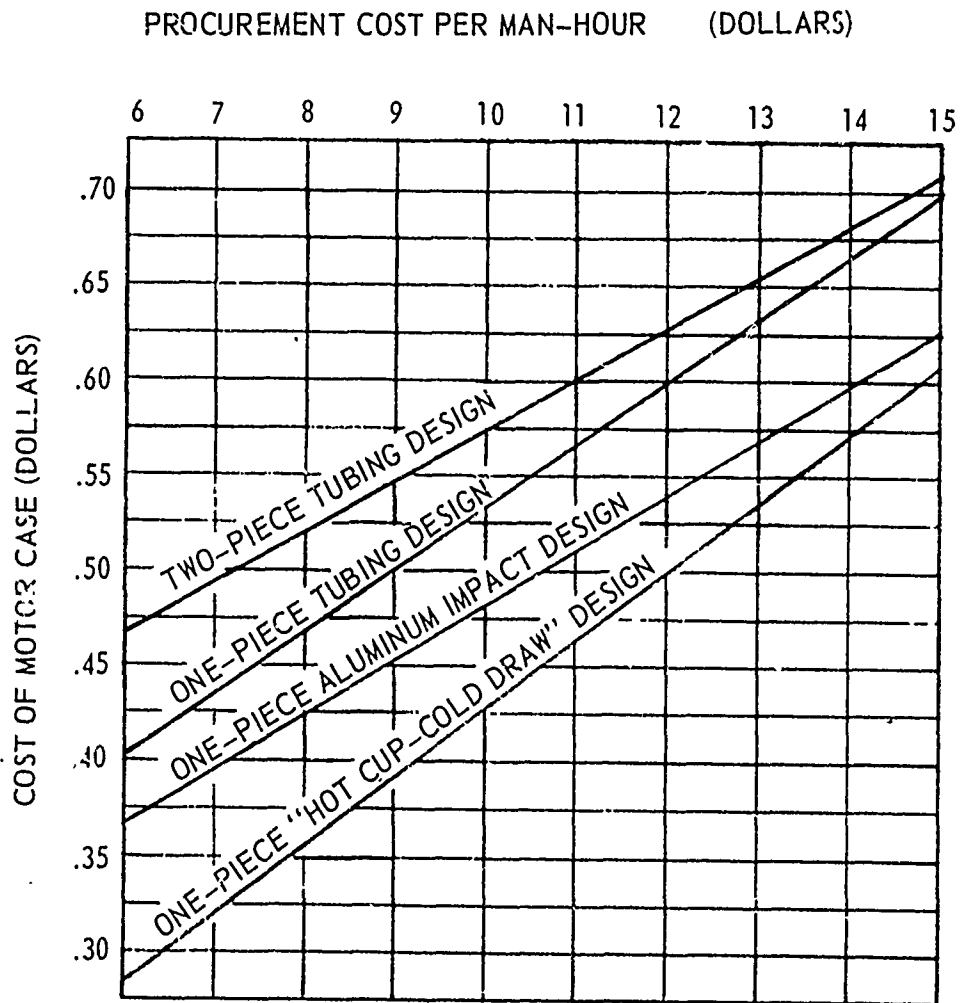


Figure 14. Motor Case Cost in Mass Production



(1) One-Piece Hot Cup-Cold Draw Design, Dwg. 9-47722 (Appendix C)

The small size of the motor case lends itself to a high rate of production for the precision forgings with a wide selection of equipment.

Heating the billet was accomplished in a small portable induction heating machine in the APE program and later in a standard size machine. The estimated production rate requires heating only 325 pounds of 1.125-inch diameter steel billets per hour. The .3-pound billets were heated to a 1700 degree F forging temperature in a few seconds. Die wear due to scale build-up on the billet should be low. A fast-stroke mechanical press of 100 to 150 tons can be utilized to minimize die wear due to exposure to the hot metal. Development of deep draw ironing and reduction die operations and high rate of production machining operations will result in reliable performance of the tooling. The master tool layout, Dwg. 9-47715 (Appendix C), was further refined to create an ideal balance of operations for maximum efficiency. Calculations for each operation were based on empirical data developed by the contractor.

It will be readily apparent that the hot cup and ironing stages of the motor case are considerably larger in diameter than the final item. This was done to create strength and stability in tooling for the higher unit pressure operations. The two reductions used to bring the part to final size are low pressure operations in which the punch serves mainly as a means of pulling the part through the die. The ultimate motor case (and other component) designs should have a minimum number of dimensioned surfaces (these relate directly to tooling and inspection cost).

(2) Two-piece Tubing Designs

(a) Drawing 9-47751 (Appendix C) - Separate Fin and Nozzle

This design was studied to determine the effect on mass production cost if the main section of the motor case is a straight tube with relatively very few subsequent operations. The nozzle would be efficiently produced on a screw machine. Each component would be ideally suited to the manufacturing method chosen.

The potential savings diminished as the study progressed. The available seamless tubing was sufficiently straight to conform to the functional requirements in general; however, the .003-inch tolerance available on the inside diameter was not sufficiently close to permit forming the threads within tolerance using a thread rolling machine. The pitch diameter

of the threads would vary .003 inch plus the normal variation common to the machine and material capabilities. In addition, the .005-inch tolerance on the outside diameter created differences in truncation of the major diameter well outside the H28 tolerances and differences in pitch diameter according to machine deflection variations caused by varying unit pressure. Outside diameter of the tube is too small for machined threads.

The basic design concept proved inefficient when the potential costs were weighed (see curves representing procurement costs in Figure 14 and detailed cost element breakdown in Appendix B).

<u>Advantages</u>	<u>Disadvantages</u>
Suitable for small shop manufacturing	More costly than one-piece design
Permits separately molded fin at lower cost than if molded on another component	External motor case threads are poor design for this application
Aluminum nozzle may be hard-anodized at less cost than if entire motor case is given this finish	
Nozzle may be made of aluminum, thereby cheaper to machine	

(b) Drawing 9-47753 (Appendix C)- Fin Molded on Nozzle

<u>Advantages</u>	<u>Disadvantages</u>
Suitable for small shop manufacturing	Cost
Fin can be molded onto the nozzle at almost as low a cost as if separate	Poor threaded joint design at nozzle end
Nozzle surfaces which mate to fin may have loose tolerances which means less cost	
Nozzle may be made from aluminum, thereby cheaper to machine	

(c) Drawing 9-47752 (Appendix C) - with one-piece fin and nozzle assembly

Advantages

Motor case may be fabricated in small shops

Aluminum fin may be impact-extruded or machined from finned bar stock

Fewer parts

Aluminum nozzle cheaper to hard anodize than entire aluminum motor case.

Disadvantages

Cost

Poor threaded joint design

Hard anodize finish necessary to protect orifice from combustion gas erosion but will cause excessive wear in launch tube

(3) One-piece Tubing Design, Dwg. 9-47737 (Appendix C)

This design was developed to determine if an overall saving could be made in mass production by reducing the number of operations and by swage-forming the nozzle. Consultation with rotary swaging experts indicated that two operations, each running at a net rate of 200 to 250 units-per-hour, will be necessary instead of the one operation running at 500 units-per-hour as originally believed. The curves on the graph of Figure 14 and the cost breakdown in Appendix B denote the mass production cost for this approach.

(4) One-piece Aluminum Impact Design, Dwg. 9-47754 (Appendix C)

This design was investigated early in the study, and again, as it became apparent that labor would become a major part of the cost. The 7075-T6 motor case has been designed with .121-inch wall thickness to raise the weight. Approximately .015-pound would be added to the motor closure to compensate for the difference. The outside diameter of the motor case would be the same as the motor closure. The impact aluminum technique is an excellent method; however, the curve does clearly show the aluminum impact design would be 3 to 5 cents more expensive than the hot cup-cold draw steel design.

The aluminum impact design will require special knowledge in the state-of-the-art to tool properly. Problems of any significance are not anticipated, and consideration has been given to gathering background data from similar programs currently in production at our plant.

The selection of motor case manufacture was made on the basis of cost as illustrated in Figure 14. The one-piece hot cup-cold drawn design was selected and the tooling was prepared. During the fabricating of the first units three problems were experienced. These problems were: (1) rolling of the threads; (2) stretch cracks in the region where the sidewall meets the heavy nozzle section, and (3) excessive wall variation in the forged cups. Investigation of the problems was as follows:

(1) Problem No. 1

In the threading operation, the cold worked material in the thread region was unable to survive the additional cold work of thread rolling in our three-roll type Reed Model A22 thread roller. Motor case sections were rolled at progressively lower "in-feed" rates by changing sets of gears until, at the lowest feed per revolution of the workpiece, a thread could be rolled to a .013-inch oversize pitch diameter. The major diameter was then approximately .002-inch oversize (but truncated in relation to the thread form), and further inward feed of the rolls caused fatigue of the motor case metal. The very thin wall, high cold work stress, small workpiece diameter and thread roll diameter all worked adversely to optimum for this type of operation. The test pieces run by the contractor were capable of being re-cut to a perfect thread in a "chasing" operation with some care, but this was not considered feasible as a production process even though it was readily accomplished in an engine lathe.

The motor case process was modified to provide material in the threaded region for cutting the full thread.

(2) Problem No. 2

The "stretch and crack" condition in the region where the sidewall meets the heavy nozzle section was found to be caused by an excessive amount of work hardening in that region prior to the two reduction operations. Although the combined total sidewall cold work reduction was 52% after the annealing operation (anneal, coin, final iron, first and final reductions), the overworked region was found to have 69%. The .30-inch long region was subjected to a total reduction from the original forged cup thickness. A "pre-head" operation was added prior to the anneal which forms the first ironed part to .065 - .070-inch wall thickness. Originally, this region had been .115 to .125-inch thick when annealed. Subsequent corrected parts run through the balance of the operations showed no signs of severe cold work and did not fail to form over the .100-inch radius of the final reduction punch in the region adjacent to the heavy nozzle material.

Additional developmental precautions were taken to avoid later occurrence of another problem. The slug "sizing" operation which upsets the one-inch diameter material to 1.125-inch diameter at room temperature, now had one corner of the slug machined to a .13-inch radius prior to "sizing." A sharp 90-degree corner sometimes will cause a fatigued metal condition when it is cold-formed to 180 degrees. This would be similar to forming a strip of metal over a sharp bend radius. However, the "sizing" operation is not necessary except when a production run does not warrant procurement of a mill order of 1.125-inch diameter bar (the steel distributors do not stock 1.125-inch diameter bar in the 1035 special quality hot rolled material as a standard practice).

(3) Problem No. 3


The excessive wall variation in the forged cup was resolved by shortening the forging punch to reduce deflection under pressure. All subsequent parts were made with these punches and exhibited excellent wall uniformity.

Several very important features inherent in the new motor case manufacturing process should be mentioned.

(1) The contractor's process is capable of producing an end product with a near constant weight because of the minimal machining required (threads at mouth and nozzle end only). The weight variation in a lot has a considerable affect on the "ballistic match" of each round. Figure 15 shows a chart of weights of the first lot of 223 rounds.

(2) The contractor's method of cold sizing the nozzle exit cone diameter in the fin assembly die helps to maintain a nearly constant expansion ratio. The downward travel of the motor case is stopped by the shoulder of the flaring punch. The die is designed to operate in a small air press equipped with a pressure regulator. Figure 16 is an illustration of the die concept.

(3) The contractor's method of cold working mechanical properties into the motor case provides yield and ultimate strengths far in excess of the minimum requirement. Units have been hydrotested at up to 22,000 psi without deformation; in fact, the majority of the first lot were hydrotested at 18,000 to 20,000 psi. Three units were hydrotested to destruction. One motor case considered defective because of a wall variation of .011-inch had a .0434 wall on the thin side near the threads. This unit burst at 22,500 psi. The other two units, with wall variations of .002 and .003-inch, burst at 26,000 and 25,500 psi. All failures were in the thinnest region.

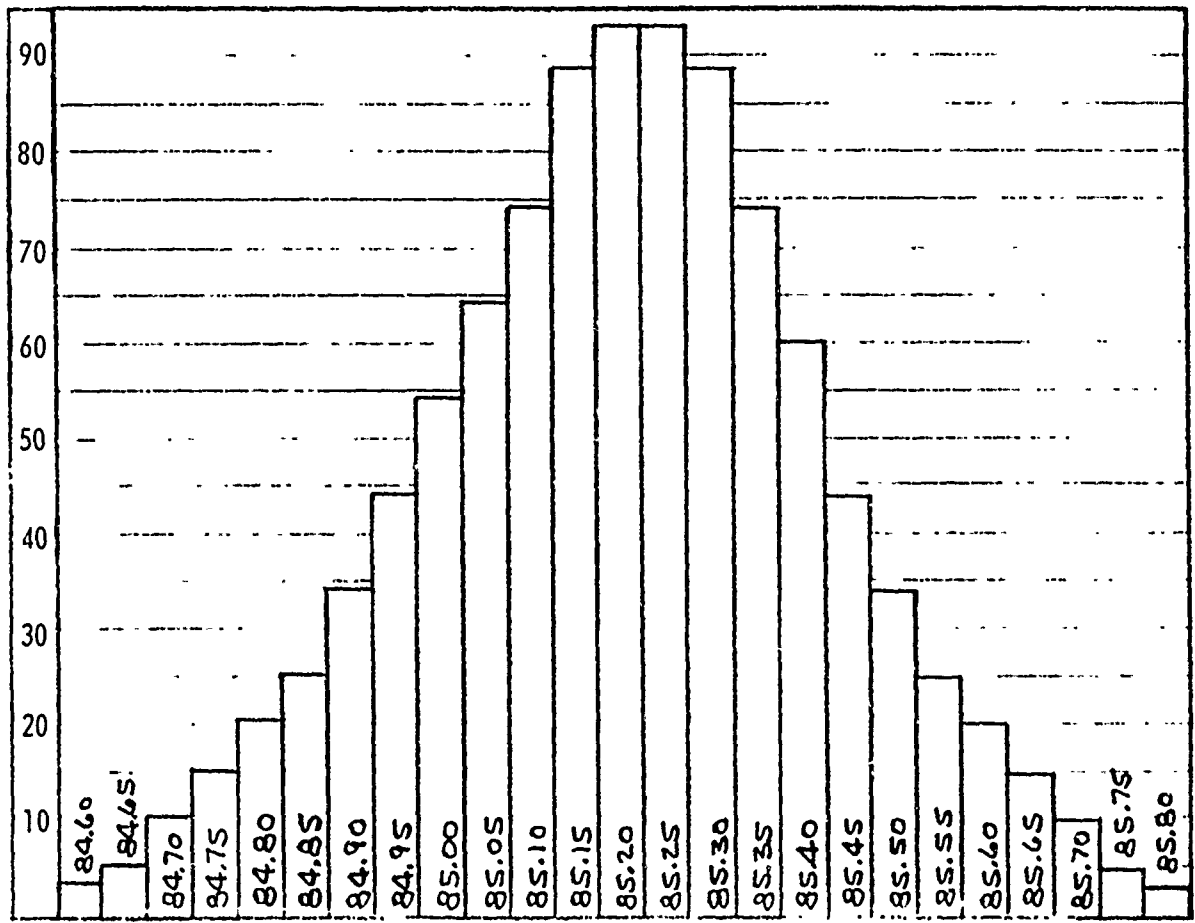

WEIGHT AFTER CADMIUM PLATING (GRAMS)

Figure 15. Weight Distribution per 1000 Units - Lot 1

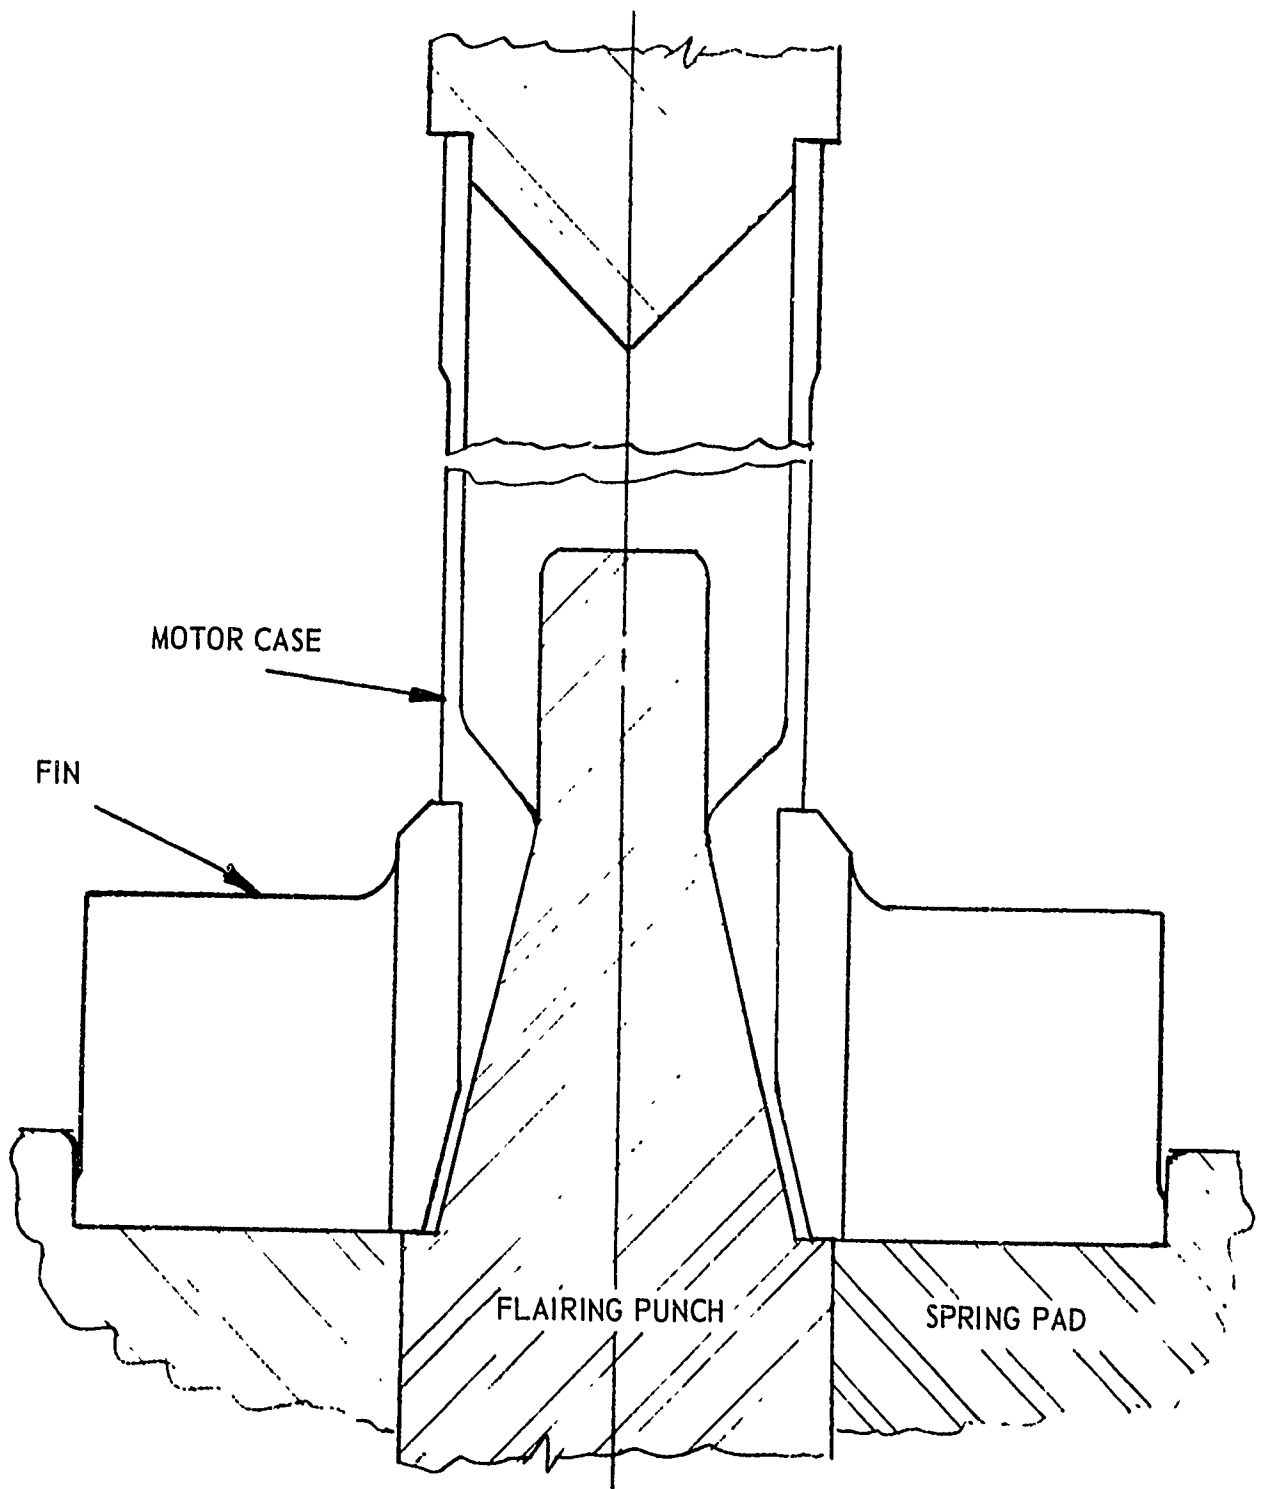


Figure 16. Fin Assembly Die

The chart shown in Figure 17 clearly demonstrates the soundness of the initial contractor decision to use 1035 steel to provide this strength level. In the contractor process, yield strength is primarily a function of carbon and manganese content and reduction in area performed during the cold working operations (after the last anneal). Referring to the chart, one can readily see that the total cold work reduction of 52% would provide sufficient strength for "user safety" even if some bars of low carbon material were inadvertently mixed into the lot.

In the original Redstone motor case, there is some possibility of using un-heat treated, or substandard material. One hundred percent hydrotesting is necessary to verify the strength. However, motor cases produced by the contractor method could be used without 100% hydrotesting. The 18,000 psi minimum destruct requirement performed on a sample basis is sufficient to verify soundness of the lot. A potential mass production cost saving of 4 cents per unit can be effected if the 100% hydrotest requirement is removed from the qualification testing of the motor case. Figure 18 shows production cost with testing.

The developed sequence of operations for the motor case is listed in Table III. The one anneal is performed between the "pre-head" and "coin" operations. Lack of the anneal would cause an excessive amount of cold work and a very high yield strength in subsequent operations (63% at final ironing and 74% at final reduction), and the workpiece would fail in tension guaranteeing that even this processing error could not go undetected.

#### f. Fin and Motor Case Assembly

The fin was originally molded in place on the motor case. Plastic molding companies have been consulted to compare the cost with that of a separately molded fin.

The original fin and motor case assembly was run in a three-segment mold which opened in three directions to facilitate insertion and removal of the motor case. This type of mold is not readily adaptable to a multiple cavity design. The relatively slow processing cycle in the injection molding press would result in a very high unit cost.

A better approach would be to use a two-segment die which opens only to facilitate easy insertion of the motor case and then remains closed while the fin and motor case assembly is ejected. The hourly production attainable with this type of mold depends upon the number of cavities which can be placed along a single parting line within the space available in a specific machine. A rate of 280 per-hour was anticipated for a seven-cavity mold at a cost of approximately \$0.075 each.



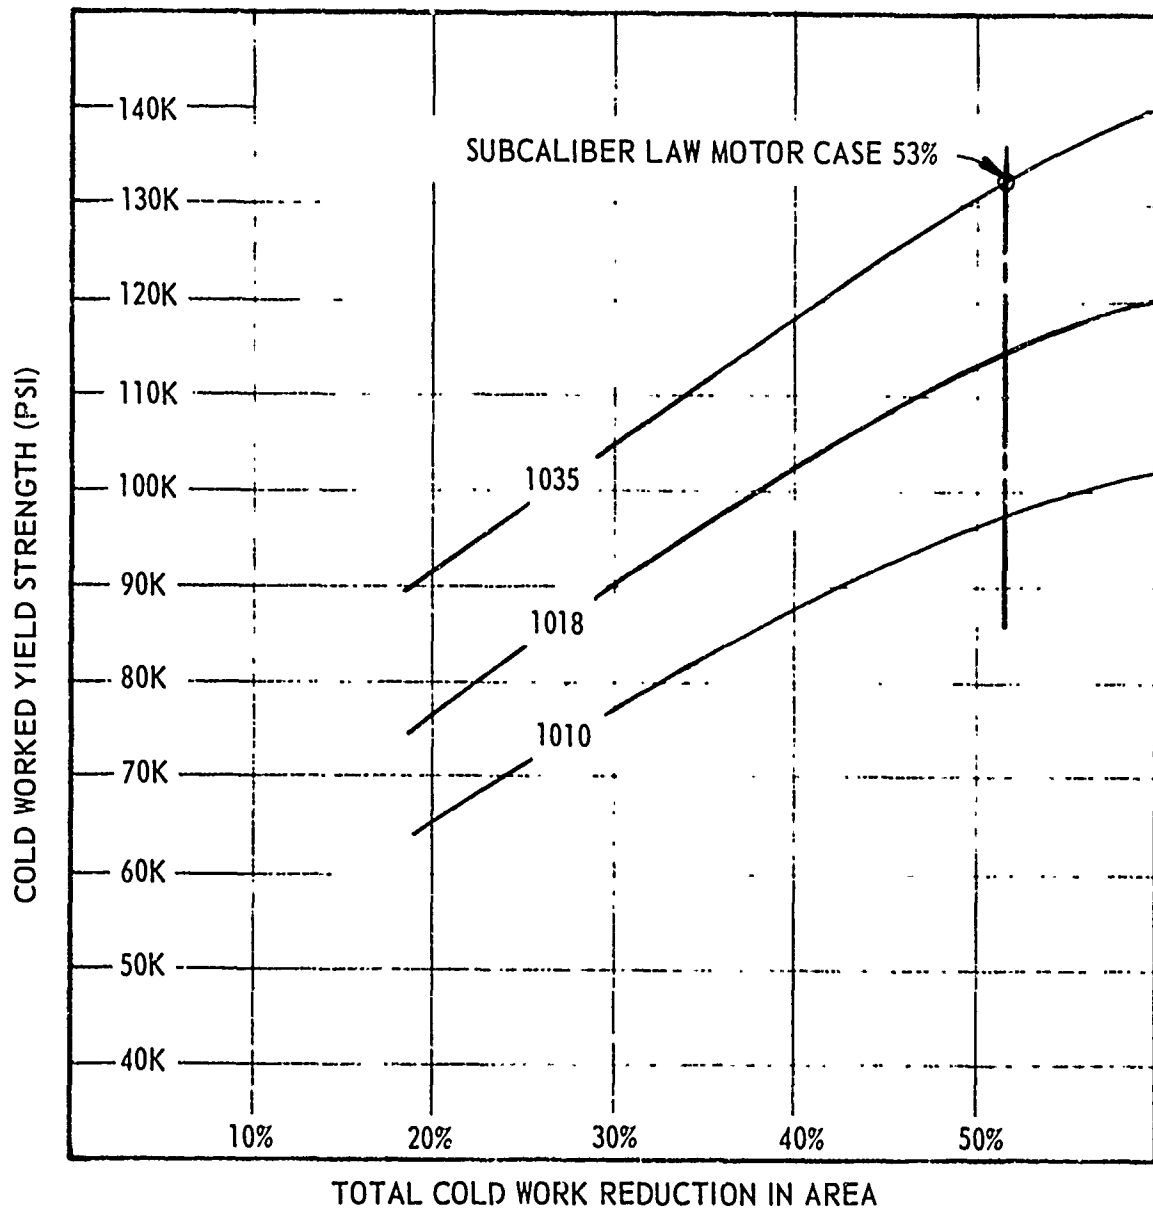


Figure 17. Motor Case Material—vs—Low Carbon Steel

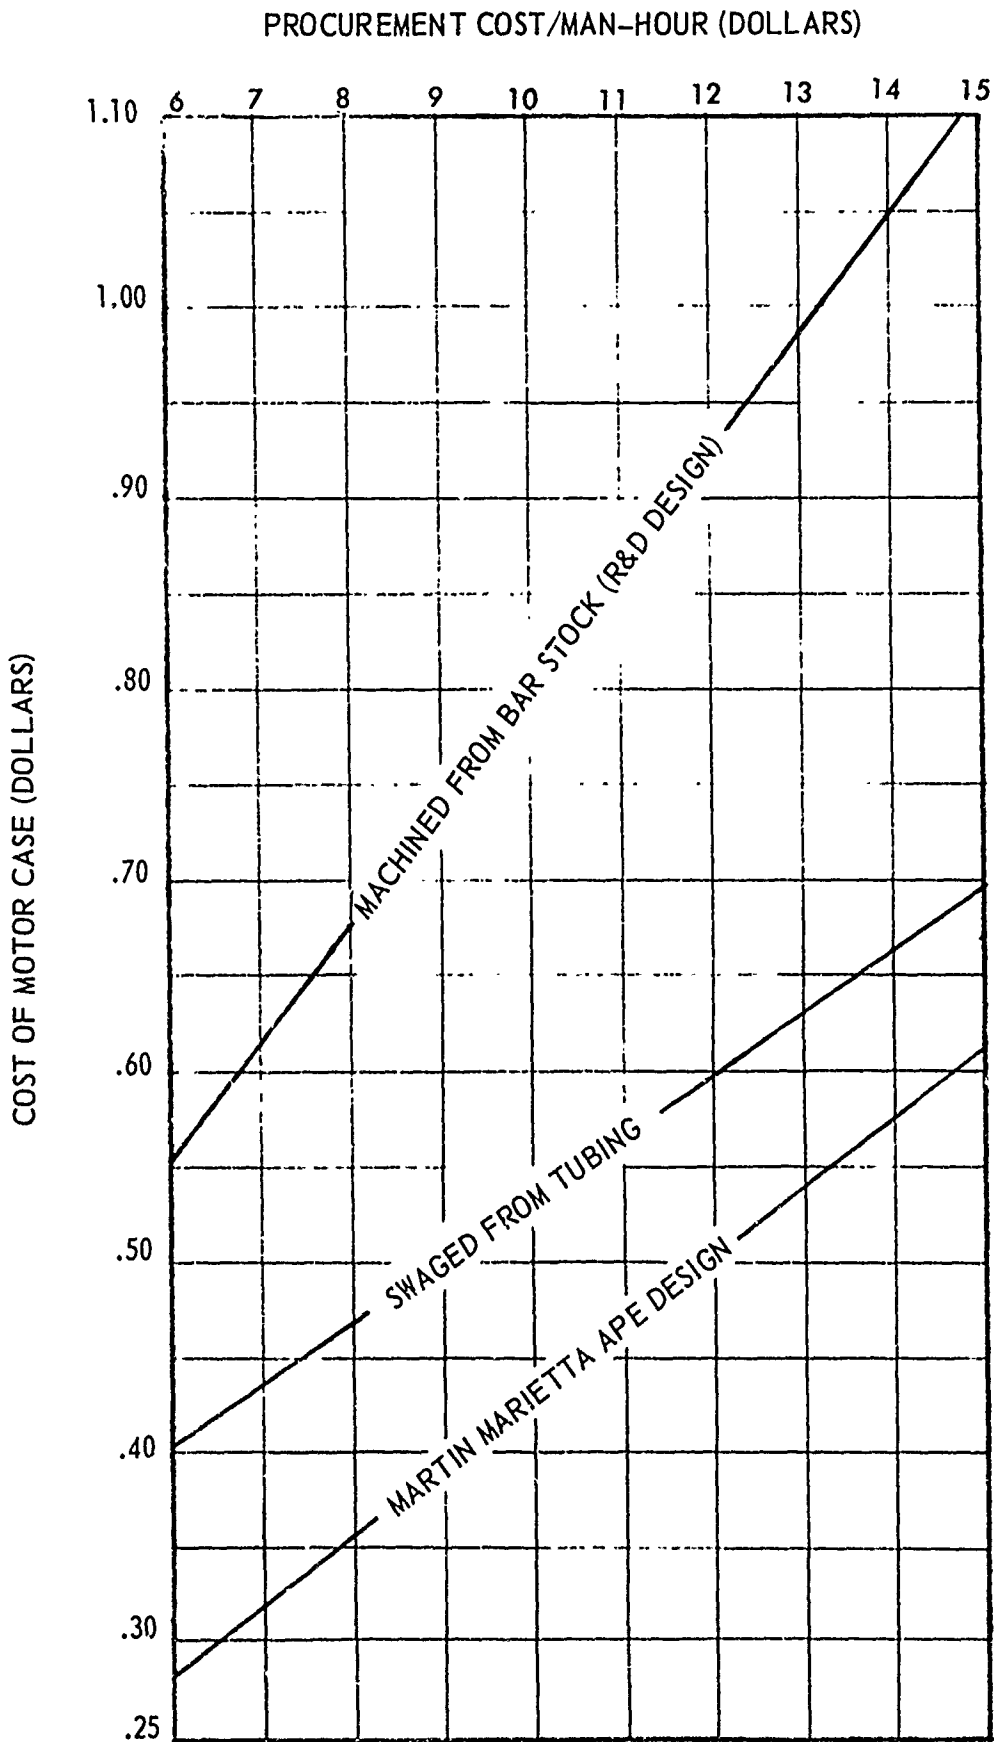


Figure 18. Motor Case Cost in Mass Production

TABLE III. Mass Production Cost - Motor Case

Operation	Description	Material	Labor Hours
1	Saw 1 1/8 dia. bar to length @ 400/hr	\$.04	.0025
2	Tumble Deburr @ 1000/hr		.0010
3	Hot Cup (impact extrude) @ 1000/hr (2 men)		.0020
4	Pickle, Phosphate & Soap Coat @ 1000/hr		.0010
5	First Draw (first iron) @ 800/hr		.0013
6	Pre-head @ 1000/hr		.0010
7	Anneal @ 1000/hr		.0010
8	Pickle, Phosphate & Soap Coat @ 1000/hr		.0010
9	Coin @ 1000/hr		.0010
10	Second Draw (final iron) @ 600/hr		.0017
11	Soap Coat @ 1000/hr		.0010
12	Third Draw (first diametral reduction) @ 600/hr		.0017
13	Final Draw (final diametral reduction) @ 600/hr		.0017
14	Machine Nozzle End @ 200/hr		.0050
15	Machine Mouth End @ 300/hr		.0033
16	Cut Threads @ 330/hr		.0030
17	Stress Relieve @ 1000/hr		.0010
18	Apply Finish @ 500/hr		.0020
19	Hydrotest (16,000 psi)		.0001
20	Inspection (2 men) @ 500/hr		.0040
Total		\$.04	.0363

SUMMARY

Item			
	@ \$6/hr	@ \$10/hr	@ \$15/hr
Material (\$.040) + G&A + Profit	\$.048	\$.048	\$.048
Labor (\$.0363-hour)	.218	.363	.545
Tool Maintenance (probable)	.020	.020	.020
Total Cost per Unit	\$.286	\$.431	\$.613

NOTE: Mass production cost (1,000,000 units/yr) for motor case (Dwg. 9-47722), one-piece hot cup-cold draw process from AISI 1035 Bar Steel.

The fin can be molded as a separate part in a 16-to-10 cavity mold at a rate of 640 to 800 per-hour for a cost of less than \$.02 each. The fin and motor case can then be assembled on a dial index feed press at a rate of 2000 units per-hour with hand loading and a higher rate if the parts handling is automated. The 2000-unit per-hour operation would cost less than \$.01 for each assembly. See Figure 19.

This cost break favors the separated molded fin (\$.03-vs-\$.075); therefore, the recommended motor case assembly is shown in Dwg. 9256060 (Appendix C), while the molded fin is shown in Dwg. 9256049 (Appendix C). The drawing shows the material to be ABS; but at present, opinion is that Butyrate is equally qualified. Drawing 9256061 (Appendix C) shows the motor case prior to fin assembly.


#### g. Igniters

The three areas that lent themselves to the greatest cost savings were the warhead and assembly, rocket motor, and igniter and assembly. Consequently, the contractor concentrated most of his efforts in these three areas. The first two have already been covered; this section will discuss the effort on igniter redesign, and it will include some early concepts that were considered and discarded.

The R&D design had several shortcomings of which not the least was the requirement for two separate molding operations, the last of which was accomplished with the igniter cup inserted in the rocket motor and loaded with ITL and Black Powder. In addition, this design has two weld joints and one squeeze fit joint where trouble might develop. Further, the satisfactory performance of the R&D igniter was not completely verified at the commencement of this work.


Figure 20 illustrates one method of overcoming some of the shortcomings. Here, the brass primer plate is small enough to pass through the nozzle throat and then be assembled to an inert block. The advantage is that the igniter assembly can be checked for seal prior to assembly into the rocket motor. The disadvantage is the required bend on the fairly thick and stiff polyethylene tubing and the limited wall for the mold shrink seal.

A second approach is shown in Figure 21. Here, the polyethylene igniter is held in a die-cast block (after insertion into the nozzle) by a simple cold or hot upsetting operation. Both of these approaches were included in the proposal.

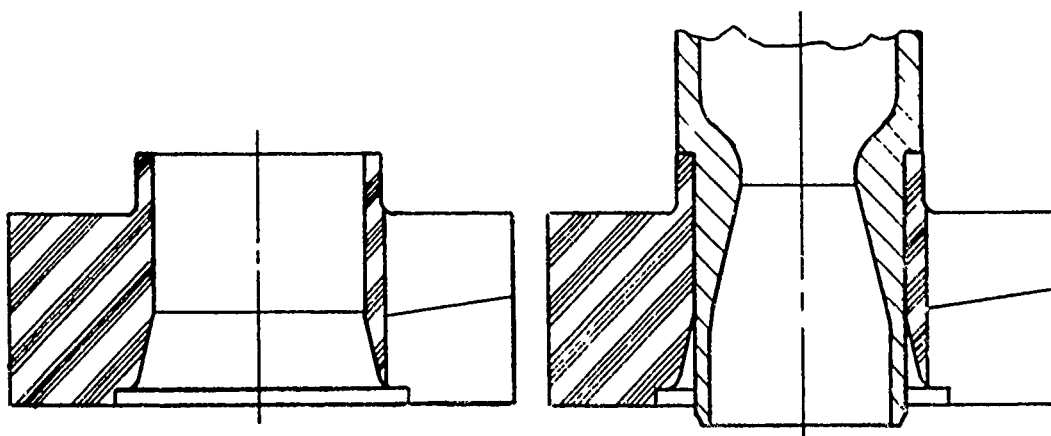

a. Molded plastic fin before assembly

b. Motor case pressed into fin

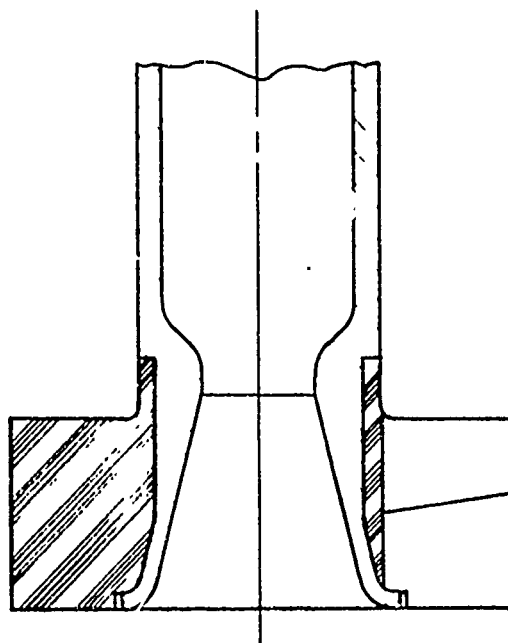

c. Completed fin and motor case assembly

Figure 19. Fin and Motor Case Assembly

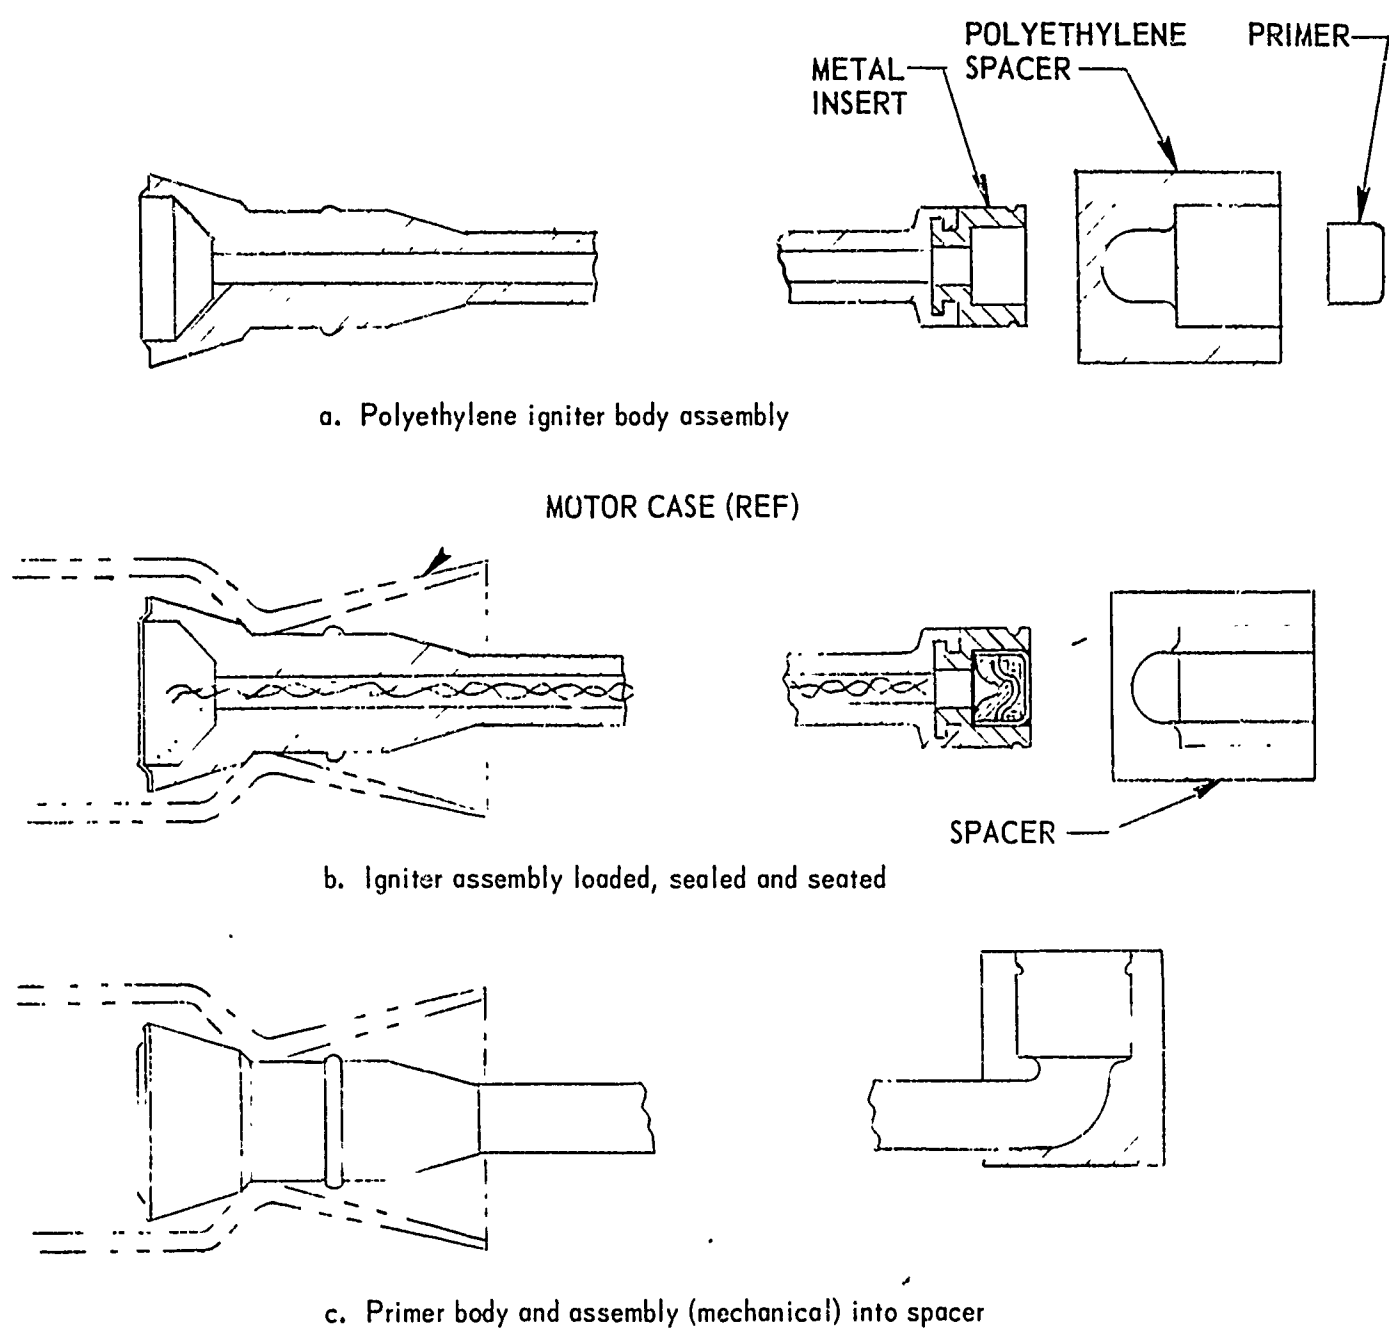


Figure 20. Igniter Assembly I

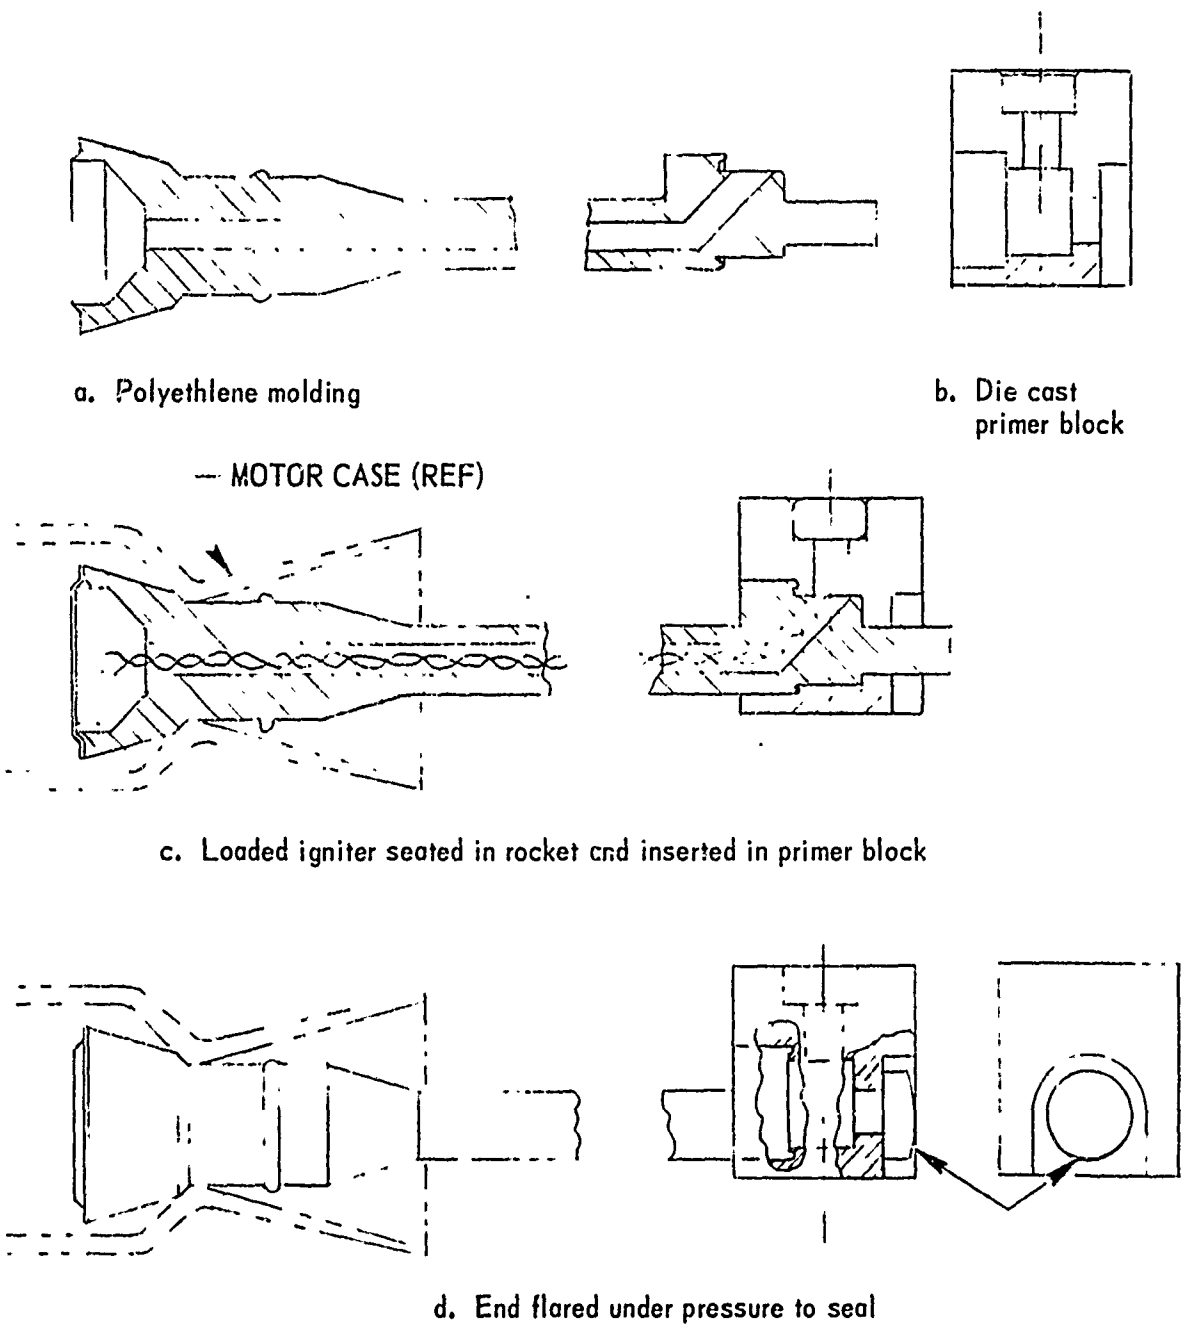


Figure 21. Igniter Assembly 2

Several other techniques were considered including a double seal (on primer output end and on igniter tube input end), but the one design that stands out in simplicity, serviceability, cost and assembly is illustrated in Dwg. 9-47706 (Appendix D). The basic igniter is a polyethylene molding. After this is loaded with the ignition transmission line and Black Powder, the output end is sealed and inspected. This igniter subassembly is then inserted and sealed in the rocket motor and staked in the zinc die cast primer block. The seal between these two parts is accomplished by a captive O-ring.

Consultation with the plastic molders revealed that this design would be much more economical to mold if the flash tube hole would be extended straight through. Furthermore, loading of the ignition line would be facilitated by this straight passage (Dwg. 9-47704, Rev. A, Appendix D). The opening would be heat-sealed subsequent to insertion of the line and prior to loading the Black Powder.

Carrying this approach through several designs and iterations, the contractor arrived at a final design directed toward further reducing cost. This design is illustrated in Dwg. 9256058, Appendix D, and is considered superior to any yet conceived in both performance and cost.

Drawing 9256055 (Appendix D) shows the polyethylene molded cup. The flash channel is straight and ends up in a boss with a 45-deg. canted face which mates the face on the primer housing (Dwg. 9256056, Appendix D). The seal is obtained by tightly squeezing the block against the primer housing face. It will be noted that the squeeze of the polysthylene by the staking operation alone should be sufficient to give an adequate seal, or at least as good as that obtained around the brass primer housing in the R&D design. While early testing indicated this sealing was adequate, subsequent tests revealed leakage. This was overcome in turn with a dip in a 50-50 solution of 3M Adhesive 4693 and No. 2 Solvent.

The igniter cup-primer housing joint will be subjected to some rather high pressures from the confined primer and ITL. In an attempt to establish the ability of this design to stand the stresses experienced in firing, the following cursory stress analysis was made:

LAW igniters were fired with and without the Black Powder charge. In both cases, the walls ruptured in the flash tube. As this part has an ID of .075-in. and a wall of .050-in., it must experience approximately 4000 psi. This would give a force of  $4000 \times (\text{area}) \times \sin 45\text{-deg.}$  in both the direction of the flash tube and perpendicular to this direction -- or towards the primer door on the launcher. The area subjected to pressure would be .024-sq. in.; therefore, the force =  $4000 \times .024 \times .707 = 67.6 \text{ lb.}$



There are three critical shear areas: (1) the polyethylene parallel to the flash tube; (2) the polyethylene perpendicular to the flash tube, and (3) the zinc die casting in this same direction (assuming no support from the launcher in all cases).

- In the first case, the polyethylene shear area will be .05-sq. in., and with a shear strength of approximately 2000 psi, this would give a resisting force of 100 lb or approximately 50% more than required.
- In the second case (the polyethylene perpendicular to the flash tube); the shear area would be .085-sq. in., and the resistance would be 170 lb, or about 150% more than required.
- The zinc with a shear strength of about 20,000 psi should be capable of taking  $.0297 \times .85 \times 20,000$  psi, or 504 lb.

The igniter shown in Dwg. 9156058 was selected and recommended. It should further be recommended that this primer block design be considered for the full size LAW, M72 and other units as well as the subcaliber,

#### (1) Igniter Tests - First Series

The first samples of 20 igniter cups (Dwg. 9256055) were made of Tenite 3360 polyethylene. Seventeen of these were used in the igniter firing tests, eight in static rocket motors and nine in motors per specification. In the former (eight), a propellant charge of 10.4 grams was used based on the preliminary raw data from the velocity tests. The data from the igniter tests is listed in Table IV.

Figure 22 illustrated typical pressure-time traces for  $-10^{\circ}\text{F}$ ; Figure 23 for  $+135^{\circ}\text{F}$  and Figures 24 and 25 illustrate typical traces for the igniter tests. It will be noted that the rocket motor curves come very close to those of the R&D version<sup>(3)</sup>. It will also be noted that the burning time of the cold round ( $-10^{\circ}\text{F}$ ) does not meet the requirement of Specification MIS-18934, nor did the R&D typical curve (page 121, trace C) of RT-TR 69-20(3).

---

(3) W. M. Riddle, T. B. Farris, Engineer Design Test Program for Training Device for 66mm Light Antitank Weapon (LAW) M72E1, Test Evaluation Report No. RT-TR-69-20, AD861845, U. S. Army Missile Command, Redstone Arsenal, Ala., May 1969, Figure 19, p. 121, Figure 21, p.123 (U)

TABLE IV. Igniter Tests

Round No.	Date	Igniter Lot (T-Tool)	Black Powder Weight (gram)	Nozzle Throat Dia. (in.)	Cond. Temp (°F)	Fire Temp (°F)	Prop. Weight (gram)	Reduced Data				Remarks
								Ignition Delay (ms)	Ignition Time (ms)	P Max (psi)	Action Time (ms)	
1	8/20	1	* .3	.316	135	74	-					No data. Igniter remained in nozzle
2	8/20	1	.3	.316	135	74	-	2.0	6.0	400		Igniter remained in nozzle
3	8/21	1	.3	.316	135	70	-	8.0	5.9	300		Igniter remained in nozzle
4	8/21	1	.3	.316	135	70	-					Igniter remained in nozzle
5	8/21	1	.3	.316	135	70	-	8.0	5.0	290		Igniter remained in nozzle - no data
6	8/21	1	.3	.316	128	72	10.4					Trace lost
7	8/21	1	.3	.316	128	73	10.4	-	1.0	lost	7.0	Trace started on pressure
8	8/21	1	.3	.316	128	73	10.4	7000**	.6	8000	6.5	Trace started on pressure
9	8/21	1	.3	.316	128	73	10.4	7200**	.6	8200	8.0	Trace started on pressure
10	8/21	1	.3	.316	-10	75	10.4	9700**	1.0	9700	13	Trace started on pressure
11	8/21	1	.3	.316	-10	75	10.4	9500**	1.0	9500	13	Trace started on pressure
12	8/21	1	.3	.316	-5	75	10.4	7200**	.9	7200	14	Trace started on pressure
13	8/21	1	.3	.316	-10	75	10.4	8600**	.8	8600	13	Trace started on pressure
14	8/21	1	.3	.316	-10	75	-					Igniter remained in nozzle - no data
15	8/21	1	.3	.316	-10	75	-					Igniter remained in nozzle - no data
16	8/21	1	.3	.316	-10	75	-	30.0	5.0	160		Igniter remained in nozzle
17	8/21	1	.3	.316	-10	75	-	7.5	5.0	160		Igniter remained in nozzle

\*DuPont lot, 79-45 Class 5.

\*\*Ignition pressure.

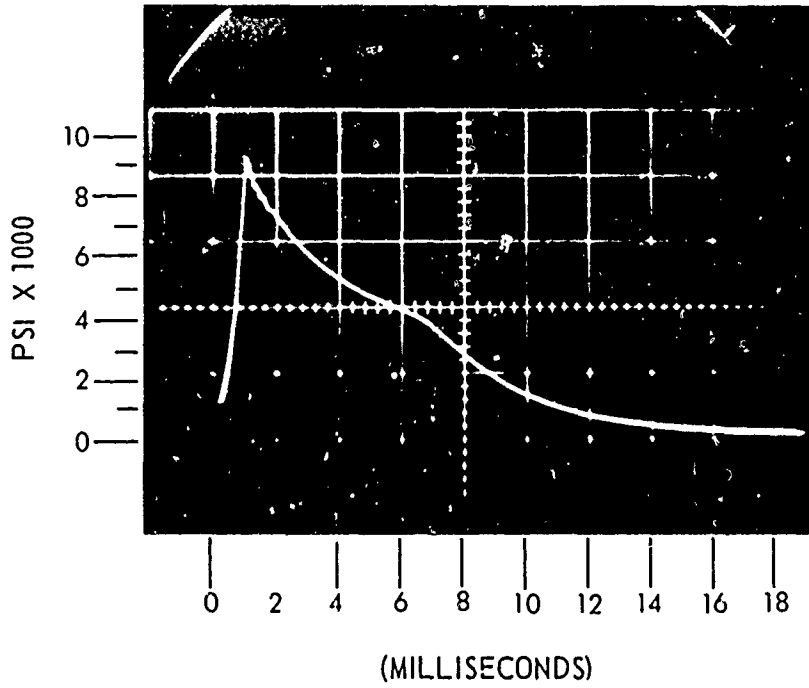


Figure 22. Typical Pressure-Time traces for -10°F Temperature

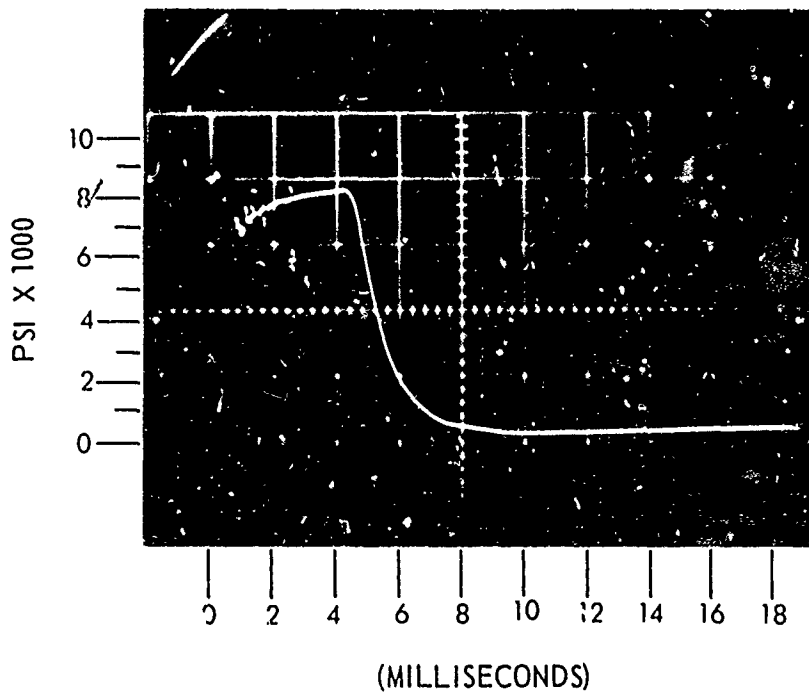


Figure 23. Typical Pressure-Time Traces for 135°F Temperature

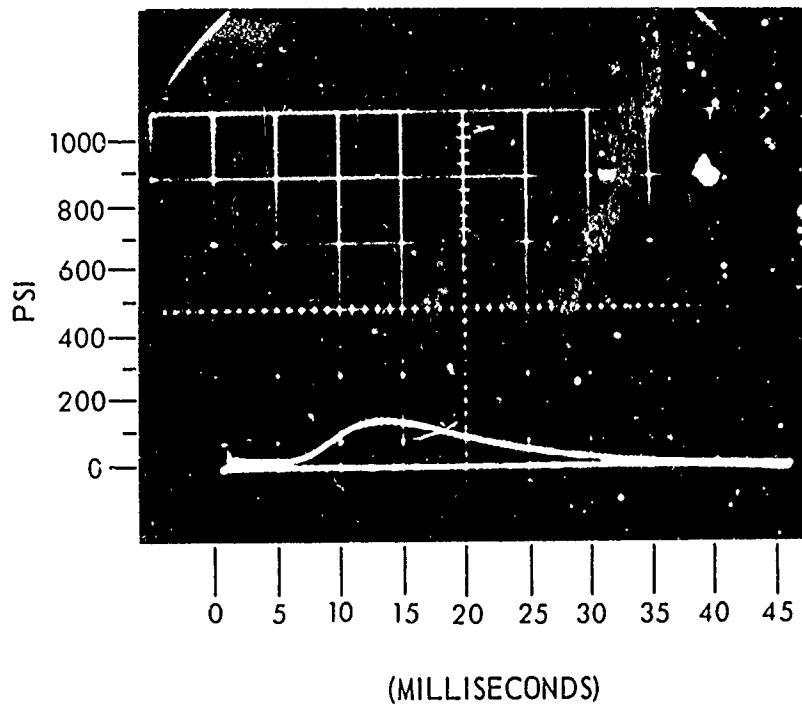


Figure 24. Typical Pressure-Time Traces for -10°F Temperature Igniter Tests

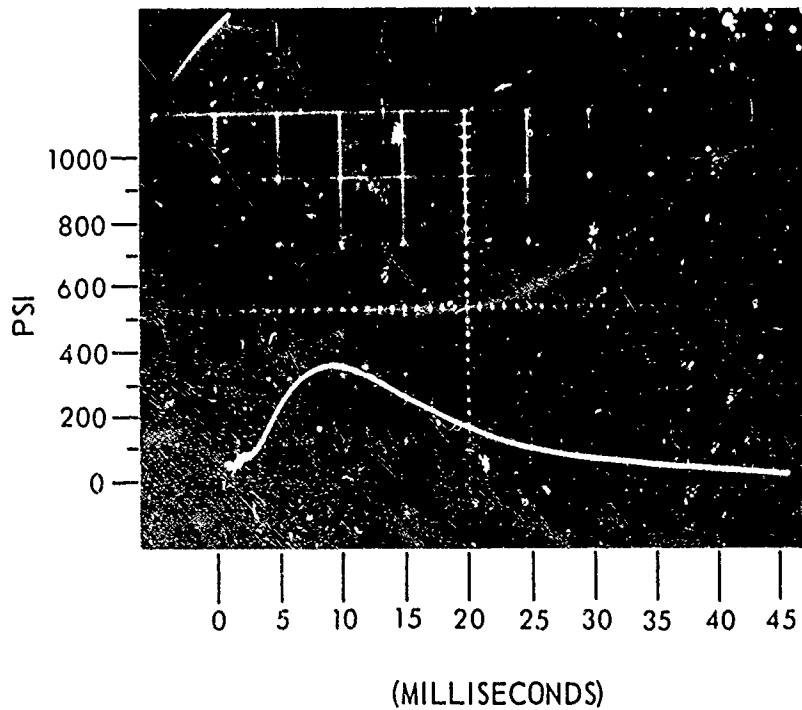


Figure 25. Typical Pressure-Time Traces for 135°F Temperature Igniter Tests

Two comments should be made to clarify the tabulated data:

- The conditioning temperature recorded was that of the box at the time the units were withdrawn. At the time of the tests, a voltage line drop was being experienced which made it difficult to control the precise box temperature at 135°F. However, the units had been soaked at 135°F for over 24 hours prior to the firings, and the propellant was probably closer to the 135° than the recorded temperature. This condition was corrected for later firings.
- The igniters were clipped and spliced with masking tape to LAW primer housing. This was necessary to obtain a timely release of the igniter cups. As a consequence, the ignition delay and ignition times recorded have little significance, and these were later verified when sufficient quantity of both cups and primer housings became available.

Aside from permitting the release of the igniter cup for further manufacture, this short test series indicates that the igniter specification, as it now exists, would require revision.

#### (2) Igniter Tests - Second Series

The first lot of igniters were fabricated from Eastman Chemical Company Tenite 3360. The second lot of igniter cups, made from Eastman Tenite 3460 polyethylene, were tested in conjunction with the primer housings. This series had five objectives:

- (a) Ignition tests to determine blowout pressure and charge of Black Powder to accomplish blowout. The purpose of this test was to establish a more realistic igniter acceptance procedure.
- (b) Rocket performance with this closure.
- (c) Effects of a deeper cavity.
- (d) Effects of 3M adhesive 4693 when substituted for the RTV.
- (e) Whether the APE configuration could withstand the two-hour, three-foot waterproof requirement.

Prior to this test series, a single igniter was assembled without ignition line and Black Powder and subjected to the waterproof test. After two hours submersion at three feet, the polyethylene cup and flash tube were cut open and examined for moisture. None was detected. The primer was then fired and it functioned properly.

(3) Data

The data for this series of tests are listed in Tables V and VI. Several interesting conclusions can be drawn from this series of tests and the data collected.

(a) The APE design meets the waterproof requirements.

(b) The Black Powder cavity which is identical with the R&D drawings is not adequate. A cavity .032-in. deeper on all dimensions is about ideal for the .3-gram of Class 5 Black Powder.

(c) This increase in depth does not appear to affect the blow-out pressure adversely.

(d) The No. 4693 3M adhesive bonded the igniter well to the nozzle even at  $-10^{\circ}\text{F}$ ; however, it had not been subjected to environmental or waterproofing tests yet. Also, it appeared that the adhesive increased blowout pressure slightly.

(e) The Eastman Chemical 3460 polyethylene igniter cups affected the motor burning characteristics. They appeared to blow out at a lower pressure and gave a less regressive curve than the previous closures. These curves are more nearly like Trace B, Figure 19, page 121 in Report No. RT-TR 69-20<sup>(3)</sup>. This type of pressure-time curve is believed to be better; however, additional factors mentioned below preclude immediate adoption of this type of material. See Figure 26 for a typical curve.

While caution must be observed in drawing absolute conclusions on the small samples tested, the averages listed in Table VII reveal the importance of the igniter-nozzle closure on the performance of the rocket.

TABLE V. Rocket Igniter Tests

Round No.	Date	Ignition Lot	B. P. Weight (gram)	Nozzle Dia. (in.)	Cond. Temp. (°F)	Igniter Type	Prop. Weight (gram)	Reduced Data				Remarks
								Ig. Del. (MS)	Ig. Time (MS)	P max (psi)	Burn Time (MS)	
1	9-24	TT 2	.3	.316	-10	S	10.5	10	3	6800	10	
2	9-24	TT 2	.3	.316	-10	M	10.5	35	3	8100	9	
3	9-24	TT 2	.3	.316	-10	S	10.5	24	2	7000	10	
4	9-24	TT 2	.3	.316	-10	D	10.5	12	4	7250	10	
5	9-24	TT 2	.3	.316	-10	D	10.5	22	2	6800	12	
6	9-24	TT 2	.3	.316	-10	M	10.5	>47				Long Delay
7	9-24	TT 2	.3	.316	-10	S	10.5	26	1	7900	10	
8	9-24	TT 2	.3	.316	-10	M	10.5	17	1	7900	10	
9	9-24	TT 2	.3	.316	-10	M	10.5	18	2	7600	10	
10	9-24	TT 2	.3	.316	-10	S	10.5	33	1	7600	11	Ignition peak 7300
11	9-24	TT 2	.3	.316	-10	S	10.5	17	1	6700	12	
12	9-24	TT 2	.3	.316	Amb 80	S	10.5	8	1	7000	9	Ignition peak 6100
13	9-24	TT 2	.3	.316	Amb 80	M	10.5	4	1	6300	8	Ignition peak 5800
14	9-24	TT 2	.3	.316	Amb 80	S	10.5	8	1	6100	11	Ignition peak 5500

KEY: S - Standard igniter and rocket configuration to drawing.  
 D - Igniter Black Powder cavity .032-in. deeper; otherwise standard.  
 M - Standard igniter with 3M, 4693 substituted for RTV.

TABLE VI. Igniter Tests - Blowout Pressure (contd)

Round No.	Date	Ignition Lot	B. P. Weight (gram)	Nozzle Dia. (in.)	Cond. Temp. (°F)	Igniter Type	Prev. Treatment	Reduced Data			Remarks
								Ig. Del. (MS)	Ig. Time (MS)	P max (psi)	
1	9-25	TT 2	.3	.316	-10	S	W				Flash tube shattered - low trace - stayed in nozzle
2	9-25	TT 2	.3	.316	-10	S	W	15	5	140	Flash tube shattered - stayed in nozzle
3	9-25	TT 2	.9	.316	-10	S	W	13	4	1360	Flash tube shattered - stayed in nozzle
4	9-25	TT 2	2.1	.316	-10	S	W	4	3	3860	Flash tube shattered - stayed in nozzle
5	9-25	TT 2	3.9	.316	-10	S	W	2	3	6850	Stem shattered - blew out
6	9-25	TT 2	3.3	.316	-10	S	W	6	1	5300	Stem shattered - blew out
7	9-25	TT 2	2.7	.316	-10	S	none	7	2	4700	Stem shattered - blew out old motor
8	9-25	TT 2	2.4	.316	-10	S	none	12	3	4100	Stem shattered - blew out old motor
9	9-25	TT 2	2.1	.316	-10	S	W	8	3	3900	Stem shattered - stayed in
10	9-25	TT 2	2.4	.316	-10	S	W	8	3	4100	Stem shattered - blew out
11	9-25	TT 2	2.1	.316	-10	D	W	9	4	3540	Stem shattered - stayed in
12	9-25	TT 2	2.3	.316	-10	D	W	8	3	3800	Stem shattered - blew out
13	9-25	TT 2	2.1	.316	-10	D	W	10	3	3500	Stem shattered - stayed in

(continued)



TABLE VI. Igniter Tests - Blowout Pressure (concluded)

Round No.	Date	Ignition Lot	B. P. Weight (gram)	Nozzle Dia. (in.)	Cond. Temp. (°F)	Igniter Type	Prev. Treatment	Reduced Data			Remarks
								Ig. Del. (MS)	Ig. Time (MS)	P max (psi)	
14	9-25	TT 2	2.1	.316	-10	D	W	6	4	3500	Stem shattered -blew out
15	9-25	TT 2	1.9	.316	-10	D	none	11	3	3100	Stem shattered -stayed in
16	9-25	TT 2	1.9	.316	-10	D	none	9	3	3300	Stem shattered -stayed in
17	9-25	TT 2	.3	.316	Amb 80	S	none	2	4	730	Flight motor stayed in
18	9-25	TT 2	2.1	.316	-10	S	none	4	3	2800	2-strand igniter stayed in flash tube split
19	9-25	TT 2	2.4	.316	-10	S	none	10	3	3650	2-strand igniter blew out

KEY: S - Standard igniter and rocket configuration to drawing.  
D - Igniter Plack Powder cavity .032-in. deeper; otherwise standard.  
M - Standard igniter with 3M, 4693 substituted for RTV.  
W - Subjected to waterproof test, 3 feet of water for 2 hours.

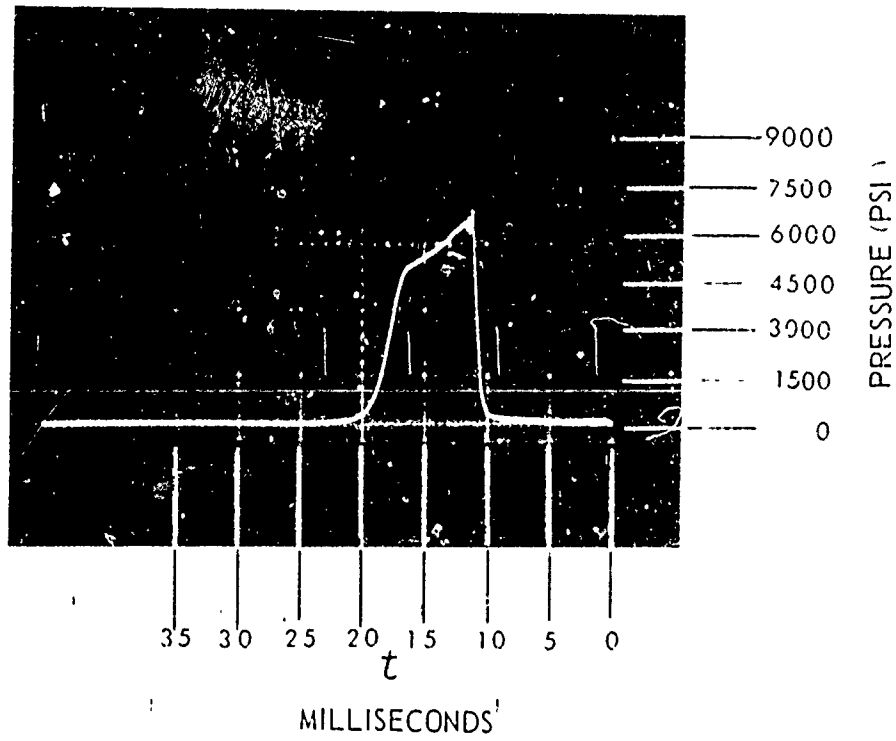


Figure 26. Typical Pressure-Time Curve (Round 1, Table V)

TABLE VII. Averages of Small Samples Tested

Material	Max. Pressure @ -10°F	Burning Time @ -10°F
Tenite 3360	8750 psi	13.3 msec
Tenite 3460	7200 psi	10.6 msec
Tenite 3460, deep cavity	7000 psi	11.5 msec
Tenite 3460 with 3M 4693 Adhesive	7900 psi	10.1 msec

(f) The flash tubes, when fired at -10°F, had a tendency to crack and shatter. Although in all but one case the ignition delay was acceptable, these igniters, as they existed, were not considered suitable.

(g) The material used (Eastman Chemical polyethylene 3460) was stronger and less flexible than the Alathon 7622 used on the LAW and R&D igniter flash tubes. The LAW igniter flash tubes will blow through near the primer block and often near the nozzle and in the center, thus relieving the pressure and the tendency to shatter. When the 3460 igniters were weakened slightly with the removal of material near the primer block, they too vented and worked properly (see the following test series).

(h) To more nearly duplicate the performance of the LAW igniter which always vents itself in the flash tube, some exploratory firings were made to aid the igniter to similarly vent. It was found that by weakening the wall near the primer block sufficiently, the igniter could be made to rupture and vent in this area. As a result, four methods of duplicating the LAW performance by weakening the wall were prepared and tested. These were:

- Method 1: 1/2-in. long flat section at center of flash tube.
- Method 2: 1/2-in. long flat section 1/2-in. from primer block (flat in both cases approximately .030-in. deep).
- Method 3: central hole of flash tube increased to .097-in.
- Method 4: .097-in. hole for 1-inch from primer block.

(i) These configurations were assembled into igniters and nozzles and fired at -10°F. The results are tabulated in Table VIII. The only one that consistently gave good venting and performance was Method 2, above.

TABLE VIII. Igniter Tests with Controlled Venting - 29 Sept 1970

Igniter Lot: TT2S  
 Black Powder Weight: .3-gram  
 Nozzle Throat Diameter: .316-inch  
 Conditioned Temperature: -10°F

Round No.	Modification	Remarks
1	Flat in center of flash tube, 2-strand	Flash tube shattered
2	Flat in center of flash tube, 2-strand	Flash tube shattered
3	Flat in center of flash tube, 3-strand	Flash tube shattered
4	Flat near primer block, 2-strand	OK - good venting
5	Flat near primer block, 2-strand	OK - good venting
6	Flat near primer block, 3-strand	OK - good venting
7	0.097-in. hole, 2-strand	Flash tube shattered
8	0.097-in. hole, 3-strand	OK - good venting
9	0.097-in. hole, 2-strand	Flash tube shattered
10	0.097-in. hole, 1-in. long at primer end, 2-strand	Flash tube shattered
11	0.097-in. hole, 1-in. long at primer end, 2-strand	OK - good venting
12	0.097-in. hole, 1-in. long at primer end, 3-strand	Shattered

(j) Carrying this work one step further, a sample of nine units similar to Method 2, above, were prepared with the depth of cut measures. These were conditioned at -10°F and fired. In all but two units, the performance was satisfactory and the igniter and flash tubes remained intact. See Table IX. The two that broke, in general, had thicker walls, and smaller venting holes resulted. In fact, in all cases, the venting hole remained smaller than that observed in the regular LAW igniter; nor was there more than one vent to an igniter. Although it is not fully known that the shattering of the igniter flash tube would be detrimental, it is felt that it could introduce uncertainties in ignition time and should be eliminated

TABLE IX. Igniter Tests with Controlled Venting - 30 Sept 1970

Igniter Lot: TT2  
 Black Powder Weight: 3-gram  
 Nozzle Throat Diameter: .316-inch  
 Conditioned Temperature: -10°F

Round No.	Depth of Flat (in.)	Wall Thickness (in.)	Remarks
1	.040	.013	OK - good venting
2	.044	.009	OK - good venting
3	.032	.021	OK - good venting
4	.025	.028	OK - good venting
5	.025	.028	OK - good venting
6	.017	.036	Flash tube broke in two
7	.022	.031	OK - good venting
8	.024	.029	Flash tube broke in two
9	.015	.038	OK - good venting

As a result of this testing, it may be concluded that the igniter's ability to avoid rupture of the flash tube depends on the material, its strength, its temperature and the proper relief of pressure. There are various combinations of these that will give satisfactory results.

(4) Igniter Tests - Third Series

The prior two series of igniter tests indicated two facts: (1) there was a difference in performance in the rocket between the two igniter materials although both met the specification (Mil-P-22748, Class A, Grade 2), and (2) that a weakened section in the flash tube would be beneficial to rupture and performance.

A third material, meeting the specification (Alathon 7320), was procured for the third series. Static rocket motor tests at -10°F and igniter firing tests at -10°F were conducted on the Alathon 7320 igniter cups, and these were found to be better than any others so far tested. However, these also experienced some cracking, although not as severe as the others.

A slight reduction of the wall near the primer block, permitting venting, overcame the cracking difficulty (see Test 1). The drawings were changed and 200 units were ordered. These were checked for cracking and performed satisfactorily (see Test 5).

(a) Test No. 1 - Igniter Cups From Alathon 7320

Earlier tests were on two types of polyethylene. Both gave as good performance as the R&D igniters, but the one that gave the better P-T curve tended more to shatter in the igniter stem at the lower temperature. A third type of polyethylene was procured which is more resistant to environmental cracking and has good elongation although its physical properties may be slightly lower than the preceding types tested. Two test series were run on these igniter cups: (1) igniter tests at  $-20^{\circ}\text{F}$  for shattering of the stem, and (2) static rocket motor firings to determine the effects on ballistics.

[1] Igniter tests at  $-20^{\circ}\text{F}$  for shattering of stem

Six sample igniters loaded in nozzles with the standard .3-gram Black Powder were conditioned at  $-20^{\circ}\text{F}$  then statically fired. Two split slightly in the stem, and the remaining were given a small flat near the primer housing such that the wall was reduced from .050-inch to approximately .030-inch in this area. The purpose of this cut was to weaken the wall in this area to allow gas venting similar to that occurring in the regular LAW igniter. The four igniters treated this way all vented and fired satisfactorily. The data from this test are listed in Table X.

TABLE X. Igniter Tests - Cold Temperature Integrity

Test Date: 3 November 1970  
 Material: Alathon 7320  
 Black Powder Weight: .3-gram  
 Conditioned Temperature:  $-20^{\circ}\text{F}$

Round No.	Notes	Results
1	Deep cavity	Split but stayed in one piece
2	Deep cavity	Split but stayed in one piece
3	↑	↑
4	Deep cavity and wall	Satisfactory
5	thinned at primer end	
6	↓	↓

## [2] Static Rocket Motor Tests

Eight static rocket motors were prepared for test. These were conditioned and fired at  $-10^{\circ}\text{F}$ . All were assembled with the Alathon igniter with approximately .020-inch material removed from the back of the stem near the primer housing. This was in agreement with the test noted above and listed in Table X. A propellant charge of 10.5 grams was used in all motors, the standard igniter Black Powder charge of .3-gram was used on six motors, and .4-gram on the remaining two motors. The data are listed in Table XI.

TABLE XI: Static Rocket Motor Igniter Tests

Test Date: 4 November 1970  
 Igniter Lot: Alathon  
 Normal Throat Diameter: .316-inch  
 Conditioned Temperature:  $-10^{\circ}\text{F}$   
 Fire Temperature:  $70^{\circ}\text{F}$   
 Propellant Weight: 10.5 grams

Round No.	B. P. Weight (gm)	Reduced Data				Remarks
		Ig. Del. (msec)	Ig. Time (msec)	P Max. (psi)	Burn Time (msec)	
1	.3					Lost - Inst.
2	.3	7	1	8150	10.5	
3	.3					Lost - Inst.
4	.3	8	2	7700	10	
5	.3	12	2	7700	11	
6	.3	10	2	7900	11	
7	.4	21	2	7700	10	
8	.4	9	2	7900	11	

## [3] Summary of Results

[a] This material had the least tendency to crack when the igniter was fired at  $-10^{\circ}\text{F}$ , although some splitting did occur.

- [b] When relieved with a slight cut (wall approximately .030-in.) near the primer housing, the igniters functioned satisfactorily
- [c] This igniter permitted excellent cold temperature ballistics:

Average maximum pressure (ignition) = 7850 psi

Burning time = 10.5 msec

Ignition time = 11.0 msec

Figure 27 illustrates a typical P-T curve.

- [d] An igniter charge of .4-gram in lieu of .3-gram gave substantially the same performance.
- [e] The Alathon 7320, with a slightly thinner wall near the primer housing, gives satisfactory performance and was selected for the igniter cups.

(b) Test No. 2 - Igniter Stem Performance - Cold

This test was run on molded igniters from Alathon 7320 of the desired configuration to determine if the igniters remained intact when fired at the lower temperatures. Nine igniters were conditioned to -20°F, five were fired in the normal position, and four were fired with the undercut on the reverse side of the bend (outside).

All igniters remained in one piece and vented properly; however, on two of the reversed igniters, a slight but perceptible ignition delay was observed. This delay would appear to have been well within the permissible tolerance. As a result, the test confirmed the desirability of the selected design. Data of this series are listed in Table XII.

TABLE XII. Prototype Igniter Intact Tests

Test Date: 27 Nov. 1970

Igniter: Alathon with undercut section

Condition Temperature: -20°F

Round No.	Undercut Orientation	Results	Remarks
1	Normal-In	Satisfactory	
2	↑ ↓		
3			
4			
5			Normal-In
6	Out		Very slight igniter delay
7	↑ ↓		
8			Very slight delay
9	Out		Satisfactory



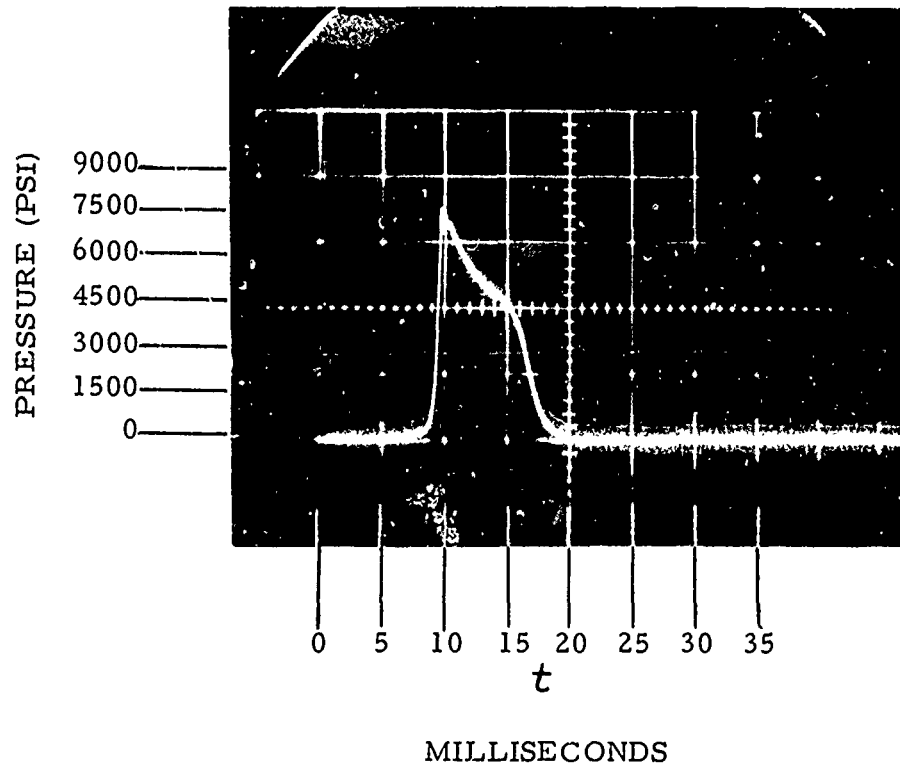


Figure 27. Typical Pressure-Time Curve - Round No. 4 (Table XI)

### 3. ROCKET TESTING

Numerous component tests were conducted throughout the program. The more pertinent tests, together with results and data, are reported under the various components. However, several tests were conducted on the complete rocket or concerned several components and such data are included in this section.

#### a. Center of Pressure

Although one of our primary efforts in the design study was to not change anything that would significantly alter the flight characteristics of the subcaliber rocket, and each proposed change was mathematically analyzed, it was felt desirable to check the center of pressure of the flight configuration when hardware became available. As a result, early in the program a simple weather-vaning test was made at 100 fps on an APE model as well as on an R&D model for the flight configuration. In both designs the center of pressure was located at 4.00 inches forward from the rear of the rocket.

To establish the stability of the rockets, the center of gravity was measured on the flight configuration of the old R&D rounds and was calculated for the APE round using actual weights of parts except the rocket motor and the fuze spring. For these, calculated weights were used. For the R&D round, the cg turned out to be 4.75 inches from the rear and for the APE round, the cg was 4.74 inches from the rear; therefore, it was concluded that the stability of the rocket is essentially unchanged with both the center of gravity and the center of pressure remaining in the same spot when measured from the rear.

#### b. Velocity and Propellant, First Test

Prior to conducting the static and flight tests, it was necessary to establish propellant weight (and length) for lot HPC-48, PE220-1 (LAW) from Lot RAD-30-48-3; otherwise, a slight error in the pressure characteristics might occur. A meticulous review of R&D reports (contractor and Arsenal) failed to reveal a clear-cut propellant weight requirement to give the 140-gram mass the required velocity. From the data, the best estimate was 9.8 grams total weight including pins and stubs (wt: .90 grams). Fourteen rockets were assembled, conditioned at 135°F, and fired. The specified velocity for the rocket, with a burnt weight of 140 grams at this temperature, is 505 fps. In assembly and test of these 14 rounds, precise propellant and flight weights were recorded so the results could be reduced to a common factor. It should also be stated that these rockets used once-fired R&D rocket motors, modified LAW igniters and special slug warheads to give the desired weight.

Table XIII lists the raw data for this test series, and Table XIV lists the corrected data for proper weights.

From Table XIII, the average velocity for a 140-gram burnt weight and 9.80-gram propellant charge (with an average .93-gram in pins and stubs) is 469.1 fps. The weight of propellant burnt to give this velocity was 8.87 grams. This gives an effective gas velocity of 7639 fps and an  $I_{sp}$  of 237 which appears about right (Solid Propellant Manual CPIA/M2 gives an  $I_{sp}$  of 240 for this expansion ratio<sup>(4)</sup>).

From the velocity region considered here, the following simplified formula is adequate:

$$V_g \times W_p = V(W_b + \frac{1}{2}W_p)$$

where:  $V_g$  = effective gas velocity = 7639 ft/sec  
 $W_p$  = propellant weight (consumed)  
 $V$  = velocity of rocket = 505 ft/sec  
 $W_b$  = burnt weight of rocket = 140 grams

This gives 9.57 grams for the weight of consumed propellant. Adding the weight of the stubs (.93-gram) gives 10.50 grams for the desired charge weight including the pins. The average grain length to give this weight will be approximately 5.30 inches.

### c. Final Development Tests

In keeping with the contractor's philosophy of checking out everything possible with modest tests prior to committing the program to a greater extent, several development tests were completed successfully prior to the initial Picatinny Arsenal required tests. These tests concluded the anticipated development tests and indicated that the APE round should meet all its requirements satisfactorily. Efforts were made to maintain or improve the performance of the R&D rocket and to verify any performance parameters at the earliest possible date.

---

(4) Solid Propellant Manual (U), CPIA/M2 rev.ed., Chemical Propulsion Information Agency, The John Hopkins University Applied Physics Laboratory, 8621 Georgia Ave., Silver Spring, Md., April 1969 (C)

TABLE XIII. Velocity Test

Round No.	Date	Ignitor B.P. Wt. (gram)	Prop. Weight (gram)	Rocket (flight) Weight (gram)	Cond. Temp (°F)	Fire Temp. (°F)	Prop Lot	Instr. for Launch	Velocity (fps)	Remarks
1	8/19	.3	9.80	135.5	135	78	30 49-3	(1)	827.0	Pins and stubs .94 gr
2	8/19	.3	9.82	136.86	135	78		(1)	772.9	Pin and stub .98 gr
3	8/19	.3	9.80	-	135	78		(1)	742.8	
4	8/19	.3	9.84	-	135	78		(1)	-	Velocity lost
5	8/20	.3	9.83	141.18	136	76		(2)	462.5	Stubs .91 gr
6	8/20	.3	9.79	143.07	136	76		(2)	459.2	Stubs .90 gr
7	8/20	.3	9.80	140.11	136	76		(2)	471.7	Stubs .90 gr
8	8/20	.3	9.80	141.15	136	76		(2)	466.4	Stubs .72 gr. Stubs burnt at target
9	8/20	.3	9.79	141.00	136	76		(2)	464.0	Stubs .91 gr
10	8/20	.3	9.80	141.63	136	76		(2)	463.6	Stubs .90 gr
11	8/20	.3	9.80	140.71	136	75		(2)	468.1	Stubs .99 gr
12	8/20	.3	9.80	142.00	136	74		(2)	467.2	Stubs 1.00 gr
13	8/20	.3	9.80	141.47	136	74		(2)	459.7	Stubs .98 gr
14	8/20	.3	9.79	140.50	137	74	30 49-3	(2)	466.0	Stubs .90 gr

NOTES:  
 (1) Solid state ballistic screens. Ballistic screens found faulty and replaced.  
 (2) Wire screens.  
 (3) 7.28 ft to first screen; 13.02 feet between screens.

TABLE XIV. Corrected Velocity

Round No.	Prop. Weight (gram)	Rocket (flight) Weight (gram)	Measured Velocity (fps)	Velocity Corrected for 9.80 gr Prop. and 140 gr Rocket (fps)
5	9.83	141.18	462.5	464.8
6	9.79	143.07	459.2	469.8
7	9.80	140.11	471.7	472.2
8	9.80	141.15	466.4	470.1
9	9.79	141.00	464.0	467.7
10	9.80	141.63	463.6	469.2
11	9.80	140.71	468.1	470.4
12	9.80	142.00	468.1	473.7
13	9.80	141.47	459.7	464.8
14	9.79	140.50	466.0	<u>468.3</u>
Average				469.1

Four rocket test series were conducted in the final developmental testing:

- Five-foot drop test, bare, which was passed successfully
- Setback, head and fuze functioning at 64-deg. from normal, which passed successfully
- Establish velocity for APE round to establish charge for round.
- Accuracy, match and flash. This series indicates the APE round is in every way equal, or superior to, the R&D rocket.

(1) Test No. 1 - Five-foot Drop Test

The specification calls for the fuze, warhead and rocket to be safe to handle and not to fire after three five-foot drops on the base and then on the nose. The units met the requirements with only minor damage as follows: The igniter stem was cut by the nozzle edge but another endured 15 drops. The igniter would push in on most base drops. Other than flattening of the nose, the heads were undamaged and the fuzes did not arm or fire.

(a) Procedure

Five warheads and fuze assemblies were assembled per Dwg. 9156063 (Appendix B), except the head filler was inert (a live M26 primer was used).

Two rocket motor assemblies were prepared to weight (but without explosive components except for the M29 primer). The reason for replacing the propulsive and explosive components with inert masses was dictated by the restrictions of the test site. The five-foot drop was conducted at ambient temperature per specification MIS 9477-1; that is, three drops on the base from five feet onto concrete (with safety clip removed) and then three drops on the nose from the same height and condition. A tube was used to guide the rocket and insure that the rocket impacted in the proper orientation. Table XV lists the test results.

(b) Summary of Results

- [1] All rockets met requirements.
- [2] One igniter stem was severed by nozzle on second drop due to no propellant resistance.
- [3] One igniter passed 15 drops without damage or firing.

TABLE XV. Impact Tests - Five-foot Drop

Test Date: 4 November 1970  
 Temperature: 70°F  
 Target: Concrete  
 Angle: 90-deg.

Drop Series No.	Head-Fuze Assembly No.	Rocket Motor No.	Prior History	Results
1	1	1	none	Satisfactory. On second tail drop, nozzle cut igniter stem. Igniter pushed in. On nose drops 2 and 3, nose flattened to 3/16-in.; otherwise, head undamaged. Fuze did not arm or fire.
2	2	2	none	Satisfactory. On second tail drop, igniter pushed in. Repositioned, dropped again and pushed in. After test, all components intact and functioned. Approx. 3/16-in. flat on nose.
3	2	2	Drop 2	Satisfactory. Each time igniter repositioned before tail drop. No damage, firing, arming, exposure; etc.
4	3	2	Drop 2 and 3 on motor	Satisfactory - same as No. 3
5	4	2	Drop 2, 3 and 4 on motor	Satisfactory - same as No. 3
6	5	2	Drop 2,3,4 and 5 on motor	Satisfactory - same as No. 3
7	1	1	Drop 1	Three additional drops on nose only - results same as No. 3

(2) Test No. 2 - Setback and Head and Fuze Functioning  
at 64-deg. from Normal

This test series was conducted to determine two things: (1) whether the small void in the head mix would likely cause premature head functioning in the bore during acceleration, and (2) if the head and fuze would properly function on 64-deg. impact. The tests were run at 140°F to give the worst acceleration conditions, and the rockets were treated to give maximum void at the rear to exaggerate the setback conditions. The rockets were fired at a range of seven feet against a steel plate.

(a) Setup and Procedure

The target and launcher were set up in the contractor's test tunnel as illustrated in Figure 28. Three witnesses observed each round. One visually witnessed the target directly; the other two witnessed the target array via mirrors which were set up to exclude any flash other than directly in the target area. In each case, there was unanimous agreement on flash. The rounds were conditioned at 140°F and tapped with the nose down prior to insertion in the launcher in order to exaggerate the void condition in the warhead. All functioned properly.

Eight rockets were fired against plate at 64-deg. from normal, and all functioned perfectly. One of these was fired against 1/8-inch aluminum and the rocket penetrated the plate. The other seven were fired against 1/4-inch steel plate. One round was fired against 1/4-inch plate 72-deg. from normal. This round did not function on the plate. One R&D head and fuze was fired for comparison. The comparison was good. All rounds (motors) appeared to skid along the plate after impact rather than bouncing. See Table XVI.

(b) Summary and conclusions of Results

- [1] The small void should offer no problem in firing.
- [2] The rockets functioned on the steel plate at 64-deg. from normal with a good flash.
- [3] The rocket heads and fuzes did not function on steel plate at an angle of 72-deg. from normal.
- [4] The flash is comparable to the R&D round.



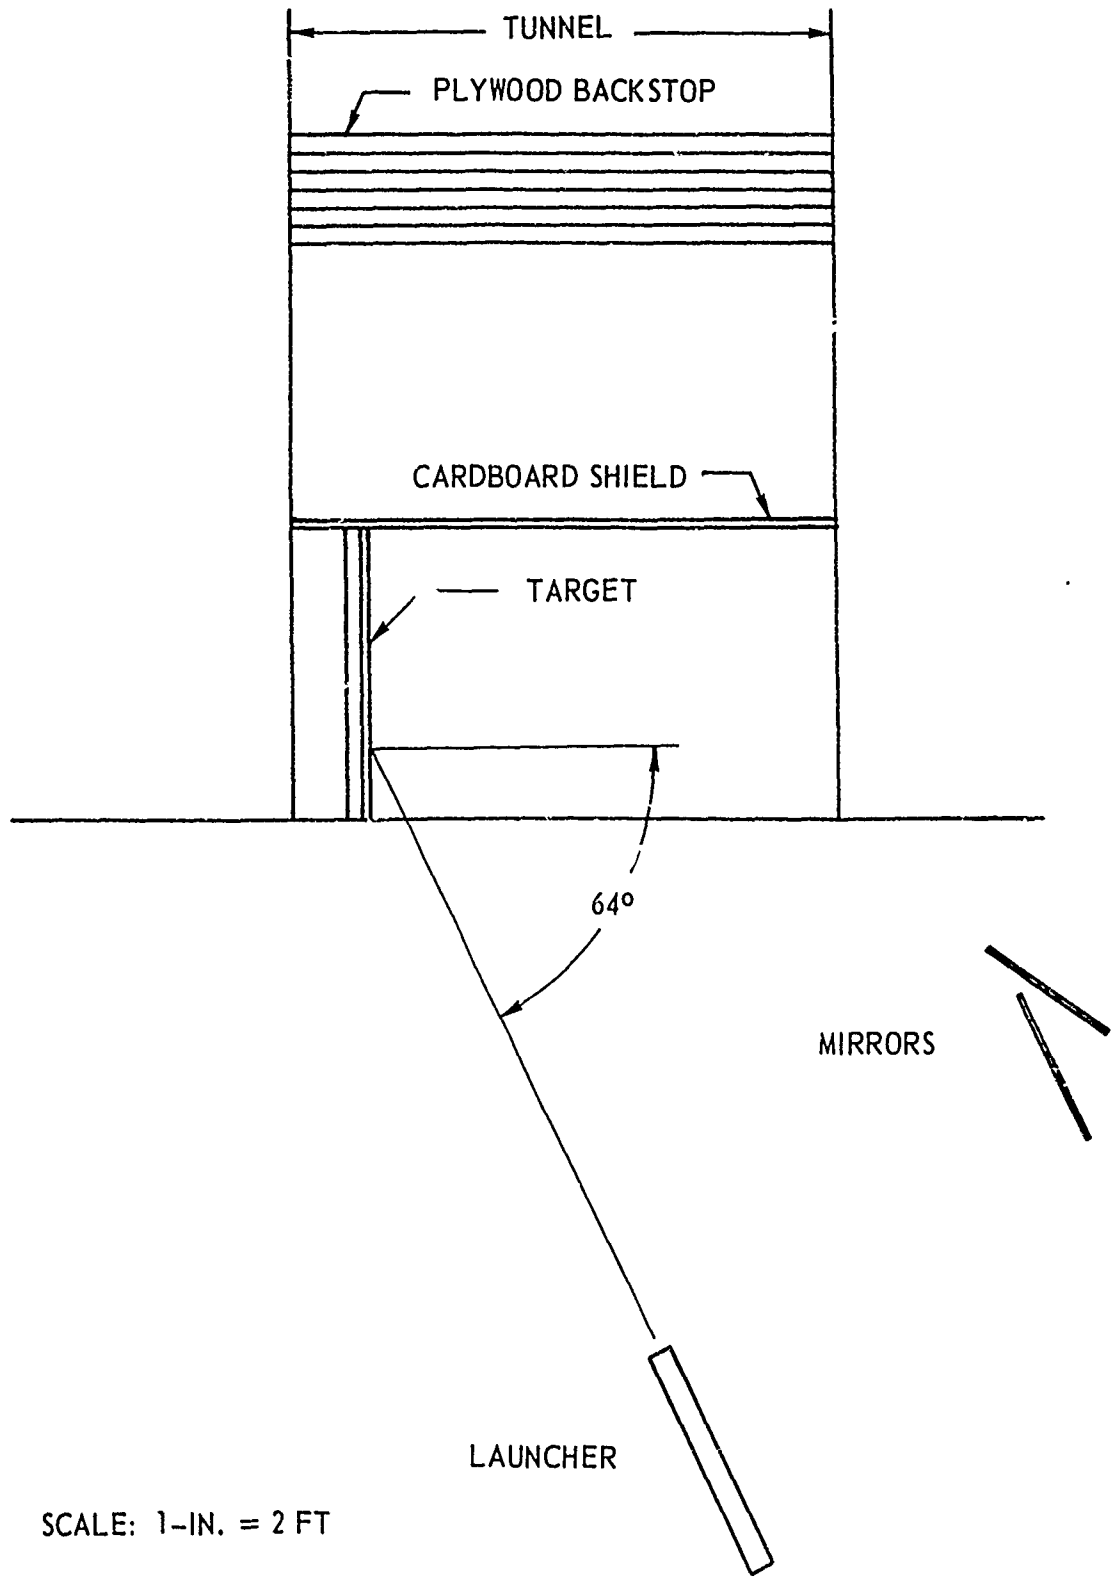


Figure 28. Test Setup i: Tunnel (64-deg. impact test)

TABLE XVI. Impact Tests for Setback and 64-deg. Impact

Test Date: 10 November 1970  
 Conditioned Temperature: 140°F  
 Backup: Cardboard 15-in., Plywood 3 ft

Round No.	Target	Angle from Normal	Results
1	1/8-in. Al Matting	64-deg.	Flash. Penetrated aluminum plate
2	1/4 in. Steel	↑	Flash
3			Flash
4		Flash	
5		64-deg.	Flash
6		72-deg.	No flash on plate
7		64-deg.	Flash
8		↓	Flash
9		↓	R&D Head flash
10		1/4-in. Steel	64-deg.

(3) Test No. 3 - Establish Velocity of Propellant Charge for APE Hardware

With the availability of all APE hardware, tests were scheduled for establishing the propellant charge and checking the flight. This series of firings was conducted to establish the charge while the fourth series was fired to verify flight accuracy and center of impact and flash.

Ten rounds were loaded for this test but three were lost due to instrumentation failure. The data on the remaining rounds is given in Table XVII. The rockets were approximately 1 gram heavier than the R&D rocket; and as a result, a low velocity was to be expected from the charge of 10.50 grams established for the 140-gram in-flight rocket. The test results give an average velocity of 488 fps for an average weight (flight) of 141.6 grams.

The specifications give a velocity of  $505 \pm 10$  fps for  $135^{\circ}\text{F}$  and  $488 \pm 10$  fps for  $-10^{\circ}\text{F}$ . There is no specified velocity for  $70^{\circ}\text{F}$ . From calculations and comparison with Aberdeen Proving Ground Test Data, the velocity at  $70^{\circ}\text{F}$  was established to be 496 fps and the propellant (burnt) required to give this velocity is 9.73 grams. By adding the weight of the pins and unburnt stubs, this gives a charge weight of 10.66 grams (including pins). This is the charge weight that was used in the flight firings, the 150 rounds for test, as well as the remaining production.

TABLE XVII. Velocity Test to Establish APE Propellant Charge

Test Date: 20 November 1970  
 Igniter Black Powder Weight: .3-gram  
 Propellant Weight: 10.50 grams  
 Conditioned Temperature:  $70^{\circ}\text{F}$   
 Fire Temperature:  $70^{\circ}\text{F}$   
 Propellant Lot: 30 48-3  
 Instrument Break wire screens

Round No.	Rocket (flight) Weight (gr)	Velocity (fps)
1	141.39	488.9
2	141.63	486.4
3	141.72	489.4
4	141.82	486.2
5	141.62	487.2
6	141.43	486.8
7	<u>141.68</u>	<u>489.2</u>
Average	141.61	487.7

(4) Test No. 4 - Accuracy and Flash Tests

This was the final development test prior to delivery and test of the 150 units. Within the limits of the contract, all possible parameters had been verified by testing except long range flight and visibility at 300 meters which was the purpose of this final test.

(a) Procedure

Ten APE rockets were loaded with 10.66 grams of propellant to give 496 fps. An additional seven R&D rounds (with once-fired motors and APE igniters) were loaded with 10.52 grams of propellant to give the same velocity. Also, seven sighting-in rounds and 10 LAW rounds were included.

All rounds were conditioned to  $70^{\circ} \pm 2^{\circ} \text{F}$  and fired at a target range of 200 meters with an elevation of 50.4 mils. The target was 12 ft x 12 ft made of 3/4-in. plywood with 20 gage steel sheet facing; in addition, four feet of cardboard extended on the top and each side of the target (essentially making a target of 20 ft x 16 ft). Two rounds impacted the cardboard target extension; one an APE round and one an R&D round. Neither of these rounds was observed to flash; all other subcaliber rounds gave visible flashes at 200 and 300 meters.

The APE subcaliber data is listed in Table XVIII; the R&D subcaliber data is listed in Table XIX, and the LAW data is listed in Table XX.

The center of impact from aim point was as follows:

	X <u>Horizontal (in.)</u>	Y <u>Vertical (in.)</u>
APE	6 left	18 up
R&D	24 left	34 up
LAW	3 left	20 up

Standard deviations for the rounds fired are:

	X <u>Horizontal (in.)</u>	Y <u>Vertical (in.)</u>
APE	14	22
R&D	26	33
LAW	12	6

(b) Conclusions from Rocket Tests

The flash was good and visible at 300 meters for all rounds that hit the steel target, and the APE flashes were at least equal to, or better than, the R&D heads.

The accuracy and center of impact is adequate and at least as good as the R&D round. The match to the LAW at 70°F, with the charge established, is about as good as may be expected. Figure 29 graphically illustrates the comparison.

It was observed that several of the subcaliber rounds (both APE and R&D) passed through the target at a rather severe yaw angle, which indicates that the rounds are marginally stable. This is also backed up by the CP-CG relationship, and perhaps more than anything else accounts for the round's relatively poor accuracy (about 3 mils standard deviation) for this type of rocket.

A simple redesign of the fin should improve this situation.

TABLE XVIII. Accuracy and Flash Tests - APE

Test Date: 25 November 1970  
 Type Tested: All APE components  
 Conditioned Temperature: 70°F  
 Range: 200 meters  
 Elevation: 50.4 mils

Round No.	Impact		Flash		Remarks
	X (in.)	Y (in.)	200 M	300 M	
HA-1	12 R	31 D	Yes	Yes	Good flash
HA-2	7 R	14 U	No	No	Hit cardboard (aiming point was on cardboard-slight yaw.
HA-3	2 R	31 U	Yes	Yes	Very good flash
HA-4	4 L	26 U	Yes	Yes	Very good flash
HA-5	35 L	0	Yes	Yes	Very good flash
HA-6	13 L	28 U	Yes	Yes	Very good flash
HA-7	12 L	14 U	Yes	Yes	Very good flash
HA-8	17 L	17 U	Yes	Yes	Very good flash
HA-9	3 L	22 U	Yes	Yes	Very good flash
HA-10	0	56 U	Yes	Yes	Very good flash

NOTE: Propellant charge weight: 10.6 grams to give 496 fps velocity at 70°F.

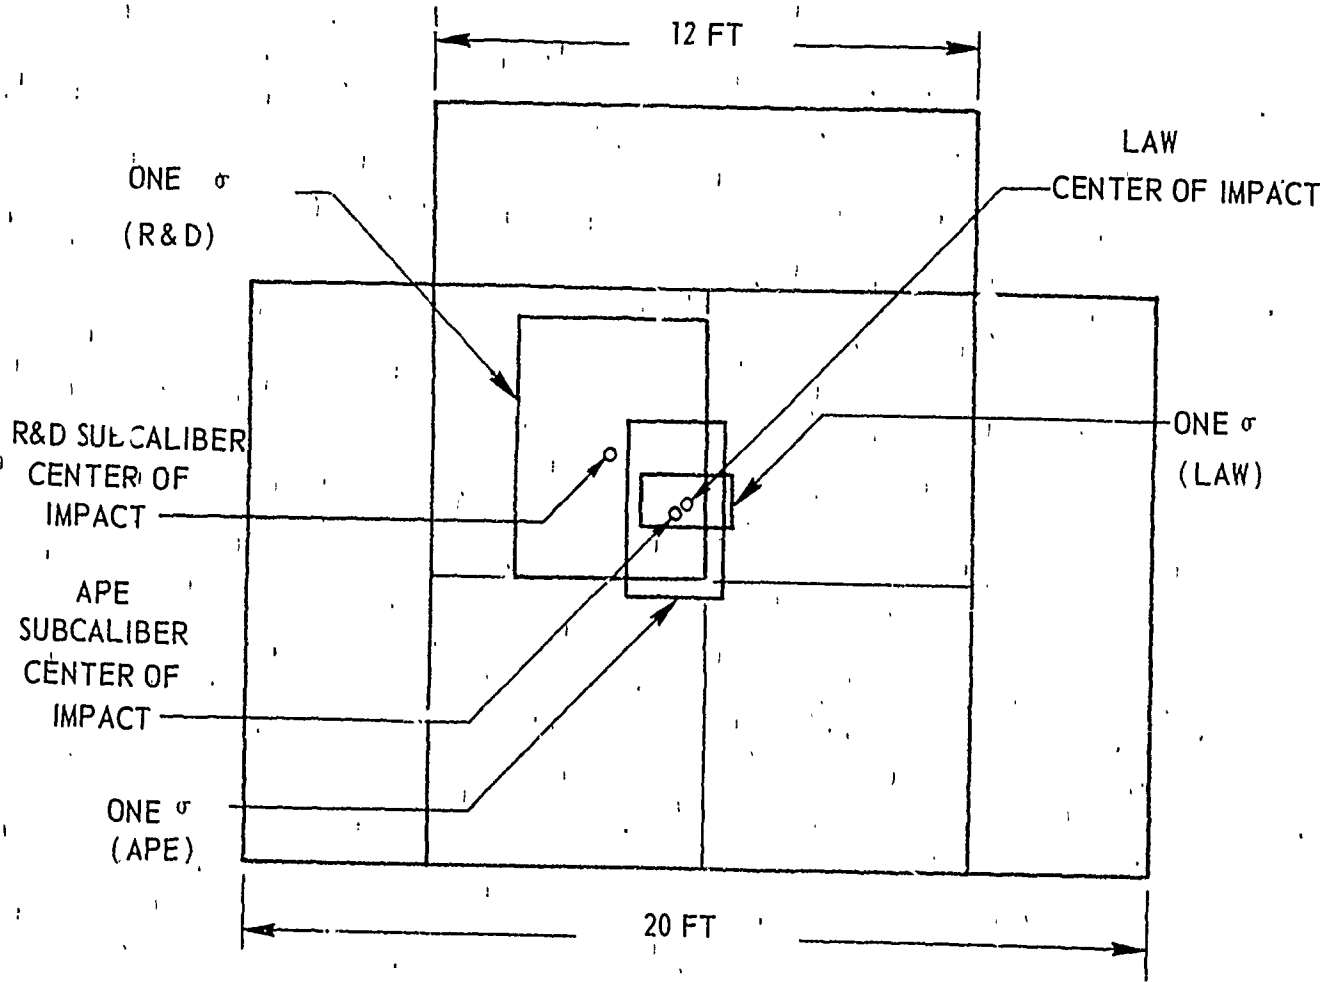


Figure 29. Target Comparison at 200 Meters

TABLE XIX. Accuracy and Flash Tests - R&D

Test Date: 25 November 1970  
 Type: R&D Hardware with once-fired motors and APE igniters  
 Conditioned Temperature: 70°F  
 Range: 200 meters  
 Elevation: 50.4 mils

Round No.	Impact		Flash		Remarks
	X (in.)	Y (in.)	200 M	300 M	
R&D-1	48 L	96 U	No	No	Hit cardboard
R&D-2	60 L	10 D	Yes	Yes	Good flash - yawed
R&D-3	0	29 D	Yes	Yes	
R&D-4	8 R	31 U	Yes	Yes	Yawed
R&D-5	8 L	10 U	Yes	Yes	Yawed
R&D-6	42 L	28 U	Yes	Yes	Yawed
R&D-7	17 L	52 U	Yes	Yes	Yawed very badly

NOTE: Propellant charge weight: 10.52 grams to give 496 fps velocity at 70°F.

TABLE XX. Accuracy of LAW Rounds

Test Date: 25 November 1970  
 Type: LAW - inert head  
 Conditioned Temperature: 70°F  
 Range: 200 meters  
 Elevation: 50.4 mils

Round No.	Impact		Round No.	Impact	
	X (in.)	Y (in.)		X (in.)	Y (in.)
LAW-1	11 R	14 U	LAW-6	1 L	21 U
LAW-2	11 R	9 U	LAW-7	2 R	22 U
LAW-3	2 L	22 U	LAW-8	14 L	27 U
LAW-4	6 R	31 U	LAW-9	18 L	17 U
LAW-5	1 L	22 U	LAW-10	22 L	18 U

(5) Firing Tests for Picatinny Arsenal

In December 1970, the contract was modified to include the firing tests of first deliverable lots of rockets and launcher kits.

One hundred and fifty rockets and 10 launchers were assembled for test. These units were tested at Range 227, Camp Pendleton, 15 through 18 December 1970. Testing was witnessed by personnel from Picatinny Arsenal and other defense agencies.

The test series as specified by the contract change was as follows:

- (a) Accuracy 135<sup>o</sup>F      20 rounds
- (b) Accuracy -10<sup>o</sup>F      20 rounds
- (c) Accuracy 70<sup>o</sup>F      35 rounds
- (d) Waterproof      15 rounds  
(2 hrs - 3 ft submersion and  
then fire at 70<sup>o</sup>F)
- (e) Five-foot drop      15 rounds  
(3 drops on tail;  
3 on nose without  
safety pin)
- (f) Head functioning      15 rounds  
(at 64-deg. angle)
- (g) Transportation      30 rounds  
vibration

The results of the test series has been reported in contractor report HA-2438, "Tests on APE Rockets, Practice 34.2mm LAW Sub-caliber XM73 and Launcher XM190, Held at Camp Pendleton 15-18 December 1970." A summary of the results is incorporated below:

- (a) There were no launcher kit malfunctions
- (b) No rounds gave evidence of post-muzzle burning
- (c) No rounds gave evidence of propellant loss (short round)
- (d) All rounds that impacted virgin metal and wood targets gave visible flashes at 200 and 300 meters
- (e) No round had time from firing pin impact to muzzle exit greater than .05-sec.



- (f) APE rocket is superior to R&D rocket as reported in APR Report No. APG-MT-3275 in:
- Velocity variation (standard deviation at all temperatures)
  - No short rounds
  - Dispersion at all temperatures
- (g) Only two anomalies were experienced:
- One head prematured in launcher at 135°F, giving a slight bulge.
  - Three rockets submitted to waterproof tests misfired. In these, the igniter leaked due to improper crimp. Remaining 12 rockets from this test, fired and functioned properly.
- (h) All rockets submitted to Transportation Vibration were undamaged, and all fired and functioned properly.
- (i) All rounds fired to impact at 64-deg from normal functioned properly; although, one rocket missed the target and functioned on graze impact in soft soil.
- (j) Of the fifteen bare rockets dropped five feet, none armed, fired or exposed explosive components dangerously. Six lost one stud on head each, and one partially cut flash tube. Nine of the units were fired.
- (k) Pertinent statistical results:
- [1] -10°F - Range 200 m. (20 rounds)  
Velocity: 492 fps       $\sigma = 4.3$  fps  
Center of impact horizontal: 14 inches R  
Center of impact vertical: 71 inches U  
 $\sigma$  horizontal: 22 inches  
 $\sigma$  vertical: 19 inches
- [2] 70°F - Range 200 m. (35 rounds)  
Velocity: 503.7 fps       $\sigma = 3.0$  fps  
Center of impact horizontal: 10 inches R  
Center of impact vertical: 26 inches U  
 $\sigma$  horizontal: 12 inches  
 $\sigma$  vertical: 13 inches

[3] 135°F - Range 200m. (19 rounds)  
Velocity: 510.3 fps       $\sigma = 1.75$  fps  
Center of impact horizontal: 6 inches L  
Center of impact vertical: 45 inches U  
 $\sigma$  horizontal: 14 inches  
 $\sigma$  vertical: 22 inches

## II. ESTIMATED COST FOR MASS PRODUCTION

This section defines the comparison of costs between pre and post-APE units.

### 1. LAUNCHER KIT

Because the quantities of the launcher kit are small (e.g., 5000 per year) and the kit itself is simple, no concerted effort was made to establish a unit-by-unit cost comparison between the R&D version and the APE design. Instead, all launcher effort was concentrated in arriving at an inexpensive, simple, serviceable and straightforward design that could be easily installed in the field. However, a production cost estimate of the APE kit was made for a quantity of 5000 units. The cost was \$13.60 per unit. The cost breakdown is listed in Table XXI.

Subsequent information indicates the quantity production cost of the APE kit to be approximately 60% that of the R&D unit on substantially the same quantity production.

TABLE XXI. Unit Cost Breakdown for APE M190  
Launcher Kit Production

Part Number	Part Name	Quantity	Cost per Kit (\$)
9256066	Front Support	1	.359
9256065	Rear Support	1	1.42
9256064	Tube	1	3.95
9256083	Rear Door Pin	1	.107
9256082	Rear Door	1	.93
MS 20659-103	Terminal	1	.02
MS 3527F-231	Screw	4	.08
MS 21083	Nut	4	.05
9256068	Center Support	1	.224
9256081	Rear Door Screw	2	.087
	Packaging	1/20	.371
	Polyethylene Bag	1	.001
9256080	Assemble	1	.04
9218009	Connector		.008
9256085	Labels	1	.011
	Tube Assembly	1	4.75
Loading, Packaging and Stenciling			.22
			\$ 13.60


## 2. ROCKET

A comparative cost estimate was made on the fabrication of the R&D rocket design and the APE or contractor design. Cost has been estimated on a basis of a one-million production lot. Most component costs are based on firm quotes, but some minor items and assemblies are estimates. The data are presented in Figure 30. The estimated cost for the APE Rocket Assembly is \$2.00-vs-a cost of \$2.80 for the R&D version. These prices do not include acceptance testing, but inasmuch as the costs are common to each design, they will not change the differential. Likewise, as the estimates are made on equivalent basis, the differential should be relatively valid even though cost estimates may differ slightly from other sources. As indicated in Figure 30, the APE rocket will cost \$0.80 less to produce than the R&D version. The major savings comes from: (1) the rocket motor, (2) the igniter, and (3) the warhead. If the fuze can be eliminated, this too would be a major item adding another \$0.23 to the saving. This is also illustrated in Figure 30, but this task was not an object of this program, and a proposal has been submitted for its development and inclusion.

R & D ROCKET


MARTIN MARIETTA ALUMINUM  
APE ROCKET

MARTIN MARIETTA ALUMINUM  
APE FUZELESS ROCKET

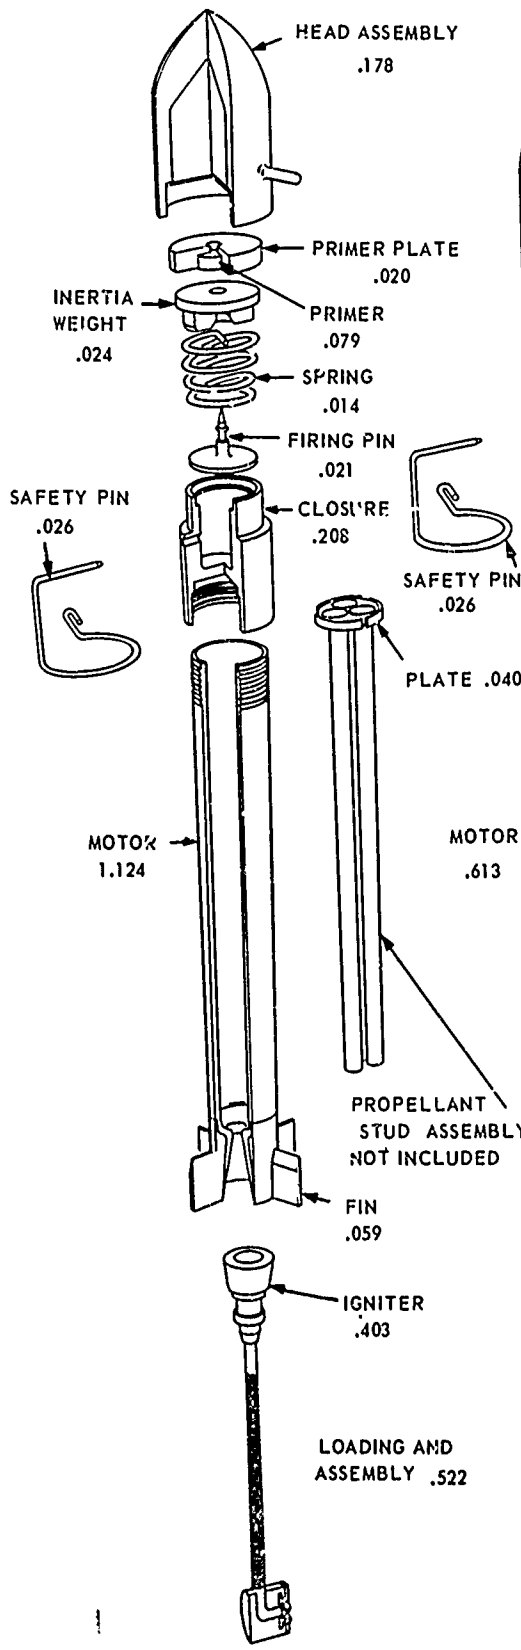


PACKAGING MATERIAL .08

TOTAL COST \$2.798

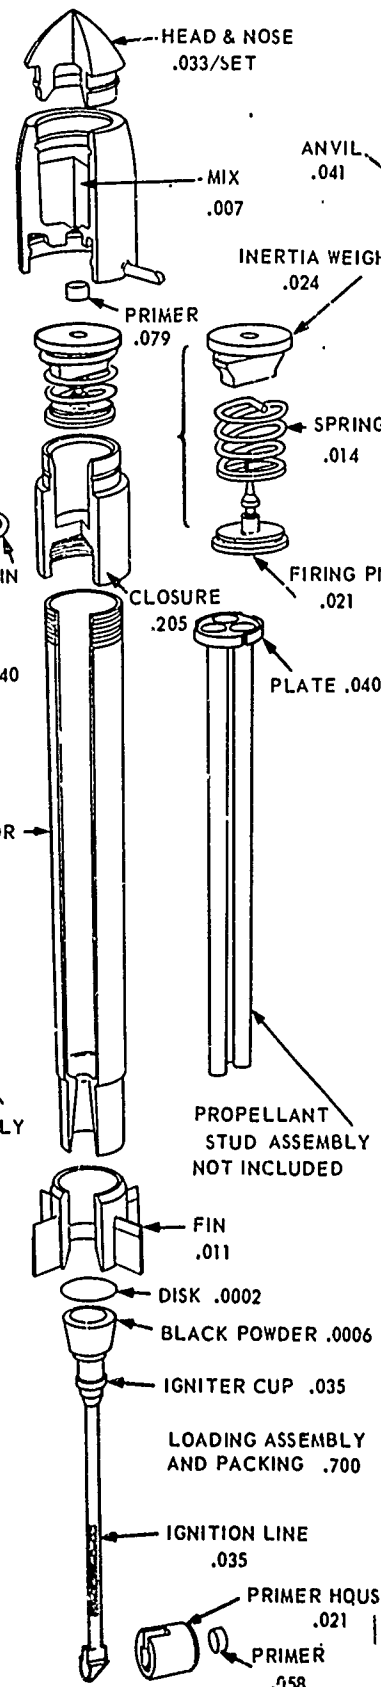

PACKAGING MATERIAL .08

TOTAL COST \$2.003

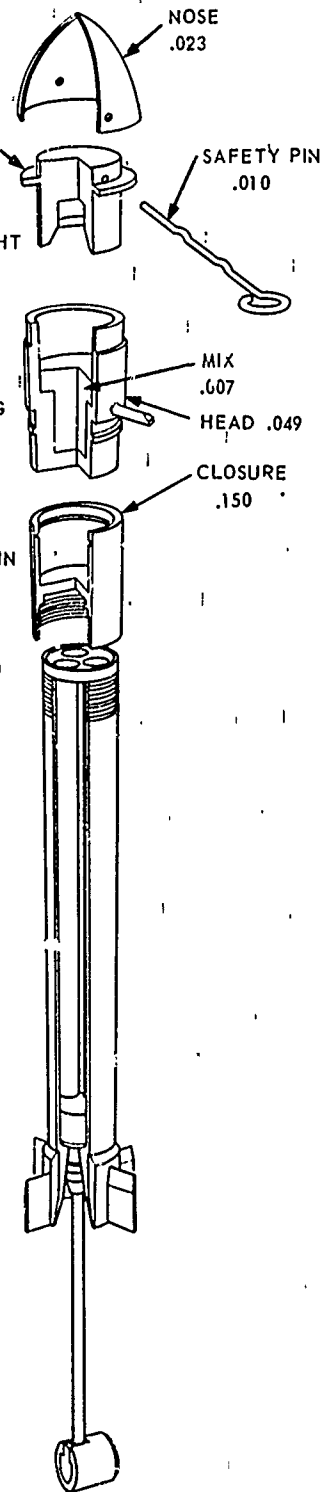

PACKAGING MATERIAL .08

TOTAL COST \$1.776

### III. DRAWINGS AND SPECIFICATIONS

#### 1. DRAWINGS

The contract called for delivery of a set of drawings with engineering and associated lists prepared to Category E, Form 1 of MIL-D-1000. Prints of these drawings were forwarded to Picatinny Arsenal for review in September, 1970. The corrected vellums were forwarded to Picatinny Arsenal on 16 March 1971.

Similarly, vellums of inspection equipment as required by the contract was forwarded to Picatinny Arsenal on 16 March 1971. Appendix E includes drawings of the M73 Rocket and M190 Launcher together with indented lists of drawings and specifications for these items and a list of inspection drawings.

#### 2. SPECIFICATIONS

Following the same format used for the R&D round, six preliminary specifications were prepared. These specifications are:

<u>Number</u>	<u>Title</u>
9477-1	Rocket, Practice 34.2mm Subcaliber XM73, Loading Assembly and Packing
9477-2	Head and Closure Assembly for Rocket, Practice 34.2mm Subcaliber XM73
9477-3	Motor Case for Rocket, Practice 34.2mm Subcaliber XM73
9477-4	Closure for Rocket, Practice 34.2mm Subcaliber XM73
9477-5	Igniter and Motor Assembly for Rocket, Practice 34.2mm Subcaliber XM73
9477-6	Kit, Launcher, Rocket XM190

While these specifications were thought to be complete and satisfactory, revisions were contemplated when more information became available as the program progressed.

The specifications were forwarded to Picatinny Arsenal for review and approval in August 1970.

After review by Arsenal personnel, they were returned to the contractor in September, 1970 with the request that they be reduced to three specifications which were:

M73 Rocket, Load, Assembly, and Pack  
M73 Rocket Metal Parts  
M190 Launcher Metal Parts

The three were subsequently reduced to two specifications in cooperation with Picatinny Arsenal as follows:

MIL-R-50858(MU) Rocket, Practice, 35mm, Subcaliber M73,  
Parts for Loading and Assembly

MIL-L-50857(MU) Launcher, Rocket: M190, Parts For

The specifications were reworked and the drafts were delivered 28 January 1971.

Several changes to the existing R&D specification requirements were recommended to permit inspection and acceptance to be more economical. Among those accepted and incorporated in the specification were:

a. Launch Tube Hydrostatic Test (100%)

This test requirement called for 100% hydrostatic testing at 300 psi. This pressure would stress the tube to be used to only 7 or 8% or its minimum capability. The rocket also would only stress the material a small fraction of its strength. Inasmuch as this test would pass all tubes and would not be a realistic criteria for satisfactory launchers, its elimination was recommended as an unnecessary expense.

b. Fuze Radiographic Examination (100%)

The APE fuze was redesigned into a subassembly that allowed only one component (the subassembly) to be assembled into the fuze body, and this unit could only be assembled in the correct orientation and unarmed; otherwise, the safety clip could not be assembled (all operations completed before the next step: assembly of the head). As a result, the radiographic inspection became unnecessary and was eliminated.

c. Acceleration Test (800 g, 5 seconds)

This test was eliminated as it really did not insure that the fuze would be safe if dropped. It was redundant to the 5-foot drop test (bare). Inasmuch as the 5-foot drop test is more realistic and more economical to conduct, this acceleration test was eliminated as an unnecessary expense.

d. Rocket Motor and Closure Hydrostatic Test (100%)

The contractor recommended this test be reduced to a lot sampling test. The reasons were that the processes of manufacture insure uniformity of units of more than sufficient strength. In addition, tests conducted by Redstone Arsenal indicated it was virtually impossible to generate a malfunction that would result in a dangerous motor or closure.

e. Waterproof Test on Igniters (three in. of water for 24 hours)

It was recommended the waterproofing test on the igniter be eliminated due to its being a costly test in its use of hardware and did not prove out the whole sealing problem. The complete round waterproof test would catch the pertinent shortcomings.

In the subsequent Aberdeen Proving Grounds tests, some subtle leakage was experienced in the igniters (three-ft submersion for two hours), but it is doubtful whether this type of testing (three inches of water) would have uncovered such problems, and it would not find any leakage into the propellant chamber.

f. Pull-Test on the Igniters

This test was eliminated as the APE design does not have a weakness in this area as exhibited by the R&D design.

g. Waterproof Test on Head (one ft. of water for one hour)

The performance of this test requires observance for one hour to ascertain if bubbles are emitted in a steady stream. While it would be a good insurance for the heads to be waterproof, this would be tested in the complete round test. Therefore, it is recommended that the requirement be discarded. In all waterproof test of the complete round, no heads were produced that malfunctioned because of non-waterproofness.



In addition to the contractor's recommended cost saving changes to the specifications that were accepted and incorporated, there were a few that were rejected for various reasons. These were:

a. Elimination of the stress-crack resistance test that is required on the polyethylene igniter cup.

b. Igniter firing tests which check the igniter characteristics in a motor with equivalent free volume to the rocket.

There were many good reasons to alter or eliminate these test requirements, but there were apparently better reasons for maintaining them.

#### IV. MANUFACTURE

The contract called for production of 3000 rockets and 100 launcher kits. These were broken down into 150 rockets and 10 kits for preliminary tests; and upon approval, 2850 rockets and 90 launcher kits manufactured to the drawings and specifications prepared and discussed in Section III.

The first items (150 rockets and 10 launchers) were fabricated in the contractor's experimental shop (except for plastic components and some small parts), and the rockets were loaded and assembled at the contractor's testing range. No difficulty was experienced in this manufacture.

In manufacturing the larger quantities, most of the smaller items were subcontracted because this was the most economical method of production for these quantities. Likewise, the loading and assembly of the rockets was subcontracted as this quantity was both more efficiently loaded by an explosive fabricator and the quantity was more than could be normally handled by the range facilities.

In this program, only one major delaying difficulty was experienced. This was the fabrication of the closure for the rocket. Two subcontractors had difficulty in making it. While some of the early difficulties may have been partially due to tight tolerances, it was ascertained that most difficulty was due to less than optimum fabrication procedures. As a result, the drawing was reviewed with experts in automatic screw machine production, and several changes were made to permit more economies in mass production. These changes have been included in the drawings for future release.

Because of the delay, the later quantity of rockets was split into two lots. The first lot of 840 rounds was shipped to TECOM, Aberdeen Proving Grounds, for tests. The second lot was shipped to Picatinny Arsenal. The launcher kits were delivered to Picatinny Arsenal.

## V. ABERDEEN PROVING GROUNDS (TECOM) TESTS

The subcaliber rockets and launcher kits were subjected to all flight and environment test requirements of the Specifications MIL-R-50858 (MU) and MIL-L-50857 (MU).

The rockets and launchers performed exceptionally well in all facets of this test series except in the waterproof test where 9 out of 15 units failed to fire. One other phenomenon was experienced; i. e., 17 out of 20 units exhibited warhead breakage when subjected to the five-foot drop bare; whereas, the previous drop tests revealed no difficulty in this area.

Picatinny Arsenal allowed the contractor to use up to 250 rounds to solve and correct the problems. Of this quantity, only 175 units were expended (mostly out of overrun) to isolate the problem areas and solve the problem. This program to isolate the trouble and establish a correction was carried on at the contractor's expense.

The leakage was found to occur in two areas: (1) in the primer housing joint, and (2) at the nozzle seal. The former was amenable to several solutions, the simplest of which is a five-second dip in a 50-50 solution of 3M Adhesive 4693 and 3M Solvent No. 2.

The second also had several solutions of which the simplest and most economical is a coating of the same solution in the nozzle joint area. A series of tests conducted by the contractor confirmed the waterproofing techniques and 14 rounds at Aberdeen Proving Grounds were modified by a contractor representative on March 28, 1972. These were submitted to the two-hour, three-foot water submersion and then fired on March 29. All rounds fired satisfactorily.

The investigation of the head breaking resulted in the conclusion that the breakage resulted from the way the rounds were dropped at TECOM. There the rounds were dropped in free-fall and sometimes impacted at a sharp angle or with angular velocity. When duplicated by the contractor, the same type breakage was experienced.

The specification requires three drops on the tail and three drops on the nose. To insure this type of impact, the contractor and Durkee Environmental Laboratories, in their tests, dropped the units through a 1 1/2-inch ID tube that permitted the rocket to exit two feet off the concrete.

This clearance was such as not to interfere with the bounce of the rockets. When dropped in this manner, only minor damage is experienced by the rocket heads; therefore, if the rockets are indeed dropped on the tail and nose, no difficulty is experienced in the APE round. This is understandable as this head material is much more impact-resistant than the preceding R&D round.

If, on the other hand, it is required that the warhead withstand high angle impacts without breakage, steps can be taken to meet the requirement by slight changes in material and joint design.

## VI. CONCLUSIONS AND RECOMMENDATIONS

All of the objectives of the contract have been met. The APE launcher kit will cost approximately 60% of the cost of its predecessor. In addition, better alignment is maintained between the launch tube and the sights. Furthermore, the rear door is easier and quicker to open; there are no loose parts to become lost, and it will also simplify field installation and maintenance.

The rocket will also be significantly lower in price—approximately 72% that of the R&D round (\$2.00-vs-\$2.80); thus, the APE manufacture should save the government more than three quarters of a million dollars per year (based on 1,000,000 rockets and 5000 kits per year).

In addition, the APE rocket and launcher has out-performed the earlier version in every way; e.g., the igniter is more consistent in performance, the rocket is more accurate and the round is more stable in flight while being more rugged to handle.

Moreover, the specifications have been improved and acceptance tests have been simplified.


While this study has resulted in a superior weapon at a significantly reduced cost, certain other improvements became apparent during the work which could not be undertaken or completed under the scope of the contract. Among these are: (1) elimination of the fuze which should make a safer round at an additional cost reduction of about 23 cents per rocket; (2) better stability of the rocket which would not decrease the cost but would improve the stability and accuracy, and (3) improved ballistic match with the LAW and LAW sights at all temperatures. This approach would have only slight downward effect on the cost but would increase the effectiveness of the training and thereby result in an overall training cost effectiveness. These improvements have been submitted to Picatinny Arsenal for consideration in an unsolicited proposal.

It is recommended that the APE rocket and launcher kit be released for production at the earliest possible time. It is further recommended that the three improvement plans discussed above be funded to realize further improvement in the cost and performance of this weapon at the earliest possible date.

APPENDIX A

Drawing 9256067      Inner Tube Assembly

**Preceding page blank**

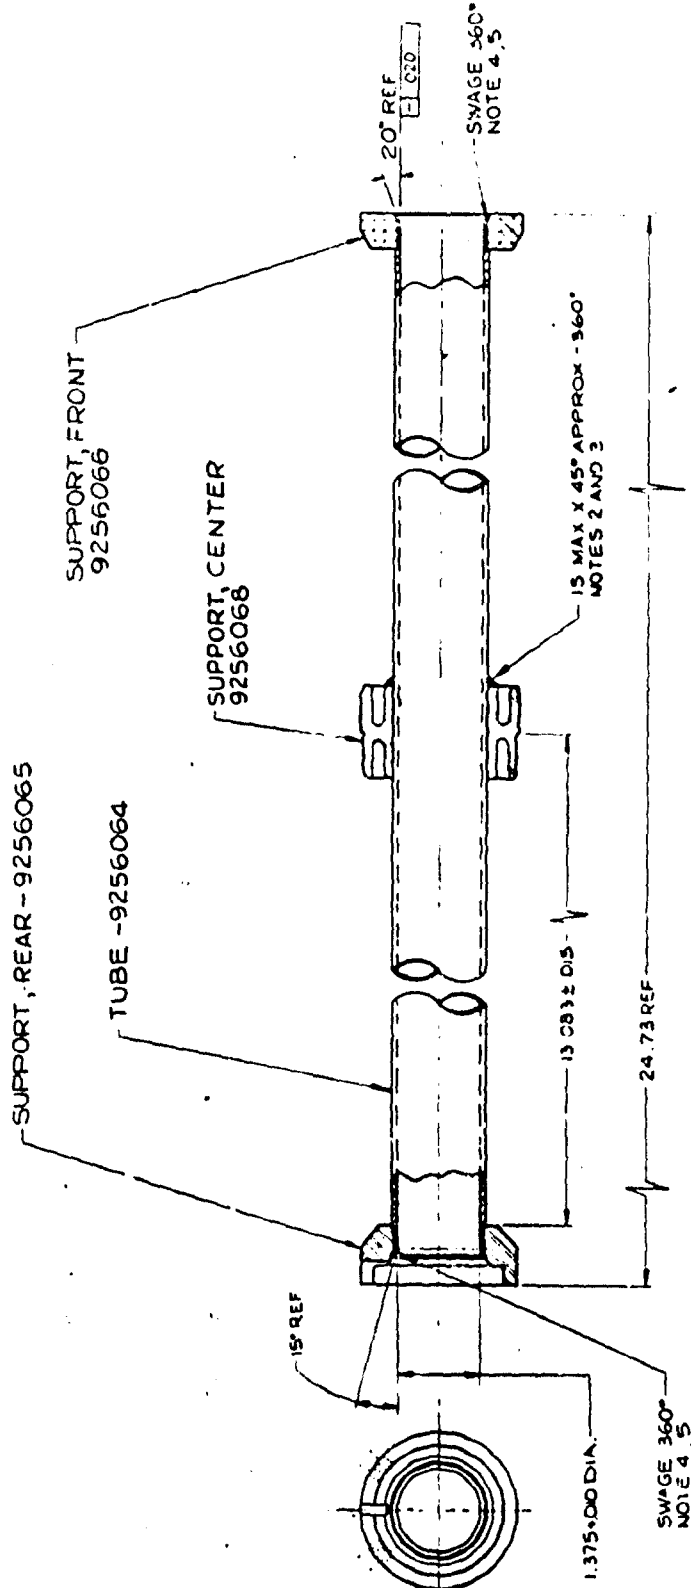

FOR THE FOLLOWING PARTS  
 SEE THE ASSOCIATED LIST  
 FOR ASSOCIATED LIST, SEE - 9256067

- NOTES**
- 1-SPEC MIL-A-2550 APPLIES.
  - 2-APPLY EPOXY CEMENT, DWG 9256077 TO INDICATED SURFACES. (NOTE 3)
  - 3-ALL BONDING SURFACES TO BE FREE OF FOREIGN MATTER PRIOR TO BONDING.
  - 4-FRONT AND REAR SUPPORTS MUST WITHSTAND AN AXIAL PULL-OFF FORCE OF 50 LBS MM AFTER SWAGING.
  - 5-CRAZING PERMITTED IN SWAGED AREA.


PART NO. 9256067	
PCB/RYN ORIGINAL DWG, NEW R-247	
INNER TUBE ASSEMBLY	
REV	DATE
D	19203 P
9256067	

93.1

93.2

Preceding page blank

A

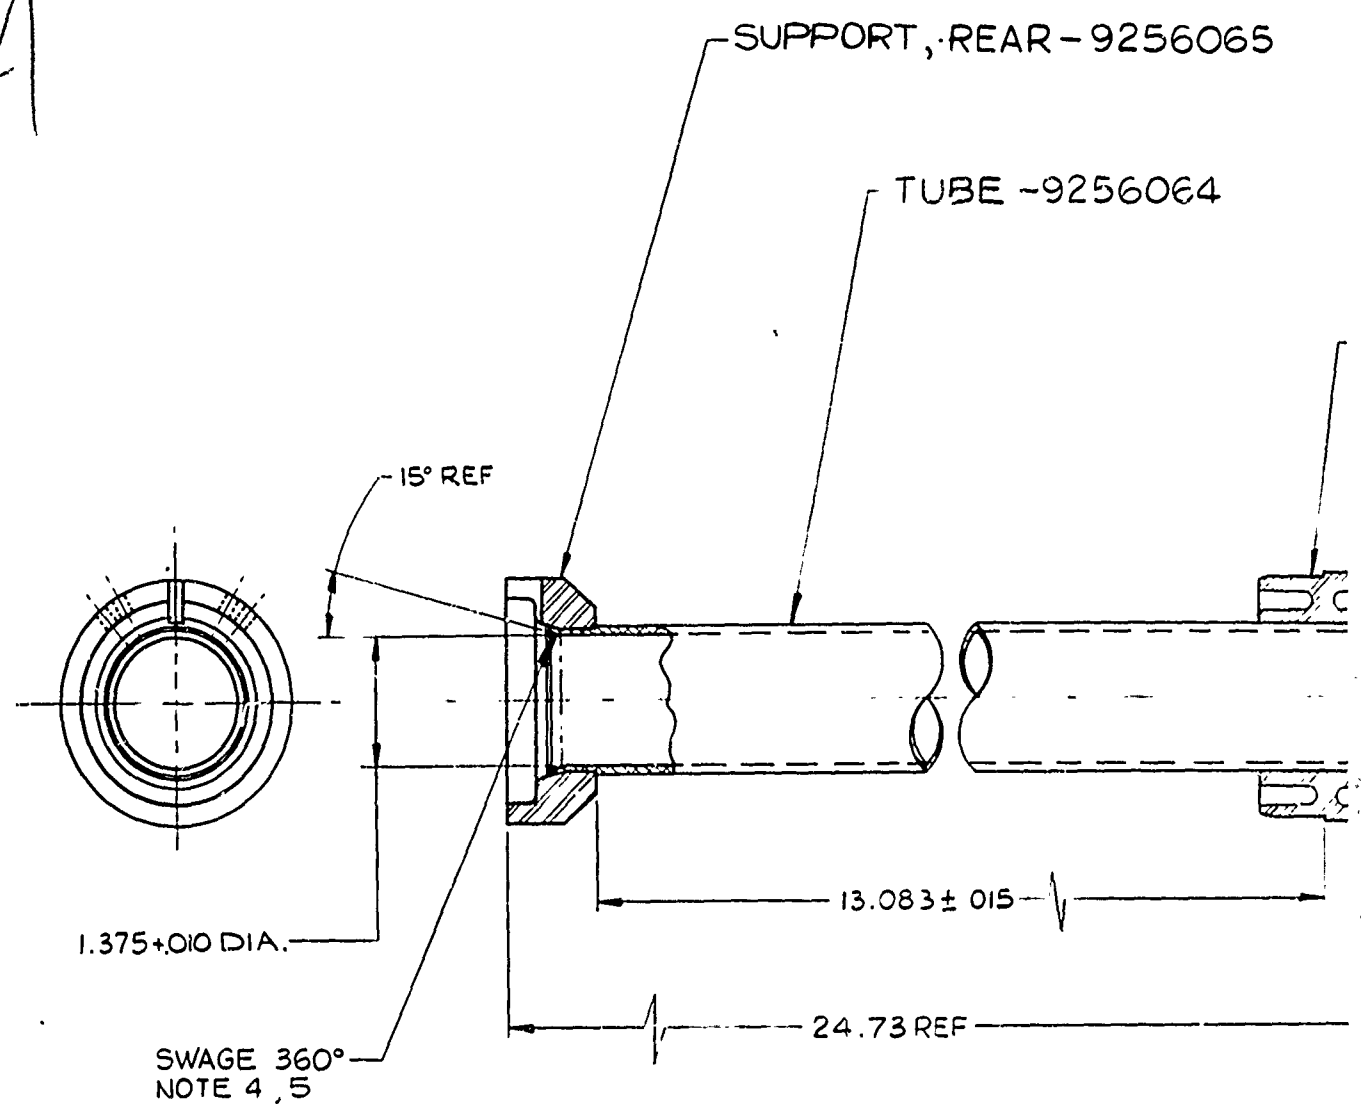

- NOTES
- 1-SPEC MIL-A-2550 APPLIES.
  - 2-APPLY EPOXY CEMENT, DWG 9256077 TO INDICATED SURFACES. (NOTE 3)
  - 3-ALL BONDING SURFACES TO BE FREE OF FOREIGN MATTER PRIOR TO BONDING.
  - 4-FRONT AND REAR SUPPORTS MUST WITHSTAND AN AXIAL PULL-OFF FORCE OF 50LBS MIN. AFTER SWAGING.
  - 5-CRAZING PERMITTED IN SWAGED AREA.

Preceding page blank



4

3

2


1

REVISIONS			
SYM	DESCRIPTION	DATE	APPROV

B

SUPPORT, FRONT  
9256066

SUPPORT, CENTER  
9256068

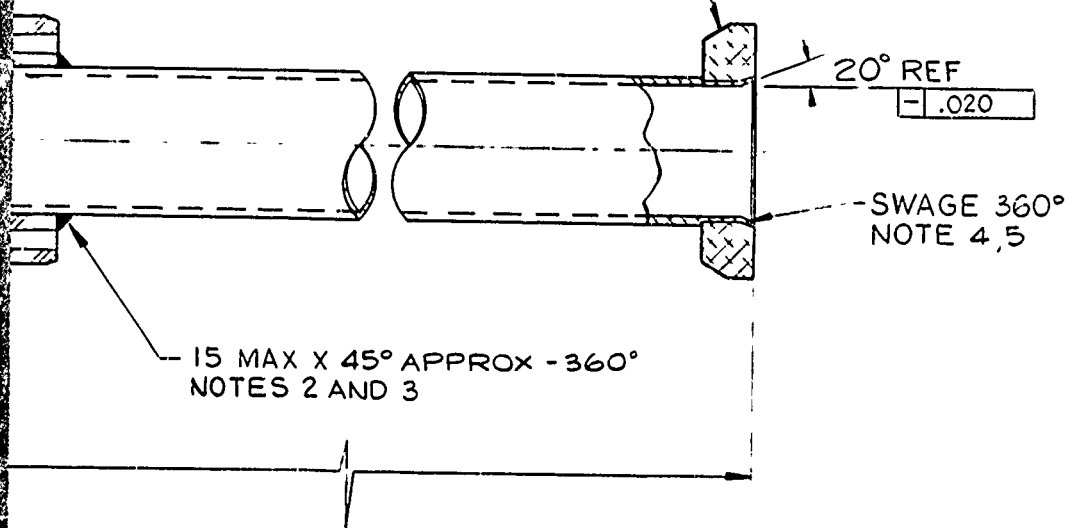

FOR ASSOCIATED LIST, SEE -9256067

PART NO. 9256067


		MECHANICAL PROPERTIES	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	ORIGINAL DATE OF DRAWING 1 SEPT 1970		PICATINNY ARSENAL DQVR, NEW JERSEY
		Y2	TOLERANCES ON DECIMALS ±	DRAFTSMAN HA	CHECKER	INNER TUBE ASSEMBLY
	LCHR KIT	TS	FRACTIONS ± ANGLES ±	ENGR JJC	ENGR JJC	
9256079	M:90	EL2	MATERIAL	ENGR	ENGR	
	NEXT ASSY	RA				
	USED ON					

APPENDIX B  
WARHEAD AND FUZE DRAWINGS

<u>Drawing Number</u>	<u>Title</u>
9256053	Head Loading Assembly, HF
9256062	Firing Pin Assembly
9256048	Inertia Weight
9256050	Firing Pin
9256059	Spring
9-47755	Two-Piece Firing Pin
9256063	Head & Closure Assembly, HE

Preceding page blank

REV	DESCRIPTION	DATE	BY
1	SEE 130C	1/15/53	W.C.
2	SEE 130C	1/27/53	W.C.

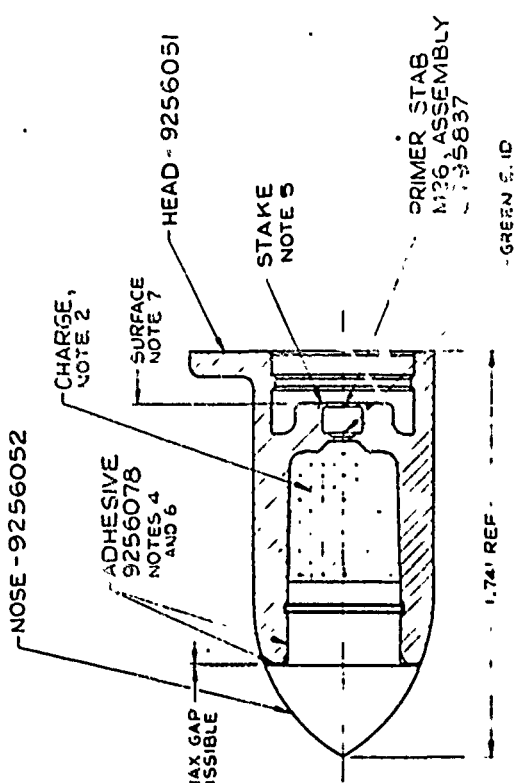

3-ALTERNATE PROCEDURE - PREMIX ALUMINUM POWDER, SULFUR AND ANTIMONY SULFIDE AND LOAD PROPER PROPORTIONS OF THIS BLEND AND POTASSIUM PERCHLORATE INDIVIDUALLY. PROCEED WITH STEPS B & C OF NOTE 3.

- NOTES--
- 1- SPEC MIL-A-2550 APPLIES.
  - 2- LOAD WITH CHARGE AS SPECIFIED IN LOADING PROCEDURES OR BY USING A PREMIXED COMPOSITION WITH THE FOLLOWING INGREDIENTS. - (NOTE 3)
- | INGREDIENTS                                                                                                                                               | BY WEIGHT    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| POTASSIUM PERCHLORATE, GRADE A, CLASS 2 SPEC MIL-D-217                                                                                                    | 960MG ± 75MG |
| ALUMINUM POWDER, FLAKED, TYPE I, GRADE B, CLASS 3, EXCEPT THAT APPARENT DENSITY SHALL BE 0.30 MIN. TO 0.50 MAX GRAMS PER CUBIC CENTIMETER, SPEC MIL-A-512 | 325MG ± 30MG |
| SULFUR GROUND                                                                                                                                             | 50MG ± 15MG  |
| STAKE 3, SPEC MIL-S-487                                                                                                                                   | 55MG ± 8MG   |
| ANTIMONY SULFIDE, CLASS 3, SPEC MIL-A-159                                                                                                                 |              |
- 3- LOADING PROCEDURES:
    - A - LOAD INGREDIENTS INDIVIDUALLY AS LISTED IN NOTE 2 WITHOUT MIXING. (NOTE 5)
    - B - ASSEMBLE NOSE TO HEAD PER NOTE 4.
    - C - MIX INGREDIENTS BY VIBRATING FOR 2 ± 4 MINUTES AT 65 ± 10 CYCLES/SEC WITH AN AMPLITUDE OF 19 ORBITAL MOTION SURFACES INDICATED AND CARE AT AN AMBIENT TEMPERATURE OF 70° ± 2°C FOR 2 HELD HOURS MIN. (NOTE 6)
  - 4- APPLY ADHESIVE - 9256078 COMPLETELY AROUND NOSE ON TOP SURFACE. STAKE TO BE SEATED FIRMLY ON BOTTOM OF CAVITY WITH GREEN END SEATED. STAKE IN FOUR PLACES.
  - 5- PRIMER TO BE SEATED FIRMLY ON BOTTOM OF CAVITY WITH GREEN ADHESIVES
  - 6- ALL SURFACES TO BE FREE OF FOREIGN MATTER PRIOR TO APPLYING ADHESIVES
  - 7- STAKE MUST NOT PROTRUDE MORE THAN .005 ABOVE NOTED SURFACE

SEE THE FOLLOWING PAGES FOR ASSOCIATED LIST, SEE - 9256053

PART NO. 9256053

PREPARED BY: T.M. BOYER, M.A. HENRY

HEAD LOADING ASSEMBLY, M.L.

D 19203 P 9256053

DATE	1/15/53
BY	W.C.
APPROVED	
FOR ASSOCIATED LIST, SEE - 9256053	



8

7

6

5

A

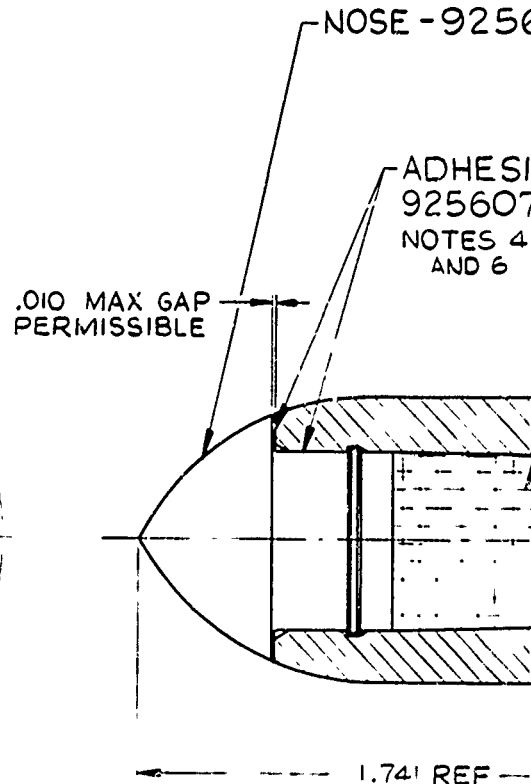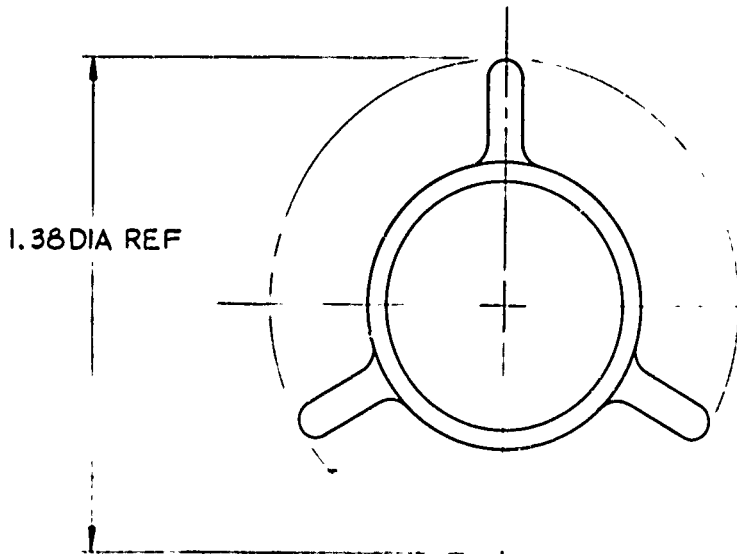

NOTES:-

- 1 - SPEC MIL-A-2550 APPLIES.
- 2 - LOAD WITH CHARGE AS SPECIFIED IN LOADING PROCEDURES OR BY USING A PREMIXED COMPOSITION WITH THE FOLLOWING INGREDIENTS:- (NOTE 3)

INGREDIENTS

BY WEIGHT

POTASSIUM PERCHLORATE, GRADE A, CLASS 2, SPEC MIL-P-217	-----	960MG ± 75MG
ALUMINUM POWDER, FLAKED, TYPE I, GRADE B, CLASS 3, EXCEPT THAT APPARENT DENSITY SHALL BE 0.30 MIN. TO 0.50 MAX GRAMS PER CUBIC CENTIMETER, SPEC MIL-A-512	-----	338MG ± 30MG
SULFUR, GROUND GRADE B, SPEC MIL-S-487	-----	50MG ± 15MG
ANTIMONY SULFIDE, CLASS 3, SPEC MIL-A-159	-----	53MG ± 8MG

3-LOADING PROCEDURES:-

- A - LOAD INGREDIENTS INDIVIDUALLY AS LISTED IN NOTE 2 WITHOUT MIXING -(NOTE 3)
- B - ASSEMBLE. NOSE TO HEAD PER NOTE 4. (A<sub>2</sub>H)
- C - MIX INGREDIENTS BY VIBRATING FOR 2+4 MINUTES AT (B<sub>2</sub>H) 65±10 CYCLES/SEC WITH AN AMPLITUDE OF .19 ORBITAL MOTION.

- 4- APPLY ADHESIVE - 9256078 COMPLETELY AROUND NOSE ON SURFACES INDICATED AND CURE AT AN AMBIENT TEMPERATURE OF 70°± 20°F FOR TWELVE HOURS MIN. (NOTE 6)
- 5- PRIMER TO BE SEATED FIRMLY ON BOTTOM OF CAVITY WITH GREEN END SEATED. STAKE IN FOUR PLACES
- 6- ALL SURFACES TO BE FREE OF FOREIGN MATTER PRIOR TO APPLYING ADHESIVES.
- 7- STAKE MUST NOT PROTRUDE MORE THAN .005 ABOVE NOTED SURFACE


(A<sub>2</sub>H) 8-ALTERNATE SULFUR PROPORTION INDIVIDUAL

FOR

325606
NEXT ASSY
AP
DO NOT

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A-H	SEE NOC	9/20/71	WC
B-H	SEE NOC	10/6/71	WC

B

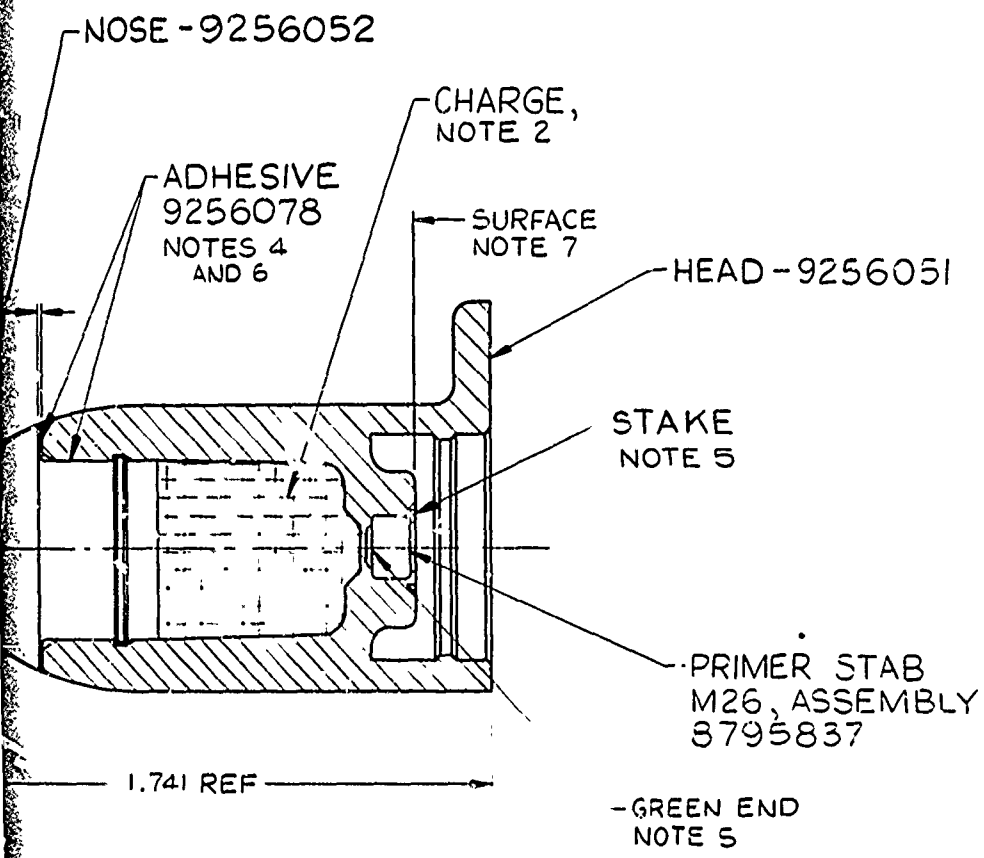

(A2H) 8-ALTERNATE PROCEDURE - PREMIX ALUMINUM POWDER, SULFUR AND ANTIMONY SULFIDE AND LOAD PROPER PROPORTIONS OF THIS BLEND AND POTASSIUM PERCHLORATE INDIVIDUALLY. PROCEED WITH STEPS B & C OF NOTE 3.


FOR ASSOCIATED LIST, SEE - 9256053

PART NO. 9256053

		MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINAL DATE OF DRAWING SEPT 1970		PICATINNY ARSENAL DOVER, NEW JERSEY	
		YP		TOLERANCES ON DECIMALS ±		DRAFTSMAN HA		CHECKER	
		TS		FRACTIONS ± ANGLES ±		ENGR. JJC		ENGR. JJC	
9256063 RKT, M73		EL2		MATERIAL		ENGR		ENGR	
NEXT ASSY USED ON		RA		HEAT TREATMENT		SUBMITTED		SIZE CODE IDENT NO	
APPLICATION		BH		FINAL PROTECTIVE FINISH		APPROVED		D 19203 P 9256053	
DO NOT APPLY PART NO		RH						SCALE 4, 1 UNIT WT SHEET	
AS SPECIFIED									

972 ↑

REVISIONS		DATE	APPROVAL
SYM	DESCRIPTION		
A-H	See N.O.C.	1-11-71	✓

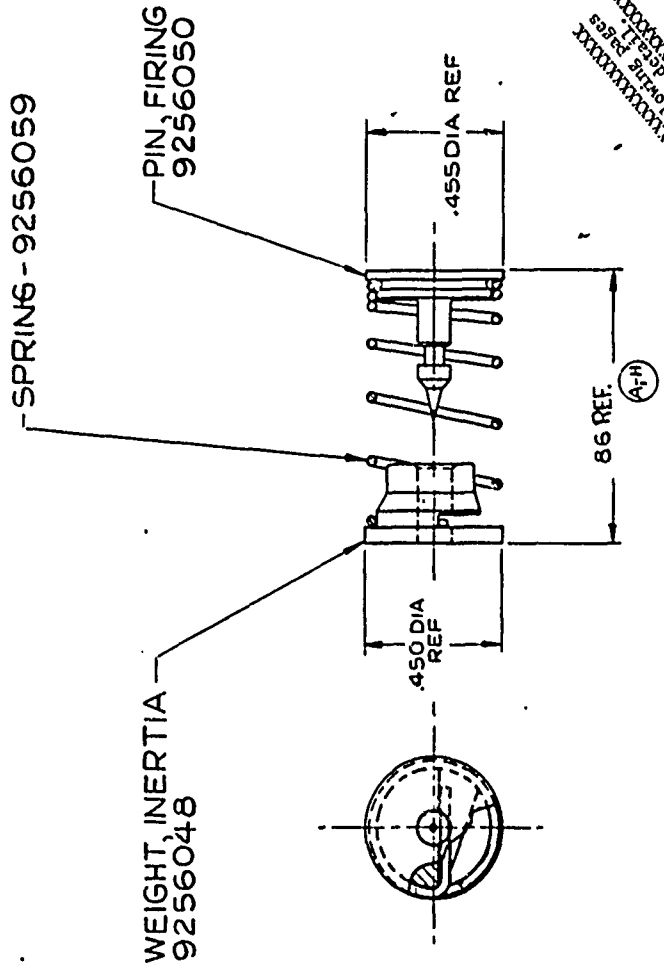

NOTES:  
 1- SPEC MIL-A-2550 APPLIES  
 2- SPRING MUST ENGAGE WEIGHT AND FIRING PIN  
 AS SHOWN.

FOR ASSOCIATED LIST, SEE -9256062

PART NO. 9256062

MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINAL DATE OF DRAWING	
YF		TOLERANCES ON DECIMALS =		: SEPT 1970	
IS		FRACTIONS =		DRAWN BY	CHK'D BY
RA		ANGLES =		H/A	ENG/2E
BI		MATERIAL		ENG/2E	ENG/2E
BH		HEAT TREATMENT		UNMITTED	APPROVED
DO NOT		FINAL PROTECTIVE FINISH			
APPLY PART NO.					
9256063	RKT, M73				
MOET ASSY	USED ON				
APPLICATION					
SIZE	CODE IDENT NO.				
C	19203 P				
SCALE 3/1	UNIT WT. 0.0633 (NO. APPROX) G/PIEC				

PICATINNY ARSENAL DOVER, NEW JERSEY

FIRING PIN ASSEMBLY

9256062

99-2

99-1


Preceding page blank

UNCLASSIFIED  
 DATE 11-11-2011

D  
C  
B  
A

A

WEIGHT, INERTIA  
9256048

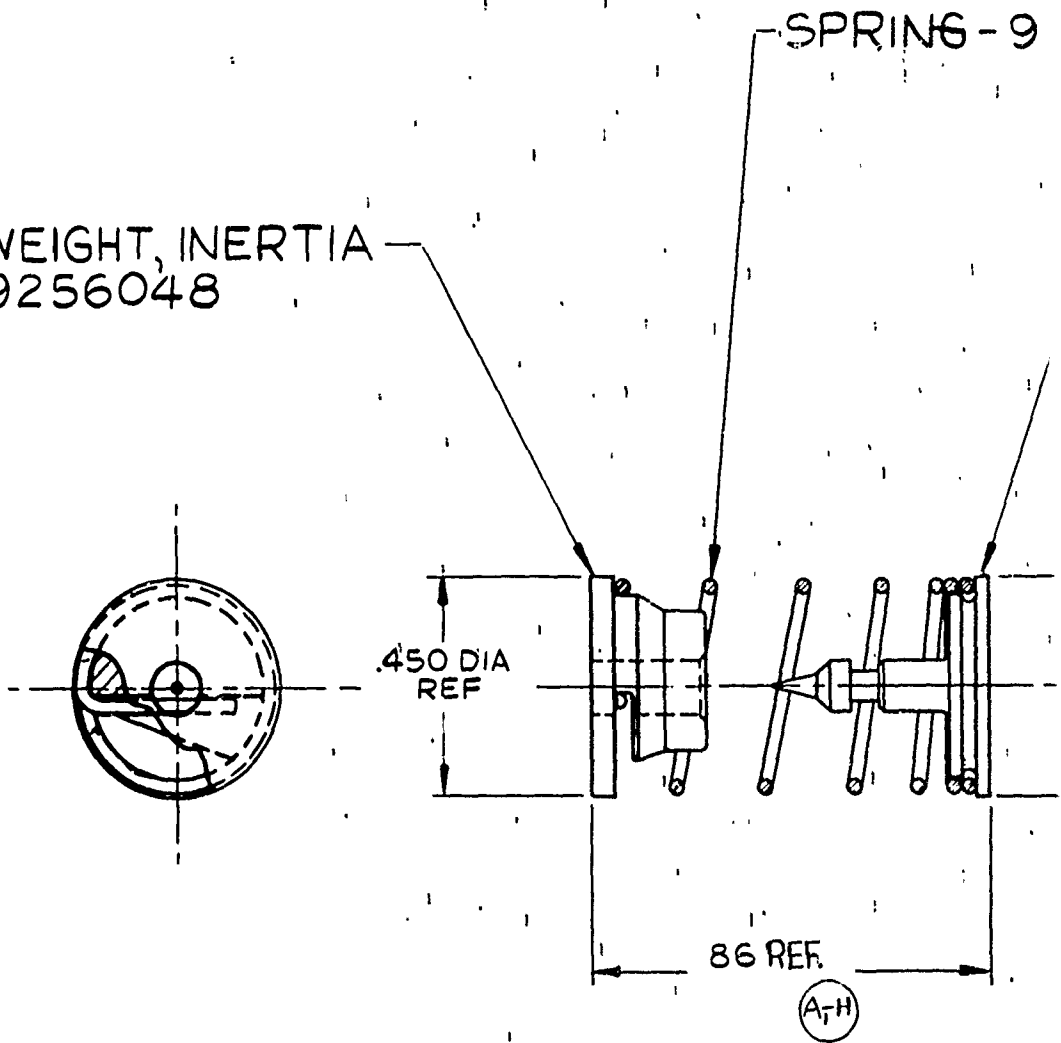

- NOTES:-  
 1 - SPEC MIL-A-2550 APPLIES.  
 2 - SPRING MUST ENGAGE WEIGHT AND FIRING PIN AS SHOWN.

FOR ASSOCIATED LIST, SEE -9256062

		MECHANICAL PROPERTIES	UNLESS OTHER DIMENSIONS A
		YP	TOLERANCES ON DECIMALS
		TS	FRACTIONS ±
9256063	RKT, M73	EL2	MATERIAL
NEXT ASSY	USED ON	RA	HEAT TREATMENT
APPLICATION		BH	
DO NOT	APPLY PART NO.	RH	

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A-4	See NOC	1-11-72	W

B

SPRING - 9256059

PIN, FIRING  
9256050

.455 DIA REF

86 REF.

(A-H)

PIN

1ST, SEE -9256062

PART NO. 9256062

MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINAL DATE OF DRAWING 1 SEPT 1970		PICATINNY ARSENAL DOVER, NEW JERSEY	
YP		TOLERANCES ON DECIMALS ±		DRAFTSMAN HA	CHECKER	FIRING PIN ASSEMBLY	
TS		FRACTIONS ± ANGLES ±		ENGR JCS	ENGR HEC		
EL2		MATERIAL		ENGR	ENGR		
RA		HEAT TREATMENT		SUBMITTED			
BH		FINAL PROTECTIVE FINISH		APPROVED		SIZE C	CODE IDENT NO. 19203 P
						9256062	
SCALE 4/1						UNIT WT. 0.0621 LB APPROX SHEET	





4

3


A

D

C

B

A

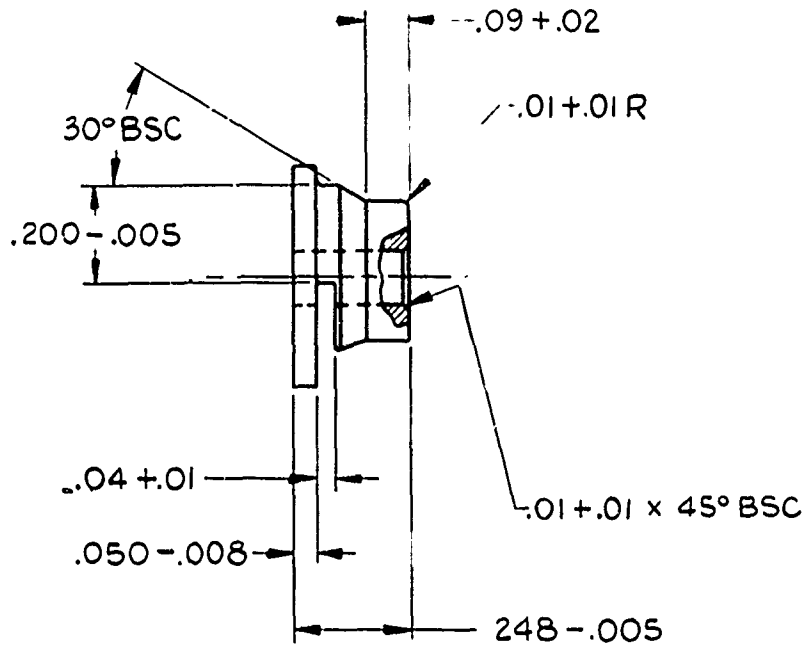

NOTES -

- 1 - SPEC MIL-A-2550 APPLIES.
- 2 - MATERIAL - STEEL, CARBON, COLD DRAWN, BAR, ROUND, GRADE B1113, SPEC ASTM A103.
- 3 - FINISH <sup>125</sup>/ ALL SURFACES EXCEPT AS NOTED.
- 4 - UNLESS OTHERWISE SPECIFIED, ALL EDGES TO BE .01 MAX X 45° BSC.
- 5 - PROTECTIVE FINISH: - FINISH 1.1.2.3. OF MIL-STD-171.

Preceding page blank

		MECHANICAL PROPERTIES	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
		YP	TOLERANCES ON DECIMALS ±
9256062	RKT, M73	TS	FRACTIONS ± ANGLES ±
		EL2	
NEXT ASSY	USED ON	RA	MATERIAL
APPLICATION		BH	SEE NOTE 2
DO NOT	APPLY PART NO.	RH	HEAT TREATMENT
			FINAL PROTECTIVE FINISH

2

1

REVISIONS


SYM	DESCRIPTION	DATE	APPROVAL
A-H	SEE NOTE	7/7/71	<i>[Signature]</i>

*B*

D

C

B

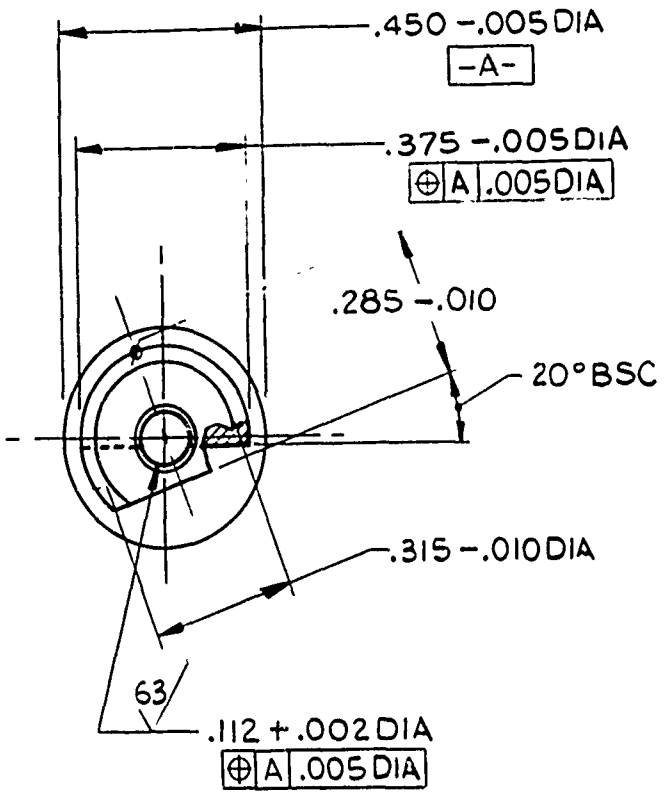

SC


171.

PART NO. 9256048

MECHANICAL PROPERTIES	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	ORIGINAL DATE OF DRAWING 1 SEPT 1970		PICATINNY ARSENAL DOVER, NEW JERSEY	
TOLERANCES ON DECIMALS $\pm$	FRACTIONS $\pm$ ANGLES $\pm$	DRAFTSMAN HA	CHECKER	WEIGHT, INERTIA	
MATERIAL SEE NOTE 2	HEAT TREATMENT	ENGR <i>WC</i>	ENGR <i>HE</i>		
FINAL PROTECTIVE FINISH	APPROVED	SUBMITTED	SIZE C	CODE IDENT NO. 19203 P	9256048

A

REVISIONS		
SYM	DESCRIPTION	DATE
A-1	SEE A-1	9/70
		APPROVAL

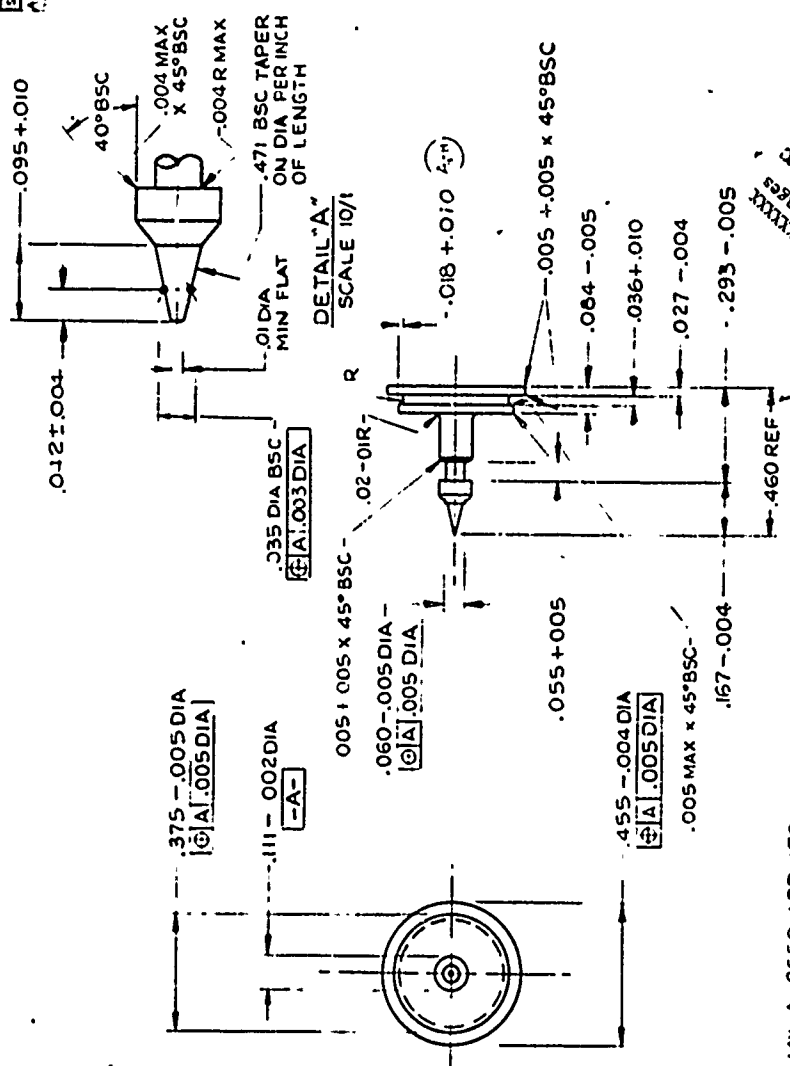

NOTES: -  
 1 - SPEC MIL-A-2550 APPLIES  
 2 - MATERIAL - ALUMINUM-ALLOY, 7075-T6, ROD, SPEC ASTM B211 OR ASTM B221.  
 3 - FINISH 63' ALL SURFACES  
 4 - PROTECTIVE FINISH. - FINISH 7.2.1 OF MIL-STD-171

XXXXXXXXXXXXXXXXXX  
 SEE THE FOLLOWING PAGES  
 FOR ENGINEERING NOTES

PART NO 9256050

PICATINNY ARSENAL DOVER, NEW JERSEY

PIN, FIRING

SCALE 3/1


UNIT WT

ORIGINAL DATE OF DRAWING	1 SEPT 1970	
DRAFTSMAN	RJA	
CHECKER	RJA	
ENGR'G	ENGR'G	ENGR'G
ENGR'G	ENGR'G	ENGR'G
ENGR'G	ENGR'G	ENGR'G
SUBMITTED		
APPROVED		
UNLESS OTHERWISE SPECIFIED	DIMENSIONS ARE IN INCHES	
MECHANICAL PROPERTIES	YF	UTS
	EL2	EL3
	EL4	EL5
	EL6	EL7
	EL8	EL9
	EL10	EL11
	EL12	EL13
	EL14	EL15
	EL16	EL17
	EL18	EL19
	EL20	EL21
	EL22	EL23
	EL24	EL25
	EL26	EL27
	EL28	EL29
	EL30	EL31
	EL32	EL33
	EL34	EL35
	EL36	EL37
	EL38	EL39
	EL40	EL41
	EL42	EL43
	EL44	EL45
	EL46	EL47
	EL48	EL49
	EL50	EL51
	EL52	EL53
	EL54	EL55
	EL56	EL57
	EL58	EL59
	EL60	EL61
	EL62	EL63
	EL64	EL65
	EL66	EL67
	EL68	EL69
	EL70	EL71
	EL72	EL73
	EL74	EL75
	EL76	EL77
	EL78	EL79
	EL80	EL81
	EL82	EL83
	EL84	EL85
	EL86	EL87
	EL88	EL89
	EL90	EL91
	EL92	EL93
	EL94	EL95
	EL96	EL97
	EL98	EL99
	EL100	EL101
	EL102	EL103
	EL104	EL105
	EL106	EL107
	EL108	EL109
	EL110	EL111
	EL112	EL113
	EL114	EL115
	EL116	EL117
	EL118	EL119
	EL120	EL121
	EL122	EL123
	EL124	EL125
	EL126	EL127
	EL128	EL129
	EL130	EL131
	EL132	EL133
	EL134	EL135
	EL136	EL137
	EL138	EL139
	EL140	EL141
	EL142	EL143
	EL144	EL145
	EL146	EL147
	EL148	EL149
	EL150	EL151
	EL152	EL153
	EL154	EL155
	EL156	EL157
	EL158	EL159
	EL160	EL161
	EL162	EL163
	EL164	EL165
	EL166	EL167
	EL168	EL169
	EL170	EL171
	EL172	EL173
	EL174	EL175
	EL176	EL177
	EL178	EL179
	EL180	EL181
	EL182	EL183
	EL184	EL185
	EL186	EL187
	EL188	EL189
	EL190	EL191
	EL192	EL193
	EL194	EL195
	EL196	EL197
	EL198	EL199
	EL200	EL201
	EL202	EL203
	EL204	EL205
	EL206	EL207
	EL208	EL209
	EL210	EL211
	EL212	EL213
	EL214	EL215
	EL216	EL217
	EL218	EL219
	EL220	EL221
	EL222	EL223
	EL224	EL225
	EL226	EL227
	EL228	EL229
	EL230	EL231
	EL232	EL233
	EL234	EL235
	EL236	EL237
	EL238	EL239
	EL240	EL241
	EL242	EL243
	EL244	EL245
	EL246	EL247
	EL248	EL249
	EL250	EL251
	EL252	EL253
	EL254	EL255
	EL256	EL257
	EL258	EL259
	EL260	EL261
	EL262	EL263
	EL264	EL265
	EL266	EL267
	EL268	EL269
	EL270	EL271
	EL272	EL273
	EL274	EL275
	EL276	EL277
	EL278	EL279
	EL280	EL281
	EL282	EL283
	EL284	EL285
	EL286	EL287
	EL288	EL289
	EL290	EL291
	EL292	EL293
	EL294	EL295
	EL296	EL297
	EL298	EL299
	EL300	EL301

Preceding page bk

A

D  
C  
B  
A

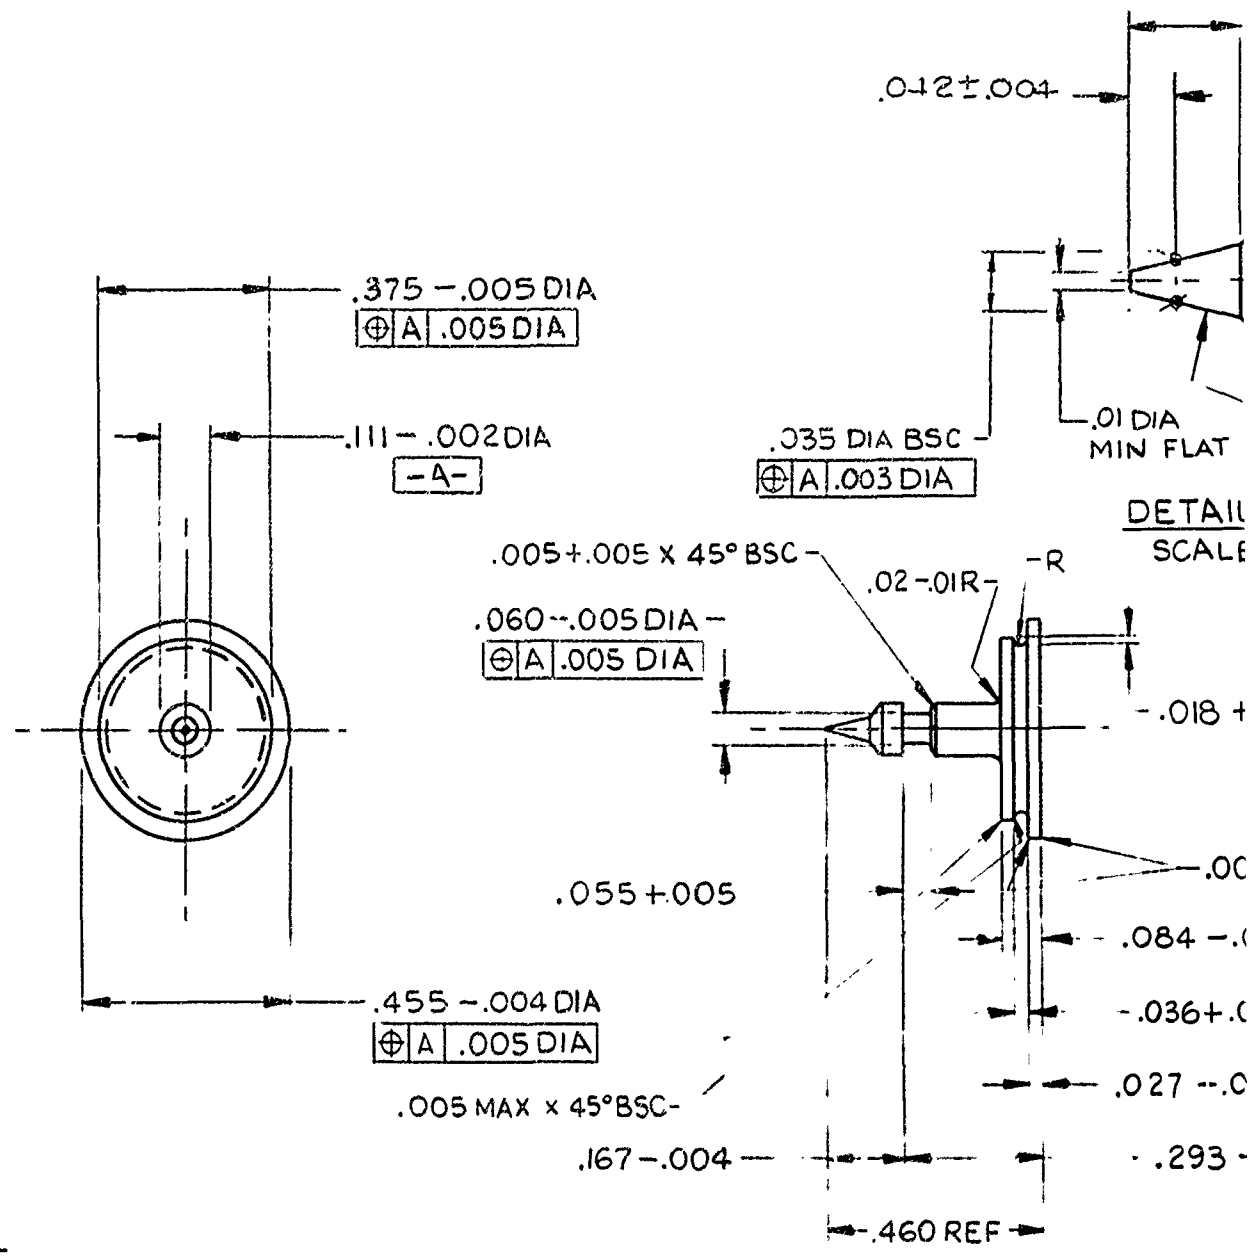

- NOTES:-
- 1 - SPEC MIL-A-2550 APPLIES.
  - 2 - MATERIAL:- ALUMINUM-ALLOY, 7075-T6, ROD, SPEC ASTM B211 OR ASTM B221.
  - 3 - FINISH  $\frac{63}{\sqrt{10}}$  ALL SURFACES.
  - 4 - PROTECTIVE FINISH:- FINISH 7.2.1 OF MIL-STD-171


Preceding page blank

		MECHANICAL PROPERTIES	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
		YP	TOLERANCES ON DECIMALS ±
		TS	FRACTIONS ± ANGLES ±
9256062	RKT, M73	EL2	
NEXT ASSY	USED ON	RA	MATERIAL
APPLICATION:		BH	SEE NOTE 2
DO NOT	APPLY PART NO.	RH	HEAT TREATMENT
			FINAL PROTECTIVE FINISH
			SEE NOTE 4

2


1

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A-H	SEE NO.	9/7/70	

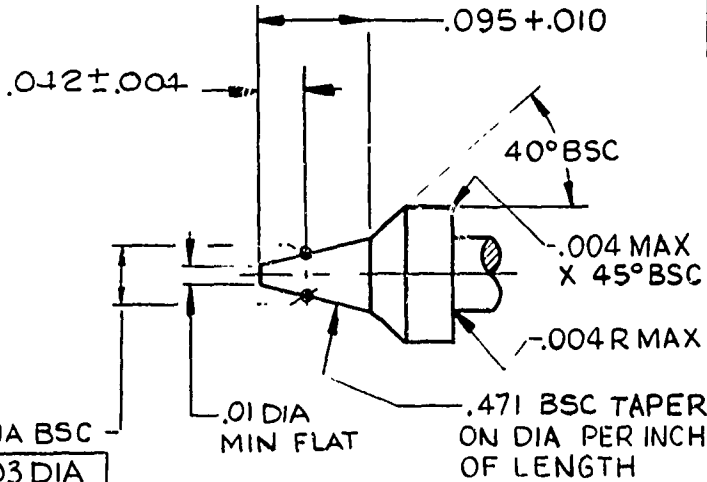

B

DETAIL "A"  
SCALE 10/1

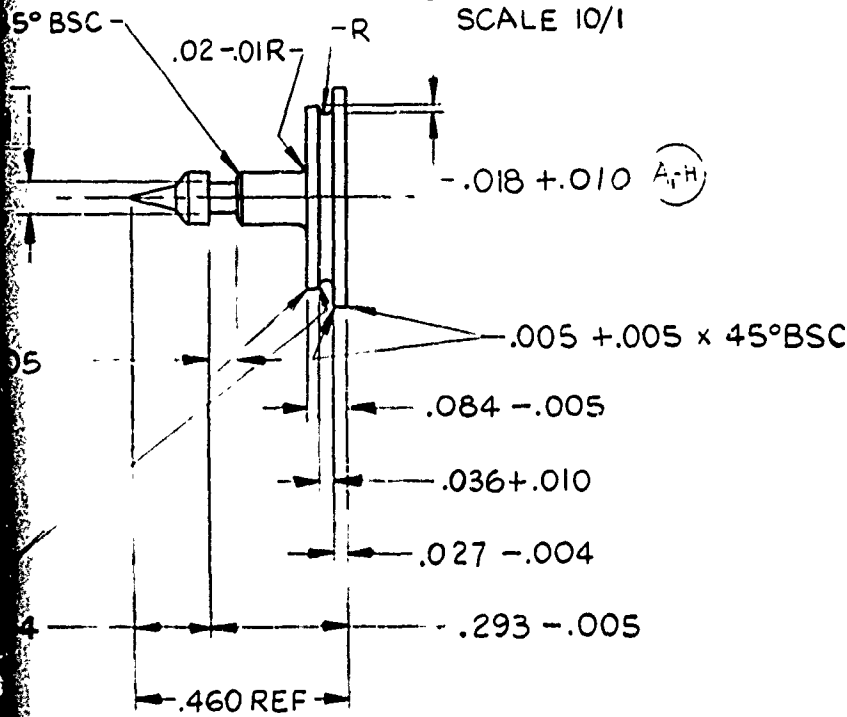


D-171

PART NO. 9256050

MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	ORIGINAL DATE OF DRAWING 1 SEPT 1970		PICATINNY ARSENAL DOVER, NEW JERSEY		
YP		TOLERANCES ON DECIMALS ±	DRAFTSMAN HA	CHECKER	PIN, FIRING		
TS		FRACTIONS ± ANGLES ±	ENGR UJC	ENGR JJC			
EL2			ENGR	ENGR			
RA		MATERIAL SEE NOTE 2					
BH		HEAT TREATMENT	SUBMITTED		SIZE	CODE IDENT NO.	
RH		FINAL PROTECTIVE FINISH SEE NOTE 4	APPROVED		C	19203	P 9256050

A

SYM	DESCRIPTION	DATE	APPROVAL
A-H	SEE UDC	6-23-71	WC
B-H	SEE UDC	7-20-71	WC
C-H	SEE UDC	10-12-71	WC

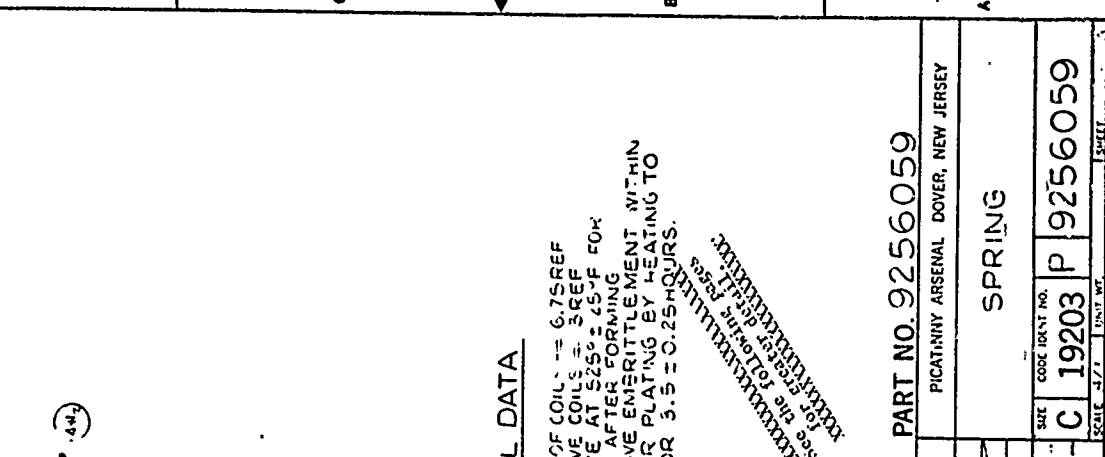

**SPECIAL DATA**

A-TOTAL NUMBER OF COILS = 6.75 REF  
 B-NUMBER OF ACTIVE COILS = 3 REF  
 C-STRESS RELIEVE AT 250 ± 25°F FOR 30 ± 5 MINUTES AFTER FORMING  
 D-TREAT TO REMOVE EMITTLEMENT WITHIN 30 MINUTES AFTER PLATING BY HEATING TO 375 ± 25°F FOR 3.5 ± 0.25 HOURS.

- NOTE 9  
 1-SPEC MIL-A 285C APPLIES  
 2-MATERIAL - 17-7 PH CARBON SPEC ASTM A228.  
 3-WIRE DIA VETER .032  
 4-DIRECTION OF TENSION - RIGHT HAND  
 5-COILS AT COMPRESSION LENGTH OF 1.57 INCHES = 2.22 ± 0.30 LBS  
 6-SOLID HEIGHT WITHOUT PERMANENT SET - .257 MAX  
 7-10 WORK WITHIN .463 DIA MIN BORE  
 8-20 RESISTIVE FINISH - FINISH 11.2.3 OF MIL-STD-171  
 9-SEAL AREAS MUST NOT EXTEND BEYOND O.D. OF SPRING

Reproduced from  
 best available copy.

PART NO 9256059  
 PICATINNY ARSENAL DOVER, NEW JERSEY

MECHANICAL PROPERTIES	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	TOLERANCES ON DECIMALS =	FRACTIONS =	ANGLES =	MATERIAL	TREATMENT	FINISH	APPROVED	ORIGINAL DATE OF DRAWING	
									DESIGNER	CHECKER
TP									1	SEPT 1970
TS										
RA										
BS										
RS										
RT										

Preceding page blank

105.2

105.1

SCALE 3/4" = 1" UNIT WT. SHEET


A

D

.375-.00-  
DIA

.787 REF  
FREE LENGTH


C,H .315±.020




NOTE 9

1.025 ± .015 R

GROUND  
SQUARE

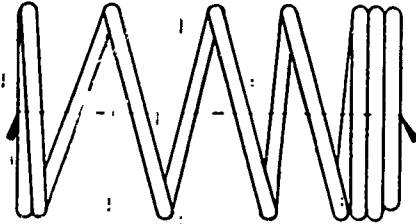

SQUARED END-  
WITH INACTIVE  
COILS

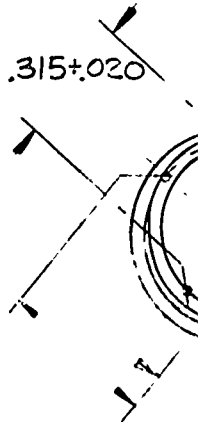

Reproduced from  
best available copy.

C

B

A

NOTES -

- 1- SPEC MIL-A-2550 APPLIES.
- 2- MATERIAL - WIRE, STEEL, HIGH CARBON SPEC ASTM A228.
- 3- WIRE DIAMETER .032
- 4- DIRECTION OF HELIX - RIGHT HAND
- 5- LOAD AT COMPRESSED LENGTH OF .457 INCHES = 2.22 ± 0.30 LBS
- 6- SOLID HEIGHT WITHOUT PERMANENT SET - .237 MAX
- 7- TO WORK WITHIN .463 DIA MIN BORE
- 8- PROTECTIVE FINISH - FINISH 1.2.3 OF MIL-STD-171.
- 9- BEND AREAS MUST NOT EXTEND BEYOND O.D. OF SPRING.

Preceding page blank

		MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
		YP		TOLERANCES ON DECIMALS ±
		TS		FRACTIONS ± ANGLES
9256062	RKT, M73	EL2		
NEXT ASSY	USED ON	RA		MATERIAL SEE NOTE 2
APPLICATION		BH		HEAT TREATMENT
DO NOT	APPLY PART NO.	RH		FINAL PROTECTIVE FINISH




2

1

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A-H	SEE NOC	6-28-71	WC
B-H	SEE NOC	7-26-71	WC
C-H	SEE NOC	10-12-71	WC

GTH

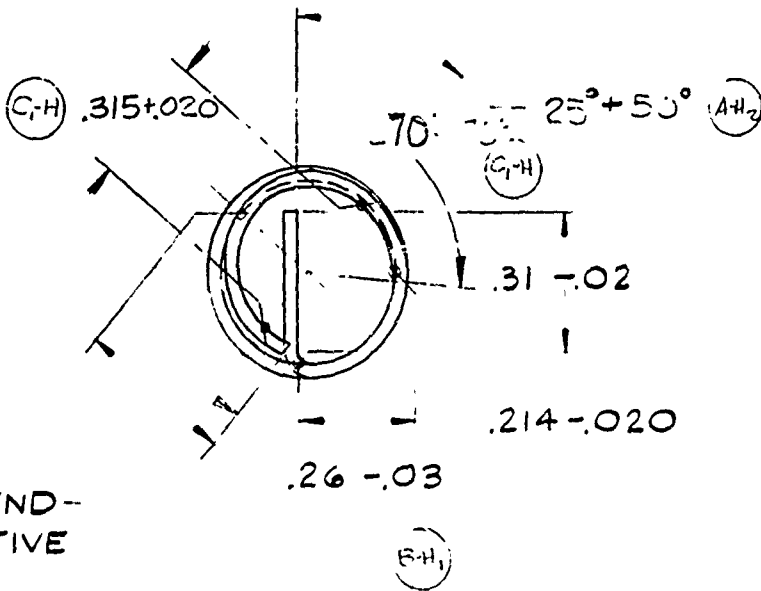

B

SQUARED END-  
WITH INACTIVE  
FILLS

### SPECIAL DATA

- A-TOTAL NUMBER OF COILS = 6.75 REF
- B-NUMBER OF ACTIVE COILS = 3 REF
- C-STRESS RELIEVE AT  $525 \pm 25^\circ F$  FOR 30 = 5 MINUTES AFTER FORMING
- D-TREAT TO REMOVE EMBRITTLEMENT WITHIN 70 MINUTES AFTER PLATING BY HEATING TO  $375 \pm 25^\circ F$  FOR 3.5 = 0.25 HOURS.

STM A228.



2.22 ± 0.30 LBS  
MAX

171.  
OF SPRING.

## PART NO. 9256059

MECHANICAL PROPERTIES	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	ORIGINAL DATE OF DRAWING 1 SEPT 70		PICATINNY ARSENAL DOVER, NEW JERSEY		
1	TOLERANCES ON DECIMALS ±	DRAFTSMAN MA	CHECKER	SPRING		
2	FRACTIONS ±      ANGLES ±	ENGR JOC	ENGR WC			
3	MATERIAL SEE NOTE 2	ENGR	ENGR			
4	HEAT TREATMENT	SUBMITTED		SIZE	CODE IDENT NO.	
5	FINAL PROTECTIVE FINISH SEE NOTE 8	APPROVED		C	19203	P 9256059
			SCALE 4/1	UNIT WT.	SHEET	A

1052

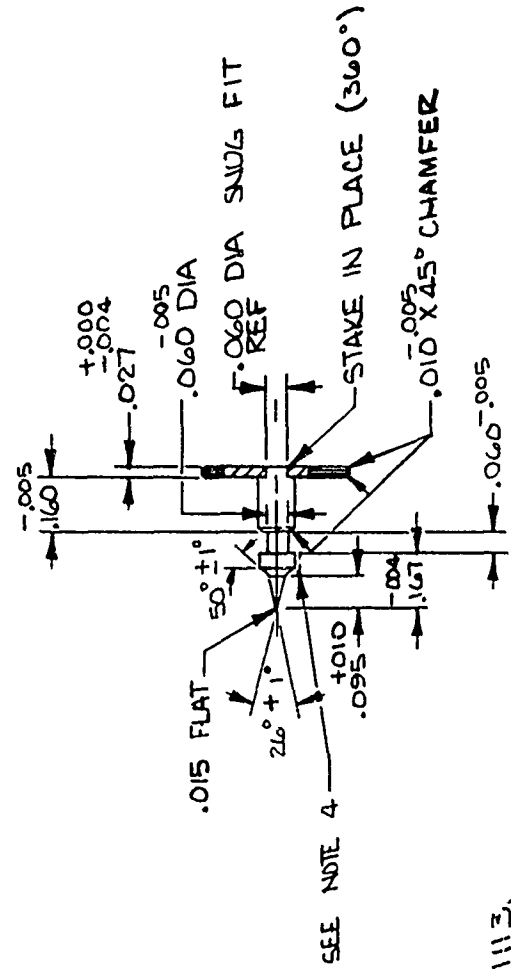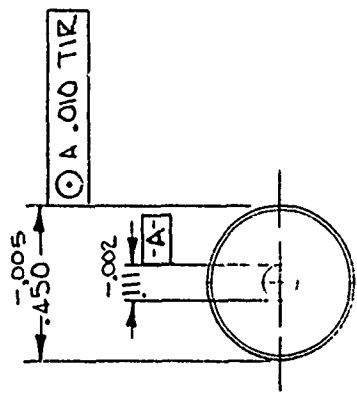


**NOTES**

- 1 SPEC MIL-A-225C APPLIES
- 2 STEEL-CARBON COLD FINISHED BAR TYPE 1113, SPEC ASTM A108. (0.15% TO 0.35% LEAD ADDED)
- 3 ALL CORNERS TO BE LEFT SHARP EXCEPT WHERE NOTED
- 4  $\sqrt{R}$  THIS AREA ONLY AND REV. SHARP CORNERS .004 MAX
- 5  $\sqrt{R}$  ALL OVER UNLESS OTHERWISE SPECIFIED.
- 6 FINISH NO 1.1.2.2 OF MIL-STD-171
- 7 TWO PIECE ASSEMBLY.

ORDNANCE PART NO 1024-2A5

QTY.	NEXT ASSY OR SUB-ASSY	QTY.	MODEL OR COMPLETE ASSY	DET.	REQ.	SIZE	MATERIAL
			PIN, FIRING				
UNLESS OTHERWISE SPECIFIED TOLERANCES DECIMAL $\pm .010$ .XX $\pm .010$ .XXX $\pm .005$ ANGLES $\pm \frac{1}{2}^\circ$ FEET : 000 FRACTIONS $\pm \frac{1}{16}$							
THIS DRAWING/DRAWING AND THE DETAILS, DIMENSIONS AND CONCEPTS HEREIN "ON" ARE THE EXCLUSIVE PROPERTY OF HARVEY ALUMINUM (INCORPORATED) AND IS SHOWN IN CONFIDENCE FOR THE EXPRESS AND SOLE PURPOSE OF DESCRIBING THE ITEM WITH THE UNDERSTANDING THAT THE INFORMATION HEREIN WILL BE RETAINED IN STRICT CONFIDENCE. HA-1330 REV. 9/67							
JOB NO.							
DRAWN		DATE	CHK'D	DATE	AP'RD	DATE	DATE
RW		5-8-70					
SCALE		2 X 1	PART		DRAWING NO. 9-47755		
HARVEY ALUMINUM, INC. TORRANCE, CALIF.							

REVISED	DATE	BY
SEE NOC	CH/11	GC

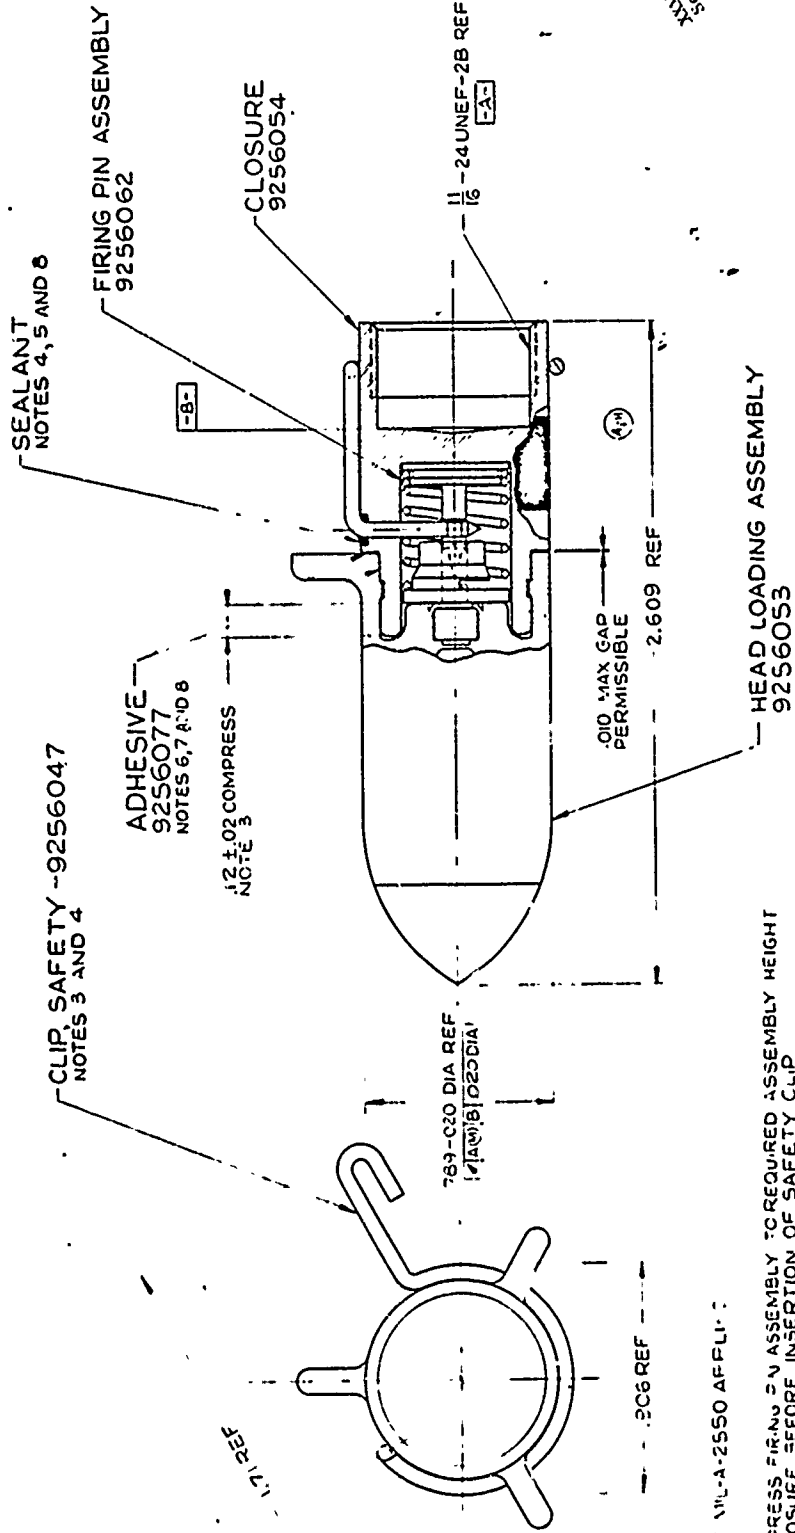

CLIP, SAFETY - 9256047  
NOTES 3 AND 4

ADHESIVE - 9256077  
NOTES 6, 7 AND 8

.52 ± .02 COMPRESS  
NOTE 3

SEALANT  
NOTES 4, 5 AND 8

FIRING PIN ASSEMBLY  
9256062

CLOSURE  
9256054

11/16 - 24 UNEF-2B REF

OID MAX GAP  
PERMISSIBLE

.2609 REF

HEAD LOADING ASSEMBLY  
9256053

HEAD AND CLOSURE  
ASSEMBLY, HE:  
9256063

NOTES:

1- SPEC MIL-A-2550 APPLIC

2

- 3 COMPRESS FIRING PIN ASSEMBLY TO REQUIRED ASSEMBLY HEIGHT IN CLOSURE BEFORE INSERTION OF SAFETY CLIP
- 4- SEAL WITH A BEAD OF ADHESIVE - SEALANT, SILICONE, GENERAL PURPOSE, COCS OPTIONAL, SPEC MIL-A-46108 COMPLETELY AROUND SAFETY CLIP AS SHOWN, NOTES 5 AND 6)
- 5- CURE ADHESIVE SEAM AT AN AMBIENT TEMPERATURE OF 70 ± 20°F FOR 2 HOURS MIN WITH 20% MIN RELATIVE HUMIDITY
- 6- APPLY ADHESIVE ALL AROUND INDICATED SURFACES OF CLOSURE AND HEAD (NOTE 7)
- 7- CURE ADHESIVE ASSEMBLY AT AN AMBIENT TEMPERATURE OF 70 ± 20°F FOR 2 HOURS MIN
- 8- ALL SURFACES TO BE FREE OF FOREIGN MATTER PRIOR TO APPLYING ADHESIVE
- 9- UNDIMENSIONED DIMENSIONS NEED NOT BE GAGED.

REPRODUCIBLE  
FOR USE IN  
PRODUCTION

FOR ASSOCIATED LIST, SEE - 9256063

PART NO 9256063

DESIGNATION	9256063	DATE	10/71
DESCRIPTION	HEAD AND CLOSURE ASSEMBLY, HE:		
QUANTITY	1	DATE	1 SEPT 1970
REVISION	1	DATE	10/71
APPROVED	D 19203	DATE	10/71
DRAWN		DATE	
CHECKED		DATE	
INSTRUMENTS			
INSPECTION			
REWORK			
MATERIAL			
TEST			
REMARKS	UNIT WEIGHT		
	MATERIAL		
	FINISH TREATMENT		
	FINAL PROTECTIVE FINISH		
	APPROVED		

Preceding page blank

109.1

KEEP ON XEROX  
COPY MACHINE

A

D

C

→


B

A

CLIP, SAFETY -9256047  
NOTES 3 AND 4

ADHESIVE  
92560  
NOTES 6,7

.12 ± .02 COMPRESS  
NOTE 3

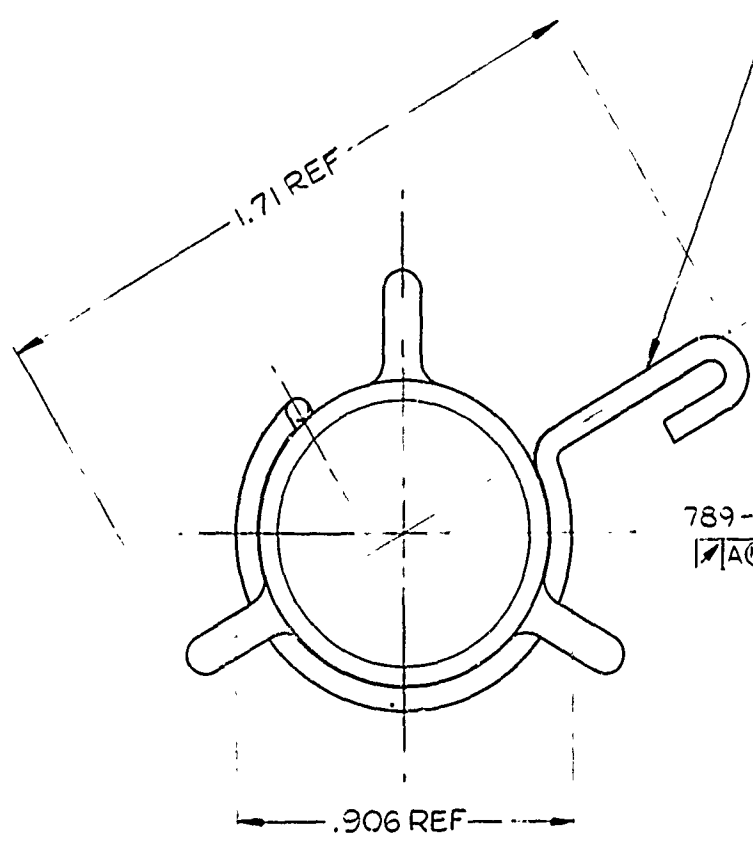

789-.020 DIA REF  
|A(M)|B|O20DIA|

.01  
PE


NOTES:-

- 1 - SPEC MIL-A-2550 APPLIES.
- 2 -
- 3 - COMPRESS FIRING PIN ASSEMBLY TO REQUIRED ASSEMBLY HEIGHT IN CLOSURE BEFORE INSERTION OF SAFETY CLIP.
- 4 - SEAL WITH A BEAD OF ADHESIVE-SEALANT, SILICONE, GENERAL PURPOSE, COLOR OPTIONAL, SPEC MIL-A-46106 COMPLETELY AROUND SAFETY CLIP AS SHOWN. (NOTES 5 AND 8)
- 5 - CURE ADHESIVE-SEALANT AT AN AMBIENT TEMPERATURE OF 70° ± 20°F FOR 12 HOURS MIN WITH 20% MIN RELATIVE HUMIDITY
- 6 - APPLY ADHESIVE ALL AROUND INDICATED SURFACES OF CLOSURE AND HEAD. (NOTE 7)
- 7 - CURE ADHESIVE ASSEMBLY AT AN AMBIENT TEMPERATURE OF 70° ± 20°F FOR 12 HOURS MIN
- 8 - ALL SURFACES TO BE FREE OF FOREIGN MATTER PRIOR TO APPLYING ADHESIVE.
- 9 - UNTOLERANCED DIMENSIONS NEED NOT BE GAGED.

Preceding page blank

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVA
A-II	SEE NOC	5/17/71	WE

B

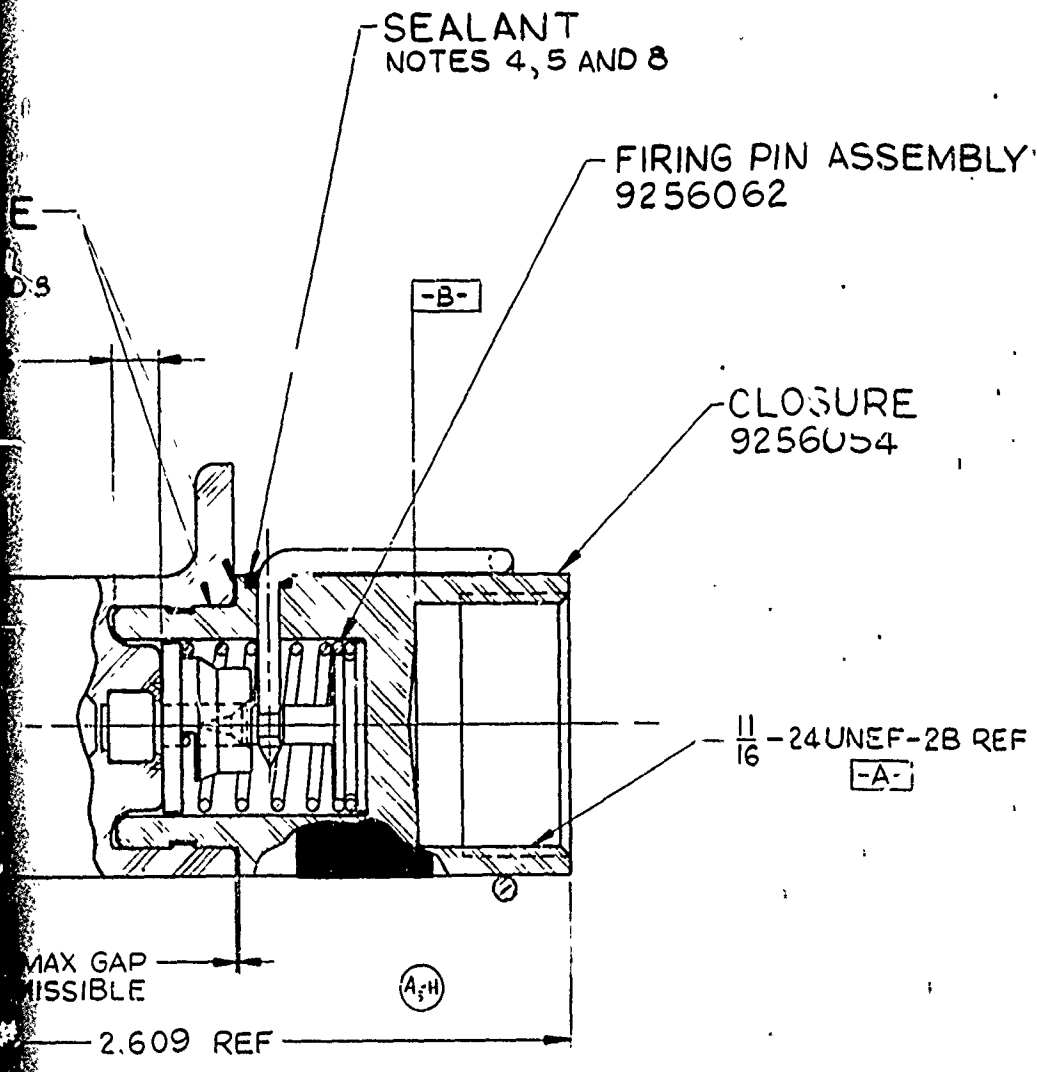

HEAD LOADING ASSEMBLY  
9256053

FOR ASSOCIATED LIST, SEE -9256063

PART NO. 9256063

		MECHANICAL PROPERTIES	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	ORIGINAL DATE OF DRAWING 1 SEPT 1970		PICATINNY ARSENAL DOVER, NEW JERSEY	
		YP	TOLERANCES ON DECIMALS ±	DRYANISMAN HA	CHECKER	HEAD AND CLOSURE ASSEMBLY, HE:	
		TS	FRACTIONS ± ANGLES ±	ENGR	ENGR		
9256070	RKT, M73	EL2					
NEXT ASSY	USED ON	RA	MATERIAL	ENGR	ENGR	SIZE	COAR IDENT NO
APPLICATION		BH	HEAT TREATMENT	SUBMITTED		D	19203 P
DO NOT	APPLY PART NO	RH	FINAL PROTECTIVE FINISH	APPROVED		9256063	
						SCALE 4/1	SHEET


APPENDIX C

COST DATA ON MOTOR PRODUCTION AND DRAWINGS

<u>Drawing Number</u>	<u>Title</u>
9-47715	Master Tool Layout
9-47722	Motor Case
9-47751	Two-Piece Tubing Motor
9-47753	Two-Piece Tubing Motor
9-47752	Two-Piece Tubing Design, One-Piece Fin & Nozzle Assembly
9-47737	One-Piece Tubing Design
9-47754	One-Piece Aluminum Impact Design
9256049	Fin
9256060	Motor Case Assembly
9156061	Motor Case

Table

C-I	Mass Production Cost (Dwg 9-47722)
C-II	Mass Production Cost (Dwg 9-47751)
C-III	Mass Production Cost (Dwg 9-47737)
C-IV	Mass Production Cost (Dwg 9-47754)

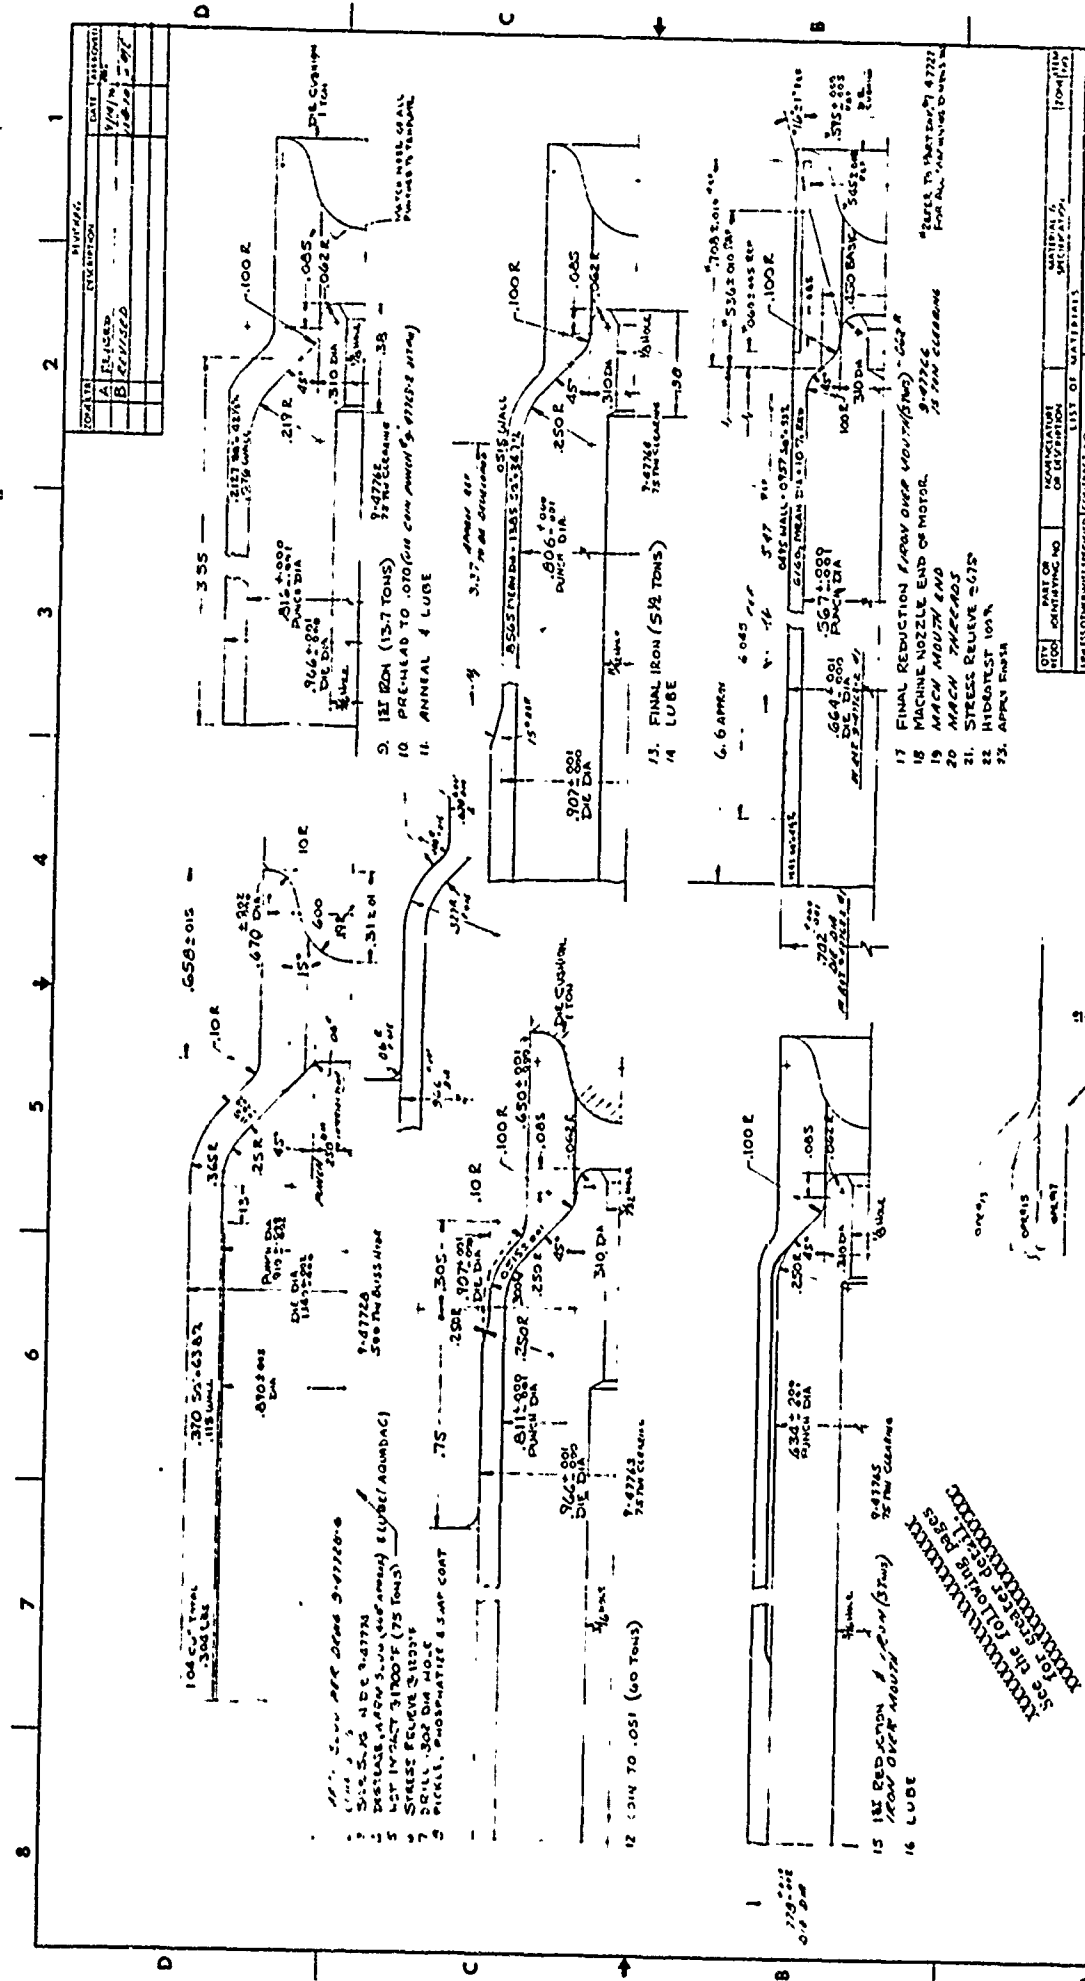

DATE	BY	REVISION
1/10/51	W.L.	REVISED
1/10/51	W.L.	REVISED
1/10/51	W.L.	REVISED
1/10/51	W.L.	REVISED

QTY	PART OR IDENTIFICATION NO	QUANTITY	DESCRIPTION	CONTRACT NO	REVISION
	104 C-TYPICAL				
	370 50:53.67				
	512 MAX DIA				

QTY	PART OR IDENTIFICATION NO	QUANTITY	DESCRIPTION	CONTRACT NO	REVISION
	104 C-TYPICAL				
	370 50:53.67				
	512 MAX DIA				

QTY	PART OR IDENTIFICATION NO	QUANTITY	DESCRIPTION	CONTRACT NO	REVISION
	104 C-TYPICAL				
	370 50:53.67				
	512 MAX DIA				

QTY	PART OR IDENTIFICATION NO	QUANTITY	DESCRIPTION	CONTRACT NO	REVISION
	104 C-TYPICAL				
	370 50:53.67				
	512 MAX DIA				

104 C-TYPICAL  
370 50:53.67  
512 MAX DIA

See the following pages for the following parts:  
XXXXXXX  
XXXXXXX  
XXXXXXX

PRECEDING PAGE BLANK


113.1

113.2

1

D


A

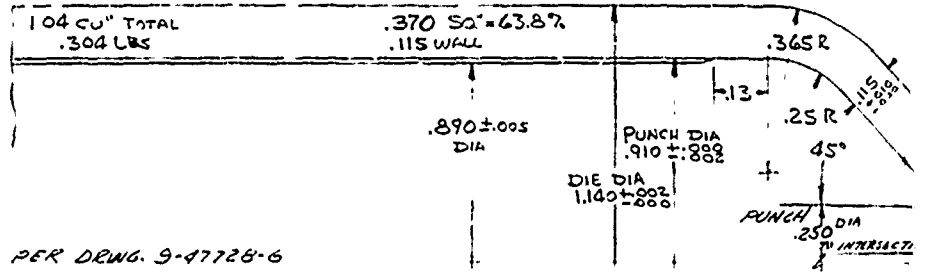

1. MAKE SLUG PER DRWG. 9-47728-6
2. LUBE SLUG
3. SIZE SLUG IN DIE 9-47774
4. DEGREASE, WARM SLUG (460° APPROX) & LUBE (AQUADAG)
5. HOT IMPACT @ 1700°F (75 TONS)
6. STRESS RELIEVE @ 1200°F
7. DRILL .302 DIA HOLE
8. PICKLE, PHOSPHATIZE & SOAP COAT

9-47728  
500 TON BLISS HYD

C

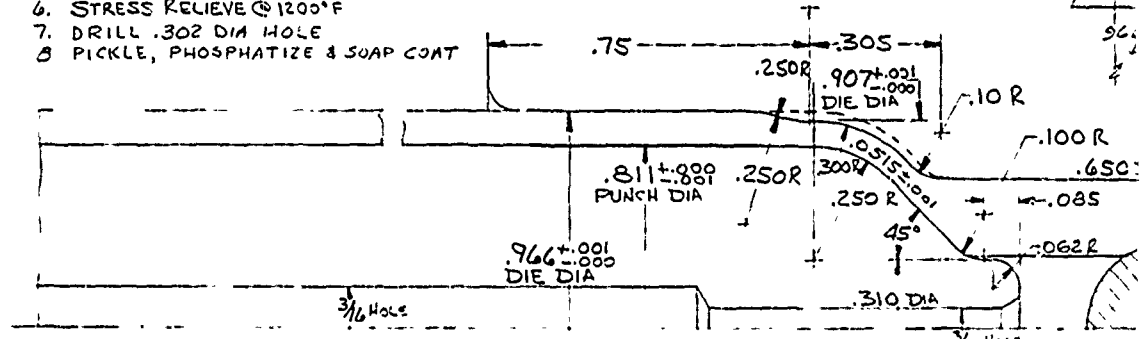


12. COIN TO .051 (60 TONS)

9-47763  
75 TON CLEARING

→

B

.778<sup>±.002</sup>  
DIE DIA

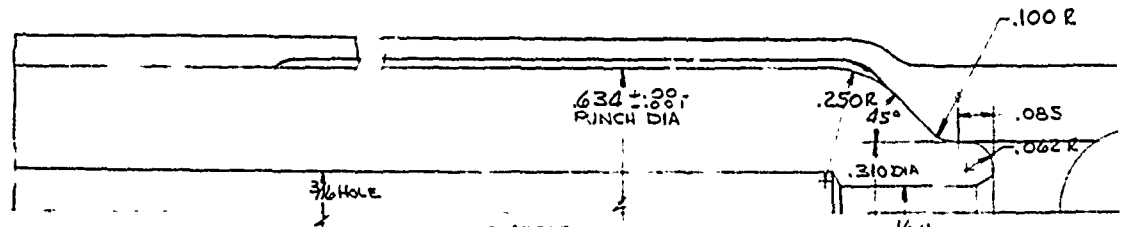

15 ISI REDUCTION & IRON (3 TONS)  
IRON OVER MOUTH

9-47765  
75 TON CLEARING

16 LUBE

OPR#13

OPR#15


OPR#17

A


Preceding page blank




REVISIONS				
ZONE	TR	DESCRIPTION	DATE	APPROVED
	A	REVISED	9/14/70	
	B	REVISED	12-8-70	R. G. E.

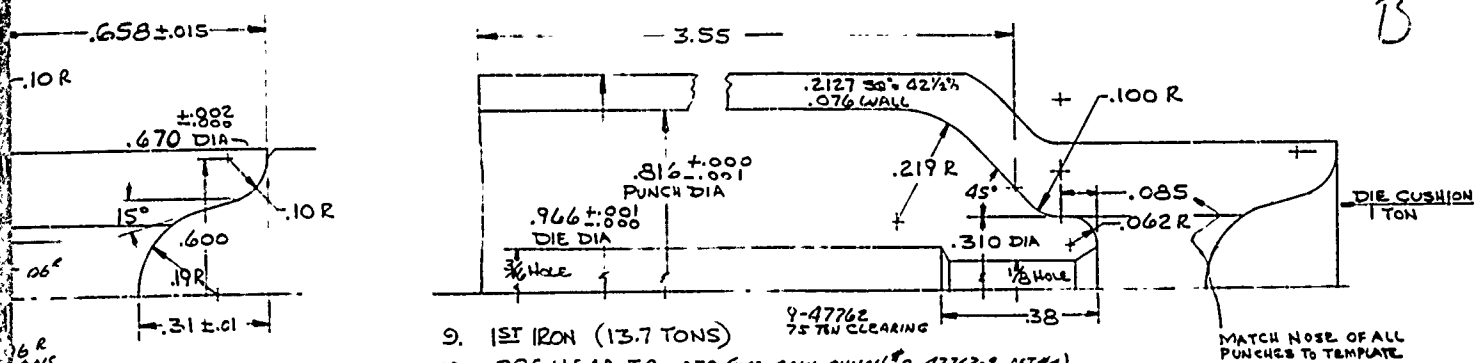

- 9. 1ST IRON (13.7 TONS)
- 10. PRE-HEAD TO .070 (USE COIN PUNCH #9-47762 DETAG)
- 11. ANNEAL & LUBE

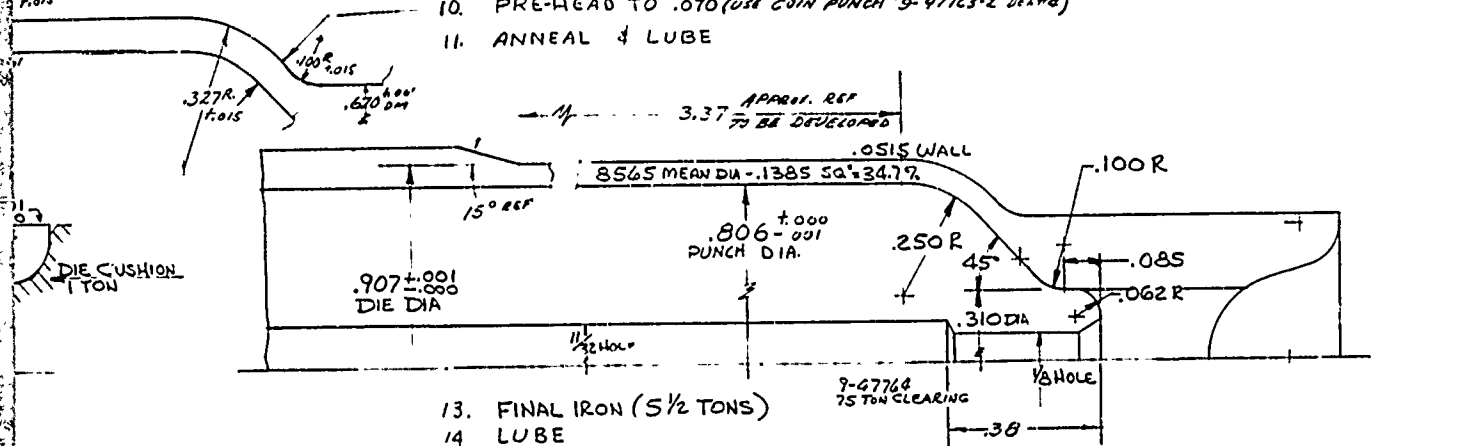

- 13. FINAL IRON (5 1/2 TONS)
- 14. LUBE

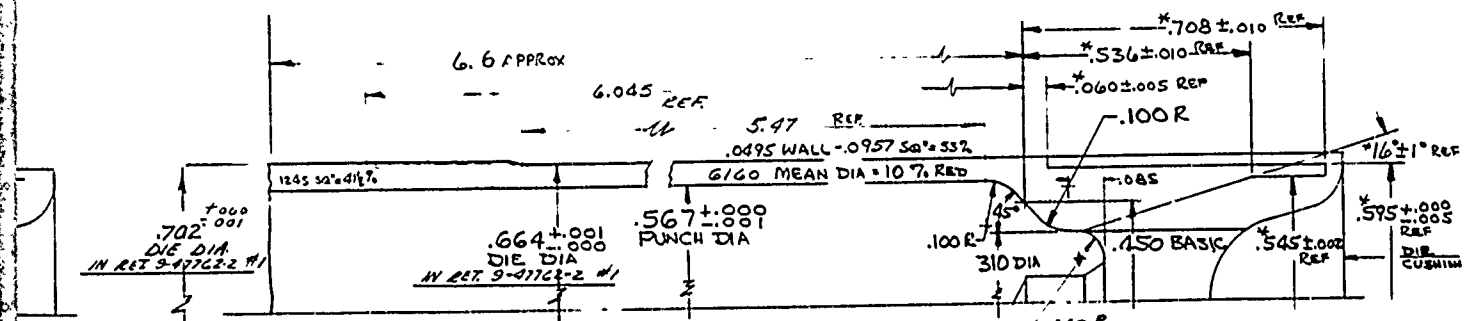


- 17. FINAL REDUCTION & IRON OVER MOUTH (STAYS)
  - 18. MACHINE NOZZLE END OF MOTOR 9-47766 75 TON CLEARING
  - 19. MACH. MOUTH END
  - 20. MACH. THREADS
  - 21. STRESS RELIEVE @ 675°
  - 22. HYDROTEST 100%
  - 23. APPLY FINISH
- \*REFER TO PARTING #9-47722 FOR ALL MACHINING DIMENSIONS

QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL & SPECIFICATION	ZONE	ITEM NO
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED		CONTRACT NO	<b>HARVEY</b> <b>ENGINEERING</b> <b>LABORATORIES</b>		
TOLERANCES ON DECIMALS XX ± .03 XXX ± .010 ANGULAR +0°30'		DRAWN BY R. GROSS			
FINISH		CHECKED BY	<b>MASTER TOOL LAYOUT</b> <b>HOT CUP IMPACT METHOD No 2</b> <b>MOTOR CASE, SUBCALIBER LAW</b>		
MATERIAL		APPROVED HET			
NEXT ASSY		APPROVED	SIZE D	CODE IDENT NO 27610	CHG B
USED ON APPLICATION			SCALE 3/1	WT	SHEET

113.2

REV	DATE	BY	CHK	APP
A	10/12/50	J.P.	J.P.	
B	10/12/50	J.P.	J.P.	
C	10/12/50	J.P.	J.P.	
D	10/12/50	J.P.	J.P.	

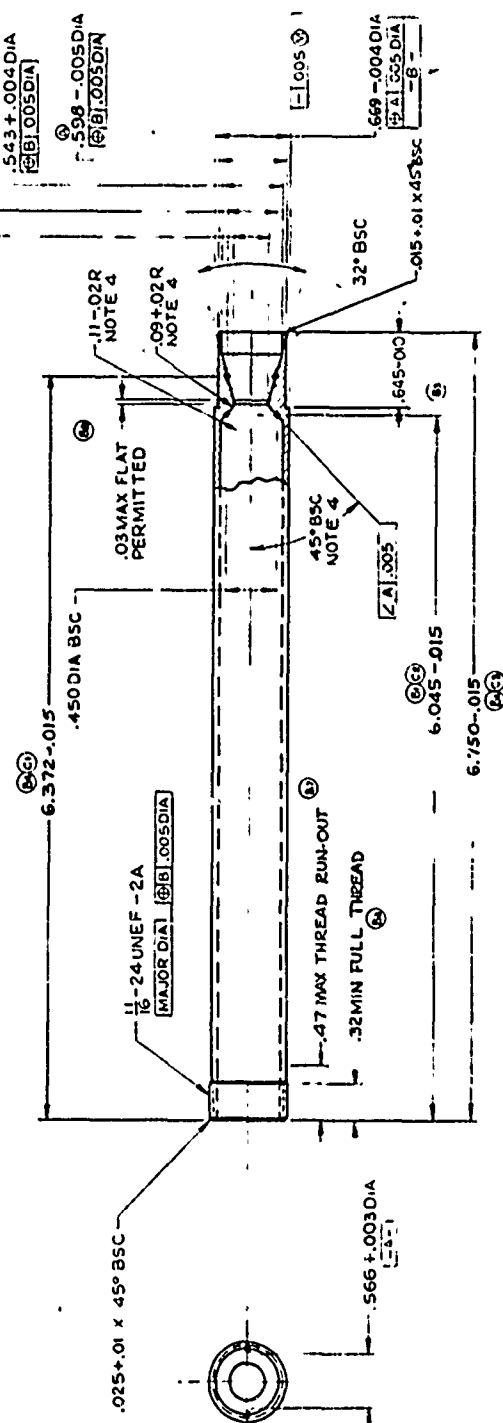


- NO. 5.-  
 1 - SPEC MIL-A-2550 APPLIES.  
 2 - MATERIAL: STEEL, CARBON, HOT-ROLLED, GRADE 1035, SPEC ASTM A576.  
 3 - FINISH: ALL SURFACES.  
 4 - INDICATED RADIUS AND SURFACES MUST BLEND WITH A SMOOTH CONTOUR.  
 5 - PROTECTIVE FINISH: FINISH 1.1.2.3 OF MIL-STD-171, COLORED BROWN NO. 30117 OR 30140 APPROX. TREAT TO REMOVE EMBITLEMENT WITHIN 30 MINUTES AFTER PLATING BY HEATING TO 375°±25°F FOR 3 HOURS MIN. PROTECTIVE FINISH-EXTERIOR SURFACE.  
 6 - MOTOR CHAMBER MUST BE CAPABLE OF WITHSTANDING AN INTERNAL PRESSURE OF 15,000 PSI MIN APPLIED FOR NOT LESS THAN TWO SECONDS WITHOUT DEFORMATION AND MUST NOT FRACTURE WHEN SUBJECTED TO 18,000 PSI MIN.

See the following notes for general dimensions

DATE	10/12/50
DESIGNER	J.P.
CHECKED	J.P.
APPROVED	J.P.
TITLE	VICTOR CASE
SUB-CALIBER	1.47752
QUANTITY	19203
DATE	10/12/50

A

D  
C  
B  
A

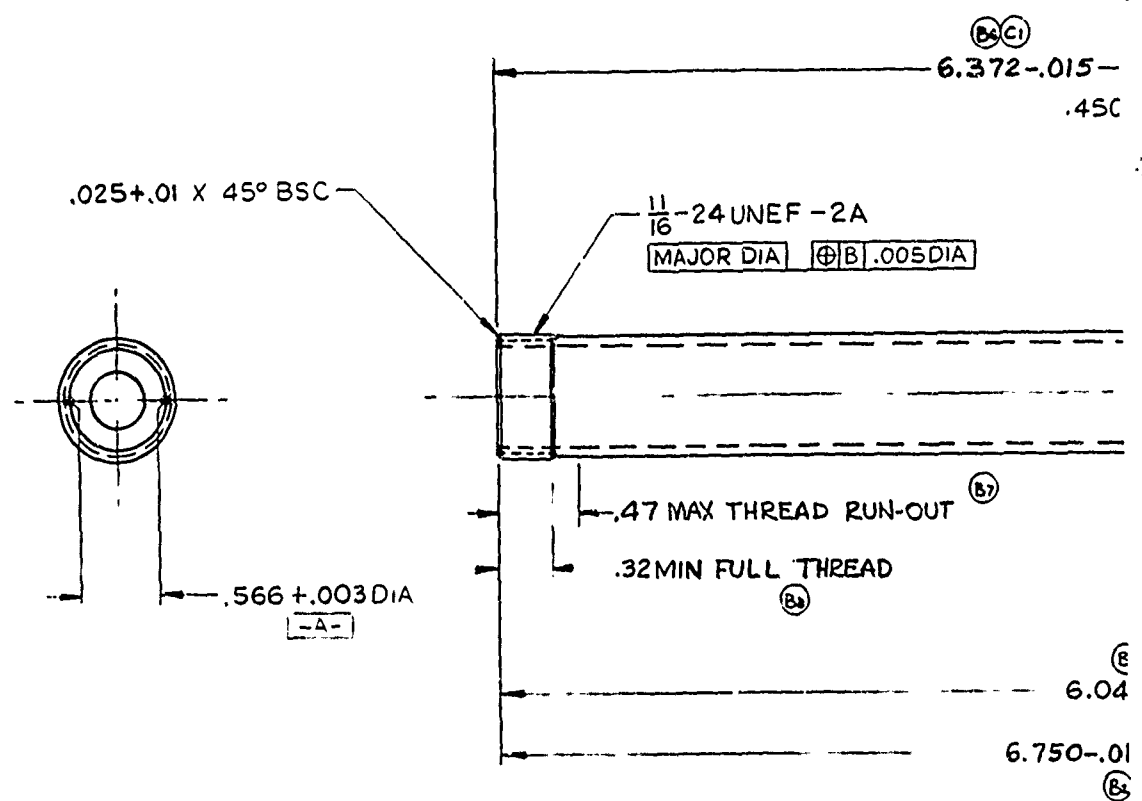


NOTES:-

- 1 - SPEC MIL-A-2550 APPLIES.
- 2 - MATERIAL: STEEL, CARBON, HOT-ROLLED, GRADE 1035, SPEC ASTM A576.
- 3 - FINISH 125 ALL SURFACES.
- 4 - INDICATED RADII AND SURFACES MUST BLEND WITH A SMOOTH CONTOUR
- 5 - PROTECTIVE FINISH:- FINISH 1.1.2.3 OF MIL-STD-171, COLORED BROWN NO. 3011 OR 30140 APPROX. TREAT TO REMOVE EMBRITTLEMENT WITHIN 30 MINUTES AFTER PLATING, BY HEATING TO 375 ± 25°F FOR 3 HOURS MIN. PROTECTIVE FINISH- EXTERIOR
- 6 - MOTOR CHAMBER MUST BE CAPABLE OF WITHSTANDING AN INTERNAL PRESSURE OF 16,000 PSI MIN APPLIED FOR NOT LESS THAN TWO SECONDS WITHOUT DEFORMATION AND MUST NOT FRACTURE WHEN SUBJECTED TO 18,000 PSI MIN.

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A	REDRAWN	7 OCT 70	REG
B	SEE NOC DTD 18 NOV 70	18 NOV 70	REG
C	SEE NOC DTD 22 DEC 70	22 DEC 70	REG
D	SEE NOC DTD 27 MAY 71	27 MAY 71	J. E.

B


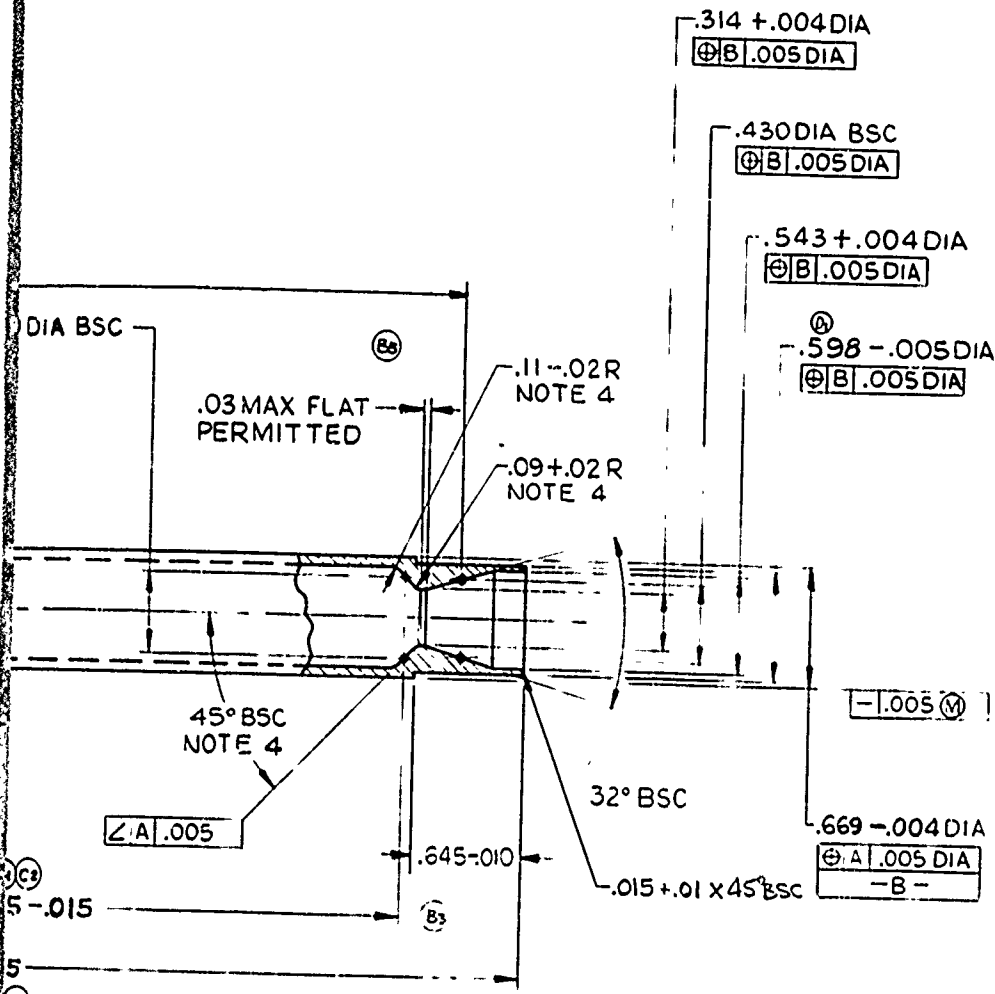


R 7 SURFACE

		MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINAL DATE OF DRAWING 1970		SAME AS PICTAN D 6 905601 HARVEY ENGINEERING LABORATORY	
YP	103,000 PSI MIN	TOLERANCES ON DECIMALS $\pm$		FRACTIONS $\pm$ ANGLES $\pm$		DRAFTSMAN M A	CHECKER	MOTOR CASE SUB-CALIBER LAW ROCKET	
TE		MATERIAL		SEE NOTE 2		ENGR	ENGR		
EL2		HEAT TREATMENT				ENGR	ENGR		
RA		FINAL PROTECTIVE FINISH		SEE NOTE 5		SUBMITTED			
MOT ASSY	USED ON	APPLICATION		APPLY PART NO.		APPROVED		SIZE D	CODE IDENT NO. 19203
								SCALE 2/1	UNIT WT
								SHEET	

NOTES:

- 1. SPEC A-2550 APPLIES.
- 2. THIS NOZZLE WITH 25 FOOT ROUNDS MILLING TORQUE.

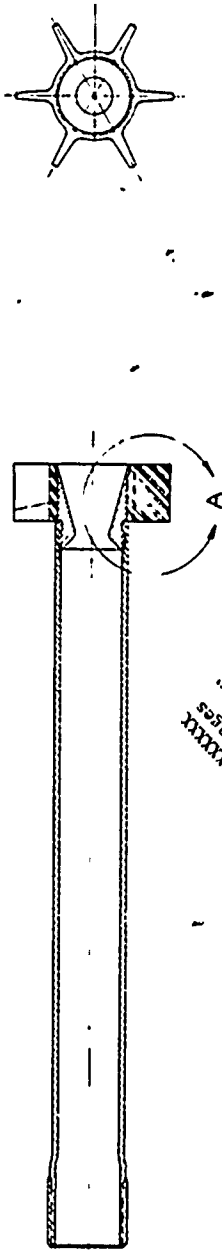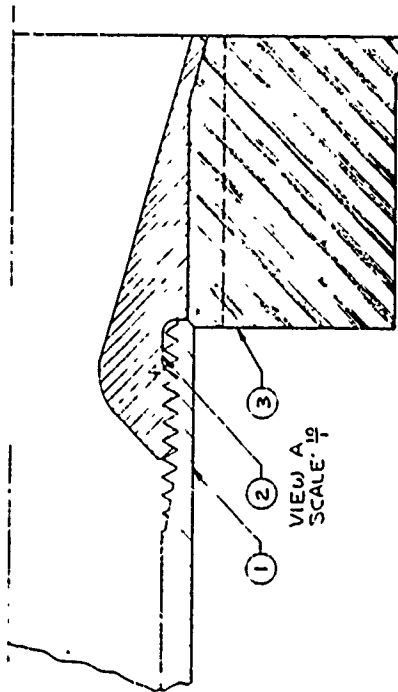

XXXXXXXXXXXXXXXXXXXX  
 See the following pages  
 for greater details

QTY	PART OR IDENTIFYING NO	DESCRIPTION OR EXTENSION	UNIT	AMOUNT
1	FIN			1
1	NOZZLE			2
1	MOTOR CASE			1

UNLESS OTHERWISE SPECIFIED	CONTRACT NO	HEAVY 747
TOLERANCES ON DIMENSIONS	DRAWN BY	SCOTT GARDNER
FRACTIONS	CHECKED BY	INDUSTRIAL TECH
DIMENSIONS	DATE	
DECIMALS	DESIGNED BY	
ANGLES	PART OR IDENTIFYING NO	
FINISH	DESCRIPTION OR EXTENSION	
	APPROVED	
	APPROVED	
	SCALE	1/4"

FIN & MOTOR CASE ASSY	
3 PIECE ASSY (SEPARATE FIN)	
SIZE	D 27610 9-4775 i
SCALE	1/4"

Preceding page blank

117.1

117.2

A

D

NOTES:

- 1. SPEC MIL-A-2550 APPLIES.
- 2. TIGHTEN NOZZLE WITH 25 FOOT POUNDS MINIMUM TORQUE.

C



B

A



Preceding page blank

↓

4


3

2



1

REVISIONS				
ZONE	TR	DESCRIPTION	DATE	APPROVED

*B*

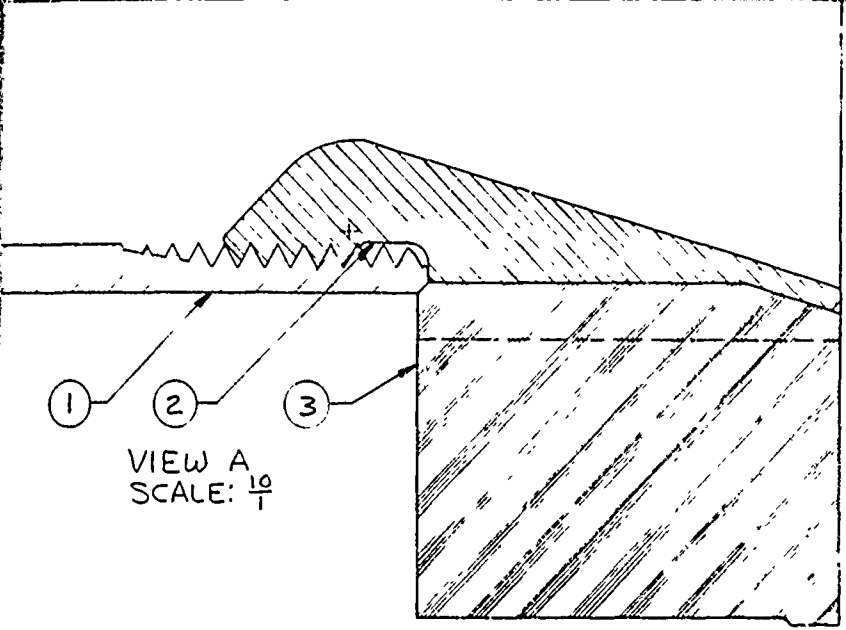

VIEW A  
SCALE:  $\frac{10}{1}$

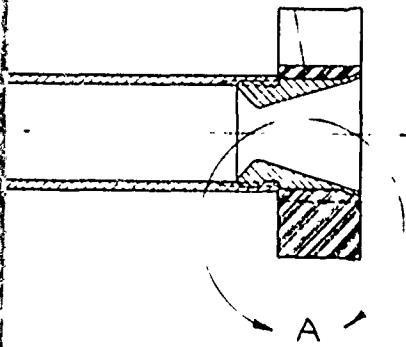

1		FIN			3
1		NOZZLE			2
1		MOTOR CASE			1
QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL & SPECIFICATION		ZONE ITEM NO
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED		CONTRACT NO		<b>HARVEY</b> <small>ALUMINUM</small> <small>ENGINEERING</small> <small>LABORATORIES</small>	
TOLERANCES ON		DRAWN BY	DATE	<b>FIN &amp; MOTOR CASE ASSY</b> <b>3 PIECE ASSY (SEPARATE FIN)</b>	
DECIMALS XX .01		<i>R. GROSS</i>	5/18/70	SIZE CODE IDENT NO <b>D 27610 9-47751</b>	
ANGULAR XXX .00		CHECKED BY		CHG	
FINISH		PROJECT ENGR	5/14/70	SCALE 2/1 WT SHEET	
MATERIAL		APPROVED	5/18/70		
NEXT ASSY USED ON APPLICATION		APPROVED			

↑

4

3




2

1

117.2

**NOTES:**

- 1. SPEC MIL-A-2550 APPLIES.
- 2. TIGHTEN FIN & NOZZLE ASSY WITH 2.5 FOOT POUNDS MINIMUM TORQUE.

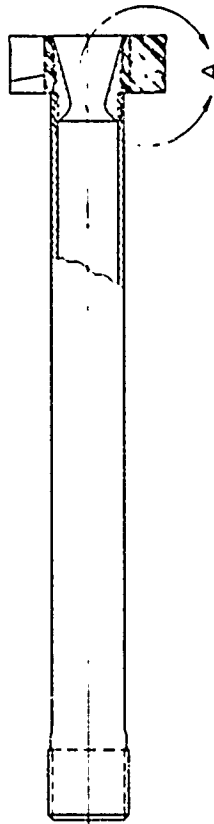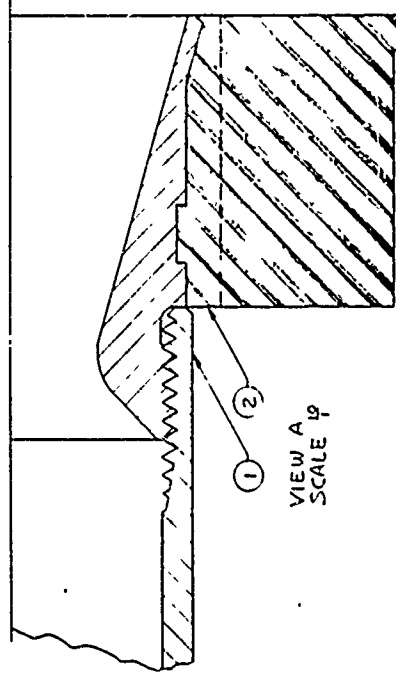

See the following pages  
 for engineering detail pages

FIN & NOZZLE ASSY		PART NO. 119.2	
FIN & NOZZLE ASSY		REV. 1	
FIN & NOZZLE ASSY		DATE 11/19/52	
FIN & NOZZLE ASSY		DRAWN BY	
FIN & NOZZLE ASSY		CHECKED BY	
FIN & NOZZLE ASSY		APPROVED BY	
FIN & NOZZLE ASSY		MATERIAL	
FIN & NOZZLE ASSY		MATERIAL USED ON	
FIN & NOZZLE ASSY		APPLICATION	
FIN & NOZZLE ASSY		SCALE 1/4\"/>	

Preceding page blank

119.1

119.2

1 2 3 4 5 6 7 8

REVISED	DATE	APPROVED



A

D

NOTES:

- 1. SPEC MIL-A-2550 APPLIES
- 2. TIGHTEN FIN & NOZZLE ASSY WITH 25 FOOT POUNDS MINIMUM TORQUE.

C



B

A




Preceding page blank



4 | 3 | 2 | 1

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED

B

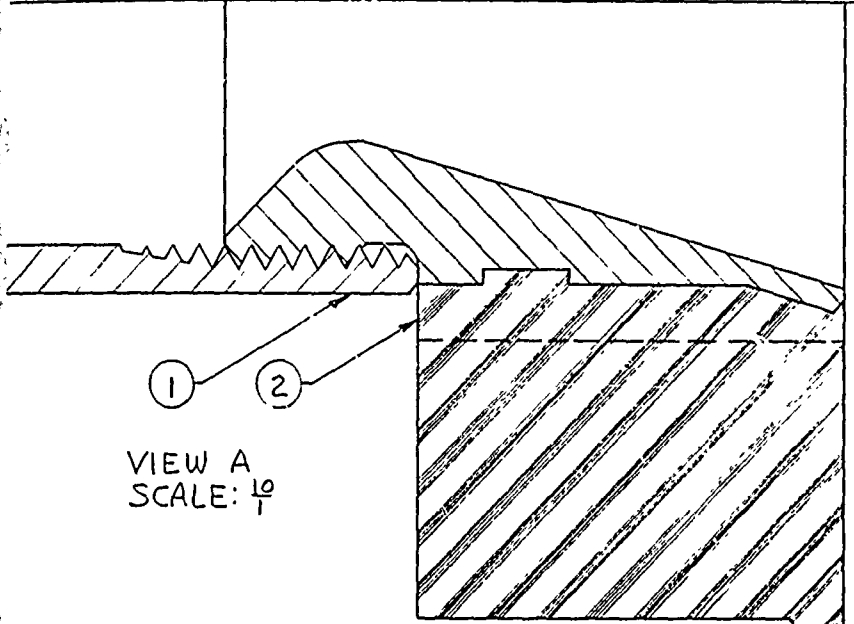

VIEW A  
SCALE: 10/1



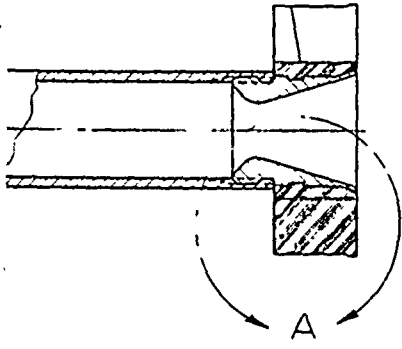


1		FIN & NOZZLE ASSY		
1		MOTOR CASE		
QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL & SPECIFICATION	ZONE
LIST OF MATERIALS				
UNLESS OTHERWISE SPECIFIED		CONTRACT NO	<b>HARVEY</b> Aluminum <small>100% PURE ALUMINUM</small> <b>HARVEY</b> ENGINEERING HYDROTORQUES	
TOLERANCES ON		DRAWN BY	DATE	<b>FIN &amp; MOTOR CASE ASSY</b> 3 PIECE ASSY (FIN MOLDED ON NOZ)
DECIMALS XX +.03		<i>R Gross</i>	5-25-70	
ANGULAR XXX +.010		CHECKED BY		SIZE CODE IDENT NO <b>D 27610 9-47753</b>
XXX +.030		PROJECT ENGR	5/24/70	
FINISH		APPROVED		SCALE 2/1 WT SHEET
MATERIAL		<i>R Gross</i>	5/27/70	
NEXT ASSY USED ON APPLICATION		APPROVED		

4 | 3 | 2 | 1

8 7 6 5 4 3 2 1

NOTES:  
 1 SPEC MIL-A-2550 APPLIES.  
 2 TIGHTEN NOZZLE WITH 25 FOOT POUNDS  
 MINIMUM TORQUE.

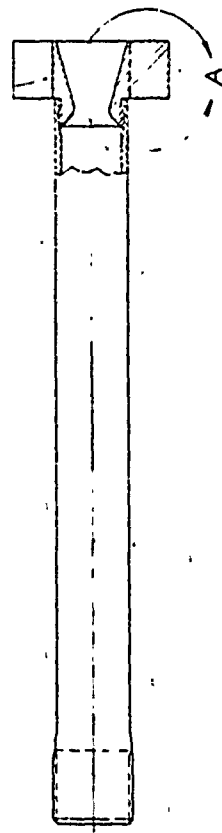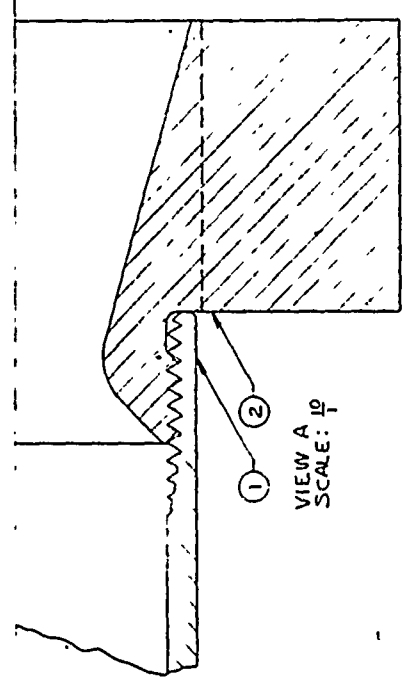

XXXXXXXXXXXXXXXXXXXX  
 See the following pages  
 for finger detail  
 XXXXXXXXXXXXXXXXXXXX

NOZZLE		MOTOR CASE	
QTY	DESCRIPTION	QTY	DESCRIPTION
1	NOZZLE	1	MOTOR CASE
MATERIAL: 5.0110 PART NO: 9-47752 SCALE: 1/4"			

PRECEDING PAGE BLANK

121.1 7 6 5 4 3 2 1

8

7

6

5

A

D

NOTES:


- 1. SPEC MIL-A-2550 APPLIES.
- 2. TIGHTEN NOZZLE WITH 25 FOOT. POUNDS MINIMUM TORQUE.

C



B

A



Preceding page blank



4


3

2



1

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED

B

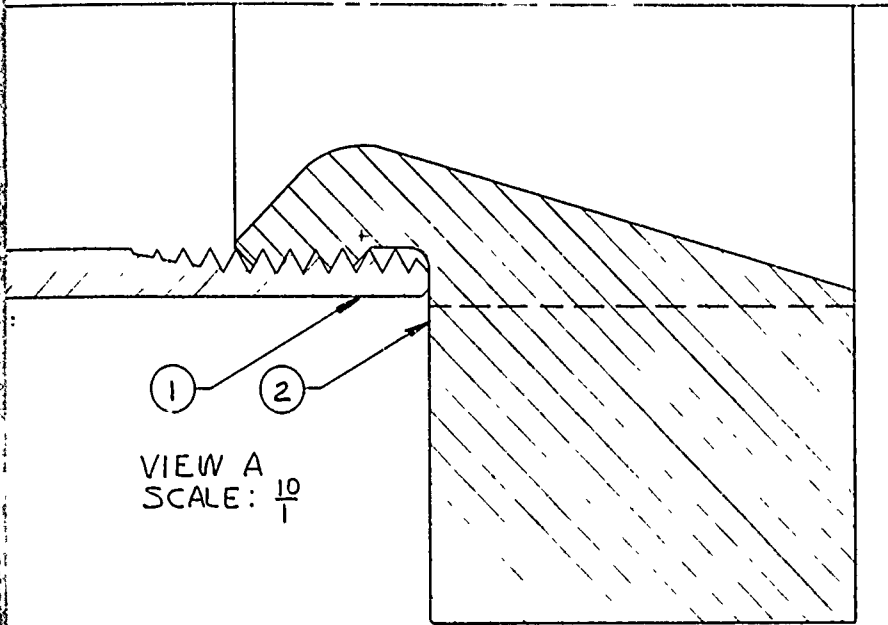

VIEW A  
SCALE:  $\frac{10}{1}$

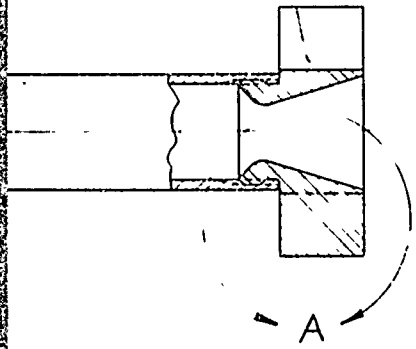

1	NOZZLE	6061-T6 ALUMINUM EXTRUSION	2			
1	MOTOR CASE		1			
QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL & SPECIFICATION	ZONE	ITEM NO	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED		CONTRACT NO		<b>HARVEY</b> Aluminum <small>PROTECTIVE COATINGS</small> HARVEY ENGINEERING LABORATORIES		
TOLERANCES ON		DRAWN BY	DATE	FIN & MOTOR CASE ASSY		
DECIMALS XX .03		R Gross	5/19/70			
ANGULAR XXX .010		CHECKED BY		2 PIECE ASSY (1 PIECE NOZZLE & FIN)		
XXX .030		R Gross	5/19/70			
FINISH		APPROVED	5/21/70	SIZE	CODE IDENT NO	
MATERIAL		APPROVED		D	27610	
NEXT ASSY USED ON APPLICATION				SCALE 2/1	WT	SHEET
					9-47752	CHG

121.2


4

3


2

1

FLARE 360° AS SHOWN AFTER  
PRESSING FIN INTO MOTOR CASE

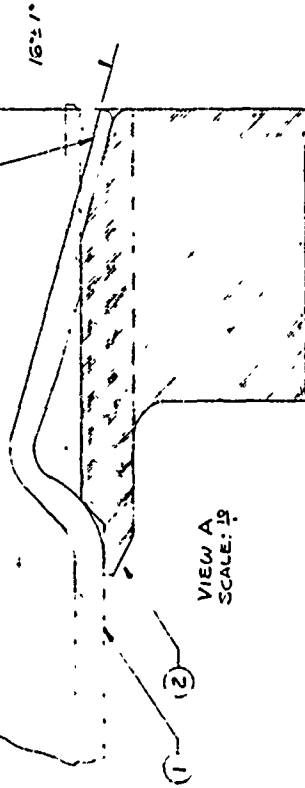

VIEW A  
SCALE: 1/8"

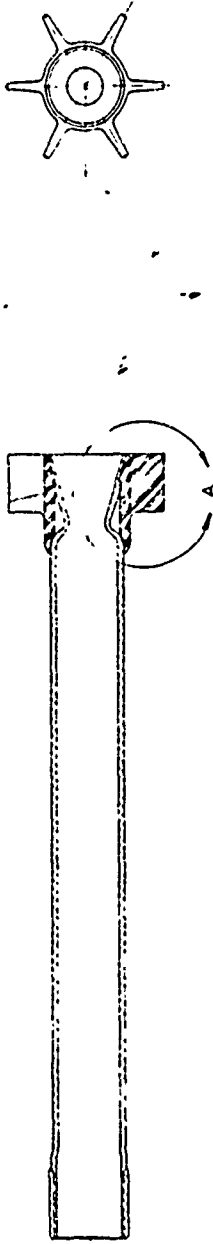

NOTE  
1 SPEC MIL-A-2550 APPLIES

XXXXXXXXXXXXXXXXXXXXXXXXXXXX  
 XXXXX FOR THE FOLLOWING  
 SPECIFIC PARTS  
 XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

SYMBOL		DESCRIPTION		QUANTITY
1	FIN	MOTOR CASE		1
1	IDENTIFYING NO.	MOTOR CASE		1

UNLESS OTHERWISE SPECIFIED	CONTRACT NO.	HEAVY & LIGHT
TOLERANCES ON	DATE	INDUSTRIAL SPECIFICATIONS
FRANKS ON	2/21/78	
SECONDS R.R. ± .00	UNIFIED BY	
ANGULAR R.R. ± 0.10	DESIGN	
FINISH	SECURING	
	APPROVED	
	H.I.	
	APPROVED	

MATERIAL	SHEET OR LIST NO.	SCALE	UNIT
	D 27610	9-47737	1



Preceding page blank

123-1

125-2



NOTE:  
1. SPEC MIL-A-2550 APPLIES.



D

C



B


A

Preceding page blank



4 3 2 1

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
				<i>EC</i>

FLARE 360° AS SHOWN AFTER PRESSING FIN ONTO MOTOR CASE

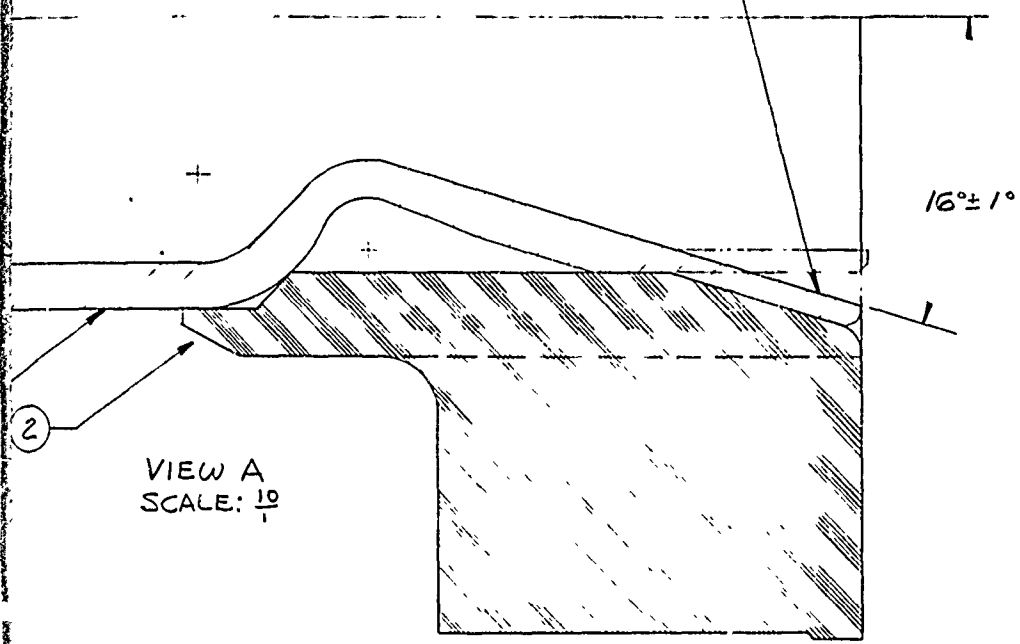

VIEW A  
SCALE: 1/10

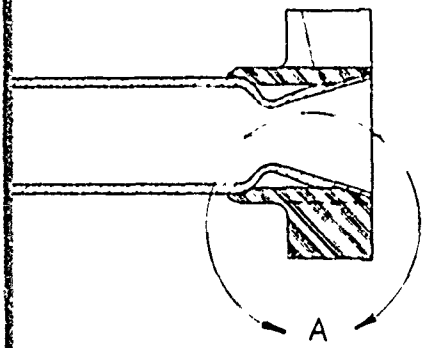

1		FIN			2
1		MOTOR CASE			1
QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL & SPECIFICATION		ZONE ITEM NO
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED		CONTRACT NO		<b>HARVEY</b> Aluminum <small>(ALUMINUM CORPORATION)</small> <b>HENVEY</b> ENGINEERING LABORATORIES	
TOLERANCES ON		DRAWN BY	DATE		
DECIMALS	XX : 03	<i>R Gross</i>	5/22/70	FIN & MOTOR CASE ASSY FOR MOTOR CASE FROM TUBING	
ANGULAR	XXX : 010 : 0 30	CHECKED BY			
FINISH		<i>Plastic Eng. R Gross</i>	5/22/70	SIZE CODE IDENT NO <b>D 27610 9-47737</b>	
MATERIAL		APPROVED	<i>HC</i>		
		APPROVED		SHEET	
	NEXT ASSY	USED ON	APPLICATION		


4 3 2 1

123.2



**NOTES -**

1. SPEC. N. F. 2557 APPLIES
2. ALL DIMENSIONS ARE IN ALUM. ALLOY 7075-T6, ASTM B221-68
3. REMOVE BURRS AND BREAK SHARP EDGES .020 MAX.
4. ALL FINISH ALL OVER
5. ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED
6. ALL DIMENSIONS TO BE WITHIN TOLERANCES
7. ALL DIMENSIONS TO BE WITHIN TOLERANCES
8. ALL DIMENSIONS TO BE WITHIN TOLERANCES
9. ALL DIMENSIONS TO BE WITHIN TOLERANCES
10. ALL DIMENSIONS TO BE WITHIN TOLERANCES

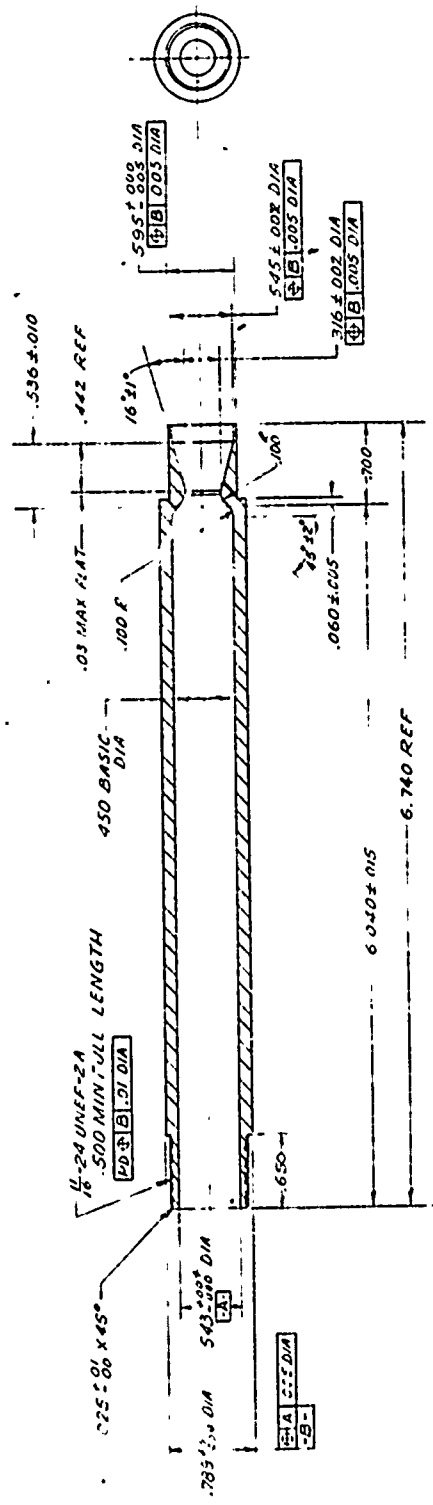

See the following pages for drawing details

CITY	PLANT	DATE	BY
ALBUQUERQUE	1000	10-15-68	J. W. H.
PART OR IDENTIFYING NO.			
MOTOR CASE			
TEMPERATURE OR DESCRIPTION			
LIST OF MATERIALS			
CONTRACT NO.	REV.	DATE	BY
1000	1	10-15-68	J. W. H.
DESIGNED BY	CHECKED BY	APPROVED BY	DATE
J. W. H.	J. W. H.	J. W. H.	10-15-68
MATERIAL			
ALUMINUM			
SPECIFICATION			
9-47754			
SHEET 27			

Preceding page blank

125.2


125.1

A

NOTES:-

- 1- SPEC MIL-A-2550 APPLIES
- 2 MATERIAL: ALUM ALLOY 7075-T6, ASTM B221-68
- 3- REMOVE BURRS AND BREAK SHARP EDGES .020 MAX.
- 4-125J FINISH ALL OVER.
- 5- RADIUS IN NOZZLE THROAT FROM THE MOTOR TUBE I.D. TO THE .316 DIA. SHALL BLEND IN A SMOOTH CONTOUR
- 6- MOTOR SHALL WITHSTAND AN INTERNAL PRESSURE OF 16,000 PSI APPLIED FOR 2 SECONDS WITHOUT PERMANENT DEFORMATION IN EXCESS OF DRAWING TOLERANCES.
- 7- MOTOR SHALL BE CAPABLE OF WITHSTANDING AN INTERNAL PRESSURE OF 18,000 PSI WITHOUT BURSTING.
- 8 FINISH IN ACCORDANCE WITH MIL-STD-171, FINISH 1.1.1.3, COLOR PROVIN PER FED-STD-595, NO 30117 TO 30140 ON ALL SIDES


D  
C  
B  
A

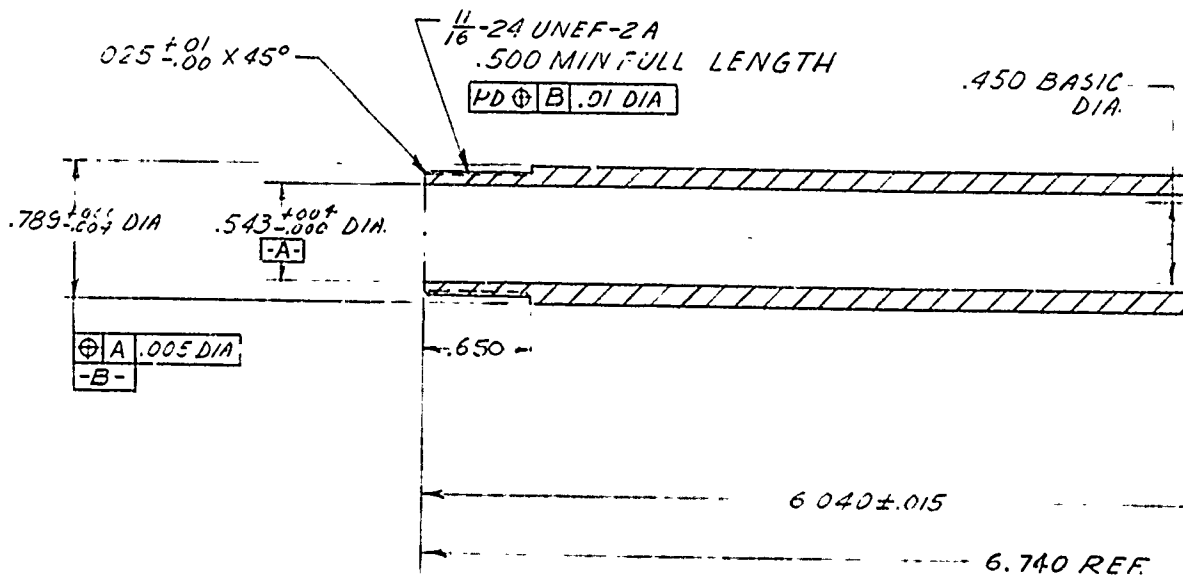

Preceding page blank

REVISIONS			
ZONE	TR	DESCRIPTION	DATE
1			


B

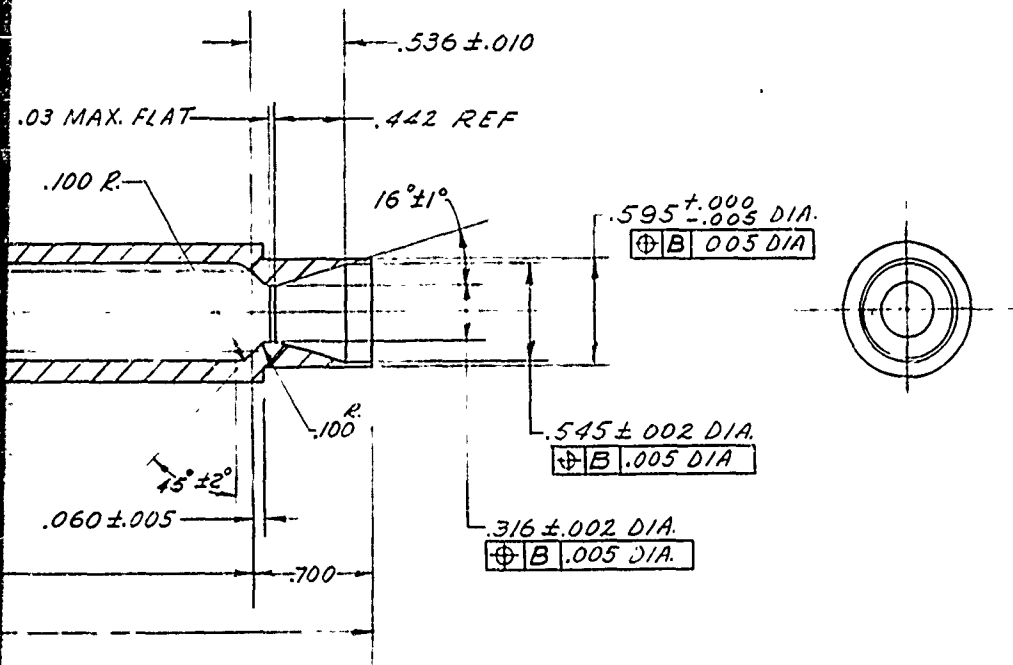

QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL & SPECIFICATION	ZONE	ITEM NO
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED		CONTRACT NO		<b>HARVEY ENGINEERING LABORATORIES</b>	
TOLERANCES ON DECIMALS XX . 03 XXX . 010 ANGULAR . 0 30		DRAWN BY <i>G. Estrella</i>			
FINISH		CHECKED BY PROJECT ENGR R. GROSS	5-5-70	<b>MOTOR CASE            SUB-CALIBER LAW ROCKET            (ALUMINUM IMPACT EXTRUSION)</b>	
MATERIAL		APPROVED J.E. ...	APPROVED DATE		
NEXT ASSY APPLICATION		USED ON APPLICATION	SCALE 2/1	W/T	SHEET

125.2

REV	DATE	BY	CHK	APP
1	11-13-50	SEE NOC	S/MH	WAC

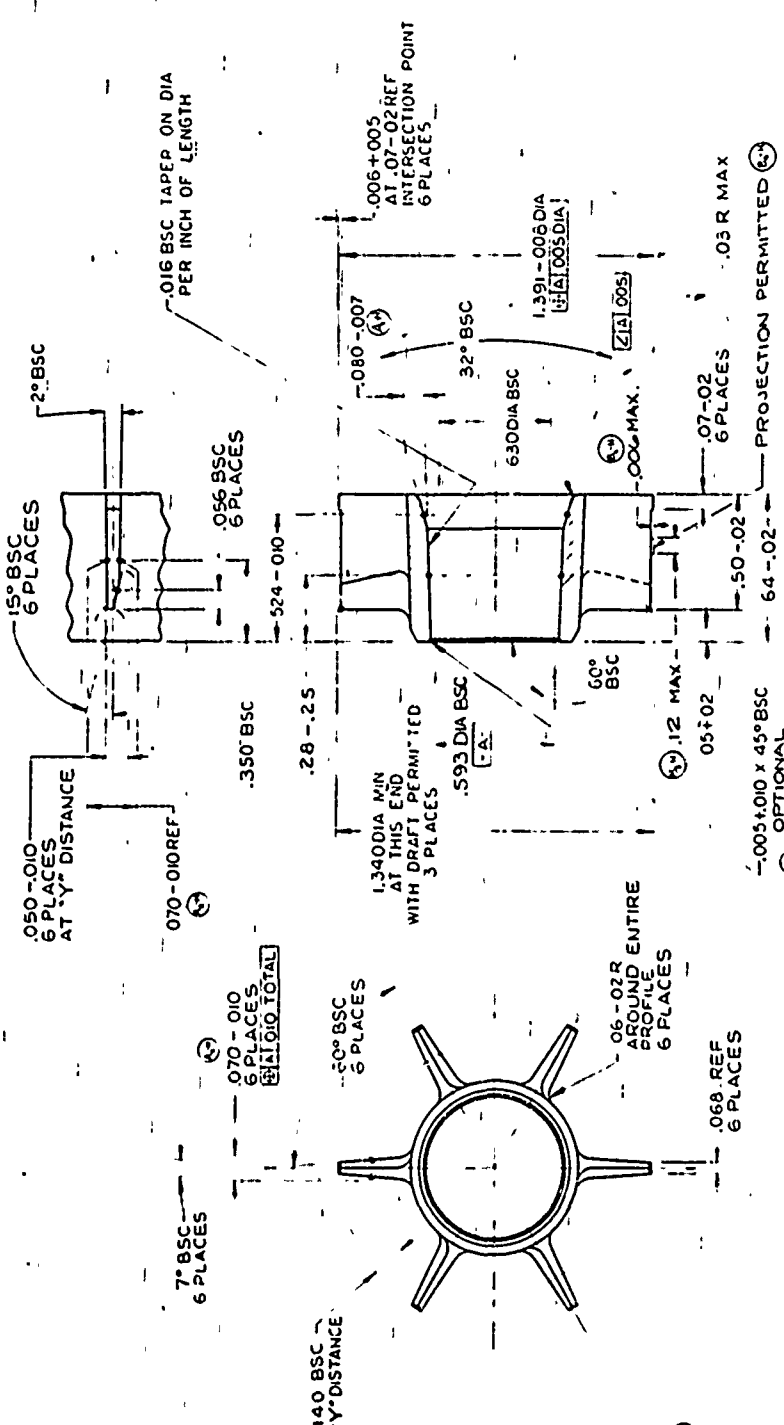

- NOTES:-
- 1-SPEC MIL-A-2550 APPLIES
  - 2-MATERIAL - PLASTIC MOLDING MATERIAL - ACRYLONITRILE-BUTADIENE-STYRENE (ABS), RIGID TYPE V, COLOR OPTIONAL, SPEC L-P-1183
  - 3-FINISH 125/ ALL SURFACES.
  - 4-ALTERNATE MATERIAL-CELLULOSE ACETATE BUTYRATE, GRADE MH, SPEC ASTM D707, COLOR OPTIONAL.

ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN INCHES  
 SEE THE RELEVANT DRAWING FOR THE LOCATION OF DIMENSIONS

PART NO 2250-119		DATE OF ORDER	
P. A. VAN ARMAN, CORP. MA. 01813		SEP 27 1950	
QUANTITY	1	DATE	SEP 27 1950
DESCRIPTION	FIN	BY	WAC
APPROVED		DATE	
REVISIONS		BY	
1	SEE NOTE 2	DATE	
2		DATE	
3		DATE	
4		DATE	
5		DATE	
6		DATE	
7		DATE	
8		DATE	
9		DATE	
10		DATE	

127.2

127.1

Preceding page blank


A

D

C

B


A

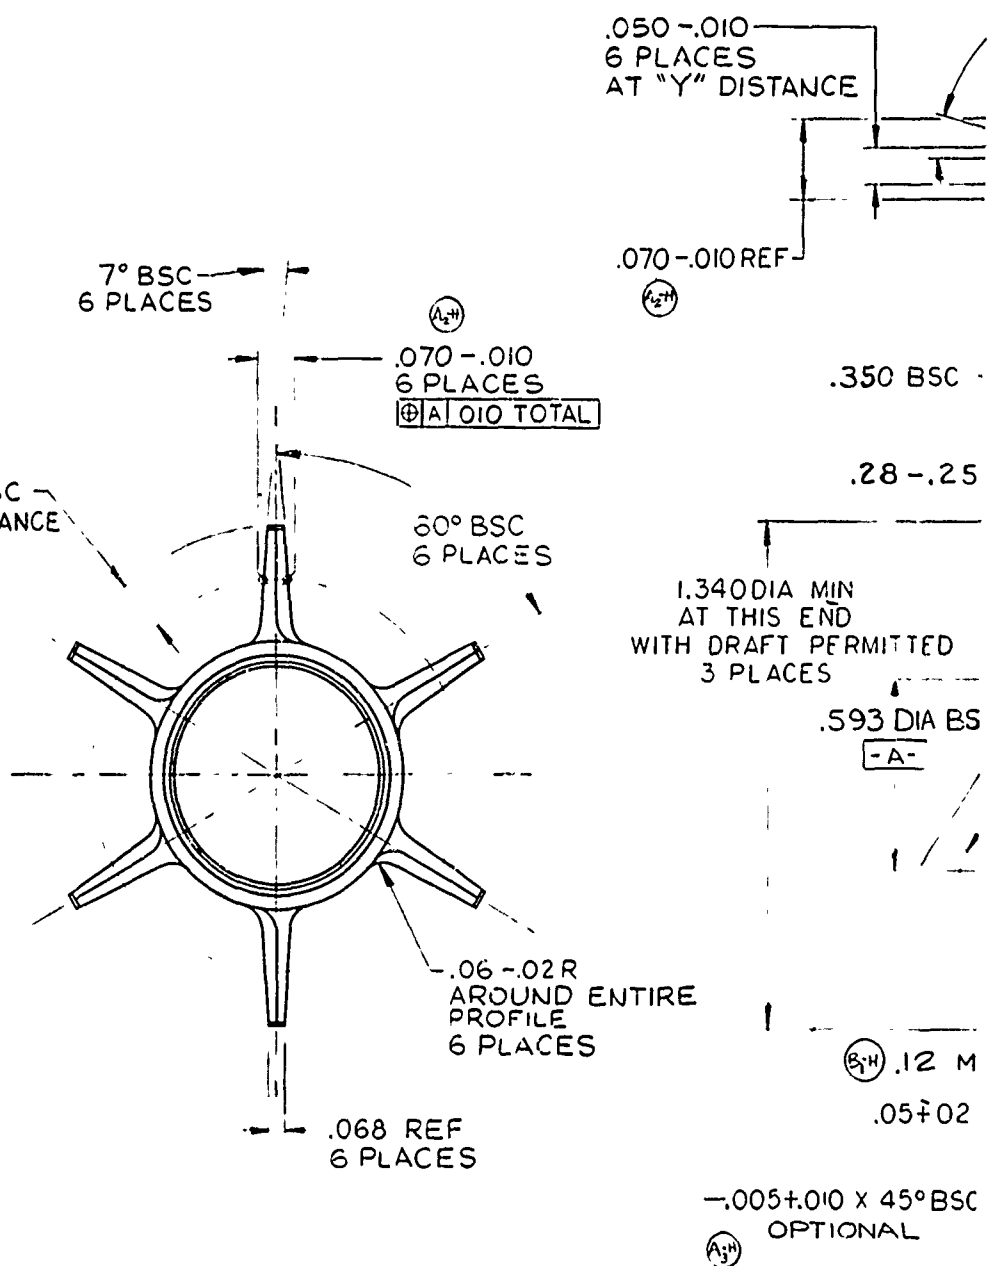

- NOTES:-
- 1- SPEC MIL-A-2550 APPLIES
  - 2- MATERIAL:- PLASTIC MOLDING MATERIAL, ACRYLONITRILE-BUTADIENE-STYRENE (ABS), RIGID TYPE V, COLOR OPTIONAL, SPEC L-P-1183.
  - 3- FINISH 125/ ALL SURFACES.
  - 4- ALTERNATE MATERIAL:-CELLULOSE ACETATE BUTYRATE, GRADE MH, SPEC ASTM D707, COLOR OPTIONAL.

SYM	DESCRIPTION	DATE	APPROV
A-H	SEE NOC	5/12/71	WC
B-H	SEE NOC	5/26/71	WC


*B*

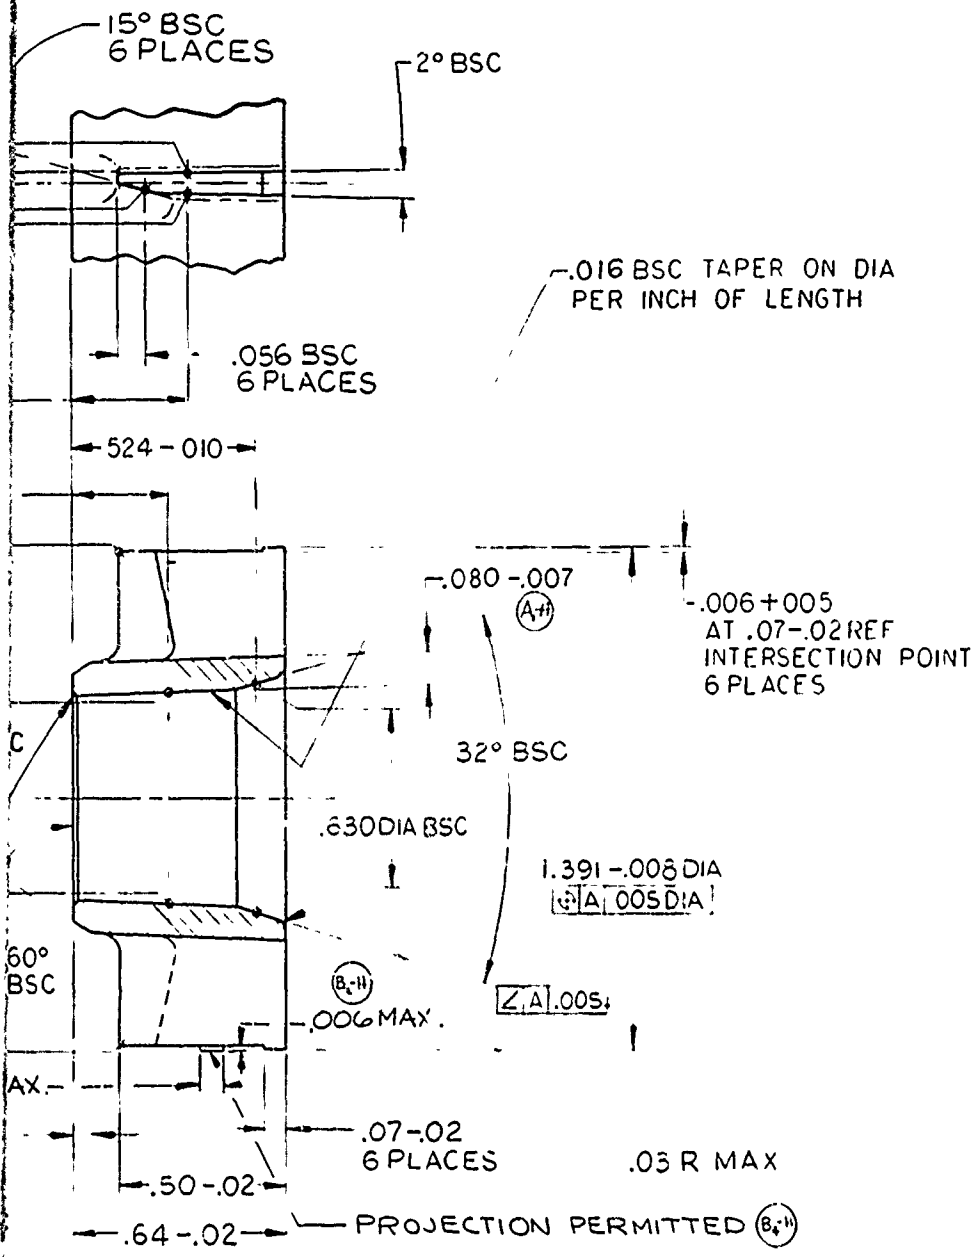

PART NO. 9256049

MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINAL DATE OF DRAWING		PICATINNY ARSENAL DOVER, NEW JERSEY	
YP		TOLERANCES ON DECIMALS ±		1 SEPT 970		FIN	
TS		FRACTIONS ±	ANGLES ±	DRAFTER	CHECKER		
EL2		MATERIAL		ENGR	ENGR		
RA		SEE NOTE 2		ENGR	ENGR		
APPLICATION		HEAT TREATMENT		SUBMITTED		SIZE	CODE IDENT NO
DO NOT	APPLY PART NO	FINAL PROTECTIVE FINISH		APPROVED		D	19203 P
						9256049	

127.2

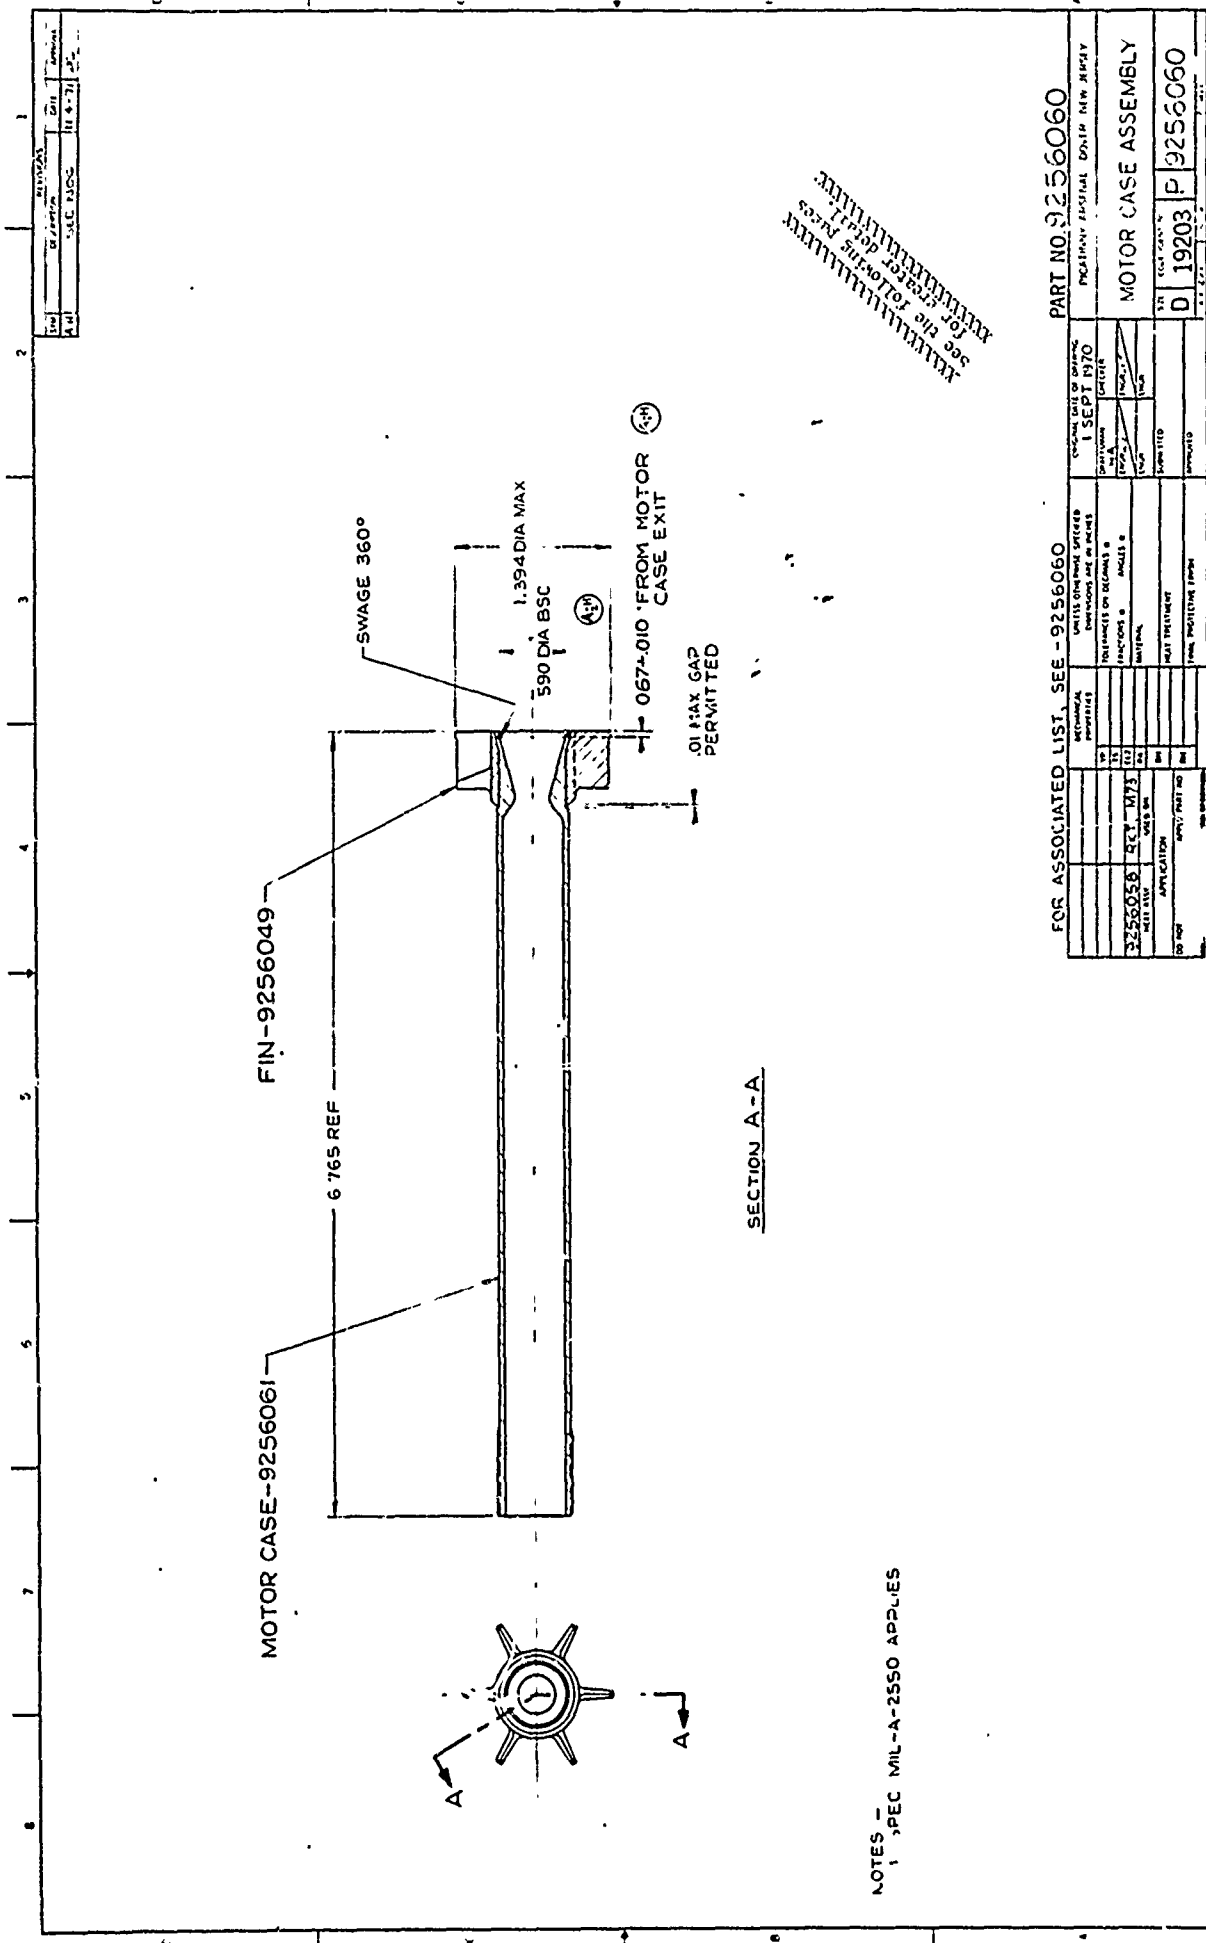

SECTION A-A

NOTES - 1. SPEC MIL-A-2550 APPLIES

See the following pages for drawings of related parts

FOR ASSOCIATED LIST, SEE - 9256060

SYMBOL	DESCRIPTION	DATE	BY
1	REVISED TO SHOW CHANGES TO DRAWING	1 SEPT 1970	...

SYMBOL	DESCRIPTION	DATE	BY
2	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
3	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
4	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
5	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
6	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
7	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
8	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
9	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
10	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
11	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
12	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
13	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
14	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
15	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
16	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
17	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
18	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
19	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
20	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
21	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
22	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
23	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
24	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
25	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
26	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
27	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
28	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
29	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
30	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
31	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
32	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
33	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
34	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
35	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
36	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
37	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
38	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
39	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
40	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
41	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
42	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
43	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
44	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
45	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
46	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
47	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
48	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
49	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
50	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
51	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
52	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
53	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
54	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
55	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
56	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
57	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
58	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
59	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
60	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
61	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
62	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
63	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
64	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
65	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
66	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
67	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
68	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
69	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
70	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
71	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
72	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
73	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
74	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
75	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
76	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
77	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
78	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
79	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
80	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
81	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
82	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
83	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
84	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
85	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
86	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
87	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
88	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
89	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
90	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
91	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
92	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
93	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
94	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
95	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
96	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
97	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
98	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
99	...	...	...

SYMBOL	DESCRIPTION	DATE	BY
100	...	...	...

PART NO. 9256060

PROJ. NO.	9256060
REV.	D
DATE	1970
BY	...
CHECKED	...
APPROVED	...

MOTOR CASE ASSEMBLY

D 19203 P 9256060

A

D

C



B

A

MOTOR CASE-9256061

FIN

6.765 REF

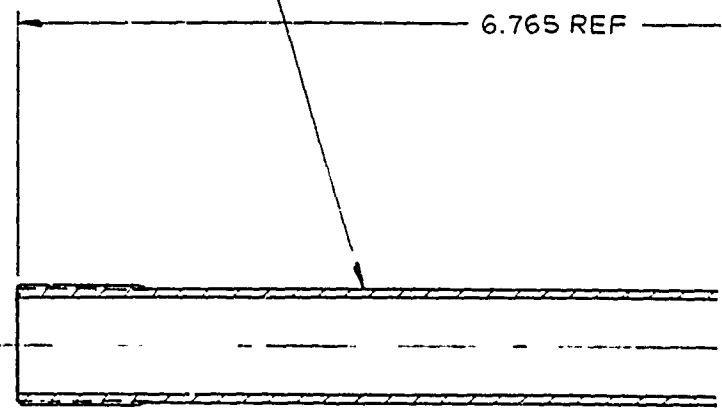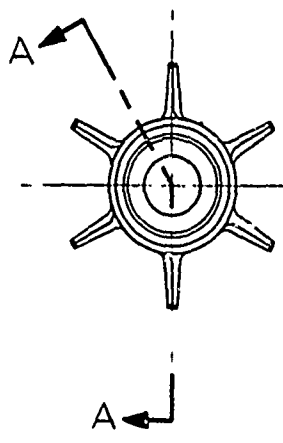


SECTION A-A

NOTES:-  
1 SPEC MIL-A-2550 APPLIES



REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A-11	SEE NOC	11-4-71	WC

*B*

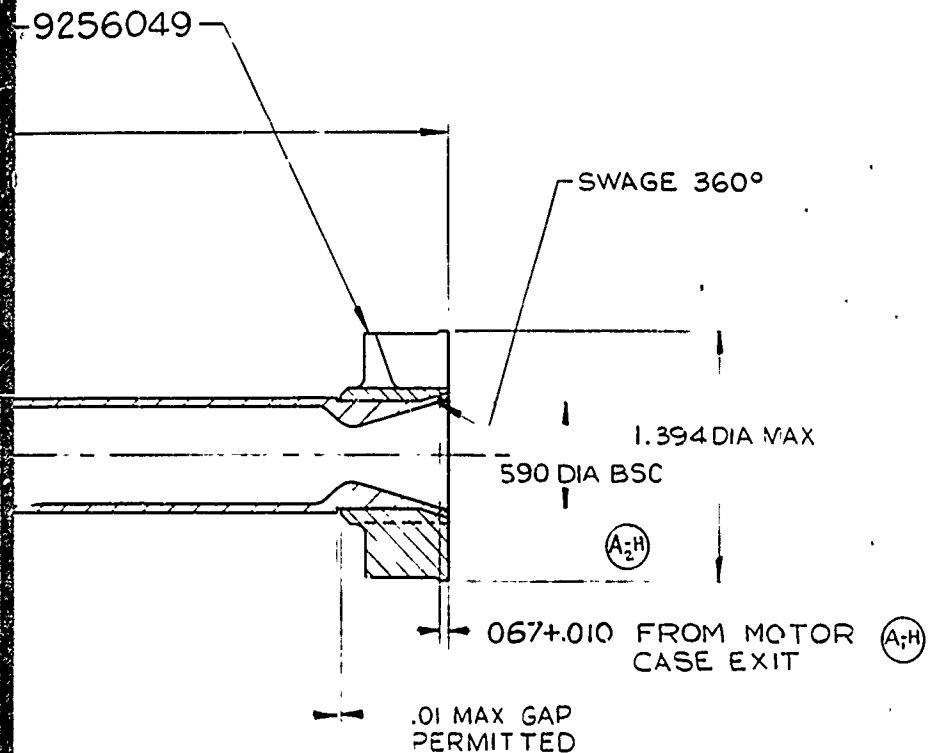


FOR ASSOCIATED LIST, SEE - 9256060

PART NO 9256060

		MECHANICAL PROPERTIES	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	ORIGINAL DATE OF DRAWING 1 SEPT 1970	PICATINNY ARSENAL DOVER, NEW JERSEY	
		YP	TOLERANCES ON DECIMALS ±	DRAFTSMAN HA	CHECKER	
		TS	FRACTIONS ± ANGLES ±	ENGR/EL	ENGR/EL	
9256058	RKT, M73	EL2	MATERIAL	ENGR	ENGR	
NEAT ASSY	USED ON	RA	HEAT TREATMENT	SUBMITTED		
APPLICATION		BH	FINAL PROTECTIVE FINISH	APPROVED		
DO NOT	APPLY PART NO	RH		SIZE	CODE IDENT NO	
				D	19203	P 9256060
				SCALE 2/1		SHEET

129.2


DATE	APPROVED
11/11/70	[Signature]
SEE DOC	19203

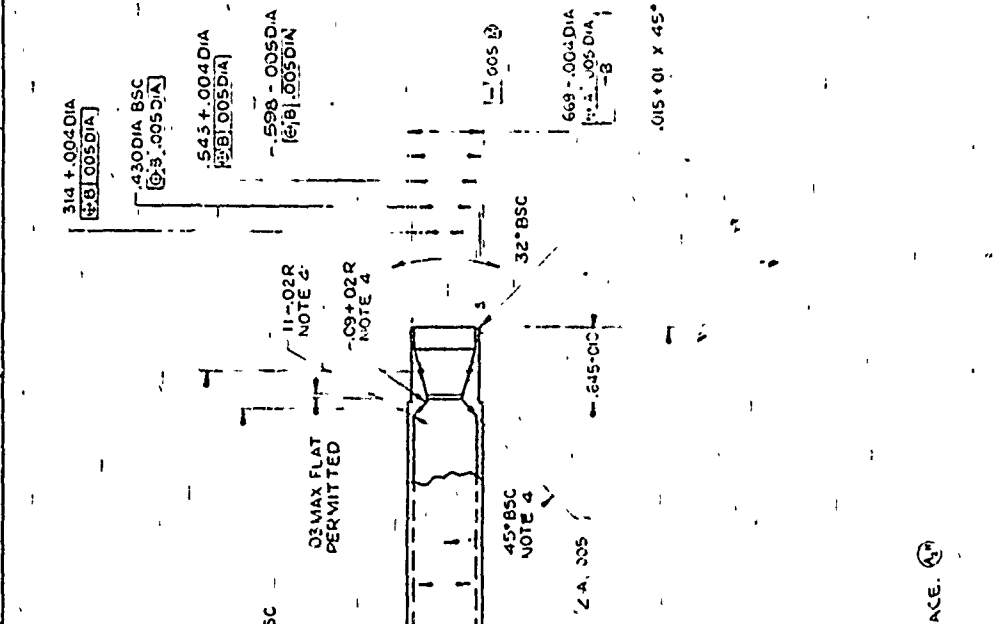

THIS DRAWING IS THE PROPERTY OF THE AIR FORCE  
 AND IS LOANED TO YOU FOR YOUR INFORMATION ONLY  
 IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS  
 WITHOUT THE WRITTEN PERMISSION OF THE AIR FORCE

- NOTES -
- 1 - SPEC MIL-A-2550 APPLIES.
  - 2 - MATERIAL: STEEL, CARBON, HOT-ROLLED, GRADE 1035 SPEC ASTM A570
  - 3 - FINISH: 1/8 ALL SURFACES.
  - 4 - INCLINED RADIUS AND SURFACES MUST BLEND WITH A SMOOTH CONTOUR
  - 5 - PROTECTIVE FINISH - FINISH 1.12.3 OF MIL-STD-171. CO-CRUC. ROOM NO. 50117. TREAT TO REMOVE EMbrittlement WITHIN 30 MINUTES AFTER PLATING BY HEATING TO 375 ± 25°F FOR 3 HOURS MIN PROTECTIVE FINISH - EXTERIOR SURFACE. (A)
  - 6 - MOTOR CHAMBER MUST BE CAPABLE OF WITHSTANDING AN INTERNAL PRESSURE OF 18,000 PSI MIN. APPLIED FOR NOT LESS THAN 2 SECONDS WITHOUT DEFORMATION AND MUST NOT FRACTURE WHEN SUBJECTED TO 18,000 PSI MIN.


PART NO 19203		REVISION NO 01	
VECTOR CASE		D 19203 19256061	
DATE	BY	DATE	BY
11/11/70	[Signature]		
DESIGNED BY		CHECKED BY	
DRAWN BY		APPROVED BY	
MATERIAL		FINISH	
HEAT TREATMENT		TOLERANCES UNLESS OTHERWISE SPECIFIED ARE IN INCHES	
MATERIAL SPECIFICATION		DIMENSIONS ON DIMENSIONS	
HEAT TREATMENT		DIMENSIONS ON DIMENSIONS	
MATERIAL SPECIFICATION		DIMENSIONS ON DIMENSIONS	

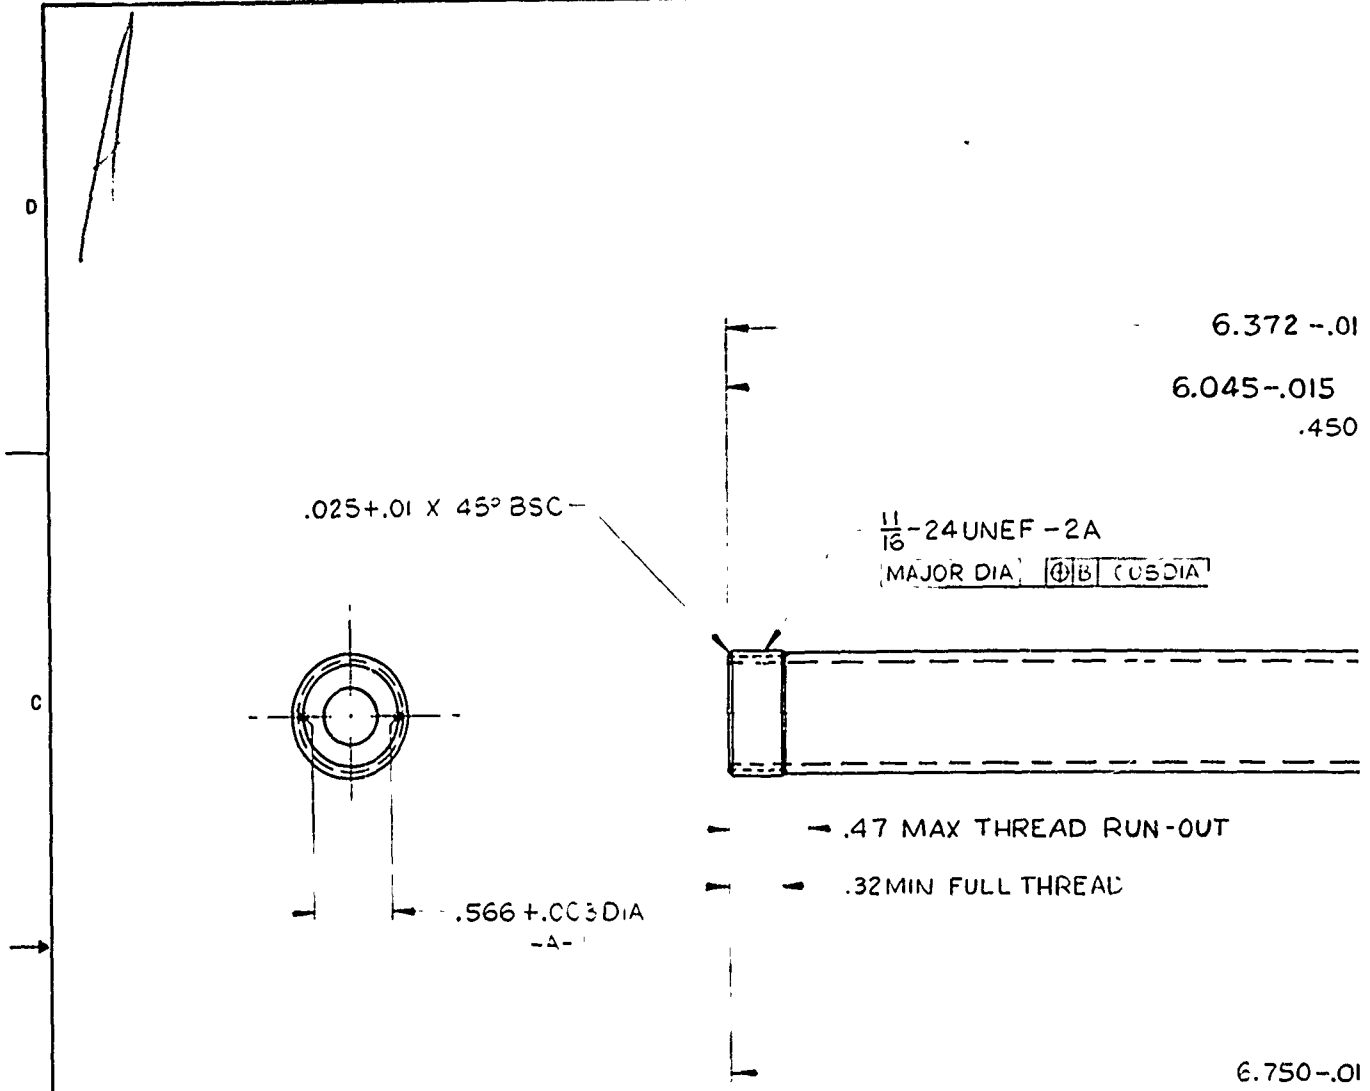

NOTES -

- 1 - SPEC MIL-A-2550 APPLIES.
- 2 - MATERIAL: STEEL, CARBON, HOT-ROLLED, GRADE 1035 SPEC ASTM A576.
- 3 - FINISH 125/ ALL SURFACES.
- 4 - INDICATED RADII AND SURFACES MUST BLEND WITH A SMOOTH CONTOUR.
- 5 - PROTECTIVE FINISH: - FINISH 1.1.2.3 OF MIL-STD-171. COLORED BROWN NO 3011 OR 30140 APPROX. TREAT TO REMOVE EMBRITTLEMENT WITHIN 30 MINUTES AFTER PLATING BY HEATING TO 375 ± 25°F FOR 3 HOURS MIN. PROTECTIVE FINISH-EXTERIOR.
- 6 - MOTOR CHAMBER MUST BE CAPABLE OF WITHSTANDING AN INTERNAL PRESSURE OF 16,000 PSI MIN. APPLIED FOR NOT LESS THAN 2 SECONDS WITHOUT DEFORMATION AND MUST NOT FRACTURE WHEN SUBJECTED TO 18,000 PSI MIN.

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A-H	SEE NOC	5/12/71	wc

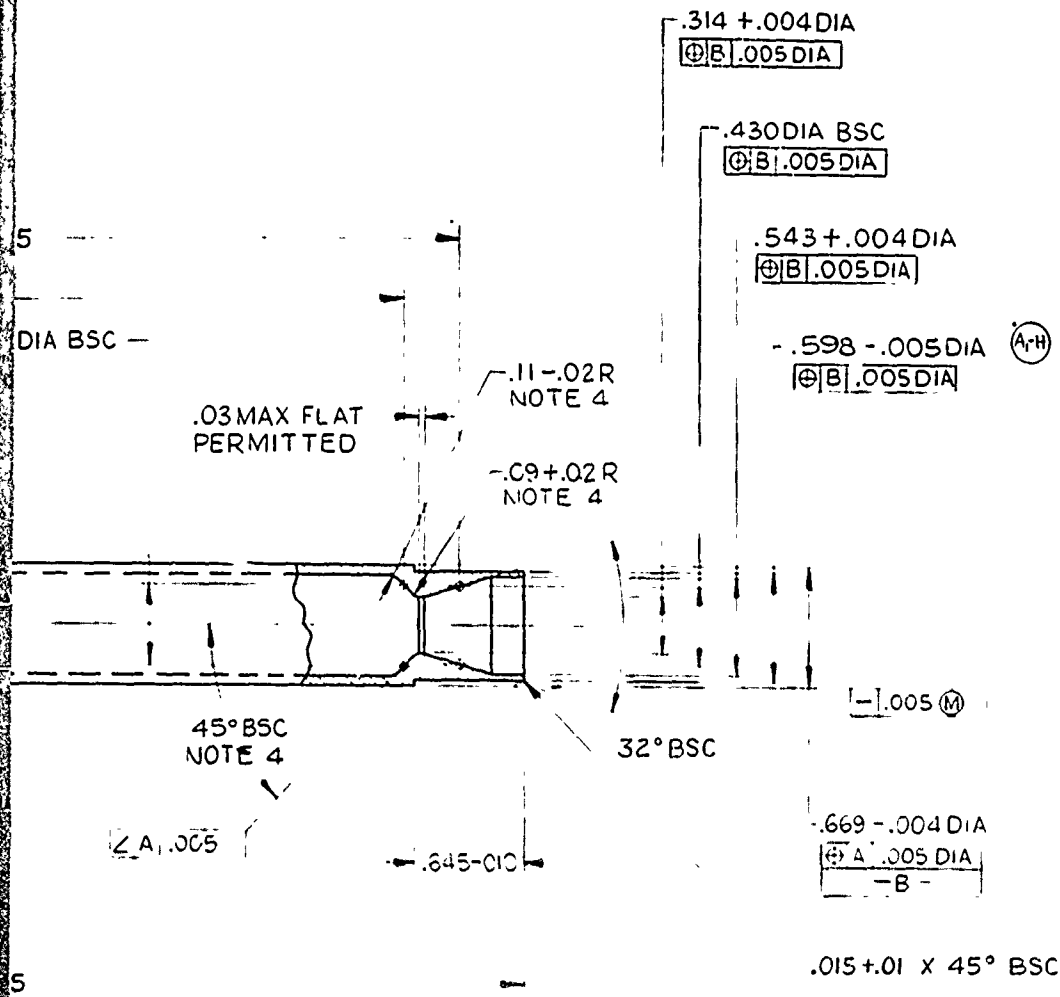

7  
R  
TER  
SURFACE.  $\text{A-H}$   
ON

PART NO. 9256061

		MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINAL DATE OF DRAWING 1 SEPT 1970		PICATINNY ARSENAL DOVER, NEW JERSEY			
		YP	103 700PSI MIN	TOLERANCES ON DECIMALS ±		DRAFTSMAN M A	CHECKER	MOTOR CASE			
		TS		FRACTIONS ± ANGLES ±		ENGR	ENGR				
9256060		EL2		MATERIAL		ENGR	ENGR				
NEXT ASSY		RA		SEE NOTE 2		SUBMITTED		SIZE	CODE IDENT NO		
APPLICATION		BH		HEAT TREATMENT		APPROVED		D	19203	P	9256061
DO NOT APPLY PART NO		RH		FINAL PROTECTIVE FINISH				SCALE 2:1	UNIT WT	SHEET	
				SEE NOTE 5							

1.2 ↑

A

APPENDIX C

MOTOR CASE

TABLE C-I. Mass Production Cost (1,000,000 Units/Yr) for Motor Case (Dwg. 9-47722), One-piece Hot Cup-Cold Draw Process from AISI 1035 Bar Steel

Operation	Description	Material	Labor Hours
1	Saw 1 $\frac{1}{4}$ dia. bar to .935 length @ 400/hr	.04	.0025
2	Tumble Deburr @ 1000/hr		.0010
3	Hot Cup (impact extrude) @ 1000/hr (2 men)		.0020
4	Pickle Phosphate & Soap Coat @ 1000/hr		.0010
5	First Draw (first iron) @ 800/hr		.0013
6	Anneal @ 1000/hr		.0010
7	Pickle Phosphate & Soap Coat @ 1000/hr		.0010
8	Coin @ 1000/hr		.0010
9	Second Draw (final iron) @ 600/hr		.0017
10	Soap Coat @ 1000/hr		.0010
11	Third Draw (first diametral reduction @ 600/hr		.0017
12	Final Draw (final diametral reduction @ 600/hr		.0017
13	Machine Nozzle End @ 200/hr		.0050
14	Machine Mouth End @ 300/hr		.0033
15	Roll Threads @ 500/hr		.0020
16	Stress Relieve @ 1000/hr		.0010
17	Hydrotest (16000 psi) @ 500/hr		.0020
18	Apply Finish @ 500/hr		.0020
19	Inspection (2 men) @ 500/hr		.0040
Total		.04	.0362

SUMMARY

Item	Cost		
	@ \$6/hr	@ \$10/hr	@ \$15/hr
Material (\$.040) + G&A + Profit	\$.048	\$.048	\$.048
Labor (.0362 hour)	\$.217	\$.362	\$.543
Tool Maintenance (probable)	\$.020	\$.020	\$.020
<b>Total Cost Per Unit</b>	<b>\$.285</b>	<b>\$.430</b>	<b>\$.611</b>

APPENDIX C

MOTOR CASE

TABLE C-II. Mass Production Cost (1,000,000 Units/Yr) for Motor Case (Dwg. 9-47751), Two-piece Design from AISI 4140 Leaded Tubing (Requires Separate Nozzle)

Operation	Description	Material	Labor Hours
1	Saw Tubing to length @ 800/hr	.17	.0013
2	Tumble Deburr @ 1000/hr		.0010
3	Apply Lube @ 1000/hr		.0010
4	Partially Close End @ 1000/hr		.0010
5	Heat Treat @ 500/hr		.0020
6	Pickle, Phosphate & Soap Coat @ 1000/hr		.0010
7	Iron 5% Reduction to Straighten @ 600/hr		.0017
8	Machine Aft End @ 300/hr		.0033
9	Machine Fwd End @ 300/hr		.0033
10	Roll Threads @ 500/hr		.0020
11	Stress Relieve @ 1000/hr		.0010
12	Hydrotest (16,000 psi) @ 500/hr		.0020
13	Apply Finish @ 500/hr		.0020
14	Inspection (2 men) @ 500/hr		.0040
Total		.17	.0266

SUMMARY

Item	Cost		
	@ \$6/hr	@ \$10/hr	@ \$15/hr
Material (\$.17) + G&A + Profit	\$.202	\$.202	\$.202
Labor (.0266 hour)	\$.159	\$.266	\$.399
Tool Maintenance (probable)	\$.005	\$.005	\$.005
Cost of Separate Nozzle (probable)	\$.100	\$.100	\$.100
Total Cost Per Unit	\$.466	\$.573	\$.706

APPENDIX C

MOTOR CASE

TABLE C-III. Mass Production Cost (1,000,000 Units/Yr) for Motor Case (Dwg. 9-47737), One-piece Design from Seamless AISI 4140 Leaded Tubing (Swage Form Nozzle)

Operation	Description	Material	Labor Hours
1	Saw Tubing to 7-in. Long Blank @ 800/hr	.17	.0013
2	Tumble Deburr @ 1000/hr		.0010
3	Rotary Swage First Operation @ 250/hr		.0040
4	Rotary Swage Second Operation @ 250/hr		.0040
5	Heat Treat @ 500/hr		.0020
6	Pickle Phosphate & Soap Coat @ 1000/hr		.0010
7	Iron 5% Reduction to Straighten @ 600/hr		.0017
8	Machine Nozzle End @ 300/hr		.0033
9	Machine Mouth End @ 300/hr		.0033
10	Roll Threads @ 500/hr		.0020
11	Stress Relieve @ 1000/hr		.0010
12	Hydrotest (16,000 psi) @ 500/hr		.0020
13	Apply Finish @ 500/hr		.0020
14	Inspection (2 men) @ 500/hr		.0040
Total		.17	.0326

SUMMARY

Item	Cost		
	@ \$6/hr	@ \$10/hr	@ \$15/hr
Material (\$0.17) + G&A + Profit	\$ .202	\$ .202	\$ .202
Labor (.0326 hour)	\$ .196	\$ .326	\$ .489
Tool Maintenance (probable)	\$ .005	\$ .005	\$ .005
Total Cost Per Unit	\$ .403	\$ .533	\$ .696

APPENDIX C

MOTOR CASE

TABLE C-IV. Mass Production Cost (1,000,000 Units/Yr) for Motor Case (Dwg. 9-47754), One-piece Cold Impact Extrusion Design from 7075-T6 Aluminum (Requires Molded-On Fin)

Operation	Description	Material	Labor Hours
1	Saw 1-in. Bar to Length @ 1000/hr	.15	.0010
2	Tumble Deburr @ 1000/hr		.0010
3	Anneal @ 1000/hr		.0010
4	Pickle Phosphate & Soap Coat @ 1000/hr		.0010
5	Cold Impact Extrude @ 1000/hr		.0010
6	Die Trim Flange on Bottom End @ 1000/hr		.0010
7	Heat Treat to T4 Condition @ 1000/hr		.0010
8	Lubricate @ 1000/hr		.0010
9	Iron 5% Reduction to Straighten @ 600/hr		.0017
10	Artificial Age to T6 Condition @ 500/hr		.0020
11	Machine Nozzle End @ 400/hr		.0025
12	Machine Mouth @ 400/hr		.0025
13	Hard Anodize (3 men) @ 500/hr		.0060
14	Hydrotest (16,000 psi) @ 500/hr		.0020
15	Inspection (2 men) @ 500/hr		.0040
Total		.15	.0287

SUMMARY


Item	Cost		
	@ \$6/hr	@ \$10/hr	@ \$15/hr
Material (\$.15) + G&A + Profit	\$.180	\$.180	\$.180
Labor (.0287 hour)	\$.172	\$.287	\$.430
Tool Maintenance (probable)	\$.015	\$.015	\$.015
Total Cost Per Unit	\$.367	\$.482	\$.625



APPENDIX D

DRAWINGS OF IGNITERS

<u>Drawing Number</u>	<u>Title</u>
9-47706	Igniter Motor Assembly
9-47704	Cup, Molded, Igniter
9256058	Igniter - Motor Assembly
9256055	Igniter Cup
9256056	Housing, Primer, Igniter

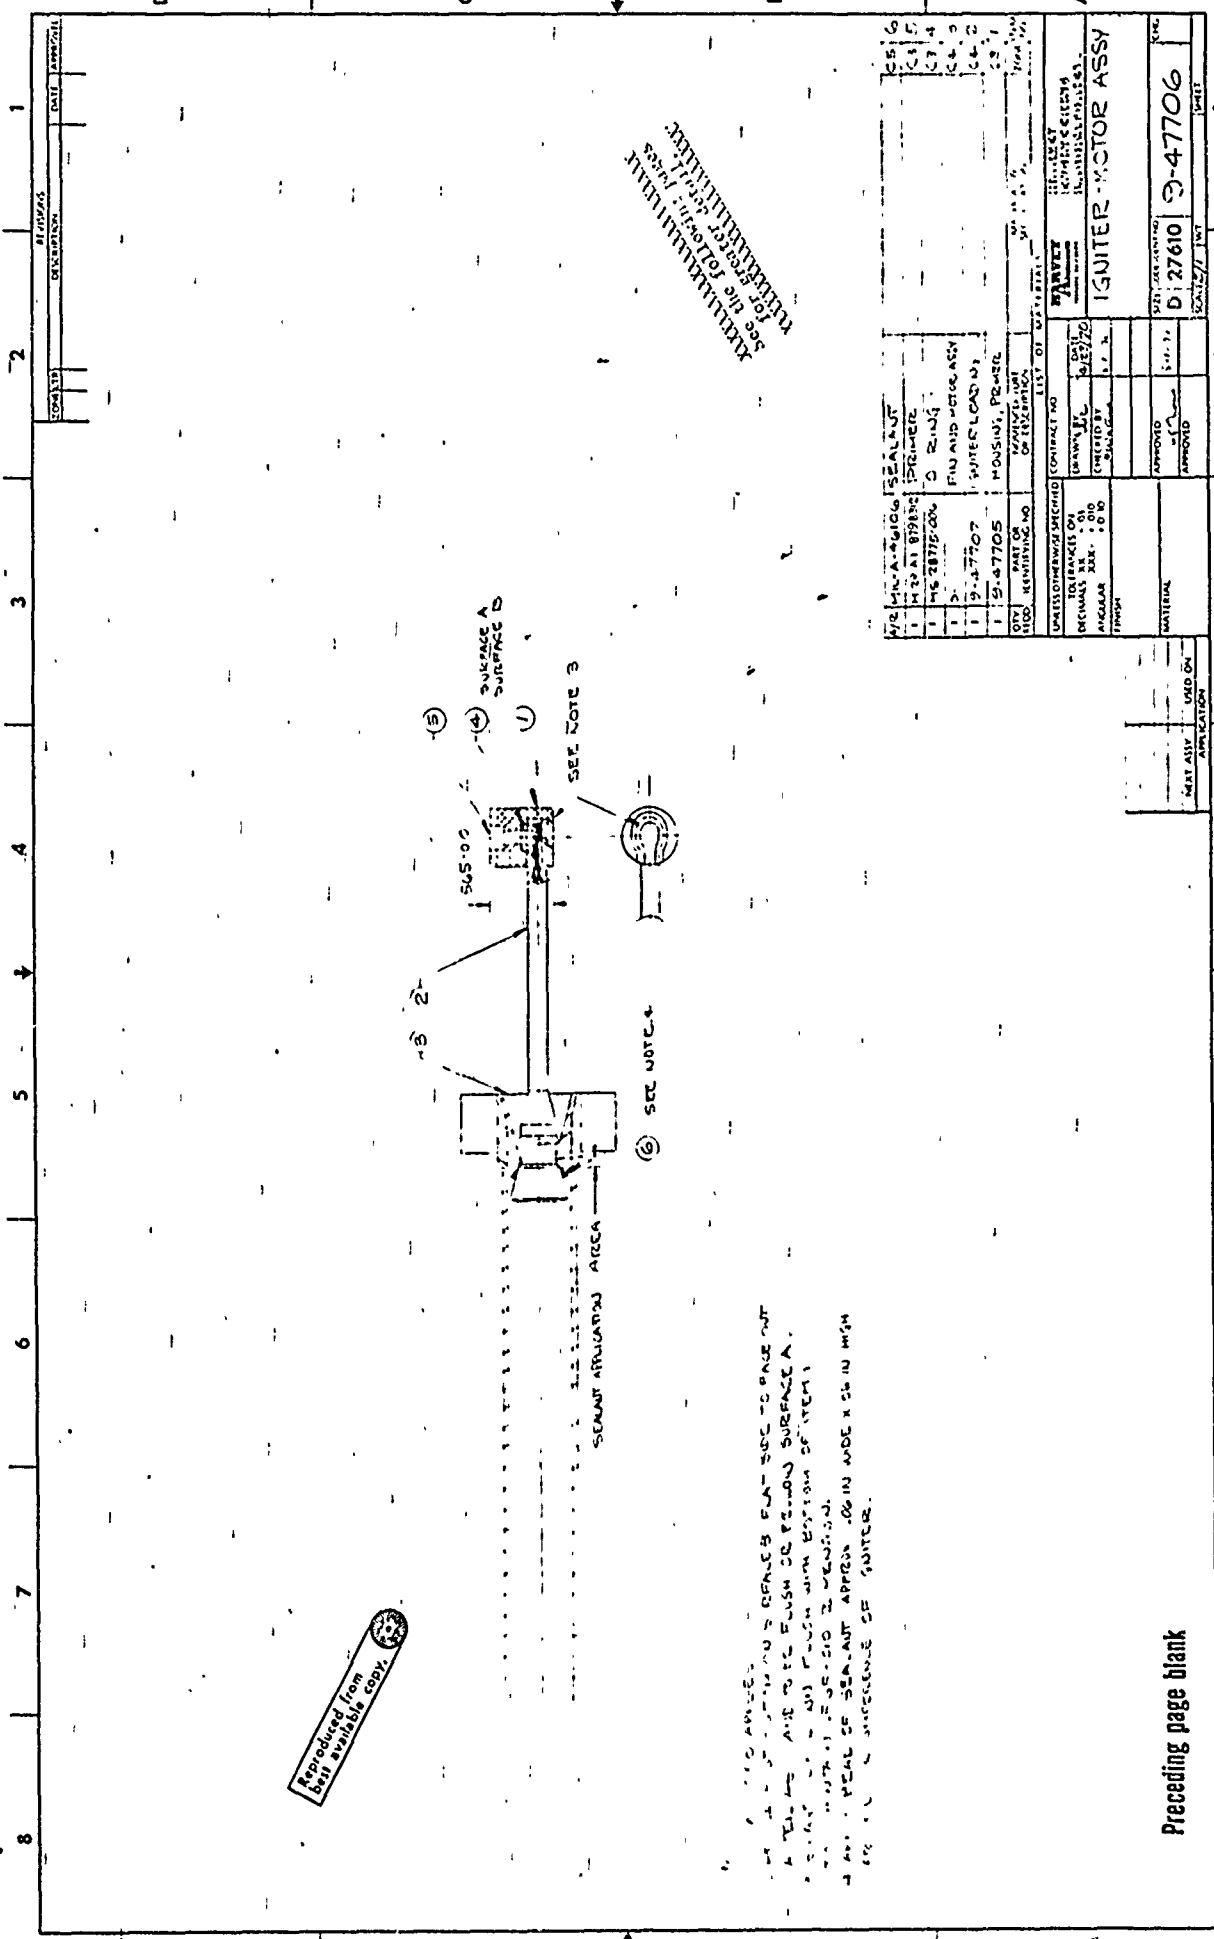

Reproduced from  
Best available copy.

1. TO ANGLES  
2. TO BE FINISHED BY THE BUYER  
3. TO BE FINISHED BY THE BUYER  
4. TO BE FINISHED BY THE BUYER  
5. TO BE FINISHED BY THE BUYER  
6. TO BE FINISHED BY THE BUYER  
7. TO BE FINISHED BY THE BUYER  
8. TO BE FINISHED BY THE BUYER

REPRODUCED FROM  
BEST AVAILABLE COPY

1	1/2 IN. A. 6106 SEALANT	1	1/2 IN. A. 6106 SEALANT	1	1/2 IN. A. 6106 SEALANT
2	1/2 IN. A. 6106 SEALANT	2	1/2 IN. A. 6106 SEALANT	2	1/2 IN. A. 6106 SEALANT
3	1/2 IN. A. 6106 SEALANT	3	1/2 IN. A. 6106 SEALANT	3	1/2 IN. A. 6106 SEALANT
4	1/2 IN. A. 6106 SEALANT	4	1/2 IN. A. 6106 SEALANT	4	1/2 IN. A. 6106 SEALANT
5	1/2 IN. A. 6106 SEALANT	5	1/2 IN. A. 6106 SEALANT	5	1/2 IN. A. 6106 SEALANT
6	1/2 IN. A. 6106 SEALANT	6	1/2 IN. A. 6106 SEALANT	6	1/2 IN. A. 6106 SEALANT
7	1/2 IN. A. 6106 SEALANT	7	1/2 IN. A. 6106 SEALANT	7	1/2 IN. A. 6106 SEALANT
8	1/2 IN. A. 6106 SEALANT	8	1/2 IN. A. 6106 SEALANT	8	1/2 IN. A. 6106 SEALANT

Preceding page blank

139.2

139.1


REPRODUCED FROM  
BEST AVAILABLE COPY

A

D

Reproduced from  
best available copy.

C

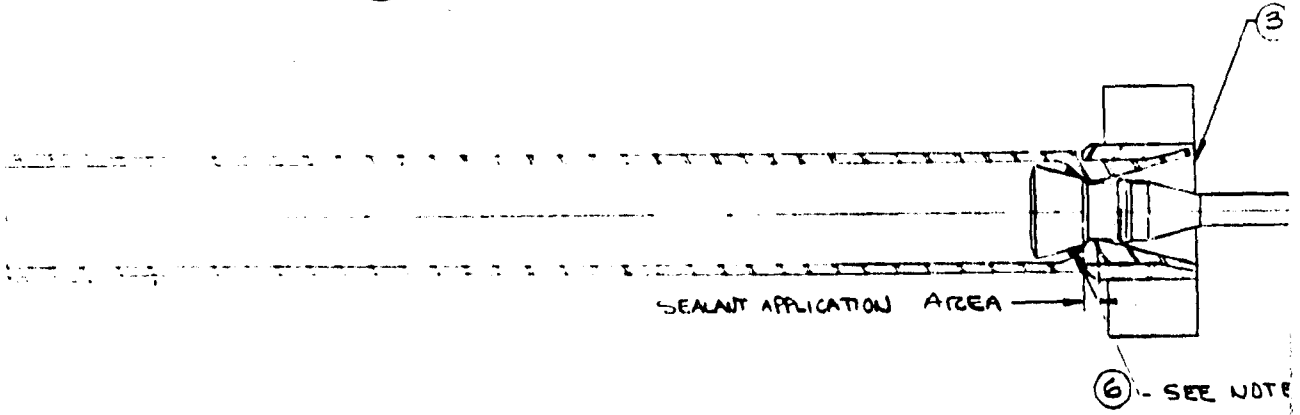

→

⑥ - SEE NOTE

NOTE

- 1. ITEM A 2550 APPLIES
- 2. PRIMER MUST BE APPLIED ON SURFACE B. FLAT SIDE TO FACE OUT AFTER ASSEMBLY AND TO BE FLUSH OR BELOW SURFACE A.
- 3. EDGE LIP DOWN FLUSH WITH BOTTOM OF ITEM 1 TO MAINTAIN .265-.010 DIMENSION.
- 4. APPLY BEAD OF SEALANT APPROX .06 IN. WIDE X .06 IN. HIGH AROUND CIRCUMFERENCE OF IGNITER.

B

Best Available Copy



A

Preceding page blank

4 3 2 1

REVISIONS				
ZONE	TR	DESCRIPTION	DATE	APPROVED

3

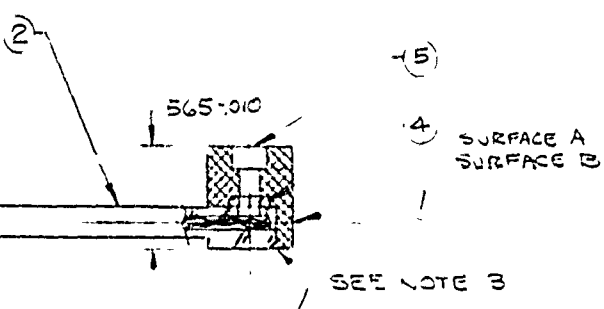

QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL & SPECIFICATION	ZONE	ITEM NO
A/2	MIL-A-46106	SEALANT		C5	6
1	M 29-A1 8798312	PRIMER		C3	5
1	MS 28775-006	O RING		C3	4
1	3-	FIN AND MOTOR ASSY		C4	3
1	3-47707	IGNITER LOADING		C4	2
1	3-47705	HOUSING, PRIMER		C3	1



LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED	CONTRACT NO		<b>HARVEY</b> <b>ENGINEERING</b> <b>LABORATORIES</b>		
TOLERANCES ON	DRAWN BY	DATE	IGNITER-MOTOR ASSY		
DECIMALS XX .03	W.C.	4/23/70			
XXX .010	CHECKED BY	5/1/70	SIZE	CODE IDENT NO	CHG
ANGULAR .030	FINISH		D	27610	3-47706
MATERIAL	APPROVED		SCALE	2/1	WT
NEXT ASSY USED ON APPLICATION	APPROVED		SHEET		

4 3 2 1

139.2

NOTES

- 1 SPEC MIL-A-2850 APPLIES
- 2 MATERIAL - PLASTIC - POLYETHYLENE AND COPOLYMERS HIGH DENSITY MOLDING AND EXTRUSION MATERIAL CLASS A GRADE 2 A OR 2 PER MIL-D-22748
- 3 .075 DIA HOLE MAY GO THROUGH BUT MATERIAL MUST BE LEFT FOR HEAT TREATING AT NEXT OPERATIONS DWG (A47707)

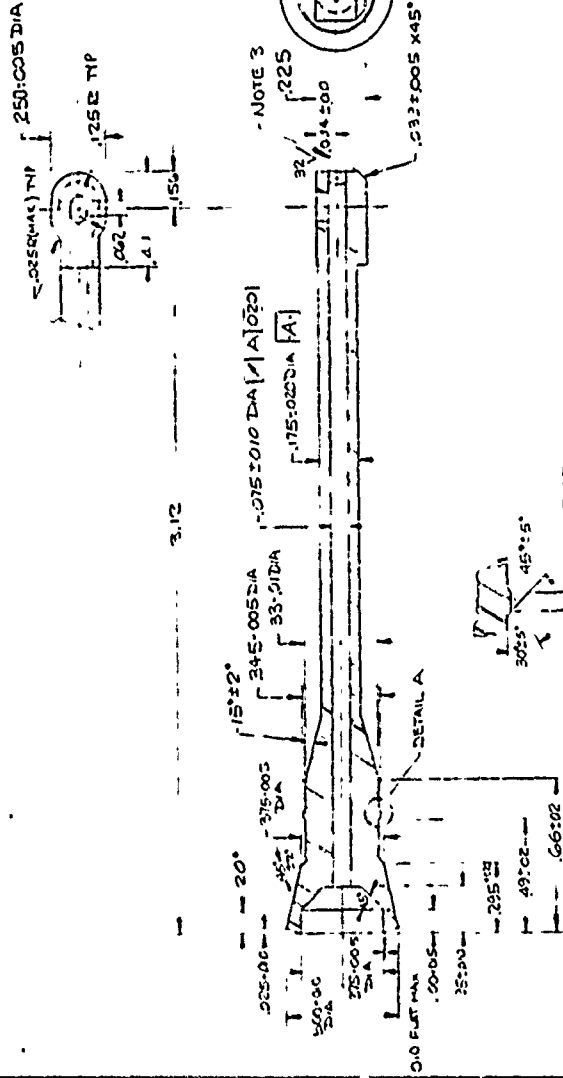

SEE THE FOLLOWING PAGES FOR GREATER DETAIL

Preceding page blank

141.2

141.1

QTY	PART OR IDENTIFICATION NO	SYMBOL	QUANTITY	UNIT
UNLESS OTHERWISE SPECIFIED	CONTRACT TAG	DATE	BY	DATE
DESIGNED BY	CHECKED BY	APPROVED	DATE	DATE
APPROVED	DATE	DATE	DATE	DATE
MATERIAL	APPROVED	DATE	DATE	DATE
MATERIAL		D 27610 3-47704		

3-47707  
REVISION  
APPLICATION

ALUMINA  
ELECTRIC  
SEL 1316  
7-1

NOTES

- 1. SPEC MIL-A-2550 APPLIES
- 2. MATERIAL - PLASTIC POLYETHYLENE AND COPOLYMERS HIGH DENSITY MOLDING AND EXTRUSION MATERIAL CLASS A GRADE 2, 4 OR 6 PER MIL-P-22748
- 3. .075 DIA. HOLE MAY GO THROUGH BUT MATERIAL MUST BE LEFT FOR HEAT SEALING AT NEXT OPERATION (SEE DWG 247707)


A

D

C

B

A

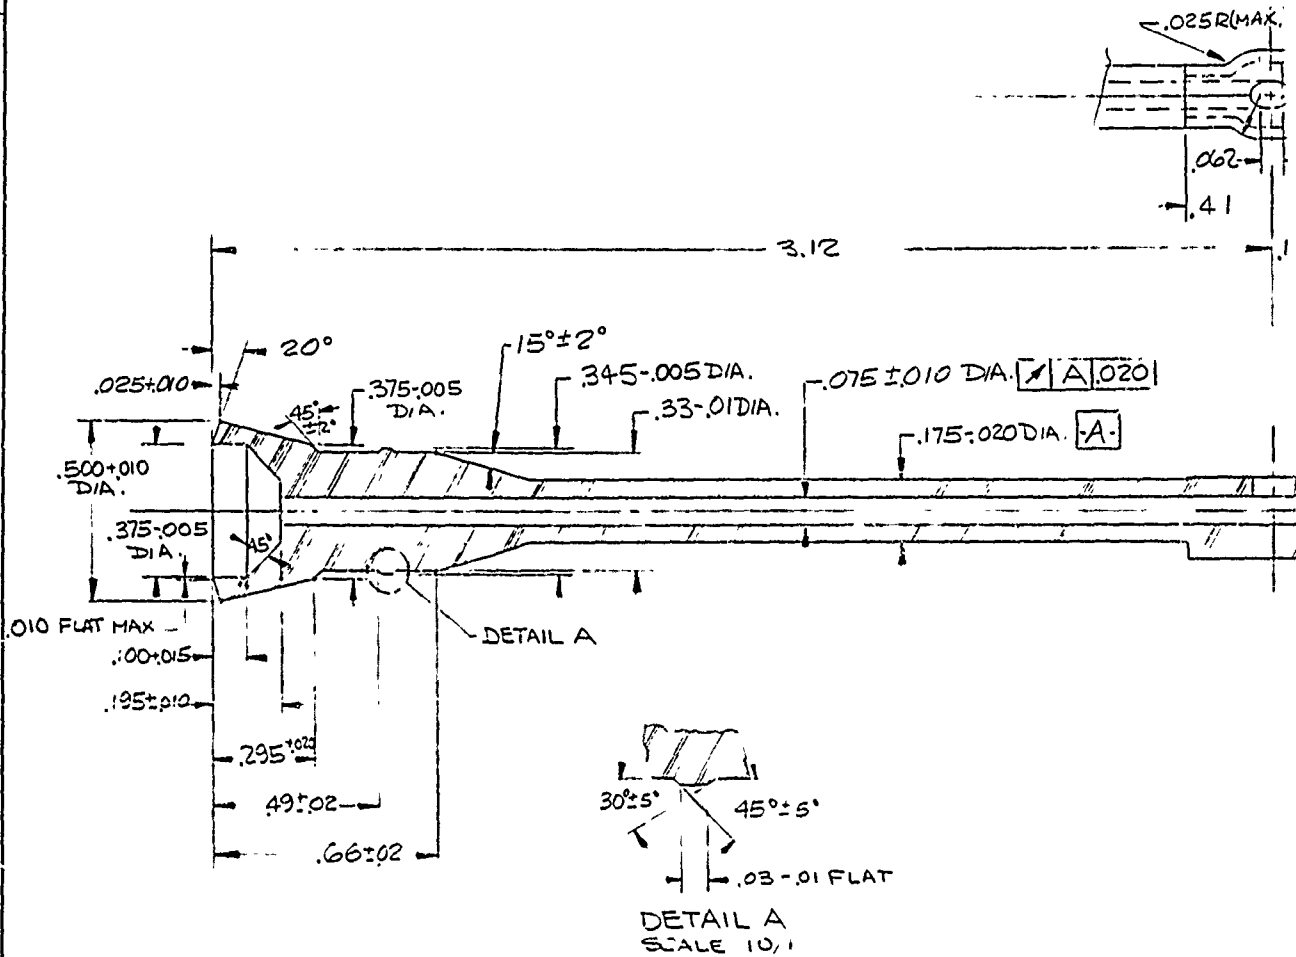

Preceding page blank

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
A		SEE JOC	5/16/70	


R

250:005 DIA.

.125 R TP.



FULL SCALE

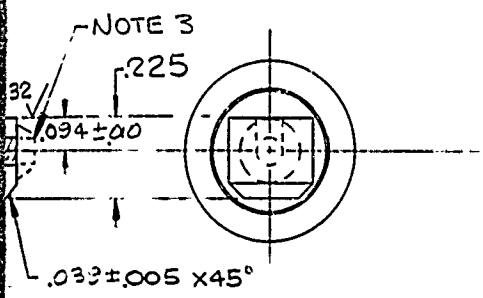

QTY RECD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL & SPECIFICATION	ZONE	ITEM NO
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED:		CONTRACT NO		<b>HARVEY</b> <small>ALUMINUM</small> <b>ENGINEERING LABORATORIES</b>	
TOLERANCES ON		DRAWN BY	DATE		
DECIMALS	XX .03		7-3-72	CUP, M' LDED, NITER,	
ANGULAR	XXX .010	CHECKED BY			
FINISH	.030				
MATERIAL		APPROVED	SIZE	CODE IDENT NO	CHG
(2)			D	27610	9-47704
APPLICATION		APPROVED	SCALE	TWT	ISHEET

9-47707  
NEXT ASSY USED ON

41.2

4

3

2

1


MOTOR CASE ASSEMBLY  
9256060

IGNITER ASSEMBLY  
9256057  
NOTE 4

PRIMER, PERCUSSION,  
M29A1, ASSEMBLY  
8798312  
NOTE 5

ADHESIVE  
NOTES 2, 3 AND 8

SEALER  
NOTES 6, 7 AND 8

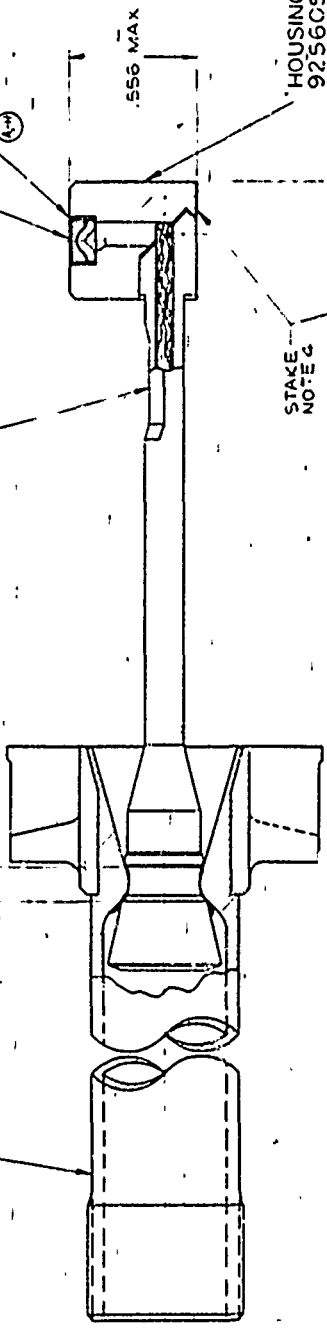

9.06 REF


- NOTES:
- 1-SPEC MIL-A-2550 APPLIES
  - 2-SEALANT BEAD OF ADHESIVE - SEALANT, SILICONE, SEVERAL PURPOSE, COLOR OF CHL, SPEC MIL-A-4000, COMPLETELY AROUND GUNTER, AS SHOWN, NOTES 3 AND 8
  - 3-CURE ADHESIVE - SEALANT AT AN AMBIENT TEMPERATURE OF  $70 \pm 20^\circ\text{F}$  FOR 24 HRS
  - 4-SEALANT BEAD OF ADHESIVE - SEALANT, SILICONE, SEVERAL PURPOSE, COLOR OF CHL, SPEC MIL-A-4000, COMPLETELY AROUND GUNTER, AS SHOWN, NOTES 3 AND 8
  - 5-SEALANT BEAD OF ADHESIVE - SEALANT, SILICONE, SEVERAL PURPOSE, COLOR OF CHL, SPEC MIL-A-4000, COMPLETELY AROUND GUNTER, AS SHOWN, NOTES 3 AND 8
  - 6-SEALANT BEAD OF ADHESIVE - SEALANT, SILICONE, SEVERAL PURPOSE, COLOR OF CHL, SPEC MIL-A-4000, COMPLETELY AROUND GUNTER, AS SHOWN, NOTES 3 AND 8
  - 7-SEALER MATERIAL -  
A-LACER, CELLULOSE NITRATE, TYPE II, SPEC MIL-L-0287  
B-ADHESIVE AND SEALING COMPOUNDS, CELLULOSE NITRATE BASE, TYPE I OR TYPE II, SPEC MIL-A-308  
C-ARVUSH, PHENOL-FORMALDEHYDE, GRADE AOR B, TYPE I, SPEC MIL-V-13750
  - 8-ALL SURFACES TO BE FREE OF FOREIGN MATTER PRIOR TO APPLYING ADHESIVE AND SEALER MATERIAL.

See the following pages for greater detail.

FOR ASSOCIATED PART, SEE - 9256058

MATERIAL PROPERTIES		DATE OF DRAWING	
SYMBOL	DESCRIPTION	DATE	BY
9256057	IGNITER ASSEMBLY	1 SEPT 1973	...
APPLICATION		DESIGNED BY	
...		...	
TREATMENT		CHECKED BY	
...		...	
FINISH		APPROVED BY	
...		...	
PART NO. 9256058		PARTIAL SERIAL DATA FILE	
IGNITER MOTOR ASSEMBLY		...	
D 19203 P 9256058		...	



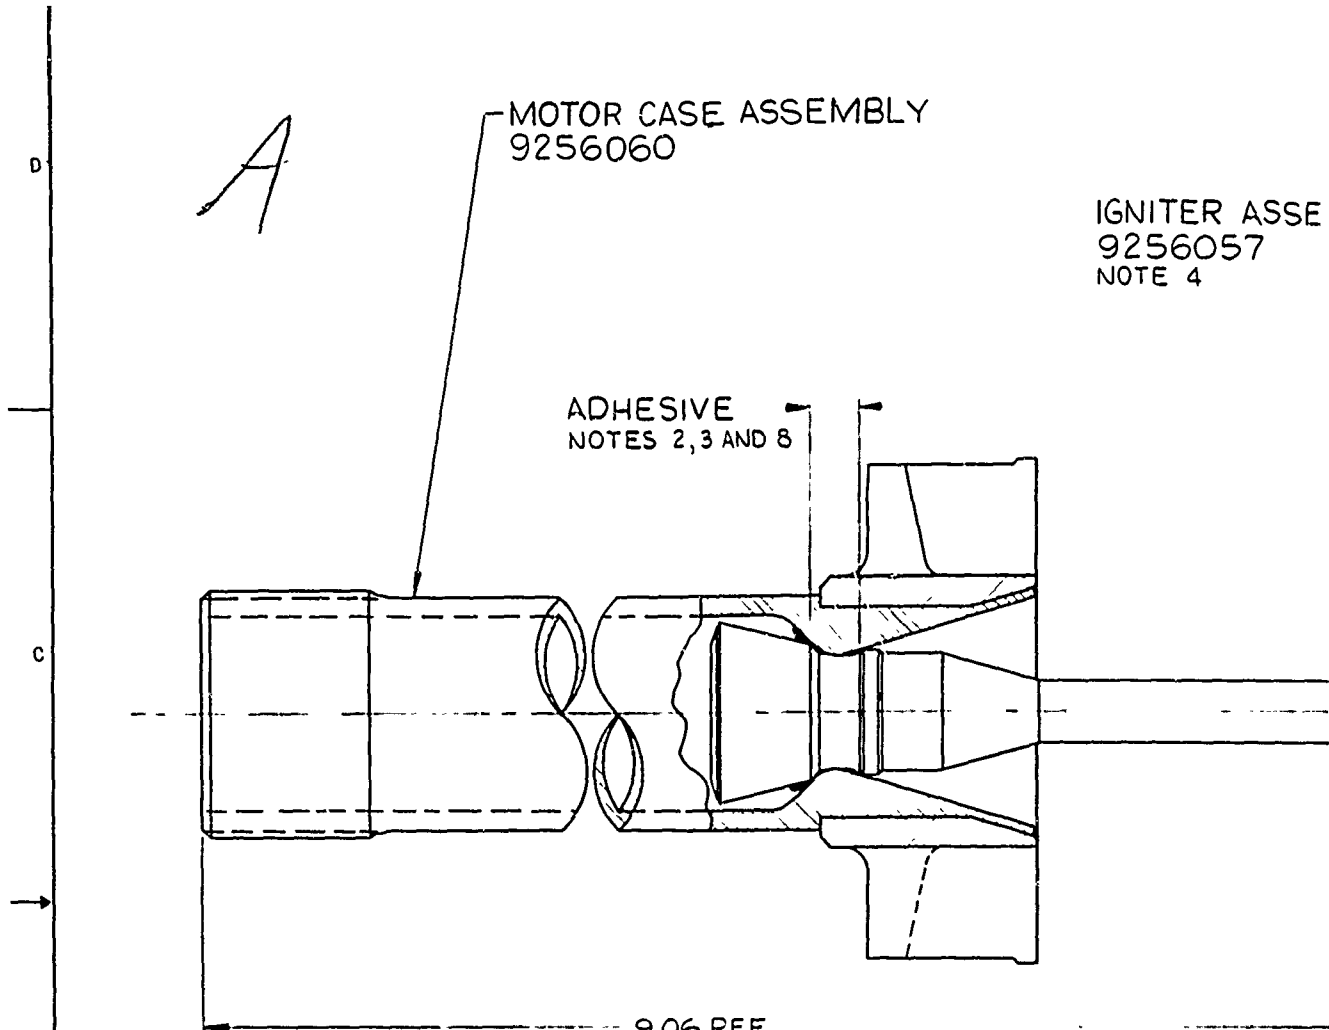


NOTES:-

- 1- SPEC MIL-A-2550 APPLIES.
- 2- SEAL WITH A BEAD OF ADHESIVE - SEALANT, SILICONE GENERAL PURPOSE, COLOR OPTIONAL, SPEC MIL-A-46106, COMPLETELY AROUND IGNITER AS SHOWN. NOTES 3 AND 4.
- 3- CURE ADHESIVE - SEALANT AT AN AMBIENT TEMPERATURE OF 70° ± 20°F FOR 24 HOUR MIN. WITH 20% MIN. RELATIVE HUMIDITY.
- 4- STAKE PRIMER HOUSING OVER IGNITER ASSEMBLY AS SHOWN
- 5- SEAT PRIMER FIRMLY WITH FLAT END FLUSH TO BELOW FLUSH OF PRIMER HOUSING
- 6- SEAL AROUND PRIMER FACE AND HOUSING USING TYPE A, B OR C SEALER MATERIAL (NOTE 7) AFTER SEATING PRIMER IN HOUSING.
- 7- SEALER MATERIAL:-
  - A- LACQUER, CELLULOSE NITRATE, TYPE II, SPEC MIL-L-0287.
  - B- ADHESIVE AND SEALING COMPOUNDS, CELLULOSE NITRATE BASE, TYPE II OR TYPE III, SPEC MIL-A-388.
  - C- VARNISH, PHENOL-FORMALDEHYDE, GRADE A OR B, TYPE I, SPEC MIL-V-13750.
- 8- ALL SURFACES TO BE FREE OF FOREIGN MATTER PRIOR TO APPLYING ADHESIVE AND SEALER MATERIAL.

ACK 1960-6-R  
1 MAY 61

REVISIONS			
SIM	DESCRIPTION	DATE	APPROVAL
A-H	SEE NOC	12/3/7	XX

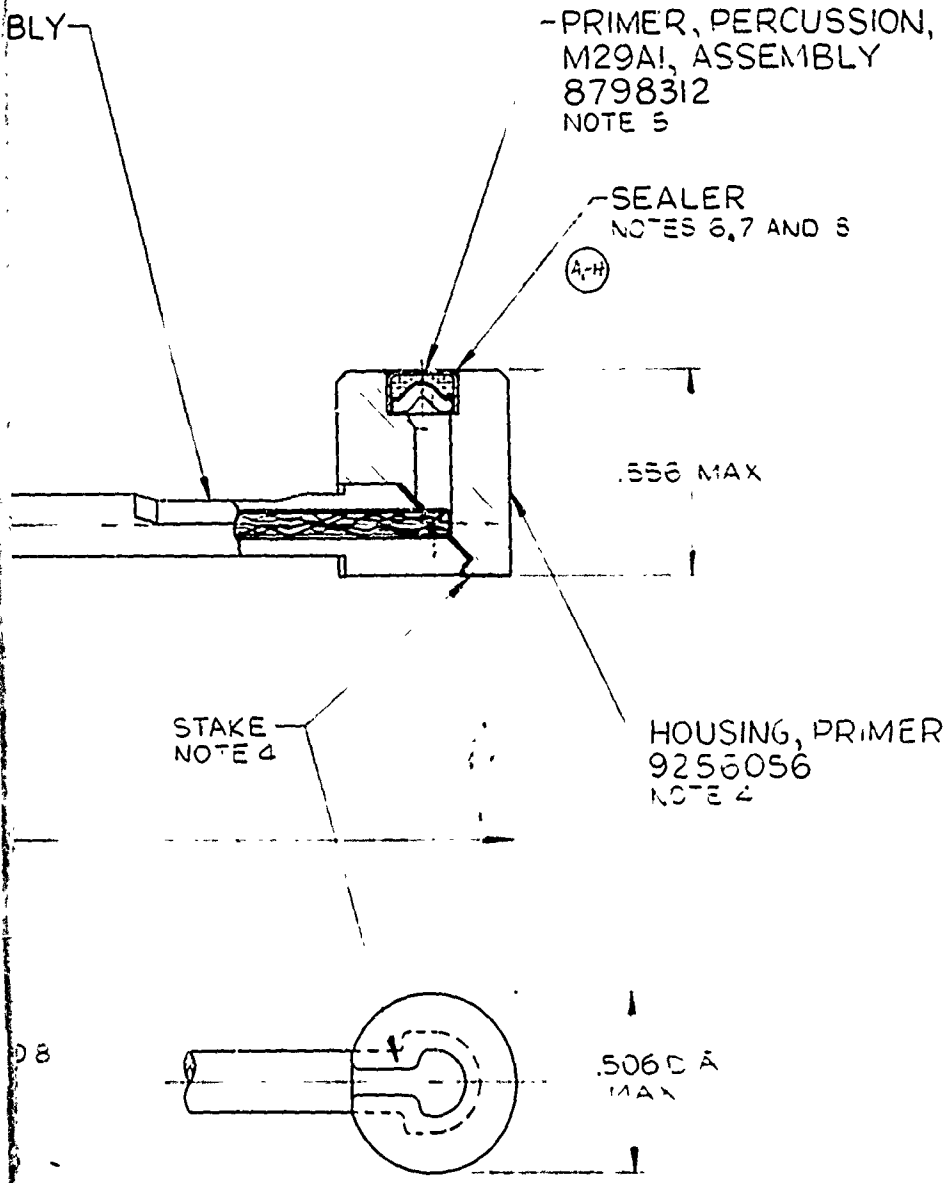


FOR ASSOCIATED LIST, SEE - 9256058

PART NO. 9256058

		MECHANICAL PROPERTIES		TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DATE OF DRAWING 1 SEPT 970		PICAT NNY ARSENAL DOVER NEW JERSEY			
		YP		TOLERANCES ON GEOMETRIC		MAN	CHECKER	IGN TER-MOTOR ASSEMBLY			
		YS		FORMING & ANGLES	MA	ENGR					
9256070	RKT, M73	EL2		MATERIAL		EN	ENGR	SIZE		D 19203 F 9256058	
NEXT ASSY	USED ON	RA		HEAT TREATMENT		APPROVED		SCALE		AS SHOWN	
APPLICATION		BH		FINAL PROTECTIVE FINISH		APPROVAL		SHEET		1	
DO NOT	APPLY PART NO	RH									




A

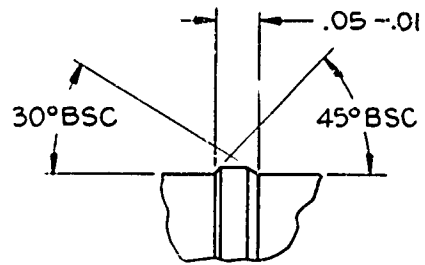

.12-.04

DETAIL "A"  
SCALE 10/1

SEC

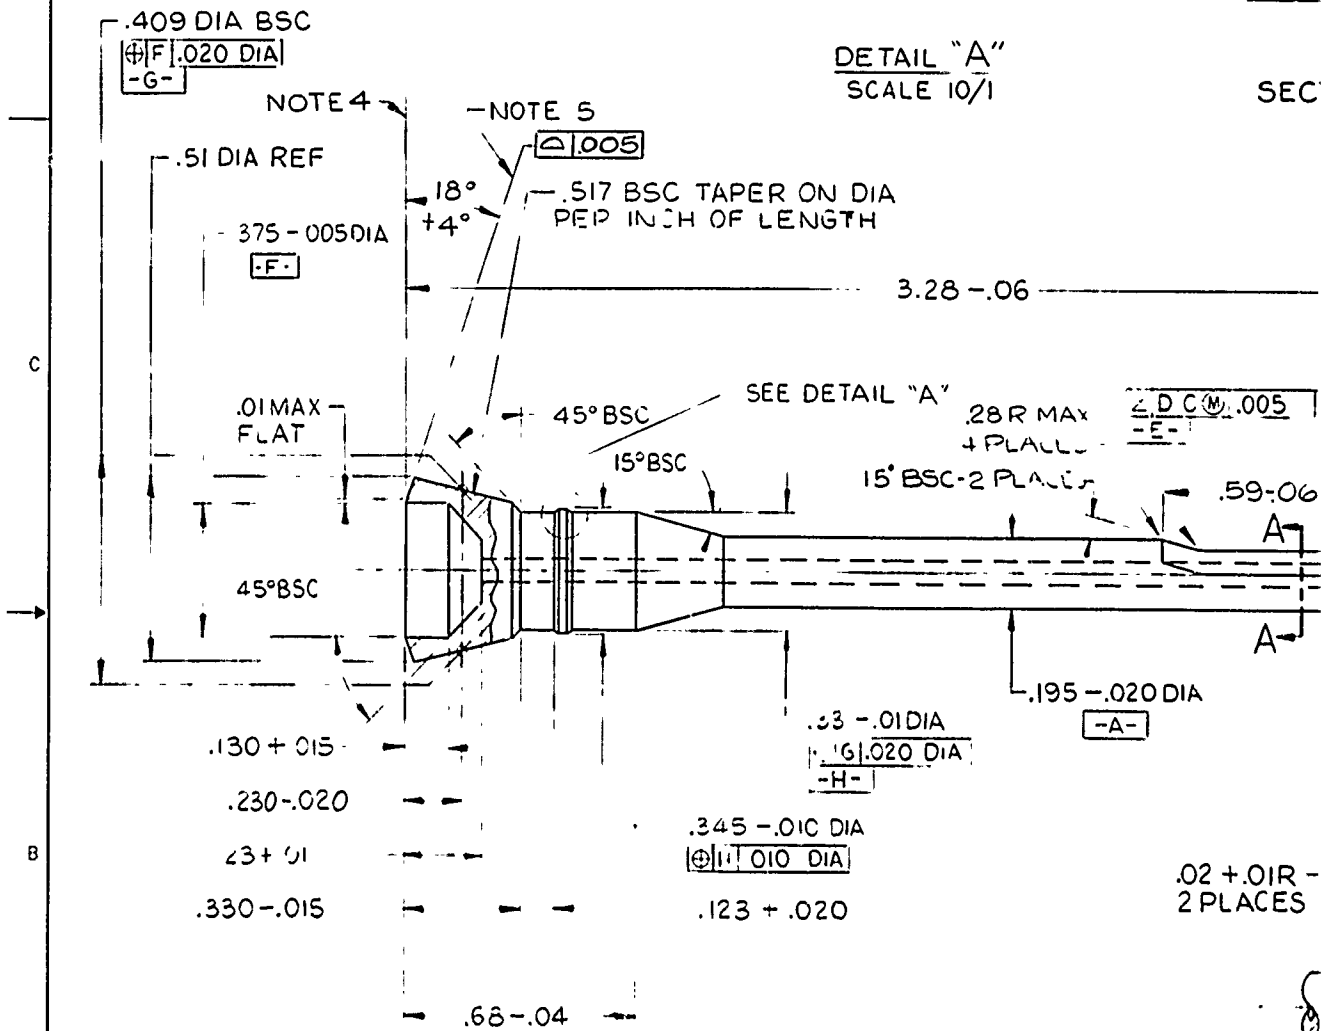


NOTES:-


- 1-SPEC MIL-A-2550 APPLIES
- 2-MATERIAL:- PLASTIC, ALATHON 7320, DWG 9256084
- 3-FINISH 125/ ALL SURFACES EXCEPT AS NOTED.
- 4-MOLD FLASHING .01 HIGH X .01 WIDE PERMITTED.  
FOR ENTIRE LENGTH OF PART ON SURFACES INDICATED.
- 5-SURFACE INDICATED TO BE FREE OF FLASHING OR SURFACE  
DEFECTS DEEPER THAN .003

.03 ± .01  
AROUND  
ENTIRE  
PROFILE

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL

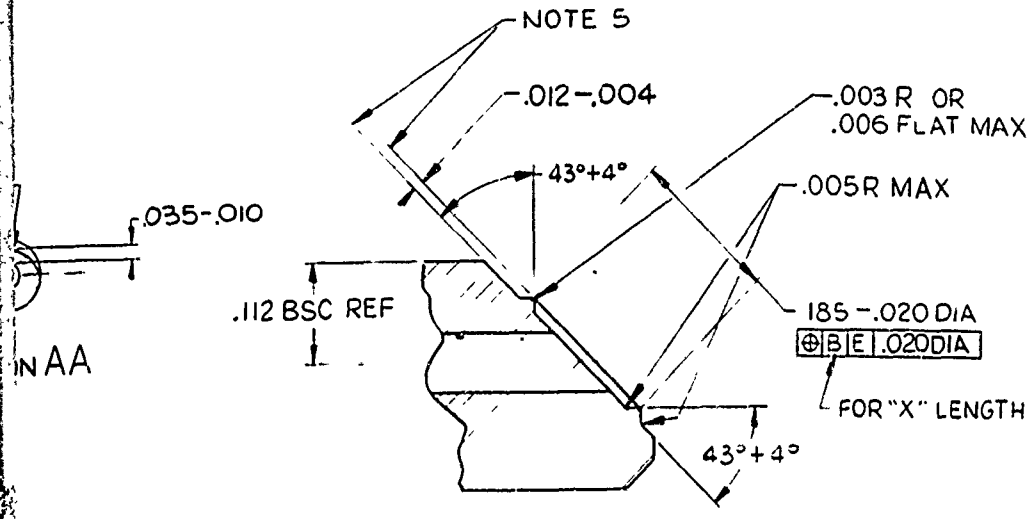


DETAIL "B"  
SCALE 10/1

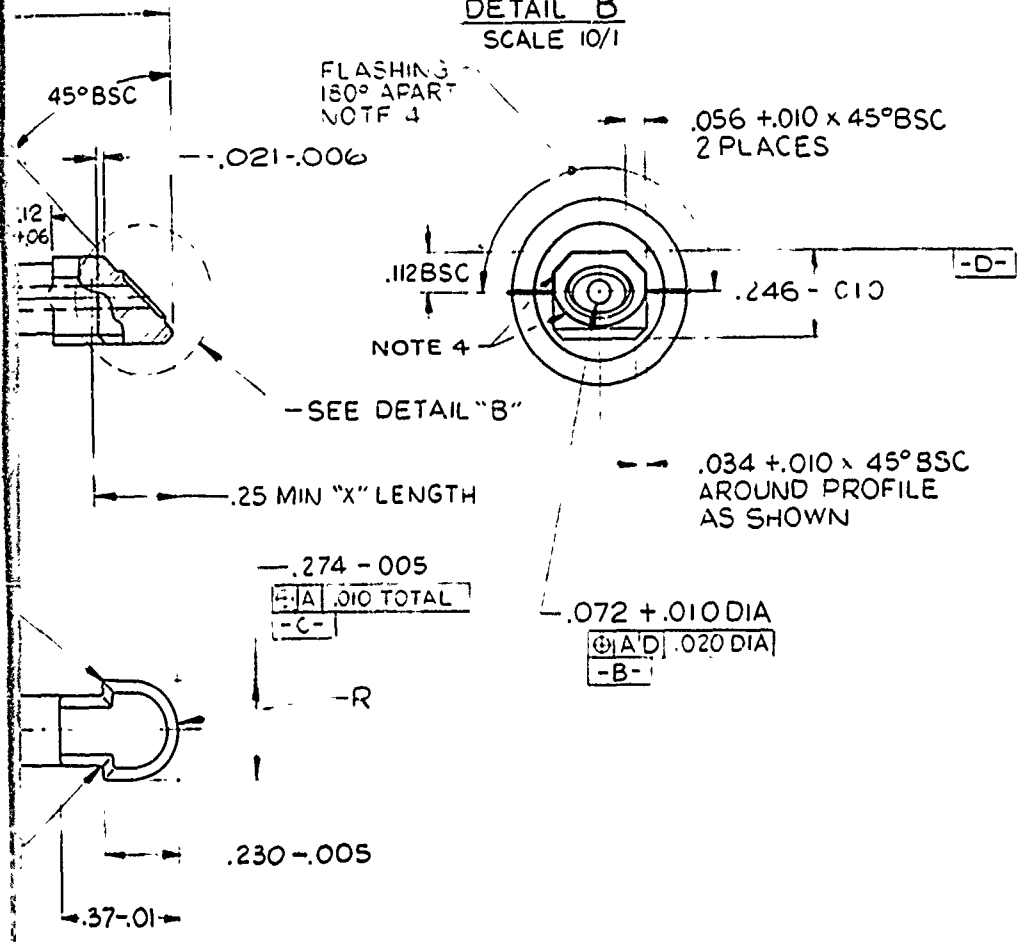

PART NO. 9256055

MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINAL DATE OF DRAWING 1 SEPT 1970		PICATINNY ARSENAL DOVER, NEW JERSEY	
YP		TOLERANCES ON DECIMALS ±		DRAFTSMAN HA	CHECKER	IGNITER CUP	
TS		FRACTIONS ± ANGLES ±		ENGR WJ	ENGR E		
EL2		MATERIAL SEE NOTE 2		ENGR	ENGR		
RA		HEAT TREATMENT		SUBMITTED		SIZE	CODE IDENT NO.
BH		FINAL PROTECTIVE FINISH		APPROVED		D	19203 P
RH						9256055	
DO NOT APPLY PART NO						SCALE 4/1	UNIT WT
AS-SPECIFIED						SHEET	

145.2

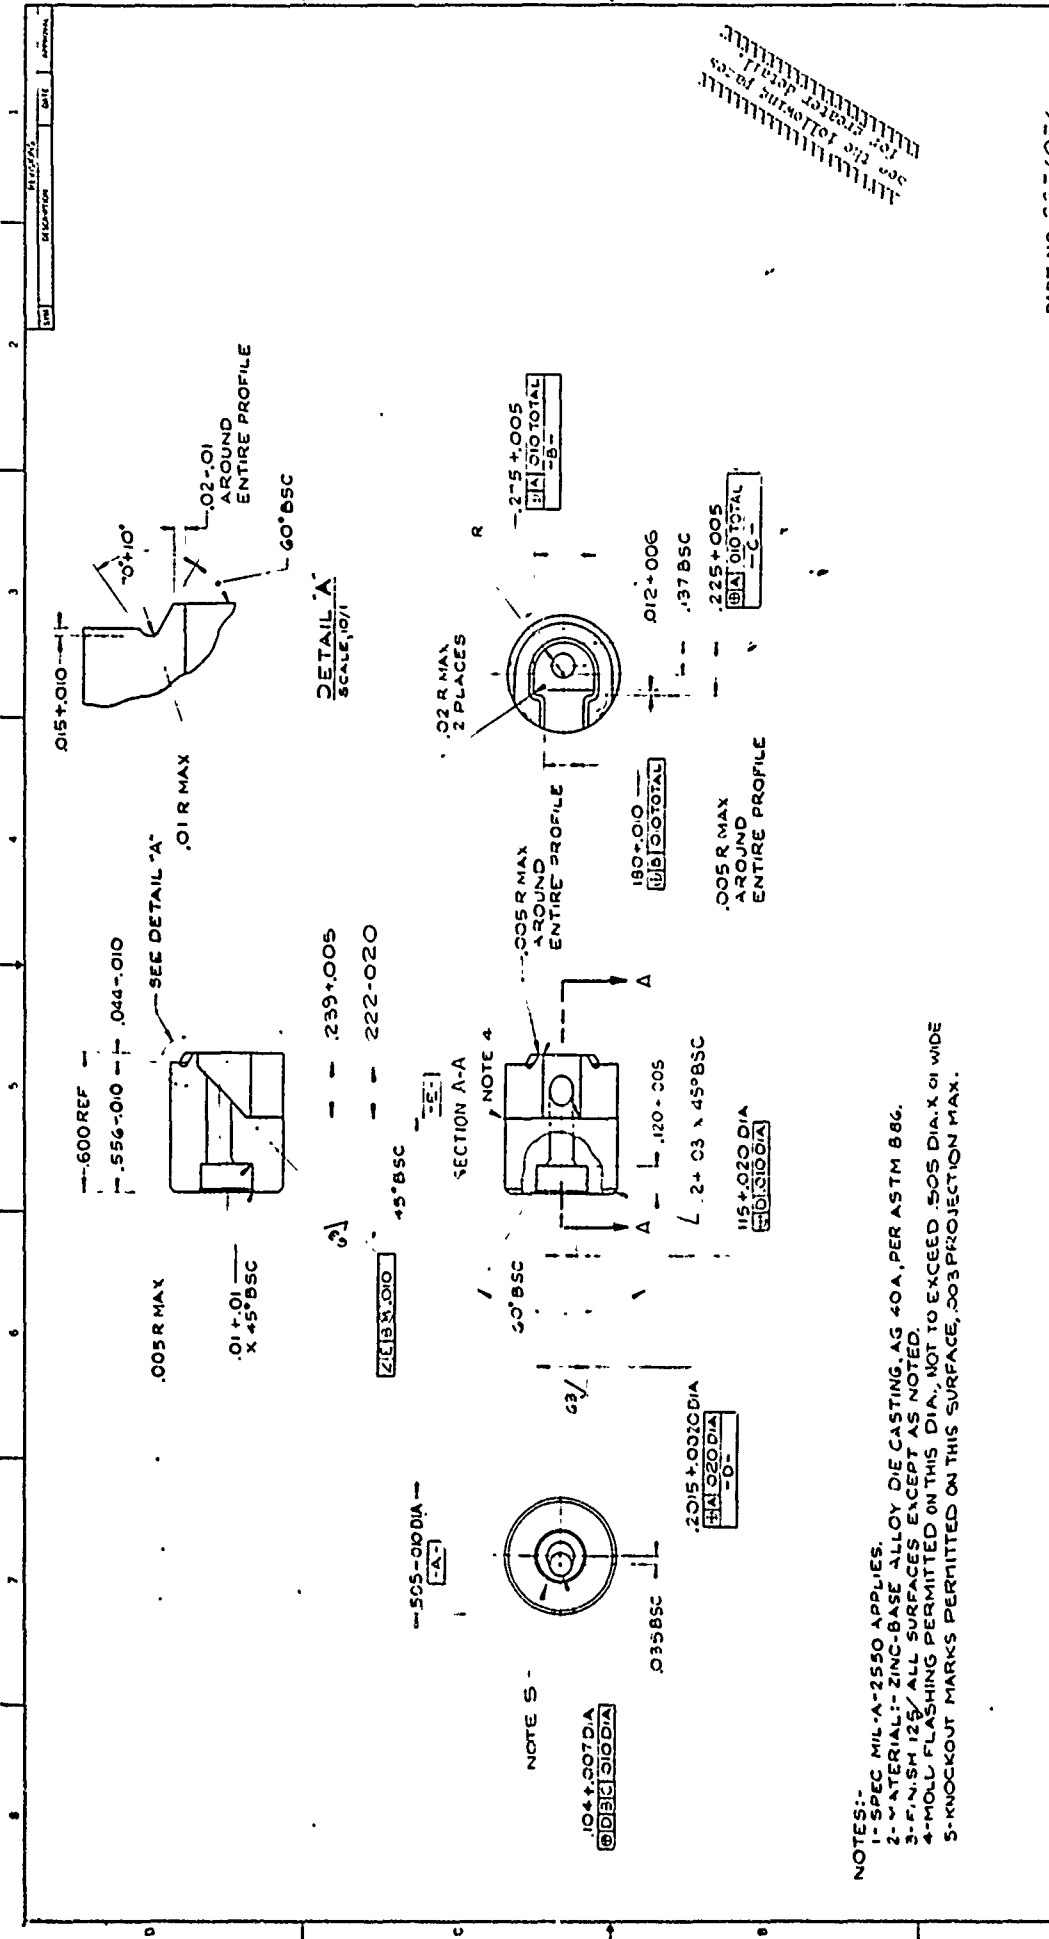

ALL DIMENSIONS ARE IN INCHES  
 UNLESS OTHERWISE SPECIFIED  
 SEE THE FOLLOWING FOR  
 THE TOLERANCE SYSTEM

- NOTES:-
- 1- SPEC MIL-A-2550 APPLIES.
  - 2- MATERIAL:- ZINC-BASE ALLOY DIE CASTING, AS 40A, PER ASTM 886.
  - 3- FINISH 125; ALL SURFACES EXCEPT AS NOTED.
  - 4- MOLD FLASHING PERMITTED ON THIS DIA., NOT TO EXCEED .505 DIA. X .01 WIDE
  - 5- KNOCKOUT MARKS PERMITTED ON THIS SURFACE, .003 PROJECTION MAX.

PART NO. 256056

FRONTIER AIRMAIL CORP, NEW JERSEY


-OJUNG, PRIMER IGNITER

DATE	BY	APP'D
19203 P	9256056	

REVISION	DESCRIPTION	DATE
1	ISSUED	1 SEPT 1970
2	REVISED	
3	REVISED	
4	REVISED	
5	REVISED	
6	REVISED	
7	REVISED	
8	REVISED	
9	REVISED	
10	REVISED	


APPROVED: [Signature]

DATE: 147.2

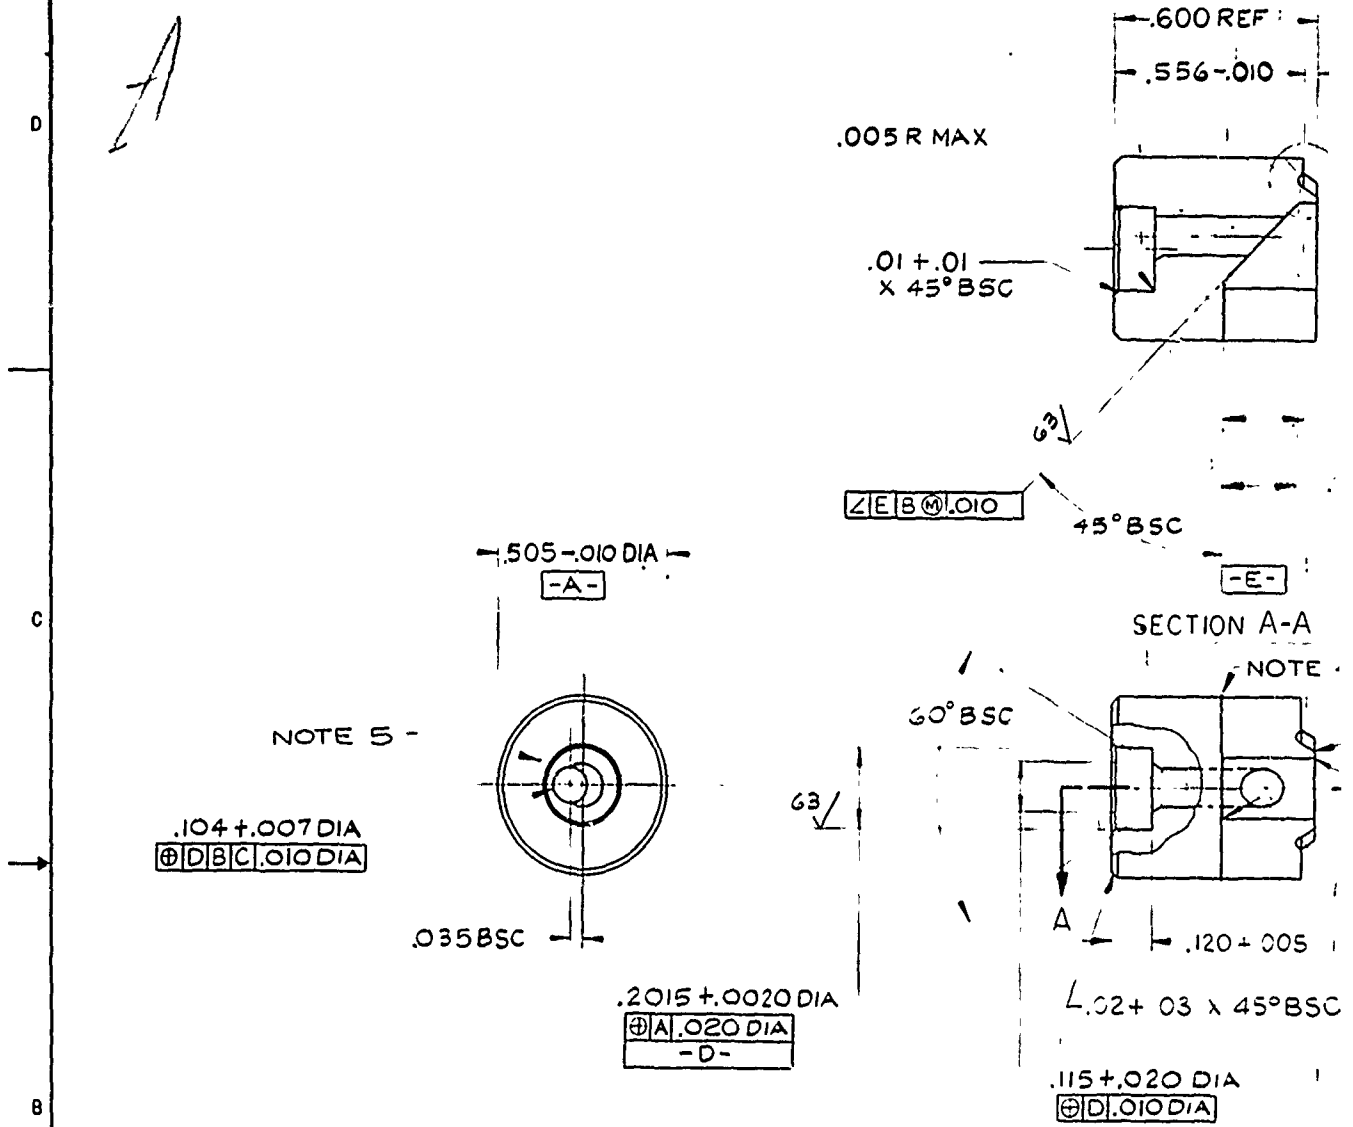

- NOTES:-
- 1- SPEC MIL-A-2550 APPLIES.
  - 2- MATERIAL:- ZINC-BASE ALLOY DIE CASTING, AG 40A, PER ASTM B86.
  - 3- FINISH 125/ ALL SURFACES EXCEPT AS NOTED.
  - 4- MOLD FLASHING PERMITTED ON THIS DIA., NOT TO EXCEED .505 DIA. X .01 WID.
  - 5- KNOCKOUT MARKS PERMITTED ON THIS SURFACE, .003 PROJECTION MAX.


REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL

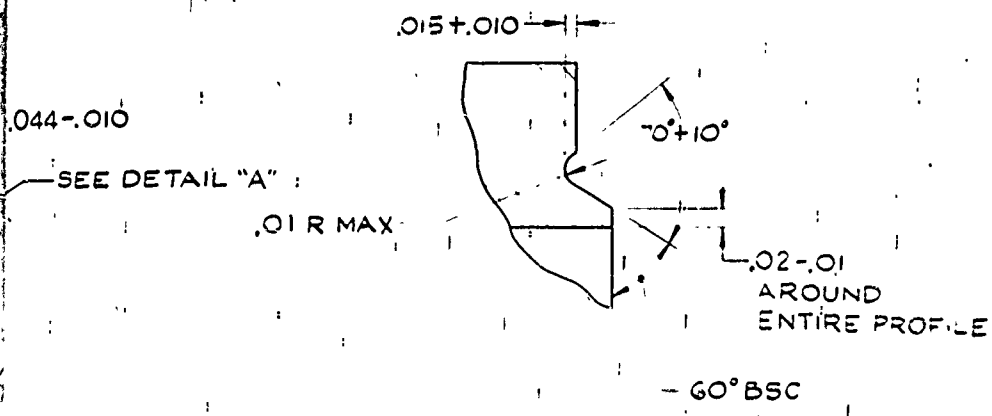

.39+.005

.22r.020

DETAIL "A"  
SCALE 10/1

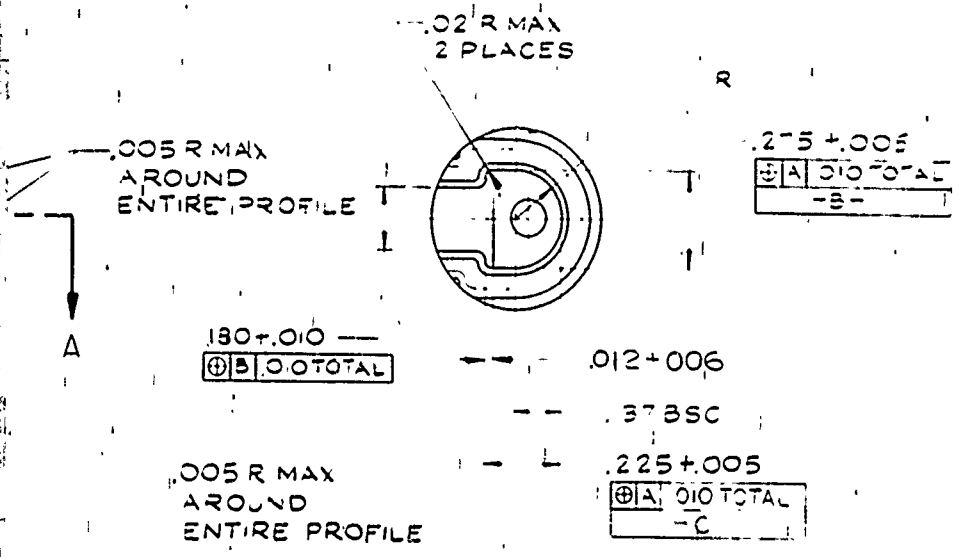

PART NO 9256056

MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINAL DATE OF DRAWING SEPT 1970		PICATINNY ARSENAL DOVLR, NEW JERSEY	
YP		TOLERANCES ON DECIMALS ±		DRAFTSMAN H A	CHECKER	-OUS NG, PR MER IGNITER	
TS		FRACTIONS ± ANGLES ±		ENGR J G	ENGR		
EL2	9256058 RKT, M73	MATERIAL SEE NOTE 2		ENGR	ENGR	SIZE CODE IDENT NO	
RA	NEXT ASSY USED ON	HEAT TREATMENT		SUBMITTED		D	19203
BH	APPLICATION	FINAL PROTECTIVE FINISH		APPROVED		0	9256056
RH	DO NOT APPLY PART NO						
	REPROVED						



APPENDIX E  
DRAWINGS AND SPECIFICATIONS

Drawing 9256070      Rocket, Practice, 35mm Subcaliber M73

Indented List of Rocket Drawings and Specifications

Drawing 9256079 Sheet 1      Launcher, Rocket M190  
                                         Sheet 2

Indented List of Drawings for Conversion Kit for M190 Launcher  
and Specification

List of Inspection Drawings


IGNITER-MOTOR ASSEMBLY  
9256058

HEAD AND CLOSURE ASSEMBLY, HE:  
9256063

PLATE, STUD AND PROPELLANT  
ASSEMBLY 10242693

789-020DIA REF  
-A-

1391-020DIA REF  
-A-

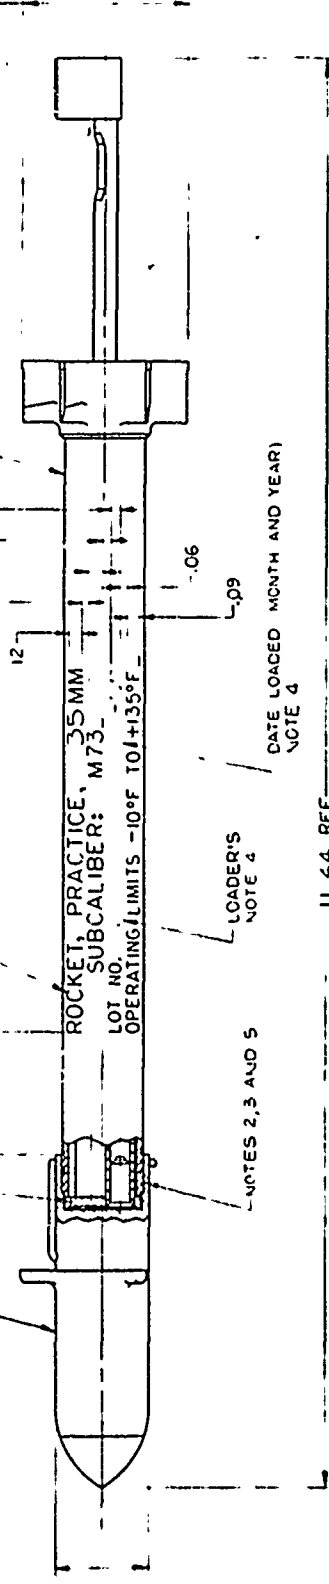

NOTES 2, 3 AND 5

LOADER'S  
NOTE 4

DATE LOADED MONTH AND YEAR  
NOTE 4

11.44 REF

- NOTES -
- 1 SPEC MIL-A-2550 AND MIL-R-50558 APPLY
  - 2 APPLY SEALANT MIL-S 22473, GRADE A TO THREADS (NOTES AND 5)
  - 3 ASSEMBLE ITEM 9256063 TO ITEM 9256058 USING APPROX 150 INCH POUNDS OF TORQUE
  - 4 ALL 1.75 INCH DIA INDICATED AREA BY STENCIL OR RUBBER STAMP, 30 MIC CAPITAL LETTERS, USING STENCIL INK, WHITE NO. 37875, SPEC TT-1-556. (NOTE 5)
  - 5 THREADS AND MARKING AREA TO BE FREE OF FOREIGN MATTER PRIOR TO BONDING AND MARKING.
  - 6 UN-CLEARANCED DIMENSIONS NEED NOT BE GAGED

FOR THE USE OF THE  
MILITARY

FOR ASSOCIATED LIST, SEE-9256070

PART NO 9256070

REVISIONS	DATE	BY	APP'D
1	SEP 1970		
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			
51			
52			
53			
54			
55			
56			
57			
58			
59			
60			
61			
62			
63			
64			
65			
66			
67			
68			
69			
70			
71			
72			
73			
74			
75			
76			
77			
78			
79			
80			
81			
82			
83			
84			
85			
86			
87			
88			
89			
90			
91			
92			
93			
94			
95			
96			
97			
98			
99			
100			

ROCKET, HE


D 19203 P 9256070

Preceding page blank

151/1

151/2

A

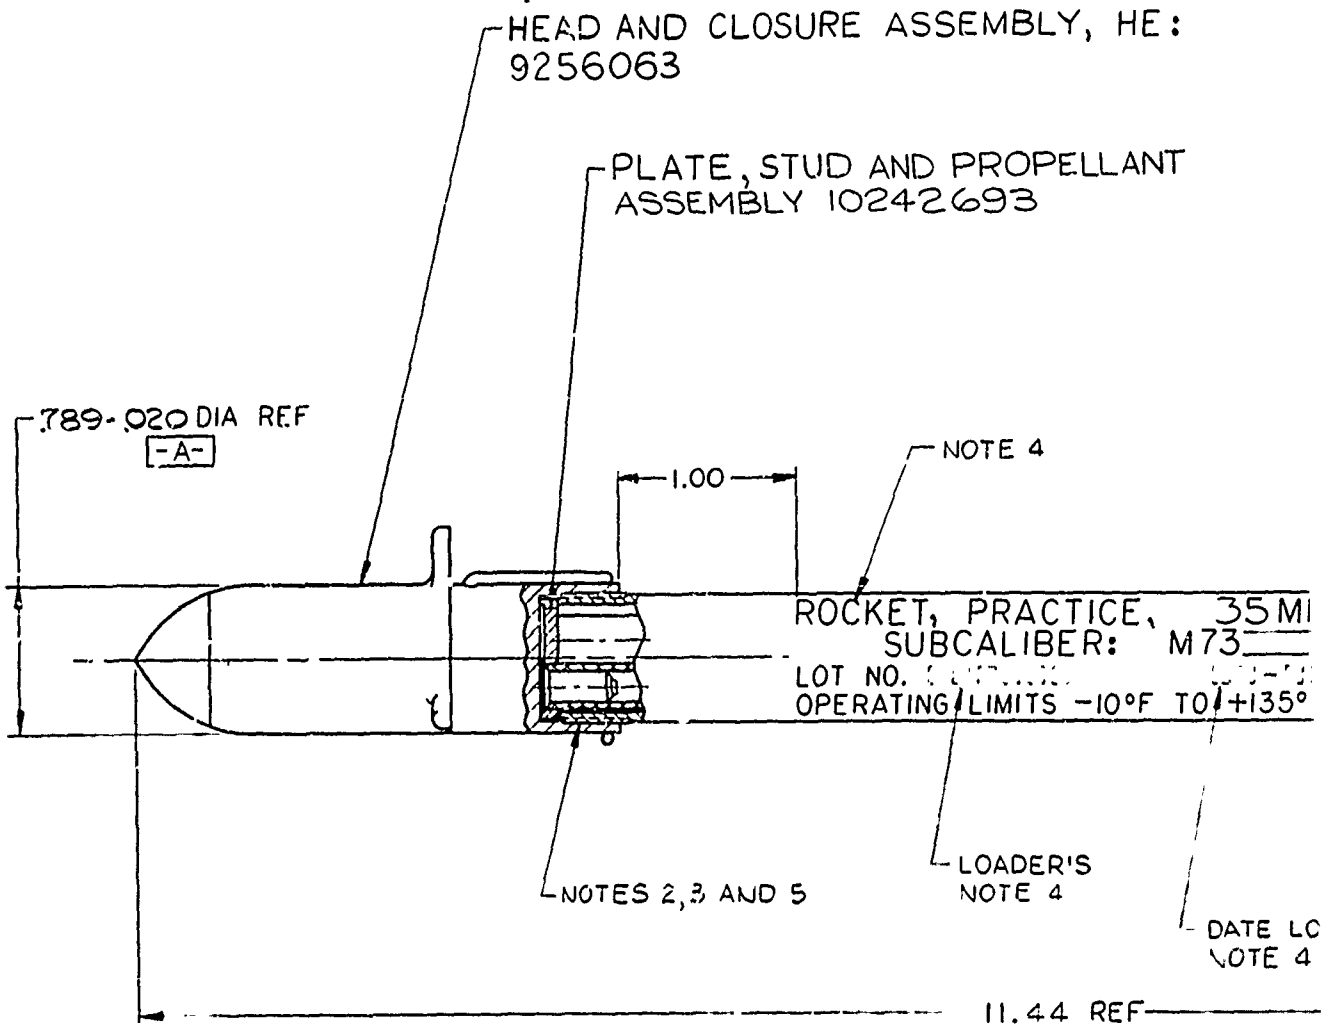

## NOTES:-

- 1- SPEC MIL-A-2550 AND MIL-R-50858 APPLY
- 2- APPLY SEALANT MIL-S-22473, GRADE AV TO THREADS. (NOTES AND 5)
- 3- ASSEMBLE ITEM 9256063 TO ITEM 9256058 USING APPROX 150 INCH POUNDS OF TORQUE.
- 4- APPLY MARKING TO INDICATED AREA BY STENCIL OR RUBBER STAMP, GOTHIC CAPITAL LETTERS, USING STENCIL INK, WHITE NO. 37875, SPEC TT-I-558. (NOTE 5)
- 5- THREADS AND MARKING AREA TO BE FREE OF FOREIGN MATTER PRIOR TO BONDING AND MARKING.
- 6- UNTOLERANCED DIMENSIONS NEED NOT BE GAGED.

4

3


2

1

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL

IGNITER-MOTOR ASSEMBLY  
9256058

B

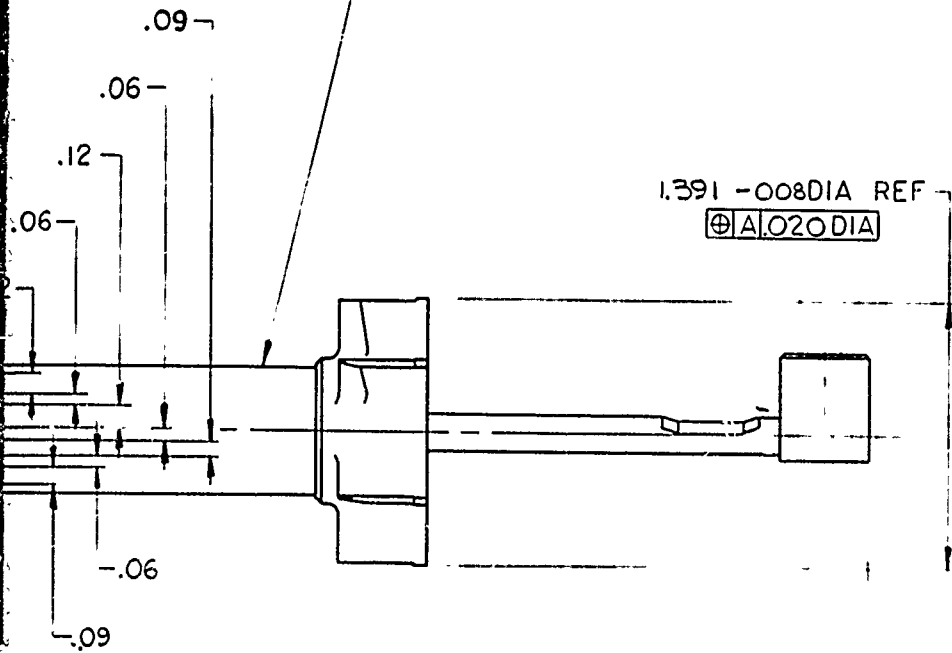

ED (MONTH AND YEAR)

FOR ASSOCIATED LIST, SEE -9256070


PART NO. 9256070

MECHANICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	ORIGINAL DATE OF DRAWING SEPT 1970	PICATINI ARSENAL DOVER NEW JERSEY	
VP		TELEPHONE NO. (OPTIONAL)	CHAIRMAN HA	ENGINEER	ROCKET, PR. 3.11 35 MM SUBCALIBER: M73
FS		DATE	ENGINEER	ENGINEER	
EL		MATERIAL	ENGINEER	ENGINEER	
HA			ENGINEER	ENGINEER	
BI					

INDENTURED LIST OF ROCKET DRAWINGS AND SPECIFICATIONS

Drawing Number	Title
10242697	Box, Packing, Ammo for Rocket Practice 35mm Subcaliber M73
9256072	Carton, Packing, Ammo for Rocket Practice, 35mm Subcaliber M73
9256070	Rocket, Practice, 35mm Subcaliber M73
9256086	Rocket, Practice, 35mm Subcaliber M73, Parts For
9256063	Head & Closure Assembly, HE
9256053	Head Loading Assembly
9256052	Nose
9256051	Head
9256078	Adhesive
9256062	Firing Pin Assembly
9256048	Inertia Weight
9256059	Spring
9256050	Firing Pin
9256077	Adhesive
9256047	Safety Clip
9256054	Closure
9256058	Igniter Motor Assembly
9256060	Motor Case Assembly
9256061	Motor Case
9256049	Fin
9256057	Igniter Assembly
9256055	Igniter Cup
9256084	Alathon 7320
9256056	Primer Housing

Specification MIL-R-50858(MU)

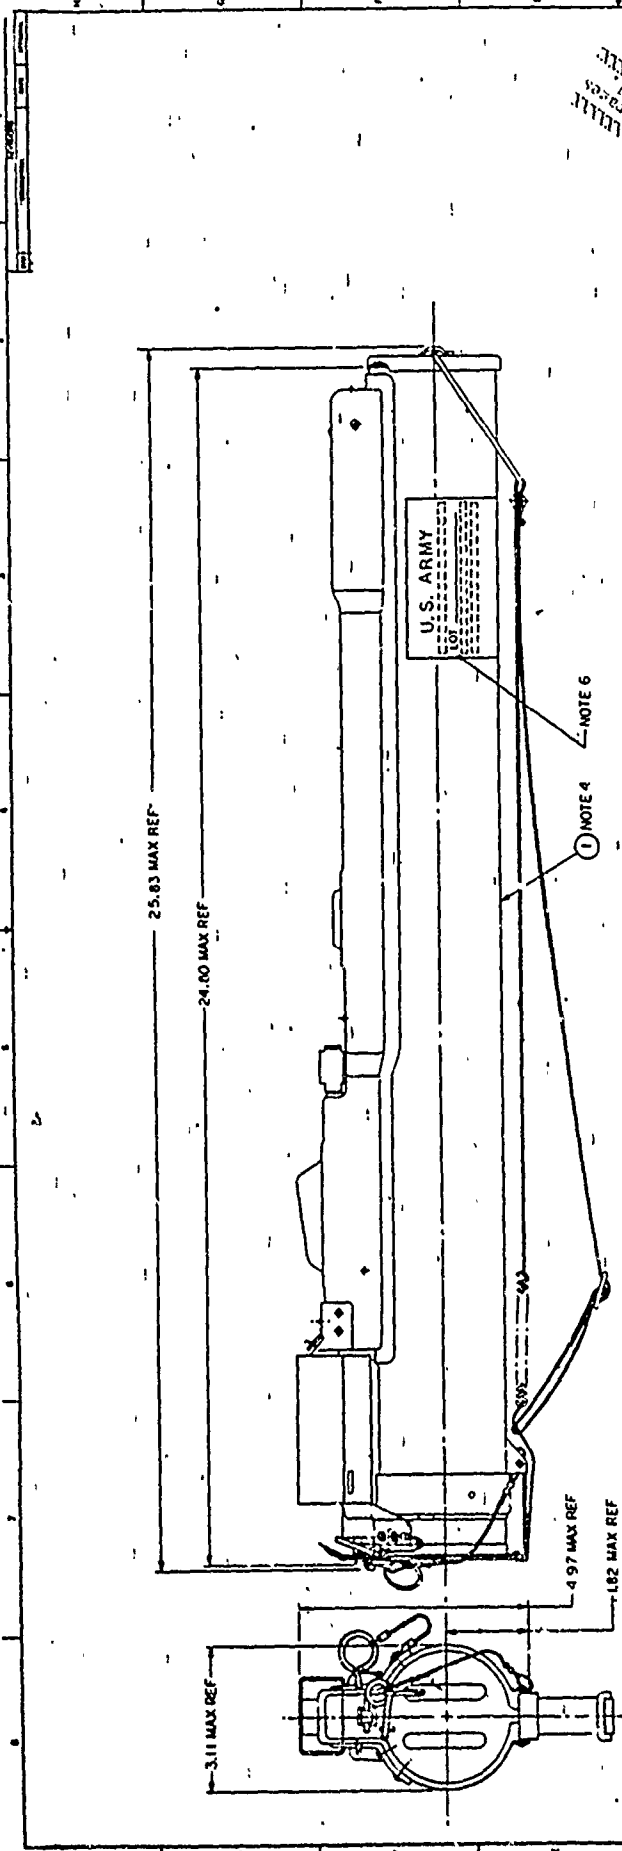

See the following pages for proper details

- NOTES:-
- 1 - SPEC MIL-A-2250 AND MIL-50657 APPLY.
  - 2 - PROTECTIVE FINISH - RETOUCH SURFACES WHERE NECESSARY USING FINISH 201 OF MIL-STD-171, COLORED APPROX. OLIVE DRAB NO. X34087 OF FED-STD-595. PAINT PERMITTED ON FLANGES OF BOOT, TRIGGER AND BOOT, DEFLECT, PAINT PERMITTED ON, BUT NOT REQUIRED ON, INACCESSIBLE AREAS OF HANDLE, SAFETY, IGNITER CAVITY, BRACKET, SIGHT, REAR HOUSING EXTRUSION AND REAR PORTION OF INNER TUBE ASSY. REAR SIGHT ASSY AND BOOT, SIGHT, REAR ARE NOT TO BE PAINTED.
  - 3 - UNTOLERANCED DIMENSIONS NEED NOT BE GAGED.
  - 4 - ITEMS 1, 2 & 3 ARE USED TO CONVERT THE M72A1 ROCKET TO LAUNCHER ROCKET; M190 PER INSTRUCTIONS CONTAINED IN FORM 9-8970-229-12-APPENDIX 2.
  - 5 - ITEMS 4, 5, 6 & 9 ARE USED FOR INFORMATION ONLY AND ARE PART OF ITEM 3 INSTALLATION KIT 9256073.
  - 6 - INSERT LOCATION M72A1 LAUNCHER LABEL USING INDELEIBLE OR PERMANENT INK BEFORE APPLYING ITEM 4.
  - 7 - APPLY OVER EXISTING LABEL.
  - 8 - SCREW ITEMS 5 DOWN UNTIL THEY BOTTOM ON REAR DOOR ITEM 6, THEN BACK OFF SCREWS. ITEM 5 UNTIL SCREW DRIVER SLOTS ARE VERTICAL AS PICTURED.

ITEM	DESCRIPTION	PARIS LIST	QUANTITY	UNIT
11	TUBE INNER	9256073	1	EA
10	PAINT	SEE 7, 11, MIL-50657	4	EA
9	NUIT	MS7083	4	EA
8	SCREW	3525-2925	4	EA
7	REAR DOOR ASSY	9256073	1	EA
6	BOOT	9256073	1	EA
5	DOOR KEYS	9256073	1	EA
4	LABEL (M190)	9256073	1	EA
3	KIT INST. FOR CONVERSION	9256073	1	EA
2	TUBE ASSY W/BOOT	9256073	1	EA
1	LAUNCHER ASSY	9256073	1	EA
	ITEM DESCRIPTION	PARIS LIST	QUANTITY	UNIT

FOR ASSOCIATED LIST - SEE 9256079

1 SECT. 970


LAUNCHER, ROCKET: M190

PART NO. 9256073

F 19203 P 9256079

155-2


Preceding page blank

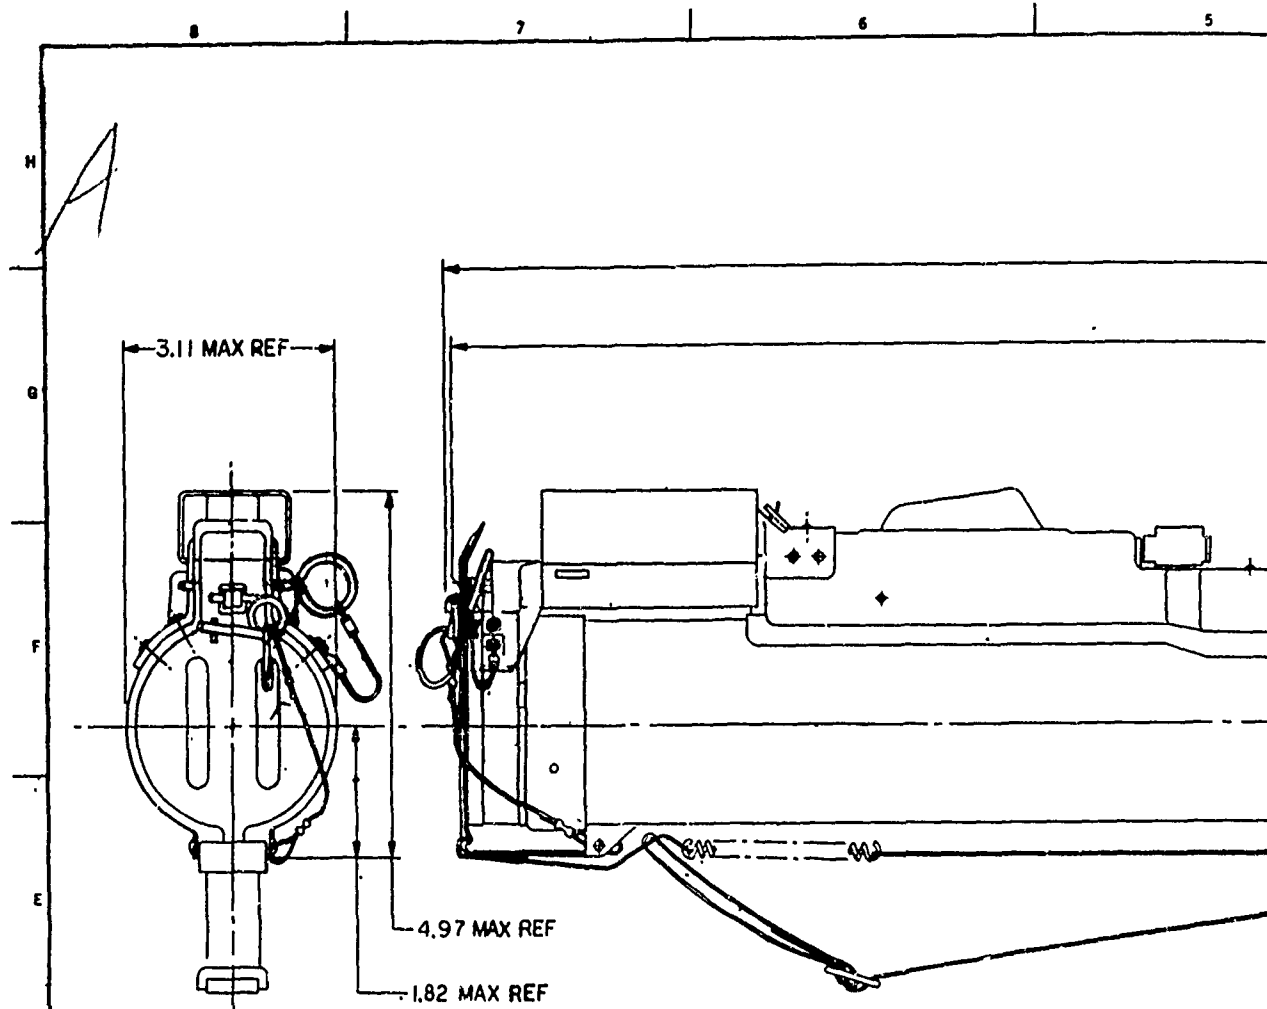

NOTES:-

- 1 - SPEC MIL-A-2550 AND MIL-L-50657 APPLY.
- 2 - PROTECTIVE FINISH:- RETOUCH SURFACES WHERE NECESSARY USING FINISH 20.1 OF MIL-STD-171, COLOR APPROX OLIVE DRAB NO. X34087 OF FED-STD-595. PAINT PERMITTED ON FLANGES OF BOOT, TRIGGER AND BOOT, DETENT. PAINT PERMITTED ON, BUT NOT REQUIRED ON, INACCESSIBLE AREAS OF HANDLE, SAFETY; IGNITER CAVITY; BRACKET, SIGHT, REAR; HOUSING EXTRUSION AND REAR PORTION OF INNER TUBE ASSY. REAR SIGHT ASSY AND BOOT, SIGHT, REAR ARE NOT TO BE PAINTED.
- 3 - UNTOLERANCED DIMENSIONS NEED NOT BE GAGED.
- 4 - ITEMS 1,2&3 ARE USED TO CONVERT THE M72A1 ROCKET TO LAUNCHER ROCKET: M190 . PER INSTRUCTIONS CONTAINED IN ~~POMM-9-6920-229-12~~ <sup>ADDENDUM 2</sup>
- 5 - ITEMS 4,5,6,7,8&9 ARE USED FOR INFORMATION ONLY AND ARE PART OF ITEM 3 INSTALLATION KIT 9256073
- 6 - INSERT LOT NO. FROM M72A1 LAUNCHER LABEL USING INDELIBLE OR PERMANENT INK BEFORE APPLYING ITEM 4.
- 7 - APPLY OVER EXISTING LABEL.
- 8 - SCREW ITEMS 6 DOWN UNTIL THEY BOTTOM ON REAR DOOR ITEM 6, THEN BACK OFF SCREWS ITEM 5 UNTIL SCREW DRIVER SLOTS ARE VERTICAL AS PICTURED.

REVISIONS			
NO.	DESCRIPTION	DATE	APPROVAL

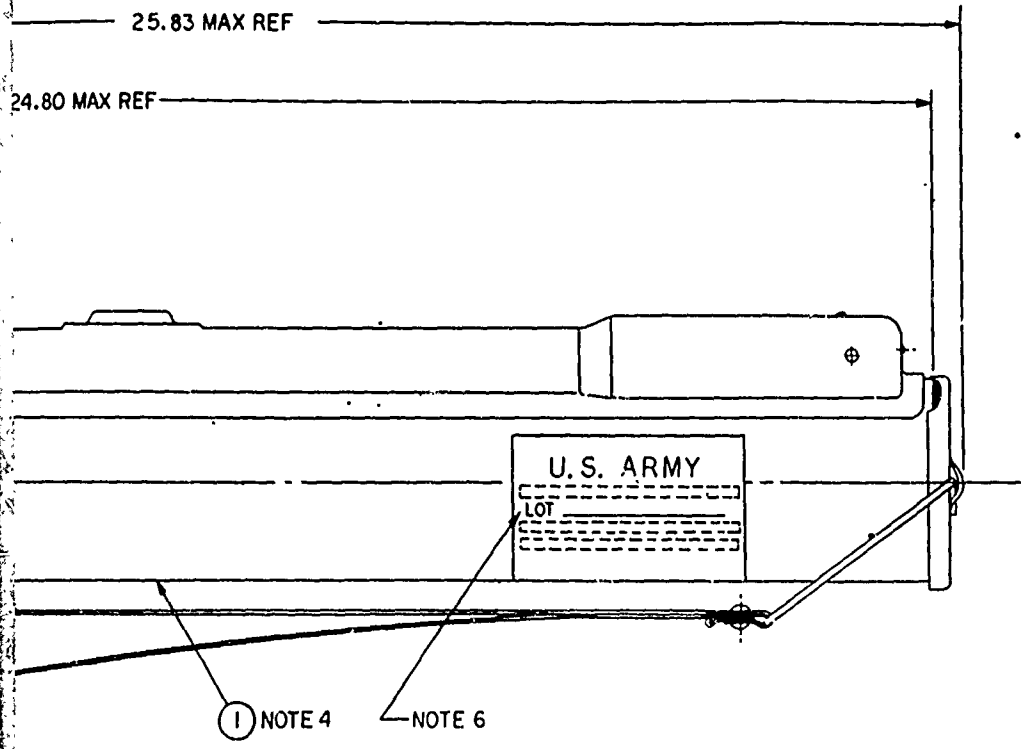


11	TUBE, INNER	9210204		1
10	PAINT	SEE NOTE 2	MIL-STD-171	AR
9	NUT	MS 21083 -N06	SEE NOTE 5	4
8	SCREW	MS35275-231		4
7	REAR DOOR PIN ASSY	9256080		1
6	DOOR, REAR	9256082		1
5	SCREW, REAR DOOR	9256081		2
4	LABEL ( M190)	9256085		1
3	KIT, INSTL FOR, INNR TUBE ASSY ( M190)	9256073	SEE NOTE 4	1
2	INNERTUBE ASSY	9256067		1
1	LCHR RKT (EXPENDED)	9249166		1
ITEM	DESCRIPTION	PART NO.	SPECIFICATION	REQ

FORM ASSOCIATED LIST - SEE 9256079

PART NO. 9256079

ECONOMICAL PROPERTIES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINAL DATE OF DRAWING 1 SEPT 1970		PICATINNY ARSENAL DOVER, NEW JERSEY	
YP	YES	TOLERANCES ON DECIMALS	—	DRAWN BY	CHECKED	LAUNCHER, ROCKET: M190	
TS	YES	FRACTIONS	—	DATE	DATE		
EL	YES	ANGLES	—	CHKD	CHKD	SIZE CODE IDENT NO. F 19203 P 9256079	
MS	YES	MATERIAL	—				
AP	YES	HEAT TREATMENT	—			FINAL PROTECTIVE MODEL SEE NOTE 2	
IN	YES						



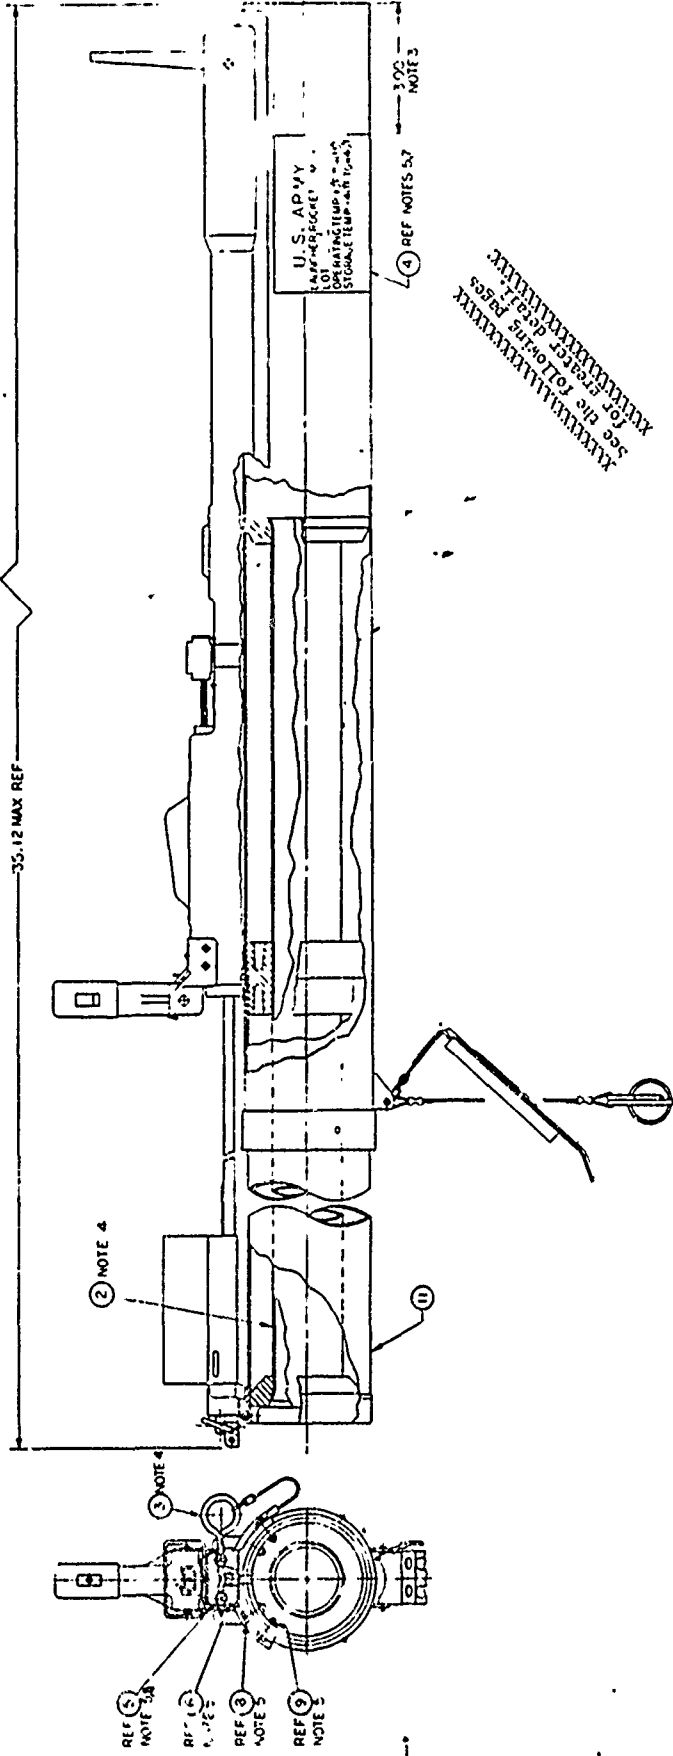

U.S. ARMY  
LAUNCHER  
ROCKET M190  
STORAGE TEMP -40 to +60°C

(4) REF NOTES 57

NOTE 3

35.12 MAX REF

(2) NOTE 4

(1)

REF (5)  
NOTE 57

REF (6)  
NOTE 57

REF (7)  
NOTE 57

REF (8)  
NOTE 57

REF (9)  
NOTE 57

XXXXXXXXXXXXXXXXXXXX  
See the following pages  
for correct detail  
XXXXXXXXXXXXXXXXXXXX

PART NO. 32-8073  
INFANTRY ARTILLERY, DIVISION NEW ARMY

LAUNCHER, ROCKET M190	
F 19203	P 19256079

SEE SHEET FOR NOTES



Preceding page blank

157.2

157.1

A

H  
G  
F  
E  
D  
C  
B  
A

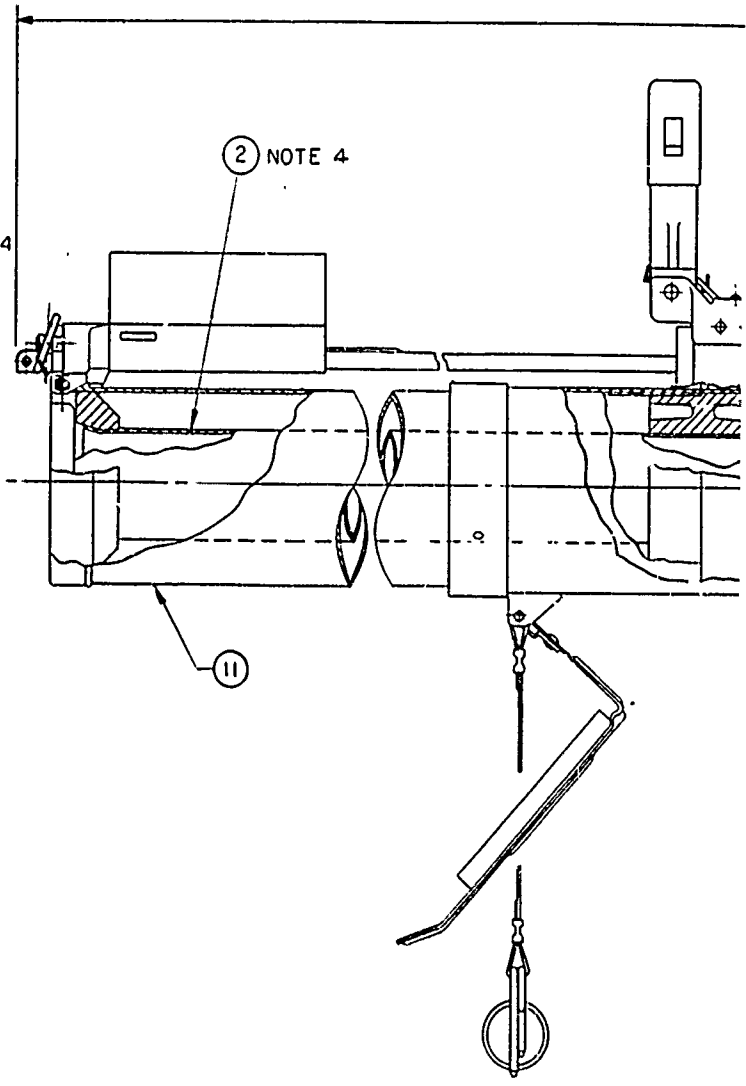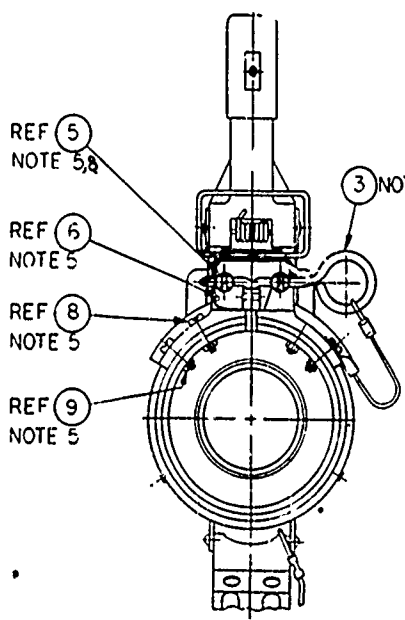

SEE SHEET I FOR NOTES

~~Proceeding page blank~~



INDENTURED LIST OF DRAWINGS FOR CONVERSION KIT  
FOR M190 LAUNCHER AND SPECIFICATION

Drawing Number	Title
9256076	Packaging Drawing for Launcher Kit
9256076-H	Polyethylene Bag
9256075	Packing Box for Launcher Kit
9256073	Conversion Kit for M190 Launcher
9256067	Inner Tube Assembly
9256064	Tube
9256065	Support, Rear
9256066	Support, Front
9256068	Support, Center
9256078	Adhesive
9256080	Rear Door Pin Assembly
9256083	Pin
9218009	Connector
10048610-2	Cord
MS 21003-3	Terminal
9256081	Screw, Rear Door
9256082	Door, Rear
9256085	Label
MS 35275-231	Screw, Machine Fil. Head
MS 21083 No. 6	Nut, Self Lock
9256079	Launcher, Rocket M190

Specification MIL-L-50857 (MU)

LIST OF INSPECTION DRAWINGS

---

Drawing Number	Title
9256087	Hydro Test Fixture for Motor Case
9256088	Spindle for Hydro Test Fixture, Motor Case
9256089	Base for Hydro Test Fixture, Motor Case
9256090	Hydro Test Fixture for Motor Closure
9256091	Base for Hydro Test Fixture, Closure
9256092	Igniter Cup Head Profile for Comparator Chart
9256093	Firing Pin Profile for Comparator Chart
9256094	Stress Bend Test Fixture - Igniter Cup

---