



ARL-SR-0371 • Apr 2017  
ARL-ADHES-QA-001.02 Rev 1.0



# **Adhesives: Test Method, Group Assignment, and Categorization Guide for High-Loading- Rate Applications – History and Rationale**

**by Robert Jensen, David Flanagan, Daniel DeSchepper, and  
Charles Pergantis**

Approved for public release; distribution is unlimited.

## **NOTICES**

### **Disclaimers**

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.



# **Adhesives: Test Method, Group Assignment, and Categorization Guide for High-Loading- Rate Applications – History and Rationale**

**by Robert Jensen, David Flanagan, Daniel DeSchepper, and  
Charles Pergantis**

***Weapons and Materials Research Directorate, ARL***

***Coatings, Corrosion, and Engineered Polymers Branch (CCEPB)\****

***\*CCEPB is ISO 9001:2008 Certified by SRI Quality Systems Registrar***

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188		
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. <b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b>					
<b>1. REPORT DATE (DD-MM-YYYY)</b> April 2017		<b>2. REPORT TYPE</b> Special Report		<b>3. DATES COVERED (From - To)</b> July 2008–April 2017	
<b>4. TITLE AND SUBTITLE</b> Adhesives: Test Method, Group Assignment, and Categorization Guide for High-Loading-Rate Applications – History and Rationale			<b>5a. CONTRACT NUMBER</b>		
			<b>5b. GRANT NUMBER</b>		
			<b>5c. PROGRAM ELEMENT NUMBER</b>		
<b>6. AUTHOR(S)</b> Robert Jensen, David Flanagan, Daniel DeSchepper, and Charles Pergantis			<b>5d. PROJECT NUMBER</b> R.0010455.2.92		
			<b>5e. TASK NUMBER</b>		
			<b>5f. WORK UNIT NUMBER</b>		
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> US Army Research Laboratory ATTN: RDRL-WMM-C Aberdeen Proving Ground, MD 21005-5069			<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> ARL-SR-0371 ARL-ADHES-QA-001.02 Rev 1.0		
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>			<b>10. SPONSOR/MONITOR'S ACRONYM(S)</b>		
			<b>11. SPONSOR/MONITOR'S REPORT NUMBER(S)</b>		
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> Approved for public release; distribution is unlimited.					
<b>13. SUPPLEMENTARY NOTES</b> Send comments or inquiries to: usarmy.APG.arl.mbx.adhesive-research@mail.mil					
<b>14. ABSTRACT</b> This report provides the development history and rationale for the standard process description ARL-ADHES-QA-001.00 Rev 1.0, <i>Adhesives: Test Method, Group Assignment, and Categorization Guide for High Loading Rate Applications</i> , by the Adhesives and Informatics Team, Coatings, Corrosion and Engineered Polymers Branch, US Army Research Laboratory.					
<b>15. SUBJECT TERMS</b> adhesives, history, invention, innovation, technology development, informatics, standardization, relational database					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>	<b>18. NUMBER OF PAGES</b>	<b>19a. NAME OF RESPONSIBLE PERSON</b>
<b>a. REPORT</b>	<b>b. ABSTRACT</b>	<b>c. THIS PAGE</b>			<b>19b. TELEPHONE NUMBER (Include area code)</b>
Unclassified	Unclassified	Unclassified	UU	34	Robert E Jensen 410-306-1521

## **Contents**

---

---

<b>List of Figures</b>	<b>iv</b>
<b>1.0 Purpose</b>	<b>3</b>
<b>2.0 Scope</b>	<b>3</b>
<b>3.0 Policy</b>	<b>8</b>
<b>4.0 Responsibilities</b>	<b>8</b>
<b>5.0 Requirements</b>	<b>8</b>
<b>6.0 Terms and Definitions</b>	<b>8</b>
<b>7.0 Records</b>	<b>8</b>
<b>8.0 Appendix A. Innovation vs. Invention</b>	<b>9</b>
<b>9.0 Appendix B. Technological Development Curves</b>	<b>11</b>
<b>10.0 Appendix C. Development History of Aviation Adhesives</b>	<b>13</b>
<b>11.0 Acknowledgments</b>	<b>17</b>
<b>12.0 References</b>	<b>18</b>
<b>List of Symbols, Abbreviations, and Acronyms</b>	<b>27</b>
<b>Distribution List</b>	<b>28</b>

## List of Figures

---

---

Fig. 1	Adhesive groups based upon single-lap-joint performance ( $S_{\max}$ and $d_{\text{failure}}$ ) at RT (dry conditioning) .....	4
Fig. 2	ARL experimental population of adhesive groups based upon $S_{\max}$ and $d_{\text{failure}}$ single-lap-joint performance at RT (dry conditioning) .....	4
Fig. 3	Detailed ARL experimental population of single-lap-joint performance showing adhesive chemical classifications. Dry sample conditioning tested at normal RT and humidity conditions (1.62-mm-thick 2024 T3 aluminum substrates).....	5
Fig. 4	The bonding requirements for adhesives in ground vehicle applications require technological development past aviation benchmarks .....	8
Fig. B-1	The “S-curve” .....	11
Fig. C-1	The “S-curve” for aerospace adhesives .....	16

**Coatings, Corrosion, and Engineered Polymers Branch  
Standard Process Description (SPD)**

**Adhesives: Test Method and Group Assignment Guide for High-Loading-  
Rate Applications – Preparation and Testing of Single-Lap-Joints**

**ARL-ADHES-QA-001.02 rev 1.0**

Origin Date: 07/21/2008

Rev. No. 0.1 Date: 04/20/2017

**Prepared by:**

Robert Jensen

**Experimental data by:**

David Flanagan and Daniel DeSchepper

Adhesives and Informatics Team  
Coatings, Corrosion, and Engineered Polymers Branch  
Materials and Manufacturing Science Division  
US Army Research Laboratory  
RDRL-WMM-C  
APG, MD 21005

Send comments or inquiries to: [usarmy.APG.arl.mbx.adhesive-research@mail.mil](mailto:usarmy.APG.arl.mbx.adhesive-research@mail.mil)

**Reviewed by:**

CCEPB ISO 9001:2008 Working Group  
Charles Pergantis

Coatings, Corrosion, and Engineered Polymers Branch  
Materials and Manufacturing Science Division  
US Army Research Laboratory  
RDRL-WMM-C  
APG, MD 21005


**Approved by:**

James F Snyder (Chief)  
Coatings, Corrosion, and Engineered Polymers Branch  
Materials and Manufacturing Science Division  
US Army Research Laboratory  
RDRL-WMM-C  
APG, MD 21005


### History of Changes\*

Rev. No.	Date	Pages	Description of Changes
0.1	12/09/2016		First draft prepared by Adhesives and Informatics Team. Document not OPSEC approved for release.
1.0	04/20/2017		Technically reviewed and OPSEC approved for public release; distribution unlimited. Administrative and operational procedures for continuation beyond the Second Tier of testing and characterization are omitted.

### Authorization Signatures

Originator:  Date: 19 APR 2017

CCEPB Quality Assurance Coordinator  Date: 19 APR. 2017

Approval:  Date: 19 APR 2017

---

\* For formatting recommendations refer to: Document Types and Naming Conventions, LHC-PM-QA-202.00 Rev 1.2, CERN, Geneva, Switzerland; 2003 Apr 3.



## 1.0 Purpose

This report provides the development history and rationale for the standard process description (SPD) ARL-ADHES-QA-001.00 Rev 1.0, *Adhesives: Test Method, Group Assignment, and Categorization Guide for High-Loading-Rate Applications*, by the Adhesives and Informatics Team, Coatings, Corrosion and Engineered Polymers Branch (CCEPB), US Army Research Laboratory (ARL).

## 2.0 Scope

This SPD fulfills partial requirements for the CCEPB to qualify for International Organization for Standardization 9001:2008 certification.

Disclaimer: This report contains ARL-originated studies containing advice and recommendations. The “History and Rationale” of the title is included as a consideration to future researchers.

Figure 1 shows the property assignment regions for adhesive group categories specified in *Adhesives: Test Method, Group Assignment, and Categorization Guide for High-Loading-Rate Applications*, ARL-ADHES-QA-001.00 Rev 1.0.<sup>1</sup> The assignment regions can be defined by a plot of maximum strength ( $S_{\max}$ ) versus displacement complete failure ( $d_{\text{failure}}$ ) as measured from standardized single-lap-joint tests per ASTM D1002 under quasi-static loading conditions at room temperature (RT).<sup>2</sup> Figure 2 shows a global plot of  $S_{\max}$  versus  $d_{\text{failure}}$  with the inclusion of 894 experimental data test points taken at and by ARL for various adhesive materials. Figure 3 provides a more-detailed data representation with respect to the adhesive material types. The intended ARL focus of testing these adhesives has primarily been for bonding armor assemblies. The global response to ballistic loading for a number of these adhesives has been observed and evaluated by ARL researchers.

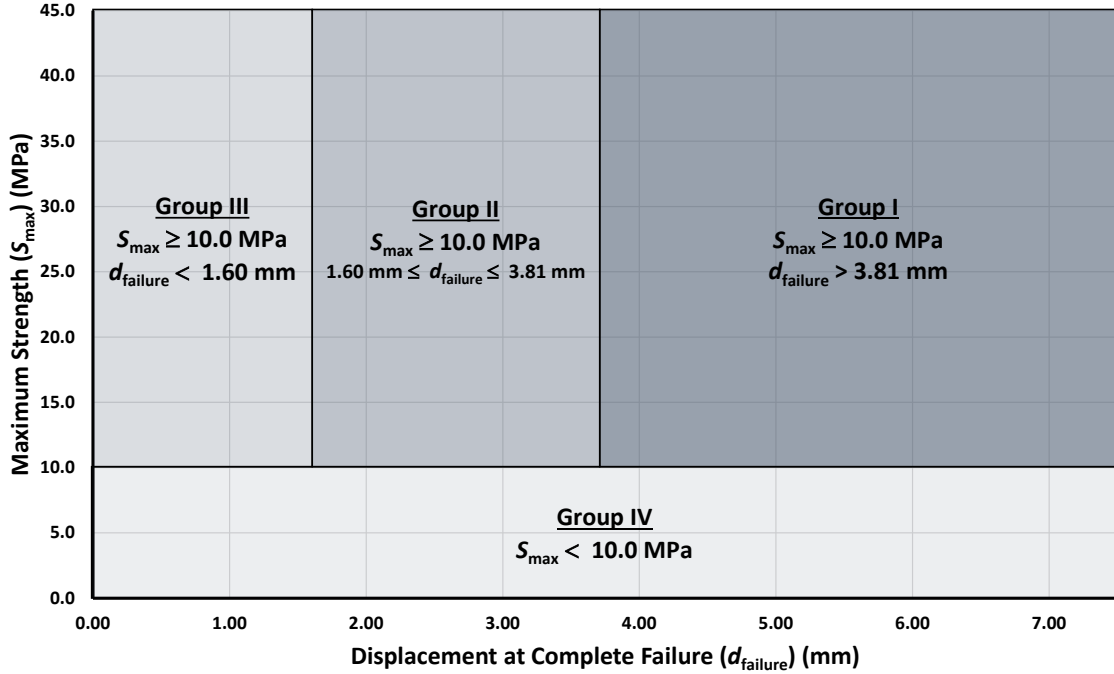


Fig. 1 Adhesive groups based upon single-lap-joint performance ( $S_{max}$  and  $d_{failure}$ ) at RT (dry conditioning)

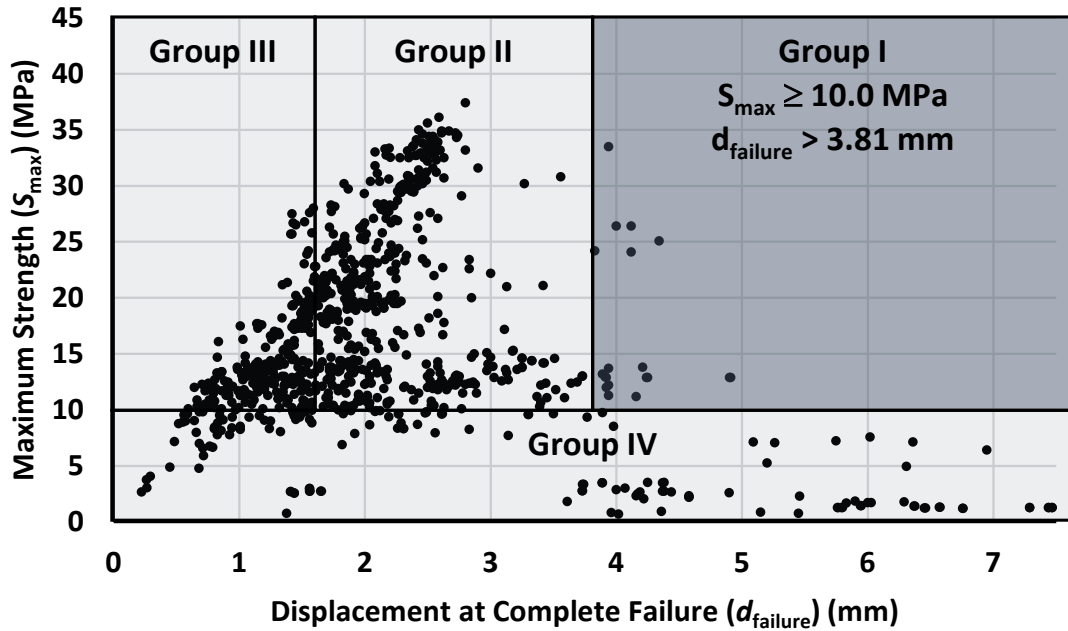


Fig. 2 ARL experimental population of adhesive groups based upon  $S_{max}$  and  $d_{failure}$  single-lap-joint performance at RT (dry conditioning)

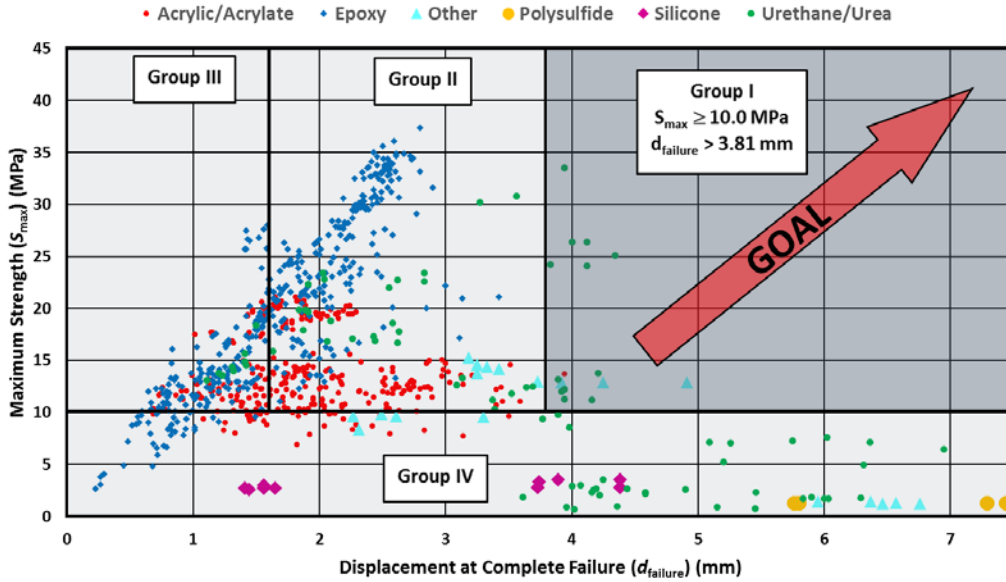


Fig. 3 Detailed ARL experimental population of single-lap-joint performance showing adhesive chemical classifications. Dry sample conditioning tested at normal RT and humidity conditions (1.62-mm-thick 2024 T3 aluminum substrates).

## 2.1 Adhesive Categories

### 2.1.1 Group I Category Adhesives (Adhesives for High-Loading-Rate Environments)

Group I adhesives represent a performance region where increases in ballistic damage tolerance occur with respect to survivability of the bondline. This is a qualitative assessment based on the global performance of the bonded armor assembly against the test threat, the size of the damage area, the damage modes of the constituent armor materials, and if the adhesive bondline will withstand multiple impacts (i.e., the strike face and backing plate bond remains intact). The further hot/wet and elevated temperature requirements specified in ARL-ADHES-QA-001.00 are screening checks to minimize potential longer-term service durability issues with an upfront minimal effort in testing. ARL-ADHES-QA-001.00 conveys the empirical observations and experience of ARL researchers in using adhesives to bond armor assemblies in terms of quasi-static performance metrics using a well-established academic and industrial test geometry configuration. The eventual “goal” for adhesives for armor applications is to develop, test, and evaluate a system able to withstand maximum strength and deflection much greater than 10.0 MPa and 3.81 mm, respectively, as shown in Fig. 3.

### **2.1.1.1 Experimental and Modelling Challenges**

The loading conditions experienced by ground combat vehicles during high-strain-rate/high-stress (ballistic) events are complex.<sup>3-13</sup> From the Army's call for proposals to establish a Collaborative Research Alliance focused on Materials in Extreme Dynamic Environments (MEDEs), the fundamental problem is "the lack of understanding of the physical phenomena at multiple scales that govern high-stress and high strain-rate material performance resulting from the paucity of validated linkages between experimental and computational research tools at critical length and time scales."<sup>14</sup> Specifically, the MEDE proposal guidance outlined the following major gaps in the current state of the art:

- A limited ability to relate materials chemistry, structure, and defects to materials response and failure under extreme conditions.
- An inadequate ability to predict the roles of materials structure, processing, and properties on performance in relevant extreme environments and designs.
- The lack of experimental capabilities to quantify multiscale response and failure of materials under extreme conditions.

### **2.1.1.2 Variable High-Loading-Rate Environments**

Lightweight armor configurations are constantly evolving as new threats are encountered.<sup>15-21</sup> Co-evolution of predator and prey species occurs in nature.<sup>22-28</sup> Historically, threat and protection schemes engaged in human combat are also continuously co-evolving, such as armor and antiarmor development. Liddel Hart pointed out that in 1940 the use of a propelled armored offensive was "a concept as revolutionary as the use of the horse, the long spear, the phalanx, the flexible legion, the 'oblique order', the horse-archer, the longbow, the musket, the [artillery] gun".<sup>29</sup>

### **2.1.1.3 Minimal Linkages to Academia and Industry**

Little information pertaining to armor configurations exists in the open literature. Literature that does exist is related to generic (unclassified) armor configurations matched against unclassified threats, such as 7.62-mm fragment-simulating projectiles and so on. Typically, only the global response of the armor package/assembly is observed and evaluated. Regardless of the material studied (ceramic, metal, composite, adhesive, etc.), trends are implied, but distinct constitutive properties are seldom determined,<sup>30-32</sup> whereas useful generic studies are challenging to scale as the momentum and impact energies of the ballistic event increase in magnitude.

Armor specifications are typically based upon performance, while aerospace adhesive specifications define precise material properties using standardized and accepted testing protocols. Aerospace specifications are well-known and implementable by adhesive formulators. Armor specifications, including spall liners, aluminum, and rolled homogeneous armor steel, are restrictive in terms of material composition and performance.<sup>33–36</sup>


The absence of high loading rate–derived adhesive specifications can lead to borrowing from aviation, which may not provide adequate performance in high-loading-rate regimes.

#### **2.1.1.4 Comments on Ballistic Testing of Adhesively Bonded Armor Assemblies**

Judgments on the performance ratings of individual armor assembly constituents, including the adhesive, are typically tied to the global performance of the entire armor package. A high-performance rating from ballistic testing does not guarantee that the adhesive will maintain the characteristics as the threat and armor configuration vary. Likewise, poor performance in a single test configuration does not always guarantee that the adhesive will not be suitable in alternative armor designs.

#### **2.1.2 Group II, III, and IV Category Adhesives**

The experimental data points plotted in Figs. 1–3 show the highest population densities in Groups II, III, and IV. Groups II and III are attainable by current aerospace-grade bonding adhesives, and Group IV performance metrics can be achieved by aerospace-grade sealants. Groups II, III, and IV are realistic performance criteria for adhesives that have previously scaled through Department of Defense (DOD) technology-readiness-level progressions into full commercial availability. In contrast, Group I is sparingly populated with very few experimental data test points for a relatively few adhesives that are not at commercial acceptance levels. The continual evolving and variable nature of armor protection schemes will ensure a multitude of adhesive bonding schemes needed to meet Group I requirements. This armor configuration variability and relatively mild upper-service temperature requirements could provide the impetus for adhesive formulators to probe ground vehicle applications for product expansion, particularly where non-DOD commercial opportunities exist. This could potentially lead to adhesive advancements past the development plateau of aerospace, as portrayed in Fig. 4.

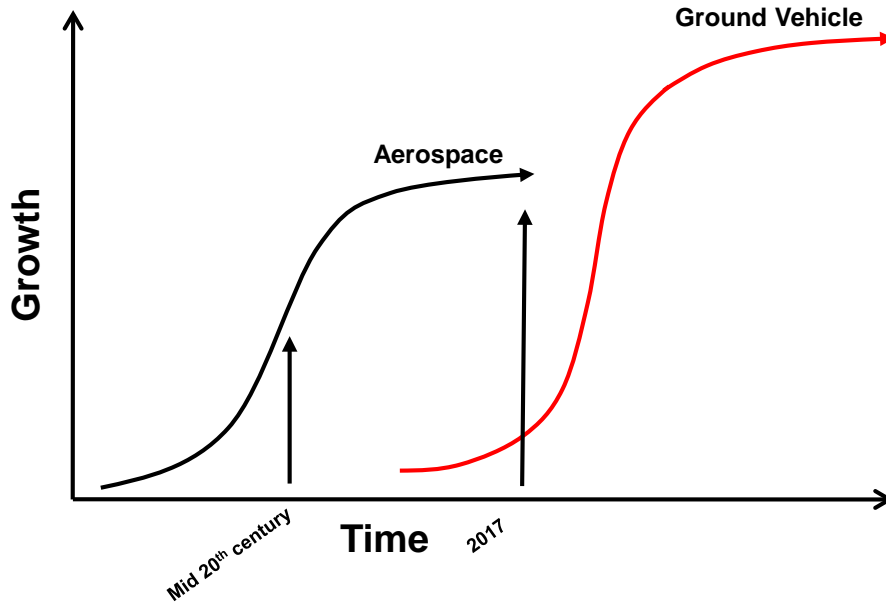

**Fig. 4** The bonding requirements for adhesives in ground vehicle applications require technological development past aviation benchmarks

Supplemental commentary is reported in the following appendix sections describing technological growth progression and a brief history of high-performance adhesives from the aerospace industry.

**3.0 Policy**

Not applicable.

**4.0 Responsibilities**

Not applicable.

**5.0 Requirements**

Not applicable.

**6.0 Terms and Definitions**

Not applicable.

**7.0 Records**

Not applicable.

## 8.0 Appendix A. Innovation vs. Invention

Knowledge translation progresses through 3 stages: discovery, invention, and innovation.<sup>37,38</sup> Discovery is the identification of new knowledge and is traditionally brought into light through mechanisms such as peer-reviewed academic papers. The invention is the embodiment, or working demonstration, of the discovery into practice. Innovation is the refinement of the invention to a sufficient stage of development to bring it to the commercial market.

Joseph Schumpeter (1883–1950) adapted the phrase “Creative Destruction” in his theories of economic development.<sup>39–41</sup> The variant phrase “Disruptive Technology”, by Joseph Bower and Clayton Christensen, gained popularity in the mid-1990s.<sup>42</sup> However, Schumpeter’s economic theories remain influential to modern scholars.<sup>43</sup>

A transistor is a semiconductor device used to control and amplify electrical currents and is a model example contrasting the following invention versus innovation stages of technology development.

- The invention of the transistor was credited to John Bardeen, Walter Brattain, and William Shockley while working for Bell Telephone Laboratories in 1947. Efforts to invent a practical transistor were the accumulation of intense war-driven needs for enhanced radar performance. Bardeen, Brattain, and Shockley were awarded the 1956 Nobel Prize in Physics for their invention.<sup>44</sup>
- While the invention of the transistor in 1947 represented a tremendous scientific advancement, there were still many practical considerations that were yet to be developed to successfully transition the technology into commercial industry.<sup>45–48</sup>
- Gordon K Teal represents the “innovator” in the history of transistor technology. Teal was a former Bell Labs employee who began working for Texas Instruments in 1953. Teal overcame the performance limitations of Bell Labs’ germanium-based transistor design by developing a method to grow large single-crystal silicon as the semiconductor material. Texas Instruments was capable of mass producing the new silicon transistor design for the first successful transistor radio to progress beyond the prototype stage, the Regency TR-1, in 1954.

Innovation is the successful implementation of creative ideas within an organization.<sup>49</sup> According to Joseph F Engelberger, the “father of robotics”, innovation requires 1) recognized need, 2) competent people with relevant technology, and 3) financial support.

Innovation also carries very high failure rates. Failure leads to loss in morale, increased cynicism, and resistance to change. Erik Brynjolfsson (Massachusetts Institute of Technology's Sloan School) basically states that industrial use of newer innovative technology occurs at higher levels once the existing management infrastructure exits the workforce.<sup>50,51</sup>




## 9.0 Appendix B. Technological Development Curves

While Schumpeter provided the initial concept that innovation was the driving force for economic growth, it was W Rupert Maclaurin, Department of Economics and Social Science at the Massachusetts Institute of Technology in the 1940s and 1950s, who first provided an analytically quantitative “linear model of innovation”.<sup>52</sup> Prior to the Second World War, traditional economic theory reasoned that growth was simply related to the ability to increase available production capacity. Maclaurin systematically and rigorously studied “technological progressiveness” for a broad range of industries, including chemical, photographic, aviation, oil, radio and television, electric light, automobile, paper, steel, food processing, cotton and textiles, coal mining, and housing assembly, and derived the following “series of measurements” to track technological innovation for his linear model: “Linear model of innovation: Pure science to Invention to Innovation to Finance to Acceptance”.<sup>52</sup>

Many nonlinear recursive models have been proposed since Maclaurin’s initial linear growth theory to meet the complexities of specific industries.<sup>53</sup>

The “S-curve”, shown in Fig. B-1, was conceived in the early 1970s by Richard Foster while working as a business consultant for McKinsey and Co. in New York.<sup>54-56</sup> The primary advantage of the S-curve is that it represents a model, of growth versus time, that is easy to comprehend.<sup>54,57</sup>

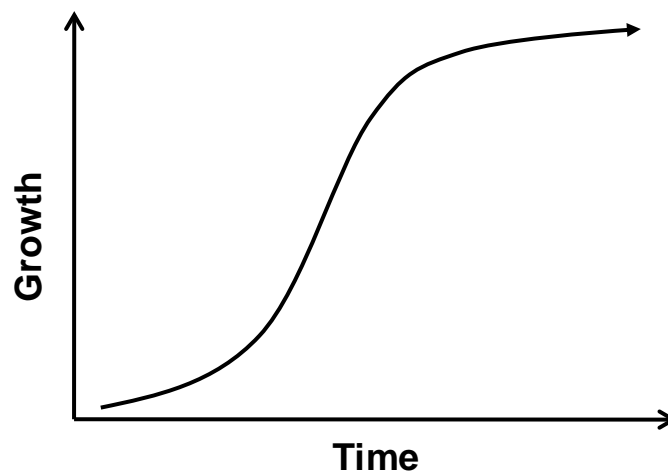

**Fig. B-1 The “S-curve”**

Some of the advantages of the S-curve include the following:

- Ease in evaluation of the different stages of technology
- Indicator of the need to shift when gains in growth decline
- Provides motivation to be at the forefront of new technology

- Reduces the chances of hasty rejections of emerging technology

Some of the disadvantages of the S-curve include the following:

- Does not indicate how large the gains generated by the emerging technology will be
- Does not precisely guide business managers with respect to the timing of transitioning the shift from old to new technology
- The S-curve is a generalization, which may or may not fit to specific industries.

Research efforts to mathematically quantify the S-curve are ongoing, continually.<sup>58-61</sup>

The actual invention stage and process of a technological growth curve, while significant, is a relatively small factor in determining the success of a new product. Inventors who more fully understand the broader growth process of technology and who are more willing to escort their invention through licensing and potential commercialization in an advisory role seem to have a better chance at bridging the gap between invention and innovation.<sup>62</sup> Braunerhjelm and Svensson<sup>62</sup> verified Schumpeter's assertion that the invention and innovation stages of technology growth are separate through a statistical study of Swedish patents. It was found that the success rate of the invention was actually lower if the inventor also assumed ownership and leadership during the innovation stage. However, true entrepreneurs who drive the innovation stage clearly benefitted when the inventor was able to assist in a supportive role, primarily to adapt the technology to specific customer needs and to reduce uncertainty.

Philibert provides a comprehensive approach to understanding the complexities in the relationships between invention, innovation, and the eventual diffusion of the new technology into the commercial marketplace at the international level in efforts to reduce global CO<sub>2</sub> emissions.<sup>63</sup> It seems to be clearly understood that the invention of new technologies as alternative energy sources is only a partial solution to curbing the rise of atmospheric CO<sub>2</sub> levels.

It is also known that research and development managers at corporate and government levels are intimately connected with the success or failure of new inventions.<sup>64-66</sup> Specifically, government lead research is in a position to absorb a greater amount of risk than corporate counterparts. Government-sponsored technical standards can provide motivation for private companies to progress from the invention to innovation stages.<sup>65</sup> However, it is also cautioned that government-sponsored technical standards that "do not endure" can also impede innovation.<sup>65</sup>

## 10.0 Appendix C. Development History of Aviation Adhesives

### 10.1 Norman de Bruyne and Aero Research Ltd

Aviation material property requirements are dominated by “strength and stiffness”, which have been well-defined for the commercial adhesive industry since the middle of the 20th century:

- Aviation is a very mature industry, and the correlations between materials properties with processing, performance, design, structure, and manufacturing that have been studied extensively.<sup>67</sup>
- Modern adhesives with properties specifically tailored for aircraft fabrication were patented in Great Britain in the 1930s and in the United States in the 1950s.<sup>68-70</sup>
- Literature sources related to the performance of aircraft adhesives date at least to 1943.<sup>71</sup>

Modern aviation adhesives (and composites) owe their existence to the pioneering work of Norman Adrian de Bruyne in the 1930s through the 1950s.<sup>72-74</sup> De Bruyne earned his master’s and doctoral degrees from Trinity College at the University of Cambridge studying electrical and radioactive field emission. De Bruyne had a passion for aviation and obtained his pilot’s license in 1929. “He was totally dissatisfied with the complacency shown in aircraft design during the late 1920s and early 1930s, and was convinced he could do a lot better.”<sup>72</sup>

De Bruyne formed The Cambridge Aeroplane Construction Company in 1931, which became Aero Research Limited (Duxford, Cambridge) in 1934. Aero Research Ltd was responsible for most of the initial ground-breaking inventions that aviation adhesives and composites were founded on, including the following:

- Invented Gordon Aerolite composite, which used a phenol-formaldehyde matrix and flax roving reinforcement.
- Invented Aerolite urea-formaldehyde adhesives for laminating and bonding wood. This adhesive was used to construct the laminated plywood Airspeed Horsa glider and de Havilland Mosquito.
- Invented sandwich honeycomb composite structures.
- Invented poly(vinyl formal) – phenol-formaldehyde adhesive (Redux 775) for the first metal-to-metal bonding in aircraft (de Havilland Sea Hornet).
- Invented modern film adhesives.

- Educated and introduced a much broader commercial audience to the benefits of adhesive bonding through teaching annual “summer schools” at Cambridge University in the postwar years.

De Bruyne and the technical staff at Aero Research Ltd were also innovators. While phenol and urea-formaldehyde chemistry dates to the early 1900s,<sup>75,76</sup> it was Aero Research Ltd that modified the chemistries and processing techniques that innovated their use for aviation applications.

## 10.2 Maturation of Redux 775

The advances in aviation adhesives pioneered by Norman de Bruyne and Aero Research Ltd in the 1930s and adopted by de Havilland in the 1940s were possible because the engineering properties required were already known.

From Kinloch’s memoir of de Bruyne:

- “De Bruyne became convinced that there was considerable scope for the introduction of novel designs and materials in aircraft structures, especially because it seemed that anything other than a biplane was regarded as un-English and not really practicable by the current aircraft design engineers.”<sup>72</sup>
- De Bruyne set about designing and constructing the Snark<sup>73</sup> in the early 1930s.
- De Bruyne was able to construct the Snark as a monoplane using lightweight stressed plywood, laminated with phenol-formaldehyde resin, as the fuselage and wing material.
- The design was so advanced that the Royal Aircraft Establishment (RAE) initially “dismissed the whole design concept and stated that it could not issue a certificate (so the aircraft could be legally flown) for such a lightweight structure, because its light weight must imply an inadequate strength”.
- The Snark design was approved by the RAE on June 21, 1934, following full-scale destructive testing of the fuselage structure.
- Kinloch states that de Bruyne based his design of the Snark on “Prager’s analysis of plastic failure”<sup>77</sup> and “Wagner’s tension field analysis”.<sup>78</sup>

The lessons learned from the Snark subsequently led de Havilland to use Aerolite urea-formaldehyde plywood bonding in the Mosquito<sup>73</sup> poly(vinyl formal) – phenol-formaldehyde adhesive (Redux 775) metal-to-metal bonding in the Sea Hornet<sup>73</sup> and the transition of adhesive bonding into commercial aviation with the

Dove.<sup>79</sup> By the end of the Second World War the basic correlations between fundamental quasi-static adhesive mechanical properties and the full structural response of aircraft were known, and the connection between performance requirements and formulation had essentially been bridged.

Although Aero Research Ltd was acquired by Ciba in 1947, Redux-type adhesives are currently qualified for aircraft production and sold through Hexcel.<sup>80</sup>

### 10.3 Increased Service Temperature Requirements

The need for higher service temperatures was a primary factor in driving adhesives for aviation applications beyond the initial phenol-formaldehyde base chemistry established by Aero Research Ltd. However, their exact histories are much more difficult to trace through academic literature and patent references. Wikipedia states that resin formulation based upon epichlorohydrin was first reported in 1927, and modern bisphenol-A epoxy resins were invented by Pierre Castan (Switzerland) and Sylvan Greenlee (United States) in 1937.<sup>81</sup> The Wikipedia statements were not verified directly, though patents for Castan<sup>82</sup> and Greenlee<sup>83</sup> issued at later dates indicate that it is possible that they were involved with epoxy synthesis.

Likewise, the origins of epoxy film adhesives are equally obscure in the literature and patent archives, although Higgins reports the use of American Cyanamid (Cytec) FM 1000 for bonding in the Boeing 727 in 1963.<sup>84</sup> A large number of representative epoxy adhesive patents can be found from the 1950s, 1960s, and 1970s.<sup>85-87</sup>

The possible origins of bismaleimide (BMI) and cyanate-ester-resin-based adhesives are even more obscure in the patent literature.<sup>88,89</sup> The academic literature for BMI and cyanate-ester-based adhesives becomes more widespread in the 1990s although not approaching the number of publications for epoxy adhesives.<sup>90,91</sup>

### 10.4 Plateaued Development

The drive by the commercial aviation industry for lighter aircraft has resulted in a steady increase the use of composite structures since the mid-1970s.<sup>84</sup> The use of adhesives and composites should scale with each other.

- The McDonnell Douglas MD-80 used less than 5% composite structure by weight in 1980. The current Boeing 787 uses approximately 50% composite structure by weight.
- Additional metal-to-metal bonding also exists in aircraft, such as bonded reinforcement joints and struts, so the percentage of adhesive bonds used probably scales greater than the percentage of composite used.

This increasing use of adhesives in aircraft since the 1970s is based upon chemistry that in some cases is decades old and has not translated to the continual development of new adhesive formulations or chemistries. Results from a market survey of the adhesives and sealants industries in 2008 revealed the following:

- The market survey reported profiles for 434 adhesive companies.
- The corporate trends seemed to point toward expanding production in the BRIC (Brazil, Russia, India, and China) nations.
- Adhesive industry corporate news was dominated by mergers and acquisitions. The market survey acknowledged that the adhesives market is very dynamic.
- For 2008, 255 recent product innovations/introductions were listed but only one was aerospace-related: “Huntsman Advanced Materials Unveils New Aerospace Adhesives”.
- New developments in solvent-free and environmentally friendly adhesive technology appears as most prevalent product innovation.<sup>92</sup>

By 2008 the technological development of aviation adhesives were certainly well within the upper plateau of growth potential based on a simple S-curve analysis, as shown in Fig. C-1.

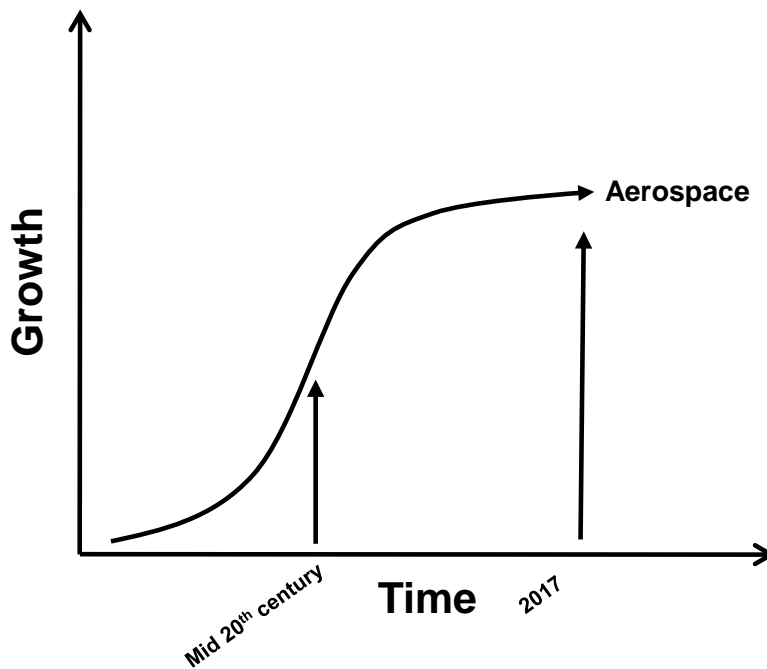


Fig. C-1 The “S-curve” for aerospace adhesives

## **11.0 Acknowledgments**

Further contributions to the information contained in this SPD are included in the references.<sup>93-97</sup>

The authors also acknowledge Mr John Bishopp for historical support. He began his career at Aero Research Ltd and was very gracious in providing historical documentation for the usage of aircraft adhesives by England during the Second World War and the subsequent development of Redux 775.

## 12.0 References

1. Jensen R, DeSchepper D, Flanagan D, Kosik-Chaney W, Robinette J, Chaney G, Pergantis C. Adhesives: test method, group assignment, and categorization guide for high-loading-rate applications. Aberdeen Proving Ground (MD): Army Research Laboratory (US); 2014 June. Report No.: ARL-SR-288.
2. ASTM standard D1002-10. Standard test method for apparent shear strength of single-lap-joint adhesively bonded metal specimens by tension loading (metal-to-metal). West Conshohocken (PA): ASTM International; 2010.
3. Woodward RL, Gooch WA, O'Donnell RG, Perciballi WJ, Baxter BJ, Pattie SD. A study of fragmentation in the ballistic impact of ceramics. *International Journal of Impact Engineering*. 1994;16:605–618.
4. Chin ESC. Army focused research team on functionally graded armor composites. *Materials Science and Engineering*. 1999;A259:155–161.
5. Lundberg P, Renstrom R, Lundberg B. Impact of metallic projectiles on ceramic targets: transition between interface defeat and penetration. *International Journal of Impact Engineering*. 2000;24:259–275.
6. Madhu V, Ramanjaneyulua K, Bhat TB, Gupta NK. An experimental study of penetration resistance of ceramic armour subjected to projectile impact. *International Journal of Impact Engineering*. 2005;32:337–350.
7. Savio SG, Ramanjaneyulua K, Madhu V, Bhat TB. An experimental study on ballistic performance of boron carbide tiles. *International Journal of Impact Engineering*. 2011;38:535–541.
8. Gupta N, Prasad VVB, Madhu V, Basu Bikramjit. Ballistic studies on TiB<sub>2</sub>-Ti functionally graded armor ceramics. *Defence Science Journal*. 2012;62:382–389.
9. Deka LJ, Bartus SD, Vaidya U.K. Multi-site impact response of S<sub>2</sub>-glass/epoxy composite laminates. *Composites Science and Technology*. 2009; 69:725–735.
10. Tasdemirci A, Hall IW. Numerical and experimental studies of damage generation in multi-layer composite materials at high strain rates. *International Journal of Impact Engineering*. 2007;34:189–204.
11. Bartus SD, Vaidy UK. A review: impact damage of composite materials. *Journal of Advanced Materials*. 2007;39:3–21.



12. Resnyansky AD. The impact response of composite materials involved in helicopter vulnerability assessment: literature review – part 1. Edinburgh (South Australia): Defence Science and Technology Organisation; 2006. DSTO Report No.: DSTO-TR-1842 Part 1.
13. Resnyansky AD. The impact response of composite materials involved in helicopter vulnerability assessment: literature review – part 2. Edinburgh (South Australia): Defence Science and Technology Organisation; 2006. Report No.: DSTO-TR-1842 Part 2.
14. Collaborative Research Alliance (CRA) for Materials in Extreme Dynamic Environments (MEDE). Funding opportunity title announced by the US Army Research Laboratory [accessed 2011]. [http://www.arl.arm.mil/www/pages/532/FINAL\\_MEDE\\_PA.pdf](http://www.arl.arm.mil/www/pages/532/FINAL_MEDE_PA.pdf).
15. Deka LJ, Bartus SD, Vaidya UK. Multi-site impact response of S2-glass/epoxy composite laminates. *Composites Science and Technology*. 2009;69:725–735.
16. Deka LJ, Bartus SD, Vaidya UK. Damage evolution and energy absorption of e-glass/polypropylene laminates subjected to ballistic impact. *Journal of Materials Science*. 2008;43(13):4399–4410.
17. Bartus SD. A review: impact damage of composite materials. *Journal of Advanced Materials*. 2007;39(3):3–21.
18. Bogetti TA, Hoppel CPR, Harik VM, Newill JF, Burns BP. Predicting the nonlinear response and failure of composite laminates: correlation with experimental results. *Composites Science and Technology*. 2004;64:477–485.
19. STANAG 4569. Procedures for evaluating the protection level of logistic and light armoured vehicles. Brussels (Belgium): North Atlantic Treaty Organization; 2012.
20. Wikipedia. STANAG 4569 [accessed 2012 Jan 24]. [http://en.wikipedia.org/wiki/STANAG\\_4569](http://en.wikipedia.org/wiki/STANAG_4569).
21. Purchase description transparent armor. Warren (MI): US Army Tank-Automotive and Armaments Command; 26 Apr 2010. Report No.: Metric ATPD 2352R.
22. ISI Web of Knowledge. Keyword search “predator and prey and evolution”. 2488 references, 199 since September 2012 [accessed 2013 Sep 5]. <https://webofknowledge.com>.
23. Mougi A, Iwasa Y. Unique coevolutionary dynamics in a predator–prey system. *Journal of Theoretical Biology*. 2011;277:83–89.

24. Lin G. Spreading speeds of a Lotka–Volterra predator–prey system: the role of the predator. *Nonlinear Analysis*. 2011;74:2448–2461.
25. Ellner SP, Becks L. Rapid prey evolution and the dynamics of two-predator food webs. *Journal of Theoretical Ecology*. 2011;4:133–152.
26. Reynolds C. Interactive evolution of camouflage. *Artificial Life*. 2011;17:123–136.
27. Zylberberg J, DeWeese MR. How should prey animals respond to uncertain threats? *Frontiers in Computational Neuroscience*. 2011;5:1–7.
28. He Q, Mobilia M, Tauber UC. Coexistence in the two-dimensional May-Leonard model with random rates. *The European Physical Journal B*. 2011;82:97–105.
29. Manchester W. *The last lion: Winston Spencer Churchill*. Boston (MA): Little, Brown and Company; 1988. p. 672. Manchester cites Liddell-Hart BH. *History of the Second World War*. London (UK): Weidenfeld Nicholson; 1970. p. 66–67.
30. Tasdemirci A, Tunusoglu G, Güden M. The effect of the interlayer on the ballistic performance of ceramic/composite armors: experimental and numerical study. *International Journal of Impact Engineering*. 2012;44:1–9.
31. Lopez-Puente J, Arias A, Zaera R, Navarro C. The effect of the thickness of the adhesive layer on the ballistic limit of ceramic/metal armours: an experimental and numerical study. *International Journal of Impact Engineering*. 2005;32:321–336.
32. Grujicic M, Pandurangan B, d’Entremont B. The role of adhesive in the ballistic/structural performance of ceramic/polymer–matrix composite hybrid armor. *Materials and Design*. 2012;41:380–393.
33. MIL-DTL-62474F w/amendment 1. Laminate: aramid-fabric-reinforced, plastic; 2008 May 21. Superseding MIL-DTL-62474F; 2007 Nov 29.
34. MIL-DTL-64154B w/amendment 1. Laminate: fiberglass-fabric-reinforced, phenolic; 19 2012 Jan 19. Superseding MIL-DTL-64154B; 2008 Dec 17.
35. MIL-DTL-46027K(MR). Armor plate, aluminum alloy, weldable 5083, 5456, and 5059; 2007 July 31. Superseding MIL-DTL-46027K(MR): 1998 Sep 4.

36. MIL-DTL-12560J(MR). Armor plate, steel, wrought, homogeneous (for use in combat-vehicles and for ammunition testing); 2009 July 24. Superseding MIL-A-12560H(MR) w/amendment 4; 2007 July 20 and MIL-DTL-46177C(MR); 1998 Oct 24.
37. Lane JP, Flagg JL. Translating three states of knowledge – discovery, invention, and innovation. *Implementation Science*. 2010;5(9).
38. Artz KW, Norman PM, Hatfield DE, Cardinal LB. A longitudinal study of the impact of R and D, patents, and product innovation on firm performance. *Journal of Product Innovation Management*. 2010;27:725–740.
39. Wikipedia. Joseph Schumpeter [accessed 2011 Dec 20]. [http://en.wikipedia.org/wiki/Joseph\\_Schumpeter](http://en.wikipedia.org/wiki/Joseph_Schumpeter).
40. McCraw TK. *Prophet of innovation: Joseph Schumpeter and creative destruction*. Cambridge (MA): Belknap Press of Harvard University Press; 2007.
41. Schumpeter JA. *Business cycles: a theoretical, historical and statistical analysis of the capitalist process*. Vol. 2. New York (NY): McGraw-Hill; 1939.
42. Boyer JL, Christensen CM. Disruptive technologies: catching the wave. *Harvard Business Review*. 1995;73(1):43–53.
43. Wonglimpiyarat J. The nano-revolution of Schumpeter's Kondratieff cycle. *Technovation*. 2005;25:1349–1354.
44. Nobelprize.org. The Nobel Prize in Physics 1956 [accessed 2011 Dec 22]. [http://www.nobelprize.org/nobel\\_prizes/physics/laureates/1956/](http://www.nobelprize.org/nobel_prizes/physics/laureates/1956/).
45. Riordan M. The lost history of the transistor. *IEEE Spectrum*. 2004;41(5):44–49.
46. Riordan M. The end of AT & T. *IEEE Spectrum*. 2005;42(7):46–51.
47. Riordan M. How Europe missed the transistor. *IEEE Spectrum*. 2005;42(11):52–57.
48. Riordan M. How Bell Labs missed the microchip. *IEEE Spectrum*. 2006;43(12):36–41.
49. Wikipedia. Innovation [accessed 2011 Dec 20]. <http://en.wikipedia.org/wiki/Innovation>.
50. Brynjolfsson E. TED.com [accessed 2014 June 4]. [https://www.ted.com/talks/erik\\_brynjolfsson\\_the\\_key\\_to\\_growth\\_race\\_em\\_with\\_em\\_the\\_machines](https://www.ted.com/talks/erik_brynjolfsson_the_key_to_growth_race_em_with_em_the_machines).

51. Brynjolfsson E, McAfee A. Winning the race with ever-smarter machines. MIT Sloan Management Review. 2012;53(2):51–60.
52. Godin B. In the shadow of Schumpeter: S Rupert Maclaurin and the study of technological innovation. Minerva. 2008;46:343–360.
53. Schmoch U. Double-boom cycles and the comeback of science-push and market-pull. Research Policy. 2007;36:1000–1015.
54. Asthana P. Jumping the technology s-curve. IEEE Spectrum. 1995;32(6):49–54.
55. Foster R, Kaplan S. Creative destruction: why companies that are built to last under-perform the market – and how to successfully transform them. New York (NY): Doubleday; 2001.
56. Foster R. Working the s-curve – assessing technological threats. Research Management. 1986;29(4):17–20.
57. 12Manage. S-Curve [accessed 2011 Dec 22]. [http://www.12manage.com/description\\_s\\_curve.html](http://www.12manage.com/description_s_curve.html).
58. Bonser RHC, Vincent JFV. Technology trajectories, innovation, and the growth of biomimetics. Journal of Mechanical Engineering Science Part C. 2007;221:1177–1180.
59. Sood A, Tellis GJ. Technological evolution and radical innovation. Journal of Marketing. 2005;69(7):152–168.
60. Nikula U, Jurvanen C, Gotel, O, Gause DC. Empirical validation of the classic change curve on a software technology change project. Information and Software Technology. 2010;52:680–696.
61. Bejan A, Lorente S. The constructal law origin of the logistics s curve. Journal of Applied Physics. 2011;110:024901.
62. Braunerhjelm P, Svensson R. The inventor’s role: was Schumpeter right? Journal of Evolutionary Economics. 2010;20:413–444.
63. Philibert C. Technology innovation, development and diffusion. Paris (France): Organisation for Economic Co-operation and Development (OECD) and International Energy Agency (IEA); 2003.
64. Schilling MA, Esmundo M. Technology s-curves in renewable energy alternatives: analysis and implications for industry and government. Energy Policy. 2009;37:1767–1781.

65. Cozzarin BP. Performance measures for the socio-economic impact of government spending on R and D. *Scientometrics*. 2006;68(1):41–71.
66. Yang K-P, Chiao Y-C, Kuo C-C. The relationship between R and D investment and firm profitability under a three-stage sigmoid curve model: evidence from an emerging economy. *IEEE Transactions on Engineering Management*. 2010;57(1):103–117.
67. Miller AG, Lovell DT, Seferis JC. The evolution of an aerospace material: influence of design, manufacturing and in-service performance. *Composite Structures*. 1994;27(1–2):193–206.
68. De Bruyne NA, Rayner CAA. Improvements in or relating to synthetic resin adhesives or cements. British patent 540,442; 1941 Oct 17.
69. De Bruyne NA, Newell GS, Perry KRC, inventors; Ciba Ltd, assignee. Self-sustaining adhesive sheet and process for producing the same as well as for uniting surfaces with it. United States patent US 2,872,365. 1959 Feb 3.
70. De Bruyne NA, inventor. Rohm & Haas, assignee. Method of providing adhesion between surfaces. United States patent US 2,499,134. 1950 Feb 28.
71. Dietz AGH, Grinsfelder H. Behavior of plywood under repeated stresses *Transactions of the ASME*. 1943;65:187–191.
72. Kinloch AJ. Norman Adrian de Bruyne, 8 November 1904 – 7 March 1997. *Biographical Memoirs of Fellows of the Royal Society*. 2000;46:125–143.
73. Bishopp JA. The history of redux and the redux bonding process. *International Journal of Adhesion and Adhesives*. 1997;17:287–301.
74. Cognard P, editor. *Handbook of adhesives and sealants*. Chapter 5, vol. 1: adhesives and sealants: basic concepts and high tech bonding. San Diego (CA): Elsevier; 2005.
75. Baekeland LH, inventor. Baekeland LH, assignee. Method of making insoluble products of phenol and formaldehyde. United States patent US 942,699. 1909 Dec 7.
76. Ripper K, inventor. Process for manufacturing homogeneous glasslike condensation products of urea and formaldehyde. United States patent US 1,625,283. 1927 Apr 19.
77. Prager W. The influence of distortion on the theorem of plastic bodies. *Zeitschrift fur Angewandte Mathematik und Mechanik*. 1935;15:76–80.

78. Wagner H. Flat sheet metal girders with very thin webs, part I – general theories and assumptions. Washington (DC): National Advisory Committee for Aeronautics; 1931. Technical Memorandum No. 604.
79. The Aeroplane. 1946 Sep 20; No: 329.
80. Adhesives - the redux range of film adhesives, foaming films, primers and liquid shims [accessed 2016 Dec 6]. <http://www.hexcel.com/products/aerospace/adhesives-main>.
81. Wikipedia. Epoxy [accessed 2012 Jan 01]. [http://en.wikipedia.org/wiki/Epoxy\\_adhesive#Adhesives](http://en.wikipedia.org/wiki/Epoxy_adhesive#Adhesives).
82. Castan P, inventor. Process of preparing synthetic resins. United States patent 2,324,483. 1943 July 20.
83. Greenlee SO, inventor, Devoe & Reynolds Co., assignee. Amine-epoxy-phenol compositions. United States patent 2,510,855. 1950 June 6.
84. Higgins A. Adhesive bonding of aircraft structures. International Journal of Adhesion and Adhesives. 2000;20:367–376.
85. Been JL, Grover MM, inventors, Rubber and Asbestos Corporation, assignee. Adhesive compositions of polyepoxide resins and butadiene-acrylonitrile rubbers and method of making bristle brushes using same. United States patent US 2,879,252. 1959 Mar 24.
86. Olsen MM, inventor, assigned to Minnesota Mining and Manufacturing Company (3M), assignee. Adhesive-coated sheet material. United States patent US 3,326,741. 1967 June 20.
87. Batzer H, Lohse F, Schmid R, inventors. Ciba Ltd., assignee. Curable epoxy resin composition containing novel dissecondary amines. United States patent US 3,609,121 1971 Sep 28.
88. Angelo RJ, Tatum WE, inventors, E.I. du Pont de Nemours and Company, assignee. Aromatic polyamide-amides. United States patent US 3,316,212; 1967 Apr 25.
89. Loudas BL, Vogel HA, inventors, Minnesota Mining and Manufacturing Company (3M), assignee. Cyanatophenyl-terminated polyarylene ethers. United States patent US 3,595,900. 1971 July 27.
90. Chin JW, Wightman JP. Surface characterization and adhesive bonding of toughened bismaleimide composites. Composites Part A. 1996;27A:419–428.

91. Kinloch AJ, Taylor AC. The toughening of cyanate-ester polymers. part 1 - physical modification using particles, fibres and woven-mates. *Journal of Materials Science*. 2002;37:433–460.
92. MarketResearch.com. Adhesives and sealants. San Jose (CA): Global Industry Analysts, Inc; 2008 Mar 1.
93. Jensen R, Kosik W, Gardner J, O'Brien D. Critical adhesive needs for Army applications and opportunities for innovation. Presented at the 34th Annual Meeting of the Adhesion Society; 2011 Feb 13–16; Savannah, GA.
94. Kosik W, Squillacioti R, Ziegler W, Gardner J, Jensen R. Novel adhesives innovation through forward looking specifications requirements and database implementation. Presented at the 34th Annual Meeting of the Adhesion Society; 2011 Feb 13–16; Savannah, GA.
95. Jensen R, Kosik WC, DeSchepper D, Flanagan D. Leveraging Army unique mission requirements to advance the state-of-the-art in adhesives development. Blacksburg (VA): Adhesion Society Newsletter; 2011 Dec.
96. Kosik WC, Kaufman J, DeSchepper D, Flanagan D. Curatorial protocols for capturing single-lap joint test results using the materials selection analysis tool platform. Presented at the 35th Annual Meeting of the Adhesion Society; 2012 Feb 26; New Orleans, LA.
97. Jensen R, Kaufman J, Kosik WC, Henrie B. Screening adhesively bonded single-lap-joint testing results using nonlinear calculation parameters. Presented at the 35th Annual Meeting of the Adhesion Society; 2012 Feb 26; New Orleans, LA.

INTENTIONALLY LEFT BLANK.



## List of Symbols, Abbreviations, and Acronyms

---

ARL	US Army Research Laboratory
BMI	bismaleimide
BRIC	Brazil, Russia, India, and China
CCEPB	Coatings, Corrosion and Engineered Polymers Branch
$d_{\text{failure}}$	displacement complete failure
DOD	Department of Defense
MEDEs	Materials in Extreme Dynamic Environments
RAE	Royal Aircraft Establishment
RT	room temperature
$S_{\text{max}}$	maximum strength
SPD	standard process description

1 DEFENSE TECHNICAL  
(PDF) INFORMATION CTR  
DTIC OCA

2 DIRECTOR  
(PDF) US ARMY RESEARCH LAB  
RDRL CIO L  
IMAL HRA MAIL & RECORDS  
MGMT

1 GOVT PRINTG OFC  
(PDF) A MALHOTRA

1 DIR USARL  
(PDF) RDRL WMM C  
R JENSEN