REPORT DOCUMENTATION PAGE

Form Approved OMB NO. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggesstions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA, 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any oenalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE F	ABOVE ADDRESS.			
1. REPORT DATE (DD-MM-YYYY)	2. REPORT TYPE		3. DATES COVERED (From - To)	
14-12-2016	Final Report		9-Mar-2016 - 8-Sep-2016	
4. TITLE AND SUBTITLE		5a. CONTRACT NUMBER		
Final Report: Instrumentation up-fit for reactive nanolaminate			W911NF-16-1-0077	
PVD		5b. GF	RANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER		
		61110	02	
6. AUTHORS		5d. PROJECT NUMBER		
Jon-Paul Maria				
		5e. TA	SK NUMBER	
		5f. WC	ORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAM	ES AND ADDRESSES		8. PERFORMING ORGANIZATION REPORT	
North Carolina State University			NUMBER	
2701 Sullivan Drive				
Admin Srves III, Box 7514	\5. 5 514			
	95 -7514		10. CRONCOR/MONITORIC A CRONWAY(C)	
9. SPONSORING/MONITORING AGENCY (ES)	(NAME(S) AND ADDRESS		10. SPONSOR/MONITOR'S ACRONYM(S) ARO	
U.S. Army Research Office P.O. Box 12211			11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
Research Triangle Park, NC 27709-2211			68172-EG-RI.1	
12. DISTRIBUTION AVAILIBILITY STATE	EMENT			
Approved for Public Release; Distribution Unl	imited			
13. SUPPLEMENTARY NOTES				
The views, opinions and/or findings contained	l in this report are those of the a	uthor(s) ai	nd should not contrued as an official Department	

The views, opinions and/or findings contained in this report are those of the author(s) and should not contrued as an official Department of the Army position, policy or decision, unless so designated by other documentation.

14. ABSTRACT

PI Maria conducted an instrument upfit for physical vapor deposition (PVD) systems that combines electron beam (e-beam) evaporation with magnetron sputtering and pulsed laser deposition. The original instrumentation was supported by a 2014 DURIP award to enable clean, uniform, and rapid deposition of a wide variety of metallic, semiconducting, and ceramic thin films that serve multiple current and pending DoD programs at NCSU. While this instrumentation benefits several programs, its primary role is to support nanoenergetic materials research and

15. SUBJECT TERMS

PVD, multilayer, sputtering

16. SECURITY CLASSIFICATION OF:				19a. NAME OF RESPONSIBLE PERSON	
a. REPORT	b. ABSTRACT	c. THIS PAGE	ABSTRACT	OF PAGES	Jon-Paul Maria
UU	UU	υυ	UU		19b. TELEPHONE NUMBER 919-522-9310

Report Title

Final Report: Instrumentation up-fit for reactive nanolaminate PVD

ABSTRACT

PI Maria conducted an instrument upfit for physical vapor deposition (PVD) systems that combines electron beam (e-beam) evaporation with magnetron sputtering and pulsed laser deposition. The original instrumentation was supported by a 2014 DURIP award to enable clean, uniform, and rapid deposition of a wide variety of metallic, semiconducting, and ceramic thin films that serve multiple current and pending DoD programs at NCSU. While this instrumentation benefits several programs, its primary role is to support nanoenergetic materials research and the new NCSU-led MURI: Multi-modal Energy Flow at Atomically Engineered Interfaces.

Enter List of papers submitted or published that acknowledge ARO support from the start of the project to the date of this printing. List the papers, including journal references, in the following categories:

(a) Papers published in peer-reviewed journals (N/A for none)

Received	<u>Paper</u>
TOTAL:	
Number of Paper	s published in peer-reviewed journals:
	(b) Papers published in non-peer-reviewed journals (N/A for none)
Received	<u>Paper</u>
TOTAL:	
Number of Paper	s published in non peer-reviewed journals:

(c) Presentations

Number of Pre	sentations: 0.00
	Non Peer-Reviewed Conference Proceeding publications (other than abstracts):
Received	<u>Paper</u>
TOTAL:	
1011121	
Number of Non	n Peer-Reviewed Conference Proceeding publications (other than abstracts):
	Peer-Reviewed Conference Proceeding publications (other than abstracts):
Received	<u>Paper</u>
TOTAL:	
Number of Pee	r-Reviewed Conference Proceeding publications (other than abstracts):
	(d) Manuscripts
Received	<u>Paper</u>
тоты	
TOTAL:	
Number of Ma	nuscrints:
	Books
	Dooks
Received	<u>Book</u>
received	<u>Book</u>
TOTAL:	

Received	Book Chapter	
TOTAL:		
		Patents Submitted
		Patents Awarded
		Awards
		Graduate Students
<u>NAME</u>		PERCENT_SUPPORTED
FTE Equ		
Total Nu	mber:	
		Names of Post Doctorates
<u>NAME</u>		PERCENT_SUPPORTED
FTE Equ		
Total Nu	mber:	
		Names of Faculty Supported
NAME		PERCENT_SUPPORTED
FTE Equ	ivalent:	
Total Nu	mber:	
	N	ames of Under Graduate students supported
NAME		PERCENT_SUPPORTED
FTE Equ	ivalent:	
Total Nu		

Student Metrics This section only applies to graduating undergraduates supported by this agreement in this reporting period
The number of undergraduates funded by this agreement who graduated during this period with a degree in science, mathematics, engineering, or technology fields: 0.00 The number of undergraduates funded by your agreement who graduated during this period and will continue to pursue a graduate or Ph.D. degree in science, mathematics, engineering, or technology fields: 0.00 Number of graduating undergraduates who achieved a 3.5 GPA to 4.0 (4.0 max scale): 0.00 Number of graduating undergraduates who achieved a DoD funded Center of Excellence grant for Education, Research and Engineering: 0.00 The number of undergraduates funded by your agreement who graduated during this period and intend to work for the Department of Defense 0.00 The number of undergraduates funded by your agreement who graduated during this period and will receive scholarships or fellowships for further studies in science, mathematics, engineering or technology fields: 0.00
Names of Personnel receiving masters degrees
<u>NAME</u>
Total Number:
Names of personnel receiving PHDs
<u>NAME</u>
Total Number:
Names of other research staff
NAME PERCENT_SUPPORTED
FTE Equivalent: Total Number:
Sub Contractors (DD882)
Inventions (DD882)
Scientific Progress

Technology Transfer

please see attached document

PROJECT DESCRIPTION

PI Maria used the RI support to enhance and expand physical vapor deposition (PVD) systems that combines electron beam (e-beam) evaporation with magnetron sputtering and pulsed laser deposition. The instrumentation was originally supported by a 2014 DURIP award to enable clean, uniform, and rapid deposition of a wide variety of metallic, semiconducting, and ceramic thin films that serve multiple current and pending DoD programs at NCSU. While this instrumentation benefits several programs, its primary role is to support nanoenergetic materials research under the current following programs:

W911NF-13-1-0493: Rational Engineering of Reactive Nanolaminates for Tunable Ignition and Power

W911NF-16-1-0406: "Multi-modal Energy Flow and Atomically Engineered Interfaces"

DESCRIPTION OF EXISTING AND ENHANGED EQUIPMENT

The 2014 DURIP program supported fabrication of two physical vapor deposition systems that accommodate sputtering, e-beam evaporation, and, pulsed laser deposition. While the configurations are optimized for nanolaminate deposition, they include design elements and capabilities that complement existing infrastructure at NCSU to ensure maximum impact on existing and future research programs.

The original proposal was designed to fund one system that could accommodate all modes of deposition. However, doing so would have put restrictions on the composite set of capabilities. For example; changing between modes would have required source exchanges that would compromise vacuum cleanliness, it would be difficult to have one sample manipulator position that offered ideal source-to-substrate distances for evaporation, laser deposition, and sputtering, and the composite geometry that accommodated all sources would impart limits on film thickness uniformity.


To eliminate these compromises, the Maria Group incorporated a series of existing components from the Maria labs into the construction plan. In so doing, the same amount of DURIP support was able to create two companion systems that could accomplish, with ideal deposition conditions/configurations, all of the deposition modes desired. Pressure ranges, temperature ranges, and source-to-substrate distances that are suited ideally for each individual technique could be achieved by separating the chambers. In addition, two chambers increase substantially the total throughput.

The original RI grant request was to support modest additions to the current system that could impart additional deposition capabilities well beyond those proposed initially. Specifically:

- 1. A load lock chamber that serves both chambers and allows sample hand-off between systems in vacuo; and,
- 2. A substrate manipulator for the evaporator chamber that allows deposition at elevated temperatures.

While the RI was pending review, the Maria Group and collaborators competed for and ultimately were awarded an ARO MURI titled: Multi-modal Energy Flow at Atomically Engineered Interfaces. This MURI supports a companion effort to W911NF-13-1-0493 focusing on energetic nanomaterials and a partnering effort on energy relaxation in interfacial plasmonic structures. With this large new program pending, the PI requested (and was granted permission) to redirect some of the funding to best serve the entire set of instrumentation that serves ARO programs at NCSU.

To this effect, approximately 40% of the funds were redirected from the originally proposed intent. The substrate manipulator that would be fitted into the existing evaporator was purchased from NBM designs as originally planned. The manipulator was installed and operates as intended. Substrates can now be heated to temperatures as high as 850 °C which will enable reactive depositions, improved microstructures, epitaxy if needed, and smoother surfaces. An image of the system with the new manipulator is shown below:

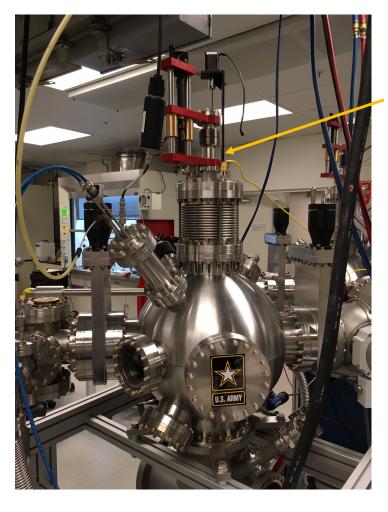

New high temperature substrate manipulator assembly for existing ebeam evaporation system

Figure 1: E-beam evaporator unit built with 2014 ARO DURIP grant with the addition of a high temperature substrate manipulator

Instead of a load-lock that would link both existing systems, we redirected funding to assist construction of a new PVD system that would be dedicated to the plasmonic thrust of the new NCSU MURI. The funds left over after manipulator purchase were applied to the purchase of a new sputtering chamber, a pulsed DC power supply, and several custom source flanges. These components, combined with existing equipment at NCSU enabled our team to construct the system shown below that is dedicated to CdO-based plasmonic heterostructures.

New pulsed DC plasma power supply for reactive sputtering of CdO thin films

New 18" spherical chamber to house a multi-cathode reactive sputtering process of conductor/insulator heterostructures

New custom flanges to support magnetrons with individual shutters

New custom flanges to support magnetrons with individual shutters

Figure 2: Photograph of new multi-magnetron sputtering system at Maria Labs for preparing plasmonic multilayers for the NCSU MURI: Multi-modal Energy Flow at Atomically Engineered Interfaces. The three items supported by this RI are highlighted in the image.

All up-fits were completed by November 2016 and both systems are fully tested and qualified, and deposition optimization research is underway.