A036735

⑫

B.S.

PRINCETON UNIVERSITY

Department of Civil Engineering

D D C

AUG 26 1977

RECEIVED

B

STRUCTURES AND MECHANICS

SCREW DISLOCATION IN NONLOCAL
HEXAGONAL ELASTIC CRYSTALS

by

A. Cemal Eringen
and
F. Balta

D D C

AUG 26 1977

B

July 1977

SCREW DISLOCATION IN NONLOCAL[1]
HEXAGONAL ELASTIC CRYSTALS

by

A. Cemal Eringen
and
F. Balta
Princeton University

ABSTRACT

The solution is given for the problem of screw dislocation in
hexagonal crystals with long range interatomic interactions.
The field equations of nonlocal elastic solids are employed
to determine the anti-plane shear stresses and the elastic
energy for a screw dislocation in the basal plane. Interestingly
enough, none of the classical stress and energy singularities
are present in the nonlocal solutions. Maximum shear stresses
are calculated for several hexagonal crystals and compared
with the isotropic materials. Theoretical shear stress to
initiate a dislocation with a Burger's vector of one atomic
distance is calculated and found to be in the acceptable range
known from the lattice dynamic calculations.

1. INTRODUCTION

The classical elasticity solutions of Volterra dislocations are well

documented (cf. [1]). The simplest among these is the screw dislocation

in an isotropic elastic solid which exhibits a $1/r$-singularity for the shear

stress and a logarithmic singularity for the elastic energy. The classical

elasticity solutions, therefore, fail in a "core region" near the center

line of a cylinder. In a previous paper [2] we have shown that such

singularities are not present in the solutions based on the nonlocal elasticity

theory. This, rather recent theory [3,4], models the solids much more

---

satisfactorily in that the effect of long range interatomic interactions are taken into account in the stress constitutive equations. This in return allows the treatment of geometrical discontinuities and those associated with the physical inputs (force distributions, wave lengths, energy, etc.) in a more satisfactory manner. Yet, it is a continuum theory so that all problems can be formulated as boundary-value problems. The failure of classical elasticity theory in the dislocation core region has led physicists to invent various atomistic models to provide an estimate for the state of stress and energy in this region.

Encouraged with the results of our recent work on isotropic nonlocal elastic solids [2] we felt that the analysis should be extended to anisotropic solids, since in anisotropic materials the solution is influenced highly with the orientational effects. Hexagonal crystals represent technically an important class of materials with well-known stable dislocation patterns. Here we give the solution of the screw dislocation problem with the Burger's vector lying in the basal plane. In section 2 we present a brief summary of the field equations of the nonlocal elasticity theory. In section 3 we obtain the solution of the screw dislocation problem leading to expressions of the stress fields and the elastic energy. In section 4 some results of computer calculations are presented and the maximum shear stresses that cause a single dislocation in several hexagonal crystals (Mg, Apatite, Cd, Zn) are calculated. The shear stress distributions along a radial plane for these crystals display considerable differences from those for the isotropic solids. Gratifyingly no stress and energy singularity occur so that by use of the maximum shear stress hypothesis it is possible to calculate theoretical shear stress (cohesive stress).

2. FORMULATION

The basic equations of linear, homogeneous, nonlocal elastic solids, in the static case with vanishing body force, are [3,4]:

$$(2.1) \qquad t_{k\ell,k} = 0$$

$$(2.2) \qquad t_{k\ell} = \int_V a_{k\ell mn}(\underset{\sim}{x}',\underset{\sim}{x}) e_{mn}(\underset{\sim}{x}') dv(\underset{\sim}{x}') \,,$$

$$(2.3) \qquad e_{mn} = \tfrac{1}{2}(u_{m,n} + u_{n,m}) \,,$$

where the only difference from the classical elasticity theory is in the stress constitutive equations (2.2) which state that the stress at a reference point $\underset{\sim}{x}$ is a function of strains at <u>all</u> points $\underset{\sim}{x}'$. As usual we use the summation convention for the repeated indices over the range $(1,2,3)$ and denote the partial differentiation with respect to x_k by a comma, e.g.

$$t_{k\ell,m} \equiv \partial t_{k\ell}/\partial x_m \,, \qquad u_{k,\ell}(\underset{\sim}{x}') = \partial u_k/\partial x'_\ell \,.$$

The total strain energy of the body is given by

$$(2.4) \qquad \Sigma = \tfrac{1}{2}\int_V t_{k\ell} e_{\ell k} dv = \tfrac{1}{2}\int_V \int_V a_{k\ell mn}(\underset{\sim}{x}',\underset{\sim}{x}) e_{k\ell}(\underset{\sim}{x}) e_{mn}(\underset{\sim}{x}') dv(\underset{\sim}{x}') dv(\underset{\sim}{x})$$

From this expression and (2.2) it is clear that the nonlocal elastic moduli $a_{k\ell mn}(\underset{\sim}{x}',\underset{\sim}{x})$ possess the symmetry regulations

$$(2.5) \qquad a_{k\ell mn}(\underset{\sim}{x}',\underset{\sim}{x}) = a_{\ell kmn}(\underset{\sim}{x}',\underset{\sim}{x}) = a_{mnk\ell}(\underset{\sim}{x},\underset{\sim}{x}') = a_{nmk\ell}(\underset{\sim}{x},\underset{\sim}{x}')$$

Hence there are 21 independent functions for the nonlocal anisotropic solids that contribute to the total elastic energy. The translational invariance of (2.2) dictates that for homogeneous materials $a_{k\ell mn}$ must depend on $\underset{\sim}{x}'-\underset{\sim}{x}$. Hence

$$(2.6) \qquad a_{k\ell mn}(\underset{\sim}{x}',\underset{\sim}{x}) = a_{k\ell mn}[(x_1'-x_1)^2, (x_2'-x_2)^2, (x_3'-x_3)^2]$$

In conformity with the phonon dispersion curves in lattice dynamics we can approximate $a_{k\ell mn}(\underset{\sim}{x}'-\underset{\sim}{x})$ by

$$(2.7) \qquad a_{k\ell mn}(\underset{\sim}{x}'-\underset{\sim}{x}) = c_{k\ell mn}\alpha[(x_1'-x_1)^2, (x_2'-x_2)^2, (x_3'-x_3)^2],$$

where $c_{k\ell mn}$ are the elastic constants of the classical elasticity and $\alpha(\underset{\sim}{x}'-\underset{\sim}{x})$ is an _attenuation_ _function_ that depends on $\underset{\sim}{x}'-\underset{\sim}{x}$.

From the physics of solids the following properties of $\alpha(\underset{\sim}{x}'-\underset{\sim}{x})$ are obvious.

(a) $\alpha(\underset{\sim}{x}'-\underset{\sim}{x})$ attenuates rapidly with $x_k'-x_k$.

(b) In the classical elasticity limit $\alpha(\underset{\sim}{x}'-\underset{\sim}{x})$ must become a Dirac delta measure.

Based on these observations we assume that:

(i) $\alpha(\underset{\sim}{x}'-\underset{\sim}{x})$ is a continuous function of $\underset{\sim}{x}'-\underset{\sim}{x}$, with a bounded support Ω where $\alpha>0$.

(ii)

$$(2.8) \qquad \int_{\Omega} \alpha(\underset{\sim}{x}'-\underset{\sim}{x})dv(\underset{\sim}{x}') = 1 \quad.$$

In an exactly similar fashion to our work [2] we can now prove that (2.1) and (2.2) are satisfied if and only if

(2.9) $\sigma_{k\ell,k} = 0$ in V ,

where

(2.10) $\sigma_{k\ell} = c_{k\ell mn} e_{mn}$

is the classical Hookes' law. This result may be stated as:

Theorem of Correspondence:

The displacement field of the boundary-value problem of nonlocal, anisotropic elasticity, under the assumptions (i) and (ii), is identical to that of the classical anisotropic elasticity theory. The stress field is, however, given by

$$(2.11) \quad t_{k\ell}(\underset{\sim}{x}) = \int_V \alpha(\underset{\sim}{x}'-\underset{\sim}{x})\sigma_{k\ell}(\underset{\sim}{x}')dv(\underset{\sim}{x}') .$$

These results are valid for any kind of anisotropic solid.

For the hexagonal crystals the number of non-zero independent elastic constants $c_{k\ell mn}$ is five (cf. [1] p. 428) so that (2.10) has the form:

$$(2.12) \quad \begin{bmatrix} \sigma_{11} \\ \sigma_{22} \\ \sigma_{33} \\ \sigma_{23} \\ \sigma_{31} \\ \sigma_{12} \end{bmatrix} = \begin{bmatrix} c_{11} & c_{12} & c_{13} & 0 & 0 & 0 \\ c_{12} & c_{22} & c_{12} & 0 & 0 & 0 \\ c_{13} & c_{12} & c_{11} & 0 & 0 & 0 \\ 0 & 0 & 0 & c_{44} & 0 & 0 \\ 0 & 0 & 0 & 0 & c_{55} & 0 \\ 0 & 0 & 0 & 0 & 0 & c_{44} \end{bmatrix} \begin{bmatrix} e_{11} \\ e_{22} \\ e_{33} \\ e_{23} \\ e_{31} \\ e_{12} \end{bmatrix}$$

where

$$c_{11} = c_{1111} \quad , \quad c_{12} = c_{1122} \quad , \quad c_{13} = c_{1133} \quad , \quad c_{22} = c_{2222} \quad ,$$

(2.13)

$$c_{44} = c_{2323} \quad , \quad c_{55} = \tfrac{1}{2}(c_{11}-c_{13})$$

The attenuation function $\alpha(\underset{\sim}{x}'-\underset{\sim}{x})$ may also have different rates of decay in the basal plane perpendicular to the x_2-axis than in the x_2-direction. Considering the fact that in the basal plane, hexagonal crystals are isotropic and recalling (2.7) we must have

(2.14) $\quad \alpha = \alpha\,[\,(x_\beta'-x_\beta)(x_\beta'-x_\beta),\ (x_2'-x_2)^2\,] \quad , \quad \beta=1,3 \ .$

The specific form of this function can be fixed by the dispersion curves available in lattice dynamics. A very useful one is the function[1]

(2.15) $\quad \alpha = \alpha_o \exp[-(k_1/a)^2(x_\beta'-x_\beta)(x_\beta'-x_\beta)-(k_2/a)^2(x_2'-x_2)^2], \ \beta=1,3$

where α_o is determined by the normalization (2.8). The constants k_1 and k_2 are, respectively, the attenuation factors in the basal plane and along the x_2-axis and a is the lattice parameter.

---

[1] While this function does not have finite support nevertheless it gives the Dirac delta measure in the limit $a \to 0$.

3.   SCREW DISLOCATION

A pure screw dislocation in the z-direction in the basal plane of a hexagonal crystal is possible, Fig. 1. Referred to rectangular coordinates $(x_1=x, \; x_2=y, \; x_3=z)$, the nonzero components of the displacement and stress fields are given by (cf. [1], p. 426)

$$(3.1) \qquad u_z = \frac{b}{2\pi} \tan^{-1} (B^{-\frac{1}{2}}y/x),$$

$$(3.2) \qquad \sigma_{xz} = - \frac{Ab}{2\pi} \; \frac{y}{Bx^2+y^2} \; ,$$

$$(3.3) \qquad \sigma_{yz} = \frac{ABb}{2\pi} \; \frac{x}{Bx^2+y^2}$$

where $b=(0,0,b)$ is the Burger's vector, and A and B are constants related to the classical elastic moduli c_{ij} by

$$(3.4) \qquad A = [c_{44}(c_{11}-c_{13})/2]^{\frac{1}{2}} \quad , \qquad B = 2c_{44}/(c_{11}-c_{13})$$

The elastic energy per unit length of a cylinder, with inner and outer radii r_o and R, is given by

$$(3.5) \qquad \Sigma/L = \frac{Ab^2}{4\pi} \, \ell n \, (\frac{R}{r_o}) \quad .$$

From these results it is clear that the stress field has a 1/r-singularity and the energy has a logarithmic singularity as $r_o \to 0$. This, of course, is the troublesome state, well-known in classical elasticity.

According to the theorem of correspondence we can employ these results to obtain the solution in nonlocal elasticity. To this end we first calculate the classical stress fields in cylindrical coordinates. Thus,

$$(3.6) \quad \sigma_{\theta z} = -\sigma_{xz}\sin\theta + \sigma_{yz}\cos\theta = \frac{Ab}{2\pi}\frac{1}{r} \quad ,$$

$$\sigma_{rz} = \frac{A(B-1)b}{2\pi}\frac{1}{r}\frac{\tan\theta}{B+\tan^2\theta} \quad ,$$

where

$$\cos\theta = x/(x^2+y^2)^{\frac{1}{2}} \quad , \quad \sin\theta = y/(x^2+y^2)^{\frac{1}{2}} \quad .$$

In curvilinear coordinates the physical components of the stress field $t^{(k)}_{(\ell)}$ is given by (see [2])

$$(3.7) \quad t^{(k)}_{(\ell)} = \int_V \alpha(\underset{\sim}{x}'-\underset{\sim}{x})\sigma^{(k')}_{(\ell')}(\underset{\sim}{x}')\delta^{\ell'}_{\ell}\delta^{k}_{k'}dv(\underset{\sim}{x}') \quad ,$$

where $\delta^{\ell'}_{\ell}$ and $\delta^{k}_{k'}$ are the direction cosines between the curvilinear coordinates x'^{k} and x^{k}. In this case we have

$$\delta^{1}_{1'} = \delta^{2}_{2'} = \underset{\sim}{e}_r\cdot\underset{\sim}{e}'_r = \underset{\sim}{e}_\theta\cdot\underset{\sim}{e}'_\theta = \cos(\theta'-\theta) \quad , \quad \delta^{3}_{3'} = \underset{\sim}{e}_z\cdot\underset{\sim}{e}'_z = 1 \quad ,$$

$$(3.8)$$

$$\delta^{2}_{1'} = \underset{\sim}{e}_\theta\cdot\underset{\sim}{e}'_r = \sin(\theta'-\theta) \quad , \quad \delta^{1}_{2'} = \underset{\sim}{e}_r\cdot\underset{\sim}{e}'_\theta = -\sin(\theta'-\theta),$$

where $(\underset{\sim}{e}_r, \underset{\sim}{e}_\theta, \underset{\sim}{e}_z)$ are the unit vectors of the cylindrical coordinates at x and $(\underset{\sim}{e}'_r, \underset{\sim}{e}'_\theta, \underset{\sim}{e}'_z)$ are those at $\underset{\sim}{x}'$, Fig. 2.

Substituting (3.8) into (3.7) we obtain

$$t_{rz} = \int_V \alpha(\underset{\sim}{x}'-\underset{\sim}{x})\ [-\sigma_{\theta z}(\underset{\sim}{x}')\sin(\theta'-\theta)+\sigma_{rz}(\underset{\sim}{x}')\cos(\theta'-\theta)]dv(\underset{\sim}{x}'),$$

$$(3.9)$$

$$t_{\theta z} = \int_V \alpha(\underset{\sim}{x}'-\underset{\sim}{x})\ [\sigma_{\theta z}(\underset{\sim}{x}')\cos(\theta'-\theta)+\sigma_{rz}(\underset{\sim}{x}')\sin(\theta'-\theta)]dv(\underset{\sim}{x}') \quad .$$

The normalization constant α_o in (2.15) is obtained by integrating over the infinite space. This gives

(3.10) $\alpha_o = \pi^{-3/2} k_1^2 k_2 a^{-3}$.

In cylindrical coordinates for the function α we have

$$\alpha(\underset{\sim}{x}'-\underset{\sim}{x}) = \alpha_o \exp[-(k_1/a)^2(z'-z)^2] \cdot \exp[-(k_1/a)^2 r^2 \cos^2\theta$$
$$-(k_2/a)^2 r^2 \sin^2\theta] \cdot \exp[-(k_1/a)^2(r'^2\cos^2\theta'-2rr'\cos\theta\cos\theta')$$
$$-(k_2/a)^2(r'^2\sin^2\theta'-2rr'\sin\theta\sin\theta')]$$

If we note that the function α is even in $(\theta'-\theta)$ the integrals in (3.9) take the forms

$$t_{rz} = \frac{A(B-1)b}{2\pi} \int_{-\infty}^{\infty}\int_{o}^{\infty}\int_{o}^{2\pi} \alpha(\underset{\sim}{x}'-\underset{\sim}{x}) \frac{\tan\theta'}{B+\tan^2\theta'} \cos(\theta'-\theta)d\theta'dr'dz' \quad ,$$

(3.12)

$$t_{\theta z} = \frac{Ab}{2\pi} \int_{-\infty}^{\infty}\int_{o}^{\infty}\int_{o}^{2\pi} \alpha(\underset{\sim}{x}'-\underset{\sim}{x})[\cos(\theta'-\theta)+(B-1)\frac{\tan\theta'}{B+\tan^2\theta'}\sin(\theta'-\theta)]d\theta'dr'dz' \; .$$

Integration in (3.12) over r' and z' can be carried out leading to

$$t_{rz} = \frac{Ak\kappa}{4\pi^{3/2}} \frac{b}{a} \int_{o}^{2\pi} [(B-1)\frac{\sin\theta'\cos\theta'}{1+(B-1)\cos^2\theta'} \cos(\theta'-\theta)f(\rho,\theta,\theta')d\theta' \quad ,$$

(3.13)

$$t_{\theta z} = \frac{Ak\kappa}{4\pi^{3/2}} \frac{b}{a} \int_{o}^{2\pi} [\cos(\theta'-\theta)+(B-1)\frac{\sin\theta'\cos\theta'}{1+(B-1)\cos^2\theta'}\sin(\theta'-\theta)]f(\rho,\theta,\theta')d\theta'$$

where

(3.14) $\rho = kr/a$, $k=k_1$, $k_2/k_1 = \kappa$

$$f(\rho,\theta,\theta') = \exp\{-\rho^2[1+(\kappa^2-1)\sin^2\theta - \frac{(\cos\theta\cos\theta'+\kappa^2\sin\theta\sin\theta')^2}{1+(\kappa^2-1)\sin^2\theta'}]\}$$

$$\cdot\{1+\text{erf}[\rho\ \frac{\cos\theta\cos\theta'+\kappa^2\sin\theta\sin\theta'}{[1+(\kappa^2-1)\sin^2\theta']^{\frac{1}{2}}}]\}$$

$$\cdot[1+(\kappa^2-1)\sin^2\theta']^{-\frac{1}{2}}$$

The displacement field is given by

(3.15) $u_r = u_\theta = 0$, $u_z = \frac{b}{2\pi}\ \tan^{-1}(B^{-\frac{1}{2}}\tan\theta)$,

so that the only non-zero componenet of the strain tensor is

(3.16) $e_{\theta z} = \frac{B^{\frac{1}{2}}b}{4\pi}\ \frac{1}{r}\ [1+(B-1)\cos^2\theta]^{-1}$.

The total strain energy per unit length in the z-direction is now
calculated by

(3.17) $\Sigma/L = \frac{B^{\frac{1}{2}}b}{8\pi}\ \int_{r_0}^{R}\ [1+(B-1)\cos^2\theta]^{-1}t_{\theta z}(r,\theta)drd\theta$

4. DISCUSSION

The shear stress $t_{\theta z}$ takes its maximum values at $\theta=\pi/2$. The non-
dimensional shear stress,

(4.1) $\tau_{\theta z} = t_{\theta z}/t_0$, $t_0 \equiv \frac{Ak}{2\pi}\ \frac{b}{a}$,

is plotted in Fig. 3 as a function of ρ for various hexagonal crystals.

We have selected the value of κ as the ratio of elastic constants c_{22}/c_{11}

with the consideration that the attenuation in a given direction is probably

proportional to the elastic modulus in that direction. The elastic

constants used are taken from [5] and they are listed in Table 1 together

with κ and the maximum value of $\tau_{\theta z}$ and the $\rho = \rho_m$ at which it occurs. The

$t_{\theta z}/t_o$ is also shown on Fig. 3 as a function of ρ for the isotropic crystals.

It is clear that the maximum shear stress and its location is greatly

affected by the anisotropy. In particular, for Cd and Zn the maximum

shears are nearly one half of that for the isotropic solids. In Figs. 4

and 5 we display the non-dimensional shear stresses $t_{\theta z}$ and $\tau_{rz} = t_{rz}/t_o$ as

functions of θ for magnesium. The maxima occurs at $\rho \doteq 1.10$, $\theta = \pi/2$ for

$t_{\theta z}$ and $\rho \doteq 1.40$, $\theta = \pi/4$ for t_{rz}.

For engineering purposes it may be useful to give the ratios of shear

stresses to those for the isotropic solids. These are shown in Fig. 6 as

functions of ρ at $\theta = \pi/2$. These curves may be used to make estimates for

other hexagonal crystals with different κ. Since t_{rz} is much smaller than

$t_{\theta z}$ we have not provided corresponding curves for t_{rz}.

Unlike the results in the classical theory the shear stresses possess

no singularity but acquire maxima. Consequently we can equate the maximum

shear stress to the cohesive shear stress to obtain the condition to produce

a dislocation of single atomic distance. Thus taking b/a=1 we have

calculated the ratio of theoretical shear stress to the shear modulus c_{44}.

These are listed in Table 2 for different attenuation constants k=1, 1.25

and 1.50. The value k=1.50 makes the dispersion curve for the plane shear

waves obtained theoretically by using (2.15) nearly coincident with those

obtained from experiments of Joynson[6]. It appears that the theoretical shear stress calculated is about twice the value based on lattice dynamics calculations (cf. [7], p. 19) for Zn. Considering the inaccuracies involved in the estimate of interatomic force laws, it is clear that the present results are in the right range. In fact, if one takes k somewhat smaller than 1 and κ slightly different, it is possible to lower these ratios. However, one cannot place any great faith in these values in the absence of experiments sufficiently accurate for the atomic scale phenomena.

The total energy given by (3.17) may be expressed as

$$(4.2) \qquad \Sigma = Ab^2 L\Sigma_o$$

where Σ_o depends on κ, B and P=kR/a. For various materials Σ_o is calculated and listed in Table 3. The case of isotropic materials agree very well with the result given in [2][1]. Σ_o grows indefinitely with the radius R becoming infinite for R=∞ as expected.

---

[1] In [2] eqs. (4.2) and (4.3) contain a typographical error. Right-hand side of Σ should be multiplied by $\frac{1}{2}$ in both (4.2) and (4.3).

Table 1. Maximum Shear Stress

| Material | Elastic Constants | | | | | $\kappa =$ (c_{22}/c_{11}) | $\tau_{\theta z} =$ $(t_{\theta z}/t_o)$ | $\rho_m =$ (kr_m/a) |
| | c_{11} | c_{12} | c_{13} | c_{22} | c_{44} | | | |
	$\times 10^{11} \mathrm{dyn/cm}^2$							
Zn	16.5	5.0	3.1	6.2	3.96	0.376	0.3370	2.65
Mg	5.93	2.14	2.57	6.15	1.64	1.037	0.6555	1.08
Cd	11.4	4.0	3.94	5.08	2.0	0.446	0.3911	2.25
Apatite	16.7	6.6	1.31	14.0	6.63	0.838	0.5871	1.29
Ice	1.34	0.53	0.65	1.45	0.313	1.082	0.6824	1.03

Table 2. $t_{\theta z}/c_{44}$

| Material | k | | |
	1.00	1.25	1.50
Zn	0.0698	0.0872	0.1049
Mg	0.1056	0.1320	0.1584
Cd	0.0850	0.1062	0.1275
Apatite	0.1007	0.1258	0.1510
Ice	0.1140	0.1425	0.1710

Table 3: Coefficient Σ_o of Total Energy; $\Sigma_o = \Sigma/Ab^2L$

Material \ P=kR/a	1.	2.	3.	5.	7.	10.
Isotropic (ref.[2])	0.0158	0.0400	0.0555	0.0755	0.0889	0.1031
Isotropic (Present: B=κ=1)	0.0159	0.0392	0.0553	0.0755	0.0894	0.1071
Zn	0.0061	0.0184	0.0304	0.0491	0.0622	0.0767
Mg	0.0164	0.0400	0.0560	0.0762	0.0902	0.1082
Cd	0.0072	0.0212	0.0342	0.0535	0.0667	0.0813
Apatite	0.0137	0.0356	0.0515	0.0717	0.0853	0.1019
Ice	0.0169	0.0408	0.0568	0.0771	0.0911	0.1095

14

REFERENCES

[1] Hirth, J. P. and Lothe, J. [1968]: Theory of Dislocations, McGraw-Hill.

[2] Eringen, A. C. [1977]: "Screw Dislocations in Nonlocal Elasticity", J. Phys. D: Appl. Phys., Vol. 10, pp. 671-678.

[3] Eringen, A. C. [1972]: "Linear Theory of Nonlocal Elasticity and Dispersion of Plane Waves," Int. J. Engng. Sci., 10, pp. 425-435.

[4] Eringen, A. C. [1976]: Continuum Physics, Vol. IV, Academic Press.

[5] Hearmon, R. F. S. [1966, 1969]: "The elastic Constants of Non-Piezoelectric Crystals", Landolt-Börnstein, Numerical Data and Functional Relationships in Science, ed. by Hellwage, K. H., Vols. III/1 and III/2, Springer-Verlag.

[6] Joynson R. E. [1954]: Phys. Rev. 94, pp. 851.

[7] Kelly, A. [1966]: Strong Solids, Oxford, Calerondon Press.

FIGURE CAPTIONS

Fig. 1 Screw Dislocation in Hexagonal Crystals

Fig. 2 Coordinates in (x,y) - plane

Fig. 3 Non-dimensional shear stress $\tau_{\theta z}$ versus ρ

Fig. 4 Non-dimensional shear stress $\tau_{\theta z}$ versus θ for Mg

Fig. 5 Non-dimensional shear stress τ_{rz} versus θ for Mg

Fig. 6 The ratio of shear stress $t_{\theta z}$ to shear stress for isotropic bodies
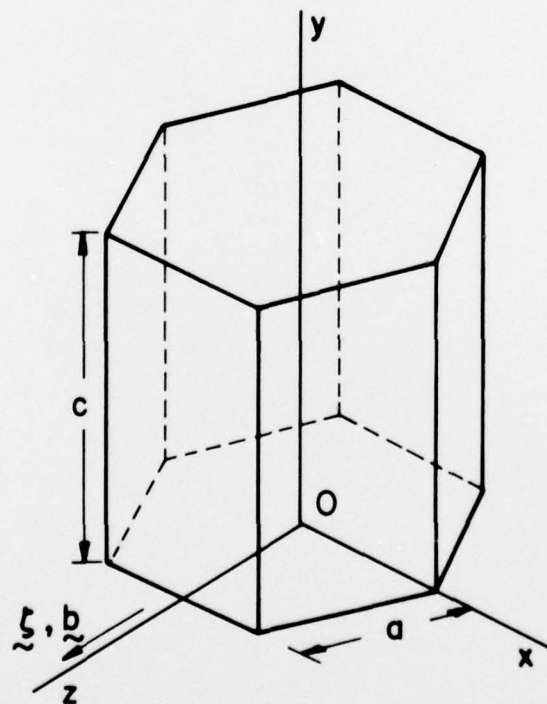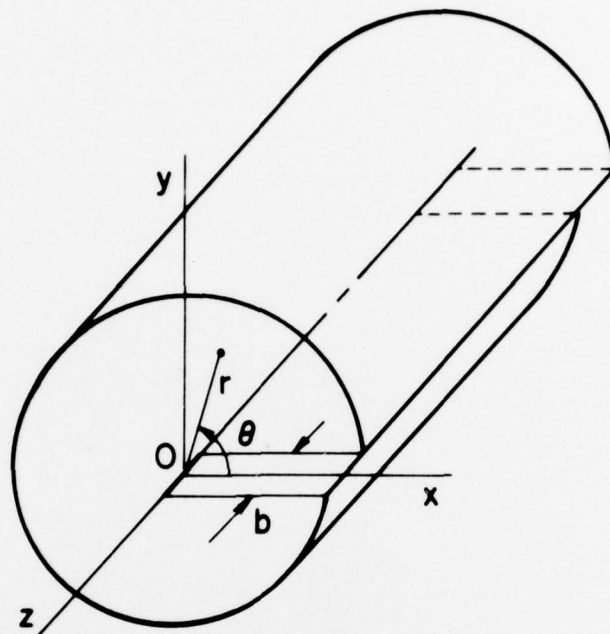
FIGURE I
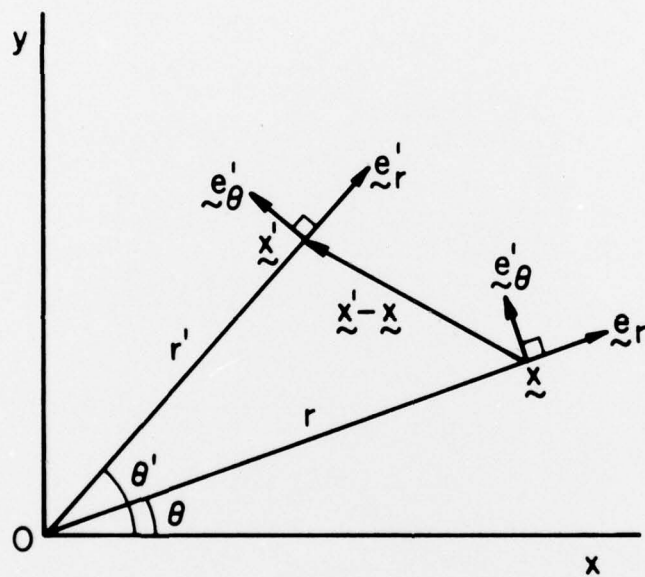
FIGURE 2
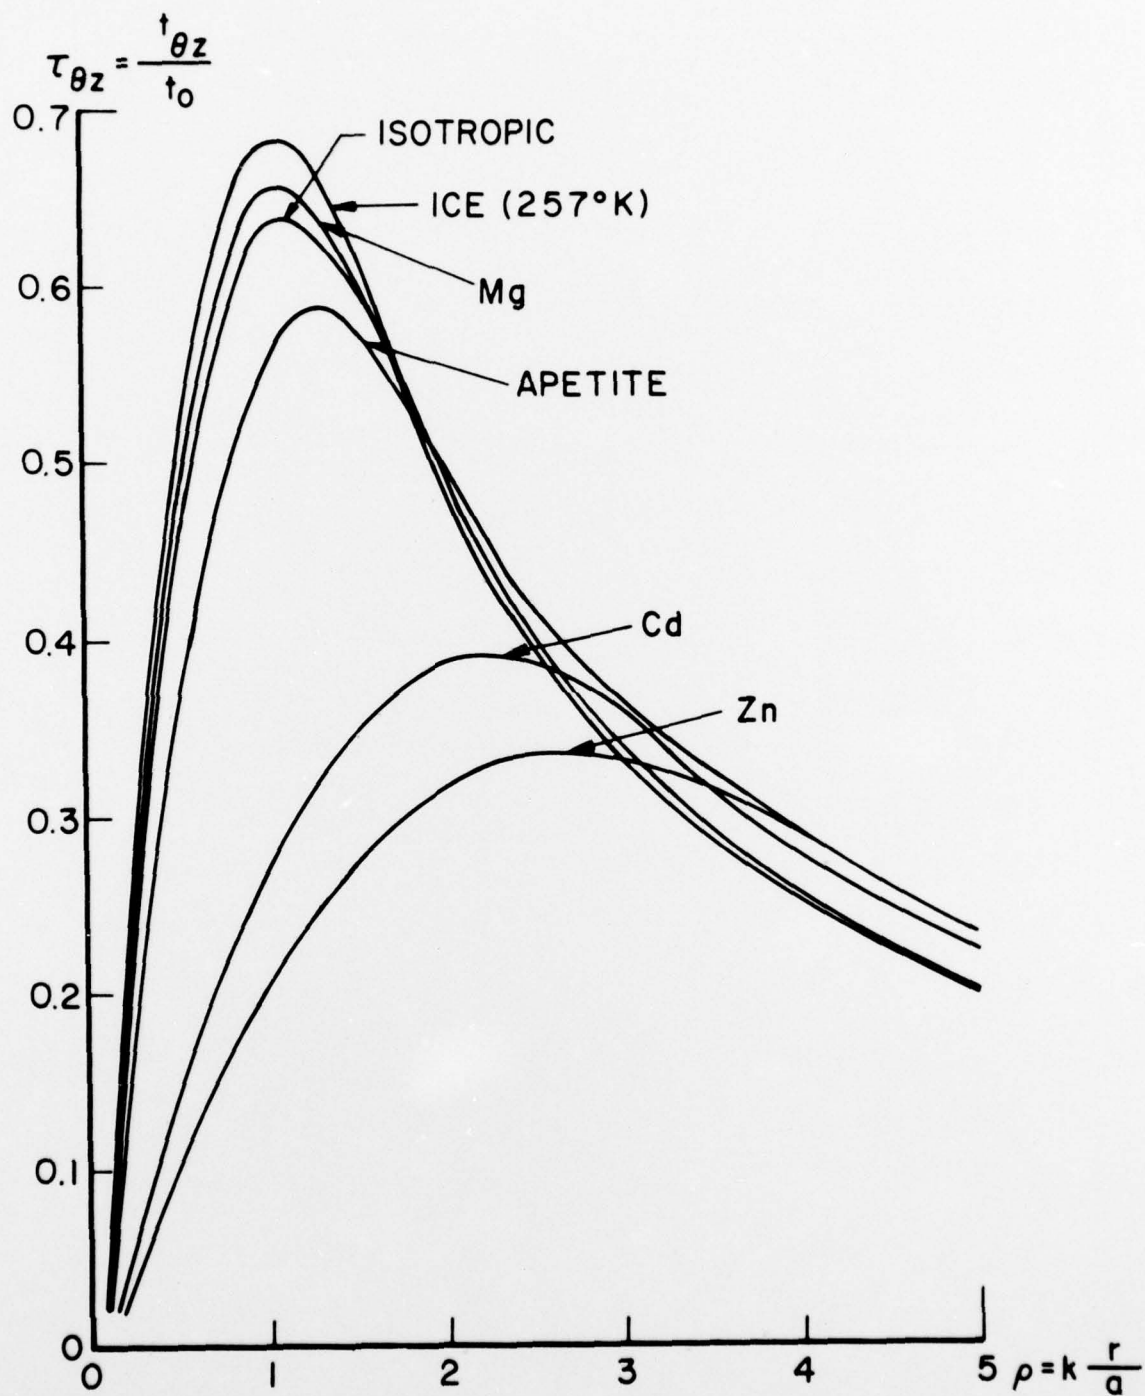
FIGURE 3
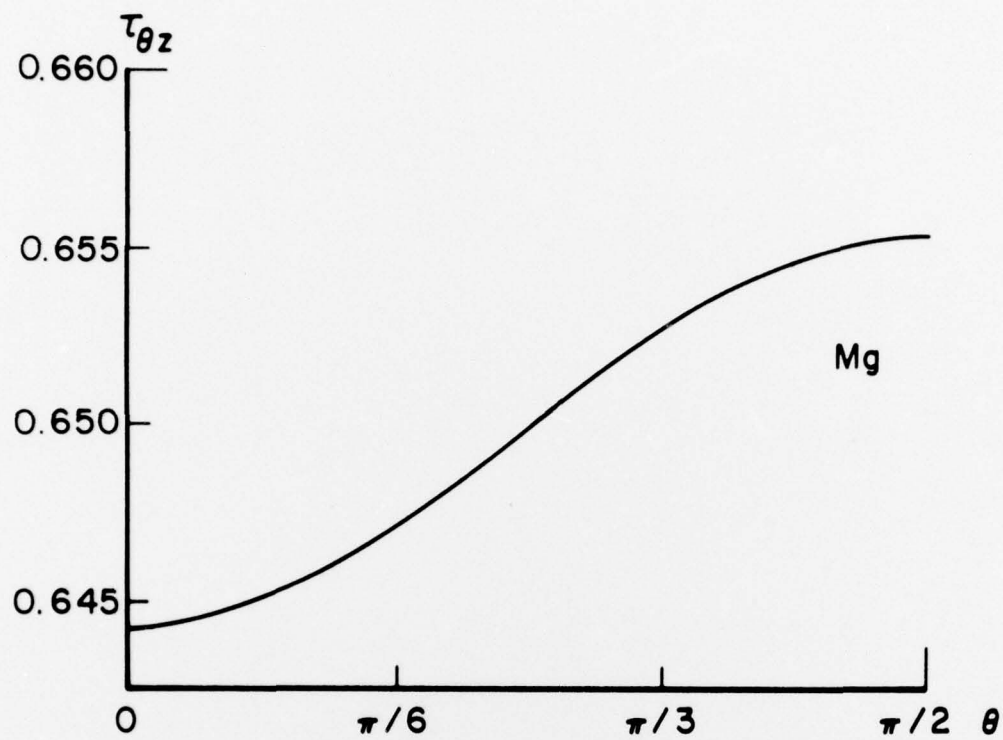
FIGURE 4
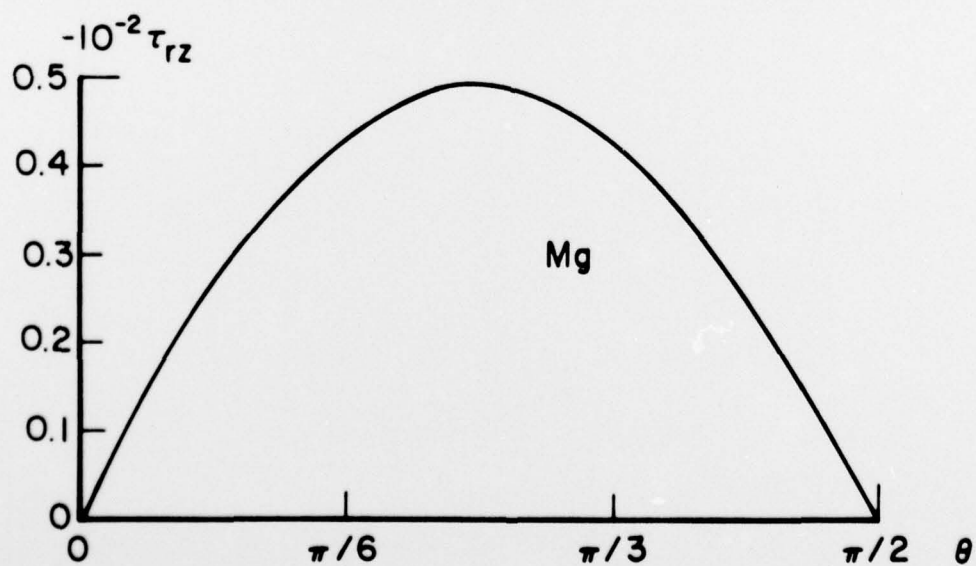
FIGURE 5
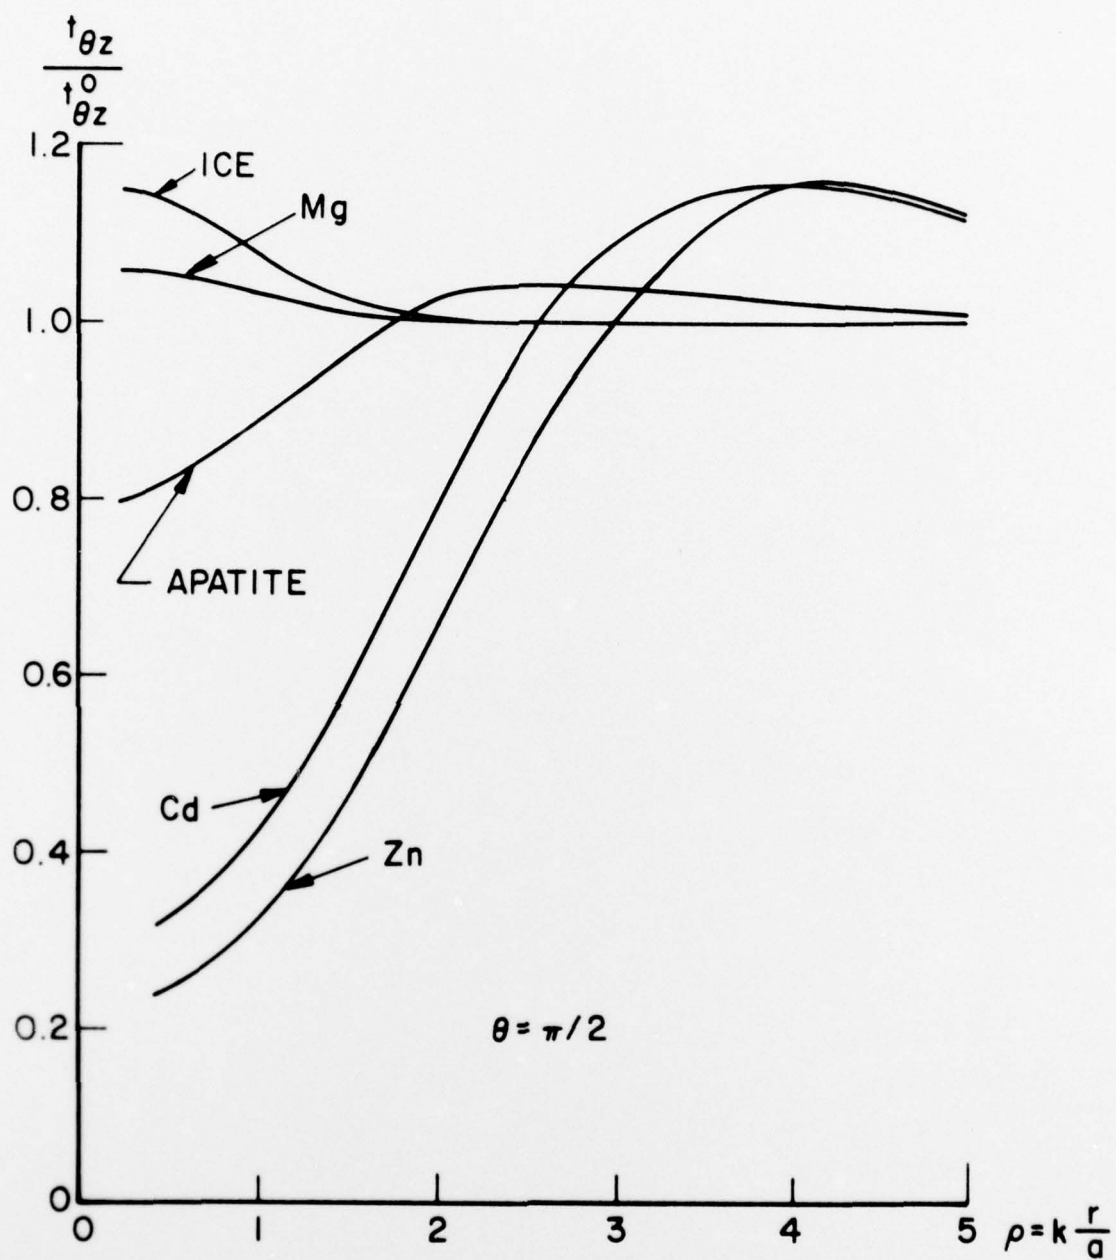
FIGURE 6

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Technical Report 47	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Screw Dislocation in Nonlocal Hexagonal Elastic Crystals.		5. TYPE OF REPORT & PERIOD COVERED Technical Report.
		6. PERFORMING ORG. REPORT NUMBER 77-SM-12
7. AUTHOR(s) A. C. Eringen and F. Balta		8. CONTRACT OR GRANT NUMBER(s) N00014-76-C-0240
9. PERFORMING ORGANIZATION NAME AND ADDRESS Princeton University Princeton, New Jersey 08540		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS P00002
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research (Code 471) Arlington, VA 22217		12. REPORT DATE July 1977
		13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office) 25p.		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; Distribution Unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Screw Dislocation
Nonlocal Elasticity
Hexagonal Crystals
Dislocation core

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The solution is given for the problem of screw dislocation in hexagonal crystals with long range interatomic interactions. The field equations of nonlocal elastic solids are employed to determine the anti-plane shear stresses and the elastic energy for a screw dislocation in the basal plane. Interestingly enough, none of the classical stress and energy singularities are present in the nonlocal solutions. Maximum shear stresses are calculated for several hexagonal crystals and compared with the isotropic materials. Theoretical

19. shear stress to initiate a dislocation with a Burger's vector of one atomic distance is calculated and found to be in the acceptable range known from the lattice dynamic calculations.

PART 1 - GOVERNMENT

Administrative & Liaison Activities

Chief of Naval Research
Department of the Navy
Arlingon, Virginia 22217
  Attn: Code 474 (2)
             471
             222

Director
ONR Branch Office
495 Summer Street
Boston, Massachusetts 02210

Director
ONR Branch Office
219 S. Dearborn Street
Chicago, Illinois 60604

Director
Naval Research Laboratory
Attn: Code 2629 (ONRL)
Washington, D.C. 20390 (6)

U.S. Naval Research Laboratory
Attn: Code 2627
Washington, D.C. 20390

Director
ONR - New York Area Office
715 Broadway - 5th Floor
New York, N.Y. 10003

Director
ONR Branch Office
1030 E. Green Street
Pasadena, California 91101

Defense Documentation Center
Cameron Station
Alexandria, Virginia 22314   (12)

Army

Commanding Officer
U.S. Army Research Office Durham
Attn: Mr. J. J. Murray
CRD-AA-IP
Box CM, Duke Station
Durham, North Carolina 27706   2 .

Commanding Officer
AMXMR-ATL
Attn: Mr. R. Shea
U.S. Army Materials Res. Agency
Watertown, Massachusetts 02172

Watervliet Arsenal
MAGGS Research Center
Watervliet, New York 12189
 Attn: Director of Research

Technical Library

Redstone Scientific Info. Center
Chief, Document Section
U.S. Army Missile Command
Redstone Arsenal, Alabama 35809

Army R&D Center
Fort Belvoir, Virginia 22060

Navy

Commanding Officer and Director
Naval Ship Research & Development Center
Bethesda, Maryland 20034
  Attn: Code 042 (Tech. Lib. Br.)
          17 (Struc. Mech. Lab.)
          172
          172
          174
          177
         1800 (Appl. Math. Lab.)
        5412S (Dr. W.D. Sette)
          19 (Dr. M.M. Sevik)
        1901 (Dr. M. Strassberg)
        1945
        196
             (Dr. D Feit)
        1962

Naval Weapons Laboratory
Dahlgren, Virginia 22448

Naval Research Laboratory
Washington, D.C. 20375
  Attn: Code 8400
         8410
         8430
         8440
         6300
         6390
         6380

Naval Ship Engineering Center
Prince George's Plaza
Hyattsville, Maryland 20782
  Attn: NAVSEC 6100 Ship Sys Engr & Des Dep
              6102C Computer-Aided Ship Des
              6105G
              6110 Ship Concept Design
              6120 Hull Div.
              6120D Hull Div.
              6128 Surface Ship Struct.
              6129 Submarine Struct.

Air Force

Commander WADD
Wright-Patterson Air Force Base
Dayton, Ohio 45433
  Attn: Code WWRMDD
            AFFDL (FDDS)
        Structures Division
        AFLC (MCEEA)

Chief, Applied Mechanics Group
U.S. Air Force Inst. of Tech.
Wright-Patterson Air Force Base
Dayton, Ohio 45433

Chief, Civil Engineering Branch
WLRC, Research Division
Air Force Weapons Laboratory
Kirtland AFB, New Mexico 87117

Air Force Office of Scientific Research
1400 Wilson Blvd.
Arlington, Virginia 22209
  Attn: Mechanics Div.

NASA

Structures Research Division
National Aeronautics & Space Admin.
Langley Research Center
Langley Station
Hampton, Virginia 23365

National Aeronautic & Space Admin.
Associate Administrator for Advanced
    Research & Technology
Washington, D.C. 02546

Scientific & Tech. Info. Facility
NASA Representative (S-AK/DL)
P.O. Box 5700
Bethesda, Maryland 20014

Other Government Activities

Commandant
Chief, Testing & Development Div.
U.S. Coast Guard
1300 E. Street, N.W.
Washington, D.C. 20226

Technical Director
Marine Corps Dev. & Educ. Command
Quantico, Virginia 22134

Director
National Bureau of Standards
Washington, D.C. 20234
  Attn: Mr. B.L. Wilson, EM 219

Dr. M. Gaus
National Science Foundation
Engineering Division
Washington, D.C. 20550

Science & Tech. Division
Library of Congress
Washington, D.C. 20540

Director
Defense Nuclear Agency
Washington, D.C. 20305
  Attn: SPSS

Commander Field Command
Defense Nuclear Agency
Sandia Base
Albuquerque, New Mexico 87115

Director Defense Research & Engrg
Technical Library
Room 3C-128
The Pentagon
Washington, D.C. 20301

Chief, Airframe & Equipment Branch
FS-120
Office of Flight Standards
Federal Avaiation Agency
Washington, D.C. 20553

Chief, Research and Development
Maritime Administration
Washington, D.C. 20235

Deputy Chief, Office of Ship Constr.
Maritime Administration
Washington, D.C. 20235
  Attn: Mr. U.L. Russo

Atomic Energy Commission
Div. of Reactor Devel. & Tech.
Germantown, Maryland 20767

Ship Hull Research Committee
National Research Council
National Academy of Sciences
2101 Constitution Avenue
Washington, D.C. 20418
 Attn: Mr. A.R. Lytle

— — — — —

PART 2 - CONTRACTORS AND OTHER
          TECHNICAL COLLABORATORS

— — — — —

Universities

Dr. J. Tinsley Oden
University of Texas at Austin
345 Eng. Science Bldg.
Austin, Texas 78712

Prof. Julius Miklowitz
California Institute of Technology
Div. of Engineering & Applied Sciences
Pasadena, California 91109

Dr. Harold Liebowitz, Dean
School of Engr. & Applied Science
George Washington University
725 - 23rd St., N.W.
Washington, D.C. 20006

Prof. Eli Sternberg
California Institute of Technology
Div. of Engr. & Applied Sciences
Pasadena, California 91109

Prof. Paul M. Naghdi
University of California
Div. of Applied Mechanics
Etcheverry Hall
Berkeley, California 94720

Professor P. S. Symonds
Brown University
Division of Engineering
Providnece, R.I.   02912

Prof. A. J. Durelli
The Catholic University of America
Civil/Mechanical Engineering
Washington, D.C. 20017

Prof. R.C. Testa
Columbia University
Dept. of Civil Engineering
S.W. Mudd Bldg.
New York, N.Y. 10027

Prof. H. H. Bleich
Columbia University
Dept. of Civil Engineering
Amsterdam & 120th St.
New York, N.Y. 10027

Prof. F.L. DiMaggio
Columbia University
Dept. of Civil Engineering
616 Mudd Building
New York, N.Y. 10027

Prof. A.M. Freudenthal
George Washington University
School of Engineering &
  Applied Science
Washington, D.C. 20006

D. C. Evans
University of Utah
Computer Science Division
Salt Lake City, Wash   84112

Prof. Norman Jones
Massachusetts Inst. of Technology
Dept. of Naval Architecture &
  Marine Engrng
Cambridge, Massachusetts 02139

Professor Albert I. King
Biomechanics Research Center
Wayne State University
Detroit, Michigan   48202

Dr. V. R. Hodgson
Wayne State University
School of Medicine
Detroit, Michigan   48202

Dean B. A. Boley
Northwestern University
Technological Institute
2145 Sheridan Road
Evanston, Illinois 60201

Industry and Research Institutes

Library Services Department
Report Section Bldg. 14-14
Argonne National Laboratory
9700 S. Cass Avenue
Argonne, Illinois   60440

Dr. M. C. Junger
Cambridge Acoustical Associates
129 Mount Auburn St.
Cambridge, Massachusetts   02138

Dr. L.H. Chen
General Dynamics Corporation
Electric Boat Division
Groton, Connecticut   06340

Dr. J.E. Greenspon
J.G. Engineering Research Associates
3831 Menlo Drive
Baltimore, Maryland   21215

Dr. S. Batdorf
The Aerospace Corp.
P.O. Box 92957
Los Angeles, California   90009

Dr. K.C. Park
Lockheed Palo Alto Research Laboratory
Dept. 5233, Bldg. 205
3251 Hanover Street
Palo Alto, CA   94304

Library
Newport News Shipbuilding &
Dry Dock Company
Newport News, Virginia   23607

Dr. W.F. Bozich
McDonnell Douglas Corporation
5301 Bolsa Ave.
Huntington Beach, CA   92647

Dr. H.N. Abramson
Southwest Research Institute
Technical Vice President
Mechanical Sciences
P.O. Drawer 28510
San Antonio, Texas   78284

Dr. R.C. DeHart
Southwest Research Institute
Dept. of Structural Research
P.O. Drawer 28510
San Antonio, Texas   78284

Dr. M.L. Baron
Weidlinger Associates,
Consulting Engineers
110 East 59th Street
New York, N.Y.   10022

Dr. W.A. von Riesemann
Sandia Laboratories
Sandia Base
Albuquerque, Ney Mexico   87115

Dr. T.L. Geers
Lockheed Missiles & Space Co.
Palo Alto Research Laboratory
3251 Hanover Street
Palo Alto, California   94304

Dr. J.L. Tocher
Boeing Computer Services, Inc.
P.O. Box 24346
Seattle, Washington   98124

Mr. Willian Caywood
Code BBE, Applied Physics Laboratory
8621 Georgia Avenue
Silver Spring, Maryland   20034

Mr. P.C. Durup
Lockheed-California Company
Aeromechanics Dept., 74-43
Burbank, California   91503