

AD-A067 056

NAVAL UNDERSEA WARFARE CENTER SAN DIEGO CALIF
TRANSDUCER CALIBRATION DATA. XU 1313/BQM SERIAL NUMBERS 22 AND --ETC(U)
FEB 68

F/G 17/1





UNCLASSIFIED

NUWC-5688


NL

| OF |
ADA
067056

11



END
DATE
FILMED
6-79
DDC

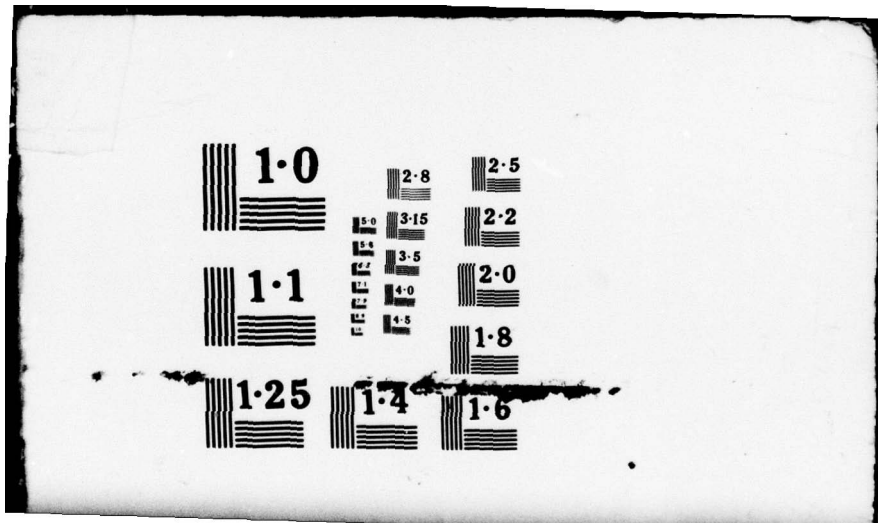

LEVEL II

MOST Project - 4

XU 1313/BQM Serial Nos. 22 & 59

Report No. 5688 ✓ February 1968

001508

OOV LIBRARY COPY

1000 4

BI

1
B.S.

DDC

RECEIVED
APR 5 1979
F

NAVAL UNDERSEA WARFARE CENTER ✓

SAN DIEGO, CALIFORNIA 92152

TRANSDUCER CALIBRATION DATA

AD A0 67056

DDC FILE COPY

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

TRANSDUCER EVALUATION CENTER

001508
AB-15

(14) NUWC-5688

(11) Feb 68

(12) 16 p.

(6)

Transducer Calibration Data,
XU 1313/BQM Serial Numbers
22 and 59.

NAVAL UNDERSEA WARFARE CENTER
Transducer Calibration Facility
San Diego, California 92152

ACCESSION for	
NTIS	White Section ☒
DDC	Buff Section ☐
UNANNOUNCED	☐
JUSTIFICATION	
<i>Attch on file</i>	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. and/or SPECIAL
A	

Approved:

John R. Porchon
Mrs. Delores E. Burton
Head - Data Reduction

680903-0066

403 023

slk

C O N T E N T S ;

Report No. 5688

XU 1313/BQM S/N's 22 & 59

Page No.

Photograph ----- 3

Coordinate ----- 4

XU 1313/BQM S/N 22

Receiving Response ----- 5

Directivity Patterns ----- 6

Effect of Pressure (2000 psig) ----- 9

XU 1313/BQM S/N 59

Receiving Response ----- 10

Directivity Patterns ----- 11


Effect of Pressure (2000 psig) ----- 13

Composite Graphs


Receiving Response ----- 14

Effect of Pressure ----- 15

✓
T1067

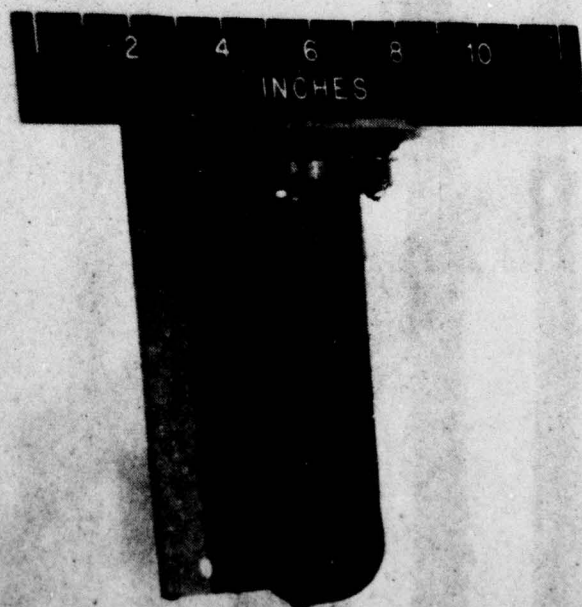

TRANSDUCER COORDINATE DIAGRAM

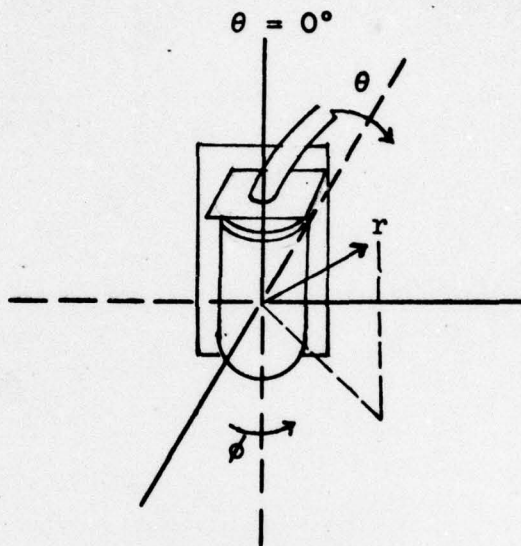

The spherical coordinate system is used to define the angles in the directivity pattern: θ and ϕ shown in the above diagram give the directions in which the response is measured. The transducer is placed in the frame of reference with its axis of symmetry coincident with $\theta = 0^\circ$, its fiducial mark in the $\phi = 0^\circ$ plane, and its center at $r = 0$.

The two patterns most frequently measured are:

- (1) those made by holding ϕ constant at some angle and rotating θ through 360° .

$(\phi = a^\circ; \text{rotate } \theta)$

- (2) those made by holding θ constant at some angle and rotating ϕ through 360° .

$(\theta = b^\circ; \text{rotate } \phi)$

Measured at TRANSDEC
9 February 1968

NAVAL UNDERSEA WARFARE CENTER
Transducer Calibration Facility
San Diego, California 92152

RECEIVING RESPONSE OF XU 1313/BQM S/N 22

Temperature: 13°C
Depth: 6 meters

Open-circuit voltage measured at
the end of cable supplied with unit.

Measured in the direction of
0° on patterns.

db below 1 volt/microbar


Frequency in kHz

FIGURE 1A

CODING BOOK COMPANY, INC. NORWOOD, MASSACHUSETTS.
PRINTED IN U.S.A.

NO. 3124. POLAR CO-ORDINATE.

71067

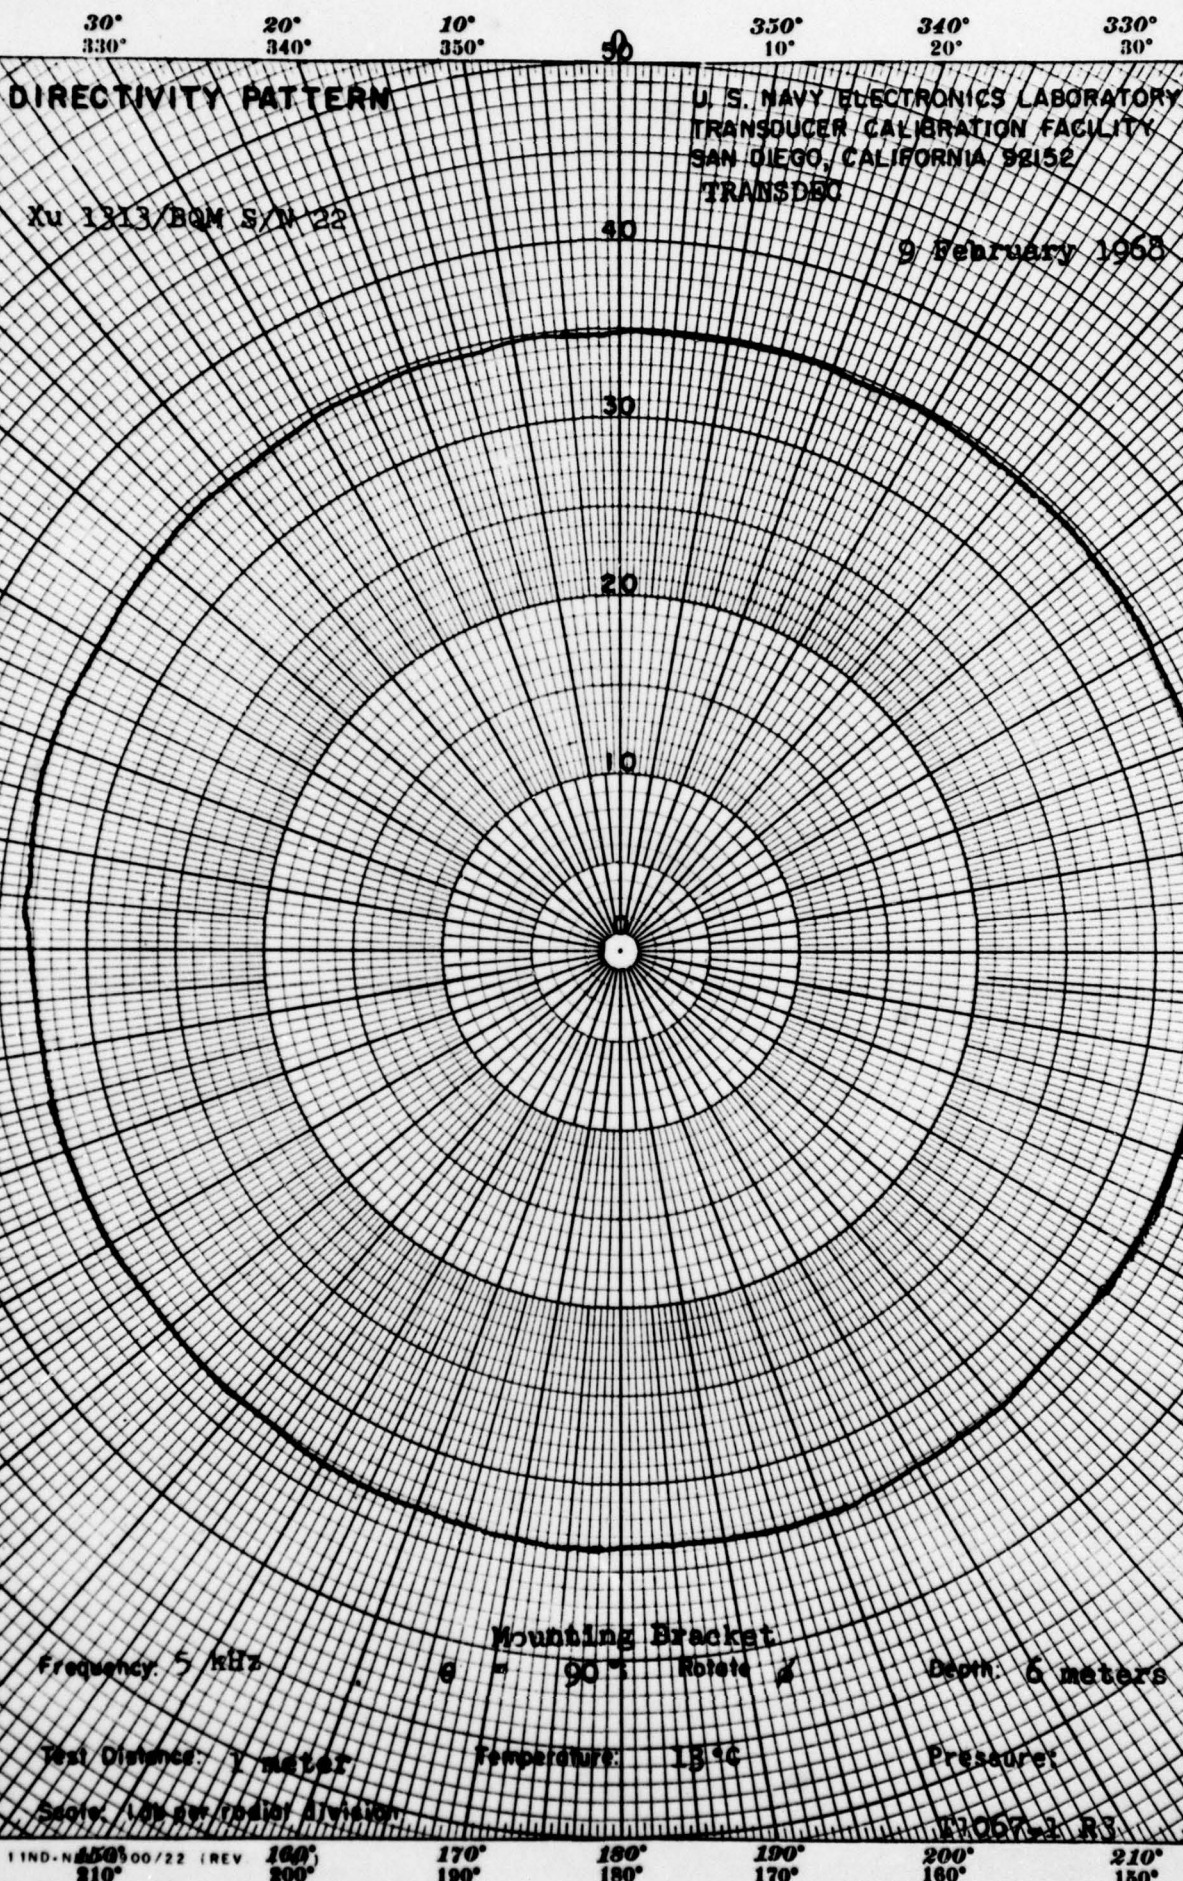

CODING BOOK COMPANY, INC. NORWOOD, MASSACHUSETTS.
PRINTED IN U.S.A.


NO. 3124. POLAR CO-ORDINATE.

DIRECTIVITY PATTERN

U. S. NAVY ELECTRONICS LABORATORY
TRANSDUCER CALIBRATION FACILITY
SAN DIEGO, CALIFORNIA 92152
TRANSDUC

XU 1313/BOM S/N 22

9 February 1968

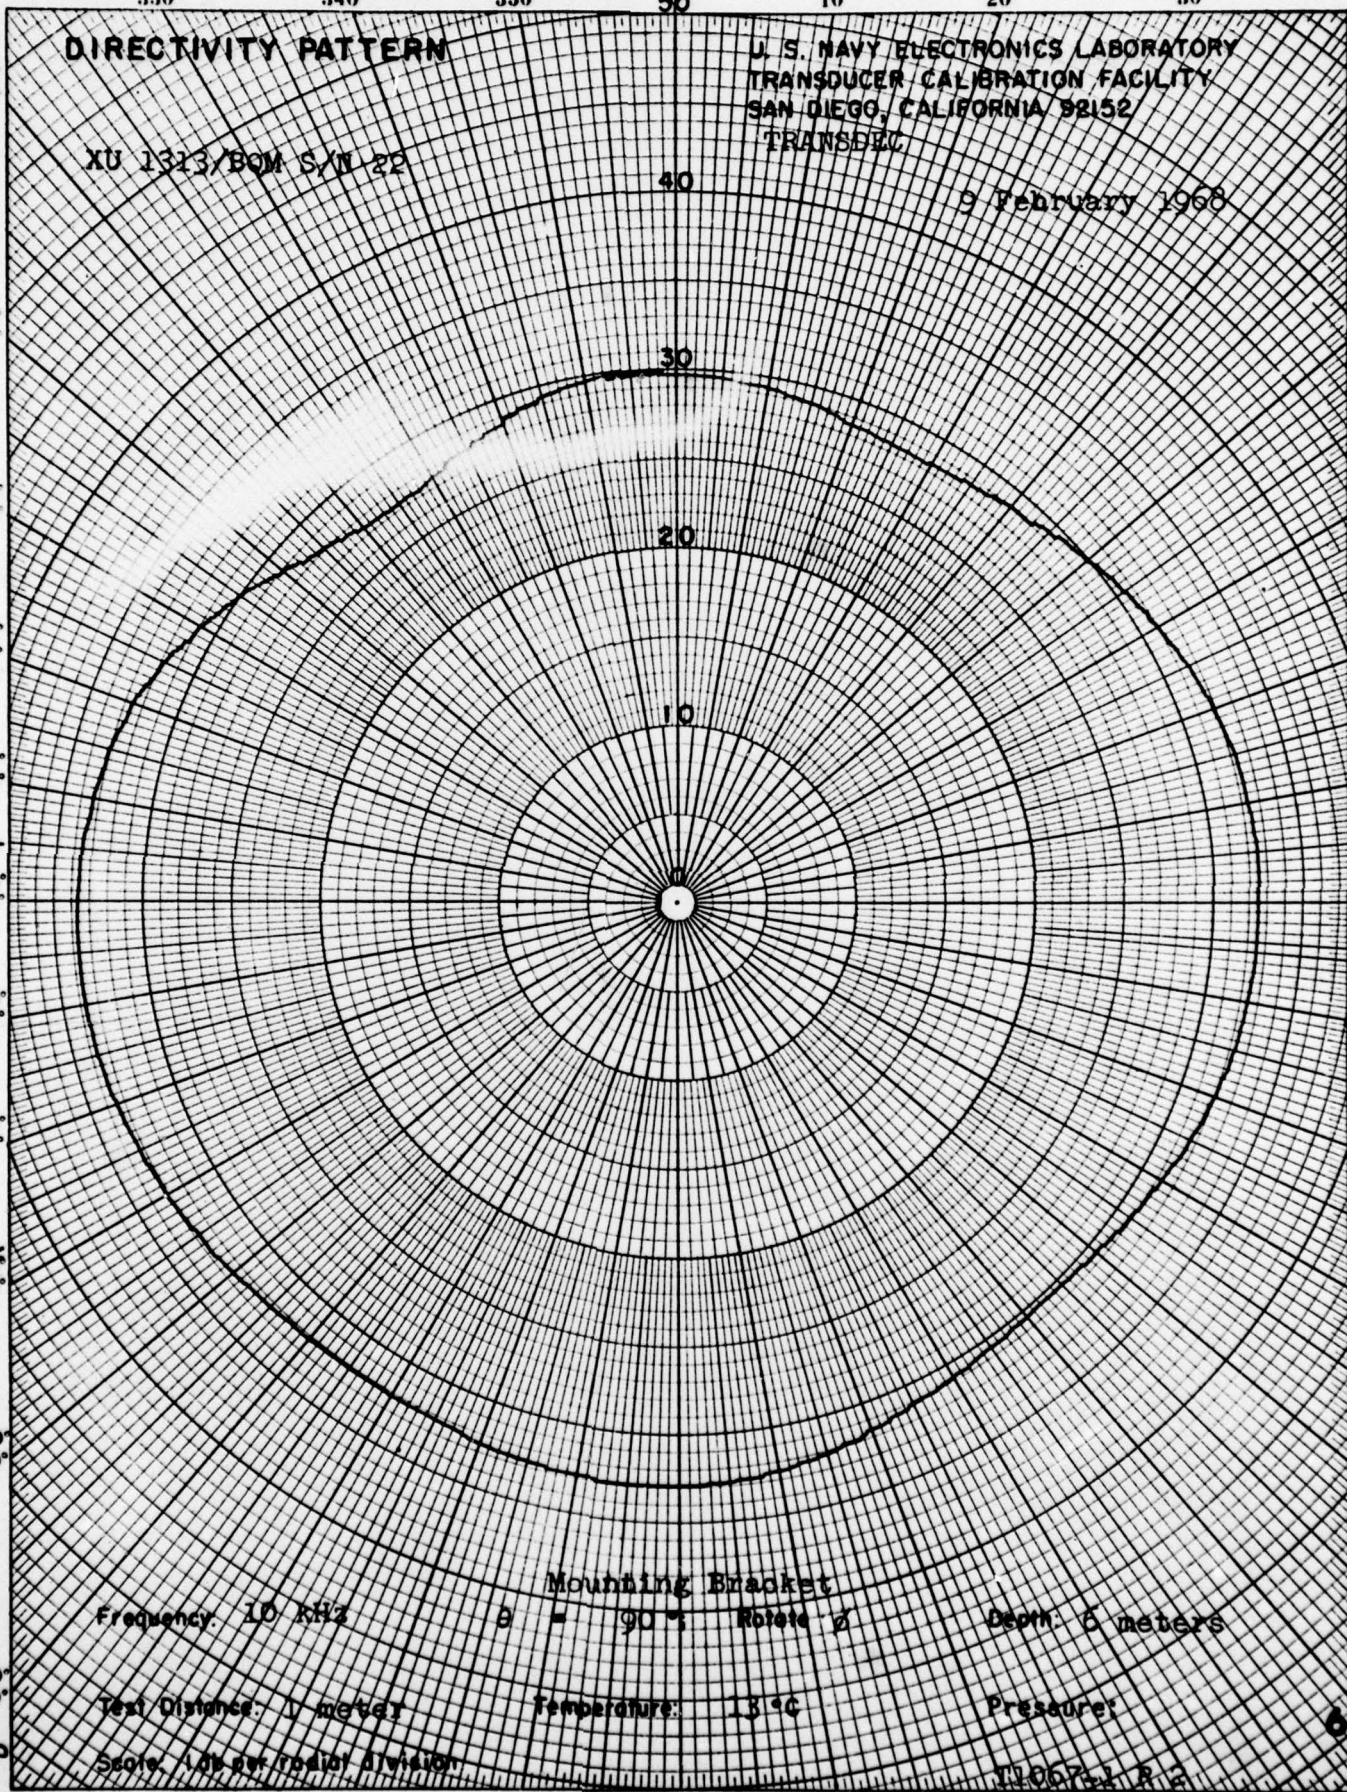


11057-1 R 2

DIRECTIVITY PATTERN

U. S. NAVY ELECTRONICS LABORATORY
TRANSDUCER CALIBRATION FACILITY
SAN DIEGO, CALIFORNIA 92152
TRANSDUC

XU 1313/BQM 8/W 22

9 February 1968

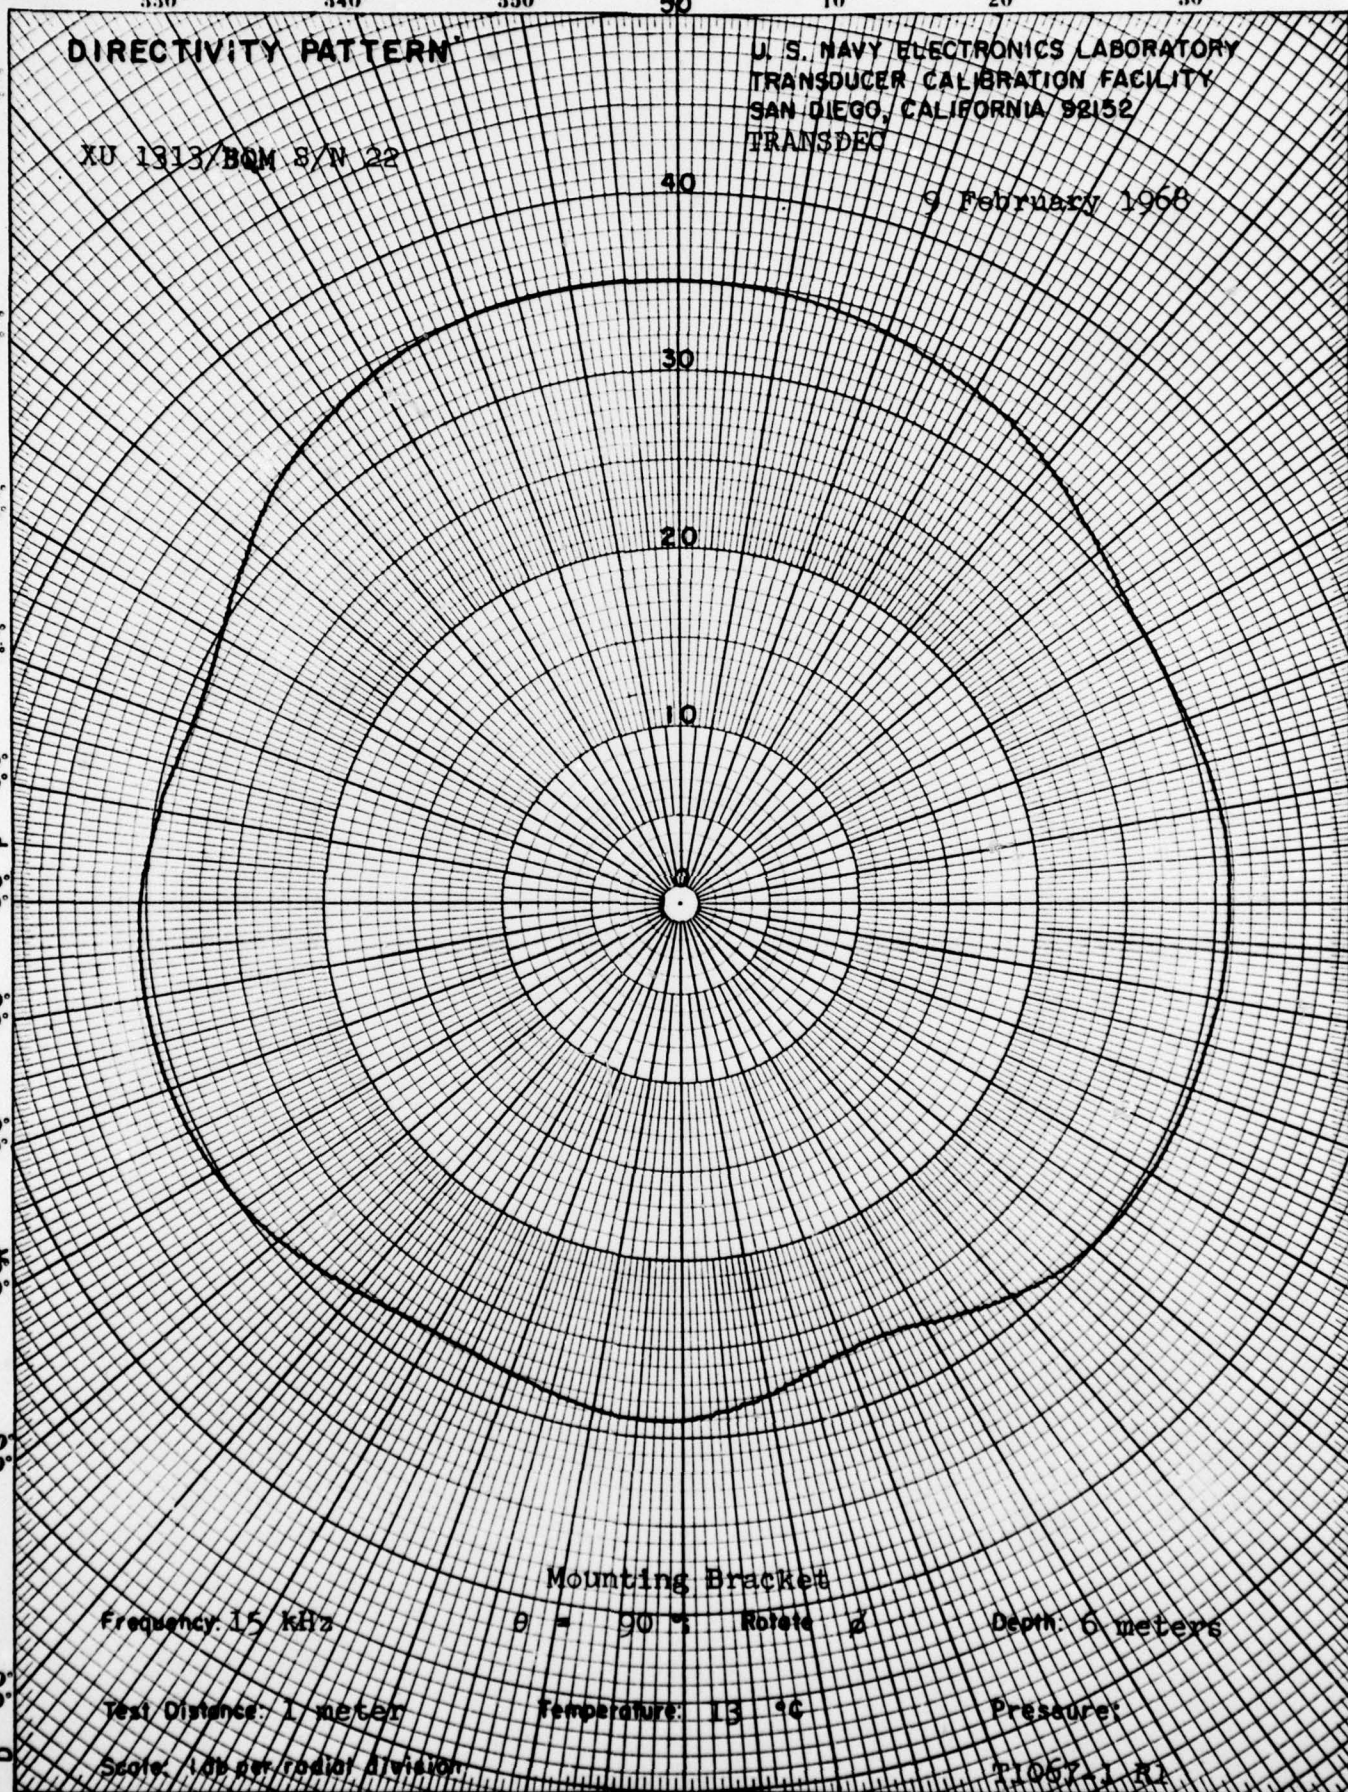

Frequency: 15 kHz

Mounting Bracket

$\theta = 90^\circ$ Rotate z

Depth: 6 meters

Test Distance: 1 meter

Temperature: 13 °C

Pressure:

Scale: 10 dB per radial division

T1057-1 R1

11 IND-NAS 00/22 (REV 160° 210° 200°)

170°


180°

190°

200°

210°

10 X 10 TO 1/2 INCH 46 1327
 7 1/2 X 10 IN. ALBANY, N.Y.
 KEUFFEL & ESSER CO.

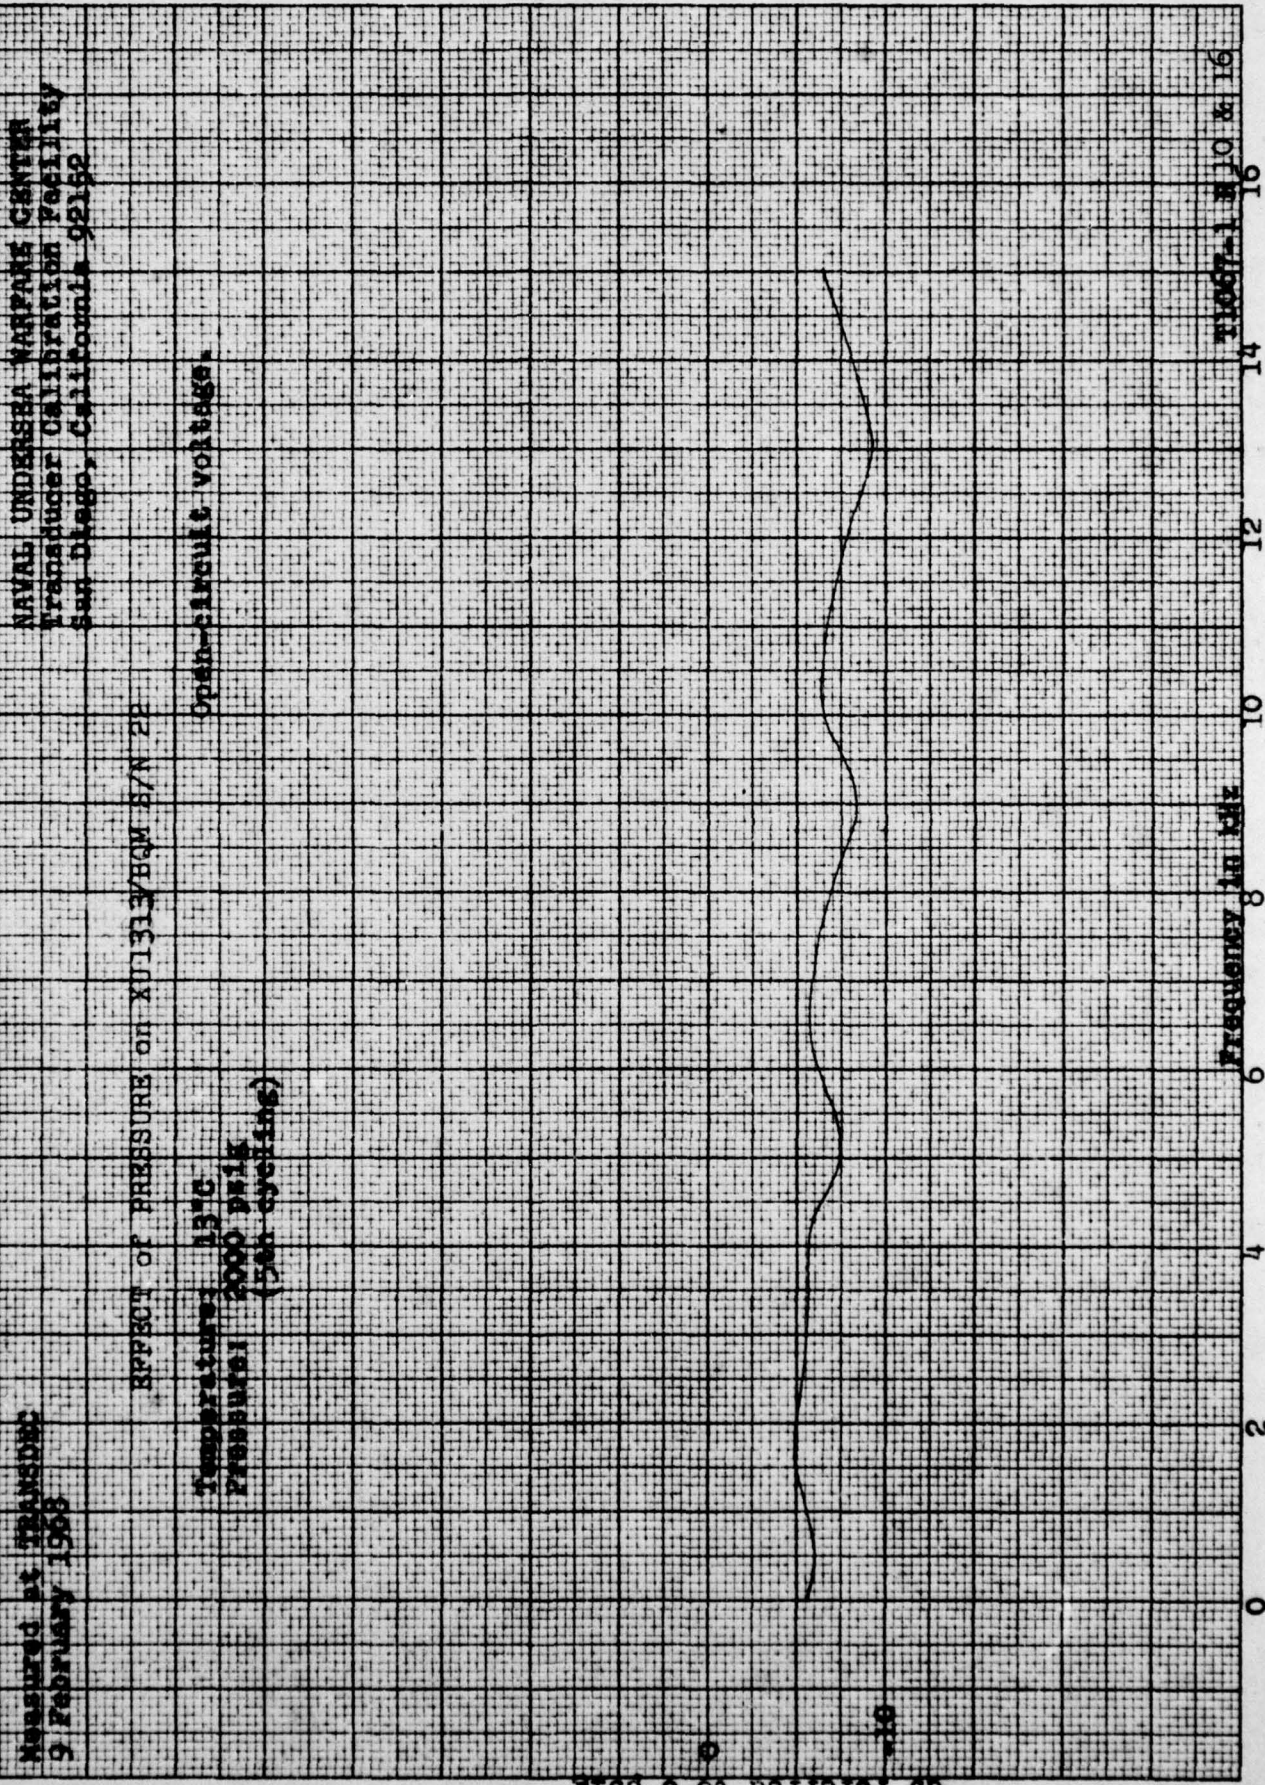

Measured at TRANSDUCER
 9 February 1968

NAVAL UNDERSEA WARFARE CENTER
 Transducer Calibration Facility
 San Diego, California 92152

RECEIVING RESPONSE OF XU 1313/BQM 5/W 59

Temperature: 13°C
 Depth: 6 meters

Open-circuit voltage measured at
 the end of cable supplied with unit.

Measured in the direction of
 0° on patterns.

db below 1 volt/microbar
 100
 110

Frequency in kHz
 0 2 4 6 8 10 12 14 16
 11067-1 R5

CODER BOOK COMPANY, INC. NORWOOD, MASSACHUSETTS.
PRINTED IN U.S.A.


NO. 3124. POLAR CO-ORDINATE.

DIRECTIVITY PATTERN

U. S. NAVY ELECTRONICS LABORATORY
TRANSDUCER CALIBRATION FACILITY
SAN DIEGO, CALIFORNIA 92152
TRANSDEC

XU 1313/BQM S/N 59

9 February 1968

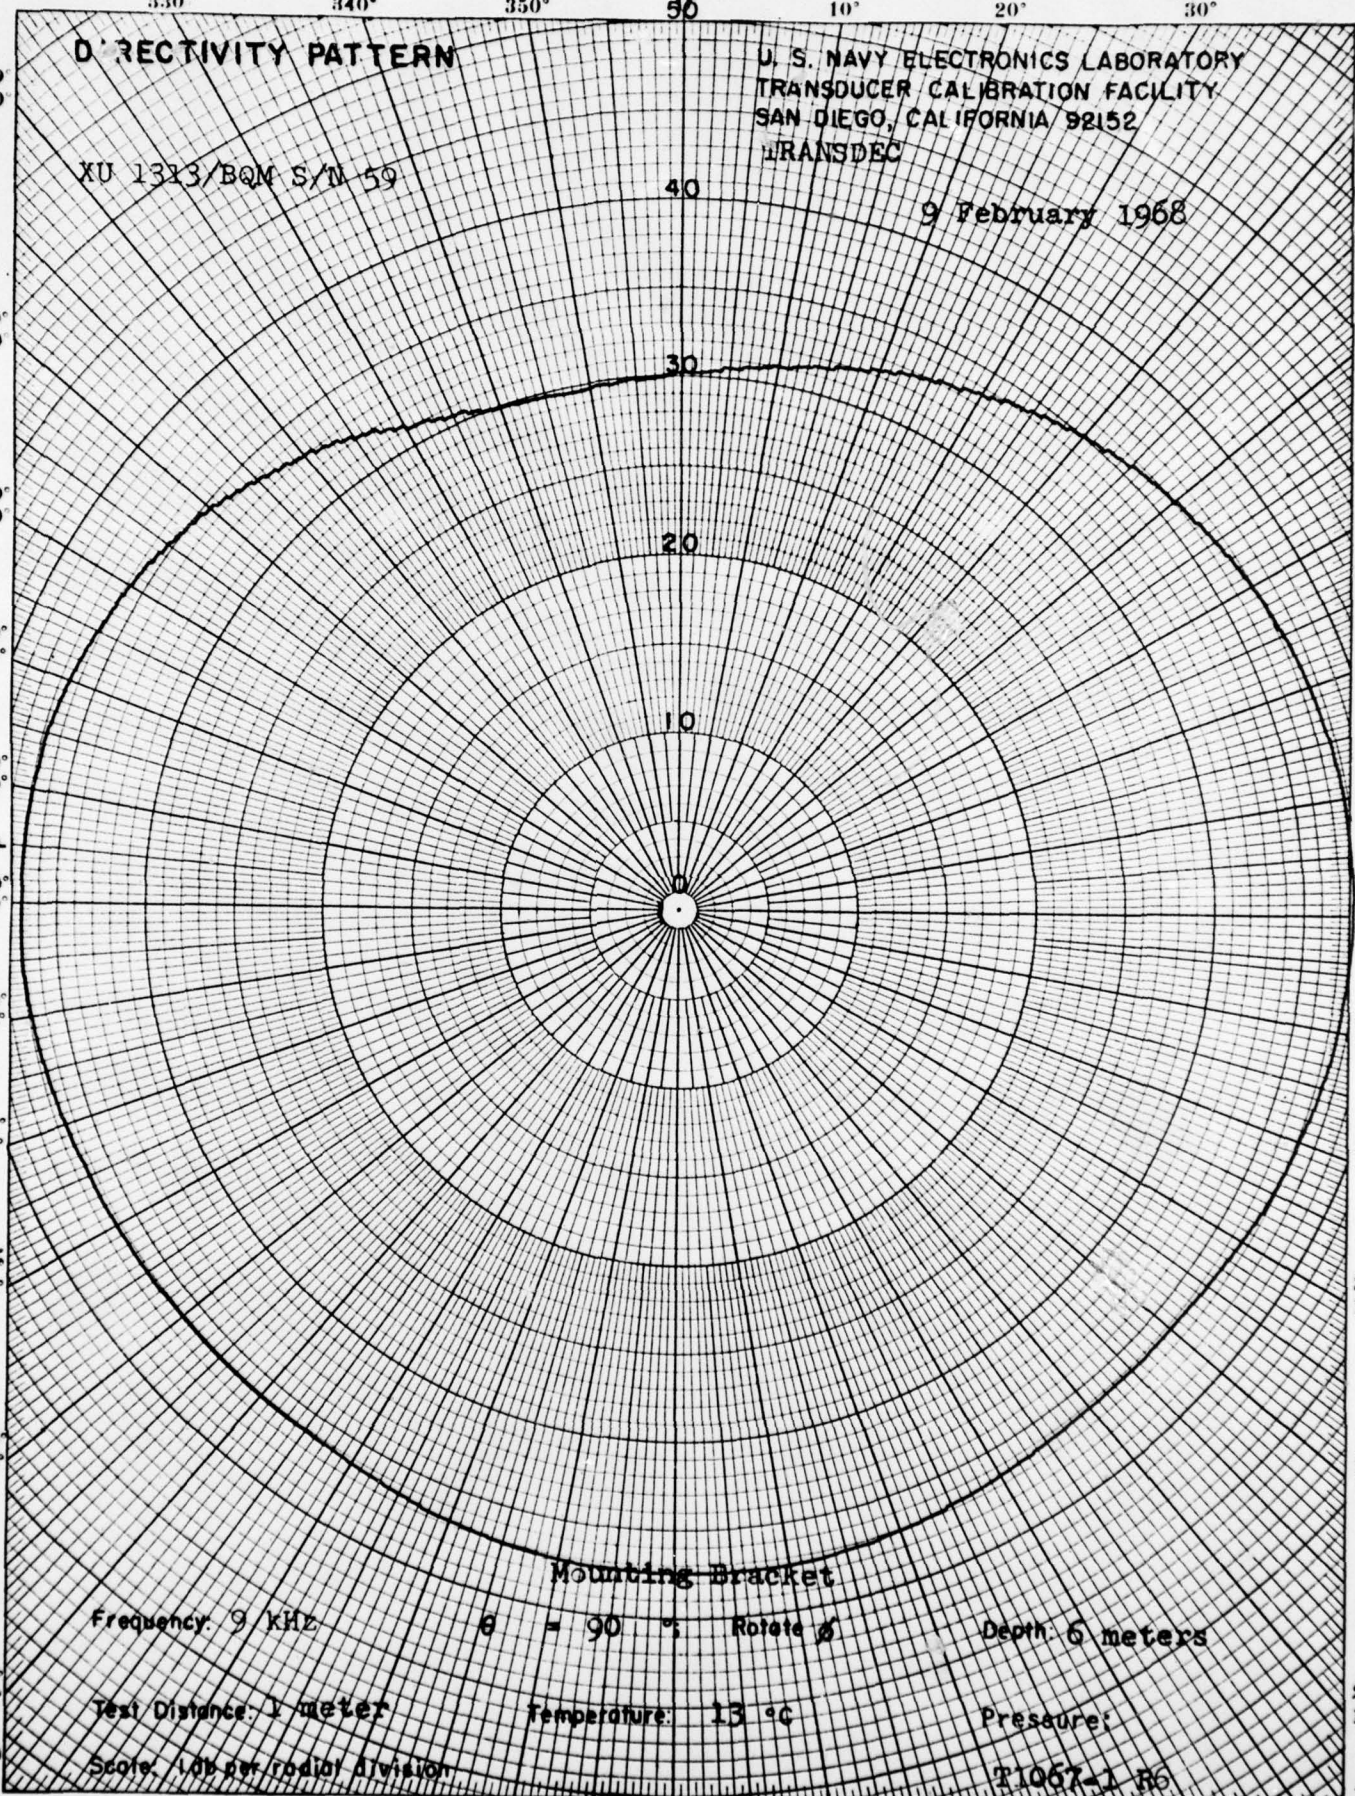

Mounting Bracket

Frequency: 9 kHz

$\theta = 90^\circ$; Rotate ϕ

Depth: 6 meters

Test Distance: 1 meter

Temperature: 13 °C

Pressure:

Scale: 10 dB per radial division

T1067-1 R6

11ND-N 100/22 (REV 160) 210° 200° 170° 180° 190° 200° 210° 150°


246

71067


CODING BOOK COMPANY, INC. NORTHWOOD, MASSACHUSETTS, U.S.A.

NO. 3124, POLAR CO-ORDINATE

15Kc
128
1901

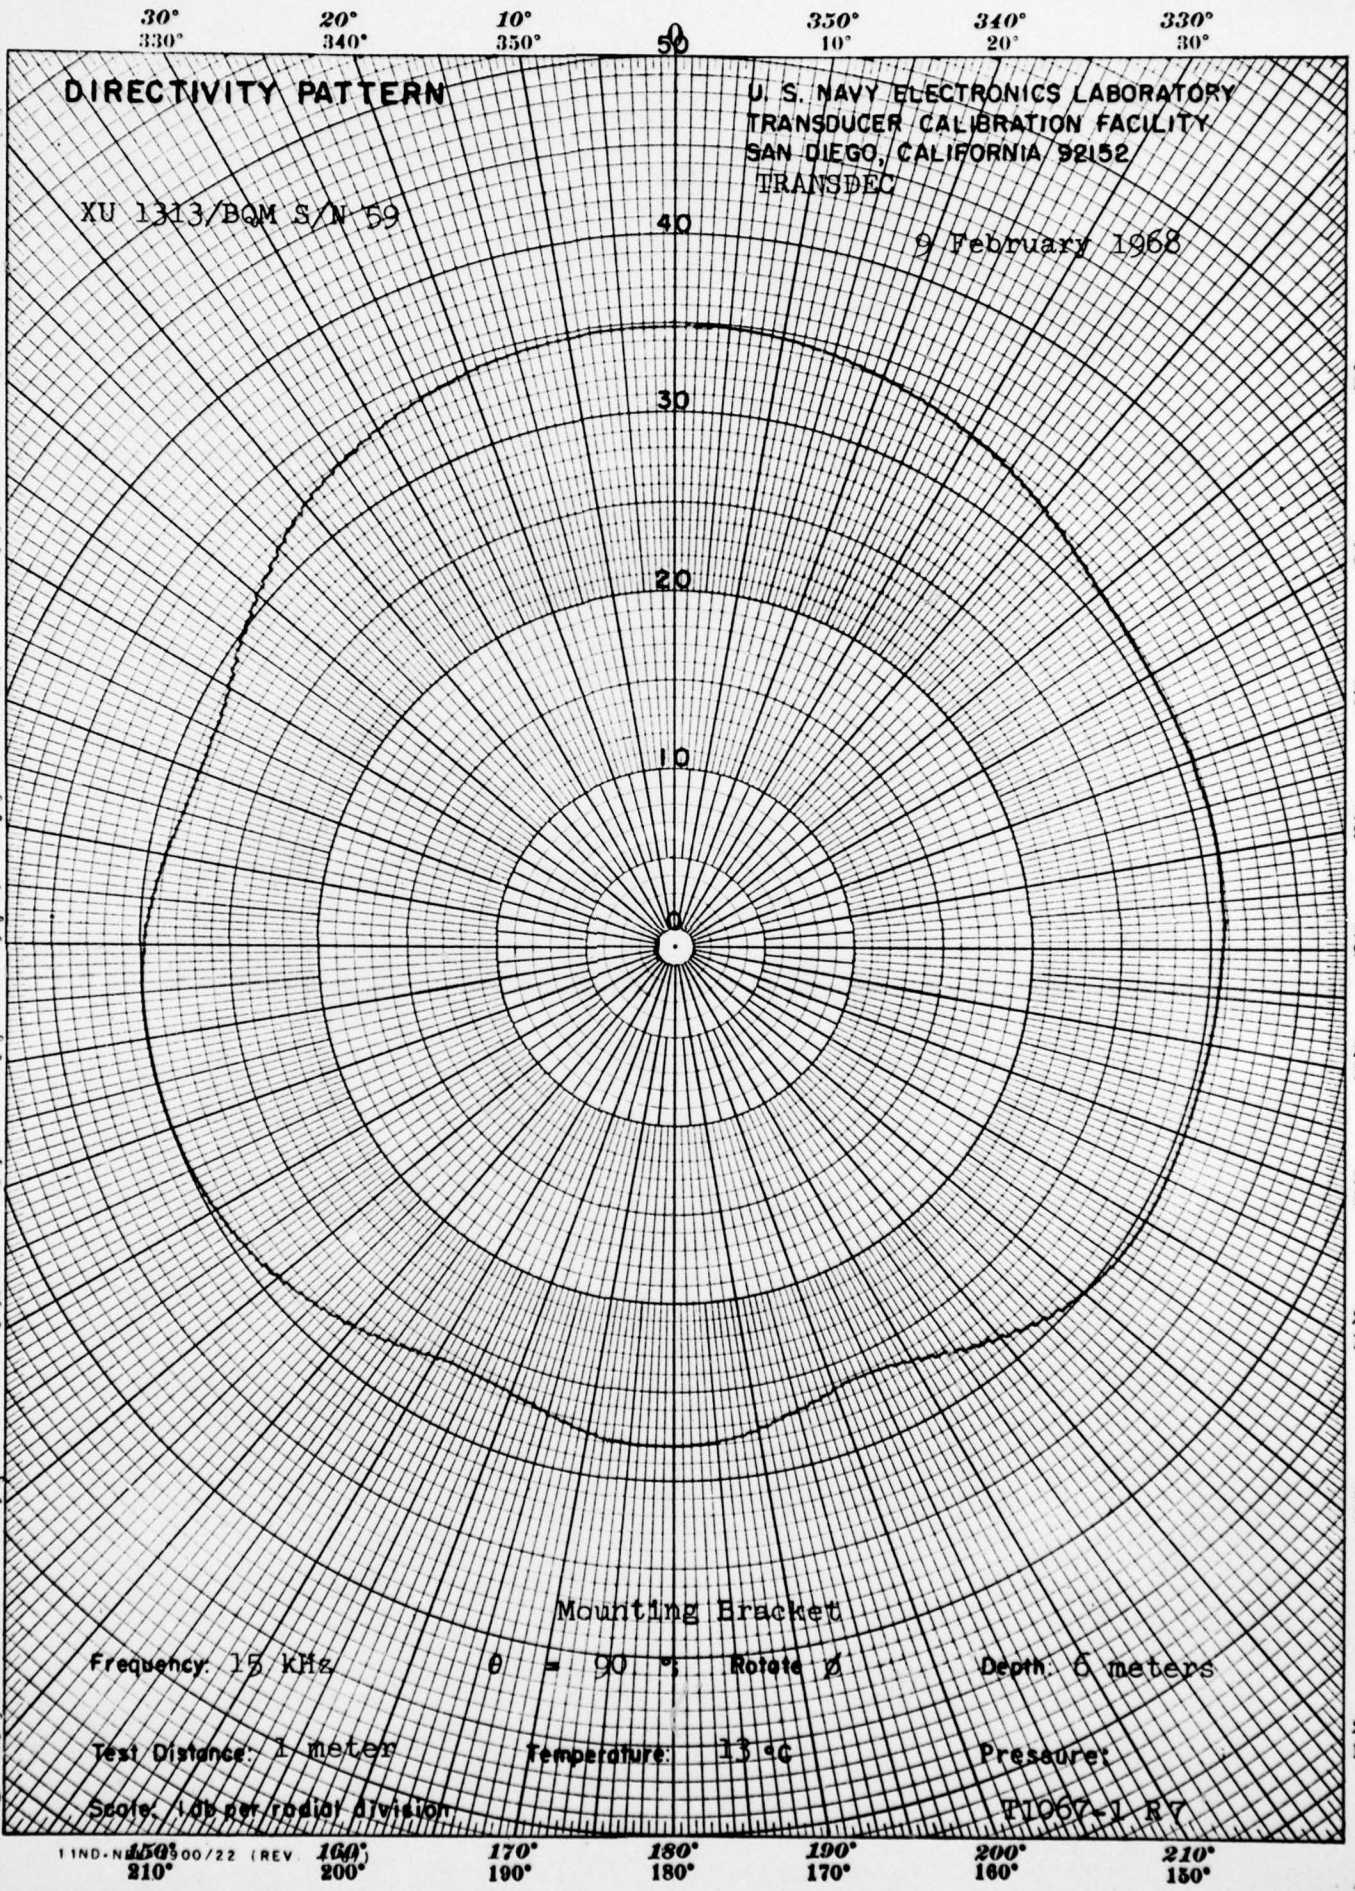

1 1/2" 10" 10" TO 1 1/2" INCH 46 1327
 7 1/2" 10" 10" IN. ALUMINUM
 KEUFFEL & ESSER CO.

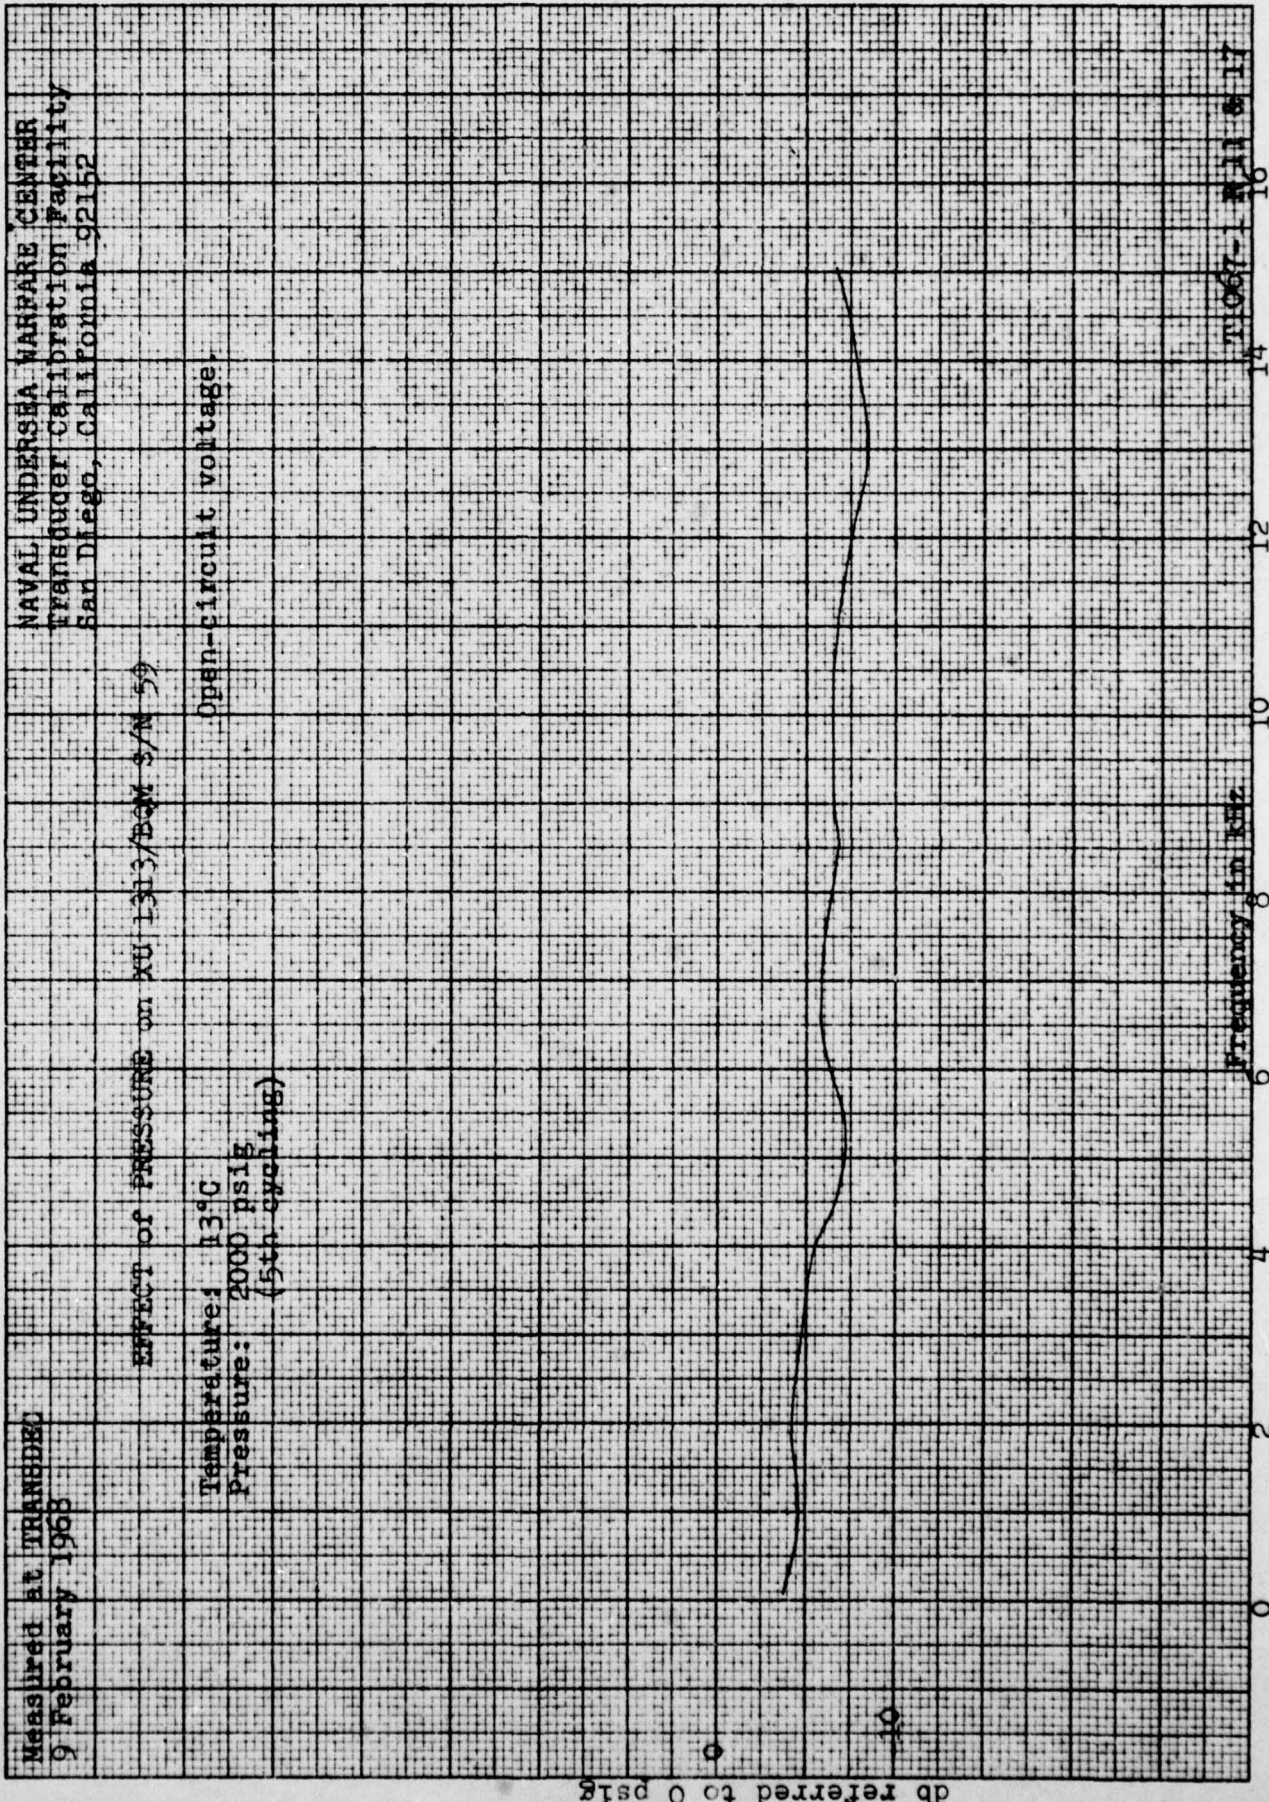

No 10 X 10 TO 1/2 INCH 46 1327
 7 1/2 X 10 IN. ALBANY, N.Y.
 NEUFEL & ESSER CO.

Measured at TRANSDEC
 9 February 1968


NAVAL UNDERSEA WARFARE CENTER
 Transducer Calibration Facility
 San Diego, California 92152

RECEIVING RESPONSES of XU 1313/BOM S/N's 22 & 59

Temperature: 13°C
 Depth: 6 meters

Open-circuit voltage measured at
 the end of cable supplied with unit.

db below 1 volt/microbar

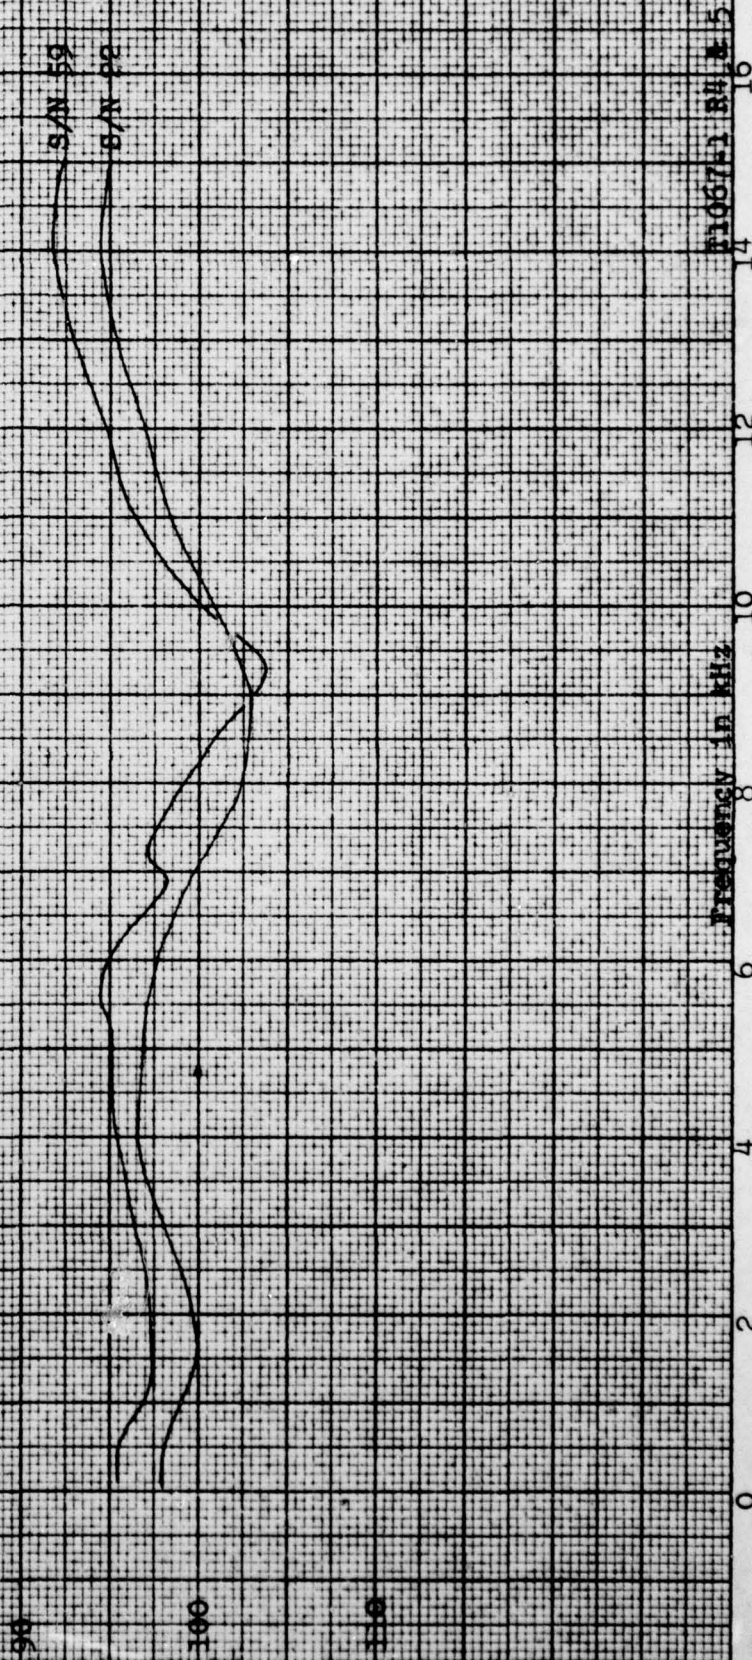

K&E 10 X 10 TO 1/2 INCH 46 1327
 7 1/2 X 10 IN. • ALDAMING • U.S.A.
 KEUFEL & ESSER CO.

Measured at TRANSDEC
 9 February 1968

NAVAL UNDERSEA WARFARE CENTER
 Transducer Calibration Facility
 San Diego, California 92152

EFFECT OF PRESSURE ON XU 1313/BQM S/N's 22 & 59

Temperature: 13°C
 Pressure: 2000 psig
 (5th cycling)

Open-circuit voltage.

db referred to 0 psig

