

AD-A005 826

MB ASSOCIATES SAN RAMON CALIF  
XM746 PRACTICE FUZE. (U)  
1979


F/6 19/1

DAAK10-79-C-0040

NL

UNCLASSIFIED

1 of 1  
45/00/26

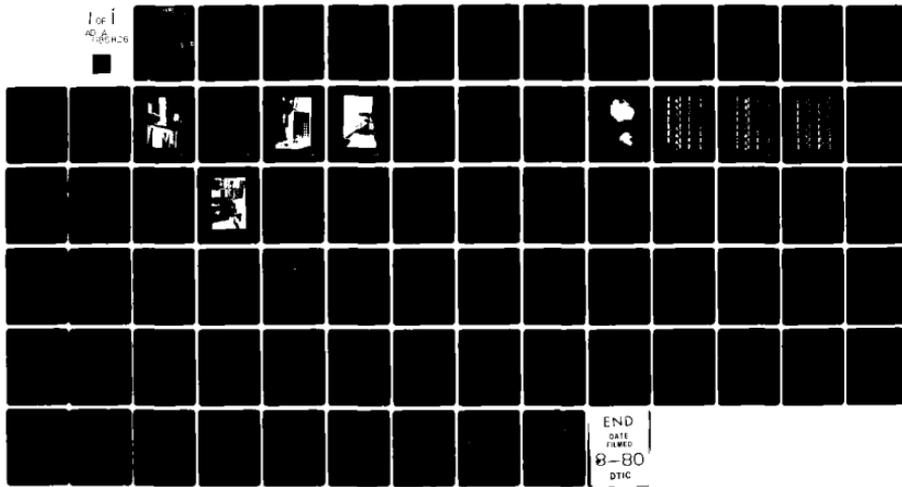

END  
DATE  
FILMED  
8-80  
DTIC

ADA085826

**LEVEL**

6

XM746 PRACTICE FUZE

Progress Report, no. 2

1 March - 28 September 1979

AD83773 SLC  
2

7-12991

Progress Report No. 2

12 75

15

Contract No. DAAK10-79-C-0040

**DTIC ELECTE**  
JUN 13 1980  
S C D

Prepared for:

Department of the Army  
U. S. Army Armament Research and  
Development Command  
Dover, New Jersey, 07801

This document has been approved  
for public release and sale; its  
distribution is unlimited.

Prepared by:

MBAssociates  
Bollinger Canyon Road  
San Ramon, California  
94583

DC FILE COPY

2-1-80

80 1 21 0-0

## 1.0 INTRODUCTION

This progress report covers the period 1 March to 28 September, under contract no. DAAK10-79-C-0040. This program is for the Design and Development of the XM746 Practice Fuze Spotting Charge.

### 1.1 Background

In March the requirements for a settable ogive were dropped, which allowed the use of the standard PDM 739 Fuze, modified to the XM747 Fuze. Also, the visible range for the spotting charge was increased 2000m - from 2000m to 4000m.

Tests of 3 candidate spotting charges were conducted at Yuma Proving Grounds (YPG) in April and at Ft. Sill in June to select the most suitable charge for the XM747 Fuze; however, due to dust clouds created on impact at YPG, the signature tended to be obscured. At Ft. Sill, 2.6 inches of rain fell on the impact area the day before, resulting in an extremely soft and muddy impact area. The smoke signal from the fuze impact was smothered by the impact medium and the signal was either minimal or not visible. Due to the above, a full determination could not be made but the results indicated additional development was necessary.

### 1.2 Design Modifications

As a result of the YPG and Ft. Sill tests, two design modifications to improve the spotting charge display were decided to be worth development and evaluation:

- Drilling of four 1/2 inch holes toward the rear of the projectile to allow smoke exit ports to be exposed to the atmosphere for a longer period of time (about 2-milliseconds) before being buried in the impact medium.

- Modify the granulation and ignition systems of the candidate pyrotechnic compositions to reduce functioning times.

### 1.3 Static Testing at MBA

Static testing of a matrix of the modified designs was conducted over an 8 day period starting on 9 September.

1.3.1 Object of Test

7:1141 → The primary object of the test was to determine function time, smoke cloud size and duration of Ordnance Research Inc. (ORI) type B & type C charges, ARRADCOM MOD E and MOD E1 charges and the MBA improved ~~TiCl<sub>4</sub>~~ ARRADCOM MOD E charge. See Table 1 for compositions. Based on the test results, the best performing ORI and ARRADCOM configuration was to be carried forward for ballistic range testing at Ft. Lewis. In the case of the MBA design, it would be carried forward only if the function time was fast enough to indicate a reasonable probability of success. As discussed below, the function time was adequate to justify continued development.

1.3.2 Hardware

The hardware used in the testing was the M107 (155mm) Projectile and XM747 Fuze. The GFE fuzes were received with six .437 dia. holes. The holes were taped 1/2-20 and screws were used as necessary, see Figure 1, to meet the test plan for 0, 3 & 6 holes in the fuze. The projectile had four .500 holes drilled radial into the body 7.500 in. from the base, see Figure 2.

MBA blended the ARRADCOM composition MOD E and E1 and loaded the composition into GFE plastic containers, see Figure 3, to ARRADCOM specifications. See Table 2 and attachments A & B for blending and loading records.

Two  $TiCl_4$  container designs were considered and identified as configuration A & B. The A configuration was rejected due to the fact it projected beyond the rear of the fuze, see Figure 4, which would cause packaging problems in the event of a future production program. The B configuration is contained within the fuze body, see Figure 5. To accomplish this, it was necessary to reduce the  $TiCl_4$  charge from 22cc to 18cc and reduce the expulsion charge from 47 to 27 grams relative to the A configuration. The charge container length was also reduced by 3/4 in.

ORI supplied their spotting charge ORI "B" and "C" in sealed containers for the test.

TABLE 1  
DESCRIPTION OF  
PYROTECHNIC SMOKE COMPOSITIONS

MOD E:

<u>Ingredient</u>	<u>% by Wt</u>	<u>Spec</u>
Zinc Dust	40 ± 1	JAN-Z-365
Potassium Perchlorate	20 ± 0,5	MIL-P-217A, GrA, C14
Potassium Nitrate	20 ± 0,5	MIL-P-15613 C1 2
Aluminum (Atomized)	20 ± 0,5	MIL-P-14067A Type II

MOD E1 as above except for MDF DET Core, see Figure 3.

ORI B - Proprietary Red Phosphorous Composition

ORI C - Proprietary Red Phosphorous Composition

MBA\*

Titanium Tetrachloride

SPECIFICATIONS (Weston, Michigan Plant)

Titanium, wt. %		25,0 minimum
Chlorine, wt. %		74.0 minimum
Color		50 maximum
Metal Analysis, ppm		
Tin (Sn)	10 max.	Chromium (Cr) 5 max.
Aluminum (Al)	10 max.	Antimony (Sb) 5 max.
Iron (Fe)	15 max.	Arsenic (As) 10 max.
Vanadium (V)	10 max.	Lead (Pb) 1 max.
Silicon (Si)	10 max.	Nickel (Ni) 5 max.
Copper (Cu)	5 max.	

MOD E - 47 gms. Composition per above

\*

ARRADCOM MOD E charge used as TiCl<sub>4</sub> expulsion charge

TABLE 1 (Continued)

TITANIUM TETRACHLORIDE -  $TiCl_4$ \*

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification For	<i>Per</i>
By	<i>[Signature]</i>
Distribution	
Availability Codes	
Dist	Avail and/or special
<b>A</b>	

PHYSICAL PROPERTIES

Chemical Formula	$TiCl_4$
Molecular Weight	189.7
Color, Form	clear liquid
Melting Point	-30°C
Boiling Point	136.4°C
Specific Gravity (20°C)	1.726
Density (lbs./gal.)	14.4
Stability	decomposes in the presence of moist air

SPECIFICATIONS (Weston, Michigan Plant)

Titanium, wt.%	25.0 minimum		
Chlorine, wt.%	74.0 minimum		
Color	50 maximum		
Metal Analysis, ppm			
Tin (Sn)	10 max.	Chromium (Cr)	5 max.
Aluminum (Al)	10 max.	Antimony (Sb)	5 max.
Iron (Fe)	15 max.	Arsenic (As)	10 max.
Vanadium (V)	10 max.	Lead (Pb)	1 max.
Silicon (Si)	10 max.	Nickel (Ni)	5 max.
Copper (Cu)	5 max.		

SAFETY AND HANDLING

Titanium tetrachloride must be maintained under inert atmosphere. Nitrogen containing less than 10 ppm oxygen is recommended. Exposure to moisture in the air generates hydrochloric acid and titanium dioxide. Refer to the titanium tetrachloride "Product Safety Information" sheet for safety information, and to the Stauffer brochure "A Guide to Cylinder Unloading."

TABLE 1A

SENSITIVITY COMPARISON OF PYROTECHNIC SMOKES

<u>CHARACTERISTIC</u>	<u>COMPOSITION</u>		<u>ORI 'C'</u>
	<u>SW 522</u>	<u>ORI 'B'</u>	
Vacuum Stability: Gas Evolved - ML	0.92 40 Hrs @ 120°C	1.88 40 Hrs @ 100°C	11+ Failed - Stopped After 16 hours
Impact Test: (Bruceton 50% F.P.) 2.5 Kg Wt Drop Ht (cm) Std Ball Drop (Prim Expl) (cm)	198	96.5*	51*
Friction Pendulum: Fiber Shoe Steel Shoe	No Action Cracks, Sparks, Partial Detonation	Detonates Burns, Detonates	Burns Cracks, Burns
Electrostatic Sensitivity: @ 0.25 Joules	No Ignition 20 Tries	Ignites Between 0.025 & 0.25 Joules (Failed)**	No Ignition 20 Tries
Ignition Temp: DTA 10°C/Minute Up to 227°C	No Ignition To 700°C Even @ 20°C/Min	No Ignition (In Argon)	Endotherm 54°C Endotherm 64-84°C Endotherm 104-129°C (In Argon)

\* Value for RD 1333 Lead Azide is 48-56 CM.

\*\* 0.025 Joules can be carried on human body

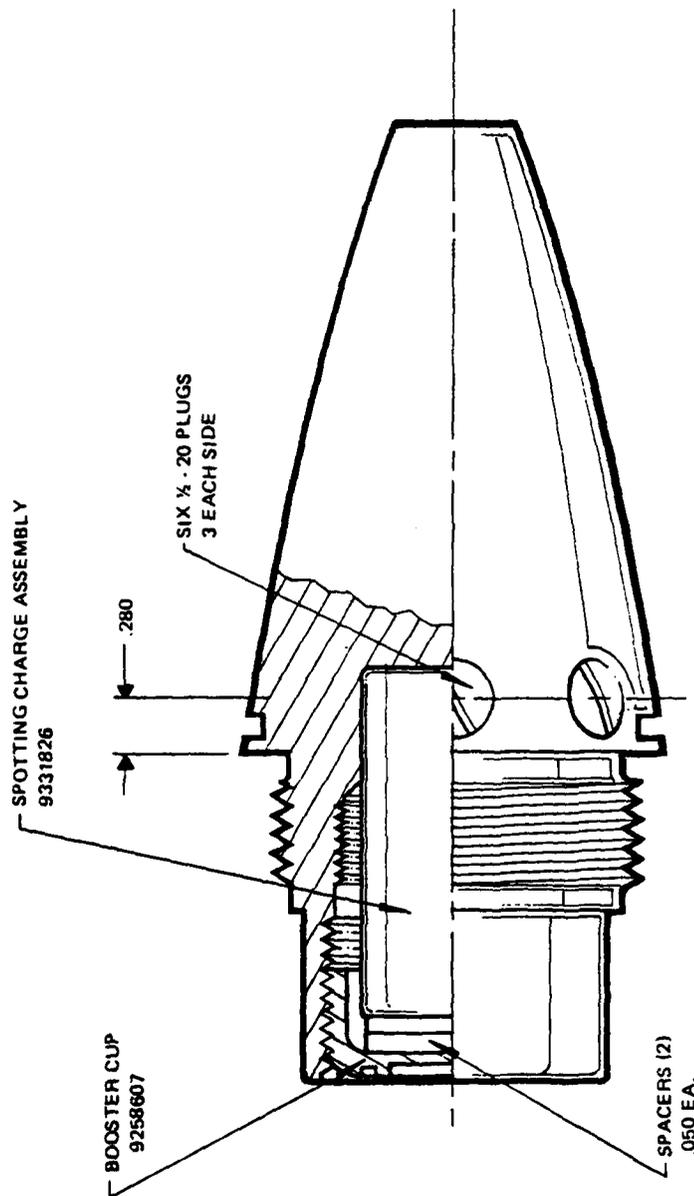


FIGURE 1  
XM747 FUZE BODY



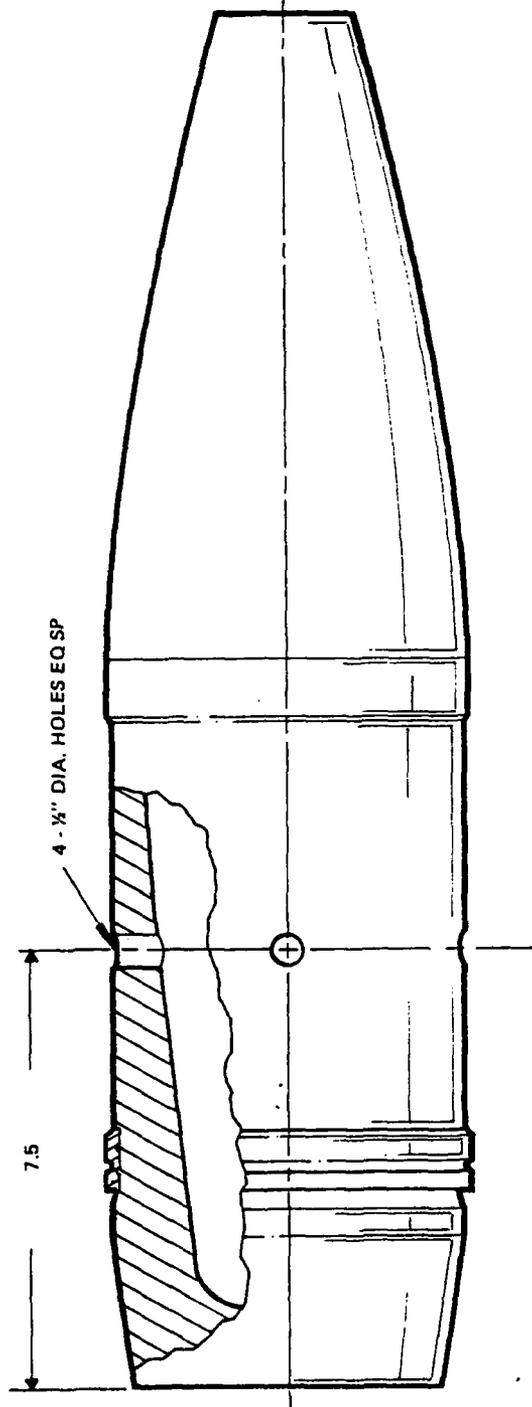


FIGURE 2  
M107 (155mm) PROJECTILE

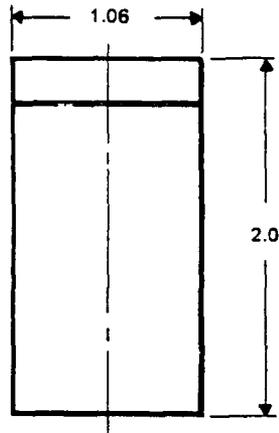

MOD E CONTAINER

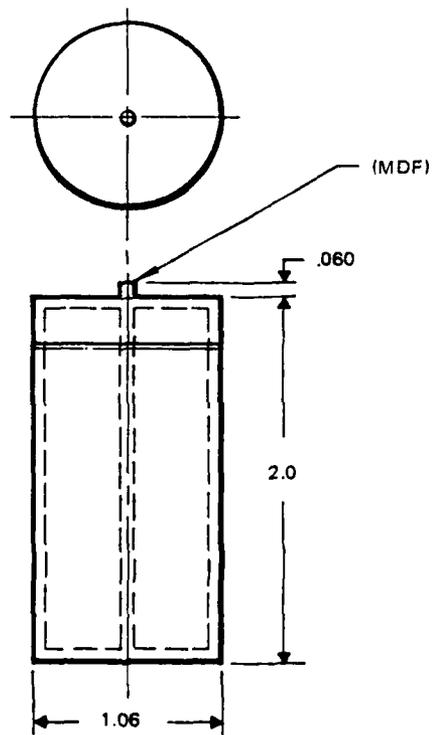

MOD E1 CONTAINER

FIGURE 3  
ARRADCOM CONFIGURATION

**MBA**  
3029-16852

TABLE 2

NOTES:

1. Spec MIL-A-2550 Applies.
2. Load with approximately 48 grams ARRADCOM smoke composition, MOD E, as follows:

INGREDIENT	% BY WT.	PARTICLE SIZE (MICRONS)	SPEC
Zinc Dust	40 $\pm$ 1	7 $\pm$ 3	JAN-Z-365
Potassium Perchlorate	20 $\pm$ 0.5	Per spec	MIL-P-217A, GRA, CL 4
Potassium Nitrate	20 $\pm$ 0.5	30 $\pm$ 15	MIL-P-156B, CL 2
Aluminum (Atomized)	20 $\pm$ 0.5	Per spec	MIL-P-14067A, Type II

3. Advisory: Blend Smoke Composition Ingredients Use Globe or Ball Mill Equipment.
4. Compact Charge, Spotting by Vibrating or Tamping in Cup, Spotting Charge, 9331828.
5. Secure Cover to Cup with 2 part Epoxy.

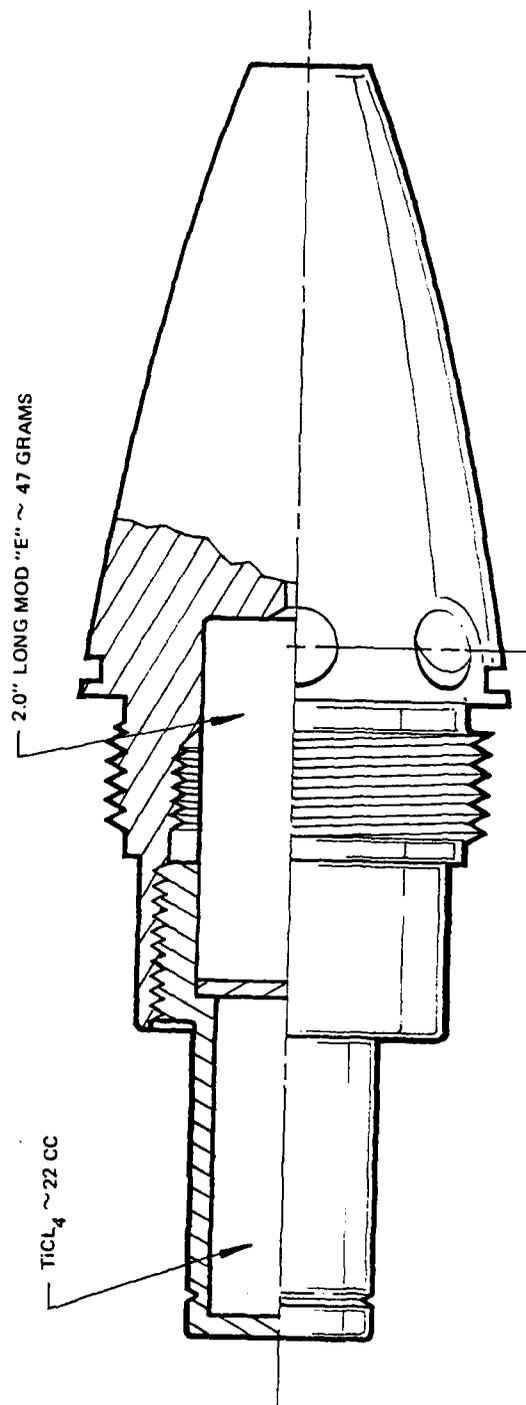


FIGURE 4  
TiCl<sub>4</sub>/MOD "E", CONFIGURATION "A"

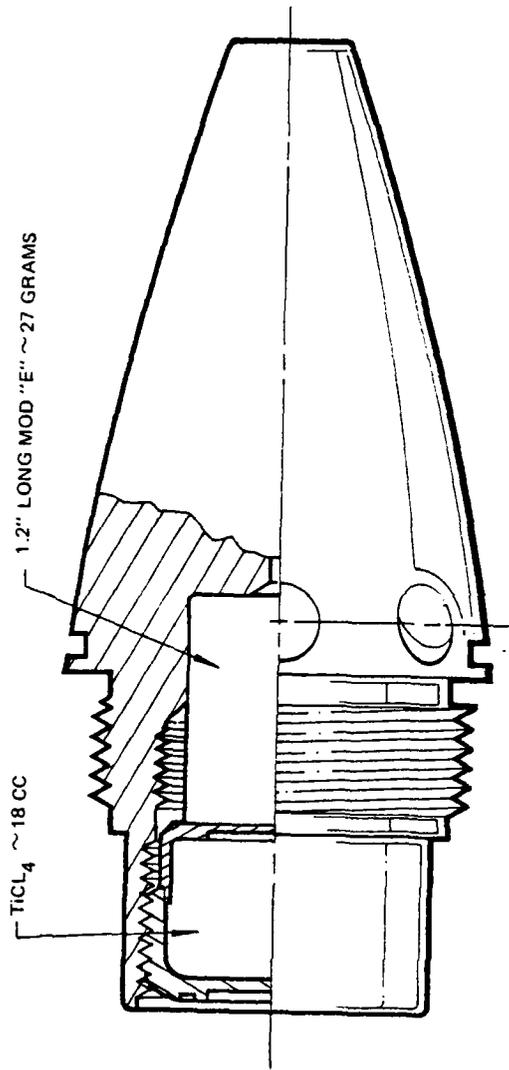


FIGURE 5  
TiCl<sub>4</sub>/MOD "E", CONFIGURATION "B"

### 1.3.3 Testing

A total of 54 tests of the various spotting charges and smoke port configurations were conducted, see Table 3 for Test Plan. The fuzes were assembled to the M107 projectile, placed in a test fixture and fired with an electric squib, see Figure 6.

ARRADCOM and Ft. Sill representatives witnessed the test series and evaluated the spotting charges and hardware configurations.

### 1.3.4 Instrumentation and Equipment

- a. Molelectron Model PR-100 electric radiometer, amplifier and a CIC Model 5-124 recording oscillograph for energy output of the spotting charge.
- b. Hy Cam Hi Speed 16mm camera to record function times.
- c. Scoopic 16mm camera for film coverage of the testing.
- d. Velocity screens to a digital counter for instantaneous function time read out, see Figure 7 for typical hook-up.
- e. Agastat step timer to control function times between cameras and fuze detonation. See Figure 8.
- f. Walk-in oven for temperature conditioning of fuzes to  $-30^{\circ}\text{F}$  and  $+130^{\circ}\text{F}$  for 12 hours, see Figure 9.

### 1.3.5 Test Summary


The first 11 tests were devoted primarily to selecting the best ARRADCOM and ORI spotting charge configuration.

The fuzes were assembled as shown in Figure 1 except the 6 holes were not plugged. Based on previous designs, 2-.050 steel spacers were placed between the booster cup and the spotting charge to prevent rupturing the booster cup base. This was done to insure expelling the total charge out of the fuze ports.

6 August 1979  
REV 1A

STATIC TEST PLAN (MBA)  
FUZE. PD, PRACTICE, XM747

TABLE 3

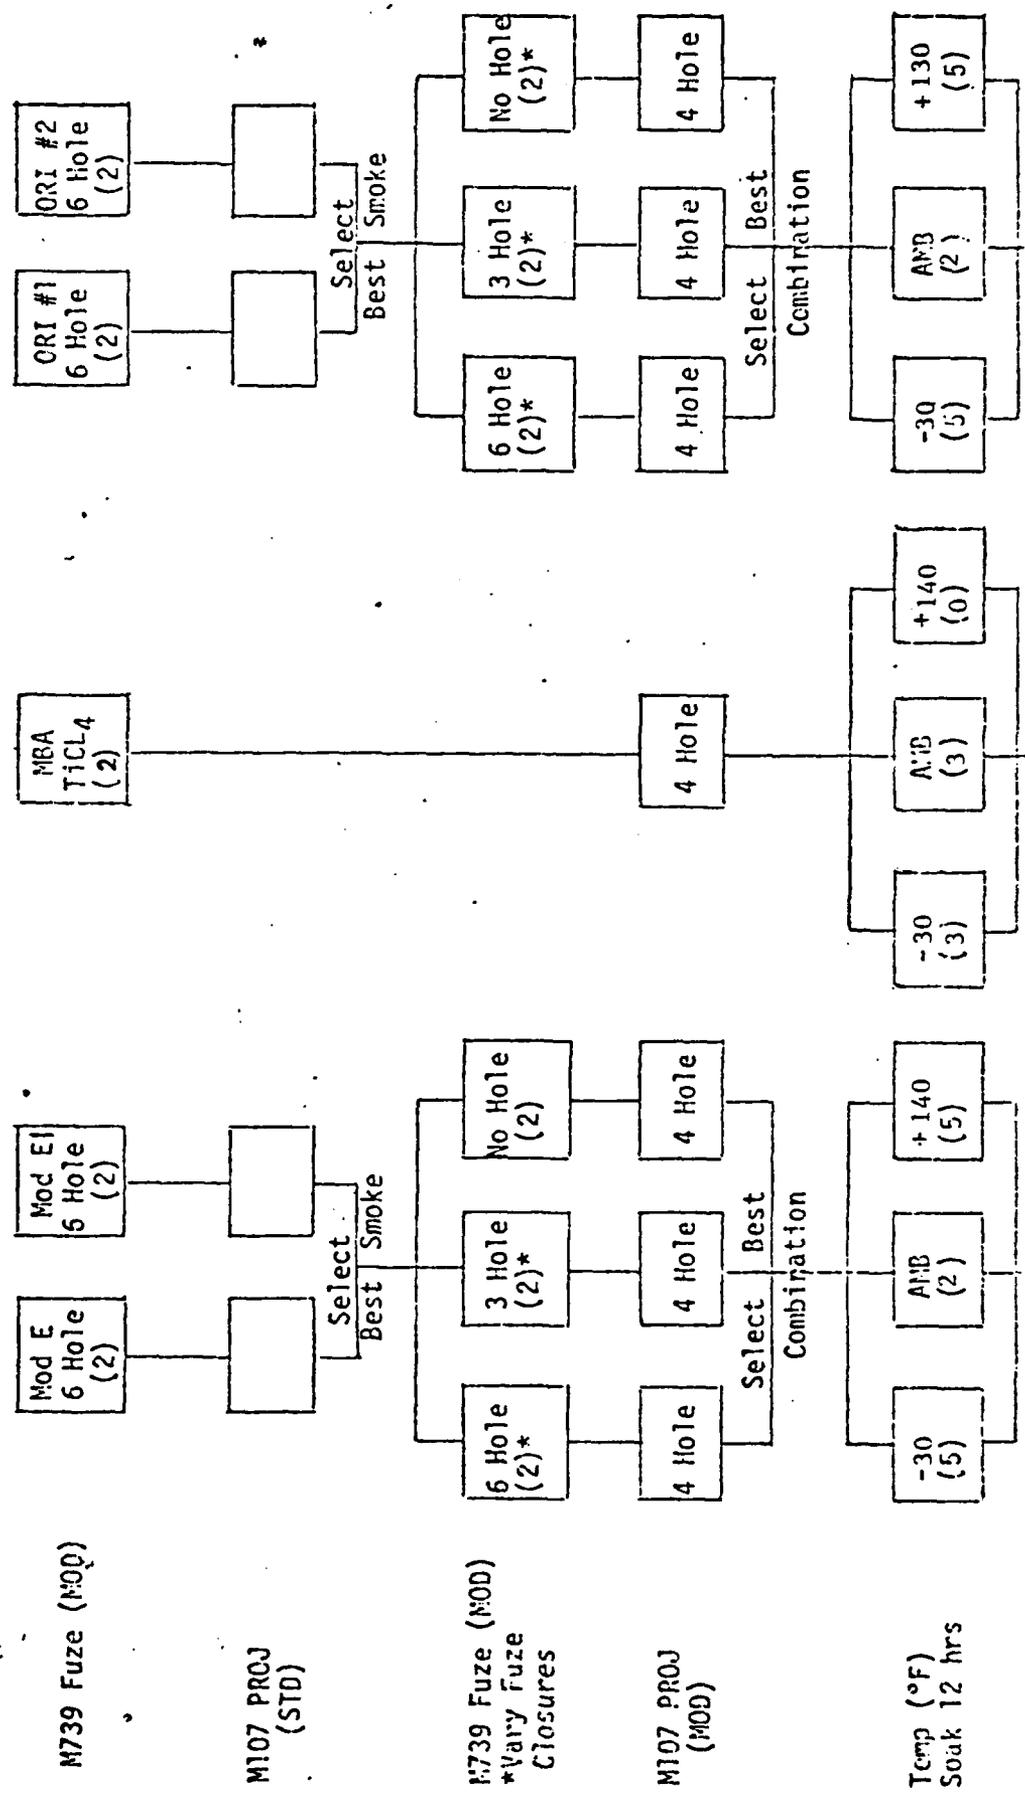

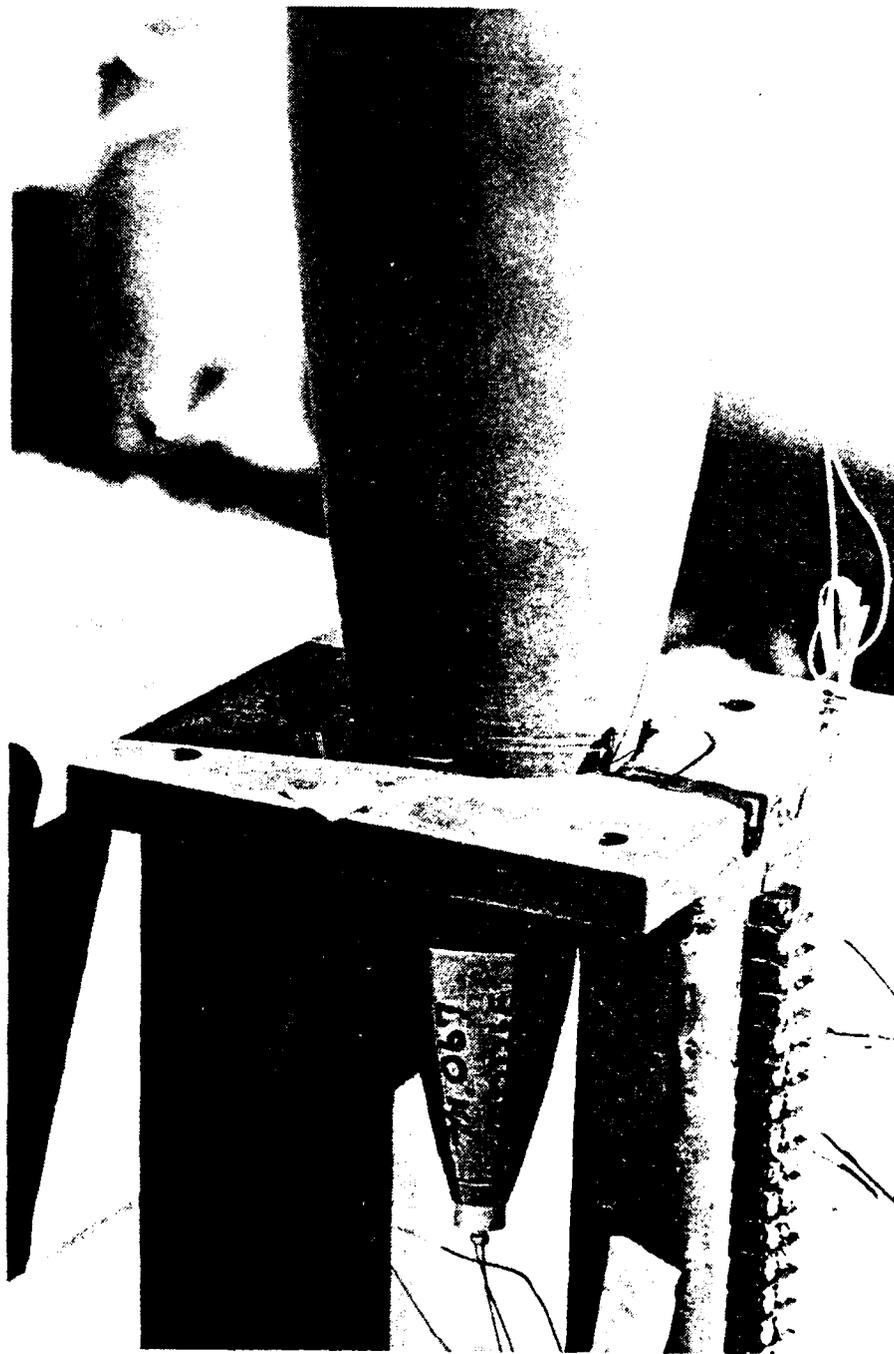


FIGURE 6  
TYPICAL TEST SET UP

**MBA**

3139-16870

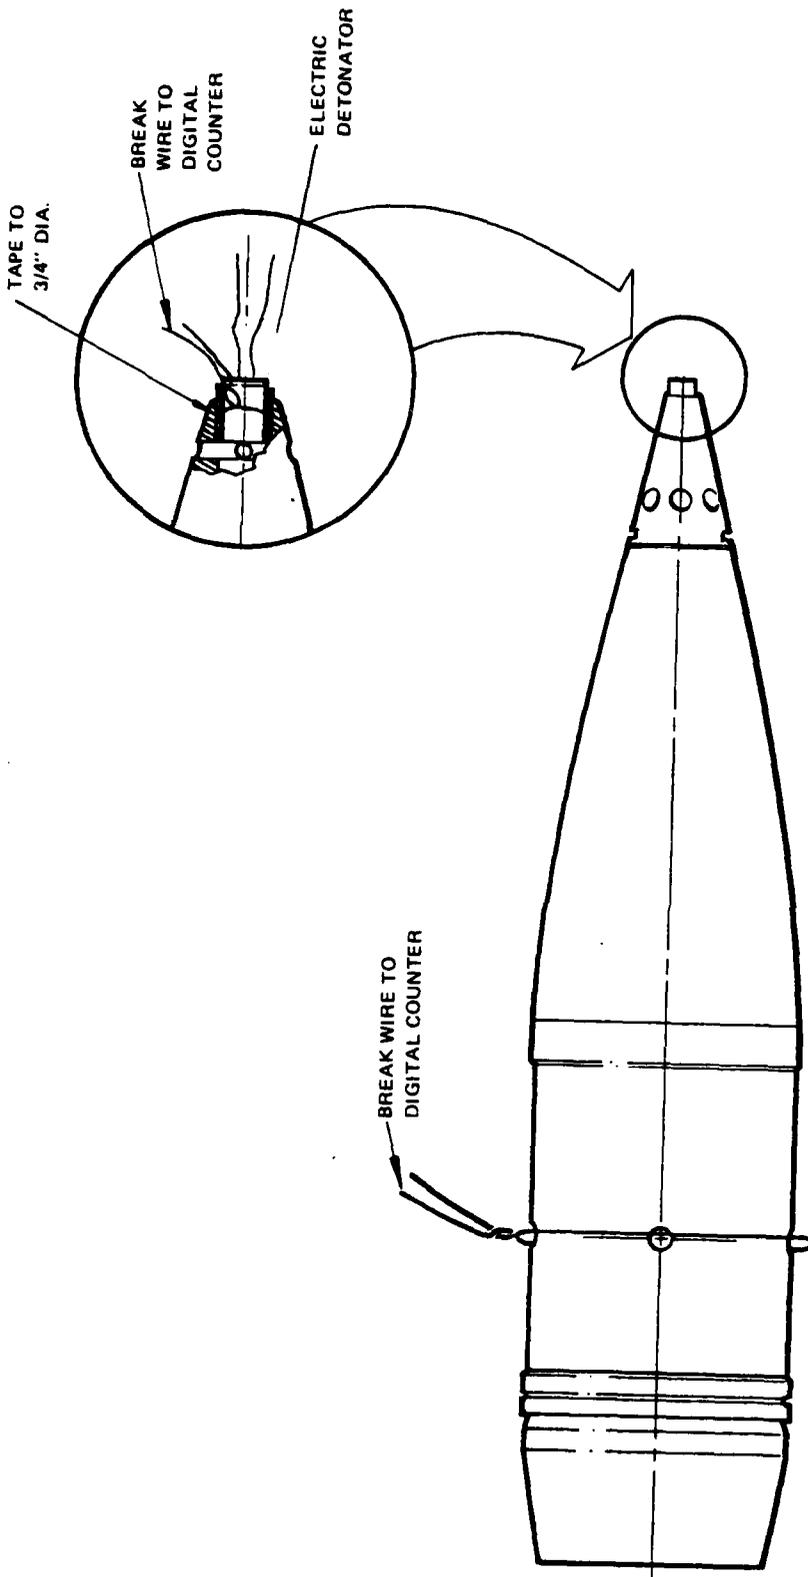


FIGURE 7  
TYPICAL VELOCITY SCREEN

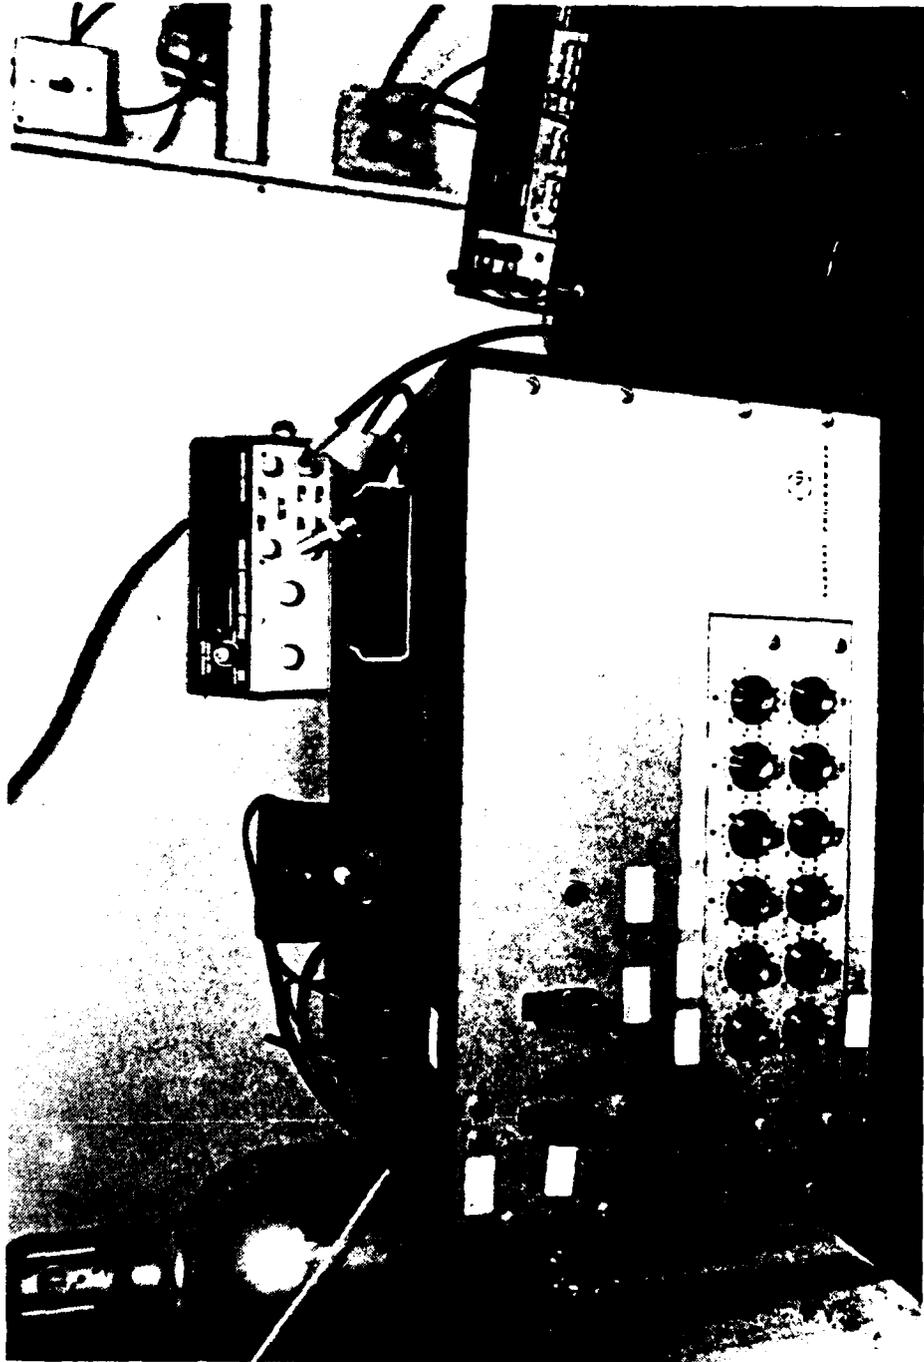


FIGURE 8  
TEST CONTROL MODULE



FIGURE 9  
WALK IN OVEN

**MBA**  
3139-16872

TABLE 4

Page 1 of 2

## STATIC TESTING: PRACTICE FUZE SH747

DATE	DESCRIPTION	TEST No.	SR No.	FUZE TEMP °F	SPOTTING CHARGE	CHARGE VOL CC/ wtGN	TIME MS FUZE BW	TIME MS FUZE FILM	TIME MS PROJ BW	TIME MS PROJ FILM	REMARKS
6-11	6 Hole Fuze - 0 Holes Proj.	1	020	AMB	MOD "E"	44.11	.138	-	-	-	*Fuze did not function
6-11	6 Hole Fuze - 0 Holes Proj.	2	021	AMB	MOD "E1"	46.95	.195	-	-	-	
6-11	6 Hole Fuze - 0 Holes Proj.	3	024	AMB	MOD "E1"	46.3	.173	-	-	-	
6-11	6 Hole Fuze - 0 Holes Proj.	4	022	AMB	ORI "C"	-	.180	-	-	-	
6-11	6 Hole Fuze - 0 Holes Proj.	5	023	AMB	ORI "B"	-	.706	-	-	-	
6-11	0 Hole Fuze - 4 Hole Proj.	6	025	AMB	TIC1A/ MOD"E1"	22/46.6	-	-	2.69	-	
9-12	6 Hole Fuze - 0 Hole Proj.	7	026	AMB	MOD "E"	46.6	.188	-	-	-	Configuration "A" cont.
9-12	6 Hole Fuze - 0 Hole Proj.	8	027	AMB	MOD "E1"	47.15	1.32	-	-	-	
9-12	6 Hole Fuze - 0 Hole Proj.	9	028	AMB	ORI "B"	-	.191	-	-	-	
9-12	6 Hole Fuze - 0 Hole Proj.	10	029	AMB	ORI "C"	-	.191	-	-	-	
9-12	6 Hole Fuze - 0 Hole Proj.	11	030	AMB	MOD "E1"	45.7	.174	-	-	-	Booster cup did not rupture
9-12	6 Hole Fuze - 4 Hole Proj.	12	031	AMB	MOD "E"	49.0	-	-	-	-	Booster cup did not rupture
9-12	3 Hole Fuze - 4 Hole Proj.	13	033	AMB	MOD "E"	46.85	-	-	-	-	Booster cup did not rupture
9-12	0 Hole Fuze - 4 Hole Proj.	14	035	AMB	MOD "E"	46.9	-	-	-	-	*Fuze did not function
9-12	6 Hole Fuze - 4 Hole Proj.	15	032	AMB	MOD "E"	46.5	-	-	-	-	Booster cup did not rupture
9-12	0 Hole Fuze - 4 Hole Proj.	16	043	AMB	TIC1A/ MOD"E"	22/47.45	-	-	-	-	*Fuze did not function Configuration "A" container
9-13	3 Hole Fuze - 4 Hole Proj.	17	039	AMB	ORI "C"	-	-	.143	-	11.2	Booster cup did not rupture
9-13	0 Hole Fuze - 4 Hole Proj.	18	041	AMB	ORI "C"	-	-	-	-	5.07	
9-13	0 Hole Fuze - 4 Hole Proj.	19	042	AMB	ORI "C"	-	-	-	-	2.40	
9-13	3 Hole Fuze - 4 Hole Proj.	20	034	AMB	MOD "E"	47.55	-	.250	1.678	2.60	
9-13	0 Hole Fuze - 4 Hole Proj.	21	036	AMB	MOD "E"	46.85	-	-	2.160	2.43	
9-13	0 Hole Fuze - 4 Hole Proj.	22	044	AMB	TIC1A/ MOD"E"	22/47.5	-	-	2.371	-	Fuze failed at ports Configuration "A"
9-13	0 Hole Fuze - 4 Hole Proj.	23	046	AMB	MOD "E"	46.6	-	-	2.691	-	Fuze failed at ports Configuration "A" container
9-13	0 Hole Fuze - 4 Hole Proj.	24	045	AMB	TIC1A/ MOD"E"	22/47.5	-	-	-	1.84	
9-17	0 Hole Fuze - 4 Hole Proj.	25	061	-50°F	ORI "C"	-	-	-	8.591	9.04	
9-17	0 Hole Fuze - 4 Hole Proj.	26	063	-50°F	ORI "C"	-	-	-	6.036	6.57	*Interrupt not in proper position
9-17	0 Hole Fuze - 4 Hole Proj.	27	047	-50°F	MOD "E"	45.75	-	-	2.495	2.79	

TABLE 4 (contd.)

STATIC TESTING PRACTICE FUZE SM747

DATE	DESCRIPTION	TEST No.	SR No.	FUZE TEMP °F	SPOTTING CHARGE	CHARGE VOL CC/ WCGH	TIME MS FUZE BW	TIME MS FUZE FILM	TIME MS PROJ BW	TIME MS PROJ FILM	REMARKS
9-18	0 Hole Fuze - 4 Hole Proj.	28	059	-30°F	ORI"C"	-	6.00		6.00	9.57	
9-18	0 Hole Fuze - 4 Hole Proj.	29	062	-30°F	ORI"C"	-	-		-	7.95	
9-18	0 Hole Fuze - 4 Hole Proj.	30	060	-30°F	ORI"C"	-	7.747		7.747	8.09	
9-18	0 Hole Fuze - 4 Hole Proj.	31	053	-30°F	MOD"E"	47.05	2.496		2.496	2.67	
9-18	0 Hole Fuze - 4 Hole Proj.	32	052	-30°F	MOD"E"	46.25	1.620		1.620	1.79	
9-18	0 Hole Fuze - 4 Hole Proj.	33	051	-30°F	MOD"E"	48.45	2.232		2.232	2.34	
9-18	0 Hole Fuze - 4 Hole Proj.	34	050	-30°F	MOD"E"	47.65	2.065		2.065	2.31	
9-18	0 Hole Fuze - 4 Hole Proj.	35	058	-30°F	TICL4/ MOD"E"	22/45.15	2.853		2.853	3.21	Configuration "A" container
9-18	0 Hole Fuze - 4 Hole Proj.	36	057	-30°F	TICL4/ MOD"E"	22/45.9	-		-	4.07	Configuration "A" container
9-18	0 Hole Fuze - 4 Hole Proj.	37	055	-30°F	TICL4/ MOD"E"	22/47.5	-		-	2.55	Configuration "A" container
9-20	0 Hole Fuze - 4 Hole Proj.	38	076	+140°F	ORI"C"	-	-		-	6.10	
9-20	0 Hole Fuze - 4 Hole Proj.	39	078	+140°F	ORI"C"	-	5.908		5.908	5.29	
9-20	0 Hole Fuze - 4 Hole Proj.	40	075	+140°F	ORI"C"	-	5.061		5.061	5.94	
9-20	0 Hole Fuze - 4 Hole Proj.	41	074	+140°F	ORI"C"	-	5.520		5.520	7.06	
9-20	0 Hole Fuze - 4 Hole Proj.	42	077	+140°F	ORI"C"	-	6.661		6.661	7.06	
9-21	0 Hole Fuze - 4 Hole Proj.	43	066	+140°F	MOD"E"	48.75	1.223		1.223	1.41	
9-21	0 Hole Fuze - 4 Hole Proj.	44	068	+140°F	MOD"E"	45.75	1.892		1.892	2.15	
9-21	0 Hole Fuze - 4 Hole Proj.	45	067	+140°F	MOD"E"	46.05	2.922		2.922	3.80	
9-21	0 Hole Fuze - 4 Hole Proj.	46	070	+140°F	MOD"E"	49.55	2.180		2.180	2.30	
9-21	0 Hole Fuze - 4 Hole Proj.	47	069	+140°F	MOD"E"	46.95	2.746		2.746	2.93	
9-28	0 Hole Fuze - 4 Hole Proj.	48	079	AMB	ORI"C"	-	-		-	5.59	
9-28	0 Hole Fuze - 4 Hole Proj.	49	080	AMB	ORI"C"	-	-		-	6.28	
9-28	0 Hole Fuze - 4 Hole Proj.	50	064	AMB	MOD"E"	47.10	1.64		1.64	1.81	
9-28	0 Hole Fuze - 4 Hole Proj.	51	065	AMB	MOD"E"	47.05	1.81		1.81	2.40	Configuration "B" container
9-28	0 Hole Fuze - 4 Hole Proj.	52	086	AMB	TICL4/ MOD"E"	18/27.86	2.40		2.40	2.62	Configuration "B" container
9-28	0 Hole Fuze - 4 Hole Proj.	53	087	AMB	TICL4/ MOD"E"	18/26.95	2.62		2.62	3.22	Configuration "B" container
9-28	0 Hole Fuze - 4 Hole Proj.	54	088	AMB	TICL4/ MOD"E"	18/27.05	3.22		3.22	3.22	Configuration "B" container

NOTE: ORI"C" & MOD"E" ALL DISPLAYED GOOD SMOKE AND FLASH.  
TICL4/MOD"E" EXCELLENT SMOKE FOR LONGER DURATION. GOOD FLASH.

Based on visual observations, review of the 16mm film and examination of function time data, see Table 4, ARRADCOM's MOD E was selected over the MOD E1. It was apparent the mild detonating fuze (MDF) did not improve function time. ORI "C" was selected primarily on the basis of more smoke than ORI "B" composition.

A series of tests were conducted to verify the distribution of the spotting charge output between the fuze and projectile ports (see Tables 3 and 4). It was also necessary during this test series to determine the need, if any, for a .050 steel spacer to slightly delay the rupturing of the booster cup and distribute the spotting charge between the fuze and projectile ports. During tests 12, 13, 15 & 17, see Table 4, the booster cup did not rupture as planned. Based on these results, it was concluded that the .050 spacer be removed for all future tests.

Tests no. 18 thru 24 with the 6 fuze ports blocked off, 5 of the cups ruptured, see Figure 9, and 2 of the fuze bodies (tests 22 and 24) had tensile failure in the area of smoke port, see Figure 10. The failure was attributed to the modification of the fuze (the addition of 6 smoke ports) which removed about 70% of the material in the area of the failure.

As a result of the above test failures it was decided that the balance of testing be conducted with unmodified PDM739 fuzes (without six .437 dia. holes).

The balance of the testing went relatively problem free with only minor instrument problems.

In comparing ORI "C" and MOD "E" cloud size and duration, no major difference could be seen; however, the flash seemed to be more intense coming from the ORI "C" charge. The MBA  $TiCl_4$ /MOD "E" cloud, when compared to OR "C" and MOD "E", was much more intense and its duration considerably longer, in the order of 15-20 sec. compared to about 5-10 sec. The film clips in Figure 11, A, B & C, show the typical spotting charge of the MOD "E", ORI "C" and MBA  $TiCl_4$  exiting from the rear of the projectile shortly after fuze function (MOD "E" at 10.0 MS, ORI "C" 14.0 MS and MBA  $TiCl_4$  11.0 MS).




FIGURE 10  
TYPICAL BOOSTER CUP RUPTURE



FIGURE 11  
FUZE BODY FAILURE

**MBA**

3139-16873

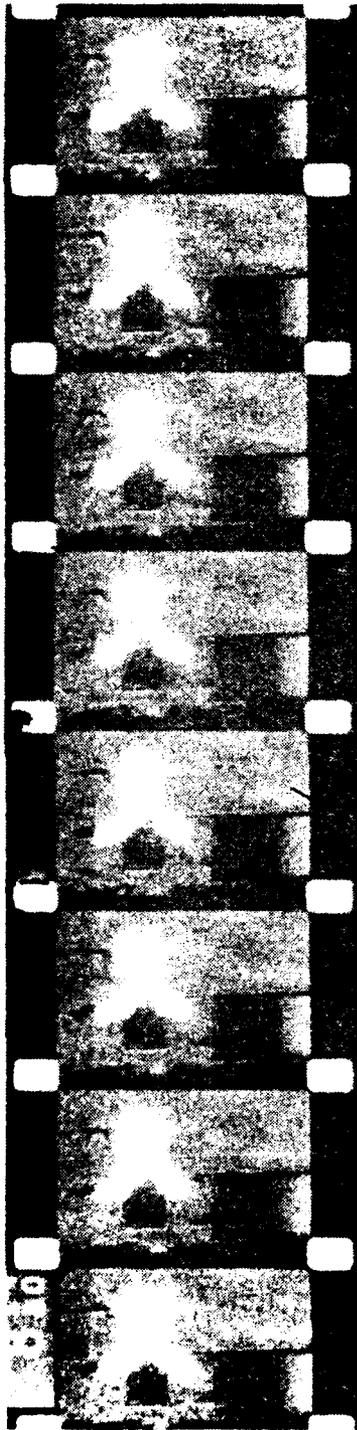

TIME = 10.0 MS

TIMING MARK

1.0 MS



TIME = .2 SEC

FIGURE 11A  
16mm FILM CLIP MOD "E" TEST #51



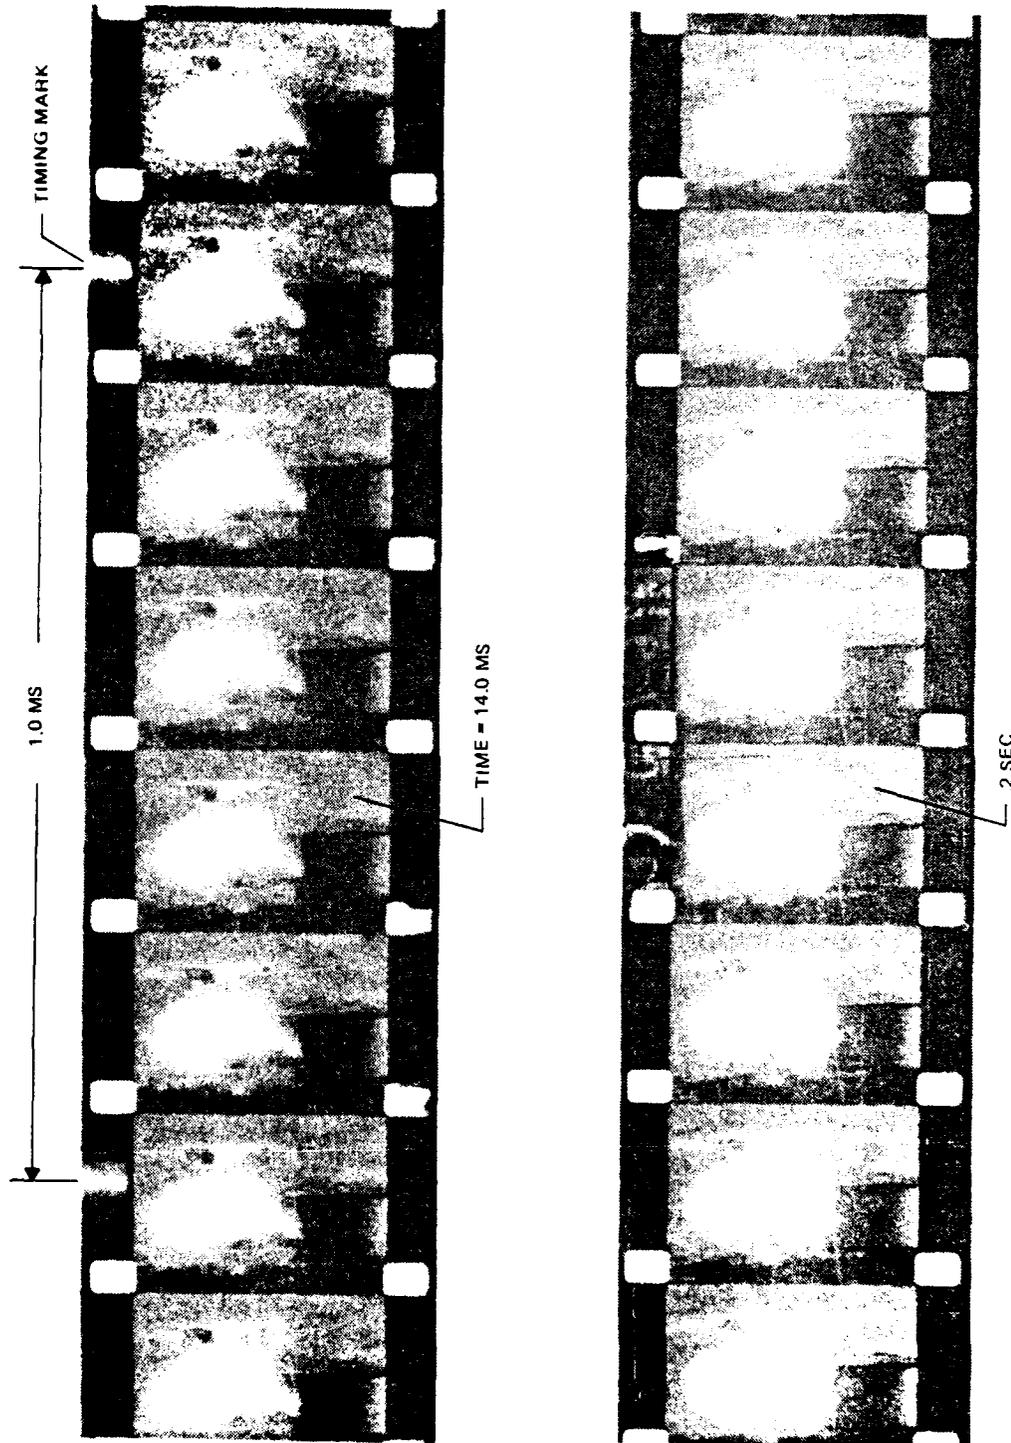


FIGURE 11B  
16mm FILM CLIP ORI "C" TEST #48

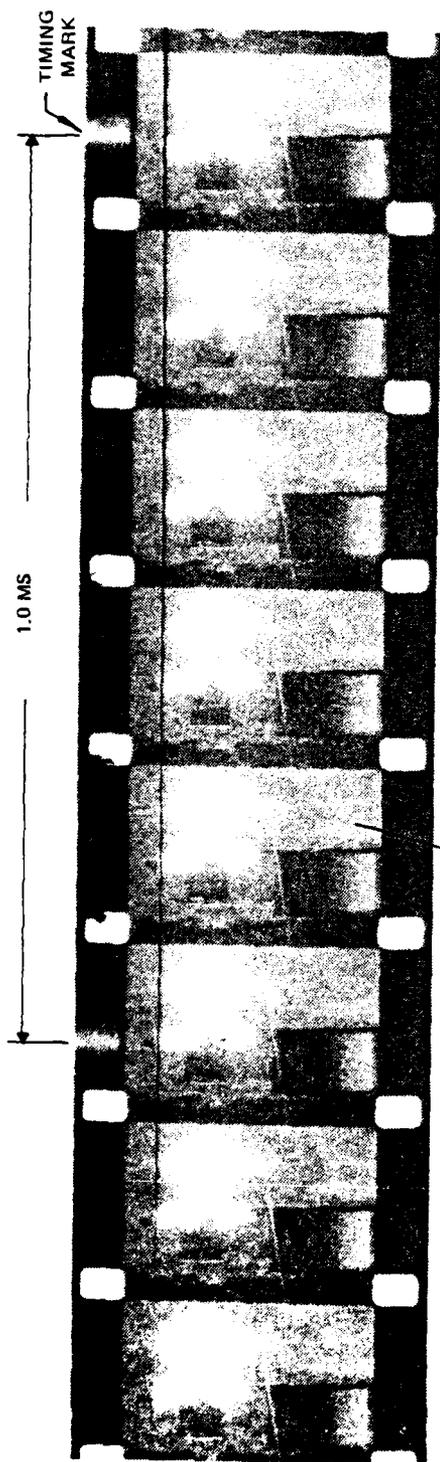

TIME = 11.0 MS

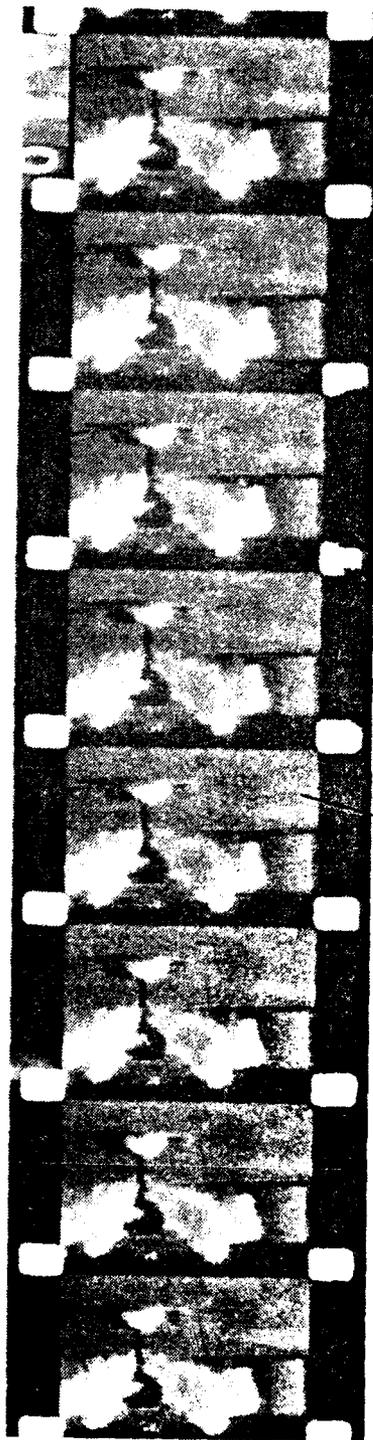

TIME = .2 SEC

FIGURE 11C  
16mm FILM CLIP MBA TiCl<sub>4</sub> TEST #53

Figure 12 presents ARRADCOM's estimate of the worst case, most rapid burial condition for the 155mm projectile in question. This condition exists in deeply saturated light sand soils. The ARRADCOM model predicts coverage of the smoke ports located 19 inches back on the projectile, 1.8 milliseconds after impact.

MBA has performed a similar, though less detailed, analysis using data from Lawrence Livermore Labs. which predicts a worst case burial time on the order of 2.2 milliseconds. One sigma error band on the MBA model is on the order of 0.5 milliseconds.


1.7 ms  $\ll$  Burial Time  $\ll$  2.7 ms

There is probably a similar, though unknown to MBA, error band on the ARRADCOM model and in any event, the predictions from both models agree reasonably well. They both indicate that for worst case impact conditions, a design that produces significant quantities of smoke in approximately 1.7 to 1.8 milliseconds should be very effective when functioned on soft impact medias.

Unfortunately, this is not the case. The fastest mix, ARRADCOM MOD E, per Table 4, begins visible generation in approximately 2.0 ms and the MBA  $\text{TiCl}_4$  configuration using the ARRADCOM MOD E mix as an expulsion charge plus flash and smoke enhancer has an equivalent time of approximately 2.5 ms. The ORC "C" configuration is very slow relative to the other two candidates with a smoke on-set time in the 6.0 millisecond range.

If the mathematical models are approximately correct, the ORC configuration will prove to be unacceptably slow. Hope can be held out for the other two configurations because their function times are within the error band. The ARRADCOM version has a function time very close to the ARRADCOM model mean time and faster than the equivalent MBA model time.

Expulsion port geometry can further improve the probability of achieving a visible cloud on soft media impact. The ports can be canted back at 45 degrees. With the choked flow gases exiting at Mach 1 from the canted ports, the gases will have a net forward velocity component approximately 1/3 that of the shell at the critical period when they flow into the circular cavity between the shell and ejected from impact.

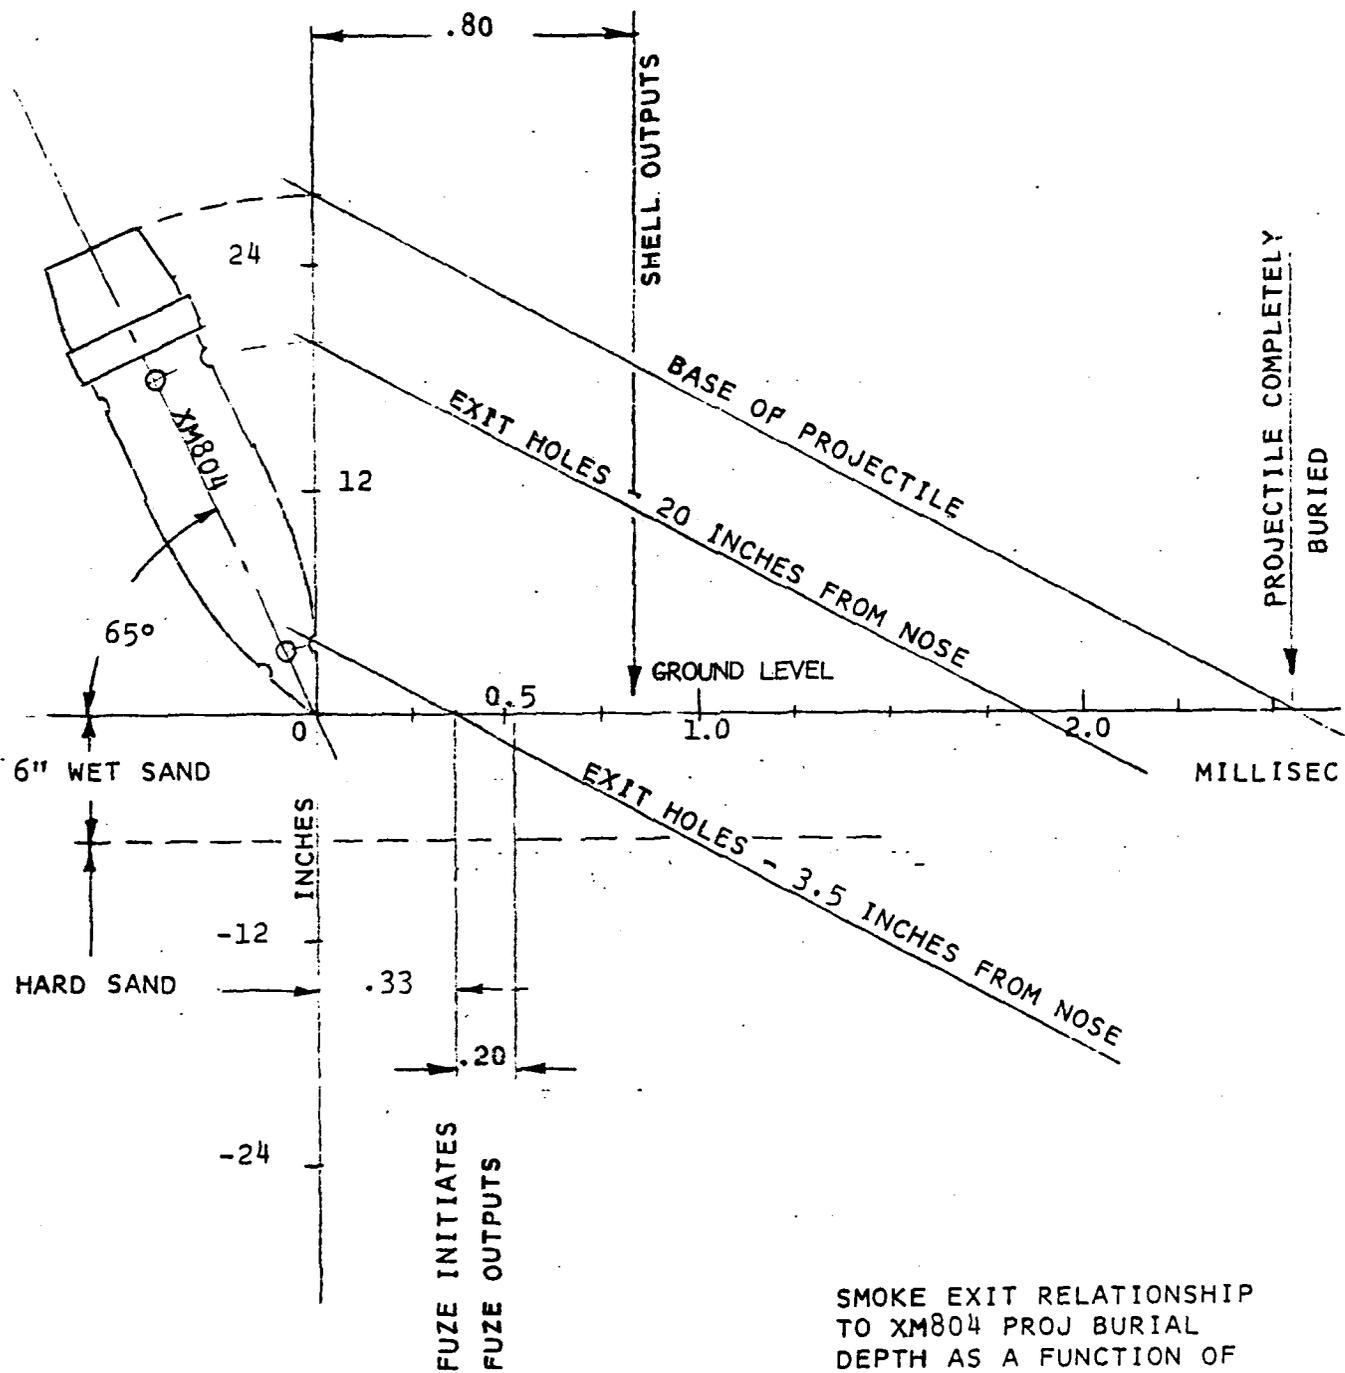

SMOKE EXIT RELATIONSHIP  
 TO XM804 PROJ BURIAL  
 DEPTH AS A FUNCTION OF  
 EXIT HOLE LOCATION  
 IMP VEL - 900 FT/SEC  
 IMP ANGLE - 65 DEG  
 MEDIUM - WET SAND

FIGURE 12

L. POST  
 NOV. 79

The temperature testing ( $-30^{\circ}\text{F}$  and  $+130^{\circ}\text{F}$ ) showed no real change in function time or cloud size compared to ambient temperature testing.

The  $\text{TiCl}_4$  B configuration containers were used in Tests 52, 53 and 54 with no noticeable change in cloud size and function time.

Only a small number of tests were covered with the radiometer due to instrumentation problems.

The radiometer data sheet summary shows the peak intensity in each wavelength region, see Table 5. From the ratio of these intensities, an estimate of the maximum temperature (related to grey body temperature and atmospheric conditions) can be made.

The duration of time that the fuze was observed to burn, and the delay between initiating the fire control signal and the rise of fuze intensity was also recorded.

The measurement probes of the radiometers are spectrally filtered to separately measure intensity in the 1.7 - 2.8 micrometer range and the 3-5 micrometer range. Calibration was referenced to a Barnes Model 11-200T,  $1060^{\circ}\text{C}$  black body source for each set of measurements. See Figure 13.

Because of the low total power produced, the radiometers were moved as close as practical to the test fuze. The 7-1/2 degree field of view permitted measurements at 40 feet.

In its simplest form the radiometer equation is (1)

$$I = CVR^2$$

where

$I$  = source intensity in  $\text{w sr}^{-1}$

$C$  = radiometer calibration in  
 $\text{w SR}^{-1} \text{ v}^{-1} \text{ ft}^2$

$V$  = radiometer output voltage

$R$  = source to radiometer distance in feet

The  $I/R^2$  dependence of voltage on intensity is a result of the fact that the radiometer has no imaging optics and thus simply measures irradiance (watts per square meter at the detector).

TABLE 5

## SMOKE TEST RESULTS FROM RADIOMETER

TEST	FUZE	DATE	I 1.7-2.8 Watts/Ster	I 3-5 Watts/Ster	TEMP °K	DURATION SEC	DELAY M.SEC+ 1
#38	#076	9/20/79	477	1491	840	.225	-
#39		9/20/79	438	1316	850	.084	17.5
#40		9/20/79	876	2140	900	.2	11.2
#41		9/20/79	494	1438	860	.19 .15	15
#42		9/20/79	374	1456	800	.19 .10	18.8
	#048	9/13/79	2789	5380	960	.175	3.0
#11	#030	9/11/79	4662	11094	910	.25	-
		9/11/79	1499	2523	1020	.2	-
	#025	9/11/79	2288	4474	960	.225	-

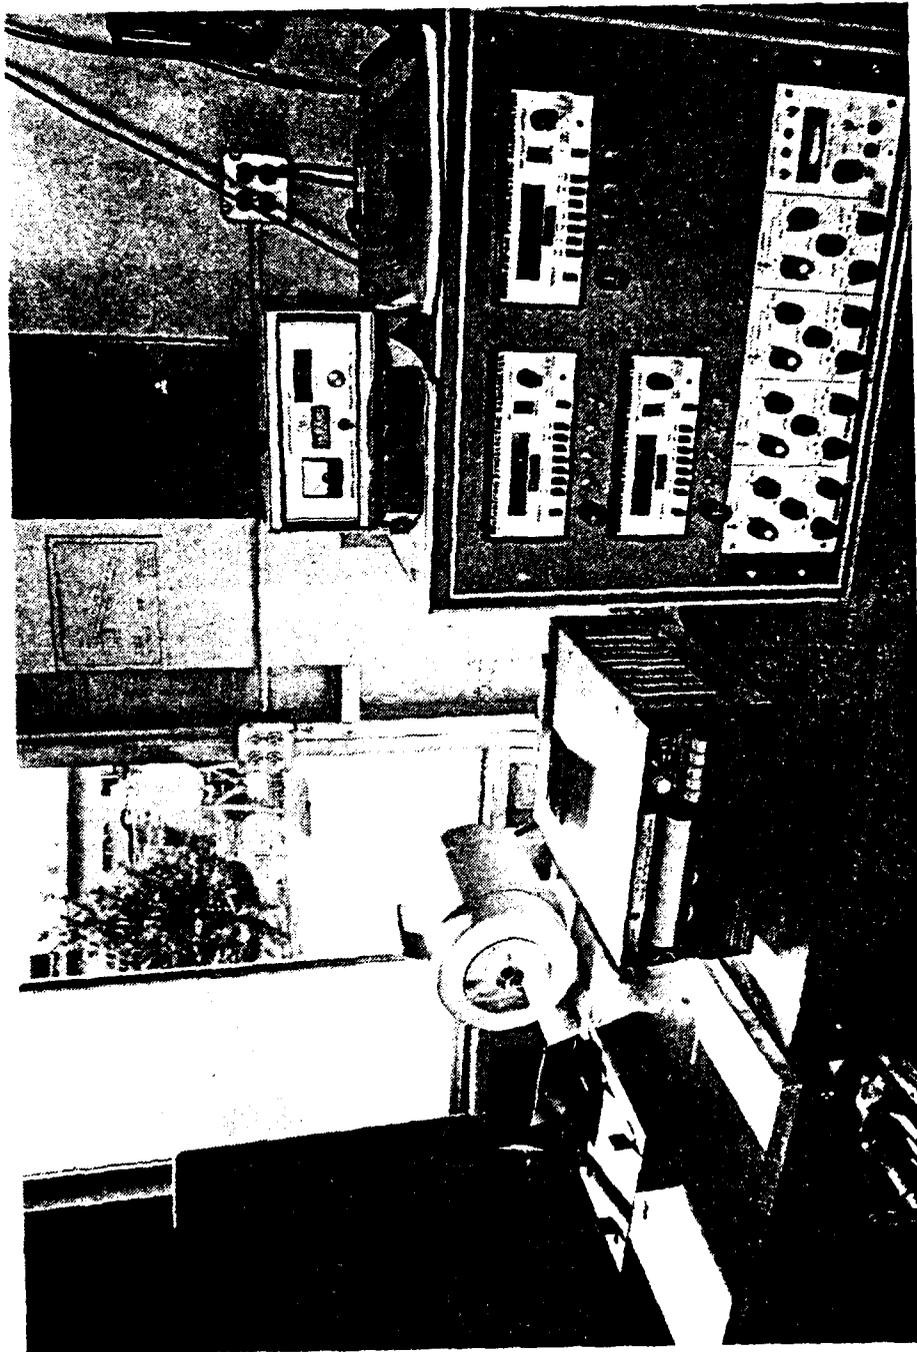


FIGURE 13  
RADIOMETER BLACK SOURCE AND CONTROL

The radiometer response is a function of the wavelength of the incident radiation. This is because the atmosphere between the source and the radiometer; as well as the window, filter and detector, have wavelength dependent responses.

The equation which describes the radiometer voltage output for an irradiance of the radiometer by a monochromatic source of wavelength  $\lambda$  is

$$V(\lambda) = E \cdot sV_d(\lambda) \cdot T_a(\lambda) \cdot T_w(\lambda) \cdot T_f(\lambda)$$

where

$E$  = the irradiance in  $\text{w m}^{-2}$  in the plane of the detector in the absence of the radiometer or an atmosphere.

$sV_d(\lambda)$  = the spectral detector response in  $\text{vm}^2 \text{w}^{-1}$  for a given level of irradiance at wavelength  $\lambda$ . The term  $V_d(\lambda)$  is a relative response of the system while  $s$  is a parameter that reflects the radiometer sensitivity. It may change with time or environment and thus makes periodic calibration necessary.

$T_a(\lambda)$ ,  $T_w(\lambda)$ , and  $T_f(\lambda)$  = respectively the spectral transmittance of the atmosphere between the source and the radiometer, the radiometer window, and the radiometer filter.

#### Analysis for Ballistic Testing

The stress analysis on the critical components, i.e., the booster cup base and the cup/body interface, shows adequate margins of safety for safe operation (see Appendix A). In lieu of actual data on internal pressure required to separate or fail the cup base during detonation, an expected bursting pressure was calculated.

Factor of safety used in the margin of safety calculations were 1.15 applied to the yield allowable and 1.5 applied to the ultimate allowable. These values are standard aerospace practice. Because of the extremely high acceleration forces or set-back loads, the actual margins of safety during normal handling operations are far in excess of hazardous material requirements.

The methods, referenced in the analysis, are standard practice and should not cause concern over their validity. As demonstrated in the analysis, the minimum margin of safety occurred at the cup base material thickness transition from 0.040 inches to 0.104 inches. This margin is 0.80 on yield which represents a stress level 80 percent below the material allowable when reduced by the yield factor of safety. The most critical area is therefore approximately twice as strong as required to support the worse case loading.

The analysis also predicts a bursting pressure of 10,500 psi which appears to be compatible with good performance during the detonation event. Although actual pressures are not known, they are anticipated to be in the order of 20,000 psi if totally contained. This two to one pressure ratio is comfortable for good reliable failure expectation.

1.4            Plans for Next Period

Fabricate, assemble and deliver hardware to Ft. Lewis for test on or about November 6th, 42 each MOD E charges; 26 each ORIC charges; 8 each 747 Fuzes with MOD E and ORIC charges; 26 each 747 Fuzes without charges; 34 each 747 Fuzes with MBA charges; and 16 each 747 Fuzes with 6 each .437 dia. holes.

1.5            Expenditures

Expenditures for January through September, \$77,500.

APPENDIX A

# PRACTICE FUZE STRESS ANALYSIS

## LOADING CONDITIONS

SURVIVE - SET-BACK FORCES

11,200 G'S

OPERATE - DETONATION

## APPROACH

AARADCOM CONFIG TO BE CHECKED ONLY FOR SET-BACK FOR FAILURE OF THREADS AT CUP/BODY INTERFACE & CUP BASE

MBA CONFIG TO BE SIZED TO SURVIVE SET-BACK & FAIL AT DETONATION.

CUP/BODY INTERFACE

CUP (TKL4-i) - EST STRESS CONCENTRATION

EST DESIGN BASED ON SET-BACK  
EVALUATE STRENGTH TO DETERMINE FAILURE MODES AT DETONATION.

WGT OF SMOKE CONTAINER 50 GRMS

## MATERIAL ALLOWABLES

ASTM A-109 TEMPER 5

$$F_{ty} = 44 \times 10^3 \text{ PSI}$$

OTHER PROPERTIES CAN BE EXPECTED TO BE

$$F_{tu} = 67 \times 10^3 \text{ PSI}$$

$$F_{su} = 44 \times 10^3 \text{ PSI}$$

REF ASME HANDBOOK, "METALS PROPERTIES,"  
MCGRAW-HILL, 1954

## FACTORS OF SAFETY

USE STANDARD AEROSPACE VALUES

$$FS = 1.15 \text{ YIELD STRENGTH}$$

$$FS = 1.50 \text{ ULTIMATE STRENGTH}$$


## MARGIN OF SAFETY

DEFINITION: PERCENTAGE THAT MATERIAL ALLOWABLE EXCEEDS THE WORKING STRESS TIMES THE FACTOR OF SAFETY

$$MS = \frac{F_t}{FS \times \sigma_t} - 1$$

MS > 0 FOR ADEQUATE STRUCTURE

AARADCOM CONFIGURATION - <sup>30057676</sup> CWP BASE

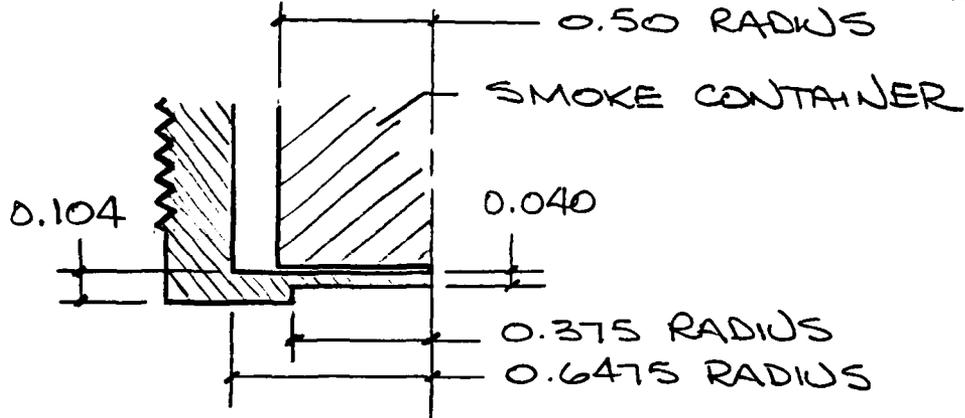

SMOKE CONTAINER (MOD E)

$$W = 50 / 453.8 = 0.110 \text{ LB}$$

$$\ddot{X} = 11,200 \text{ G'S}$$

$$F = (0.110)(11,200) = 1234 \text{ LB}$$

SOLVE FOR STRESS AT EDGE USING  
ROARK 4TH ED p 218 CASE 8  
EDGES FIXED UNIFORM LOAD OVER  
CONCENTRIC CIRCLE  $r_0$

RADIAL STRESS

$$f_r = \frac{3W}{2\pi h^2} \left[ 1 - \frac{r_0^2}{a^2} \right] \quad \begin{array}{l} a = 0.6475 \\ r_0 = 0.50 \end{array}$$

$$f_r = \frac{3(1234)}{2\pi(.104)^2} \left[ 1 - \left( \frac{.5}{.6475} \right)^2 \right]$$

$$f_r = 22,000 \text{ PSI}$$

## TANGENTIAL STRESS

$$f_t = \frac{3W}{2\pi mt^2} \left[ 1 - \frac{r_0^2}{a^2} \right]$$

$$m = \frac{1}{\mu} = \frac{1}{.3}$$

$$\therefore f_t = .3 \cdot f_r = 6600 \text{ PSI}$$

## DETERMINE MAXIMUM OCTAHEDRAL STRESS

SEE "ANALYSIS AND DESIGN OF FLIGHT VEHICLE STRUCTURES," EF BRUNN, 1965, CHAPTER C1 DC.17 FOR OCTAHEDRAL SHEAR STRESS THEORY.

$$f_{max} = \sqrt{f_r^2 + f_t^2 - f_r f_t}$$

$$f_{max} = \sqrt{(22)^2 + (6.6)^2 - (22)(6.6)} \cdot 10^3$$

$$= 19,500 \text{ PSI}$$

## MARGINS OF SAFETY

$$MS = \frac{F_t}{FS \cdot f_t} - 1$$

YIELD

$$MS = \frac{44 \times 10^3}{1.15 (19.5 \times 10^3)} - 1 = \underline{\underline{0.96}}$$

ULTIMATE

$$MS = \frac{67 \times 10^3}{1.5 (19.5 \times 10^3)} - 1 = \underline{\underline{1.29}}$$

SOLVE FOR STRESS AT  $r=0.5$  (EDGE OF 0.040 THK DISC)

THE QWP BASE IS A REDUNDANT STRUCTURE & THE LOAD WILL DISTRIBUTE ON TO THE TWO BASE THICKNESS SUCH THAT THEIR INTERFACE WILL HAVE THE SAME DEFLECTION. THE DISTRIBUTION WILL BE INVERSELY PROPORTIONAL TO THEIR DEFLECTION. ASSUME THE PLATE STIFFNESS RATIO IS PROPORTIONAL TO  $t^3$  AS FOR A BEAM IN BENDING THEN THE LOAD ON THE CENTER WILL BE

$$W_c = \frac{(0.04)^3}{(0.104)^3 + (0.04)^3} W$$

$$= 66 \text{ LB} \cdot 0.54$$

AGAIN FROM ROARK CASE 8 AT  $r=0.5$

$$f_r = \frac{3W}{2\pi m t^2} \left[ (m+1) \log \frac{a}{r_0} + (m+1) \frac{r_0^2}{4a^2} - (3m+1) \frac{r^2}{4r_0^2} \right]$$

$$(m+1) \log \frac{a}{r_0} = \left(1 + \frac{1}{3}\right) \log \frac{0.6475}{0.5} = 0.486 ?$$

$$(m+1) \frac{r_0^2}{4a^2} = \left(1 + \frac{1}{3}\right) \left(\frac{0.5}{1.295}\right)^2 = 0.646$$

$$(3m+1) \frac{r^2}{4r_0^2} = \left(1 + \frac{3}{3}\right) \left(\frac{0.375}{1.0}\right)^2 = 1.547$$

$$f_r = \frac{3(66)3}{2\pi (0.04)^2} \left[ 0.486 + 0.646 - 1.547 \right]$$

$$= -24500 \text{ PSI}$$

(- SIGN DENOTES TENSION ON TOP SURFACE)

$$f_t = -\frac{3W}{2\pi mt^2} \left[ (m+1) \log \frac{a}{r_0} + (m+1) \frac{r_0^2}{4a^2} - (m+3) \frac{r^2}{4r_0^2} \right]$$

$$(m+3) \frac{r^2}{4r_0^2} = \left( \frac{1}{3} + 3 \right) \left( \frac{.375}{1.0} \right)^2 = 0.890$$

$$f_t = -\frac{3(66)3}{2\pi(.04)^2} [ .486 + .646 - .890 ]$$

$$= -14,300 \text{ PSI}$$

MAXIMUM STRESS AT  $r = 0.375$

$$f_{max} = \sqrt{(24.5)^2 + (14.3)^2 - (24.5)(14.3)} \times 10^3$$

$$= 21,300 \text{ PSI}$$

MARGINS OF SAFETY

YIELD


$$MS = \frac{44 \times 10^3}{(1.15)(21.3) \times 10^3} - 1 = \underline{\underline{0.796}}$$

ULTIMATE

$$MS = \frac{67 \times 10^3}{(1.5)(21.3) \times 10^3} - 1 = \underline{\underline{1.097}}$$

THE MBA CONFIGURATION IS IDENTICAL TO MOD E FOR CUP BASE LOADING & THE MOD E STRESS ANALYSIS APPLIES.

# MBA CONFIGURATION - THREAD SHEAR

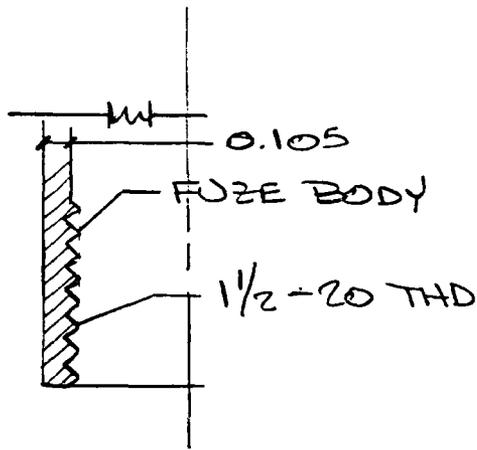

## MATERIAL PROPERTIES

2024-T4 AL ALLOY

$$F_{tu} = 62 \times 10^3 \text{ PSI}$$

$$F_{ty} = 42 \times 10^3 \text{ PSI}$$

$$F_{su} = 37 \times 10^3 \text{ PSI}$$


THE ALUMINUM BODY WILL BE CRITICAL BECAUSE THE ALUMINUM ALLOWABLES ARE SLIGHTLY LOWER THAN THE A-109 STEEL VALUES

THE LOAD ON THE MBA CONFIGURATION IS  $\approx$  3 TIMES THAT ON THE MOD E FUZE  $\therefore$  ONLY THE MBA CONFIGURATION WILL BE ANALYZED

$$\text{WGT(TICKL4)} = 0.565 \text{ LB}$$

$$\text{WGT(WP + SMOKE)} = 0.220 \text{ LB}$$

$$F = (.565 + .220) 11,200 = 8300 \text{ LB}$$



AREA IN SHEAR

$$A = \pi D L N$$

$$= \pi (1.446) (0.0314) (17.5)$$

$$= 2.5 \text{ IN}^2$$

$$f_s = \frac{P}{A} = \frac{8800}{2.5} = 3520 \text{ PSI}$$

MS = HIGH

CHECK BODY TENSION

$$A = \pi D_m t$$
$$= \pi (1.6)(.105) = 0.528 \text{ IN}^2$$

$$f_t = \frac{P}{A} = \frac{8800}{.528} = 16,700 \text{ PSI}$$

YIELD..

$$MS = \frac{42 \times 10^3}{1.15(16.7)10^3} - 1 = \underline{\underline{1.18}}$$

ULTIMATE

$$MS = \frac{62 \times 10^3}{1.5(16.7)10^3} - 1 = \underline{\underline{1.47}}$$

## EVALUATION OF RUPTURE PRESSURE

THE PRESSURE REQUIRED TO RUPTURE THE CWP BASE CAN BE ESTIMATED BY DETERMINING THE FORCE REQUIRED TO FAIL THE BASE & THE TRANSLATING THIS FORCE INTO A PRESSURE

THE MINIMUM MARGINS OF SAFETY OCCUR AT THE CHANGE IN BASE THICKNESS, WHERE

$$f_r = \frac{3W}{2\pi m t^2} \left[ (m+1) \log \frac{a}{r_0} + (m+1) \frac{r_0^2}{4a^2} - (3m+1) \frac{r^2}{4r_0^2} \right]$$

$$f_t = \frac{3W}{2\pi m t^2} \left[ (m+1) \log \frac{a}{r_0} + (m+1) \frac{r_0^2}{4a^2} - (m+3) \frac{r^2}{4r_0^2} \right]$$

BECAUSE ONLY  $W$  IS A VARIABLE THE RATIO  $f_r/f_t$  WILL BE A CONSTANT EQUATION  $f_{max}$  TO THE ULTIMATE ALLOWABLE

$$F_u = f_{max} = \sqrt{f_r^2 + f_t^2} - f_r f_t$$

$$f_r/f_t = \frac{24.5}{14.3} = 1.713$$

$$F_u = \sqrt{(1.713)^2 + 1} - 1.713 f_t$$

$$= 1.5 f_t$$

$$f_t = \frac{67 \times 10^3}{1.5} = 44,700 \text{ PSI}$$

$$44,700 = \frac{3W3}{2\pi(.04)^2} [.486 + .646 - .890]$$

$$W = 206.3 \text{ LB}$$

AREA OF PRESSURE ACTION

$$A = \frac{\pi}{4} (.375)^2 = 0.1104 \text{ IN}^2$$

$$\begin{aligned} \text{PRESSURE} &= 206.3 / .11 \\ &= 1870 \text{ PSI} \end{aligned}$$

THIS PRESSURE APPEARS TO BE ON THE LOW SIDE A BETTER APPROACH MAY BE TO USE ROARK CASE 6, EDGES FIXED, UNIFORM LOAD OVER ENTIRE SURFACE.

$$f_r = \frac{3W}{4\pi t^2} \quad f_t = \frac{3W}{4\pi m t^2}$$

$$\frac{f_t}{f_r} = .3$$

$$f_m = \sqrt{(.3)^2 + 1} \cdot .3 f_t = 0.90 f_t$$

$$f_t = \frac{67 \times 10^3}{0.9} = 75400 \text{ PSI}$$

$$75400 = \frac{3W}{4\pi (.105)^2} = 65.W$$

$$W = 1160$$

$$\text{PRESSURE} = \frac{1160}{.1104} = 10,507 \text{ PSI}$$

WHICH APPEARS TO BE A MORE MEANINGFUL VALUE.

ATTACHMENT A

SMOKE COMP. (PROJ. 069) P/N SW-522 B/N 082979-1

START 1:30

STOP 3:30

TEMP.

HUMIDITY

W/O # 4780

TEMP.	TIME: IN	TIME: OUT	<del>DESSICANT</del>	DESSICANT
140°F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM PERCHLORATE	
140°F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM NITRATE	
130°F	2:30 PM (8/27)	8:00 AM (8/28)	ZINC DUST	
130°F	2:30 PM (8/27)	8:00 AM (8/28)	ALUM. POWDER	

COMMENTS: Comp. Blended in Ball Jar on Ball Mill.  
Using (50 ea.) OO RUBBER STOPPERS.

Comp. consists of.

	Percent by wt.
ZINC DUST - 181.45 GRAMS	40%
ALUM. POWDER - 90.7 GRAMS	20%
POTASSIUM PERCHLORATE - 90.7 GRAMS	20%
POTASSIUM NITRATE - 90.7 GRAMS	20%

(ALUM. POWDER  
MIL-P-14067A  
TYPE II 20/325  
VALIMET  
P.O.# 69929

(POTASSIUM PERCHLORATE  
MIL-P-217A  
GR.A CL.4  
BARIUM & CHEMICALS  
P.O.# 69931

(POTASSIUM NITRATE  
MIL-P-156B  
CL.2  
Croton Chemicals  
P.O.# 69930

ZINC DUST

JAN-Z-365

Picatinny Arsenal

Chas. Knapp 201-328-3052

8/30/79

SMOKE Comp. (PROJ. 069) P/N SW-522

B/N ~~082979-1~~  
083079-1

START 8:20

STOP 10:20

TEMP.

HUMIDITY

W/O # 4780

L/N-1

TEMP.	TIME: IN	TIME: OUT	<del>DESSICANT</del>	DESSICANT
140 °F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM PERCHLORATE	
140 °F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM NITRATE	
130 °F	2:30 PM (8/27)	8:00 AM (8/28)	ZINC DUST	
130 °F	2:30 PM (8/27)	8:00 AM (8/28)	ALUM. POWDER	

COMMENTS: Comp. blended in Boll jar on Boll Mill.

Using (50 ea) 00 Rubber Stoppers.

Comp. consists of. percent by wt.

Zinc Dust - 181.45 GRAMS - 40 %

Alum. Powder - 90.7 GRAMS - 20 %

Potassium perchlorate - 90.7 G - 20 %

Potassium Nitrate - 90.7 GRAMS 20 %

(ALUM. POWDER  
MIL-P-140674 A  
TYPE II 200/325  
VALIMET  
P.O. # 69929

POTASSIUM PERCHLORATE  
MIL-P-217A  
GR. A CL. 4  
BARIUM + CHEMICALS  
P.O. # 69931

POTASSIUM NITRATE  
MIL-P-156B  
CL. 2  
CROTON CHEMICALS  
P.O. # 69930

(ZINC DUST  
JAN-Z-365  
PICATINVEY ARSONAL  
CHAS. KNAPP 201-328-3059

SMOKE Comp. 4/N SW-522.

B/N CE3079-2

4/N-1

PROJECT 069

START 11:00 AM

STOP 1:00 PM

TEMP.

HUMIDITY

W/O # 4780

TEMP.	TIME: IN	TIME: OUT	MAT'L DRIED <del>SCREEN SIZE</del>	DESSICANT
140°F	10:30AM (8/28)	8:30AM (8/29)	POTASSIUM PERCHLORATE	
140°F	10:30AM (8/28)	8:30AM (8/29)	POTASSIUM NITRATE	
130°F	2:30AM (8/27)	8:00AM (8/28)	ZINC DUST	
130°F	2:30PM (8/27)	8:00AM (8/28)	AL. POWDER	

COMMENTS: Comp. blended in Ball Jar on Ball Mill, using 00 Rubber stoppers (50ea.).

Comp. consists of:

Percentage by wt.

ZINC DUST	—	40%	—	204.15 G.
ALUMINUM POWDER	—	20%	—	102.0 G.
POTASSIUM PERCHLORATE	—	20%	—	102.0 G.
POTASSIUM NITRATE	—	20%	—	102.0 G.

(ALUMINUM POWDER)  
MIL-P-14067A  
TYPE II 20/325  
VALIMET  
P.O. # 69929

(POTASSIUM PERCHLORATE)  
MIL-P-217A  
GR. A CL. 4  
BARIUM & CHEMICALS  
P.O. # 69931

(POTASSIUM NITRATE)  
MIL-P-156B  
CL. 2  
CROTON CHEMICALS  
P.O. # 69930

(ZINC DUST  
JAN-Z-365  
PICATINNY ARSONAL  
CHAS. KNAPP - 201-328-3052)

ETA 8/30 | COMP. SMOKE COMP. P/N SW-522 | AMOUNT 453.6

B/N 083079-3 4/1-1 PROJ. 069

START 1:30 PM

STOP 3:30 PM

TEMP.

HUMIDITY 40%

W/O #4780

OVEN TEMP.	TIME: IN	TIME: OUT	MAT'L DRIED <del>SCREEN SIZE</del>	DESSICANT
140°F	10:30AM (8/28)	8:30AM (8/29)	POTASSIUM PERCHLORATE	
140°F	10:30AM (8/28)	8:30AM (8/29)	POTASSIUM NITRATE	
130°F	2:30PM (8/27)	8:00AM (8/28)	ZINC DUST	
130°F	2:30PM (8/27)	8:00AM (8/28)	AL. POWDER	

COMMENTS: Comp. Blended in Ball Jar or Ball Mill, using 00 RUBBER STOPPERS (50 ea).

Comp. Consists of: Percentage by wt.

ZINC DUST - 181.45 GRAMS - 40%

ALUM. POWDER - 90.7 GRAMS - 20%

POTASSIUM PERCHLORATE - 90.7 GRAMS - 20%

POTASSIUM NITRATE - 90.7 GRAMS - 20%

(ALUM. POWDER MIL-P-14067A TYPE II - 200/325 VALIMET P.O. # 69929)	(POTASSIUM PERCHLORATE MIL-P-217A GR.A - CL.4 BARIUM & CHEMICALS P.O. # 69931)	POTASSIUM NITRATE MIL-P-156B CL.2 CROTON CHEMICAL P.O. # 69930
--	--	--

ZINC DUST  
JAN-2-365

CHAS. KNAPP

B/N 083179-1

W/O # 4780

L/N 1

PROJ. 069

START 9:00

STOP 11:00

TEMP.

HUMIDITY

TEMP.	TIME: IN	TIME: OUT	MAT'L DRIED <del>SCREEN SIZE</del>	DESSICANT
140°F	10:30AM (8/28)	8:30AM (8/29)	POTASSIUM PERCHLORATE	
140°F	10:30AM (8/28)	8:30AM (8/29)	POTASSIUM NITRATE	
130°F	2:30PM (8/27)	8:00AM (8/28)	ZINC DUST	
130°F	2:30PM (8/27)	8:00AM (8/28)	ALUMINUM POWDER	

COMMENTS: COMP. BLENDED IN BALL JAR ON BALL MILL, USING  
00 RUBBER STOPPERS.

COMP. CONSISTS OF;

PERCENTAGE BY WT.

ZINC DUST - 181.45 GRAMS - 40%  
 ALUMINUM POWDER - 90.7 GRAMS - 20%  
 POTASSIUM PERCHLORATE - 90.7 GRAMS - 20%  
 POTASSIUM NITRATE - 90.7 GRAMS - 20%

ALUMINUM POWDER  
 MIL-P-14067A  
 TYPE II 200/325  
 VALIMET  
 P.O.# 69929

POTASSIUM PERCHLORATE  
 MIL-P-217A  
 GR. A CL. 4  
 BARIUM & CHEMICALS  
 P.O.# 69931

POTASSIUM NITRATE  
 MIL-A-156 B  
 CL. 2  
 CROTON CHEMICALS  
 P.O.# 69930

ZINC DUST

JAN-Z-365

PICATINNY ARSONAL

CHAS. KNAPP

201-328-3052

B/N 083179-2 W/O # 4780 2/N1 PROJ. 069

START 11:45 STOP 1:45

TEMP. HUMIDITY

TEMP.	TIME: IN	TIME: OUT	MAT'L DRIED <del>TEMP.</del>	DESSICANT
140°F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM PERCHLORATE	
140°F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM NITRATE	
30°F	2:30 PM (8/27)	8:00 AM (8/28)	ZINC DUST	
30°F	2:30 PM (8/27)	8:00 AM (8/28)	ALUMINUM POWDER	

COMMENTS: COMP. BLENDED IN BALL JAR ON BALL MILL,  
USING OO RUBBER STOPPERS (50 ea.).

COMP. CONSISTS OF; PERCENTAGE BY WT.

- ZINC DUST - 181.45 G. - 40%
- ALUM. POWDER - 90.7 G. - 20%
- POTASSIUM PERCHLORATE - 90.7 G. - 20%
- POTASSIUM NITRATE - 90.7 G. - 20%

ALUMINUM POWDER	POTASSIUM PERCHLORATE	POTASSIUM NITRATE
MIL - P - 14067A	MIL - P - 217A	MIL - P - 156B
TYPE II 200/325	GR. A CL. 4	CL. 2
VALIMET	BARIIUM & CHEM.	CRONON CHEM.
P.O. # 69929	P.O. # 69931	P.O. # 69930

ZINC DUST  
JAN-Z-365  
PICATINNY ARSONAL  
CHAS. KNAPP  
201-328-3052

W/NO#4780 PROJ. 069

B/N 083179-3 4/N-1 W/NO#4780 PROJ. 069

START 1:45	STOP 3:45
TEMP.	HUMIDITY

TEMP.	TIME: IN	TIME: OUT	MAT'L DRIED	DESSICANT
140°F	10:30AM (8/28)	8:30AM (8/29)	POTASSIUM PERCHLORATE	
140°F	10:30AM (8/28)	8:30AM (8/29)	POTASSIUM NITRATE	
130°F	2:30PM (8/27)	8:00AM (8/28)	ZINC DUST	
130°F	2:30PM (8/27)	8:00AM (8/28)	ALUM. POWDER	

COMMENTS: COMP. BLENDED ON BALL MILL IN BALL JAR, USING 00 RUBBER STOPPERS (SOLO).

COMP. CONSISTS OF; PERCENTAGE BY WT.

ZINC DUST - 181.45 G.	-	40%
AL. POWDER - 90.7 G.	-	20%
POTASSIUM PERCHLORATE - 90.7 G.	-	20%
POTASSIUM NITRATE - 90.7 G.	-	20%

ALUM. POWDER  
MIL-P-14067A  
TYPE II 200/325  
VALIMET  
P.O.# 69929

POTASSIUM PERCHLORATE  
MIL-P-217A  
GR. A CL. 4  
BARIUM & CHEM.  
P.O.# 69931

POTASSIUM NITRATE  
MIL-P-156B  
CL. 2  
CROTON CHEM.  
P.O.# 69930

ZINC DUST  
JAN-Z-365  
CATINNY ARSONAL  
CHAS. KNAPP  
201-328-3052

P/N SW-522

B/N 092479-1

4/N1

START 9:30 AM

STOP 11:30 PM

TEMP.

HUMIDITY

W/O # 4780

TEMP.	TIME: IN	TIME: OUT	SCREEN SIZE	DESSICANT
140°F	10:30 AM (8/28)	8:30 <sup>AM</sup> (8/29)	POTASSIUM PERCHLORATE	
140°F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM NITRATE	
140°F	DRIED 24 HRS.		ZINC DUST	
130°F	2:30 PM (8/27)	8:00 AM (8/29)	ALUMINUM POWDER	

COMMENTS: Comp. blended in Ball Jar on Ball Mill,  
 using 00 RUBBER STOPPERS (50 EA.).

Comp. Consists of:

Percentage by wt.

- ZINC DUST - 181.45 GRAMS ——— 40%
- ALUMINUM POWDER - 90.7 GRAMS ——— 20%
- POTASSIUM PERCHLORATE - 90.7 GRAMS — 20%
- POTASSIUM NITRATE - 90.7 GRAMS — 20%

ALUM. POWDER  
 MIL-P-14067A  
 TYPE II 20/325  
 VALIMET  
 P.O.# 69929

POTASSIUM PERCHLORATE  
 MIL-P-217A  
 G.R.A CL.4  
 BARIUM CHEMICALS  
 P.O.# 69931

POTASSIUM NITRATE  
 MIL-P-156B  
 CL.2  
 CROTON CHEMICALS  
 P.O.# 69930

ZINC DUST  
 NJ ZINC CO.  
 SFD 122

SILCKE Comp. (PROJ. 069) P/N SW-522 B/N 092479-2 1/1

START 1:00

STOP 3:00

TEMP.

HUMIDITY

W/O # 4780

TEMP.	TIME: IN	TIME: OUT	SCREEN SIZE	DESSICANT
140°F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM PERCHLORATE	
140°F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM NITRATE	
140°F	CURED 24 HRS		ZINC DUST	
130°F	2:30 PM (8/27)	8:00 AM (8/28)	ALUMINUM POWDER	

COMMENTS: Comp. blended in Ball Jar on Ball Mill, using 00 rubber stoppers (50 ea.).

Comp. Consists of:

ZINC DUST - 181.45 GRAMS -	40%
ALUMINUM POWDER - 90.7 G. -	20%
POTASSIUM PERCHLORATE - 90.7 G. -	20%
POTASSIUM NITRATE - 90.7 G. -	20%

ALUM. POWDER  
MIL-P-14067A  
TYPE I 200/325  
VALIMET  
P.O.# 69929

POTASSIUM PERCHLORATE  
MIL-P-217A  
GR.A - CL.4  
BARIUM CHEMICALS  
P.O.# 69931

POTASSIUM NITRATE  
MIL-P-156B  
CL.2  
CROTON CHEMICALS  
P.O.# 69930

ZINC DUST  
N.J. ZINC CO.  
SFD 122

SMOKE COMP. (PROJ. 069) P/N SW-522 B/N 092579-1 4/N 1

START 11:00	STOP
TEMP.	HUMIDITY

W/O # 4780

TEMP.	TIME: IN	TIME: OUT	SCREEN SIZE	DESSICANT
140°F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM PERCHLORATE	
140°F	10:30 AM (8/28)	8:30 AM (8/29)	POTASSIUM NITRATE	
140°F	CURED 24 HRS.		ZINC DUST	
130°F	2:30 PM (8/27)	8:00 AM (8/28)	ALUMINUM POWDER	

COMMENTS: Comp. blended in Ball Jar on Ball Mill, using 100 rubber stoppers (50 ea.).

Comp. consists of:

Percentage by wt.

ZINC DUST - 181.45 GRAMS \_\_\_\_\_ 40%  
 ALUMINUM POWDER - 90.7 GRAMS \_\_\_\_\_ 20%  
 POTASSIUM PERCHLORATE - 90.7 GRAMS \_\_\_\_\_ 20%  
 POTASSIUM NITRATE - 90.7 GRAMS \_\_\_\_\_ 20%

AL. POWDER	POTASSIUM PERCHLORATE	POTASSIUM NITRATE
MIL-P-14067A	MIL-P-217A	MIL-P-156B
TYPE II 200/325	GR.A - CL.4	CL.2
VALIMET	BARIUM CHEM.	CROTON CHEM.
P.O.# 69929	P.O.# 69931	P.O.# 69930

ZINC DUST  
 N.J. ZINC CO.  
 SFD-122

ATTACHMENT B

115174

SMOKE CONTAINERS / DET. CORD

069

#1.	GROSS	303.65	GRAMS	(S/N 011)
	TARE	258.65	"	
	NET	45.0	"	

#2.	GROSS	304.6	GRAMS	(S/N 012)
	TARE	258.65	"	
	NET	45.95	"	

#3.	GROSS	303.6	GRAMS	(S/N 019)
	TARE	258.65	"	
	NET	44.95	"	

#4.	GROSS	303.45	GRAMS	(S/N 013)
	TARE	258.6	"	
	NET	44.85	"	

#5.	GROSS	302.3	GRAMS	
	TARE	258.6	"	
	NET	43.7	"	

WT. OF  DET CORD = 1.51 GRAMS TOTAL WT  
 = .875 GRAMS EXPLOSIVE WT.

SMOKE Comp.      S/N 082979-1      L/N 1

1110/79

SMOKE CONTAINERS / DET. CORD

069

SMOKE COMP. - B/N 082979-1

L/N 1

S/N 6. GROSS - 250.60 G.  
TOT. TARE - 205.55 G.  
NET - 45.05 G.

BASE TARE - 198.1 G.  
CONTAINER TARE  
WITH LID 7.45 G.  
205.55

S/N 7. GROSS - 251.2 G.  
TOT. TARE - 205.5 G.  
NET - 45.7 G.

BASE TARE - 198.1 G.  
CONTAINER TARE  
WITH LID - 7.4 G.  
205.5

S/N 8. GROSS - 251.05 G.  
TOT. TARE - 205.50 G.  
NET - 45.55 G.

BASE TARE - 198.1 G.  
CONTAINER TARE  
WITH LID - 7.4 G.  
TOT. TARE - 205.5 G.

S/N 9. GROSS - 250.60 G.  
TOT. TARE - 205.55 G.  
NET - 45.05 G.

BASE TARE - 198.1 G.  
CONTAINER TARE  
WITH LID - 7.45 G.  
205.55 G.

S/N 10. GROSS - 250.50  
TOT. TARE - 205.55 G.  
NET - 44.95 G.

BASE TARE - 198.1 G.  
CONTAINER TARE - 7.45 G.  
WITH CAP 7.45 G.  
TOT. TARE WT 205.55

S/N 9 Filled container ≈ half full with  
B/N 082979-1 and used B/N 083079-1 to fill  
smoke container.

10 SHEETS 5 SQUARE  
100 SHEETS 5 SQUARE  
200 SHEETS 5 SQUARE



1/10/79 SMOKE CONTAINERS

069

SMOKE COMP. - B/N 083079-1 - 4/1 - NO DET. CORD

S/N 11	-	GROSS	-	50.01 G.
		CONTAINER/LID TARE	-	5.90 G.
		NET	-	44.11 G.

S/N 12		GROSS	-	<del>49.65</del> G.	50.45
		CONTAINER/LID TARE	-	<del>5.90</del> G.	5.90
		NET	-	43.75 G.	44.55

S/N 13		GROSS	-	<del>52.70</del>	51.02
		CONTAINER/LID TARE	-	<del>5.90</del>	5.90
		NET	-	46.85	45.12

S/N 14		GROSS	-	52.70	
		CONTAINER/LID TARE	-	5.85	
		NET	-	46.85	

42 SHEETS 3 SQUARE  
 42 SHEETS 2 SQUARE  
 42 SHEETS 1 SQUARE  
 NATIONAL

3/10/79

SMOKE CONTAINERS / DET. CORD

069

SMOKE COMP. B/N 083079-1 4/N 1

S/N 15 GROSS - 54.4 G.  
 CONTAINER/LID TARE - 7.45 G.  
 NET 46.95 G.

S/N 16 GROSS - 54.6 G.  
 CONTAINER/LID TARE - 7.45 G.  
 NET 47.15 G.

S/N 17 GROSS - 53.9 G  
 CONTAINER/LID TARE - 7.6 G  
 NET 46.3 G

S/N 18 GROSS - 54.2 G  
 CONTAINER/LID TARE 7.6  
 NET 46.6 G

S/N 19 GROSS - 52.6 G  
 CONTAINER/LID TARE 6.0 G  
 NET 46.6 G

NO DET. CORD

SMOK COMP. B/N 083079-1  
 S/N 20 GROSS - 52.5 G  
 CONTAINER/LID TARE 6.0 G  
 NET 46.5 G

NO DET. CORD

S/N 21 GROSS - 54.9 G  
 LID/CONTAINER TARE - 5.9 G.  
 NET 49.0 G

NO DET. CORD

S/N 22 GROSS - 53.45 G.  
 CONTAINER/LID TARE - 5.9 G.  
 NET 47.55 G.

NO DET. CORD

42 181 50 SHEETS 5 SQUARE  
 42 182 100 SHEETS 5 SQUARE  
 42 183 100 SHEETS 5 SQUARE



11/11/71 SMOKE CONTAINERS

C.69

B/N 083079-2

S/N 23 GROSS - 52.75 G. NO DET. CORD  
 CONTAINER/LID TARE - 5.9 G.  
 NET - 46.85 G.

S/N 24 GROSS - 52.8 G. NO DET. CORD  
 CONTAINER/LID TARE - 5.9 G.  
 NET - 46.9 G.

S/N 25 GROSS - 54.25 G.  
 CONTAINER/LID TARE - 7.35 G.  
 WITH DET. CORD NET - 47.50 G.

S/N 26 GROSS - 54.5 G.  
 CONTAINER/LID TARE - 7.35 G.  
 WITH DET. CORD NET - 47.15 G.

S/N 27 GROSS - ~~51.7 G.~~ 53.3 G.  
 TARE - ~~5.85 G.~~ 5.85 G.  
 NET - 47.85 G. 47.45 G.

S/N 28 GROSS - 52.35 G.  
 TARE - 5.85 G.  
 NET - 46.50 G.

B/N 083079-2

S/N 29 GROSS - 51.60 G. NO DET. CORD  
 CONT./LID TARE - 5.85 G.  
 NET - 45.75 G.

B/N 083079-2

S/N 30 GROSS - 52.45 G. NO DET. CORD  
 CONT./LID TARE - 5.85 G.  
 NET - 46.60 G.

B/N 083079-2

S/N 31 GROSS - 51.75 G.  
 CONT./LID TARE - 5.85 G. NO DET. CORD  
 NET - 45.90 G.

100 SHEETS 5 SQUARE  
 150 SHEETS 5 SQUARE  
 200 SHEETS 5 SQUARE  
 NATIONAL



7/12/79

SMOKE CONTAINERS

069

B/N 083079-3

B/N 38 GROSS

51.00 G

CONT. + LID TARE

5.85 G

NO DET. CORD

NET

45.15 G

B/N 083079-3

B/N 39 GROSS

52.05 G

CONT. + LID TARE

5.85 G

NO DET. CORD

NET

46.20 G

B/N 083079-3

S/N 40 GROSS

51.50 G

CONT. + LID TARE

5.85 G

NO DET. CORD

NET

45.65 G

B/N 083079-3

S/N 41 GROSS

52.90 G

CONT. + LID TARE

5.85 G

NO DET. CORD

NET

47.05 G

B/N 083079-3

S/N 42 GROSS

53.00 G

CONT. + LID TARE

5.85 G

NO DET. CORD

NET

47.15 G

{ B/N 083079-3 (29<sup>00</sup>)  
B/N 0831-1

S/N 43 GROSS

52.80 G

CONT. + LID TARE

5.85 G

NO DET. CORD

NET

46.95 G

42 SHEETS 5 SQUARE  
43 SHEETS 5 SQUARE  
44 SHEETS 5 SQUARE  
45 SHEETS 5 SQUARE



9/13/74

SMOKE CONTAINER

069

B/N 083179-1

S/N 44 GROSS 54.60 G  
CONT. + LID TARE 5.85 G  
NET 48.75 G

NO DET CORD

B/N 083179-1

S/N 45 GROSS 52.90 G  
CONT. + LID TARE 5.85 G  
NET 47.05 G

NO DET CORD

B/N 083179-1

S/N 46 GROSS 54.60 G  
CONT. + LID TARE 5.85 G  
NET 48.75 G

NO DET CORD

B/N 083179-1

S/N 47 GROSS 54.30 G  
CONT. + LID TARE 5.85 G  
NET 48.45 G

NO DET CORD

B/N 083179-1

S/N 48 GROSS 53.50 G  
CONT. + LID TARE 5.85 G  
NET 47.65 G

NO DET CORD

B/N 083179-1

S/N 49 GROSS 55.40 G  
CONT. + LID TARE 5.85 G  
NET 49.55 G

NO DET CORD

9/17/79

SMOKE CONTAINER

069

B/N 083179-1

S/N 50 GROSS 52.35 G

CONTAINER+LID TARE 5.85 G

NET 46.50 G

B/N 083179-1

S/N 51 GROSS 52.95 G

CONT+LID TARE 5.85 G

NET 47.10 G

40 SHEETS \$ SQUARE  
43 381 100 SHEETS \$ SQUARE  
43 380 200 SHEETS \$ SQUARE  
NATIONAL



B/N 083179-1

S/N 52 GROSS 52.55 G

CONT+LID TARE 5.85 G

NET 47.00 G

B/N 083179-2

S/N 53 GROSS 52.65 G

CONT+LID TARE 5.85 G

NET 47.80 G

B/N 083179-2

S/N 54 GROSS 52.85 G

CONT+LID TARE 5.85 G

NET 47.00 G

B/N 083179-2

S/N 55 GROSS 53.05 G

CONT+LID TARE 5.85 G

NET 47.20 G

7/10/71

SMOKE CONTAINER

C69

S/N 083179-2

S/N 56	GROSS	52.75 G
	CONT.+LID TARE	<u>5.85 G</u>
	NET	46.90 G

S/N 57	GROSS	53.50 G.
	CONT.+LID TARE	<u>5.85 G</u>
	NET	47.65 G.

S/N 58	GROSS	52.75 G.
	CONT.+LID TARE	<u>5.85 G</u>
	NET	46.5 G.

S/N 59	GROSS	51.60 G
	CONT.+LID TARE	<u>5.85 G</u>
	NET	45.75 G.

S/N 60	GROSS	52.50 G.
	CONT.+LID TARE	<u>5.85 G</u>
	NET	46.65 G.

S/N 61	GROSS	52.45 G.
	CONT.+LID TARE	<u>5.85 G</u>
	NET	46.6 G.

25/79

SMOKE CONTAINERS (PICHINNY SMOKE COMP.)

069

S/N 62 (B/N 083179-2)

GR. - 53.50 G.  
T. - 6.05 G.  
NET - 47.45 G.

S/N 72 (B/N 092479-1)

GR. - 51.85 G.  
T. - 5.9 G.  
NET - 45.95 G.

S/N 63 (B/N 083179-2) <sup>27.5G.</sup> (B/N 083179-2) <sup>18.5G.</sup>

GR. - 52.0 G.  
T. - 6.0 G.  
NET - 46.0 G.

S/N 73 (B/N 092479-2)

GR. - 51.6 G.  
T. - 5.9 G.  
NET - 45.7 G.

S/N 64 (B/N 083179-3)

GR. - 51.50 G.  
T. - 5.95 G.  
NET - 45.55 G.

S/N 74 (B/N 092479-2)

GR. - 51.7 G.  
T. - 5.9 G.  
NET - 45.8 G.

S/N 65 (B/N 083179-3)

GR. - 51.6 G.  
T. - 6.0 G.  
NET - 45.6 G.

S/N 75 (B/N 092479-2)

GR. - 52.4 G.  
T. - 6.0 G.  
NET - 46.4 G.

S/N 66 (B/N 083179-3)

GR. - 51.2 G.  
T. - 6.0 G.  
NET - 45.2 G.

S/N 76 (B/N 092479-2)

GR. - 51.8 G.  
T. - 5.95 G.  
NET - 45.85 G.

S/N 67 (B/N 083179-3)

GR. - 51.95 G.  
T. - 5.90 G.  
N. - 46.05 G.

S/N 77 (B/N 092479-2)

GR. - 51.25 G.  
T. - 5.9 G.  
NET - 45.35 G.

S/N 68 (B/N 092479-1)

GR. - 52.1 G.  
T. - 6.0 G.  
NET - 46.1 G.

S/N 78 (B/N 092479-2)

GR. - 51.95 G.  
T. - 5.9 G.  
NEW - 46.05 G.

S/N 69 (B/N 092479-1)

GR. - 52.0 G.  
T. - 6.0 G.  
NET - 46.0 G.

S/N 79 (B/N 092479-2)

GR. - 51.3 G.  
T. - 5.9 G.  
NET - 45.4 G.

S/N 70 (B/N 092479-1)

GR. - 52.35 G.  
T. - 6.0 G.  
NET - 46.35 G.

S/N 80 (B/N 092479-2)

GR. - 52.9 G.  
T. - 5.9 G.  
NET - 47.0 G.

S/N 71 (B/N 083179-3)

GR. - 52.35 G.  
T. - 6.0 G.  
NET - 46.35 G.

S/N 81 (B/N 092479-1)

GR. - 51.9 G.  
T. - 5.9 G.  
NET - 46.0 G.

50 SHEETS 5 SQUARE  
100 SHEETS 5 SQUARE  
25 SHEETS 5 SQUARE



S/N 82 (B/N 092479-1)  
GR. - 51.6 G.  
T. - 6.0 G.  
NET - 45.6 G.

S/N 92 (B/N 092479-2)  
GR. - 51.5 G.  
T. - 5.95 G.  
NET - 45.55 G.

S/N 83 (B/N 092479-1)  
GR. - 52.4 G.  
T. - 5.9 G.  
NET - 46.5 G.

S/N 93 (B/N 092479-2)  
GR. - 52.65 G.  
T. - 5.9 G.  
NET - 46.75 G.

S/N 84 (B/N 092479-1)  
GR. - 51.8 G.  
T. - 5.9 G.  
NET - 45.9 G.

S/N 94 (B/N)  
GR. - 51.7 G.  
TARE - 6.0 G.  
NET - 45.7 G.

S/N 85 (B/N 083179-3)  
GR. - 52.35 G.  
T. - 6.0 G.  
NET - 46.35 G.

S/N 95 (B/N 092479-2)  
GR. - 51.6 G.  
T. - 5.9 G.  
NET - 45.7 G.

S/N 86 (B/N)  
GR. - 51.9 G.  
T. - 6.0 G.  
NET - 45.9 G.

S/N 96 (B/N 092479-1)  
GR. - 51.9 G.  
T. - 5.9 G.  
NET - 46.0 G.

S/N 87 (B/N 092479-1)  
GR. - 51.95 G.  
T. - 5.9 G.  
NET - 46.05 G.

S/N 97 (B/N 083179-3)  
GR. - 32.2 G.  
T. - 4.4 G.  
NET - 27.8 G.

S/N 88 (B/N 092479-2)  
GR. - 51.5 G.  
T. - 5.9 G.  
NET - 45.6 G.

S/N 98 (B/N 083179-3)  
GR. - 31.4 G.  
T. - 4.45 G.  
N. - 26.95 G.

S/N 89 (B/N 092479-2)  
GR. - 51.8 G.  
T. - 5.9 G.  
NET - 45.9 G.

S/N 99 (B/N 083179-3)  
GR. - 31.6 G.  
T. - 4.55 G.  
N. - 27.05 G.

S/N 90 (B/N 092479-2)  
GR. - 52.0 G.  
T. - 5.9 G.  
NET - 46.1 G.

S/N 91 (B/N 092479-2)  
GR. - 51.7 G.  
T. - 5.95 G.  
NET - 45.75 G.

TICKLE CONTAINER #1  
GROSS - 253.90 G  
TARE - 215.55 G.  
38.35 G.

TICKLE CONTAINER #2  
GROSS - 256.4 G  
TARE - 217.1 G.  
39.3 G.

" " #3  
GROSS - 254.7  
TARE - 216.3 G.  
NET - 38.4

" " #4  
GROSS - 252.8  
TARE - 214.9 G.  
NET 37.9

" " #5  
GROSS - 257.8  
TARE - 218.7 G.  
NET - 39.1

" " #6  
GROSS - 255.7  
TARE - 217.9 G.  
NET - 37.8

" " #7  
GROSS - 94.20 G.  
TARE - 63.35 G.  
NET - 30.85 G.

" " #8  
GROSS - 93.2 G.  
TARE - 63.2 G.  
NET - 30.0 G.

" " #9  
GROSS - 94.05 G.  
TARE - 63.6 G.  
NET - 30.45 G.

S/N 020

MOD E 6 HOLE FUZE ~~6~~ HOLES  
SMOKE CONTAINER - S/N 11 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
44.11 GRAMS SMOKE COMP.

S/N 021

MOD E-1 6 HOLE FUZE ~~6~~ HOLES  
SMOKE CONTAINER - S/N 15 (PICATINNY SMOKE COMP.)  
WITH DET. CORD  
46.95 GRAMS SMOKE COMP.

S/N 022

~~MOD E~~ 6 HOLE FUZE ~~6~~ HOLES  
ORI SMOKE CONTAINER  
119C

S/N 023

MOD E 6 HOLE FUZE ~~6~~ HOLES  
ORI SMOKE CONTAINER  
119B

S/N 024

MOD E-1 6 HOLE FUZE ~~6~~ HOLES  
SMOKE CONTAINER - S/N 17 (PICATINNY SMOKE COMP.)  
WITH DET. CORD  
46.3 GRAMS SMOKE COMP.

S/N 025

MOD E-1 6 HOLE FUZE ~~6~~ 6 HOLES PLUGGED  
SMOKE CONTAINER - S/N 18 (PICATINNY SMOKE COMP.)  
WITH DET. CORD.  
46.6 GRAMS SMOKE COMP.  
22 CC TICKLE

S/N 026

MODE 6 HOLE FUZE ⊕ HOLES  
SMOKE CONTAINER - S/N 19 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
46.6 GRAMS SMOKE COMP.

S/N 027

MODE-1 6 HOLE FUZE ⊕ HOLES  
SMOKE CONTAINER - S/N 16 (PICATINNY SMOKE COMP.)  
WITH DET. CORD  
47.15 GRAMS SMOKE COMP.

S/N 028

ORI B 6 HOLE FUZE ⊕ HOLES  
ORI SMOKE CONTAINER  
119 B

S/N 029

ORI C 6 HOLE FUZE ⊕ HOLES  
ORI SMOKE CONTAINER  
119 C

S/N 030

MODE-1 6 HOLE FUZE ⊕ HOLES  
SMOKE CONTAINER - S/N 7 (PICATINNY SMOKE COMP.)  
WITH DET. CORD  
45.7 GRAMS SMOKE COMP.

S/N 031

MODE 6 HOLE FUZE ⊕ HOLES  
SMOKE CONTAINER - S/N 21 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
49.0 GRAMS SMOKE COMP.

S/N 032

MODE 6 HOLE FUZE ⊕ HOLES  
SMOKE CONTAINER - S/N 20 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
46.5 GRAMS SMOKE COMP.

7/12/19

PRACTICE FUZE TEST SERIES

069

S/N 033

MOD - E 3 HOLES PLUGGED  
SMOKE CONTAINER - S/N 14 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
46.85 GRAMS SMOKE COMP.

S/N 034

MOD - E 3 HOLES PLUGGED  
SMOKE CONTAINER - S/N 22 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
47.55 GRAMS SMOKE COMP.

S/N 035

MOD - E 6 HOLES PLUGGED  
SMOKE CONTAINER - S/N 24 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
46.9 GRAMS SMOKE COMP.

S/N 036

MOD - E 6 HOLES PLUGGED  
SMOKE CONTAINER - S/N 23 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
46.85 GRAMS SMOKE COMP.

S/N 037

6 HOLES 0 HOLES  
ORI - C

S/N 038

6 HOLES 0 HOLES  
ORI - C

S/N 039

3 HOLES ~~3~~ PLUGGED  
ORI - C

S/N 040

3 HOLES PLUGGED  
ORI - C

S/N 041

6 HOLES PLUGGED  
ORI - C

S/N 042

6 HOLES PLUGGED  
ORI - C

S/N 043 \* NO FIRE!  
 MOD - E 6 HOLES PLUGGED  
 SMOKE CONTAINER - S/N 27 (PICATINNY SMOKE COMP.)  
 NO DET. CORD  
 47.45 GRAMS SMOKE COMP.  
 38.35 GRAMS TICKLE 22.3 CC

S/N 044  
 MOD - E 6 HOLES PLUGGED  
 SMOKE CONTAINER - S/N 28 (PICATINNY SMOKE COMP.)  
 NO DET. CORD  
 46.5 GRAMS SMOKE COMP.  
 39.3 GRAMS TICKLE 22.4 CC

~~\* S/N 043  
 MOD - E1 6 HOLES PLUGGED  
 SMOKE CONTAINER - S/N 25 (PICATINNY SMOKE COMP.)  
 WITH DET. CORD  
 47.5 GRAMS SMOKE COMP.  
 TICKLE~~

S/N 045  
 MOD - E1 6 HOLES PLUGGED ~~47.5~~  
 SMOKE CONTAINER - S/N 25 (PICATINNY SMOKE COMP.)  
 WITH DET. CORD  
 47.5 GRAMS SMOKE COMP.  
 38.35 GRAMS TICKLE

S/N 046  
 MOD - E 6 HOLES PLUGGED  
 SMOKE CONT. - S/N 30 (PICATINNY SMOKE COMP.)  
 NO DET. CORD  
 46.6 G.

S/N 047  
 MOD - E 6 HOLES PLUGGED  
 SMOKE CONT. S/N 29 (PICATINNY SMOKE COMP.)  
 NO DET. CORD  
 45.75 G. SMOKE COMP.

S/N 048  
 MOD - E EXP. #98 WITH CAP REMOVED - CROSS BAR  
 SMOKE CONT. - S/N 31 EXP. BAR  
 NO DET. CORD  
 45.9 G. SMOKE COMP.

1/14/79

PRACTICE FUZE TEST SERIES

069

S/N 049

MOD-E ~~2~~ HOLES  
SMOKE CONTAINER - S/N 39 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
46.6 GRAMS SMOKE COMP.

S/N 050

MOD-E ~~2~~ HOLES  
SMOKE CONTAINER - S/N 48 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
47.65 GRAMS SMOKE COMP.

S/N 051

MOD-E ~~2~~ HOLES  
SMOKE CONTAINER - S/N 47 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
48.45 GRAMS SMOKE COMP.

S/N 052

MOD-E ~~2~~ HOLES  
SMOKE CONTAINER - S/N 36 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
46.25 GRAMS SMOKE COMP.

S/N 053

MOD-E ~~2~~ HOLES  
SMOKE CONTAINER - S/N 45 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
47.05 GRAMS SMOKE COMP.

S/N 054

MOD-E - ~~2~~ HOLES - TICKLE  
SMOKE CONTAINER - S/N 34 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
46.9 GRAMS. SMOKE COMP.  
TICKLE #5 - 39.1 GRAMS.

S/N 055

MOD-E - ~~2~~ HOLES - TICKLE  
SMOKE CONTAINER - S/N 32 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
47.5 GRAMS SMOKE COMP.  
TICKLE #4 - 37.9 GRAMS

42 SHEETS 3 SQUARE  
42 SHEETS 3 SQUARE  
42 SHEETS 3 SQUARE



S/N 056

MOD - E -  $\emptyset$  HOLES - TICKLE  
SMOKE CONTAINER - S/N 35 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
45.6 GRAMS SMOKE COMP.  
TICKLE #3 - 38.4 GRAMS

S/N 057

MOD - E -  $\emptyset$  HOLES - TICKLE  
SMOKE CONTAINER - S/N 33 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
45.9 GRAMS SMOKE COMP.  
TICKLE #6 - 37.8 GRAMS

S/N 058

MOD - E -  $\emptyset$  HOLES - TICKLE  
SMOKE CONTAINER - S/N 38 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
45.15 GRAMS SMOKE COMP.  
TICKLE #1 -

S/N 059 -  $\emptyset$  HOLES ORI - C

S/N 060 -  $\emptyset$  HOLES ORI - C

S/N 061 -  $\emptyset$  HOLES ORI - C

S/N 062 -  $\emptyset$  HOLES ORI - C

S/N 063 -  $\emptyset$  HOLES ORI - C

50 SHEETS  
100 SHEETS  
200 SHEETS



1/17/79

PRACTICE FUZE TEST SERIES

069

S/N 064

MOD-E ⊕ HOLES

SMOKE CONTAINER - S/N 42 (PICATINNY SMOKE COMP.)

NO DET. CORD

47.1 GRAMS SMOKE COMP.

S/N 065

MOD-E ⊕ HOLES

SMOKE CONTAINER - S/N 41 (PICATINNY SMOKE COMP.)

47.05 GRAMS SMOKE COMP.

NO DET. CORD

S/N 066

MOD-E ⊕ HOLES

SMOKE CONTAINER - S/N 44 (PICATINNY SMOKE COMP.)

48.75 GRAMS SMOKE COMP.

NO DET. CORD

S/N 067

MOD-E ⊕ HOLES

SMOKE CONTAINER - S/N 37 (PICATINNY SMOKE COMP.)

46.05 GRAMS SMOKE COMP.

NO DET. CORD

S/N 068

MOD-E ⊕ HOLES

SMOKE CONTAINER - S/N 40 (PICATINNY SMOKE COMP.)

45.75 GRAMS SMOKE COMP.

NO DET. CORD

S/N 069

MOD-E ⊕ HOLES

SMOKE CONTAINER - S/N 43 (PICATINNY SMOKE COMP.)

46.95 GRAMS SMOKE COMP.

NO DET. CORD

S/N 070

MOD-E ⊕ HOLES

SMOKE CONTAINER - S/N 49 (PICATINNY SMOKE COMP.)

49.55 GRAMS SMOKE COMP.

NO DET. CORD

S/N 071

MOD-E ⊕ HOLES

SMOKE CONTAINER - S/N 46

(PICATINNY SMOKE COMP.)

48.75 GRAMS SMOKE COMP.

NO DET. CORD

S/N 072

MOD-E ⊕ HOLES

SMOKE CONTAINER - S/N 50

(PICATINNY SMOKE COMP.)

46.5 GRAMS SMOKE COMP.

NO DET. CORD

S/N 073

⊕ HOLES

SMOKE CONTAINER - S/N 51

(PICATINNY SMOKE COMP.)

47.1 GRAMS SMOKE COMP.

NO DET. CORD

S/N 074

⊕ HOLES

~~SMOKE CONTAINER~~

ORI-C SMOKE

John

S/N 075

⊕ HOLES

~~SMOKE CONTAINER~~

ORI-C SMOKE

John

S/N 076

⊕ HOLES

ORI-C SMOKE

John

S/N 077

⊕ SMOKE

ORI-C

SMOKE

John

S/N 078

~~SMOKE CONTAINER~~

⊕ HOLES

ORI-C

SMOKE

John

S/N 079

⊕ HOLES

ORI-C

SMOKE

S/N 080

⊕ HOLES

ORI-C

SMOKE

S/N 081

⊕ HOLES

ORI-C

SMOKE

S/N 082

⊕ HOLES

ORI-C

SMOKE

S/N 083

⊕ HOLES

ORI-C

SMOKE

10 SHEETS 5 SQUARE  
25 SHEETS 3 SQUARE  
50 SHEETS 2 SQUARE  
100 SHEETS 1 SQUARE



7/27/79 PRACTICE FUZE TEST SERIES

069

S/N 084

MOD-E      ⊖ HOLES      ~~SMOKE~~  
SMOKE CONTAINER - S/N 53 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
47.8 GRAMS SMOKE COMP.  
~~SMOKE~~

S/N 085

MOD-E      ⊖ HOLES      ~~SMOKE~~  
SMOKE CONTAINER - S/N 60 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
46.65 GRAMS SMOKE COMP.  
~~SMOKE~~

S/N 086

MOD-E      ⊖ HOLES      TICKLE  
SMOKE CONTAINER AND TICKLE CONTAINER MODIFIED  
SMOKE CONTAINER - S/N 97 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
27.8 G. GRAMS SMOKE COMP.  
30.85 G. GRAMS TICKLE (TICKLE S/N 7)

S/N 087

⊖ HOLES      TICKLE      MOD-E  
SMOKE CONTAINER AND TICKLE CONTAINER MODIFIED  
SMOKE CONTAINER - S/N 98 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
26.95 G. SMOKE COMP.  
30.0 G. TICKLE (TICKLE S/N 8)

S/N 088

MOD-E      ⊖ HOLES      TICKLE  
SMOKE CONTAINER AND TICKLE CONTAINER MODIFIED  
SMOKE CONTAINER - S/N 99 (PICATINNY SMOKE COMP.)  
NO DET. CORD  
27.05 G. SMOKE COMP.  
30.45 G. TICKLE (TICKLE S/N 9)