

AD-A092 454

DAVID W TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CE--ETC F/6 9/2  
DOCUMENTATION FOR THE SHIP HYDROSTATICS COMPUTER PROGRAM HYDRO.(U)  
OCT 80 S C FISHER  
DTNSRDC/SPD-0965-01

UNCLASSIFIED

NL

1 of 1  
AD-A092 454

END  
DATE  
FILMED  
1-81  
DTIC

98

10 21 08

LEVEL 12

12

AD A092454

DTNSRDC/SPD-0965-01

DOCUMENTATION FOR THE SHIP HYDROSTATICS COMPUTER PROGRAM HYDRO

**DAVID W. TAYLOR NAVAL SHIP  
RESEARCH AND DEVELOPMENT CENTER**

Bethesda, Maryland 20084



DOCUMENTATION FOR THE SHIP HYDROSTATICS COMPUTER  
PROGRAM HYDRO

BY

STEVEN C. FISHER

DEC 4 1980  
C

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED


SHIP PERFORMANCE DEPARTMENT REPORT

OCTOBER 1980

DTNSRDC/SPD-0965-01

DDC FILE COPY

## MAJOR DTNSRDC ORGANIZATIONAL COMPONENTS

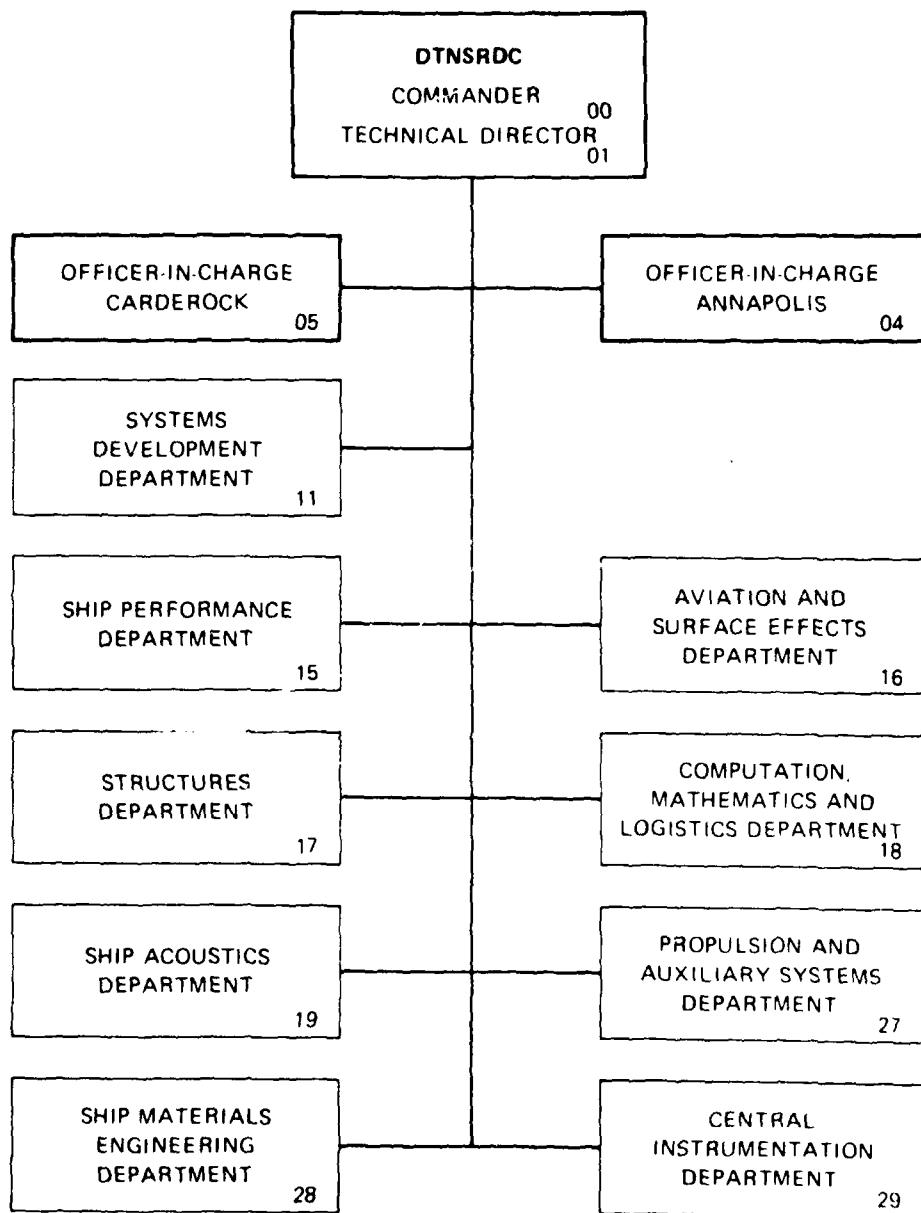

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

| REPORT DOCUMENTATION PAGE                                                                                                                                                                                                                                                             |                                     | READ INSTRUCTIONS<br>BEFORE COMPLETING FORM                                                                                         |    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|----|
| 1. REPORT NUMBER<br>DTNSRDC/SPD-0965-01                                                                                                                                                                                                                                               | 2. GOVT ACCESSION NO.<br>AD-A092454 | 3. RECIPIENT'S CATALOG NUMBER                                                                                                       |    |
| 4. TITLE (and Subtitle)<br>DOCUMENTATION FOR THE SHIP HYDROSTATICS COMPUTER<br>PROGRAM <u>HYDRO</u>                                                                                                                                                                                   |                                     | 5. TYPE OF REPORT & PERIOD COVERED<br>9 FINAL                                                                                       | 7. |
|                                                                                                                                                                                                                                                                                       |                                     | 6. PERFORMING ORG. REPORT NUMBER<br>DTNSRDC/SPD-0965-01                                                                             |    |
| 7. AUTHOR(s)<br>STEVEN C. FISHER                                                                                                                                                                                                                                                      |                                     | 8. CONTRACT OR GRANT NUMBER(s)                                                                                                      |    |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS<br>DAVID W. TAYLOR NAVAL SHIP R&D CENTER<br>SHIP PERFORMANCE DEPT.<br>BETHESDA, MD. 20084                                                                                                                                                 |                                     | 10. PROGRAM ELEMENT, PROJECT, TASK<br>AREA & WORK UNIT NUMBERS<br>P.E. 62543N<br>Subprogram No. 43-421-001<br>Work Unit 1500-104-32 |    |
| 11. CONTROLLING OFFICE NAME AND ADDRESS<br>NAVAL MATERIAL COMMAND (NAVMAT)<br>Code 08D17<br>Washington, D. C. 20360                                                                                                                                                                   |                                     | 12. REPORT DATE<br>11 OCTOBER 1980                                                                                                  |    |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)                                                                                                                                                                                                           |                                     | 13. NUMBER OF PAGES                                                                                                                 |    |
|                                                                                                                                                                                                                                                                                       |                                     | 15. SECURITY CLASS. (of this report)<br>UNCLASSIFIED                                                                                |    |
|                                                                                                                                                                                                                                                                                       |                                     | 15a. DECLASSIFICATION DOWNGRADING<br>SCHEDULE                                                                                       |    |
| 16. DISTRIBUTION STATEMENT (of this Report)<br><br>APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED                                                                                                                                                                                |                                     |                                                                                                                                     |    |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)                                                                                                                                                                                            |                                     |                                                                                                                                     |    |
| 18. SUPPLEMENTARY NOTES                                                                                                                                                                                                                                                               |                                     |                                                                                                                                     |    |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number)<br><br>HYDROSTATICS<br>CUBIC PARAMETRIC SPLINES                                                                                                                                                    |                                     |                                                                                                                                     |    |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number)<br><br>The computer program HYDRO, a hydrostatics program using cubic parametric splines for curve fitting, is presented. Program documentation and the instructions on program usage are included. |                                     |                                                                                                                                     |    |

DD FORM 1473

1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE

1

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

# TABLE OF CONTENTS

|                                                                                     | Page |
|-------------------------------------------------------------------------------------|------|
| LIST OF FIGURES . . . . .                                                           | iv   |
| LIST OF TABLES . . . . .                                                            | iv   |
| NOMENCLATURE . . . . .                                                              | v    |
| ABSTRACT. . . . .                                                                   | 1    |
| ADMINISTRATIVE INFORMATION. . . . .                                                 | 1    |
| INTRODUCTION. . . . .                                                               | 1    |
| OVERVIEW OF THE PROGRAM HYDRO. . . . .                                              | 1    |
| INPUT INFORMATION.. . . .                                                           | 2    |
| OUTPUT INFORMATION. . . . .                                                         | 3    |
| APPENDIX A - DETAILED DESCRIPTIONS OF THE SUBROUTINES AND<br>COMMON BLOCKS. . . . . | 34   |

|                    |                                     |
|--------------------|-------------------------------------|
| Accession For      |                                     |
| NTIS GRA&I         | <input checked="" type="checkbox"/> |
| DTIC TAB           | <input type="checkbox"/>            |
| Unannounced        | <input type="checkbox"/>            |
| Justification      |                                     |
| By                 |                                     |
| Distribution/      |                                     |
| Availability Codes |                                     |
| Dist               | Special                             |
| A                  |                                     |

## LIST OF FIGURES

|                                        | Page |
|----------------------------------------|------|
| 1 - Block Diagram of the Program HYDRO | 4    |
| 2 - Hull Offset Coordinate System      | 5    |

## LIST OF TABLES

|                                                                                | Page |
|--------------------------------------------------------------------------------|------|
| 1 - Required Input Information for Running HYDRO                               | 6    |
| 2 - Sample Input for Program HYDRO                                             | 10   |
| 3 - Variable Values for Sample Input                                           | 11   |
| 4 - Sample Output for Program HYDRO with Output Tables in English and SI Units | 13   |
| 5 - Sample Output Tables for Program HYDRO in English Units                    | 30   |
| 6 - Sample Output Tables for Program HYDRO in SI Units                         | 32   |

# NOMENCLATURE

| <u>SYMBOL</u> | <u>CC SYMBOL</u>           | <u>DESCRIPTION</u>                                          |
|---------------|----------------------------|-------------------------------------------------------------|
| A             | A                          | Sectional area                                              |
| $A_M$         | AM                         | Midships sectional area                                     |
| $A_{WA}$      | AWA                        | Waterplane area of afterbody                                |
| $A_{WF}$      | AWF                        | Waterplane area of forebody                                 |
| $A_{WT}$      | AWT                        | Waterplane area                                             |
| $A_X$         | AX                         | Maximum transverse Sectional area                           |
| B             | B                          | Beam                                                        |
| (B)           | CIRCB $B_M/V_T^{1/3}$      | R.E. Froude's breadth coefficient                           |
| $B_M$         | BM                         | Beam at amidships                                           |
| $B_X$         | BX                         | Beam, measured on the waterline at the maximum area section |
| $C_B$         | CB $V_T/(L_{WL} B_X T_X)$  | Block coefficient                                           |
| $C_M$         | CM $A_M/(B_M T_M)$         | Midship section coefficient                                 |
| $C_P$         | CP $V_T/(L_{WL} A_X)$      | Longitudinal prismatic coefficient                          |
| $C_{PA}$      | CPA $V_A/(L_A A_M)$        | Longitudinal prismatic coefficient of afterbody             |
| $C_{PE}$      | CPE $V_E/(L_E A_X)$        | Longitudinal prismatic coefficient of entrance              |
| $C_{PF}$      | CPF $V_F/(L_F A_M)$        | Longitudinal prismatic coefficient of forebody              |
| $C_{PR}$      | CPR $V_R/(L_R A_X)$        | Longitudinal prismatic coefficient of run                   |
| $C_S$         | CS $S/(V_T L_{WL})^{1/2}$  | Wetted surface coefficient in non-dimensional form          |
| $C_{VP}$      | CVP $V_T/(A_{WT} T_X)$     | Vertical prismatic coefficient                              |
| $C_{VPA}$     | CVPA $V_A/(A_{WA} T_{MA})$ | Vertical prismatic coefficient of afterbody                 |

| <u>SYMBOL</u>   | <u>CC SYMBOL</u>                        | <u>DESCRIPTION</u>                                                                                                                                                              |
|-----------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $C_{VPF}$       | CVPF $\nabla_F / (A_{WF} T_{MF})$       | Vertical prismatic coefficient of forebody                                                                                                                                      |
| $C_{WP}$        | CWP $A_{WT} / (L_{WL} B_X)$             | Waterplane coefficient                                                                                                                                                          |
| $C_{WPA}$       | CWPA $A_{WA} / (L_A B_M)$               | Waterplane coefficient of afterbody                                                                                                                                             |
| $C_{WPF}$       | CWPF $A_{WF} / (L_F B_M)$               | Waterplane coefficient of forebody                                                                                                                                              |
| $C_{WS}$        | CWS $S / (\Delta_T L_{WL})^{1/2}$       | Taylor's wetted surface coefficient in dimensional form                                                                                                                         |
| $C_X$           | CX $A_X / (B_X T_X)$                    | Maximum transverse section coefficient                                                                                                                                          |
| $C_V$           | CVOL $\nabla_T / L_{WL}^3$              | Volumetric coefficient                                                                                                                                                          |
| D-L             | D-L $\Delta_T / (0.01L)^3$              | Displacement - length ratio                                                                                                                                                     |
| $f_E$           | FTE                                     | Taylor's "f" at forward perpendicular                                                                                                                                           |
| $\overline{FB}$ | XFB                                     | Longitudinal center of bouyancy from F.P. or forward end of WL (formerly LCB)                                                                                                   |
| $\overline{FF}$ | XFF                                     | Distance of center of flotation from F.P. or forward end of WL (formerly LCF)                                                                                                   |
| (K)             | CIRCK $0.5833 \frac{V}{\Delta_T^{1/6}}$ | R.E. Froude's speed-displacement coefficient, ratio of ship speed of a wave having its length proportional to cube root of volume of displacement for design condition of ship. |
| L               | L                                       | Length, in general                                                                                                                                                              |
| $L_E$           | LE                                      | Length of entrance, from FP to forward end of parallel middlebody or maximum section                                                                                            |
| $l_P$           | LP                                      | Length of parallel middlebody                                                                                                                                                   |
| $L_{PP}$        | LPP                                     | Length between perpendiculars                                                                                                                                                   |



| <u>SYMBOL</u> | <u>CC SYMBOL</u>                           | <u>DESCRIPTION</u>                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $L_R$         | LR                                         | Length of run, from section of maximum area or after end of parallel middle-body to waterline termination or other designated point                                                                                                                                                                                                                                                                                                   |
| $L_{WL}$      | LWL                                        | Length on waterline                                                                                                                                                                                                                                                                                                                                                                                                                   |
| (M)           | CIRCM $L_{PP}/\nabla^{1/3}$                | R.E. Froudes' length coefficient or length-displacement ratio                                                                                                                                                                                                                                                                                                                                                                         |
| (P)           | CIRCP $0.746 \frac{V}{(L_{WL} C_p)^{1/2}}$ | Baker's speed constant on basis of which ships of equal wave-making length can be compared.                                                                                                                                                                                                                                                                                                                                           |
| $T_M$         | TM                                         | Draft at amidships                                                                                                                                                                                                                                                                                                                                                                                                                    |
| $T_{MA}$      | TMA                                        | Draft of afterbody at 0.75 L                                                                                                                                                                                                                                                                                                                                                                                                          |
| $T_{MF}$      | TMF                                        | Draft of forebody at 0.25 L                                                                                                                                                                                                                                                                                                                                                                                                           |
| S             | S                                          | Wetted Surface                                                                                                                                                                                                                                                                                                                                                                                                                        |
| (S)           | CIRCS $S/\nabla^{2/3}$                     | R.E. Froudes' wetted surface coefficient                                                                                                                                                                                                                                                                                                                                                                                              |
| $t_E$         | TTE                                        | Taylor tangent to area curve- intercept of tangent to curve at the bow on the midship ordinate, expressed as a ratio of the midship ordinate                                                                                                                                                                                                                                                                                          |
| (T)           | CIRCT $T_M/\nabla^{1/3}$                   | R.E. Froudes' draft coefficient                                                                                                                                                                                                                                                                                                                                                                                                       |
| $T_X$         | TX                                         | Draft at maximum area section                                                                                                                                                                                                                                                                                                                                                                                                         |
| $\Delta T$    | DIS                                        | Displacement of the ship in tons of 2240 lbs usually given for the design condition in salt water at 59°. Conversion from model displacement in fresh water involves ratio of densities of salt and and fresh water. The displacement volume of the model is converted to displacement using 35.970 cu ft/ton and the displacement volume for the ship is converted to displacement using 34.977 cu. ft/ton. (continued on next page) |

# GLOSSARY (Continued)

| <u>SYMBOL</u>     | <u>CC SYMBOL</u> | <u>DESCRIPTION</u>                                                                                                                                                                                                                                                                                                                                       |
|-------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $\Delta T$ (cont) | DIS              | The ratio of the displacement, model to ship, used is $(35.970/34.977)^3 = (1.0284)^3$ . Standard usage in NSRDC is for a model temperature of $68^{\circ}\text{F}$ or $20^{\circ}\text{C}$ and latitude of Washington D.C., and a ship temperature of $59^{\circ}\text{F}$ or $15^{\circ}\text{C}$ , 3.5 percent salinity, $45^{\circ}$ north latitude. |
| V                 | V                | Speed of ship, knots                                                                                                                                                                                                                                                                                                                                     |
| $\nabla_A$        |                  | Volume of afterbody                                                                                                                                                                                                                                                                                                                                      |
| $\nabla_E$        |                  | Volume of entrance                                                                                                                                                                                                                                                                                                                                       |
| $\nabla_F$        |                  | Volume of forebody                                                                                                                                                                                                                                                                                                                                       |
| $\nabla_R$        |                  | Volume of run                                                                                                                                                                                                                                                                                                                                            |
| $\nabla_T$        |                  | Total volume                                                                                                                                                                                                                                                                                                                                             |

## ENGLISH/SI EQUIVALENTS

|                      |                                        |
|----------------------|----------------------------------------|
| 1 degree (angle)     | = 0.01745 rad (radians)                |
| 1 foot               | = 0.3048 m (meters)                    |
| 1 foot per second    | = 0.3048 m/sec (meters per second)     |
| 1 inch               | = 25.40 mm (millimeters)               |
| 1 knot               | = 0.5144 m/s (meters per second)       |
| 1 lb (force)         | = 4.448 N (Newtons)                    |
| 1 lb (force) - inch  | = 0.1130 N·m (Newton-meter)            |
| 1 long ton (2240 lb) | = 1.016 metric tons, or 1016 kilograms |
| 1 horsepower         | = 0.746 kW (kilowatts)                 |

## ABSTRACT

The computer program HYDRO, a hydrostatics program using cubic parametric splines for curve fitting, is presented. Program documentation and the instructions on program usage are included.

## ADMINISTRATIVE INFORMATION

This Project was authorized and funded by the Naval Material Command (NAVMAT) Ship Performance and Hydromechanics Program under Program Element 62543N, Subproject Number 43-421-001, Work Unit Number 1500-104-32.

## INTRODUCTION

Previously at DTNSRDC, a complete hydrostatic analysis of a given hull form required the execution of three separate computer programs. In an effort to consolidate and improve these programs, a new computer program, HYDRO, was written. Because the number of programs has been reduced to one, the time required to complete the analysis has been shortened. The original programs used the trapezoidal rule for calculating the sectional areas and volumes. HYDRO uses parametric splines to define the hull shape to allow exact integration, which improves the accuracy of the results.

Program documentation is included below. Instructions on program usage and a sample output are also given.

## OVERVIEW OF THE PROGRAM HYDRO

The computer program HYDRO defines the stations and curves using a cubic parametric spline to fit the offsets. Each pair of parametric splines  $(x(t), y(t))$  define a segment between two consecutive points. The equations are:

$$x = a_x t^3 + b_x t^2 + c_x t + d_x$$

$$y = a_y t^3 + b_y t^2 + c_y t + d_y$$

$$0 \leq t \leq 1$$

The sectional areas are obtained by integrating the splines. The volume, waterplane area, and wetted surface are obtained by integrating parametric splines that are fitted to the sectional area, waterplane, and wetted surface curves. However, the station girths cannot be found through integration of the splines. The girths are calculated by taking evenly spaced points that are interpolated between the original offsets, and integrated using Simpson's rule.

The endpoints of the sectional area, waterplane, and wetted surface curves are at the furthest forward and furthest aft stations with non-zero sectional area, if no bow or stern profile has been entered. If the bow or stern profile has been included, the endpoints are taken at the intersection of the waterline with the bow or stern. If the bow has a bulb, the tip of the bulb is used as the forward endpoint instead of the bow waterline intersection.

HYDRO consists of 12 subprograms, and uses 4 common blocks. A block diagram of the program HYDRO is shown in Figure 1, and a brief description of each subprogram and common block is given in Appendix A. The core requirement for loading and running the program is approximately 65,000 octal words. The amount of time required to run the program depends upon the number of stations, points per station, and drafts, but normally does not exceed 20 seconds.

#### INPUT INFORMATION

Table 1 contains a list of the required input information and the respective format needed to run the program. An example input deck is shown in Table 2, and the corresponding input values are shown in Table 3.

The offsets of the model can either be input in the form required by the earlier hydrostatics programs, (IPROG = 0) or in the form used by the NAVSEA lines generation programs and the TEKTRONICS computer program DIGITIZE (IPROG = 1). The stations must be in order, from the bow to the stern, and the offsets for each station must be in order of increasing waterline height. A maximum of 40 stations and 40 points per station are allowed. The coordinate system for the model offsets is shown in Figure 2.

Taylor's  $f$  and  $t$ , and the half angle of entrance can either be input or calculated, depending on the value of the variable ICALC. The calculated values may not be accurate if the bow sections have an unusual shape.

HYDRO allows additional sectional area and wetted surface to be input. This feature adjusts the results to reflect the additional volume and wetted surface due to items that might not be indicated by the station offsets, such as skeg. The additional volume is added indirectly by increasing the sectional area of certain stations, so that the LCB will be shifted accordingly.

Up to six drafts can be used. The drafts are input at the bow and the stern so the model can be trimmed. The drafts are given at distances from the waterline to the baseline.

#### OUTPUT INFORMATION

The output, shown in Table 4, is given in English and SI units (MET = 1). The output tables are taken directly from the earlier hydrostatics programs. It should be noted that the  $L_{WL}$  coefficients are calculated using the waterline length input into the program. The program output consists of an echo of station offsets, control variables, station areas and girths, tables of hull coefficients, and non-dimensionalized beams and section areas. The printing of the station offsets is suppressed if the value of the variable INSTAT is greater than zero.

The output tables are given in English, SI, and English and SI units, depending upon the value of the variable MET. Table 4 shows the output tables in English and SI units (MET = 1). Tables 5 and 6 show the output tables in English (MET = 0) and in SI (MET = 2) units.


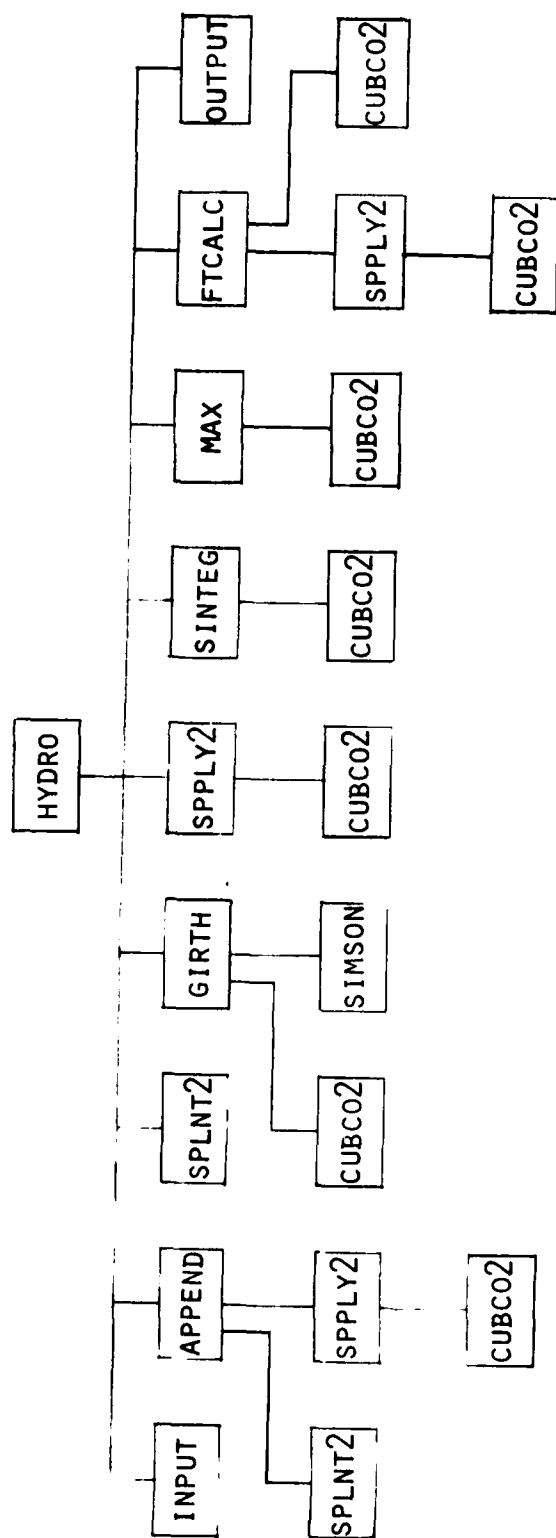


Figure 1 - Block Diagram of the Program HYDRO

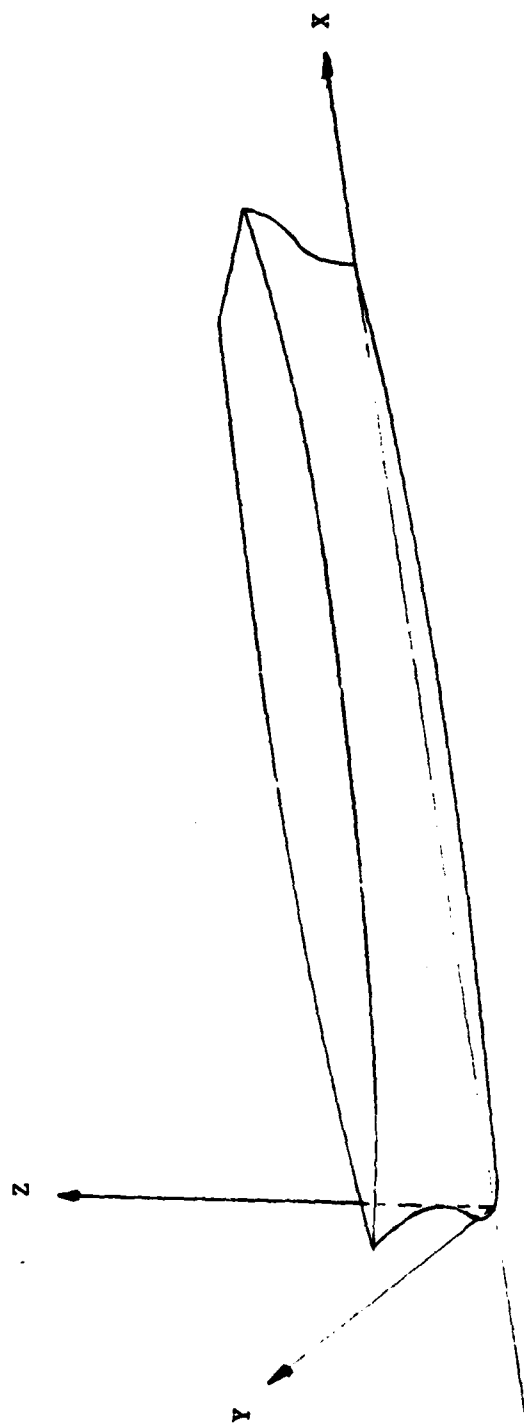

5

FIGURE 2 - HULL OFFSET COORDINATE SYSTEM

TABLE 1

Required Input Information for Running HYDRO

| <u>CARD</u> | <u>FORMAT</u> | <u>COL</u> | <u>NAME</u> | <u>DESCRIPTION</u>                                                                          |
|-------------|---------------|------------|-------------|---------------------------------------------------------------------------------------------|
| 1           | A10           | 1-10       | MODEL       | Model number                                                                                |
| 2           | 8A10          | 1-80       | TITLE       | The title for the output                                                                    |
| 3           | F10.5         | 1-10       | XLAM        | Ship to model scale                                                                         |
|             | F10.5         | 11-20      | V           | Model speed (knots)                                                                         |
|             | F10.5         | 21-30      | XLWL        | $L_{WL}$ , ft (model)                                                                       |
|             | F10.5         | 31-40      | XLPP        | $L_{PP}$ , ft (model)                                                                       |
|             | F10.5         | 41-50      | SS          | Station spacing ft (model)                                                                  |
| 4           | F10.5         | 1-10       | XX          | X axis scaling factor                                                                       |
|             | F10.5         | 11-20      | YY          | Y axis scaling factor                                                                       |
|             | F10.5         | 21-30      | ZZ          | Z axis scaling factor                                                                       |
|             | F10.5         | 31-40      | XBS         | X axis scaling factor for bow and stern profiles                                            |
|             | F10.5         | 41-50      | YBS         | Z axis scaling factor for bow and stern profiles                                            |
| 5           | F10.5         | 1-10       | XM          | Distance from bow to amidships, ft (model)                                                  |
|             | F10.5         | 11-20      | WATDEN      | Water density, lbs/ft <sup>3</sup> (usually 62.4)                                           |
|             | I5            | 21-25      | MET         | Output Index<br>MET=0 English Units<br>MET=1 English and Metric units<br>MET=2 Metric Units |
|             | I5            | 26-30      | ISTAT       | Print control for station offsets. If ISTAT > 0, suppress printing                          |



Table 1 - Required Input Information for Running HYDRO (Cont)

| <u>CARD</u> | <u>FORMAT</u> | <u>COL</u> | <u>NAME</u> | <u>DESCRIPTION</u>                                                                                                                                                           |
|-------------|---------------|------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6           | F10.5         | 1-10       | XLP         | Length of parallel middlebody                                                                                                                                                |
|             | F10.5         | 11-20      | ENTA        | Half angle of entrance, degrees                                                                                                                                              |
|             | F10.5         | 21-30      | FTE         | Taylor's f                                                                                                                                                                   |
|             | F10.5         | 31-40      | TTE         | Taylor's t                                                                                                                                                                   |
|             | I5            | 41-45      | ICALC       | If not zero, ENTA, FTE, & TTE will be calculated                                                                                                                             |
| 7           | I5            | 1-5        | N           | Number of stations                                                                                                                                                           |
|             | I5            | 6-10       | NDRAFT      | Number of drafts                                                                                                                                                             |
|             | I5            | 11-15      | I PROG      | =0 if offsets are in the old format<br>=1 if offsets are in the new format                                                                                                   |
|             | I5            | 16-20      | IBOW        | =0 if no bow or stern profile is entered<br>=1 if only a bow profile is entered<br>=2 if only a stern profile is entered<br>=3 if both a bow and a stern profile are entered |
| 8           | I5            | 1-5        | NSTAT       | Number of stations that have extra sectional area that are not indicated by the offsets                                                                                      |
|             | F10.5         | 6-15       | EXWET       | Additional wetted surface not indicated by the offsets                                                                                                                       |
| 8a          | F10.5         | 1-10       | XXL         | Station number with extra sectional area                                                                                                                                     |
|             | F10.5         | 11-20      | EXVOL       | Extra sectional area, ft <sup>2</sup> (model scale)                                                                                                                          |

Table 1 - Required Input Information for Running HYDRO (Cont)

| <u>CARD</u> | <u>FORMAT</u>                                                                          | <u>COL</u> | <u>NAME</u> | <u>DESCRIPTION</u>                               |
|-------------|----------------------------------------------------------------------------------------|------------|-------------|--------------------------------------------------|
| 9           | F10.5                                                                                  | 1-10       | SF          | Forward station where the draft is taken.        |
|             | F10.5                                                                                  | 11-20      | SA          | Aft station where the draft is taken.            |
|             | F10.5                                                                                  | 21-30      | TF          | Forward draft, ft.<br>(model scale)              |
|             | F10.5                                                                                  | 31-40      | TA          | Aft draft, ft<br>(model scale)                   |
|             | I5                                                                                     | 41-45      | IPRINT      | If not zero, large output table will be printed. |
| 10          | F10.5                                                                                  | 21-30      | X           | Station offset distance from F.P. (positive aft) |
|             | F10.5                                                                                  | 31-40      | Y           | Beam                                             |
|             | F10.5                                                                                  | 41-50      | Z           | height above baseline                            |
| 10a         | The card following the last card 10 must have 99999. or greater starting in column 21. |            |             |                                                  |
| 11          | ( ignored if no bow profile is entered )                                               |            |             |                                                  |
|             | F10.5                                                                                  | 21-30      | XB          | Bow offset distance from FP (positive aft)       |
|             | F10.5                                                                                  | 31-40      | YB          | Height above baseline                            |
| 11a         | The card following the last card 11 must have 99999. or greater starting in column 21. |            |             |                                                  |
| 12          | (ignored if no stern profile is entered)                                               |            |             |                                                  |
|             | F10.5                                                                                  | 21-30      | XS          | Stern offset Distance from FP (positive aft)     |
|             | F10.5                                                                                  | 31-40      | YS          | Height above baseline                            |
| 12a         | The card following the last card 12 must have 99999. or greater starting in column 21. |            |             |                                                  |

Table 1 - Required Input Information for Running HYDRO (Cont)

NOTE - Cards 10 and 10a are the input cards for the offsets in the new format. The corresponding cards for the old format are:

| <u>CARD</u> | <u>FORMAT</u> | <u>COLS</u> | <u>NAME</u> | <u>DESCRIPTION</u>                          |
|-------------|---------------|-------------|-------------|---------------------------------------------|
| 10          | 8F10.5        | 1-80        | X           | Station distance from forward perpendicular |
| 10a         | 15            | 1-5         | MM          | Number of offsets in a given station        |
| 10b         | 8F10.5        | 1-80        | Y           | Beam offsets at a given station             |
| 10c         | 8F10.5        | 1-80        | Z           | Height offsets at a given station.          |

The series of cards 10a - c repeat N times.

```

9876
EXAMPLE RUN FOR PROGRAM HYDRO
31.435 4.637 27.358 27.358 1.368
.0833333 .0833333 .0833333 .0833333 .0833333
13.673 62.4 1 0 1
.0 .0 .0 0 1
25 1 1 3
3 1.6
15. .02
17. .06
18. .1
0.0 19.0 1.098 1.098 1
0.0 0.0 11.4522
0.000000 0.095436 13.17003
0.000000 0.54351 15.26960
8.207413 0.623125 1.678300
8.207413 0.613149 1.908701
8.207413 0.724131 2.863051
8.207413 0.792435 3.817402
8.207413 0.876451 5.726102
8.207413 0.911591 7.634803
8.207413 0.935569 9.543503
8.207413 1.020193 11.45220
8.207413 1.217493 13.17003
8.207413 1.751158 15.26960
16.41482 0.614068 0.000000
16.41482 0.966174 0.954351
16.41482 1.204187 1.908701
16.41482 1.342564 2.863051
16.41482 1.521101 3.817402
16.41482 1.737611 5.726102
16.41482 1.871119 7.634803
16.41482 1.955119 9.543503
16.41482 2.456174 13.98324
16.41482 8.477151 14.09195
16.41482 9.432149 14.22009
328.2965 10.61108 14.36429
328.2965 11.71173 14.61164
328.2965 12.79443 14.93028
99999999.
13.36040 0.000000
9.377755 0.954351
7.911856 1.908701
6.877164 2.863051
5.943622 3.817402
4.568764 5.726102
3.368877 7.634803
2.213633 9.543503
1.060726 11.45220
0.000000 13.17003
-1.37241 15.26960
-2.71332 17.17830
-4.14649 19.08701
-5.68381 20.99571
-7.32941 22.90441
-9.06786 24.81311
-10.8930 26.72181
-12.8299 28.63051
-15.2696 30.73008
99999999.
246.2224 1.373
262.6372 3.241
279.0522 5.441
295.4668 7.86
311.8817 10.488
328.2965 13.189
99999999.

```

Table 2 - Sample Input for Program HYDRO

TABLE 3  
VARIABLE VALUES FOR SAMPLE INPUT

| <u>CARD NO.</u> | <u>VARIABLE</u> | <u>VALUES</u>                 |
|-----------------|-----------------|-------------------------------|
| 1               | MODEL           | 9765                          |
| 2               | TITLE           | EXAMPLE RUN FOR PROGRAM HYDRO |
| 3               | XLAM            | 31.435                        |
|                 | V               | 4.637 knots                   |
|                 | XLWL            | 27.358 ft                     |
|                 | XLPP            | 27.358 ft                     |
|                 | SS              | 1.368 ft                      |
| 4               | XX              | 0.08333 ft/inch               |
|                 | YY              | 0.08333                       |
|                 | ZZ              | 0.08333                       |
|                 | XBS             | 0.08333                       |
|                 | YBS             | 0.08333                       |
| 5               | XM              | 13.679 ft                     |
|                 | WATDEN          | 62.4 lbs/ft <sup>3</sup>      |
|                 | MET             | 1                             |
|                 | ISTAT           | 0                             |
| 6               | XLP             | 0.0                           |
|                 | ENTA            | 0.0                           |
|                 | FTE             | 0.0                           |
|                 | TTE             | 0.0                           |
|                 | ICALC           | 1                             |
| 7               | N               | 25                            |
|                 | NDRAFT          | 1                             |
|                 | IPROG           | 1                             |
|                 | IBOW            | 3                             |
| 8               | NSTAT           | 3                             |
|                 | EXWET           | 1.6 ft <sup>2</sup>           |
| 8a 1            | XXL(1)          | 16.                           |
|                 | EXVOL(1)        | 0.02 ft <sup>2</sup>          |
| 11              | XXL(2)          | 17                            |
|                 | EXVOL(2)        | 0.06 ft <sup>2</sup>          |
| 111             | XXL(3)          | 18                            |
|                 | EXVOL(3)        | 0.10 ft <sup>2</sup>          |

Table 3 - Variable Values for Sample Input (Cont)

| VARIABLE VALUES FOR SAMPLE INPUT |                 |               |
|----------------------------------|-----------------|---------------|
| <u>CARD NO.</u>                  | <u>VARIABLE</u> | <u>VALUES</u> |
| 9                                | SF              | 0.0           |
|                                  | SA              | 19.0          |
|                                  | TF              | 1.1 ft        |
|                                  | TA              | 1.1 ft        |
|                                  | IPRINT          | 1             |
| 10, 10a                          | STATION OFFSETS |               |
| 11, 11a                          | BOW OFFSETS     |               |
| 12, 12a                          | STERN OFFSETS   |               |

EXAMPLE RUN FOR PROGRAM HYDRO

INPUT DATA

|                            |   |        |
|----------------------------|---|--------|
| SCALE RATIO                | = | 31.435 |
| MODEL SPEED                | = | 4.637  |
| LWL                        | = | 27.358 |
| LBP                        | = | 27.358 |
| STATION SPACING            | = | 1.368  |
| X AXIS SCALING FACTOR      | = | .083   |
| Y AXIS SCALING FACTOR      | = | .083   |
| Z AXIS SCALING FACTOR      | = | .083   |
| X AXIS SCALING FACTOR      | = | .083   |
| FOR BOW AND STERN          |   |        |
| Y AXIS SCALING FACTOR      | = | .083   |
| FOR BOW AND STERN          |   |        |
| BOW TO MIDSHIPS            | = | 13.679 |
| WATER DENSITY              | = | 62.400 |
| MET (OUTPUT UNIT INDEX)    | = | 1      |
| PARALLEL MIDDLEBODY LENGTH | = | 0.000  |
| HALF ANGLE OF ENTRANCE     | = | 0.000  |
| TAYLOR'S F                 | = | 0.000  |
| TAYLOR'S T                 | = | 0.000  |
| ICALC                      | = | 1      |
| NO. OF STATIONS            | = | 25     |
| NO. OF DRAFTS              | = | 1      |
| INPUT STYLE (IPROG)        | = | 1      |
| IBOW                       | = | 3      |
| ADDED WETTED SURFACE       | = | 1.600  |
| NSTAT                      | = | 3      |

ADDED STATION AREA

| STATION | AREA  |
|---------|-------|
| 16.00   | .0200 |
| 17.00   | .0600 |
| 18.00   | .1000 |

DRAFT INFORMATION

| NO. | FWD<br>STATION | FWD<br>DRAFT | AFT<br>STATION | AFT<br>DRAFT |
|-----|----------------|--------------|----------------|--------------|
| 1   | 0.00           | 1.10         | 19.00          | 1.10         |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units

Table 4- Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

STATION 0.00

X = 0.00

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| .954                     | 0.000           |
| 1.098                    | .008            |
| 1.272                    | .045            |

STATION .50

X = .68

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| .140                     | .052            |
| .159                     | .054            |
| .239                     | .060            |
| .318                     | .066            |
| .477                     | .073            |
| .636                     | .076            |
| .795                     | .078            |
| .954                     | .085            |
| 1.098                    | .101            |
| 1.272                    | .146            |

STATION 1.00

X = 1.37

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .054            |
| .080                     | .081            |
| .159                     | .100            |
| .239                     | .115            |
| .318                     | .127            |
| .477                     | .145            |
| .636                     | .156            |
| .795                     | .166            |
| .954                     | .180            |
| 1.098                    | .203            |
| 1.272                    | .253            |



Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

STATION 1.50

x = 2.05

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .070            |
| .080                     | .123            |
| .159                     | .158            |
| .239                     | .183            |
| .318                     | .204            |
| .477                     | .236            |
| .636                     | .257            |
| .795                     | .274            |
| .954                     | .294            |
| 1.098                    | .321            |
| 1.272                    | .372            |

STATION 2.00

x = 2.74

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .085            |
| .034                     | .132            |
| .080                     | .176            |
| .159                     | .228            |
| .198                     | .248            |
| .239                     | .267            |
| .318                     | .298            |
| .446                     | .335            |
| .477                     | .342            |
| .636                     | .373            |
| .732                     | .389            |
| .795                     | .398            |
| .954                     | .425            |
| .967                     | .427            |
| 1.098                    | .455            |
| 1.132                    | .464            |
| 1.253                    | .502            |

STATION 2.50

x = 3.42

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .094            |
| .010                     | .134            |
| .080                     | .248            |
| .090                     | .260            |
| .159                     | .319            |
| .239                     | .367            |
| .240                     | .368            |
| .318                     | .402            |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

|       |      |
|-------|------|
| .452  | .448 |
| .477  | .456 |
| .636  | .500 |
| .668  | .507 |
| .795  | .536 |
| .863  | .552 |
| .954  | .573 |
| 1.023 | .590 |
| 1.098 | .613 |
| 1.272 | .677 |

STATION 3.00

X = 4.10

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .095            |
| .001                     | .131            |
| .001                     | .134            |
| .032                     | .266            |
| .080                     | .344            |
| .120                     | .387            |
| .159                     | .420            |
| .239                     | .472            |
| .267                     | .488            |
| .318                     | .514            |
| .436                     | .569            |
| .477                     | .587            |
| .605                     | .635            |
| .636                     | .646            |
| .769                     | .688            |
| .795                     | .695            |
| .916                     | .732            |
| .954                     | .745            |
| 1.040                    | .775            |
| 1.098                    | .796            |
| 1.149                    | .815            |
| 1.246                    | .854            |

STATION 4.00

X = 5.47

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .095            |
| .001                     | .134            |
| .004                     | .269            |
| .005                     | .279            |
| .024                     | .402            |
| .075                     | .528            |
| .153                     | .645            |
| .252                     | .750            |
| .368                     | .842            |
| .494                     | .920            |
| .623                     | .987            |
| .754                     | 1.043           |

Table 4 - Sample Output for Program HYDFO with Output Tables  
in English and SI Units (Cont)

|       |       |
|-------|-------|
| .795  | 1.058 |
| .881  | 1.091 |
| .954  | 1.114 |
| 1.003 | 1.131 |
| 1.098 | 1.162 |
| 1.118 | 1.168 |
| 1.225 | 1.203 |
| 1.272 | 1.217 |

STATION 5.00

X = 6.84

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
|--------------------------|-----------------|

|       |       |
|-------|-------|
| 0.000 | .095  |
| .001  | .134  |
| .004  | .269  |
| .008  | .404  |
| .010  | .478  |
| .014  | .541  |
| .039  | .676  |
| .087  | .804  |
| .154  | .924  |
| .240  | 1.033 |
| .340  | 1.131 |
| .454  | 1.216 |
| .577  | 1.288 |
| .707  | 1.347 |
| .795  | 1.379 |
| .837  | 1.396 |
| .954  | 1.433 |
| 1.085 | 1.476 |
| 1.098 | 1.479 |
| 1.202 | 1.509 |
| 1.272 | 1.527 |

STATION 6.00

X = 8.21

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
|--------------------------|-----------------|

|       |       |
|-------|-------|
| 0.000 | .095  |
| .001  | .134  |
| .004  | .269  |
| .008  | .404  |
| .011  | .542  |
| .015  | .682  |
| .016  | .736  |
| .022  | .825  |
| .049  | .964  |
| .096  | 1.097 |
| .166  | 1.220 |
| .256  | 1.331 |
| .362  | 1.428 |
| .483  | 1.510 |
| .612  | 1.578 |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

|       |       |
|-------|-------|
| .746  | 1.634 |
| .795  | 1.647 |
| .881  | 1.680 |
| .954  | 1.698 |
| 1.014 | 1.718 |
| 1.098 | 1.739 |
| 1.143 | 1.751 |
| 1.268 | 1.780 |

STATION 7.00

x = 9.58

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .095            |
| .001                     | .134            |
| .004                     | .269            |
| .008                     | .404            |
| .011                     | .542            |
| .015                     | .682            |
| .018                     | .826            |
| .022                     | .975            |
| .023                     | 1.017           |
| .031                     | 1.126           |
| .066                     | 1.271           |
| .129                     | 1.404           |
| .216                     | 1.523           |
| .324                     | 1.625           |
| .449                     | 1.710           |
| .586                     | 1.778           |
| .731                     | 1.830           |
| .795                     | 1.844           |
| .878                     | 1.869           |
| .954                     | 1.882           |
| 1.023                    | 1.899           |
| 1.098                    | 1.912           |
| 1.164                    | 1.923           |
| 1.272                    | 1.936           |

STATION 8.00

x = 10.94

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .095            |
| .001                     | .134            |
| .004                     | .269            |
| .008                     | .404            |
| .011                     | .542            |
| .015                     | .682            |
| .018                     | .826            |
| .022                     | .975            |
| .026                     | 1.129           |
| .029                     | 1.271           |
| .030                     | 1.289           |
| .058                     | 1.445           |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

|       |       |
|-------|-------|
| .119  | 1.586 |
| .212  | 1.707 |
| .333  | 1.804 |
| .475  | 1.878 |
| .629  | 1.932 |
| .790  | 1.966 |
| .795  | 1.967 |
| .952  | 1.987 |
| .954  | 1.987 |
| 1.098 | 1.997 |
| 1.109 | 1.998 |
| 1.260 | 2.003 |

STATION 9.00

X = 12.31

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .095            |
| .001                     | .134            |
| .004                     | .269            |
| .008                     | .404            |
| .011                     | .542            |
| .015                     | .682            |
| .018                     | .826            |
| .022                     | .975            |
| .026                     | 1.129           |
| .030                     | 1.290           |
| .034                     | 1.446           |
| .034                     | 1.459           |
| .065                     | 1.621           |
| .141                     | 1.758           |
| .257                     | 1.865           |
| .404                     | 1.942           |
| .575                     | 1.986           |
| .758                     | 2.003           |
| .795                     | 2.004           |
| .864                     | 2.004           |
| .938                     | 2.004           |
| .954                     | 2.004           |
| 1.098                    | 2.004           |
| 1.105                    | 2.004           |
| 1.259                    | 2.004           |
| 1.272                    | 2.004           |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

STATION 10.00

X = 13.68

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .095            |
| .001                     | .134            |
| .004                     | .269            |
| .008                     | .404            |
| .011                     | .542            |
| .015                     | .682            |
| .018                     | .826            |
| .022                     | .975            |
| .026                     | 1.129           |
| .030                     | 1.290           |
| .034                     | 1.459           |
| .035                     | 1.504           |
| .054                     | 1.628           |
| .121                     | 1.773           |
| .228                     | 1.889           |
| .373                     | 1.970           |
| .558                     | 2.003           |
| .606                     | 2.004           |
| .756                     | 2.004           |
| .795                     | 2.004           |
| .938                     | 2.004           |
| .954                     | 2.004           |
| 1.098                    | 2.004           |
| 1.105                    | 2.004           |
| 1.259                    | 2.004           |
| 1.272                    | 2.004           |

STATION 11.00

X = 15.05

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .095            |
| .001                     | .134            |
| .004                     | .269            |
| .008                     | .404            |
| .011                     | .542            |
| .015                     | .682            |
| .018                     | .826            |
| .022                     | .975            |
| .026                     | 1.129           |
| .030                     | 1.290           |
| .034                     | 1.443           |
| .034                     | 1.459           |
| .061                     | 1.623           |
| .129                     | 1.766           |
| .239                     | 1.881           |
| .384                     | 1.960           |
| .559                     | 2.001           |
| .617                     | 2.004           |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

|       |       |
|-------|-------|
| .756  | 2.004 |
| .795  | 2.004 |
| .938  | 2.004 |
| .954  | 2.004 |
| 1.098 | 2.004 |
| 1.105 | 2.004 |
| 1.259 | 2.004 |
| 1.272 | 2.004 |

STATION 12.00

X = 16.41

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .095            |
| .001                     | .134            |
| .004                     | .269            |
| .008                     | .404            |
| .011                     | .542            |
| .015                     | .682            |
| .018                     | .826            |
| .022                     | .975            |
| .026                     | 1.129           |
| .030                     | 1.290           |
| .030                     | 1.302           |
| .046                     | 1.452           |
| .091                     | 1.604           |
| .166                     | 1.740           |
| .271                     | 1.854           |
| .407                     | 1.939           |
| .573                     | 1.988           |
| .757                     | 2.003           |
| .795                     | 2.004           |
| .862                     | 2.004           |
| .938                     | 2.004           |
| .954                     | 2.004           |
| 1.098                    | 2.004           |
| 1.105                    | 2.004           |
| 1.259                    | 2.004           |
| 1.272                    | 2.004           |

STATION 13.00

X = 17.78

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 0.000                    | .095            |
| .001                     | .134            |
| .004                     | .269            |
| .008                     | .404            |
| .011                     | .542            |
| .015                     | .682            |
| .018                     | .826            |
| .022                     | .975            |
| .024                     | 1.075           |
| .026                     | 1.128           |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

|       |       |
|-------|-------|
| .041  | 1.284 |
| .074  | 1.436 |
| .130  | 1.579 |
| .215  | 1.705 |
| .326  | 1.810 |
| .460  | 1.892 |
| .614  | 1.947 |
| .779  | 1.978 |
| .795  | 1.983 |
| .946  | 1.994 |
| .954  | 1.995 |
| 1.098 | 2.000 |
| 1.107 | 2.001 |
| 1.259 | 2.004 |
| 1.272 | 2.004 |

STATION 14.00

X = 19.15

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| .021                     | 0.000           |
| .030                     | .133            |
| .039                     | .265            |
| .047                     | .398            |
| .056                     | .532            |
| .065                     | .669            |
| .074                     | .808            |
| .084                     | .951            |
| .099                     | 1.096           |
| .121                     | 1.243           |
| .154                     | 1.390           |
| .208                     | 1.528           |
| .291                     | 1.649           |
| .401                     | 1.749           |
| .532                     | 1.827           |
| .678                     | 1.883           |
| .795                     | 1.912           |
| .831                     | 1.921           |
| .954                     | 1.937           |
| .984                     | 1.947           |
| 1.098                    | 1.960           |
| 1.133                    | 1.965           |
| 1.272                    | 1.974           |



Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

STATION 15.00

x = 20.52

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| .114                     | 0.000           |
| .129                     | .127            |
| .142                     | .254            |
| .155                     | .381            |
| .168                     | .509            |
| .180                     | .638            |
| .193                     | .769            |
| .206                     | .904            |
| .222                     | 1.041           |
| .243                     | 1.181           |
| .273                     | 1.321           |
| .322                     | 1.454           |
| .398                     | 1.571           |
| .500                     | 1.669           |
| .621                     | 1.747           |
| .754                     | 1.807           |
| .795                     | 1.820           |
| .894                     | 1.852           |
| .954                     | 1.862           |
| 1.034                    | 1.886           |
| 1.098                    | 1.898           |
| 1.171                    | 1.912           |
| 1.272                    | 1.926           |

STATION 16.00

x = 21.89

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| .270                     | 0.000           |
| .283                     | .119            |
| .296                     | .238            |
| .308                     | .357            |
| .321                     | .476            |
| .335                     | .596            |
| .347                     | .719            |
| .360                     | .845            |
| .373                     | .974            |
| .392                     | 1.105           |
| .420                     | 1.236           |
| .464                     | 1.362           |
| .531                     | 1.475           |
| .621                     | 1.571           |
| .727                     | 1.652           |
| .795                     | 1.691           |
| .844                     | 1.717           |
| .954                     | 1.759           |
| .968                     | 1.769           |
| 1.094                    | 1.811           |
| 1.220                    | 1.845           |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

1.272 1.855

STATION 17.00

X = 23.25

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| .453                     | 0.000           |
| .465                     | .110            |
| .477                     | .219            |
| .488                     | .328            |
| .500                     | .438            |
| .512                     | .549            |
| .525                     | .662            |
| .536                     | .777            |
| .549                     | .896            |
| .565                     | 1.017           |
| .590                     | 1.138           |
| .627                     | 1.256           |
| .682                     | 1.365           |
| .756                     | 1.461           |
| .795                     | 1.502           |
| .846                     | 1.544           |
| .947                     | 1.614           |
| .954                     | 1.615           |
| 1.056                    | 1.671           |
| 1.098                    | 1.690           |
| 1.170                    | 1.718           |
| 1.272                    | 1.752           |

STATION 18.00

X = 24.62

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| .655                     | 0.000           |
| .666                     | .099            |
| .676                     | .198            |
| .687                     | .297            |
| .698                     | .396            |
| .709                     | .496            |
| .720                     | .598            |
| .731                     | .702            |
| .743                     | .809            |
| .758                     | .919            |
| .777                     | 1.030           |
| .795                     | 1.105           |
| .806                     | 1.139           |
| .849                     | 1.244           |
| .906                     | 1.340           |
| .954                     | 1.396           |
| .979                     | 1.425           |
| 1.063                    | 1.490           |
| 1.098                    | 1.522           |
| 1.158                    | 1.558           |
| 1.259                    | 1.608           |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

1.272 1.613

STATION 19.00

X = 25.99

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| .874                     | 0.000           |
| .884                     | .088            |
| .893                     | .175            |
| .901                     | .263            |
| .911                     | .351            |
| .920                     | .440            |
| .930                     | .530            |
| .940                     | .622            |
| .950                     | .717            |
| .954                     | .750            |
| .962                     | .814            |
| .978                     | .914            |
| .998                     | 1.015           |
| 1.028                    | 1.113           |
| 1.070                    | 1.207           |
| 1.098                    | 1.255           |
| 1.125                    | 1.293           |
| 1.191                    | 1.370           |
| 1.270                    | 1.433           |
| 1.272                    | 1.437           |

STATION 20.00

X = 27.36

| HEIGHT ABOVE<br>BASELINE | HALF<br>BREADTH |
|--------------------------|-----------------|
| 1.099                    | 0.000           |
| 1.107                    | .076            |
| 1.116                    | .152            |
| 1.124                    | .228            |
| 1.132                    | .304            |
| 1.140                    | .381            |
| 1.149                    | .459            |
| 1.157                    | .539            |
| 1.165                    | .621            |
| 1.174                    | .706            |
| 1.185                    | .794            |
| 1.199                    | .885            |
| 1.218                    | .976            |
| 1.244                    | 1.066           |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

BOW  
PROFILE

| HEIGHT ABOVE<br>BASELINE | LONGITUDINAL<br>DISTANCE |
|--------------------------|--------------------------|
| 0.000                    | 1.113                    |
| .080                     | .781                     |
| .159                     | .659                     |
| .239                     | .573                     |
| .318                     | .499                     |
| .477                     | .381                     |
| .636                     | .281                     |
| .795                     | .184                     |
| .954                     | .088                     |
| 1.098                    | 0.000                    |
| 1.272                    | -.114                    |
| 1.432                    | -.226                    |
| 1.591                    | -.346                    |
| 1.750                    | -.474                    |
| 1.909                    | -.611                    |
| 2.068                    | -.756                    |
| 2.227                    | -.908                    |
| 2.386                    | -1.069                   |
| 2.561                    | -1.272                   |

STERN  
PROFILE

| HEIGHT ABOVE<br>BASELINE | LONGITUDINAL<br>DISTANCE |
|--------------------------|--------------------------|
| .114                     | 20.519                   |
| .270                     | 21.886                   |
| .453                     | 23.254                   |
| .655                     | 24.622                   |
| .874                     | 25.990                   |
| 1.099                    | 27.358                   |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

EXAMPLE RUN FOR PROGRAM HYDRO

| DRAFTS            |                |              |                |              |
|-------------------|----------------|--------------|----------------|--------------|
| MIDSHIPS<br>DRAFT | FWD<br>STATION | FWD<br>DRAFT | AFT<br>STATION | AFT<br>DRAFT |
| 1.10              | 0.00           | 1.10         | 19.00          | 1.10         |

|                               |   |          |
|-------------------------------|---|----------|
| VOLUME                        | = | 69.788   |
| DISPLACEMENT                  | = | 4354.798 |
| WATERPLANE<br>AREA            | = | 82.427   |
| WETTED<br>SURFACE<br>COMPUTED | = | 116.299  |
| WATERLINE<br>LENGTH           | = | 27.352   |
| STATION<br>AT AX              | = | 10.00    |

| X      | BEAM  | GIRTH | AREA  |
|--------|-------|-------|-------|
| 0.000  | .016  | .288  | .001  |
| .684   | .203  | 2.024 | .144  |
| 1.368  | .407  | 2.331 | .314  |
| 2.052  | .642  | 2.415 | .508  |
| 2.736  | .910  | 2.544 | .735  |
| 3.420  | 1.226 | 2.730 | .992  |
| 4.104  | 1.591 | 2.975 | 1.290 |
| 5.472  | 2.325 | 3.548 | 1.974 |
| 6.840  | 2.959 | 4.146 | 2.641 |
| 8.207  | 3.479 | 4.685 | 3.230 |
| 9.575  | 3.825 | 5.110 | 3.687 |
| 10.943 | 3.993 | 5.418 | 3.939 |
| 12.311 | 4.008 | 5.616 | 4.156 |
| 13.679 | 4.008 | 5.689 | 4.201 |
| 15.047 | 4.008 | 5.660 | 4.185 |
| 16.415 | 4.008 | 5.567 | 4.127 |
| 17.783 | 4.000 | 5.420 | 4.007 |
| 19.151 | 3.920 | 5.161 | 3.658 |
| 20.519 | 3.797 | 4.803 | 3.097 |
| 21.886 | 3.624 | 4.367 | 2.439 |
| 23.254 | 3.380 | 3.869 | 1.764 |
| 24.622 | 3.046 | 3.284 | 1.102 |
| 25.990 | 2.512 | 2.569 | .370  |
| 27.358 | 0.000 | 0.000 | 0.000 |

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

SHIP AND MODEL DATA  
MODEL 9876

EXAMPLE RUN FOR PROGRAM HYDRO  
DESCRIPTION

| DESCRIPTION                | S H I P  |         | M O D E L |        |                        |
|----------------------------|----------|---------|-----------|--------|------------------------|
|                            | ENG.     | METRIC  | ENG.      | METRIC |                        |
| WL LENGTH (LWL) FT M       | 860.0    | 262.1   | 27.36     | 8.34   | LINEAR RATIO = 31.435  |
| LENGTH BP (LPP) FT M       | 860.0    | 262.1   | 27.36     | 8.34   | V SQRT(LWL) = .887     |
| BEAM AT AX (BX) FT M       | 126.0    | 38.4    | 4.01      | 1.22   | FROUDE NO. = .264      |
| DRAFT AT AX (TX) FT M      | 34.5     | 10.5    | 1.10      | .33    | CIRCLE K = 2.410       |
| DISPLACEMENT(DIS)TON TONNE | 62104SW  | 63100SW | 1.94FW    | 1.98FW | XFB/LWL = .515         |
| LBS                        |          |         | 4354.8    |        | XFB/LPP = .515         |
| WETTED SURF.(S)SQ FT M SQ  | 114922.0 | 10676.6 | 116.30    | 10.80  | XFF/LWL = .574         |
| DESIGN SPEED(V) KTS M/S    | 26.0     | 13.4    | 4.64      | 2.39   | 1/2 ENT.ANGLE= 3.3 DEG |
|                            |          |         |           |        | 1/2 ENT.ANGLE= .058RAD |

LWL COEFFICIENTS

LPP COEFFICIENTS

|            |            |              |               |                |
|------------|------------|--------------|---------------|----------------|
| CB = .580  | CPE = .57  | LE/L = .50   | D-L = 97.64   | CB = .580      |
| CP = .607  | CPR = .64  | LP/L = 0.00  | CVOL= 3.41E-3 | CP = .607      |
| CX = .954  | CVP = .77  | LR/L = .50   | CWS = 15.73   | L/BX = 6.83    |
| CWP = .752 | CVPA = .71 | L/BX = 6.83  | CS = 2.66     | D-L = 97.64    |
| CFF = .57  | CVPF = .86 | BX/TX = 3.65 | FTE = .02     | CVOL = 3.41E-3 |
| CPA = .64  | CWPF = .64 |              | TTE = .68     |                |
|            | CWPA = .87 |              |               |                |

FWD STATIONS

|      |      |      |      |      |      |      |      |      |      |      |      |       |       |
|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|
| 0.00 | .50  | 1.00 | 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 | 6.00 | 7.00 | 8.00 | 9.00  | 10.00 |
| A AX |      |      |      |      |      |      |      |      |      |      |      |       |       |
| .000 | .034 | .075 | .121 | .175 | .236 | .307 | .470 | .629 | .769 | .878 | .952 | .989  | 1.000 |
| B BX |      |      |      |      |      |      |      |      |      |      |      |       |       |
| .004 | .051 | .102 | .160 | .227 | .306 | .397 | .580 | .738 | .868 | .954 | .996 | 1.000 | 1.000 |

AFT STATIONS

|       |       |       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 11.00 | 12.00 | 13.00 | 14.00 | 15.00 | 16.00 | 17.00 | 18.00 | 19.00 | 20.00 |
| A AX  |       |       |       |       |       |       |       |       |       |
| .996  | .982  | .954  | .871  | .737  | .581  | .420  | .262  | .088  | 0.000 |
| B/BX  |       |       |       |       |       |       |       |       |       |
| 1.000 | 1.000 | .998  | .978  | .947  | .904  | .843  | .760  | .627  | 0.000 |

THE SHIP DISPLACEMENT IS CALCULATED FOR SALT WATER AT 59 DEGREES F (15 DEGREES C)  
THE MODEL DISPLACEMENT IS CALCULATED FOR FRESH WATER AT 73 DEGREES F (22.8 DEGREES C)

Table 4 - Sample Output for Program HYDRO with Output Tables  
in English and SI Units (Cont)

| SHIP AND MODEL DATA<br>MODEL 9876 |                  |                 |                |                 |  |             |  |                |         |
|-----------------------------------|------------------|-----------------|----------------|-----------------|--|-------------|--|----------------|---------|
| EXAMPLE RUN FOR PROGRAM HYDRO     |                  |                 |                |                 |  |             |  |                |         |
| DESCRIPTION                       |                  | S H I P         |                |                 |  | M O D E L   |  |                |         |
|                                   |                  | ENG. METRIC     |                | ENG. METRIC     |  | ENG. METRIC |  |                |         |
| WL LENGTH (LWL) FT                | M                |                 |                |                 |  |             |  | LINEAR RATIO = | 31.435  |
| LENGTH BP (LPP) FT                | M                |                 |                |                 |  |             |  | V/SQRT(LWL) =  | .887    |
| BEAM AT AX (BX) FT                | M                |                 |                |                 |  |             |  | FROUDE NO. =   | .264    |
| DRAFT AT AX (TX) FT               | M                |                 |                |                 |  |             |  | CIRCLE K =     | 2.410   |
| DISPLACEMENT(DIS)TON              | TONNE            |                 |                |                 |  |             |  | XFB/LWL =      | .515    |
|                                   | LBS              |                 |                |                 |  |             |  | XFB/LPP =      | .515    |
| WETTED SURF.(S)SQ FT              | M SQ             |                 |                |                 |  |             |  | XFF/LWL =      | .574    |
| DESIGN SPEED(V) KTS               | M/S              |                 |                |                 |  |             |  | 1/2 ENT.ANGLE= | 3.3 DEG |
|                                   |                  |                 |                |                 |  |             |  | 1/2 ENT.ANGLE= | .058RAD |
| LWL COEFFICIENTS                  |                  |                 |                |                 |  |             |  |                |         |
| CB = .580                         | CPE = .575       | LE/L = .500     | D-L = 97.640   | CB = .580       |  |             |  |                |         |
| CP = .607                         | CPR = .640       | LP/L = 0.000    | CVOL= 3.408E-3 | CP = .607       |  |             |  |                |         |
| CX = .954                         | CVP = .771       | LR/L = .500     | CWS = 15.725   | L/BX = 6.825    |  |             |  |                |         |
| CWP = .752                        | CVPA = .706      | L/BX = 6.825    | CS = 2.662     | D-L = 97.640    |  |             |  |                |         |
| CPF = .575                        | CVPF = .860      | BX/TX = 3.651   | FTE = .017     | CVOL = 3.408E-3 |  |             |  |                |         |
| CPA = .640                        | CWPF = .638      |                 | TTE = .685     |                 |  |             |  |                |         |
|                                   | CWPA = .865      |                 |                |                 |  |             |  |                |         |
| ITTC COEFFICIENTS                 |                  |                 |                |                 |  |             |  |                |         |
| CM = .954                         | CIRCLE M = 6.645 | CIRCLE B = .974 |                |                 |  |             |  |                |         |
| CIRCLE T = .267                   | CIRCLE S = 6.861 |                 |                |                 |  |             |  |                |         |
|                                   | STATION          | A/AX            | B/BX           |                 |  |             |  |                |         |
|                                   | 0.00             | .000            | .004           |                 |  |             |  |                |         |
|                                   | .50              | .034            | .051           |                 |  |             |  |                |         |
|                                   | 1.00             | .075            | .102           |                 |  |             |  |                |         |
|                                   | 1.50             | .121            | .160           |                 |  |             |  |                |         |
|                                   | 2.00             | .175            | .227           |                 |  |             |  |                |         |
|                                   | 2.50             | .236            | .306           |                 |  |             |  |                |         |
|                                   | 3.00             | .307            | .397           |                 |  |             |  |                |         |
|                                   | 4.00             | .470            | .580           |                 |  |             |  |                |         |
|                                   | 5.00             | .629            | .738           |                 |  |             |  |                |         |
|                                   | 6.00             | .769            | .868           |                 |  |             |  |                |         |
|                                   | 7.00             | .878            | .954           |                 |  |             |  |                |         |
|                                   | 8.00             | .952            | .996           |                 |  |             |  |                |         |
|                                   | 9.00             | .989            | 1.000          |                 |  |             |  |                |         |
|                                   | 10.00            | 1.000           | 1.000          |                 |  |             |  |                |         |
|                                   | 11.00            | .996            | 1.000          |                 |  |             |  |                |         |
|                                   | 12.00            | .982            | 1.000          |                 |  |             |  |                |         |
|                                   | 13.00            | .954            | .998           |                 |  |             |  |                |         |
|                                   | 14.00            | .871            | .978           |                 |  |             |  |                |         |
|                                   | 15.00            | .737            | .947           |                 |  |             |  |                |         |
|                                   | 16.00            | .581            | .904           |                 |  |             |  |                |         |
|                                   | 17.00            | .420            | .843           |                 |  |             |  |                |         |
|                                   | 18.00            | .262            | .760           |                 |  |             |  |                |         |
|                                   | 19.00            | .088            | .627           |                 |  |             |  |                |         |
|                                   | 20.00            | 0.000           | 0.000          |                 |  |             |  |                |         |

THE SHIP DISPLACEMENT IS CALCULATED FOR SALT WATER AT 59 DEGREES F (15 DEGREES C)  
THE MODEL DISPLACEMENT IS CALCULATED FOR FRESH WATER AT 73 DEGREES F (22.8 DEGREES C)

Table 5 - Sample Output Tables for Program HYDRO in English Units

SHIP AND MODEL DATA  
MODEL 9876

EXAMPLE RUN FOR PROGRAM HYDRO

|                        | SHIP      | MODEL  |                          |
|------------------------|-----------|--------|--------------------------|
| WL LENGTH (LWL) FT     | 860.0     | 27.36  | LINEAR RATIO = 31.45     |
| LENGTH BP (LPP) FT     | 860.0     | 27.36  | V. SCRT. LWL = 4.7       |
| BEAM AT AX (BX) FT     | 126.0     | 4.01   | CIRCLE K = 2.410         |
| DRAFT AT AX (TX) FT    | 34.5      | 1.10   | CIRCLE P = 1.819         |
| DISPLACEMENT(DIS) TONS | 62104. SW | 1.94FW | XFB LWL = .515           |
|                        | LBS       | 4354.8 | XFB/LPP = .515           |
| WETTED SURF. (S) SQ FT | 114922.   | 116.30 | XFF, LWL = .574          |
| DESIGN SPEED (V) KTS   | 26.0      | 4.64   | 1/2 ENT. ANGLE = 3.3 DEG |

LWL COEFFICIENTS

|            |            |              |
|------------|------------|--------------|
| CB = .580  | CPE = .57  | LE L = .50   |
| CP = .60   | CPR = .64  | LP L = 0.00  |
| CX = .954  | CVP = .77  | LR/L = .50   |
| CWP = .752 | CVPA = .71 | L/BX = 6.83  |
| CPF = .57  | CVPF = .86 | BX/TX = 3.65 |
| CPA = .64  | CWPF = .64 | D-L = 97.64  |
|            | CWPA = .87 | CWS = 15.73  |

LPP COEFFICIENTS

|             |
|-------------|
| CB = .580   |
| CP = .607   |
| L/BX = 6.83 |
| D-L = 97.64 |
| FTE = .02   |
| TTE = .68   |

FWD STATIONS

|      |      |      |      |      |      |      |      |      |      |      |      |       |       |
|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|
| 0.00 | .50  | 1.00 | 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 | 6.00 | 7.00 | 8.00 | 9.00  | 10.00 |
| A/AX |      |      |      |      |      |      |      |      |      |      |      |       |       |
| .000 | .034 | .075 | .121 | .175 | .236 | .307 | .470 | .629 | .769 | .878 | .952 | .989  | 1.000 |
| B/BX |      |      |      |      |      |      |      |      |      |      |      |       |       |
| .004 | .051 | .102 | .160 | .227 | .306 | .397 | .580 | .738 | .868 | .954 | .996 | 1.000 | 1.000 |

AFT STATIONS

|       |       |       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 11.00 | 12.00 | 13.00 | 14.00 | 15.00 | 16.00 | 17.00 | 18.00 | 19.00 | 20.00 |
| A/AX  |       |       |       |       |       |       |       |       |       |
| .996  | .982  | .954  | .871  | .737  | .581  | .420  | .262  | .088  | 0.000 |
| B/BX  |       |       |       |       |       |       |       |       |       |
| 1.000 | 1.000 | .998  | .978  | .947  | .904  | .843  | .760  | .627  | 0.000 |

THE SHIP DISPLACEMENT IS CALCULATED FOR SALT WATER AT 59 DEGREES F (15 DEGREES C)  
THE MODEL DISPLACEMENT IS CALCULATED FOR FRESH WATER AT 73 DEGREES F (22.8 DEGREES C)



Table 5 - Sample Output Tables for Program HYDRO in  
English Units (Continued)

SHIP AND MODEL DATA  
MODEL 9876

EXAMPLE RUN FOR PROGRAM HYDRO

|                         | SHIP      | MODEL   |                          |
|-------------------------|-----------|---------|--------------------------|
| WL LENGTH (LWL) FT      | 860.0     | 27.358  | LINEAR RATIO = 31.435    |
| LENGTH BP (LPP) FT      | 860.0     | 27.358  | V/SQRT(LWL) = .887       |
| BEAM AT AX (BX) FT      | 126.0     | 4.008   | CIRCLE K = 2.410         |
| DRAFT AT AX (TX) FT     | 34.5      | 1.098   | CIRCLE P = .849          |
| DISPLACEMENT (DIS) TONS | 62104. SW | 1.944FW | XFB LWL = .515           |
|                         | LBS       | 4354.8  | XFB LPP = .515           |
| WETTED SURF. (SISQ) FT  | 114922.   | 116.299 | XFF LWL = .574           |
| DESIGN SPEED (V) KTS    | 26.0      | 4.637   | 1/2 ENT. ANGLE = 3.3 DEG |

| LWL COEFFICIENTS |             |               | LPP COEFFICIENTS |                  | ITTC COEFFICIENTS |  |
|------------------|-------------|---------------|------------------|------------------|-------------------|--|
| CB = .580        | CPE = .575  | LE/L = .500   | CB = .580        | CM = .954        |                   |  |
| CP = .607        | CPR = .640  | LP/L = 0.000  | CP = .607        | CIRCLE M = 6.645 |                   |  |
| CX = .954        | CVP = .771  | LR/L = .500   | L/BX = 6.825     | CIRCLE B = .974  |                   |  |
| CWP = .752       | CVPA = .706 | L/BX = 6.825  | D-I = 97.64      | CIRCLE T = .267  |                   |  |
| CPF = .575       | CVPF = .860 | BX/TX = 3.651 |                  | CIRCLE S = 6.861 |                   |  |
| CPA = .640       | CWPF = .638 | D-L = 97.64   | FTE = .02        |                  |                   |  |
|                  | CWPA = .865 | CWS = 15.73   | TTE = .68        |                  |                   |  |
|                  |             | STATION       |                  | B/BX             |                   |  |
|                  |             | 0.00          |                  | .004             |                   |  |
|                  |             | .50           |                  | .051             |                   |  |
|                  |             | 1.00          |                  | .102             |                   |  |
|                  |             | 1.50          |                  | .160             |                   |  |
|                  |             | 2.00          |                  | .227             |                   |  |
|                  |             | 2.50          |                  | .306             |                   |  |
|                  |             | 3.00          |                  | .397             |                   |  |
|                  |             | 4.00          |                  | .580             |                   |  |
|                  |             | 5.00          |                  | .738             |                   |  |
|                  |             | 6.00          |                  | .868             |                   |  |
|                  |             | 7.00          |                  | .954             |                   |  |
|                  |             | 8.00          |                  | .996             |                   |  |
|                  |             | 9.00          |                  | 1.000            |                   |  |
|                  |             | 10.00         |                  | 1.000            |                   |  |
|                  |             | 11.00         |                  | 1.000            |                   |  |
|                  |             | 12.00         |                  | 1.000            |                   |  |
|                  |             | 13.00         |                  | .998             |                   |  |
|                  |             | 14.00         |                  | .978             |                   |  |
|                  |             | 15.00         |                  | .947             |                   |  |
|                  |             | 16.00         |                  | .904             |                   |  |
|                  |             | 17.00         |                  | .843             |                   |  |
|                  |             | 18.00         |                  | .760             |                   |  |
|                  |             | 19.00         |                  | .627             |                   |  |
|                  |             | 20.00         |                  | 0.000            |                   |  |

THE SHIP DISPLACEMENT IS CALCULATED FOR SALT WATER AT 59 DEGREES F (15 DEGREES C)  
THE MODEL DISPLACEMENT IS CALCULATED FOR FRESH WATER AT 73 DEGREES F (22.8 DEGREES C)

Table 6 - Sample Output Tables for Program HYDRO in SI Units

SHIP AND MODEL DATA  
MODEL 9876

EXAMPLE RUN FOR PROGRAM HYDRO

|                         | SHIP       | MODEL   |                           |
|-------------------------|------------|---------|---------------------------|
| WL LENGTH (LWL) M       | 860.0      | 27.36   | LINEAR RATIO = 31.435     |
| LENGTH BP (LPP) M       | 860.0      | 27.36   | FROUDE NO. = .283         |
| BEAM AT AX (BX) M       | 126.0      | 4.01    | CIRCLE K = 2.587          |
| DRAFT AT AX (TX) M      | 34.5       | 1.10    | XFB/LWL = .515            |
| DISPLACEMENT(DIS) TONNE | 2223882 SW | 69.62FW | XFB/LPP = .515            |
| WETTED SURF. (S) M SQ   | 114922.    | 116.30  | XFF/LWL = .574            |
| DESIGN SPEED (V) M/S    | 26.0       | 4.64    | 1/2 ENT. ANGLE = 0.000RAD |

LWL COEFFICIENTS

|            |            |                |
|------------|------------|----------------|
| CB = .580  | CPE = .57  | LE/L = .50     |
| CP = .607  | CPR = .64  | LP/L = 0.00    |
| CX = .954  | CVP = .77  | LR/L = .50     |
| CWP = .752 | CVPA = .71 | L/BX = 6.83    |
| CPF = .57  | CVPF = .86 | BX/TX = 3.65   |
| CPA = .64  | CWPF = .64 | CVOL = 3.41E-3 |
|            | CWPA = .87 | CS = 2.66      |

LPP COEFFICIENTS

|                |
|----------------|
| CB = .580      |
| CP = .607      |
| L/BX = 6.83    |
| CVOL = 3.41E-3 |
| FTE = .02      |
| TTE = .68      |

\*\*\*\*\*

FWD STATIONS

|      |      |      |      |      |      |      |      |      |      |      |      |       |       |
|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|
| 0.00 | .50  | 1.00 | 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 | 6.00 | 7.00 | 8.00 | 9.00  | 10.00 |
| A/AX |      |      |      |      |      |      |      |      |      |      |      |       |       |
| .000 | .034 | .075 | .121 | .175 | .236 | .307 | .470 | .629 | .769 | .878 | .952 | .989  | 1.000 |
| B/BX |      |      |      |      |      |      |      |      |      |      |      |       |       |
| .004 | .051 | .102 | .160 | .227 | .306 | .397 | .580 | .738 | .868 | .954 | .996 | 1.000 | 1.000 |

\*\*\*\*\*

AFT STATIONS

|       |       |       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 11.00 | 12.00 | 13.00 | 14.00 | 15.00 | 16.00 | 17.00 | 18.00 | 19.00 | 20.00 |
| A/AX  |       |       |       |       |       |       |       |       |       |
| .996  | .982  | .954  | .871  | .737  | .581  | .420  | .262  | .088  | 0.000 |
| B/BX  |       |       |       |       |       |       |       |       |       |
| 1.000 | 1.000 | .998  | .978  | .947  | .904  | .843  | .760  | .627  | 0.000 |

THE SHIP DISPLACEMENT IS CALCULATED FOR SALT WATER AT 59 DEGREES F (15 DEGREES C)  
THE MODEL DISPLACEMENT IS CALCULATED FOR FRESH WATER AT 73 DEGREES F (22.8 DEGREES C)

Table 6 - Sample Output Tables for Program HYDRO  
in SI Units (Continued)

SHIP AND MODEL DATA  
MODEL 9876

EXAMPLE RUN FOR PROGRAM HYDRO

|                          | SHIP       | MODEL    |                           |
|--------------------------|------------|----------|---------------------------|
| WL LENGTH (LWL) M        | 860.0      | 27.358   | LINEAR RATIO = 31.435     |
| LENGTH BP (LPP) M        | 860.0      | 27.358   | FROUDE NO. = .243         |
| BEAM AT AX (BX) M        | 126.0      | 4.008    | CIRCLE K = 2.547          |
| DRAFT AT AX (TX) M       | 34.5       | 1.098    | XFB/LWL = .515            |
| DISPLACEMENT (DIS) TONNE | 2223882 SW | 69.616FW | XFB/LPP = .515            |
| WETTED SURF. (S) M SQ    | 114922.    | 116.299  | XFF/LWL = .574            |
| DESIGN SPEED (V) M/S     | 26.0       | 4.637    | 1/2 ENT. ANGLE = 0.000RAD |

LWL COEFFICIENTS

|            |             |                 |
|------------|-------------|-----------------|
| CB = .580  | CPE = .575  | LE/L = .500     |
| CP = .607  | CPR = .640  | LP/L = 0.000    |
| CX = .954  | CVP = .771  | LR/L = .500     |
| CWP = .752 | CVPA = .706 | L/BX = 6.825    |
| CPF = .575 | CVPF = .860 | BX/TX = 3.651   |
| CPA = .640 | CWPF = .638 | CVOL = 3.408E-3 |
|            | CWPA = .865 | CS = 2.662      |

LPP COEFFICIENTS

|                 |
|-----------------|
| CB = .540       |
| CP = .607       |
| L/BX = 6.825    |
| CVOL = 3.408E-3 |
| FTE = .017      |
| TTE = .685      |

ITTC COEFFICIENTS

|                 |                  |                 |
|-----------------|------------------|-----------------|
| CM = .954       | CIRCLE M = 6.645 | CIRCLE B = .974 |
| CIRCLE T = .267 | CIRCLE S = 6.861 |                 |
| STATION         | A/AX             | B/BX            |
| 0.00            | .000             | .004            |
| .50             | .034             | .051            |
| 1.00            | .075             | .102            |
| 1.50            | .121             | .160            |
| 2.00            | .175             | .227            |
| 2.50            | .236             | .306            |
| 3.00            | .307             | .397            |
| 4.00            | .470             | .580            |
| 5.00            | .629             | .738            |
| 6.00            | .769             | .868            |
| 7.00            | .878             | .954            |
| 8.00            | .952             | .996            |
| 9.00            | .989             | 1.000           |
| 10.00           | 1.000            | 1.000           |
| 11.00           | .996             | 1.000           |
| 12.00           | .982             | 1.000           |
| 13.00           | .954             | .998            |
| 14.00           | .871             | .978            |
| 15.00           | .737             | .947            |
| 16.00           | .581             | .904            |
| 17.00           | .420             | .843            |
| 18.00           | .262             | .760            |
| 19.00           | .088             | .627            |
| 20.00           | 0.000            | 0.000           |

THE SHIP DISPLACEMENT IS CALCULATED FOR SALT WATER AT 59 DEGREES F (15 DEGREES C)  
THE MODEL DISPLACEMENT IS CALCULATED FOR FRESH WATER AT 73 DEGREES F (22.8 DEGREES C)

## APPENDIX A

### DETAILED DESCRIPTIONS OF THE SUBROUTINES AND COMMON BLOCKS

PROGRAM HYDRO

Purpose: To perform a series of hydrostatic calculations on  
a given model,

Calling Sequence

MAIN PROGRAM

Common Blocks

ADVOL, CONST, FANDT, STOW

Subroutines Called

APPEND, FTCALC, GIRTH, INPUT, MAX, OUTPUT, SINTEG,  
SPLNT2, SPPLY2

## SUBROUTINE APPEND

Purpose: To calculate the waterline intersection with the bow or stern profiles.

### Calling Sequence

APPEND (X,Y,N,X1, DRAFT, ND, POINT)

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                                         |
|-----------------|-------------|------------------|------------|----------------------------------------------------------------------------|
| DRAFT           | Real        | -----            | Input      | Drafts of Ship                                                             |
| N               | Integer     | -----            | Input      | Number of points in the bow or stern profile                               |
| ND              | Integer     | -----            | Input      | Number of drafts                                                           |
| POINT           | Real        | (7)              | Output     | Longitudinal distance to profile waterline intersection                    |
| X               | Real        | -----            | Input      | Longitudinal profile offset                                                |
| X1              | Real        | -----            | Output     | Longitudinal distance to furthest forward underwater projection (bow only) |
| Y               | Real        | -----            | Input      | Vertical profile offset                                                    |

### Common Blocks

None.

### Subprograms Called.

SPLNT2 , SPPLY 2

### Detailed Description

This subroutine calculates the intersection of the bow or stern profile with the waterline(s). Also, a check is made to find the furthest forward underwater projection (i.e., a bulbous bow). These values are used as endpoints on the sectional area curves.

# SUBROUTINE CUBCO2

Purpose: To calculate the coefficients of  
a parametric spline using endpoint-  
tangent information from SPLNT2.

## Calling Sequence

Call CUBCO2 (SEG,CC)

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                            |
|-----------------|-------------|------------------|------------|---------------------------------------------------------------|
| SEG             | Real        | (8,1)            | Input      | Array containing<br>endpoint-tangent<br>form data from SPLNT2 |
| CC              | Real        | (14)             | Output     | Polynomial coefficients<br>of the parametric spline           |

## Subroutines called

None

## Common Blocks

None

# SUBROUTINE FTCALC

Purpose: To calculate Taylors' f and t  
and the half angle of entrance.

## Calling Sequence

FTCALC (PSEG, SEG, AX, N, BOWPT, XM)

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                                |
|-----------------|-------------|------------------|------------|-------------------------------------------------------------------|
| AX              | Real        | -----            | Input      | Maximum Sectional area                                            |
| N               | Integer     | -----            | Input      | Number of stations                                                |
| BOWPT           | Real        | -----            | Input      | Intersection of water-<br>line and bow                            |
| PSEG            | Real        | (8,N)            | Input      | Parametric spline<br>information for the<br>sectional area curve  |
| SEG             | Real        | (8,N)            | Input      | Parametric spline<br>information for the<br>waterplane area curve |
| XM              | Real        | -----            | Input      | Distance from FP<br>to midships                                   |

## Common Blocks

FANDT

## Subroutines Called

CUBCO2, SPPLY2

## Detailed Description

Subroutine FTCALC calculates Taylors' f and t, and the half angle of entrance if the input variable ICALC is not zero. This subroutine may not give correct answers if the bow has an unusual shape.



## SUBROUTINE GIRTH

Purpose: To calculate the wetted surface.

### Calling Sequence

GIRTH (SEG, NS, TE, N, SPAN)

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                                  |
|-----------------|-------------|------------------|------------|---------------------------------------------------------------------|
| SEG             | Real        | (8,40)           | Input      | Array containing the spline information                             |
| NS              | Integer     | -----            | Input      | Array containing the number of segments to integrate for each draft |
| TE              | Real        | -----            | Input      | Array containing the t value for the last segment for each draft    |
| N               | Integer     | -----            | Input      | Number of drafts                                                    |
| SPAN            | Integer     | -----            | Output     | Array containing the girth values                                   |

### Common Blocks

None

### Subprograms Called

CUBCO2, SIMSON

### Detailed Description

Finds the wetted perimeter of each station for multiple drafts. It interpolates points using the parametric spline data, and then calculates the segment lengths by using simpsons rule to solve the integral equations.

## SUBROUTINE INPUT

Purpose: To read in the data

Calling sequence

Call INPUT

Common Blocks

ADVOL, CONST, FANDT, STOW

Subroutines Called

None

Detailed description

This subroutine reads in all of the data, and scales the model offsets.

# SUBROUTINE MAX

Purpose: To find the station with the maximum sectional area.

Calling Sequence  
MAX (SEG, NPT, YVAL, XVAL)

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                        |
|-----------------|-------------|------------------|------------|-----------------------------------------------------------|
| NPT             | Integer     | -----            | Input      | Number of points in array                                 |
| SEG             | Real        | (8,NPT)          | Input      | Parametric spline information of the sectional area curve |
| YVAL            | Real        | -----            | Output     | Maximum sectional area                                    |
| XVAL            | Real        | -----            | Output     | Longitudinal position of the maximum sectional area value |

Common Blocks  
None

Subroutines called  
CUBCO2

# SUBROUTINE OUTPUT

Purpose: To write out the results of the hydrostatic analysis on a ship model.

## Calling Sequence

Call Output (VOL, S, WP, AX, BX, TX, AM, BM, TM,  
TMF, TMA, STA, BEAMS, SECAR, XPT, XFB, XFF)

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                                                                                                              |
|-----------------|-------------|------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| AM              | REAL        | -----            | Input      | Sectional area at midships                                                                                                                      |
| AX              | REAL        | -----            | Input      | Maximum sectional area                                                                                                                          |
| BEAMS           | REAL        | (40)             | Input      | Waterline beam offsets                                                                                                                          |
| BM              | REAL        | -----            | Input      | Beam at midships                                                                                                                                |
| BX              | REAL        | -----            | Input      | Beam at the station with the maximum sectional area                                                                                             |
| TM              | REAL        | -----            | Input      | Draft at midships                                                                                                                               |
| TMF             | REAL        | -----            | Input      | Draft at 0.25 LWL                                                                                                                               |
| TMA             | REAL        | -----            | Input      | Draft at 0.75 LWL                                                                                                                               |
| TX              | REAL        | -----            | Input      | Draft at the station with the maximum sectional area                                                                                            |
| VOL             | REAL        | (3)              | Input      | VOL (1)-Volume forward of amidships<br>VOL (2)-Volume aft of amidships<br>VOL (3)-Volume forward of the station with the maximum sectional area |

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                                                   |
|-----------------|-------------|------------------|------------|--------------------------------------------------------------------------------------|
| SECAR           | Real        | (40)             | Input      | The station sectional areas                                                          |
| WP              | Real        | (2)              | Input      | WP (1)-Waterplane area forward of midships<br>WP (2)-Waterplane area aft of midships |
| S               | Real        | -----            | Input      | Wetted surface                                                                       |
| XFB             | Real        | -----            | Input      | Distance from the FP to the LCB                                                      |
| XFF             | Real        | -----            | Input      | Distance from the FP to the LCF                                                      |
| XPT             | Real        | -----            | Input      | Distance from the FP to the station of maximum sectional area                        |
| STA             | Real        | (40)             | Input      | Stations distance from FP                                                            |

#### Common Blocks

ADVOL, CONST, FANDT

#### Subroutines Called

None

#### Detailed description

The results of the hydrostatic analysis are printed in English and/or metric units depending on the value of the variable "MET". Both ship and model scale data are presented, and the water densities are assumed to be 62.4 lbs/ft<sup>3</sup> for the model, and 64.17 lbs/ft<sup>3</sup> for the ship.

# SUBROUTINE SIMSON

Purpose: To integrate using Simpsons rule.

## Calling Sequence

SIMSON (DIST, VEC, N, VAL)

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>           |
|-----------------|-------------|------------------|------------|------------------------------|
| DIST            | Real        | -----            | Input      | Interval distance            |
| VEC             | Real        | (N)              | Input      | Array of values to integrate |
| N               | Integer     | -----            | Input      | Number of elements in VEC    |
| VAL             | Real        | -----            | Output     | Value of the integral        |

## Subroutines Called

None

## Common Blocks

None

# SUBROUTINE SINTEG

Purpose: To integrate a parametrically defined curve.

## Calling Sequence

SINTEG (SEG, NS, TE, N AREA)

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                                                     |
|-----------------|-------------|------------------|------------|----------------------------------------------------------------------------------------|
| SEG             | Real        | (8,1)            | Input      | Array containing the parametric spline information.                                    |
| N               | Integer     | -----            | Input      | Number of integrations to perform                                                      |
| NS              | Integer     | (N)              | Input      | Array containing the last segment to integrate to for each integration.                |
| TE              | Real        | (N)              | Input      | Array containing the t value for the last segment to integrate to for each integration |
| AREA            | Real        | (N)              | Output     | Array containing the results of the integration                                        |

## Subroutines Called

CUBCO2

## Common Blocks

None

## Detailed description

This subroutine evaluates the Integral  $\int_0^{y_1} f dy$  where  $f = f(x(t), y(t))$ , a series of parametric splines.

## SUBROUTINE SPLNT2

Purpose: To fit cubic parametric splines segments through a set of data points.

### Calling Sequences

Call SPLNT (SEGS, P, NP, NDI, ENDI)

| <u>VARIABLES</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                                                                                                                                                    |
|------------------|-------------|------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| P                | Real        | (2,NP)           | Input      | Array of (x,y) points                                                                                                                                                                 |
| NP               | Integer     | -----            | Input      | Number of points                                                                                                                                                                      |
| NDI              | Integer     | (2)              | Input      | Indicates whether slope at first or last point is specified<br>NDI (1)>1 slope at first point is specified<br>NDI (2)>1 slope at last point is specified                              |
| ENDI             | Real        | (2,2)            | Input      | Slope at first or last point (if NDI>1)<br>ENDI (2,1)- DX/DT at first point<br>ENDI (2,1)- DY/DT at first point<br>ENDI (1,2)- DX/DT at last point<br>ENDI (2,2)- DY/DT at last point |
| SEGS             | Real        | (8,NP-1)         | Output     | Array containing the parametric spline information in endpoint tangent form                                                                                                           |

### Common Blocks

None

### Subroutines Called

None

### Detailed Description

The subroutine returns the spine information in endpoint-tangent form. It can be changed to a polynomial coefficient form by using subroutine CUBCO2.



# SUBROUTINE SPPLY2

Purpose: To find the intersection between a curve defined by a parametric spline and  $y = \text{constant}$  line

## Calling Sequence

Call SPPLY2, (Y, SEGS, NSEGS, PT, NINT, TINT, INT)

| <u>VARIABLE</u> | <u>TYPE</u> | <u>DIMENSION</u> | <u>USE</u> | <u>DESCRIPTION</u>                                            |
|-----------------|-------------|------------------|------------|---------------------------------------------------------------|
| Y               | Real        | -----            | Input      | Y value intersecting curve                                    |
| SEGS            | Real        | (8, NSEGS)       | Input      | Array containing the parametric spline information            |
| NSEGS           | Integer     | -----            | Input      | Number of segments                                            |
| PT (1)          | Real        | -----            | Output     | X coordinate of the intersection                              |
| PT (2)          | Real        | -----            | Output     | Y coordinate of the intersection                              |
| NINT            | Integer     | -----            | Output     | Index of segment in which intersection occurs.                |
| TINT            | Real        | -----            | Output     | Value of t parameter at the intersection                      |
| INT             | Integer     | -----            | Output     | Error return<br>= 1 Intersection found<br>= 3 no intersection |

## Common Blocks

None

## Subroutines Called

CUBCO2

## Detailed Description

The t value corresponding to a given Y value is found, and is then used to calculate the X value corresponding to the Y value.

COMMON BLOCK ADVOL

| <u>FORTTRAN<br/>SYMBOL</u> | <u>MATH<br/>SYMBOL</u> | <u>TYPE</u> | <u>DESCRIPTION</u>                                   |
|----------------------------|------------------------|-------------|------------------------------------------------------|
| X                          |                        | Real        | Longitudinal distance of the<br>stations from the FP |
| SS                         |                        | Real        | Station spacing                                      |
| XM                         |                        | Real        | Distance from FP to midships                         |
| EXVOL                      |                        | Real        | Extra volume to be added to<br>certain stations      |
| XXL                        |                        | Real        | Station numbers to add extra<br>volume to            |
| NSTAT                      |                        | Real        | Number of stations to add extra<br>volume to         |
| EXWET                      |                        | Real        | Added wetted surface                                 |

## COMMON BLOCK CONST

| <u>FORTRAN<br/>SYMBOL</u> | <u>MATH<br/>SYMBOL</u> | <u>TYPE</u>         | <u>DESCRIPTION</u>                              |
|---------------------------|------------------------|---------------------|-------------------------------------------------|
| XLAM                      | $\lambda$              | REAL                | Ship to model scale ratio                       |
| XLPP                      | Lpp                    | REAL                | Length between perpendiculars                   |
| XLWL                      | L <sub>WL</sub>        | Real                | Waterline length                                |
| DENMOD                    | $\rho g$               | REAL                | Model water density                             |
| V                         |                        | REAL                | Model speed, knots                              |
| MET                       |                        | Integer             | Printout control for english or<br>metric units |
| XLP                       |                        | Real                | length of parallel middlebody                   |
| N                         |                        | Integer             | Number of stations                              |
| MODEL                     |                        | Character<br>string | Model number                                    |
| TITLE                     |                        | Character<br>string | Title for output                                |

COMMON BLOCK FANDT

| <u>FORTRAN<br/>SYMBOL</u> | <u>MATH<br/>SYMBOL</u> | TYPE | <u>DESCRIPTION</u>              |
|---------------------------|------------------------|------|---------------------------------|
| ENTA                      |                        | Real | Half angle of entrance, degrees |
| FTE                       |                        | Real | Taylors' f                      |
| TTE                       |                        | Real | Taylors' t                      |

## COMMON BLOCK STOW

| <u>FORTRAN<br/>SYMBOL</u> | <u>MATH<br/>SYMBOL</u> | <u>TYPE</u> | <u>DESCRIPTION</u>                                                           |
|---------------------------|------------------------|-------------|------------------------------------------------------------------------------|
| Y                         |                        | Real        | Half beam offsets                                                            |
| Z                         |                        | Real        | Waterline offsets corresponding<br>to Y                                      |
| ICALC                     |                        | Integer     | Control for calculating the<br>Half angle of entrance and Taylors<br>f and t |
| IBOW                      |                        | Integer     | Control to indicate if bow and/or<br>stern profiles are input                |
| SF                        |                        | Real        | Forward station where draft is<br>taken                                      |
| SA                        |                        | Real        | Aft station where draft is taken                                             |
| TF                        |                        | Real        | Forward draft at SF                                                          |
| TA                        |                        | Real        | Aft draft at SA                                                              |
| IPRINT                    |                        | Integer     | Print Control Variable                                                       |
| XB                        |                        | Real        | X axis offsets for the bow<br>profile (longitudinal)                         |
| YB                        |                        | Real        | Z axis offsets (vertical) for<br>the bow profile                             |
| XS                        |                        | Real        | X axis offsets for the bow<br>profile (longitudinal)                         |
| YS                        |                        | Real        | Z axis offsets (vertical) for the<br>bow profile                             |
| MM                        |                        | Integer     | Array containing the number of<br>points per station.                        |

DTNSRDC ISSUES THREE TYPES OF REPORTS

1. DTNSRDC REPORTS, A FORMAL SERIES, CONTAIN INFORMATION OF PERMANENT TECHNICAL VALUE. THEY CARRY A CONSECUTIVE NUMERICAL IDENTIFICATION REGARDLESS OF THEIR CLASSIFICATION OR THE ORIGINATING DEPARTMENT.
2. DEPARTMENTAL REPORTS, A SEMI-FORMAL SERIES, CONTAIN INFORMATION OF A PRELIMINARY, TEMPORARY, OR PROPRIETARY NATURE OR OF LIMITED INTEREST OR SIGNIFICANCE. THEY CARRY A DEPARTMENTAL ALPHANUMERICAL IDENTIFICATION.
3. TECHNICAL MEMORANDA, AN INFORMAL SERIES, CONTAIN TECHNICAL DOCUMENTATION OF LIMITED USE AND INTEREST. THEY ARE PRIMARILY WORKING PAPERS INTENDED FOR INTERNAL USE. THEY CARRY AN IDENTIFYING NUMBER WHICH INDICATES THEIR TYPE AND THE NUMERICAL CODE OF THE ORIGINATING DEPARTMENT. ANY DISTRIBUTION OUTSIDE DTNSRDC MUST BE APPROVED BY THE HEAD OF THE ORIGINATING DEPARTMENT ON A CASE-BY-CASE BASIS.

END

DATE  
FILMED

1-81

DTIC