

AD-A140 502


DETERMINATION OF STRATOSPHERIC WIND PROFILES BY DIGITAL
ANALYSIS(U) PHOTOMETRICS INC WOBURN MA C A TROWBRIDGE
84 JAN 84 PHM-TR-84-02 AFGL-TR-84-0041 F19628-81-C-0146


1/1

UNCLASSIFIED

F/G 4/2

NL

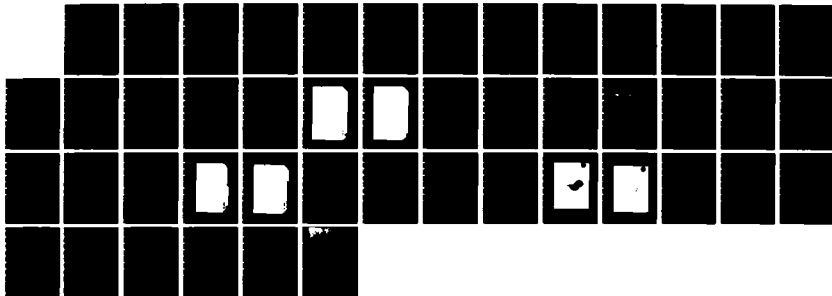



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

12

AFGL-TR-84-0041

DETERMINATION OF STRATOSPHERIC WIND PROFILES BY
DIGITAL ANALYSIS

Christian A. Trowbridge

PhotoMetrics, Inc.
4 Arrow Drive,
Woburn, MA 01801

4 January 1984

Final Report for Period 14 August 1981 - 13 August 1983

Approved for public release; distribution unlimited

AD-A140 502

DTIC FILE COPY

PREPARED FOR

AIR FORCE GEOPHYSICS LABORATORY
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
HANSCOM AFB, MASSACHUSETTS 01731

DTIC
SELECTED
APR 23 1984
E


84 04 25 020

This report has been reviewed by the ESD Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS).

This technical report has been reviewed and is approved for publication




Contract Manager



Branch Chief

FOR THE COMMANDER

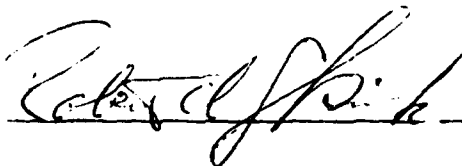

Acting Division Director

Qualified requestors may obtain additional copies from the Defense Technical Information Center. All others should apply to the National Technical Information Service.

If your address has changed, or if you wish to be removed from the mailing list, or if the addressee is no longer employed by your organization, please notify AFGL/DAA, Hanscom AFB, MA 01731. This will assist us in maintaining a current mailing list.

Do not return copies of this report unless contractual obligations or notices on a specific document requires that it be returned.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFGL-TR-84-0041	2. GOVT ACCESSION NO. A1405-02	3. PERFORMING ORGANIZATION'S CATALOG NUMBER
4. TITLE (and Subtitle) DETERMINATION OF STRATOSPHERIC WIND PROFILES BY DIGITAL ANALYSIS		5. TYPE OF REPORT & PERIOD COVERED Final Report 14 Aug 81-14 Aug 83
7. AUTHOR(s) Christian A. Trowbridge		6. PERFORMING ORG. REPORT NUMBER PhM-TR-84-02
9. PERFORMING ORGANIZATION NAME AND ADDRESS PhotoMetrics, Inc. 4 Arrow Drive Woburn, MA 01801		8. CONTRACT OR GRANT NUMBER(s) F19628-81-C-0146
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Geophysics Laboratory Hanscom AFB, Massachusetts 01731 Monitor: A.F. Quesada/LKD		10. PROGRAM ELEMENT, PROJECT, TASK AND WORK UNIT NUMBERS 61102F 668705AZ
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE 04 January 1984
		13. NUMBER OF PAGES 43
		15. SECURITY CLASSIFICATION OF THIS REPORT Unclassified
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		14a. DECLASSIFICATION/DOWNGRADING SCHEDULE N/A
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Stratosphere Photographic Triangulation Atmospheric Wind Field Image Data Analysis Smoke Trail Tracers		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A program to measure altitude profiles of the horizontal wind velocity in the stratosphere using smoke trail tracers is described. The system for accessing and digitizing photographs of the sunlight scattering trails was updated with new hardware and software. Film plane coordinates of trail center lines were identified by computer programs, and vector triangulation		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

20. Abstract (continued)

was applied to determine three-dimensional coordinates of the trail. Highly accurate camera orientations were obtained for input to the triangulation procedure by digitizing images of known stars. Time sequences of positions of points on the trail centerline were then processed to determine the horizontal wind field and its vertical shears.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

FOREWORD

The program described here involved the operation, maintenance, and upgrade of the AFGL Trail Digitization System at PhotoMetrics, Inc., for computer access of photographic records of atmospheric smoke and chemical trails. Subsequent computer analysis of triangulation image pairs was performed to determine trail positions, from which horizontal wind components and wind shears were calculated.

Earlier work by PhotoMetrics on analysis of stratospheric smoke trails is reported in Ref's 2 and 5, and the video densitometer system for measuring trail coordinates is described in Ref 1. Major improvements of both the computer hardware and software were implemented at the beginning of the current program.

The author wishes to express thanks to Dr. A.F. Quesada (Technical Monitor) of Air Force Geophysics Laboratory for his continued encouragement and support, and to K. McDevitt and C. Rice of PhotoMetrics for their contributions to this report.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/ _____	
Availability Codes	
Dist	Avail and/or Special
A-1	



TABLE OF CONTENTS

SECTION	PAGE
FOREWORD	3
I SUMMARY AND OVERVIEW	6
II DATA ANALYSIS	7
Smoke Trail Technique	7
Results	10
Stratospheric Trails	24
Auroral E Trail	25
III MODIFICATION AND MAINTENANCE OF THE TRAIL IMAGE DIGITIZATION SYSTEM	36
IV CONCLUSIONS AND RECOMMENDATIONS	40
REFERENCES	42

LIST OF ILLUSTRATIONS

FIGURE		
1.	Triangulation photograph of trail 13 Sep 1978 taken from the Observatory site	16
2.	Triangulation photograph of trail 13 Sep 1978 taken from the Twin Lakes site	17
3.	Northerly component of wind velocity determined from trail 13 Sep 78, Dash 2, 10 meter altitude resolution	18
4.	Easterly component of wind velocity determined from trail 13 Sep 78, Dash 2, 10 meter altitude resolution	19
5.	Wind and wind shears at White Sands, New Mexico, calculated from smoke trail released on 26 April 1977	20
6.	Wind and wind shears at White Sands, New Mexico, calculated from smoke trail released on 2 May 1977	21
7.	Wind and wind shears at Ft. Churchill, Manitoba calculated from smoke trail released on 13 Sept 1978	22

FIGURE (cont'd)	PAGE
8. Richardson number profile for one dash of trail 12 Sep 78	23
9. AFGL triangulation photograph of Auroral E trail taken from CENTRAL site at 08:44 UT	28
10. AFGL triangulation photograph of Auroral E trail taken from CHENA site at 08:44 UT	29
11. Horizontal winds reduced from the Auroral E trail, 102 to 120 km altitude	30
12. Horizontal winds reduced from the Auroral E trail, 120 to 138 km altitude	31
13. Profile of wind shear for the 102 to 120 km altitude region derived from Auroral E wind data ..	32
14. Profile of wind shear for the 120 to 138 km altitude region derived from Auroral E wind data ..	33
15. Auroral E trail at 08:44 UT photographed from POKER optical site by the University of Alaska.....	34
16. Enhanced version of Figure 16 used to digitize the initially low contrast "core" of the trail ...	35
17. Block diagram of the Trail Digitization System	37

LIST OF TABLES

TABLE	
1. Summary of Data Digitized	11
2. Summary of Star Frames Digitized	15

SECTION I

SUMMARY AND OVERVIEW

The objective of the work reported here is to measure stratospheric wind velocities by precision photographic triangulation of tracer smoke trails released from sounding rockets. Trail images were first reduced to digital form using the AFGL's Trail Digitization System (Ref 1) which provides semi-automatic alignment of each film frame (to establish the film plane coordinate system coincident with the camera film plane and optic axis) and measures the position of the centerline. The trail was then located by triangulation from pairs of images taken from spatially-separated remote measurement sites, and winds and shears were derived from its positions (Ref 2).

A brief review of the smoke trail triangulation technique is presented in Section II, which references the development of the vector methods currently employed. A summary of data analyzed by these methods and of the problems encountered is also presented in Section II.

An extensive modification of the Trail Digitization System is detailed in Section III, and routine (as well as unscheduled) maintenance procedures discussed. Section IV reports the program's conclusions and recommendations.

SECTION II

DATA ANALYSIS

The method for determining trail position and wind fields from photographs of smoke trails released in the stratosphere is described here. Further information about the procedures may be found in Ref's 1-4. This Section also summarizes the data sets reduced and analyzed.

SMOKE TRAIL TECHNIQUE

Although the rocket deposited smoke trail technique has been utilized for over 20 years to trace atmospheric wind speed and direction, its practical, accurate, and reliable application is relatively recent. The formulation of vector methods of solution for photogrammetric triangulation to continuously released trails -- which lack features that can be unambiguously identified from multiple projections -- took place about 10 years ago (Ref 3) and improvements in determining the orientation of triangulation cameras somewhat later (Ref 4). These advances removed the problems associated with earlier plane-earth solutions or solutions employing spherical geometry. References 1,2, and 7, the first application of these methods, show that even when applying vector solutions numerous pitfalls must be avoided.

Briefly, the dense tracer smoke remains substantially intact after its release while being transported by the wind field for periods of one to two minutes. During this time synchronized cameras at a minimum of two observation sites record the projections of the trail, whose contrast against the sky results from its great scattering of sunlight (much like the contrails of aircraft). Pairs of simultaneous images

are digitized to determine the coordinates in the film plane of the center line of the trail, and digital data are then used to triangulate its spatial locations. Transport of the trail in subsequent frames is used to calculate horizontal wind as a function of altitude.

To achieve positional accuracy for geophysical investigations requires that several parameters relating to camera location and orientation be known to high precision. Camera location (latitude, longitude, and altitude) are found from surveys of the site. The importance of accurate site location for determining altitude (and position) at the release cloud cannot be overemphasized. Tests on trail 12 Sep 78 (Ft. Churchill, Canada) were required to isolate the reason for inconsistent positional results from the triangulation. Multiple reductions of the trail data and analysis of the Canadian Survey data eventually determined that both site positions were incorrect. The process of isolating such an error from the triangulation results is imprecise and can only suggest where corrections may be required -- actual corrections must be made from knowledge of the survey data. Furthermore, the time (i.e., cost) of reducing such data is increased by up to an order of magnitude.

The three-axis orientation of the camera is obtained from a photograph of the star field at a precisely known time. Locations of images of known stars are digitized, and vector methods of Ref 4 are applied to relate their right ascension and declination to the digital film plane positions for determining the precise azimuth, elevation, and tilt about the horizontal of the camera. The actual focal length of the lens is also measured from these data. The number (n) of stars used provides $n(n-1)/2$ estimates of orientation angles and $n(n-1)(n-2)/6$ estimates of focal length. Precision of the

average of these determinations is improved by editing out those measurements whose deviation from the mean exceeds a preselected fraction of the ensemble standard deviation (this is of course a commonly-applied procedure). Typically, standard deviations of 0.005° (azimuth and elevation), 0.01° (horizontal tilt), and 0.005 cm (focal length) are routinely achieved when using 12 or more star images.

Camera location and orientation are then input to the triangulation routine along with the position of the trail centerline as viewed from two sites. This centerline is determined by computer from a line scan across that trail, made by moving the film on a precision automatic stage through a fixed central area of the video densitometer section of the trail digitization system (to maintain constant photometric response to the film's optical density). The vector methods of Ref 3 have been formulated using an iterative approach to determine the minimum error pairing of trail points of one site with those of the other. (Recall that the situation differs from that of standard triangulation in that the trail has no recognizable "pickup points.") The primary matching criterion is minimization of the dihedral angular mismatch between planes generated by film plane point line of sight vectors for each site and the line joining the two sites. As each optimum match is found, the altitude, latitude and longitude of the intersection (or point of closest approach) of the line of sight vectors is recorded for later use in measuring the wind field.

These horizontal velocity determinations are made using a time sequence of typically five or six trail point positions, over a period of one to two minutes. Each of the position files is either spline or cubic interpolated to equal altitude increments (typically 10 m), and a least-squares analysis of

position versus time provides the average horizontal velocity components and their associated experimental uncertainty. The wind velocity data routinely provide measurements of the horizontal wind's vertical shear. Further analysis may be performed (Ref's 6-8) to determine descriptors of turbulence such as length scales, heating rates, and Richardson numbers. References 4-12 are conference presentations of the results of this program and of further analyses of the wind profiles by AFGL scientists.

RESULTS

Each of the stratospheric trails which was reduced to digital form is summarized in Table 1. Included in this table is a high altitude chemical trail (in connection with AFGL's Auroral-E Experiment, ~80-140 km), which we also analyzed. Alignment of each photographic frame on the Trail Digitization System was accomplished to better than $\pm 8\mu\text{m}$ over an image dimension of 115 mm, with the position of the optic axis located with a repeatability of $\pm 8\mu\text{m}$. For the Auroral E data (POKER, ELLIOT, recorded on 70 mm film with 55 mm image size), the optic axis was located to $\pm 12\mu\text{m}$. The maximum scanning increment along the trail axis was $48\mu\text{m}$ at low altitudes; this step was reduced at higher altitudes to preserve a nearly uniform increment in altitude from point to point in defining the wind profile.

Star-position calibrations were also digitized and analyzed for all of the trails, as summarized in Table 2. Large numbers of calibrations (for each triangulation frame) were performed for Auroral E (POKER and ELLIOT sites) because the camera orientations were frequently changed. The majority of star calibrations were reduced using new software, originally developed for another application which semiautomatically

Table 1. Summary of Data Digitized

<u>Event Name or Date</u>	<u>Frame</u>	<u>Site</u>	<u>Data</u>	
NIOBE 13 Jun 75	12	SEEHORN	DASHED TRAIL	
	13			
	14			
	15			
	16			
	17			
	18			
		12	TWO BUTTES	
		13		
		14		
		15		
		16		
		17		
		18	CAL	
		12		
		13		
		14		
		15		
16				
OPS 13 Jun 75	72	TWO BUTTES	DASHED TRAIL	
	73			
	74			
	75			
	76			
	72	CAL		
	73			
	74			
	75			
	76			
PANDORA 17 Jun 75	83	SEEHORN	DASHED TRAIL	
	84			
	85			
	86			
	87			
	88			
	89			
91				

Table 1. Summary of Data Digitized (continued)

<u>Event Name or Date</u>	<u>Frame</u>	<u>Site</u>	<u>Data</u>		
PANDORA (cont'd)	83	CAL			
	84				
	85				
	86				
	87				
	88				
	89				
91					
<hr/>					
(NO NAME) 26 Apr 77	23	TWO BUTTES	DASHED TRAIL		
	24				
	25				
	26				
	27				
	28				
	23			T5	
	24				
25					
26					
27					
28					
<hr/>					
(NO NAME) 02 May 77	32	TWO BUTTES	DASHED TRAIL		
	33				
	34				
	35				
	36				
	32			T5	
	33				
	34				
	35				
	36				

Table 1. Summary of Data Digitized (continued)

<u>Event Name or Date</u>	<u>Frame</u>	<u>Site</u>	<u>Data</u>	
(NO NAME) 13 Sep 78	72	OBSERVATORY	DASHED TRAIL	
	73			
	74			
	75			
	76			
	77			
	78			
	79			
	80			
		72	TWIN LAKES	
		73		
		74		
		75		
		76		
		77		
		78		
	79			
	80			
AURORAL E 03 Mar 81	747	CHENA	HIGH ALTITUDE TRAIL	
	762			
	777			
	792			
	807			
	822			
		747	CENTRAL	
		762		
		777		
		792		
	807			
	822			
	40	POKER		
	41			
	42			
	43			
	50			
	60			
	70			
	80			

Table 1. Summary of Data Digitized (concluded)

<u>Event Name or Date</u>	<u>Frame</u>	<u>Site</u>	<u>Data</u>
AURORAL E (cont'd)	40 41 42 43 50 60 70 80	ELIOT	
AURORAL E 03 Mar 81 SPECIALLY MADE FILM COPIES	50 60 70 50 60 70	POKER ELLIOT	HIGH ALTITUDE TRAIL

Table 2. Summary of Star Frames Digitized

<u>Event Name or Date</u>	<u>Frame</u>	<u>Site</u>	<u>Maximum Uncertainty</u>	
NIOBE 13 Jun 75	10	SEEHORN	$\pm 8 \mu\text{m}$	
	9	TWO BUTTES	$\pm 8 \mu\text{m}$	
	9	CAL	$\pm 8 \mu\text{m}$	
OPS 13 Jun 75	80	TWO BUTTES	$\pm 8 \mu\text{m}$	
	30	CAL	$\pm 8 \mu\text{m}$	
PANDORA 17 Jun 75	81	SEEHORN	$\pm 8 \mu\text{m}$	
	81	CAL	$\pm 8 \mu\text{m}$	
26 Apr 77	20	TWO BUTTES	$\pm 12 \mu\text{m}$	
	20	T5	$\pm 12 \mu\text{m}$	
02 May 77	30	TWO BUTTES	$\pm 8 \mu\text{m}$	
	30	T5	$\pm 8 \mu\text{m}$	
12 Sep 78	10	TWIN LAKES	$\pm 20 \mu\text{m}$	
13 Sep 78	70	OBSERVATORY	$\pm 12 \mu\text{m}$	
	70	TWIN LAKES	$\pm 12 \mu\text{m}$	
AURORAL E 03 Mar 81	40	POKER		
	41			
	43			
	50		$\pm 12 \mu\text{m}$	
	60			
	80			
	50 (copy)			
	60 (copy)			
	70 (copy)			
	40		ELLIOT	
	41			
	42			
	43			
	50			$\pm 12 \mu\text{m}$
	60			
70				
80				
50 (copy)				
60 (copy)				
70 (copy)				



Figure 1. Triangulation photograph of trail 13 Sep 1978 taken from Observatory site (Ft. Churchill) at T = 128 Sec after rocket launch. Note fiducial markers used for alignment.



Figure 2. Triangulation photograph of trail 13 Sep 78 taken from Twin Lakes site at $t = 128$ sec after rocket launch.

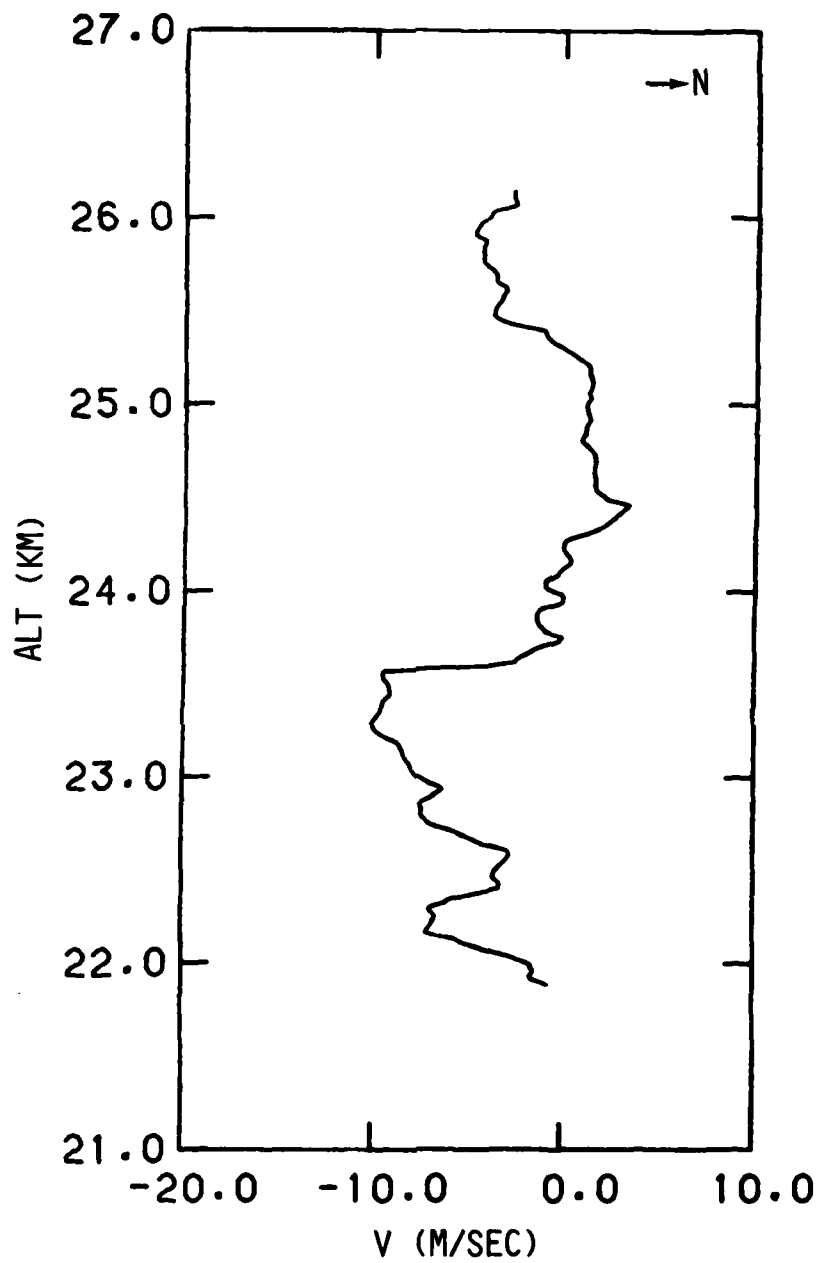


Figure 3. Northerly component of wind velocity determined from trail 13 Sep 78, Dash 2 at 10 meter altitude resolution.



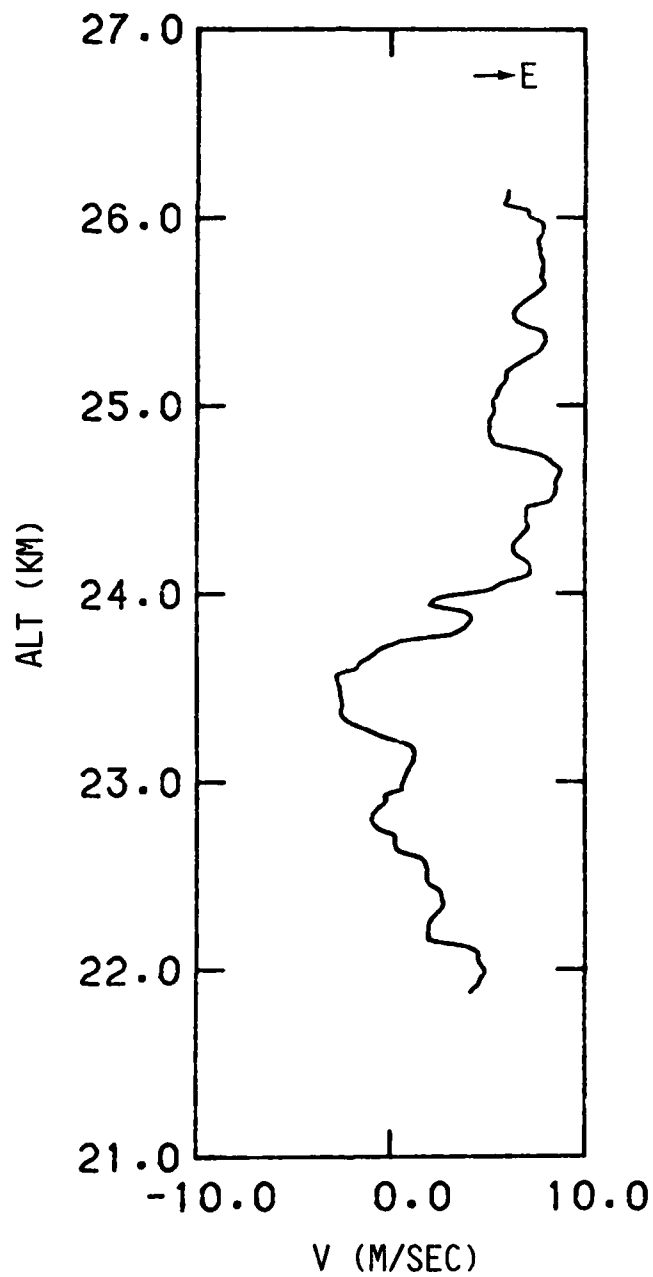


Figure 4. Easterly component of wind velocity determined from trail 13 Sep 78, Dash 2 at 10 meter altitude resolution.

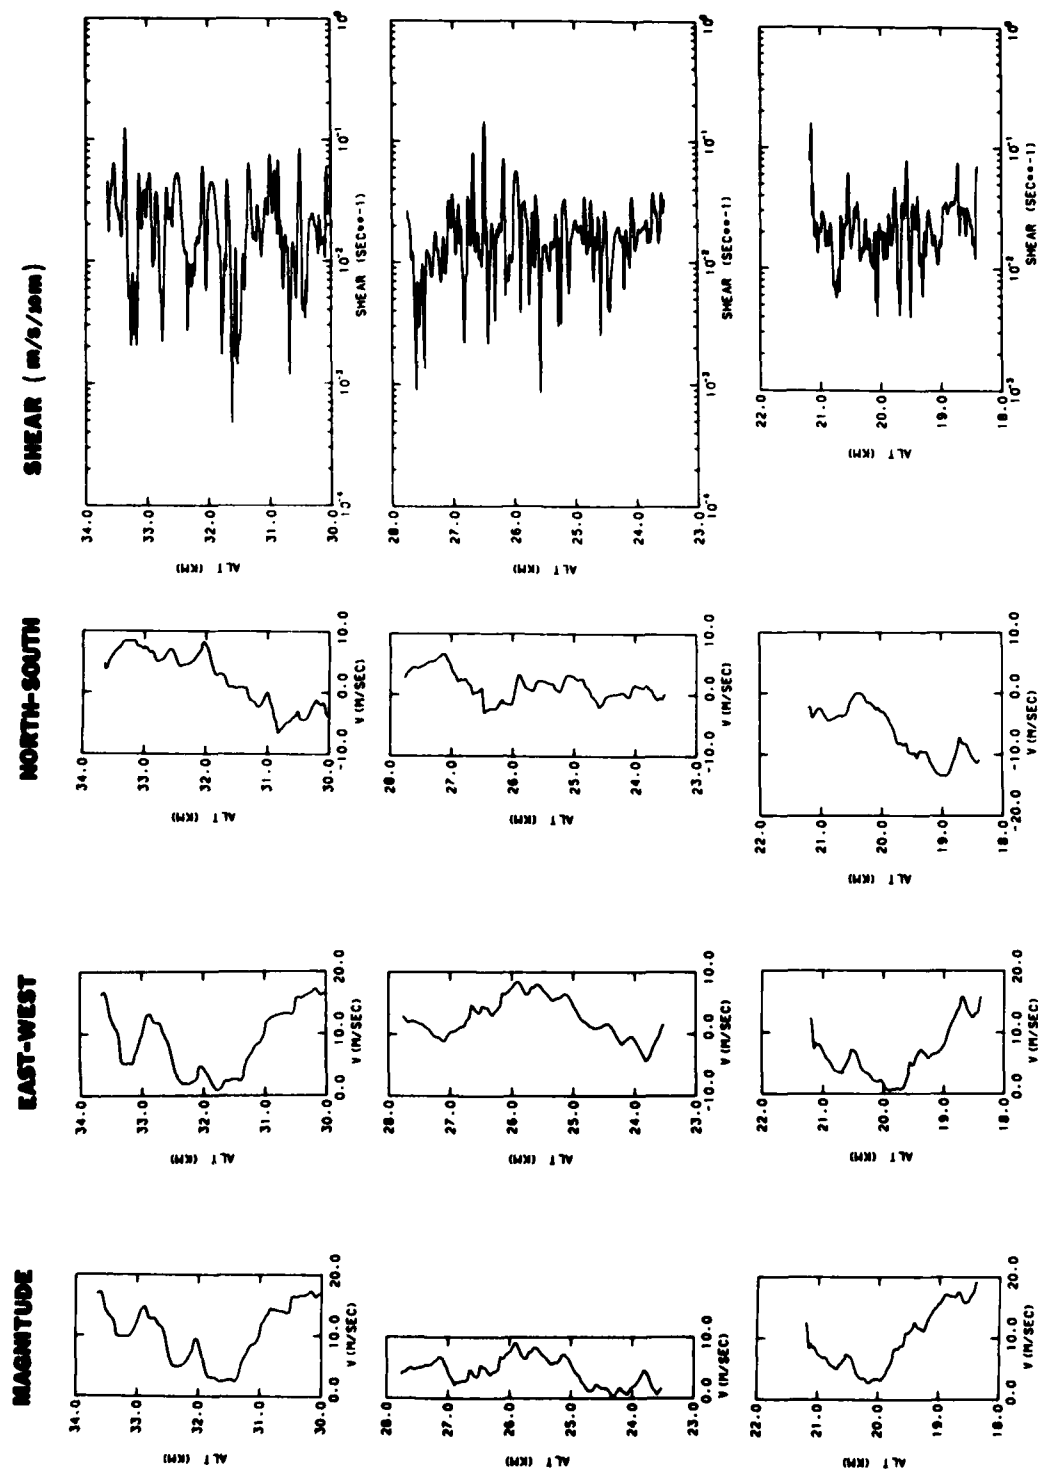


WIND & WINDSHEAR. WHITE SANDS, 26 APRIL 1977, 12 15 UT.

Figure 5. Wind and wind shears at White Sands, New Mexico, calculated from smoke trail released on 26 April 1977.

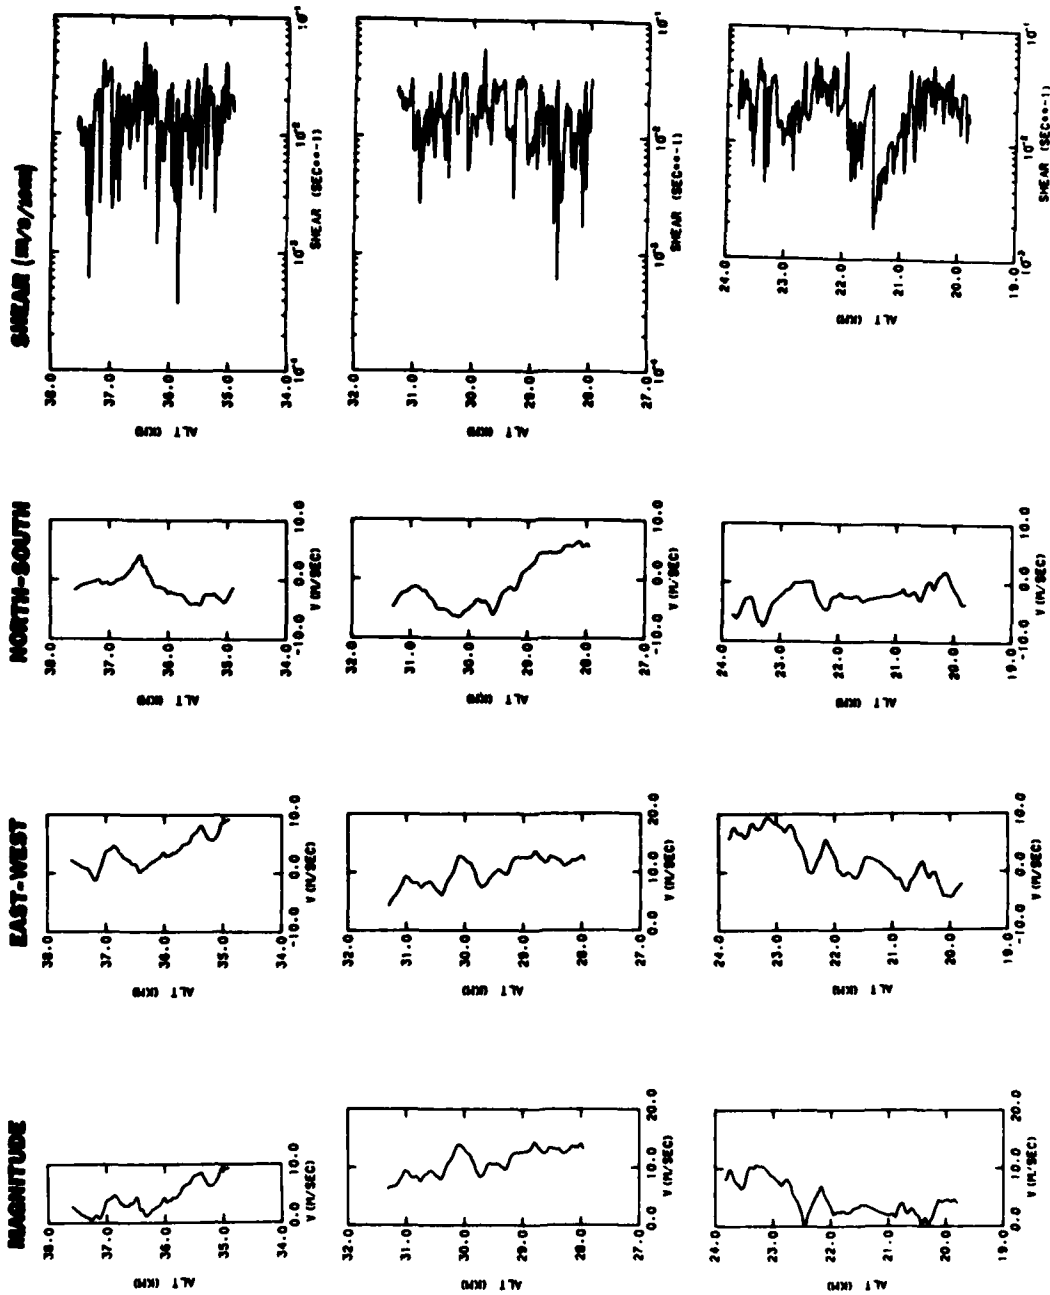

WIND & WINDSHEAR . WHITE SANDS, 2 MAY 1977, 12 04 UT .

Figure 6. Wind and wind shears at White Sands, New Mexico, calculated from smoke trail released on 2 May 1977.

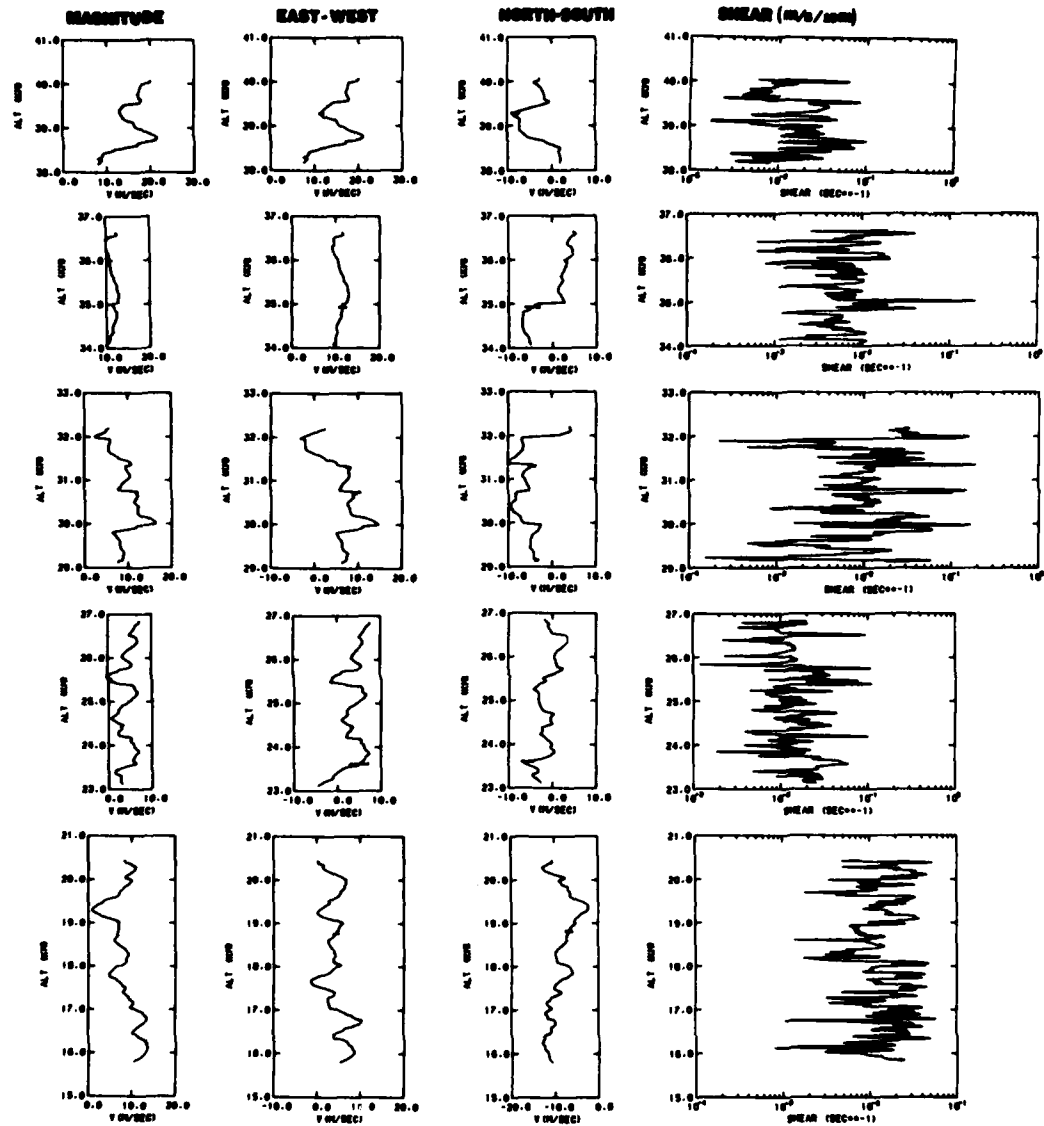

WIND & WINDSHEAR. CHURCHILL, 13 SEPTEMBER 1978, 00 53 UT.

Figure 7. Wind and wind shears at Ft. Churchill, Manitoba, Calculated from smoke trail released on 13 Sept 1978.

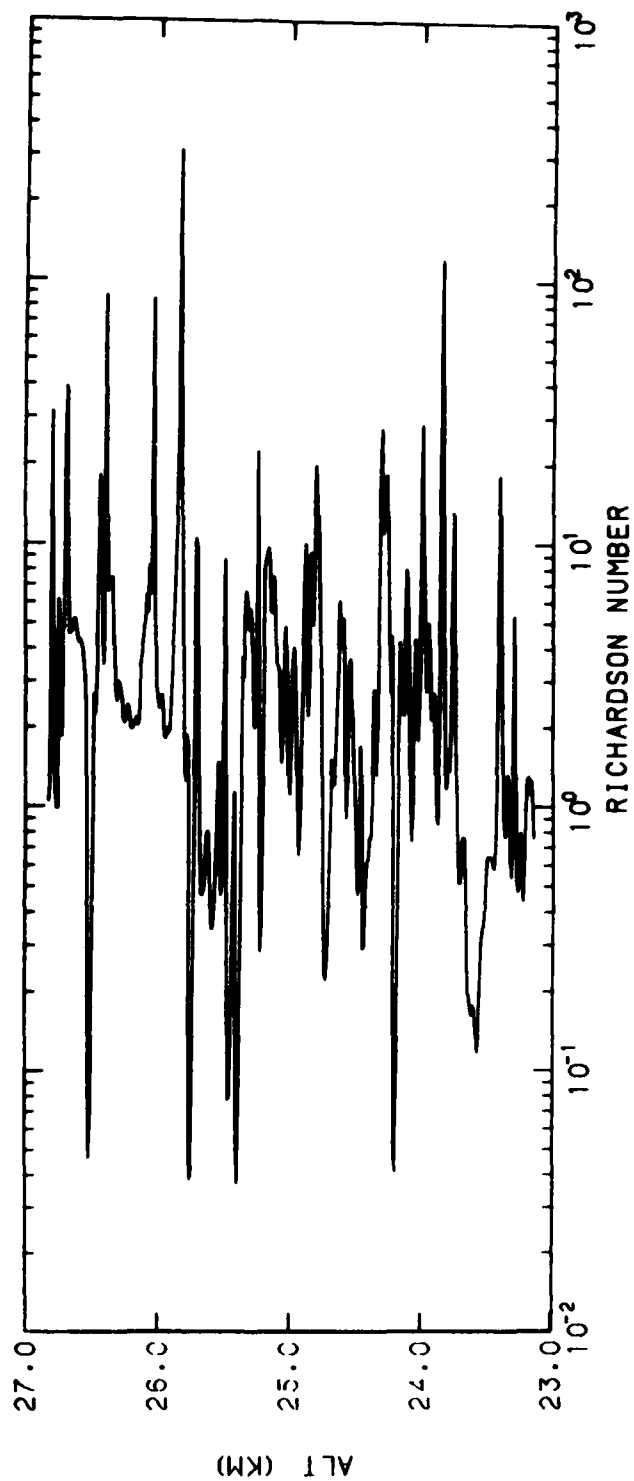


Figure 8. Richardson number profile for one dash of trail 12 Sep 78 from analysis of vertical shear of the horizontal wind and temperature measurements made from meteorological sounding rockets.

identifies the star images by means of a digital star catalog and automatically determines the film plane coordinates. Elimination of the manual identification of stars and entry of right ascension and declination has significantly reduced the time required to determine camera orientations. Repeatability of the star digitization was generally less than $\pm 8\mu\text{m}$ in both the x and y axes.

The data presented in this report are intended only to be illustrative of the analysis results which were communicated to AFGL scientists as they were obtained. Hard copy listings, computer plots, and magnetic tapes with digital information were furnished and presently reside with the LKD Branch of AFGL.

Stratospheric Trails

Each of the stratospheric trails consisted of up to 10 smoke release segments each approximately 5 km long separated by gaps of approximately 3 km. In several cases the higher altitude trail segments were near or after rocket apogee and thus spanned a very limited altitude range. Good coverage by both triangulation cameras was usually obtained from approximately 18 to 36 km altitude.

Data typical of that reduced are shown in Figures 1-8. Figures 1 and 2 are a triangulation photograph pair for release 9/13/78 taken from Observatory and Twin Lakes sites respectively. The northerly and easterly components of the wind field for dash 2 of the trail (22 to 26 km altitude) determined from a time sequence of position data, are shown in Figures 3 and 4. Wind and shear results (Ref 9) for trails 26 Apr 77, 2 May 77 and 13 Sep 78 are shown in Figures 5-7. In addition to triangulation and velocity measurements for the data listed in Table 1, previously digitized data for release 12 Sep 78

were reduced, and modified (20 m resolution) wind and shear profiles produced for trails 22 Apr 77, 20 May 78 and 22 May 78 were also calculated. Richardson numbers of turbulence were determined from the wind and temperature profiles for trails 12 Sep 78 and 13 Sep 78, an example of which is presented in Figure 8. Note that this segment of the 12 Sept 78 trail displays little turbulence (generally taken as $R_i < 1/4$) while about 95% of the data indicates that the atmosphere is stable ($R_i > 1/4$) in this region.

Auroral E Trail

The Auroral E trail (Poker Flat, AK) provided both a good test of the digitization-triangulation routines at altitudes well above the stratosphere and an example of data that are not suitable for analysis by these (or other) methods. The data set taken by AFGL from the CHENA and CENTRAL sites provided excellent wind field results from 102 to 136 km altitude and was limited only by the spatial coverage of the camera field. Figures 9 and 10 show one of the sequence of photographic pairs used for triangulation and velocity determination. Figures 11-14 are the resulting wind field (Ref 10) and shears derived from this rocket program.

In contrast to the good results from the AFGL films, images from the closely-spaced Poker Flat User Optical Site (POKER) and ELLIOT highway site cameras would not provide realistic triangulation or velocity results despite the several attempts made to reduce them. Analysis of this data set was undertaken because it would allow extension of the wind profile downward to approximately 75 km altitude. These films had been exposed as a test of a remotely operated camera system (by the University of Alaska), and were not specifically intended to be used for triangulation in view of the small

(~10 km) site separation relative to the range to the trail. Triangulation from sites placed in such close proximity can provide fairly good transverse positioning of (trails) near the stations' zenith but insufficiently accurate range (i.e., altitude) resolution. Further uncertainties result from errors in location of the sites and overexposure (saturation) of the film images of the trail.

Site location errors have been occasionally noted during previous reduction of stratospheric trails, in which errors in camera position as small as 20 m have been found to significantly alter triangulation results (and subsequent wind calculations). It is estimated that the maximum tolerable error for this (University of Alaska) Auroral E data is approximately 40 m; in contrast the final estimates of the site position accuracy are 10 m for POKER and 100 to 200 m for ELLIOT.

The lower altitude region (~75 to 100 km) this downleg-released trail was of greatest interest consisted of a large reentry bag for this downleg released trail (Figure 15). Data acquired by the usual digitizing routines that determine the trail centerline by analysis of the film density distribution transverse to the trail axis provided poor triangulation results. A series of overlays of photographic prints, digitally-determined trail center position, and center of what could be identified as the "core" of the reentry bag was prepared; these demonstrated that the center of the bag and the somewhat higher film density core of the trail were not coincident. A set of carefully prepared contact printed film copies (Figure 16) was then made and each was subjectively marked with a line to emphasize the core, which was of too low contrast for the digitizer to follow. Triangulation using the manually identified core showed improvement over the previous automatic "bag" triangulation, but trail and altitude positions remained

physically inconsistent. It appears that the combination of site location inaccuracy and small separation is responsible for these poor results. Triangulation to the "core" which is readily identifiable in contrast enhanced photographic prints, should have provided accurate and self-consistent position information in the absence of these unresolvable problems.

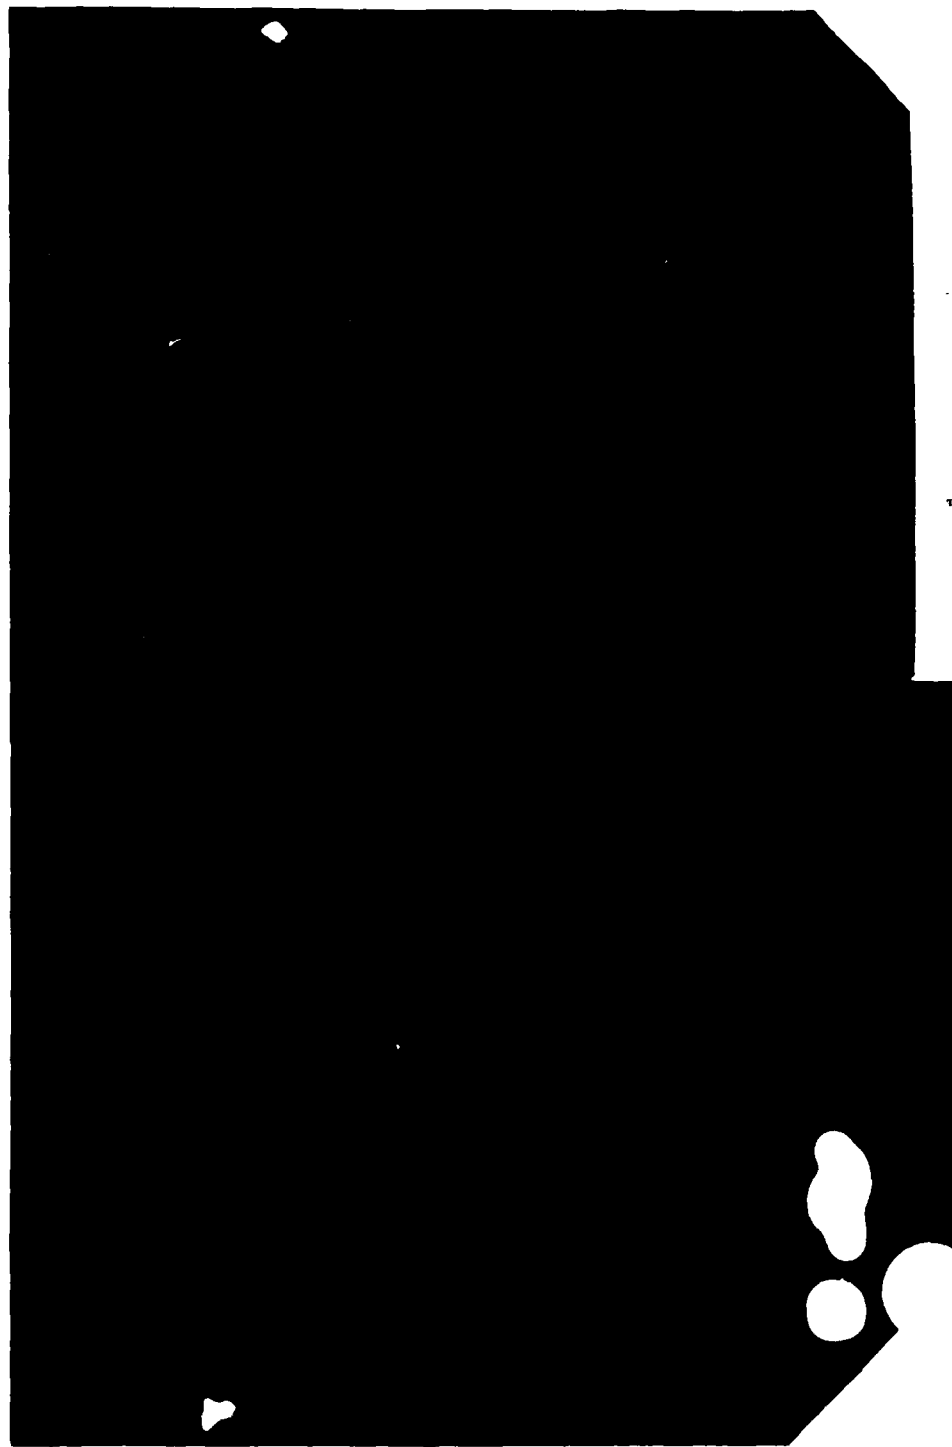


Figure 9. AFGL Triangulation photograph of Auroral E trail taken from CENTRAL site at 08:44 UT.


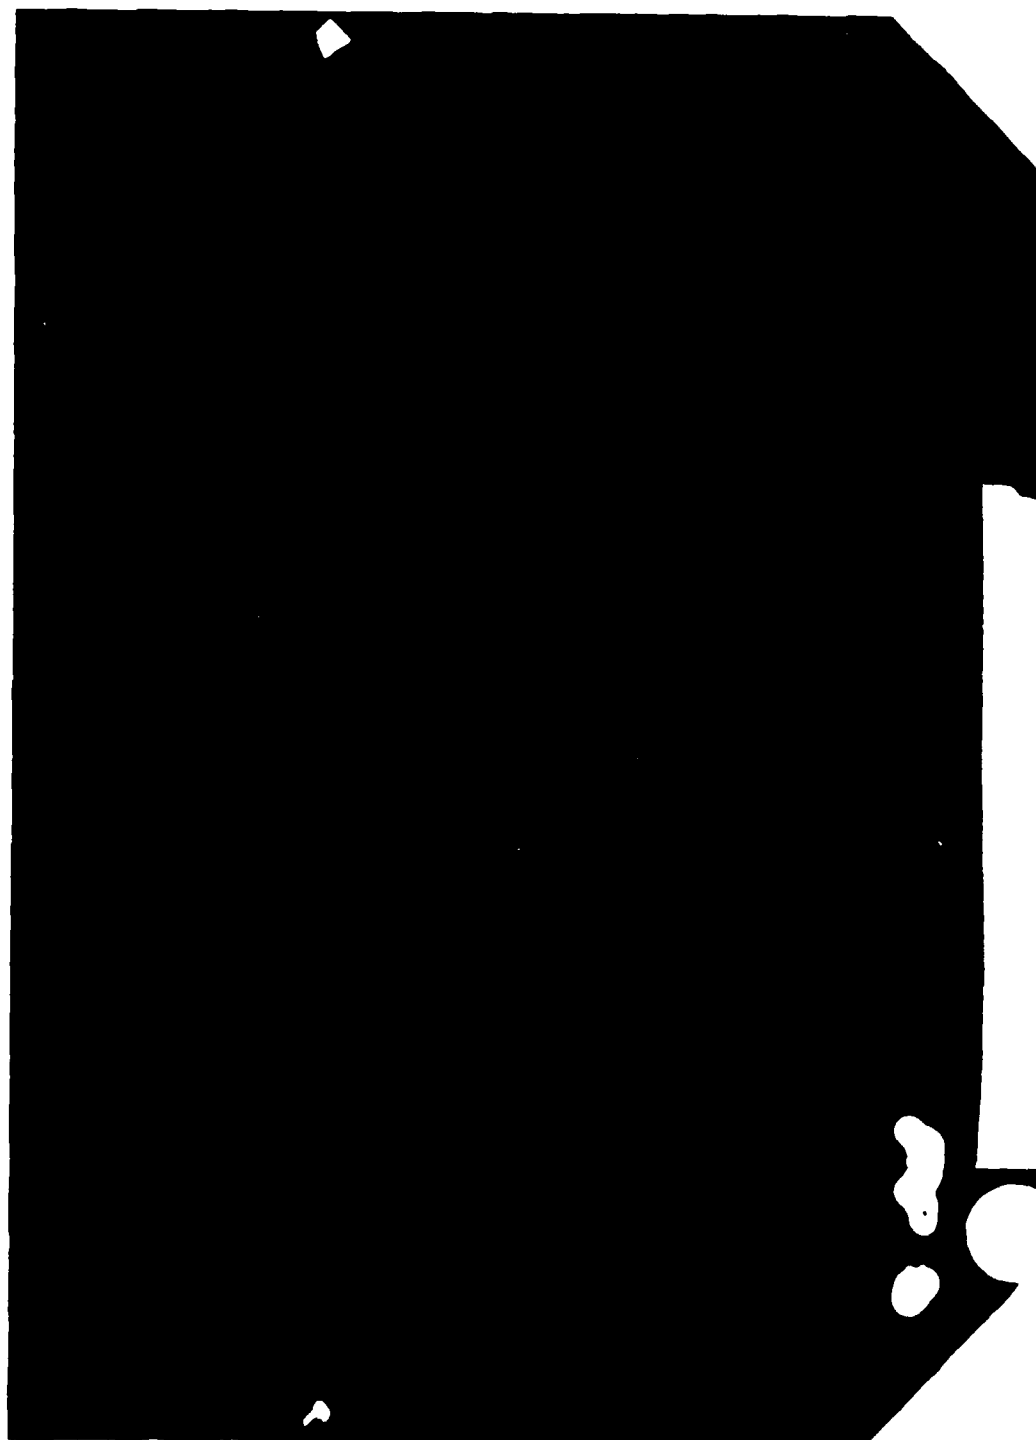



Figure 10. AFGL triangulation photography of Auroral E trail taken from CHENA site at 08:44 UT.

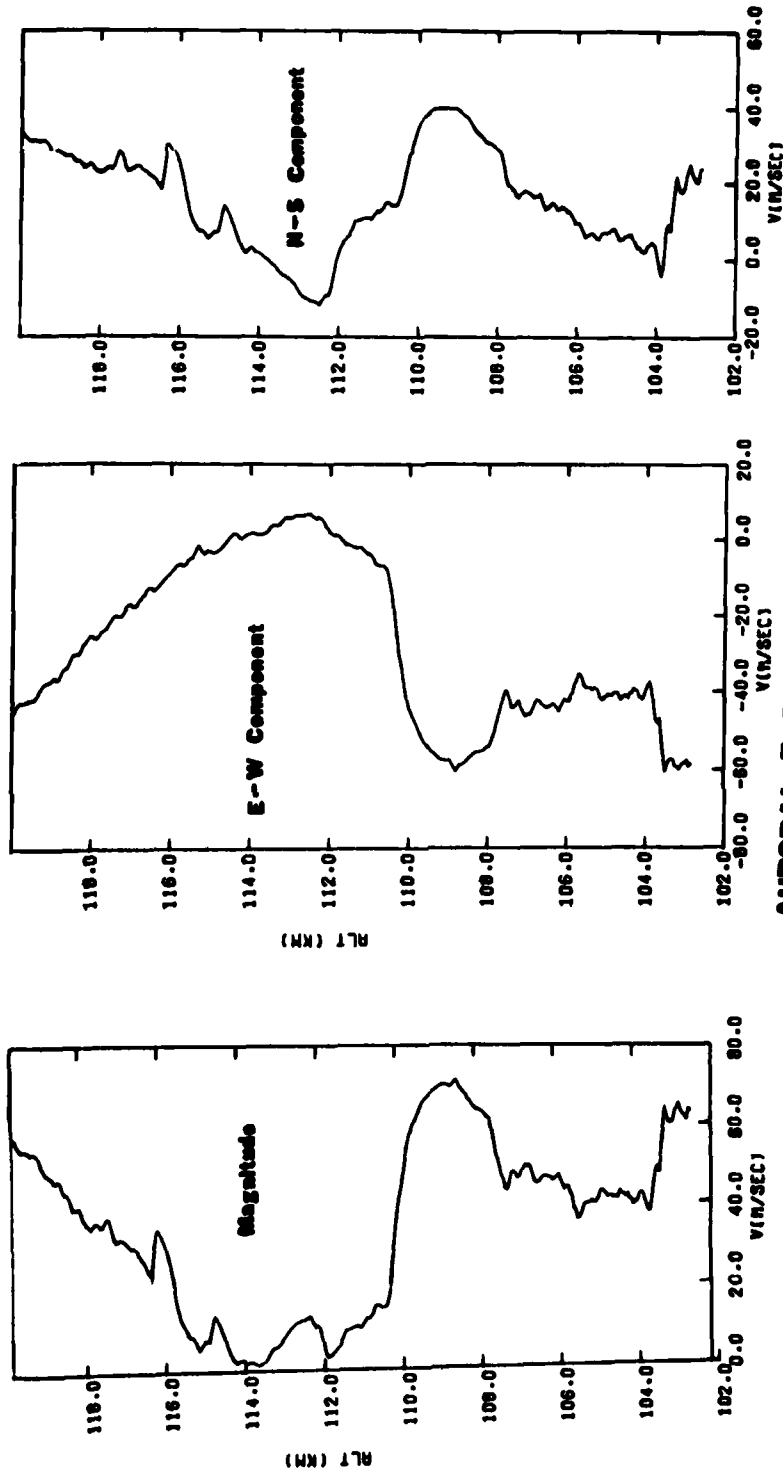

AURORAL-E PROGRAM: WINDS

**LAUNCH TIME: 08:31 UT
TMA TRAIL RELEASED ON DOWN LEG OF ROCKET TRAJECTORY**

Figure 11. Horizontal winds reduced from the Auroral E trail, 102 to 120 km altitude.

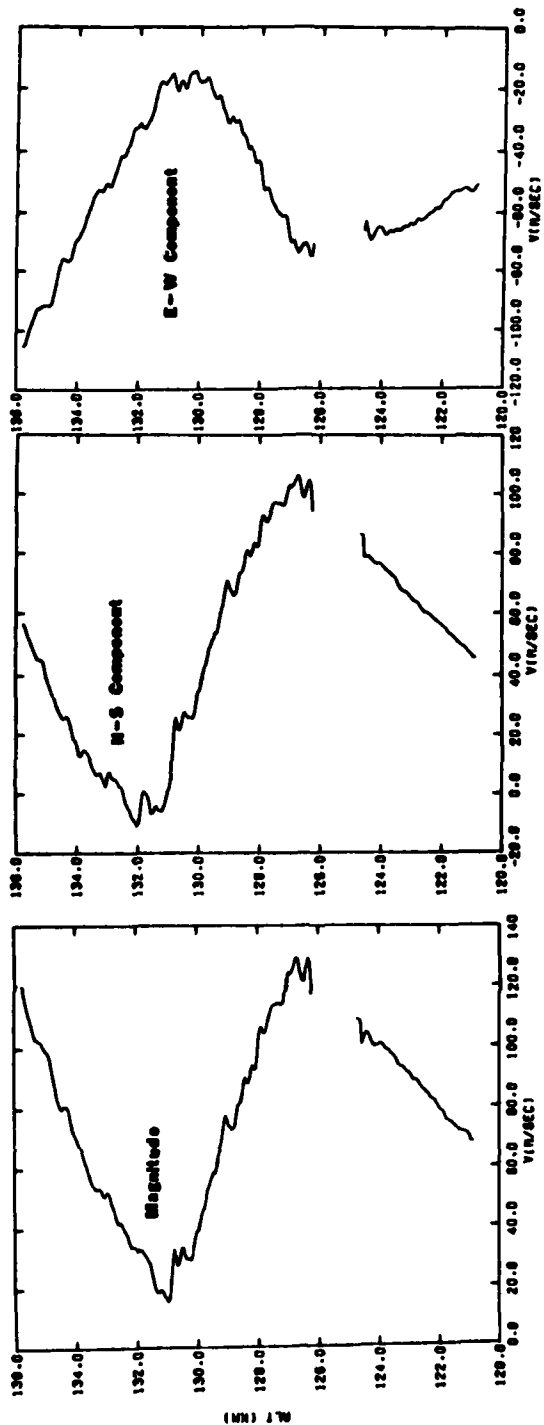

AURORAL - E PROGRAM : WINDS

Figure 12. Horizontal winds reduced for the Auroral E trail, 120 to 138 km altitude.

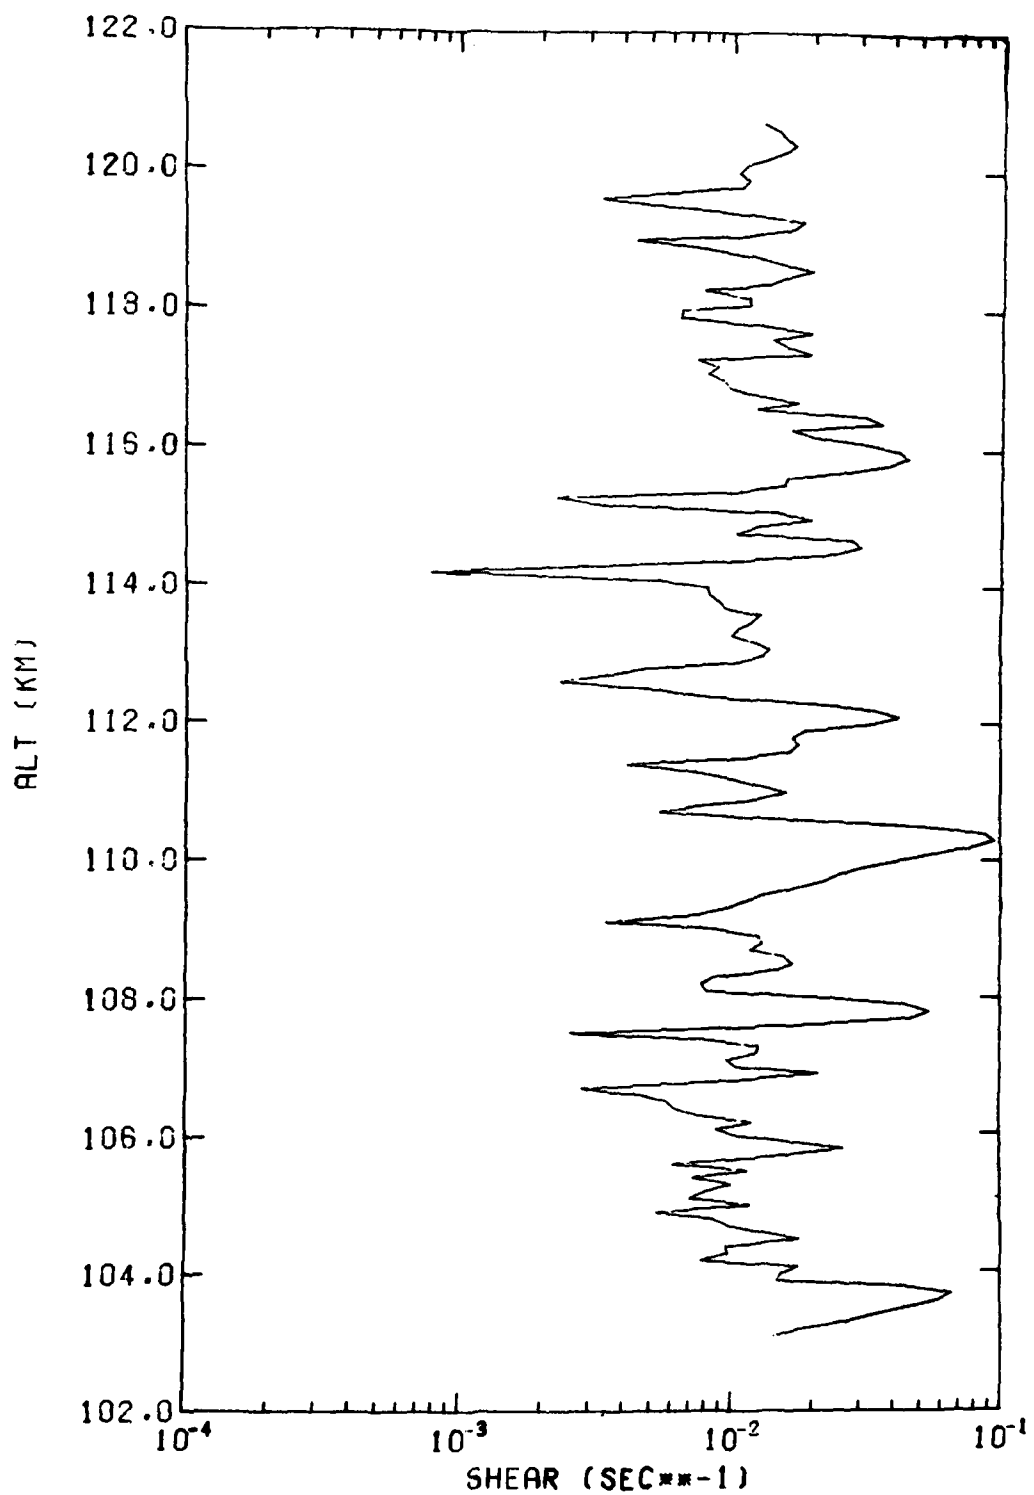


Figure 13. Profile of wind shear for the 102 to 120 km altitude region derived from Auroral E wind data.

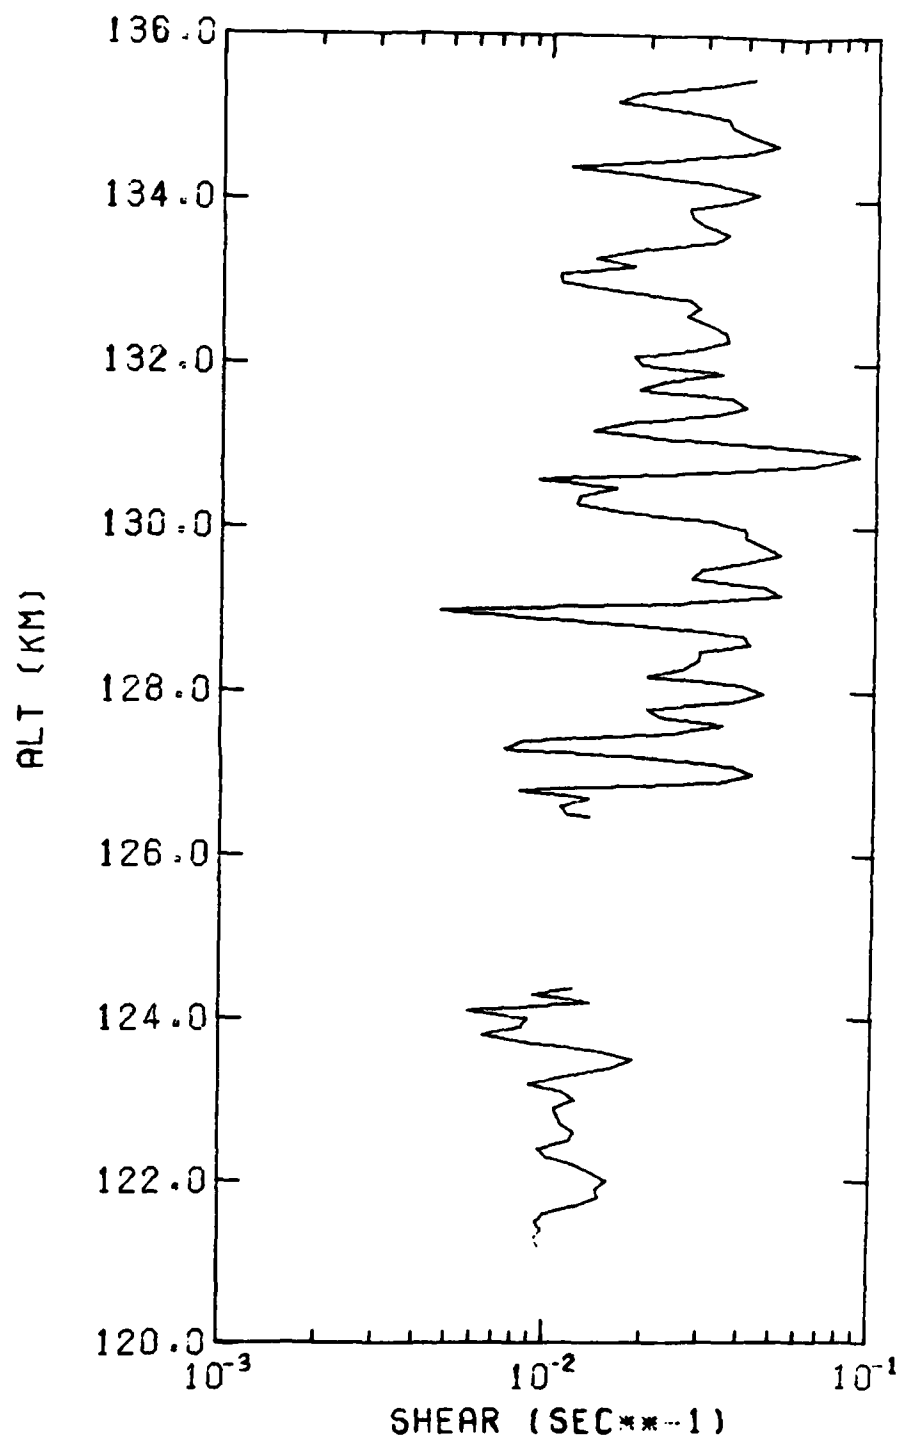


Figure 14. Profile of wind shear for the 120 to 138 km altitude region derived from Auroral E wind data.

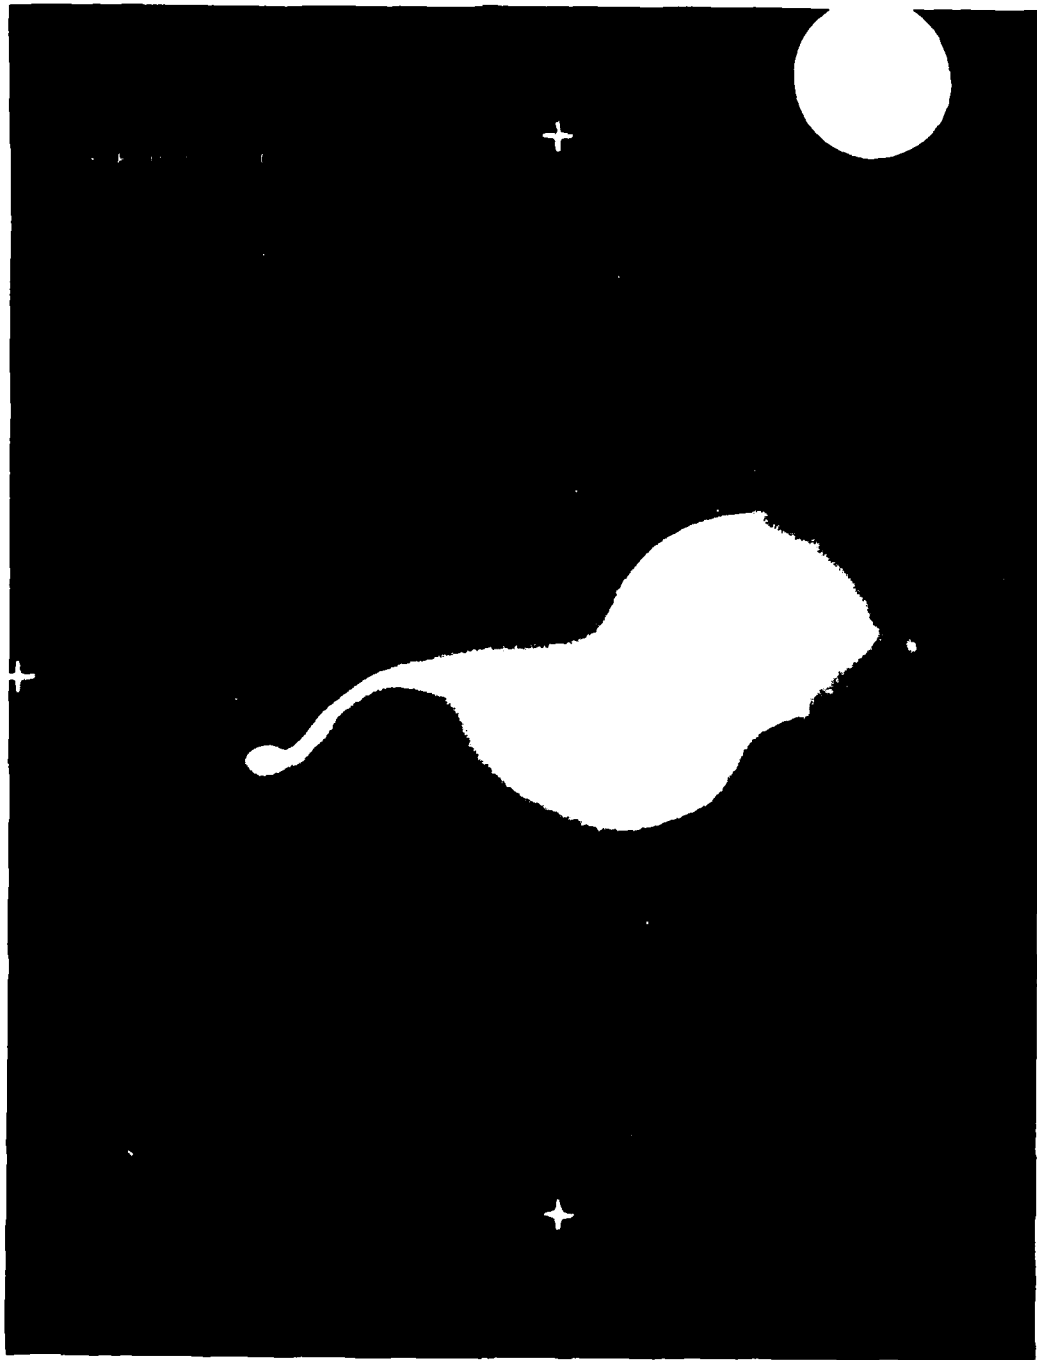


Figure 15. Auroral E trail at 08:44 UT photographed from POKER optical site by the University of Alaska. Note that the film is overexposed from ~ 100 km downward.

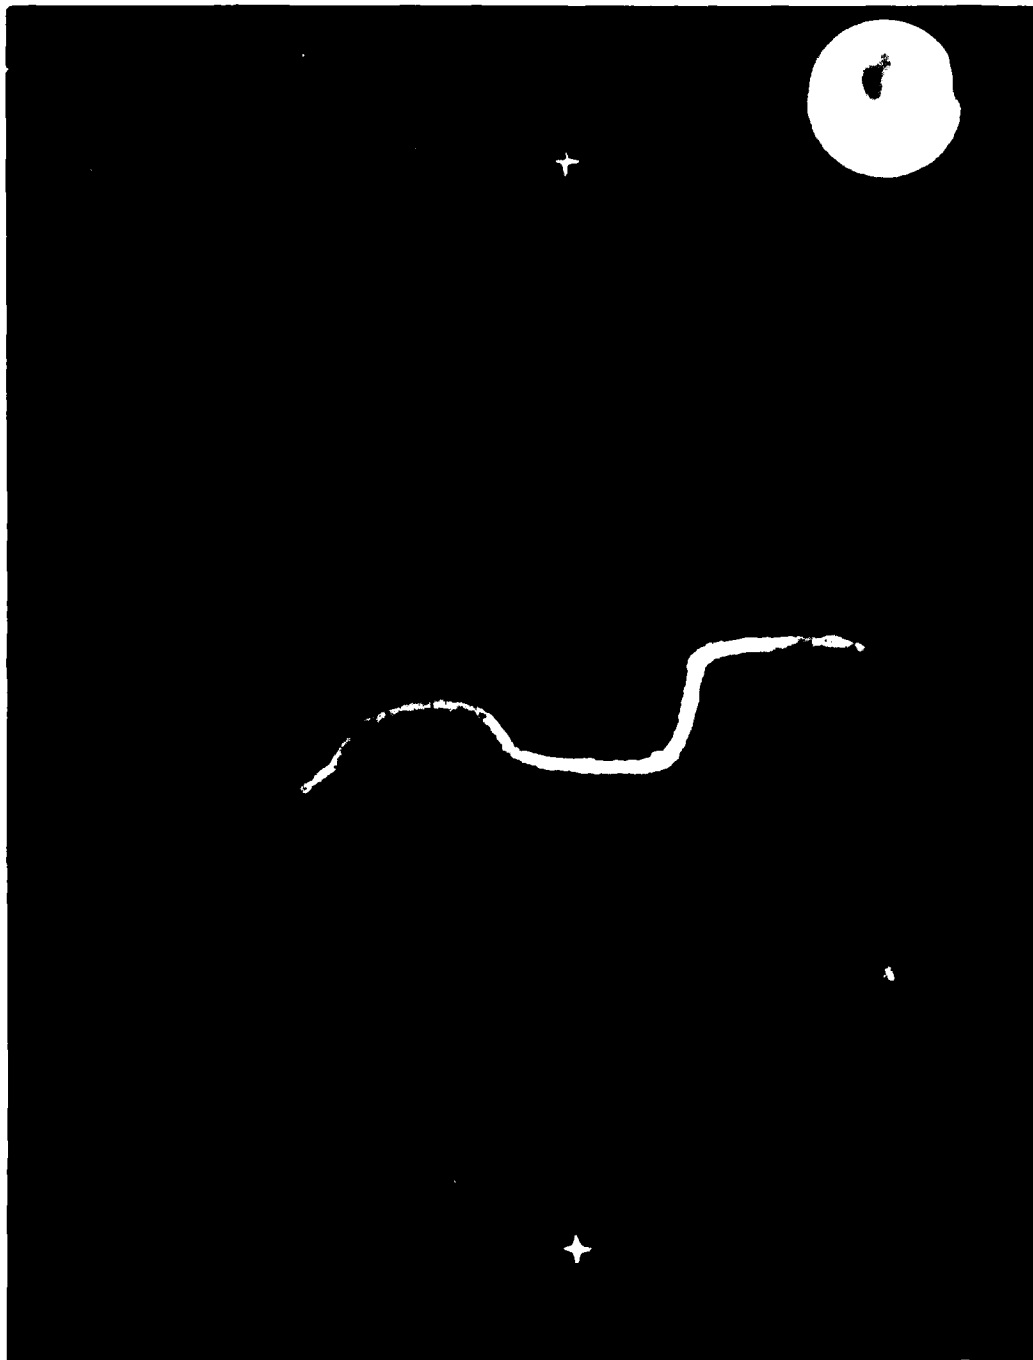


Figure 16. Enhanced version of Figure 16 used to digitize the initially low contrast "core" of the trail.

SECTION III

MODIFICATION AND MAINTENANCE OF THE TRAIL DIGITIZATION SYSTEM

At the start of the present program the existing computer and video film data processing equipment -- the Trail Digitization System -- was approximately 10 years old and the source of considerable lost time due to equipment failures. Much of the hardware was obsolete and repair parts were difficult or impossible to obtain. A major updating of both the computational and video segments, which would not only solve these breakdown problems but also greatly enhance the processing capability of the system, was therefore undertaken.

The Trail Digitization System as originally built was a major hardware and software modification of the AFGL's Video Densitometer System. All existing hardware was retained and a precision microprocessor controlled x-y stage was added to transport the film through the selected areas of the field of view of the video camera. Full field video imagery is suitable only for rough positioning of features (star images or center-lines of trails), while precise digital coordinates and densities or points on the film are obtained from encoded x and y axes of the stage.

Figure 17 is a block diagram of the new configuration of the Trail Digitization System. The 8K memory Datamate computer was replaced by a more powerful 32K memory Data General computer, the video disk memory by a Colorado Video solid state digital frame store, the magnetic tape unit by a faster and more reliable Data General unit, and the Teletype by a Data General terminal. A Data General Winchester disk drive was added to expand program and intermediate data storage, and in addition two smaller

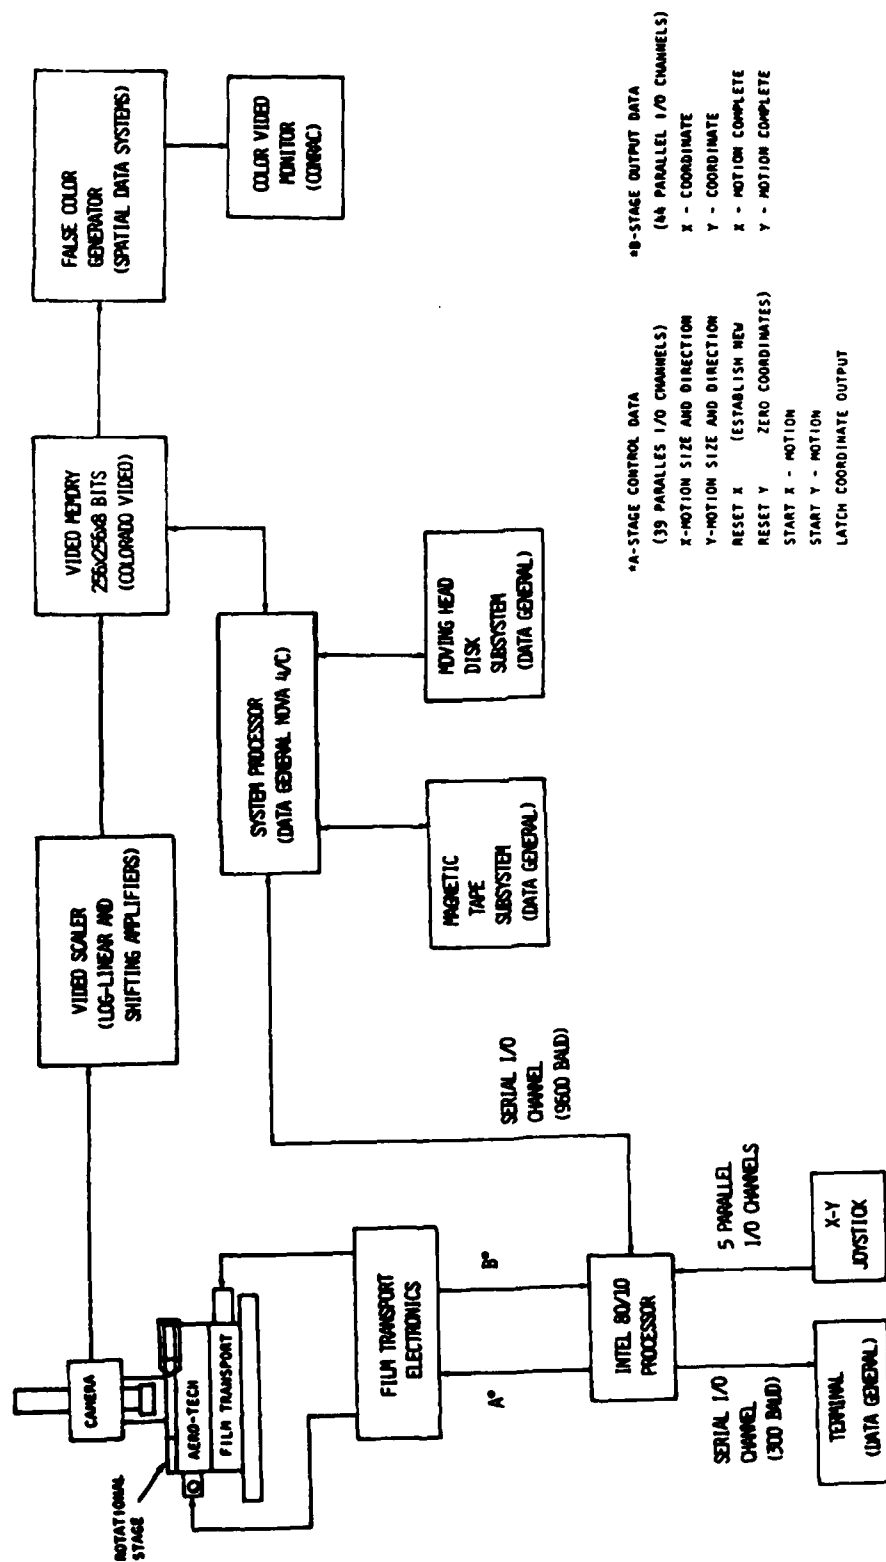


Figure 17. Block diagram of the Trail Digitization System after integration of the new hardware.

pieces of hardware, video sync stripper and video cross hair generator were incorporated. The sync stripper is used to provide necessary horizontal and vertical drive to the video camera and the cross hair generator places a visual reference on the video screen as an operator aid.

The video system is now synchronized totally electronically (previously synchronization was derived from the rotating video disk memory) which has eliminated a beat frequency problem between 60 Hz and the slightly off-60 Hz signal from the disk. Two incompatibilities of new and old equipment that arose were corrected. First the output voltage level of the AFGL Video Scaler was reduced from its 10V level to 1 volt for input to the new analog-to-digital converter, and the false color generator was similarly modified to operate at 1V level rather than 10V. Secondly, the digitize-and-store circuitry of the video memory was modified by addition of a separate video synchronization input and circuits to ensure that it would always digitize the same (geometric) video field.

The changes in hardware necessitated revision of large portions of the system software. The existing 16 Fortran programs were converted from the low level Datamate Fortran to Data General Fortran which allowed enhancement of much of the coding. Even though the overlay structure of the programs has been retained, a significant increase in system throughput has been achieved through expanded computer memory and shorter disk access time. The major processing speed advantage comes, however from a rewrite of the assembly language picture access and processing routines. These 25 subroutines were written to take advantage of the random access character of the new video memory (the old memory provided only video line by line access). The present maximum digitizing rate

(hardware limit) is approximately 1200 coordinate pairs per hour. The average digitizing rate is about one half this figure, and is dependent upon the width of the trail image. The extreme slowness of diagonal or vertical trail scans using the old system (about 10 times slower than horizontal) has been eliminated.

Routine monthly preventive maintenance of the system has consisted primarily of cleaning system components that have moving parts (tape drive, data storage disk, dot matrix printer, and stage drives). Unscheduled maintenance has been performed when the television camera failed to perform adequately and could not be adjusted within specifications. After consulting the manufacturer, we returned the camera for overhaul; this included replacement of the vidicon tube. Several failures of the Data General terminal/printer have been repaired by Data General service personnel with average system down time of about four hours. Repairs have also been made to the only remaining older equipment, the AFGL video scaler and false color generator.

SECTION IV

CONCLUSIONS AND RECOMMENDATIONS

An improved system for digitizing photographically recorded stratospheric tracer trail positions has been constructed. Digital positions have been acquired for several trails and high resolution horizontal wind vectors determined from these data. Routine calculations of horizontal stratospheric winds may be accomplished at vertical resolutions of less than 10 meters and standard deviations of velocity of approximately 0.2 m/sec.

Procedures for determining the orientation of the triangulation cameras have been simplified through the addition of a digital star catalog to the analysis system. Most of the previous manual effort in digitizing star coordinates -- locating and identifying from charts each star image on the film, moving the stage to center the image in the video field of view, and entering the star's right ascension and declination -- has been automated. The accuracy of digitizing the star coordinates has been increased from approximately $20\mu\text{m}$ to approximately $\pm 8\mu\text{m}$. Camera pointing or orientation uncertainties are routinely better than 0.005° and lens focal length determination better than $50\mu\text{m}$.

Further analysis of the wind data was routinely performed to determine the vertical shear of the horizontal wind, which is a description of the degree of turbulence present. The Richardson number which is a further descriptor of atmospheric turbulence, was calculated for two trails for which an altitude profile of stratospheric temperature was available.

The smoke trail technique was applied successfully to a high altitude sunlight-scattering chemical trail and could

thus be used as a calibration procedure for high altitude radar wind measurements (such as those made by the MST radar).

The dashed trail technique, which evolved several years ago as a means of providing identifiable points on the trail (dash ends), should be reconsidered in favor of continuously released smoke since the triangulation no longer requires these markers. Continuous trails would allow a full profile of horizontal wind velocity as a function of altitude (approximately one third to one half of the data are now lost in the gaps between dashes).

With the integration of the new hardware into the Trail Digitization System, maintenance requirements have decreased significantly. Failures have been limited to devices which have mechanical parts and to the remaining old electronic equipment. Digitizing efficiency has been increased through the reduction of time spent in troubleshooting and repair of the system.

REFERENCES

1. C.A. Trowbridge and W.S. Andrus, An Automated Coordinate Measurement System for Smoke Trail Photographs, AFGL-TR-78-0231 (PhotoMetrics, Inc., Report PhM-08-78), 29 Sep 1979, AD A062485.
2. C.A. Trowbridge, I.L. Kofsky, and R.H. Johnson, Recording and Analyzing Optical Data from Stratospheric Dynamics Experiments, AFGL-TR-78-0015 (PhotoMetrics, Inc., Report PhM-03-78), 14 Jan 1979, AD A054013.
3. A.F. Quesada, Application of Vector and Matrix Methods to Triangulation of Chemical Releases in the Upper Atmosphere, AFCRL-71-0233, 23 Apr 1971, AD 729448.
4. A.F. Quesada, Vector Evaluation of Triangulation Camera Parameters from Star Photographs, AFCRL-TR-75-0451, 21 Aug 75, AD A019655.
5. C.A. Trowbridge, Digitization and Analysis of Photographic Images of Stratospheric Smoke Trails, AFGL-TR-80-0230 (PhotoMetrics, Inc., Report PhM-02-80), 30 Jul 1980, AD A093926.
6. A.F. Quesada, S.P. Zimmerman, R.E. Good, C.A. Trowbridge, and R.O. Olsen, Mesospheric Dynamics Measured During the 1976 "Winter Anomaly" Campaign, COSPAR: Space Research Volume XVIII, Pergamon Press, 1978.
7. A.F. Quesada and C.A. Trowbridge, Analysis of Smoke Trail Photographs to Determine Stratospheric Winds and Shears, AFGL-TR-76-0243, 8 Oct 1976, AD A035504.
8. C.A. Trowbridge, Densitometric Analysis to Determine Artificial Cloud Expansion Characteristics, AFGL-TR-78-0075 (PhotoMetrics, Inc., Report PhM-05-78, AD A065259.
9. A.F. Quesada, High Resolution Stratospheric Winds from Chemical Smoke Trail Experiments at White Sands, Wallops Island, and Churchill, Paper SA51-08 presented at the Spring 1982 AGU Meeting.
10. A.F. Quesada and C.A. Trowbridge, Thermospheric Winds at Poker Flat During Diffuse Aurora of 6 March 1981, Paper SA31-11 presented at the Spring 1983 AGU Meeting.
11. R.E. Good and A.F. Quesada, Probability Distribution of Turbulent Layer Thickness in the Stratosphere, Paper M12-8 presented at the Spring 1983 AGU Meeting.

12. E.M. Dewan, N. Grossbard, A.F. Quesada and R.E. Good,
Spectral Analysis of 10 m Resolution, Horizontal Velocity
Profiles in the Stratosphere, Paper SA51-09
presented at the Spring 1982 AGU Meeting.

END

FILMED

5-84

DTIC