

AD


AD-E401 504

CONTRACTOR REPORT ARCCD-CR-86004

ESTABLISHMENT OF PRODUCTION LINE FOR MANUFACTURE OF 40-MM M169 CARTRIDGE CASE

ANDREW VARGO AMRON CORPORATION 525 PROGRESS AVENUE WAUKESHA, WI 53186

ANTHONY MARTUCCIO PROJECT ENGINEER ARDC



MAY 1986



U. S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER

CLOSE COMBAT ARMAMENT CENTER

DOVER, NEW JERSEY

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED.

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other documentation.

The citation in this report of the names of commercial firms or commercially available products or services does not constitute official endorsement by or approval of the U.S. Government.

Destroy this report when no longer needed. Do not return to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION	READ INSTRUCTIONS BEFORE COMPLETING FORM			
1. REPORT NUMBER	2. GOVT ACCESSION NO.			
Contractor Report ARCCD-CR-86004	ADA 168 419			
4. TITLE (and Subtitle)	14-11	5. TYPE OF REPORT & PERIOD COVERED		
ESTABLISHMENT OF PRODUCTION LINE FO)R			
MANUFACTURE OF 40-mm M169 CARTRIDGE				
		6. PERFORMING ORG, REPORT NUMBER		
7. AUTHOR(a)		B. CONTRACT OR GRANT NUMBER(#)		
Andrew Vargo, Amron Corporation	į	DAAK10-82-C-0247		
Anthony Martuccio, Project Engineer	ARDC			
9. PERFORMING ORGANIZATION NAME AND ADDRESS		10 000000000000000000000000000000000000		
		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS		
Amron Corporation				
525 Progress Avenue Waukesha, WI 53186				
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE		
ARDC, IMD		May 1986		
STINFO Div (SMCAR-MSI)		13. NUMBER OF PAGES		
Dover, NJ 07801-5001		53		
14. MONITORING AGENCY NAME & ADDRESS(If different	from Controlling Office)	15. SECURITY CLASS. (of this report)		
ARDC, CCAC				
Light Armament Div (SMCAR-CCL)		Unclassified		
Dover, NJ 07801-5001		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE		
	_	33112322		
16. DISTRIBUTION STATEMENT (of this Report)				
A1.6				
Approved for public release; distri	bution unlimited	•		
17. DISTRIBUTION STATEMENT (of the abetract entered in Block 20, if different from Report)				
10 10 10 10 10 10 10 10 10 10 10 10 10 1				
18. SUPPLEMENTARY NOTES				
19. KEY WORDS (Continue on reverse side if necessary and	d identify by block number)			
Automated production line				
40-mm M169 cartridge case				
20. ABSTRACT (Continue on reverse side if necessary and	identify by block number)			
•	,			
A fully automated production line w				
cartridge cases per month on a 1-8-5 basis was established. A demonstration				
test was performed to determine the actual production capacity.				
		ì		
		1		

DD 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF	THIS PAGE(When Data Entered)		_
			1
			ı
			1
			1
			1
			1
			1
			Ì
			1
			1
			ı
			Ì
			Ì
			ł
			1

Table of Contents

1.	INTROD	UCTION	Page
	1.1 1.2 1.3	Facility Project Objective	. 1
2.	PROCES	S DESCRIPTION	
	2.1	Flow Process Diagram	. 3
3.	SUMMAR	Y OF DEBUG TESTING	
	3.1 3.2 3.3 3.4 3.5 3.6 3.7	Objective	. 5 . 5 . 6
4.	DEMONS	TRATION PLAN	
	4.8	Objective	 9 10 12 12 13 14 +6
		NTIS COURT PORTION Availability Code 1 Availability Special	



5.	DEMONS	TRATION TEST	Page
	5.1	Test Description	. 17
	5.2	Data Analysis	. 18
	5.3	Demonstration Test Summary	. 19
	5.4	Problem Areas	. 19
	5.5	Conclusions	. 20
	ı	Manufacturing Process Flow Chart	. 21
	II	Process Description	. 22
	III	Equipment Demonstrated	41
	IV	Demonstration Test Schedule	43
	v	Demonstration Test Summary	
	DISTRIE	BUTION LIST	4.7

1. INTRODUCTION

1.1 FACILITY PROJECT OBJECTIVE

Amron Corporation set up a cartridge case production facility with the capability of 160,000 M169 cartridge case per month on a 1-8-5 basis, as stated in Contract DAAK10-82-C-0247.

As a requirement of this contract, a demonstration test was performed to determine actual production capacity.

Amron demonstrated this production capacity on hardware Contract DAAK10-83-C-0213.

Amron demonstrated to the Government the capability on those pieces of equipment procured under this contract.

1.2 MANUFACTURING FACILITY DEVELOPMENT

Debugging of the production machinery began in March of 1983 and was completed in May of 1983. Volume case production began in June of 1983. Debugging of automation then proceeded and was completed in October of 1984. The Demonstration Test was conducted from October 3, 1984 to November 9, 1984.

AND THE STATE OF STAT

cont figt

1.3 MANUFACTURING PROCESS SUMMARY

The M169 cartridge case is manufactured from extruded aluminum rod. The rod is cold sawed into slugs, which are then extruded, drawn, and headed in mechanical press operations. Heat treatment to a T4 state is next followed by vent hole drilling, machining, and anodizing.

The or port provides a flow chant and description of the manufacturing process, a summary of the demonstration test and lists a problem one which was encountered. Keywords:

Automated production line.

- 2.1 Flow Process Diagram: A simplified flow process diagram is provided (Exhibit I) indicating each step in the cartridge case production manufacturing sequence by operation title and number. Also, this diagram includes inprocess inspection stations and material handling modes.
- 2.2 <u>Manufacturing Process Description</u>: The manufacturing process description is identified for each production manufacturing sequence as shown on the simplified flow process diagram (Exhibit I) and individual process description sheets (Exhibit II).

3. SUMMARY OF DEBUG TESTING

OBJECTIVE: To evaluate the equipment, manufacturing procedures, inspection procedures, and set-up and calibration procedures for the M169 cartridge case line and modify or correct as necessary. This was done while the M169 was in production. Quality of cartridge cases produced, as well as personnel talents and equipment performance, had been established based on government acceptance of M169 cartridge cases prior to shipment to the Army Ammunition Plant.

3.2 MANAGEMENT:

Andrew J. Vargo - Program Manager, Engineer Manager Overall project responsibility including production manufacturing process development, equipment and tooling selections.

Shirley A. Peterson - Quality Control Manager

Overall quality assurance project responsibility for all gaging and testing procedures used in the manufacturing of the M169 cartridge case. This responsibility also dictated that in process controls be established on all production operations.

3.2 MANAGEMENT: Cont'd

William P. Novak - Production Manager

Overall production responsibility by providing competent personnel and supervision to set-up, debug and operate all production equipment provided under this project.

This debugging cycle had been accomplished prior to demonstration test based on the fact that all equipment provided under this project was in production use to manufacture MJ.69 cartridge cases for shipment to the U.S. Government.

- 3.3 SCHEDULE: The debugging cycle was performed on Amron's floor prior to the equipment release to production. This debugging phase has been completed on all manufacturing operations.
- 3.4 COST: All costs associated with the debugging cycle have been awarded under Amron's facility contract DAAK10-82-C-0247, CLIN 0001 for subject project.
- DATA COLLECTION: Data collected and recorded during the debugging cycle consisted of equipment and quality problems, analyses of these problems, and the corrective action (s) taken. Equipment purchase description specifications were used in determining the final acceptance of this equipment. Corrective action was performed by the equipment vendor or Amron's personnel depending on responsibility.

3.6 GOVERNMENT SUPPORT:

Government furnished mater/government furnished equipment:

Oper. No.	Description	Equipment
20	Saw Slug	Wagner KMLN-2 Cold Saw, Govt. I.D. No.003419-21043
60	Zinc Stearate Coat	Sweco Model FMD-20-HA Vibratory Finishing Mill Govt. I.D. No.003680-00523
70	Extrusion	Danly SS1-400 Press Govt. I.D. No.003443-08756
110	Draw	Danly SA-1-100 Press Govt. I.D. No.3443-08970
120	Trim	V & O Trimmers (2) Govt. I.D. No.3449-01608 Govt. I.D. No.3449-01412
130	Head	Bliss #7 Press Govt. I.D. No.3443-08083
170	Drill Vent Holes	Drill Machines (2) Govt. I.D. No.3598-36432 Govt. I.D. No.3413-16570

Government facilities or services: None required

3.7 SUMMARY OF RATE BUILD-UP ATTAINED DURING DEBUG TESTING:

June	1983	20,000
July	1983	30,000
Aug	1983	40,000
Sept	1983	50,000
Oct	1983	60,000
Nov	1983	70,000
Dec	1983	80,000
Jan	1984	90,000
Feb	1984	100,000
Mar	1984	105,000
Apr	1984	125,000
May	1984	125,000
June	1984	90,000
July	1984	90,000
Aug	1984	125,000
Sept	1984	144,000
Oct	1984	153,600
Nov	1984	201,600
Dec	1984	201,600

4. DEMONSTRATION PLAN

4.1 OBJECTIVE:

To demonstrate to the U.S. Government that Amron Corporation, Waukesha, Wisconsin (Antigo Plant), has successfully installed a product on line for the M169 cartridge case with a capacity of 160,000 units per month on a 1-8-5 hours per month basis.

4.2 PRODUCTION REQUIREMENTS:

Each piece of production equipment assigned to this project and listed in Exhibit III was demonstrated by producing a minimum of 34,415 acceptable M169 cases in thirty five (35) hours. All equipment necessary to support the prove-out of a manufacturing operation, regardless of ownership or origin, was operated during the demonstration of that operation.

4.3 EQUIPMENT MAINTENANCE PROGRAM:

4.3.1 Amron's maintenance policy for the M169 cartridge case manufacturing line provides for periodic production equipment shutdown. Shutdown is scheduled after the need for repair has been identified by the manufacturing department and assessment has been made by in-house maintenance personnel. The equipment shutdown schedule is determined by two (2) main factors: length of equipment downtime needed for this repair and the size of the storage bank needed at this operation to comply with contractual delivery schedule.

If an equipment failure requires an excessive amount of time to repair, Amron's maintenance policy includes the use of alternate production equipment from other product lines. This is permitted provided that the replacement piece of equipment is compatible with the production operation and minimal change over time is required, also authorization for use is received from the PCO.

- 4.3.2. The individual manufacturing operations shown on Exhibit I

 (Process Flow Diagram) and Exhibit II (Process Description

 Sheets) identify the maintenance effort to be performed on
 the equipment and associated tooling. This effort is defined
 as follows:
 - - Preventive Maintenance Schedule.
 - - Manuals:
 - - Records/Documentation.
 - - Spare Parts:

- 4.3.3. The Amron Corporation did not plan to demonstrate any maintenance tasks during this test program. If any equipment failure had been realized during this period, Amron's standard maintenance program would have been used.
- 4.4 Environmental Considerations: The Amron Corporation has four
 (4) manufacturing processes, used in the production of the M169
 cartridge case, that are under State and Federal environmental
 controls.

Operation Number 30, Clean and Etch:

Equipment: Ransohoff Rotary Drum Washer, 4-Stage with Drier.

Controls:

Wastewater - - - NR101 Effluent Reporting Section 144.54 of
Wisconsin Statutes.

Federal Pretreatment Regulations - 40 CFR
Part 413.

Hazardous Waste - - - Federal Regulations 3004 of RCRA.

State Regulations NR181 - Hazardous Waste

Management Rule.

4.4 (Cont'd)

Operation Number 80, Acid Clean:

Equipment: Ransohoff Rotary Drum Washer, 3-Stage.

Controls:

Wastewater - - - NR101 Effluent Reporting Section 144.54 of
Wisconsin Statutes.

Federal Pret_eatment Regulations - 40 CFR
Part 413.

Hazardous Waste - - - Federal Regulations 3004 of RCRA.

State Regulations NR181 - Hazardous Waste

Management Rule.

Operation 100, Deoxidize And Soap Coat:

Equipment: Advance Curing Rotary Drum Washer, 3-Stage with Drier.

Controls:

Wastewater - - - NR101 Effluent Reporting Section 144.54 of
Wisconsin Statutes.

Federal Pretreatment Regulations - 40 CFR
Part 413.

Hazardous Waste - - - Federal Regulations 3004 of RCRA.

State Regulations NR181 - Hazardous Waste

Management Rule.

4.4. (Cont'd)

Operation Number 210, Anodize:

Equipment: ACA Anomatic, continuous belt, multiple tank, anodizing system.

Controls:

Wastewater - - - NR101 Effluent Reporting Section 144.54 of
Wisconsin Statutes.

Federal Pretreatment Regulations - 40 CFR

Hazardous Waste - - - Federal Regulations 3004 of RCRA.

State Regulations NR181 - Hazardous Waste

Management Rule.

4.5. Schedule: The demonstration test schedule was as shown on Exhibit IV, Demonstration Test Dates.

Part 413.

4.6. Government Support:

4.6.1 Government Furnished Material (GFM) No additional Government furnished Government Furnished Equipment items were required in preparation or performance of this test.

4.6.2 Government Furnished Facilities

Government Furnished Services

Government Furnished Services

items were required in preparation or performance of this test.

4.7 Personnel Requirements:

4.7.1 Personnel required for performance of this <u>demonstration</u>

<u>test</u> have been categorized by work function. The

distribution of personnel is shown below:

Personnel Category	Personnel Qty.
Production (Set-up & Operators)	8
Inspection (Patrol & Line)	4
Laboratory (Tool & Gage, Chemical)	3
Maintenance (Tooling & Equipment)	2
Support (Receiving, Shipping & Stores)-	1
Supervision	2
TOTAL	20

4.8 Contractual data item requirements for the M169 facility are as defined on the DD form 1423 incorporated in contract DAAK10-82-C-0247. These data item requirements are defined below:

Sequence No.	Description of Data
A001	Final Technical Report
A002	Purchase Description
A003	Project Status Report
A004	Operational Baseline Listing
A005	Commercial Computer and Peripheral
	Equipment Manuals
A006	Instruction Manuals
A007	Demonstration Test Plan
A008	Drawings, Engineering Associated Lists
A009	Provisioning & Other Procurement
	Screening Data

4.8 (Cont'd)

Sequence No.	Description of Data
A010	Subproject Funding Report .
A011	Letter Progress Reports
A012	Equipment History Data Package
A01 3	Inspection System Program Plan
A014 A015 A016	Quality Inspection Test Demonstration and Evacuation Report
A017	Ammunition Data Card
A018	Utility Inspection Unserviceable
	Material Report
A019	Quality Engineering Inspection
A020	Equipment Descriptive Documentation
A021	Quality Inspection Defect Report
A023	Defense Priorities and Allocations
A024	System Safety Hazard Analysis Report
A025	ECP's and RFD/W's (Short Form)
A026	Bills of Material

4.9 Demonstration Test Evaluation:

4.9.1 Representatives from the Engineering and Quality
Assurance departments assisted in evaluating the
results of this demonstration test.
Government personnel involved in test evaluation
represented the following agencies:

ARRADCOM - Dover, New Jersey

P.B.M. - Dover, New Jersey

DCAS - Milwaukee, Wis

- 4.9.2 Conventional mathematics were used for the conversion and analysis of the test data. The ability of Amron to produce acceptable product at the required rates are exhibited by the data collected.
- 4.9.3 Amron's ability to produce at the stated manufacturing rate was demonstrated by the data collected during the test provides the basis of line acceptance.

DEMONSTRATION TEST

5.1 TEST DESCRIPTION

Amron Corporation demonstrated to the U.S. Government the capability of 160,000 units on a 1-8-5 basis, for the M169 cartridge case production line as stated in Contract DAAK10-82-C-0247.

This demonstration test was performed in the presence of the following Government representatives:

Mr. Joseph McCarthy US Army PBMA Dover, New Jersey

Mr. Patrick Boushon DCASMA Appleton, Wisconsin

The production run was performed to insure the capability of each operation at the rate specified by the Government.

Amron demonstrated the awarded capacity using hardware provided under Contract DAAK10-83-C-0213.

The Demonstration Test Schedule is shown on Exhibit IV.

During this demonstration, Amron maintained detailed records on each operation.

These records included as a minimum:

- a) Number of parts produced.
- b) Number of parts scrapped.
- c) Test start and stop time.
- d) Cause of excessive downtime.
- e) Average daily production rate.

Thirt/ five hours of production were accumulated at each operation. In some cases where more than one identical machine was used at an operation, only one machine was demonstrated for the test. It was assumed that all identical machines would perform the same.

During the demonstration of the first several operations, a shipment of raw material was late in arriving and the demonstration had to be interrupted. This did not count as test time, and upon receipt of the raw material the test was resumed. Running out of raw material is considered a very rare occurrence on the M169 production line.

Machine downtime due to waiting for parts from a previous operation was termed administrative downtime.

5.2 DATA ANALYSIS

5.2.1 Failure data were recorded on the Prove-Out Data Collection

Sheet. Notations on the sheets did not require further definition.

- 5.2.2. Production data were collected from part counters at mechanical operations. These same counts were used for subsequent finishing operations since the same piece parts were run through all machines in a series with no accumulation in between. Times were recorded by an observer with a stop watch.
- 5.2.3. Quality data were collected by charts which are a normal part of the Amron Quality Control System. Out of tolerance parts were normally produced during machine adjustments and counted by the set up person.

5.3 DEMONSTRATION TEST SUMMARY

Analysis results are listed under Exhibit V.

5.4 PROBLEM AREAS

- 1. No product quality problems were encountered during the test.
- 2. One serious mechanical problem was encountered. The lubrication system on the Sweco Vibratory Mill, Operation 60, was inoperative for two days due to a vacuum failure. Changing to a lower viscosity oil restored the machine to service, but an investigation with the manufacturer is proceeding to see if a simplier lubrication system can be retrofitted.

5.5 CONCLUSIONS

The demonstration run did net 100% of the awarded line capacity. These parts became the property of the Government through the current hardware contract and became part of the deliverable quantities.

Amron demonstrated the capability of the manufacturing operations to meet the (stated) rate by producing a minimum of 34,415 acceptable cartridge cases in 35 hours at each operation. All equipment necessary to support the prove-out of an operation, regardless of ownership or origin, was operated during the demonstration of that operation.

The ability to produce at the stated rate as evidenced by the data collected formed the basis of line acceptance.

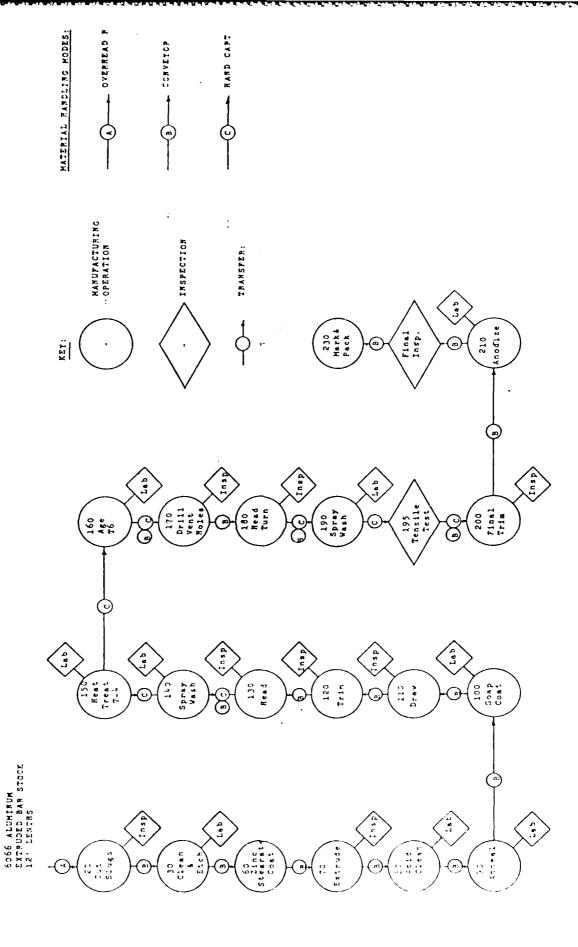


Exhibit I

Operation Number: 20
Operation Description: Saw 12 foot by 1.830 inch diameter aluminum bars into slugs approximately .803" long. Bars are loaded on to saw table by overhead crane and cut slugs discharge automatically onto conveyor belt.
Operation Characteristic: Cold sawing extruded aluminum bars.
Equipment Description: Wagner model KMLN-2 cold saw with 14' infeed table and Bijur Mist Lubrication System; Year of Mfg. 1966.
Equipment Warranties: Expired
Calibration Requirements: Carriage speed, length of cut.
Inspection Requirements: 5 samples checked for correct weight each hour.
Certification Requirements: Material Yes Personnel
Manpower Requirements: Set-up: 1/2 man Patrol Inspector: 1/2 man
Safety Requirements: Standard safety requirements are enforced as directed by good working practices and O.S.H.A. regulations.
Special Environmental Controls: None
Preventative Maintenance Schedule:
Manuals: Operating Yes Maintenance
Records/Documentation: In process control charts Work order system - maintenance

Spare Parts: Drive Belts Switches

Stock Clamps

Operation Number: 30

Operation Description: Cartridge case blanks are automatically fed thru spiral drum type washer and are dried at the exit end.

Operation Characteristic: Alkaline clean, water rinse, caustic etch, water rinse, and dry.

Equipment Description: Ransohoff Four (4) Stage Horizontal Spiral Drum Washer with Dryer.

Equipment Warranties: Expired - Year of Mfg. 1968

<u>Calibration Requirements</u>: Drum speed, steam pressure, alkaline tank temperature, caustic etch temperature and dryer temperature.

Inspection Requirements: Appearance of etch

Frequency: (1) sample every 4 hours

Certification Requirements: Material Personnel In-House

Manpower Requirements: Set-up: 1/5 man

<u>Safety Requirements:</u> Standard safety, requirements are enforced as directed by good working practices and O.S.H.A. regulations.

Special Environmental Controls: Outside air vent.

Preventative Maintenance Schedule: As required.

Manuals: Operating Yes Maintenance Yes

Records/Documentation: Work order system - maintenance

Lab services

Spare Parts: Temperature Controls

Steam Coils
Trunion Wheels

Operation	Number:	60				
Operation	Descript	ion: Cartr	idge case l	blanks ar	e automat	cically fed powered
thru vibra	atory fin	ishing mil	l filled w	ith Zinc	Stearate	powered
extrusion	lubrican	t and wood	en peg med:	ia.		

Operation Characteristic: Coat with Zinc Stearate lubricant.

Equipment Description: Sweco model FMD-20 HA Vibratory Finishing Mill.

Equipment Warranties: Expired - Year of Mfg. 1973.

Calibration Requirements: Amount of lubricant and wooden pegs in mill.

Inspection Requirements: At daily start-up.

Certification Requirements: Material Personnel In-House

Manpower Requirements: Set-up: 1/4 man

Safety Requirements: Standard safety requirements are enforced as directed by good working practices and O.S.H.A. regulations.

Special Environmental Controls: Dust Collection System.

Preventative Maintenance Schedule: As required.

Manuals: Operating Yes Maintenance

Records/Documentation: Work Order System -

Maintenance

Spare Parts: Discharge Screen

Vacuum Filters Vacuum Pump Vacuum Bowls

ENHIBIT II

•	
Operation Number: 70	
Operation Description: Cartrige case blanks are autothru extrusion press and extruded.	omatically fed
Operation Characteristic: Extrusion	
Equipment Description: Danly SS1-400 vertical straigmechanical extrusion press.	jht side
Equipment Warranties: Expired - Year of Mfg. 1952	
<u>Calibration Requirements</u> : Slide adjustment, knockout parts feeder.	t pressure,
Inspection Requirements: Seven (7) different dimension evidence of poor workmanship (5 pieces every 30 minutes)	onal checks and utes).
Certification Requirements: Material	Personnel <u>In-House</u>
Manpower Requirements: Set-up: 1/4 man Patrol Institute: 1/4 man	spector 1/8 man
Safety Requirements: Standard safety requirements and directed by good working practices and O.S.H.A. regularity	re enforce as ulations.
Special Environmental Controls: Dust Collection System	em.
Preventative Maintenance Schedule:	
Manuals: Operating Yes Maintenand	ce

Records/Documentation: In process control charts

Work order system - maintenance

Spare Parts: Extrusion Punches & Dies

Drive Belts

Operation Number: 80 Operation Description: Cartridge cases are automatically fed thru spiral drum type washer. Operation Characteristic: Acid clean, water rinse. Equipment Description: Ransohoff Three (3) Stage Horizontal Spiral Drum Washer. Equipment Warranties: Expired - Year of Mfg. 1968 Calibration Requirements: Drum speed, steam pressure, acid tank temperature, rinse tank temperature. Cleanliness of parts Inspection Requirements: Frequency: (1) sample every 4 hours Certification Requirements: Material Personnel In-house Manpower Requirements: Set-up: 1/5 man Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations. Special Environmental Controls: Outside air vent.

Preventative Maintenance Schedule: As required.

Manuals: Operating Yes Maintenance

Records/Documentation: Work Order System - Maintenance

Lab Services

Spare Parts: Temperature Controls

Steam Coils Trunnion Wheels

Operation Number: 90
Operation Description: Cartridge cases are annealed in this pot type annealing oven. Parts are loaded into pot from storage hopper. Overhead hoist positions pot in oven and then dumps pot into discharge hopper.
Operation Characteristic: Circulation of heat necessary to insure proper annealing of cartridge cases with good temperature uniformity.
Equipment Description: Despatch DT-26 natural gas pot type annealing oven.
Equipment Warranties: Expired - Year of Mfg. 1961.
Calibration Requirements: Temperature, length of cycle.
Inspection Requirements: 5 parts per load checked for hardness in lab.
Certification Requirements: Material Personnel In-House
Manpower Requirements: Set-up: 1/8 man
Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.
Special Environmental Controls: Outside air vent.
Preventative Maintenance Schedule:
Manuals: Operating Yes Maintenance
Records/Documentation: Base Recorder Charts - Process Control Work Order System - Maintenance
Spare Parts: Temperature Controller Blower Parts

EXHIBIT II

Blower Bearings Blower Motor

Operation	Number:	100
-----------	---------	-----

Operation Description: Cartridge cases are automatically fed through spiral drum type washer.

Operation Characteristic: Deoxidize, rinse, soap coat, and dry.

Equipment Description: Advanced Curing Three (3) Stage Horizontal Spiral Drum Wahser with Dryer.

Equipment Warranties: Expired - Year of Mfg. 1983.

Calibration Requirements: Drum speed, steam pressure, deoxidize Lank temperature, hot water rinse tank temperature, soap tank temperature.

Inspection Requirements: Appearance of Soap Coat.

Frequency: (1) sample every 4 hours

Certification Requirements: Material Personnel In-house

Manpower Requirements: Set-up: 1/5 man

<u>Safety Requirements:</u> Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.

Special Environmental Controls: Outside air vents.

Preventative Maintenance Schedule:

Manuals: Operating Yes Maintenance Yes

Records/Documentation: Work System - Maintenance

Lab Services

Spare Parts: Temperature Controls

Steam Coils Trunnion Wheels

EXHIBIT II

Operation Number: 110
Operation Description: Cartridge cases are automatically fed through draw press and drawn.
Operation Characteristic: Draw
Equipment Description: Danly SA-1-100 vertical straight side mechanical draw press.
Equipment Warranties: Expired - Year of Mfg. 1952.
Calibration Requirements: Slide adjustment, die size, parts feeder speed.
Inspection Requirements: Four (4) different dimensional checks and evidence of poor workmanship (6 pieces every 30 minutes)
Certification Requirements: Material Personnel In-house
Manpower Requirements: Set-up: 1/4 man
Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.
Special Environmental Controls:
Preventative Maintenance Schedule:
Manuals: Operating Yes Maintenance
Records/Documentation: In process Control Charts Work Order System - Maintenance
Spare Parts: Draw Punches & Dies Drive Belts.

Operation Number: 120
Operation Description: Cartridge cases are automatically fed through trimmer and trimmed to length.
Operation Characteristic: Rough trim
Equipment Description: V & O Model 983 trimmers (2).
Equipment Warranties: Expired
Calibration Requirements: Trim length.
Inspection Requirements: Two (2) different dimensional checks (6 pieces every 30 minutes).
Certification Requirements: Material Personnel In-house
Manpower Requirements: Set-up: 1/4 man
Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.
Special Environmental Controls:
Preventative Maintenance Schedule:
Manuals: Operating Maintenance
Records/Documentation: In process Control Charts Work Order System - Maintenance
Spare Parts: Trim Wheels Arbor Assemblies Drive Belts Bearings

Operation Number:

130

Operation Dethrough hea	eneription: ding proun.	Cartridgo	casan ara	nutomatica	illy fod	
Operation Ch	inracterist	le: Form he	ead.			
Equipment De	ncription:	Bliss #7 h	orizontal	toggle pro	! IS IS ,	,
•				,		
	,	•	•	,		
Equipment Wa	rrantics:	Expired - Y	ear of Mf	g. 1952.		
Calibration punch positi	Requirement	s: Slide ad	justment,	center blo	ck alignm	ient,
Inspection R (5 pieces ex	equirements very 20 minu	: Eleven (1 utes)	l) differ	ent dimensi	onal chec	k s
Certificatio	n Reguireme	nts: Mate:	ial	, Pe	rsonnel I	n-hous
Manpower Req	uirements: Op	Set-up: 1/4 perator: 1/4	man man			
Safety Requidirected by	rements: S Good Workin	Standard safing Practices	ety requiand o.s.	rements are H.A. regula	enforced	as
Special Envi	ronmental C	ontrols:				
Preventative	Maintenane	e Schedule:				
Manuals;	Operating		M	aintenance .	·	,
Records/Docum	nentation;	In process Work Order		Charts Maintenanc	ee	
Spare Parts:	Punches & Drive Belt					
	Center Blo					
	Crankshaft	.: £5				
	Bearings					

EXHIBIT II

Operation Number:

140

Operation Description: Cartridge cases in wire baskets are fed through a mesh belt washer and dried.
Operation Characteristic: Alkaline clean, cold water rinse, hot water rinse, and dry.
Equipment Description: Ransohoff Three (3) Stage Mesh Bolt Washer with dryer.
Equipment Warranties: Expired - Year of Mfg. 1968.
Calibration Requirements: Belt speed, steam pressure, alkaline tank temperature, rinse tank temperature, and dryer temperature:
Inspection Requirements: Cleanliness of part Frequency: (1) sample every 4 hours
Certification Requirements: Material Personnel In-house
Manpower Requirements: Set-up: 1/8 man
Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.
Special Environmental Controls: Outside air vent.
Preventative Maintenance Schedule:
Manuals: Operating Yes Maintenance
Records/Documentation: In process Control Charts Work Order System - Maintenance
Spare Parts: Stack Fan Belts Bearings Pumps

Operation Number: 150

Operation Description: Cartridge cases in wire baskets are loaded onto grids and fed through a pusher type T-4 Quench Furnace.

Operation Characteristic: Circulation of heat necessary to insure proper solid solution treatment of metal followed by rapid water quench.

Equipment Description: Pacific Scientific pusher type T-4 Quench Furnace, natural gas fired, 3 zone control.

Equipment Warranties: Expired - Year of Mfg. 1968.

Furnace temperature, quench tank Calibration Requirements: temperature. Cycle time.

Hardness test, chart recorder printouts Inspection Requirements: Frequency: 10 samples per grid

Personnel In-house

Laboratory: 1/4 man Manpower Requirements: Set-up:

Utility: 1/4 man

Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.

Special Environmental Controls: Outside air vent.

Certification Requirements: Material

Preventative Maintenance Schedule:

Yes Operating Yes Maintenance , Manuals:

In process Control Charts Records/Documentation:

Work Order System - Maintenance

Recorder Charts

Spare Parts:

Recorder Controller Bearings

Circulation Fan

Operation Number: 160

Operation Description: Cartridge cases in wire baskets are loaded onto carts and aged in an artificial aging oven.

Operation Characteristic: Circulation of heat necessary to insure proper artificial age hardening of cartridge cases with good temperature uniformity.

Equipment Description: Despatch model DT200 gas fired artificial aging oven.

Equipment Warranties: Expired - Year of Mfg. 1968.

Calibration Requirements: Temperature, air flow baffle adjustment.

Inspection Requirements: Hardness test, chart recorder printout, tensile strength test. Frequency: Hardness - 5 samples per rack.

Tensile: 5 samples per lot

Certification Requirements: Material Personnel In-house

Manpower Requirements: Set-up: 1/8 man

Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.

Special Environmental Controls: Outside air vents

Preventative Maintenance Schedule:

Manuals: Operating Yes Maintenance Yes

Records/Documentation: In process Control Charts

Recorder Chart

Work Order System - Maintenance

Spare Parts: Recorder

Controller Drive Belts

Operation Number: 170
Operation Description: Cartridge cases are automatically fed into drill machines where vent holes are drilled.
Operation Characteristic: Drill six (6) vent holes.
Equipment Description: Three (3) special drill machines with six air powered drills on a common carrier.
Equipment Warranties: Expired - Year of Mfg. 1966 and 1968 Calibration Requirements: Carrier travel
<pre>Inspection Requirements: Five (5) different dimensional checks (8 pieces every 20 minutes).</pre>
Certification Requirements: Material Personnel In-house
Manpower Requirements: Material Personnel In-house Manpower Requirements: Set-up: 1 man Tool & Gage Lab:1/2 man Operators: 1 man
Manpower Requirements: Set-up: 1 man Tool & Gage Lab:1/2 man
Manpower Requirements: Set-up: 1 man Tool & Gage Lab:1/2 man Operators: 1 man Safety Requirements: Standard safety requirements are enforced as
Manpower Requirements: Set-up: 1 man Tool & Gage Lab:1/2 man Operators: 1 man Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A regulations.
Manpower Requirements: Set-up: 1 man Tool & Gage Lab:1/2 man Operators: 1 man Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A regulations. Special Environmental Controls: None

Records/Documentation: In process Control Charts

In process Control Charts Work Order System - Maintenance

Spare Parts: Drill Bits
Drill Motors

Operation Number: 180
Operation Description: Cartridge Cases are automatically fed into screw machines where extractor groove and powder cavity areas are machined.
Operation Characteristic: Machine extractor groove, powder cavity, base, and trepan groove on cartridge case.
Equipment Description: 1-5/8 TA six spindle conomatics (2) with chucking mechanism conversion.
Equipment Warranties: Expired - Years of Mfg. 1950 and Unknown
Calibration Requirements:
Inspection Requirements: (28) dimensional checks Frequency: 6 samples per machine every 30 min
Certification Requirements: Material Personnel In-house
Mannover Requirements: Set-up: 3/4 man Tool & Lab: 1/2 man
Manpower Reduirements. See ap,
Inspector: 1/2 man Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.
Inspector: 1/2 man Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.
Inspector: 1/2 man Chandard safety requirements are enforced as
Inspector: 1/2 man Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.
Inspector: 1/2 man Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.
Inspector: 1/2 man Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations. Special Environmental Controls: None
Inspector: 1/2 man Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations. Special Environmental Controls: None Preventative Maintenance Schedule:

Spare Parts: Cutting T

MICOCOCCON CONTRACTOR CONTRACTOR

Cutting Tools Tool Holder

Collets

Spindle Bearings

EXHIBIT II

operation number:
Operation Description: Perform tensile test per operating procedure.
Operation Characteristic: Record elongation by applying measured load input on prepared specimen.
Equipment Description: Baldwir #60 HVL Universal Testing Machine.
Equipment Warranties: Expired - Year of Mfg. 1977
Calibration Requirements: Outside Service Frequency: Twelve (12) month cycle
<u>Inspection Requirements</u> : (6) samples per lot.
Certification Requirements: Material Personnel In-house
Manpower Requirements: Metallurgy Lab: 1/8 man
Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.
Special Environmental Controls: None
Preventative Maintenance Schedule:
Manuals: Operating Yes Maintenance
Records/Documentation: Calibration
Spare Parts:

Operation Number: 200
Operation Description: Cartridge cases are automatically fed through a rotary table trimming machine.
Operation Characteristic: Final trim to length, mouth size, and
chamfer.
Equipment Description: M.S.O. three station rotary table trimming machines (2).
Equipment Warranties: Expired - Year of Mfg. 1963 and 1966
Calibration Requirements: Travel of cutting heads, position of cutting tools.
Inspection Requirements: (6) dimenstional checks Frequency: (6) samples each 30 minutes
Certification Requirements: Material Personnel <u>In-house</u>
Manpower Requirements: Set-up: 1/4 man Inspector: 1/8 man
Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regualtions.
Special Environmental Controls: None
Preventative Maintenance Schedule:
Manuals: Operating Yes Maintenance
Records/Documentation: In process Control Charts Work Order System - Maintenance
Spare Parts: Cutting Tools Collets Bearings V-belts

pe			on	Number:	210

Operation Description: Cartridge cases are hand loaded, fed through belt type anodizing line, and hand unloaded.

Operation Characteristic: Deoxidize, rinse, etch, rinse, de-smut, rinse, anodize, rinse, dye, rinse, seal and dry.

Equipment Description: A.C.A. titanium belt anodizing line-eleven (11) tanks and dryer section.

Equipment Warranties: Expired - Year of Mfg. 1969.

Calibration Requirements: Belt speed, anodic coating thickness.

Inspection Requirements: Anodic coating, salt spray test requency: Anodic coating (5) samples each 15 minutes

Salt Spray Test (1) sample each 8 hours

Certification Requirements: Material Personnel In-house

Manpower Requirements: Set-up: 1/2 man Laboratory: 1/2 man

Operator: 15 man

<u>Safety Requirements:</u> Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.

Special Environmental Controls: Fume Scrubber

Preventative Maintenance Schedule:

Manuals: Operating _____ Maintenance

Records/Documentation: In process Control Charts

Recorder Chart

Work Order System - Maintenance

Spare Parts: Titanium Belts

Part Racks Bearings

EXHIBIT II

Operation Number: 230

Operation Description: Cartridge cases are automatically fed through a marking machine and stamped with identification characters.

Operation Characteristic: Mark with identification characters.

Equipment Description: Kiwi Coding machine with (2) turntables and automatic inker.

Equipment Warranties: Expired - Year of Mfg. 1983.

Calibration Requirements: Coder speed, stamp location

Inspection Requirements: Stamp appearance and location

Frequency: (6) samples each 30 minutes

Certification Requirements: Material Personnel In-house

Manpower Requirements: Inspector: 1/8 man

Safety Requirements: Standard safety requirements are enforced as directed by Good Working Practices and O.S.H.A. regulations.

Special Environmental Controls: None

Preventative Maintenance Schedule:

Manuals: Operating Yes Maintenance

Records/Documentation: Work Order System - Maintenance

Spare Parts: Inking Wheel

EQUIPMENT DEMONSTRATED FOR 160,000/MO. CAPABILITY

Operation	Operation <u>Description</u>	Equipment Description	Amron Tag No.	Ownership (Govt Furnished or Contractor)	Equipment Cycle Rate (100% Efficient) (Parts: Per Bour)	Rate Demonstrated (Parts Per Bour)
620	Cut Slugs	Wagner KMLN-2 Hydraulic Cold Saw W/automatic infeed table	4956	KAD	1,440	1,056
025	Cut Slug Inspection					
030	Clean & Etch	Ransohoff (4)Stage Spiral Drum Washer W/Heated Dry- off section	2884	·	17,500	1,056
080	Zinc Stearate Coat	Sweco Model FMD-20-HA Vibratory Finsihing Mill	4963	вря	18,000	1,056
070	Extrusion	Danly (SS-1-400 Straight Side Mechanical Extrusion Press	4966	F. D	1,800	1,056
075	Extrusion Inspection					
080	Acid Clean	Ransohoff (3)Stage Spiral Drum Washer	2857	U	25,000	1,056
060	Anneal Condition "O"	Despatch Gas-Fired re- circulating oven	765	U	1,962	1,056
. \$60	Anneal Inspection					
100	Deoxidize 6.Soap Coat	Advanced Curing (31Stage Spiral Drum Washer w/heated Dry-off section	4959	K 49	8,500	1,056
110	Draw	Danly #SA-1-100 Straight side Mechanical Press	4965	нав	3,600	1,056
115	Draw Inspection					
120	Trim	V 6 O Trimmers Model 1983 W/Trim Arbor 6 Rotating knife (2 required)	2425	GFR	2,100	528 528
125	Trim Inspection	•				
130	Head	Bliss 17 Horizontal Double Crankshaft Mechanical Press	1961	GFM	2,820	1,056
51.1	Head Inspection					

EXHIBIT III

EQUIPMENT DEMONSTRATED FOR 160,000/MG. CAPABILITY

Demonstrated : (Parts Per Hour)	1,056	1,056	•	1,056		352	352	5.2 8 8 8				528 528	950			1,056
1																
Equipment Cycle Rate (100% Efficient) (Parts Per Nour)	24,300	6,480	-	1,388		1,020	1,020	099				1,020	4			3,960
Ownership (Gc Furnished or Contractor)	U	υ		υ		GP. R. R. A.	v				υ	υυ	ţ	,	. GFM	GFM
Ameon Tag No.	2873	2885		2881		2409	90877	1977			4405	2712 2381	1152		4998	4999
Equipment Description	Ransohoff (1)Stage Mesh Belt Conveyor type Masher W/cold air dryoff	14 Pacific Scientific Gas Fired Pusher type Quench Furnace		Despatch Model DT200 Gam Fired Artificial Age Oven		Special Design Air Driven 6-Spindle Drilling Machine	W/rotary index lable (J Req'd 2800	1-5/8-TA 6-Spindle Conomatic Chucking type Screw Machine (2 Required)		See Operation #140	Baldwin \$60 KVL Universal Testing Machine	M.S.O. Vertical Head Trimm- ing Machine W/rotary Index Table (2 required)	A.C.A. Titanium Belt Type		Salt Spray Cabinet	Kiwi Coder Part Inking Machine
Operation	Spray Wash	Solution Heat Treat To	T-4 Inspection	Artificial Age T-6	T-6 Inspection	Drill Vent Holes	Vent Hole Inspection	Head Turn	Head Turn Inspection	Spray Wash	Tensile Test	Final Trim, Size 6 Chamfer	Anodize	Anodize Inspection	Final Inspection (Salt Spray)	Mark & Pack
Operation No.	140	150	155	160	155	170	175	180	185	190	135	200	210	215	220	230

M169 Cartridge Case

OPERATION NUMBER	OPERATION DESCRIPTION	TEST DATES
020	Cut Slugs	10-3-84 / 10-12-84
030	Clean & Etch	10-3-84 / 10-12-84
060	Zinc Stearate Coat	10-3-84 / 10-12-84
070	Extrusion	10-3-84 / 10-12-84
080	Acid Clean	10-3-84 / 10-12-84
090	Anneal Condition "O"	10-3-84 / 10-15-84
100	Deoxidize & Soap Coat	10-12-84/ 10-25-84
110	Draw	10-12-84/ 10-31-84
120	Trim	10-12-84/ 10-31-84
	Trim	10-12-84/ 10-31-84
130	Head	10-12-84/ 10-25-84
140	Spray Wash	10-12-84/ 10-19-84
150	Solution Heat Treat T-4	10-12-84/ 10-30-84
160	Artificial Age T-6	10-12-84/ 10-19-84
170	Drill Vent Holes	10-24-84/ 11-01-84
180	Head Turn	10-24-84/ 10-31-84
	Head Turn	10-24-84/ 10-30-84
190	Spray Wash	10-12-84/ 10-19-84
200	Final Trim, Size & Chamfer	11-01-84/ 11-15-84
	Final Trim, Size & Chamfer	11-01-84/ 11-15-84
210	Anodize	10-18-84/ 10-30-84
220	Final Insp. (Vent Hole Inspection)	11-01-84/ 11-09-84
230	Mark & Pack	11-01-84/ 11-09-84

		MACHINES	ES		á.		
OPER. NO.	OPERATION DESCRIPTION	QTY ON HAND	OTY IN TEST	OBSERVED AVAILABILITY	REJECT RATE	REQUIRED RATE 1,3	OBSERVED RATE
020	Cut Slugs	1	1	0.950	0	16.4P.P.H.	24.65
030	Clean & Etch	н	ч	1.000	0	16.4P.P.M.	35.44
050	Zinc Stearate Coat	<u>ا</u>	-	0.684	0	16.4P.P.N.	35.10
070	Extrusion	Ä	 H	0.927	0	16.4P.P.M.	32.24
080	Acid Clean	۲		1,000	0	16.4P.P.M.	32.82
060	Anneal Condition "0"	-	 Н	1.000	0	16.4P.P.M.	29.74
100	Dcoxidize & Soap Coat	 H		1.000	0	16.4P.P.M.	43.81
011 44	Draw	-	 H	606	.00013	16.4P.P.M.	64.57
120	Trim	Α.	α	.981	00	8.2P.P.M. 8.2P.P.M.	33.11
130	Head	-	 H	696*	.0000621	16.4P.P.M.	44.74
140	Spray Wash	н	H	1.000	0	16.4P.P.M.	. 77.59
150	Solution Heat Treat T-4	н	٦	1.000	0	16.4P.P.M.	55.18
160	Artificial Age T-6	н	٦	1.000	0	16.4P.P.M.	27.88
170	Drill Vent Holes	'n	-	1.000	01000.	5.47P.P.M.	15.30
180	llead Turn	ત .	M.	.984	36000°.	8.2P.P.M. 8.2P.P.M.	10.88
190	Spray Wash	•	: : : :				
1 EFOU	RECHIEFD. TO MEET ENCITTMY PERIORS	2000				1	

100 1. FEQUIPED TO MEET FACILITY DESIGN PRODUCTION RATE.
2. PERCENT RATE = 1. (NO GOOD PIECES (NO REWORK) /TOTAL PRODUCED)
3. PIECES/HR OR SHIFT, ETC.

EXHIBIT V

OPERATION OPERATION GTY ON GTY IN GREENEE ARIES RATE ARGUING GINSERVED ARADE RATE RA			MACHINES	ES.				
2 2 .973 .00049 8.2P.P.H. 18 210 Anodize 220 Inspect Vent Holes 22 1 .993 .03647 6.2P.P.H. 21 230 Mark & Pack 1 1 .994 0 16.4P.P.H. 20	OPER.	OPERATION DESCRIPTION		QTY IN TEST		REJECT RATE2		OBSERVED RATE3
220 Inspect Vent Holes 2 1 .993 .03647 8.2P.P.M. 21 230 Mark & Pack 1 1 .994 0 16.4P.P.M. 20	200	Size &	2	2	.973	.00049	.2P.P.M	18.48
220 Inspect Vent Holes 2 1 .993 .03647 8.2P.P.M. 230 Mark & Pack 1 1 .994 0 46.4P.P.M.	210	Anodize	н	٦	1.000	0	16.4P.P.M.	35.58
230 Mark & Pack 1 1994 0 16.4P.P.M.	220	Inspect Vent Holes	7		.993	.03647	8.2P.P.M.	21.38
	230	Mark & Pack	н	 H	. 994	0	16.4P.P.M.	
	45							•
		·						
			,			•	•	

1. REQUIRED TO MEET FACILITY DESIGN PRODUCTION RATE.
2. PERCENT RATE = 1. (NO GOOD PIECES (NO REWORK) /TOTAL PRODUCED) 100
3. PIECES/HR OR SHIFT, ETC.

EXHIBIT V

DISTRIBUTION LIST

Commander

Armament Research and Development Center

U.S. Army Armament, Munitions and

Chemical Command

ATTN: SMCAR-CCL (5)

SMCAR-MSI (5)

Dover, NJ 07801-5001

Commander

U.S. Army Armament, Munitions and

Chemical Command

ATTN: AMSMC-PBM-MC(D)

AMSMC-QAF(D)

Dover, NJ 07801-5001

Administrator

Defense Technical Information Center

ATTN: Accessions Division (12)

Cameron Station

Alexandria, VA 22304-6145

Director

U.S. Army Materiel Systems Analysis

Activity

ATTN: AMX SY-MP

Aberdeen Proving Ground, MD 21005-5066

Commander

Chemical Research and Development Center

U.S. Army Armament, Munitions and Chemical

Command

ATTN: SMCCR-SPS-IL

Aberdeen Proving Ground, MD 21010-5423

Commander

Chemical Research and Development Center

U.S. Army Armament, Munitions and Chemical

Command

ATTN: SMCCR-RSP-A

Aberdeen Proving Ground, MD 21010-5423

Director

Ballistic Research Laboratory

ATTN: AMXBR-OD-ST

Aberdeen Proving Ground, MD 21005-5066

Chief Benet Weapons Laboratory, CCAC Armament Research and Development Center U.S. Army Armament, Munitions and Chemical Command ATTN: SMCAR-CCB-TL

Watervliet, NY 12189-5000

Commander

U.S. Army Armament, Munitions and Chemical Command ATTN: SMCAR-ESP-L Rock Island, IL 61299-6000

Director

U.S. Army TRADOC Systems Analysis Activity ATTN: ATAA-SL White Sands Missile Range, NM 88002