

AD-A192 703

A MAXIMUM LIKELIHOOD PARAMETER ESTIMATION PROGRAM FOR  
GENERAL NON-LINEAR. (U) AERONAUTICAL RESEARCH LABS  
MELBOURNE (AUSTRALIA) J BLACKWELL JAN 88

1/1


UNCLASSIFIED

ARL-AERO-TN-392 DODR-AR-004-586

F/G 12/5

NL


END  
DATA  
FILED  
6/1/88  
LTC



G MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A192 703



DTIC FILE COPY

**DEPARTMENT OF DEFENCE**  
**DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION**  
**AERONAUTICAL RESEARCH LABORATORY**

**MELBOURNE, VICTORIA**

**Aerodynamics Technical Memorandum 392**

**A MAXIMUM LIKELIHOOD PARAMETER ESTIMATION PROGRAM  
FOR GENERAL NON-LINEAR SYSTEMS (U)**


by

**J. BLACKWELL**

Approved For Public Release.

**DTIC**  
**ELECTE**  
**MAY 03 1988**  
**S E D**

This work is copyright. Apart from any fair dealing for the purpose of study, research, criticism or review, as permitted under the Copyright Act, no part may be reproduced by any process without written permission. Copyright is the responsibility of the Director Publishing and Marketing, AGPS. Inquiries should be directed to the Manager, AGPS Press, Australian Government Publishing Service GPO Box 84, Canberra, ACT 2601.

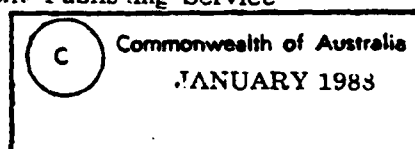

**28 5 02 303**

DEPARTMENT OF DEFENCE  
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION  
AERONAUTICAL RESEARCH LABORATORY

Aerodynamics Technical Memorandum 392

**A MAXIMUM LIKELIHOOD PARAMETER ESTIMATION PROGRAM  
FOR GENERAL NON-LINEAR SYSTEMS (U)**

by

J. BLACKWELL

**SUMMARY**

A computer program has been developed for the Maximum Likelihood estimation of parameters in general non-linear systems. Sensitivity matrix elements are calculated numerically, overcoming the need for explicit sensitivity equations. Parameters such as break points and time shifts are successfully determined using both simulated and actual test data.



**(C) COMMONWEALTH OF AUSTRALIA 1988**

---

POSTAL ADDRESS: Director, Aeronautical Research Laboratory,  
P.O. Box 4331, Melbourne, Victoria, 3001, Australia

# CONTENTS

	Page No.
NOTATION .....	ii
1. INTRODUCTION .....	1
2. DESCRIPTION OF METHOD .....	1
3. EXAMPLES USING SIMULATED DATA .....	3
3.1 Validation of Numerical Sensitivity Matrix Computation .....	3
3.1.1 Explicit Sensitivity Matrix Calculation .....	4
3.1.2 Numerical Sensitivity Matrix Computation .....	5
3.2 Systems with Break Points .....	6
3.3 Systems with Time Shifts .....	8
4. RESULTS USING FLIGHT TEST DATA .....	9
5. CONCLUDING REMARKS .....	11
ACKNOWLEDGEMENT .....	12
REFERENCES .....	13
APPENDIX A .....	14

## FIGURES

## DISTRIBUTION

## DOCUMENT CONTROL DATA

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



## NOTATION

### GENERAL :

$dt$	Time interval between successive time measurements, $t_{i+1} - t_i$
$n$	Measurement noise vector
$N$	Number of discrete time points
$t$	Time
$\hat{t}$	Time prior to time shifting
$t_i$	$i^{\text{th}}$ discrete time point
$u$	Control input vector
$x$	State vector
$y$	Observation vector
$y_j$	$j^{\text{th}}$ observation variable
$z$	Measurement vector
$\delta \xi_k$	Increment in $\xi_k$ used for numerical sensitivity calculations
$\Delta \xi$	Change in $\xi$ per iteration
$\xi$	Parameter vector
$\xi_k$	$k^{\text{th}}$ parameter
$\nabla_{\xi} y$	Sensitivity matrix
$\nabla_{\xi} y_{jk}$	$jk^{\text{th}}$ element of sensitivity matrix $(= \partial y_j / \partial \xi_k)$

### LANDING GEAR DROP TESTS (SECTION 3)

$C_1$	Tyre "spring" constant
$d$	Oleo deflection
$d_{\max}$	Maximum value of $d$
$d^*$	Tyre compression
$d_o$	Break point
$d_1, d_2$	First, second stage oleo deflection (two stage type)
$g$	Acceleration due to gravity
$G_1, G_2$	Oleo damping terms
$K_1, K_2$	Oleo "spring" constants
$L$	Load on landing gear
$L_o, L_t$	Load on oleo, tyre
$M$	Landing gear mass
$w$	$\dot{d} + \dot{d}^*$
$w_o$	Initial drop velocity
$\tau_d, \tau_L$	Time shifts in $d, L$

### FLIGHT TEST (SECTION 4)

$a_n$	Normal acceleration
$c$	Reference chord
$C_M$	Moment coefficient, as a function of $C_{M_{\alpha}}, C_{M_q}, C_{M_{\delta}}, C_{M_o}$ , and $C_{M_{\dot{\alpha}}}$
$C_N$	Force coefficient, as a function of $C_{N_{\alpha}}, C_{N_q}, C_{N_{\delta}}$ , and $C_{N_o}$

$g$	Acceleration due to gravity
$I_y$	Moment of inertia about pitch axis
$m$	Aircraft mass
$q$	Rate of change of angle of pitch
$\dot{q}$	Dynamic pressure
$R$	Radian to degree conversion factor
$S$	Wing area
$V$	Aircraft velocity
$X_w, X_{a_n}$	Longitudinal instrument offsets from c. g.
$Z_{a_n}$	Vertical instrument offset from c. g.
$\alpha$	Angle of attack
$\delta$	Elevator deflection
$\theta$	Angle of pitch

## 1. INTRODUCTION

The Maximum Likelihood Parameter Estimation technique is widely used to determine aircraft flight parameters from flight test data (Ref. 1). Much effort in this field has been confined to analysis of linear systems. If the model is non-linear, the problem becomes more difficult.

Here at Aeronautical Research Laboratory (ARL), a Maximum Likelihood computer program was developed (Ref. 2) to solve such non-linear problems. This program was successfully used to determine accelerometer offsets and calibration errors, given dynamic flight test data (Ref. 3). However, a sizable proportion of the program was problem-specific, in particular the evaluation of the sensitivity matrix. Sensitivity matrix elements were calculated explicitly by mathematical differentiation of the state equations, often a long and tedious process.

In this document, a Maximum Likelihood Parameter Estimation computer program for general non-linear systems is described. Sensitivities are calculated numerically by finite differences, overcoming the need for explicit sensitivity equations. This method allows the user to select, as unknown parameters, quantities such as break points and time shifts, for which sensitivities are not known in explicit form.

Other Maximum Likelihood programs representing generalized non-linear systems are available (Ref. 4). However, their specific application to the estimation of break points or time shifts does not appear to have been reported. The program described here is successfully used to determine both of these quantities.

Section 2 provides a brief theoretical description of the Maximum Likelihood method for non-linear systems, and the procedure used here to obtain sensitivities numerically. In Section 3, the computer program developed is validated using simulated data, before being applied to a study of aircraft landing gear modelling, a topic currently being investigated by the Aircraft Behaviour Studies - Rotary Wing Group at ARL. In Section 4, the program is used to estimate time shifts in measured flight test data.

## 2. DESCRIPTION OF METHOD

Assume that the system can be described in general by a set of non-linear dynamic equations of the form :

$$\dot{x}(t) = f(x(t), u(t), \xi) \quad [1]$$

$$y(t) = g(x(t), u(t), \xi) \quad [2]$$

$$z(t_i) = y(t_i) + n(t_i) \quad [3]$$

where :

$x$  is the state vector

$u$  is the control input vector



•  $y$  is the observation vector

$z$  is the measurement vector, sampled at  $N$  discrete time points,  $t_i$ , for  $i = 1, \dots, N$

$n$  is the measurement noise vector, assumed to be Gaussian with zero mean

$\xi$  is the vector of unknown parameters

• The Maximum Likelihood method (described in Ref. 2) determines the most probable value of  $\xi$  by an iterative procedure which can be summarized as follows :

$$R = \frac{1}{N} \sum_{i=1}^N [z(t_i) - y(t_i)] [z(t_i) - y(t_i)]^T \quad [4]$$

$$\Delta \xi = \left[ \sum_{i=1}^N (\nabla_{\xi} y(t_i))^T R^{-1} (\nabla_{\xi} y(t_i)) \right]^{-1} \left[ \sum_{i=1}^N (\nabla_{\xi} y(t_i))^T R^{-1} (z(t_i) - y(t_i)) \right] \quad [5]$$

where  $R$  is the covariance of residuals and  $\Delta \xi$  is the change in  $\xi$  per iteration.

Given  $R$  and  $\xi$ , we obtain  $\Delta \xi$  and hence an improved value of  $\xi$ , which is used to obtain a new  $y(t_i)$  and thus improved  $R$ . This process is repeated until convergence is achieved. Computation of  $\Delta \xi$  requires at each time point,  $t_i$  :

- i) values of the measurement vector,  $z(t_i)$
- ii) values of the observation vector,  $y(t_i)$
- iii) the sensitivity matrix,  $\nabla_{\xi} y(t_i)$

Values of the measurement vector are read in as data. Computation of the current observation vector,  $y(t_i)$ , from [2] requires current state vector values, which are obtained by numerical integration of the assumed system state equations ([1] above). A fourth-order Runge-Kutta numerical integration procedure is adopted. The sensitivity matrix elements are here approximated by numerical differences. This approach overcomes the need for explicit sensitivity equations, which are not always easy to determine. The central difference method is adopted here, requiring evaluation of state and observation variables at two perturbed parameter values,  $\xi + \delta \xi$  and  $\xi - \delta \xi$ . The  $jk^{\text{th}}$  element of the sensitivity matrix,  $\nabla_{\xi} y(t_i)_{jk}$ , is given by :

$$\nabla_{\xi} y(t_i)_{jk} = \frac{\partial y_j}{\partial x_k} = \frac{y_j(\xi_k + \delta \xi_k) - y_j(\xi_k - \delta \xi_k)}{2\delta \xi_k} \quad [6]$$

where  $y_j$  and  $\xi_k$  are components of vectors  $y$  and  $\xi$ .

The program developed here is based on an earlier ARL Maximum Likelihood program (Ref. 2). Details of program changes are listed in Appendix A.

### 3. EXAMPLES USING SIMULATED DATA

Simulated data is used to examine a number of different systems. In 3.1, the numerical sensitivity matrix computation is validated by analysing a simple system, both with explicit and numerical sensitivity matrix computations. In 3.2 and 3.3, the numerical model is used to examine more complicated systems which include the effect of break points and time shifts.

#### 3.1 Validation of Numerical Sensitivity Matrix Computation

Consider the case of an aircraft landing gear drop test. The landing gear, comprising a large mass,  $M$ , attached to an oleo and tyre, is dropped with initial velocity  $w_0$ . The oleo is modelled as a massless, non-linear damped spring, and the tyre as a massless, linear undamped spring.

The load on the oleo,  $L_o$ , is given by :

$$L_o = K_1 d^2 + G_1 \dot{d} \quad [7]$$

where  $d$  is the oleo deflection. The load on the tyre,  $L_t$ , is given by :

$$L_t = C_1 d^* \quad [8]$$

where  $d^*$  is the tyre compression. Since the tyre and oleo are assumed to be massless, the oleo load is equal to the tyre load, thus  $L_o = L_t = L$  (see Fig. 1).

The equation of motion for the system is :

$$M(\ddot{d} + \ddot{d}^*) = Mg - L \quad [9]$$

Taking  $d$ ,  $d^*$ , and  $w (= \dot{d} + \dot{d}^*)$  as state variables, the following state equations are obtained :

$$\dot{w} = g - \frac{C_1 d^*}{M} \quad [10]$$

$$\dot{d} = \frac{C_1 d^* - K_1 d^2}{G_1} \quad [11]$$

$$\dot{d}^* = w - \dot{d} \quad [12]$$

Observation variables are the load and oleo deflection, given by :

$$L_{obs} = C_1 d^* \quad [13]$$

$$d_{obs} = d \quad [14]$$

There are no control inputs,  $u$ , in this example. The unknown parameters are  $K_1$ ,  $C_1$ , and  $G_1$ .

The above equations, [10] - [14], are subject to constraints that  $d$ ,  $d^*$ , and  $L$  are all  $\geq 0$ .

The landing gear is dropped with initial velocity  $w_0$ , so initial values of  $w$ ,  $d$ , and  $d^*$  are  $w_0$ , 0, and 0 respectively.

Using simulated time histories of oleo load and deflection, with 81 data points and  $\Delta t = 0.01$  s, the Maximum Likelihood method is applied with a) explicit sensitivity matrix equations and b) numerical sensitivity matrix computations. Zero mean noise with an RMS of 0.0025 m for  $d$  and 0.5 kN for  $L$  is superimposed on the simulated data.

D

### 3.1.1 Explicit Sensitivity Matrix Calculation

Sensitivity matrix elements,  $\partial y_i / \partial \xi_k$ , are given by  $d_{k1}$ ,  $d_{c1}$ ,  $d_{g1}$ ,  $L_{k1}$  ( $= C_1 d_{k1}^*$ ),  $L_{c1}$  ( $= C_1 d_{c1}^* + d^*$ ) and  $L_{g1}$  ( $= C_1 d_{g1}^*$ ) where  $d_{k1} = \partial d / \partial K_1$  etc. Sensitivities are obtained from partial derivatives of the state equations [10] - [12] :

$$\dot{d}_{k1} = \frac{1}{G_1} (C_1 d_{k1}^* - 2dK_1 d_{k1} - d^2) \quad [15]$$

$$\dot{d}_{k1}^* = w_{k1} - \dot{d}_{k1} \quad [16]$$

$$\dot{w}_{k1} = \frac{-C_1 d_{k1}^*}{M} \quad [17]$$

$$\dot{d}_{c1} = \frac{1}{G_1} (d^* + C_1 d_{c1}^* - 2dK_1 d_{c1}) \quad [18]$$

$$\dot{d}_{c1}^* = w_{c1} - \dot{d}_{c1} \quad [19]$$

$$\dot{w}_{c1} = \frac{-1}{M} (C_1 d_{c1}^* + d^2) \quad [20]$$

$$\dot{d}_{g1} = \frac{1}{G_1} \left( C_1 d_{g1}^* - 2dK_1 d_{g1} - \frac{C_1 d^*}{G_1} + \frac{K_1 d^2}{G_1} \right) \quad [21]$$

$$\dot{d}_{g1}^* = w_{g1} - \dot{d}_{g1} \quad [22]$$

$$\dot{w}_{g1} = \frac{-C_1 d_{g1}^*}{M} \quad [23]$$

The above derivatives are numerically integrated with respect to time using a fourth-order Runge Kutta procedure, and the sensitivity elements calculated, from which the most probable values for parameters  $K_1$ ,  $C_1$ , and  $G_1$  are determined.

After 10 iterations, excellent agreement with the simulated data is obtained (Fig. 2). The parameter values are listed in Table 1 with the *true values* being the values used in the simulation, and the *a priori values* being the initial guess of these values. The Cramer - Rao error bounds are also shown.

Table 1. Parameter Estimates for 3-Parameter Model

Parameter	Unit	A Priori Value	True Value	Maximum Likelihood Parameter Values	
				Explicit Sensitivities	Numerical Sensitivities
$K_1$	$\text{Nm}^2 (\times 10^5)$	1	4	$3.993 \pm 0.009$	$3.993 \pm 0.009$
$G_1$	$\text{Nsrm}^1 (\times 10^4)$	1	2.5	$2.496 \pm 0.007$	$2.496 \pm 0.007$
$C_1$	$\text{Nm}^1 (\times 10^5)$	1	7	$7.037 \pm 0.041$	$7.038 \pm 0.041$
Run Time (s)				4.29	11.62

### 3.1.2 Numerical Sensitivity Matrix Computation

Sensitivity matrix elements are calculated using the central difference method (see [6]) with  $\delta \xi_k / \xi_k = 10^{-3}$ . After 10 iterations, the Maximum Likelihood method results in the parameter values shown in Table 1. It is seen that results are almost identical to the explicit sensitivity case, and indeed graphs of oleo deflection and load versus time (Fig. 3) are found to be indistinguishable from the explicit sensitivity graphs (Fig. 2). There is however an increase in computer run time due to the numerical integration of the state equations for incremented parameters  $\xi + \delta \xi$  and  $\xi - \delta \xi$ , as well as the usual  $\xi$ .

Other test cases (not shown here) were also found to give excellent agreement between explicit and numerical sensitivity calculations, thus validating the numerical procedure used here for the computation of the sensitivity elements.

The effect of varying the size of  $\delta \xi_k / \xi_k$  in the numerical sensitivity case was examined. For  $\delta \xi_k / \xi_k$  ranging from 0.1 down to  $10^{-4}$ , no appreciable increase in accuracy was obtained for the simulated data of Fig. 2 (see Table 2).

**Table 2. Maximum Likelihood Parameter Estimates using Numerical Sensitivity  
Calculations with Varying  $\delta\epsilon_k/\epsilon_k$**

Parameter	Unit	A Priori Value	True Value	$\delta\epsilon_k/\epsilon_k$			
				0.1	0.01	0.001	0.0001
$K_1$	$\text{Nm}^{-2} (\times 10^5)$	1	4	3.9928	3.9928	3.9928	3.9928
$G_1$	$\text{Nsm}^{-1} (\times 10^4)$	1	2.5	2.4962	2.4962	2.4962	2.4962
$C_1$	$\text{Nm}^{-1} (\times 10^5)$	1	7	7.0380	7.0376	7.0376	7.0381

### 3.2 Systems with Break Points

A more advanced landing gear system is the two-stage type. For oleo deflection,  $d$ , greater than some value,  $d_0$ , a second, stiffer, more damped "spring" is activated. In this way, extra hard landings are catered for, whilst soft landings do not suffer from overdamping. Essentially, a different set of state equations exist for  $d > d_0$  with  $d_0$  termed as a *break point*.

Assume the oleo load to be modelled as :

$$L = C_1 \dot{d}^* = \begin{cases} K_1 d^2 + G_1 \dot{d} & (\text{for } d < d_0) \\ K_1 d_0^2 + K_2 (d - d_0)^2 + G_2 \dot{d} & (\text{for } d \geq d_0) \end{cases}$$

The state equations in this case are :

$$\dot{w} = g - \frac{C_1 \dot{d}^*}{M} \quad [25]$$

$$\dot{d} = \frac{C_1 \dot{d}^* - K_1 d_1^2 - K_2 d_2^2}{G} \quad [26]$$

$$\dot{d}^* = w - \dot{d} \quad [27]$$

where :

$$\left. \begin{matrix} d_1 = d \\ d_2 = 0 \\ G = G_1 \end{matrix} \right\} d < d_0 \quad \quad \quad \left. \begin{matrix} d_1 = d_0 \\ d_2 = d - d_0 \\ G = G_2 \end{matrix} \right\} d \geq d_0$$

$d_1$  is the first stage deflection and  $d_2$  the second stage deflection. Observation variables are the oleo load and deflection.

Along with parameters  $K_1$ ,  $K_2$ ,  $G_1$ ,  $G_2$  and  $C_1$ , the break point  $d_0$  is taken as an unknown parameter. Using simulated time histories of oleo load and deflection, the Maximum Likelihood method with numerical sensitivity calculations is applied. The calculated observations give excellent agreement with the simulated measurements (Fig. 3). The parameter values after 10 iterations are given in Table 3.

**Table 3. Parameter Estimates for 6-Parameter Model (Including Break Point)**

Parameter	Unit	A Priori Value	True Value	Maximum Likelihood Parameter Value
$K_1$	$\text{Nm}^{-2} (\times 10^5)$	2	4	$4.040 \pm 0.017$
$K_2$	$\text{Nm}^{-2} (\times 10^5)$	10	45	$45.825 \pm 1.348$
$G_1$	$\text{Nsm}^{-1} (\times 10^4)$	1.5	2.5	$2.473 \pm 0.009$
$G_2$	$\text{Nsm}^{-1} (\times 10^4)$	3.5	4	$3.966 \pm 0.030$
$C_1$	$\text{Nm}^{-1} (\times 10^5)$	4	7	$7.064 \pm 0.039$
$d_0$	m	0.1	0.23	$0.227 \pm 0.001$

It should be noted that careful consideration needs to be given to the selection of the a priori value of the break point parameter  $d_0$ . Clearly, if  $d_0 > d_{\max}$  (where  $d_{\max}$  is the maximum value reached by quantity  $d$  in the time interval under consideration), either initially or during one of the early iterations (when parameter values are liable to oscillate), then any small change in  $d_0$  will have no effect on the observation vector,  $y$ . Consequently, sensitivities  $\partial y_i / \partial d_0$  will all be zero resulting in no improved estimate of  $d_0$ . A suitable initial value for  $d_0$  can usually be obtained by experimentation.

For most parameters, the size of  $\delta \xi_k$  used in the numerical sensitivity calculations, should be significantly less than the size of  $\xi_k$ . We use here  $\delta \xi_k / \xi_k = 10^{-3}$ . However, break points or time shifts are special cases, and careful consideration needs to be given to the size of  $\delta \xi_k$ . This is because measurements,  $z$ , only exist at discrete time points,  $t_i$ , and observations,  $y$ , are only calculated at these time points. For break point  $d_0$  (time shifts are discussed in Section 3.3), in order that  $\partial y_i / \partial d_0$  is non-zero for at least one  $t_i$ , any change,  $\delta d_0$ , in the value of  $d_0$  must be large enough such that the time where the break point acts,  $t(d_0)$ , moves across at least one time point. If  $t(d_0)$  is within the time interval  $[t_i, t_{i+1}]$ , then for  $\delta d_0$  to result in non-zero sensitivities, we require:

$$|t(d_0) - t(d_0 - \delta d_0)| > t(d_0) - t_i$$

$$\text{or } |t(d_0 + \delta d_0) - t(d_0)| > t_{i+1} - t(d_0) \quad (\text{see Fig. 5})$$

The size of  $\delta d_0$  necessary to satisfy the above condition can be found by experimentation. In the case reported here,  $\delta d_0 = 0.01$  was sufficient.

### 3.3 Systems with Time Shifts

When recording actual test data, time shifts between different measurements can occur as a result of instrumentation lag (Ref. 3). In general, the time shift for a particular measurement is not known, and can be included in the Maximum Likelihood procedure as an additional parameter. Time shifts are expected to be small and a priori values are usually set to zero.

In a landing gear drop test such as that in Section 3.2, any time shifts in measurements  $d$  and  $L$  need not be the same and can be represented by unknown parameters  $\tau_d$  and  $\tau_L$  respectively.

The simulated drop test data from Section 3.2 is used, with time shifts added in. Assuming the same landing gear model as in Section 3.2, we aim to determine these time shifts using the Maximum Likelihood procedure.

The state and observation equations ( Section 3.2 ) are :

$$\dot{d}(\hat{t}) = \frac{C_1 d^*(\hat{t}) - K_1 d_1^2(\hat{t}) - K_2 d_2^2(\hat{t})}{G} \quad [28]$$

$$\dot{d}^*(\hat{t}) = w(\hat{t}) - \dot{d}(\hat{t}) \quad [29]$$

$$\dot{w}(\hat{t}) = g - \frac{C_1 d^*(\hat{t})}{M} \quad [30]$$

$$d_{\text{obs}}(\hat{t}) = d(\hat{t}) \quad [31]$$

$$L_{\text{obs}}(\hat{t}) = C_1 d^*(\hat{t}) \quad [32]$$

where  $\hat{t}$  is the time *without* any time shift.

A time shift in  $d$  or  $L$  will result in a translation of the above observations :

$$d_{\text{obs}}(t) = d(\hat{t} - \tau_d) \quad [33]$$

$$L_{\text{obs}}(t) = L(\hat{t} - \tau_L) \quad [34]$$

Application of the Maximum Likelihood procedure gives excellent results in 10 iterations (Fig. 6 and Table 4) with both time shifts accurately predicted. Run time has increased from 24.13 to 30.50 seconds; however, this is to be expected since the number of unknown parameters has increased from 6 to 8.

**Table 4. Parameter Estimates for 8-Parameter Model (Including Break Point and Time Shifts)**

Parameter	Unit	A Priori Value	True Value	Maximum Likelihood Parameter Value
$K_1$	$\text{Nm}^{-2} (\times 10^5)$	2	4	$4.031 \pm 0.028$
$K_2$	$\text{Nm}^{-2} (\times 10^5)$	20	45	$47.535 \pm 1.977$
$G_1$	$\text{Nsm}^{-1} (\times 10^4)$	1.5	2.5	$2.486 \pm 0.018$
$G_2$	$\text{Nsm}^{-1} (\times 10^4)$	3	4	$3.931 \pm 0.054$
$C_1$	$\text{Nm}^{-1} (\times 10^5)$	5	7	$7.039 \pm 0.110$
$d_0$	m	0.1	0.23	$0.229 \pm 0.002$
$\tau_d$	s	0	0.07	$0.070 \pm 0.0008$
$\tau_L$	s	0	0.09	$0.090 \pm 0.0005$

In the Maximum Likelihood program developed here, any parameter representing a time shift is automatically rounded to a multiple of  $dt$ , the time interval between successive measurements,  $t_i$ . Observations are only computed at time  $t_i$  for comparison with the measurements, and thus any time shift must of necessity be a multiple of  $dt$ . Likewise, the small increment in time lag parameter  $\delta\tau$  required for the numerical evaluation of sensitivities, must also be a multiple of  $dt$ . Sensitivities are evaluated here by examining two outputs that have time lags  $\tau + dt$  and  $\tau - dt$ . Then :

$$\frac{\partial y_i}{\partial \tau} = \frac{y_i(\tau+dt) - y_i(\tau-dt)}{2dt}$$

#### 4. RESULTS USING FLIGHT TEST DATA

Fixed wing flight test data was available for an aircraft undergoing a longitudinal manoeuvre. State variables are taken as  $\alpha$ ,  $q$ , and  $\theta$  with control input  $\delta$ . Observation variables, for which measurements are given, are  $\alpha$ ,  $q$ , and  $a_n$  where :

$\alpha$  = angle of attack (deg)

$\theta$  = pitch angle (deg)

$q$  = rate of change of pitch angle,  $\dot{\theta}$  (deg s<sup>-1</sup>)

$a_n$  = normal acceleration (ft s<sup>-2</sup>)

$\delta$  = elevator deflection (deg)



The full state equations for a longitudinal manoeuvre are given in Equation [55], Ref. 5. For small  $\alpha$  and  $\phi$ , we obtain the state equations :

$$\dot{\alpha} = \frac{\dot{q}SR}{mV} (C_N + \dot{\alpha}_o) + q + \frac{gR}{V} \cos \theta \quad [35]$$

$$\dot{q} = \frac{\dot{q}ScR}{I_y} C_M \quad [36]$$

$$\dot{\theta} = q \quad [37]$$

with :

$$C_N = C_{N\alpha}\alpha + C_{Nq}\frac{qc}{2VR} + C_{N\delta}\delta + C_{N\dot{\alpha}_o} \quad (\text{Force Coefficient})$$

$$C_M = C_{M\alpha}\alpha + C_{Mq}\frac{qc}{2VR} + C_{M\delta}\delta + C_{M\dot{\alpha}_o} + C_{M\dot{\alpha}_o}\frac{\dot{\alpha}_o c}{2VR} \quad (\text{Moment Coefficient})$$

Observations (Equation [56], Ref. 5) are :

$$\alpha_{obs} = \alpha - \frac{X_{\alpha}}{V}q \quad [38]$$

$$q_{obs} = q \quad [39]$$

$$a_{nobs} = \frac{\dot{q}S}{mg}C_N + \frac{X_{an}}{gR}\dot{q} + \frac{Z_{an}}{R^2g}q^2 \quad [40]$$

where :

$R$  = Radian to degree conversion factor = 57.2958 deg rad<sup>-1</sup>

$S$  = Wing area = 550 ft<sup>2</sup>

$m$  = Aircraft mass = 1929.88 slug

$V$  = Aircraft velocity, assumed constant, = 1088.4199 ft s<sup>-1</sup>

$g$  = Acceleration due to gravity = 32.174 ft s<sup>-2</sup>

$c$  = Reference chord = 8.8 ft

$I_y$  = Moment of inertia about pitch axis = 310 912.906 slug ft<sup>2</sup>

$X_{\alpha}$  =  $\alpha$  - vane Longitudinal offset from c. g. = 26.3065 ft

$Z_{an}$  = Accelerometer (normal) vertical offset from c. g. = 1.3685 ft

$X_{an}$  = Accelerometer (normal) longitudinal offset from c. g. = 3.3715 ft

$C_{Nq}$  = 8.75 rad<sup>-1</sup>

$C_{N\delta}$  = 0.015 deg<sup>-1</sup>

$\dot{q}$  = Dynamic pressure, assumed constant, = 1318.026 lbf ft<sup>-2</sup>

with initial conditions  $\alpha_0 = 2.3169$  deg,  $q_0 = 0.0948$  deg  $s^{-1}$ , and  $q_0 = 2.4568$  deg. Unknown parameters are  $C_{M_\alpha}$ ,  $C_{M_q}$ ,  $C_{M_\delta}$ ,  $C_{M_0}$ ,  $C_{N_\alpha}$ ,  $C_{N_0}$ , and  $C_{N_0} + \dot{\alpha}_0$ . Parameter  $C_{M_\alpha}$  is also unknown, but in the manoeuvre reported here, it is difficult to determine both  $C_{M_\alpha}$  and  $C_{M_q}$  independently. Consequently, the two parameters are linked by a factor, obtained from their a priori values :

$$C_{M_\alpha} = 0.2836 \times C_{M_q}$$

The Maximum Likelihood procedure is applied *without* time shifts, with a time interval of  $dt = 1/60$  sec and 10 iterations, and with the control input variation shown in Fig. 7. Results are shown in Fig. 8 and Table 5. It is noted that there are discrepancies between actual measurements and predicted observations which appear to be due to time lags. Application of the Maximum Likelihood procedure with three additional time shift parameters,  $\tau_\alpha$ ,  $\tau_q$ , and  $\tau_{a_n}$ , leads to marked improvements in the predicted observation variables (Fig. 8). The Cramer-Rao error bounds are also reduced (Table 5) indicating improved parameter identification.

Table 5. Parameter Estimates using Flight Test Data

Parameter	Unit	A Priori Value	Maximum Likelihood Parameter Values	
			Without Time Shifts	With Time Shifts
$C_{M_\alpha}$	deg <sup>-1</sup>	-0.050	$-0.036 \pm 0.0002$	$-0.041 \pm 0.00008$
$C_{M_q}$	rad <sup>-1</sup>	-30	$-9.92 \pm 0.46$	$-8.29 \pm 0.14$
$C_{M_\delta}$	deg <sup>-1</sup>	-0.035	$-0.019 \pm 0.0002$	$-0.022 \pm 0.00009$
$C_{M_0}$	-	0	$0.102 \pm 0.0007$	$0.116 \pm 0.0003$
$C_{N_\alpha}$	deg <sup>-1</sup>	0.09	$0.071 \pm 0.0009$	$0.071 \pm 0.0003$
$C_{N_0}$	-	0	$-0.093 \pm 0.003$	$-0.092 \pm 0.0008$
$C_{N_0} + \dot{\alpha}_0$	-	-0.25	$-0.087 \pm 0.004$	$-0.093 \pm 0.001$
$\tau_\alpha$	s	0	-	$0.033 \pm 0.001$
$\tau_q$	s	0	-	$0.050 \pm 0.0007$
$\tau_{a_n}$	s	0	-	$0.067 \pm 0.0007$

## 5. CONCLUDING REMARKS

A general Maximum Likelihood program, suitable for identification of parameters in non-linear systems, has been described. A summary of the theoretical background has been given, and differences between an earlier ARL program noted. Sensitivities are now calculated numerically, a process which allows time shifts or break points to be identified. The program was validated on a simple 3-parameter system, before being applied to a study of aircraft landing gear modelling. The study, using simulated data, has shown that the program

can successfully identify time shifts, break points, and conventional parameters, using the numerical sensitivity approach. Finally, the program has been applied to actual flight test data, and has successfully matched time shifts and conventional parameters.

### **ACKNOWLEDGEMENT**

This work was carried out under the general guidance of Mr R. A. Feik, and the author wishes to thank him for advice and suggestions provided.

## REFERENCES

1. Hamel, P. G. : Aircraft Parameter Identification Methods and their Applications - Survey and Future Aspects. *AGARD LS-104*, paper No. 1, 1979.
2. Feik, R. A. : A Maximum Likelihood Program for Non-Linear System Identification with Application to Aircraft Flight Data Compatibility Checking. *ARL Aero. Note 411*, July 1982.
3. Feik, R. A. : On the Application of Compatibility Checking Techniques to Dynamic Flight Test Data. *ARL Aero. Report 161*, June 1984.
4. Jategaonkar, R, and Plaetschke, E. : Maximum Likelihood Parameter Estimation from Flight Test Data for General Non-Linear Systems. *DFVLR - FB 83 - 14*, 1983.
5. Maine, R. E., and Iliff , K. W. : User's Manual for *MMLE3*, a General *FORTTRAN* program for Maximum Likelihood Parameter Estimation. *NASA TP 1563*, 1980.

## APPENDIX A

### Computer Program Structure

The program described in this document was developed from an earlier ARL program, *COMPAT* (Ref. 2). In its earlier form, *COMPAT* required four problem-dependent subroutines, which calculated :

- Initial conditions
- Explicit equations for derivatives of sensitivities
- Derivatives of state equations
- Output responses (observations)

In the modified program, *COMPAT.JB.5*, initial conditions are now specified in the data file, *COMDAT.JB*, and sensitivity matrix elements are evaluated numerically, requiring only two problem-dependent subroutines (*RESP.JB* and *DERIV.JB.3* which calculate the output responses and state derivative equations respectively). The final program structure is :

Main program :	<i>COMPAT.JB.5</i>	
Subroutines :	<i>RESP.JB</i>	(output response equations)
	<i>DERIV.JB.3</i>	(derivatives of state vector equations)
	<i>COM.SUB.JB</i>	(Maximum Likelihood iterative procedure)
Data file :	<i>COMDAT.JB</i>	(input the necessary information to specify the problem, eg. number of states, number of parameters , as well as a priori parameter values and initial state conditions. Finally, time histories of control inputs, $u(t_i)$ , and measurements, $z(t_i)$ , are read in)
Output files :	<i>HP1.PLOT</i>	(contains time histories of the inputs, and measured & calculated outputs suitable for producing time history plots)
	<i>COMOUT.JB.3</i>	(contains an iterative history, as well as final values of parameters and their Cramer-Rao error bounds)

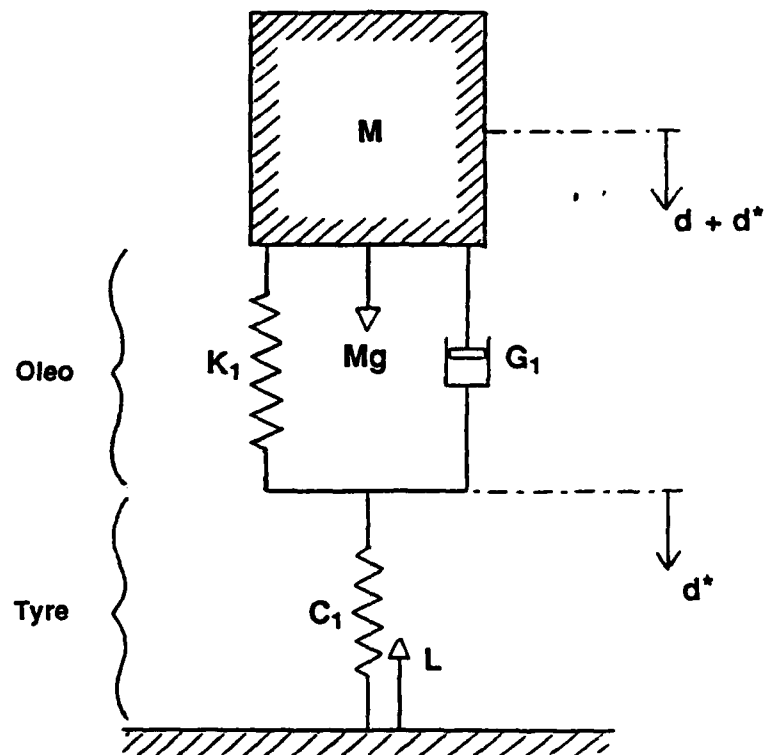



Figure 1. Forces and Displacements on Landing Gear

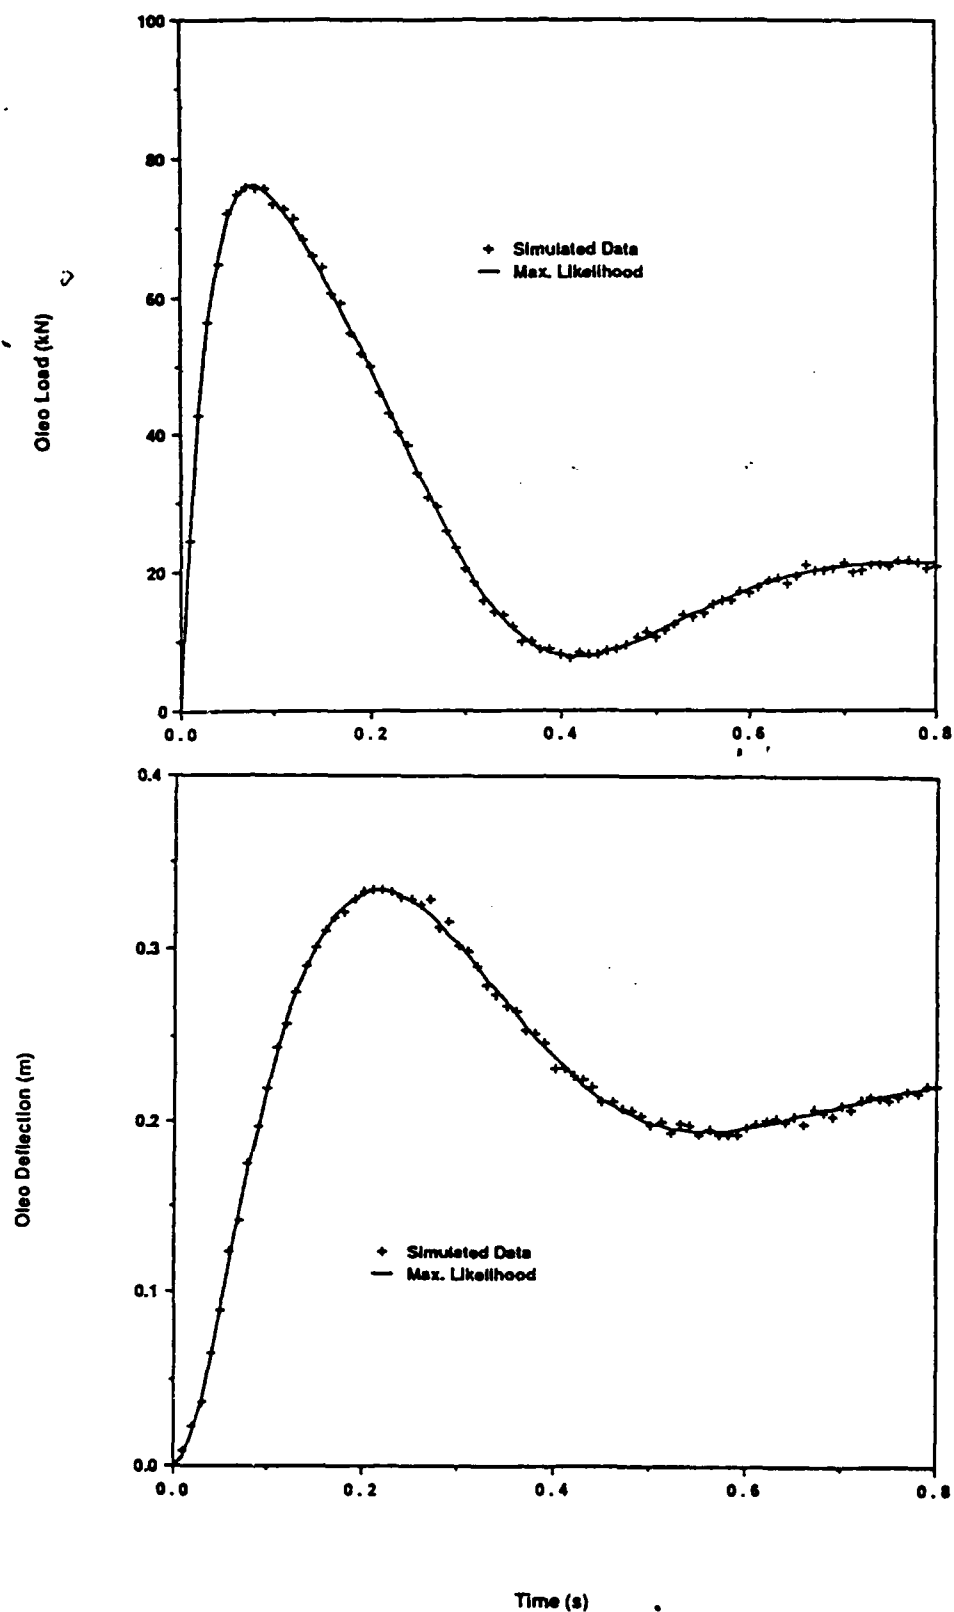


Figure 2. Oleo Load and Displacement for 3-Parameter Model (Explicit Sensitivity Equations)  $w_0 = 4 \text{ ms}^{-1}$ ,  $M=2000 \text{ kg}$

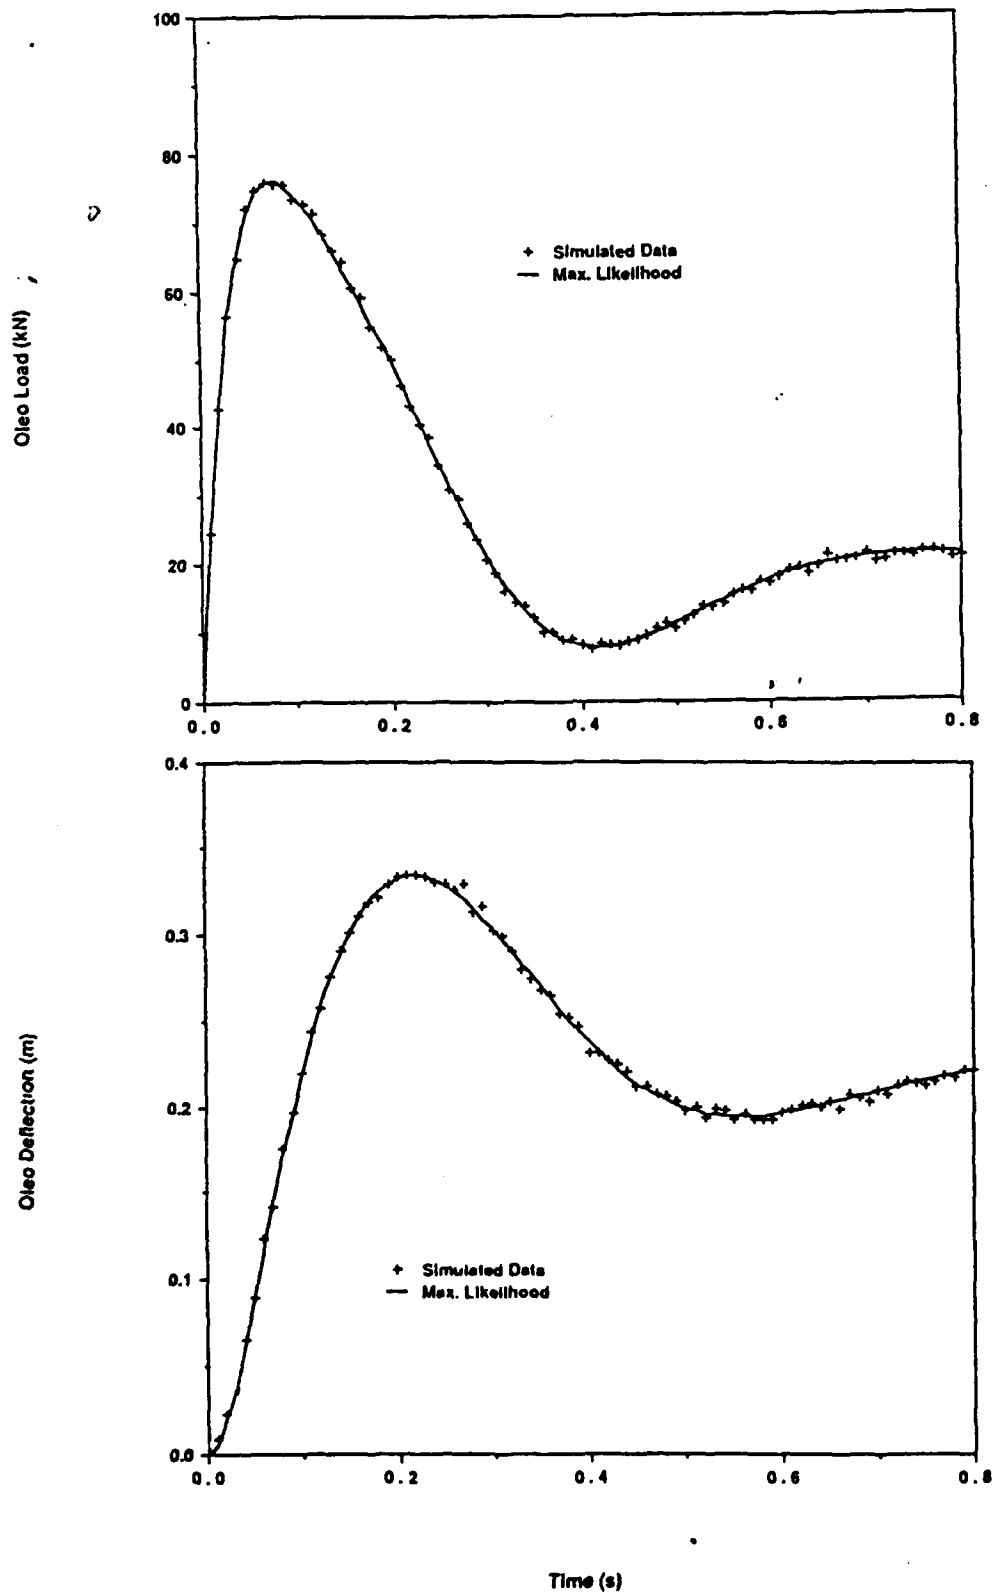


Figure 3. Oleo Load and Displacement for 3-Parameter Model (Numerical Sensitivity Computations)  $w_0 = 4 \text{ ms}^{-1}$ ,  $M=2000 \text{ kg}$



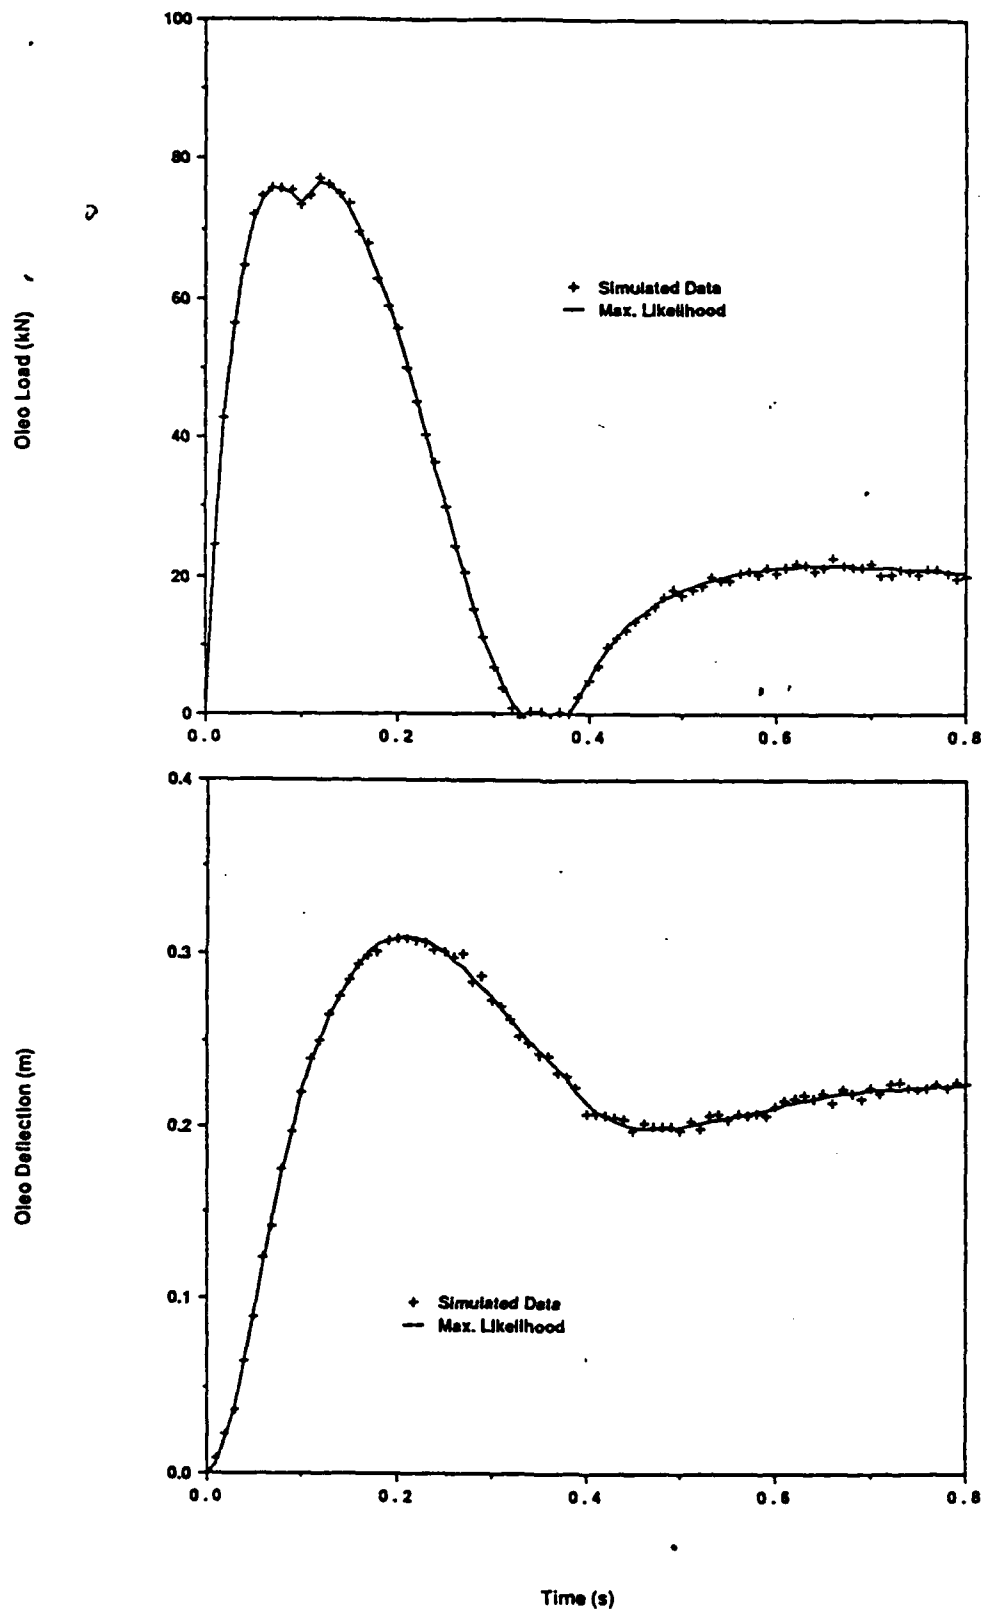


Figure 4. Oleo Load and Displacement for 6-Parameter Model (Including Break Point)

$$w_0 = 4 \text{ ms}^{-1}, M=2000 \text{ kg}$$

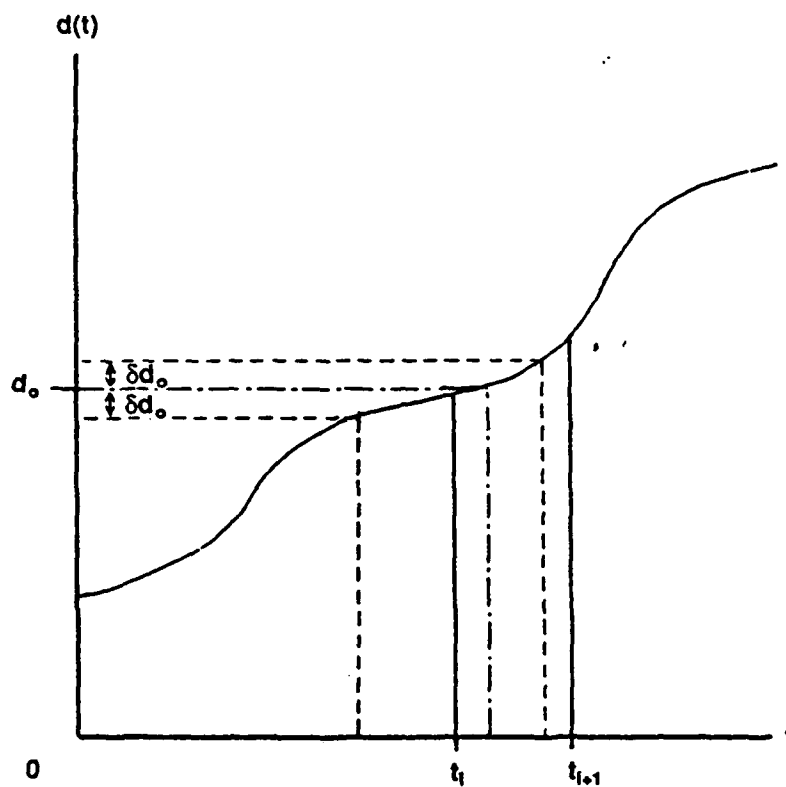


Figure 5. The Effect of Shifting a Break Point,  $d_0$ , by  $\delta d_0$ .

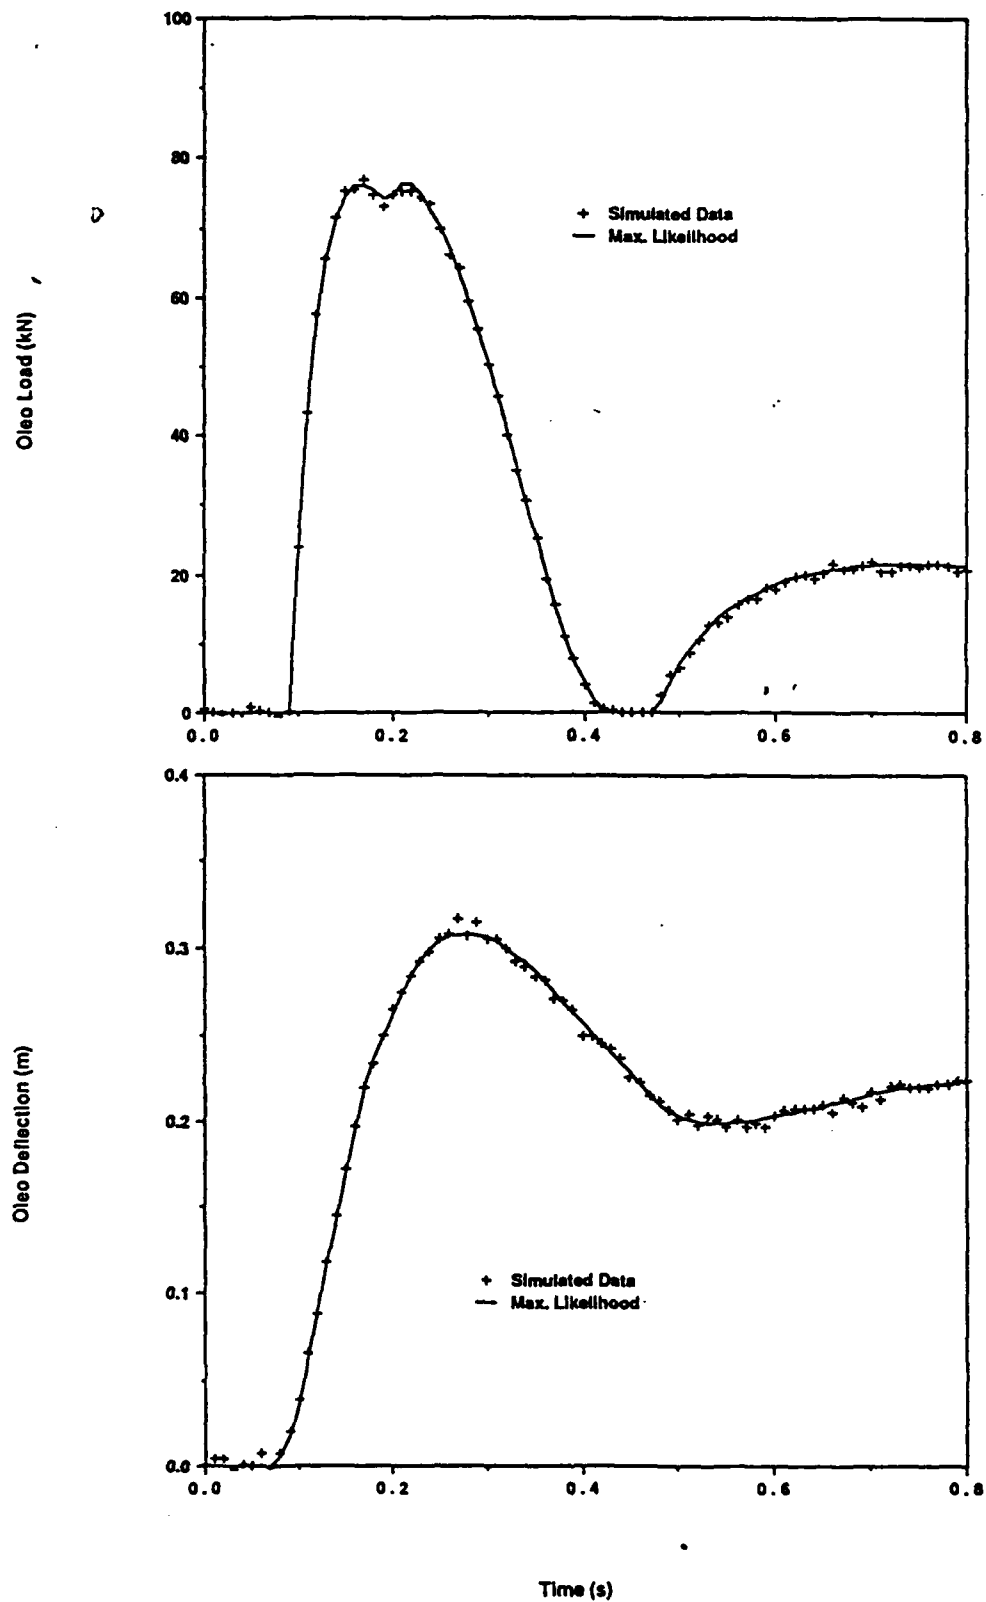


Figure 6. Oleo Load and Displacement for 8-Parameter Model (Including Break Point and Time Shifts)  $w_0 = 4 \text{ ms}^{-1}$ ,  $M=2000 \text{ kg}$

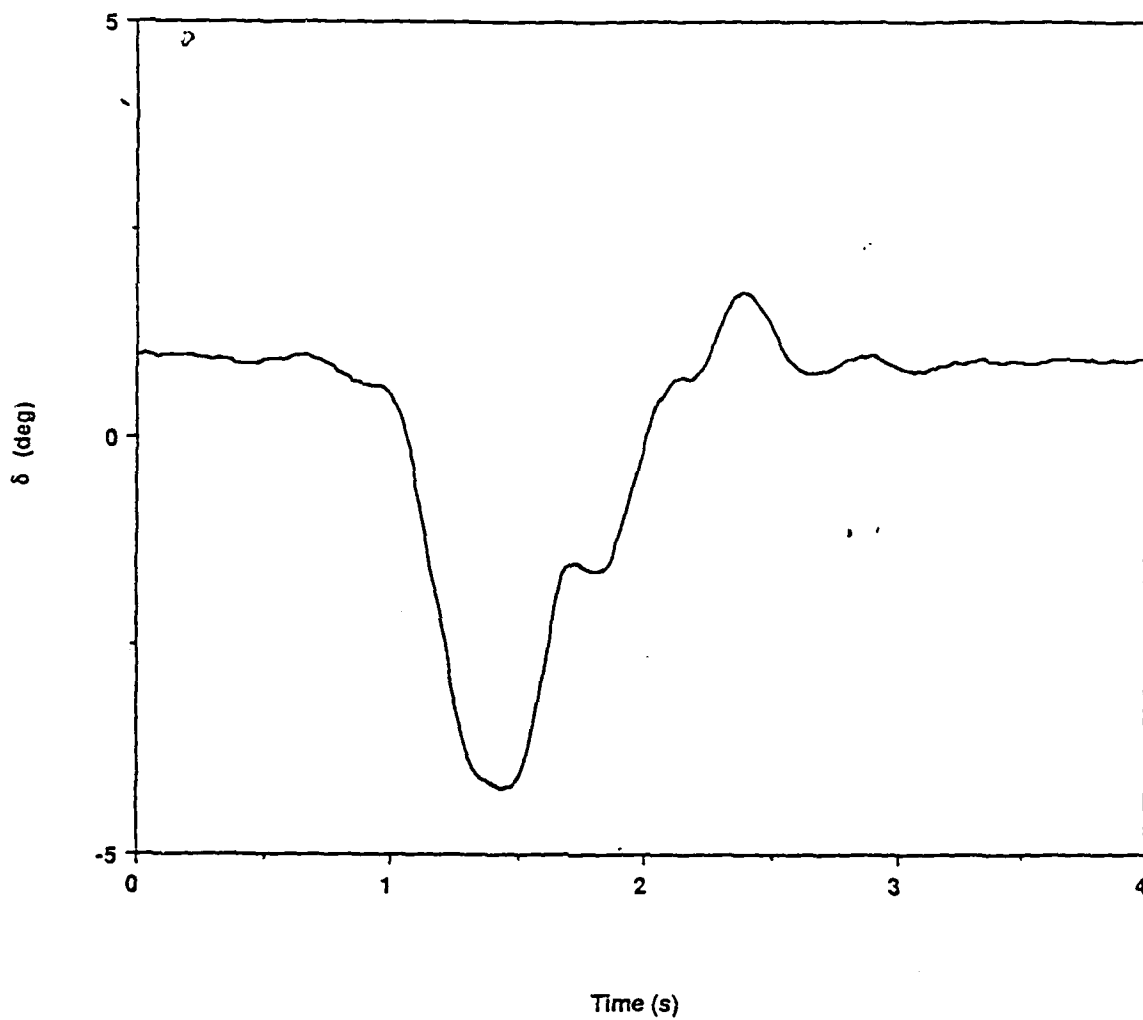


Figure 7. Control Input (Elevator Deflection) Variation with Time - Flight Test

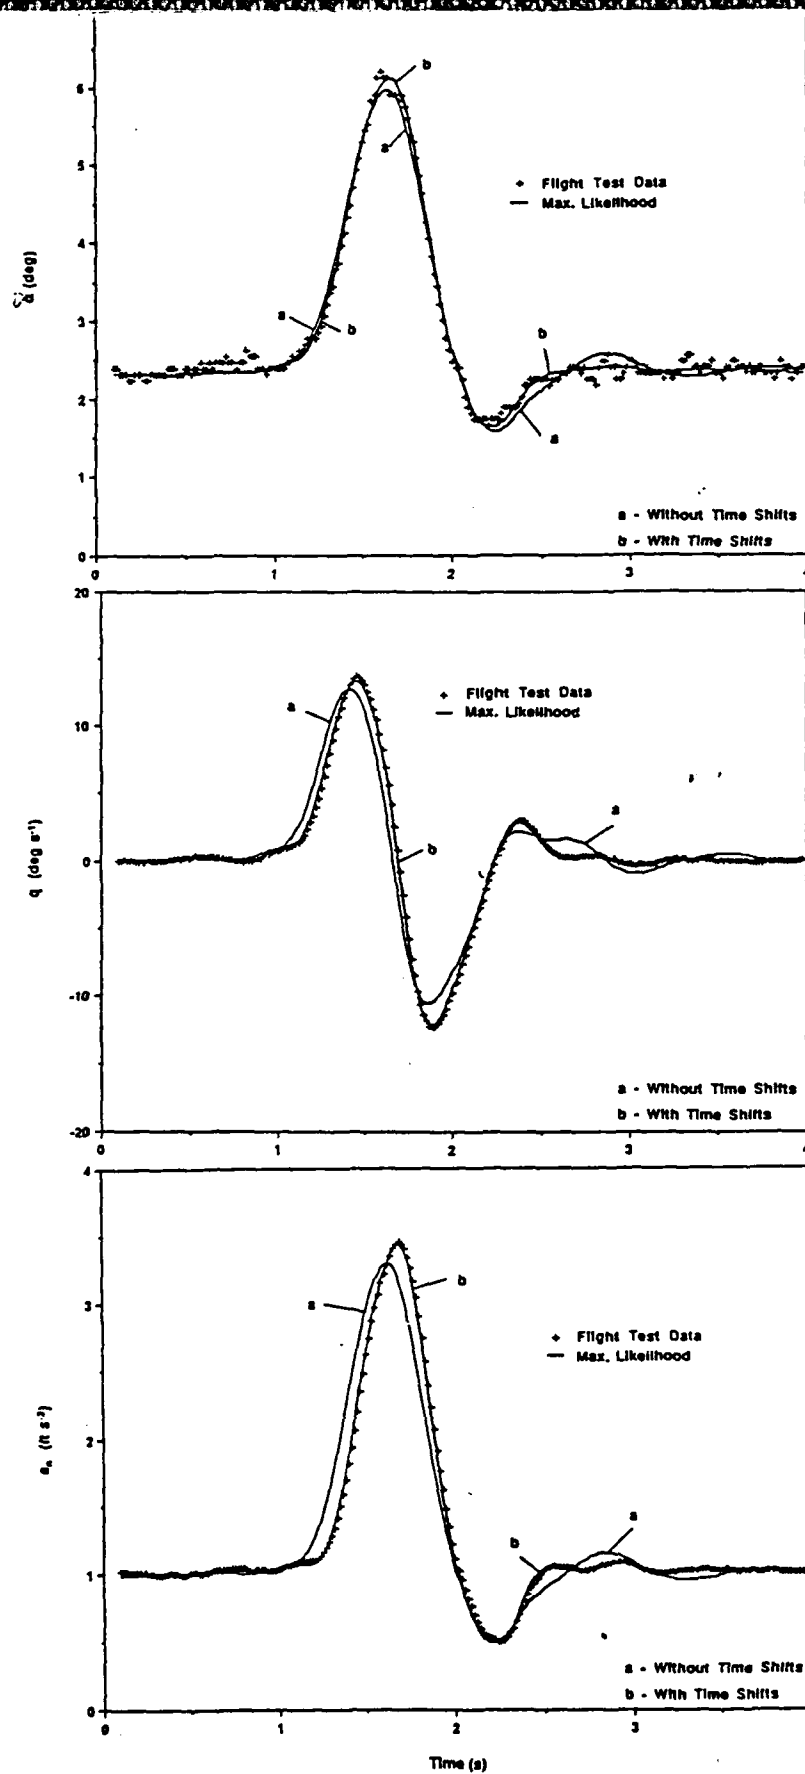


Figure 8. Variation of Angle of Attack, Pitch Rate, and Normal Acceleration - Flight Test

## DISTRIBUTION

### AUSTRALIA

#### Department of Defence

##### Defence Central

Chief Defence Scientist  
Assist Chief Defence Scientist, Operations (shared copy)  
Assist Chief Defence Scientist, Policy (shared copy)  
Director, Departmental Publications  
Counsellor, Defence Science (London) (Doc Data Sheet Only)  
Counsellor, Defence Science (Washington) (Doc Data Sheet Only)  
S.A. to Thailand MRD (Doc Data Sheet Only)  
S.A. to the DRC (Kuala Lumpur) (Doc Data Sheet Only)  
OIC TRS, Defence Central Library  
Document Exchange Centre, DISB (18 copies)  
Joint Intelligence Organisation  
Librarian H Block, Victoria Barracks, Melbourne  
Director General - Army Development (NSO) (4 copies)  
Defence Industry and Material Policy, FAS,

##### Aeronautical Research Laboratory

Director  
Library  
Superintendent - Aerodynamics and Aero Propulsion  
Head - Aerodynamics Branch  
Divisional File - Aerodynamics and Aero Propulsion  
Author: J. Blackwell  
R.A. Feik  
C.A. Martin  
N.E. Gilbert  
R.H. Perrin  
C.R. Guy  
T.G. Ryall  
G. Merrington  
M. Cooper

##### Materials Research Laboratory

Director/Library

##### Defence Science & Technology Organisation - Salisbury

Library

##### Navy Office

Navy Scientific Adviser  
Aircraft Maintenance and Flight Trials Unit  
Director of Naval Aircraft Engineering

##### Army Office

Scientific Adviser - Army (Doc Data sheet only)  
US Army Research, Development and Standardisation Group

Air Force Office

Air Force Scientific Adviser (Doc Data sheet only)  
Aircraft Research and Development Unit  
Scientific Flight Group  
Library

Statutory and State Authorities and Industry

Aero-Space Technologies Australia, Manager/Librarian (2 copies)  
Hawker de Havilland Aust Pty Ltd, Victoria, Library  
Hawker de Havilland Aust Pty Ltd, Bankstown, Library

Universities and Colleges

Melbourne  
Engineering Library

Monash  
Hargrave Library

Newcastle  
Library  
Professor G.C. Goodwin

Sydney  
Engineering Library  
Professor G.A. Bird, Aeronautical Engineering

NSW  
Physical Sciences Library  
Associate Professor R.D. Archer, Mechanical Engineering  
Library, Australian Defence Force Academy

RMIT  
Library

**CANADA**

NRC  
Aeronautical & Mechanical Engineering Library

**FRANCE**

ONERA, Library

**GERMANY**

Dr P. Hamel, DFVLR Braunschweig

**INDIA**

National Aeronautical Laboratory, Information Centre

**NETHERLANDS**

National Aerospace Laboratory (NLR), Library  
J.A. Mulder, Delft University of Technology

**UNITED KINGDOM**

Royal Aircraft Establishment  
Bedford, Library  
Dr B. Padfield  
Farnborough, Library  
A. Jean Ross

**Universities and Colleges**

Cranfield Inst. of Technology  
Library

**UNITED STATES OF AMERICA**

NASA Scientific and Technology Information Facility  
K.W. Iliff, NASA Dryden  
NASA Langley  
Library  
V. Klein

SPARES (10 copies)  
TOTAL (89 copies)



DOCUMENT CONTROL DATA

PAGE CLASSIFICATION  
**UNCLASSIFIED**

PRIVACY MARKING

1a. AIR NUMBER <b>AR-004-586</b>	1b. ESTABLISHMENT NUMBER <b>ARL-AERO-TM-392</b>	2. DOCUMENT DATE <b>JANUARY 1988</b>	3. TASK NUMBER <b>NAV 87/059</b>
4. TITLE <b>A Maximum Likelihood Parameter Estimation Program for General Non-Linear Systems.</b>		5. SECURITY CLASSIFICATION <small>(PLACE APPROPRIATE CLASSIFICATION IN BOX (S) IE. SECRET (S), CONFIDENTIAL (C), RESTRICTED (R), UNCLASSIFIED (U).)</small> <div style="display: flex; justify-content: space-around;"><div><input checked="" type="checkbox"/> U DOCUMENT</div><div><input checked="" type="checkbox"/> U TITLE</div><div><input checked="" type="checkbox"/> U ABSTRACT</div></div>	6. No. PAGES <b>26</b>
		7. No. REFS. <b>5</b>	
8. AUTHOR(S) <b>J. Blackwell</b>		9. DOWNGRADING/DELIMITING INSTRUCTIONS	
10. CORPORATE AUTHOR AND ADDRESS  <b>AERONAUTICAL RESEARCH LABORATORY P.O. BOX 4331, MELBOURNE VIC. 3001</b>		11. OFFICE/POSITION RESPONSIBLE FOR SPONSOR <b>NAVY OFFICE</b> SECURITY _____ DOWNGRADING _____ APPROVAL _____	
12. SECONDARY DISTRIBUTION (OF THIS DOCUMENT) <b>Approved for Public Release.</b>			
<small>OVERSEAS ENQUIRIES OUTSIDE STATED LIMITATIONS SHOULD BE REFERRED THROUGH ASDIS. DEFENCE INFORMATION SERVICES BRANCH, DEPARTMENT OF DEFENCE, CANBERRA, ACT 2601</small>			
13a. THIS DOCUMENT MAY BE ANNOUNCED IN CATALOGUES AND AWARENESS SERVICES AVAILABLE TO..... <b>No Limitations</b>			
13b. CITATION FOR OTHER PURPOSES (IE. CASUAL ANNOUNCEMENT) MAY BE <input checked="" type="checkbox"/> UNRESTRICTED OR <input type="checkbox"/> AS FOR 13a.			
14. DESCRIPTORS <b>Non-Linear Systems Time Lag Drop Tests Parameter Estimation Maximum Likelihood Landing Gear</b>		15. ONDA SUBJECT CATEGORIES <b>0051A</b>	
16. ABSTRACT <b>A computer program has been developed for the Maximum Likelihood estimation of parameters in general non-linear systems. Sensitivity matrix elements are calculated numerically, overcoming the need for explicit sensitivity equations. Parameters such as break points and time shifts are successfully determined using both simulated and actual test data. keywords</b>			

PAGE CLASSIFICATION  
UNCLASSIFIED

PRIVACY MARKING

THIS PAGE IS TO BE USED TO RECORD INFORMATION WHICH IS REQUIRED BY THE ESTABLISHMENT FOR ITS OWN USE BUT WHICH WILL NOT BE ADDED TO THE DISTIS DATA UNLESS SPECIFICALLY REQUESTED.

16. ABSTRACT (CONT.)		
17. IMPRINT  AERONAUTICAL RESEARCH LABORATORY, MELBOURNE		
18. DOCUMENT SERIES AND NUMBER Aerodynamics Technical Memorandum 392	19. COST CODE 511155	20. TYPE OF REPORT AND PERIOD COVERED
21. COMPUTER PROGRAMS USED  COMPAT.JB.5 (Fortran)		
22. ESTABLISHMENT FILE REF. (S)		
23. ADDITIONAL INFORMATION (AS REQUIRED)		

END

DATE

FILMED

6-1988

DTIC