

NOSC

NAVAL OCEAN SYSTEMS CENTER San Diego, California 92152-5000

Technical Document 1259
April 1988

Corrosion-Control (CC) Program: SIMA Puget Sound

A. Robinson
S. Kullerd
P. Schlunt
M. Fogata

Integrated Systems Analysts, Inc.



Approved for public release;
distribution is unlimited

The views and conclusions contained in this report are those of the authors and should not be interpreted as representing the official policies, either expressed or implied, of the Naval Ocean Systems Center or the U.S. Government.

NAVAL OCEAN SYSTEMS CENTER

San Diego, California 92152-5000

E. G. SCHWEIZER, CAPT, USN
Commander

R. M. HILLYER
Technical Director

ADMINISTRATIVE INFORMATION

This work was performed by Integrated Systems Analysts, Inc., for the Naval Surface Force, Pacific Fleet. J. Jennings, Code 932, was the contracting officer's technical representative for the Naval Ocean Systems Center.

Released by
R.K. Fogg, Jr., Head
Structural Materials
Science Branch

Under authority of
C.L. Ward, Jr., Head
Design and Development
Division

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution is unlimited.		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) ISA (WC)-ITR-120			5. MONITORING ORGANIZATION REPORT NUMBER(S) NOSC TD 1259		
6a. NAME OF PERFORMING ORGANIZATION Integrated Systems Analysts, Inc.		6b. OFFICE SYMBOL (if applicable)		7a. NAME OF MONITORING ORGANIZATION Naval Ocean Systems Center	
6c. ADDRESS (City, State and ZIP Code) 740 Bay Boulevard Chula Vista, CA 92010		7b. ADDRESS (City, State and ZIP Code) San Diego, CA 92152-5000			
8a. NAME OF FUNDING/SPONSORING ORGANIZATION Naval Surface Force, Pacific Fleet		8b. OFFICE SYMBOL (if applicable)		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N66001-86-D-0086, DO 0009	
8c. ADDRESS (City, State and ZIP Code) San Diego, CA 92136-5081		10. SOURCE OF FUNDING NUMBERS			
		PROGRAM ELEMENT NO. OMN		PROJECT NO. NSURFAAC	TASK NO. ET66
				AGENCY ACCESSION NO. DN305 090	
11. TITLE (Include Security Classification) CORROSION-CONTROL (CC) PROGRAM: SIMA Puget Sound					
12. PERSONAL AUTHOR(S) A. Robinson, S. Kullerd, P. Schlunt, and M. Fogata					
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM TO		14. DATE OF REPORT (Year, Month, Day) April 1988	
15. PAGE COUNT 139					
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Wire-sprayed aluminum		
			Powder coating		
			Shore Intermediate Maintenance Activity		
19. ABSTRACT (Continue on reverse if necessary and identify by block number) The current status of the SIMA Puget Sound Corrosion-Control (CC) Shop is reported, with recommendations regarding industrial plant equipment, manning, shop layout, consumables, training requirements, and CC work package implementation and documentation. Specific recommendations are made regarding electrostatic powder-spray systems, powder-spray booth, curing oven, and vapor degreaser. Process instructions for wire-sprayed aluminum and powder coatings are provided.					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT ☐ UNCLASSIFIED/UNLIMITED ☒ SAME AS RPT ☐ DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED		
22a. NAME OF RESPONSIBLE PERSON J. Jennings, COTR			22b. TELEPHONE (Include Area Code) (619) 553-3227		22c. OFFICE SYMBOL Code 932

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

EXECUTIVE SUMMARY

In the course of Integrated Systems Analysts, Inc.'s (ISA's), support for the Corrosion-Control (CC) Program under the direction of Commander, Naval Surface Force, U.S. Pacific Fleet (COMNAVSURFPAC), Code N4I, this interim technical information report is provided to discuss the current status of the work in progress for Shore Intermediate Maintenance Activity, Puget Sound (SIMA(PS)), with respect to Delivery Order No. 0009. The scope of this Delivery Order included the following:

- Provide engineering support for Industrial Plant Equipment (IPE) review for CC production shop at SIMA(PS) and make recommendations for improvements.
- Provide engineering, technical support and training for production CC shop facilities at SIMA(PS) in accordance with plans established during the development and operation of the SIMA San Diego(SD) Pilot CC Shop.
- Provide technical support to analyze and evaluate the CC Training Program developed for the production CC Shop Program and analyze and evaluate CC Technician certification processes.
- Provide engineering and technical support at SIMA(PS) to establish and operate a production CC shop to ensure that the development and operation complies with plans established during the development and operation of the SIMA(SD) Pilot CC Shop.
- Provide continuing engineering and technical support to the SIMA(PS) CC Shop to evaluate ship-to-shop work-package implementation, shop production efficiencies and work complete documentation.

The SIMA(PS) CC Shop is scheduled for beneficial occupancy in Fiscal Year 1992 and the CC Shop design is still in the initial stages. Many planning factors have yet to be defined by COMNAVSURFPAC and Naval Sea Systems Command (NAVSEA), and therefore much of the work performed is in the form of recommendations.

This work performed under this Delivery Order during the period of 22 April 1987 through 30 September 1987 is summarized in the following paragraphs.

- **Industrial Plant Equipment Review** - Recommendations for IPE design have been provided based upon our experience at the established CC shops. NAVSEA has yet to submit procurement requests specifying the IPE to be procured, and it is recommended that ISA be involved in the preparation and review of these IPE procurement specifications to be prepared by NAVSEA in order to ensure that lessons learned are incorporated. Once the IPE is designated, ISA will assist in obtaining

the operating permits. ISA will also develop an IPE PMS and EOSS to be implemented by COMNAVSURFPAC prior to shop operation using the validated SIMA(PH) systems as guidelines.

A preliminary listing of minor expense equipment (MEE) has also been developed and provided. It is recommended that the list of MEE to be procured be reviewed by ISA prior to submission for procurement in order to ensure suitability.

- **Training Support** - Since the SIMA(PS) CC Shop is scheduled for beneficial occupancy in Fiscal Year 1992, training has not been conducted to date. Currently, two training courses have been developed by ISA and will be validated at SIMA(PH) in Fiscal Year 1988. These courses and materials must be provided for SIMA(PS) CC Shop personnel and Ship's Force personnel as discussed herein.
- **Engineering and Technical Support for CC Shop Establishment** - A preliminary list of CC Shop consumables was developed and is provided. ISA will perform further analysis during the year prior to CC Shop operation in order to review and revise this list based upon refined production requirements and changes in local sources and standard Navy stock system supplies.

Preliminary process instructions for wire-sprayed aluminum and powder coating were developed and are also provided. ISA will review and revise these process instructions accordingly to ensure compliance with NAVSEA policy at the time of shop initial operation.

- **Work Package Implementation and Documentation** - A Ship Class Master Job Catalog for CC work is currently being developed and evaluated as a method of CC Work Package definition and implementation. CC Work Package Guides are also being developed for ships homeported at San Diego and Pearl Harbor which define CC work package candidate work and procedures to implement and document CC work. ISA will prepare CC Work Package Guides for all ships to be homeported at Puget Sound as they are designated.

This report contains details of the SIMA(PS) current CC Shop status, support provided to date, recommendations regarding shop implementation and appendices presenting the documents developed.

DISCLAIMER NOTICE

THIS DOCUMENT IS BEST QUALITY PRACTICABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

OR are
Blank pgs.
that have
Been Removed

**BEST
AVAILABLE COPY**

**BEST
AVAILABLE COPY**

TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>	<u>PAGE</u>
1.0	INTRODUCTION	1
1.1	Background	1
1.2	Scope of Work	1
2.0	SIMA PUGET SOUND	2
2.1	General	2
2.2	Military Construction (MCON) Project P-045	4
2.3	Puget Sound Port Loading	4
3.0	SIMA(PS) CC SHOP	7
3.1	General	7
3.2	CC Shop Layout	7
3.3	Equipment	7
3.3.1	Industrial Plant Equipment (IPE)	7
3.3.2	Minor Expense Equipment (MEE)	14
3.3.3	EPA Operating Permits	14
3.3.4	IPE Planned Maintenance System (PMS)	14
3.4	CC Shop Consumables	15
3.5	CC Shop Manning	15
3.6	Training	15
3.6.1	CC-Shop Technician Training Course	15
3.6.2	CC Shipboard Training Course	16
3.7	Process Instructions	16
3.7.1	Draft SIMA(PS) WSA Process Instruction	16
3.7.2	Draft SIMA(PS) Powder Coating Process Instruction	16
3.8	Ship CC Work Package Implementation and Documentation	16
4.0	SUMMARY AND RECOMMENDATIONS	17
4.1	Equipment	17
4.1.1	IPE	17
4.1.2	MEE	18
4.2	CC Shop Consumables	18
4.3	CC Shop Manning	18
4.4	Training	18
4.5	Process Instructions	19
4.6	CC Work Package Implementation and Documentation	19
	REFERENCES	20

LIST OF FIGURES

<u>FIGURE</u>	<u>TITLE</u>	<u>PAGE</u>
2-1	MCON P-045 POA&M	2
2-2	MCON Project P-045	3
2-3	Puget Sound Vicinity Map	3
2-4	MCON P-045 Building Layout	5
3-1	Original SIMA(PS) CC Shop Layout	9
3-2	Recommended SIMA(PS) CC Shop Layout	11

LIST OF TABLES

<u>TABLE</u>	<u>TITLE</u>	<u>PAGE</u>
3-1	SIMA(PS) CC Shop Proposed Services	8

LIST OF APPENDICES

<u>APPENDIX</u>	<u>TITLE</u>	<u>PAGE</u>
A	SIMA(SD) CC Shop Miscellaneous Expense Equipment (MEE)	A-1
B	Preliminary SIMA(PS) CC Shop Consumables List	B-1
C	Draft Process Instruction: Wire-Sprayed Aluminum (WSA) for Corrosion Protection; NAVSEA Corrosion-Control (CC) Systems 1 and 2	C-1
D	Draft Process Instruction: Powder Coatings, Electrostatically-Applied; NAVSEA Corrosion-Control (CC) System 4	D-1

1.0 INTRODUCTION

The Commander, Naval Surface Force, U.S. Pacific Fleet (COMNAVSURFPAC) has a continuing program to reduce nonproductive Ship's Force (S/F) labor and redirecting S/F labor to readiness training and to enhanced equipment system maintenance. Shipboard corrosion has historically been a major source of repetitive maintenance, repetitive in the sense that the paint and preservations have a short service life which results in frequent reapplication and topcoating.

1.1 BACKGROUND

In 1983, a Senior Navy Steering Board proposed that Type Commanders and their Shore Intermediate Maintenance Activities (SIMAs) identify requirements and develop the capability to deliver a full spectrum of corrosion-control (CC) services. The objective of the SIMA CC Shops would be to:

- Reduce the excessive S/F manhours spent on corrosion prevention and control.
- Extend the service life of shipboard components, spaces and structures by reducing marine corrosion.
- Reduce or eliminate material, labor and schedule costs involved in the repair or replacement due to corrosion.

The majority of SIMAs currently do not have the manning, equipment, industrial processes or Shop organization to provide all of the CC services as defined by Naval Sea Systems Command (NAVSEA), however, some SIMAs do have a limited capability to provide some CC work that meets the operational and technical requirements of COMNAVSURFPAC and/or NAVSEA.

Accordingly, COMNAVSURFPAC initiated a program to procure, install, train and operate production CC Shops at the COMNAVSURFPAC SIMAs. To date, CC Shops have been established at SIMA Pearl Harbor (PH) and SIMA San Diego (SD), and will be established at SIMAs Long Beach (LB), San Francisco (SF) and Puget Sound (PS).

1.2 SCOPE OF WORK

This report shall summarize the progress and support provided and provide recommendations. The technical support as stated within the Delivery Order was to include the following:

- Provide engineering support for Industrial Plant Equipment (IPE) review for CC production Shop at SIMA(PS) and make recommendations for improvements.
- Provide engineering, technical support and training for production CC Shop facilities at SIMA(PS) in accordance with plans established during the development and operation of the SIMA(SD) Pilot CC Shop.

- Provide technical support to analyze and evaluate the CC Training Program developed for the production CC Shop program and analyze and evaluate CC technician certification processes.
- Provide engineering and technical support at SIMA(PS) to establish and operate a production CC Shop to ensure that the development and operation complies with plans established during the development and operation of the SIMA(SD) Pilot CC Shop.
- Provide continuing engineering and technical support to the SIMA(PS) CC Shop to evaluate ship-to-shop work-package implementation, shop production efficiencies and work-completed documentation.

2.0 SIMA PUGET SOUND

2.1 GENERAL

Currently, there are five Naval facilities in the Seattle area, however, only one is involved in surface ship repair support. This facility, Puget Sound Naval Shipyard, does have the capability to apply wire-sprayed aluminum (WSA) and paint, however powder coating services and technical assistance for the other 12 NAVSEA-approved CC Systems are not available.

The new SIMA(PS) building which will house the CC Shop is being developed under Military Construction (MCON) Project P-045 at Everett, WA. The Plan of Action and Milestones (POA&M) for P-045 is shown in Figure 2-1 with the beneficial occupancy presently scheduled for early Fiscal Year 1992. The location of SIMA(PS) and P-045 is shown in Figures 2-2 and 2-3.

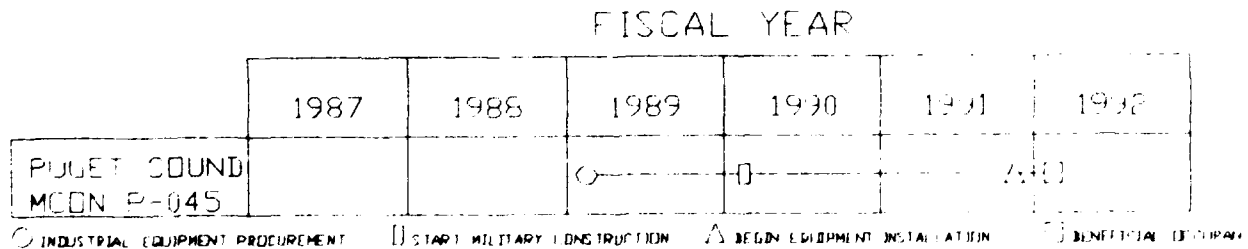


Figure 2-1 MCON P-045 POA&M

Text continues on page 4

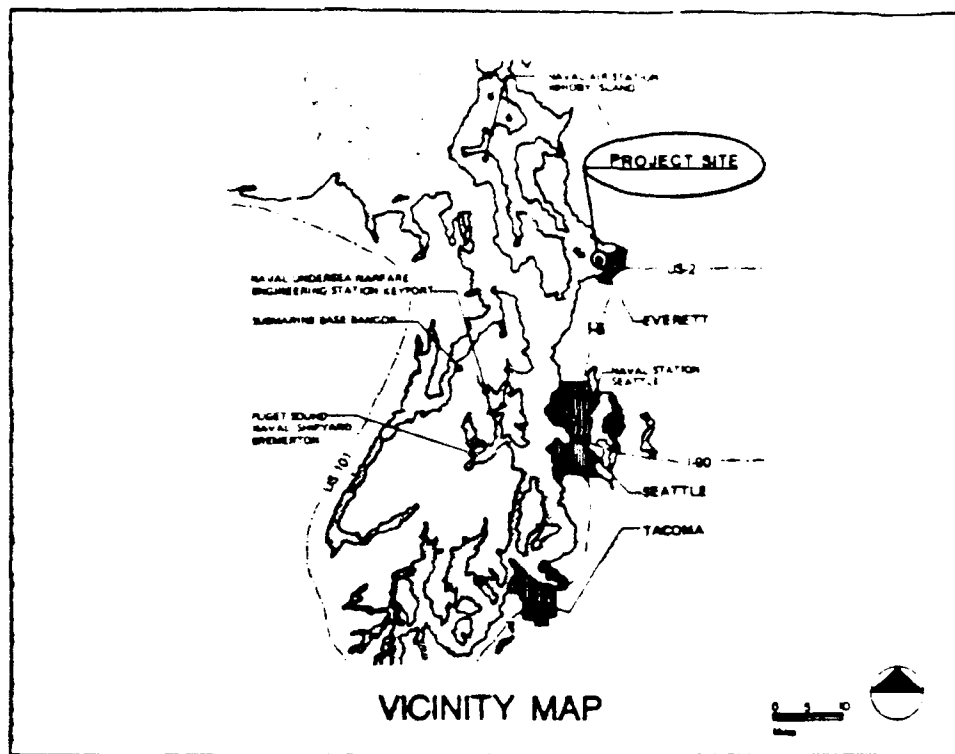


Figure 2-2 Puget Sound Vicinity Map

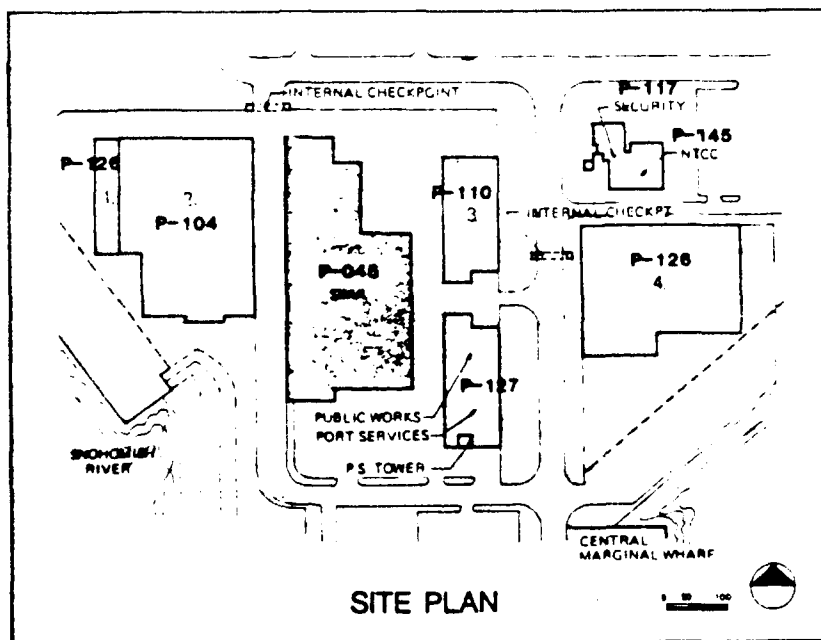


Figure 2-3 MCON Project P-045

2.2 MILITARY CONSTRUCTION (MCON) PROJECT P-045

The main floor of P-045 is approximately 102,500 square feet. The major shops to be enclosed within this building as shown in Figure 2-4 are:

- Shipfitter Shop
- Sheetmetal Shop
- Welding Shop
- Pipe/Boiler Shop
- Outside Machine Shop
- Inside Machine Shop
- Pump Shop
- Electrical Repair Shop
- Valve/Regulator Shop
- Gas Turbine Shop
- Boat Repair Shop
- Foundry
- Rigger's Shop
- Sail Loft and Canvas Shop
- Corrosion Control Shop

2.3 PUGET SOUND PORT LOADING

Currently, there are seven ships homeported in the Puget Sound area. It is planned to move a battle group into the area with a total port loading of 17 ships in Fiscal Year 1990. This increase, however, may be postponed in order to coincide with the completion of the SIMA which has a planned beneficial occupancy in Fiscal Year 1992.

Table 3-1

SIMA(PS) CC Shop Proposed Services

CC SYSTEM	NAVSEA-APPROVED SYSTEMS	METHOD OF DELIVERY
1	Wire-Sprayed Aluminum (WSA) (10-15 mils) + 2-coats DoD-P-24555 heat-resistant aluminum paint (3 mils DFT)	Shop Production
2	Wire-Sprayed Aluminum (WSA) (7-10 mils) + 5-part sealer/barrier-topcoat epoxy-polyamide, silicone-alkyd paint schedule (9.5-9.75 mils DFT)	Shop Production
3	Paint Coating Systems specified in NSTM 631	Shop Production (to WSA items)
4	Electrostatic-Sprayed Powder (ESP)	Shop Production
5	Non-Skid Deck Coating (flush deck scuttles and hatches)	Technical Advice
6	Ceramic-Coated Fasteners	Material Support
7	Water-Displacing, Clear, Corrosion-Prevention Compound	Material Support
8	Anti-Seize Thread Compound	Material Support
9	Corrosion-Resistant (CRES) 316 Fasteners	Material Support
10	Sealing and Coating Compound	Material Support
11	Polysulfide Sealant	Material Support
12	Multi-Fin Connection Protection	Technical Advice
13	Dielectric Barriers (Polyvinyl, Glass-Reinforced Insulation Gaskets and Nylon Washers)	Technical Advice and Material Support
14	Vapor-Phase Inhibitor	Technical Advice
15	Strippable Coating	Technical Advice

3.0 SIMA(PS) CC SHOP

3.1 GENERAL

The CC Shop at SIMA(PS) will consist of approximately 7,392 square feet of enclosed floor space on the northeast end of the production area of the new SIMA Building being constructed under MCON Project P-045. The 35% design drawings were submitted for review in December 1986. ISA reviewed the CC Shop design and provided comments to COMNAVSURFPAC. Our preliminary study indicated that the CC Shop capacity should be sufficient to serve the 17 ships anticipated to be homeported at Puget Sound in addition to the shop-to-shop work expected. The Shop's proposed services shall include the capability to provide application and/or technical support for the NAVSEA-approved systems as listed in Table 3-1.

3.2 CC SHOP LAYOUT

The original CC Shop layout as proposed in the 35% design drawings is shown in Figure 3-1. In order to provide greater efficiency, ISA submitted the layout shown in Figure 3-2 to COMNAVSURFPAC. This recommended layout provides more efficient material handling, improved utilization of floor space and two additional blast units.

The minimum power required by the recommended CC Shop IPE, as shown in Figure 3-2, is approximately 600A at 480V. The power presently provided at Panel DP2, which supplies the entire north end of the building with the exception of the compressors and low-bay shops, is 800A at 480V. Also, a minimum of approximately 800 cfm of compressed air is required for the recommended IPE operation in addition to miscellaneous utility air outlets required for intermittent usage. Should the recommended IPE be installed, the electrical power system and compressed air system may need to be revised.


3.3 EQUIPMENT

3.3.1 Industrial Plant Equipment (IPE)

The IPE previously recommended for the SIMA(PS) CC Shop includes the following:

- Vapor Degreaser (8'x4'x4')
- Abrasive Blast Booths (four total) (10'x20'x10')
- Reach-in Blast Cabinets (two total)
- WSA Waterwash Booth (15' minimum)
- Metallizing Systems (two total)
- Paint Waterwash Booth (15' minimum)
- Powder Spray Booth
- Powder Curing Oven
- Air Compressor

Text continues on page 15

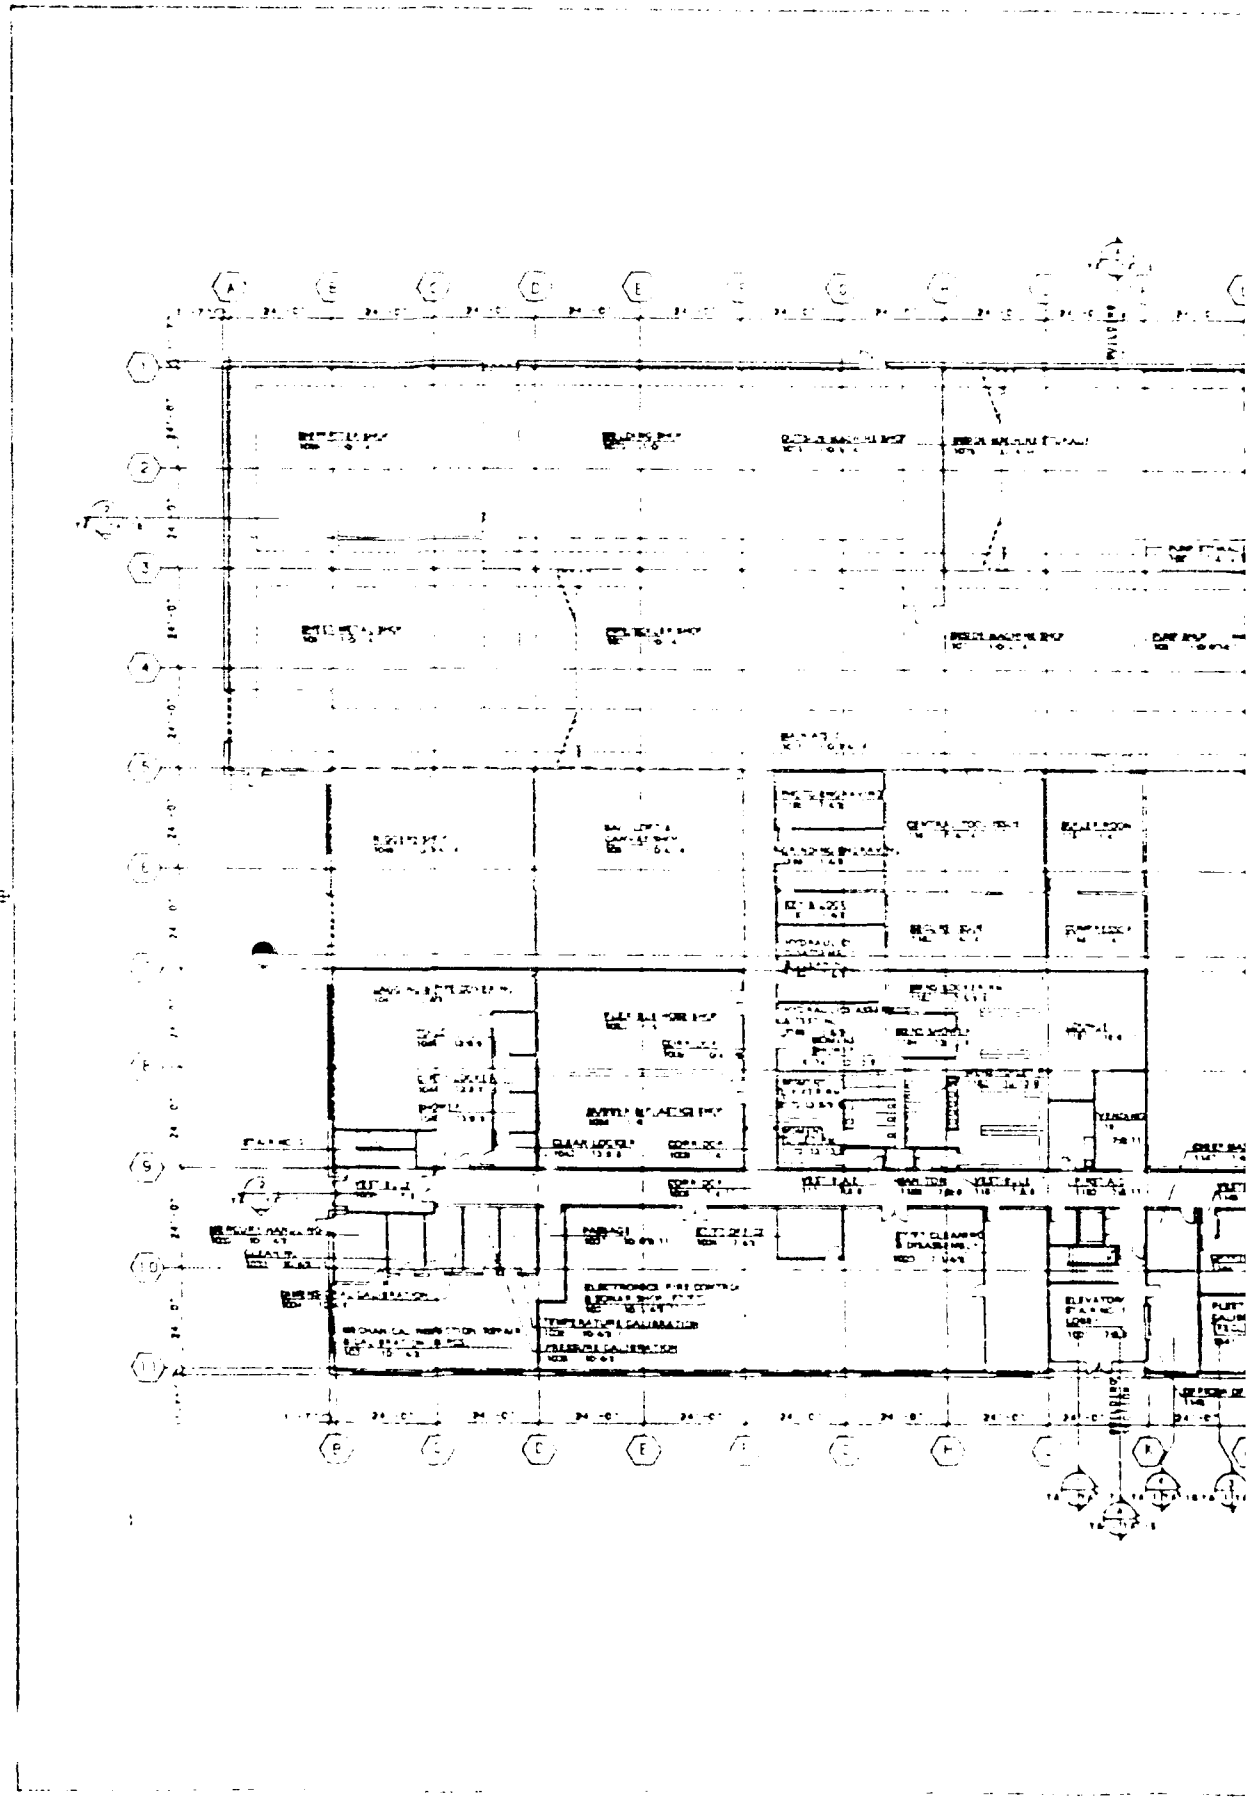

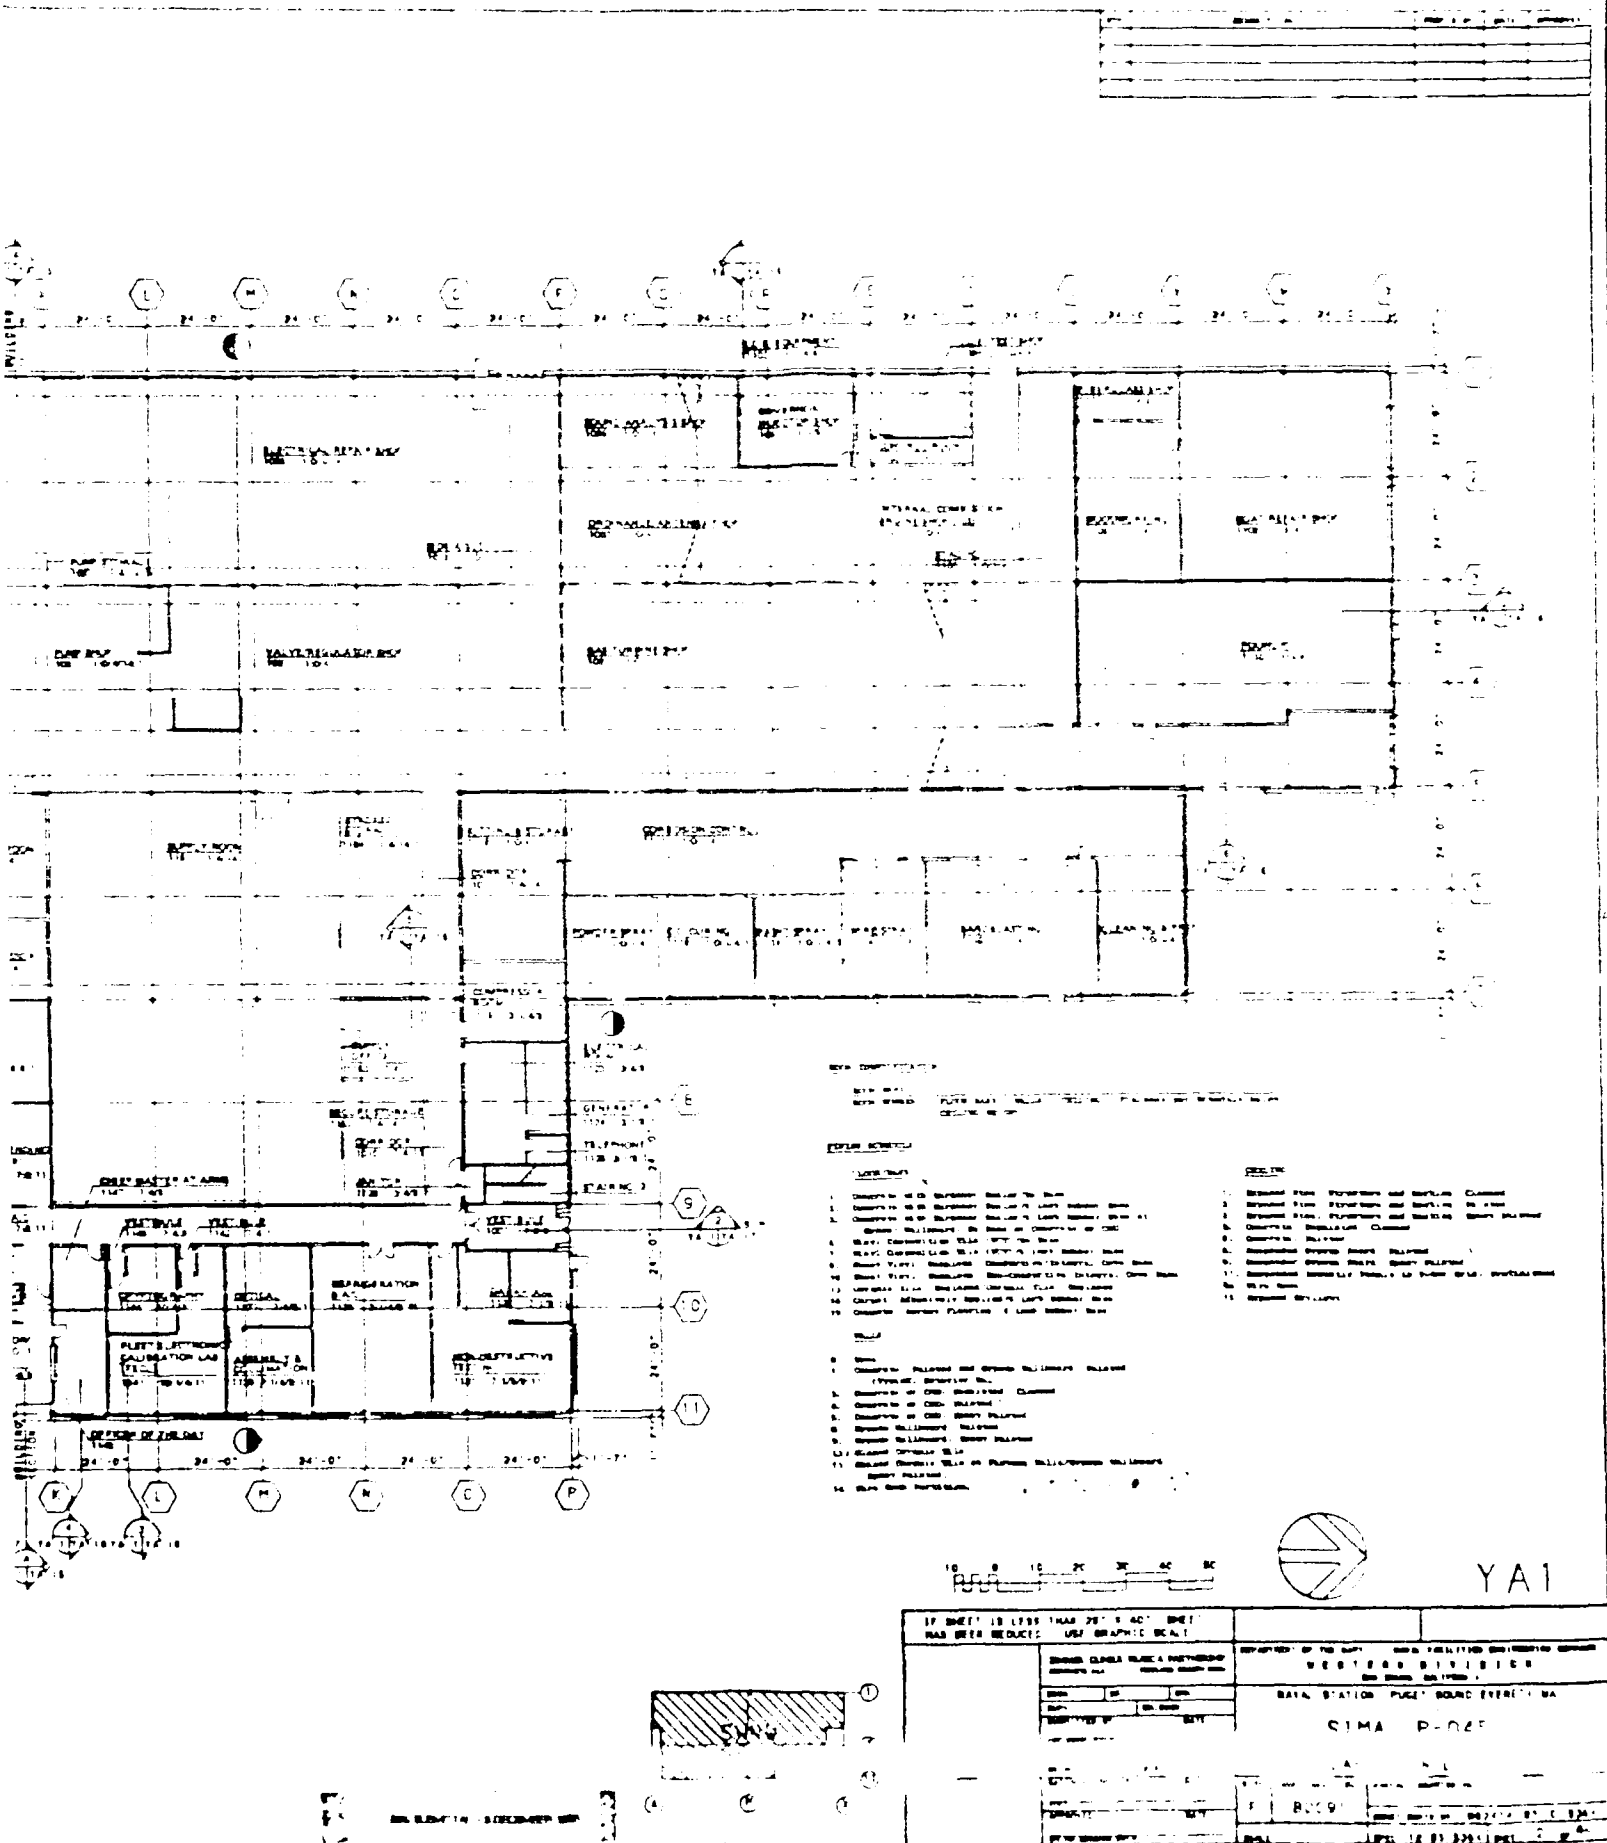


Figure 2-4

MCON P-045 Building Layout


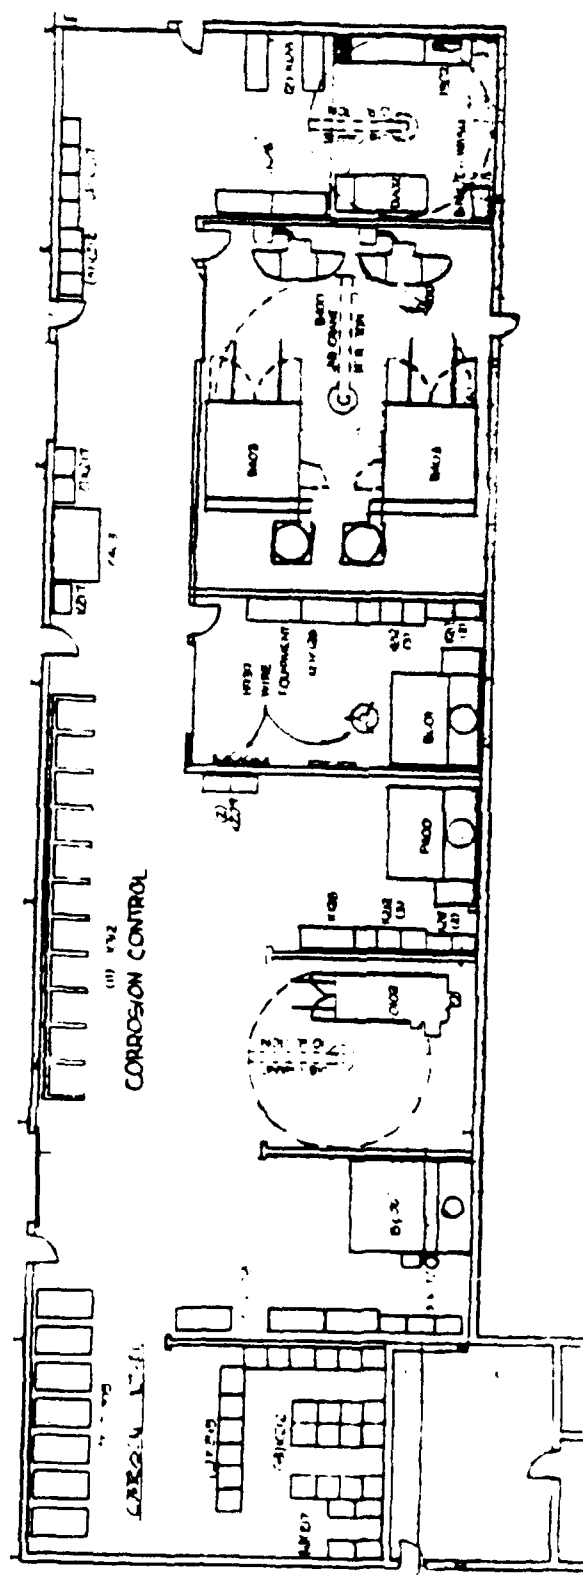


Figure 3-1 **Original SIMA(PS) CC Shop Layout**

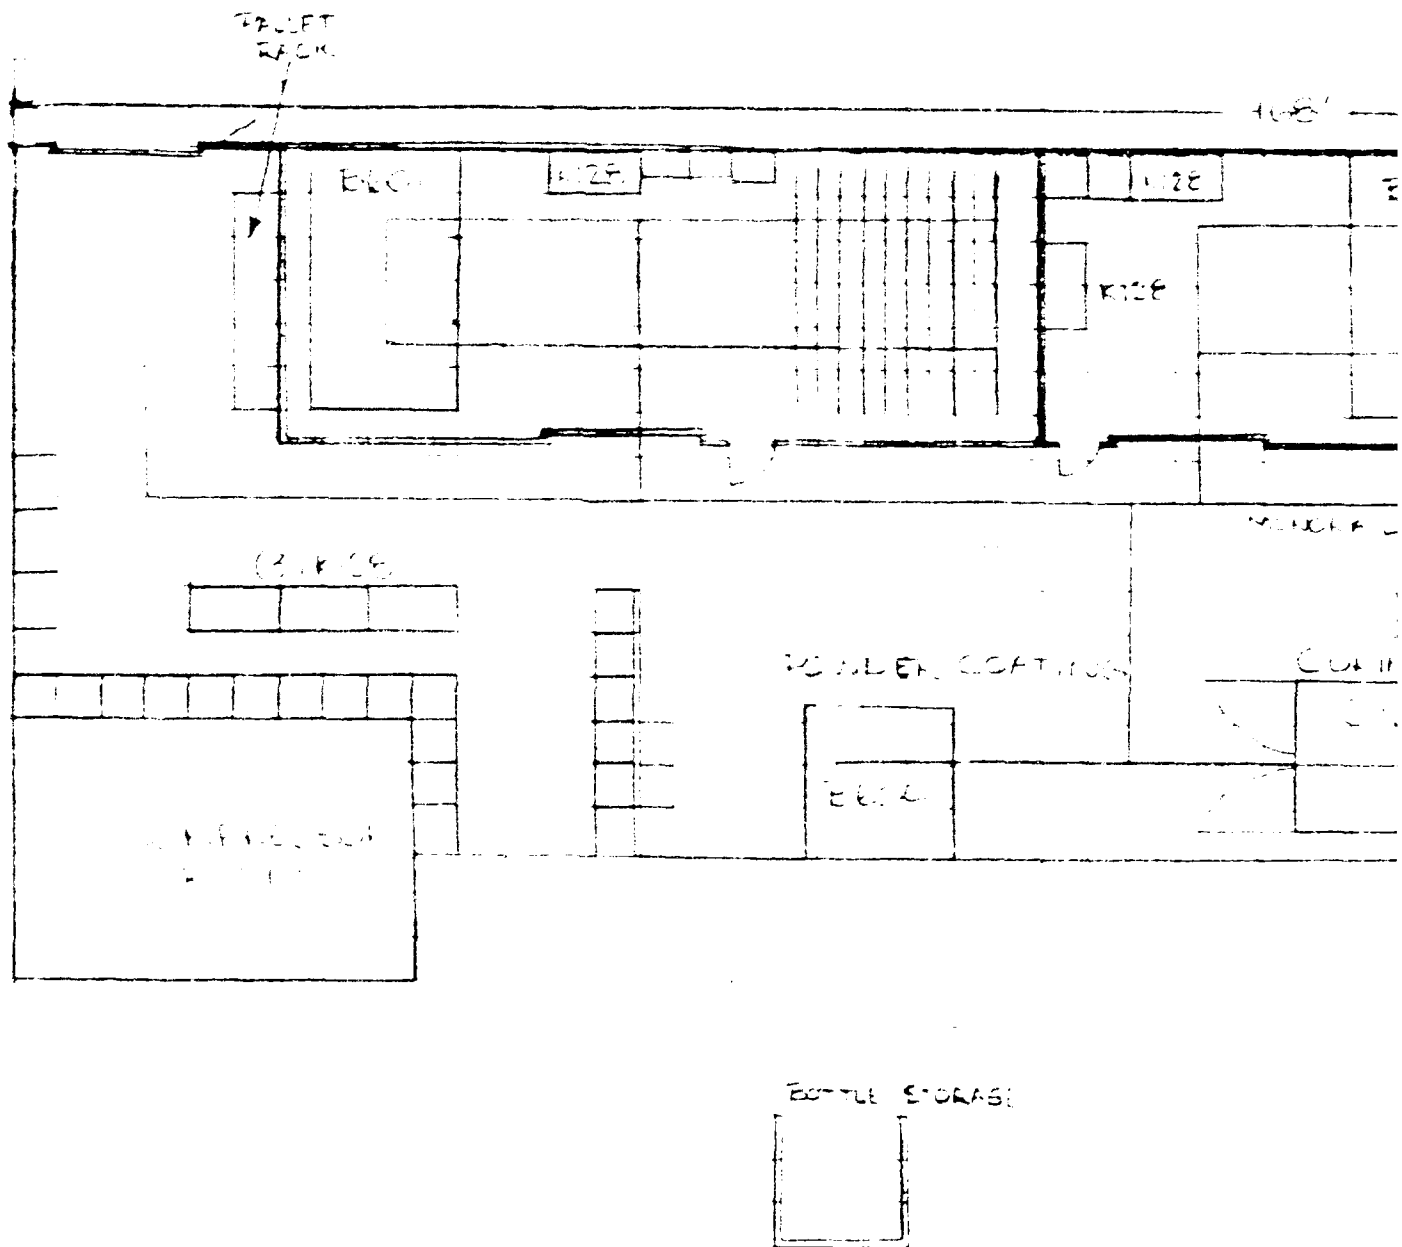

The Vapor Degreaser should be similar to Randall Mfg. Company Model V96EX which is the model procured for the SIMA(PH) CC Shop. This degreaser must be procured with a closed cooling-water system as discussed in References 3a and 3b in order to comply with current Naval conservation policies.

Abrasive Blast Booths are recommended to include air-swept floors. Preferable dimension are 10'x20'x10' and, if feasible, the blast pots should be located external to the building for easy truck access.

The Reach-In Blast Cabinets should be the pressure type rather than suction and should be similar to CLEMCO Silverado Model 4050.

Both the WSA and Paint Waterwash Booths should be a minimum of 15' long. Fire protection regulations specify that the booths must be equipped with sprinklers in the spray, plenum and stack areas. The Paint Waterwash Booth is recommended to be manufacturer's standard, however, the frontal air velocity of the WSA Waterwash Booth must be a minimum of 200 fpm.

It is strongly recommended that the Navy install the same type of Powder Spray Booth utilized in the SIMA(SD) Pilot Powder Coating Station Service Test (Ref. 3c). The booth utilized had a set of cyclicly-cleaned primary filter cartridges and a set of final absolute filters. This dry-filter cartridge booth with cyclic air backflushing performed with no pollution, safety or maintenance problems. Booths can be designed with either timed purges or plenum-pressure signaled purges. The final absolute filters remove enough powder from the final exhaust air that the booth may be exhausted into the workspace. This saves in ductwork, building heating costs and nuisance pollution problems.

The Powder Curing Oven should be similar to that recently installed at SIMA(PH). This oven is a special walk-in oven manufactured by the Grieve Corporation for the U.S. Government, purchased under Contract N00600-86-C-1510. A fume-exhaust system is not required for powder coating, but will be necessary if the oven is to be used for degreasing porous castings.

The air compressor procured for the SIMA(PH) CC Shop is an Ingersoll-Rand SSR EP200. This compressor or equivalent is recommended for the SIMA(PS) CC Shop.

It is recommended that ISA be involved in the preparation and review of the IPE procurement specifications in order to ensure the incorporation of lessons learned from established CC shops.

3.3.2 Minor Expense Equipment (MEE)

The SIMA(SD) CC Shop MEE list is provided in Appendix A. At this time, this equipment is recommended for SIMA(PS) with the following exceptions:

- A Randsburg-Gema electrostatic powder-coating system, Type 701, should be added for complex-geometry component coating.
- Item #0018, Hoist, Electric w/Trolley 1TN, 10-ft lift should be modified to provide a minimum 16-ft lift.
- Item #0007, Crane, Floor, Mobile Hydraulic should be deleted due to infrequent requirements.
- Item #0010, Gage Pull-off, for Dry Film should be deleted.
- Item #0009, Gage, Digital Dry Film should be replaced with two Nordson Corp. Model DFG-E2 gages.
- Item #0011, Printer for Digital Dry Film Gage should be deleted.

Prior to the MEE procurement for SIMA(PS), it is recommended that ISA review the list to ensure suitability and to incorporate new instruments and special requirements that exist at that time.

3.3.3 EPA Operating Permits

Most of the recommended IPE will require operating permits. Due to ever-changing pollution regulations and uncertain IPE specifications, it is too early to begin researching permit requirements at this time. It is recommended that upon designation of the IPE, ISA assist in coordinating the application for permits and review special exhaust requirements as stipulated by the local pollution control organization and Department of Health.

3.3.4 IPE Planned Maintenance System (PMS)

The establishment of a CC Shop at a SIMA requires the installation of IPE unique for the application of CC coatings. The uniqueness of this IPE to a CC Shop presents a maintenance problem to SIMA personnel in that the equipment is new and unfamiliar to the maintenance personnel. In order to reduce unnecessary equipment downtime directly related to poor preventive maintenance and improper equipment operation, a CC-Shop PMS and Equipment Operating and Sequencing System (EOSS) are being developed for the equipment being installed at SIMA(PH). This CC-Shop PMS and EOSS is scheduled for validation during the SIMA(PH) start-up training scheduled for October 1987.

In that the IPE procurement has not begun for SIMA(PS), the PMS and EOSS developed for Pearl Harbor may be directly applicable to the SIMA(PS) CC Shop. It is recommended that a PMS and EOSS for SIMA(PS) be developed as the IPE manufacturers are designated using the validated SIMA(PH) systems as a baseline.

3.4 CC SHOP CONSUMABLES

A preliminary list of CC Shop consumables is given in Appendix B. The appendix presents items, such as paint, powder, wire, masking tape, safety clothing and equipment, abrasive grit, etc., with the National Stock Number or potential open purchase sources. The appendix also presents the necessary fastener requirements for fasteners not commonly available in the Navy Supply System. The fasteners are presented in sample requisition documents (Form DD-1149).

The quantities listed and usage rates are based upon our study and analyses of the projected Puget Sound port loading for Fiscal Year 1992 and on lessons learned in the SIMA(SD) Pilot CC Shop Service Test (Ref. 3d). It is recommended that ISA monitor the consumable usage of SIMA(PH) during the next year. SIMA(PH) has a similar port loading and IPE which should result in a high correlation between the consumption rates of these two CC Shops. As the SIMA(PS) CC Shop operation nears, it is recommended that ISA analyze the correlation between SIMA(PS) and SIMA(PH), review the port deployment schedules and availability policies, actual IPE and manning of the SIMA(PS) CC Shop, investigate NSN consumables, local open-purchase sources and procurement specifications required and revise this consumable list accordingly.

3.5 CC SHOP MANNING

At this time, there is insufficient information available to specify the CC Shop manning requirements. It is recommended that ISA study the ship deployment schedules, availability policies, shop-to-shop work produced, the IPE to be installed and the manning requirements of CC Shops in operation with similar conditions and provide manning recommendations to COMNAVSURFPAC for billet requests as soon as ships are designated to be homeported at Puget Sound.

3.6 TRAINING

3.6.1 CC-Shop Technician Training Course

The CC-Shop Technician Training Course Instructor Guide was developed by ISA and reviewed by NAVSEA, as reported by Reference 3e. This course was needed for CC Shop personnel because of their inexperience in the aspects of marine corrosion, NAVSEA's approved CC methods and processes and the equipment associated with the application of these CC systems. The objective of this training program was to enable CC Shop personnel to apply the CC coatings, to provide CC technical assistance to other SIMA Shops and tended ships and to become certified in accordance with the standards governing the CC system application. In addition to the Instructor Guide of the CC-Shop Technician Training Course, COMNAVSURFPAC N4I recognized the requirement that a Student Workbook is required. The Student Workbook will provide the student with a place to take notes and serve as a ready reference for use after the course is completed. This Student Workbook has been developed as reported by Reference 3f and has been incorporated into the CC-Shop Technician Training Course.

The initial CC Shop personnel to receive the CC-Shop Technician Training Course shall be the SIMA(PH) Technicians in October 1987. The validation of the CC Shop Technician Training Course shall occur during this training and all changes to the course developed during the SIMA(PH) training shall be incorporated and published by March 1988. It is recommended that the validated CC-Shop Technician Training Course be conducted at SIMA(PS) prior to CC-Shop operation once the IPE is installed.

3.6.2 CC Shipboard Training Course

In addition, COMNAVSURFPAC N4I recognized the importance of training S/F personnel in the use of the CC systems, repair of the CC coatings and proper installation of the coated equipments aboard the ship. The CC Shipboard Training Course has been developed as reported by Reference 3f. The validation of the CC Shipboard Training Program shall occur during the first quarter of Fiscal Year 1988 onboard ships homeported in Pearl Harbor and San Diego. The validated CC Shipboard Training Course shall be published by March 1988. It is recommended that the validated CC Shipboard Training Course be provided to S/F personnel at Puget Sound prior to each ship receiving CC services.

3.7 PROCESS INSTRUCTIONS

3.7.1 Draft SIMA(PS) WSA Process Instruction

As required by paragraph 5.3.1 of Reference 3g, a naval activity must submit a written procedure to be utilized in the application of WSA at that activity for approval prior to WSA application. Appendix C is the preliminary process instruction recommended to be utilized by SIMA(PS) for WSA application. Appendix C has been developed based upon IPE similar to SIMA(PH). It is recommended this process instruction be reviewed and revised by ISA in Fiscal Year 1991 for compliance with NAVSEA policy prior to submittal to NAVSEA for approval.

3.7.2 Draft SIMA(PS) Powder-Coating Process Instruction

Although no U.S. Navy or DoD Standard currently exists for the application of powder coatings on shipboard components, a Draft Powder-Coating Process Instruction has been developed for the SIMA(PS) CC facility. Appendix D is the Draft Process Instruction for powder-coating application at SIMA(PS) developed by ISA. It is recommended this process instruction be reviewed and revised by ISA in Fiscal Year 1991 for compliance with NAVSEA policy prior to submittal to NAVSEA for approval.

3.8 CC WORK PACKAGE IMPLEMENTATION AND DOCUMENTATION

ISA is currently developing and analyzing the use of Ship Class Master Job Catalogs (MJC) for CC Work Package implementation. CC work is suitable for a MJC in that (1) equipments are common to ships of a class; (2) most equipments have quantities exceeding 50; (3) each equipment receives the same recommendation regarding CC coating and installation kit.

A draft CC MJC has been developed for the AO 177 Ship Class. This MJC will be utilized by the USS WILLAMETTE (AO 178) in January 1988, and closely monitored by ISA. Based upon the success of the AO 177 Class MJC, MJCs will be recommended to be developed for all other ship classes, and should these MJCs come into realization, it is recommended that they be utilized at SIMA(PS) for CC Work Package implementation.

ISA has also been assisting CC availability planning by developing CC Work Package Guides for Pacific Fleet ships. Each Work Package Guide discusses the background of the CC program, explains the CC availability procedures, provides Installation Kit Technical Data Sheets, contains a detailed list of all topside shipboard components recommended for CC services and provides a method of documenting CC work completed. Work Package Guides have been developed for ships serviced in SIMA(SD) and SIMA(PH). It is recommended that Work Package Guides be developed for ships to be serviced at SIMA(PS) prior to entering into CC availabilities for CC Work Package planning and documentation.

4.0 SUMMARY AND RECOMMENDATIONS

Based upon our study of the SIMA(PS) CC Shop requirements, the description of support provided and the recommendations for implementing a full-production CC Shop at SIMA(PS) are summarized as follows.

4.1 EQUIPMENT

4.1.1 IPE

The recommended specifications for previously-recommended CC Shop IPE are as follows.

- **Vapor Degreaser** - The vapor degreaser should be similar to Randal Mfg. Company Model V96EX and must have a closed cooling-water system.
- **Reach-In Blast Cabinets** - The blast cabinets should be similar to CLEMCO Silverado Model 4050.
- **Waterwash Booths** - The Paint Waterwash Booth should be manufacturer's standard. The WSA Waterwash Booth must have a frontal air velocity of 200 fpm. Both booths should be a minimum of 15' long and must have fire protection sprinklers in the spray, plenum and stack areas.
- **Powder Spray Booth** - The Powder Spray Booth should have a set of cyclicly-cleaned primary filter cartridges and a set of final absolute filters similar to that utilized during the SIMA(SD) Pilot Powder-Coating Station Service Test.
- **Powder Curing Oven** - The Powder Curing Oven should be a walk-in model similar to that installed at SIMA(PH).

- **Air Compressor** - The air compressor should be similar to Ingersoll-Rand SSR EP200.

These comments will be forwarded to NAVSEA 93F for consideration in the IPE specifications.

Most of the recommended IPE will require operating permits. ISA will assist SIMA(PS) in obtaining the required permits once the IPE is designated.

In order to avoid unnecessary IPE downtime due to poor equipment maintenance, it is recommended that PMS and EOSS be developed and validated for SIMA(PS) utilizing the SIMA(PH) systems as guidelines. ISA will begin this development once the IPE is designated.

4.1.2 MEE

A preliminary list of recommended MEE is provided. This list will be forwarded to NAVSEA 93F for consideration. It is recommended that the list of MEE to be procured be reviewed by ISA to ensure suitability.

4.2 CC SHOP CONSUMABLES

A preliminary list of CC Shop consumables was developed and is provided. ISA will perform further analyses to refine this list based upon production requirements, potential local sources and Naval Stock System supplies.

4.3 CC SHOP MANNING

At this time, there is insufficient information available to specify the CC Shop manning. Once the exact port loading is defined, ISA will perform further analysis of the manning requirements of established CC Shops, projected CC Shop production efficiencies and the port policies and schedules in order to provide a manning recommendation to COMNAVSURFPAC for billet requests.

4.4 TRAINING

Since the CC Shop is not scheduled for operation until Fiscal Year 1992, there has been no training provided to date for the SIMA(PS) CC Shop. There are, however, two training courses that have been developed: the CC-Shop Technician Training Course and the CC Shipboard Training Course. These courses will be validated in Fiscal Year 1988 and revised accordingly.

The validated CC-Shop Technician Training Course must be provided to the CC Shop personnel during the period between IPE installation and CC Shop operation in order to meet certification requirements as dictated by NAVSEA. The validated CC Shipboard Training Course should be provided to S/F personnel prior to a ship receiving CC services.

4.5 PROCESS INSTRUCTIONS

Preliminary process instructions for WSA and powder coating have been developed and are provided herein. These process instructions will be reviewed and revised by ISA in Fiscal Year 1991 for compliance with NAVSEA policies at that time.

4.6 CC WORK PACKAGE IMPLEMENTATION AND DOCUMENTATION

ISA is currently developing and analyzing the use of Ship Class MJC's for CC Work Package implementation. Based upon the success of the AO 177 Class MJC, MJC's will be recommended to be developed for all ship classes and utilized at SIMA/PS).

CC Work Package Guides have also been developed for Pacific Fleet ships which provide procedures and methods for implementing and documenting CC work. ISA will develop CC Work Package Guides for all ships which will be homeported at Puget Sound once they are designated.

REFERENCES

- 2a ISA Letter 5-7-320 to NAVSEA 93F, dated 23 July 1987.
- 3b ISA Letter 5-7-243 to NAVSEA 93F, dated 10 August 1987.
- 3c Schlunt, P., et.al., "Corrosion-Control (CC) Program: Pilot Powder Coating Station Service Test", ISA(WC)-ITR-108, 14 March 1986, Contract N66001-85-D-0015.
- 3d Adkins, W., et.al., "Corrosion-Control (CC) Program: SIMA Pilot CC Shop Service Test and Technical Support," ISA(WC)-107, 30 November 1986, Contract N66001-85-C-0350.
- 3e Brucker, C., et.al., "Corrosion-Control (CC) Shop Technician Training Curriculum in the SQIP Format," Revision, 15 August 1987, Contract N66001-86-D-0086.
- 3f "Corrosion-Control Program: SIMA CC Shop Instructor and Student Handbooks and Shipboard Training," ISA(WC)-122, 30 September 1987, Contract N66001-86-D-0086.
- 3g DoD-STD-2138(SH), "Metal-Sprayed Coating Systems for Corrosion Protection Aboard Naval Ships," 23 November 1981.

APPENDIX A
SIMA(SD) CC SHOP
MISCELLANEOUS EXPENSE EQUIPMENT
(MEE)

SIMA SAN DIEGO EXPENSE EQUIPMENT REQUIREMENTS

8 MAY 1987

WORK CENTER

71B - CORROSION CONTROL SHOP

REQUIREMENTS TOTAL

\$ 74,121.85

\$74,121.85

PAGE. 1

WORK-CENTER: ALL-BUYERS LIST
NOMENCLATURE
IT-NO ERN IT-ID COMMENTS

WORKING COPY ONLY:		MANUFACTURER/SOURCE (FSCM)		GSA CONTRACT		QTY U/P		EXTENSION	
MODEL/IDENTIFICATION		CATALOG DATA		RR		LAST-DATE			
ALLOY, SENSOR (0001) L-692 **DISBN** 718: 3	HOWMAN CORP. (XX600) MB					3 EA	\$290.00 (6150)	\$870.00	
CABINET, STD HOUSING, MODEL 340 (0002) X-452 **DISBN** 718: 3	STANLEY VIDMAR (34004) SEP3014A-VGA-SL-ST	GS-00S-38237				3 EA	\$836.95 (6323)	\$2,510.85	
CABINET, STD HOUSING, MODEL 340 (0003) N-955 **DISBN** 718: 8	STANLEY VIDMAR (34004) SEP3047A-VGA-SL-ST	GS-00S-38237				8 EA	\$722.56 (6323)	\$5,780.48	
CABINET, STD HOUSING, MODEL 340 (0004) L-430 **DISBN** 718: 24	STANLEY VIDMAR (34004) SEP3110A-VGA-SL	GS-00S-38237				24 EA	\$649.72 (6323)	\$15,593.28	
CABINET, STD HOUSING, MODEL 340 (0005) M-783 **DISBN** 718: 8	STANLEY VIDMAR (34004) SEP3189A-VGA-SL-ST	GS-00S-38237				8 EA	\$534.24 (6323)	\$4,273.92	
CONTROL CONSOLE, MODEL NTE-CC8 (0006) V-475 **DISBN** 718: 1	NORDSON CORP. (07036) 246152					1 EA	\$3,280.00 (6045)	\$3,280.00	
CRANE, FLOOR, MOBILE HYDRAULIC (0007) L-281 **DISBN** 718: 1	MCMASTER-CARR (39428) 323111					1 EA	\$1,016.52 (5296)	\$1,016.52	
FLAME EXTINGUISHER, HALON SIZE 13 TYPE D (0008) F950 0-021 **DISBN** 718: 5		9C-4210-01-100-9086				5 EA	\$100.00 (6188)	\$500.00	
GAGE, DIGITAL DRY FILM (0009) P-181 **DISBN** 718: 1	ELCOMETER INC. (XX604) A256SFNT2E					1 EA	\$2,195.00 (6147)	\$2,195.00	
GAGE, PULL-OFF, FOR DRY FILM (0010) B-779 GAGE ACCESSORY **DISBN** 718: 2	ELCOMETER INC. (XX604) 157					2 EA	\$150.00 (5296)	\$300.00	
PRINTER FOR DIGITAL DRY FILM GAGE (0011) M-468 GAGE ACCESSORY **DISBN** 718: 1	ELCOMETER INC. (XX604) HF5					1 EA	\$265.00 (5296)	\$265.00	
GAGE, PULL-OFF, DRY FILM (0012) V-309 **DISBN** 718: 2	NORDSON CORP. (07036) DF6-B1					2 EA	\$300.00 (7114)	\$600.00	
GAGE, THICKNESS, MET FILM (0013) N-695 **DISBN** 718: 5	NORDSON CORP. (07036) 790-015					5 EA	\$21.65 (6150)	\$108.25	

WORK-CENTER: ALL-BUYERS LIST
NOMENCLATURE
IT-NO ERN IT-ID COMMENTS

WORK-CENTER: ALL-BUYERS LIST		WORKING COPY ONLY: GSA CONTRACT		EXTENSION			
TT-NO	ERN	TT-ID	COMMENTS	QTY	U/P	LAST-DATE	EXTENSION

GANTRY							
0014	C947	Q-523	WALLACE, B E PRODUCTS CORP (08136)	1 EA	\$3,495.00	(7114)	\$3,495.00
01SBN 718: 1							
ST, ELECTRIC							
0015	C947	G-529	WALLACE, B E PRODUCTS CORP (08136)	1 EA	\$1,090.00	(7114)	\$1,090.00
01SBN 718: 1							
CAR UNIT							
0016	C947	U-020	WALLACE, B E PRODUCTS CORP (08136)	1 EA	\$3,800.00	(7114)	\$3,800.00
1SBN 718: 1							
SLV							
0017	C947	M-970	WALLACE, B E PRODUCTS CORP (08136)	1 EA	\$155.00	(7114)	\$155.00
1SBN 718: 1							
ST, ELECTRIC W/TROLLEY 1 IN 10 FT LIFT							
0018	K-992		MCMASTER-CARR (39428)	2 EA	\$1,136.00	(5346)	\$2,272.00
1SBN 718: 2							
FEEDER, MODEL MPE-HR3							
0019	J-777		NORDSON CORP. (07036)	1 EA	\$1,040.00	(6045)	\$1,040.00
1SBN 718: 1							
R, PAINT 1 GAL							
0020	M-557		JIFFY MIXER CO., INC. (58685)	1 EA	\$39.20	(6147)	\$39.20
1SBN 718: 1							
R, PAINT 5 GAL							
0021	T-506		JIFFY MIXER CO., INC. (58685)	1 EA	\$39.20	(6147)	\$39.20
1SBN 718: 1							
R, AIR DRIV							
0022	S-743		CHICAGO PNEUMATIC TOOL CO. (90299)	2 EA	\$143.00	(6147)	\$286.00
1SBN 718: 2							
FR GUN, MODEL NTE-2H							
0023	D-949		NORDSON CORP. (07036)	1 EA	\$1,443.00	(6045)	\$1,443.00
1SBN 718: 1							
HYROMETER, ELECTRIC PORT							
0024	M-800		KAAL SCIENTIFIC INSTR. COR (XX602)	1 EA	\$175.00	(6045)	\$175.00
1SBN 718: 1							
PALLET, DUMPMAN, 10' X 10' X 10' PER SHELF							
0025	K-115	7-007	PALK ENGINEERING COMPANY	1 EA	\$1,000.00	(6045)	\$1,000.00
1SBN 718: 1							
ASSEMBLY							
STABLE SHELF							
0026	K-115	Y-837	PALK ENGINEERING COMPANY	1 EA	\$1,000.00	(6045)	\$1,000.00
1SBN 718: 1							
RACK ASSEMBLY							

WORK-CENTER: ALL-BUYERS LIST NOMENCLATURE IT-NO ERN	IT-NO COMMENTS	MANUFACTURER/SOURCE (FSCM) MODEL/IDENTIFICATION	WORKING COPY ONLY: GSA CONTRACT CATALOG DATA	QTY (1) N-U	U/P LAST-DATE	EXTENSION
BAIR BRACE		RACK ENGINEERING (08088)		16 EA	\$19.50 (6279)	\$312.00
0027 K315 B-954 RACK ACCESSORY		SERIES 101MBT				
DISBN 718: 16						
TOP SHELF		RACK ENGINEERING (08088)		16 EA	\$153.79 (6279)	\$2,460.64
0028 K315 W-954 RACK ACCESSORY		SERIES 101MBT				
DISBN 718: 16						
RIGHT, 10" HIGH 4000LB PER SHELF		RACK ENGINEERING (08088)		17 EA	\$105.97 (6279)	\$1,801.49
0029 K315 W-25/ RACK		SERIES 101MBT				
DISBN 718: 17						
SHELVING, 3 SHELF 2 OPEN UNIT PACKED		UNICOR FEDERAL PRISON IND (24080)		4 EA	\$97.75 (1271)	\$391.00
0030 K210 X-472		48IN W X 36IN D X 87IN H				
DISBN 718: 4						
SHELVING, CABINET 3"W X 2'D X 7'H UNIT OPENED		UNICOR FEDERAL PRISON IND (24080)		5 EA	\$142.50 (1280)	\$712.50
0031 K210 U-421 ASSEMBLY		26-S-32852-258 W/I NOTCH				
DISBN 718: 5						
R-DBL W/LOCKING HANDLES UNIT PACKED		UNICOR FEDERAL PRISON IND (24080)		5 PR	\$53.57 (2173)	\$268.75
0032 K210 W-520 SHELVING UNIT 5' X 4'		26-S-32879-152				
DISBN 718: 5						
WATER, DELUGE, EMERGENCY, 5' X 1' X 1'		HAWS (27775)		3 EA	\$431.07 (2233)	\$1,293.21
0033 E400 W-730		8300				
DISBN 718: 3						
FACE PROFILE MEASURE APPARATUS		TESTEX INC. (XX601)		3 EA	\$420.00 (5296)	\$1,260.00
0034 B-086		PRESS-O-FILM				
DISBN 718: 3						
CK, PALLET, HAND		GLOBAL EQUIPMENT (30296)		2 EA	\$584.00 (6099)	\$1,168.00
0035 T701 U-950		204319H				
DISBN 718: 2						
CK, PLATFORM		MCMASTER-CARR (39428)		2 EA	\$333.41 (5296)	\$666.82
0036 Y-704		2329T24				
DISBN 718: 2						
BENCH, STEEL TOP W/CABINETS, 4' X 28IN W LYON METAL PRODUCTS, INC.		2904		14 EA	\$547.92 (6093)	\$7,670.88
0037 K112 K-112 ASSEMBLY						
DISBN 718: 14						
TOTAL						

APPENDIX B
PRELIMINARY SIMA(PS) CC SHOP
CONSUMABLES LIST

B.0 SIMA(PS) CC SHOP CONSUMABLES

B.1 PRELIMINARY CC SHOP CONSUMABLES LIST

Consumables necessary for the daily shop processes are listed in Table B-1. This list includes masking materials, abrasive grit, paint, safety materials, powder and door and hatch fasteners. Preliminary initial stock, monthly consumption rate and national stock number or potential open purchase sources are also specified.

B.2 SAMPLE REQUISITION FORMS (DD1149) FOR FASTENERS

Large quantities of corrosion-resistant (CRES) 316 fasteners and ceramically-coated mild-steel fasteners need to be purchased for installation kits provided by the shop. None of these fasteners are currently available through the Navy Supply System. In order to assist the Supply Department, the preliminary required fastener quantities and types are provided in the form of sample DD-1149s.

Fasteners fabricated from CRES 316 may be obtained directly from a vendor, however, ceramic-coated fasteners may require a two-step procedure. First, the mild-steel fasteners must be procured, and then sent to a NAVSEA-qualified coating service firm to have the ceramic coating applied.

The DD-1149s for CRES 316 fasteners are given on pages B-8 through B-30. Mild steel fasteners are covered on pages B-31 through B-42 and the required ceramic coating on pages B-43 through B-49.

Table B-1 SIMA (PS) CORROSION CONTROL SHOP CONSUMABLES LIST

ITEM	INITIAL STOCK	CONSUMPTION PER MONTH	NATIONAL STOCK NUMBER OR OPEN PURCHASE SOURCE
<u>STAGE 1 - RECEIVING</u>			
I.D. Tags	500	200	NSN 0116-LF-890-9020
Electrical Ties	6 pkgs	3 pkgs	NSN 5975-00-074-2072
Dog Tags	500	200	NSN 8465-00-242-4804
Shower Slips	500	200	NSN 7230-00-252-3384
<u>STAGE 2 - DEGREASING</u>			
Respirator, Charcoal Filters	25	25	NSN 4240-01-074-8390
1,1,1 Trichloroethane	375 gals	375 gals	NSN 6810-00-531-1487
1,1,1 Trichloroethane Spray Can	25	25	NSN 6810-00-930-6311
Glove (rubber), Chemical	1 pr	1 pr	NSN 8415-00-266-8675
Apron, plastic	1	1	NSN 8415-00-715-0450
Rags	50 boxes	50 boxes	NSN 7920-00-205-1711
<u>STAGE 3 - MASKING</u>			
Duct Tape - 1/2"	25 rolls	25 rolls	NSN 8315-00-890-9872
Duct Tape - 2"	25 rolls	25 rolls	NSN 8315-00-890-5100
Aluminum Tape, High Temp.	15 rolls	15 rolls	NSN 7510-00-816-8077
Utility Blades	10 boxes	10 boxes	NSN 8530-00-162-5629
Plugs (various sizes)			Open Purchase: Lear Siegler, Inc. Accurate Products Div. 4370 Jutland Drive San Diego, CA 92117

Table B-1 SIMA (PS) CORROSION CONTROL SHOP CONSUMABLES LIST

ITEM	INITIAL STOCK	CONSUMPTION PER MONTH	NATIONAL STOCK NUMBER OR OPEN PURCHASE SOURCE
<u>STAGE 4 - STRIP BLASTING</u>			
Garnet Sand, #36 mesh	30,000 lbs.	30,000 lbs	Open Purchase: Barton Mines Corp. P.O. Drawer 400 North Creek, NY 12853
Face welds (disposable)	125	125	Meyers Metals and Minerals, Inc. 459 Coleman Bldg Seattle, WA
Ear Pads	2 boxes	2 boxes	Open Purchase: Bullard Safety Equipment P.O. Box 385 White Oak Pike Cynthiana, KY 40031
			NSN 6515-00-137-6345
<u>STAGE 5 - ANCHOR-TOOTH BLASTING</u>			
Aluminum Oxide Grit, #16 mesh	12,500 lbs.	12,500 lbs.	Open Purchase: KELCO Sales & Engineering, Co Front St. & Paddison Avenue Norwalk, CA 90650
Press Film (X-coarse)	10 rolls	10 rolls	SOHIO Electro Minerals, Co P.O. Box 423 Niagara Falls, NY 14302
			Open Purchase: KTA-TATOR, Inc. 115 Technology Drive Pittsburgh, PA 15275

Table B-1 SIMA (PS) CORROSION CONTROL SHOP CONSUMABLES LIST

ITEM	INITIAL STOCK	CONSUMPTION PER MONTH	NATIONAL STOCK NUMBER OR OPEN PURCHASE SOURCE
<u>STAGE 5 ANCHOR-TOOTH LASTING</u> (Continued)			
Gloves, Blasting	5 prs	5 prs	Open Purchase: Safety Equipment Co 659 Industrial Drive Tallahassee, FL 32304
Face Shields (disposable)	125	125	Open Purchase: Bullard Safety Equipment P.O. Box 385 White Oak Pike Cynthiana, KY 40031
<u>STAGE 6 ALUMINUM-WIRE SPRAYING</u>			
1/8" Aluminum Wire (for flash spraying)	5 rolls	5 rolls	Open Purchase: METCO, Inc. 1101 Prospect Avenue Westbury, NY
Oxygen	15 cylinders	15 cylinders	NSN 6830-00-169-0805
Acetylene	10 cylinders	10 cylinders	NSN 8120-00-268-3360
Glove (cotton)	25 prs	25 prs	NSN 8415-00-268-8318
Respirator	25	25	NSN 4240-00-022-2524
<u>STAGE 7 POWDER COATING</u>			
Powder: Haze Grey White Red Black Yellow	900 lbs. 450 lbs. 275 lbs. 450 lbs. 125 lbs.	100 lbs. 50 lbs. 25 lbs. 50 lbs. 10 lbs.	Open Purchase: International Paint Powder Coatings 6003 Antoine Drive Houston, TX 77292-4224 Tiger Drylac USA, Inc. 9587 Arrow Route, Suite K Rancho Cucamonga, CA 91730

Table B-1 SIMA (PS) CORROSION CONTROL SHOP CONSUMABLES LIST

ITEM	INITIAL STOCK	CONSUMPTION PER MONTH	NATIONAL STOCK NUMBER OR OPEN PURCHASE SOURCE
<u>STAGE 7 - POWDER COATING</u> (Continued)			
Gloves (cotton)	10 prs	5 prs	NSN 8415-00-268-8318
Respirator (disposable, dust filter)	2 boxes	2 boxes	NSN 4240-00-629-8199
Hood (cotton)	10	10	NSN 8415-00-275-3159
Gloves 00°F Heat Resistant	2 prs	1 pr	NSN 8415-00-092-3910
1/8" Aluminum Wire (for suspension)	100 ft	50 ft	NSN 4010-00-222-4482
<u>STAGE 8 - PAINTING</u>			
Respirator, Charcoal Filters	25	20	NSN 4240-00-022-2524
Cheesecloth (strainer)	1 roll	1/2 roll	NSN 8305-00-170-5063
TT-E-78 - EGM Solvent	20 gals	20 gals	NSN 6810-00-222-2751
Formula 150 - Green Primer (type II)	60 gals	60 gals	NSN 8010-00-437-6757
Formula 151 - Haze Grey (type II)	50 gals	50 gals	NSN 8010-00-410-8460
Formula 20 - Ext. Grey Deck	10 gals	10 gals	NSN 8010-00-286-9083
TT-E-4 - White Enamel	4 gals	4 gals	NSN 8010-00-145-0165
TT-E-4 - Haze Grey Enamel	20 gals	20 gals	NSN 8010-00-917-2256
DoD-P-555(SH) Heat Resistant Aluminum Paint	20 gals	20 gals	NSN 8010-01-033-3778
Gloves (plastic)	50 prs	50 prs	NSN 6515-01-149-8842

Table B-1 SIMA (PS) CORROSION CONTROL SHOP CONSUMABLES LIST

ITEM	INITIAL STOCK	CONSUMPTION PER MONTH	NATIONAL STOCK NUMBER OR OPEN PURCHASE SOURCE
<u>STAGE 9 - INSTALLATION KIT</u> <u>DISTRIBUTING</u>			
Anti-Seize Compound	20 tubes	20 tubes	NSN 8030-00-292-1102
Polysulfide Sealant, Type I	12 cans	12 cans	NSN 8050-00-762-8807
Polysulfide Sealant, Type IV	12 cans	12 cans	NSN 8030-00-871-8489
Plastic Bags 6"	100	100	NSN 8105-00-837-7756
Plastic Bags 4"	50	50	NSN 8105-00-837-7753
Plastic Bags 12"	50	25	NSN 8105-00-837-7757
Toggle Pin, 1/2" x 2 1/2", 304 SS	40	As required	NSN 5315-00-664-0462
Toggle Pin, 1/2" x 4", 304 SS	65	As required	NSN 5315-00-664-0463
Toggle Pin, 5/8" x 2 1/2", 304 SS	25	As required	NSN 5315-00-664-0464
Toggle Pin, 5/8" x 5 1/2", 304 SS	350	As required	NSN 5315-00-664-0465
Hinge Pin (raise hatch)	60	As required	NSN 5315-00-753-3875
Washer (raised hatch)	60	As required	NSN
Cotter Pin	540	As required	NSN 5315-00-187-9460
Hinge Pin (scuttle)	95	As required	NSN 5315-00-802-1837
Collar Pin (scuttle)	180	As required	NSN 5315-01-082-2171
Upper Link Pin (scuttle)	45	As required	NSN 5315-01-140-9950
Lower Link Pin (scuttle)	45	As required	NSN 5315-01-142-3595
Collar Link Pin	45	As required	NSN 2040-01-093-1079

Table B-1 SIMA (PS) CORROSION CONTROL SHOP CONSUMABLES LIST

ITEM	INITIAL STOCK	CONSUMPTION PER MONTH	NATIONAL STOCK NUMBER OR OPEN PURCHASE SOURCE
STAGE 9 - INSTALLATION KIT DISTRIBUTING (Continued)			
Hinge Pin (Flush Deck Hatch)	14	As required	NSN 9510-00-189-7383
Washer (Flush Deck Hatch)	11	As required	NSN
Hinge Pin (Door)	475	As required	NSN 5315-00-841-1390
Collar (Door)	475	As required	NSN 3040-00-152-8830

SHIPPING CONTAINER NO. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT									
SURE INTERMEDIATE MAINTENANCE ACTIVITY PURCH SOUND									
1. AUTHORITY OR PURPOSE (CORRUPTION CONTROL, SHIP SIMULATORS)									
2. DATE SHIPPED 3. MODE OF SHIPMENT 4. SUB MOVEMENT INDICATOR OR PORT REFERENCE NO.									
5. REQUISITION DATE 6. PROMIT 7. DATE MATERIAL REQUIRED 8. REQUISITION NUMBER									
9. AUTHORITY OR PURPOSE (CORRUPTION CONTROL, SHIP SIMULATORS)									
10. SIGNATURE 11. YOUR HIR NUMBER AND DATE 12. DATE SHIPPED 13. MODE OF SHIPMENT 14. BILL OF LADING NUMBER 15. SUB MOVEMENT INDICATOR OR PORT REFERENCE NO.									
16. SPECIAL HANDLING									
17. SPECIAL HANDLING									
18. SPECIAL HANDLING									
19. SPECIAL HANDLING									
20. SPECIAL HANDLING									
21. SPECIAL HANDLING									
22. SPECIAL HANDLING									
23. SPECIAL HANDLING									
24. SPECIAL HANDLING									
25. SPECIAL HANDLING									
26. SPECIAL HANDLING									
27. SPECIAL HANDLING									
28. SPECIAL HANDLING									
29. SPECIAL HANDLING									
30. SPECIAL HANDLING									
31. SPECIAL HANDLING									
32. SPECIAL HANDLING									
33. SPECIAL HANDLING									
34. SPECIAL HANDLING									
35. SPECIAL HANDLING									
36. SPECIAL HANDLING									
37. SPECIAL HANDLING									
38. SPECIAL HANDLING									
39. SPECIAL HANDLING									
40. SPECIAL HANDLING									
41. SPECIAL HANDLING									
42. SPECIAL HANDLING									
43. SPECIAL HANDLING									
44. SPECIAL HANDLING									
45. SPECIAL HANDLING									
46. SPECIAL HANDLING									
47. SPECIAL HANDLING									
48. SPECIAL HANDLING									
49. SPECIAL HANDLING									
50. SPECIAL HANDLING									

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SURE INTERMEDIATE MAINTENANCE ACTIVITY PULF SUND

REQUISITION AND INVOICE/SHIPPING DOCUMENT									
STRIKE INTERMEDIATE MAINTENANCE ACTIVITY PUEBT SOUND									
1. SHIP TO NAME FOR									
2. APPROVAL NO. SHOWN 3. OBJ. CL. 4. SUB. CONT. NO. 5. SUBAL. LOT 6. AUTHORIZATION ACCTG. ACTIVITY 7. TRANS. TYPE 8. GENERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b) 9. NUCLEAR SYMBOL 10. UNC 11. LENGTH 12. COST CODE									
13. QUANTITY REQUESTED (d) 14. SUPPLY ACTION (e) 15. TYPE COM. TANKER (f) 16. COM. TANKER (g) 17. UNIT PRICE (h) 18. TOTAL COST (i)									
19. SPECIAL HANDLING 20. TOTAL WEIGHT 21. TOTAL COST 22. DESCRIPTION 23. TOTAL CONTAINERS 24. TOTAL COST 25. TOTAL CONTAINERS 26. TOTAL COST 27. TOTAL CONTAINERS 28. TOTAL COST 29. TOTAL CONTAINERS 30. TOTAL COST 31. TOTAL CONTAINERS 32. TOTAL COST 33. TOTAL CONTAINERS 34. TOTAL COST 35. TOTAL CONTAINERS 36. TOTAL COST 37. TOTAL CONTAINERS 38. TOTAL COST 39. TOTAL CONTAINERS 40. TOTAL COST 41. TOTAL CONTAINERS 42. TOTAL COST 43. TOTAL CONTAINERS 44. TOTAL COST 45. TOTAL CONTAINERS 46. TOTAL COST 47. TOTAL CONTAINERS 48. TOTAL COST 49. TOTAL CONTAINERS 50. TOTAL COST 51. TOTAL CONTAINERS 52. TOTAL COST 53. TOTAL CONTAINERS 54. TOTAL COST 55. TOTAL CONTAINERS 56. TOTAL COST 57. TOTAL CONTAINERS 58. TOTAL COST 59. TOTAL CONTAINERS 60. TOTAL COST 61. TOTAL CONTAINERS 62. TOTAL COST 63. TOTAL CONTAINERS 64. TOTAL COST 65. TOTAL CONTAINERS 66. TOTAL COST 67. TOTAL CONTAINERS 68. TOTAL COST 69. TOTAL CONTAINERS 70. TOTAL COST 71. TOTAL CONTAINERS 72. TOTAL COST 73. TOTAL CONTAINERS 74. TOTAL COST 75. TOTAL CONTAINERS 76. TOTAL COST 77. TOTAL CONTAINERS 78. TOTAL COST 79. TOTAL CONTAINERS 80. TOTAL COST 81. TOTAL CONTAINERS 82. TOTAL COST 83. TOTAL CONTAINERS 84. TOTAL COST 85. TOTAL CONTAINERS 86. TOTAL COST 87. TOTAL CONTAINERS 88. TOTAL COST 89. TOTAL CONTAINERS 90. TOTAL COST 91. TOTAL CONTAINERS 92. TOTAL COST 93. TOTAL CONTAINERS 94. TOTAL COST 95. TOTAL CONTAINERS 96. TOTAL COST 97. TOTAL CONTAINERS 98. TOTAL COST 99. TOTAL CONTAINERS 100. TOTAL COST									

DD FORM 1149, PTI

ORIGINAL

2002 10 01 001

HIPPOCAMPUS

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SURE INTERMEDIATE MAINTENANCE ACTIVITY PLET SOUND

“

THE UNIVERSITY OF CHICAGO

(S) WIS (C) IS (K) INI) NOIS (P) RI

114 YOU WITH MUMBAI AND DATE
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532
 533
 534
 535
 536
 537
 538
 539
 540
 541
 542
 543
 544
 545
 546
 547
 548
 549
 550
 551
 552
 553
 554
 555
 556
 557
 558
 559
 560
 561
 562
 563
 564
 565
 566
 567
 568
 569
 570
 571
 572
 573
 574
 575
 576
 577
 578
 579
 580
 581
 582
 583
 584
 585
 586
 587
 588
 589
 590
 591
 592
 593
 594
 595
 596
 597
 598
 599
 600
 601
 602
 603
 604
 605
 606
 607
 608
 609
 610
 611
 612
 613
 614
 615
 616
 617
 618
 619
 620
 621
 622
 623
 624

DO NOT WRITE IN THESE SPACES

PLANT DIV 1

1) ROOM OF JAMES H.

On 12/26/80, LEO BOEING CO. INBACN BTG 61

APPROVED 1/14

TO SUNDAY

PROPERTY ACCT D	COUNT	COST CODE	AMOUNT
-----------------	-------	-----------	--------

STOCK NUMBER	DESCRIPTION AND COMING OF MATERIAL AND/OR SERVICES
	(b)

NO	AL	UNC	LENGTH	COST CODE
SI		THREAD		

07	1 1/2	20	1 1/2	EA	100			.09	\$	9.00
08	1 1/2	20	1 3/4	EA	25			.10		2.50
09	5 1/2	18	3/4	EA	275			.046		11.65
10	5 1/2	18	1	EA	700			.047		32.90
11	5	18	1 1/2	EA	25			.061		1.53
12	5 1/2	18	1 2/4	EA	25			.061		1.53

1. TRANS - ACTION VIA MATS
UNUSABLE TO

7 SPECIAL

DATE	DESCRIPTION	AMOUNT	CHECK NO.	DEPOSITED	BALANCE
10/1/74	INITIAL DEPOSIT	100.00			100.00
10/15/74	PAYROLL	50.00	101		50.00
10/25/74	RENT	25.00	102		25.00
11/5/74	SALES	75.00		75.00	100.00
11/15/74	PAYROLL	50.00	103		50.00
11/25/74	RENT	25.00	104		25.00
12/5/74	SALES	75.00		75.00	100.00
12/15/74	PAYROLL	50.00	105		50.00
12/25/74	RENT	25.00	106		25.00
1/5/75	SALES	75.00		75.00	100.00
1/15/75	PAYROLL	50.00	107		50.00
1/25/75	RENT	25.00	108		25.00
2/5/75	SALES	75.00		75.00	100.00
2/15/75	PAYROLL	50.00	109		50.00
2/25/75	RENT	25.00	110		25.00
3/5/75	SALES	75.00		75.00	100.00
3/15/75	PAYROLL	50.00	111		50.00
3/25/75	RENT	25.00	112		25.00
4/5/75	SALES	75.00		75.00	100.00
4/15/75	PAYROLL	50.00	113		50.00
4/25/75	RENT	25.00	114		25.00
5/5/75	SALES	75.00		75.00	100.00
5/15/75	PAYROLL	50.00	115		50.00
5/25/75	RENT	25.00	116		25.00
6/5/75	SALES	75.00		75.00	100.00
6/15/75	PAYROLL	50.00	117		50.00
6/25/75	RENT	25.00	118		25.00
7/5/75	SALES	75.00		75.00	100.00
7/15/75	PAYROLL	50.00	119		50.00
7/25/75	RENT	25.00	120		25.00
8/5/75	SALES	75.00		75.00	100.00
8/15/75	PAYROLL	50.00	121		50.00
8/25/75	RENT	25.00	122		25.00
9/5/75	SALES	75.00		75.00	100.00
9/15/75	PAYROLL	50.00	123		50.00
9/25/75	RENT	25.00	124		25.00
10/5/75	SALES	75.00		75.00	100.00
10/15/75	PAYROLL	50.00	125		50.00
10/25/75	RENT	25.00	126		25.00
11/5/75	SALES	75.00		75.00	100.00
11/15/75	PAYROLL	50.00	127		50.00
11/25/75	RENT	25.00	128		25.00
12/5/75	SALES	75.00		75.00	100.00
12/15/75	PAYROLL	50.00	129		50.00
12/25/75	RENT	25.00	130		25.00
1/5/76	SALES	75.00		75.00	100.00
1/15/76	PAYROLL	50.00	131		50.00
1/25/76	RENT	25.00	132		25.00
2/5/76	SALES	75.00		75.00	100.00
2/15/76	PAYROLL	50.00	133		50.00
2/25/76	RENT	25.00	134		25.00
3/5/76	SALES	75.00		75.00	100.00
3/15/76	PAYROLL	50.00	135		50.00
3/25/76	RENT	25.00	136		25.00
4/5/76	SALES	75.00		75.00	100.00
4/15/76	PAYROLL	50.00	137		50.00
4/25/76	RENT	25.00	138		25.00
5/5/76	SALES	75.00		75.00	100.00
5/15/76	PAYROLL	50.00	139		50.00
5/25/76	RENT	25.00	140		25.00
6/5/76	SALES	75.00		75.00	100.00
6/15/76	PAYROLL	50.00	141		50.00

← TOTAL →

DD FORM 1149 (9-71)

02 03 04 05 06 07 08 09

ORIGINAL

SURE INTERMEDIATE MAINTENANCE ACTIVITY PULPET SOUND

1. NAME OF THE PARTY	2. ADDRESS	3. CITY	4. STATE	5. ZIP
6. PHONE NUMBER	7. FAX NUMBER	8. E-MAIL ADDRESS	9. WEBSITE	10. OTHER INFORMATION

LINE NO.	QTY AND NUMBER			OBJ CL	BUR CONT NO	SUBAL LOT	AUTHORIZATION ACTG ACTIVITY	TRANS TYPE	PROPERTY ACCTG ACTIVITY		COUN TRY	COST CODE			AMOUNT	
									QUANTITY REQUESTED (d)	SUPPLY ACTION (e)		TYPE COM TANNER (f)	COM TANNER MODS (g)	UNIT PRICE (h)	TOTAL COST (i)	
FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)																
FINAL SIZE		UNC THREAD	LENGTH	COST CODE												
13	6	18	2						EA	75					.080	\$ 6.00
14	6	18	2 1/2						EA	50					.099	4.95
15	6	18	3 1/2						EA	25					.100	2.50
16		16	3/4						EA	700					.064	44.80
17		16	1						EA	1700					.074	125.80
18		16	1 1/4						EA	1000					.079	79.00

16 TRANSIT STATION VIA MAIL		17 SPECIAL HANDLING		18 RECEIPT		19 RECEIVERS DOCUMENT	
DATE	TIME	DESCRIPTION	TOTAL WEIGHT	TOTAL VOLUME	CONTAINER RECEIVED EXCEPT AS NOTED	DATE	SWIFT TOTAL
01	01				CONTAINER RECEIVED EXCEPT AS NOTED	01	
02	02				QUANTITIES RECEIVED EXCEPT AS NOTED	02	
03	03				QUANTITIES RECEIVED EXCEPT AS NOTED	03	
04	04				POSTED	04	
						TOTAL	

ORIGINAL

SHURE: INTERMEDIATE MAINTENANCE ACTIVITY PIJET SOUND

CORROSION CONTROL, SHIP SIMA(PS)	
9 AUTHORITY OR PURPOSE	
10 SIGNATURE	11 VOUCHER NUMBER AND DATE
12 DATE SHIPPED	
13 MODE OF SHIPMENT	14 BILL OF LADING NUMBER
15 AIR MOVEMENT DESIGNATION OR PORT REFERENCE NO.	

GENERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES										PROPERTY ACCTG			COST CODE		AMOUNT	
ITEM NO	OBJ CL	SUR COMT NO	SUBAL LOT	AUTHORIZATION ACCTG ACTIVITY	TRANS TYPE	QUANTITY	SUPPLY	TYPE	CON	UNIT PRICE	TOTAL COST					
(a)						REORDERED	ACTION	CON	THRESH	(b)	(c)					
												(d)				
												(e)				
												(f)				
												(g)				
												(h)				
												(i)				
												(j)				
												(k)				
												(l)				
												(m)				
												(n)				
												(o)				
												(p)				
												(q)				
												(r)				
												(s)				
												(t)				
												(u)				
												(v)				
												(w)				
												(x)				
												(y)				
												(z)				
												(aa)				
												(ab)				
												(ac)				
												(ad)				
												(ae)				
												(af)				
												(ag)				
												(ah)				
												(ai)				
												(aj)				
												(ak)				
												(al)				
												(am)				
												(an)				
												(ao)				
												(ap)				
												(aq)				
												(ar)				
												(as)				
												(at)				
												(au)				
												(av)				
												(aw)				
												(ax)				
												(ay)				
												(az)				
												(ba)				
												(bb)				
												(bc)				
												(bd)				
												(be)				
												(bf)				
												(bg)				
												(bh)				
												(bi)				
												(bj)				
												(bk)				
												(bl)				
												(bm)				
												(bn)				
												(bo)				
												(bp)				
												(bq)				
												(br)				
												(bs)				
												(bt)				
												(bu)				
												(bv)				
												(bw)				
												(bx)				
												(by)				
												(bz)				
												(ca)				
												(cb)				
												(cc)				
												(cd)				
												(ce)				
												(cf)				
												(cg)				
												(ch)				
												(ci)				
												(cj)				
												(ck)				
												(cl)				
												(cm)				
												(cn)				
												(co)				
												(cp)				
												(cq)				
												(cr)				
												(cs)				
												(ct)				
												(cu)				
												(cv)				
												(cw)				
												(cx)				
												(cy)				
												(cz)				
												(da)				
												(db)				
												(dc)				
												(dd)				
												(de)				
												(df)				
												(dg)				
												(dh)				
												(di)				
												(dj)				
												(dk)				
												(dl)				
												(dm)				
												(dn)				
												(do)				
												(dp)				
												(dq)				
												(dr)				
												(ds)				
												(dt)				
												(du)				
												(dv)				
												(dw)				
												(dx)				
												(dy)				
												(dz)				
												(ea)				
												(eb)				
												(ec)				
												(ed)				
												(ee)				
												(ef)				
												(eg)				
												(eh)				
												(ei)				
												(ej)				
												(ek)				
												(el)				
												(em)				
												(en)				
												(eo)				
												(ep)				
												(eq)				
												(er)				
												(es)				
												(et)				
												(eu)				
												(ev)				
												(ew)				
												(ex)				
												(ey)				
												(ez)				
												(fa)				
												(fb)				
												(fc)				
												(fd)				
												(fe)				
												(ff)				
												(fg)				
												(fh)				
												(fi)				
												(fj)				
												(fk)				
												(fl)				
												(fm)				
</																

10 TRANSMISSION FROM VISA MAILS OR MAILS AVAILABLE TO						19 SPECIAL HANDLING						
TO	TOTAL CONTAINERS	TYPED TRANSMISSION	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBIC FEET	CONTAINERS RECEIVED EXCEPT AS NOTED	DATE	BY	SWIFT TOTAL			
						QUANTITIES RECEIVED EXCEPT AS NOTED	DATE	BY	CUMULATIVE TOTAL			
						POSTED	DATE	BY	RECEIVERS VOUCHER NO.			
			TOTAL	←					→			

AMOUNT	COST CODE	COIN	ACC'D

[illegible]

DD FORM NO. 1049-PTI
31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55

ORIGINAL

ORIGINAL

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SHORE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

CORROSION (CONTROL, SIOP, SIMA (PS)

110 DAY RETURN ON MOA 110

REPORT TO THE BOARD

0240003 D100 21

11. NAME OF INCIDENT

19. NAME OF LABORATORY

ON 12/22/1960 LEO 80 801 W/55 IN NEW YORK CITY

100-443887-100

AMOUNT

[illegible]

PROPERTY ACCT 0

NAME

AUTOMATIZATION

Equal

LA CONT NO

1300

1

Summary:

1998-1999

FEDERAL STOCK NUMBER	DESCRIPTION	AND CODING OF MATERIAL	AND/OR SERVICES
			(b)

NOMINAL SIZE	UNC THREAD	LENGTH	COST CODE
1/2	1/2-13	1.50	100
3/4	3/4-10	1.50	100
1	1-8	1.50	100
1 1/4	1 1/4-6	1.50	100
1 1/2	1 1/2-5	1.50	100
2	2-4	1.50	100
2 1/2	2 1/2-3	1.50	100
3	3-2	1.50	100
3 1/2	3 1/2-1 1/2	1.50	100
4	4-1 1/4	1.50	100
4 1/2	4 1/2-1 1/4	1.50	100
5	5-1 1/2	1.50	100
5 1/2	5 1/2-1 1/2	1.50	100
6	6-1 1/2	1.50	100
6 1/2	6 1/2-1 1/2	1.50	100
7	7-1 1/2	1.50	100
7 1/2	7 1/2-1 1/2	1.50	100
8	8-1 1/2	1.50	100
8 1/2	8 1/2-1 1/2	1.50	100
9	9-1 1/2	1.50	100
9 1/2	9 1/2-1 1/2	1.50	100
10	10-1 1/2	1.50	100
10 1/2	10 1/2-1 1/2	1.50	100
11	11-1 1/2	1.50	100
11 1/2	11 1/2-1 1/2	1.50	100
12	12-1 1/2	1.50	100
12 1/2	12 1/2-1 1/2	1.50	100
13	13-1 1/2	1.50	100
13 1/2	13 1/2-1 1/2	1.50	100
14	14-1 1/2	1.50	100
14 1/2	14 1/2-1 1/2	1.50	100
15	15-1 1/2	1.50	100
15 1/2	15 1/2-1 1/2	1.50	100
16	16-1 1/2	1.50	100
16 1/2	16 1/2-1 1/2	1.50	100
17	17-1 1/2	1.50	100
17 1/2	17 1/2-1 1/2	1.50	100
18	18-1 1/2	1.50	100
18 1/2	18 1/2-1 1/2	1.50	100
19	19-1 1/2	1.50	100
19 1/2	19 1/2-1 1/2	1.50	100
20	20-1 1/2	1.50	100
20 1/2	20 1/2-1 1/2	1.50	100
21	21-1 1/2	1.50	100
21 1/2	21 1/2-1 1/2	1.50	100
22	22-1 1/2	1.50	100
22 1/2	22 1/2-1 1/2	1.50	100
23	23-1 1/2	1.50	100
23 1/2	23 1/2-1 1/2	1.50	100
24	24-1 1/2	1.50	100
24 1/2	24 1/2-1 1/2	1.50	100
25	25-1 1/2	1.50	100
25 1/2	25 1/2-1 1/2	1.50	100
26	26-1 1/2	1.50	100
26 1/2	26 1/2-1 1/2	1.50	100
27	27-1 1/2	1.50	100
27 1/2	27 1/2-1 1/2	1.50	100
28	28-1 1/2	1.50	100
28 1/2	28 1/2-1 1/2	1.50	100
29	29-1 1/2	1.50	100
29 1/2	29 1/2-1 1/2	1.50	100
30	30-1 1/2	1.50	100
30 1/2	30 1/2-1 1/2	1.50	100
31	31-1 1/2	1.50	100
31 1/2	31 1/2-1 1/2	1.50	100
32	32-1 1/2	1.50	100
32 1/2	32 1/2-1 1/2	1.50	100
33	33-1 1/2	1.50	100
33 1/2	33 1/2-1 1/2	1.50	100
34	34-1 1/2	1.50	100
34 1/2	34 1/2-1 1/2	1.50	100
35	35-1 1/2	1.50	100
35 1/2	35 1/2-1 1/2	1.50	100
36	36-1 1/2	1.50	100
36 1/2	36 1/2-1 1/2	1.50	100
37	37-1 1/2	1.50	100
37 1/2	37 1/2-1 1/2	1.50	100
38	38-1 1/2	1.50	100
38 1/2	38 1/2-1 1/2	1.50	100

2. 1/2.

3

1 1/2

2

2 1/2

3

10 TRACK STATION VIA MATS
ON MATS. MARCEABLE TO

COMPLETION

902 MAY

10141

REMARKS:

100

—

← **TOTAL** →

↓

100

100

—

[illegible]

ORIGINAL

SHIPPING CONTAINERALLY 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SURE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

CORROSION CONTROL SHIP SIMA (PS)

1. NAME OF SHIP TO WHICH FOR

11. DATE SHIPPED
12. MODE OF SHIPMENT
13. BILL OF LADING NUMBER
14. AIR MOVEMENT DESIGNATION OR PORT REFERENCE NO.

15. AUTHORITY OR PURPOSE
16. SIGNATURE
17. VOUCHER NUMBER AND DATE

18. PROPERTY ACCTG
19. COUN TRY
20. COST CODE
21. AMOUNT

22. QUANTITY REQUESTED
23. SUPPLY ACTION
24. TYPE CODE
25. UNIT PRICE
26. TOTAL COST

27. SPECIAL HANDLING

28. TRANSPORTATION VIA MATS

29. TOTAL CONTAINER

30. TOTAL CONTAINER

31. TOTAL CONTAINER

32. TOTAL CONTAINER

33. TOTAL CONTAINER

34. TOTAL CONTAINER

35. TOTAL CONTAINER

36. TOTAL CONTAINER

37. TOTAL CONTAINER

38. TOTAL CONTAINER

39. TOTAL CONTAINER

40. TOTAL CONTAINER

41. TOTAL CONTAINER

42. TOTAL CONTAINER

43. TOTAL CONTAINER

44. TOTAL CONTAINER

45. TOTAL CONTAINER

ORIGINAL

DD FORM 1149 (9 PT)

1. NAME OF SHIP TO WHICH FOR

2. NAME OF SHIP TO WHICH FOR

3. NAME OF SHIP TO WHICH FOR

SHIPPING CONTAINER NO. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SIRE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

(CORROSION CONTROL SLOP SIMA(PS))

1. SHIP TO: NAME FOR

12. DATE SHIPPED

13. MODE OF SHIPMENT

14. BILL OF LADING NUMBER

15. AIR MOVEMENT DESIGNATION OR PORT REFERENCE NO.

AMOUNT

COST CODE

PROPERTY ACCTG

TRANS TYPE

AUTHORIZATION

SUBAL

LOT

OBJ CL

BLR CONT NO

AND SUBHEAD

16. FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES

N.T. NAL UNC LENGTH COST CODE

THREAD

55

7

9

3 1/2

EA

200

.9

\$ 180.00

56

7

9

4 1/2

EA

325

.9

337.50

57

1

8

9 1/2

EA

10

.95

9.75

17. TRANSPORTATION VIA MATS

OR MATS, HANGABLE TO

TOTAL

CONTAINERS

TYPE FOR

PACKING

DESCRIPTION

TOTAL

WEIGHT

18. SPECIAL

MANAGING

CONTAINERS

RECEIVED

EXCEPTAL

NOTED

DATE

BY

SHEET TOTAL

DD FORM 1149 (9 PT)

ORIGINAL

U.S. GPO: 1967 O-35972

SHIPPING CONTAINER DATA		1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50	
REQUISITION AND INVOICE/SHIPPING DOCUMENT			
1. NAME: SHORE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND 2. NO.: 3. SHIP TO: NAME FOR:			
4. APPROPRIATION AND SUBHEAD: 5. FEDERAL STOCK NUMBER DESCRIPTION AND COMING OF MATERIAL AND/OR SERVICES (b):		6. BUREAU CONT NO: 7. SUBAL LOT: 8. OBJ CL:	
9. AUTHORITY OR PURPOSE: CORROSION CONTROL SHIP SIMA (PS) 10. SIGNATURE: 11. DATE SHIPPED: 12. MODE OF SHIPMENT: 13. AIR MOVEMENT DESIGNATION OR PORT REFERENCE NO:		14. VOUCHER NUMBER AND DATE: 15. BILL OF LADING NUMBER:	
16. TRANSPORTATION VIA MATS OR MSES: (HARBOURABLE TO) 17. SPECIAL HANDLING:		18. CONTAINERS RECEIVED: (TOTAL) 19. QUANTITIES RECEIVED: (TOTAL) 20. POSTED:	
21. REQUEST INDEFINITE DELIVERY CONTRACT BE LET ON THE ABOVE ITEMS. 22. THREE SOURCES OF SUPPLY ARE PROVIDED: FALCON METAL CORP. STOCK EXCHANGER 10715 John Price Road P.O. Box 249 Dept. T Canton, TX 75103 P.O. Box 7429 PH: 214-848-8561 Charlotte, NC 28217 1-800-438-0332 SAWSON INDUSTRIES, INC. 3440-A Overland Ave. Los Angeles, CA 90034 213-559-3845		23. TOTAL CONTAINERS: 24. TOTAL QUANTITIES: 25. TOTAL POSTED:	
26. TOTAL CONTAINERS: 27. TOTAL QUANTITIES: 28. TOTAL POSTED:		29. TOTAL CONTAINERS: 30. TOTAL QUANTITIES: 31. TOTAL POSTED:	
32. TOTAL CONTAINERS: 33. TOTAL QUANTITIES: 34. TOTAL POSTED:		35. TOTAL CONTAINERS: 36. TOTAL QUANTITIES: 37. TOTAL POSTED:	
38. TOTAL CONTAINERS: 39. TOTAL QUANTITIES: 40. TOTAL POSTED:		41. TOTAL CONTAINERS: 42. TOTAL QUANTITIES: 43. TOTAL POSTED:	
44. TOTAL CONTAINERS: 45. TOTAL QUANTITIES: 46. TOTAL POSTED:		47. TOTAL CONTAINERS: 48. TOTAL QUANTITIES: 49. TOTAL POSTED:	
50. TOTAL CONTAINERS: 51. TOTAL QUANTITIES: 52. TOTAL POSTED:		53. TOTAL CONTAINERS: 54. TOTAL QUANTITIES: 55. TOTAL POSTED:	
56. TOTAL CONTAINERS: 57. TOTAL QUANTITIES: 58. TOTAL POSTED:		59. TOTAL CONTAINERS: 60. TOTAL QUANTITIES: 61. TOTAL POSTED:	
62. TOTAL CONTAINERS: 63. TOTAL QUANTITIES: 64. TOTAL POSTED:		65. TOTAL CONTAINERS: 66. TOTAL QUANTITIES: 67. TOTAL POSTED:	
68. TOTAL CONTAINERS: 69. TOTAL QUANTITIES: 70. TOTAL POSTED:		71. TOTAL CONTAINERS: 72. TOTAL QUANTITIES: 73. TOTAL POSTED:	
74. TOTAL CONTAINERS: 75. TOTAL QUANTITIES: 76. TOTAL POSTED:		77. TOTAL CONTAINERS: 78. TOTAL QUANTITIES: 79. TOTAL POSTED:	
80. TOTAL CONTAINERS: 81. TOTAL QUANTITIES: 82. TOTAL POSTED:		83. TOTAL CONTAINERS: 84. TOTAL QUANTITIES: 85. TOTAL POSTED:	
86. TOTAL CONTAINERS: 87. TOTAL QUANTITIES: 88. TOTAL POSTED:		89. TOTAL CONTAINERS: 90. TOTAL QUANTITIES: 91. TOTAL POSTED:	
92. TOTAL CONTAINERS: 93. TOTAL QUANTITIES: 94. TOTAL POSTED:		95. TOTAL CONTAINERS: 96. TOTAL QUANTITIES: 97. TOTAL POSTED:	
98. TOTAL CONTAINERS: 99. TOTAL QUANTITIES: 100. TOTAL POSTED:		101. TOTAL CONTAINERS: 102. TOTAL QUANTITIES: 103. TOTAL POSTED:	
104. TOTAL CONTAINERS: 105. TOTAL QUANTITIES: 106. TOTAL POSTED:		107. TOTAL CONTAINERS: 108. TOTAL QUANTITIES: 109. TOTAL POSTED:	
110. TOTAL CONTAINERS: 111. TOTAL QUANTITIES: 112. TOTAL POSTED:		113. TOTAL CONTAINERS: 114. TOTAL QUANTITIES: 115. TOTAL POSTED:	
116. TOTAL CONTAINERS: 117. TOTAL QUANTITIES: 118. TOTAL POSTED:		119. TOTAL CONTAINERS: 120. TOTAL QUANTITIES: 121. TOTAL POSTED:	
122. TOTAL CONTAINERS: 123. TOTAL QUANTITIES: 124. TOTAL POSTED:		125. TOTAL CONTAINERS: 126. TOTAL QUANTITIES: 127. TOTAL POSTED:	
128. TOTAL CONTAINERS: 129. TOTAL QUANTITIES: 130. TOTAL POSTED:		131. TOTAL CONTAINERS: 132. TOTAL QUANTITIES: 133. TOTAL POSTED:	
134. TOTAL CONTAINERS: 135. TOTAL QUANTITIES: 136. TOTAL POSTED:		137. TOTAL CONTAINERS: 138. TOTAL QUANTITIES: 139. TOTAL POSTED:	
140. TOTAL CONTAINERS: 141. TOTAL QUANTITIES: 142. TOTAL POSTED:		143. TOTAL CONTAINERS: 144. TOTAL QUANTITIES: 145. TOTAL POSTED:	
146. TOTAL CONTAINERS: 147. TOTAL QUANTITIES: 148. TOTAL POSTED:		149. TOTAL CONTAINERS: 150. TOTAL QUANTITIES: 151. TOTAL POSTED:	
152. TOTAL CONTAINERS: 153. TOTAL QUANTITIES: 154. TOTAL POSTED:		155. TOTAL CONTAINERS: 156. TOTAL QUANTITIES: 157. TOTAL POSTED:	
158. TOTAL CONTAINERS: 159. TOTAL QUANTITIES: 160. TOTAL POSTED:		161. TOTAL CONTAINERS: 162. TOTAL QUANTITIES: 163. TOTAL POSTED:	
164. TOTAL CONTAINERS: 165. TOTAL QUANTITIES: 166. TOTAL POSTED:		167. TOTAL CONTAINERS: 168. TOTAL QUANTITIES: 169. TOTAL POSTED:	
170. TOTAL CONTAINERS: 171. TOTAL QUANTITIES: 172. TOTAL POSTED:		173. TOTAL CONTAINERS: 174. TOTAL QUANTITIES: 175. TOTAL POSTED:	
176. TOTAL CONTAINERS: 177. TOTAL QUANTITIES: 178. TOTAL POSTED:		179. TOTAL CONTAINERS: 180. TOTAL QUANTITIES: 181. TOTAL POSTED:	
182. TOTAL CONTAINERS: 183. TOTAL QUANTITIES: 184. TOTAL POSTED:		185. TOTAL CONTAINERS: 186. TOTAL QUANTITIES: 187. TOTAL POSTED:	
188. TOTAL CONTAINERS: 189. TOTAL QUANTITIES: 190. TOTAL POSTED:		191. TOTAL CONTAINERS: 192. TOTAL QUANTITIES: 193. TOTAL POSTED:	
194. TOTAL CONTAINERS: 195. TOTAL QUANTITIES: 196. TOTAL POSTED:		197. TOTAL CONTAINERS: 198. TOTAL QUANTITIES: 199. TOTAL POSTED:	
200. TOTAL CONTAINERS: 201. TOTAL QUANTITIES: 202. TOTAL POSTED:		203. TOTAL CONTAINERS: 204. TOTAL QUANTITIES: 205. TOTAL POSTED:	
206. TOTAL CONTAINERS: 207. TOTAL QUANTITIES: 208. TOTAL POSTED:		209. TOTAL CONTAINERS: 210. TOTAL QUANTITIES: 211. TOTAL POSTED:	
212. TOTAL CONTAINERS: 213. TOTAL QUANTITIES: 214. TOTAL POSTED:		215. TOTAL CONTAINERS: 216. TOTAL QUANTITIES: 217. TOTAL POSTED:	
218. TOTAL CONTAINERS: 219. TOTAL QUANTITIES: 220. TOTAL POSTED:		221. TOTAL CONTAINERS: 222. TOTAL QUANTITIES: 223. TOTAL POSTED:	
224. TOTAL CONTAINERS: 225. TOTAL QUANTITIES: 226. TOTAL POSTED:		227. TOTAL CONTAINERS: 228. TOTAL QUANTITIES: 229. TOTAL POSTED:	
230. TOTAL CONTAINERS: 231. TOTAL QUANTITIES: 232. TOTAL POSTED:		233. TOTAL CONTAINERS: 234. TOTAL QUANTITIES: 235. TOTAL POSTED:	
236. TOTAL CONTAINERS: 237. TOTAL QUANTITIES: 238. TOTAL POSTED:		239. TOTAL CONTAINERS: 240. TOTAL QUANTITIES: 241. TOTAL POSTED:	
242. TOTAL CONTAINERS: 243. TOTAL QUANTITIES: 244. TOTAL POSTED:		245. TOTAL CONTAINERS: 246. TOTAL QUANTITIES: 247. TOTAL POSTED:	
248. TOTAL CONTAINERS: 249. TOTAL QUANTITIES: 250. TOTAL POSTED:		251. TOTAL CONTAINERS: 252. TOTAL QUANTITIES: 253. TOTAL POSTED:	
254. TOTAL CONTAINERS: 255. TOTAL QUANTITIES: 256. TOTAL POSTED:		257. TOTAL CONTAINERS: 258. TOTAL QUANTITIES: 259. TOTAL POSTED:	
260. TOTAL CONTAINERS: 261. TOTAL QUANTITIES: 262. TOTAL POSTED:		263. TOTAL CONTAINERS: 264. TOTAL QUANTITIES: 265. TOTAL POSTED:	
266. TOTAL CONTAINERS: 267. TOTAL QUANTITIES: 268. TOTAL POSTED:		269. TOTAL CONTAINERS: 270. TOTAL QUANTITIES: 271. TOTAL POSTED:	
272. TOTAL CONTAINERS: 273. TOTAL QUANTITIES: 274. TOTAL POSTED:		275. TOTAL CONTAINERS: 276. TOTAL QUANTITIES: 277. TOTAL POSTED:	
278. TOTAL CONTAINERS: 279. TOTAL QUANTITIES: 280. TOTAL POSTED:		281. TOTAL CONTAINERS: 282. TOTAL QUANTITIES: 283. TOTAL POSTED:	
284. TOTAL CONTAINERS: 285. TOTAL QUANTITIES: 286. TOTAL POSTED:		287. TOTAL CONTAINERS: 288. TOTAL QUANTITIES: 289. TOTAL POSTED:	
290. TOTAL CONTAINERS: 291. TOTAL QUANTITIES: 292. TOTAL POSTED:		293. TOTAL CONTAINERS: 294. TOTAL QUANTITIES: 295. TOTAL POSTED:	
296. TOTAL CONTAINERS: 297. TOTAL QUANTITIES: 298. TOTAL POSTED:		299. TOTAL CONTAINERS: 300. TOTAL QUANTITIES: 301. TOTAL POSTED:	
302. TOTAL CONTAINERS: 303. TOTAL QUANTITIES: 304. TOTAL POSTED:		305. TOTAL CONTAINERS: 306. TOTAL QUANTITIES: 307. TOTAL POSTED:	
308. TOTAL CONTAINERS: 309. TOTAL QUANTITIES: 310. TOTAL POSTED:		311. TOTAL CONTAINERS: 312. TOTAL QUANTITIES: 313. TOTAL POSTED:	
314. TOTAL CONTAINERS: 315. TOTAL QUANTITIES: 316. TOTAL POSTED:		317. TOTAL CONTAINERS: 318. TOTAL QUANTITIES: 319. TOTAL POSTED:	
320. TOTAL CONTAINERS: 321. TOTAL QUANTITIES: 322. TOTAL POSTED:		323. TOTAL CONTAINERS: 324. TOTAL QUANTITIES: 325. TOTAL POSTED:	
326. TOTAL CONTAINERS: 327. TOTAL QUANTITIES: 328. TOTAL POSTED:		329. TOTAL CONTAINERS: 330. TOTAL QUANTITIES: 331. TOTAL POSTED:	
332. TOTAL CONTAINERS: 333. TOTAL QUANTITIES: 334. TOTAL POSTED:		335. TOTAL CONTAINERS: 336. TOTAL QUANTITIES: 337. TOTAL POSTED:	
338. TOTAL CONTAINERS: 339. TOTAL QUANTITIES: 340. TOTAL POSTED:		341. TOTAL CONTAINERS: 342. TOTAL QUANTITIES: 343. TOTAL POSTED:	
344. TOTAL CONTAINERS: 345. TOTAL QUANTITIES: 346. TOTAL POSTED:		347. TOTAL CONTAINERS: 348. TOTAL QUANTITIES: 349. TOTAL POSTED:	
350. TOTAL CONTAINERS: 351. TOTAL QUANTITIES: 352. TOTAL POSTED:		353. TOTAL CONTAINERS: 354. TOTAL QUANTITIES: 355. TOTAL POSTED:	
356. TOTAL CONTAINERS: 357. TOTAL QUANTITIES: 358. TOTAL POSTED:		359. TOTAL CONTAINERS: 360. TOTAL QUANTITIES: 361. TOTAL POSTED:	
362. TOTAL CONTAINERS: 363. TOTAL QUANTITIES: 364. TOTAL POSTED:		365. TOTAL CONTAINERS: 366. TOTAL QUANTITIES: 367. TOTAL POSTED:	
368. TOTAL CONTAINERS: 369. TOTAL QUANTITIES: 370. TOTAL POSTED:		371. TOTAL CONTAINERS: 372. TOTAL QUANTITIES: 373. TOTAL POSTED:	
374. TOTAL CONTAINERS: 375. TOTAL QUANTITIES: 376. TOTAL POSTED:		377. TOTAL CONTAINERS: 378. TOTAL QUANTITIES: 379. TOTAL POSTED:	
380. TOTAL CONTAINERS: 381. TOTAL QUANTITIES: 382. TOTAL POSTED:		383. TOTAL CONTAINERS: 384. TOTAL QUANTITIES: 385. TOTAL POSTED:	
386. TOTAL CONTAINERS: 387. TOTAL QUANTITIES: 388. TOTAL POSTED:		389. TOTAL CONTAINERS: 390. TOTAL QUANTITIES: 391. TOTAL POSTED:	
392. TOTAL CONTAINERS: 393. TOTAL QUANTITIES: 394. TOTAL POSTED:		395. TOTAL CONTAINERS: 396. TOTAL QUANTITIES: 397. TOTAL POSTED:	
398. TOTAL CONTAINERS: 399. TOTAL QUANTITIES: 400. TOTAL POSTED:		399. TOTAL CONTAINERS: 400. TOTAL QUANTITIES: 400. TOTAL POSTED:	

SHIPPING CONTAINERALLY 

SUBSIDIARY MAINTENANCE ACTIVITY PAGE SOUND

MORFITY OR PURPOSE

WAGE FOR

MINIMAL SIZE	UNC THREAD	COST CODE
-----------------	---------------	-----------

Line	Account	Debit	Credit	Balance
01	24			
02	20			
03	18			
04	16			
05	14			
06	12			
07	10			
08	08			
09	06			
10	04			
11	02			
12	00			
13	98			
14	96			
15	94			
16	92			
17	90			
18	88			
19	86			
20	84			
21	82			
22	80			
23	78			
24	76			
25	74			
26	72			
27	70			
28	68			
29	66			
30	64			
31	62			
32	60			
33	58			
34	56			
35	54			
36	52			
37	50			
38	48			
39	46			
40	44			
41	42			
42	40			
43	38			
44	36			
45	34			
46	32			
47	30			
48	28			
49	26			
50	24			
51	22			
52	20			
53	18			
54	16			
55	14			
56	12			
57	10			
58	08			
59	06			
60	04			
61	02			
62	00			
63	98			
64	96			
65	94			
66	92			
67	90			
68	88			
69	86			
70	84			
71	82			
72	80			
73	78			
74	76			
75	74			
76	72			
77	70			
78	68			
79	66			
80	64			
81	62			
82	60			
83	58			
84	56			
85	54			
86	52			
87	50			
88	48			
89	46			
90	44			
91	42			
92	40			
93	38			
94	36			
95	34			
96	32			
97	30			
98	28			
99	26			
100	24			

RECEIVED VIA MAIL
JAN 10 1961

17 SPECIAL HANDLING

IS CHANGEABLE TO		TOTAL CONTAINER	TYPE COM TAINER	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBIC	CONTAINERS RECEIVED EXCEPT AS NOTED	DATE	BY	SHEET TOTAL
10 8'							QUANTITIES RECEIVED EXCEPT AS NOTED	DATE	BY	GRAND TOTAL
10 8'							QUANTITIES RECEIVED EXCEPT AS NOTED	DATE	BY	20 RECEIVERS VOUCHER NO

↑ TOTAL ↓

ORIGINAL

ORIGINAL

SHIPPING CONTAINERALLY

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SURE: IMMEDIATE MAINTENANCE ACTIVITY FIRST

REQUISITION AND INVOICE/SHIPPING DOCUMENT		SHEET NO. OF NO. 13 SHEETS 114		5. REQUISITION DATE	6. REQUISITION NUMBER
SHEAF INTERMEDIATE MAINTENANCE ACTIVITY (PURT SOUND)		7. DATE MATERIAL REQUIRED		8. PRIORITY	
		9. AUTHORITY (YOUR PERSON CONTROL SHEEP STIVA(PS))			
		10. SIGNATURE		11. VOUCHER NUMBER AND DATE	
		12. DATE SHIPPED			
		13. MODE OF SHIPMENT		14. BILL OF LADING NUMBER	
		15. AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.			

ITEM NO (1)	APPROPRIATE AND SUBHEAD	OBJ CL	BUR CONT NO	SUBAL LOT	AUTHORIZATION ACCTG ACTIVITY	TRANS TYPE	PROPERTY ACCTG ACTIVITY		COUN TRY	COST CODE			AMOUNT	
							QUANTITY REQUESTED (d)	SUPPLY ACTION (e)		TYPE CON TAINER (f)	COM TAINER NOS (g)	UNIT PRICE (h)	TOTAL COST (i)	
	GENERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)													
	UNC THREAD													
07	12					EA	500					.26	\$ 130.00	
08	11					EA	2300					.35	805.00	
09	9					EA	1100					.45	495.00	
10	8					EA	20					.56	11.20	

16 TRANSPORTATION VIA MATS OR MULES - APPLICABLE TO										17 SPECIAL HANDLING			
ISSUED AT	TOTAL CONTAINER	TYPE CON TAINER	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBE	18	CONTAINERS RECEIVED EXCEPT AS NOTED	DATE	BY	SHEET TOTAL			
19						RECEIVED	QUANTITIES RECEIVED EXCEPT AS NOTED	DATE	BY	GRAND TOTAL			
20							POSTED	DATE	BY	20 RECEIVER'S VOUCHER NO			
← TOTAL →													

SHIPPING CONTAINERIALITY 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SIRE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

CORROSION CONTROL SHIP SIMA (PS)

NAME FOR

DATE SHIPPED

MODE OF SHIPMENT

BILL OF LADING NUMBER

AIR MOVEMENT DESIGNATION OR PORT REFERENCE NO

IN AND SUBHEAD

OBJ CL

BUR CONT NO

SUBAL LOT

AUTOMATION ACTG ACTIVITY

TRANS TYPE

PROPERTY ACCTG ACTIVITY

COUN TRY

COST CODE

AMOUNT

FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)

QUANTITY REQUESTED (d)

SUPPLY ACTION (e)

TYPE COM TAINER (f)

CON TAINER NOS (g)

UNIT PRICE (h)

TOTAL COST (i)

FINISH HEXAGONAL LOCK NUTS. THE NUTS SHALL BE MADE OF CORROSION RESISTANT AUSTENITIC STEEL, MATERIAL GRADE (LOY) 316, IN ACCORDANCE WITH ASTM F 593-85. THE NUTS SHALL BE COLD WORKED AND INDIVIDUALLY MARKED WITH THE MATERIAL GRADE, IN ACCORDANCE WITH MIL-S-22858. THE LOCK NUTS SHALL BE OF THE PLASTIC INSERT TYPE. THE THREADS SHALL BE UNIFIED NATIONAL COURSE LEAD SERIES, BLASTS 2A. THE NUTS SHALL BE PROVIDED THE FOLLOWING SIZES AND QUANTITIES (DIMENSIONS ARE INCHES UNLESS OTHERWISE STATE).

RELATION VIA MATS CHARLEABLE TO

TOTAL CONTAINER

TYPE COM TAINER

TOTAL WEIGHT

TOTAL CODE

CONTAINERS RECEIVED SPECIALLY NOTED

DATE

BY

SHEET TOTAL

RECEIVED BY

QUANTITIES RECEIVED SPECIALLY NOTED

DATE

BY

GRAND TOTAL

RECEIVED BY

DATE

BY

20 RECEIVERS VOUCHER NO

← TOTAL →

DD FORM 1149 (9 PT) 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REPLACES EDITION OF 1 MAY 58 WHICH MAY BE USED

U.S. GPO: 1967 O-305-072

ORIGINAL

REQUISITION AND INVOICE/SHIPPING DOCUMENT																			
SHEER INTERMEDIATE MAINTENANCE ACTIVITY PUEET SOUND																			
MARK FOR																			
CORROSION CONTROL SHOP SIMA(PS)																			
10 SIGNATURE																			
11 VOUCHER NUMBER AND DATE																			
12 DATE SHIPPED																			
13 MODE OF SHIPMENT																			
14 BILL OF LADING NUMBER																			
15 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO																			
SHIPMENT CONTAINER		NO. OF SHEETS		REQUISITION DATE		REQUISITION NUMBER		PRIORITY											
1		2		3		4		5											
01		02		03		04		05											
06		07		08		09		10											
11		12		13		14		15											
16		17		18		19		20											
21		22		23		24		25											
26		27		28		29		30											
31		32		33		34		35											
36		37		38		39		40											
41		42		43		44		45											
46		47		48		49		50											
PROPERTY ACTIVITY		COUN TRY		COST CODE		AMOUNT													
1		2		3		4													
01		02		03		04													
05		06		07		08													
09		10		11		12													
13		14		15		16													
17		18		19		20													
21		22		23		24													
25		26		27		28													
29		30		31		32													
33		34		35		36													
37		38		39		40													
41		42		43		44													
45		46		47		48													
49		50		51		52													
FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES		UNIT OF ISSUE		QUANTITY REQUESTED		SUPPLY ACTION		TYPE CON TAINER NOS		UNIT PRICE		TOTAL COST							
1		2		3		4		5		6		7							
01		02		03		04		05		06		07							
08		09		10		11		12		13		14							
15		16		17		18		19		20		21							
22		23		24		25		26		27		28							
29		30		31		32		33		34		35							
36		37		38		39		40		41		42							
43		44		45		46		47		48		49							
50		51		52		53		54		55		56							
TOTAL CONTAINER		TYPE CON TAINER		DESCRIPTION		TOTAL WEIGHT		TOTAL CUBE		CONTAINERS RECEIVED EXCEPT AS NOTED		DATE		BY		SHEET TOTAL			
1		2		3		4		5		6		7		8		9			
01		02		03		04		05		06		07		08		09			
10		11		12		13		14		15		16		17		18			
19		20		21		22		23		24		25		26		27			
28		29		30		31		32		33		34		35		36			
37		38		39		40		41		42		43		44		45			
46		47		48		49		50		51		52		53		54			
55		56		57		58		59		60		61		62		63			
64		65		66		67		68		69		70		71		72			
73		74		75		76		77		78		79		80		81			
82		83		84		85		86		87		88		89		90			
91		92		93		94		95		96		97		98		99			
100		101		102		103		104		105		106		107		108			
TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL	
1		2		3		4		5		6		7		8		9		10	
01		02		03		04		05		06		07		08		09		10	
11		12		13		14		15		16		17		18		19		20	
21		22		23		24		25		26		27		28		29		30	
31		32		33		34		35		36		37		38		39		40	
41		42		43		44		45		46		47		48		49		50	
51		52		53		54		55		56		57		58		59		60	
61		62		63		64		65		66		67		68		69		70	
71		72		73		74		75		76		77		78		79		80	
81		82		83		84		85		86		87		88		89		90	
91		92		93		94		95		96		97		98		99		100	
TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL	
1		2		3		4		5		6		7		8		9		10	
01		02		03		04		05		06		07		08		09		10	
11		12		13		14		15		16		17		18		19		20	
21		22		23		24		25		26		27		28		29		30	
31		32		33		34		35		36		37		38		39		40	
41		42		43		44		45		46		47		48		49		50	
51		52		53		54		55		56		57		58		59		60	
61		62		63		64		65		66		67		68		69		70	
71		72		73		74		75		76		77		78		79		80	
81		82		83		84		85		86		87		88		89		90	
91		92		93		94		95		96		97		98		99		100	
TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL	
1		2		3		4		5		6		7		8		9		10	
01		02		03		04		05		06		07		08		09		10	
11		12		13		14		15		16		17		18		19		20	
21		22		23		24		25		26		27		28		29		30	
31		32		33		34		35		36		37		38		39		40	
41		42		43		44		45		46		47		48		49		50	
51		52		53		54		55		56		57		58		59		60	
61		62		63		64		65		66		67		68		69		70	
71		72		73		74		75		76		77		78		79		80	
81		82		83		84		85		86		87		88		89		90	
91		92		93		94		95		96		97		98		99		100	
TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL	
1		2		3		4		5		6		7		8		9		10	
01		02		03		04		05		06		07		08		09		10	
11		12		13		14		15		16		17		18		19		20	
21		22		23		24		25		26		27		28		29		30	
31		32		33		34		35		36		37		38		39		40	
41		42		43		44		45		46		47		48		49		50	
51		52		53		54		55		56		57		58		59		60	
61		62		63		64		65		66		67		68		69		70	
71		72		73		74		75		76		77		78		79		80	
81		82		83		84		85		86		87		88		89		90	
91		92		93		94		95		96		97		98		99		100	
TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL	
1		2		3		4		5		6		7		8		9		10	
01		02		03		04		05		06		07		08		09		10	
11		12		13		14		15		16		17		18		19		20	
21		22		23		24		25		26		27		28		29		30	
31		32		33		34		35		36		37		38		39		40	
41		42		43		44		45		46		47		48		49		50	
51		52		53		54		55		56		57		58		59		60	
61		62		63		64		65		66		67		68		69		70	
71		72		73		74		75		76		77		78		79		80	
81		82		83		84		85		86		87		88		89		90	
91		92		93		94		95		96		97		98		99		100	
TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL	
1		2		3		4		5		6		7		8		9		10	
01		02		03		04		05		06		07		08		09		10	
11		12		13		14		15		16		17		18		19		20	
21		22		23		24		25		26		27		28		29		30	
31		32		33		34		35		36		37		38		39		40	
41		42		43		44		45		46		47		48		49		50	
51		52		53		54		55		56		57		58		59		60	
61		62		63		64		65		66		67		68		69		70	
71		72		73		74		75		76		77		78		79		80	
81		82		83		84		85		86		87		88		89		90	
91		92		93		94		95		96		97		98		99		100	
TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL		TOTAL	
1		2		3		4		5		6		7		8		9		10	
01		02		03		04		05		06		07		08		09		10	
11		12		13		14		15		16		17		18		19		20	
21		22		23		24		25		26		27		28		29		30	
31		32		33		34		35		36		37		38		39		40	
41		42		43		44		45		46		47		48		49		50	
51		52		53		54		55		56		57		58		59		60	
61		62		63		64		65		66		67		68		69		70	
71		72		73		74		75		76		77		78		79		80	
81		82		83		84		85		86		87		88		89		90	
91		92		93		94													

SHORE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

9 AUTHORITY OR PURPOSE		CORRECTION CONTROL, SHIP SIM(PS)	
10 SIGNATURE		11- VOUCHER NUMBER AND DATE	
12 DATE SHIPPED		13 BILL OF LADING NUMBER	
13 MODE OF SHIPMENT		14 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO	

APP. NO.	OBJ. CL.	SUR. CONT. NO.	SUBAL. LOT	ALPHABETIZATION ACT. G. ACTIVITY	TRANS. TYPE	PROPERTY ACT. G. ACTIVITY	SUPPLY ACT. G. ACTIVITY	TYPE CON. TANNER (f)	CON. TANNER NOS. (g)	UNIT PRICE (h)	TOTAL COST (i)
REQUEST INDEFINITE DELIVERY CONTRACT BE LET ON THE ABOVE ITEMS. THREE SOURCES OF SUPPLY ARE PROVIDED: FALCON METAL CORP. STOCK EXCHANGER 10715 John Price Road P.O. Box 249 Dept. T Canton, TX 75103 P.O. Box 7429 PH: 214-848-8561 Charlotte, NC 28217 1-800-438-0332 SAMSON INDUSTRIES, INC. 3440-A Overland Ave. Los Angeles, CA 90034 213-559-3845											

17 SPECIAL HANDLING						19 RECEIPT		20 SWEET TOTAL	
TOTAL CONTAINER	TYPE COM TANKER	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBE	CONTAINERS RECEIVED EXCEPT AS NOTED	DATE	BY	SWEET TOTAL	
					QUANTITIES RECEIVED EXCEPT AS NOTED	DATE	BY	CARD TOTAL	
					POSTED	DATE	BY	TO RECIPIENT'S VOUCHER NO.	

TOTAL ← →

SHIPPING CONTAINERALLY 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT									
SHORE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND									
NO. OF SHEETS 02 REQUISITION DATE 04 DATE MATERIAL REQUIRED PRIORITY									
AUTHORITY OR PURPOSE CORROSION CONTROL, SHOP SIMA (PS) VOUCHER NUMBER AND DATE									
SIGNATURE DATE SHIPPED MODE OF SHIPMENT BILL OF LADING NUMBER									
AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO									
PROPERTY ACCTG ACTIVITY		COUN TRV		COST CODE		AMOUNT			
QUANTITY REQUESTED (d)	SUPPLY ACTION (e)	TYPE CONTAINER (f)	CON TAINER NOS (g)	UNIT PRICE (h)	TOTAL COST (i)				
FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)									
MINIMAL WASHER SIZE									
01	10	EA	1000	.20	\$ 200.00				
02	14	EA	5000	.25	1250.00				
03	16	EA	1000	.05	50.00				
04	18	EA	10,000	.07	700.00				
05	16	EA	500	.30	500				
06	12	EA	2,650	.14	371.00				

DD FORM 1149 (9 PT) 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

ORIGINAL

S/N 0102 17 011 1801

REPLACES EDITION OF 1 MAY 58 WHICH MAY BE USED

SHIPPING CONTAINERALLY — 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT										SHEET NO. OF SHEETS 03 04		5 REQUISITION DATE		6 REQUISITION NUMBER							
STORE INTERMEDIATE MAINTENANCE ACTIVITY RUET SOUND										7 DATE MATERIAL REQUIRED		8 PRIORITY									
9 AUTHORITY CONTROL, SHIP SIMA (PS)										10 SIGNATURE		11 VOUCHER NUMBER AND DATE									
										12 DATE SHIPPED											
										13 MODE OF SHIPMENT		14 BILL OF LADING NUMBER									
										15 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO											
16 INFORMATION AND SUBHEAD			OBJ CL		SUB CONT NO		SUBAL LOT		AUTHORIZATION ACTG ACTIVITY		TRANS TYPE		PROPERTY ACTG ACTIVITY		COUN TRY		COST CODE		AMOUNT		
FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)										QUANTITY REQUESTED (d)		SUPPLY ACTION (e)		TYPE COM TAINER (f)		CON TAINER NOS (g)		UNIT PRICE (h)		TOTAL COST (i)	
MINIMAL WASHER SIZE																					
07	/16										EA	500							.20	\$ 100.00	
08	/8										EA	2150							.20	430.00	
09	/4										EA	2150							.20	430.00	
10	/8										EA	500							.20	100.00	
11											EA	80							.30	6.00	

DD FORM 1149 (9-PT) 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

ORIGINAL

S/N 0102 LP 011 1801

REPLACES EDITION OF 1 MAY 58 WHICH MAY BE USED

SHIPPING CONTAINER TALLY — 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SHORE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

9 AUTHORITY CONTROL SHOP SIMA (PS)

10 SIGNATURE

11 SHIP TO MARK FOR

12 DATE SHIPPED

13 MODE OF SHIPMENT

15 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO

PROPERTY ACTIVITY

16 PROPERTY ACTIVITY

17 SPECIAL HANDLING

AMOUNT

18 TOTAL COST

19 UNIT PRICE

20 CON TAINER NOS

21 TYPE CON TAINER

22 SUPPLY ACTION

23 QUANTITY REQUESTED

24 UNIT OF ISSUE

25 TRANS TYPE

26 AUTHORIZATION ACTIVITY

27 SUBAL LOT

28 IS R CONT NO

29 OBJ CL

30 APPROX DATE AND SUBHEAD

B-30

REQUEST INDEFINITE DELIVERY CONTRACT BE LET ON THE ABOVE ITEMS.

THREE SOURCES OF SUPPLY ARE PROVIDED:

FALCON METAL CORP. STOCK EXCHANGER
10715 John Price Road P.O. Box 249
Dept. T Canton, TX 75103
P.O. Box 7429 PH: 214-848-8561
Charlotte, NC 28217
1-800-438-0332

SAWSON INDUSTRIES, INC.
3440-A Overland Ave.
Los Angeles, CA 90034
213-559-3845

16 SPECIAL HANDLING

17 SPECIAL HANDLING

18 SPECIAL HANDLING

19 SPECIAL HANDLING

20 SPECIAL HANDLING

21 SPECIAL HANDLING

22 SPECIAL HANDLING

23 SPECIAL HANDLING

24 SPECIAL HANDLING

25 SPECIAL HANDLING

26 SPECIAL HANDLING

27 SPECIAL HANDLING

28 SPECIAL HANDLING

29 SPECIAL HANDLING

30 SPECIAL HANDLING

31 SPECIAL HANDLING

32 SPECIAL HANDLING

33 SPECIAL HANDLING

34 SPECIAL HANDLING

35 SPECIAL HANDLING

36 SPECIAL HANDLING

37 SPECIAL HANDLING

38 SPECIAL HANDLING

39 SPECIAL HANDLING

40 SPECIAL HANDLING

41 SPECIAL HANDLING

42 SPECIAL HANDLING

43 SPECIAL HANDLING

44 SPECIAL HANDLING

45 SPECIAL HANDLING

46 SPECIAL HANDLING

47 SPECIAL HANDLING

48 SPECIAL HANDLING

49 SPECIAL HANDLING

50 SPECIAL HANDLING

51 SPECIAL HANDLING

52 SPECIAL HANDLING

53 SPECIAL HANDLING

54 SPECIAL HANDLING

55 SPECIAL HANDLING

56 SPECIAL HANDLING

57 SPECIAL HANDLING

58 SPECIAL HANDLING

59 SPECIAL HANDLING

60 SPECIAL HANDLING

61 SPECIAL HANDLING

62 SPECIAL HANDLING

63 SPECIAL HANDLING

64 SPECIAL HANDLING

65 SPECIAL HANDLING

66 SPECIAL HANDLING

67 SPECIAL HANDLING

68 SPECIAL HANDLING

69 SPECIAL HANDLING

70 SPECIAL HANDLING

71 SPECIAL HANDLING

72 SPECIAL HANDLING

73 SPECIAL HANDLING

74 SPECIAL HANDLING

75 SPECIAL HANDLING

76 SPECIAL HANDLING

77 SPECIAL HANDLING

78 SPECIAL HANDLING

79 SPECIAL HANDLING

80 SPECIAL HANDLING

81 SPECIAL HANDLING

82 SPECIAL HANDLING

83 SPECIAL HANDLING

84 SPECIAL HANDLING

85 SPECIAL HANDLING

86 SPECIAL HANDLING

87 SPECIAL HANDLING

88 SPECIAL HANDLING

89 SPECIAL HANDLING

90 SPECIAL HANDLING

91 SPECIAL HANDLING

92 SPECIAL HANDLING

93 SPECIAL HANDLING

94 SPECIAL HANDLING

95 SPECIAL HANDLING

96 SPECIAL HANDLING

97 SPECIAL HANDLING

98 SPECIAL HANDLING

99 SPECIAL HANDLING

100 SPECIAL HANDLING

DD FORM 1 MAR 56 1 149 (9 PT)

REPLACES EDITION OF 1 MAY 58 WHICH MAY BE USED

S/N 0102 (F 011 1901)

ORIGINAL

SHORE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

14

NAME OF PURPOSE

1960-1961
1962-1963
1964-1965
1966-1967
1968-1969
1970-1971
1972-1973
1974-1975
1976-1977
1978-1979
1980-1981
1982-1983
1984-1985
1986-1987
1988-1989
1990-1991
1992-1993
1994-1995
1996-1997
1998-1999
2000-2001
2002-2003
2004-2005
2006-2007
2008-2009
2010-2011
2012-2013
2014-2015
2016-2017
2018-2019
2020-2021
2022-2023
2024-2025
2026-2027
2028-2029
2030-2031
2032-2033
2034-2035
2036-2037
2038-2039
2040-2041
2042-2043
2044-2045
2046-2047
2048-2049
2050-2051
2052-2053
2054-2055
2056-2057
2058-2059
2060-2061
2062-2063
2064-2065
2066-2067
2068-2069
2070-2071
2072-2073
2074-2075
2076-2077
2078-2079
2080-2081
2082-2083
2084-2085
2086-2087
2088-2089
2090-2091
2092-2093
2094-2095
2096-2097
2098-2099
2100-2101
2102-2103
2104-2105
2106-2107
2108-2109
2110-2111
2112-2113
2114-2115
2116-2117
2118-2119
2120-2121
2122-2123
2124-2125
2126-2127
2128-2129
2130-2131
2132-2133
2134-2135
2136-2137
2138-2139
2140-2141
2142-2143
2144-2145
2146-2147
2148-2149
2150-2151
2152-2153
2154-2155
2156-2157
2158-2159
2160-2161
2162-2163
2164-2165
2166-2167
2168-2169
2170-2171
2172-2173
2174-2175
2176-2177
2178-2179
2180-2181
2182-2183
2184-2185
2186-2187
2188-2189
2190-2191
2192-2193
2194-2195
2196-2197
2198-2199
2200-2201
2202-2203
2204-2205
2206-2207
2208-2209
2210-2211
2212-2213
2214-2215
2216-2217
2218-2219
2220-2221
2222-2223
2224-2225
2226-2227
2228-2229
2230-2231
2232-2233
2234-2235
2236-2237
2238-2239
2240-2241
2242-2243
2244-2245
2246-2247
2248-2249
2250-2251
2252-2253
2254-2255
2256-2257
2258-2259
2260-2261
2262-2263
2264-2265
2266-2267
2268-2269
2270-2271
2272-2273
2274-2275
2276-2277
2278-2279
2280-2281
2282-2283
2284-2285
2286-2287
2288-2289
2290-2291
2292-2293
2294-2295
2296-2297
2298-2299
2300-2301
2302-2303
2304-2305
2306-2307
2308-2309
2310-2311
2312-2313
2314-2315
2316-2317
2318-2319
2320-2321
2322-2323
2324-2325
2326-2327
2328-2329
2330-2331
2332-2333
2334-2335
2336-2337
2338-2339
2340-2341
2342-2343
2344-2345
2346-2347
2348-2349
2350-2351
2352-2353
2354-2355
2356-2357
2358-2359
2360-2361
2362-2363
2364-2365
2366-2367
2368-2369
2370-2371
2372-2373
2374-2375
2376-2377
2378-2379
2380-2381
2382-2383
2384-2385
2386-2387
2388-2389
2390-2391
2392-2393
2394-2395
2396-2397
2398-2399
2400-2401
2402-2403
2404-2405
2406-2407
2408-2409
2410-2411
2412-2413
2414-2415
2416-2417
2418-2419
2420-2421
2422-2423
2424-2425
2426-2427
2428-2429
2430-2431
2432-2433
2434-2435
2436-2437
2438-2439
2440-2441
2442-2443
2444-2445
2446-2447
2448-2449
2450-2451
2452-2453
2454-2455
2456-2457
2458-2459
2460-2461
2462-2463
2464-2465
2466-2467
2468-2469
2470-2471
2472-2473
2474-2475
2476-2477
2478-2479
2480-2481
2482-2483
2484-2485
2486-2487
2488-2489
2490-2491
2492-2493
2494-2495
2496-2497
2498-2499
2500-2501
2502-2503
2504-2505
2506-2507
2508-2509
2510-2511
2512-2513
2514-2515
2516-2517
2518-2519
2520-2521
2522-2523
2524-2525
2526-2527
2528-2529
2530-2531
2532-2533
2534-2535
2536-2537
2538-2539
2540-2541
2542-2543
2544-2545
2546-2547
2548-2549
2550-2551
2552-2553
2554-2555
2556-2557
2558-2559
2560-2561
2562-2563
2564-2565
2566-2567
2568-2569
2570-2571
2572-2573
2574-2575
2576-2577
2578-2579
2580-2581
2582-2583
2584-2585
2586-2587
2588-2589
2590-2591
2592-2593
2594-2595
2596-2597
2598-2599
2600-2601
2602-2603
2604-2605
2606-2607
2608-2609
2610-2611
2612-2613
2614-2615
2616-2617
2618-2619
2620-2621
2622-2623
2624-2625
2626-2627
2628-2629
2630-2631
2632-2633
2634-2635
2636-2637
2638-2639
2640-2641
2642-2643
2644-2645
2646-2647
2648-2649
2650-2651
2652-2653
2654-2655
2656-2657
2658-2659
2660-2661
2662-2663
2664-2665
2666-2667
2668-2669
2670-2671
2672-2673
2674-2675
2676-2677
2678-2679
2680-2681
2682-2683
2684-2685
2686-2687
2688-2689
2690-2691
2692-2693
2694-2695
2696-2697
2698-2699
2700-2701
2702-2703
27

1. Year 10 Math 100

SECRET

ALL MEN OF WORTH!

THE JOURNAL OF LAW AND ECONOMICS

NO FURTHER INFO TO BE FURNISHED IN RESPONSE TO THIS REQUEST

DEPARTMENT OF POLICE AND FIRE

PROPERTY ACCT & ACTIVITY	COUNT	COST CODE
-----------------------------	-------	-----------

AMOUNT

11

FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES

R-31

FINISH TYPE 1 HEXAGONAL HEAD BOLTS IN ACCORDANCE WITH MIL-S-1222H, ("STUDS, BOLTS, HEX CAP SCREWS, SOCKET HEAD CAP SCREWS AND NUTS", DATED 21 OCTOBER 1986). THE BOLTS SHALL BE MADE OF LOW OR MEDIUM CARBON STEEL IN ACCORDANCE WITH SAE-GRADE 2. THE FASTENERS SHALL BE UNWORKED; WASHER FACED; AND INDIVIDUALLY MARKED WITH THE MATERIAL GRADE, IN ACCORDANCE WITH MIL-S-1222H. THE DIMENSIONS OF THE BOLTS SHALL BE IN ACCORDANCE WITH TABLE 2 OF ANSI B18.2.1-1981, SQUARE AND HEX BOLTS AND SCREWS INCH SERIES. THE THREADS SHALL BE UNIFIED NATIONAL COARSE THREAD SERIES, CLASS 2A.

1. INFORMATION VIA MAIL

SPECIAL

1000

101A1

2015-2016

CONTAINERS

WATER TOTAL

॥

—

GRAND TOTAL

—

.....

0110M

100

DD FORM 1149 (9 ET)

[illegible]

3
3
3
3
3

ORIGINAL

SHIPPING (CONTINUED) 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT									
SURE INTERMEDIATE MAINTENANCE ACTIVITY PUCET SOUND									
CORROSION CONTROL SHOP SIMA(PS)									
1. DATE OF ORDER									
2. DATE OF ORDER									
3. DATE OF ORDER									
4. DATE OF ORDER									
5. DATE OF ORDER									
6. DATE OF ORDER									
7. DATE OF ORDER									
8. DATE OF ORDER									
9. DATE OF ORDER									
10. DATE OF ORDER									
11. DATE OF ORDER									
12. DATE OF ORDER									
13. DATE OF ORDER									
14. DATE OF ORDER									
15. DATE OF ORDER									
16. DATE OF ORDER									
17. DATE OF ORDER									
18. DATE OF ORDER									
19. DATE OF ORDER									
20. DATE OF ORDER									
21. DATE OF ORDER									
22. DATE OF ORDER									
23. DATE OF ORDER									
24. DATE OF ORDER									
25. DATE OF ORDER									
26. DATE OF ORDER									
27. DATE OF ORDER									
28. DATE OF ORDER									
29. DATE OF ORDER									
30. DATE OF ORDER									
31. DATE OF ORDER									
32. DATE OF ORDER									
33. DATE OF ORDER									
34. DATE OF ORDER									
35. DATE OF ORDER									
36. DATE OF ORDER									
37. DATE OF ORDER									
38. DATE OF ORDER									
39. DATE OF ORDER									
40. DATE OF ORDER									
41. DATE OF ORDER									
42. DATE OF ORDER									
43. DATE OF ORDER									
44. DATE OF ORDER									
45. DATE OF ORDER									
46. DATE OF ORDER									
47. DATE OF ORDER									
48. DATE OF ORDER									
49. DATE OF ORDER									
50. DATE OF ORDER									

SHIPPING CONTAINERALLY → 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT										5 REQUISITION NUMBER	
SURE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND										6 PRIORITY	
9 AUTHORITY OR PURPOSE (CORRUSSION (UNITED SHIP SIMA(PS)										11A VOUCHER NUMBER AND DATE	
10 SIGNATURE										11B VOUCHER NUMBER AND DATE	
12 DATE SHIPPED										14 BILL OF LADING NUMBER	
13 MODE OF SHIPMENT										15 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO	
16 APPROPRIATE AND SUBHEAD										PROPERTY ACT G	
17 SPECIAL HANDLING										COUN TRY	
18 TRANSPORTATION VIA MATS										COST CODE	
19 TOTAL CONTAINER										AMOUNT	
20 TOTAL CONTAINER										COST CODE	
21 TOTAL CONTAINER										COST CODE	
22 TOTAL CONTAINER										COST CODE	
23 TOTAL CONTAINER										COST CODE	
24 TOTAL CONTAINER										COST CODE	
25 TOTAL CONTAINER										COST CODE	
26 TOTAL CONTAINER										COST CODE	
27 TOTAL CONTAINER										COST CODE	
28 TOTAL CONTAINER										COST CODE	
29 TOTAL CONTAINER										COST CODE	
30 TOTAL CONTAINER										COST CODE	
31 TOTAL CONTAINER										COST CODE	
32 TOTAL CONTAINER										COST CODE	
33 TOTAL CONTAINER										COST CODE	
34 TOTAL CONTAINER										COST CODE	
35 TOTAL CONTAINER										COST CODE	
36 TOTAL CONTAINER										COST CODE	
37 TOTAL CONTAINER										COST CODE	
38 TOTAL CONTAINER										COST CODE	
39 TOTAL CONTAINER										COST CODE	
40 TOTAL CONTAINER										COST CODE	
41 TOTAL CONTAINER										COST CODE	
42 TOTAL CONTAINER										COST CODE	
43 TOTAL CONTAINER										COST CODE	
44 TOTAL CONTAINER										COST CODE	
45 TOTAL CONTAINER										COST CODE	
46 TOTAL CONTAINER										COST CODE	
47 TOTAL CONTAINER										COST CODE	
48 TOTAL CONTAINER										COST CODE	
49 TOTAL CONTAINER										COST CODE	
50 TOTAL CONTAINER										COST CODE	
01	2	16	EA	210							
02	1	13	EA	55							
03	1	12	EA	55							
04	1	11	EA	400							
05	1	10	EA	150							

SHIPPING CONTAINER TALLY —

SURE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

10 SIGNATURE

NOT FOR RELEASE

DATE SHIPPED

1. MODE OF SHIPMENT

[illegible]

3 AIR MOVEMENT DESIGNATOR OR PORTY REFERENCE NO

ADVANCED PROPERTIES

PROPERTY ACCT G

COST CODE

AMOUNT

100

GENERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)

REQUEST INDEFINITE DELIVERY CONTRACT BE LET ON THE ABOVE ITEMS.

THREE SOURCES OF SUPPLY ARE PROVIDED:

FALCON METAL CORP.
10715 John Price Road
Dept. T
P.O. Box 7429
Charlotte, NC 28217
1-800-438-0332

SAWSON INDUSTRIES, INC.
3440-A Overland Ave.
Los Angeles, CA 90034
213-559-3845

16 TRANS. : ACTION VIA MAYS
OR MAY : MARGARET TO

17 SPECIAL HANDLING

101,550.

CONTAINERS

AG

GROSS TOTAL

DD FORM 1149 (9-PT)

DD FORM 1, 11-60 (Rev. 1-61) 1149 (9-PT) 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 ORIGINAL

ORIGINAL

SHIPPING CONTAINERALLY 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SURE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

(CORROSION CONTROL SHOP SIMA(PS))

1. NAME OF THE BUYER FOR

2. APPROVED BY AND SUBHEAD

OBJ CL SUBAL LOT AUTHORIZATION ACCTG ACTIVITY

PROPERTY ACCTG COUN TRV COST CODE

AMOUNT

FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES

(b)

FINISH PLAIN WASHERS. THE WASHERS SHALL BE MADE OF 30 OR MEDIUM CARBON STEEL IN ACCORDANCE WITH SAE-GRADE 30. THE WASHERS SHALL BE FREE FROM BURRS, LOOSE SCALE, RP EDGES AND ALL OTHER DEFECTS THAT MIGHT AFFECT THEIR SERVICEABILITY. THEY SHALL HAVE A SURFACE FINISH PRODUCED IN ACCORDANCE WITH ASTM A 380-78. THE WASHERS SHALL BE FURNISHED WITHOUT AN ADDITIVE CHEMICAL OR ALLIC FINISH AND SHALL BE INDIVIDUALLY MARKED WITH MATERIAL GRADE. STAMPING SHALL BE PERMANENT AND BE RAISED OR DEPRESSED. STAMPING SHALL BE MADE IN A LOW STRESS STAMP. WASHER DIMENSIONS SHALL BE IN ACCORDANCE WITH TABLE 1A OF ANSI B18.22.1 - 1965, PLAIN WASHERS.

QUANTITY REQUESTED (d)

SUPPLY ACTION (e)

TYPE CON TAINER NOS (f)

UNIT PRICE (h)

TOTAL COST (i)

16. TRANSPORTATION VIA MATS CHARGEABLE TO

17. SPECIAL HANDLING

ST	TOTAL CONTAINER	TYPE CON TAINER	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBE	RECEIVED	DATE	CONTAINERS RECEIVED EXCEPT AS NOTED	DATE	ST	SHEET TOTAL
ST						RECEIVED	DATE	QUANTITIES RECEIVED EXCEPT AS NOTED	DATE	ST	CARD TOTAL
ST						POSTED	DATE	POSTED	DATE	ST	TO RECEIVER'S VOUCHER NO

← TOTAL →

SHIPPING CONTAINERIALITY 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SHORE INTERMEDIATE MAINTENANCE ACTIVITY PUFFET SOUND

CORROSION (UNIFORM SHEET SIMA(PS)

10 SIGNATURE 11 VOUCHER NUMBER AND DATE

12 DATE SHIPPED

13 MODE OF SHIPMENT

14 BILL OF LADING NUMBER

15 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO

16 ACTION AND SUBHEAD

PROPERTY ACCTG ACTIVITY

COUN TRY

COST CODE

AMOUNT

FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES

(b)

MINIMAL WASHER SIZE

COST CODE

01 /8

EA 400

02 /2

EA 300

03 /16

EA 110

04 /8

EA 650

05 /4

EA 300

17 SPECIAL HANDLING

18 CONTAINERS RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

19 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

20 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

21 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

22 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

23 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

24 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

25 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

26 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

27 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

28 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

29 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

30 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

31 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

32 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

33 TOTAL COMBINED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DATE

QUANTITIES RECEIVED

DD FORM 1149 (9 PT)

REPLACES EDITION OF 1 MAY 58 WHICH MAY BE USED

S/N 0102 LP 011 1801

ORIGINAL

SHIPPING CONTAINERALLY										1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50									
REQUISITION AND INVOICE/SHIPPING DOCUMENT										6 REQUISITION NUMBER									
SURE INTERMEDIATE MAINTENANCE ACTIVITY PUFFET SOUND										7 DATE MATERIAL REQUIRED									
8 AUTHORITY OR PURPOSE										9 PROMITY									
CORROSION CONTROL SHOP SIMA(PS)										10 SIGNATURE									
11 VOUCHER NUMBER AND DATE										12 DATE SHIPPED									
13 MODE OF SHIPMENT										14 BILL OF LADING NUMBER									
15 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO										16 PROPERTY ACTIVITY									
17 SPECIAL HANDLING										18 CONTAINERS RECEIVED AS NOTED									
19 TOTAL CUBE										20 QUANTITIES RECEIVED AS NOTED									
21 TOTAL WEIGHT										22 POSTED									
23 TOTAL										24 RECEIVED VOUCHER NO									
FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES										TOTAL COST									
(b)										(f)									
REQUEST INDEFINITE DELIVERY CONTRACT BE LET ON THE ABOVE ITEMS.																			
THREE SOURCES OF SUPPLY ARE PROVIDED:																			
FALCON METAL CORP. STOCK EXCHANGER																			
10715 John Price Road P.O. Box 249																			
Dept. T Canton, TX 75103																			
P.O. Box 7429 PH: 214-848-8561																			
Charlotte, NC 28217																			
1-800-438-0332																			
SAWSON INDUSTRIES, INC.																			
3440-A Overland Ave.																			
Los Angeles, CA 90034																			
213-559-3845																			
16 TRAIL ORIENTATION VIA MATS																			
17 SPECIAL HANDLING																			
18 CONTAINERS RECEIVED AS NOTED																			
19 TOTAL CUBE																			
20 QUANTITIES RECEIVED AS NOTED																			
21 TOTAL																			
22 POSTED																			
23 RECEIVED VOUCHER NO																			

ORIGINAL

SIN 0102 LP 011 1801

REPLACES EDITION OF 1 MAY 58 WHICH MAY BE USED

DD FORM 1149 (9 PT) 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SHURE INTERMEDIATE MAINTENANCE ACTIVITY PULST SOUND

9 AUTHORITY OR PURPOSE
CORPORATION (CONTROL, STOCK, SIMILAR)

110. VOUCHER NUMBER AND DATE

WARRANT FOR

12 DATE SHIPPED

MODE OF SHIPMENT

ADDRESSING THE NEEDS OF THE ELDERLY Journal of Aging and Health 20(10) 1107-1116

U.S. AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.	DATE	TIME	LOCATION	TYPE	STATUS	REMARKS

APPENDIX

ON AND SUBMIT

AMOUNT

COST CODE

COUN

PROPERTY ACT G

1000

FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES

APPLY CERAMIC COATING IN ACCORDANCE WITH MIL-C-81751B TYPE 1 CLASS TO THE SAE-GRADE 2 CARBON STEEL FASTENERS PROVIDED. COATING SYSTEM SHALL CONSIST OF SPECIFIED CERAMIC BASE COAT WITH HIGH TEMPERATURE SEALER (GRAY IN COLOR). APPLICABLE COATING PRODUCTS INCLUDE: SERMETEL SYSTEM; XYLAR 1/XYLAR 101 SYSTEM; OR ALSEAL-518 AND SEAL 598 SYSTEM.

10 TRANS. STATION VIA MATS
1000 CHARGEABLE TO

17 SPECIAL HANDLING

CHARGE TO		TOTAL CONTAINER	TYPE OF TANKER	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBE	RECEIPT		BY		SHEET TOTAL	
	BY							CONTAINERS RECEIVED EXCEPT AS NOTED	DATE			
	BY							QUANTITIES RECEIVED EXCEPT AS NOTED	DATE		GRAND TOTAL	
	BY							POSTED	DATE		TO RECEIVER'S VOUCHER NO.	
							TOTAL ← →					

[illegible]

ORIGINAL

SHIPPING CONTAINERALLY — 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT										5. REQUISITION DATE		6. REQUISITION NUMBER							
1. FROM										7. DATE MATERIAL REQUIRED		8. PRIORITY							
2. TO										9. AUTHORITY OR PURPOSE		10. SIGNATURE							
3. SHIP										11. VOUCHER NUMBER AND DATE		12. DATE SHIPPED							
4. APPR.										13. MODE OF SHIPMENT		14. BILL OF LADING NUMBER							
5. AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.										15. AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.		16. AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.							
FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES										PROPERTY ACCT G		COUN-TRY		COST CODE		AMOUNT			
(a)										QUANTITY REQUESTED (d)		SUPPLY ACTION (e)		TYPE CON TAINER (f)		UNIT PRICE (h)		TOTAL COST (i)	
(b)										UNIT OF ISSUE (c)									
01	ACONAL HEAD BOLTS 5/16-18 1 1/4"									EA	75								
02	ACONAL HEAD BOLTS 3/8-16 1 1/4"									EA	50								
03	ACONAL HEAD BOLTS 3/8-16 1 1/2"									EA	150								
04	ACONAL HEAD BOLTS 3/8-16 1 3/4"									EA	10								
05	ACONAL HEAD BOLTS 3/8-16 2"									EA	15								
06	ACONAL HEAD BOLTS 3/8-16 2 1/2"									EA	3								
07	ACONAL HEAD BOLTS 3/8-16 4"									EA	3								
17. SPECIAL HANDLING										TOTAL CUBE		TOTAL WEIGHT		TOTAL CUBE		TOTAL WEIGHT			
18. TRANS. CHARGEABLE TO										BY		DATE		CONTAINERS RECEIVED EXCEPT AS NOTED		BY		DATE	
19. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
20. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
21. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
22. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
23. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
24. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
25. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
26. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
27. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
28. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
29. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
30. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
31. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
32. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
33. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
34. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
35. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
36. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
37. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
38. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
39. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
40. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
41. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
42. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
43. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
44. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
45. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
46. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
47. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
48. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
49. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	
50. RECEIVED BY										BY		DATE		QUANTITIES RECEIVED EXCEPT AS NOTED		BY		DATE	

DD FORM 1149 (9-PT) 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

ORIGINAL

SHIPPING CONTAINERALLY 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SHORE INTERMEDIATE MAINTENANCE ACTIVITY PAPER SOUND

NO. OF SHEETS 03	5 REQUISITION DATE 07	6 REQUISITION NUMBER
7 DATE MATERIAL REQUIRED	8 PRIORITY	
9 AUTHORITY OR PURPOSE (UNION, SLOP, SIMA, PS)		
10 SIGNATURE		
11 VOUCHER NUMBER AND DATE		
12 DATE SHIPPED		
13 MODE OF SHIPMENT		
14 BILL OF LADING NUMBER		
15 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.		

ITEM NO.	FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)	OBJ CL	BUR CONT NO	SUBAL LOT	AUTHORIZATION ACCTG ACTIVITY	TRANS TYPE	PROPERTY ACCTG			COST CODE	AMOUNT		
							QUANTITY REQUESTED (d)	SUPPLY ACTION (e)	TYPE CON TAINER (f)		CON TAINER NOS (g)	UNIT PRICE (h)	TOTAL COST (i)
08	EXAGONAL HEAD BOLTS	1/2-13	1	1/4"		EA	50						
09	EXAGONAL HEAD BOLTS	1/2-13	1	1/2"		EA	25						
10	EXAGONAL HEAD BOLTS	1/2-13	1	3/4"		EA	25						
11	EXAGONAL HEAD BOLTS	1/2-13	2			EA	25						
12	EXAGONAL HEAD BOLTS	1/2-13	2	1/2"		EA	5						
13	EXAGONAL HEAD BOLTS	1/2-13	3			EA	5						
14	EXAGONAL HEAD BOLTS	9/16-12	1	1/2"		EA	10						

16 TRANSPORTATION VIA WATS IS CHARGEABLE TO				17 SPECIAL HANDLING			
TOTAL CONTAINER	TOTAL WEIGHT	TOTAL CUBE	18	CONTAINERS RECEIVED RECEIVED NOTED	DATE	BY	SHEET TOTAL
RED BY			19	QUANTITIES RECEIVED RECEIVED NOTED	DATE	BY	GRAND TOTAL
RED BY				POSTED	DATE	BY	20 RECEIVERS VOUCHER NO.

DD FORM 1149 (9-PT) 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

ORIGINAL

DO NOT WRITE IN THESE SPACES

S. N. 0102 IF 011 1801

SHURE INTERMEDIATE MAINTENANCE ACTIVITY PUGET SOUND

1. AUTHORITY OR PURPOSE (ORIGIN AND/OR SERVICE)										11. VOUCHER NUMBER AND DATE										
10. SIGNATURE										12. DATE SHIPPED										
13. MODE OF SHIPMENT										14. BILL OF LADING NUMBER										
15. AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.																				
16. APPROVAL		17. ON AND SUBHEAD		18. OBJ CL		19. SUBAL LOT		20. AUTHORIZATION ACCT G ACTIVITY		21. TRANS TYPE		22. PROPERTY ACCT G ACTIVITY		23. COUN TRY		24. COST CODE		25. AMOUNT		
FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)																				
ITEM NO.	QTY	UNIT	DESCRIPTION	DATE	QTY	UNIT	DESCRIPTION	DATE	QTY	UNIT	DESCRIPTION	DATE	QTY	UNIT	DESCRIPTION	DATE	QTY	UNIT	DESCRIPTION	DATE
15	15	EA	LAGONAL HEAD BOLTS	9/16-12	3"															
16	30	EA	LAGONAL HEAD BOLTS	9/16-12	4"															
17	5	EA	LAGONAL HEAD BOLTS	5/8-11	1 1/2"															
18	85	EA	LAGONAL HEAD BOLTS	5/8-11	2"															
19	35	EA	LAGONAL HEAD BOLTS	5/8-11	2 1/2"															
20	165	EA	LAGONAL HEAD BOLTS	5/8-11	3"															
21	40	EA	LAGONAL HEAD BOLTS	3/4-10	1 1/2"															
17. SPECIAL HANDLING																				
18. SPECIAL HANDLING																				
19. SPECIAL HANDLING																				
20. SPECIAL HANDLING																				
21. SPECIAL HANDLING																				
22. SPECIAL HANDLING																				
23. SPECIAL HANDLING																				
24. SPECIAL HANDLING																				
25. SPECIAL HANDLING																				
26. SPECIAL HANDLING																				
27. SPECIAL HANDLING																				
28. SPECIAL HANDLING																				
29. SPECIAL HANDLING																				
30. SPECIAL HANDLING																				
31. SPECIAL HANDLING																				
32. SPECIAL HANDLING																				
33. SPECIAL HANDLING																				
34. SPECIAL HANDLING																				
35. SPECIAL HANDLING																				
36. SPECIAL HANDLING																				
37. SPECIAL HANDLING																				
38. SPECIAL HANDLING																				
39. SPECIAL HANDLING																				
40. SPECIAL HANDLING																				
41. SPECIAL HANDLING																				
42. SPECIAL HANDLING																				
43. SPECIAL HANDLING																				
44. SPECIAL HANDLING																				
45. SPECIAL HANDLING																				
46. SPECIAL HANDLING																				
47. SPECIAL HANDLING																				
48. SPECIAL HANDLING																				
49. SPECIAL HANDLING																				
50. SPECIAL HANDLING																				
51. SPECIAL HANDLING																				
52. SPECIAL HANDLING																				
53. SPECIAL HANDLING																				
54. SPECIAL HANDLING																				
55. SPECIAL HANDLING																				
56. SPECIAL HANDLING																				
57. SPECIAL HANDLING																				
58. SPECIAL HANDLING																				
59. SPECIAL HANDLING																				
60. SPECIAL HANDLING																				
61. SPECIAL HANDLING																				
62. SPECIAL HANDLING																				
63. SPECIAL HANDLING																				
64. SPECIAL HANDLING																				
65. SPECIAL HANDLING																				
66. SPECIAL HANDLING																				
67. SPECIAL HANDLING																				
68. SPECIAL HANDLING																				
69. SPECIAL HANDLING																				
70. SPECIAL HANDLING																				
71. SPECIAL HANDLING																				
72. SPECIAL HANDLING																				
73. SPECIAL HANDLING																				
74. SPECIAL HANDLING																				
75. SPECIAL HANDLING																				
76. SPECIAL HANDLING																				
77. SPECIAL HANDLING																				
78. SPECIAL HANDLING																				
79. SPECIAL HANDLING																				
80. SPECIAL HANDLING																				
81. SPECIAL HANDLING																				
82. SPECIAL HANDLING																				
83. SPECIAL HANDLING																				
84. SPECIAL HANDLING																				
85. SPECIAL HANDLING																				
86. SPECIAL HANDLING																				
87. SPECIAL HANDLING																				
88. SPECIAL HANDLING																				
89. SPECIAL HANDLING																				
90. SPECIAL HANDLING																				
91. SPECIAL HANDLING																				
92. SPECIAL HANDLING																				
93. SPECIAL HANDLING																				
94. SPECIAL HANDLING																				
95. SPECIAL HANDLING																				
96. SPECIAL HANDLING																				
97. SPECIAL HANDLING																				
98. SPECIAL HANDLING																				
99. SPECIAL HANDLING																				
100. SPECIAL HANDLING																				
101. SPECIAL HANDLING																				
102. SPECIAL HANDLING																				
103. SPECIAL HANDLING																				
104. SPECIAL HANDLING																				
105. SPECIAL HANDLING																				
106. SPECIAL HANDLING																				
107. SPECIAL HANDLING																				
108. SPECIAL HANDLING																				
109. SPECIAL HANDLING																				
110. SPECIAL HANDLING																				
111. SPECIAL HANDLING																				
112. SPECIAL HANDLING																				
113. SPECIAL HANDLING																				
114. SPECIAL HANDLING																				
115. SPECIAL HANDLING																				
116. SPECIAL HANDLING																				
117. SPECIAL HANDLING																				
118. SPECIAL HANDLING																				
119. SPECIAL HANDLING																				
120. SPECIAL HANDLING																				
121. SPECIAL HANDLING																				
122. SPECIAL HANDLING																				
123. SPECIAL HANDLING																				
124. SPECIAL HANDLING																				
125. SPECIAL HANDLING																				
126. SPECIAL HANDLING																				
127. SPECIAL HANDLING																				
128. SPECIAL HANDLING																				

SHIPPING CONTAINER TALLY — 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SHORE INTERMEDIATE MAINTENANCE ACTIVITY PUEBLO SOUND

SHEET NO. OF SHEETS 05 07		5 REQUISITION DATE		6 REQUISITION NUMBER	
7 DATE MATERIAL REQUIRED		8		9 PRIORITY	
9 AUTHORITY OR PURPOSE (ORIGINATOR CONTROL SHIP SIMA(PS))					
10 SIGNATURE		11 VOUCHER NUMBER AND DATE			
12 DATE SHIPPED		13		14 BILL OF LADING NUMBER	
15 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.					

ACTION AND SUBHEAD		OBJ CL	BUR CONT NO	SUBAL LOT	AUTHORIZATION ACCT G ACTIVITY	TRANS TYPE	PROPERTY ACCT G ACTIVITY		COUN TRY	COST CODE			AMOUNT	
FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)							UNIT OF ISSUE (c)	QUANTITY REQUESTED (d)	SUPPLY ACTION (e)	TYPE COM TAINER (f)	COR TAINER NOS (g)	UNIT PRICE (h)	TOTAL COST (i)	
22	EXAGONAL HEAD BOLTS	3/4-10	2"			EA	25							
23	EXAGONAL HEAD BOLTS	3/4-10	2 1/2"			EA	60							
24	EXAGONAL HEAD BOLTS	3/4-10	3 1/2"			EA	50							
25	EXAGONAL NUTS	3/8-16				EA	210							
26	EXAGONAL NUTS	1/2				EA	55							
27	EXAGONAL NUTS	9/16				EA	55							
28	EXAGONAL NUTS	5/8				EA	400							

17 SPECIAL HANDLING		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50	
TOTAL WEIGHT		TOTAL CUBE		CONTAINERS RECEIVED AS NOTED		DATE		BY		SHEET TOTAL		QUANTITIES RECEIVED AS NOTED		DATE		BY		GRAND TOTAL		QUANTITIES RECEIVED AS NOTED		DATE		BY		POSTED		DATE		BY		20 RECEIVERS VOUCHER NO.																																			

DD FORM 1149 (9 PT) 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

ORIGINAL

B-47

SURE INTERMEDIATE MAINTENANCE ACTIVITY PULPET SOUND

9. AUTHORITY OR PURPOSE (UNITED STATES AIR FORCE)		11. VOUCHER NUMBER AND DATE	
10. SIGNATURE		12. DATE SHIPPED	
13. MODE OF SHIPMENT		14. BILL OF LADING NUMBER	
15. AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.			

LINE NO.	QTY	ON AND SUBHEAD	OBJ CL	BUR CONT NO	SUBAL LOT	AUTHORIZATION ACCT G ACTIVITY	TRANS TYPE	PROPERTY ACCT G ACTIVITY		COUN TRY	COST CODE			AMOUNT		
								QUANTITY REQUESTED (d)	SUPPLY ACTION (e)		TYPE COM TAINER (f)	CON TAINER NOS (g)	UNIT PRICE (h)	TOTAL COST (i)		
		FEDERAL STOCK NUMBER DESCRIPTION AND CODING OF MATERIAL AND/OR SERVICES (b)														
29		NATIONAL NUTS	3/4				EA	150								
30		VIN WASHERS	3/8				EA	400								
31		VIN WASHERS	1/2				EA	300								
32		VIN WASHERS	9/16				EA	110								
33		VIN WASHERS	5/8				EA	650								
34		VIN WASHERS	3/4				EA	300								

17 SPECIAL HANDLING										
BY	TOTAL CONTAINER	TYPE CON TAINER	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBE	RECEIPT		DATE	BY	SHEET TOTAL
						CONTAINERS RECEIVED EXCEPT AS NOTED				
BY								QUANTITIES RECEIVED EXCEPT AS NOTED	BY	GRAND TOTAL
BY								POSTED	BY	TO RECEIVER'S VOUCHER NO.

DD
1149 (9 PT)
51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100
ORIGINAL

ORIGINAL

SHIPPING CONTAINERALLY — 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT

SHORE INTERMEDIATE MAINTENANCE ACTIVITY PUERT SOUND

9 AUTHORITY OR PURPOSE (CROSS ON CONTROL SHEET SIMA(PS))	5 REQUISITION DATE	6 REQUISITION NUMBER
10 SIGNATURE	7 DATE MATERIAL REQUIRED	8 PRIORITY
11 DATE SHIPPED	12 DATE SHIPPED	13 VOUCHER NUMBER AND DATE
14 MODE OF SHIPMENT	15 BILL OF LADING NUMBER	16 AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO

PROPERTY ACCT G ACTIVITY	COUN TRY	COST CODE	AMOUNT
QUANTITY REQUESTED (d)	SUPPLY ACTION (e)	TYPE COM TAINER (f)	UNIT PRICE (h)
UNIT OF ISSUE (c)			TOTAL COST (i)

REQUEST INDEFINITE DELIVERY CONTRACT BE LET ON THE ABOVE ITEMS.

NO SOURCES OF APPLICATION SERVICES ARE PROVIDED:

EMATECH INTERNATIONAL INC.
126 WEST HOSEBANS AVENUE
WINDALE (L.A.), CA 90260
(13) 973-1142

ITALIC CERAMICS COATINGS INC.
O. BOX 1598
ST QUEST, PA 19380
(15) 279-1212

18 TOTAL CONTAINER	19 TOTAL WEIGHT	20 TOTAL CUBE	21 SPECIAL HANDLING
22 TOTAL CONTAINER	23 TOTAL WEIGHT	24 TOTAL CUBE	25 CONTAINERS RECEIVED EXCEPTAS NOTED
26 TOTAL CONTAINER	27 TOTAL WEIGHT	28 TOTAL CUBE	29 QUANTITIES RECEIVED EXCEPTAS NOTED
29 TOTAL CONTAINER	30 TOTAL WEIGHT	31 TOTAL CUBE	32 POSTED
33 TOTAL CONTAINER	34 TOTAL WEIGHT	35 TOTAL CUBE	36 RECEIVERS VOUCHER NO
37 TOTAL CONTAINER	38 TOTAL WEIGHT	39 TOTAL CUBE	40 TOTAL

DD FORM 1149 (9-PT) 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 ORIGINAL

APPENDIX C

DRAFT PROCESS INSTRUCTION:

WIRE-SPRAYED ALUMINUM (WSA) FOR CORROSION PROTECTION:
NAVSEA CC SYSTEMS 1 AND 2

No.: _____

Effective: _____

Cancels: _____

D R A F T

PROCESS INSTRUCTION

**Shore Intermediate Maintenance Activity
Puget Sound**

**TITLE: WIRE-SPRAYED ALUMINUM (WSA) FOR CORROSION
PROTECTION; NAVSEA CORROSION-CONTROL (CC) SYSTEMS 1
AND 2**

SECTION:	I	EQUIPMENT	V	OPERATOR TRAINING
	II	MATERIAL		AND CERTIFICATION
	III	SAFETY	VI	METHOD
	IV	QUALITY CONTROL	VII	FEEDBACK

ORIGINATOR:

APPLICABLE SHIP TYPES: ALL

REASON FOR REVISION:

APPROVALS:

DATE

ORIGINATOR:	_____
PLANNING:	_____
REPAIR OFFICER:	_____
PRODUCTION:	_____
SAFETY:	_____
QUALITY ASSURANCE:	_____
ENGINEERING:	_____

REVIEW: ANNUALLY OR WHENEVER DCD-STD-2138(SH) IS CHANGED.

LEAD SHOP: CORROSION-CONTROL SHOP 71A

SCOPE:

The scope of this process instruction covers the required equipment, safety, quality control, personnel training/certification and application process (method) for applying wire-sprayed aluminum coatings (NAVSEA Corrosion Control (CC) Systems 1 and 2, for high-temperature or low-temperature service, respectively). This includes the application of the required paint coatings (NAVSEA CC System 3). Procedures are in accordance with DoD-STD-2138(SH) (Ref. A) to follow the guideline set forth in the NAVSEA Ship Class Corrosion Control Manuals (Ref. B).

REFERENCES:

- A. DoD-STD-2138(SH), Metal-Sprayed Coating Systems for Corrosion Protection Aboard Naval Ships, 23 November 1981.
- B. NAVSEA Corrosion-Control Manuals for Ship Classes AO-177, CG-16, DD-963, FF-1052, FFG-7, LHA-1, LPD-4, LPH-2 and LST-1179.
- C. Federal Occupational Safety and Health Administration (OSHA) Standards and Regulations, (29 CFR 1910) Revision 11 March 1983.
- D. NAVSEA S9086-VD-STM-000/CH-631, Preservation of Ships in Service (Surface Preparation and Painting), April 1981.
- E. National Fire Protection Association (NFPA) Standard 33, Spray Application Using Flammable and Combustible Materials, 1985.
- F. CC-Shop Technician Training Curriculum in the SQIP Format, ISA(WC)-110, April 1986.
- G. NAVSEA 0655-AA-JPA-010, Job Performance Aid for Metal Sprayed Coating Systems.
- H. Naval Reserve IMA-7 Training Program, Corrosion Control Using Wire Sprayed Aluminum.
- I. METCO, Type 10E Flame Spray Gun Instruction Manual.
- J. MOGUL, TJ-5 Instruction Manual.

SECTION I
EQUIPMENT

1.1 EQUIPMENT LIST

The following list gives the process sequence, generic equipment description and manufacturer for the equipment associated with the WSA process for SIMA Puget Sound.

PROCESS SEQUENCE	EQUIPMENT DESCRIPTION
Precleaning	Vapor Degreaser
Rough-Blasting	Rough-Blasting Booth (10' x 15' x 15')
Rough-Blasting and Anchor-Tooth Blasting	Testing Sieve, 16-36 mesh
Anchor-Tooth Blasting	Anchor-Tooth Blasting Booth (10' x 10' x 20')
Anchor-Tooth Blasting	Dial Micrometer
Wire-Spray	Waterwash Spray Booth (8' x 6' x 12')
Wire-Spray Wire-Spray and Paint-Spray	Flame Wire-Spray Gun Systems (gun, manifold, wire spool) Dry Film Thickness Gages
Paint-Spray	Waterwash Spray Booth (8' x 6' x 20')
Paint-Spray	Paint-Spray Guns

SECTION II

MATERIAL

2.1 ALUMINUM WIRE

Aluminum wire used for CC Systems 1 and 2 shall conform to the requirements set forth in MIL-W-6712. The wire shall be coated by the manufacturer with special lubricants to aid in wire feed and minimize nozzle wear. The lubricants must not foul the recipient surface nor the sprayed aluminum matrix, leading to corrosion or loss of adhesion. The wire shall be stored and handled carefully and uncoil readily and be free of bends, kinks or burrs that would prevent its passage through the spray gun.

2.2 GASES

Gases used for thermal spraying aluminum wire shall conform to:

<u>GAS</u>	<u>SPECIFICATION</u>
Oxygen	BB-0-925
Acetylene	BB-A-106

2.3 ABRASIVE BLASTING MEDIA

2.3.1 Rough Blasting

Crushed garnet abrasive blasting media with a standard 16-mesh size shall be used to clean painted and corroded metallic surfaces.

2.3.2 Anchor-Tooth Blasting

Aluminum oxide abrasive blasting media with a standard 16- 36-mesh size shall be used to provide anchor-tooth surface profile of 2-3 mils, when measured with profile tape (Testex or equivalent) during final surface preparation of the substrate.

2.3.3 Restrictions

(a) Abrasive particles shall be clean, dry, sharp and free of rust and excessive fines.

(b) Abrasive particles shall not contain any feldspar or other mineral constituents that tend to break down and remain on the surface. Abrasive particles that have been used for cleaning contaminated surfaces shall not be used for final surface preparation, even if the abrasive has been screened.

(c) Abrasive blasting pots and hoses must be clean and uncontaminated. It is advisable to "dedicate" blasting pots and hoses to the anchor-tooth blasting operation.

(d) Prior to use, the crushed garnet and aluminum oxide grit shall pass the following oil contamination test:

- (1) Fill a clean 5-ounce vial or bottle half full of abrasive particles.
- (2) Fill the remainder of the vial or bottle with clean water.
- (3) Cap and shake the vial or bottle.
- (4) Inspect water for oil sheen.
- (5) If any oil is observed, the abrasive particles shall not be used.

This test must be repeated for each reuse of anchor-tooth blasting media.

2.4 PROCESS AIR

Air compressors utilized in the abrasive blasting and thermal spray process shall furnish air which is free of oil and moisture. The air supply shall be adequate to maintain a minimum pressure of 75 lbs per square inch at the blast nozzle. The air shall conform to the requirements of BB-A-1034, with a maximum hydrocarbon content of 0.005mg/liter. Total maximum water content shall be 0.3mg/liter at 20°F.

2.5 MASKING MATERIALS

Any masking material that provides adequate protection of the substrate through both the abrasive blasting and thermal spraying operations without causing substrate corrosion or contamination may be used. Acceptable masking materials include various tapes, plastic caps or plugs, hose sections and wood or metal inserts.

The masking tapes used are:

- (a) 1/2" green duct tape, NSN 8315-00-890-9872.
- (b) 2" green duct tape, NSN 8315-00-074-5100.
- (c) Hi-temp Al foil tape (0.007" thick, 3/4" wide x 36 yd. per roll, Stock No. 06004), T&F Division of SHR Industries, 3660 Edison, Rolling Meadows, Illinois 6008, (312) 392-8090.

2.6 CLEANING SOLVENTS

Toluene conforming to TT-T-548 and trichloroethane conforming to O-T-620C are approved cleaning solvents.

WARNING:

Toluene is flammable. Both toluene and trichloroethane are toxic. Use only in well-ventilated spaces. Do not use near open flames, blasting, thermal spraying work, or sources of sparks. Do not allow prolonged contact with bare skin. Read and follow precautions on container shipping labels before using contents.

2.7 PAINT

2.7.1 CC System 1, High-Temperature Service

Paint applied to items in service above 175°F shall conform to DoD-P-24555, "Paint, Aluminum, Heat Resisting (650°C)."

2.7.2 CC System 2, Low-Temperature Service

Paint applied to items in service below 175°F shall conform to the following:

2.7.2.1 Sealer and Barrier Coats

MIL-P-24441, "Paint, Epoxy-Polyamide, General Specification for, Type II", shall be utilized for sealing the wire sprayed aluminum and providing barrier protection. The paints shall be available in primer green (Formula 150) and haze gray (Formula 151).

2.7.2.2 Topcoats

TT-E-490, "Enamel, Silicone Alkyd Copolymer, Semigloss", shall be used for haze gray topcoats.

TT-E-489, "Enamel, Alkyd", shall be used for white, red, yellow and black topcoats.

DoD-E-699, "Deck Enamel, Formula 20", shall be used for deck gray topcoats on horizontal surfaces.

2.7.2.3 Thinner

TT-E-781, "Ethylene Glycol Monoethyl Ether, Technical (EGM)"; or a 50%/50% mixture of butyl alcohol (TT-B-846) and super high flash naptha (MIL-N-15178), shall be utilized to thin the MIL-P-24441 epoxy paints.

2.8 QUALITY CONTROL

A dial micrometer is used to measure the anchor-tooth surface profile off of the Press-O-Film tape (or equivalent) that had been applied to the surface. The Press-O-Film shall be extra course and may be ordered from Testex, Inc., P. O. Box 867, Newark, Delaware 19711.

SECTION III

SAFETY

3.1 GENERAL

The primary responsibility for safety rests with the individual, non-supervisory personnel who have been assigned to perform the work. The individual's skill level and knowledge of potential hazards is the first guard against unsafe conditions.

The operator's responsibility for safety is shared by his supervisor and all higher levels of management who must ensure that the operator has had the requisite training, is provided sufficient guidance and direction and maintains the required proficiency. In addition, periodic monitoring of all safety requirements should be made to assure they conform to the applicable Federal Occupational Safety and Health Administration (OSHA) Standards and Regulations, (29 CFR 1910) (Ref. C). Particular attention should be paid to Sections 1910.94, 1910.95, 1910.106 and 1910.107. Detailed safety information is given in DoD-STD-2138(SH), NAVSEA S9086-VD-STM-000, Chapter 631 (Ref. D) and National Fire Protection Association (NFPA) Standard 33 (Ref. E).

3.2 PRECLEANING SOLUTIONS AND SOLVENTS AND THINNING SOLVENTS

When naval personnel use alkaline cleaners or solvents for precleaning, and solvents for thinning, all applicable sections of NSTM, Chapter 631, Section 2, and the applicable NAVOSH Manual apply. All applicable OSHA rules and regulations and manufacturer's safety instructions shall apply to other industrial activities. Follow all safety precautions given on the shipping containers.

3.2.1 Respiration

Avoid inhalation of all solvent fumes by the use of proper ventilation and charcoal filter respirators.

3.2.2 Skin and Eyes

Avoid all solvent and cleaning solution contact with skin. Wear gloves which are impervious to the liquids as well as safety goggles.

3.3 ABRASIVE BLASTING OPERATIONS

When performing abrasive blasting, the current NAVOSH Manual and Sections 631-2.272 through 631-2.288 apply. Never point a blast nozzle at any part of any human body.

3.3.1 Flammable Residues or Fumes

Prior to any abrasive blasting, items previously containing flammable materials shall be purged of dangerous concentrations and certified safe by a Gas-Free Engineer .

3.3.2 Grounding

Blast hose shall be grounded to dissipate static charges.

3.3.3 Protective Clothing

Face shields with dust hoods or helmets with forced-fed purified air shall be used to protect the eyes, face, chin and neck from airborne particles. Safety glasses or goggles shall be worn by all persons near any blasting operation.

3.4 COMPRESSED GASES

3.4.1 Compressed Air

Compressed air shall be used at pressures recommended by the equipment manufacturers. Compressed air shall not be used to clean clothing.

3.4.2 Compressed Oxygen and Acetylene

3.4.2.1 Daily Inspection

Inspect all gas equipment daily for leaks and loose connections.

3.4.2.2 Keep Gas Cylinders Safe

Consider all charged gas cylinders as potentially dangerous. Always secure the cylinders to keep them from toppling. When the cylinders are not in use, shut off gas. Keep cylinders away from heat. Any cylinders that are not installed on the manifold, must have their valve caps in place.

3.4.2.3 Ventilation

Before opening any of the gas valves, always provide adequate ventilation of the work area.

3.5 WIRE SPRAY PROCESS

3.5.1 Manufacturer's Recommendations

Wire spray guns shall be maintained according to the manufacturer's recommendations. At least one copy of each gun type's operating manual must be kept on file at the Shop.

3.5.2 Ignition

Do not ignite the gun without having the wire in the nozzle. If ignited without the wire, a flame may flashback and damage the gun and injure the operator. Do not use matches for ignition. Use only a friction lighter, pilot light or arc igniter.

3.5.3 Personal Protection

3.5.3.1 Metallic Poisoning

Never permit metallic spray dust to enter the eyes, mouth, cuts, scratches or open wounds. After spraying, wash hands thoroughly.

3.5.3.2 Flame-Resistant Clothing

Flame-resistant clothing shall be used and leather or rubber gauntlets shall be worn. The clothing should be strapped tightly around ankles and wrists to prevent metallic dust contact.

3.5.3.3 Hearing Protection

Double hearing protection shall be worn by all operators and attendant personnel, unless otherwise specified by SIMA Safety Department after a decibel level check.

3.5.3.4 Eye Protection

Goggles or face shields shall be worn for protection against dust and intense light from the wire spray operation. Flame wire spraying requires the use of light filter shades 2-4. Arc wire spraying requires shades 11-12.

3.5.3.5 Respiratory

Filter masks shall be worn by the wire spray gun operator during spraying operations. The spray booth must be in operation prior to gun ignition.

SECTION IV

QUALITY CONTROL

4.1 PRODUCTION QUALITY CONTROL RESPONSIBILITY

The following inspection procedures shall be followed by the Shop Quality Control Inspector (SQCI) for all wire sprayed aluminum work accomplished by the Corrosion Control Shop.

4.2 RECEIPT INSPECTION - A receipt inspection shall be accomplished as follows:

(a) Conduct a visual inspection to determine if welding, structural repairs, degalvanizing, removal of prior WSA coatings or further disassembly is required. If repairs are required, notify shop supervisor so item can be routed to applicable shop. If further disassembly is required, advise shop supervisor that further disassembly is required before shop acceptance.

(b) Inspect Ship-to-Shop Tag (Enclosure 1) attached to the item for completeness and give Part 3 to the ship's representative.

(c) Utilize a Production Control Record (Enclosure 2) for each lot of similar items on the SIMA Job Order. Assign a Production Control Number from the Production Control Work Log. Enter this number in the serial number block of the Ship-to-Shop Tag. The Production Control Number will consist of:

- o The letter designation of the IMA.
- o A sequential four-digit number beginning with 0001.

Example: For an item that was coated at SIMA, Puget Sound, a typical production control number would be W-0001.

(d) Attach a metal tag with the Production Control Number stamped on it. After the metal tag is attached, remove the Ship-to-Shop Tag and staple it to the Production Control Record. Release item for precleaning.

(e) Degreasing shall be conducted according to Section 6.2.1. Visually inspect the items to assure that they are free from oil or grease. Release item for masking.

4.3 MASKING INSPECTION - A masking inspection shall be conducted as follows:

(a) Ensure that only high-temperature flame-resistant masking materials and plugs are used.

(b) Visually inspect items to ensure that all areas not to be coated ("fit and function" surfaces and openings) are either masked off or plugged. Ensure masking is tightly adherent to the substrate and to itself when applied in multiple layers. Refer to Section 6.3 for proper masking of dissimilar metal contact areas. Release items for strip blasting.

4.4 STRIP-BLASTING INSPECTION - A strip-blast inspection will be conducted after strip blasting as follows:

- (a) Ensure that all scale, rust and paint has been removed.
- (b) Ensure that all masked areas are still intact. Remask as required.
- (c) Inspect for warpage, cracks, bad welds or over blast. Take corrective action as necessary to correct any discrepancies.
- (d) Take random grit-mesh-size measurements prior to the first daily production run and at the end of the daily production run. Additional measurements may be necessary during the day to assure that the grit is 16-36 mesh in size.

4.5 ANCHOR-TOOTH-BLAST INSPECTION - An anchor-tooth-blast inspection will be conducted after anchor-tooth blasting as follows:

- (a) Visually inspect and ensure that all masked areas are still intact. Remask as required.
- (b) Visually inspect and ensure that all areas of each component in the lot are uniformly blasted to white metal (SSPC-5). Ensure that anchor-tooth-blasted components are handled with clean cloth gloves and rags.
- (c) Measure the anchor-tooth profile at a random location on a minimum of one randomly-selected component from the lot. Use Press-O-Film (x-coarse) and a calibrated dial micrometer thickness gage (MITUTOYO #7326 or equivalent).
- (d) Ensure that anchor-tooth profile is 2 to 3 mils.
- (e) Enter the profile measurement, date and time on the Production Control Record, and initial the Press-O-Film Tab and attach the tab to Production Control Record.
- (f) Sign Production Control Record in Section 4 for the Anchor-Tooth Blast Inspection.
- (g) Ensure that the equipment operators are noting the date and time of their process sequence completion on the Production Control Record.
- (h) Release components to the wire spray work station, ensuring that coating operation is started within four hours after anchor tooth surface preparation. If more than 15 minutes is expected to lapse between the surface preparation and the start of the wire spray process, the prepared anchor-tooth surface shall be protected from moisture, contamination and fingermarks. Wrapping with clean paper will normally provide adequate protection.

4.6 WIRE-SPRAY INSPECTION

4.6.1 Pre-Wire-Spray Process Checks

(a) Permit wire spraying only when the temperature of the steel surface to receive the WSA is greater than the 10°F (5°C) above the dew point. Dew points shall be taken by the WSA operators at the beginning of each shift and recorded in the CC Shop Dew Point Log. The check should be repeated if any significant change in weather occurs (i.e., rain begins). The SQCI should ensure that the log is being kept properly.

(b) Daily, the SQCI shall check the Bend Test Log kept by the WSA operators and that day's test coupons, to ensure that the required process tests were done before starting WSA production.

4.6.2 Post-Wire-Spray Inspection

(a) Ensure that the wire-spray process was started within four hours and completed within six hours after the anchor-tooth surface preparation.

(b) Visually inspect the surface, ensuring that the coating is free of blisters, chips and cracks.

(c) Calibrate the thickness gage (magnetic flux type) before the first measurements in the morning and afternoon, and at random times during the day. The calibration can change due to temperature and handling.

(d) Measure the coating thickness on each item in the lot. Thickness measurements will be taken in at least five random locations, including areas where the item's geometry changes, such as angles and flanges. Wire-spray coating thicknesses shall be:

- o 10-15 mils for high-temperature service (NAVSEA CC System 1).
- o 7-10 mils for low-temperature service (NAVSEA CC System 2).

Note: Components with coating thicknesses below specifications shall receive additional WSA coats. Components with coating thicknesses above 20 mils shall be reblasted to white metal and recoated.

(e) Sign Section 6, WSA Thickness Check, of the Production Control Record. Release item to paint spraying work station.

4.7 SEALER, BARRIER AND TOPCOAT INSPECTION

An inspection of the sealer, barrier and topcoats will be conducted as follows:

4.7.1 High-Temperature Applications (NAVSEA CC System 1)

4.7.1.1 First Coat

Ensure that no more than four hours has elapsed between the wire-spray application and the application of the first coat (sealer coat) of the heat-resistant aluminum paint (DoD-P-24555). **Note: If more than four hours has elapsed since wire spraying, then it is necessary to remove and reapply the WSA.**

4.7.1.2 Second Coat

Ensure that at least eight hours has elapsed since the application of the sealer coat before the second coat of paint is applied.

4.7.2 Low-Temperature Applications (NAVSEA CC System 2)

4.7.2.1 First Coat

Ensure that no more than four hours has elapsed between the wire-spray application and the application of the first coat (sealer coat). The first coat is Formula 150 (green primer) thinned by 50% (volume) with added solvent (EGM). **Note: If more than four hours has elapsed since wire spraying, then it is necessary to remove and reapply the WSA.**

4.7.2.2 Second Coat

Ensure that at least eight hours but not more than 72 hours has elapsed between the application of the sealer coat and the second coat. The second coat is a barrier coating of full strength Formula 150 (green primer).

4.7.2.3 Third Coat

Ensure that at least eight hours but not more than 72 hours has elapsed between the application of the third coat and the second coat. The third coat is a barrier coating of full strength Formula 151 (gray).

4.7.2.4 Fourth Coat

Ensure that a minimum of 24 hours elapsed between the application of the third and fourth coats. The fourth coat is a topcoat of alkyl paint (TT-E-489 or TT-E-490) for vertical components or Formula 20 for horizontal components.

4.7.2.5 Fifth Coat

Ensure that a minimum of 24 hours elapsed between the application of the fifth and fourth coats. The fifth coat is of the same paint formulation as the fourth coat.

4.8 FINAL COATING THICKNESS INSPECTION ON ALL SIMILAR ITEMS IN JOB ORDER

(a) Ensure that a minimum of 24 hours has elapsed since the application of the final topcoat.

(b) Visually inspect the surface of each item, ensuring it is free of holidays, cracks or runs. Under no circumstances should any green primer be visible.

(c) Measure the total coating thickness (with a magnetic type thickness gage) on each item in the Job Order, ensuring that the required coating thickness was attained. Total coating thicknesses must be:

o 13-18 mils for high-temperature service (NAVSEA CC System 1).

o 17-20 mils for low-temperature service (NAVSEA CC System 2).

If any items do not meet the coating total thickness requirements, but previously met the WSA thickness requirements, then more topcoat paint must be applied.

(e) When all items in the Job Order have the required coating thicknesses, sign Section 14 of the Production Control Record.

(f) Release items to final assembly and packaging area.

4.9 FINAL ASSEMBLY INSPECTION

A final assembly inspection will be conducted as follows:

a Ensure that all masking and plugging material is removed.

(b) Ensure that, if required, installation kit and instructions are complete and are attached.

(c) Ensure that item is properly protected and stowed in such a manner as to protect all coated surfaces during transport.

4.10 ABRASIVE BLAST MEDIA INSPECTION

The SQCI shall be responsible for the inspection of all new and used abrasive blast media for both the rough blasting and anchor-tooth blasting operations. The actual inspection may be performed by another assigned CC Shop Technician, but daily reports must be provided to the SQCI.

(a) All new shipments of crushed garnet (16 mesh) and aluminum oxide (16-36 mesh) must be sampled and tested to assure that they comply with restrictions "A" and "D" of Section 2.3.3.

(b) The crushed garnet utilized in the rough blaster shall be checked at each cycle through the pressure pot for excessive fines by using a 36 mesh screen on the sample. If excessive fines exist (50% by volume), then the media must be replaced.

(c) The aluminum oxide utilized in the anchor-tooth blaster shall be checked at each cycle through the pressure pot for excessive fines by using a 36-mesh screen and tested for oil contamination according to part "D" of Section 2.3.3.

SECTION V

OPERATOR TRAINING AND CERTIFICATION

5.1 TRAINING

SPMA CC Shop personnel shall be trained and certified for applying the WSA CC Systems 1 and 2. Course completion and certification requires passing written examination and applying the WSA coating to test panels and test shapes in accordance with DoD-STD-2138.

The major training source documents are:

- o DoD-STD-2138(SH) (Ref. A);
- o NAVSEA 0655-AA-JPA-010, Job Performance Aid for Metal Sprayed Coating Systems (Ref. G);
- o Naval Reserve IMA- Training Program, Corrosion Control Using Wire-Sprayed Aluminum (Ref. H);
- o Equipment Manufacture Operator and Field/Factory Maintenance Instructions; and
- o This Process Instruction.

5.2 CERTIFICATION OF OPERATORS

Section 5.4 of DoD-STD-2138(SH) (Ref. A) applies; the applicable information is summarized below:

- o **Certification Test Requirements**

(Test Panels: Four 2" x 3" x 0.050" wire sprayed 7-10 mils thick.)

- (1) **Visual Examination**

- (a) Inspect for uniform appearance and complete absence of:

- o blisters,
 - o cracks,
 - o chips or loosely-adhering particles,
 - o oil or other internal contaminants, and
 - o pits exposing the undercoat or substrate.


- b. Ensure aluminum modules do not exceed 0.045" diameter by 0.025" high.

(2) **Bend Test**


- o Bend sprayed panels 180° on a 1/2" diameter rod with WSA coating on the outer radius.
- o Visually examine for no disbonding, delamination or gross cracking of the coating due to bending. Small hairline cracks or alligatoring of the coating in the vicinity of the bend are permissible. Acceptable and non-acceptable bend test results are illustrated below:



IDEAL
(Smooth)



MARGINAL
(Cracks)




REJECT
(Disbonding)

(3) **Bond Test**


- o Conduct a bond test of five 1" diameter x 1" long steel fixtures in accordance with ASTM C633. The average bond strength must be greater than 2000 psi, with no bond strength less than 1500 psi.

(4) Shape Test

- "T" Shape

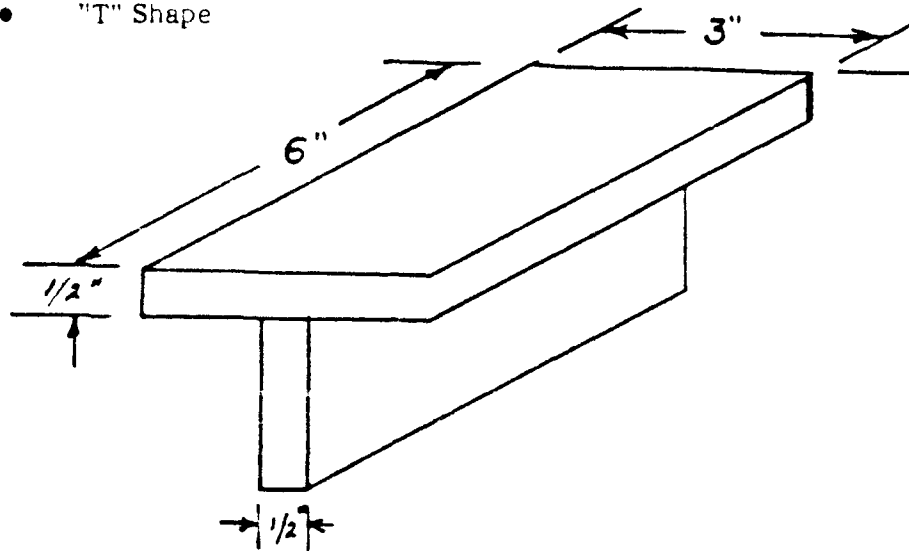

- "Pipe" Shape

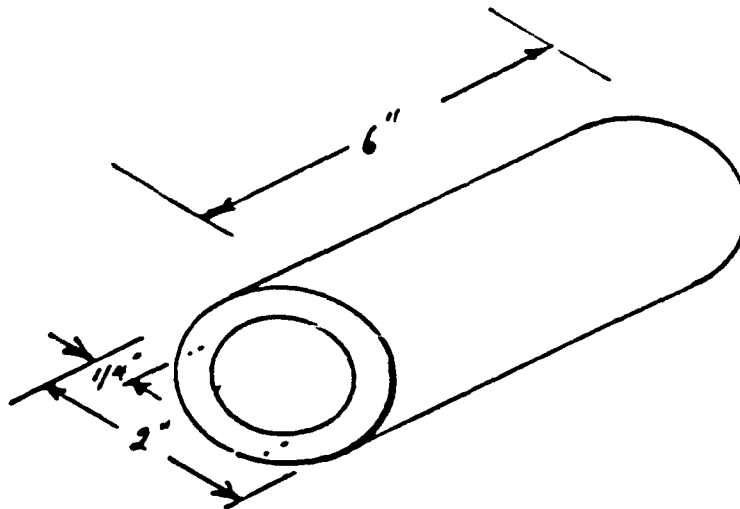

- The "T" and "pipe" shapes must be coated with 7-10 mils WSA and pass the coating thickness and visual examination.

SECTION VI

METHOD

6.1 SHIP EQUIPMENT/COMPONENTS RECEIPT

Acceptance by the CC Shop of ship equipments/components for processing shall be accomplished by the Shop Petty Officer assigned to tracking the production status of work accomplished by the Shop and work in conjunction with the SQCI. Refer to Section 4 for responsibilities of the SQCI during product receipt. Initiate a Production Control Record for each SIMA Job Order.

6.1.1 Receipt Requirements

(a) Only ship items which are noted in the SIMA Job Order shall be accepted.

(b) Only items which have been properly disassembled to their smallest removable components shall be accepted.

(c) Components which arrive damaged will not be accepted and must be rerouted by the ship for repair or replacement.

6.2 PRECLEANING

Prior to any masking, blasting or spraying, surfaces shall undergo the following:

6.2.1 Degreasing

Surfaces that have come in contact with oil or grease shall be solvent cleaned. Solvents shall be in accordance with Section 2.6. Cleaning should be accomplished by vapor degreasing, but may also be performed by wiping and brushing.

6.2.2 Additional Cleaning

After solvent cleaning, if surfaces still have deposits that may cause disruptive contamination of the blasting grit, they may be cleaned with trisodium phosphate solution, rinsed with clear, potable water and dried.

6.2.3 Preliminary Determination of Possible Heat Cleaning, Degalvanizing or Dealuminizing Requirements

The items should be checked to determine if any additional surface preparation will be required before abrasive rough blasting.

6.2.3.1 Heat Cleaning - Porous materials that were heavily soaked in oils or greases require heat cleaning.

6.2.3.2 Demetallizing - Metals that have been coated with zinc or aluminum during manufacture must be demetallized in a facility with a caustic dip tank. Determine if any aluminum or zinc coatings are present on the component by scraping off paint (with a knife) down to bare metal. Then use a calibrated coating thickness gage (magnetic type) to determine if there is a layer of nonmagnetic coating (i.e., zinc or aluminum) present. The gage should indicate near zero if no metal coating exists.

6.3 MASKING

6.3.1 General

- (a) Refer to Section 2.5 for proper masking material.
- (b) Mask all areas which may be adversely affected by abrasive blasting or metal spraying.
- (c) Tightly apply two layers of tape with the second layer at right angles to the first.
- (d) When masking around dissimilar metals, such as brass wedges or bushings on steel components, apply the masking tape so that the WSA will be applied 1/4-inch onto the periphery of the dissimilar metal.
- (e) Inspect masking for damage between the abrasive blasting and metal spray process and replaced if damaged.

6.3.2 Required Masking

The following surfaces shall be properly masked or plugged:

- (a) Machined surfaces that are required to move with respect to each other, such as threads, bearing contacts, gear teeth and slides.
- (b) Surfaces related to component alignment, proper seating and mountings, such as flange faces, counterbores and keyways.
- (c) Electrical assemblies, such as contacts, relays and insulators.

6.4 STRIP BLASTING

Items shall be strip blasted to remove all old paint and corrosion products.

- (a) Utilize 16-mesh abrasive grit. Refer to Section 2.3.1 for strip blasting material.
- (b) Exercise care when abrasively blasting thin gage metals to prevent product warping or any other damage.

(c) Remain alert for any warpage, cracks, bad welds or excessive metal removal. Any items exhibiting this type of damage shall receive the necessary repairs before continuing further in the process. Minor repairs shall be accomplished by the CC Shop or by the applicable Repair Shop, utilizing a "hard card". Major repairs require contacting the SIMA Planner to obtain a Job Order Supplement for repair work by the applicable Shop.

(d) Refer to Section 4.4 to assist the SQCI.

(e) After abrasive blasting, the items shall be cleaned of all grit and dust by using an air gun and lint-free rag.

6.5 HEAT CLEANING, DEGALVANIZING OR DEALUMINIZING WHEN NECESSARY

Components requiring heat cleaning for entrapped oils in porous surfaces or removal of previously failed metallic coatings may now be processed.

6.5.1 Heat Cleaning

(a) To remove oil and grease contamination from porous surfaces, the parts shall be heated in a vented electric oven for at least four hours.

(b) Only items being degreased may be in the oven at the same time.

(c) Steel alloys may be heated to 600°F. Aluminum alloys, except age-hardened alloys, may be heated to 300°F.

6.5.2 Demetallizing

The removal of metallic coatings is most easily accomplished through chemical baths, and is therefore recommended. The coatings can be removed by rough abrasive blasting, but this will more than double the manhour and material requirements of the operation.

6.5.2.1 Degalvanizing

Zinc coatings that have suffered appreciable failure must be removed in an acid dip tank through an authorized service activity.

6.5.2.2 Dealuminizing

Aluminum coatings that have suffered appreciable failure must be removed in a caustic dip tank through an authorized service activity.

6.6 ANCHOR-TOOTH ABRASIVE BLASTING

Anchor-tooth blasting is conducted to guarantee the presence of a surface profile for bonding of the coating and to clean the surface of contamination left by the rough blasting operation. Refer to Section 2.3.2 for material specification requirements.

(a) Items shall be anchor-tooth blasted to a "white metal" finish (SSPC-SP5). A white metal finish is defined as a surface with a gray-white, uniform metallic color, slightly roughened to form a suitable anchor pattern for coatings. When viewed with a 10X magnifying glass, the surface shall be free of oil, grease, dirt mill scale, corrosion products, paint or any other foreign matter.

(b) The abrasive blasting shall be accomplished using clean aluminum oxide grit (10-30 mesh) to ensure that the proper anchor tooth of 2-3 mils is provided. The anchor-tooth profile is measured using Press-O-Film (X-coarse) and a calibrated dial micrometer. The SQCI will be responsible for certifying that the items in the Job Order meet these requirements, by random sampling, but the operator must be familiar with the profile test and monitor his/her own work as well.

(c) Care must be exercised to prevent damaging thin-gage items. Anchor-tooth blasting should be conducted as a quick sweep of the surface, not as a metal removal procedure.

(d) After the item has been blasted, it shall be cleaned of all grit and dust by using an air gun and lint-free rags.

(e) The cleaned item shall be protected from moisture, contamination and fingerprints. Wrapping with clean paper will normally provide adequate protection. Handle the anchor-tooth blasted items with clean cloth gloves or rags.

(f) Anchor-tooth blast inspection shall be conducted as stated in paragraph 4.5.

(g) The wire spray process must be started within four hours after the anchor-tooth blast, or else the anchor-tooth blast will have to be repeated.

6.7 WIRE SPRAY APPLICATION

6.7.1 Wire Spray Gun Operation

Refer to the operating manuals for the METCO 10E and/or MOGUL TJ5 flame wire spray guns for the application of aluminum. The manuals provide the necessary gas flow rates and maintenance required.

6.7.2 Dew Point Check

Check the steel substrate's surface temperature to assure that no condensation will form due to the relative humidity of the ambient air. If the steel substrate temperature is not 10°F (5°C) above the dew point, no metal spraying shall be conducted.

6.7.3 Daily Sample Coupons

Prior to commencement and once during each day's or shift's production run, a sample coupon shall be prepared by the operator.

(a) Anchor-tooth blast a test coupon with the grit currently in use. The test coupon (3 x 2 x 0.05 inches) shall be sprayed on one of its large faces. The WSA shall be applied 7-10 mils if the production run is for low-temperature applications, or 10-15 mils if the production run is for high-temperature applications.

(b) The test coupon shall be visually examined and shall not contain any: blisters, cracks, chips or loosely-adhering particles, oil or internal contaminants, or pits exposing the substrate.

(c) The sprayed panel shall be bent approximately 180 degrees on 1/2-inch diameter rod. The coating shall be on the outside surface of the bend.

(d) No disbonding, delamination or gross cracking of the coating shall occur due to bending. Small hairline cracks or alligatoring of the coating in the vicinity of the bend are permissible. Figure 6-1 illustrates acceptable and nonacceptable bend test results.

(e) If the coupon fails the test, then the cause of failure must be found and fixed and the test repeated until a coupon passes. This may require checking: the gas cylinder pressures or for any acetone in the flow meters; the drains on the air filter; the anchor-tooth on the coupon; and the grit for breakdown or contamination.

6.7.4 Application of WSA to Ship Components

6.7.4.1 Time Requirement

The metal spray application shall be started within four hours after anchor-tooth surface preparation, and finished within six hours. Continue to note the date and time of the completion of each process sequence.

6.7.4.2 Application


(a) The aluminum coating shall be applied in multiple layers, and in no case shall less than two crossing passes (oriented at right angles to each other) be made over every part of the surface.

(b) The sprayed metal shall overlap by 50% on each pass of the gun to assure uniform coverage.


(c) The aluminum coating shall be applied to the required thicknesses of:

- o 10-15 mils for high-temperature service (NAVSEA CC System 1).
- o 7-10 mils for low-temperature service (NAVSEA CC System 2).


The operator shall make thickness checks during the process to ensure adequate thickness is provided. The operators should be responsible in not allowing any products with thin coats of WSA to pass further along in the process.

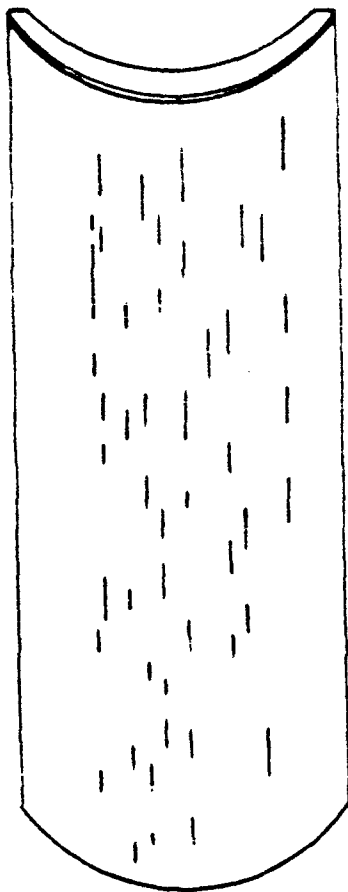

IDEAL
Smooth Surface

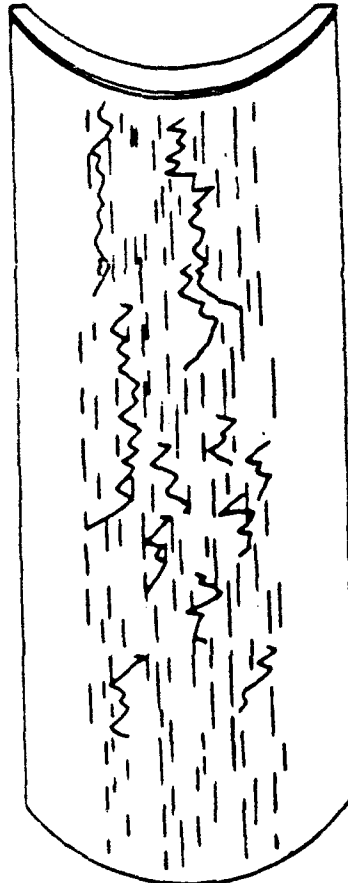

MARGINAL
Cracks

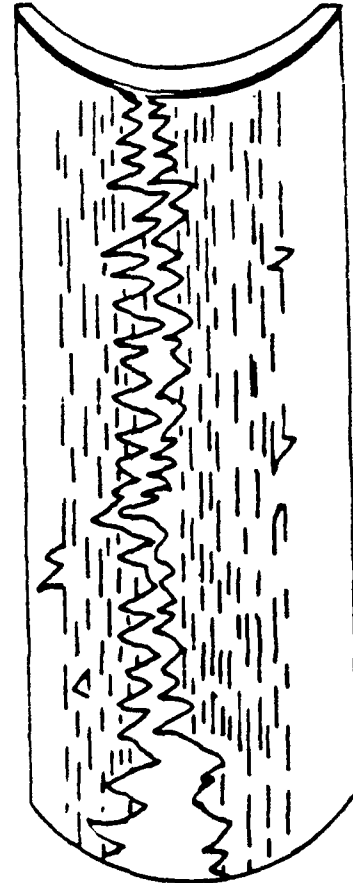

REJECT
Disbonding
Delamination

Figure 6-1 Coupon Bend Test Accept/Reject Examples

(d) The spray gun shall be held 5 to 8 inches from the surface being sprayed. The angle of the spray stream shall be as close to 90 degrees as possible, and never less than 45 degrees. Utilize gun accessories, such as angle nozzles, to maintain proper spray angles. The operator should study the recipient item before commencing spraying to determine the best plan to follow. Local masking may be necessary to prevent overspray from building up on complex shapes.

(e) Upon completion of spraying, contact the SQCI to certify proper coating thickness on the Production Control Record.

(f) Protect the freshly coated item from moisture, dirt and hand marks. Handle with clean gloves and rags.

(g) The WSA coating shall be sealed within four hours of WSA application to prevent the entrapment of moisture and corrosive salts from the marine atmosphere.

6.8 PAINT APPLICATION

When applying the various paints, the operators shall monitor the wet film thickness to aid in obtaining the specified dry film thickness (DFT). Using a wet film thickness gage, take measurements during each coat. The wet film thickness will be approximately twice as thick as the resultant DFT after drying. Refer to Section 2.7 for paint material specifications.

6.8.1 Application for High-Temperature Components (NAVSEA CC System 1)

Refer to Figure 6-2 for an illustration of this coating system.

6.8.1.1 First Coat (Sealer Coat)

(a) The first coat (sealer coat) shall be applied within four hours after the WSA application.

(b) The sealer paint is the heat-resistant aluminum paint meeting DoD-P-24555.

(c) Apply the paint to obtain a dry film thickness (DFT) of 1.5 mils. The wet film thickness will be approximately 3 mils.

6.8.1.2 Second Coat (Topcoat)

(a) Allow eight hours to pass before applying the second coat of heat-resistant aluminum paint.

(b) Apply another 1.5 mil DFT coat of paint, to obtain a total paint DFT of 3 mils.

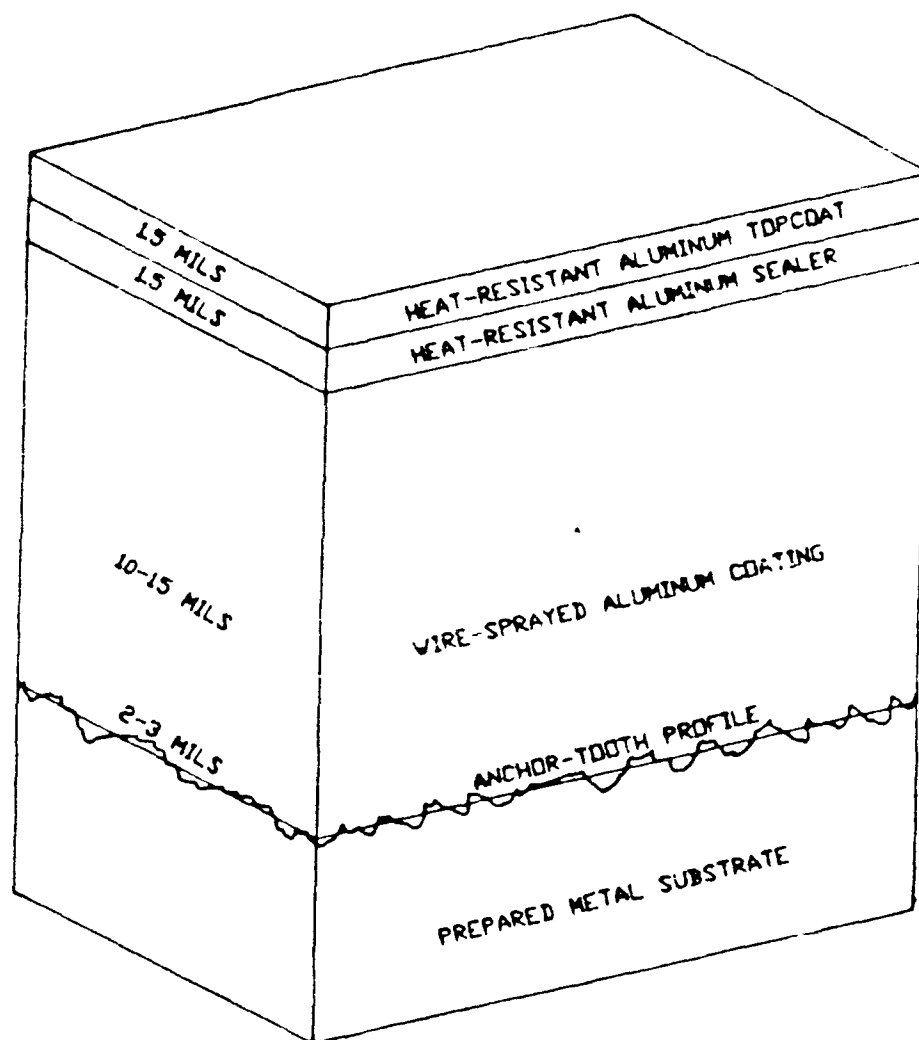


Figure 6-2 NAVSEA CC System 1, WSA With Heat-Resistant Aluminum Paint

6.8.2 Application for Low-Temperature Components (NAVSEA CC System 2)

Refer to Figure 6-3 for an illustration of this paint system.

6.8.2.1 First Coat (Sealer Coat)

(a) The first coat (sealer coat) shall be applied within four hours after the WSA application.

(b) The sealer paint is Formula 150 (green primer) thinned by 50% volume with solvent. Thinning solvent shall be either EGM or another approved solvent.

(c) Apply to a DFT of 0.5 to 0.75 mils, i.e., requires a wet film thickness of 1-1.5 mils.

6.8.2.2 Second Coat (Barrier Coat)

(a) The second coat shall be applied at least eight hours but not more than 72 hours after the first coat was applied.

(b) Utilize full strength Formula 150 (green primer) as the second coat.

(c) Apply enough paint to obtain a 3-mil DFT (i.e., requires a wet film thickness of 6-mils).

(d) Some items, such as doors, hatches and scuttles, may have angle areas that cannot be coated by spray paint. Utilize a painter's 1-1.5" angle brush to coat these areas.

6.8.2.3 Third Coat (Barrier Coat)

(a) The third coat shall be applied at least eight hours but not more than 72 hours after the second coat was applied.

(b) Utilize full strength Formula 151 (gray) as the third coat.

(c) Apply enough paint to obtain a 3-mil DFT.

(d) When hard to spray angle areas are present, utilize a painter's 1-1.5" angle brush to coat these areas.

6.8.2.4 Fourth Coat (Topcoat)

(a) The fourth coat shall be applied after a minimum of 24 hours has elapsed since third coat was applied.

(b) Utilize alkyd paints (TT-E-489 or TT-E-490) meeting the color requirements for the particular ship component for vertical surfaces; and Formula 20 for horizontal surfaces.

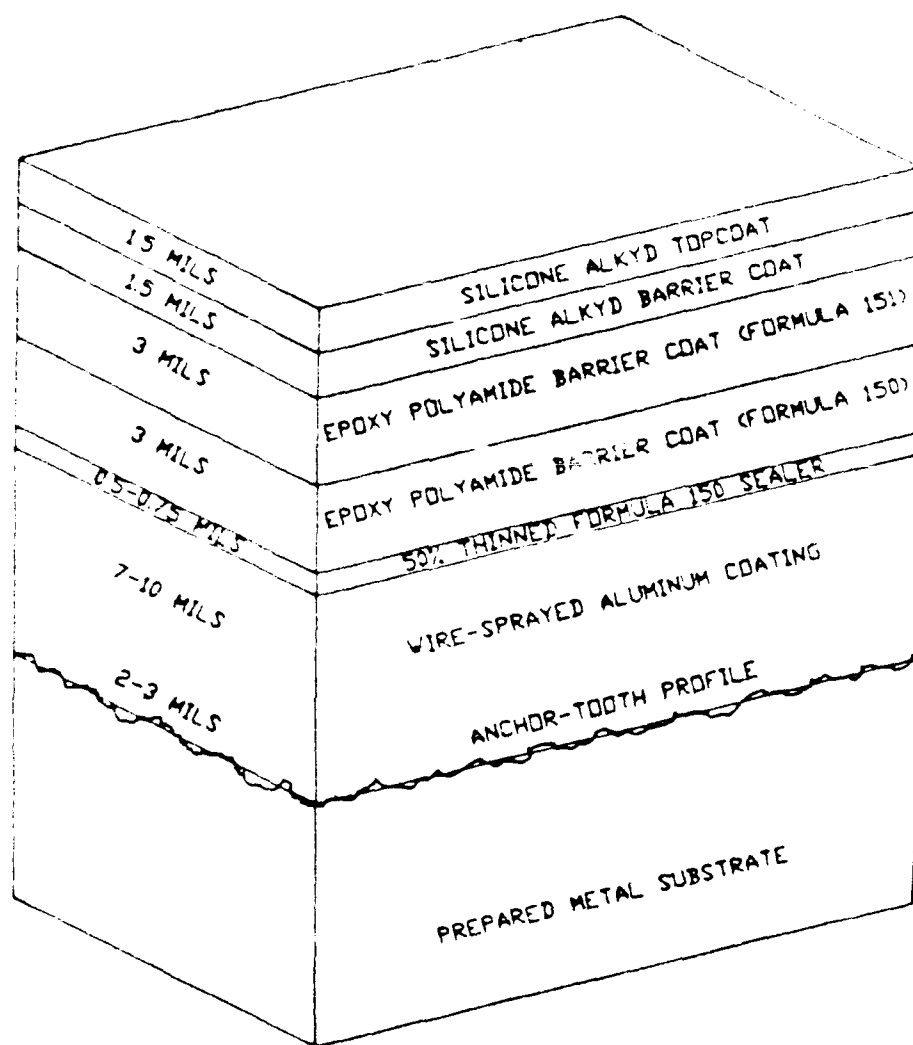


Figure 6-3 NAVSEA CC System 2, WSA With Five-Coat Paint System

- (c) Apply enough paint to obtain a 1.5-mil DFT.

6.8.2.5 Fifth Coat (Topcoat)

(a) The fifth coat shall be applied after a minimum of 24 hours has elapsed since the fourth coat was applied.

(b) Utilize the same paint as before (TT-E-489, TT-E-490 or Formula 20) meeting the color requirements of the particular ship component.

- (c) Apply enough paint to obtain a 1.5-mil DFT.

- (d) Allow final coat to dry.

6.9 FINAL COATING THICKNESS INSPECTION

The SQCI officially performs this inspection, but the operators responsible for WSA and paint application should be aware of the results. The operators need to be familiar with any problem areas. Refer to Section 4.8 for inspection procedures. The total coating thicknesses must be:

- o 13-18 mils for high-temperature service (NAVSEA CC System 1).
- o 17-20 mils for low-temperature service (NAVSEA CC System 2).

6.10 FINAL ASSEMBLY

- (a) Remove all masking and plugging material.

(b) Prepare the required installation kit (i.e., fasteners, anti-seize, sealant and instructions).

(c) Properly protect item for temporary stowage and transport to customer ship.

(d) The Shop Petty Officer in charge of production tracking and the SQCI shall agree to final product release.

(e) Remove and discard the metal identification tag and re-attach Ship-to-Shop Tag.

(f) Remove Part 2 of Ship-to-Shop Tag and notify Shop Supervisor that item is ready for pickup.

(g) When Ship's Force picks up item, complete and attach Parts 1 and 3 of Ship-to-Shop Tag to Production Control Record.

SECTION VII

FEEDBACK

In addition to the daily supervision of production and quality control, the following "feedback" indications will be used to monitor and maintain/improve the quality and productivity of the CC Shop:

- o Verbal and written reports from customer ships and shops.
- o Weekly analysis of the CC Shop's:
 - .. Production input to output;
 - .. Labor and materials consumed;
 - .. PM/CM activity;
 - .. QC activity and results;
 - .. Product degradation/failure reports; and
 - .. Operator training/certification.



**SHIP TO SHOP TAG
(GENERAL USE)**

TAG _____ OF _____

SURFGEN QA FORM 9090 4A (1/79)
S N C 16 LF 890 9C20

(PART 1)

SHIP _____

JCN _____

EIC/APL _____ SER NO _____

JOB BRIEF/EQUIP NOMENCLATURE _____

LEAD W/C _____ DATE RECD _____ DELIVERED BY _____

ATTACH PART 1 AND PART 3 TO COMPLETED WORK REQUEST
AFTER PICK UP BY SHIP

READY FOR PICK UP TAG **(PART 2)**

SHIP _____

JCN _____

EIC/APL _____ SER NO _____

JOB BRIEF/EQUIP NOMENCLATURE _____

LEAD W/C REP _____ DATE _____

CUSTOMER MATERIAL RECEIPT **(PART 3)**

SHIP _____

JCN _____

JOB BRIEF/EQUIP NOMENCLATURE _____

RECD BY _____ DATE _____

DELIVERED BY _____ DATE _____

SHIP'S ENGINEER SHALL RETAIN THIS TAG (PART 3) AS RECEIPT
FOR MATERIAL DELIVERED TO THE TENDER.

Enclosure 1

CORROSION CONTROL SHOP WIRE SPRAYED ALUMINUM PRODUCTION CONTROL RECORD

USS _____
Ship _____ Hull Number _____

Job Control Number (JCN) _____

Production Control Number _____

Item Description _____

Location Deck Frame Side _____

TYPE COATING:

_____ WSA (HT) SYS 1
_____ WSA (LT) SYS 2

FINISH COLOR:

_____ Heat Res. Alum. Paint
_____ Haze Gray
_____ Deck Gray
_____ Other _____

SECTION	PROCESS SEQUENCE	DATE	TIME	SHOP QCI SIGNATURE	
1	Receipt, Degrease, Degalvanize or Dealuminize				
2	Masking				
3	Rough Abrasive Blast				
4	Anchor-Tooth Abrasive Blast 2-3 mils				
5	Thermal Spray Operator Name _____			Attach Profile Tape Here	
6	WSA Thickness Check SYS 1: 10-15 mils SYS 2: 7-10 mils				
	Seal, Barrier and Top Coat				
	Type/DFT Rgmt	DATE	TIME		
CC SYS 1	7	Heat Res. Alum. Paint/1.5 mils			
	8	Heat Res. Alum. Paint/1.5 mils			
CC SYS 2	9	50% Formula 150/0.5-0.75 mils			
	10	Formula 150/3 mils			
	11	Formula 151/3 mils			
	12	Alkyd Topcoat/ 1.5 mils			
	13	Alkyd Topcoat/ 1.5 mils			
14	Final Coating Thickness on all similar items in Work Order SYS 1: 13-18 mils SYS 2: 11-15 mils				
15	Final Assembly and Packaging				

Enclosure 2

APPENDIX D

DRAFT PROCESS INSTRUCTION:

POWDER COATINGS, ELECTROSTATICALLY APPLIED
NAVSEA CC SYSTEM 4

No.: _____

Effective: _____

Cancels: Original Issue

D R A F T

PROCESS INSTRUCTION

Shore Intermediate Maintenance Activity

Puget Sound

**TITLE: POWDER COATINGS, ELECTROSTATICALLY APPLIED:
NAVSEA CORROSION-CONTROL (CC) SYSTEM 4**

SECTION:	I	EQUIPMENT	V	OPERATOR TRAINING
	II	MATERIAL	VI	METHOD
	III	SAFETY	VII	FEEDBACK
	IV	QUALITY CONTROL		

ORIGINATOR:

APPLICABLE SHIP TYPES: ALL

REASON FOR REVISION: ORIGINAL ISSUE

APPROVALS:

DATE

ORIGINATOR: _____

PLANNING: _____

REPAIR OFFICER: _____

PRODUCTION: _____

SAFETY: _____

QUALITY ASSURANCE: _____

ENGINEERING: _____

REVIEW: ANNUALLY

**LEAD SHOP: CORROSION-CONTROL SHOP
SHOP 704**

SCOPE: The scope of this process instruction covers the required equipment, method or industrial process, safety and quality control required for applying the NAVSEA Corrosion-Control (CC) System 4 (Powder Coatings, Electrostatically Applied) (Ref. A) to ferrous and aluminum-alloy substrates in accordance with the powder manufacturer's recommendations.

REFERENCES:

- A. NAVSEA Corrosion-Control Manual for AO-177, DD-963, FF-1052, FFG-7, CG-16, LHA-1, LST-1179, LPH-2 and LPD-4 Class.
- B. NORDSON, Manufacturer of Electrostatic Powder Coating Equipment, Finishing Equipment Division, D-1 and D-1A Powder Spray Systems.
- C. RANDSBURG-GEMA Electrostatic Powder Coating System, Type 701 and 702.
- D. BAYCO Industries of Ca., Custom Curing Ovens.
- E. American Society for Testing and Materials (ASTM) D-4060, Standard Test Method for Abrasion Resistance of Organic Coatings by the Taber Abraser.
- F. ASTM-D-3359, Standard Methods for Measuring Adhesion by Tape Test.
- G. ASTM-D-870, Standard Method of Water Immersion Test of Organic Coatings on Steel.
- H. NAVSEA S9086-VD-STM-000/CH-631, Preservation of Ships in Service (Surface Preparation and Painting), 15 Apr 81.
- I. ASTM D-3363, Standard Test Method for Film Hardness by Pencil Test.
- J. ASTM-D-2794, Standard Test Method for Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact).
- K. ASTM-B-117, Standard Method of Salt Spray (Fog) Testing.
- L. Federal Occupational Safety and Health Administration (OSHA) Standards and Regulations, (29 CFR 1910) Rev. 11 March 1983.
- M. National Fire Protection Association (NFPA) Standard 33, Spray Application Using Flammable and Combustible Materials, 1985.
- N. NFPA Standard 70, National Electrical Code, 1984.
- O. CC-Shop Technician Training Curriculum, in the SQIP Format, ISA(WC)-110, April 1986.

SECTION I

EQUIPMENT

1.1 GENERAL

The equipments specified in this Process Instruction are typical for application of powder coating systems electrostatically applied in an industrial activity. The equipments consists of an electrostatic spray gun, power supply, resin hoppers, (Refs. B and C); dry filter spray booth, resin recovery system (optional), conveyor system (optional) curing oven, (Ref. D); grit-blast booth, grit-blast nozzle and hoses, pressure pots, grit-recovery system (optional), air-purification system, air-dryer system and quality control and safety equipment. A typical equipment layout and production flow diagram is presented in Figure 1-1. A general list of equipment is given in Table 1-1.

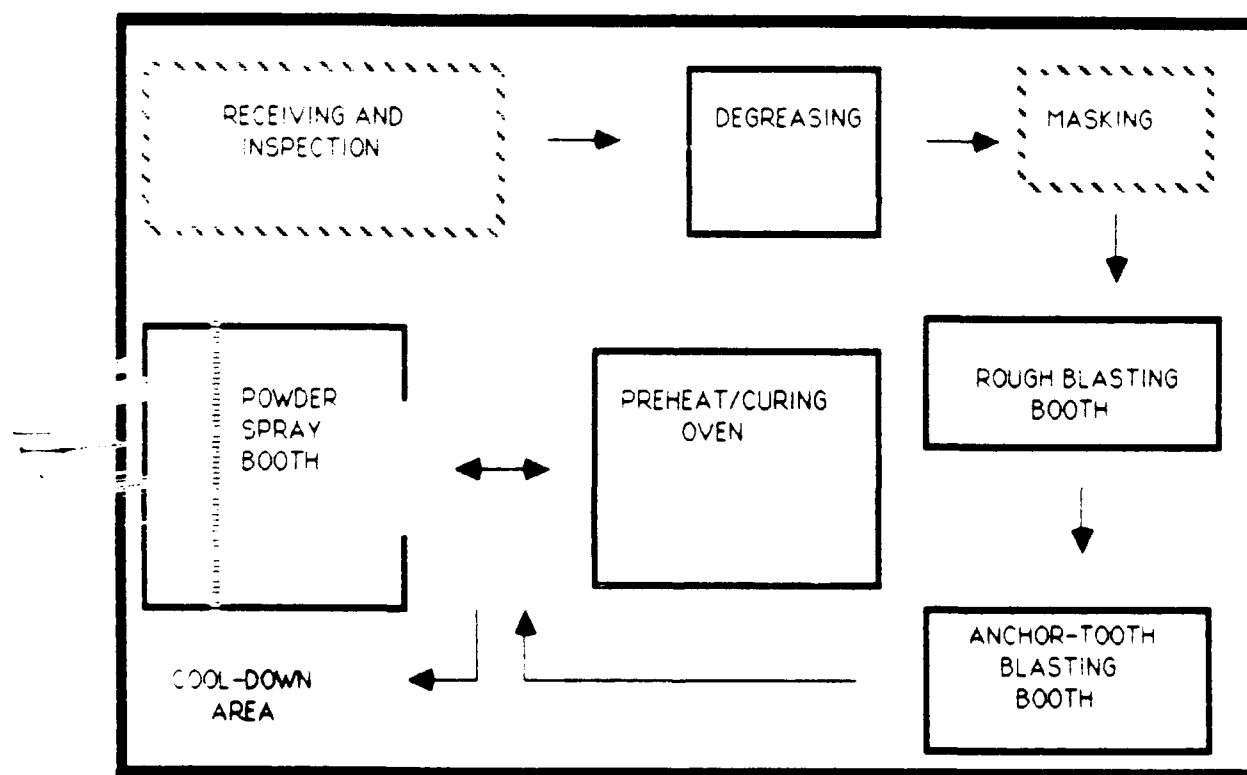


Figure 1-1 Powder Coating Station, Idealized Equipment Layout

Table 1-1 General List of Equipment

SURFACE PREPARATION EQUIPMENT

Degreaser, Vapor
Degreaser, Immersion (optional)
Rough Blaster (booth, pressure pots, cyclone, hoses and nozzles)
Anchor-Tooth Blaster (booth, pressure pots, cyclone, hoses and nozzles)
Dial Micrometer (for surface profile tape)
Testing Sieves (30, 60 and 80 mesh)

COATING EQUIPMENT

Electrostatic Spray Powder System (gun, hoppers and controls)
Spray Booth, dry filter
Preheating/Curing Oven
Curing Racks/Carts on Monorail
Suspension Hooks

QUALITY CONTROL EQUIPMENT

Coating Thickness Gage, magnetic flux type
Coating Thickness Gage, eddy current type
Impact Test Meter, Gardner type (optional)

MISCELLANEOUS EQUIPMENT

Work Tables
Razor Blades and Disposable Knives
Heat-Resistant Gloves and Sleeves
Dust Filter Masks
Leg Stats

SECTION II

MATERIAL

2.1 RESIN

2.1.1 Powdered Epoxy

The powdered epoxy shall consist of a finely divided powder that shall require no blending, mixing or addition of other compounds to effect a cure. The resin shall be thermosetting (oven cured) when applied in film thicknesses from 8 to 12 mils within one to two coats. The cure temperatures and oven time will depend on the component or item weight. Cure temperatures and cure time will also be effected by preheating of the component.

2.1.1.1 Abrasion Resistance

The cured powder coating weight loss shall be less than 60mg per 1000 cycles, when tested in accordance with ASTM-D-4060 (Ref. E) using a Taber abraser with CS-10 wheels and a 1.0 kg load.

2.1.1.2 Adhesion

The cured coating must pass without any lifting of the coating, when tested in accordance with ASTM-D-3359, Method A (Ref. F).

2.1.1.3 Chemical Resistance

The chemical resistance of powder coatings to 24-hour immersion in salt water and fuel oil shall be tested in accordance with ASTM-D-870 (Ref. G), with no resultant blistering, disbonding or softening.

2.1.1.4 Color and Gloss

The color and gloss of the curing coating must be in accordance with that specified for the particular component in NAVSEA S9086-VD-STM-000, Chapter 631 (Ref. H). The color must match the following:

Haze Gray	FED-STD-595-26270	(40-50% gloss)
Red	FED-STD-595-21105	(40-60% gloss)
Yellow	FED-STD-595-23538	(40-60% gloss)
Black	FED-STD-595-27038	(40-60% gloss)
Flat Black	FED-STD-595-37038	(0-10% gloss)
White	FED-STD-595-27875	(40-60% gloss)
White	FED-STD-595-27886	(40-60% gloss)

2.1.1.5 Hardness

The cured coating shall have a pencil hardness of 2H or greater when determined in accordance with ASTM-D-3363 (Ref. I).

2.1.1.6 Impact Strength

The cured coating, at an average thickness of 3-mils, shall be capable of withstanding a mechanical shock load of not less than 100 in/lb, on direct impact, when tested in accordance with ASTM-D-2794 (Ref. J).

2.1.1.7 Overbake Stability

The powder coating shall be able to sustain a 100% overbake without yellowing or any reduction in performance properties.

2.1.1.8 Salt Spray Resistance

The cured coating applied to ASTM-A-370 copper-free hot-rolled carbon steel and given 1000 hours minimum exposure in the salt-spray booth shall have less than 1/4 in creepage from scribe when tested in accordance with ASTM-D-2794 (Ref. K).

2.1.1.9 Shelf Life

The shelf life of the uncured resin shall not be less than one-year from the date of manufacture when stored in original unopened containers below 80°F and 50% $\pm$ 10% relative humidity. **Note:** Storage requires environmental control.

2.2 ABRASIVE BLASTING MEDIA

2.2.1 Rough Blasting for Cleaning

Crushed garnet abrasive blasting media with a mesh size from 30 to 60 shall be used to clean painted, rusted/oxidized metallic surface.

2.2.2 Anchor-Tooth Blasting

Aluminum oxide abrasive blasting media with a 80 mesh size shall be used to provide the anchor tooth of 1 to 2 mils maximum measured with profile tape (Testex, Inc. or equivalent) during final surface preparation of the substrate.

2.2.3 Restrictions

(A) Abrasive particles shall be clean, dry, sharp and free of rust and excessive fines.

(B) Abrasive particles shall not contain any feldspar or other mineral constituents that tend to break down and remain on the surface. Abrasive particles that have been used for cleaning contaminated surfaces shall not be used for final surface preparation, even if the abrasive has been rescreened.

(C) Abrasive blasting pots and hoses must be clean and uncontaminated. It is advisable to "dedicate" blasting pots and hoses to the anchor-tooth blasting operation.

(d) Prior to use, the crushed garnet and aluminum oxide grit shall pass the following oil contamination test:

- (i) Fill a clean 5-ounce vial or bottle half full of abrasive particles.
- (ii) Fill the remainder of the vial or bottle with clean water.
- (iii) Cap and shake the vial or bottle.
- (iv) Inspect water for oil sheen.
- (v) If any oil is observed, the abrasive particles shall not be used.

This test must be repeated for each reuse of anchor-tooth blasting media.

2.3 PROCESS AIR

The air equipment used in the abrasive blasting process and the powder coating process shall furnish air which is free of oil and moisture (maximum of 5 mg/m³ of hydrocarbons) and maximum of 35°F dew point at the maximum flow rate (CFM) and maximum pressure (lb/ft²). The air supply shall be adequate to maintain a minimum pressure of 75 lbs. per square inch (lb/in²) at the blast generator.

2.4 MASKING MATERIALS

Any masking material that provides adequate protection of the substrate through both the abrasive blasting and curing operations without causing substrate corrosion or contamination may be used. Acceptable masking materials include various high temperature tapes, plastic caps or plugs, hose sections or metal inserts.

The masking tapes used are:

- (A) 1/2" Green Duct Tape, NSN 8315-00-890-987Z.
- (B) 2" Green Duct Tape, NSN 8315-00-074-5100.
- (C) Hi-Temp Foil Tape (0.007" thick, 3/4" wide x 36 yd per roll, Stock No. 06004). T&F Division of SHR Industries, 3660 Edison Place, Rolling Meadows, IL 6008, or an equivalent tape able to withstand temperatures up to 450°F.

2.5 CLEANING MATERIALS

2.5.1 Solvents

Ethyl Alcohol (denatured) conforming to 0-E-760, toluene conforming to TT-T-548, and trichloroethane conforming to 0-T-620C are approved cleaning solvents.

WARNING:

Toluene and ethyl alcohol are flammable. Ethanol, toluene and trichloroethane are toxic. Use only in well-ventilated spaces. DO NOT use near open flames, blasting, thermal spraying work or sources of sparks. DO NOT allow prolonged contact with bare skin. Read and follow precautions on container shipping labels before using contents.

2.5.2 Alkaline

The alkaline cleaning agent is made up of three chemicals: tribasic sodium phosphate dedocahydrate; pentahydrate sodium metasilicate, technical grade; and detergent, nonionic, Type II, water soluble (MIL-D-016791, Type I). The solution shall consist of 3 lbs. sodium phosphate tribasic, 3 lbs sodium metasilicate and 3 pts. water soluble nonionic detergent (MIL-D-016791, Type I) in 50 gallons of fresh water. Refer to NSTM Chp. 631, Section 2 for health and safety requirements (Ref. K). In 0.1N concentrations, these materials are extremely caustic and can be harmful to skin, eyes and any body contact. **USE CAUTION!** Read and follow precautions on container shipping labels before using contents.

2.6 QUALITY CONTROL

A dial micrometer is used to measure the anchor-tooth surface profile off of the Press-O-Film tape (or equivalent) that had been applied to the surface. The Press-O-Film shall be extra coarse and may be ordered from Testex, Inc., P. O. Box 867, Newark, Delaware 19711.

SECTION III

SAFETY

3.1 GENERAL

The primary responsibility for safety rests with the individual, non-supervisory personnel who have been assigned to perform the work. The individual's skill level and knowledge of potential hazards is the first guard against unsafe conditions.

The operator's responsibility for safety is shared by his supervisor and all higher levels of management who must ensure that the operator has had the requisite training, is provided sufficient guidance and direction and maintains the required proficiency. In addition, periodic monitoring of all safety requirements should be made to assure they conform to the applicable Federal Occupational Safety and Health Administration (OSHA) Standards and Regulations, (29 CFR 1910) (Ref. L). Particular attention should be paid to sections 1910.94, 1910.106 and 1910.107. Detailed safety information is given in National Fire Protection Association (NFPA) Standards 33 and 70 (Refs. M and N).

3.2 PRECLEANING

When using solvents or alkaline cleaners, all applicable sections of NSTM, Ch. 631 Section 2 and the applicable NAVOSH Manual apply when performed by Naval personnel. All applicable OSHA rules and regulations shall apply to other industrial activities and manufacturer's safety instructions. Avoid inhalation of solvent fumes and contact with skin as much as possible.

3.3 ABRASIVE BLASTING

When performing abrasive blasting, the current NAVOSH Manual and Sections 631-2.272 through 631-2.288 of NSTM Ch. 631 apply for SIMA(SD) personnel. All applicable OSHA rules and regulations apply to other industrial activities.

3.3.1 Flammable Residues or Fumes

If the items previously contained flammable materials, it shall be purged of dangerous concentrations and must be certified safe by a Gas-Free Engineer prior to any abrasive blasting.

3.3.2 Grounding

Blast hose shall be grounded to dissipate static charges.

3.3.3 Protective Clothing

Face shields with dust hoods or helmets with forced-fed purified air shall be used to protect the eyes, face, chin and neck from airborne particles. Safety glasses or goggles shall be worn by all persons near any blasting operation.

3.4 ELECTROSTATIC SPRAY POWDER

3.4.1 Spray Booth

Powder-in-air concentration of greater than 0.05-0.07 oz per cubic foot can be ignited by hot flame or strong electrical discharge. Proper application equipment shall be used to keep powder-in-air concentrations below 0.01 oz/ft³. Spray booths are designed for single gun or multi-gun operation. The use of more guns than as specified for the booth will create a dangerous powder-in-air concentration and so must never be done. The spray equipment shall be interlocked with the booth blower so that no powder may be sprayed when the ventilation is shut off. The work floor of the coating area must be electrically conductive. All metal objects within 15 ft. of spray gun must be grounded. **DO NOT spray near any source of ignition.**

3.4.2 Component Suspension Devices

Hangers shall be clean to assure good electrical ground of component and to avoid static electrical discharge. The component shall be well-grounded (0-300 ohms) when the electrostatic voltage is maintained at 50-100 Kv.

3.4.3 Personnel Precautions

3.4.3.1 Respiration - Personnel operating the spray equipment shall wear respiration masks approved by NIOSH. These powders are classified as "nuisance dust" and are not toxic.

3.4.3.2 Skin Contamination - Personnel should minimize contact with the powdered resin to avoid possible irritation or allergenic reaction. Long sleeve work clothing and cotton paint hoods should be worn. If powder gets on skin, it should be removed with soap and water. Safety glasses or goggles are recommended but not required.

3.4.3.3 Electrical - Personnel in the spray area must wear electrically conductive shoes (e.g., leather soles), or leg stats so that there is less than 50 megohms resistance between themselves and earth ground. The operator should hold spray gun in bare hand. If gloves are worn, the palm should be cut out to assure skin-to-metal contact.

3.4.3.4 Heat - The sprayed component is heat cured to complete coating polymerization. The oven temperatures used are from 325 to 450°F. Personnel handling these components after the cure cycle shall wear heat-resistant gloves and use extreme care to avoid contact with exposed skin areas.

3.4.4 Powder Resin

The Material Safety Data Sheet, Form OSHA-20 or equivalent, must be kept on file for each powder product in Shop files and SIMA Safety Office.

SECTION IV

QUALITY CONTROL

4.1 PRODUCTION QUALITY CONTROL RESPONSIBILITY

The following inspection procedures shall be followed by the Shop Quality Control Inspector for all powder coating work accomplished by the Corrosion Control Shop.

4.2 RECEIPT INSPECTION - A receipt inspection shall be accomplished as follows:

(A) Conduct a visual inspection to determine if welding, structural repairs, removal of prior coatings or further disassembly is required. If repairs are required, notify shop supervisor so item can be routed to applicable shop. If further disassembly is required, advise shop supervisor that further disassembly is required before shop acceptance.

(B) Inspect Ship-to-Shop Tag (Enclosure 1), attached to the item for completeness and give Part 3 to the ship's representative.

(C) Utilize a Production Control Record (Enclosure 2) for each lot of similar items on the SIMA Job Order. Assign a Production Control Number from the Production Control Work Log. Enter this number in the serial number block of the Ship-to-Shop Tag. The Production Control Number will consist of:

- o The letter designation of the IMA.
- o A sequential four-digit number beginning with 0001.

Example: For an item that was coated at SIMA, Puget Sound, a typical production control number would be W-0001.

(D) Attach a metal dog tag with the Production Control Number stamped on it. After the metal tag is attached, remove the Ship-to-Shop Tag and staple it to the Production Control Record.

(E) Release item for precleaning. Free from oil, grease and other contamination. Visual inspection.

4.3 MASKING INSPECTION - A masking inspection shall be conducted as follows:

(A) Ensure that only masking materials and plugs designed to withstand up to 450°F temperature exposure are used for oven operations. The standard green duct tape is sometimes preferred for blasting operations and may be thus used, but it should be replaced with heat-resistant aluminum or fiberglass tape prior to placement of the component into the oven.

(B) Visually inspect items to ensure that all areas not to be coated ("fit and function" surfaces and openings) are either masked off or plugged. Ensure masking is tightly adherent to the substrate and to itself when applied in multiple layers.

4.4 STRIP-BLASTING INSPECTION - A strip-blasting inspection will be conducted after strip blasting as follows:

(A) Ensure that all scale, rust and paint has been removed.

(B) Ensure that all masked areas are still intact. Remask as required.

(C) Inspect for warpage, cracks, bad welds or over blast. Take corrective action as necessary to correct any discrepancies.

(D) Random grit-mesh-size measurements shall be taken prior to the first daily production run and at the end of the daily production run.

4.5 ANCHOR-TOOTH-BLAST INSPECTION - An anchor-tooth-blast inspection will be conducted after anchor-tooth blasting as follows:

(A) Visually inspect and ensure that all masked areas are still intact. Remask as required.

(B) Visually inspect and ensure that all areas at each component in the lot are uniformly blasted to white metal (SSPC-5).

(C) Measure the anchor-tooth profile at a random location on at least one randomly-selected component from the lot, minimum. Use Press-O-Film (x-coarse) and calibrated dial micrometer thickness gage (MITUTOYD #7326 or equivalent).

(D) Ensure that anchor-tooth profile is 1 to 2 mils.

(E) Enter measurement, date and initial the Press-O-Film Tab and attach the tab to Production Control Record.

(F) Sign Production Control Record in Section 4 for the Anchor-Tooth Blast Inspection.

(G) Release to powder coat ensuring that coating operation is started within four hours after anchor tooth surface preparation. If more than 15 minutes is expected to lapse between the surface preparation and the start of the coating process, the prepared anchor-tooth surface shall be protected from moisture, contamination and fingerprints. Wrapping with clean paper will normally provide adequate protection.

(H) Ensure that the equipment operators are noting the date and time of their process sequence completion on the Production Control Record.

4.6 POWDER COAT INSPECTION - A post powder coating inspection will be conducted as follows:

(A) Ensure that the powder application was started within four hours after the anchor-tooth surface preparation.

(B) Visually inspect all components processed with a 10X power magnifying glass. The coating shall be uniform, have no blisters, pinholes, cracks or chips.

(C) The coating's cure shall be checked by lightly tapping the coating with a metal object, such as a putty knife or screw driver. A properly cured coating will be resilient to the metal object. If the coating is brittle and breaks at the point of contact, the coating fails and must be completely removed and reprocessed. Over-cured coatings are typically dull and brittle. If the coating is soft and permanently indented, the object shall be placed in the oven at the curing temperature for another five minutes and again inspected afterwards.

(D) Calibrate thickness gages for ferrous substrates and aluminum substrates at first measurement in the morning and the afternoon. A magnetic flux measurement device is used for non-conductive coatings over mild steel. An eddy-current measurement device is used on non-conductive coatings over aluminum.

(E) Measure each item ensuring that the required coating thickness was attained, 8 to 12 mils. Thickness measurements will be taken in at least five random locations per item. If the coating thickness is unacceptable, the item shall be returned for reprocessing. (Refer to Section 6.10)

(F) Sign Production Control Record in Section 10 Cured Coating Thickness. Record the high and low thickness measurements taken, the date and time.

(G) Release to final assembly area.

4.7 FINAL ASSEMBLY INSPECTION - A final assembly inspection will be conducted as follows:

(A) Ensure that all masking and plugging material is removed.

(B) Ensure that, if required, installation kit and instructions are complete and are attached.

(C) Ensure that items are properly protected and stowed in such a manner as to protect all coated surfaces for the transport from the CC Shop to installation on the customer ship. Make certain that the items are properly stacked/placed on the truck used.

4.8 ABRASIVE BLAST MEDIA INSPECTION

The SQCI shall be responsible for the inspection of all new and used abrasive blast media for both the rough blasting and anchor-tooth blasting operations. The actual inspection may be performed by another assigned CC Shop Technician, but daily reports must be provided to the SQCI.

(A) All new shipments of crushed garnet (30-60 mesh) and aluminum oxide (80 mesh) must be sampled and tested to assure that they comply with restrictions "A" and "D" of Section 2.2.3.

(B) The crushed garnet utilized in the rough blaster shall be checked at each cycle through the pressure pot for excessive fines by using a 60 mesh screen on the sample. If excessive fines exist then the media must be replaced.

(C) The aluminum oxide utilized in the anchor-tooth blaster shall be checked at each cycle through the pressure pot for excessive fines by using an 80 mesh screen and tested for oil contamination according to part "D" of Section 2.2.3.

SECTION V

OPERATOR TRAINING

5.1 TRAINING

SIMA CC Shop personnel shall be trained for applying the NAVSEA CC System 4 by completing the 3-day "CC Shop Electrostatic Spray Powder: Equipment and Application Process Course" (Ref. O). The course covers the theory and practical aspects of powder coating systems; the production process of the powder coating system (receipt inspection/item identification, surface preparation, masking, anchor-tooth blasting, powder spraying and curing; quality control; record keeping; DoD-STD-XXXX; this SIMA Process Instruction; and CC Shop operations (work stations and product flow, productivity and standard times, QC, consumables and supply support.) Approximately 1/3 of the time will be classroom training; 2/3 hands-on shop training in the SIMA CC Shop.

The major training source documents are:

- o NAVSEA Ship Class Corrosion-Control Manuals (Ref. A).
- o DoD-STD-XXXX, Powder Coating Systems for Corrosion Protection Aboard Naval Ships.
- o NAVSEA S9086-VD-STM-000/CH-631 (Ref. H).
- o NFPA Standard 33, Spray Application Using Flammable and Combustible Materials (Ref. M).
- o Equipment Manufacture Operator and Field/Factory Maintenance Instructions.
- o This Process Instruction.

SECTION VI

METHOD

6.1 SHIP EQUIPMENT/COMPONENTS RECEIPT

Acceptance by the CC Shop of ship equipments/components for processing shall be accomplished by the Shop Petty Officer assigned to tracking the production status of work accomplished by the Shop. Refer to Section 4 for responsibilities of the SQCI during product receipt. A Production Control Record is initiated for each SIMA Job Order. The operators must note the time and date of completion of each sequence.

6.1.1 Receipt Requirements

(A) Only ship items which are noted in the SIMA Job Order shall be accepted.

(B) Only items which have been properly disassembled to their smallest easily removed components shall be accepted.

(C) Components which arrive noticeably damaged cannot be accepted and must be rerouted by the ship for repair or replacement.

6.2 PRECLEANING

Prior to any masking, blasting or spraying, surfaces shall undergo the following:

6.2.1 Degreasing

Surfaces that have come in contact with oil or grease shall be solvent cleaned. Solvents shall be in accordance with Section 2.5. Cleaning should be accomplished by vapor degreasing, but may also be performed by wiping and brushing.

6.2.2 Additional Cleaning

After solvent cleaning, if surfaces still have deposits that may cause disruptive contamination of the blasting grit, then they may be cleaned with trisodium phosphate solution, rinsed with clear, potable water and dried.

6.3 MASKING

Refer to paragraph 2.4 for masking material.

(A) All threaded areas must be masked. Only high-temperature tape and plugs designed to withstand up to 450°F shall be used. Any green duct tape utilized for the abrasive blasting operations shall be replaced with high-temperature aluminum foil or nylon tape.

(B) As little masking as possible should be used on items to be powder coated so that as much of the item's surface as possible will be protected by the powder coat.

(C) Inspection of item, reference paragraph 4.3.

6.4 STRIP BLASTING

Refer to paragraph 2.2.1 for strip blasting material. Items shall be strip blasted to remove all old paint and corrosion products.

(A) Care must be exercised where stripping thin gage metals to prevent product warping or any other damage.

(B) Grit sizes of 30-60 mesh shall be used to prevent too large of a surface profile from being made on the surface.

(C) Strip blasting inspection shall be conducted as stated in paragraph 4.4.

6.5 HEAT CLEANING (DEGREASING)

Components with porous surfaces that have entrapped oils or greases shall be heat cleaned in a vented electric oven for four hours at 400°C. Only items being degreased may be in the oven at the same time.

6.6 ANCHOR-TOOTH BLASTING

Anchor-tooth blasting is conducted to guarantee the presence of a surface profile for mechanical bonding by the coating and to clean the surface of contamination left by the strip blasting operation. Refer to paragraph 2.2.2 for material requirement specifications.

(A) Items shall be anchor-tooth blasted to a white metal finish (SSPC-SP5) using clean grit (80 mesh) to ensure that the proper anchor tooth of 1 to 2 mils is provided and that any contamination left from the strip blasting grit is removed. The anchor-tooth profile is measured using Press-O-Film (X-coarse) and calibrated dial micrometer.

(B) Care must be exercised to prevent damaging thin-gage items. Anchor-tooth blasting should be conducted as a quick sweep of the surface, not as a metal removal procedure.

(C) After the item has been blasted, it shall be cleaned of all grit and dust by using an air gun and lint-free rags. Additional cleaning can be accomplished with denatured alcohol.

(D) The cleaned item shall be protected from moisture, contamination and fingerprints.

(E) Anchor-tooth blast inspection shall be conducted as stated in paragraph 4.5.

6.7 PREHEAT

Component preheating is required to both free the object of moisture and provide a hot surface for the powder to build up thickly when applied. Once preheated, the component should be transferred to spray area as quickly and safely as possible.

6.7.1 Thin-Gage Steel and Aluminum. These components shall be preheated for at least 15 minutes at the cure temperature, unless otherwise specified by powder manufacturers.

6.7.2 Steel Castings. Steel castings shall be preheated for one hour at the cure temperature.

6.7.3 Aluminum Castings. Aluminum castings shall be preheated for half an hour at the cure temperature.

6.8 ELECTROSTATIC SPRAY POWDER APPLICATION

Powder coating can be done in a one-coat or two-coat process depending on the type of resin and/or the coating equipment operator. Only personnel familiar with applying the resin correctly should be permitted to coat actual production items. Refer to paragraph 2.1 for material requirement specifications.

6.8.1 Receipt. Coating equipment and booth should be immediately operational upon receipt of preheated item.

6.8.2 Grounding. The components conveying/suspension system must be electrically grounded before electrostatic spray gun is operated.

(A) The suspension of parts from a rack or bar in the spray booth requires: that there be an adequate electrical connection to earth ground; and the point of contact be kept to a minimum because the contact point will not receive any powder.

(B) The wire hooks (typical diameter less than 0.13") used on the small items shall be disposed of after one use.

(C) Large hooks (typical diameter greater than 0.39") shall be checked for adequate metallic contact and periodically grit blasted.

(D) Areas which are not to be powder coated but have metal inserts or enough structural integrity to be points of suspension should be utilized.

6.8.3 Powder Coating in a Single Coat Operation. If conditions are such that the part can be coated with 8 to 12 mils of the desired resin in one coat, than this is the preferred operation. Conditions allowing this include: components mass (heat retention), powder formulation, grain size, time between preheat and spraying and operator skill.

(A) Interior areas sharp corners and edges shall be coated first with the electrostatic voltage set at least half of that used for coating flat surfaces.

(B) Apply powder to the smooth or flatter surfaces of the component utilizing three criss-cross passes (horizontal-vertical-horizontal) in slow, even strokes. The most powder shall be delivered on the first pass with the voltage set at its highest. Due to a lessening of electrostatic attraction as thickness increases, it may be necessary to turn down the voltage to prevent the repelling of incoming powder. Repelling will result in localized powder clumps on the surface. If powder begins to fall off of the item, immediately cease coating that item and check for clumps.

(C) Powder clumps should be removed by blowing them off with an air gun. The area should then be carefully recoated.

(D) When coating a surface, the gun shall remain on. By continually releasing the trigger, an uneven stream of powder is blown towards the part. Whenever first depressing the spray gun trigger, the gun must be pointed away from the component to keep from depositing clumps of powder.

(E) Once all components are sprayed, they shall be returned to the oven immediately for complete curing (refer to Section 6.9).

6.8.4 Powder Coating in a Two-Coat Operation. If conditions are such that the part must be coated with 8 to 12 mils of the desired resin in two coats, then perform the following:

(A) Interior areas sharp corners and edges shall be coated first.

(B) Apply powder to the smooth or flatter surfaces of the component utilizing three criss-cross passes (horizontal-vertical-horizontal) in slow, even strokes. The most powder shall be delivered on the first pass with the voltage set at its highest. Due to a lessening of electrostatic attraction as thickness increases, it may be necessary to turn down the voltage to prevent the repelling of incoming powder. Repelling will result in localized powder clumps on the surface. If powder begins to fall off of the item, immediately cease coating that item and check for clumps.

(C) Powder clumps should be removed by blowing them off with an air gun. The area should then be carefully recoated.

(D) When coating a surface, the gun shall remain on. By continually releasing the trigger, an uneven stream of powder is blown towards the part. Whenever depressing the spray gun trigger, the gun must be pointed away from the component to keep from depositing clumps of powder.

(E) Return sprayed parts to curing oven for 5 minutes to gel the coating.

(F) Repeat 6.8.4.A-D.

(G) Return components to oven for complete cure (refer to section 6.9).

6.9 CURING

The coating is cured at the temperature specified by the resin manufacturer. Manufacturers provide a range of temperatures and time schedules. The operators should choose one that provides a complete cure in 10-20 minutes. Manufacturers' recommendations for utilizing variations of the standard cure schedules should be followed for components with complicated geometries. The heat transfer and retention rates of various areas on a part may cause irregular curing.

6.9.1 Cure Time. The parts should remain in the oven for the complete cure time if they are to be single coated or are in the second coat of a two-coat operation.

6.9.2 Cool Down and Coating Inspection. Upon curing, the parts are removed from the oven. The coating should be checked for brittleness or completeness of cure while still hot by tapping it with a metal object, such as a screw driver or putty knife. Allow the component to cool, then check coating thickness as specified in paragraph 4.6.

6.10 REWORK

Any component noted by the operators or SQCI as not having a satisfactory coating shall be dealt with according to the following.

6.10.1 Thin Coatings - Components with coating thicknesses below the 8 mil minimum shall be lightly abrasively blasted in the anchor-tooth blaster to impart a surface profile into the coating. The part should then be preheated for 15 minutes at the cure temperature and powder coated once according to Section 6.8.3 or 6.8.4, whichever the lead powder coating Petty Officer believes is best.

6.10.2 Thick Coatings - Excessively thick coatings must be removed or reduced by abrasive blasting. The removal of powder coating may be assisted by baking the part at 450°F for two to three hours, then cooling to ambient temperature prior to the abrasive blasting. Follow standard procedures beginning at Section 6.7.

6.10.3 Over Baked or Charred Coatings - Complete removal of the coating is required. Begin the entire process over at Section 6.5.

6.11 FINAL POWDER COATING THICKNESS INSPECTION

The SQCI officially performs this inspection, but the operators responsible for powder application should be aware of the results. The operators need to be familiar with any problem areas. Refer to Section 4.6 for inspection procedures.

6.12 FINAL ASSEMBLY

(A) Remove all masking and plugging material.

(B) Prepare the required installation kit (i.e., fasteners, anti-seize, sealant and instructions).

(C) Properly protect and package item for temporary stowage and transport to customer ship.

(D) The Shop Petty Officer in charge of production tracking and the SQCI shall agree to final product release.

(E) Remove metal identification tag, discard and re-attach Ship-to-Shop Tag.

(F) Remove Part 2 of Ship-to-Shop Tag and notify Shop Supervisor that item is ready for pickup.

(G) When Ship's Force picks up item, complete and attach Parts 1 and 3 of Ship-to-Shop Tag to Production Control Record.

SECTION VII

FEEDBACK

7.1 FEEDBACK INDICATIONS

In addition to the daily supervision of production and quality control, the following "feedback" indications will be used to monitor and maintain/improve the quality and productivity of the CC Shop:

- (A) Verbal and written reports from customer ships and shops.
- (B) Weekly analysis of the CC Shop's:
 - o Production input to output
 - o Labor and materials consumed
 - o PM/CM activity
 - o QC activity and results
 - o Product degradation/failure reports



**SHIP TO SHOP TAG
(GENERAL USE)**

TAG _____ OF _____

SURFGEN QA FORM 9090-4A (1/79)
S N 0116 LF 890 9020

(PART 1)

SHIP _____

JCN _____

EIC/APL _____ SER NO _____

JOB BRIEF/EQUIP NOMENCLATURE _____

LEAD W/C _____ DATE RECD _____ DELIVERED BY _____

**ATTACH PART 1 AND PART 3 TO COMPLETED WORK REQUEST
AFTER PICK UP BY SHIP**

READY FOR PICK UP TAG **(PART 2)**

SHIP _____

JCN _____

EIC/APL _____ SER NO _____

JOB BRIEF/EQUIP NOMENCLATURE _____

LEAD W/C REP. _____ DATE _____

CUSTOMER MATERIAL RECEIPT **(PART 3)**

SHIP _____

JCN _____

JOB BRIEF/EQUIP NOMENCLATURE _____

REC'D BY _____ DATE _____

DELIVERED BY _____ DATE _____

**SHIP'S ENGINEER SHALL RETAIN THIS TAG (PART 3) AS RECEIPT
FOR MATERIAL DELIVERED TO THE TENDER.**

Enclosure 1

CORROSION CONTROL SHOP POWDER COATING PRODUCTION CONTROL RECORD

USS _____
Ship _____ Hull Number _____

Job Control Number (JCN) _____

Production Control Number _____

Item Description _____

Location Deck Frame Side _____

TYPE COATING:



_____ Epoxy

FINISH COLOR:

_____ Haze Gray _____ Red

_____ White _____ Black

_____ Other _____

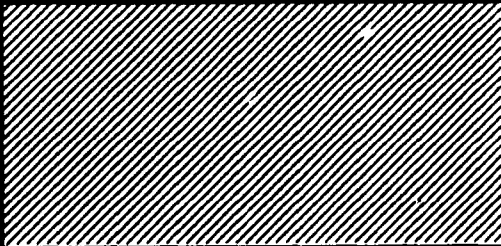SECTION	PROCESS SEQUENCE	DATE	TIME	SHOP QCI SIGNATURE
1.	Receipt, Degrease			
2.	Masking			
3.	Rough Abrasive Blast			
4.	Anchor-Tooth Abrasive Blast 1-2 mils			
5.	Component Preheat 15 min. 30 min. 60 min. (circle one)			Attach Profile Tape Here
6.	Powder Spray, First Coat Operator Name _____			
7.	Gel 5 min.			
8.	Powder Spray, Second Coat			
9.	Final Cure Temp _____ Duration _____			
10.	Final Coating Thickness on all similar items in Work Order 8-12 mils			
11.	Final Assembly and Packaging			

Enclosure 2

Approved for public release:
distribution is unlimited.

The views and conclusions contained in this report are those of the authors and should not be interpreted as representing the official policies, either expressed or implied, of the Naval Ocean Systems Center or the U. S. Government.