

AD-A216 030

(4)

REPORT DOCUMENT			
1a. REPORT SECURITY CLASSIFICATION Unclassified		1b. RES	
2a. SECURITY CLASSIFICATION AUTHORITY DEC 20 1989		3. DISTRIBUTION/AVAILABILITY OF REPORT Unclassified/Unlimited	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE		4. PERFORMING ORGANIZATION REPORT NUMBER(S) ONR Technical Report #18	
5a. NAME OF PERFORMING ORGANIZATION Dept. of Chem. Eng. & Mat. Sci. Corrosion Research Center		5b. OFFICE SYMBOL (If applicable)	
5c. ADDRESS (City, State, and ZIP Code) University of Minnesota Minneapolis, MN 55455		7a. NAME OF MONITORING ORGANIZATION Office of Naval Research	
7b. ADDRESS (City, State, and ZIP Code) 800 North Quincy Street Arlington, VA 22217-5000		7c. ADDRESS (City, State, and ZIP Code) 800 North Quincy Street Arlington, VA 22217-5000	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION DARPA/ONR		8b. OFFICE SYMBOL (If applicable) Code 1113	
8c. ADDRESS (City, State, and ZIP Code) 800 North Quincy Street Arlington, VA 22217-5000		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER Contract No. N00014-88-K-0360	
10. SOURCE OF FUNDING NUMBERS		11. TITLE (Include Security Classification) Performance of Superconductive Oxides as Cathodes for Lithium Rechargeable Batteries	
12. PERSONAL AUTHOR(S) B.B. Owens, M.Z.A. Munshi, P.S.S. Prasad, W.H. Smyrl, W. Kinzy Jones, J.B. Schlenoff and H.F. Wu		13a. TYPE OF REPORT Technical	
13b. TIME COVERED FROM 7/88 TO 10/89		14. DATE OF REPORT (Year, Month, Day) 89/10/23	
15. PAGE COUNT		16. SUPPLEMENTARY NOTATION Published in the Extended Abstracts of the 30th Battery Symp., Nagoya, Japan, 10/27-29/89	
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) Li battery, insertion cathode, yttrium barium copper oxides, non-aqueous cell, (SW)	
19. ABSTRACT (Continue on reverse if necessary and identify by block number) The superconducting oxides, yttrium barium copper oxide (A) and neodymium copper oxide (B) were fabricated into cathodes for lithium nonaqueous batteries. The cathode limited cells had electrolytes of 1M LiClO ₄ or LiAsF ₆ in propylene carbonate or 2-methyl-tetrahydrofuran and were hermetically sealed in stainless steel case-positive cans. The initial open circuit potentials were in the range of 3.0-3.5 volts for all cell types. The potentials of both type A and B cells with oxides prepared in an atmosphere of O ₂ were about 200 mV greater than those for cathodes that have been prepared in an N ₂ atmosphere. Cycle and capacity test results are presented. <i>Keywords.</i>		20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS	
21. ABSTRACT SECURITY CLASSIFICATION Unclassified		22a. NAME OF RESPONSIBLE INDIVIDUAL Boone B. Owens and William H. Smyrl	
22b. TELEPHONE (Include Area Code) (702) 625-4048		22c. OFFICE SYMBOL	


89 12 19 052

B.B. Owens, M.Z.A. Munshi, P.S.S. Prasad, W.H. Smyrl
W. Kinzy Jones*, J.B. Schlenoff** and H.F. Wu**
University of Minnesota, Minneapolis, MN-55455, U.S.A

The superconducting oxides, yttrium barium copper oxide (A) and neodymium copper oxide (B) were fabricated into cathodes for lithium nonaqueous batteries. The cathode limited cells had electrolytes of 1M LiClO_4 or LiAsF_6 in propylene carbonate or 2-methyl-tetrahydrofuran and were hermetically sealed in stainless steel case-positive cans. The initial open circuit potentials were in the range of 3.0 - 3.5 volts for all cell types. The potentials of both type A and B cells with oxides prepared in an atmosphere of O_2 were about 200 mV greater than those for cathodes that have been prepared in a N_2 atmosphere. Cycle and capacity test results are presented.

1. INTRODUCTION

The possibility of utilizing superconducting oxides as the electropositive electrode in nonaqueous lithium batteries was recently described by Jones¹ who reported the discharge of a primary cell



Jones reported the apparent insertion of 0.87 Li^+ into the cathode at 25°C, with no effect on the superconductive transition temperature.

2. EXPERIMENTAL

We have further investigated these reactions for cell systems that may be rechargeable in order to assess the reversibility of the ion insertion, assuming that the discharge mechanism is not a decomposition type of reaction. The superconducting oxides, yttrium barium copper oxide ($\text{YBa}_2\text{Cu}_3\text{O}_7$) and neodymium copper oxide ($\text{Nd}_2\text{CuO}_{4-x}\text{F}_x$) were synthesized by procedures described by Jones¹ and James², respectively.


These oxides were fabricated into cathodes for lithium nonaqueous batteries that contained a large excess of lithium. The cells had electrolytes of 1M LiClO₄ or LiAsF₆ in 2-methyltetrahydrofuran (THF), or 1, 3 dioxolane (DOL). The cells were fabricated in a 2% relative humidity dry room under controlled environmental conditions and were hermetically sealed in stainless steel case-positive cans. The design was essentially the same as described by

* Florida International University, Miami, FL 33199

****Florida State University, Tallahassee, FL, 32306**

ity Codes
and/or
special


Jones¹. In addition to cell type I, the following cells were also investigated:



3. RESULTS

The initial open circuit potentials were in the range of 3-3.5 volts for all cell types. The potentials of those cells with oxides prepared in an atmosphere of O_2 were about 200 mV greater than those for cathodes that had been prepared in a N_2 atmosphere.

Cells II and III were discharged under identical conditions, at a rate of 100 microamps. Up to 0.75 lithium ions inserted into the $\text{YBa}_2\text{Cu}_3\text{O}_7$, but only 0.03 lithium ions inserted into the $\text{Nd}_2\text{CuO}_{4-x}\text{F}_x$, as shown in Figure 1. The cell II was cycled at $x = 0.04$ and demonstrated reversible behavior. Further tests are in progress to identify the nature of the discharge products for these cell systems.

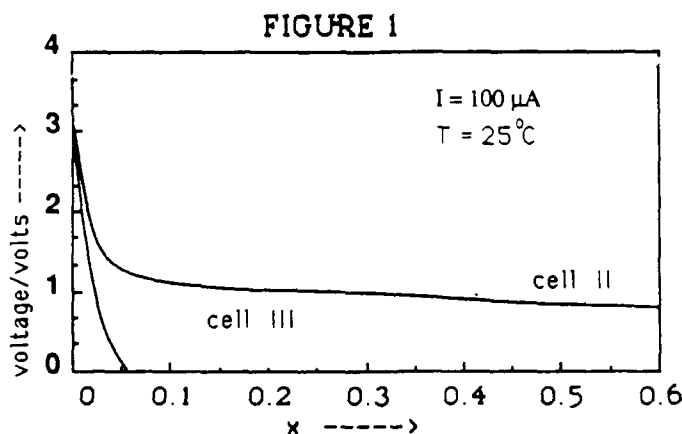

ACKNOWLEDGEMENT

The authors wish to acknowledge the financial support from the Office of Naval Research and the Defense Advanced Research Projects Agency.

REFERENCES

1. W. Kinzy Jones, "Electrochemical Modification of Superconductive Oxides", Proceedings of the 1st International Symposium on Superconductivity (ISS '88), August 28-31, Nagoya, 1988.
2. James et al. Nature, **338**, 240 (1989).