

WEAPON TRAINING INSTRUMENTATION

AD-A278 305



OVERVIEW

The project objective is to design a non-intrusive instrumentation package that will record the individual soldiers actions and performance such as sight picture, weapon spatial orientation at time of fire, and the pattern of physical interactions with the weapon during live fire and force on force training exercises. The recorded information would then be available for the post exercise analysis where the instructor would critique the soldier. This recorded information could also monitor the soldiers progress and quickly identify any remedial training required.

PROPOSED APPROACH

Figure 1 original proposed approach to meet the original objective. A video camera bore sighted to weapon and a video recorder to record the operators visual target acquisition as well as the insertion of pertinent data (lateral and transverse angle display and a when fired indication) for the post exercise analysis.

DTIC
ELECTE
APR 22 1994
S F

417517
94-12029




May 5, 1992

SEO

This document has been approved
for public release and sale; its
distribution is unlimited

94 4 20 183

DTIC QUALITY INSPECTED 3

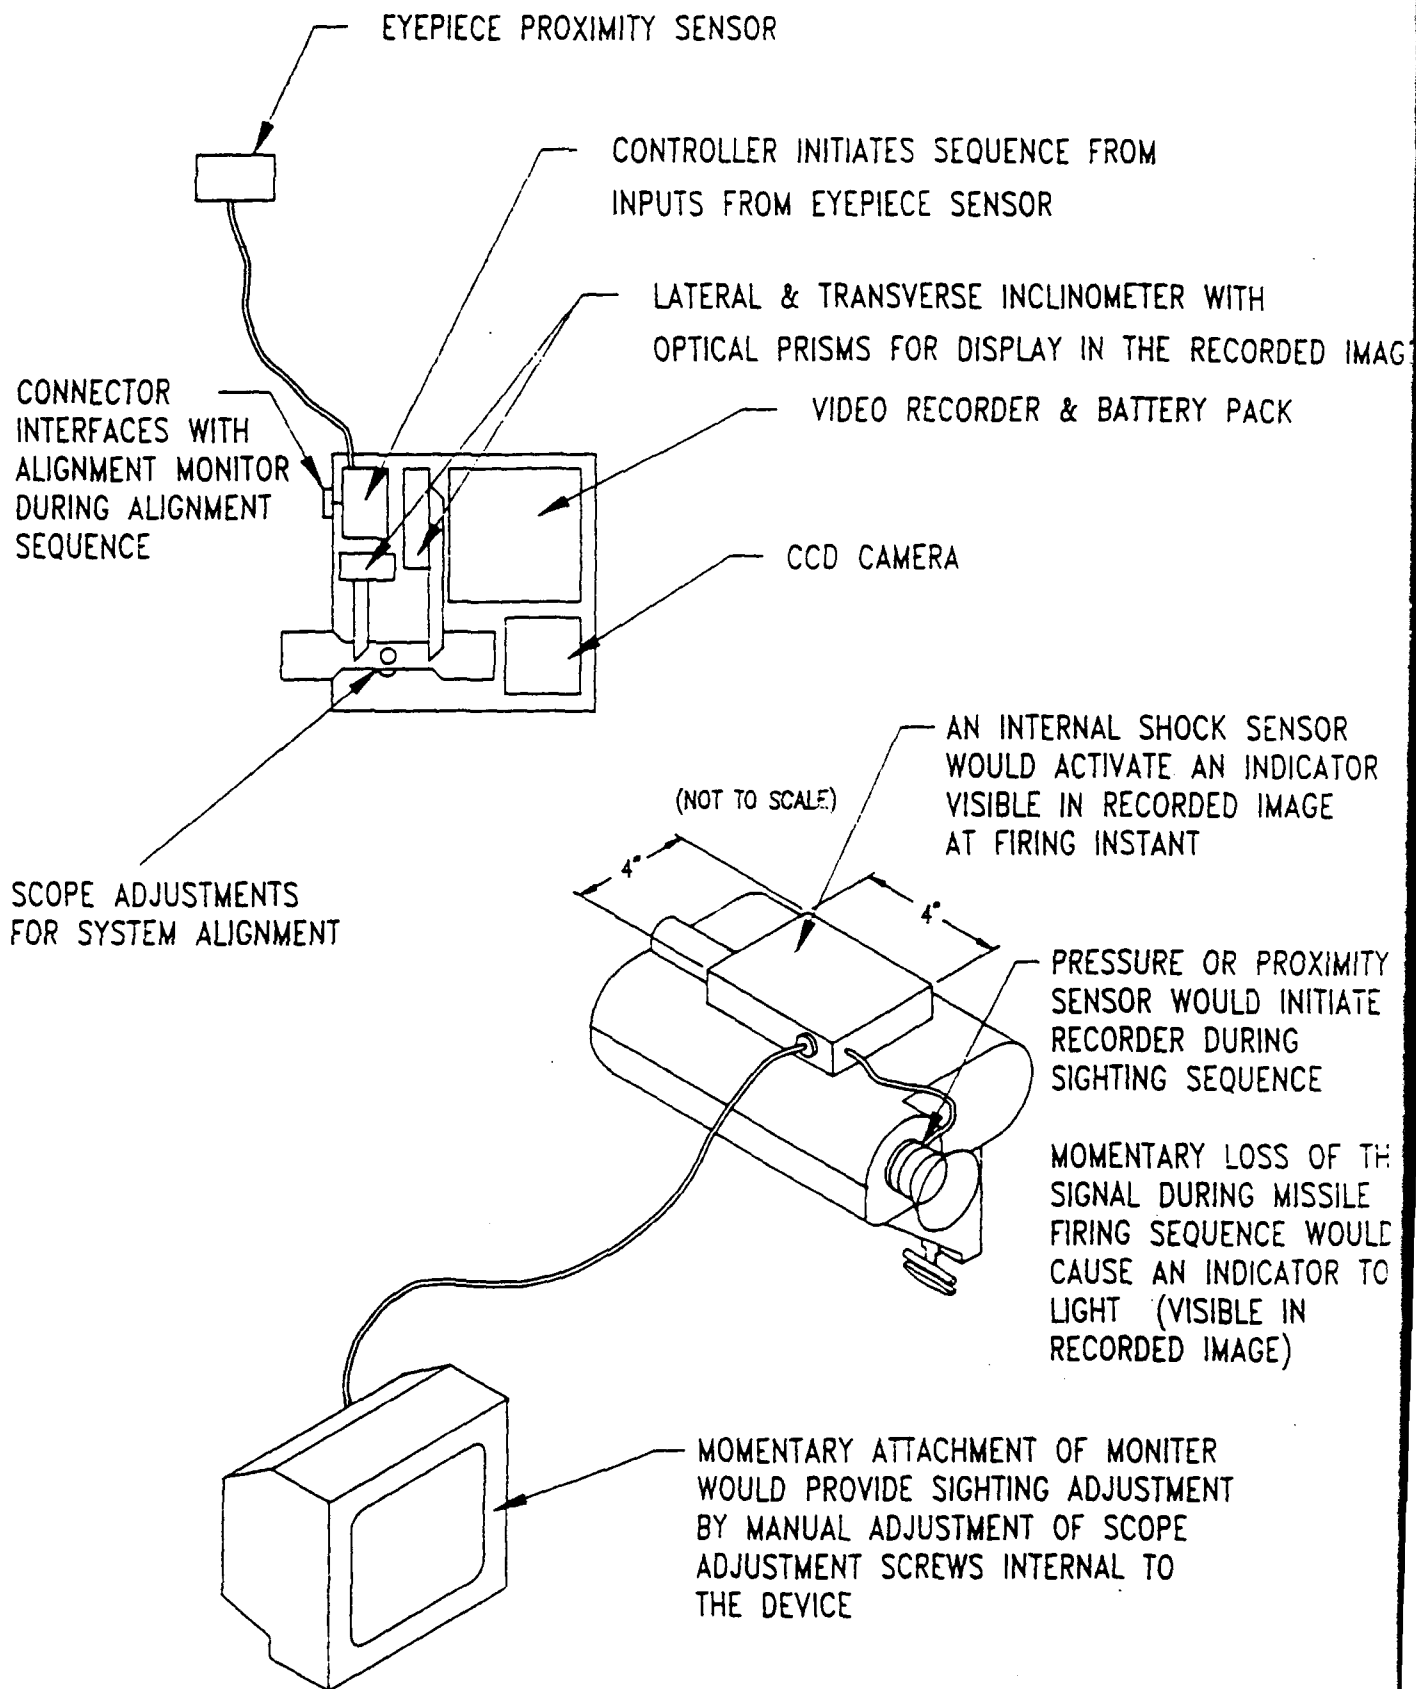

WEAPON, OPERATIONAL RECORDING DEVICE
(WORD)

Q2196W

WEAPON TRAINING INSTRUMENTATION

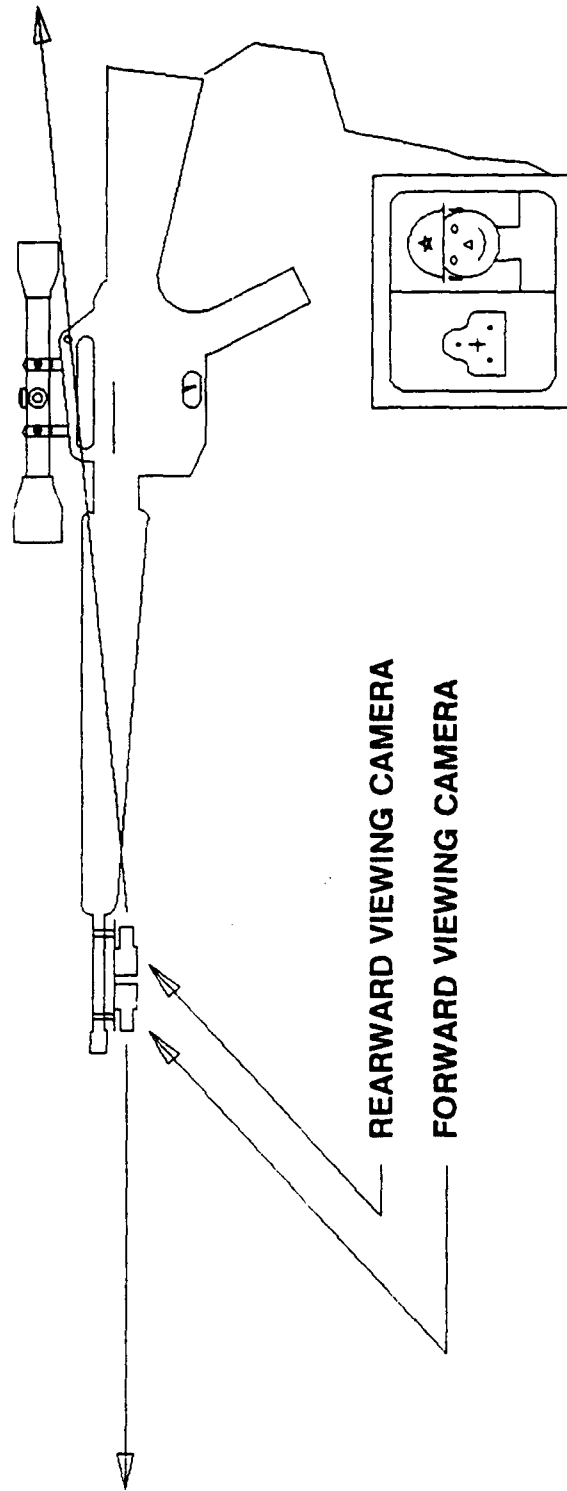


FIGURE 2

M-16 RIFLE INSTRUMENTATION

May 5, 1992

SEO

WEAPON TRAINING INSTRUMENTATION

Why is automatic firing mode so ineffective ?
Did the trainee jerk or flinch when he fired ?
Did the trainee blink when he fired ?
etc.

A video monitor could be provided to allow the instructor to view the activities as they happen with the "instant replay" option.

For force on force engagement simulations the recorder would necessarily be small and probably man worn. The recorded audio would help the instructor determine the players interaction with his crew members.

M-16 INSTRUMENTATION RISK ASSESSMENT

SEO investigation has revealed that there are many manufacturers of sub-miniature video equipment. Figure 3 shows a data sheet for a miniature video camera with good resolution, low lux operational ability, and sensitive to both the visible and the IR light spectrums. This camera should be good for both day and night operation. The auto iris control allows the camera to adjust for changing light conditions. The lenses are standard "C" mount which means that various lenses are readily available. This camera appears to nicely satisfy all of the now known requirements for the M-16 instrumentation.

Options available in the mini video equipment arena include wireless cameras as well as mini video recorders which designed to be man worn.

May 5, 1992

SEO

WEAPON TRAINING INSTRUMENTATION

THIS IS

THE

STANDARD SIZE

- 1/2" CCD (510H X 492V or 500H X 582V)
- SELF-CONTAINED ONEPIECE CAMERA
- AUTO IRIS CONTROL SIGNAL OUT PUT
- STANDARD "C" MOUNT

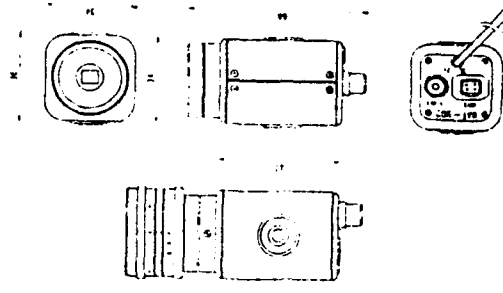
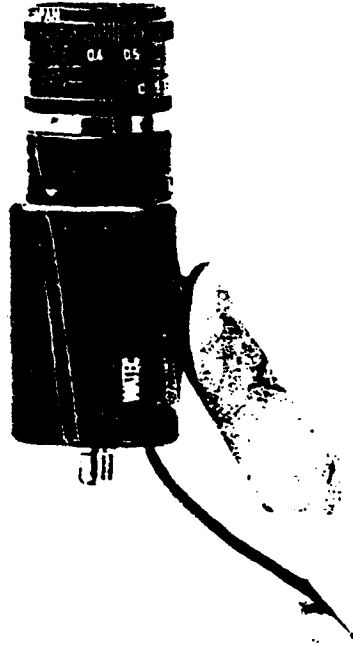


FIGURE 3

MINI VIDEO CAMERA

May 5, 1992

SEO

WEAPON TRAINING INSTRUMENTATION

ADDITIONAL USES FOR THE M-16 INSTRUMENTATION

Although the scope of the proposed instrumentation for the M-16 rifle is to provide data for player action analysis perhaps an expansion of the rifle mounted camera concept could be used in the real world as well for instructor analysis. One could provide a remote miniature video display could be attached as a monocular portion of some type of field glasses which the soldier (or civilian) would wear and would allow the operator to aim the weapon using the information from the display. This would allow the weapon position to be something other than the standard against the shoulder and would allow the operator to accurately fire his weapon around corners (or over his head if in a fox hole) with minimum body exposure to the target.

ADDITIONAL WEAPONS

Once the system is instrumented for a particular weapon expanding the capabilities to include a variety of weapons should be a relatively simple task. The smallest weapons are the greatest challenge due to the necessary small size and weight requirement.

May 5, 1992



WEAPON TRAINING INSTRUMENTATION

WHAT INFORMATION IS REALLY IMPORTANT ?

- | | |
|-------------------------------------|---|
| ☒ | Video Record of sight pattern |
| ☒ | Record of the instant the weapon was fired |
| ☒ | Record of the audio interaction with the crew |
| ? | Time of Day |
| ? | Date |
| ? | Lateral inclinometer information |
| ? | Transverse inclinometer information |
| ? | Range to target information |
| ? | Velocity of the moving target |
| ? | Calculated projectile impact |

TIME OF DAY AND DATE

Methods for recording time of day and date data are typically features included in most video camcorders.

LATERAL AND TRANSVERSE INCLINOMETER INFORMATION

Lateral & Transverse clinometer information is relatively straight forward information to record. Several devices which output digital and/or analog signals representing the angle of the sending unit are available. The only problem is formatting the information to mix with the video being recorded.

May 5, 1992

SEO

WEAPON TRAINING INSTRUMENTATION

RANGE TO TARGET INFORMATION

An eye safe rangefinder could be built into the system to provide the instructor/analyzer with the range to target information. Current rangefinder technology is still somewhat limited in the area of small suitable eye safe long range rangefinders. The use of retro-reflectors mounted on the targets (as used in PGTS) are very helpful in increasing the effective range of eye safe rangefinders.

The GaAs or NdYlf homogeneous output type rangefinders are currently the most suited for this application. There is some interest in the use of 1550 nm as a suitable eye safe range finder operating wavelength since the eye safe power levels at 1550 nm take advantage of a tenfold increase over conventional AlGaAs lasers.

VELOCITY OF THE MOVING TARGET

Some work has been accomplished in this field by SEO engineers. The concept used relies upon the video input and a correlation of two video images separated by a known time frame. This comparison enables the computer to identify the moving object and to calculate the relative velocity of the object. Using this velocity information along with the ballistic look up table the azimuth correction can be calculated.

May 5, 1992

SEO

WEAPON TRAINING INSTRUMENTATION

CALCULATED PROJECTILE IMPACT POINT

(Refer to section on Golubic Patent)

The calculated projectile impact point could also be recorded and presented to the trainee/instructor to aid the post exercise analysis.

ELEVATION: The elevation correction of the projectile impact point could be calculated through ballistic look up tables if the range information were known.

AZIMUTH: A moving target presents a somewhat more difficult task for ballistic calculations. The moving target's velocity must be known for this calculation.

May 5, 1992



WEAPON TRAINING INSTRUMENTATION

THE GOLUBIC PATENT

U.S. Patent # 5,026,158 issued June 25, 1991 to Victor Golubic addresses "apparatus and method for displaying and storing impact points of firearm projectiles on a sight field of view". The Golubic invention does not provide a non-intrusive instrumentation package as addressed in the SBIR objective; however portions of the Golubic patented invention may be applicable should we pursue to calculate the impact point. The Golubic invention claims to determine the impact point a projectile with respect to a moving target. Golubic only adds the projectile trajectory distance to the calculated impact point and does not address the velocity and direction of the moving target. The PGTS and Kollsman type trainers do provide this capability for the large weapon trainers. It is probable that the CLASS sight (computerized Laser Sight with/LRF) used by the Swedish ordinance provides the impact corrections for small arms.

The Golubic invention would probably be good for game hunters as illustrated in the patent however many improvements would be required before the invention would be practical in the law enforcement or military world. When a soldier or law enforcement officer is required to use his weapon there is no time to use the rangefinder technique identified by Golubic. The law enforcement officer's engagements are typically within short operating range and require quick response. The field soldier may have more time but can not be encumbered with knobs to twist and buttons to push. An active ranging and moving target velocity measuring system would need be ready at all times. In such a system the shooter could engage the target in his reticle, depress a switch and have the reticle move to the appropriate corrected aim point. This would need to happen very quickly.

May 5, 1992

SEO

WEAPON TRAINING INSTRUMENTATION

AD-A278 305



SUMMARY

Although we have spent some time investigating the technical aspects of recording the angle clinometer data as presented in our original proposal we now feel that instrumentation on the M-16 as outlined above has become our major objective. We have obtained an clinometer for this application but feel that the modification of design plan towards small arms implementation may better fulfill the desires of the end user requirement of this type of equipment. With the small arms approach a need for reduced size and weight become very important, and the need for range finder and clinometer data become less important.

At the present time we are pursuing the M-16 approach with the major emphasis on the target picture as the major data to be recorded. We are considering a rearward looking camera which would record the facial actions (blinking, jerking, etc.) of the trainee during his target acquisition, firing, and follow through. We hope to have some actual preliminary tests completed in about three weeks.

May 5, 1992

