



Shielding Effectiveness Test Report for a TI-Shield™ Enclosure

by William O. Coburn and Christian G. Reiff (ARL),
Linden Albright, and Albert Mauroni (Booz, Allen)

ARL-MR-224

July 1995

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE July 1995		3. REPORT TYPE AND DATES COVERED Final, 1 Dec 1994 to 1 Feb 1995
4. TITLE AND SUBTITLE Shielding Effectiveness Test Report for a TI-Shield™ Enclosure			5. FUNDING NUMBERS PE: 62120	
6. AUTHOR(S) William O. Coburn, Christian G. Reiff (ARL), Linden Albright, and Albert Mauroni (Booz, Allen)				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory Attn: AMSRL-WT-ND 2800 Powder Mill Road Adelphi, MD 20783-1197			8. PERFORMING ORGANIZATION REPORT NUMBER ARL-MR-224	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory 2800 Powder Mill Road Adelphi, MD 20783-1197			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES AMS code: 622120.H250011 ARL PR: 5FE7E5				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) An electromagnetic (EM) shielding effectiveness test was conducted to evaluate the performance of 10-mil-thick TI-Shield™ applied to an Army tactical shelter. TI-Shield™ is a clad metal composite of copper/alloy49/copper which is typically available bonded to 1/4-in. particle board. Gaven Industries installed the TI-Shield™ panels to the interior of a plywood shelter mockup using continuously soldered seams. This shielded enclosure was then tested according to IEEE-STD-299-1991, with some modifications. The shelter mockup and EM testing are discussed with the results presented as recommended by the standard. These results demonstrate that application of TI-Shield™ to a shelter would satisfy the EM shielding requirement of MIL-STD-907B.				
14. SUBJECT TERMS Shielding effectiveness, TI-Shield™, IEEE-STD-299-1991, MIL-STD-907B			15. NUMBER OF PAGES 19	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT SAR	

Contents

1. Introduction	5
2. Background	5
3. System Description	6
4. Test Objectives	7
5. Test Approach	8
5.1 <i>Low-Range Calibration Procedures</i>	9
5.2 <i>Mid-Range Calibration Procedures</i>	9
6. Preliminary Measurements	11
7. Measurement Procedures	11
8. Results	13
9. Conclusions	15
References	15
Distribution	17

Figures

1. Framing structure for HSS mockup	6
2. Door cleat locations and detail	8
3. Top views of mid-range calibration procedure and mid-range measurement procedure	10
4. Test point and seam locations	12

Tables

1. Equipment for shielding effectiveness measurements	9
2. Test point locations and antenna polarizations	12
3. Shielding effectiveness test results	13
4. Shielding effectiveness of an HSS mockup	14

1. Introduction

An electromagnetic (EM) shielding effectiveness (SE) test was performed as an evaluation of a relatively lightweight, cost-effective material that may be used for EM shielding of an equipment enclosure, such as the Standardized Integrated Command™* Post Shelter (SICPS). This EM testing was done to support the U.S. Army Research Laboratory (ARL) Composite Shielding Initiative [1] and to collect data for a demonstration of composite shielding technology. This report focuses on an evaluation of 10-mil-thick TI-Shield™, one of the currently available advanced-technology shielding materials. This roller-bonded, clad metal composite of copper/permalloy49/copper (Cu/A49/Cu) is manufactured by Texas Instruments, Inc., and distributed by Gaven Industries, Inc., in 2-ft-wide rolls (approximately \$8/ft²).

2. Background

The ARL has established a program of applied research to acquire, develop, and apply EM shielding technology to ensure the survivability of Army resources to EM threats. The program has a strong focus on characterizing, understanding, predicting, and controlling the interaction of EM fields with composite materials. The environment we consider is non-ionizing EM radiation, including electromagnetic pulse (EMP), high-power microwave (HPM), EM interference (EMI), and lightning. The program proposes to provide an evolutionary development of the EM shielding technology to enhance survivability performance and system effectiveness.

As part of this program we evaluate and test practical and cost-effective shielding techniques that can be applied to composite structures used in Army systems. Our emphasis is to acquire, install, and test several available advanced EM-shielding materials that could be used in Army tactical shelters so that we can evaluate the EM performance of the shielded enclosure. The size and physical configuration of the enclosure we selected for this demonstration represent the SICPS designed for the Heavy High Mobility Multipurpose Wheeled Vehicle (HMMWV).

As part of a Natick Research, Development, and Engineering Center program, a Hardened Standard Shelter (HSS) has been proposed as the next generation Army tactical shelter [2]. One version of the HSS is an approximately 25-mil-thick welded aluminum skin inside a filament-wound, graphite/epoxy (G/E) composite structure. For a conductivity relative to copper, $\sigma_r = 0.5$, the magnetic (H -) field SE of this liner is estimated as 52 dB at 20 kHz and 80 dB at 200 kHz [3]. Although Al provides lightweight EM shielding (5.6 oz/ft²), installation can be expensive because of the difficulties of welding aluminum.

*Trademark of Texas Instruments, Incorporated.


A49 is a 49-percent nickel, 50-percent iron alloy (no anneal), which has a typical relative permeability of 2,500 to 90,000 [4]. We use the conductivity of a 50-percent nickel, 50-percent iron alloy, $\sigma_r = 0.0384$, relative to Cu [3]. According to Gaven Industries, Inc., the proportional layer structure of the clad metal is 20-percent Cu, 60-percent A49, and 20-percent Cu, so the relative thickness is approximately 2 mils of Cu, 6 mils of A49, and 2 mils of Cu. The material density is 8.3 g/cm^3 , so for a thickness of 10 mil, the weight is about 7 oz/ft^2 . TI-Shield™ seems to satisfy a basic requirement for shielding composite structures, as it does not significantly add to the system weight. Further, it is easily applied with standard construction and soldering techniques. The SE measurement results indicate that TI-Shield™ can have a better SE than the welded Al liner.

3. System Description

The enclosure we chose for this series of tests is a plywood mockup of the HSS that would be used with the Heavy HMMWV. The HSS can be manufactured of fiber-reinforced plastics; it provides protection against blast overpressure, fragmentation rounds, chemical/biological attack, and EM environment effects (E^3). This composite HSS provides EM shielding by an aluminum liner that is welded together and used as a form for the filament-wound G/E. This aluminum liner is expensive to install and adds weight to the HSS. Electric (E -) and H -field intensity measurements inside the mockup are compared to the unperturbed or “free field” intensity. Once the shield material is installed, any difference in field intensity is defined as the SE for this size enclosure.

Figure 1 is a sketch of the wood structure ($8 \text{ ft l} \times 6.8 \text{ ft w} \times 5.3 \text{ ft h}$) used for the HSS mockup. We built the shelter 8 ft long so that standard lengths of wood could be used (the HSS is actually 8.5 ft long). This 6-in.-shorter shel-

Figure 1. Framing structure for HSS mockup.

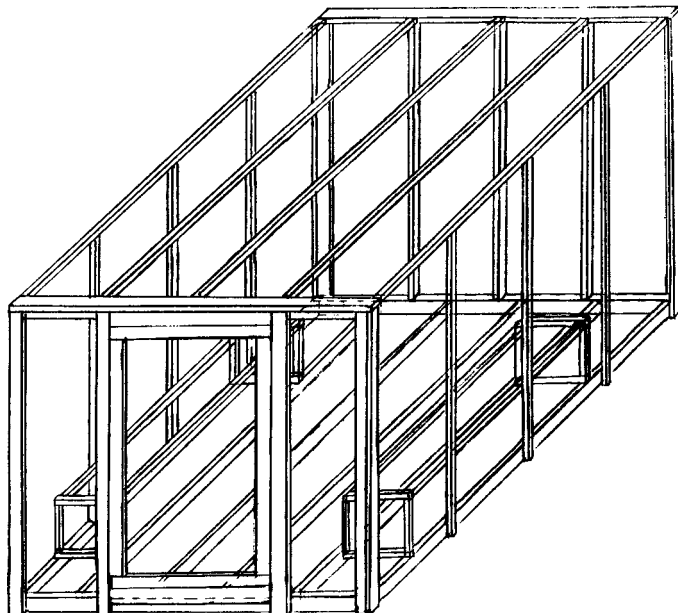

ter will not affect the EM field attenuation measurements, since the test frequencies chosen are not near the fundamental cavity resonance. The mockup did not include the inside compartment in the front of the shelter, normally used to enclose the generator unit; its absence will not affect the EM field-attenuation measurements of the shelter's shielding material. The inside compartments for the wheel wells were included in the mockup (fig. 1).

We glued the entire frame structure together so that temporary metal fasteners could be removed and would not affect the EM measurements. The mockup was made from 1/4-in. plywood except the floor, which was made of 1/2-in. plywood. The interior (including the wheel wells) was then covered with 1/4-in. particle board that had TI-Shield™ bonded to it. This resulted in 1/2-in.-thick walls and ceiling and a 3/4-in.-thick floor. Gaven Industries installed the particle board and soldered the seams using standard techniques. Seams were overlapped at least 1 in. and continuously soldered. The TI-Shield™ panels were glued to the mockup so that temporary metal screws could be removed. The holes left by the temporary fasteners were covered with TI-Shield™ patches and soldered, as were the triple corners (i.e., corners which include the floor or ceiling).


A plywood panel was covered with TI-Shield™ and used as a door. Non-metallic fasteners were designed to hold the door in eight places (fig. 2(a)). The cleat arrangement using nonconductive bolts and spacer blocks is shown in figure 2(b). The door panel was sized so that there would be at least a 2-in. overlap of shielding material around the door perimeter. A wire-mesh gasket was installed between the door and shelter wall to provide more uniform contact between the eight cleats (fig. 2(b)). The shimmed spacer blocks are adjusted to provide high-pressure contact. The resulting door arrangement, though not as good as an rf fingerstock door, could be adjusted to provide reasonably uniform electrical contact.

4. Test Objectives

The objectives of this series of EM tests are

1. to perform an SE evaluation of 10-mil TI-Shield™ when installed in a mockup of the HSS, in accordance with MIL-STD-907B [5];
2. to use the SE test procedures of IEEE Std 299-1991 [6], which supersedes MIL-STD-285 [7], to obtain sufficient data to evaluate the shielded mockup; and
3. to collect baseline SE data that can be used for comparison to analytical results, other shielding material test data, and for an evaluation of intentional and/or unintentional shield degradations.

Figure 2. Door cleat:
(a) locations and
(b) detail.

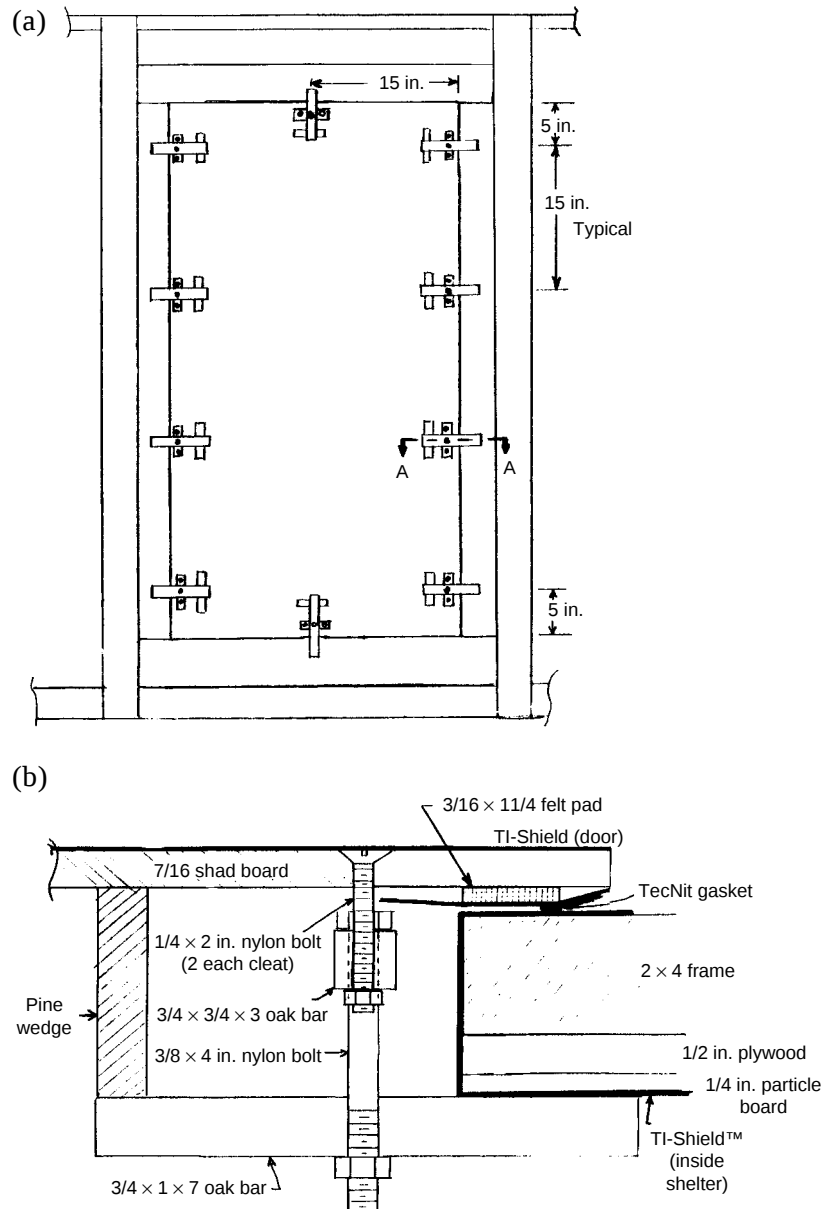

5. Test Approach

The test approach is to follow IEEE Std 299-1991 using the equipment listed in table 1. Equipment that requires calibration had been appropriately certified within the past year. IEEE Std 299-1991 calls for SE tests at seven frequencies in three ranges (high, mid, and low), along with a preliminary spatial scan to disclose serious defects. The high-range measurements (1.7 to 18 GHz) were not possible because equipment was not available. The mid-range measurements (300 MHz to 1 GHz) were in accordance with IEEE Std 299-1991, except log-periodic (LP) antennas were used instead of dipole antennas. The directional gain of these antennas provides good dynamic range but the physical size requires some deviation from the recommended test procedures. The low-range measure-

Table 1. Equipment for shielding effectiveness measurements.

Instrumentation	Description
Tektronix 492P	spectrum analyzer
Hewlett Packard 8660C	synthesized signal generator
Hewlett Packard 86602B	rf section (1–1300 MHz)
Hewlett Packard 86601A	rf section (0.01–110 MHz)
ENI 240L	rf amplifier (200 W, 0.02–10 MHz)
ENI 510L	rf amplifier (9.5 W, 1.7–500 MHz)
Tripp Light PV-500FC	dc to ac inverter
3-turn, 12-in.-diameter loop	transmit antenna
1-turn, 12-in.-diameter loop	receive antenna
(2) Emco 3146	log periodic antennas

ments (14 kHz to 20 MHz) were in accordance with IEEE Std 299-1991 except that the three test frequencies were somewhat higher than the recommended values, due to equipment limitations. At all frequencies, the substitution technique is used to quantify the measured SE.


5.1 Low-Range Calibration Procedures

The configuration for the low-range free-field calibration consists of coplanar loops with the edges 24.5 in. apart in the absence of the shield. The free-field calibration and test procedures are in accordance with IEEE Std 299-1991. At each frequency the antenna current is recorded, and the maximum received signal represents the calibration level for this current. The receiver bandwidth is set at the same value used for the SE measurements, which is 1 kHz in all cases. The antenna height is 36 in. above the ground. The test frequencies were selected, based on the available equipment, to be 20 kHz, 200 kHz, and 20 MHz. The lowest cavity resonant frequency for this enclosure is, $F_r = 107$ MHz, so the chosen frequencies are consistent with the requirements of IEEE Std 299-1991.

5.2 Mid-Range Calibration Procedures

The test configuration for the mid-range free-field calibration (fig. 3(a)), is more complicated. The distances specified in IEEE Std 299-1991 are modified to account for the larger antennas (roughly 2 ft in length) used in these tests. The center of the receive antenna is located 2 ft from the outside shelter wall, while the center of the transmit antenna is located 6 ft from this wall. The antenna separation (center to center) for calibration is then 4 ft (1.3 m), and the recommended scanning procedure is used. The antenna separations are consistent with IEEE Std 299-1991; however, the length of the longest LP elements violates the electrically small antenna length (one-eighth wavelength) specified to avoid variations in the antenna input impedance owing to the shield proximity. The recommended calibration procedures were used in addition to a true free-space calibration (i.e., in the absence of the shelter). The variations observed during these calibration procedures were 1 to 3 dB.

Figure 3. Top views of (a) mid-range calibration procedure (not to scale) and (b) mid-range measurement procedure (not to scale.)

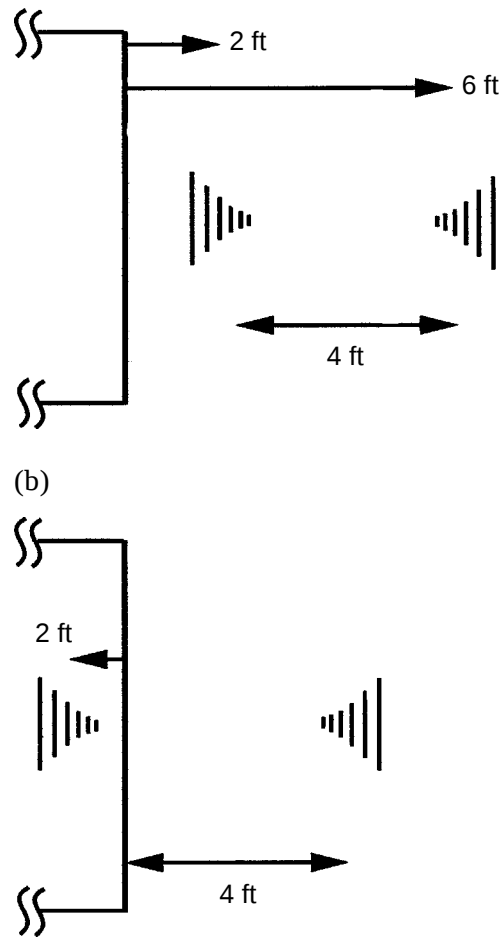

At each frequency the transmit antenna current is recorded. The average of the maximum and minimum received signal is the calibration level for this input current. The receiver bandwidth is set at the same value used for the SE measurements, which is 1 kHz in all cases. The antenna height is 36 in. above the ground. The selected test frequencies are 350 and 850 MHz, which are greater than $3F_r$. During the SE measurements, the receive antenna center is kept at 2 ft from the inside wall surface while the transmit antenna center is kept at 4 ft from the outside wall surface. The center-to-center antenna separation is then 6 ft (fig. 3(b)). The wall thickness (0.5 in.) and the difference between calibration and measurement antenna separations are neglected as recommended in IEEE Std 299-1991.

Variations of the recommended procedures were investigated, such as calibrations in free-space versus near the shelter, and variations in the antenna separation. These experiments resulted in a 1- to 3-dB difference in received signal between the calibration and measurement configurations. This small difference is also typical of the variations observed during the calibration and measurement scanning procedures. Using an average of the calibration measurements and recording the maximum received signal for the SE measurements, as recommended in IEEE Std 299-1991, minimizes the importance of these small variations. The mid-range SE results

would not compare directly to measurements taken with electrically small dipole antennas, but the difference should be less than 6 dB.

6. Preliminary Measurements

The preliminary scanning measurements recommended in IEEE Std 299-1991 were conducted at 20 MHz, which is much less than F_r , and at 350 MHz, which is much greater than F_r . The results indicated no significant problem areas except the door. Test points near the door showed SE reductions of several decibels, which depended on the pressure applied to the door's contact points. Since the HSS mockup has no other penetrations, the preliminary measurements indicated that all seams had been adequately soldered. The nonlinearity tests recommended in IEEE Std 299-1991 were not possible because of an insufficient measurement dynamic range. However, since the magnetic material is sandwiched between Cu sheets, no saturation effects would be expected at the field intensity levels used for testing [4].

7. Measurement Procedures

The low-range measurement procedure was in accordance with IEEE Std 299-1991, so the edge-to-edge antenna separation is 24.5 in. In all cases, the coplanar orientation of the loop antennas was used. We chose multiple test points to evaluate the SE of each shelter face, the corners, and around the door. However, the number of seams required for the installation of TI-Shield™ precluded the test locations specified in IEEE Std 299-1991. One test point (TP) at the center of each side was chosen as a representative panel measurement, and we scanned the nearby seams using the recommended technique. The TP locations relative to the soldered seams are indicated in figure 4 (where only the major seams soldered during installation are shown for clarity). The transmit antenna remained at the required polarization (horizontal (H) or vertical (V) with respect to the ground) while the receive antenna was displaced and rotated. The largest reading was recorded for each TP at each frequency. The TP nomenclature, antenna polarization, and location are described in table 2. The TP locations in the corners (C1 and C2) are accessible and were tested as recommended in IEEE Std 299-1991 with horizontal polarization of the coplanar loop antennas.

The mid-range measurement procedure is consistent with IEEE Std 299-1991, but the physical size of the LP antennas required the distances shown in figure 3(b). Each TP was tested using both polarizations of the matched antennas and the recommended scanning technique. In the scanning procedure the transmit antenna remained at a fixed polarization while the receive antenna was displaced and rotated. The largest reading was recorded for each TP at each frequency and polarization. This measurement (the minimum SE) was typically 2 to 3 dB larger and was observed near the solder locations.

Figure 4. Test point and seam locations.

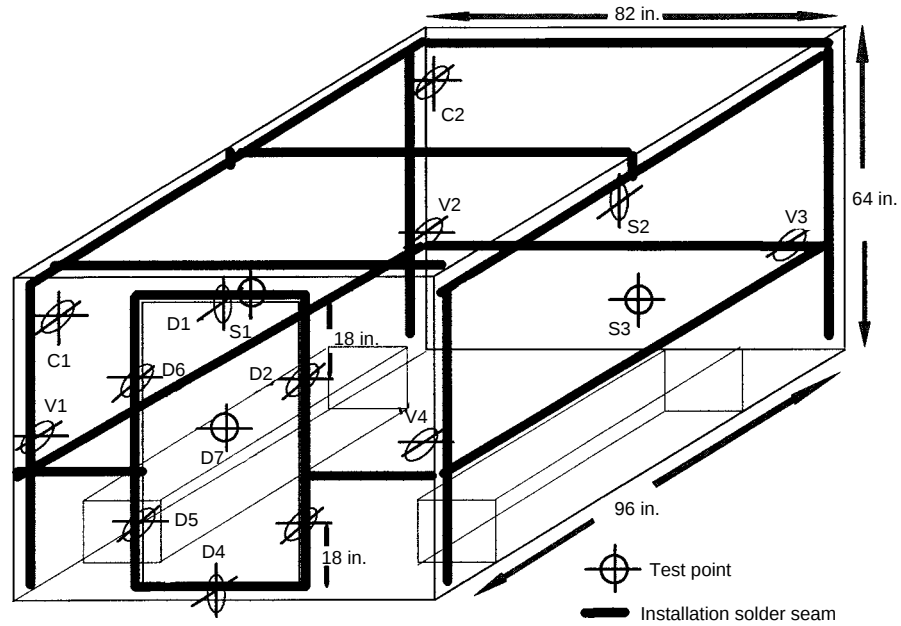


Table 2. Test point locations and antenna polarizations.

TP	Description	Location on HSS (see fig. 4)	Loop plane ^{a,b}	Log-periodic plane ^{a,b}
C1	Rear triple corner	Upper rear roadside corner	H	Diagonal
C2	Front triple corner, top	Upper front roadside corner	H	Diagonal
D1	Door top	Top door seam	V	H, V
D2	Right door seam, next to top	Curbside door seam	H	H, V
D3	Right door seam, next to bottom	Curbside door seam	H	H, V
D4	Door bottom	Bottom door seam	V	H, V
D5	Left door seam, next to bottom	Roadside door seam	H	H, V
D6	Left door seam, next to top	Roadside door seam	H	H, V
D7	Door center	Center of door	H, V	H, V
S1	Roadside wall	Center of roadside wall	H, V	H, V
S2	Front wall	Center of front wall	H, V	H, V
S3	Curbside wall	Center of curbside wall	H, V	H, V
V1	Vertical seam 1	Center of rear-roadside vertical seam	H, V	H, V
V2	Vertical seam 2	Center of front-roadside vertical seam	H, V	H, V
V3	Vertical seam 3	Center of front-curbside vertical seam	H, V	H, V
V4	Vertical seam 4	Center of rear-curbside vertical seam	H, V	H, V

^aWith respect to the ground plane.

^bPerpendicular orientation of receive antenna also used during the scanning procedure.

Note: H = horizontal; V = vertical

8. Results

The results for each TP are based on the largest received signal in the scanning procedure for that TP. The substitution technique quantifies the measured SE, and the average of all measurements was calculated according to IEEE Std 299-1991. This average is included even for the *H*-field SE measurements as shown in table 3. According to IEEE Std 299-1991, the shelter SE should actually be reported as shown in table 4. For a local source, the lowest measured value is reported as the enclosure SE; for a distant source, the average of all measurements is reported as the enclosure SE. The lowest measured value and the average of all measurements excluding the door test points (TP D1 to D7) are also shown and characterize the enclosure SE without the door. The measured SE in the door area of the shelter indicates the quality of the door closure rather than the SE performance of the material. Thus, a good indication of the TI-Shield™ performance, when not limited by penetrations, is shown in table 4 by the standard results excluding the door test points.

Table 3. Shielding effectiveness test results.

Measurement location		Nominal shielding level (dB)				
		H-field at 24.5 in.			Plane wave at 72 in.	
		20 kHz	200 kHz	20 MHz*	350 MHz	850 MHz
Test point	Polarization					
D1	V	42	64	65	—	—
D2	H	44	63	64	—	—
D3	H	50	70	64	—	—
D4	V	43	60	65	—	—
D5	H	48	68	64	—	—
D6	H	45	62	64	—	—
D7	H	52	71	64	103	98
D7	V	53	71	65	100	89
S1	H	63	74	64	103	100
S1	V	63	75	65	105	104
S2	H	63	71	64	101	105
S2	V	63	71	65	102	104
S3	H	63	71	64	113	105
S3	V	63	71	65	106	104
V1	H	63	74	64	104	106
V1	V	—	—	—	103	101
V2	H	63	74	64	102	96
V2	V	—	—	—	103	104
V3	H	63	71	64	103	105
V3	V	—	—	—	105	104
V4	H	60	71	64	103	101
V4	V	—	—	—	103	100
C1	H	63	74	64	—	—
C2	H	63	75	64	—	—
Average		59	71	64	104	102

*Exceeds measurement dynamic range at this frequency.

Table 4. Shielding effectiveness of an HSS mockup.

Frequency	Type of measurement	Standard results (dB)			
		Local source		Distant source	
		With door	Without door	With door	Without door
20 kHz	H-field	42	60	59	63
200 kHz	H-field	60	71	71	73
20 MHz*	H-field	64	64	64	64
350 MHz	E-field	100	101	104	105
850 MHz	E-field	89	96	102	103

*Exceeds measurement dynamic range at this frequency.

For comparison, the calculated H -field SE for 10-mil-thick Cu is about 50 dB at 20 kHz and 70 dB at 200 kHz. The calculated SE for 6-mil-thick A49 ($\mu_r = 2500$) is about 28 dB at 20 kHz and 100 dB at 200 kHz [3]. If the exact construction and EM properties of the layered material are known, the effective media approximation (i.e., a weighted average according to layer thickness) can be used to estimate the average electrical parameters [8]. For a roller-bonded material, such a model is difficult to determine exactly, as the interface between layers is not well defined. This model does not include the additional reflective losses at the Cu / A49 interfaces. This impedance mismatch must be included [9] and explains why the TI-Shield™ structure performs better than A49 / Cu / A49 or steel five times as thick [10].

The measured enclosure SE is expected to be less than that predicted for an infinite planar slab, since the field diffusion through the soldered seams typically limits the SE in practice. This is true even for well-formed seams where the field leakage (aperture coupling) is small but the field diffusion through the seam is still larger than that through the shield material. The measured SE also depends on the enclosure size and increases proportionally to the ratio of volume to surface area, so larger structures demonstrate a higher SE [11]. For TI-Shield™, magnetic contact is not maintained across the soldered seam and a slot model can be used to estimate the H -field transmission per meter of slot length. For soldered seams (90-percent In / 10-percent Sn) with a 1-cm overlap and 25- μ m solder thickness, the H -field SE of a 1-m slot is on the order of 57 dB at 20 kHz [9]. According to Gaven Industries the solder thickness is typically 25 μ m, so the TI-Shield™ seams should have better performance since the overlap is at least 2.5 cm.

The data indicate that the H -field SE (neglecting door leakage) is limited to about 70 dB at 20 kHz by this H -field diffusion through the nonmagnetic solder joints. This limiting effect can be somewhat improved by using fewer seams, a larger overlap, different solder, etc, but the H -field diffusion through the seams is expected to be greater than that through the TI-Shield™ material at frequencies below about 100 kHz. The measured data indicate that a TI-Shield™ structure can readily meet the EM shielding requirements of MIL-STD-907B, MIL-STD-188-125 [12], or the National Security Agency Specification No. 65-6 [13].

9. Conclusions

The HSS mockup constructed for these tests represents a nonconductive (i.e., nonmetallic) command-post-size shelter. Gaven Industries did the TI-Shield™ installation using standard construction and soldering techniques. The door design provided the most practical means of frequent shelter access while maintaining good electrical contact. Thus, the shielded HSS mockup represents an EM-hardened tactical shelter where the SE performance is somewhat limited by the lack of an rf fingerstock door. TI-Shield™ applied to conducting (or poorly conducting) shelters should demonstrate an even larger SE, which is typically limited by the performance of the door and penetrations.

The results demonstrate that 10-mil TI-Shield™ can satisfy the EM-shielding requirements of MIL-STD-907B in the frequency range 150 kHz to 10 GHz. The verification testing specified in MIL-STD-907B is in accordance with MIL-STD-285, which has been superseded by IEEE Std 299-1991. The tests were thus conducted according to IEEE Std 299-1991 except as specifically indicated. The results are compiled and reported according to IEEE Std 299-1991, except that the standard results neglecting the door measurements are included for comparison. Even without an rf fingerstock shielded door, the HSS mockup has good EM performance and would pass the SE requirement of MIL-STD-907B. The material is extremely cost effective, lightweight, and can be readily installed using standard techniques. Discounting the reduced SE of the door, 10-mil TI-Shield™ is an effective solution to meet (or exceed) typical SE requirements. New standards are currently being developed for shielded enclosures where the low-frequency SE requirement will be reduced [14]. In this case, even a very thin clad metal would be an attractive alternative for EM shielding compared to welded Al shields.

References

1. R. J. Chase, *Composite Shielding Initiative for Army Resources*, Army Research Laboratory, ARL-SR-9, June 1994.
2. Hardened Standardized Integrated Command Post Shelter (SICPS) (HSS) Fact Sheet, Natick Research, Development, and Engineering Center, April 1995.
3. D.R.J. White, *A Handbook on Electromagnetic Shielding Materials and Performance*, Don White Consultants, Inc., 1975.
4. *Electromagnetic Interference Shielding Materials from Texas Instruments*, Texas Instruments, Inc., MMSY002, 1993.
5. MIL-STD-907B, *Military Standard Engineering and Design Criteria for Shelters, Expandable and Non-expandable*, Department of Defense, 9 September 1985.

6. IEEE Std 299-1991, *IEEE Standard for Measuring the Effectiveness of Electromagnetic Shielding Enclosures*, American National Standards Institute (ANSI), Institute for Electrical and Electronics Engineers, 2 July 1991.
7. MIL-STD-285, *Military Standard Method of Attenuation Measurements for Electromagnetic Shielding Enclosures for Electronic Test Purposes*, Department of Defense, 25 June 1956.
8. W. J. Biter, P. J. Jamnicky, and W. O. Coburn, *Shielding Improvements by Use of Thin Multilayer Films*, 7th International SAMPE Electronic Materials and Processes Conference, Parsippany, NJ, June 1994, p. 234.
9. W. O. Coburn, C. Le, J. Latess, W. J. Biter, and N. D. Roberts, *Microstructural Engineered Thin Film Material for Electromagnetic Shielding*, Radiation Effects Res. Eng. **31**, No. 1, February 1995.
10. Y. Trenkler and L. E. McBride, *Shielding Improvement by Multi-layer Design*, Proceedings of the IEEE National Symposium on Electromagnetic Compatibility, 1990.
11. J. A. Birken, W. G. Duff, D. R. Pflug, and R. A. Wallenberg, *Composite Material Aircraft EM Properties and Design Guidelines*, Naval Air System Command, AIR-518-5, January 1981.
12. MIL-STD-188-125, *High-Altitude Electromagnetic Pulse (HEMP) Protection for Ground-Based C⁴I Facilities Performing Critical, Time-Urgent Missions: Volume II Transportable Systems*, Department of Defense, 11 July 1994.
13. National Security Agency Specification No. 65-6, *Specification for R.F. Shielded Enclosures (U)*, 30 October 1964. (CONFIDENTIAL)
14. *Standard Test Methods for Electromagnetic Shielding Effectiveness of Durable Relocatable Structures*, American Society for Testing Materials, Sixth Draft, January 1995.

Distribution

Admnstr
Defns Techl Info Ctr
Attn DTIC-DDA (2 copies)
Cameron Sta Bldg 5
Alexandria VA 22304-6145

Director
Defns Intllgnc Agcy
Attn RTS-2A Techl Lib
Washington DC 20301

Defns Nuc Agcy
Attn RAES Elect Syst Techlgy Div
Attn RAST Electromagnetic Applctn Div
Attn TITL Tech Lib
6801 Telegraph Rd
Alexandria VA 22310-3398

Defns Nuc Agency Office of Techl Applications
Attn D R Lewis
Alexandria VA 22310

Commander
Natick RDE Ctr
Attn SATNC-WST M Jee
Natick MA 01760-5014

Ofc of the Assist Secy of the Army for Rsrch
Dev & Acqstn
Attn SARD-TR Dr R Chait
Room 3E476 The Pentagon
Washington DC 20310-0103

Cmdr
US Army ARDEC
Attn AMSTA-AR-CCL-D W Williams
Attn SMCAR-AEC-IE N Svendsen
Bldg 65 N
Picatinny Arsenal NJ 07806-5000

US Army AVRDEC
Attn AMSAT-R-EFM P Haselbauer
Attn AMSAT-R-NST J Bazzetta
4300 Goodfellow Blvd
ST Louis MO 63120-1798

US Army BRDEC
Attn SATB-FGE J Ferrick
Attn SATB-FGE T Childers
FT Belvoir VA 22060-5606

Commander
US Army Matl Cmnd
Attn AMCAM-CN
5001 Eisenhower Ave
Alexandria VA 22333-0001

US Army Mis Cmnd Mis Rsrch & Dev Ctr
Attn AMSMI-RD-ST-CM J Jacklitsch
Attn AMSMI-RD-TI G Van Kirk
Redstone Arsenal AL 35898-5243

Director
US Army Mis Cmnd (USAMICOM)
Attn AMSMI-RD-CS-R Documents
Redstone Arsenal AL 35898-5400

Cmdr
US Army MRDEC
Attn AMSMI-RD-ST-CM J Vandier
Huntsville AL 35898-5240

US Army Natick RDEC
Attn SATNC-SUSD-SHD A Murphy
Kansas Stret
Natick MA 01760-5018

Commander
US Army Nuc & Chem Agcy
Attn MONA-NU R Pfeffer
7150 Heller Loop Rd Ste 101
Springfield VA 22150

Cmdr
US Army TARDEC
Attn AMSTA-ZT G Baker
Warren MI 48397-5000

Commander
US Army TECOM
Attn STERT-TE-E J Knaur
Redstone Technical Test Center
Huntsville AL 35898-8052

Distribution

US Army TECOM Techl Dir Ofc
Attn AMSTE-TC-D R Bell
Aberdeen Proving Ground MD 21005

Nav Rsrch Lab
Attn Code 4820 Techl Info Div
4555 Overlook Ave SW
Washington DC 20375-5000

Commander
Nav Surfc Weapons Ctr
Attn Code E231 Techl Lib
Dahlgren VA 22448-5020

Nav Warfare Ctr
Attn Code OZT T Conway
Lakehurst NJ 08733

Dir Air Force Armament Directorate
Attn WL/MNAA S Federle
101 W Eglin Blvd. Ste 346A
Eglin AFB FL 32542-6810

FCDNA/FCTOS
Attn T Smith
1680 Texas Stret SE
Kirtland AFB NM 98118-5669

USAF Wright Laboratory
Attn WL/MLSF N Ontko
2179 12th Stret Ste 1 Bldg 652
Wright Patterson AFB OH 45430-7718

Natl Inst of Stand & Techlgy
Attn V Ulbrecht Rsrch Info Ctr
Rm E01 Bldg 101
Attn W McDonough
Bldg 224 Rm A-209
Gaithersburg MD 20899

DoD Joint Spectrum Center
Attn CA J Word
120 Worthing Basin
Annapolis MD 21401

NASA Langley Rsrch Ctr
Attn AMSRL-VS K Kinsley
Attn AMSRL-VS W Elber
Hampton VA 23681-0001

US Army Rsrch Lab
Attn AMSRL-MA-P B Halpin
Attn AMSRL-MA-P W Haskell
Attn AMSRL-MA-S E Clegg
Attn AMSR-WT-PD J Bender
Arsenal Stret
Watertown MA 02172-0001

US Army Rsrch Lab
Attn AMSRL-WT-PB Chf
Attn AMSRL-WT-WB Chf
Attn AMSRL-WT-WC Chf
Attn AMSRL-WT-WD Chf
Aberdeen Proving Ground MD 21005

US Army Rsrch Lab
Attn AMSRL-OP-SD-TA Mail & Records
Mgmt
Attn AMSRL-OP-SD-TL Tech Library
(3 copies)
Attn AMSRL-OP-SD-TP Tech Pub
Attn AMSRL-SS-F Chf
Attn AMSRL-SS-S Chf
Attn AMSRL-WT-N Chf
Attn AMSRL-WT-NB Chf
Attn AMSRL-WT-ND C Le
Attn AMSRL-WT-ND Chf
Attn AMSRL-WT-ND W O Coburn
(10 copies)
Attn AMSRL-WT-NE Chf
Attn AMSRL-WT-NF Chf
Attn AMSRL-WT-NG Chf
Attn AMSRL-WT-NH Chf
Attn AMSRL-WT-NJ Chf
Attn AMSRL-WT-N Sr Rsrch Scntst
Attn AMSRL-WT-ND J Latess
Adelphi, MD 20783-1197

DEPARTMENT OF THE ARMY
U.S. Army Research Laboratory
2800 Powder Mill Road
Adelphi, MD 20783-1197

An Equal Opportunity Employer