

# Precision CMOS Clock Oscillator for HI-G Applications

Presented by  
Fred Mirow  
Chief Engineer  
Micro Oscillator,  
Inc.

Co Author  
Dick Mabry  
AFRL/MNMF  
Eglin AFB

***WEB SITE:            MICRO-OSCILLATOR.COM***

## Report Documentation Page

<b>Report Date</b> 16Apr2001	<b>Report Type</b> N/A	<b>Dates Covered (from... to)</b> -
<b>Title and Subtitle</b> Precision CMOS Clock Oscillator for HI-G Applications		<b>Contract Number</b>
		<b>Grant Number</b>
		<b>Program Element Number</b>
<b>Author(s)</b> Mirow, Fred; Mabry, Dick		<b>Project Number</b>
		<b>Task Number</b>
		<b>Work Unit Number</b>
<b>Performing Organization Name(s) and Address(es)</b> Micro Oscillator, Inc.		<b>Performing Organization Report Number</b>
<b>Sponsoring/Monitoring Agency Name(s) and Address(es)</b> NDIA (National Defense Industrial Association) 211 Wilson BLvd., Ste. 400 Arlington, VA 22201-3061		<b>Sponsor/Monitor's Acronym(s)</b>
		<b>Sponsor/Monitor's Report Number(s)</b>
<b>Distribution/Availability Statement</b> Approved for public release, distribution unlimited		
<b>Supplementary Notes</b> Proceedings from The 45th Annual Fuze Conference, 16-18 April 2001 Sponsored by NDIA, The original document contains color images.		
<b>Abstract</b>		
<b>Subject Terms</b>		
<b>Report Classification</b> unclassified	<b>Classification of this page</b> unclassified	
<b>Classification of Abstract</b> unclassified	<b>Limitation of Abstract</b> UU	
<b>Number of Pages</b> 23		

# Summary of Discussion


- ◆ MOI-1000 CLOCK OSCILLATOR
- ◆ COMPARISON OF OSCILLATOR TYPES
- ◆ SBIR AF98-220
- ◆ MOI-2000 CLOCK OSCILLATOR
- ◆ Proposed 32.7KHZ Oscillator
- ◆ Summary & Recap

# MOI-1000 Clock Oscillator

- *Smallest*
- *Fastest Turn On*
- *Most Rugged*
- *Lowest Power*



# OSCILLATOR CIRCUIT

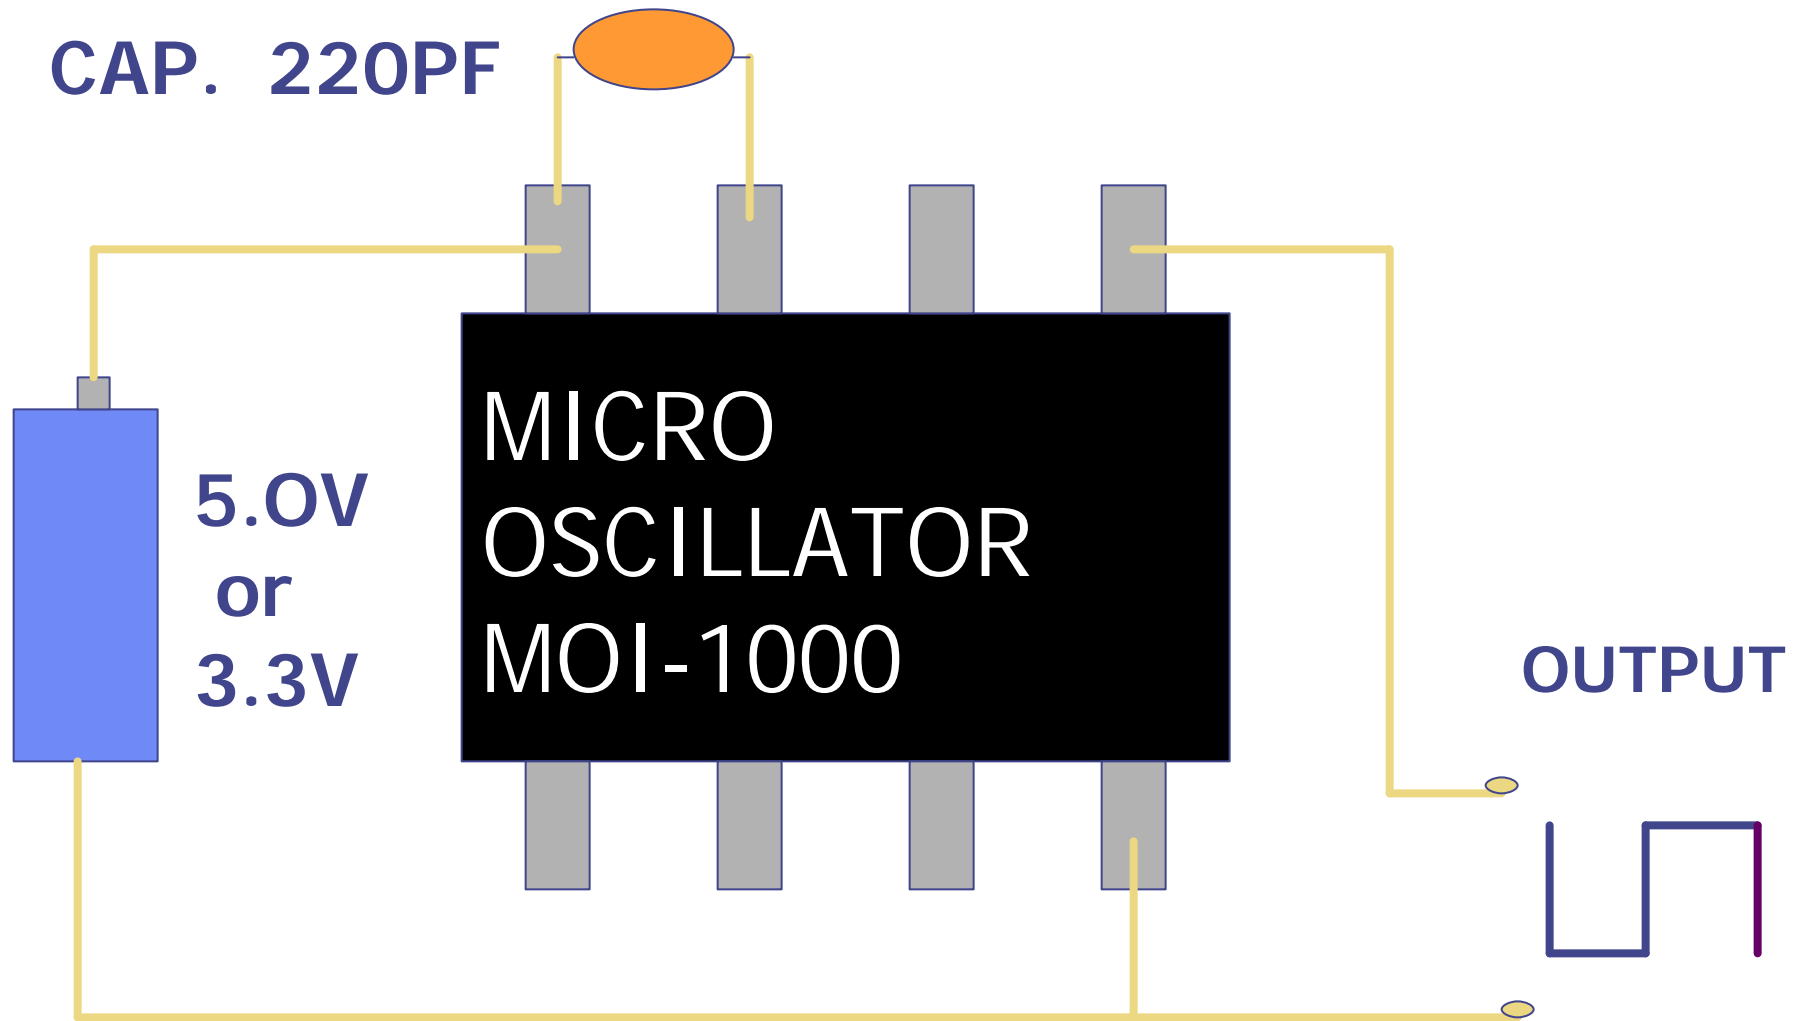


# MOI-1000 SPECIFICATION

## CMOS IC


SIZE	1.7 X .9 MM
FREQUENCY	16, 20, 24 MHz
FREQUENCY ACCURACY (Temp. & Voltage, Etc.)	
INDUSTRIAL TEMP	0.5%
MILITARY TEMP	1.0%
OPERATING POWER	(5.0V) 25 mW
	(3.3V) 10 mW
OUTPUT, SQUARE WAVE SYMMETRY	55/45%
SHOCK, OPERATIONAL	> 80,000 G
PACKAGE	SO-8, MSO-8 or Bare Die

# MOI-1000 ACCELERATION TEST (UNIT OPERATING)

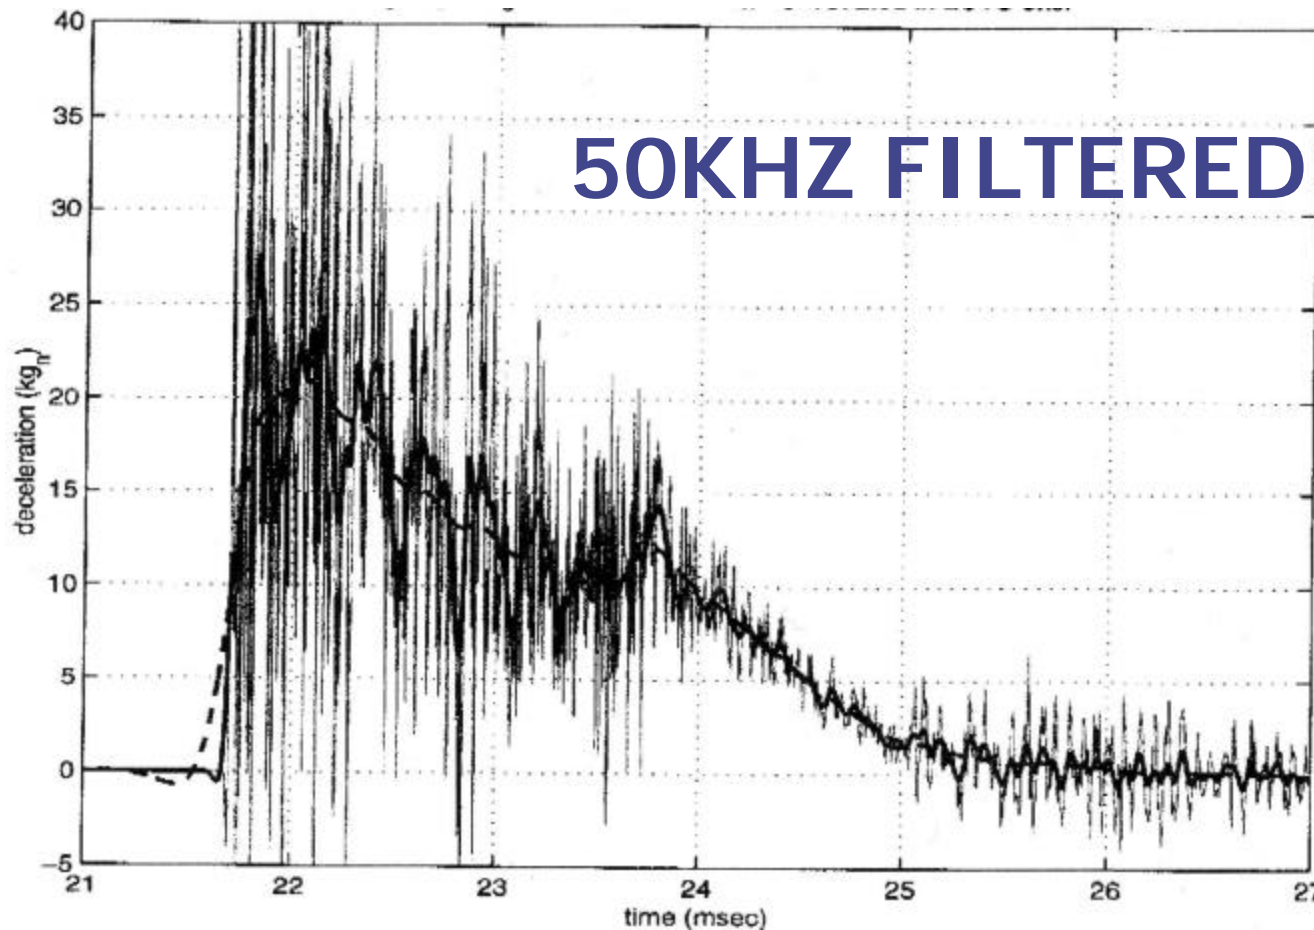

**155 MM HOWITZER, CONCRETE WALL**  
**PLOT CURTESY OF AFRL/MNMF**


# MOI-1000 ACCELERATION TEST (UNIT OPERATING)

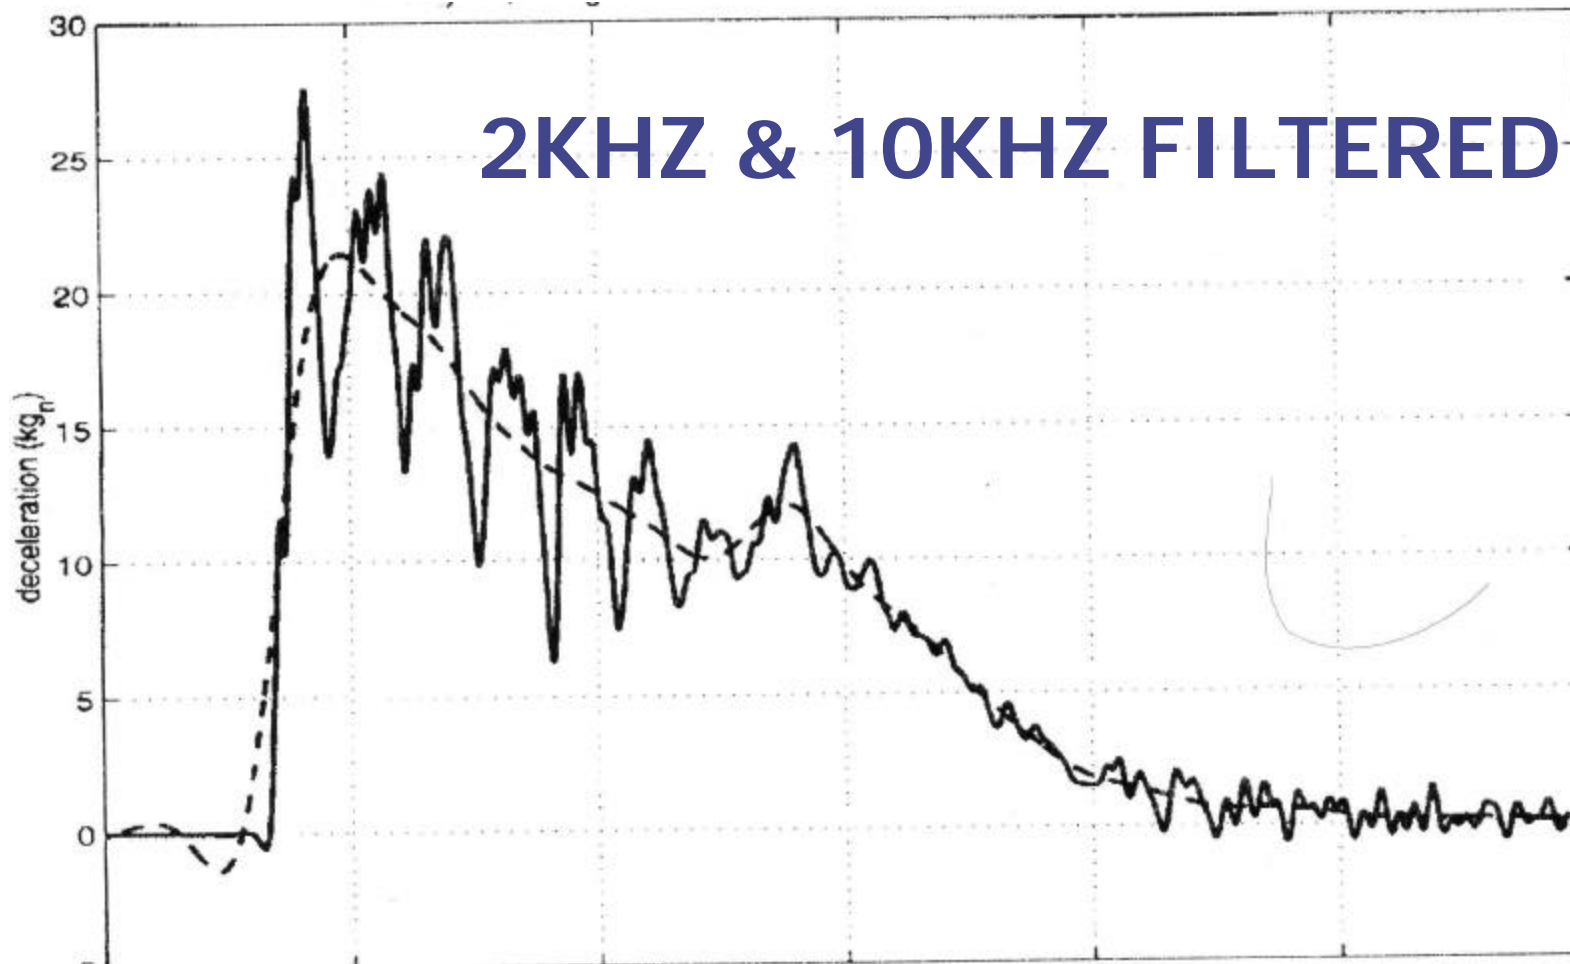



**155 MM HOWITZER, CONCRETE WALL  
PLOT CURTESY OF AFRL/MNMF**



# MOI-1000 CLOCK OSCILLATOR SYSTEM BLOCK DIAGRAM

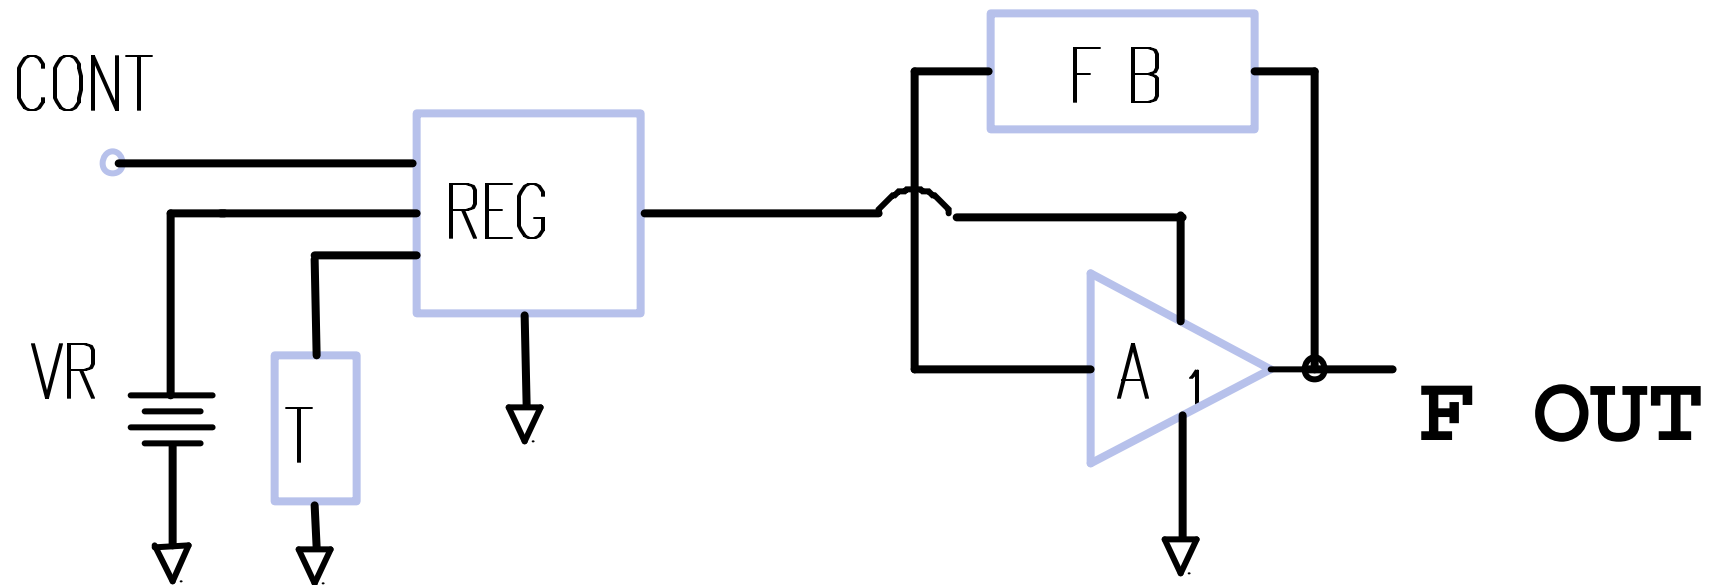

# PROPAGATION DELAY TIME VARIATIONS

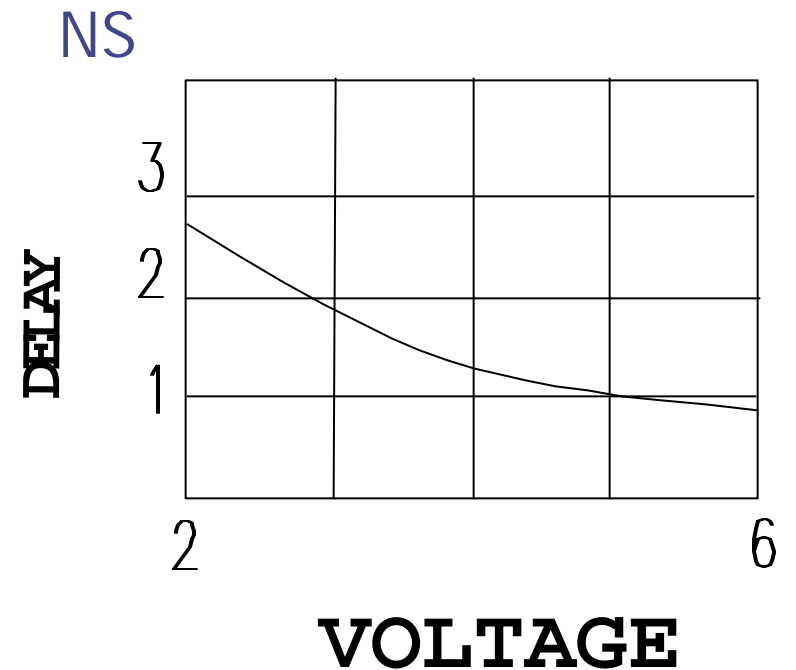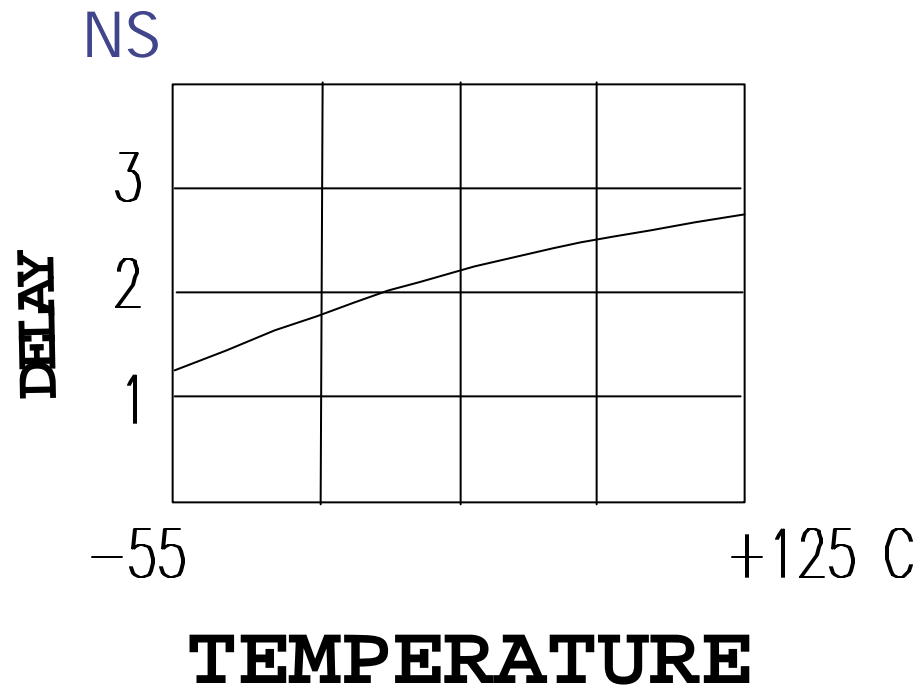

# CLOCK OSCILLATOR COMPARISON CHART

	MICRO OSCILLATOR	CRYSTAL CLOCK	CERAMIC RESONATOR
FREQ. TOL.	MEDIUM	HIGH	MEDIUM
SIZE (mm)	.9 x 1.7	5 x 7	2.8 x 6.5
HYBRID	YES	NO	NO
RUGGEDNESS	VERY HIGH	LOW	MEDIUM

## MOI-1000 ADVANTAGES

- 1: COMPLETE CLOCK OSCILLATOR
- 2: SMALL SIZE, BARE DIE OR S0-8
- 3: NO START UP PROBLEMS
- 4: NO FREQUENCY JUMPING
- 5: 3.3 V OR 5.0 V AVAILABLE
- 6: +/- 0.5% TOLERANCE INDUSTRIAL
- 7: +/- 1.0% TOLERANCE MILITARY

## MOI-1000 DISADVANTAGES

- 1: NOT AS ACCURATE AS CRYSTAL

# EXISTING APPLICATIONS

## **PROGRAMMABLE PROJECTILE FUZE**

CRITICAL REQUIREMENTS MET-  
OPERATIONAL IN HIGH G ENVIRONMENT  
FAST TURN ON TIME  
BARE DIE FOR HYBRID PACKAGING  
LOW OPERATING POWER

## **HARD TARGET FUZING**

CRITICAL REQUIREMENTS MET-  
OPERATIONAL IN HIGH G ENVIRONMENT  
LOW OPERATING POWER

# SBIR AF98-220

## PURPOSES:

1) IMPROVE MOI-1000:


REDUCED OPERATING POWER  
WIDER FREQUENCY RANGE

2) DEVELOP 32.7KHZ VERSION

# SBIR TIMER BASE SYSTEM SPECIFICATION

	<b>SYSTEM 1</b>	<b>SYSTEM 2</b>
VOLTAGE	5V $\pm 5\%$	3.3V $\pm 5\%$
CURRENT	1 MA MAX	1 MA MAX
FREQ. TOL.	$\pm 1\%$ ABSOLUTE	$\pm 1\%$ ABSOLUTE
FREQ. RANGE SINGLE FREQ.	14.0 TO 20.0 MHZ	3.5 TO 5.0 MHZ
OPERATING TEMP.	-55 TO 125 °C	-55 TO 125 °C
OUTPUT DRIVE	2 HC CMOS	2 HC CMOS

# MOI-2000 CLOCK OSCILLATOR SYSTEM BLOCK DIAGRAM

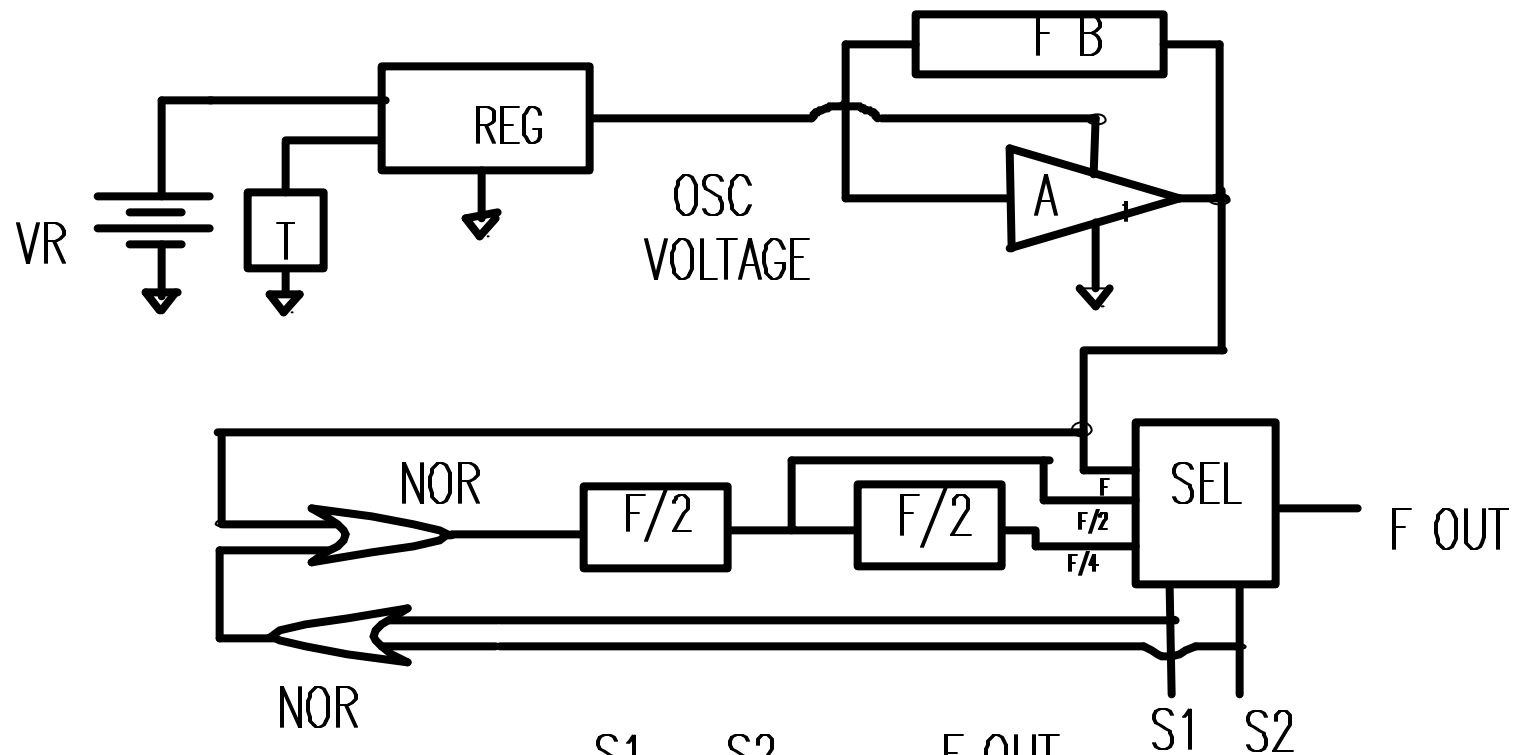

S1	S2	F OUT
0	0	F
1	0	F/2
0	1	F/4



# COMPARISON OF MOI-1000 TO MOI-2000

MOI-1000

MOI-2000

FREQ.

14 to 24MHz

4 to 20 MHz

CURRENT

5.0 VOLTS

5mA

1.6mA

3.3 VOLTS

3mA

1ma

TOL.


+/-1%

+/-1%


# MOI-2000 PREPRODUCTION MEASURED PERFORMANCE

VOLTAGE	5	3.3
CURRENT	2.2 Ma	1.4 Ma
FREQUENCY	16 MHz	10 MHz
FREQ. TOL.		
-55 - 125°C	± 1.0%	± 1%


# MOI-2000 OSCILLATOR OUTPUT 3.3V 12PF LOAD, 53/47% DUTY CYCLE

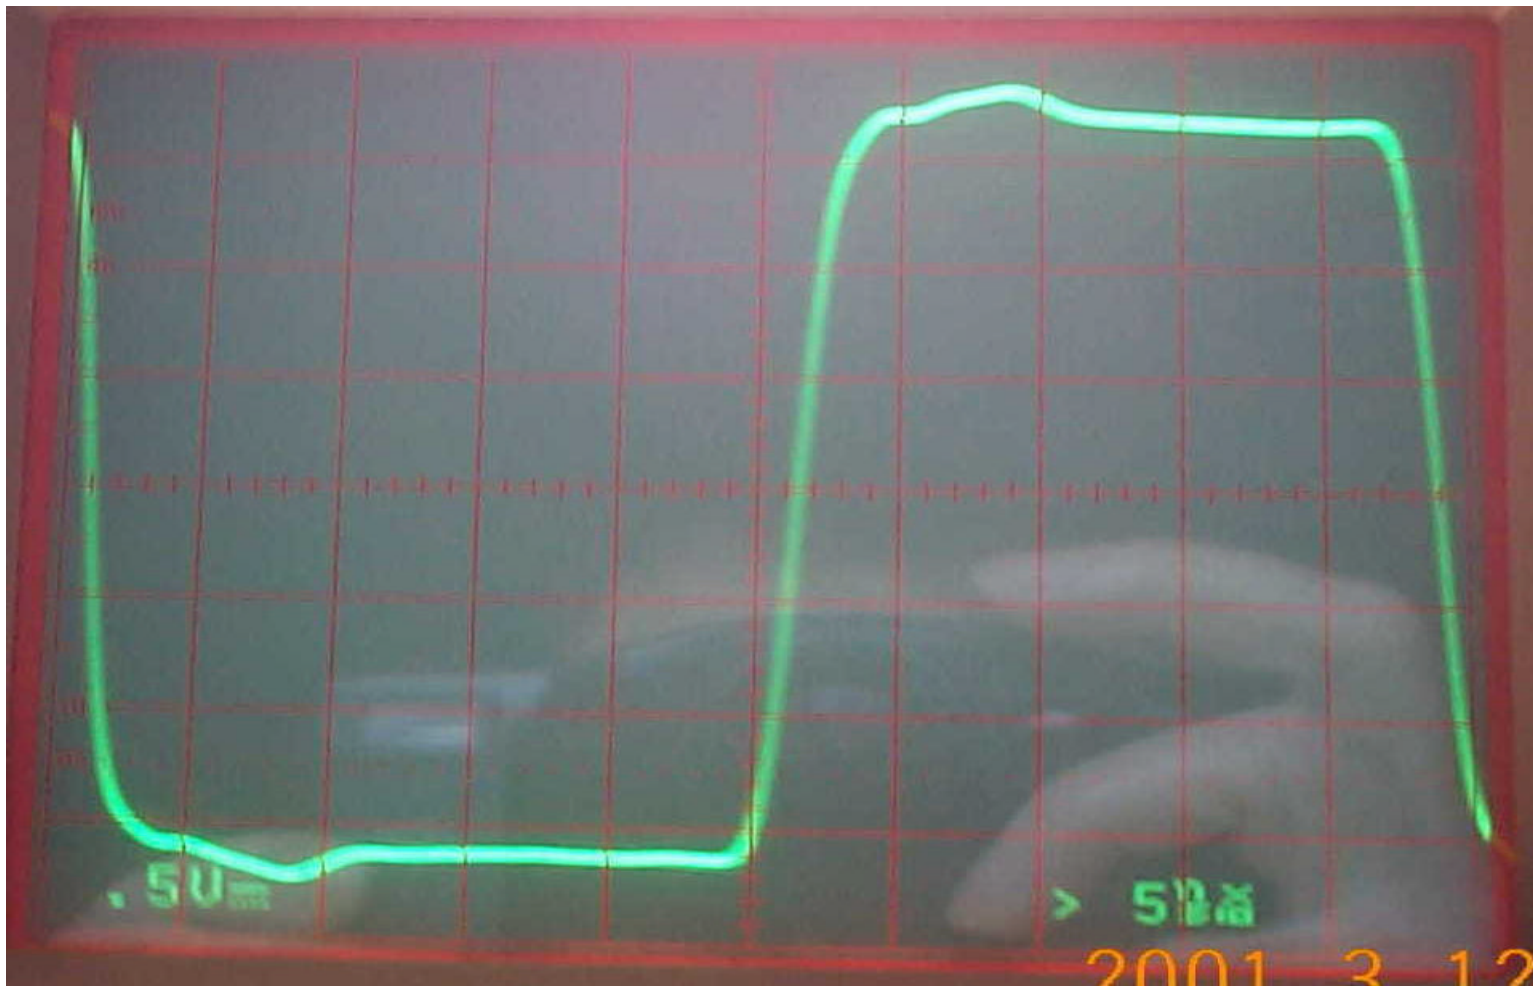

MOI-2000 OSCILLATOR OUTPUT  
3.3V 12PF LOAD, 2 NSEC/DIV

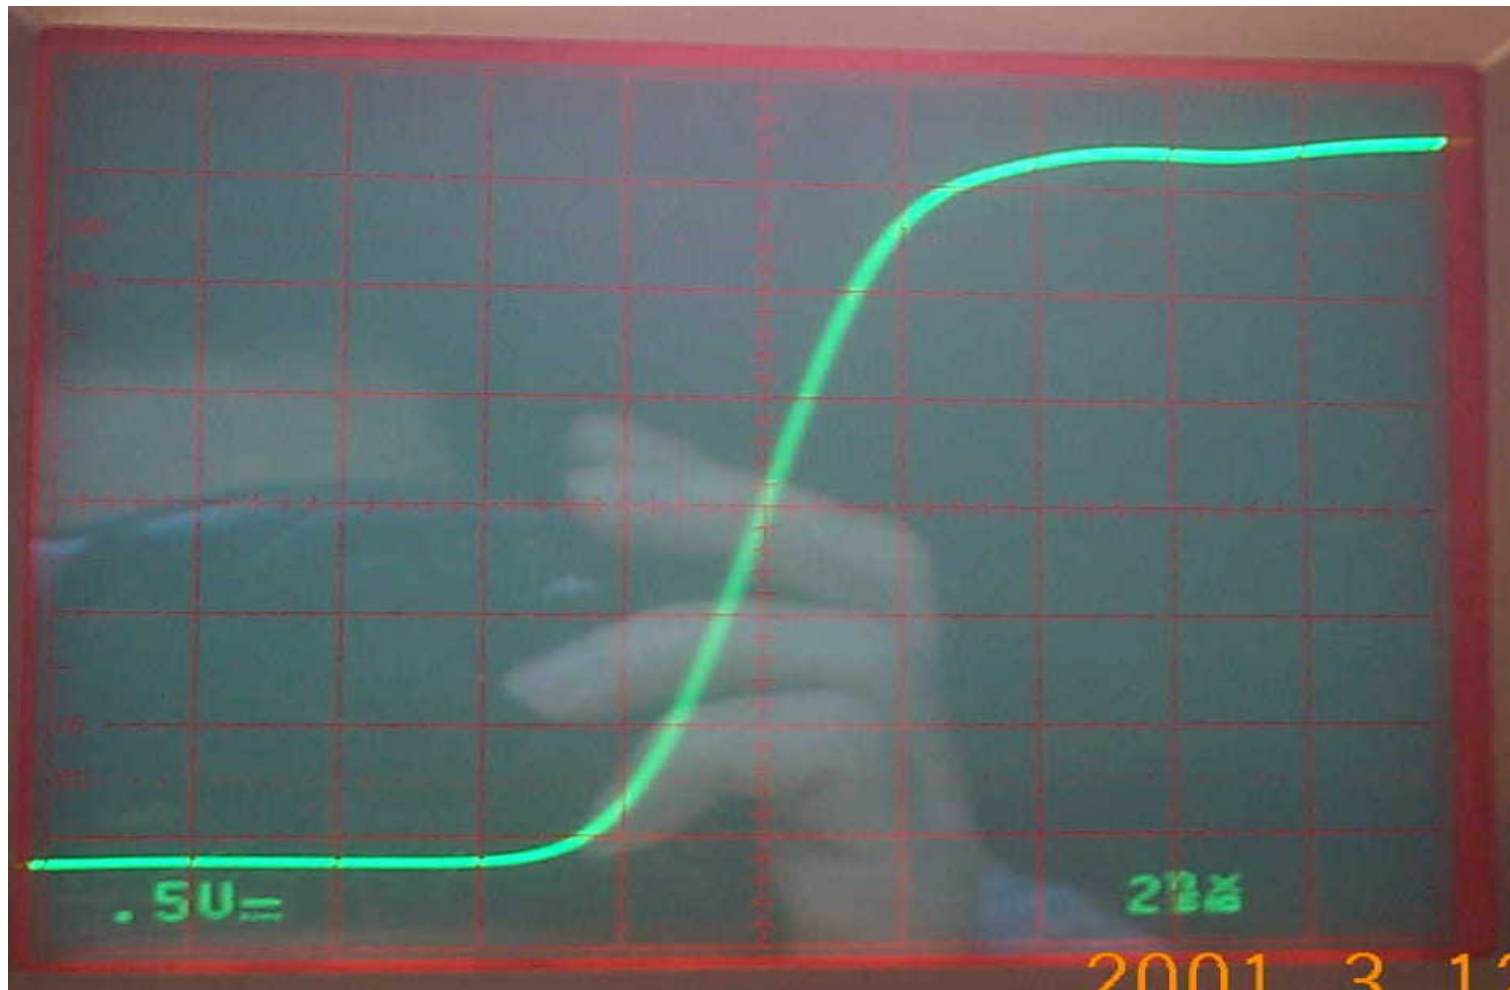

# MOI-2000 OSCILLATOR OUTPUT DELAYED 3.3V 12PF LOAD

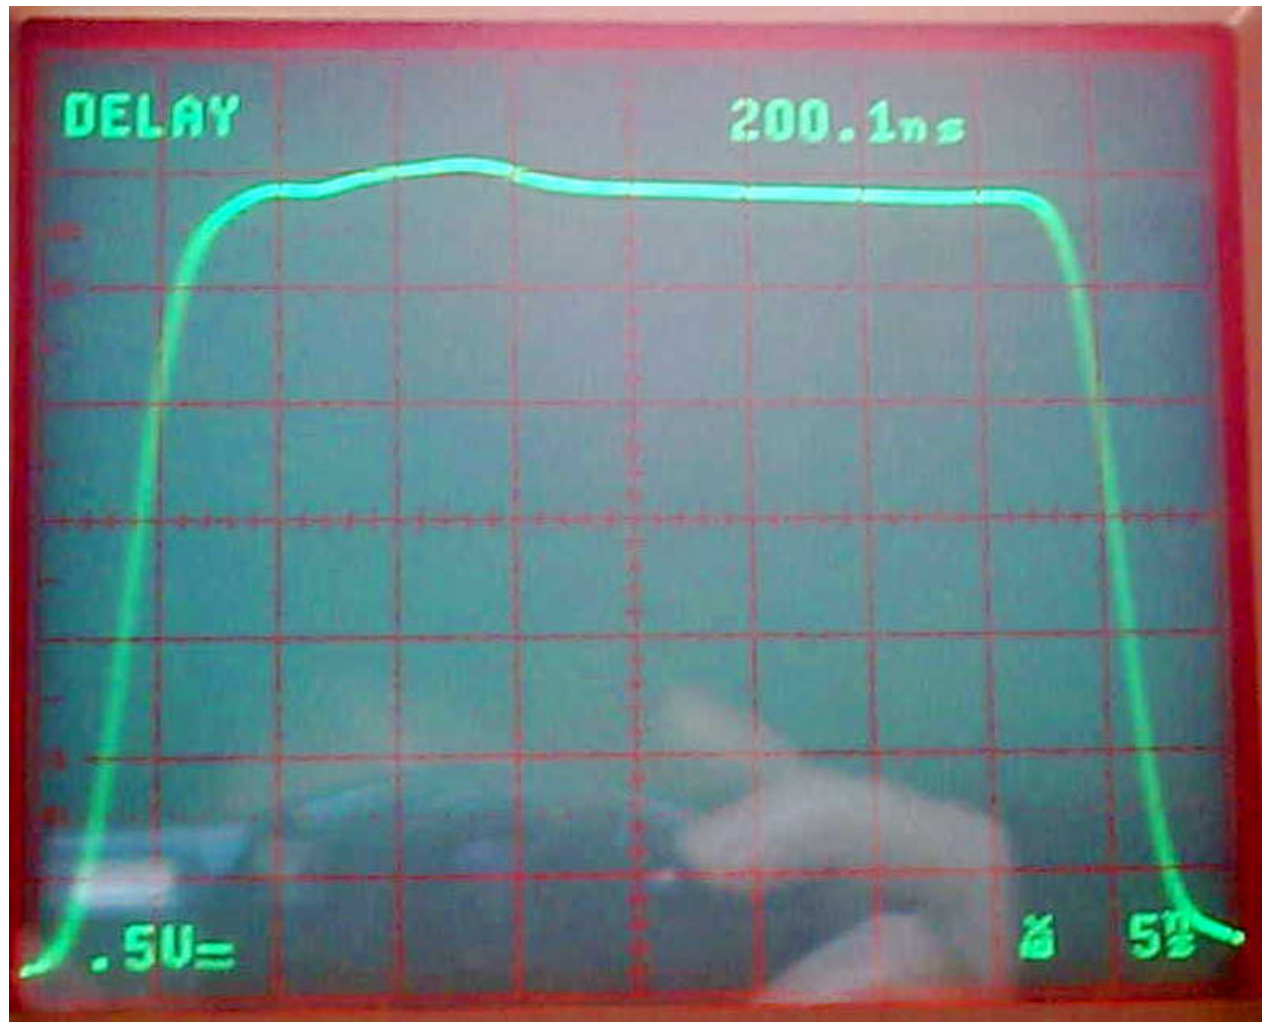

# 32.7 KHz TIME BASE SYSTEM SBIR SPECIFICATION

Operating Voltage	3.3v or 5V 5%
Operating Current	0.2 ma max
Frequency Tol.	+/- 1%
Frequency	32.7 KHz
Operating Temp.	-55 to 125 c
Package	S0-8

# OSCILLATOR AVAILABILITY SCHEDULE

**MOI-2000**

**5V**

**JULY 2001**

**3.3V**

**NOW**

**32 .7KHz**

**JULY 2002**

# Summary & Recap

## MOI-1000

5 YEARS OF PROVEN  
PERFORMANCE IN  
HI-G APPLICATIONS

## MOI-2000

SAME PROVEN TECHNOLOGY AS  
MOI-1000 AT A MUCH LOWER  
OPERATING POWER LEVEL