

| REPORT DOCUMENTATION PAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                  |                                                 | Form Approved<br>OMB No. 0704-0188                                  |                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------|---------------------------------------------------------------------|-------------------------------------------|
| Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to: Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.                                                                                                                                                                                                                                                                                  |                                                  |                                                 |                                                                     |                                           |
| 1. AGENCY USE ONLY (Leave blank)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                  | 2. REPORT DATE<br>July 2001                     |                                                                     | 3. REPORT TYPE AND DATES COVERED<br>Final |
| 4. TITLE AND SUBTITLE<br><b>PERFORMANCE COMPARISON: DIRECT-PUSH WELLS<br/>VERSUS DRILLED WELLS</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                  |                                                 | 5. FUNDING NUMBERS                                                  |                                           |
| 6. AUTHOR(S)<br>Chuck Reeter, Josh Fortenberry, Ernie Lory, and Mark Kram                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                  |                                                 |                                                                     |                                           |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)<br>Commanding Officer<br>Naval Facilities Engineering Service Center<br>1100 23 <sup>rd</sup> Ave<br>Port Hueneme, CA 93043-4370                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                  |                                                 | 8. PERFORMING ORGANIZATION<br>REPORT NUMBER<br>TDS-2087-ENV         |                                           |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                  |                                                 | 10. SPONSORING/MONITORING AGENCY                                    |                                           |
| 11. SUPPLEMENTARY NOTES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                  |                                                 |                                                                     |                                           |
| 12a. DISTRIBUTION/AVAILABILITY STATEMENT<br>Approved for public release; distribution is unlimited.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                  |                                                 | 12b. DISTRIBUTION CODE                                              |                                           |
| 13. ABSTRACT (Maximum 200 words)<br>A comparison between ground water monitoring alternatives (direct-push installed monitoring wells and drilled monitoring wells) is being conducted on the leading edge of a methyl tertiary butyl ether (MTBE) plume located in a shallow semi-perched aquifer (saturated thickness extending 9 to 22 feet (2.7 to 6.7 meters) below ground surface). The purpose of this effort is to determine whether direct-push wells compare favorably with conventional hollow stem auger (HAS) drilled wells. To make this determination, ground water samples were extracted from numerous adjacent direct-push and HAS installed wells over several sampling events. Analysis of variance (ANOVA) statistical techniques were applied to the resulting chemical data to differentiate between the variability attributed to well type, temporal, and spatial factors. <div style="text-align: right; font-size: 2em; font-weight: bold; margin-top: 20px;">20020204 156</div> |                                                  |                                                 |                                                                     |                                           |
| 14. SUBJECT TERMS<br>MTBE, direct-push wells, conventional hollow stem auger wells, ground water,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                  |                                                 | 15. NUMBER OF PAGES                                                 |                                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                  |                                                 | 16. PRICE CODE                                                      |                                           |
| 17. SECURITY CLASSIFICATION<br>OF REPORT<br>U                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 18. SECURITY CLASSIFICATION<br>OF THIS PAGE<br>U | 19. SECURITY CLASSIFICATION<br>OF ABSTRACT<br>U | 20. LIMITATION OF ABSTRACT<br>U                                     |                                           |
| NSN 7540-01-280-5500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                  |                                                 | Standard Form 298 (Rev. 2-89) Prescribed by ANSI Std Z39-18 298-102 |                                           |



# TechData Sheet

Naval Facilities Engineering Service Center  
Port Hueneme, California 93043-4370



**TDS-2087-ENV**

**July 2001**

## *Advanced Fuel Hydrocarbon Remediation National Technology Test Site, Port Hueneme*

### *Performance Comparison: Direct-Push Wells Versus Drilled Wells*

#### **INTRODUCTION**

A comparison between ground water monitoring alternatives (direct-push installed monitoring wells and drilled monitoring wells) is being conducted on the leading edge of a methyl tertiary butyl ether (MTBE) plume located in a shallow semi-perched aquifer (saturated thickness extending 9 to 22 feet ( 2.7 to 6.7 meters) below ground surface). The purpose of this effort is to determine whether direct push wells compare favorably with conventional hollow stem auger (HSA) drilled wells. To make this determination, groundwater samples were extracted from numerous adjacent direct-push and HSA installed wells over several sampling events. Analysis of variance (ANOVA) statistical techniques were applied to the resulting chemical data to differentiate between the variability attributed to well type, temporal, and spatial factors.

#### **BACKGROUND**

Direct-push monitoring wells are typically considered "temporary" monitoring points, since detailed comparisons with conventional drilled HSA monitoring wells have not previously been conducted. The main regulatory concerns regarding the use of direct-push wells for long-term ground water monitoring include the following:

- Filter pack materials (to prevent sediment entry) are either not used or are not based on grain size distribution of the formation in contact with the well screen section.
- Direct-push well installation specifications do not exist. Therefore, current minimum annular sealing requirements are based solely on drilled well specifications.
- Annular sealing may not be complete for pre-packaged well screen devices and tremmie filter pack applications under certain geologic conditions.

Sample representativeness can be affected by vertical migration of contaminants (cross contamination) caused by incomplete annular sealing of the well. Tremmie filter pack installation methods used for HSA wells can produce voids and preferential migration pathways, and lead to cross contamination. The American Society of Testing and Materials (ASTM) Standard Practice for Design and Installation of Groundwater Monitoring Wells in Aquifers (ASTM D 5092) specifies filter pack design based on grain size distribution of the screened interval of the aquifer formation.

The State of California Department of Water Resources (1981) requires the following:

*"An oversized hole, at least 4 inches (100 millimeters) greater than the diameter of the conductor casing, shall be drilled to the depth specified ... and the annular space ... filled with sealing material."*

The purpose of the 2-inch (5.08-cm) increase in annular sealing radius is to ensure that formation particles are inhibited from entering the well. However, since the design theory of sand pack gradation is based on mechanical retention of the formation particles, a pack thickness of only two or three grain diameters is required to retain and control the formation materials (Driscoll, 1986). Since it is impractical to tremmie a sand pack in a drilled well annulus only a fraction of an inch thick and expect the material to completely surround the well screen, the 2-inch (5.08-cm) requirement has been used as a minimum criteria. Current designs for pre-packaged direct-push well screens allow for the use of "thin" filter packs (Figure 1). Therefore, the 2-inch (5.08-cm) requirement applied to drilled wells may not be necessary for direct-push, pre-packed wells.

## APPROACH


On 11 August 1999, an advisory committee comprised of experts from industry, government regulatory entities, and academia was assembled to determine how best to compare the performance of direct-push and drilled monitoring wells. Of particular interest was the comparison of chemical data (e.g., concentration of contaminant of concern and monitored natural attenuation indicator parameters), field measured parameters (e.g., temperature, pH, dissolved oxygen, etc.), and hydrogeologic data (potentiometric surface measurement) for the different types of wells. Detailed discussions related to direct-push well construction, experimental design, well configuration plans, statistical analysis, and sampling approaches were considered.

Field efforts included piezocone measurements, collection of core samples and water samples from selected depths, installation of customized monitoring well test cells (Figures 2 and 3), and sampling of the wells in triplicate using a low flow sampling procedure developed by EPA Region 1 through four rounds. Laboratory efforts included chemical analysis of water samples (for MTBE)

and various inorganic materials and parameters), determination of permeability for selected core samples (for screen placement selections), and determination of grain size distribution (for well design as required by ASTM D 5092). To evaluate performance of wells adhering to the ASTM D 5092 specifications, grain size distribution curves were generated to determine filter pack grain size and corresponding slot size recommendations.

The recent development of pre-packaged well screen materials and annular protection devices for direct-push wells meeting the ASTM D 5092 specifications offers an alternative to the highly uncertain HSA tremmie filter pack installation method. Pre-packed well screens were evaluated during this comparison. Two additional well designs were also employed to account for the most common well installation designs used by HSA drillers and direct-push device operators. A total of 32 wells were installed in two cells from 8 to 14 February 2000.

An extensive statistical effort was conducted to compare the performance of the different well designs for the specific hydrogeologic regime. Analysis of variance (ANOVA) was selected as the best technique for analyzing data consisting of categorical factor predictors and a continuously varying response variable.

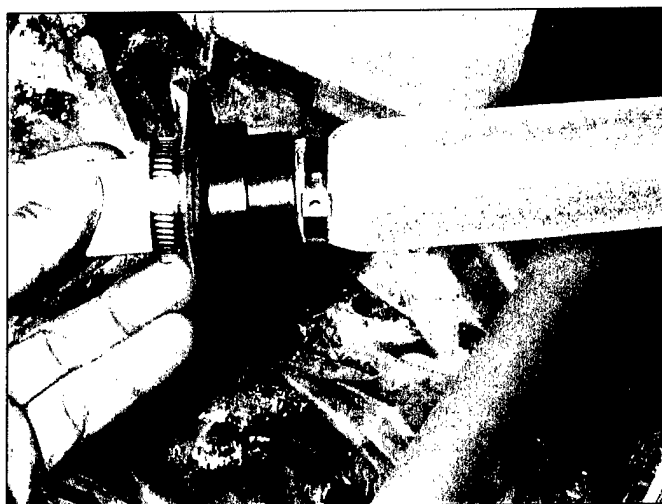

*Figure 1. Preparation of a 3-4-inch prepack direct-push well. The stainless steel enmeshed sand pack sleeve covers the slotted portion of the PVC riser pipe. The flanged area protects the screen from backfill materials.*

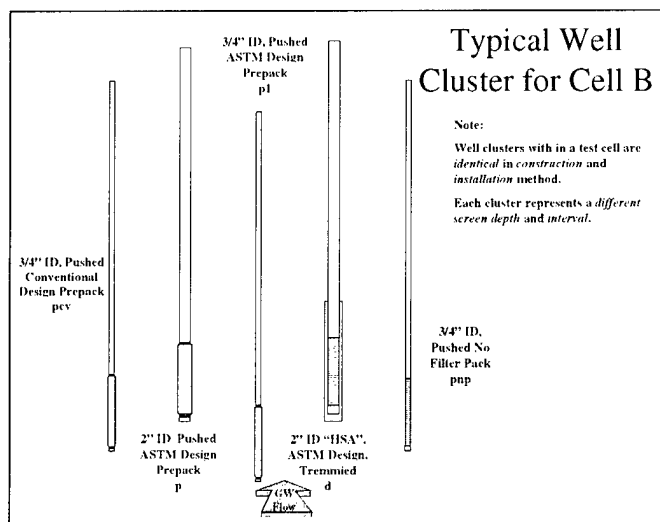


Figure 2. Cell B well cluster configuration.

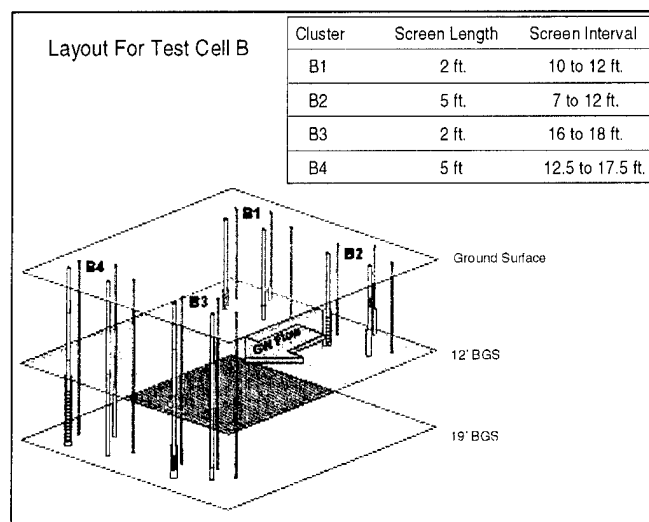


Figure 3. Cell B layout.

## RESULTS

Using ANOVA standard statistical techniques, it was determined that no significant performance differences were observed between the direct-push wells and HSA drilled wells. Within experimental error, the performance was comparable for the particular hydrogeologic setting. Details of the analytical and statistical approach can be found in Kram et al., 2001. Although a comprehensive hydraulic evaluation was not conducted, the different well designs performed similarly with respect to water level measurement. Efforts to gain regulatory acceptance are currently in progress.

## BENEFITS

Direct-push sample access devices can help Remediation Project Managers save significant amounts of money and time for well installation, sampling, and monitoring efforts. For instance, more direct-push wells can be installed per day, material costs are lower, and no hazardous soil cutting waste is generated.

## ACKNOWLEDGMENTS

Funding for field installations, ground water monitoring, and report preparation was provided by Naval Facilities Engineering Command Southwest Division. Funding for the Advanced Fuel Hydrocarbon Remediation National Environmental Technology Test Site

(NETTS) is provided by the Department of Defense Strategic Environmental Research and Development Program (SERDP).

## REFERENCES

- American Society for Testing and Materials. ASTM D 5092: Standard Practice for Design and Installation of Ground Water Monitoring Wells in Aquifers.
- Driscoll, F.G. (1986). Groundwater and Wells. Johnson Filtration Systems, Inc., St. Paul, Minn., 5512, 1986.
- Naval Facilities Engineering Service Center. Technical Report, TR-2120-ENV. Performance Comparison: Direct-Push Wells Versus Drilled Wells, by Mark L. Kram, Dale Lorenzana, Joel Michaelsen, and Ernest Lory, 2001.
- State of California (1981). California Department of Water Resources Bulletin 74-81: Water Well Standards: State of California, December 1981, 92 pages.

---

*For further information on the Comparision of  
Direct-Push Wells versus Drilled Wells, contact:*



**Naval Facilities Engineering Service Center  
Environmental Department**

***Mr. Chuck Reeter, RG, PHG***

Manager, Technology Application Branch  
(805) 982-4991, DSN: 551-4991,  
Internet: reetercv@nfesc.navy.mil

***Mr. Ernest Lory***

Manager, Advanced Fuel Hydrocarbon  
Remediation  
National Environmental Technology Test Site,  
Port Hueneme  
(805) 982-1299, DSN: 551-1299  
Internet: loryee@nfesc.navy.mil

***Mr. Josh Fortenberry***

RPM, Southwest Division  
(805) 982-4990, DSN: 551-4990  
Internet: fortenberryjt@nfesc.navy.mil

***Mr. Mark Kram***

Hydrologist  
(805) 982-2669, DSN: 551-2669  
Internet: kramml@nfesc.navy.mil

*Our Web address is:*

*[www.nfesc.navy.mil](http://www.nfesc.navy.mil)*

*For technical assistance, call:*

*1-888-4 THE ESC (1-888-484-3372)*