

AN ULTRA-COMPACT MARX-TYPE HIGH-VOLTAGE GENERATOR*

D. Goerz, T. Ferriera, D. Nelson, R. Speer, M. Wilson

Lawrence Livermore National Laboratory

P.O. Box 808, Mail Stop L-153

Livermore, CA 94550 USA

Abstract

This paper discusses the design of an ultra-compact, Marx-type, high-voltage generator. This system incorporates high-performance components that are closely coupled and integrated into an extremely compact assembly. Low profile, custom ceramic capacitors with coplanar extended electrodes provide primary energy storage. Low-inductance, spark-gap switches incorporate miniature gas cavities imbedded within the central region of the annular shaped capacitors, with very thin dielectric sections separating the energy storage capacitors. Carefully shaped electrodes and insulator surfaces are used throughout to minimize field enhancements, reduce fields at triple-point regions, and enable operation at stress levels closer to the intrinsic breakdown limits of the dielectric materials. Specially shaped resistors and inductors are used for charging and isolation during operation. Forward-coupling ceramic capacitors are connected across successive switch-capacitor-switch stages to assist in switching. Pressurized SF₆ gas is used for electrical insulation in the spark-gap switches and throughout the unit. The pressure housing is constructed entirely of dielectric materials, with segments that interlock with the low-profile switch bodies to provide an integrated support structure for all of the components. This ultra-compact Marx generator employs a modular

design that can be sized as needed for a particular application. Units have been assembled with 4, 10, and 30 stages and operated at levels up to 100 kV per stage.

I. INTRODUCTION

Marx generators are frequently used in many pulsed power applications. Usually, they are employed to energize pulse forming sections that can deliver greater peak power to lower impedance loads than the Marx can itself. Most often, these Marx units are constructed with standard, commercially available components, arranged as compactly as possible.

For certain applications, Marx generators can be used to directly power some apparatus or device. For these applications, overall system performance can be significantly improved by employing an ultra-compact Marx generator comprised of specially shaped components assembled into an integrated package. We have developed such devices for various applications.

II. DESCRIPTION

The ultra-compact Marx is depicted in Figure 1. It is a sophisticated electrical device and elaborate mechanical

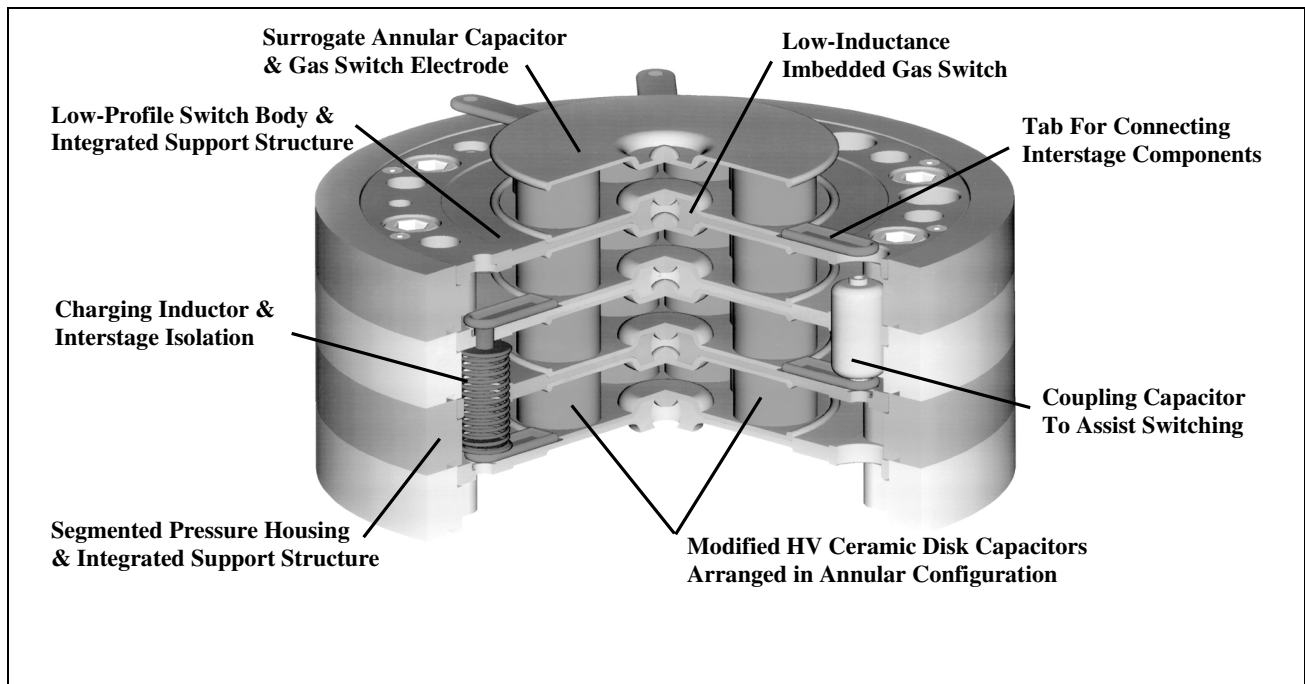


Figure 1. Cutaway-view drawing of the ultra-compact Marx showing key components and integrated packaging.

* Work performed under the auspices of the U. S. Department of Energy by the Lawrence Livermore National Laboratory under Contract W-7405-Eng-48.

Report Documentation Page		Form Approved OMB No. 0704-0188
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.		
1. REPORT DATE JUN 2001	2. REPORT TYPE N/A	3. DATES COVERED -
4. TITLE AND SUBTITLE An Ultra-Compact Marx-Type High-Voltage Generator		5a. CONTRACT NUMBER
		5b. GRANT NUMBER
		5c. PROGRAM ELEMENT NUMBER
6. AUTHOR(S)	5d. PROJECT NUMBER	
	5e. TASK NUMBER	
	5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Lawrence Livermore National Laboratory P.O. Box 808, Mail Stop L-153 Livermore, CA 94550 USA		8. PERFORMING ORGANIZATION REPORT NUMBER
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited		
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. IEEE International Pulsed Power Conference (19th). Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License., The original document contains color images.		
14. ABSTRACT This paper discusses the design of an ultra-compact, Marx-type, high-voltage generator. This system incorporates high-performance components that are closely coupled and integrated into an extremely compact assembly. Low profile, custom ceramic capacitors with coplanar extended electrodes provide primary energy storage. Low-inductance, spark-gap switches incorporate miniature gas cavities imbedded within the central region of the annular shaped capacitors, with very thin dielectric sections separating the energy storage capacitors. Carefully shaped electrodes and insulator surfaces are used throughout to minimize field enhancements, reduce fields at triple-point regions, and enable operation at stress levels closer to the intrinsic breakdown limits of the dielectric materials. Specially shaped resistors and inductors are used for charging and isolation during operation. Forward-coupling ceramic capacitors are connected across successive switch-capacitor-switch stages to assist in switching. Pressurized SF6 gas is used for electrical insulation in the spark-gap switches and throughout the unit. The pressure housing is constructed entirely of dielectric materials, with segments that interlock with the low-profile switch bodies to provide an integrated support structure for all of the components. This ultra-compact Marx generator employs a modular design that can be sized as needed for a particular application. Units have been assembled with 4, 10, and 30 stages and operated at levels up to 100 kV per stage.		
15. SUBJECT TERMS		

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

assembly [1].

Each energy storage capacitor assembly is made up of eight remanufactured disk capacitors arranged in an annular configuration. The 440-pF, 40-kV, N4700-type disk capacitors are modified as shown in Figure 2 to a final height of 1.7 cm. Then they are assembled between extended coplanar electrodes that help maintain uniform

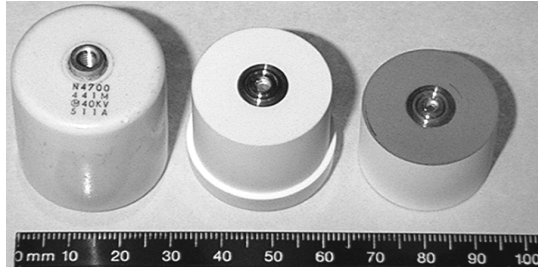


Figure 2. Modifications to commercial disk capacitors.

fields at the triple point regions. Each capacitor assembly is tested to 120 kV in SF_6 before usage. At the elevated operating level of 100 kV, the electrical stress in the ceramic substrate is 60 kV/cm and the effective capacitance is reduced to about 65 percent of normal [2].

The surrogate annular capacitor electrodes also serve as the gas switch electrodes. They are precisely machined to the same shape as the dielectric switch body. Figure 3 shows how the capacitor and switch become an integral unit. The main portion of the switch body that separates



Figure 3. Cutaway view of switch body positioned on top of mating electrode of surrogate annular cap.

the adjacent surrogate annular caps is only 2-mm thick for charge levels as high as 100 kV.

In the central region of the annular cap assembly, a recessed area is formed where the miniature spark gap switch is imbedded. The switch is comprised of raised button electrodes formed on the annular capacitors that protrude into the gas cavity within the dielectric switch body. The cavity wall is contoured to reduce the electric field at the triple points. SF_6 gas has been used to achieve the highest operating levels. Figure 4 shows the operating curve of a typical gas switch having a 2.43-mm gap [3,4].

For such a compact Marx, even the arrangement of charging components becomes difficult. We elected to use a bipolar charging configuration with +50kV and –

50kV power supplies connected through coaxial cables to linear strings of custom charging components.

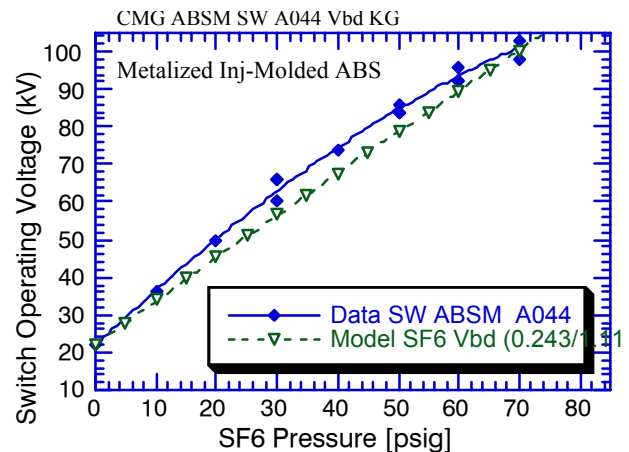


Figure 4. Operating curve of miniature gas switch.

Both resistors and inductors were developed for charging the ultra-compact Marx and providing interstage isolation during operation. Figure 5 shows both types of components.

Each is capable of withstanding the 200-kV impulses over their nominal 3-cm length when operated in a pressurized SF_6 environment. Figure 6 shows the arrangement of the resistors in the Marx along with the tabs used to connect to the sides of the energy storage capacitors.




Figure 5. Charging inductor and resistor.

Also shown in Figure 6 is the arrangement of feed-forward coupling capacitors.

Ordinarily, in conventional Marx generators, the switch capacitance is low enough that stray stage-to-housing capacitance is adequate to couple enough voltage across adjacent

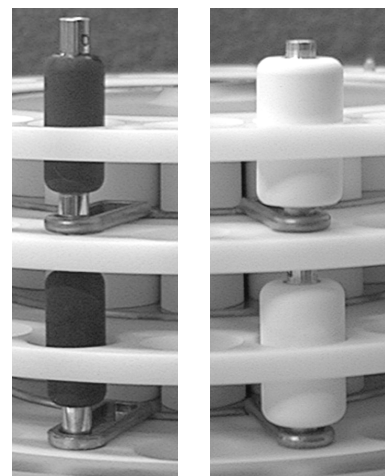


Figure 6. Arrangement of charging resistors (left) and interstage coupling capacitors (right).

switches to cause them to operate. However, in an ultra-compact Marx generator the extremely low-profile switch has such high capacitance that stray coupling is not sufficient. This shortcoming can be overcome by incorporating discrete coupling capacitors connected across stages. In the arrangement shown, the capacitors have no voltage across them when the Marx is charged, but see transient voltages up to 200 kV when the Marx operates. We used commercially available 140-pF 40-kV encapsulated ceramic capacitors, machined somewhat to adjust length and radius edges.

Assembly of the ultra-compact Marx is a process of

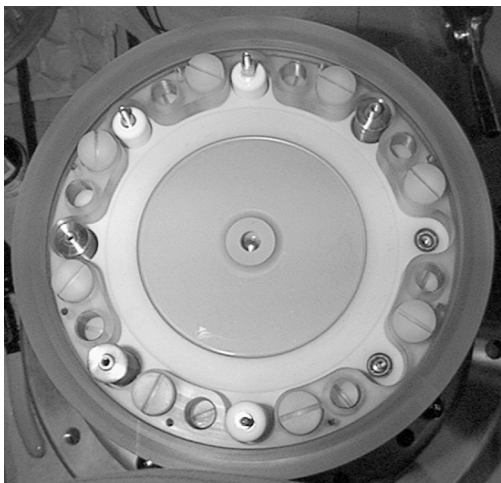


Figure 7b. Next sequential assembly step.

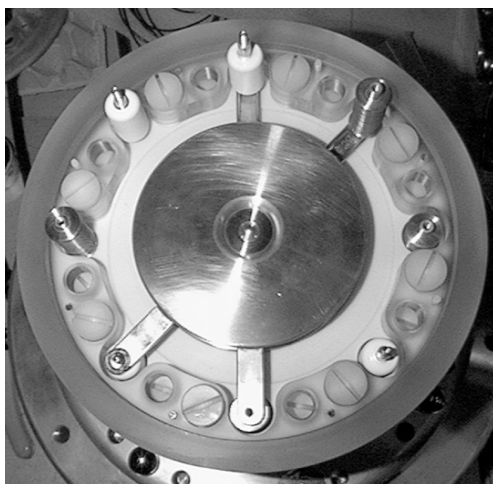


Figure 7a. Intermediate assembly step.

stacking adjoining components and interlocking them with sections of a segmented pressure housing. Figures 7a and 7b show two sequential assembly steps.

III. TEST RESULTS

Prototype units of various sizes have been built and tested. The largest to date is a 30-stage unit that is 75-cm long. Figure 8 shows an open shutter photo taken during a test. The pattern of illumination at each stage is

caused by light from each spark gap channeling through the clear dielectric switch body and backlighting the outboard components. The load is comprised of eight 400-ohm liquid resistors running alongside the unit.

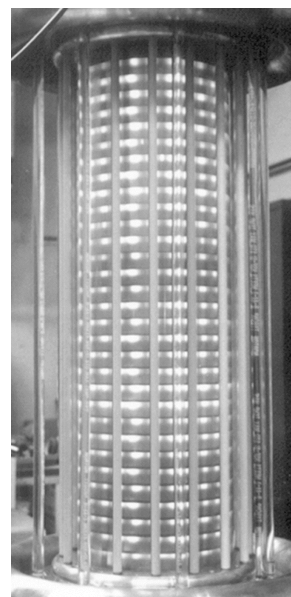


Figure 8. Photograph of 30-stage Ultra-Compact Marx during operation

As designed, operation of any single switch should be sufficient to cause the adjacent switches to self-break. Allowing the weakest switch to selfbreak works quite well. Several methods for triggering have been explored. One uses a trigger pin built into the bottom switch. Another employs trigger pulses coupled through the charge lines to the next in-line switch. Figure 9 shows the voltage on the charge lines for such a case.

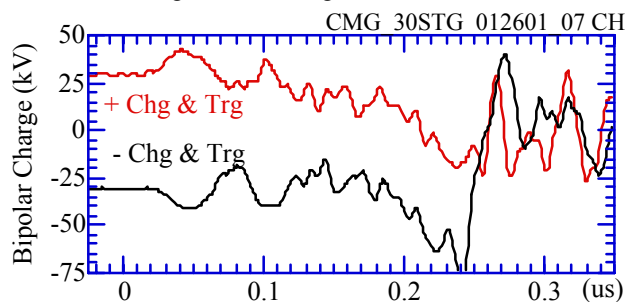


Figure 9. Voltage on charge lines during triggering.

Figure 10 shows a representative output pulse from the prototype 30-stage Marx driving a resistive load. The risetime of the erection process is controlled by the feed-forward coupling capacitors and is comparable to the overall system response. Short circuit testing has also been done to determine system response and compare with circuit modeling. The ultra-compact Marx

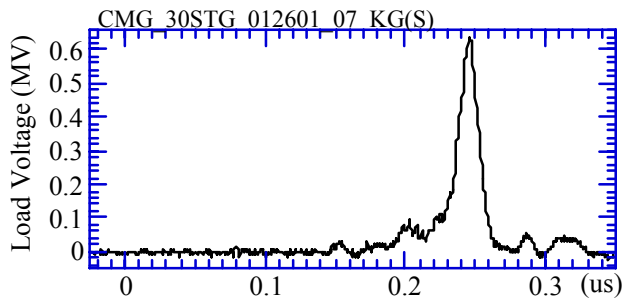


Figure 10. Output voltage into 50 ohm resistive load

can be charged and operated in either polarity, and is capable of withstanding a full voltage reversal.

Further testing is planned to fully evaluate and characterize the performance of the ultra-compact Marx. Figures 11 and 12 show preliminary information from one series of tests covering the middle portion of the operating range.

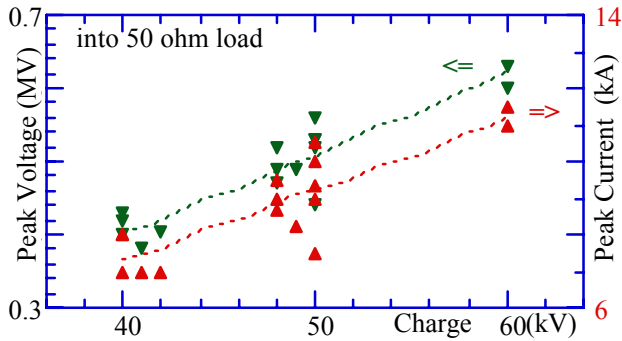


Figure 11. Scaling of peak output levels with charge.

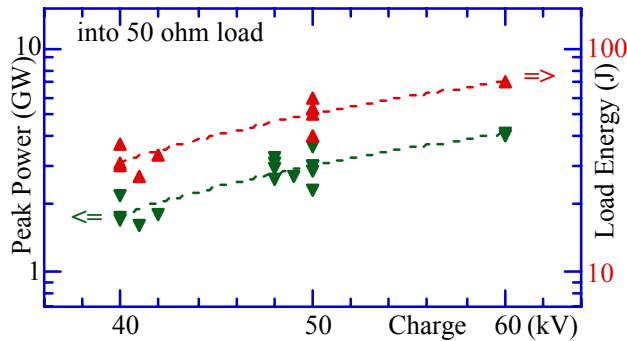


Figure 12. Scaling of output power and energy

V. REFERENCES

- [1] D. Goerz and M. Wilson, "Ultra-Compact Marx-Type High-Voltage Generator," U.S. Patent 6,060,791 issued May 9, 2000.
- [2] D. Goerz and M. Wilson, "Toward Higher Performance Ceramic Capacitors," presented at 1998 High Voltage Workshop, Daytona Beach, FL, 1998.
- [3] D. Goerz, M. Wilson, R. Speer, and J. Penland, "Compact Gas Switch Development," LLNL Engineering RD&T Annual Report, UCRL-ID-125475, Feb, 1997.
- [4] D. Goerz and M. Wilson, "A Low-Profile High-Voltage Compact Gas Switch," in Proc. 11th IEEE Pulsed Power Conference, Baltimore, MD, 1997.

IV. SUMMARY

An ultra-compact Marx-type high-voltage generator has been developed and tested. Custom, low-profile components have been devised to achieve performance levels 3 to 5 times higher than normal. An integrated packaging approach has produced an extremely compact assembly and overall high performance.