

REPORT DOCUMENTATION PAGE			Form Approved OMB NO. 0704-0188		
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA, 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY)		2. REPORT TYPE New Reprint		3. DATES COVERED (From - To) -	
4. TITLE AND SUBTITLE High-Accuracy Measurement of Atomic Polarizability in an Optical Lattice Clock				5a. CONTRACT NUMBER W911NF-11-1-0202	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 1D10BM	
6. AUTHORS J. A. Sherman, N. D. Lemke, N. Hinkley, M. Pizzocaro, R. W. Fox, A. D. Ludlow, C. W. Oates				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAMES AND ADDRESSES Massachusetts Institute of Technology (MIT) 77 Massachusetts Ave. NE18-901 Cambridge, MA 02139 -4307				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS (ES) U.S. Army Research Office P.O. Box 12211 Research Triangle Park, NC 27709-2211				10. SPONSOR/MONITOR'S ACRONYM(S) ARO	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) 60300-PH-DRP.16	
12. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.					
14. ABSTRACT Despite being a canonical example of quantum mechanical perturbation theory, as well as one of the earliest observed spectroscopic shifts, the Stark effect contributes the largest source of uncertainty in a modern optical atomic clock through blackbody radiation. By employing an ultracold, trapped atomic ensemble and high stability optical clock, we characterize the quadratic Stark effect with unprecedented precision. We report the ytterbium optical clock's sensitivity to electric fields (such as blackbody radiation) as the differential static polarizability of the ground and excited clock levels: $26.2612(7)$ kHz/(kV/cm) 2 (1). The clock's fractional uncertainty due to room					
15. SUBJECT TERMS atomic frequency standards, atomic polarizability, optical atomic clocks					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON Vladan Vuletic
a. REPORT UU	b. ABSTRACT UU	c. THIS PAGE UU			19b. TELEPHONE NUMBER 617-324-1174

Report Title

High-Accuracy Measurement of Atomic Polarizability in an Optical Lattice Clock

ABSTRACT

Despite being a canonical example of quantum mechanical perturbation theory, as well as one of the earliest observed spectroscopic shifts, the Stark effect contributes the largest source of uncertainty in a modern optical atomic clock through blackbody radiation. By employing an ultracold, trapped atomic ensemble and high stability optical clock, we characterize the quadratic Stark effect with unprecedented precision. We report the ytterbium optical clock's sensitivity to electric fields (such as blackbody radiation) as the differential static polarizability of the ground and excited clock levels: $36.2612(7) \text{ kHz (kV/cm)}^{-2}$. The clock's fractional uncertainty due to room temperature blackbody radiation is reduced an order of magnitude to 3×10^{-17} .

REPORT DOCUMENTATION PAGE (SF298)
(Continuation Sheet)

Continuation for Block 13

ARO Report Number 60300.16-PH-DRP
High-Accuracy Measurement of Atomic Polariza...

Block 13: Supplementary Note

© 2012 . Published in Physical Review Letters, Vol. Ed. 0 108, (15) (2012), ((15). DoD Components reserve a royalty-free, nonexclusive and irrevocable right to reproduce, publish, or otherwise use the work for Federal purposes, and to authorize others to do so (DODGARS §32.36). The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.

Approved for public release; distribution is unlimited.

High accuracy measure of atomic polarizability in an optical lattice clock

J. A. Sherman,^{1,*} N. D. Lemke,^{1,2} N. Hinkley,^{1,2} M. Pizzocaro,³ R. W. Fox,¹ A. D. Ludlow,¹ and C. W. Oates¹

¹National Institute of Standards and Technology, 325 Broadway, Boulder, Colorado 80305, USA

²University of Colorado, Department of Physics, Boulder, Colorado 80309, USA

³Politecnico di Torino, Corso duca degli Abruzzi 24, 10125 Torino, Italy

(Dated: December 14, 2011)

Despite being a canonical example of quantum mechanical perturbation theory, as well as one of the earliest observed spectroscopic shifts, the Stark effect contributes the largest source of uncertainty in a modern optical atomic clock through blackbody radiation. By employing an ultracold, trapped atomic ensemble and high stability optical clock, we characterize the quadratic Stark effect with unprecedented precision. We report the ytterbium optical clock's sensitivity to electric fields (such as blackbody radiation) as the differential static polarizability of the ground and excited clock levels $\alpha_{\text{clock}} = 36.2612(7) \text{ kHz (kV/cm)}^{-2}$. The clock's fractional uncertainty due to room temperature blackbody radiation is reduced an order of magnitude to 3×10^{-17} .

PACS numbers: 32.10.Dk, 32.60.+i, 06.20.fb, 44.40.+a

An atom immersed in an electric field $\vec{E}_a$ becomes *polarized*—the electronic wave-function is stretched into alignment with the field. Generally, energies of the lowest-lying electronic quantum states $|i\rangle$ are reduced by $-\frac{1}{2}\alpha_i^{(0)}E_a^2$ (see Fig. 1) where $\alpha_i^{(0)}$ is termed a state's static polarizability [1]. The scaling of the Stark effect is quadratic because $\vec{E}_a$ is responsible for inducing, and also interacting with, an atomic dipole moment.

Neutral atom lattice clocks [2] employ 10^3 – 10^5 ultra-

cold alkaline-earth atoms tightly confined in an optical standing wave potential so their intrinsically narrow, largely imperturbable, $^1S_0 \leftrightarrow ^3P_0$ transitions [3] may establish stable and accurate frequency and time references [4, 5]. In analogy to a pendulum's oscillation slowing due to thermal expansion, a ytterbium lattice clock slows when electrically stretched, or polarized, by thermal blackbody radiation (BBR) fields [6, 7]. This phenomenon has been measured in the cesium fountain primary standard [8, 9] and other optical transitions [1, 10, 11].

No shield at finite temperature protects a clock atom from the time varying electric field of BBR, the electromagnetic energy absorbed and re-emitted by all matter in thermal equilibrium according to the Stefan-Boltzmann law [12]. Inside a hollow shell of opaque matter (a *blackbody*), the time-averaged electric field intensity depends strongly on temperature:

$$\langle E^2 \rangle_T = \frac{1}{2} \int_0^\infty \frac{8\alpha^3}{\pi} \frac{\omega^3 d\omega}{e^{\omega/k_B T} - 1} = \frac{4(\alpha\pi)^3}{15} (k_B T)^4, \quad (1)$$

$$\approx (8.319 \text{ V/cm})^2 \left(\frac{T}{300 \text{ K}} \right)^4,$$

where $\alpha \approx 1/137$ is the fine-structure constant, k_B is Boltzmann's constant, and T is the blackbody's absolute temperature [13]. Near room temperature, the spectrum of radiation is peaked strongly near $9.6 \mu\text{m}$ —invisible to the eye and also far detuned from strong electronic transitions in ytterbium.

The ytterbium clock frequency ($\nu \approx 518 \text{ THz}$) is shifted by the net BBR Stark effect of the two clock states, which can be expressed as

$$\Delta\nu_{\text{BBR}} = -\frac{1}{2} \left(\alpha_e^{(0)} - \alpha_g^{(0)} \right) \langle E^2 \rangle_T [1 + \eta_{\text{clock}}(T)], \quad (2)$$

where $\alpha_{g,e}^{(0)}$ are the static polarizabilities of ground and excited states (1S_0 and 3P_0 , respectively), and $\eta_{\text{clock}}(T)$ [7]

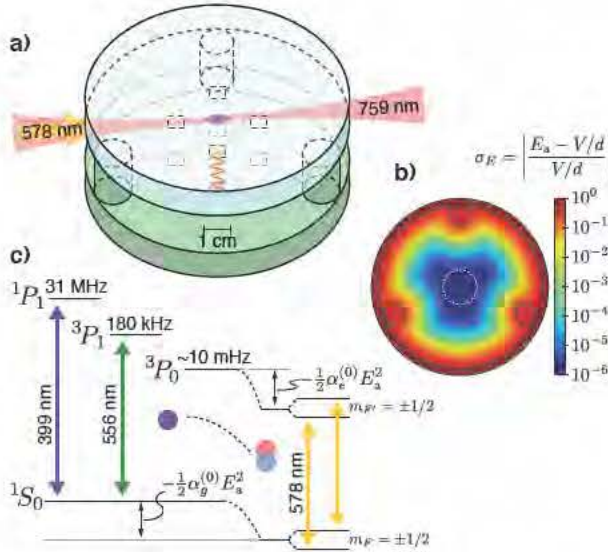


FIG. 1. a) A scale drawing of transparent conductive electrodes surrounding a one-dimensional optical lattice of ytterbium atoms. Four pairs of metallic pads (one of which is highlighted) allow *in situ* interferometric measurement of the electrode spacing d . b) Deviations σ_E of the applied electric field E_a from the ideal field created by infinite-planar electrodes become negligible in the central 1 cm region (dashed white circle). c) Relevant energy levels, laser transition wavelengths, and linewidths ($\Gamma/2\pi$) of ^{171}Yb . Clock states 1S_0 and 3P_0 are shown Stark-shifted by $\vec{E}_a$.

is a small computed parameter accounting for the dynamic aspect of the BBR field [14]. At room temperature, $\eta_{\text{clock}}(300 \text{ K}) = 0.0145(15)$ is a small contribution to $\Delta\nu_{\text{BBR}} \approx -1.3 \text{ Hz}$. More significantly, knowledge of $\alpha_{\text{clock}} \equiv \alpha_e^{(0)} - \alpha_g^{(0)}$ is theoretical, and limited to 10% accuracy due to the complexity of this many-electron atom [7, 15, 16].

To measure α_{clock} , and reduce the clock's uncertainty due to BBR, we fitted electrodes [17] to an existing ytterbium clock apparatus [6]. A voltage V on ideal electrodes spaced by d in vacuum creates an electric field $E_a = V/d$, shifting the clock transition by $\Delta\nu = -\frac{1}{2}\alpha_{\text{clock}}(V/d)^2$. Deviations from this infinite-parallel plane capacitor model are bounded at the 10^{-6} (1 ppm) level by designing a large electrode diameter-to-spacing ratio, ensuring a high degree of parallelism, and centering the atoms radially within the electrodes. Perturbations due to dielectric and conducting mounting structure contribute similar amounts of field uncertainty.

The electrodes, shown in Fig. 1, are comprised of rigidly spaced parallel fused silica plates (101.6(1) mm in diameter) featuring a transparent conductive coating on the inner surfaces. The outer surfaces are anti-reflection coated for all relevant laser wavelengths. The electrode separation $d = 15.03686(8) \text{ mm}$ is maintained by three fused silica rods bonded 45(1) mm from the center axis with hydroxide catalysis [18, 19]. d is determined interferometrically by measuring (*in situ*) the free-spectral-range $\nu_{\text{fsr}} = c/2d$ of planar etalons formed by 90%-reflective metallic pads (33 nm gold on 2 nm chromium) deposited over the 0.3 nm indium-tin-oxide inner electrode faces [17]. Each 6 mm square pad is offset 28 mm from center. An external cavity diode laser is tuned by 17 THz around $\lambda_p = 766 \text{ nm}$ to observe ~ 10 of $N_f \approx 1700$ etalon transmission peaks. Each transmission feature, located with a wavelength meter to $\pm 50 \text{ MHz}$, has a linewidth of 500 MHz, consistent with a finesse $\mathcal{F} \approx 20$. Spacing the observed peaks logarithmically allows an efficient least-squares determination of ν_{fsr} . Systematic wavelength and fringe-center inaccuracy is largely divided down by N_f . Uncertainty in the metal pad thickness contributes 3×10^{-7} uncertainty to d . Gold's index of refraction ($n_r \approx 0.16$) [20] varies gently about λ_p ; variations in ν_{fsr} with fringe index due to mirror phase shifts contribute an error of 1.2×10^{-6} . Stray etalons add a similarly sized line-pulling error. Electrode parallelism is constrained by the measured finesse as well as spatially independent pad-pair measurements of d .

Thin strips of silver-loaded epoxy join insulated wires to electrode perimeters. Two wires are redundantly bonded to each electrode to establish the sheet resistance of the conductive layer ($R_{\text{ito}} = 3 \text{ k}\Omega$). The parasitic vacuum resistance between the electrodes and the grounded vacuum structure is $R_{\text{leak}} = 316(9) \text{ G}\Omega$ ($R_{\text{leak}} = 14.3(5) \text{ G}\Omega$) below (above) an observed field-emission threshold occurring near 800 V. Leads to the electrodes have current-

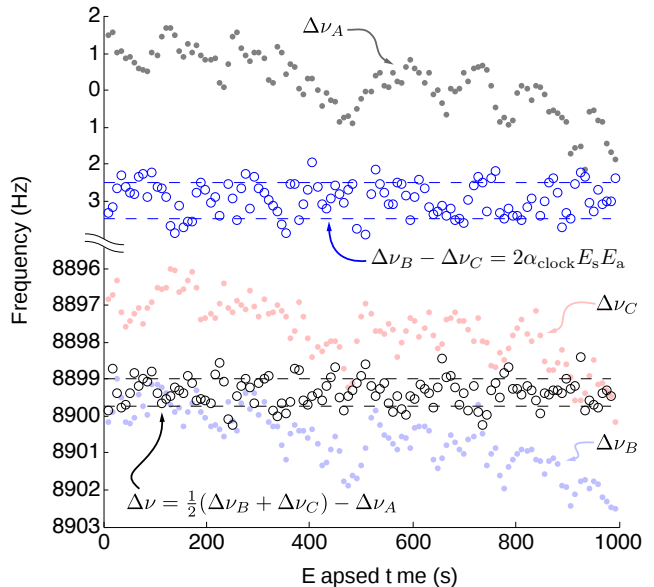


FIG. 2. Integrated clock laser error signals are shown for $E_a \approx 700.6 \text{ V/cm}$ under three interleaved conditions: both electrodes grounded ('A', grey dots), and each electrode at high voltage with the other grounded ('B' and 'C', blue and red dots). Laser drift, common to these signals, is removed from the quadratic Stark shift signal (black open circles, see Eq. 3) and the stray field signal $\Delta\nu_B - \Delta\nu_C$ (blue open circles). Dashed lines show standard deviations for these signals. A passive feed-forward linear drift canceler reduced clock laser drift to 4 Hz over this 1000 s data run.

limiting resistances of 10 k Ω each; the worst-case E_a error from voltage division is 1.4×10^{-6} . We constructed a regulated voltage source producing 100 V–1050 V with 1.0×10^{-6} instability over 1 s–1000 s [21].

A clock interrogation cycle (360 ms) begins with slowing, cooling, and trapping ^{171}Yb from an atomic beam with a magneto-optical trap operating first on the $^1S_0 \leftrightarrow ^1P_1$ transition (399 nm), then on the narrower $^1S_0 \leftrightarrow ^3P_1$ transition (556 nm). Ultracold atoms (10 μK) are confined by an optical lattice (1D) at the so-called *magic* wavelength near 759 nm resulting in no net ac-Stark shift between 1S_0 and 3P_0 [3, 22]. Atoms are optically pumped into one nuclear-spin state ($m_F = \pm 1/2$) of 1S_0 . A π -polarized pulse (100 ms) of resonant 578 nm laser radiation coherently excites one of two $\Delta m_F = 0$ transitions (split by 500 Hz by an applied magnetic field $\vec{B}$) to the long-lived 3P_0 state (see Fig. 1). A series of laser pulses converts the resulting clock state populations into fluorescence signals which are then normalized against atom number fluctuations [6].

The stabilized 578 nm laser is independently locked to the atomic transition under three interleaved conditions: both electrodes grounded (condition 'A'), and each electrode at high voltage with the other grounded ('B' and 'C'). Each condition, mediated by opto-coupled

reed-relays, lasts $\tau_v = 2.9$ s, during which the clock laser maintains a fractional frequency stability approaching 3×10^{-16} [23]. In each period τ_v , two interrogations are performed on each side of both nuclear-spin spectroscopic features. Slow laser drifts are common to all three integrated error signals, $\Delta\nu_A$, $\Delta\nu_B$, and $\Delta\nu_C$ (see Fig. 2). The quadratic Stark shift is

$$\Delta\nu = \frac{1}{2}(\Delta\nu_B + \Delta\nu_C) - \Delta\nu_A. \quad (3)$$

The total Allan deviation [24] is used to determine the statistical uncertainty of $\Delta\nu$. For presented data, $\vec{E}_a \parallel \vec{E}_{\text{lattice}}$ (both were perpendicular to $\vec{B}$), though other configurations were examined.

Reversing $\vec{E}_a$ [17] yields information about stray electric fields $\vec{E}_s$ parallel to $\vec{E}_a$ or differential contact potentials [25] (e.g. one electrode may develop a thin layer of ytterbium deposition). The difference $\Delta\nu_B - \Delta\nu_C = 2\alpha_{\text{clock}}\vec{E}_a \cdot \vec{E}_s$ reveals that $|\vec{E}_s \cdot \hat{z}| \approx 0.1$ V/cm (see Fig. 3); temporal drift and weak correlation with $\vec{E}_a$ are observed.

Shifts due to a truly static field $\vec{E}_s$ subtract completely in Eq. 3. However, time dependent changes, notably those correlated with the polarity of $\vec{E}_a$, do not. Because of careful experimental design, we are not aware of any appreciable stray field source with such a correlation. Nevertheless, because an increase in dwell time τ_v potentially allows an accumulation of unknown stray charge (and thus a correlated stray field), we varied τ_v over 0.8 s–12 s and resolved a small but negligible correlation in $\Delta\nu$ at applied fields twice the maximum used for reported data. We observed no systematic variation in the measured polarizability α_{clock} with E_a . We note that for data presented here, E_a remained three orders of magnitude below the dielectric strength of fused silica, and five orders of magnitude below the characteristic level [26] for ITO electron emission. The time constant for electrode charging is 8 μ s. Typically, 100 ms is allowed for settling. Connecting high voltage to both electrodes creates an electric-gradient field; by observing $\Delta\nu < 30$ mHz with 2 kV applied, we constrain the atoms' radial position to ± 10 mm, consistent with visual observations.

Fig. 3a shows the observed clock frequency shift quadratically as a function of E_a . When fit to a polynomial, the data are consistent with no quartic, cubic, linear, or offset terms—an ideal demonstration of the Stark effect as non-degenerate perturbation theory. No inhomogeneous line broadening is observed with increased shift, so the fractional statistical uncertainty in $\Delta\nu$ reduces as E_a^{-2} . In contrast, the uncertainty of the applied voltage (the dominant systematic uncertainty) rises as E_a^2 according the specifications of our commercial voltmeters. Fig. 3c plots the polarizability inferred at each E_a . Table I lists the sources of measurement uncertainty at a particular applied field. Taking the mean of all measurements, weighted by the total standard errors, we de-

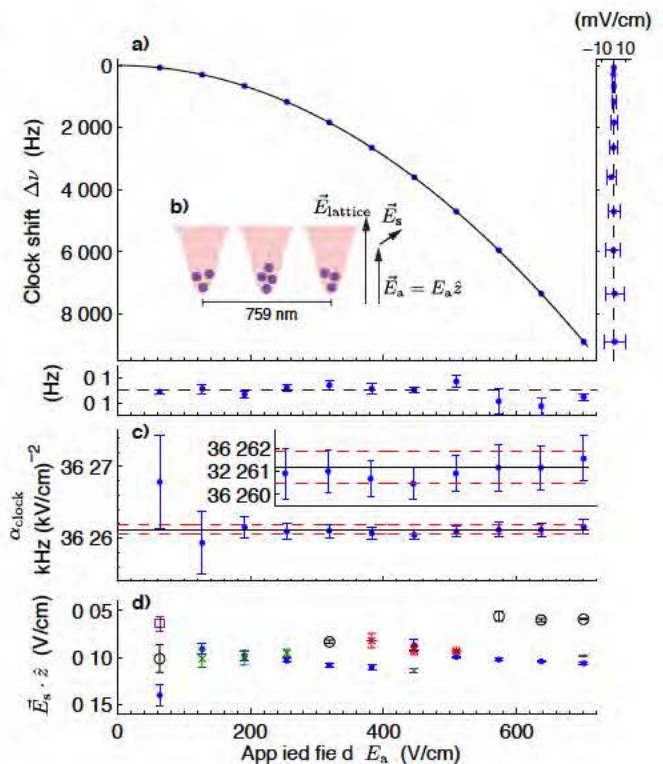


FIG. 3. The clock slows when stretched. a) Residuals of a quadratic fit $\Delta\nu = -\frac{1}{2}\alpha_{\text{clock}}E_a^2$ display measurement uncertainties in $\Delta\nu$ (below) and E_a (right). b) An inset depicts lattice trapped atoms and the relative orientations of $\vec{E}_{\text{lattice}}$, $\vec{E}_a$, and hypothetical static stray field $\vec{E}_s$. c) At each E_a , we display $\alpha_{\text{clock}} = -2\Delta\nu/E_a^2$ with combined statistic and systematic uncertainties (see Table I). An inset shows data at higher resolution. Solid and dashed lines show the final result and standard error, respectively. d) The component of a stray field $\vec{E}_s \parallel \vec{E}_a$ is precisely detected upon $\vec{E}_a$ reversal. We observe more temporal variation in E_s than correlation with E_a . Data with different marker styles were acquired on separate days.

termine $\alpha_{\text{clock}} = 36.2612(7)$ kHz/(kV/cm)². A least-squares functional fit (Fig. 3a) yields a consistent value for α_{clock} . Table II demonstrates the agreement between this measurement and theoretical predictions.

Neither static nor BBR fields cause spin-magnitude-dependent ($\propto |m_F|^2$) *tensor* Stark shifts because both clock states have insufficient total angular momentum ($F = F' = 1/2$) [27]. Spin-sign-dependent ($\propto m_F$) *vector* Stark shifts are absent as well: BBR has no net polarization and static fields lack the time dependence to be circularly polarized [28]. No opposite-parity states lie close to either clock state so no linear dependence of $\Delta\nu$ on E_a is expected or observed. A third-order effect [29] mixing the polarization due to the optical lattice ($E_{\text{lattice}} \approx 10$ kV/cm) and E_a is expected to cause a 10^{-9} fractional error at the highest E_a . A fourth-order term $\Delta\nu \propto E_a^4$ (the *hyper-polarizability*) is responsible for a

TABLE I. Uncertainty budget for a representative datum. Errors in E_a contribute twice the uncertainty as those in $\Delta\nu$ due to the dependence $\alpha_{\text{clock}} = -2\Delta\nu/E_a^2$. This factor of two is included in the tabulated quantities below. The total uncertainty in α_{clock} , for the particular measurement shown, is found by summing all contributions in quadrature.

Uncertainty source	$\times 10^{-6}$	Notes/conditions
Shift statistical error	8.3	$\Delta\nu = -3603.77(3)$ Hz (1800 s averaging)
Higher-order Stark shifts	0.01	
Electric field (E_a) errors:		$E_a = 445.836(4)$ V/cm
Voltmeter systematic	16.4	Regulated 670.3966(55) V
R_{leak} voltage division	0.1	$I_{\text{leak}} = 2.1$ nA; 20 k Ω leads
Finite electrode size	1	Atoms centered ± 10 mm
Electrode parallelism	4	$\theta_{\text{wedge}} < 7$ μ rad
Electrode deformation	0.8	Warping of fused silica by gravity
Dielectric spacers	2	Perturbation of ideal field due to three fused silica posts
Spacing d (statistical)	1.6	$N_f > 1700$ fringes spanned
Spacing d (systematic)	9	Fringe centering, wavemeter accuracy, stray etalons, stability
Etalon probe tilt, ϕ	0.3	$(1 - \cos \phi)$ error, $\phi \ll 0.5$ mrad; retro-coupling single-mode fiber
Yb thermal beam	0.06	Dielectric $(\epsilon_r - 1) \sim 8 \times 10^{-9}$
Stray fields, static	0.04	Uncertainty in $\vec{E}_a$ reversal
Stray fields, varying	2	$\Delta\nu$ correlation with τ_v
Uncertainty in α_{clock}	21	

TABLE II. Comparison with theoretical predictions. Results are also presented in SI and frequently used *atomic units* (a.u.) [1].

$\alpha_{\text{clock}} \equiv \alpha_e^{(0)} - \alpha_g^{(0)}$			
[kHz (kV/cm) $^{-2}$]	[a.u.]	$10^{-39}[\text{C m}^2/\text{V}]$	Reference
40.1(3.7)	161(15)	2.65(25)	[15]
38.6(4.0)	155(16)	2.56(26)	[7]
33(13)	134(51)	2.21(84)	[16]
36.2612(7)	145.726(3)	2.40269(5)	this work

similarly sized effect. We observed no systematic effect in $\Delta\nu$ upon varying the lattice intensity or polarization. We ensured that the atomic density did not systematically vary with application of E_a ; such a correlation could introduce contamination from the cold collision shift [30]. We resolved no shift by systematically varying the electrodes between grounded and floating configurations.

In an ideal blackbody environment at 300 K, the clock transition frequency is reduced from its value at $T = 0$ K by $\Delta\nu_{\text{BBR}} = -1.273(1)$ Hz, where the uncertainty is now dominated by that of η_{clock} (see Eq. 2). In practice, precise knowledge of α_{clock} and η_{clock} is not sufficient to determine the effect of BBR, since knowledge of the environment is limited. Non-uniformities arise due to temperature gradients, a hot effusive oven tip (850 K) and heated viewport (600 K), each about 30 cm away from the trapped atoms, and vacuum walls and view-

ports with less than unity emissivity and opacity. An effective 1 K uncertainty in T leads to a fractional uncertainty of 3×10^{-17} in the room temperature clock. A cryogenically shielded environment at $T = 77(1)$ K with carefully controlled optical access can reduce the BBR shift uncertainty to the 1×10^{-18} regime [31]. A stray static field of 0.1 V/cm shifts the ytterbium clock transition -0.18 mHz, a fractional change of 4×10^{-19} . A conductive enclosure at any temperature further ensures these, or smaller, stray static fields [32].

We note that our present uncertainty in α_{clock} is competitive with the best known atomic or molecular polarizability, that of helium [33]. Beyond timekeeping, possible metrological applications of the present work include high voltage measurement without the use of resistive dividers, and more directly, an atomic electric field meter sensitive at moderate field strengths.

This research was performed while J.A.S. held a National Research Council Research Associateship Award. The authors acknowledge NIST and DARPA QuASaR for financial support, F. Calcagni and J. Perkins for contributing to electrode fabrication, T. Fortier and S. Diddams for femtosecond optical frequency comb measurements, and E.N. Fortson for a useful discussion on potential systematic effects.

* jeff.sherman@nist.gov

- [1] J. Mitroy, M. S. Safronova, and C. W. Clark, J. Phys. B **43**, 202001 (2010).
- [2] H. Katori, M. Takamoto, V. G. Palchikov, and V. D. Ovsiannikov, Phys. Rev. Lett. **91**, 173005 (2003).
- [3] S. G. Porsev, A. Derevianko, and E. N. Fortson, Phys. Rev. A **69**, 021403 (2004).
- [4] T. Udem, R. Holzwarth, and T. W. Hänsch, Nature **416**, 233 (2002).
- [5] L. Hollberg, C. W. Oates, G. Wilpers, C. W. Hoyt, Z. W. Barber, S. A. Diddams, W. H. Oskay, and J. C. Bergquist, J. Phys. B **38**, S469 (2005).
- [6] N. D. Lemke, A. D. Ludlow, Z. W. Barber, T. M. Fortier, S. A. Diddams, Y. Jiang, S. R. Jefferts, T. P. Heavner, T. E. Parker, and C. W. Oates, Phys. Rev. Lett. **103**, 063001 (2009).
- [7] S. G. Porsev and A. Derevianko, Phys. Rev. A **74**, 020502 (2006).
- [8] E. Simon, P. Laurent, and A. Clairon, Phys. Rev. A **57**, 436 (1998).
- [9] E. J. Angstmann, V. A. Dzuba, and V. V. Flambaum, Phys. Rev. Lett. **97**, 040802 (2006).
- [10] T. Rosenband, W. M. Itano, P. O. Schmidt, D. B. Hume, J. C. J. Koelemeij, J. C. Bergquist, and D. J. Wineland, “Blackbody radiation shift of the $^{27}\text{Al}^+ \ ^1S_0 - ^3P_0$ transition,” (2006), arXiv:physics/0611125.
- [11] J. Li and W. A. van Wijngaarden, Phys. Rev. A **53**, 604 (1996).
- [12] L. D. Landau and E. M. Lifshitz, *Statistical Physics, Third edition, Part I (Course in Theoretical Physics)*, Vol. 5 (Butterworth-Heinemann, 1980).

- [13] E. J. Angstmann, V. A. Dzuba, and V. V. Flambaum, Phys. Rev. A **74**, 023405 (2006).
- [14] State specific parameters ($\eta_g \approx 0, \eta_p = 0.007$) computed in [7] help to define $\eta_{\text{clock}} \equiv (\eta_e \alpha_e^{(0)} - \eta_g \alpha_g^{(0)})/\alpha_{\text{clock}}$.
- [15] V. A. Dzuba and A. Derevianko, J. Phys. B **43**, 074011 (2010).
- [16] S. G. Porsev, Y. G. Rakhlin, and M. G. Kozlov, Phys. Rev. A **60**, 2781 (1999).
- [17] L. R. Hunter, D. Krause Jr, K. E. Miller, D. J. Berkeland, and M. G. Boshier, Opt. Comm. **94**, 210 (1992).
- [18] D. H. Gwo, “Ultra precision and reliable bonding method,” (2001), US Patent 6,284,085.
- [19] S. Reid, G. Cagnoli, E. Elliffe, J. Faller, J. Hough, I. Martin, and S. Rowan, Phys. Lett. A **363**, 341 (2007).
- [20] L. G. Schulz and F. R. Tangherlini, JOSA **44**, 362 (1954).
- [21] P. Horowitz and W. Hill, *The Art of Electronics*, Vol. 2 (Cambridge, 1989) pp. 368–375.
- [22] Z. W. Barber, J. E. Stalnaker, N. D. Lemke, N. Poli, C. W. Oates, T. M. Fortier, S. A. Diddams, L. Hollberg, C. W. Hoyt, A. V. Taichenachev, *et al.*, Phys. Rev. Lett. **100**, 103002 (2008).
- [23] Y. Y. Jiang, A. D. Ludlow, N. D. Lemke, R. W. Fox, J. A. Sherman, L. S. Ma, and C. W. Oates, Nature Photonics **5**, 158 (2011).
- [24] D. A. Howe, IEEE Trans. Ultrason. Ferroelectr. Freq. Control **47**, 1102 (2000).
- [25] L. H. Fisher and R. N. Varney, Amer. J. Phys. **44**, 464 (1976).
- [26] Y. Y. Lau, Y. Liu, and R. K. Parker, Physics of Plasmas **1**, 2082 (1994).
- [27] J. R. P. Angel and P. G. H. Sandars, Proc. R. Soc. A **305**, 125 (1968).
- [28] J. E. Stalnaker, D. Budker, S. J. Freedman, J. S. Guzman, S. M. Rochester, and V. V. Yashchuk, Phys. Rev. A **73**, 043416 (2006).
- [29] M. V. Romalis and E. N. Fortson, Phys. Rev. A **59**, 4547 (1999).
- [30] N. D. Lemke, J. von Stecher, J. A. Sherman, A. M. Rey, C. W. Oates, and A. D. Ludlow, Phys. Rev. Lett. **107**, 103902 (2011).
- [31] T. Middelmann, C. Lisdat, S. Falke, J. S. R. Vellore Winfred, F. Riehle, and U. Sterr, IEEE Trans. Instrum. Meas. **99**, 1 (2010).
- [32] J. Lodewyck, M. Zawada, L. Lorini, M. Gurov, and P. Lemonde, arXiv:1108.4320 (2011).
- [33] J. W. Schmidt, R. M. Gavioso, E. F. May, and M. R. Moldover, Phys. Rev. Lett. **98**, 254504 (2007).