

# UNCLASSIFIED

AD NUMBER	
ADA801172	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to DoD only; Administrative/Operational Use; 08 MAR 1950. Other requests shall be referred to National Aeronautics and Space Administration, Washington, DC. Pre-dates formal DoD distribution statements. Treat as DoD only.	
AUTHORITY	
NACA research abstracts no. 70 dtd 21 Sep 1954; NASA TR Server website	

THIS PAGE IS UNCLASSIFIED

# Reproduction Quality Notice

This document is part of the Air Technical Index [ATI] collection. The ATI collection is over 50 years old and was imaged from roll film. The collection has deteriorated over time and is in poor condition. DTIC has reproduced the best available copy utilizing the most current imaging technology. ATI documents that are partially legible have been included in the DTIC collection due to their historical value.

If you are dissatisfied with this document, please feel free to contact our Directorate of User Services at [703] 767-9066/9068 or DSN 427-9066/9068.

**Do Not Return This Document  
To DTIC**

Reproduced by



CENTRAL AIR DOCUMENTS OFFICE

WRIGHT-PATTERSON AIR FORCE BASE - DAYTON, OHIO

REEL-

3459

A.T.I

72382

*The*  
**U.S. GOVERNMENT**

IS ABSOLVED

FROM ANY LITIGATION WHICH MAY ENSUE FROM ANY  
INFRINGEMENT ON DOMESTIC OR FOREIGN PATENT RIGHTS  
WHICH MAY BE INVOLVED.

**CONFIDENTIAL**

*Reproduced*

**FROM**

**LOW CONTRAST COPY.**

**ORIGINAL DOCUMENTS  
MAY BE OBTAINED ON  
LOAN**

**FROM**

**CADO**

LOAN RETURN TO CADO-D1 BY: <b>78</b>		CADO CONTROL NO:	US CLASSIFICATION: <b>Conf'd 1</b>	ATI NO: <b>72382</b>	OA NO: <b>NACA RML50A18</b>
DATE INITIATED: <b>28 April 1950</b>		TITLE: <b>Aerodynamic Characteristics of a Wing with Un-swept Quarter-Chord Line, Aspect Ratio 2, Taper Ratio 0.78, and NACA 65A004 Airfoil Section - Transonic Bump Method (Research Memorandum) 8 March 1950. 17 pp.</b>			
ORIGINAL COPY TO: <b>CADO L1</b>		AUTHOR(S): <b>(5) Polhamus, Edward C.; Campbell, George S.</b>			
DISTRIBUTION LIMITED TO:		ORIGINATING AGENCY: <b>(5) National Advisory Committee for Aeronautics, Langley Aeronautical Lab., Langley Air Force Base, Va.</b>			
COPIES OBTAINABLE FROM:		FOREIGN TITLES: <b>(N.A.)</b>			
SPECIAL INSTRUCTIONS: <b>UTI</b>		PUBLISHED BY: <b>(Same) UT</b>		PUBLISHING NO: <b>(Same)</b>	
		TRANSLATED BY: <b>(N.A.)</b>		TRANSLATION NO: <b>(N.A.)</b>	
AGO CONTROL <b>(N.A.)</b>		PREVIOUSLY CATALOGED AS: <b>(N.A.)</b>			

DATE: <b>March 50</b>	COUNTRY: <b>U.S.</b>	LANGUAGE: <b>English</b>	PAGES: <b>17</b>	ILLUSTRATIONS: <b>photos, table, diagr, graphs</b>
SUBJ. DIVISION & SECTION:		SUBJECT HEADINGS:		
2		6		
		<b>Wings - Mach number effect</b>		
		<b>RD/VAK Wings - Lift</b>		
RELATED REFERENCES:				
CORRESPONDENCE FILED UNDER:			ORIGINAL LOAN RETURNED TO OWNER (DATE):	
CADO CONTROL NO:			ATI NO: <b>72382</b>	

ABSTRACT

72382

**AIR DOCUMENTS DIVISION, T-2  
AMC, WRIGHT FIELD  
MICROFILM No.  
RC-3459 F**

INSPECTED BY:										
CADO-D1	CADO-P1	CADO-P2	CADO-P31	CADO-P32	CADO-P34	CADO-P4	CADO-F12	CADO-B1	CADO-B31	CADO-B41
		<b>CWE</b>	<b>CEK</b>	<b>R</b>	<b>VRE</b>	<b>Z</b>				
TRANSFERRED TO:					RECEIVED BY:			DATE:		
CADO CONTROL NO:					ATI NO: <b>72382</b>					
RECEIVED BY:					DATE:			INITIALS:		

CAGO FORM NO. 5 - CONTROL AND RECORD SHEET

CONFIDENTIAL

Copy 35  
RM L50A18

MAR 15 1950




# RESEARCH MEMORANDUM

AERODYNAMIC CHARACTERISTICS OF A WING WITH  
UNSWEEPED QUARTER-CHORD LINE, ASPECT RATIO 2, TAPER  
RATIO 0.78, AND NACA 65A004 AIRFOIL SECTION

TRANSFORM-BUILD METHOD

by Edward C. Polhamus and George S. Campbell

National Advisory Committee  
for Aeronautics  
Langley Aeronautical Laboratory  
Hampton, Virginia



NATIONAL ADVISORY COMMITTEE  
FOR AERONAUTICS

WASHINGTON  
March 8, 1950

CONFIDENTIAL

NACA RM L50A18

FILE NO. 22382

FILE COPY



## NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

## RESEARCH MEMORANDUM

AERODYNAMIC CHARACTERISTICS OF A WING WITH  
UNSWEPT QUARTER-CHORD LINE, ASPECT RATIO 2, TAPER  
RATIO 0.78, AND NACA 65A004 AIRFOIL SECTION

## TRANSONIC-BUMP METHOD

By Edward C. Polhamus and George S. Campbell

## SUMMARY

The aerodynamic characteristics of a low-aspect-ratio wing have been investigated in the Langley high-speed 7- by 10-foot tunnel over a Mach number range of 0.60 to 1.17 by use of the transonic-bump technique. The results include lift, drag, pitching-moment, and root bending moment for a wing having an unswept quarter-chord line, aspect ratio 2, taper ratio 0.78, and an NACA 65A004 airfoil section.

The variations of aerodynamic characteristics with Mach number in the low-lift range were relatively small except for a sudden 9-percent mean aerodynamic chord rearward movement of the aerodynamic center near a Mach number of unity.

Theoretical values of lift-curve slope and lateral center of pressure have been shown to be in good agreement with experimental results for subsonic Mach numbers. A comparison of the drag data with theory indicated that the high values of drag due to lift were probably caused by a loss in leading-edge suction.

## INTRODUCTION

A series of wing and wing-fuselage combinations is being investigated in the Langley high-speed 7- by 10-foot tunnel to study the effects of wing geometry on longitudinal stability characteristics at transonic speeds. By utilizing the transonic-bump technique a Mach number range of about 0.60 to 1.18 is obtained.

CONFIDENTIAL

This paper presents the results of an investigation of force and moment characteristics for a wing with an unswept quarter-chord line, aspect ratio 2, taper ratio 0.78, and an NACA 65A004 airfoil section parallel to the free stream.

#### MODEL AND APPARATUS

The semispan wing model of the present tests had an unswept quarter-chord line, an aspect ratio of 2, a taper ratio of 0.78, and an NACA 65A004 airfoil section parallel to the free stream. A two-view drawing of the wing, which was made of beryllium copper, is presented in figure 1; airfoil ordinates are given in table I. The wing was obtained by modifying an unswept wing having an aspect ratio of 4 and a taper ratio of 0.6 that was previously tested as part of the transonic research program. Pictorial views of the model mounted on the bump are presented in figures 2 and 3.

The model was mounted on an electrical strain-gage balance enclosed within the bump. The lift, drag, pitching-moment, and root bending moment were measured with potentiometers.

#### COEFFICIENTS AND SYMBOLS

$C_L$	lift coefficient (Twice panel lift/ $qS$ )
$C_D$	drag coefficient (Twice panel drag/ $qS$ )
$C_m$	pitching-moment coefficient referred to $0.25\bar{c}$ (Twice panel pitching moment/ $qS\bar{c}$ )
$C_B$	bending-moment coefficient about root chord line $\left(\text{Root bending moment} / q \frac{S}{2} \frac{b}{2}\right)$
$\Delta C_D$	drag coefficient due to lift ( $C_D - C_{D_0}$ )
$q$	effective dynamic pressure over span of model ( $\rho V^2/2$ )
$\rho$	air density
$V$	free-stream velocity
$S$	twice wing area of semispan model, 11.11 square inches



$\bar{c}$  mean aerodynamic chord of wing using theoretical tip

$$\left( \frac{2}{S} \int_0^{b/2} c^2 dy \right)$$

$c$  local wing chord

$y$  spanwise distance from wing root

$b$  twice span of model

$A$  aspect ratio of wing ( $b^2/S$ )

$X$  distance along airfoil chord, percent chord

$Y$  airfoil ordinate, percent chord

$M$  effective Mach number over span of model

$M_a$  average chordwise local Mach number

$R$  Reynolds number of wing based on  $\bar{c}$

$\alpha$  angle of attack, degrees

$y_{cp}$  lateral center of pressure, percent semispan  $\left( 100 \frac{C_B}{C_L} \right)$

Subscripts:

$M$  at a constant Mach number

$l$  local value

$o$  at zero lift

TESTS

The tests were conducted in the Langley high-speed 7- by 10-foot tunnel utilizing an adaptation of the NACA wing-flow technique for obtaining transonic speeds. The method used involves mounting a model in the high-velocity flow field generated over the curved surface of a bump located on the tunnel floor. (See reference 1.)

Typical contours of the local Mach number in the region of the model location on the bump, obtained from surveys with no model in position, are shown in figure 4. The spanwise Mach number gradient for the model tested increases from 0.02 at low Mach numbers to 0.04 at the higher speeds. The chordwise Mach number gradient is generally less than 0.02. No attempt has been made to evaluate the effect of these spanwise and chordwise variations of Mach number. The dash lines shown near the wing root represent a local Mach number 5 percent below the maximum value and indicate the extent of the bump boundary layer. The effective Mach number was obtained from contour charts similar to those presented in figure 4 from the relationship

$$M = \frac{2}{5} \int_0^{b/2} cM_a dy$$

The variation of test Reynolds number with Mach number is shown in figure 5.

Force and moment data were obtained for the model configuration tested through a Mach number range of 0.60 to 1.17 and an angle-of-attack range of  $-2^\circ$  to  $10^\circ$ .

A cut out in the bump surface to allow changes in angle of attack during test runs necessitated use of an end plate to prevent leakage (fig. 2). Allowance for end-plate clearance exposed about 1/16 inch of the wing butt to the air stream. Since the exposed portion of the butt was well within the boundary layer (fig. 4), the effect on forces and moments is assumed small.

The end-plate tares on drag were obtained through the test Mach number range at zero angle of attack by testing the model configuration without an end plate. For this test, the same gap of about 1/16 inch was maintained between the wing root and the bump surface, and a sponge-wiper seal was fastened to the wing butt beneath the surface of the bump to prevent leakage (fig. 3). Tests of other bump models showed that the end-plate tares were practically invariant with angle of attack. Hence, the tares obtained at zero angle of attack were applied to all drag data. Jet-boundary corrections have not been evaluated since the boundary conditions to be satisfied are not rigorously defined. However, inasmuch as the effective flow field is large compared with the span and chord of the model, these corrections are believed to be small.

## RESULTS AND DISCUSSION

The force and moment data are presented in figure 6. The summary of aerodynamic characteristics throughout the test Mach number range is shown in figure 7. Unless otherwise noted, the discussion is based on this summary. The slopes through zero lift have been averaged over a lift-coefficient range of  $\pm 0.1$ .

## Lift and Drag Characteristics

The lift-curve slope increased gradually with Mach number from a value of 0.045 at a Mach number of 0.60 to the value of 0.055 at a Mach number of about 1.0. Values of theoretical lift-curve slope, as given in reference 2, using the Weissinger method and the three-dimensional Prandtl-Glauert transformation are shown (fig. 7) to be in good agreement with experimental results throughout the subsonic range tested. The value of theoretical lift-curve slope was calculated at sonic speed from the value of  $\frac{1}{57.3} \left( \frac{\pi A}{2} \right)$  given in reference 3.

The lateral center of pressure was located at 42 percent of the semispan at a Mach number of 0.60. This value is essentially in agreement with the theoretical value obtained from reference 2. The lateral shift in loading with Mach number is observed to be small throughout the Mach number range of the present tests.

It is seen from figure 7 that the drag rise with Mach number is relatively small. However, the results indicate that the drag due to lift is approximately twice the theoretical value for full leading-edge suction (reference 2). In fact, the parameter  $\Delta C_D / C_L^2$  approaches the theoretical value for zero leading-edge suction  $\left( \frac{1}{57.3 \left( \frac{\partial C_L}{\partial \alpha} \right)_M} \right)$ . The

expression for zero leading-edge suction results from the fact that with no leading-edge suction, the resultant force is normal to the chord line rather than the relative wind. Experimental lift-curve slope was used to compute the drag-due-to-lift parameter for zero leading-edge suction. The results indicate that this thin wing, having a relatively sharp leading edge, develops very little leading-edge suction, causing high drag due to lift.

## Pitching-Moment Characteristics

Near zero lift coefficient, the aerodynamic center was at the quarter-chord at a Mach number of 0.60. The aerodynamic center gradually

shifted forward to 20 percent of the mean aerodynamic chord at high subsonic speeds. Between a Mach number of 0.98 and 1.03, the aerodynamic center moved rearward to the 29-percent point and remained nearly constant at the higher Mach numbers tested. It is noted from figure 6 that the aerodynamic center moved rearward at higher lifts, particularly at the higher Mach numbers.

### CONCLUSIONS

The results of an investigation of a thin, unswept wing of low aspect ratio indicate the following:

1. The variations of the aerodynamic characteristics with Mach number in the low-lift range were relatively small except for a sudden 9-percent mean aerodynamic chord rearward movement of the aerodynamic center near a Mach number of 1.0.
2. Available theory satisfactorily predicted lift-curve slope and lateral center of pressure throughout the subsonic Mach number range.
3. Although the drag rise with Mach number was relatively small, the drag due to lift was high, apparently due to a loss in leading-edge suction.

Langley Aeronautical Laboratory  
National Advisory Committee for Aeronautics  
Langley Air Force Base, Va.

### REFERENCES

1. Schneider, Leslie E., and Ziff, Howard L.: Preliminary Investigation of Spoiler Lateral Control on a  $42^\circ$  Sweptback Wing at Transonic Speeds. NACA RM L7F19, 1947.
2. DeYoung, John: Theoretical Additional Span Loading Characteristics of Wings with Arbitrary Sweep, Aspect Ratio, and Taper Ratio. NACA TN 1491, 1947.
3. Spreiter, John R.: Aerodynamic Properties of Slender Wing-Body Combinations at Subsonic, Transonic, and Supersonic Speeds. NACA TN 1662, 1948.

TABLE I

## NACA 65A004 AIRFOIL ORDINATES

[Percent chord]

X	Y
0	0
.5	.311
.75	.378
1.25	.481
2.5	.656
5.0	.877
7.5	1.062
10	1.216
15	1.463
20	1.649
25	1.790
30	1.894
35	1.962
40	1.996
45	1.996
50	1.952
55	1.867
60	1.742
65	1.584
70	1.400
75	1.193
80	.966
85	.728
90	.490
95	.249
100	.009
Leading-edge radius = 0.102	
Trailing-edge radius = 0.010	

NACA



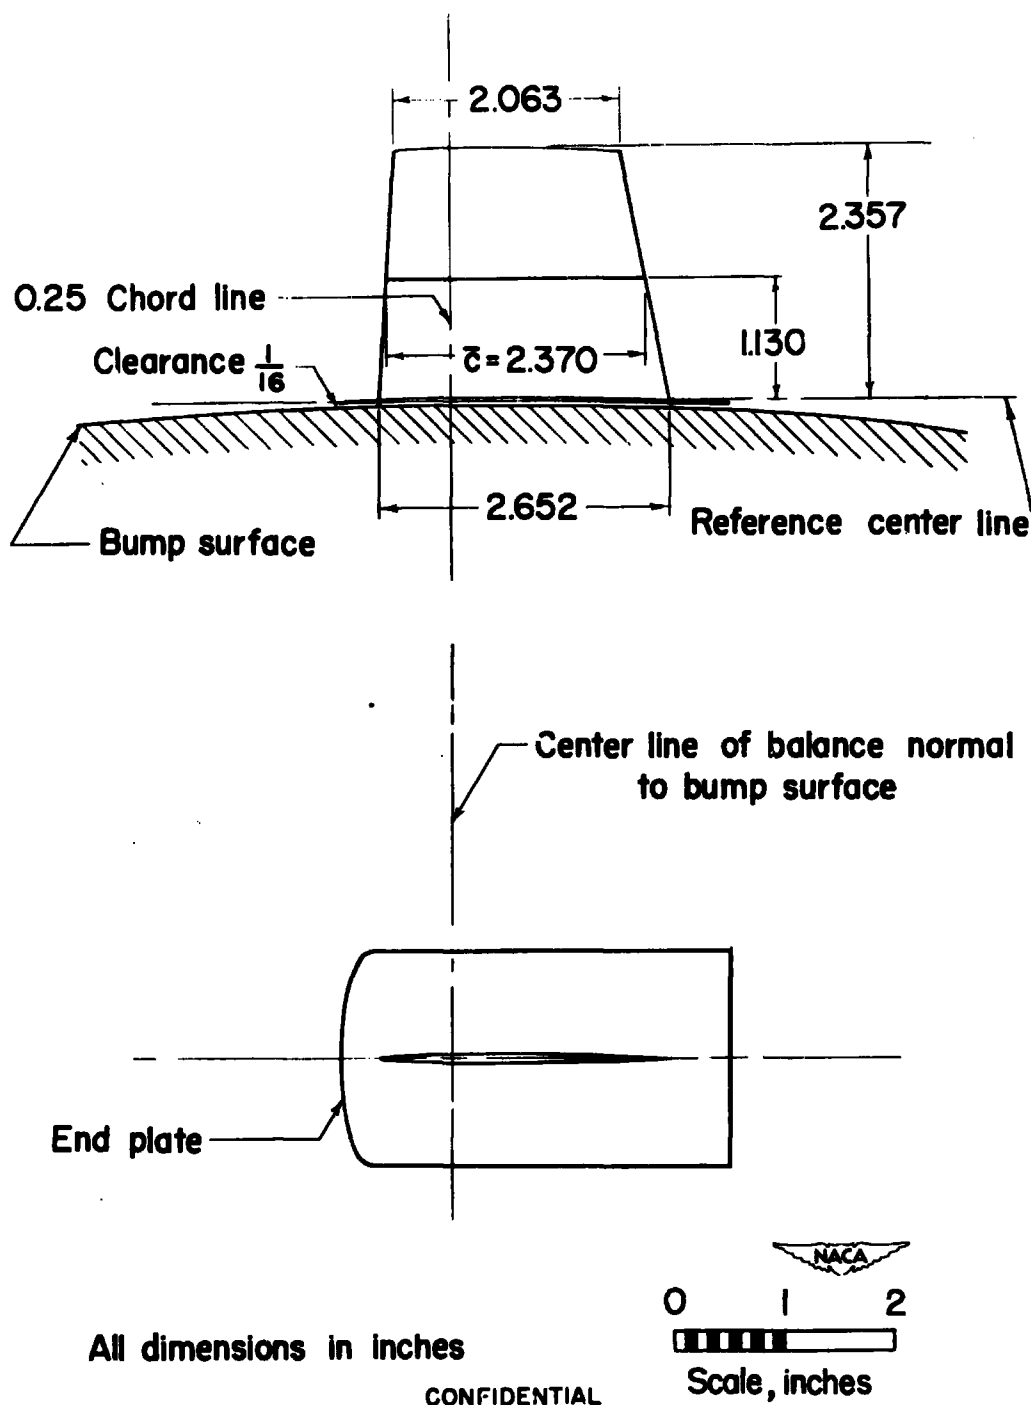


Figure 1.- General arrangement of model with unswept quarter chord, aspect ratio 2, taper ratio 0.78, and NACA 65A004 airfoil.


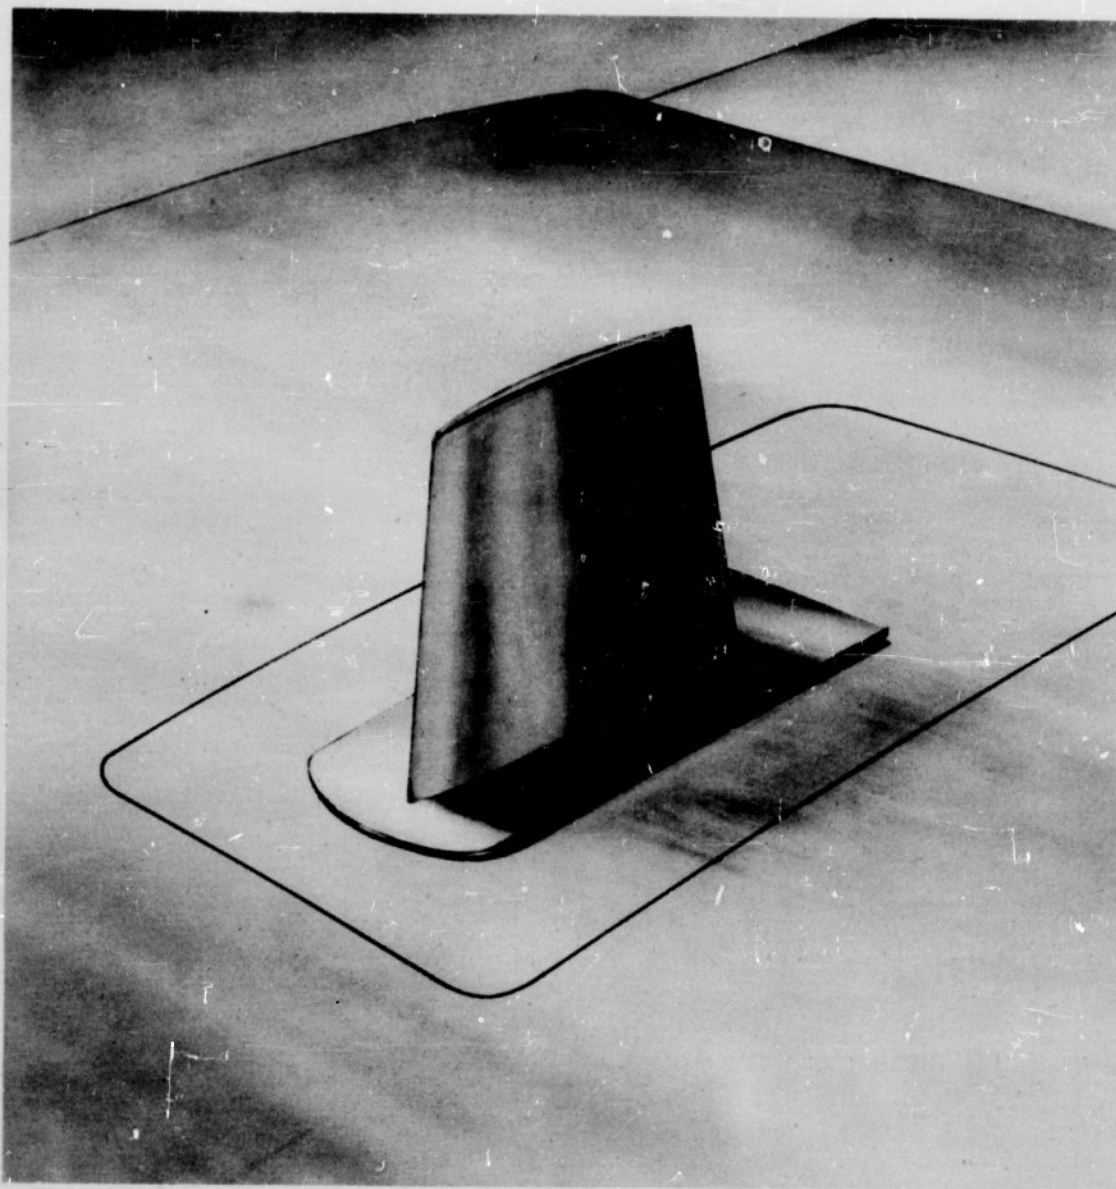


Figure 2.- Pictorial view of wing model and end plate mounted on the bump.  
CONFIDENTIAL



L-63786

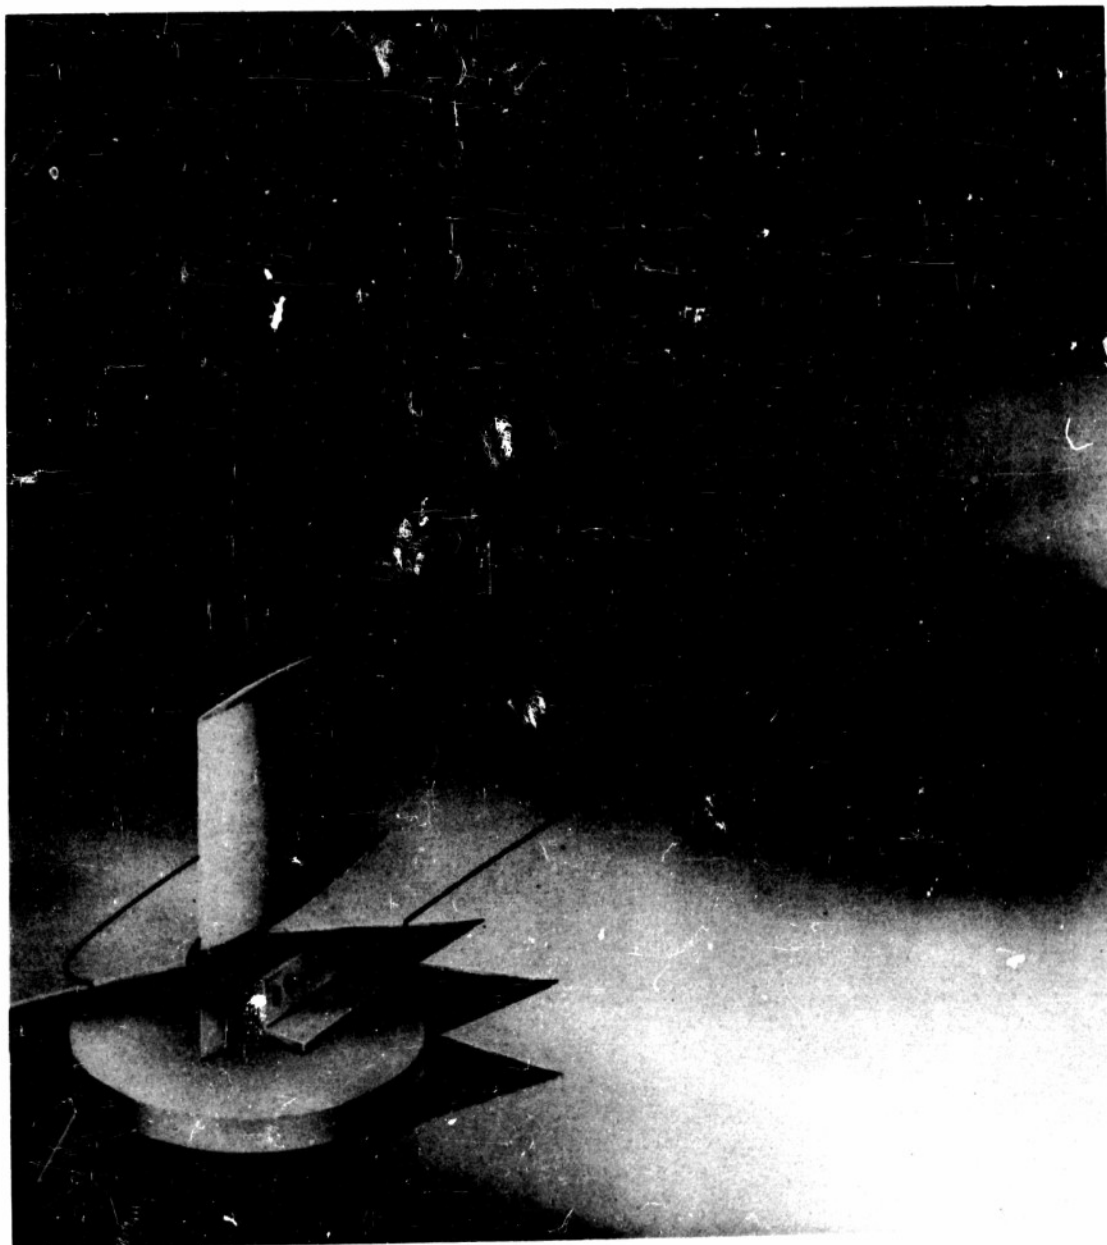


Figure 3.- Pictorial view showing sponge-wiper seal installation on the model.  $\alpha = 0^\circ$ .

CONFIDENTIAL

NACA  
L-62922

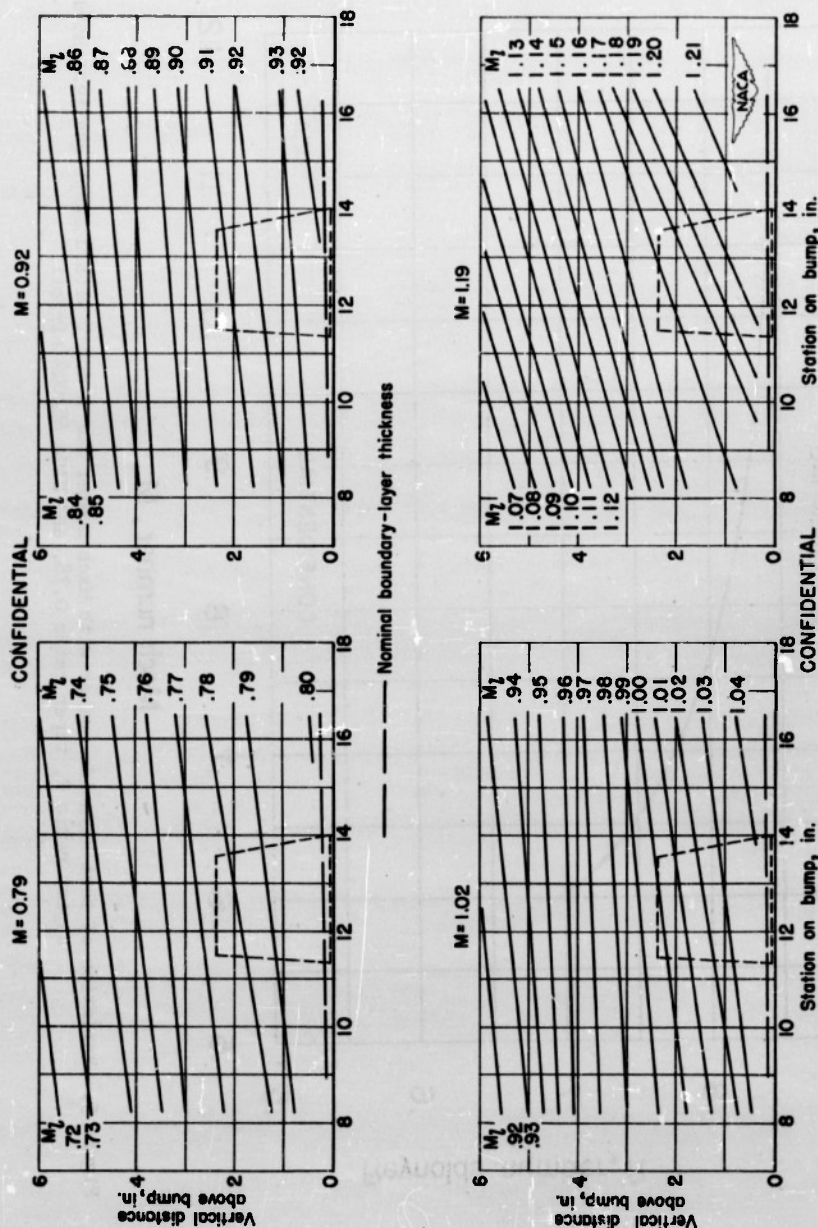


Figure 4.- Typical Mach number contours over transonic bump in region of model location.

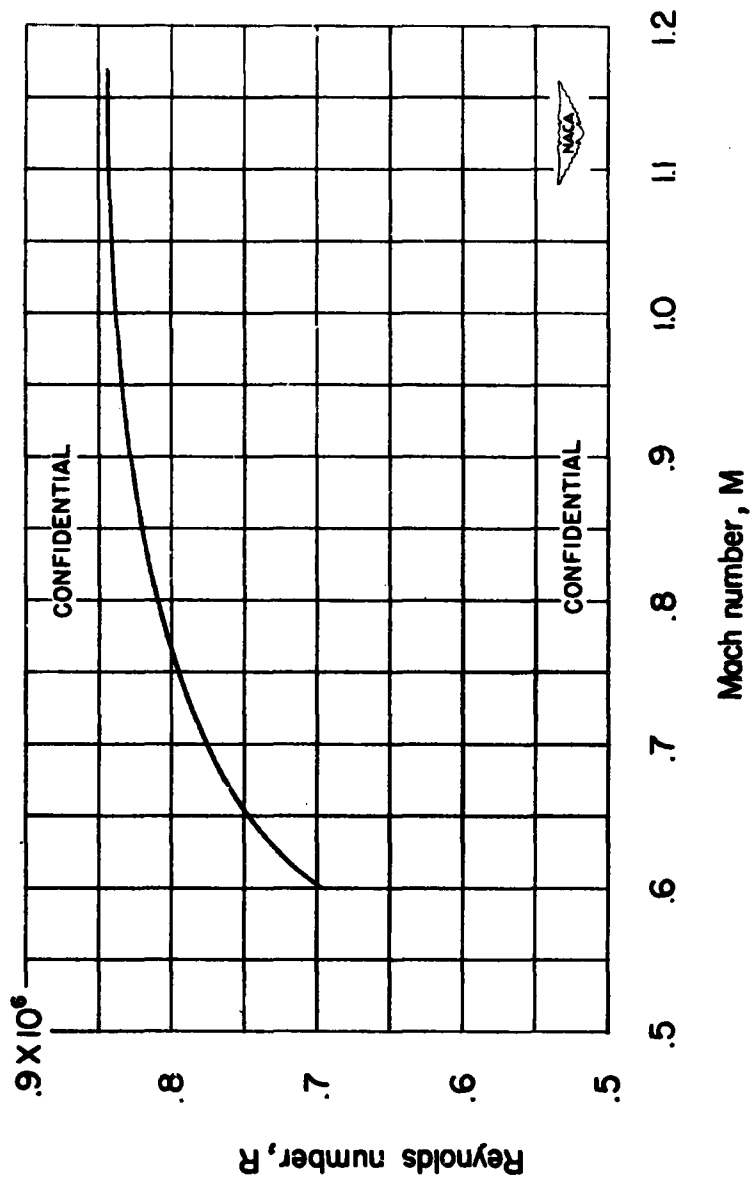


Figure 5.- Variation of test Reynolds number with Mach number for a model with unswept quarter chord, aspect ratio 2, taper ratio 0.78, and NACA 65A004 airfoil.



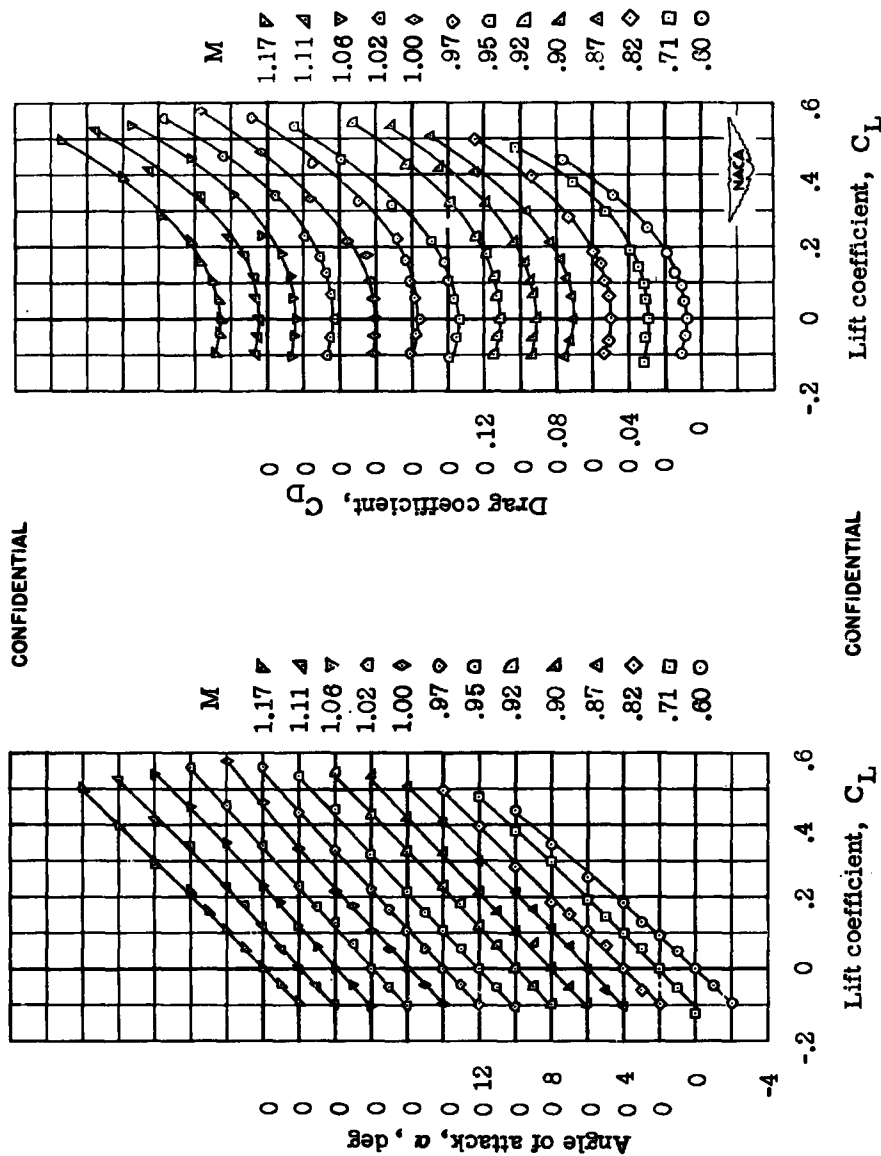


Figure 6.- Aerodynamic characteristics for a model with unswept quarter chord, aspect ratio 2, taper ratio 0.78, and NACA 65A004 airfoil.

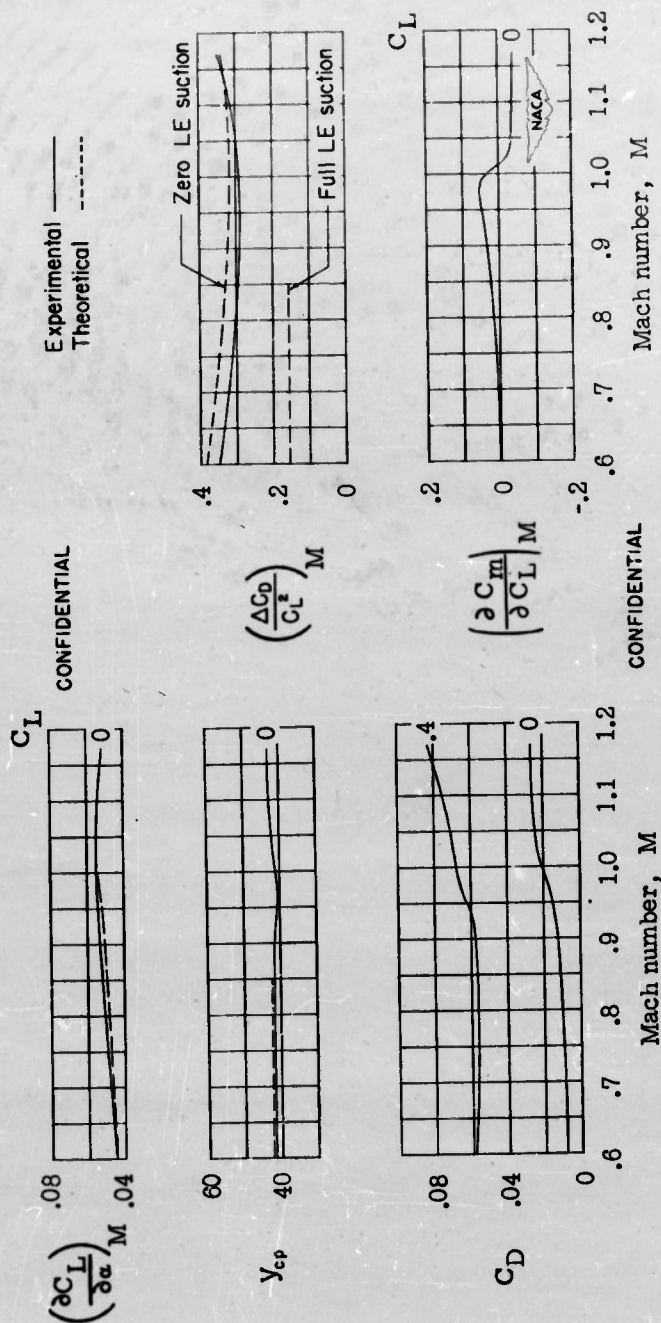






Figure 7.- Summary of aerodynamic characteristics for a model with unswept quarter chord, aspect ratio 2, taper ratio 0.78, and NACA 65A004 airfoil.

<p>CONFIDENTIAL</p> <p>Mach Number Effects - Complete Wings</p> <p>1.2.2.6</p> <p></p> <p>Aerodynamic Characteristics of a Wing with Unswept Quarter-Chord Line, Aspect Ratio 2, Taper Ratio 0.78, and NACA 65A004 Airfoil Section. Transonic-Bump Method.</p> <p>By Edward C. Polhamus and George S. Campbell</p> <p>NACA RM L50A18 March 1950</p>	<p>CONFIDENTIAL</p> <p>Stability, Longitudinal - Static</p> <p>1.8.1.1.1</p> <p></p> <p>Aerodynamic Characteristics of a Wing with Unswept Quarter-Chord Line, Aspect Ratio 2, Taper Ratio 0.78, and NACA 65A004 Airfoil Section. Transonic-Bump Method.</p> <p>By Edward C. Polhamus and George S. Campbell</p> <p>NACA RM L50A18 March 1950</p>
<p>CONFIDENTIAL</p> <p>CONFIDENTIAL</p> <p></p> <p>Polhamus, Edward C. and Campbell, George S.</p> <p>Aerodynamic Characteristics of a Wing with Unswept Quarter-Chord Line, Aspect Ratio 2, Taper Ratio 0.78, and NACA 65A004 Airfoil Section. Transonic-Bump Method.</p> <p>By Edward C. Polhamus and George S. Campbell</p> <p>NACA RM L50A18 March 1950</p>	<p>CONFIDENTIAL</p> <p></p>

CONFIDENTIAL

CONFIDENTIAL

Abstract

This paper presents the results of an investigation by the transonic-bump method of a wing having an unswept quarter-chord line, aspect ratio 2, taper ratio 0.78, and NACA 65A004 airfoil. Lift, drag, pitching-moment, and root-bending-moment characteristics were obtained over a Mach number range of from 0.60 to 1.17. Experimental values of lift-curve slope, lateral center of pressure, and drag due to lift are compared with available theory.

CONFIDENTIAL

CONFIDENTIAL

Abstract

This paper presents the results of an investigation by the transonic-bump method of a wing having an unswept quarter-chord line, aspect ratio 2, taper ratio 0.78, and NACA 65A004 airfoil. Lift, drag, pitching-moment, and root-bending-moment characteristics were obtained over a Mach number range of from 0.60 to 1.17. Experimental values of lift-curve slope, lateral center of pressure, and drag due to lift are compared with available theory.

CONFIDENTIAL

CONFIDENTIAL

Abstract

This paper presents the results of an investigation by the transonic-bump method of a wing having an unswept quarter-chord line, aspect ratio 2, taper ratio 0.78, and NACA 65A004 airfoil. Lift, drag, pitching-moment, and root-bending-moment characteristics were obtained over a Mach number range of from 0.60 to 1.17. Experimental values of lift-curve slope, lateral center of pressure, and drag due to lift are compared with available theory.

CONFIDENTIAL

Reproduced by



CENTRAL AIR DOCUMENTS OFFICE

WRIGHT-PATTERSON AIR FORCE BASE - DAYTON, OHIO

REEL-

3459

A.T.I

72382

*The*  
**U.S. GOVERNMENT**

**IS ABSOLVED**

**FROM ANY LITIGATION WHICH MAY ENSUE FROM ANY  
INFRINGEMENT ON DOMESTIC OR FOREIGN PATENT RIGHTS  
WHICH MAY BE INVOLVED.**

**CONFIDENTIAL**



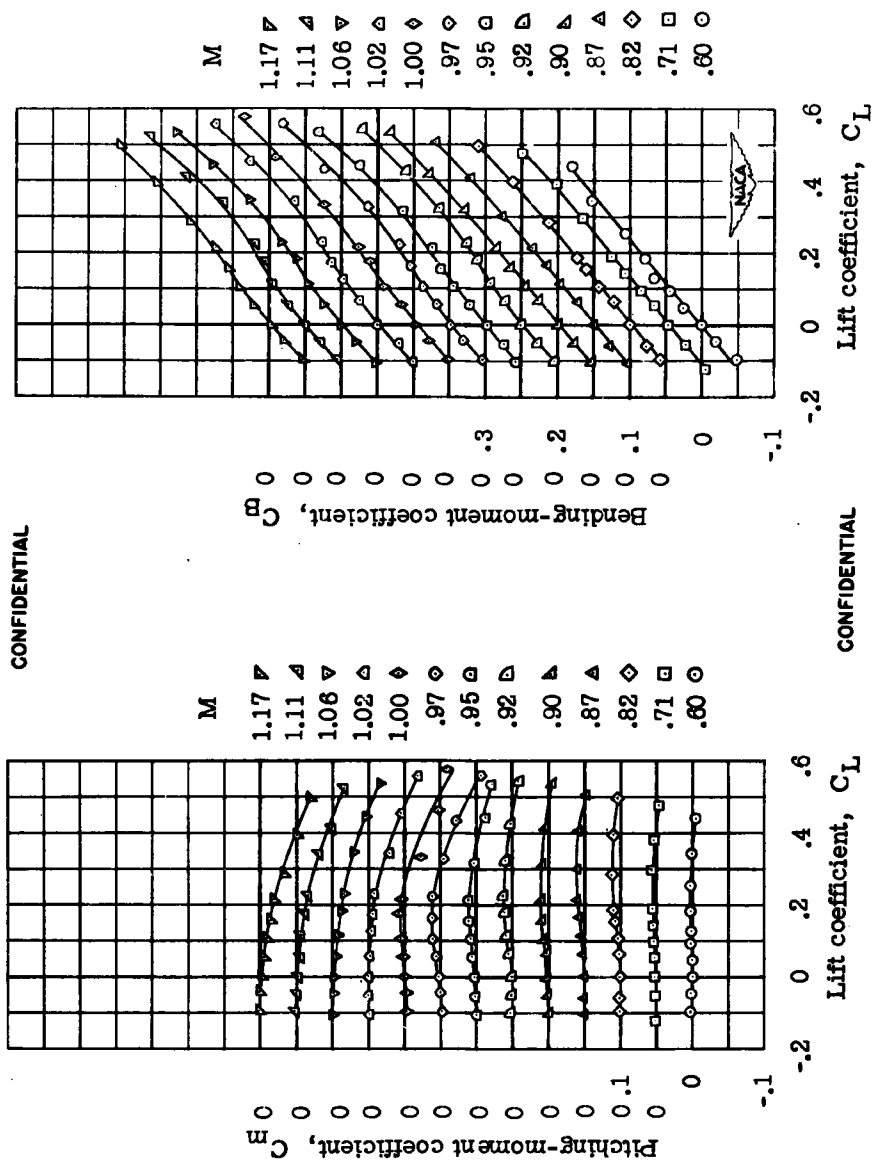


Figure 6.- Concluded.

ATI- 72 382

U

National Advisory Committee for Aeronautics,  
Langley Aeronautical Lab., Langley Air Force  
Base, Va. (Report No. NACA, RML50A18)

AERODYNAMIC CHARACTERISTICS OF A WING  
WITH UNSWEPT QUARTER-CHORD LINE, ASPECT  
RATIO 2, TAPER RATIO 0.78, AND NACA 65A004  
AIRFOIL SECTION - TRANSONIC BUMP METHOD  
(RESEARCH MEMORANDUM), by Edward C.  
Polhamus and George S. Campbell. 8 Mar 1950,  
17 pp.

(Not abstracted)

DIVISION: Aerodynamics (2) 9.7  
SECTION: Airfoils (6)  
DISTRIBUTION: U.S. Military Organizations request  
copies from ASTIA-DSC. Others request copies  
from NACA, Washington, D.C.

SECURITY INFORMATION

- ~~SECRET~~ over
- I. Polhamus, Edward C.
  - II. Campbell, George S.

When this card has served its purpose, it may  
be destroyed in accordance with AFR 205-1, Army  
Reg. 380-5 or OPNAV Inst. 551-1.

ARMED SERVICES TECHNICAL INFORMATION AGENCY  
DOCUMENT SERVICE CENTER

UNCLASSIFIED per authority of NACA Research Abstracts No. 70  
dated 21 September 1954. (14 Oct 54)

ATI- 72 382

National Advisory Committee for Aeronautics,  
Langley Aeronautical Lab., Langley Air Force  
Base, Va. (Report No. NACA RML50A18)

**AERODYNAMIC CHARACTERISTICS OF A WING  
WITH UNSWEPT QUARTER-CHORD LINE, ASPECT  
RATIO 2, TAPER RATIO 0.78, AND NACA 65A004  
AIRFOIL SECTION - TRANSONIC BUMP METHOD  
(RESEARCH MEMORANDUM), by Edward C.**

**Polhamus and George S. Campbell. 8 Mar 1950,  
17 pp.**

~~CONFIDENTIAL~~

(Not abstracted)

**DIVISION: Aerodynamics (2)**

**SECTION: Airfoils (6)**

**DISTRIBUTION: U.S. Military Organizations request  
copies from ASTIA-DSC. Others request copies  
from NACA, Washington, D.C.**

SECURITY INFORMATION

DECLASSIFIED ~~CONFIDENTIAL~~

I. Polhamus, Edward C.  
II. Campbell, George S.

When this card has served its purpose, it may  
be destroyed in accordance with AFM 205-1, Army  
Reg. 300-1 or OPMNAV Inst. 551-1.

ARMED SERVICES TECHNICAL INFORMATION AGENCY  
DOCUMENT SERVICE CENTER

DECLASSIFIED

~~CONFIDENTIAL~~