

UNCLASSIFIED

AD NUMBER: AD0829606

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

This document is subject to special export controls and each transmittal to foreign government or foreign nationals may be made only with prior approval of: HQ.SAMSO, LA., CA. 90045, Attn: SMSD.

AUTHORITY

ST-A SAMSO, USAF LTR, 28 FEB 1972

AD829606 # 148

AD829606



This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of:  
Hq.SAMSO, LA., Ca. 90045  
Attn: SMSD

DDC  
APR 9 1968

CONVAIR

A DIVISION OF GENERAL DYNAMICS CORPORATION  
SAN DIEGO





TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>	<u>PAGE</u>
1.	Summary	1
2.	Symbols and Nomenclature	1
3.0	Discussion	2
3.1	Derivation of the Velocity Equation	4
3.2	Derivation of the Launch Angle Equation	5
3.3	Derivation of the Miss Coefficient, $d(R\lambda)/d\alpha_0$	6
3.4	Derivation of the Miss Coefficient, $d(R\lambda)/d\alpha_L$	7
3.5	Expression for Time of Flight, T	8
4.0	Results	8
5.1	References	9
5.2	Note on Minimum Energy Orbits	9

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.	Symbols of the Geometrical Ellipse	10
2.	Types of Ballistic Trajectories	10
3.	Velocity Components	11
4.	Eccentric Anomalies at Launch and Impact	11
5.	Trajectory Parameters and Miss Coefficients for a Range of 5,400 n. mi.	12
6.	" " 10,200 n. mi.	13
7.	" " 10,800 n. mi.	14
8.	" " 11,400 n. mi.	15
9.	" " 13,500 n. mi.	16
10.	" " 16,200 n. mi.	17
11.	" " 18,970 n. mi.	18
12.	" " 21,600 n. mi.	19

## 1 - Summary

It is assumed in this report that all trajectories are based upon an object being launched with an initial velocity at a specific launch angle. There is no powered flight. The earth is assumed to be spherical and non-rotating with a vacuum atmosphere.

For any desired earth range there is an infinite family of trajectory paths which will give that range. The main parameter chosen to describe these different paths is the eccentricity of the elliptical trajectory. In the curves showing the trajectory results the eccentricity is chosen as the independent variable. The following trajectory parameters are plotted as a function of range and eccentricity:

- (a) initial launch velocity
- (b) initial launch angle
- (c) time of flight
- (d) error in range due to an error in the initial magnitude of the velocity when the launch angle is held fixed.
- (e) error in range due to an error in the velocity which is perpendicular to the initial velocity direction when the velocity magnitude is held fixed.

Curves are shown for earth ranges extending from 5400 nautical miles to 21,600 nautical miles.

## 2 - Symbols and nomenclature

The following symbols, some of which are illustrated in figures 1, 2, 3, and 4 were used throughout:

- $r$  = the distance from the earth's center (focus of elliptical trajectory) to the object.
- $\mu$  =  $GM$ , where  $G$  is the universal gravitational constant and  $M$  is the mass of the earth.



- $h$  = angular momentum per unit mass  
 $v_0$  = initial magnitude of launch velocity  
 $\alpha$  = initial launch angle (the angle between the velocity vector and the launch horizontal)  
 $\lambda$  = the earth's geocentric range angle (the angle between the launch position vector and the impact position vector)  
 $R$  = radius of the earth  
 $\theta$  = angle between the major axis and the position vector of the object  
 $\theta_0$  = the angle between the ellipse's major axis and the reference axis.  
 $l$  = semi-latus rectum of the ellipse.  
 $e$  = eccentricity of the ellipse  
 $E$  = total energy of the object per unit mass  

$$E = \frac{\text{potential energy}}{\text{unit mass}} + \frac{\text{kinetic energy}}{\text{unit mass}} = -\frac{\mu}{r} + \frac{1}{2}v^2$$
 $\gamma$  = angle between the position vector and the velocity vector  
 $a$  = semi-major axis of the ellipse  
 $T$  = time of flight, launch to impact  
 $E_1$  = the eccentric anomaly at the launch site  
 $E_2$  = the eccentric anomaly at the impact point

### 3 - Discussion

An elliptical trajectory can be described in two ways. One way is in geometrical terms and the other way is in energy terms (ref. 1). In this report both forms are used to derive equations for velocity, launch angle, and miss coefficients.

The geometrical form is given by

$$\frac{1}{r} = \frac{1}{l} [1 + e \cos(\theta - \theta_0)] \quad (1)$$

The energy form is given by

$$\frac{1}{r} = \frac{\mu}{h^2} \left[ 1 + \sqrt{1 + \frac{2Eh^2}{\mu^2}} \cos(\theta - \theta_0) \right] \quad (2)$$

It can be seen that by equating equal parts in equations (1) and (2)

$$l = \frac{h^2}{\mu} \quad (3)$$

and

$$e = \sqrt{1 + \frac{2Eh^2}{\mu^2}} \quad (4)$$

The geometrical meaning of  $\theta$ ,  $\theta_0$ ,  $r$ , and  $l$  are shown in Figure 1.

At a given launch site it is possible to send an object into any kind of desired trajectory by the proper choice of velocity magnitude,  $V_0$ , and launch angle,  $\alpha$ . In Figure 2 are shown three possible trajectories. Trajectory (a) is an elliptical path which gives a earth range of  $2\pi R$  nautical miles, if  $R$  is expressed in nautical miles. Trajectory (b) takes an object three-fourths of the way around the earth having a range of  $\frac{3}{2}\pi R$  nautical miles. Trajectory (c) indicates an elliptical path which has an earth range of  $\pi R$  nautical miles.

Define  $\lambda$  as the earth's geocentric range angle from launch to impact. The earth range then equals  $\lambda R$ . The relationship between  $\theta_0$  and  $\lambda$  is given by

$$\theta_0 = \frac{\lambda}{2} - 180^\circ \quad (5)$$

It is possible to express the geometrical ellipse as a function of the desired angle,

$$\frac{1}{r} = \frac{1 + e \cos(\theta + 180^\circ - \frac{\lambda}{2})}{R[1 + e \cos(180^\circ - \frac{\lambda}{2})]} \quad (6)$$

or

$$\frac{1}{r} = \frac{1 - e(\cos \theta \cos \frac{\lambda}{2} + \sin \theta \sin \frac{\lambda}{2})}{R[1 - e \cos \frac{\lambda}{2}]} \quad (7)$$



### 3.1 - Derivation of the Velocity Equation

The launch velocity can be expressed as a function of range angle,  $\lambda$ , and eccentricity,  $e$ . Equating equal parts of equations (2) and (7) one gets

$$\frac{h^2}{\mu} = R[1 - e \cos \lambda/2] \quad (8)$$

and

$$\sqrt{1 + \frac{2Eh^2}{\mu^2}} \cos(\theta - \theta_0) = e(-\cos \theta \cos \lambda/2 - \sin \theta \sin \lambda/2). \quad (9)$$

Equation (8) can also be expressed as

$$\frac{h^2}{\mu} = \frac{R^2 v_0^2 \sin^2 \gamma}{\mu} = R[1 - e \cos \lambda/2] \quad (10)$$

where  $\gamma$  is the angle between the launch velocity vector and the launch position vector. Solving for  $v_0^2 \sin^2 \gamma$ , equation (10) gives

$$v_0^2 \sin^2 \gamma = \frac{\mu}{R} [1 - e \cos \lambda/2]. \quad (11)$$

Now using equations (4)

$$e^2 = 1 + \frac{2Eh^2}{\mu^2} = 1 + \frac{2(-\frac{\mu}{R} + \frac{1}{2} v_0^2) v_0^2 R^2 \sin^2 \gamma}{\mu^2} \quad (12)$$

and solving for  $v_0^2 \sin^2 \gamma$  one obtains

$$v_0^2 \sin^2 \gamma = \frac{\mu^2 (1 - e^2)}{2\mu R - v_0^2 R^2}. \quad (13)$$



From equations (11) and (13) one finally obtains an expression for  $v_0$  as a function of  $e$  and  $\lambda$ .

$$v_0^2 = \frac{\mu}{R} \left[ 2 - \frac{(1-e^2)}{1-e \cos \frac{\lambda}{2}} \right] \quad (14)$$

### 3.2 - Derivation of the Launch Angle Equation

The launch angle,  $\alpha$ , is related to  $\gamma'$  by the expression

$$\alpha = 90^\circ - \gamma'. \quad (15)$$

From equation (11) we get

$$\sin^2 \gamma' = \frac{\mu}{R} \left[ \frac{1-e \cos \frac{\lambda}{2}}{v_0^2} \right] \quad (16)$$

and since

$$\sin \gamma' = \sin(90^\circ - \alpha) = \cos \alpha \quad (17)$$

we obtain

$$\cos^2 \alpha = \frac{\mu}{R} \left[ \frac{1-e \cos \frac{\lambda}{2}}{v_0^2} \right] \quad (18)$$

For the launch angle we have

$$\alpha = \cos^{-1} \left[ \frac{\sqrt{\frac{\mu}{R} (1-e \cos \frac{\lambda}{2})}}{v_0} \right] \quad (19)$$



### 3.3 - Derivation of the Miss Coefficient, $d(R\lambda)/dV_0$

The change in range,  $d(R\lambda)$ , caused by a change in velocity,  $dV_0$ , when the launch angle,  $\alpha$ , is held fixed can now be derived starting with equation (14).

Solving for  $\cos \frac{\lambda}{2}$  in equation (14) gives

$$\cos \frac{\lambda}{2} = \frac{1}{e} \left[ 1 - \frac{\frac{M}{R}(1-e^2)}{(2\frac{M}{R} - V_0^2)} \right] \quad (20)$$

Note that from equations (12) and (17) one obtains

$$e^2 = 1 - \frac{(2\frac{M}{R} - V_0^2)V_0^2 R^2 \cos^2 \alpha}{M^2} \quad (21)$$

Solving for  $(2\frac{M}{R} - V_0^2)$  in equations (21) and substituting into equation (20) one obtains

$$\cos \frac{\lambda}{2} = \frac{1}{e} \left[ 1 - \frac{R V_0^2 \cos^2 \alpha}{M} \right] \quad (22)$$

Expressing the eccentricity,  $e$ , as given in equation (21) one finally gets an expression for  $\cos \frac{\lambda}{2}$  as a function of  $V_0$  alone,

$$\cos \frac{\lambda}{2} = \frac{1 - \frac{R}{M} V_0^2 \cos^2 \alpha}{\sqrt{1 - \frac{(2\frac{M}{R} - V_0^2)V_0^2 R^2 \cos^2 \alpha}{M^2}}} \quad (23)$$

By differentiation of equation (23) one can obtain

$$\frac{d(R\lambda)}{dV_0} = \frac{4R^2}{M V_0 e \sin \frac{\lambda}{2}} \left[ \frac{M}{R} + \left( \frac{V_0^2}{e} - \frac{eM}{R} - \frac{M}{Re} \right) \cos \frac{\lambda}{2} + \left( \frac{M}{R} - V_0^2 \right) \cos^2 \frac{\lambda}{2} \right] \quad (24)$$

after the elimination of the  $\cos^2 \alpha$  terms by use of equation (18).

If  $R$  is given in feet,  $M$  in  $(\text{feet})^3 / (\text{second})^2$ , and  $N_0$  in feet/second, it will be necessary to include a multiplying factor of  $(\frac{1}{6076.1})$  to give the miss coefficient  $d(R\lambda)/dN_0$  in nautical miles/feet/second.

3.4 - Derivation of the Miss Coefficient,  $d(R\lambda)/dN_{\perp}$ .

An intermediate miss coefficient  $d(R\lambda)/d\alpha$  can be derived from equation (23) by differentiation. This miss coefficient can be converted to  $d(R\lambda)/dN_{\perp}$  which gives the change in range caused by a change in the velocity perpendicular to the launch velocity vector. See Figure 3.

Immediately after differentiating equation (23) one can obtain

$$\frac{d(R\lambda)}{d\alpha} = -\frac{2R^2 N_0^2 \sin 2\alpha}{Me \sin \frac{\lambda}{2}} \left[ 1 - \frac{R}{2Me} (2\frac{M}{R} - N_0^2) \cos \frac{\lambda}{2} \right] \quad (25)$$

Using

$$\sin 2\alpha = \frac{2}{N_0^2} \left[ \left( \frac{M}{R} - \frac{M}{R} e \cos \frac{\lambda}{2} \right) (N_0^2 - \frac{M}{R} + \frac{M}{R} e \cos \frac{\lambda}{2}) \right]^{\frac{1}{2}} \quad (26)$$

and

$$\left( 2\frac{M}{R} - N_0^2 \right) = \frac{M(1-e^2)}{R(1-e \cos \frac{\lambda}{2})} \quad (27)$$

one can obtain the simpler form

$$\frac{d(R\lambda)}{d\alpha} = \frac{2R \left[ \left( \frac{1+e^2}{e} \right) \cos \frac{\lambda}{2} - 2 \right]}{1 - e \cos \frac{\lambda}{2}} \quad (28)$$

Now referring again to Figure 3, it can be seen that

$$\frac{d(R\lambda)}{dN_{\perp}} = \frac{d(R\lambda)}{d\alpha} \cdot \frac{d\alpha}{dN_{\perp}} \approx \frac{d(R\lambda)}{d\alpha} \cdot \tan^{-1} \frac{\Delta N_{\perp}}{N_0} = \frac{d(R\lambda)}{d\alpha} \cdot \frac{\Delta N_{\perp}}{\Delta N_{\perp}}$$

for  $\Delta N_{\perp} \ll N_0$ . For convenience  $\Delta N_{\perp}$  was chosen as 1 foot/second. The miss coefficient becomes,

$$\frac{d(R\lambda)}{dN_{\perp}} = \frac{2R \left[ \left( \frac{1+e^2}{e} \right) \cos \frac{\lambda}{2} - 2 \right]}{N_0 (1 - e \cos \frac{\lambda}{2})} \quad (29)$$

If R is given in nautical miles,  $d(R\lambda)/dN_{\perp}$  will be in units of nautical miles/feet/seconds.

### 3.5 - Expression for Time of Flight

The time of flight is given by the expression

$$T = \frac{E_2 - E_1 - e(\sin E_2 - \sin E_1)}{\sqrt{\frac{\mu}{a^3}}} \quad (30)$$

where

$$a = \frac{l}{1-e^2} = \frac{R[1-e \cos \frac{\lambda}{2}]}{1-e^2} \quad (31)$$

and

$$\sin E_2 = -\frac{R \sin \frac{\lambda}{2}}{a \sqrt{1-e^2}}, \quad \sin E_1 = \frac{R \sin \frac{\lambda}{2}}{a \sqrt{1-e^2}} \quad (32)$$

See Figure 4 for the description of angles  $E_1$  and  $E_2$ .

Expressing the time of flight in terms of  $e$ ,  $\lambda$ , and  $N_0$  gives

$$T = \frac{\sin^{-1} \left[ \frac{-\sqrt{1-e^2} \sin \frac{\lambda}{2}}{1-e \cos \frac{\lambda}{2}} \right] - \sin^{-1} \left[ \frac{\sqrt{1-e^2} \sin \frac{\lambda}{2}}{1-e \cos \frac{\lambda}{2}} \right] + 2e \frac{\sqrt{1-e^2} \sin \frac{\lambda}{2}}{1-e \cos \frac{\lambda}{2}}}{\sqrt{\frac{\mu}{R^3} \left( 2 - \frac{R}{\mu} N_0^2 \right)^3}} \quad (33)$$

### 4.0 - Results

The curves shown in Figures 5 through 12 show the trajectory parameters and miss coefficients plotted as a function of eccentricity for specific ranges.

5 - REFERENCES

- 1 - Principles of Mechanics - J. L. Synge and B.A. Griffith  
McGraw-Hill Book Co., Inc., New York, 1942

5.2 Note on Minimum Energy Orbits

The minimum energy orbits have no practical significance for ranges exceeding 10,800 n. mi. The minimum energy orbit for these greater ranges is circular,  $e = 0$ . For circular orbits the miss coefficients are infinite.

SYMBOLS OF THE GEOMETRICAL ELLIPSE

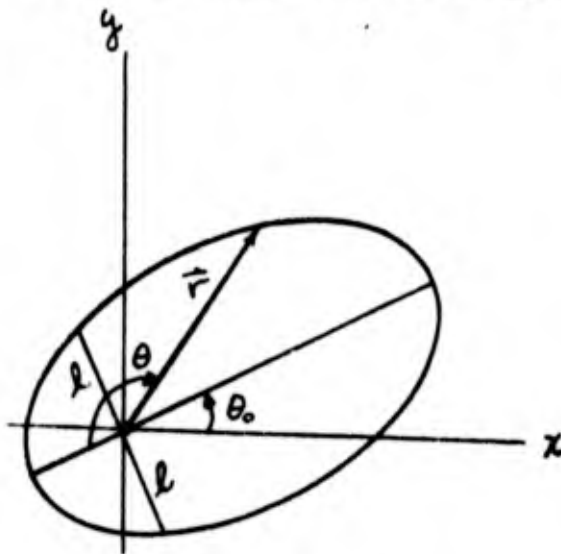


Fig. 1

TYPES OF BALLISTIC TRAJECTORIES

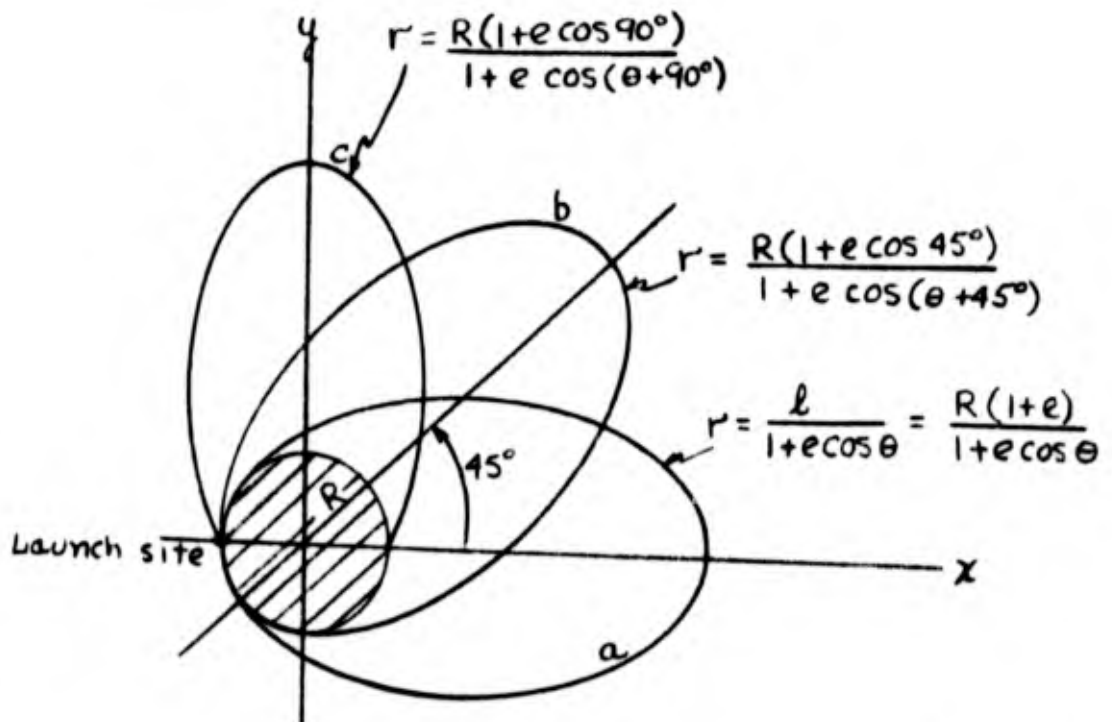


Fig. 2

VELOCITY COMPONENTS

Launcher  
Vertical


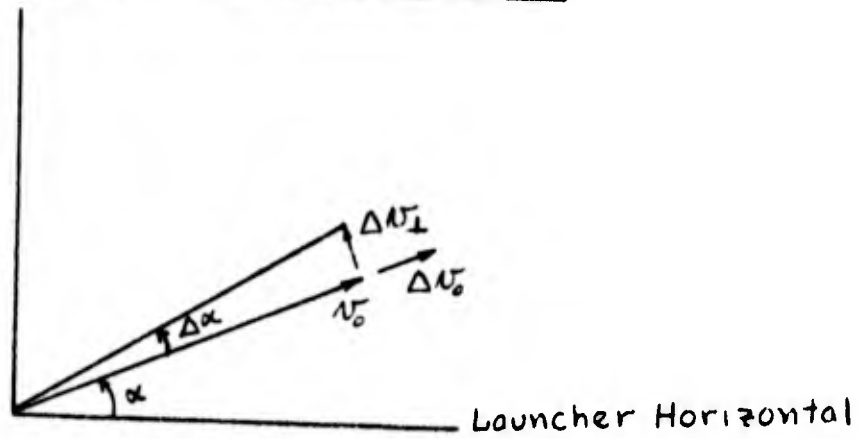


Fig. 3

ECCENTRIC ANOMALIES AT LAUNCH AND IMPACT

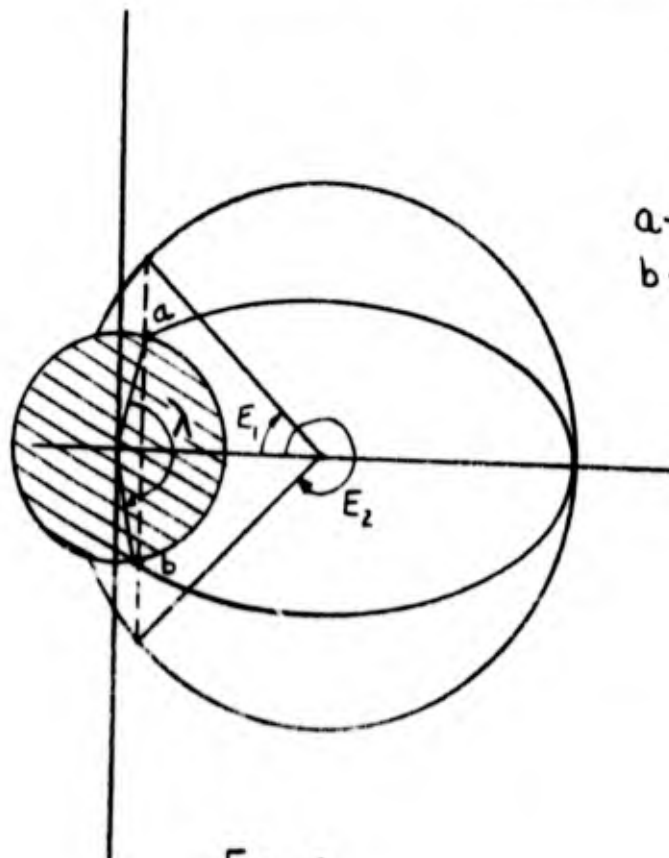


a - IS Launch site  
 b - IS IMPACT point

Fig. 4



REF: 10-110 TO THE COM 350 1-1:LG


A

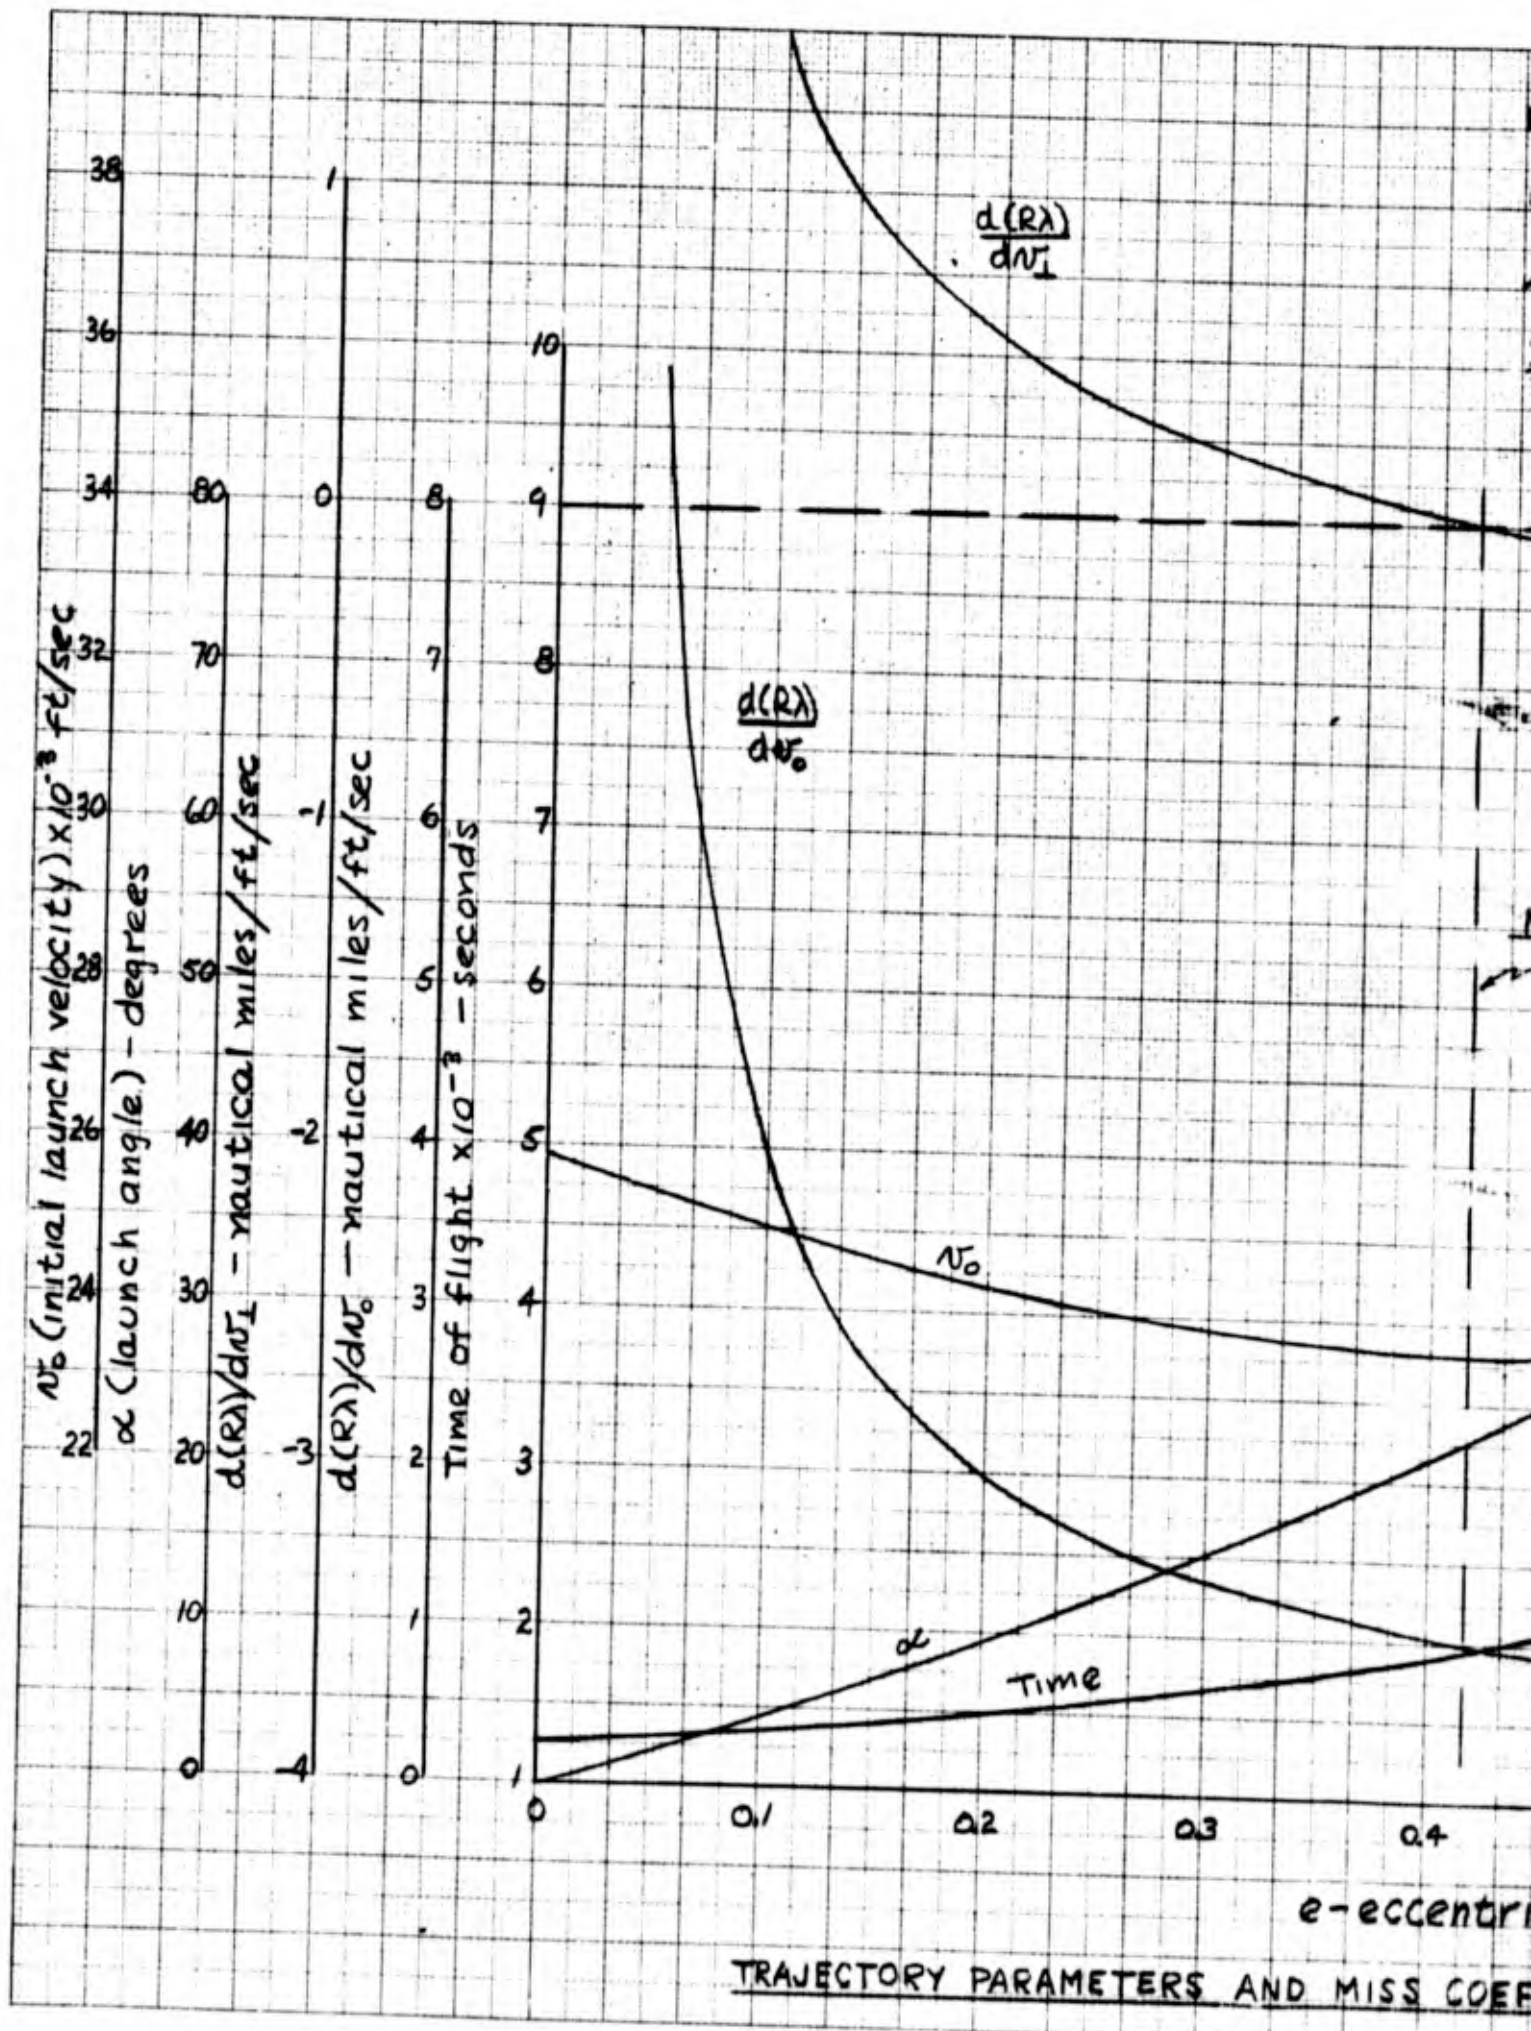

TRAJECTORY PARAMETERS AND MISS COEFF

e - eccentricity

Range = 5400 n. mi.  
 $R = 2.0903 \times 10^7$  ft.  
 $\mu = 1.40814 \times 10^{16}$  ft<sup>3</sup>/sec<sup>2</sup>  
 $\lambda = 90^\circ$

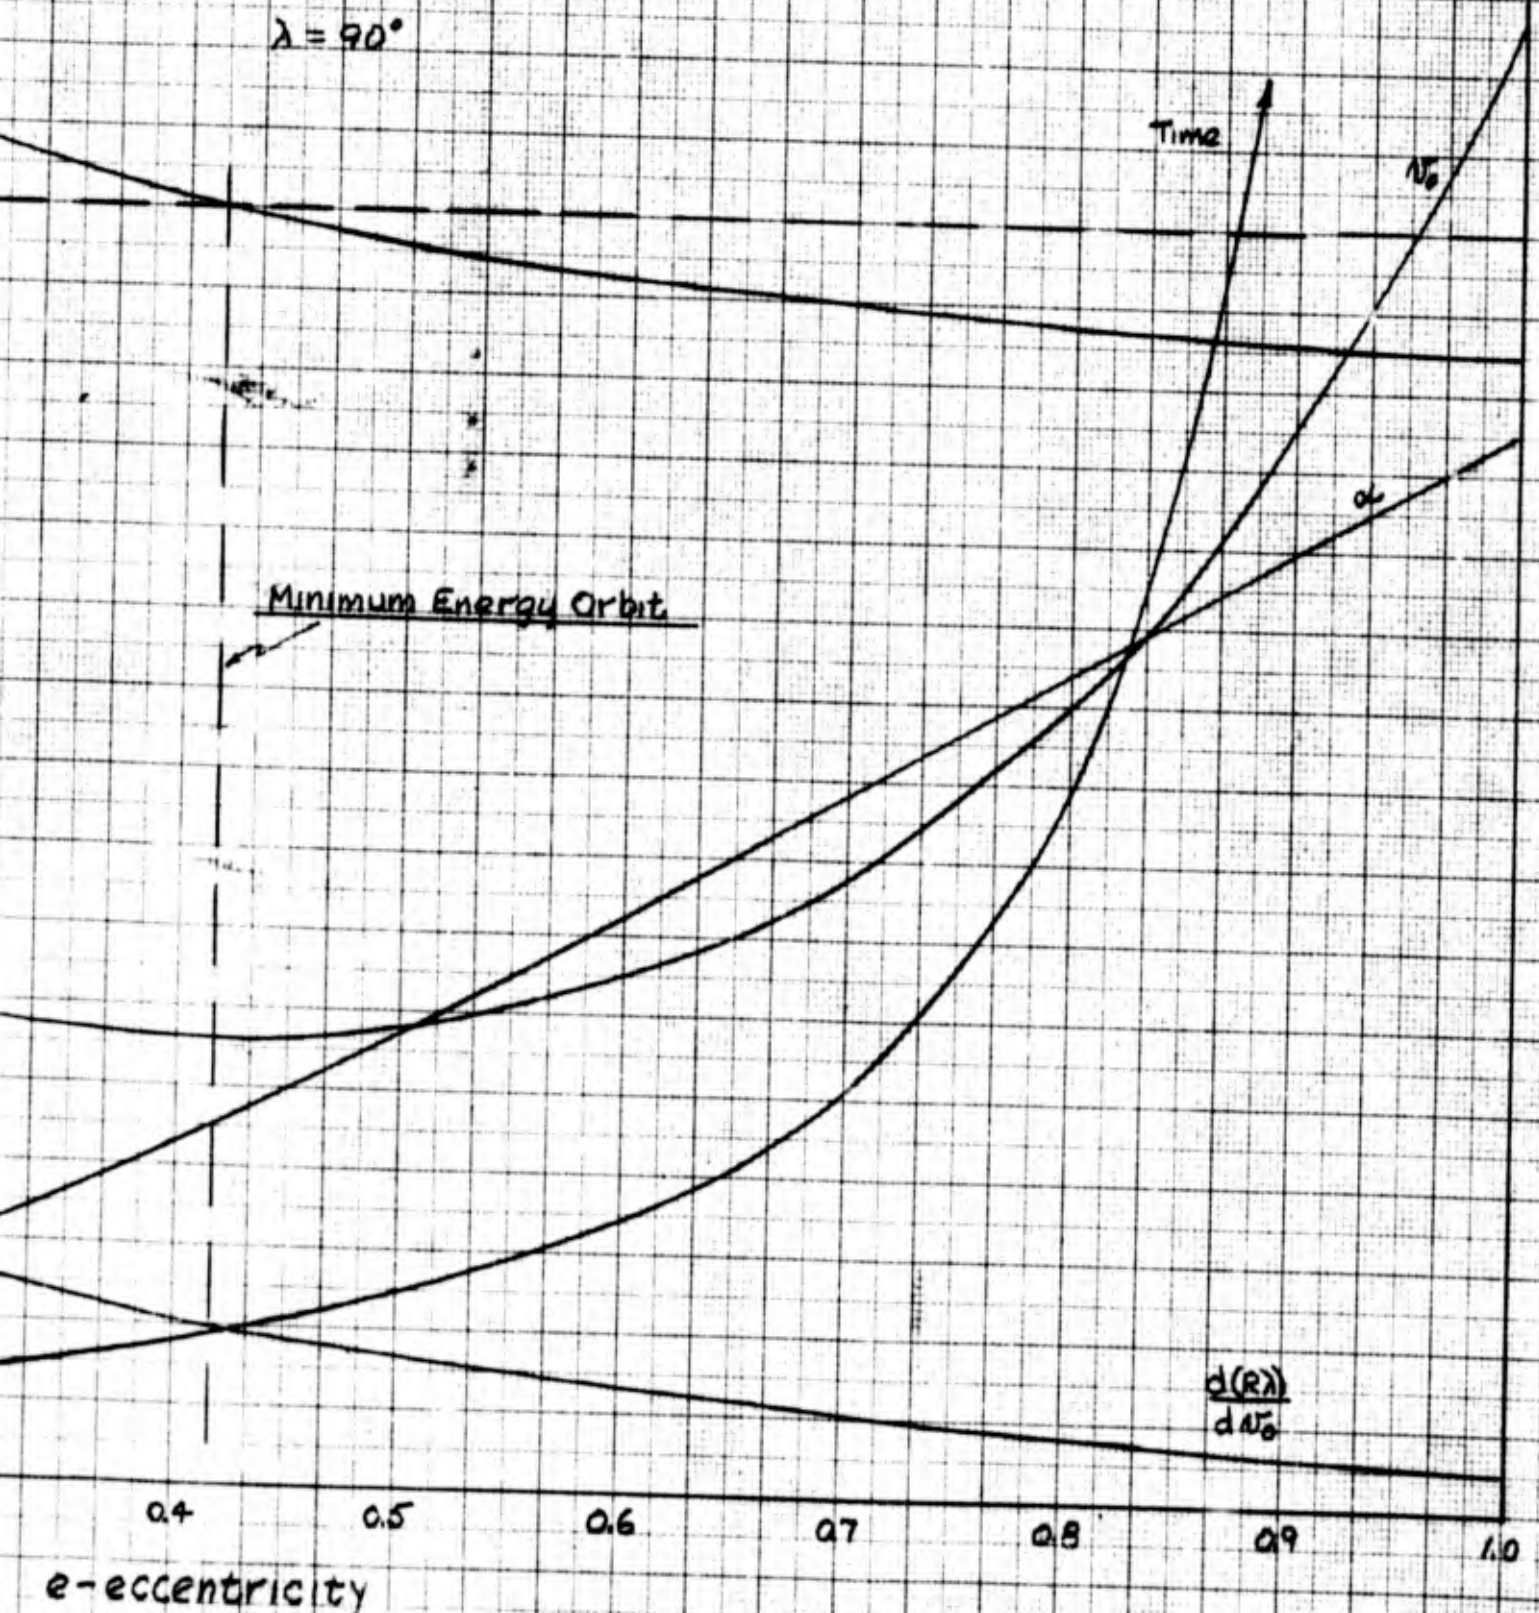

MISS COEFFICIENTS FOR A RANGE OF 5400 NAUTICAL MILES


FIG. 5

B

359-14L  
REF ID: A61883

A


Range = 10,800  
 $R = 2.0903 \times 10^4$   
 $M = 1.40814 \times 10^3$   
 $\lambda = 180^\circ$

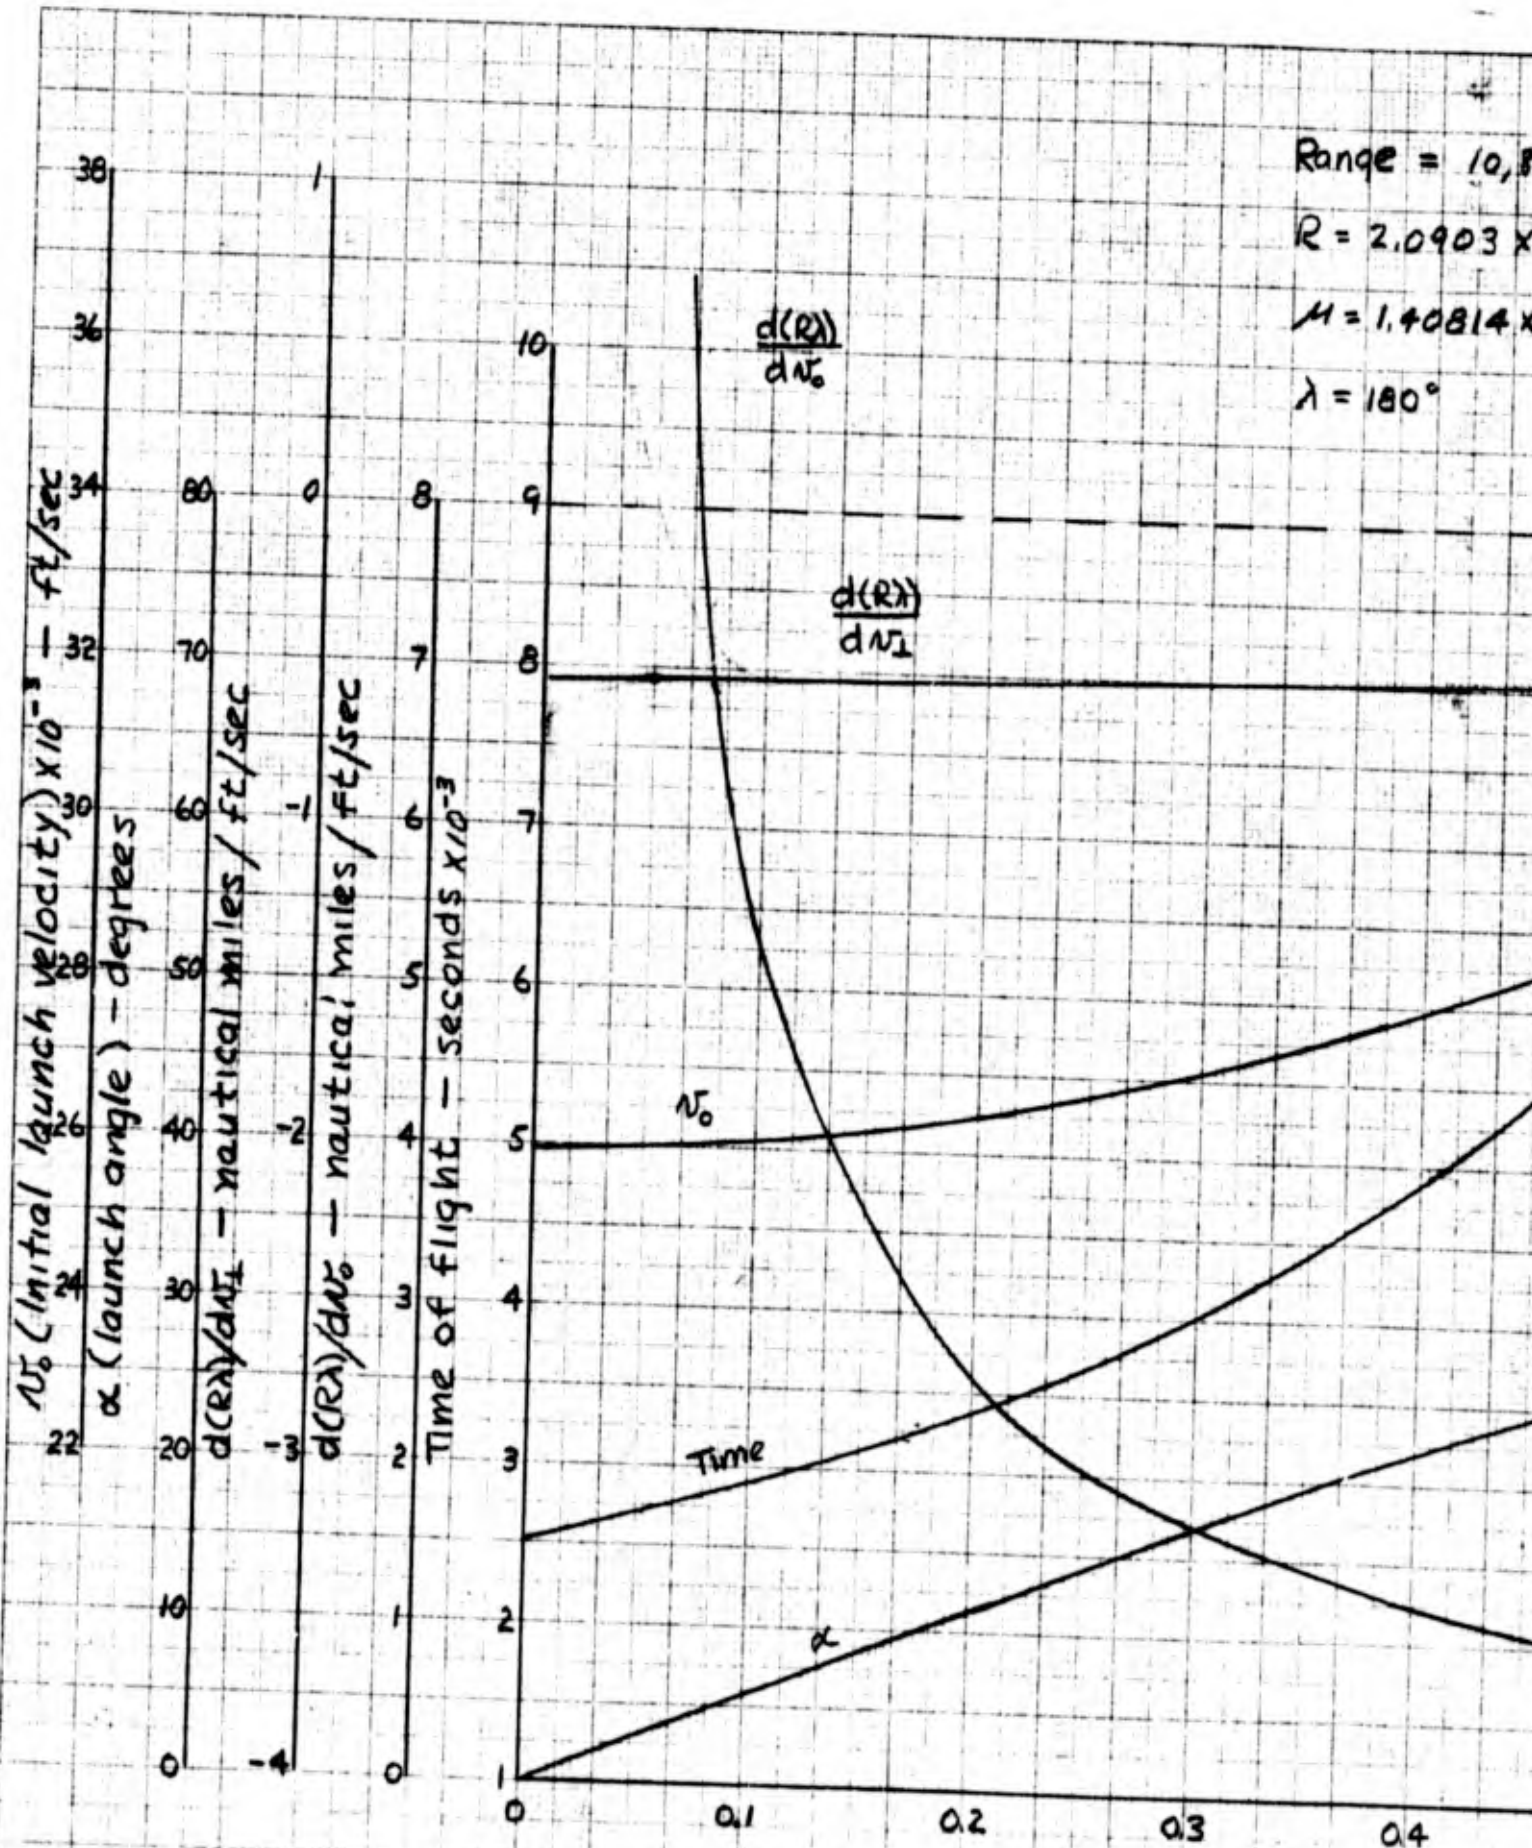

TRAJECTORY PARAMETERS AND MISS CO

Date 28 Feb. '58


Range = 10,800 n.m.  
 $R = 2.0903 \times 10^7$  ft.  
 $\mu = 1.40814 \times 10^{16}$  ft<sup>3</sup>/sec<sup>2</sup>  
 $\lambda = 180^\circ$

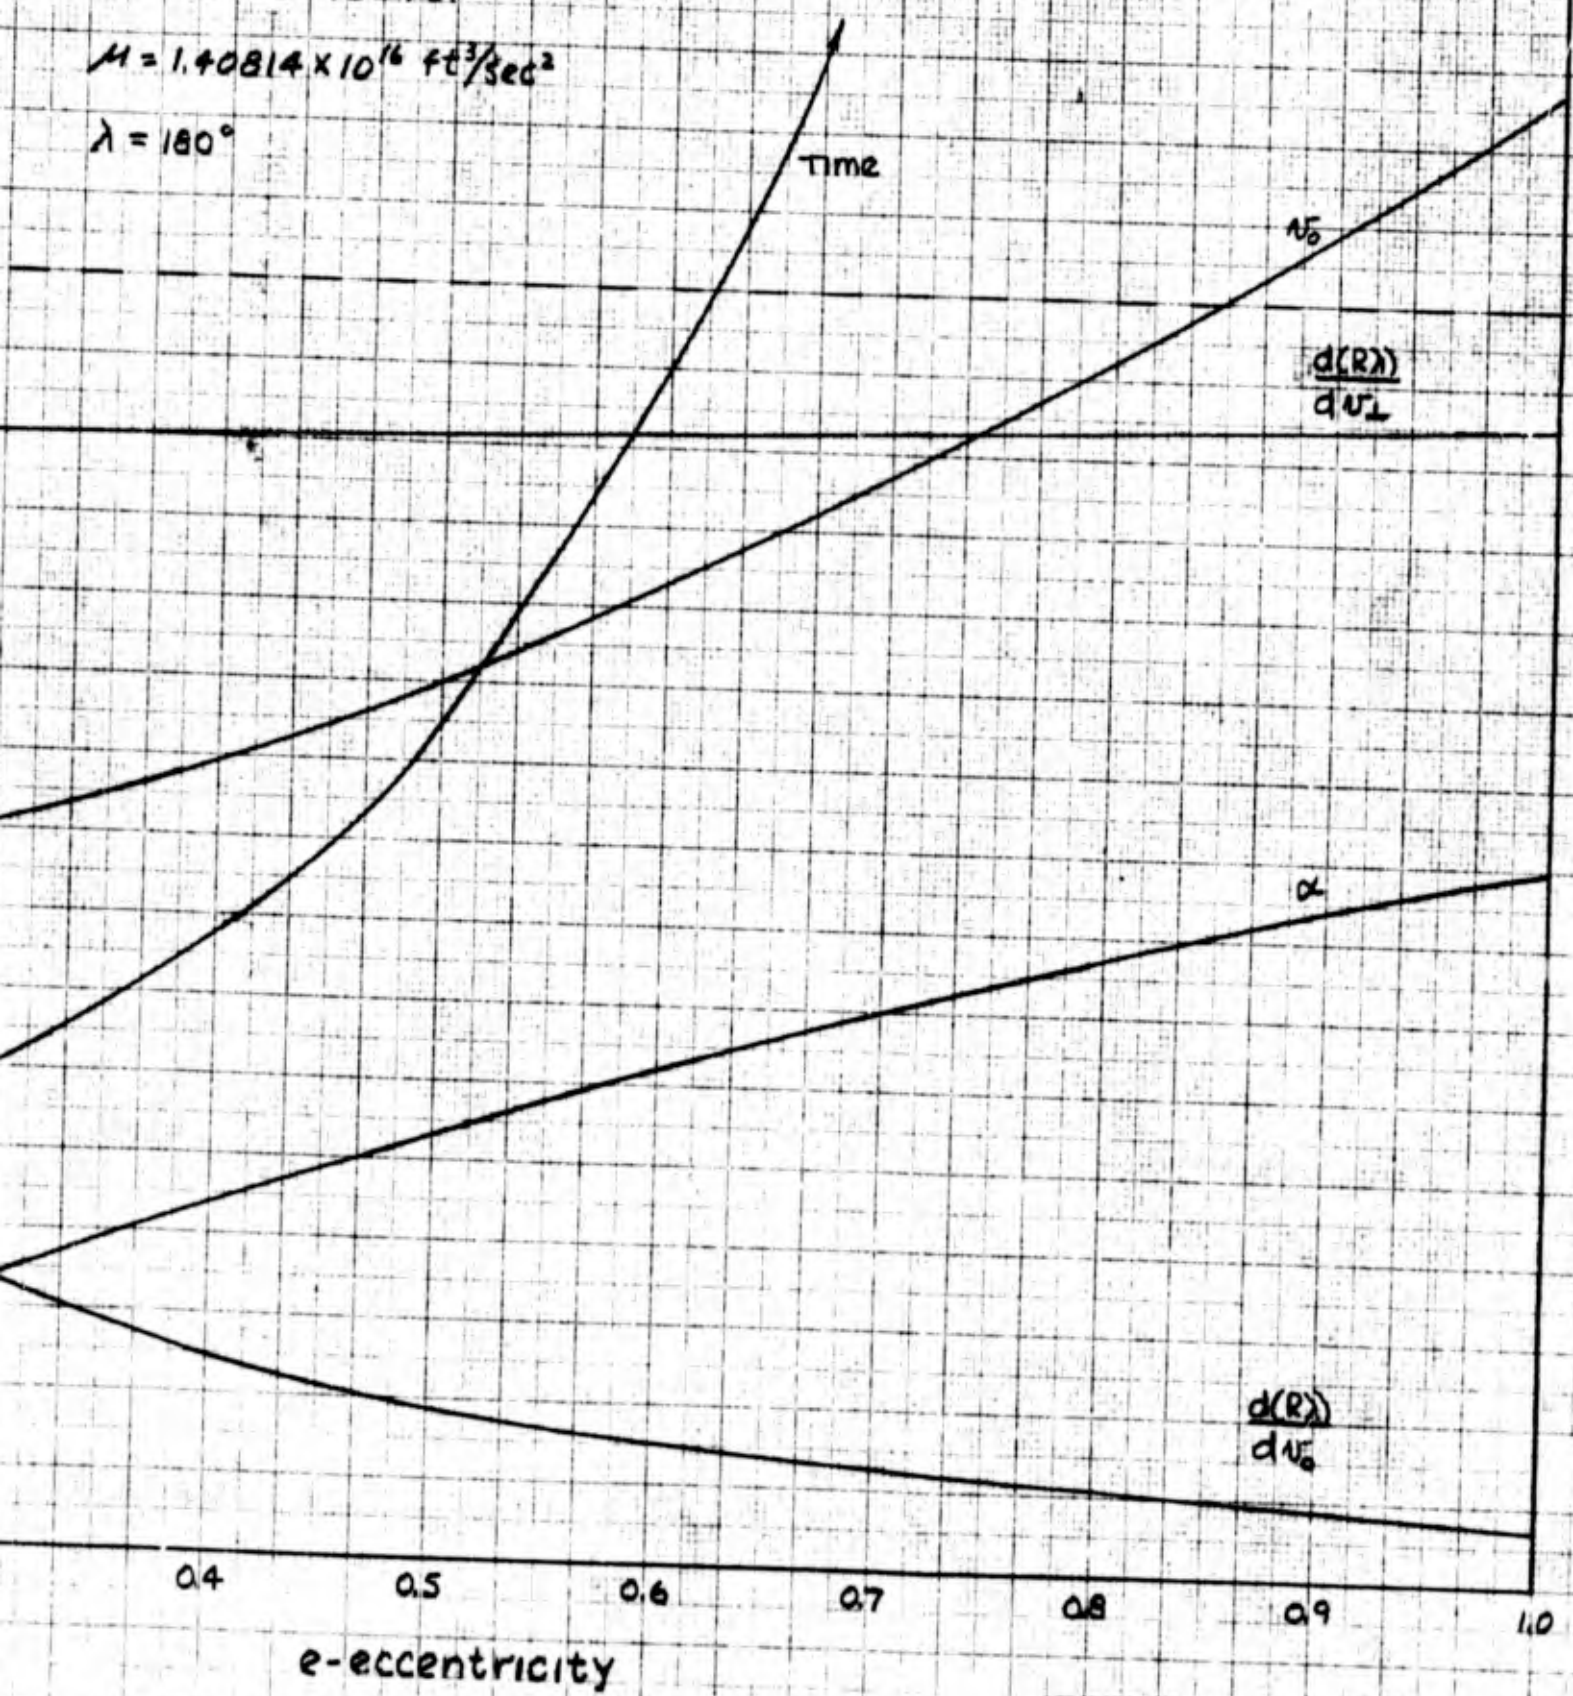

ERS AND MISS COEFFICIENTS FOR A RANGE OF 10,800 NAUTICAL MILES **FIG. 7**

B

Range = 10,200  
 $R = 2.0903 \times 10^7$   
 $\mu = 1.40814 \times 10^8$   
 $\lambda = 170^\circ$

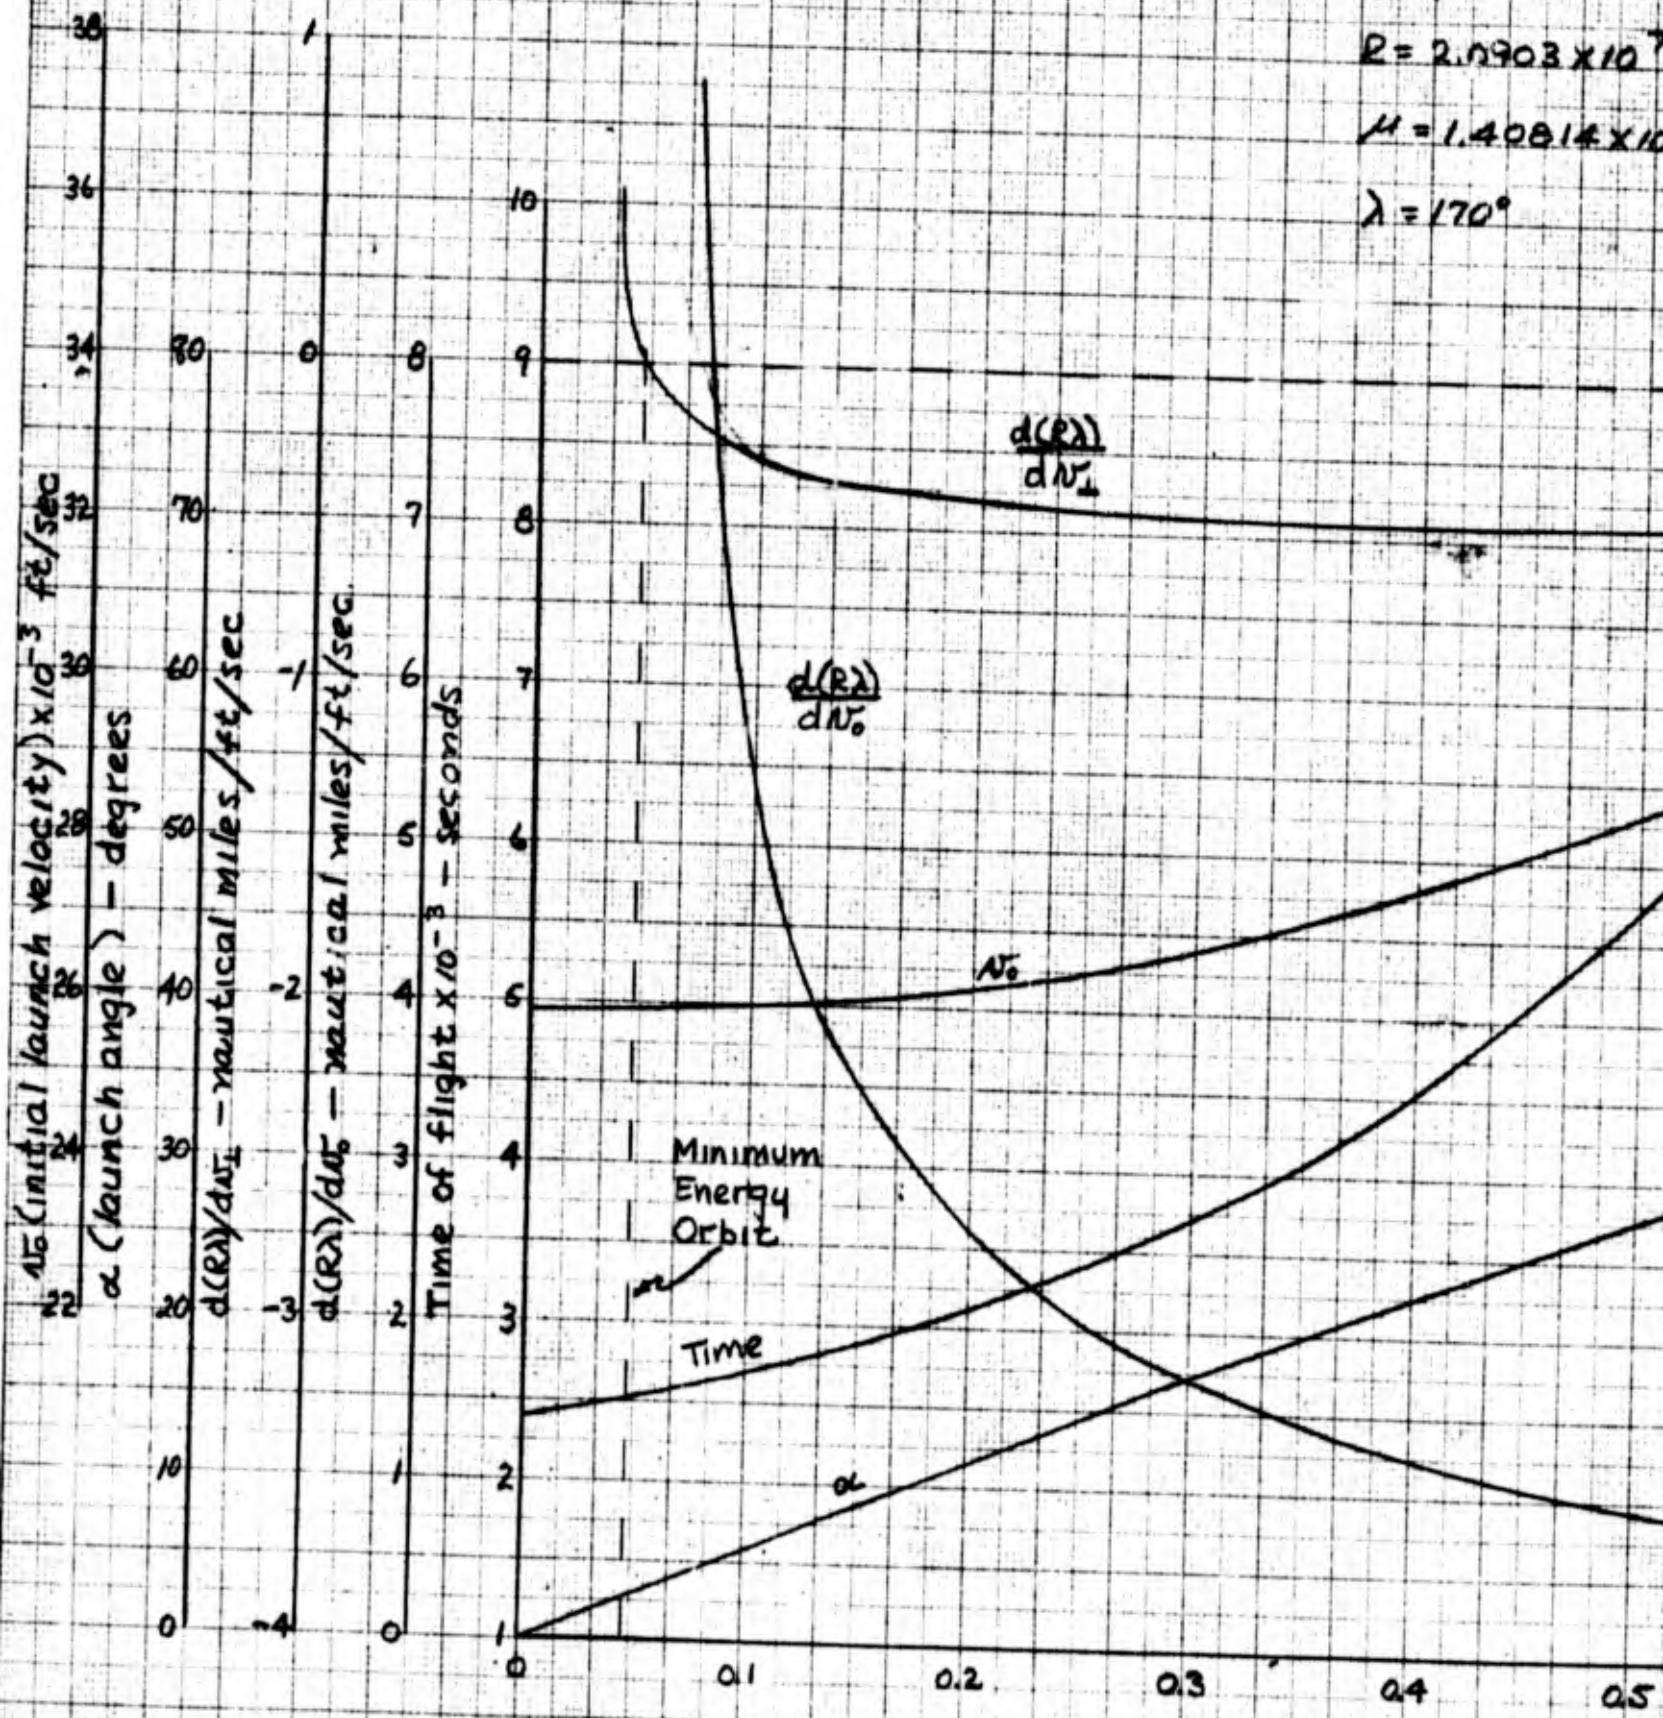

TRAJECTORY PARAMETERS AND MISS COEFFICIENT

A


Date 28 Feb. '58

Range = 10,200 n. mi.

$R = 2.0903 \times 10^7 \text{ ft.}$

$\mu = 1.40814 \times 10^{16} \text{ ft}^3/\text{sec}^2$

$\lambda = 170^\circ$

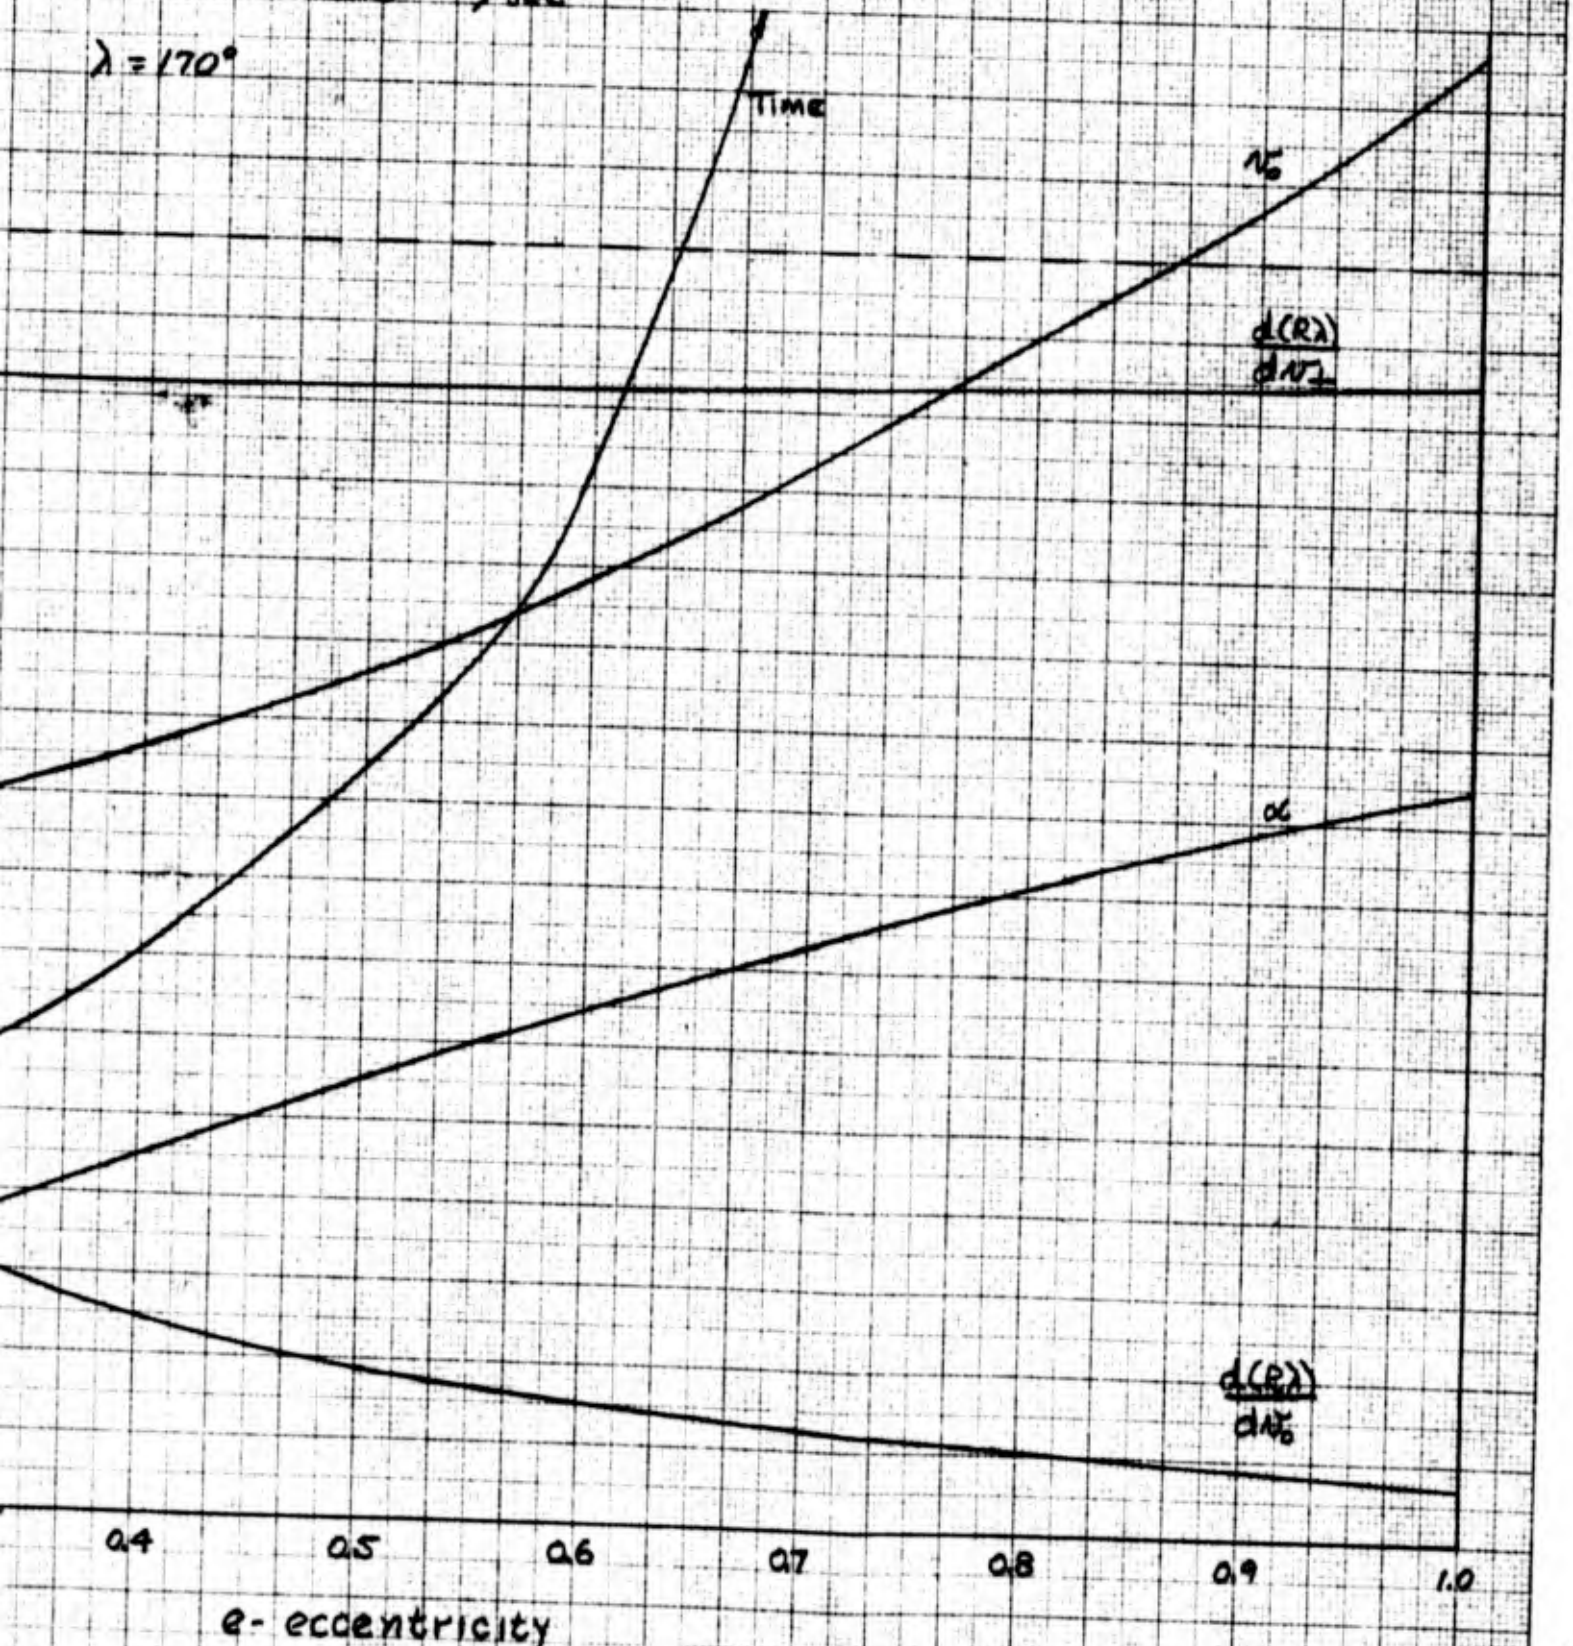


D MISS COEFFICIENTS FOR A RANGE OF 10,200 NAUTICAL MILES

FIG. 6

B

Range  
 $R = 2.0$   
 $M = 1.40$   
 $\lambda = 190^\circ$

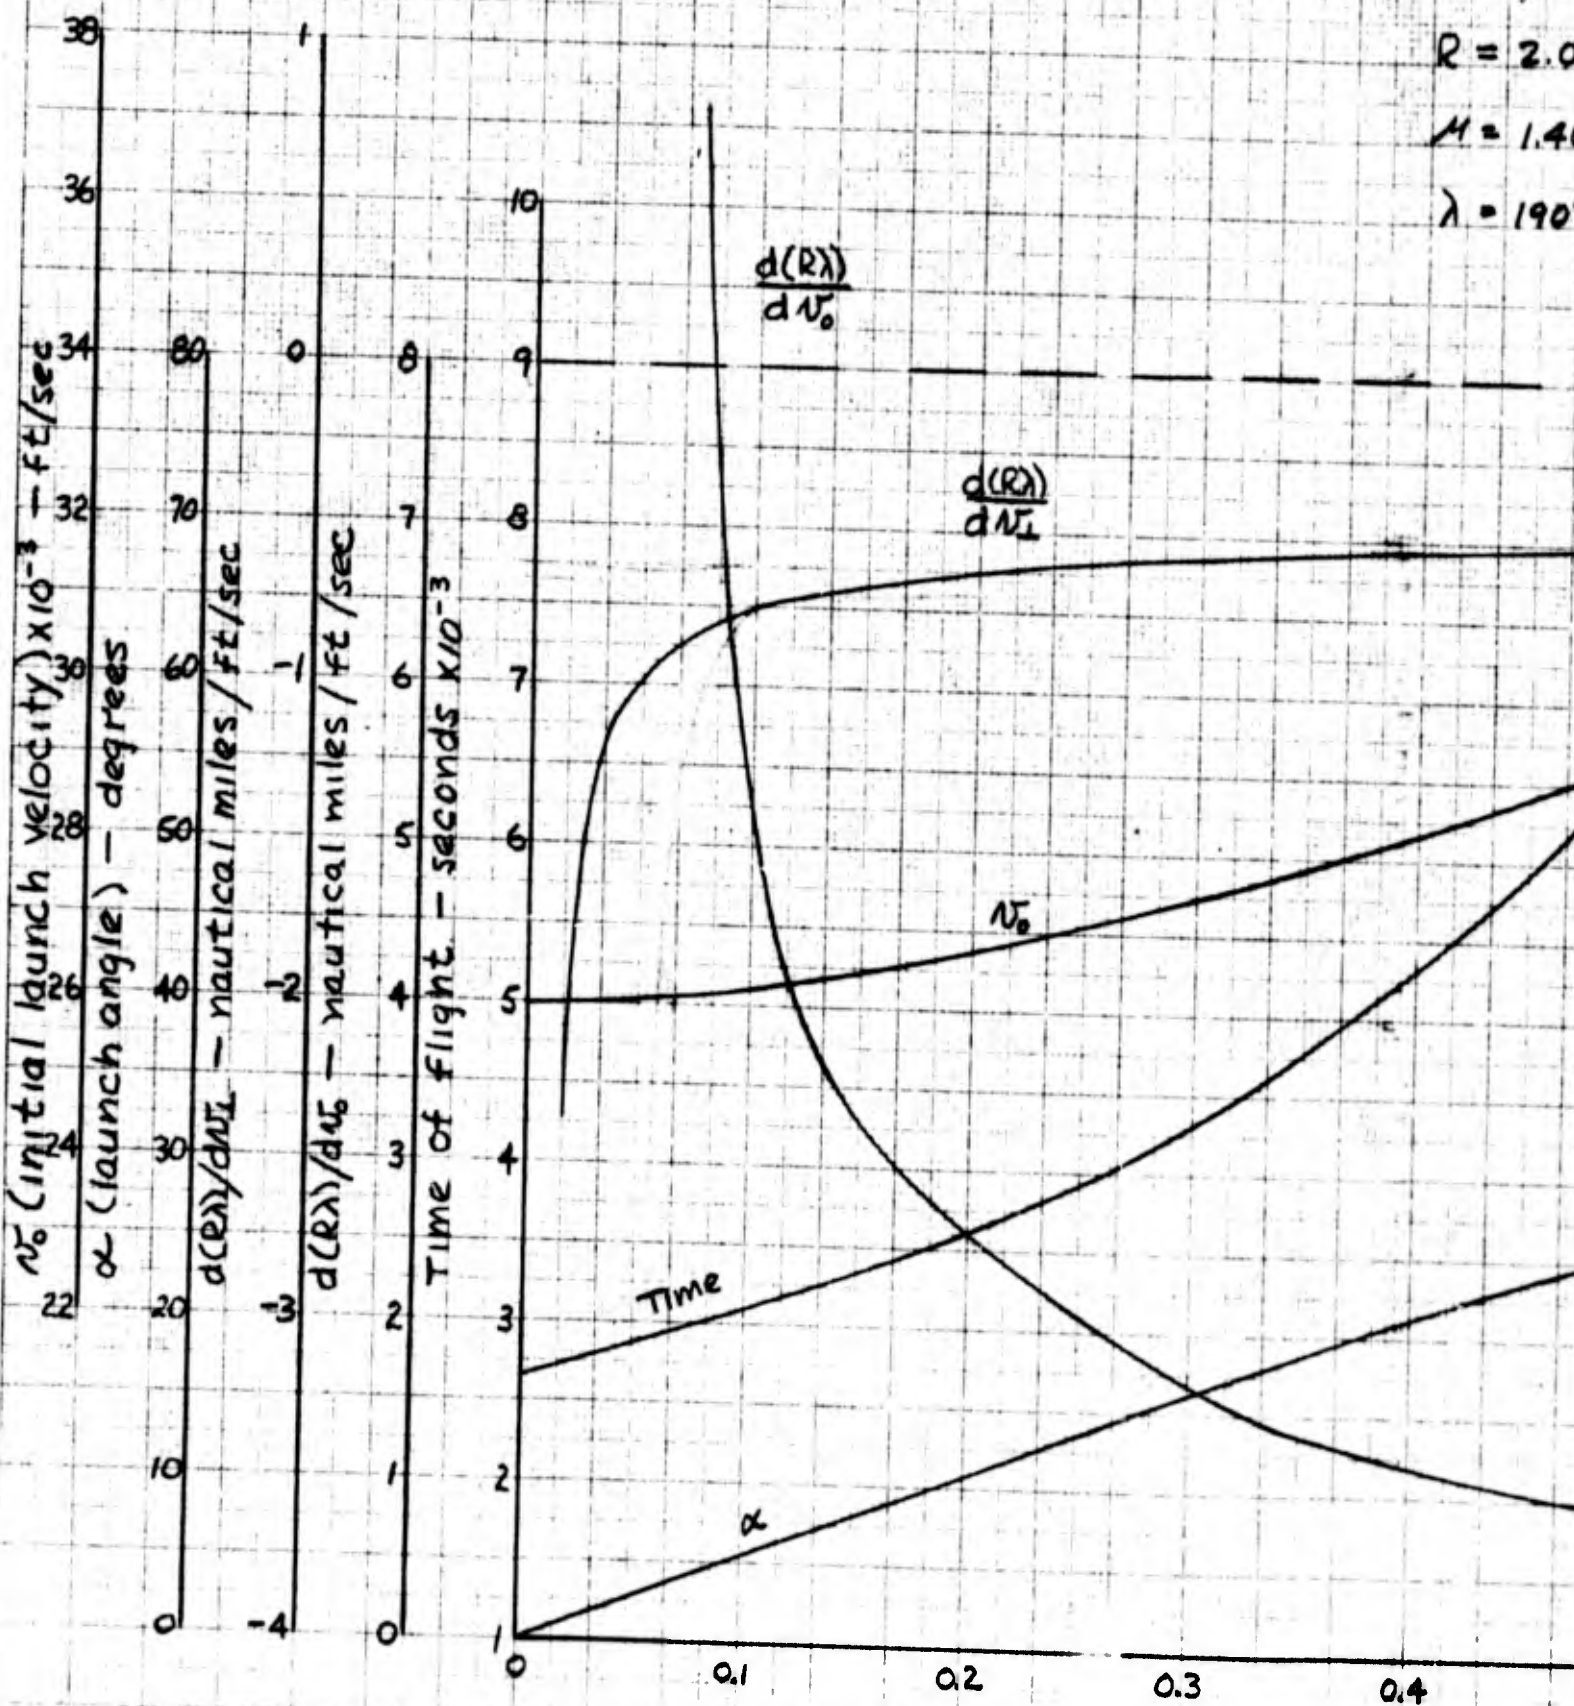

TRAJECTORY PARAMETERS AND MISS COEFF

A

e-ec

Range = 11,400 n.mi.

$R = 2.0903 \times 10^7$  ft.

$M = 1.40814 \times 10^{16}$  ft<sup>3</sup>/sec<sup>2</sup>

$\lambda = 190^\circ$

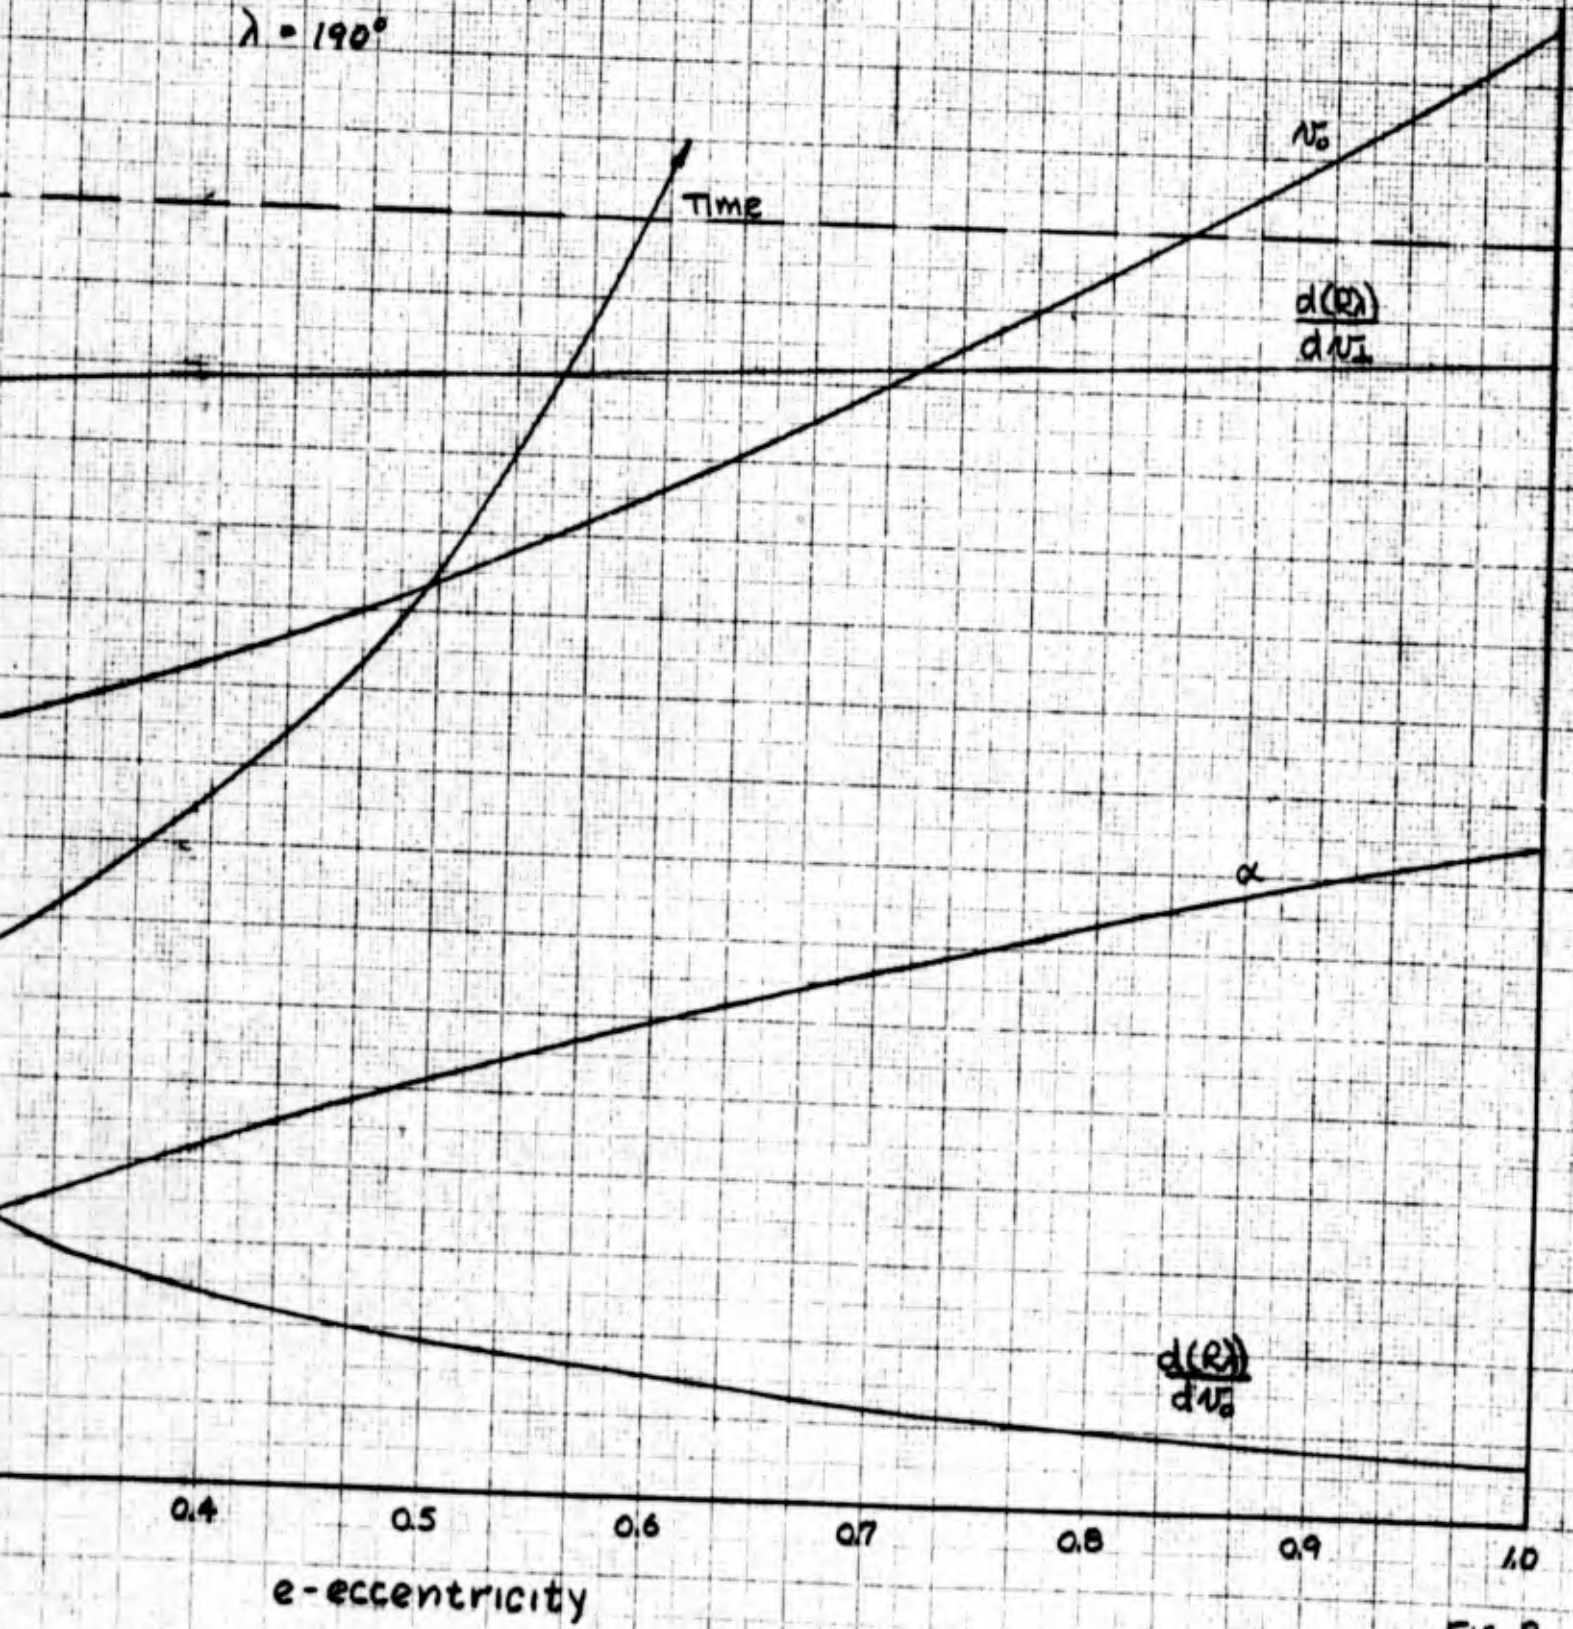


FIG. 8

RS AND MISS COEFFICIENTS FOR A RANGE OF 11,400 NAUTICAL MILES

B




Range = 13,500 n.m.l.

$R = 2.0903 \times 10^7$  ft.

$M = 1.40814 \times 10^{14}$  ft<sup>3</sup>/sec<sup>2</sup>

$\lambda = 225^\circ$

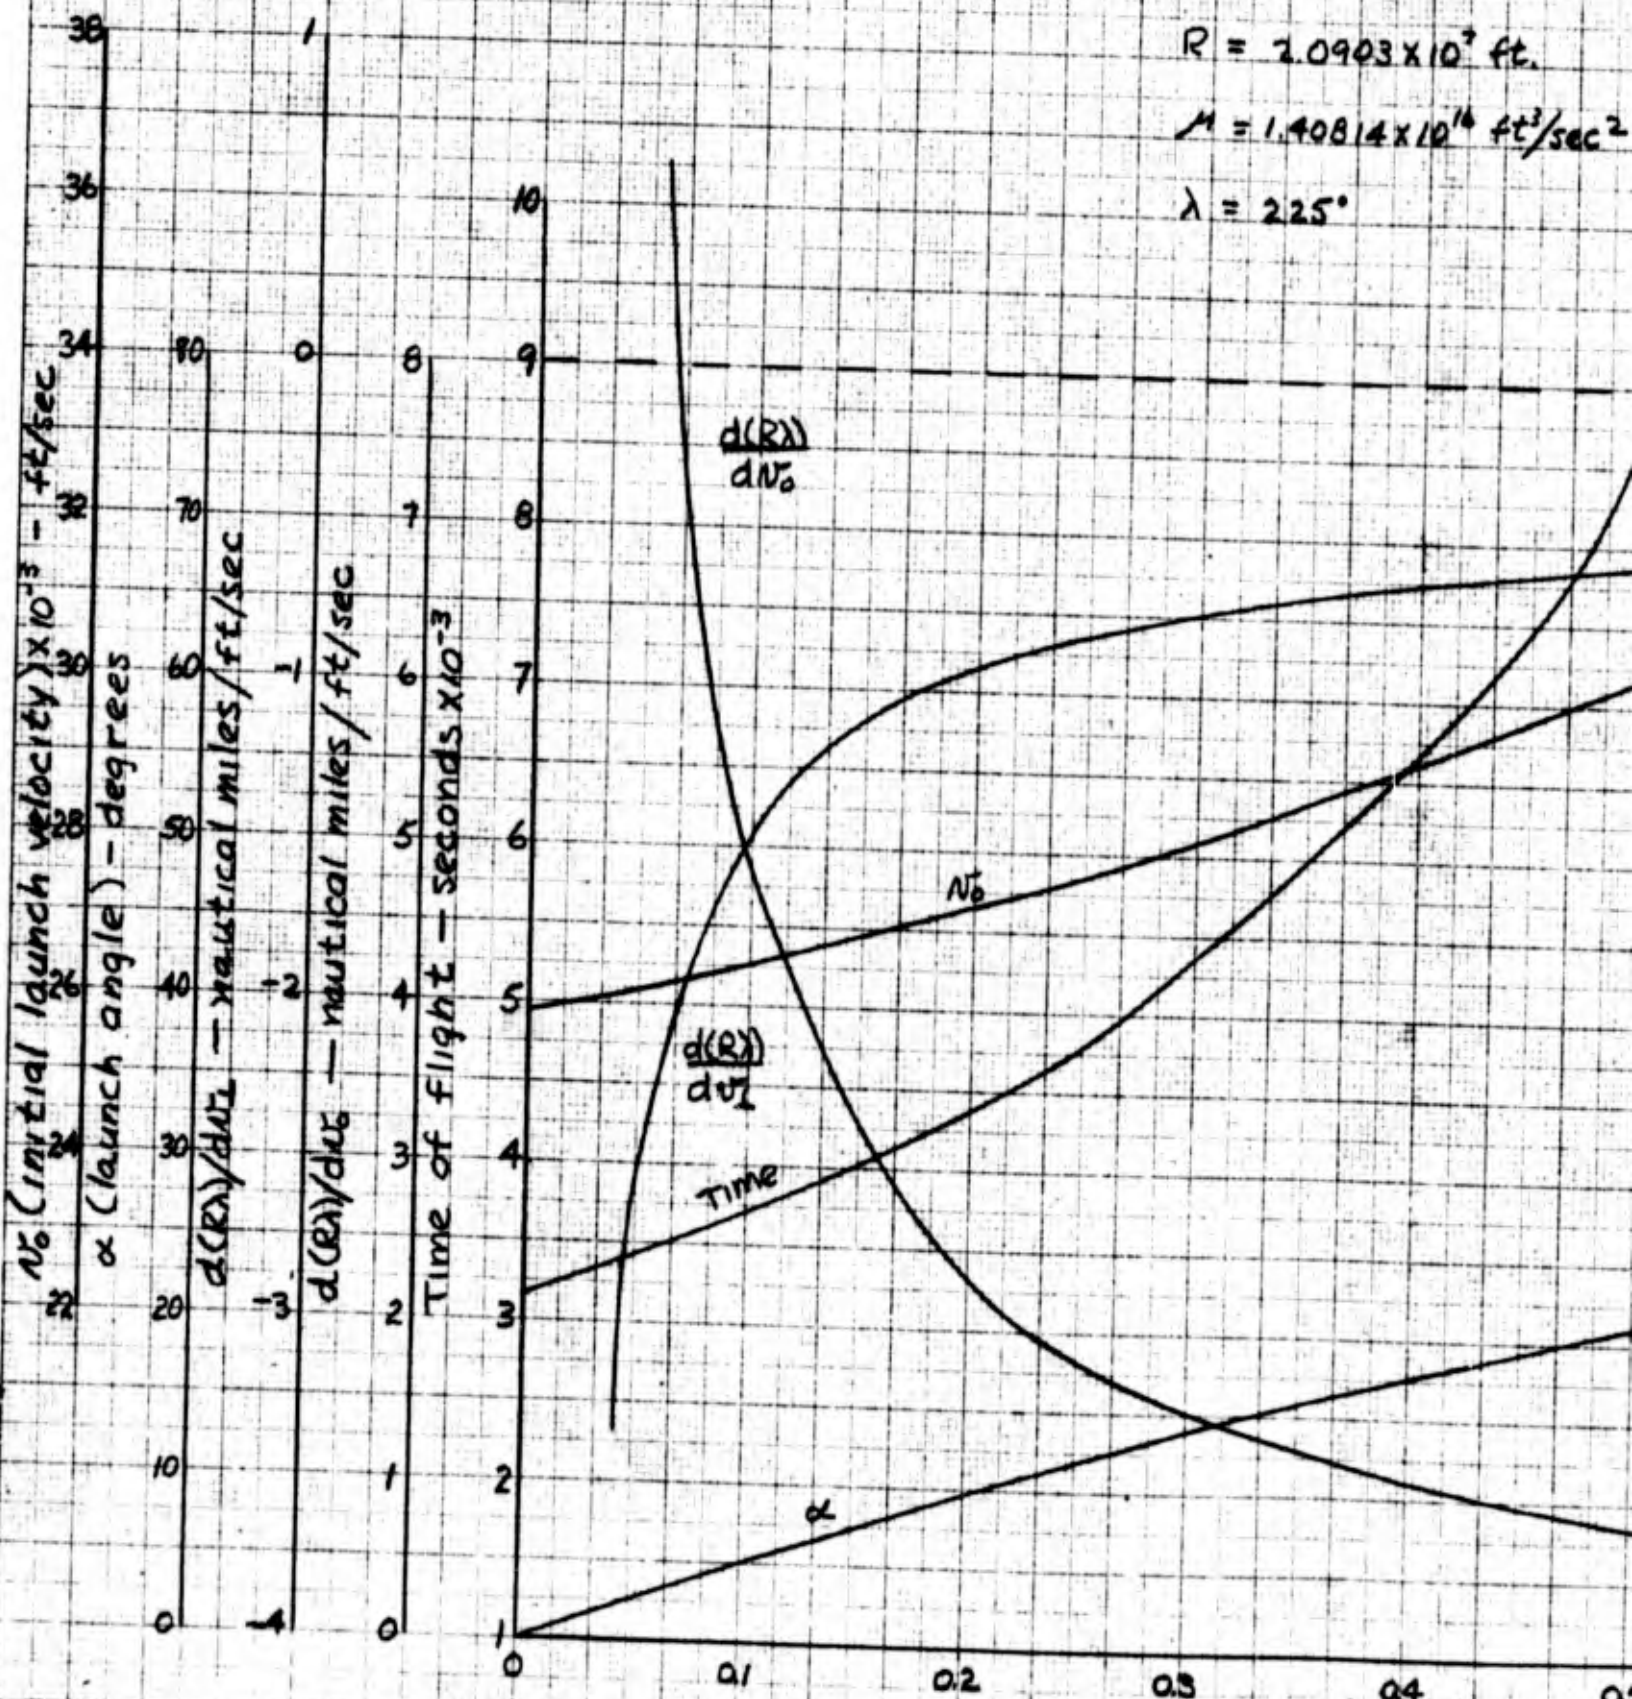

TRAJECTORY PARAMETERS AND MISS COEFFICIENT

A


Date 28 Feb. '58

range = 13,500 n. mil.

$= 2.0903 \times 10^7$  ft.

$= 1.40814 \times 10^{16}$  ft<sup>2</sup>/sec<sup>2</sup>


$= 225^\circ$

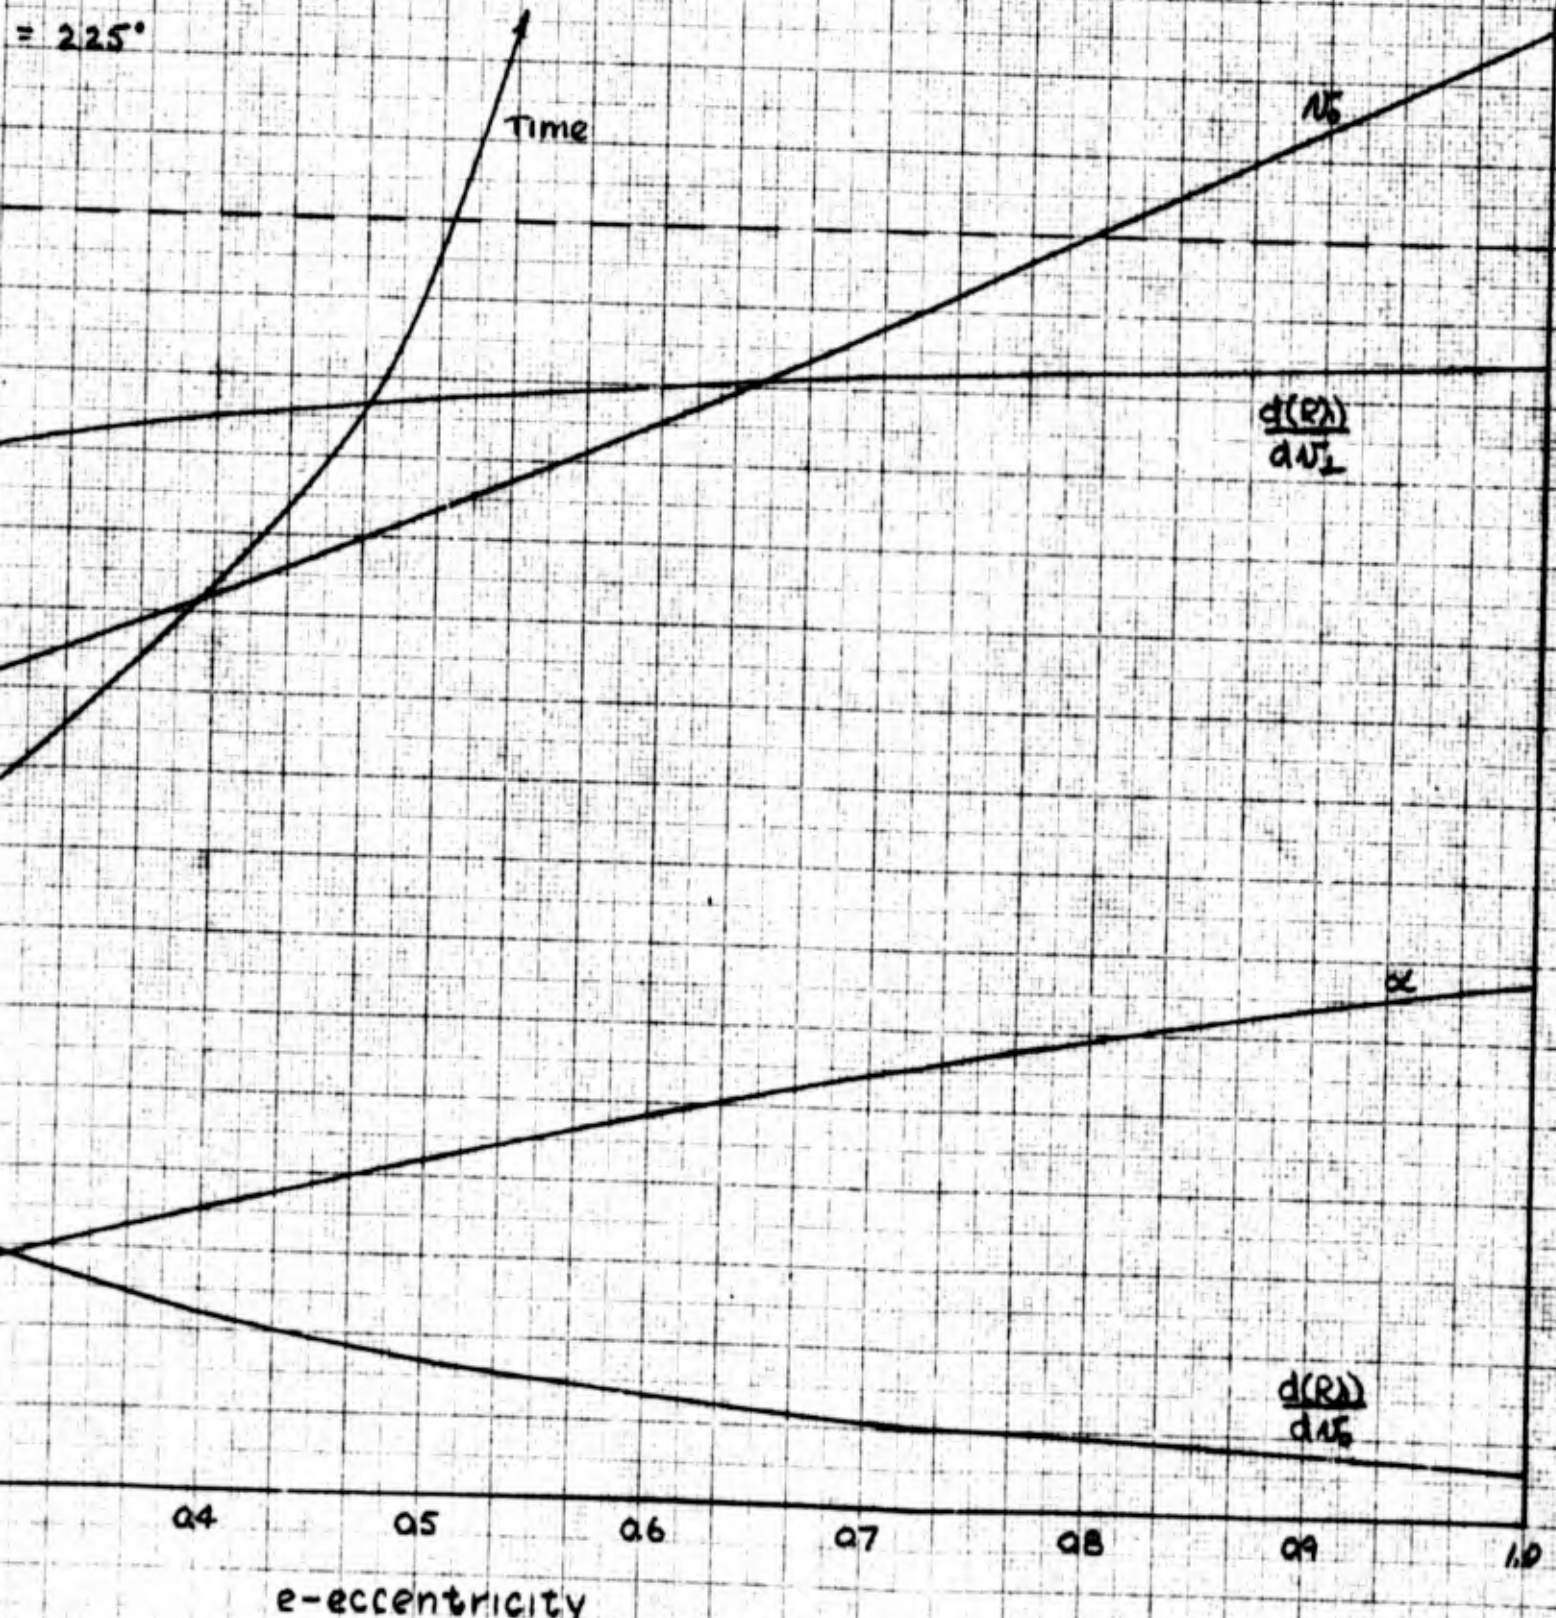

MISS AND MISS COEFFICIENTS FOR A RANGE OF 13,500 NAUTICAL MILES

FIG. 9

B

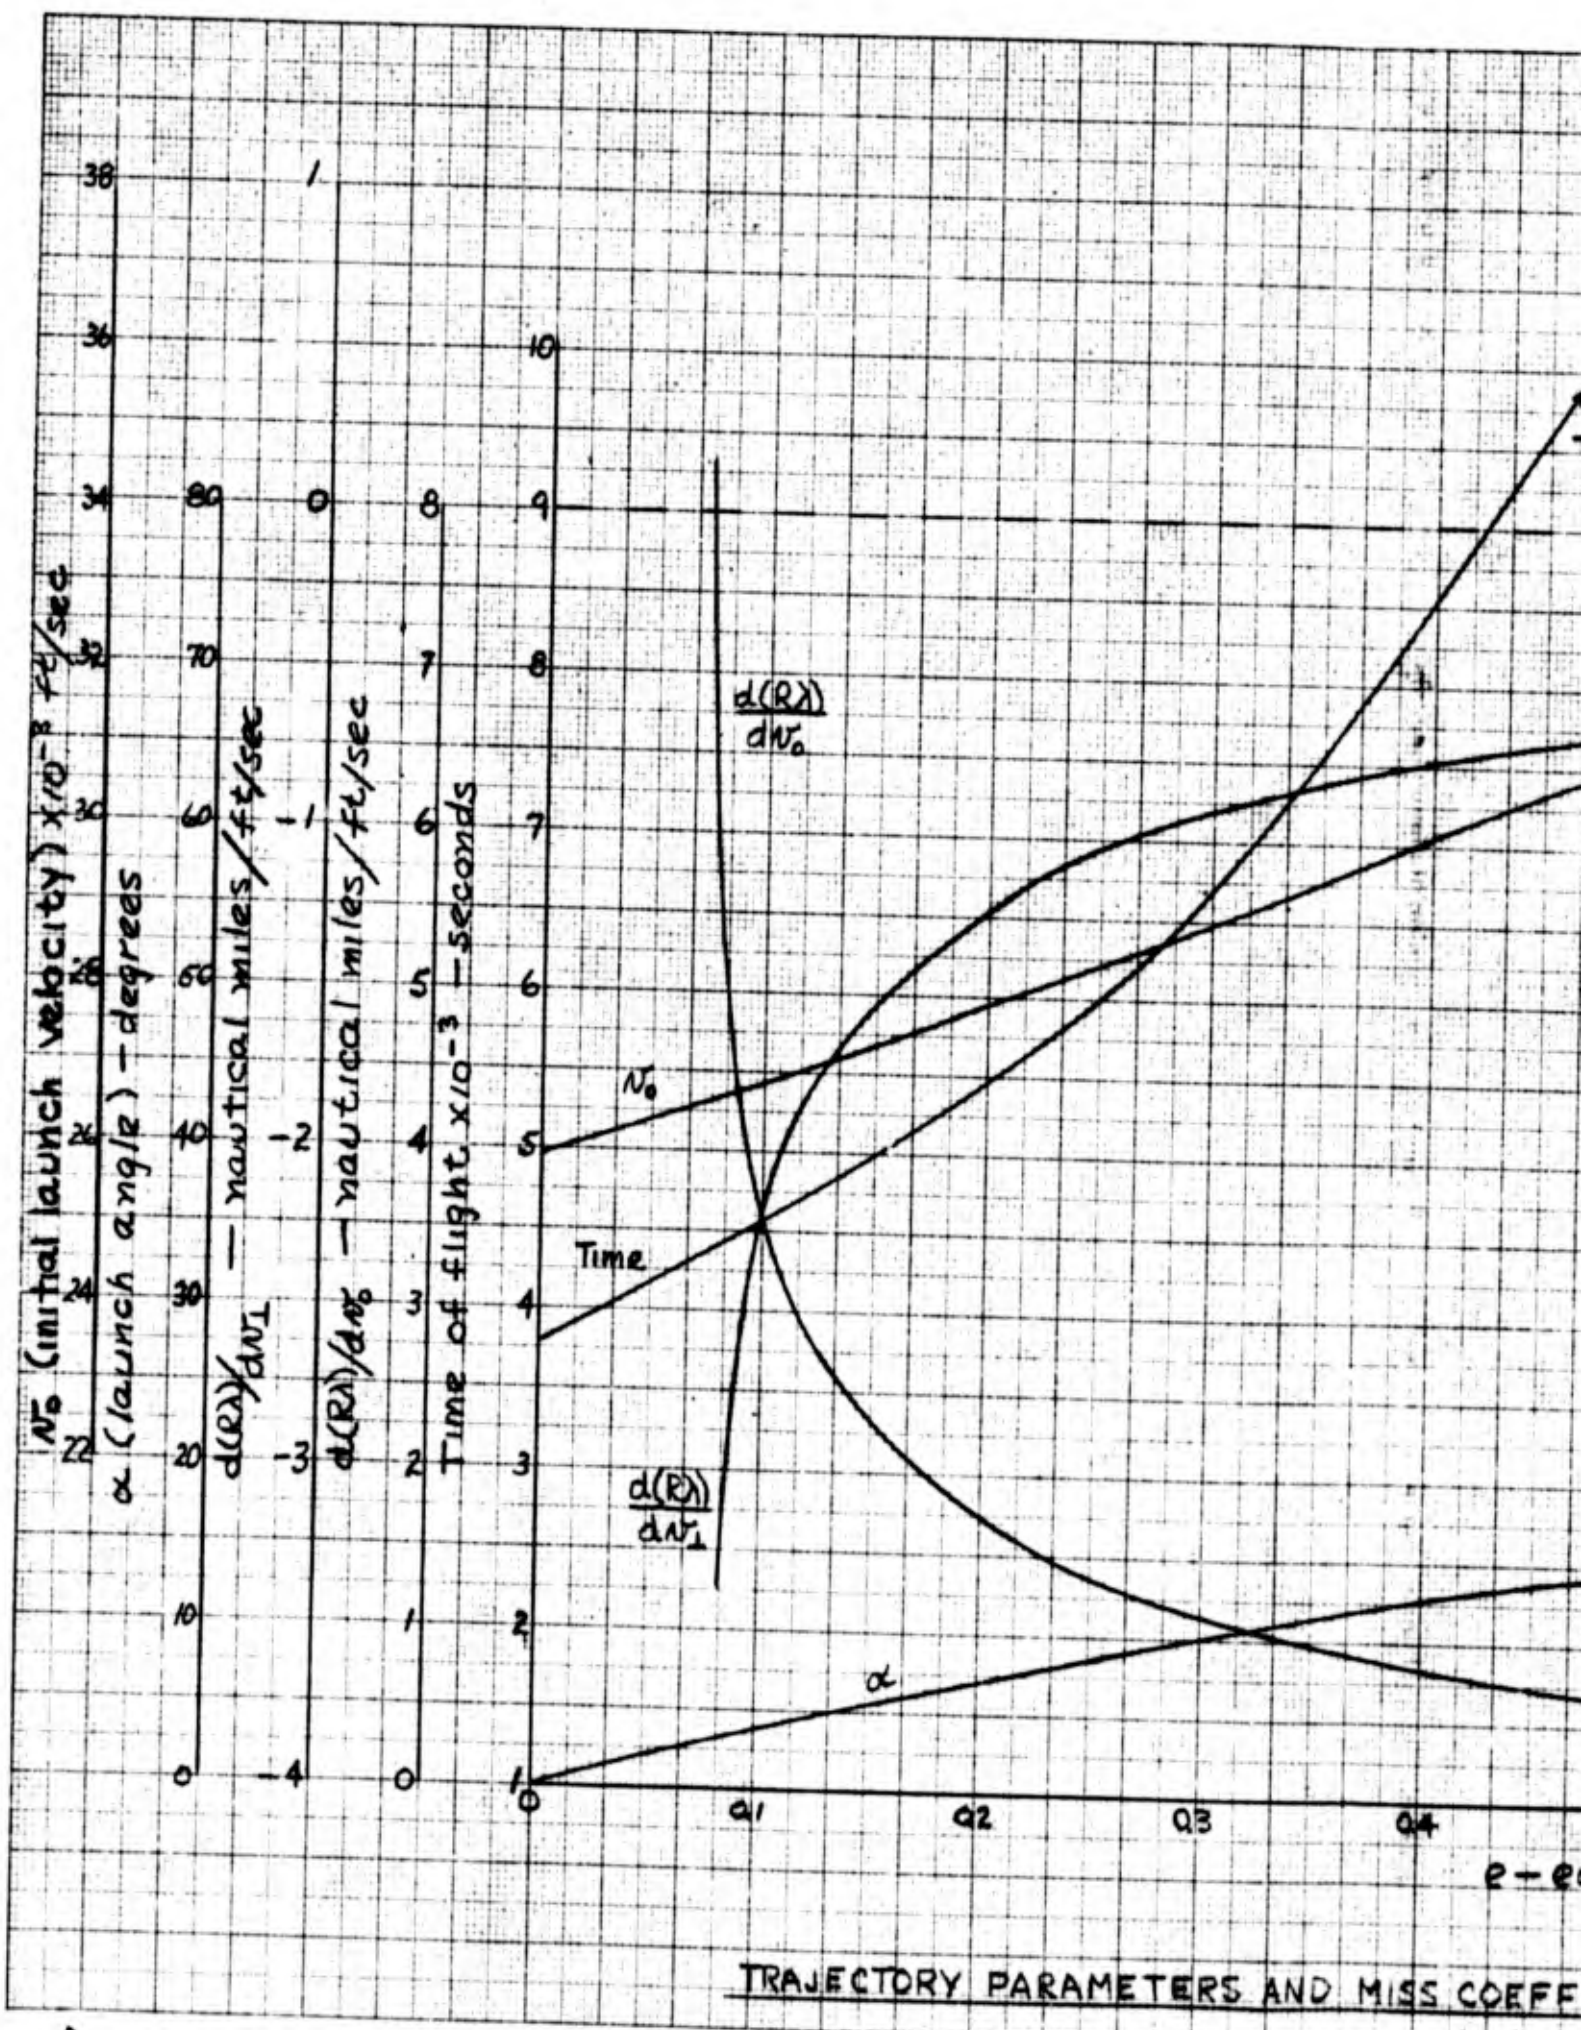

TRAJECTORY PARAMETERS AND MISS COEFF


A

RANGE = 16,200 N.M.

$R = 2.0903 \times 10^7$  ft.

$H = 1.408 \times 10^{16}$  ft<sup>3</sup>/sec<sup>2</sup>


$\lambda = 270^\circ$

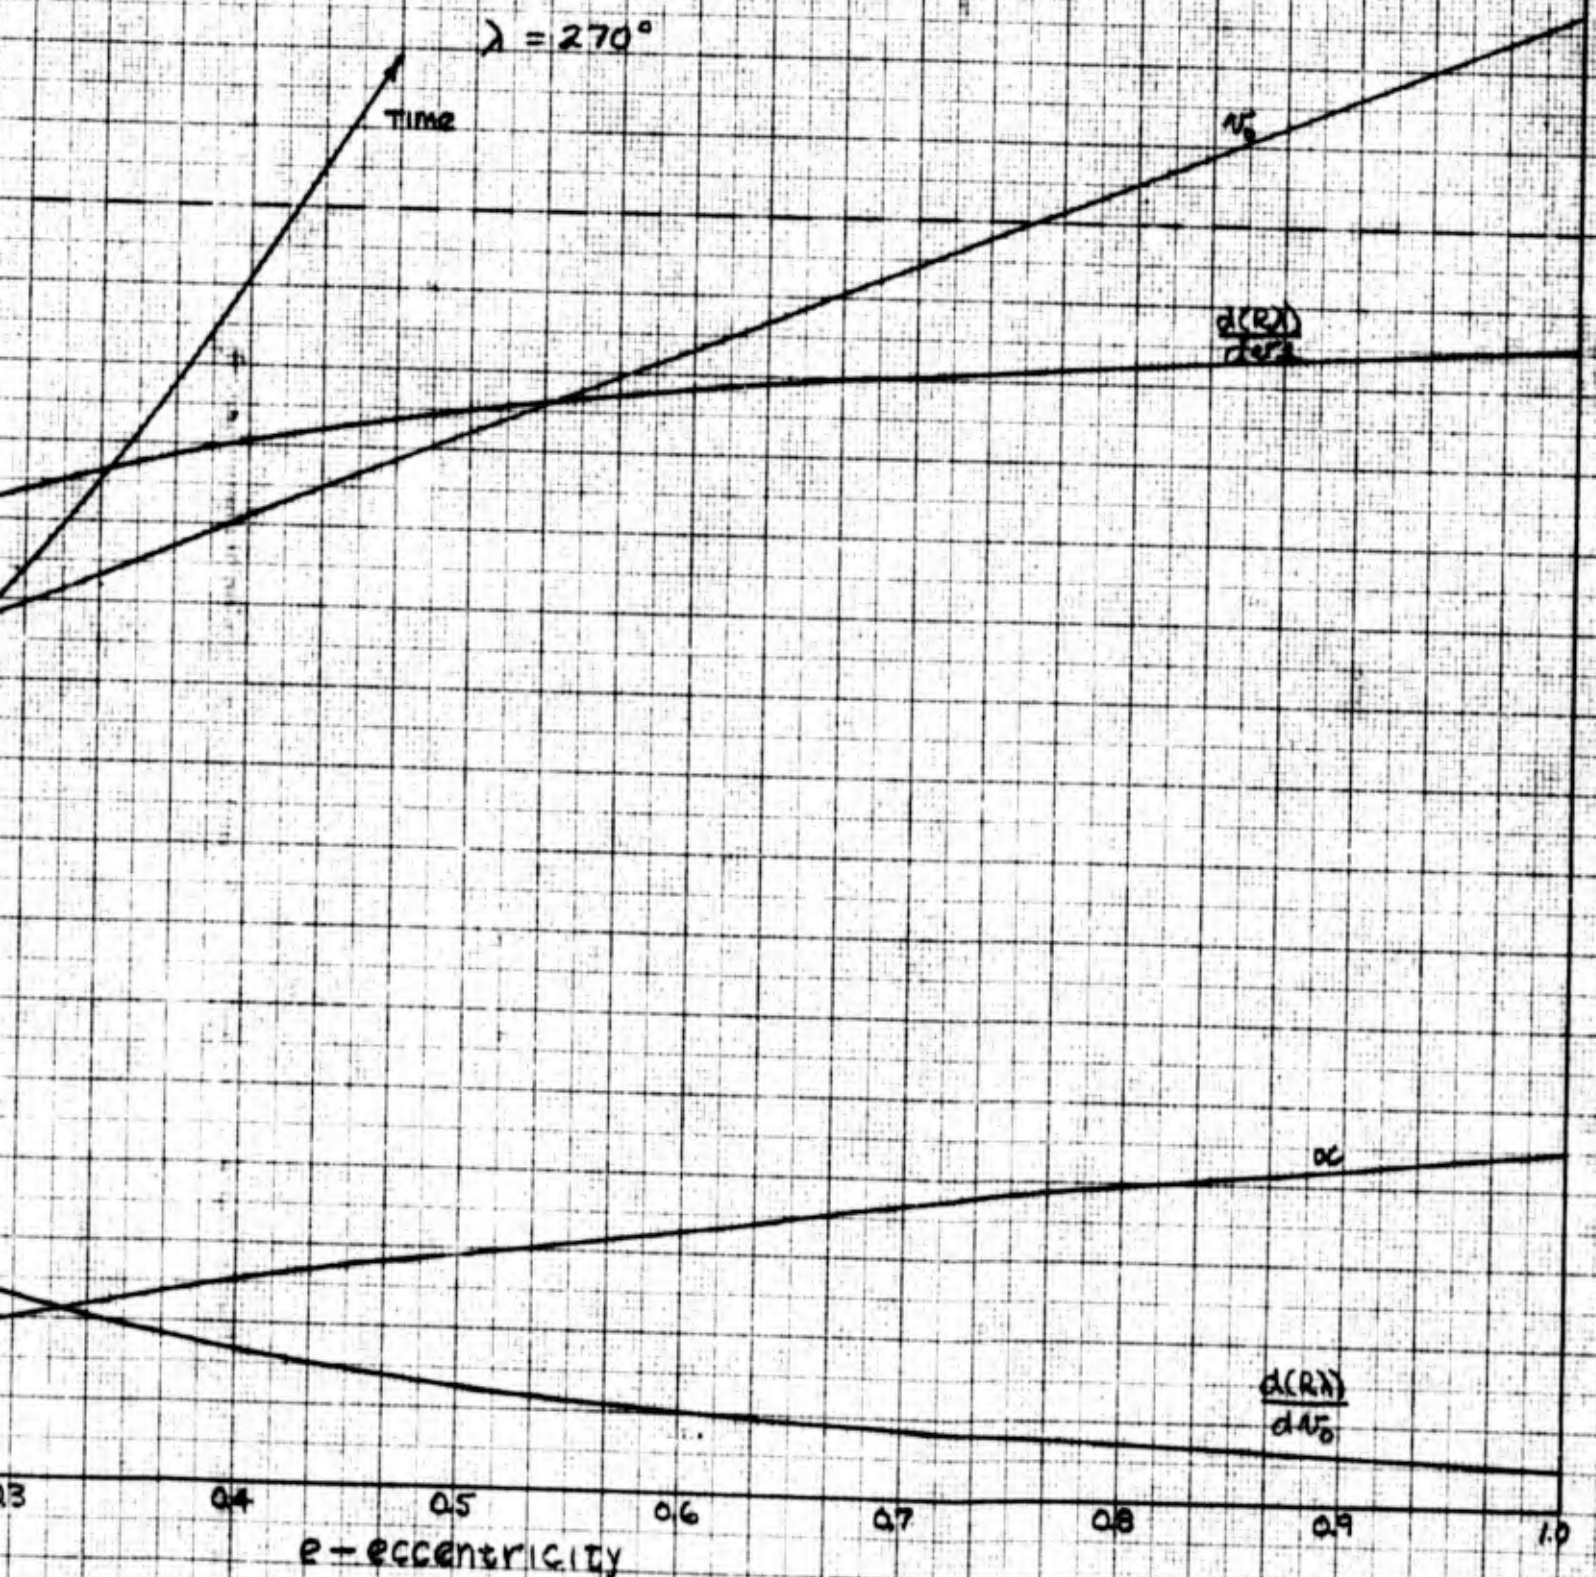

MISS COEFFICIENTS FOR A RANGE OF 16,200 NAUTICAL MILES

FIG. 10


3

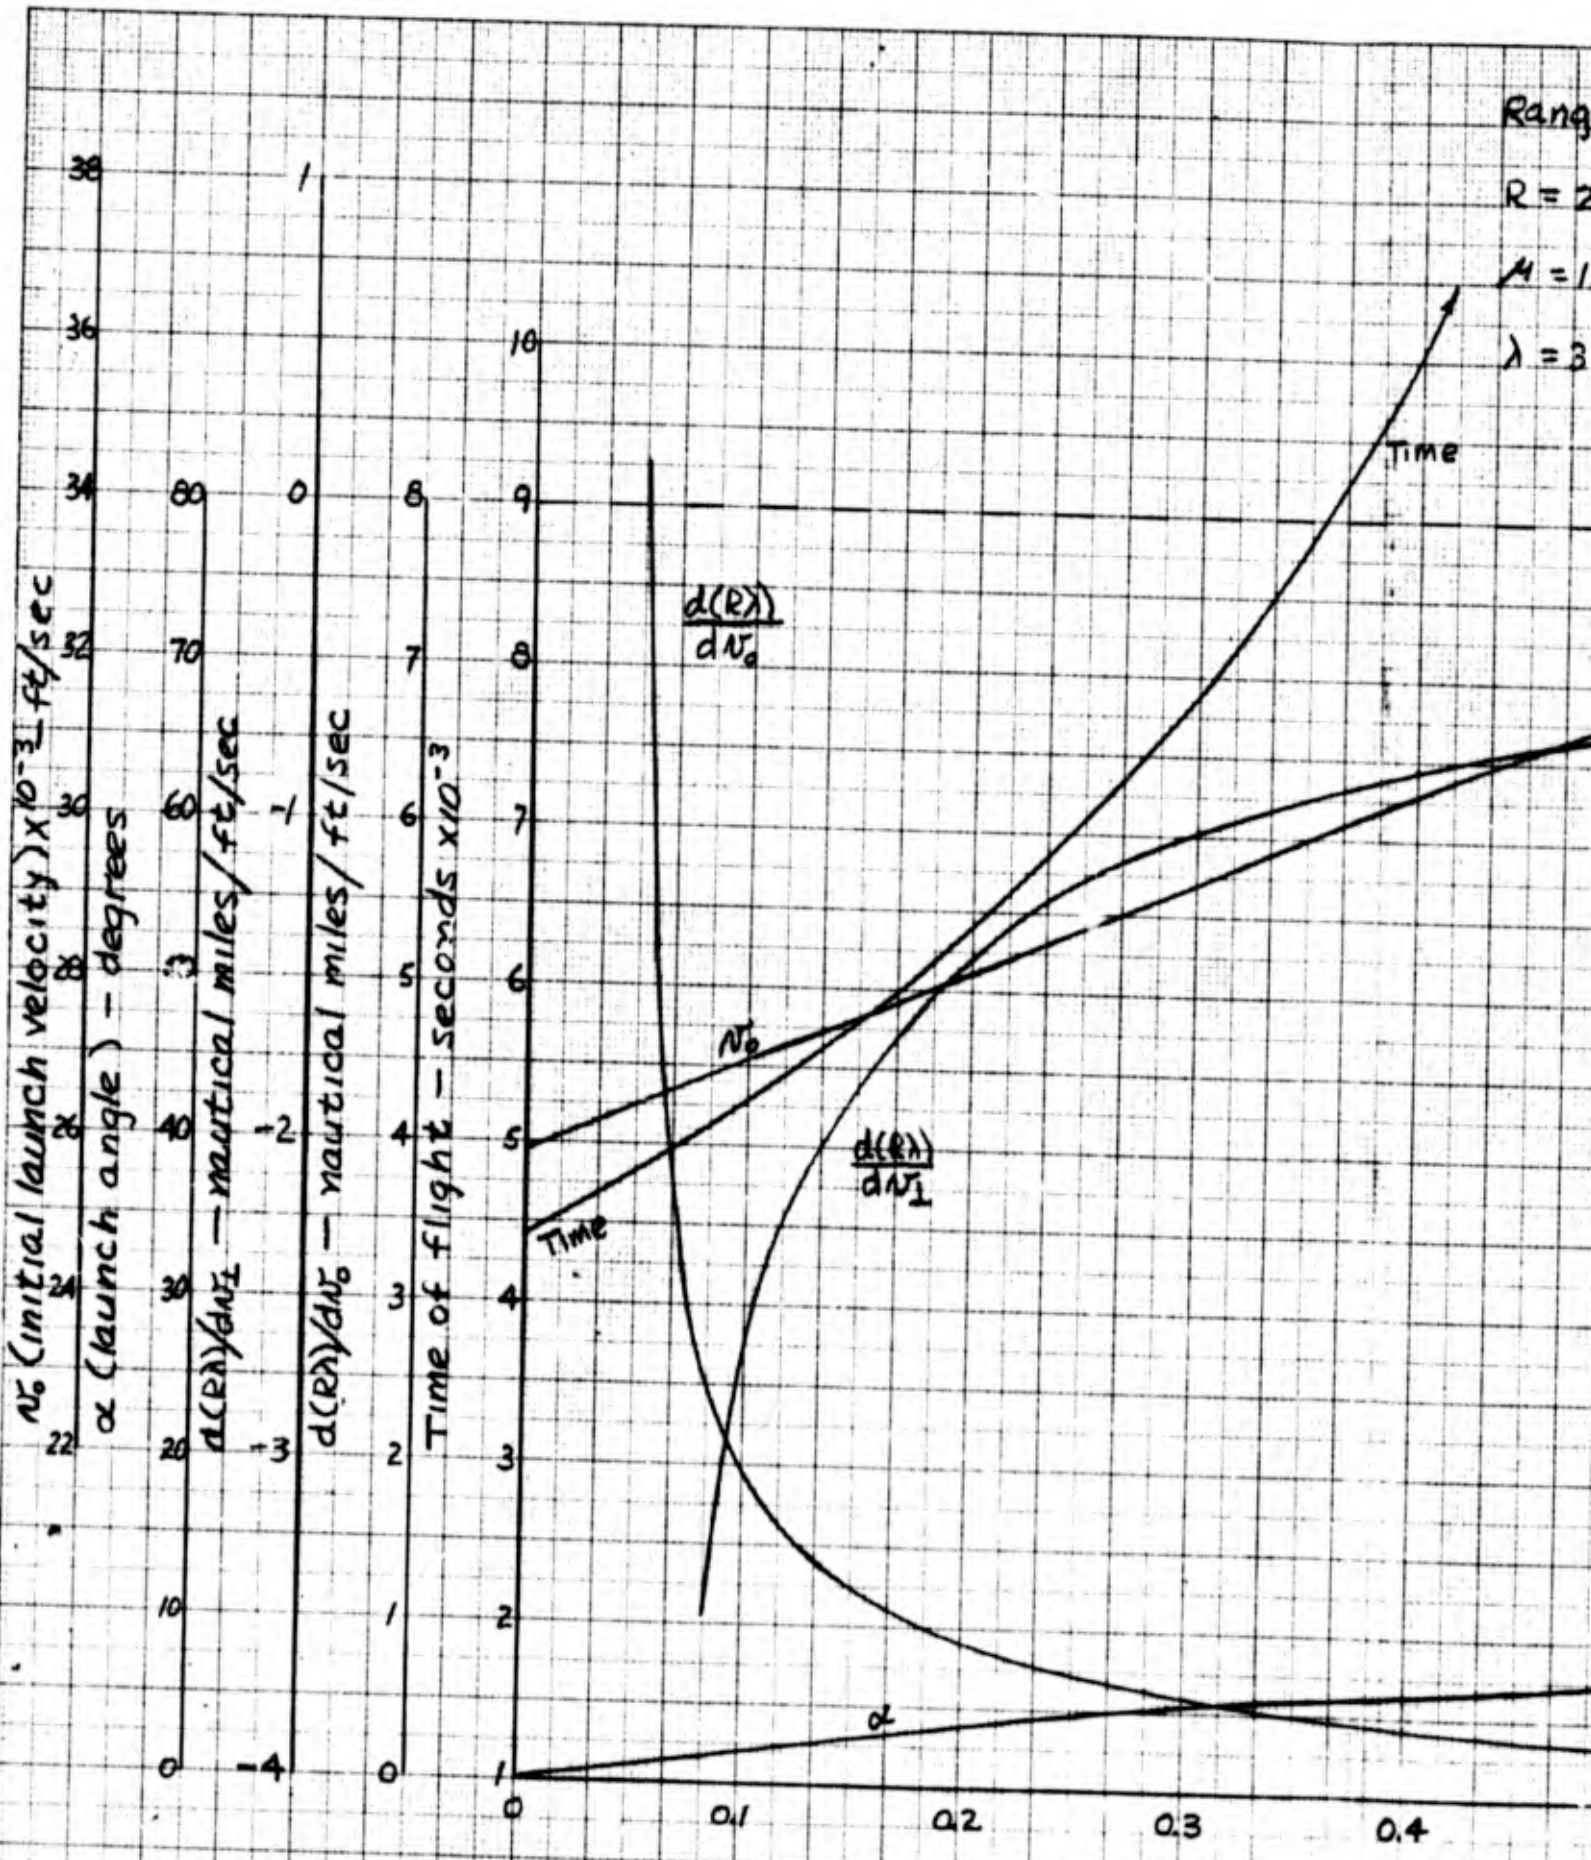

TRAJECTORY PARAMETERS AND MISS COEFFICIENT

A

Range = 18,970 n. mi.  
 $R = 2.0903 \times 10^7$  ft  
 $M = 1.40814 \times 10^{16}$  ft<sup>3</sup>/sec<sup>2</sup>  
 $\lambda = 315^\circ$

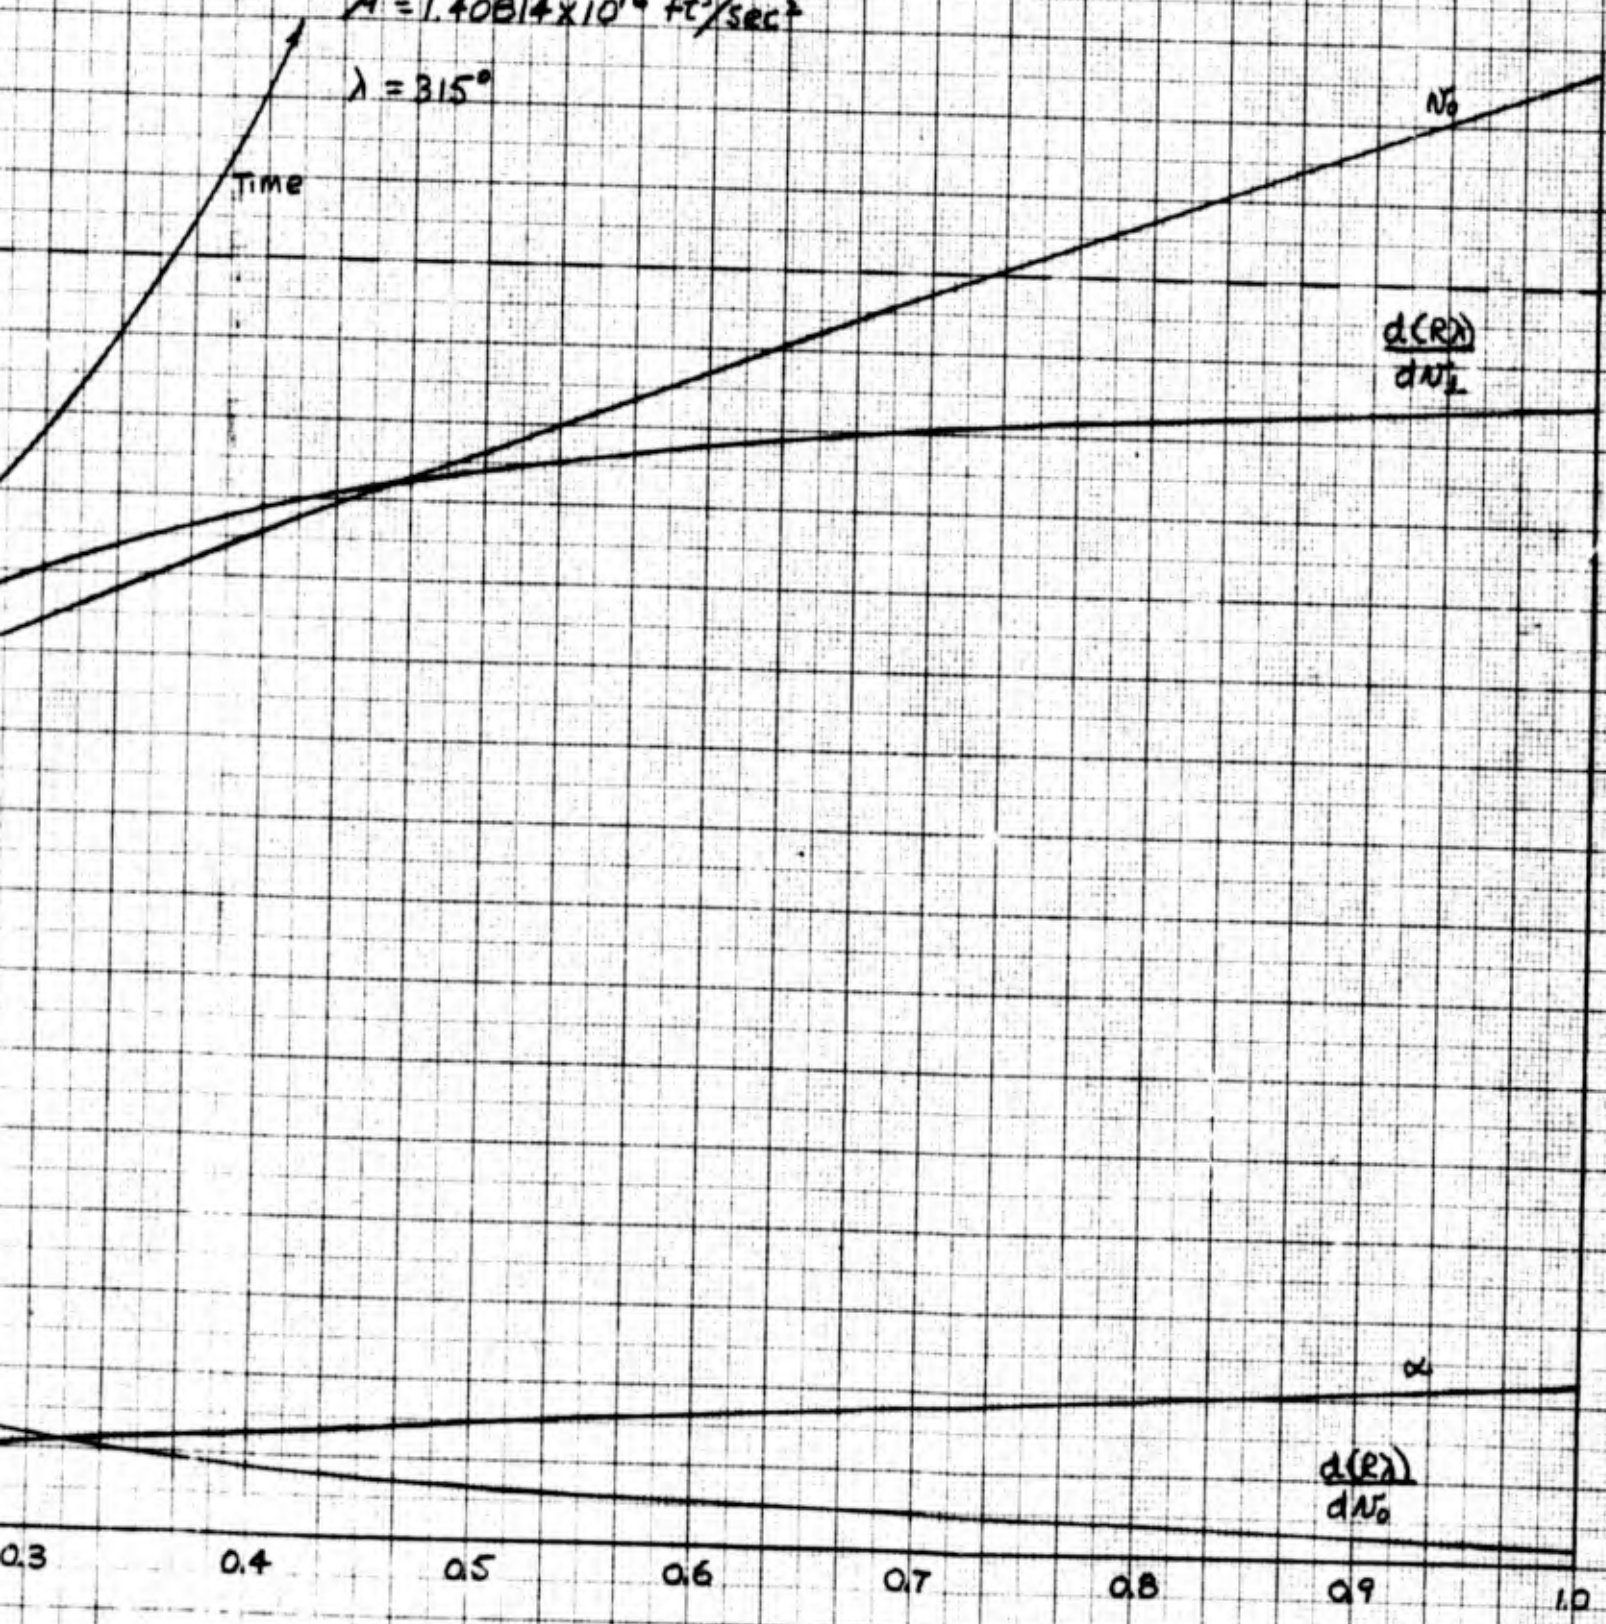


MISS COEFFICIENTS AND MISS COEFFICIENTS FOR A RANGE OF 18,970 NAUTICAL MILES

FIG. 11

3


$R =$   
 $M =$   
 $\lambda =$

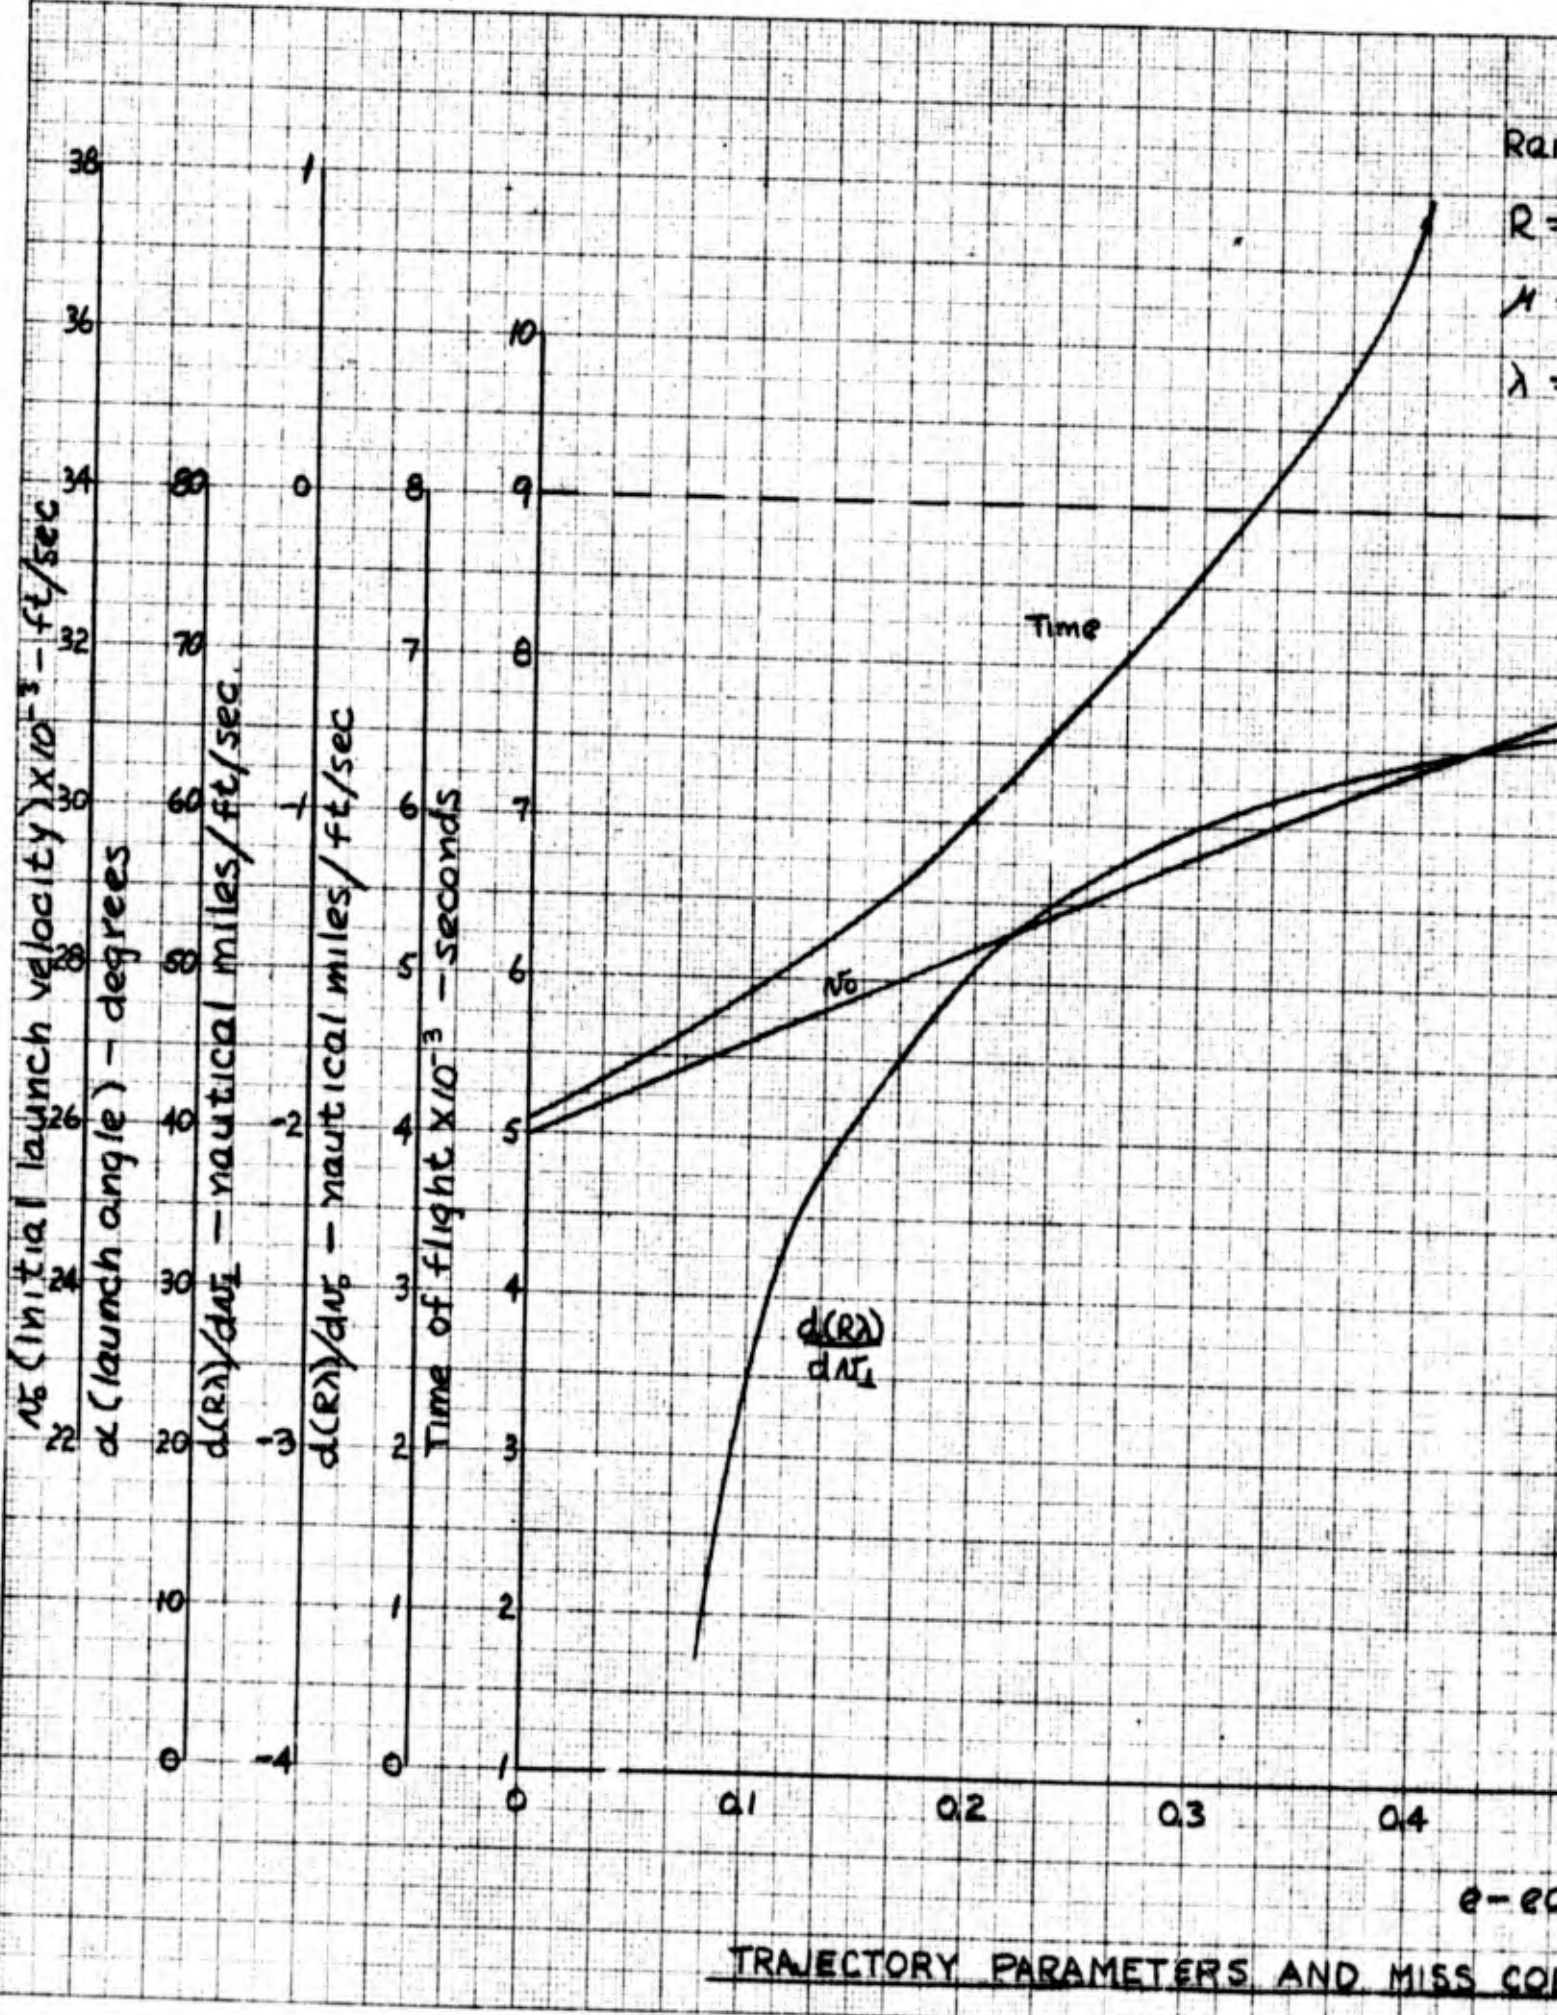

TRAJECTORY PARAMETERS AND MISS COEFFICIENT

A

Range = 21,600 n. mi.  
 $R = 2.0908 \times 10^7$  ft.  
 $\mu = 1.40814 \times 10^{16}$  ft<sup>3</sup>/sec<sup>2</sup>  
 $\lambda = 360^\circ$

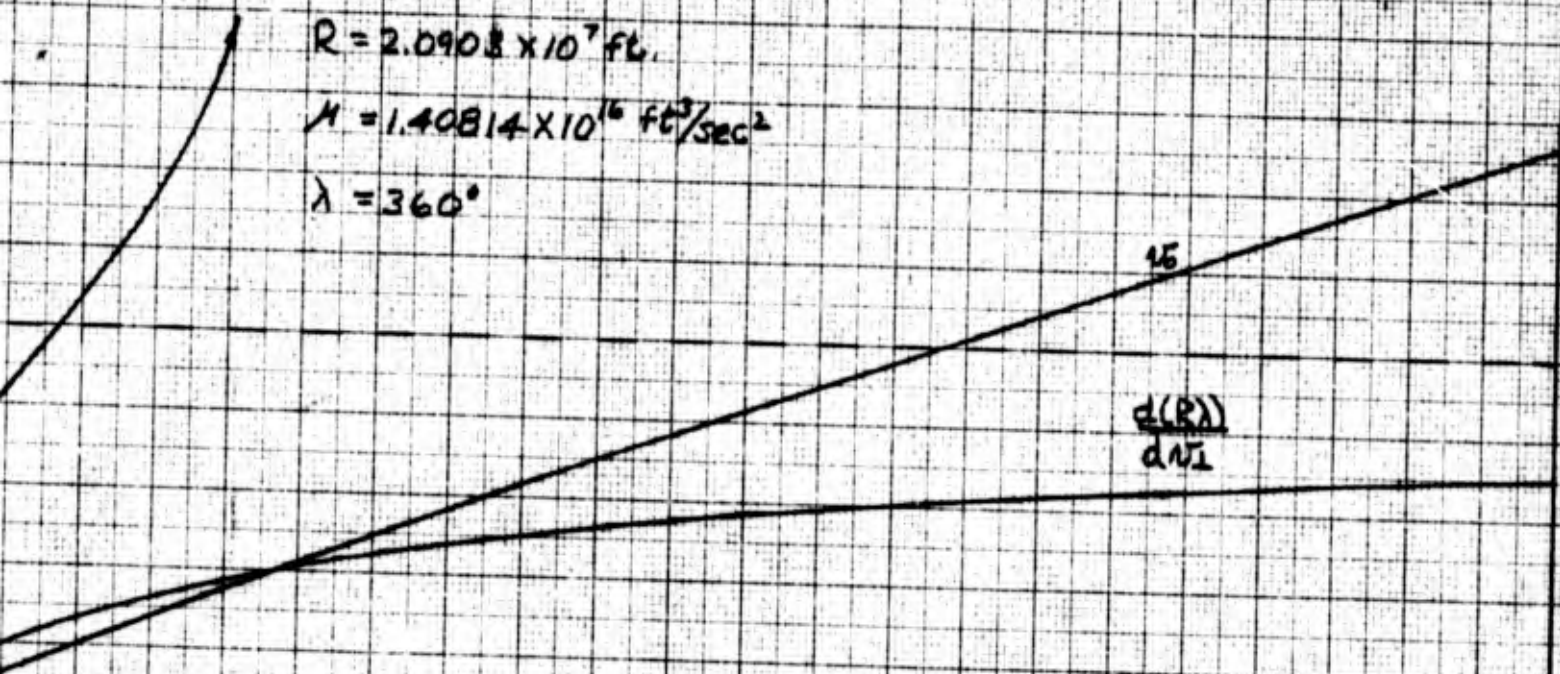

$\alpha = 0^\circ$  for all  $e$

$$\begin{cases} \frac{d(R)}{dV_0} = 0 & \text{for } 0 < e < 1 \\ \frac{d(R)}{dV_0} = \infty & \text{for } e = 0, 1 \end{cases}$$

0.4                  0.5                  0.6                  0.7                  0.8                  0.9                  1.0

$e$ -eccentricity

FIG. 12

RS AND MISS COEFFICIENTS FOR A RANGE OF 21600 NAUTICAL MILES