

U.S. DEPARTMENT OF COMMERCE
National Technical Information Service

AD-A025 602

WORST-CASE ANALYSIS OF A NEW HEURISTIC
FOR THE TRAVELLING SALESMAN PROBLEM

CARNEGIE-MELLON UNIVERSITY

PREPARED FOR
OFFICE OF NAVAL RESEARCH


FEBRUARY 1976

173115

①

PT

ADA 025602

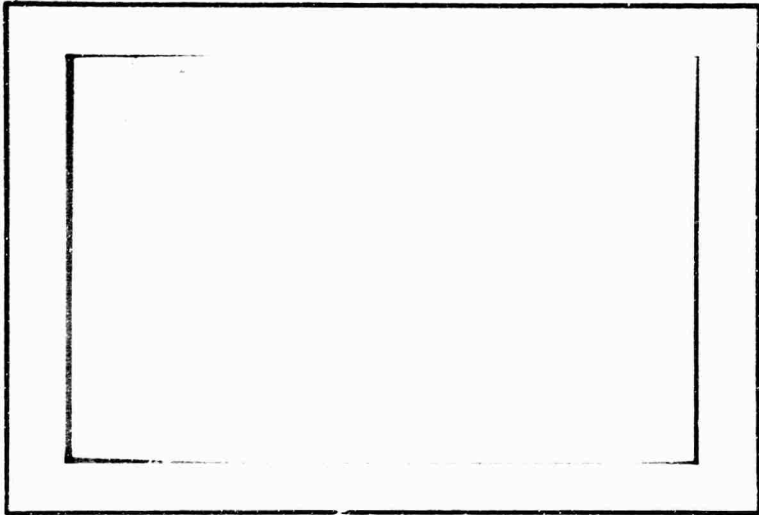


Carnegie-Mellon University

PITTSBURGH, PENNSYLVANIA 15213

GRADUATE SCHOOL OF INDUSTRIAL ADMINISTRATION

WILLIAM LARIMER MELLON, FOUNDER

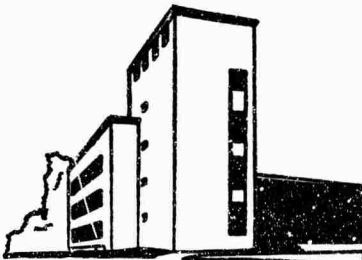

REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE
U. S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA. 22161

DDC
JUN 16 1976
A

DISTRICT OF COLUMBIA
Approved for public release
Distribution unlimited

1

W.P.#62-75-76

Management Sciences Research Report No. 388

WORST-CASE ANALYSIS OF A NEW HEURISTIC
FOR THE TRAVELLING SALESMAN PROBLEM

by

Nicos Christofides*

February 1976

D D C
RECEIVED

This research was prepared as part of the activities of the Management Sciences Research Group, Carnegie-Mellon University. Reproduction in whole or in part is permitted for any purpose of the U.S. Government.

Management Science Research Group
Graduate School of Industrial Administration
Carnegie-Mellon University
Pittsburgh, Pennsylvania 15213

*Carnegie-Mellon University; on leave from Imperial College, London.

| REPORT DOCUMENTATION PAGE | | READ INSTRUCTIONS BEFORE COMPLETING FORM |
|--|-----------------------|---|
| 1. REPORT NUMBER Technical Report No. 388 | 2. GOVT ACCESSION NO. | 3. RECIPIENT'S CATALOG NUMBER |
| 4. TITLE (and Subtitle) Worst-Case Analysis of a New Heuristic For the Travelling Salesman Problem | | 5. TYPE OF REPORT & PERIOD COVERED Technical Report February 1976 |
| | | 6. PERFORMING ORG. REPORT NUMBER |
| 7. AUTHOR(s) Nicoc Christofides | | 8. CONTRACT OR GRANT NUMBER(s) |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS Graduate School of Industrial Administration Carnegie-Mellon University Pittsburgh, Pennsylvania 15213 | | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS |
| 11. CONTROLLING OFFICE NAME AND ADDRESS Personnel and Training Research Programs Office of Naval Research (Code 434) Arlington, Virginia 22217 | | 12. REPORT DATE February 1976 |
| | | 13. NUMBER OF PAGES 10 |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) | | 15. SECURITY CLASS. (of this report) Unclassified |
| | | 16. DECLASSIFICATION/DOWNGRADING SCHEDULE |
| 15. DISTRIBUTION STATEMENT (of this Report) Approved for public release, distribution unlimited | | |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) | | |
| 18. SUPPLEMENTARY NOTES | | |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Travelling salesman problem, computational complexity, bounds | | |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number) An $O(n^3)$ heuristic algorithm is described for solving n-city travelling salesman problems (TSP) whose cost matrix satisfies the triangularity condition. The algorithm involves as substeps the computation of a shortest spanning tree of the graph G defining the TSP, and the finding of a minimum cost perfect matching of a certain induced subgraph of G. A worst-case analysis of this heuristic shows that the ratio of the answer obtained to the optimum TSP solution is strictly less than $3/2$. This represents a 50% (over) | | |

reduction over the value 2 which was the previously best known such ratio for the performance of other polynomial-growth algorithms for the TSP,

3. 1981

ib

ABSTRACT

An $O(n^3)$ heuristic algorithm is described for solving n -city travelling salesman problems (TSP) whose cost matrix satisfies the triangularity condition. The algorithm involves as substeps the computation of a shortest spanning tree of the graph G defining the TSP, and the finding of a minimum cost perfect matching of a certain induced subgraph of G . A worst-case analysis of this heuristic shows that the ratio of the answer obtained to the optimum TSP solution is strictly less than $3/2$. This represents a 50% reduction over the value 2 which was the previously best known such ratio for the performance of other polynomial-growth algorithms for the TSP.

| | |
|---------|------|
| ADDRESS | DATE |
| 1978 | |
| 1978 | |

ic

A

1. INTRODUCTION

Heuristic algorithms with polynomial rates of growth in the number of variables can be used to provide approximate solutions to combinatorial problems. The question then arises as to what is the worst possible ratio of the value of the answer obtained by the heuristic to the value of the optimum solution. We will denote this worst-case ratio by R_w .

Values of R_w for the graph-coloring problem have been investigated by Garey & Johnson [4] who showed that finding a polynomial-growth graph-coloring algorithm with $R_w < 2$ is just as hard as finding a polynomial algorithm for optimal coloring. For the loading (packing) problem [3, 5] Johnson et al. described an algorithm with $R_w \leq 11/9$. Rosenkrantz, Stearns and Lev's investigated a variety of heuristics for the travelling salesman problem. For the best of the algorithms investigated in [7], $R_w \rightarrow 2$ as n , - the number of cities in the travelling salesman problem (TSP) - tends to ∞ .

In this paper we describe a heuristic algorithm with $O(n^3)$ growth rate and for which $R_w < 3/2$ for all n . This represents an improvement of 50% over the previously best known value of R_w for the TSP.

2. THE MAIN RESULT

Consider the n -city TSP defined on the complete graph $G = (X, A)$ where X is the set of vertices and A is the set of links. Let the link cost matrix be $[c_{ij}]$ which satisfies the triangle inequality.

Let $T^* = (X, A_{T^*})$ be the shortest spanning tree (SST) of the graph G , and let $C(T^*)$ be the cost of T^* . Let:

$$X^0(T^*) = \{x_i \mid d_i(T^*) \text{ odd}\},$$

where $d_1(T^*)$ is the degree of vertex $x_1 \in X$ with respect to the tree T^* . The cardinality $|X^O(T^*)|$ of the set $X^O(T^*)$ is always even [1].

Consider now the subgraph $\langle X^O(T^*) \rangle$ induced by the set $X^O(T^*)$ of vertices. Since $|X^O(T^*)|$ is even, a perfect matching in $\langle X^O(T^*) \rangle$ always exists. A matching is called "perfect" [1] if it contains exactly $1/2 |X^O(T^*)|$ links. Let $M_0^* = (X^O(T^*), A_{M_0^*})$ be the minimum-cost perfect matching of $\langle X^O(T^*) \rangle$ and $C(M_0^*)$ be its cost.

We can now state the following theorem:

Theorem 1.

A hamiltonian circuit ϕ_H of G can be found with cost

$$C(\phi_H) \leq C(T^*) + C(M_0^*) < \frac{3}{2}C(\phi^*) \text{ where } C(\phi^*) \text{ is the optimal value of the TSP tour } \phi^*.$$

In the proof of Theorem 1 we will make use of the following

Lemma.

Lemma 1.

For an n -city TSP with n even, we have $C(M^*) \leq \frac{1}{2}C(\phi^*)$, where M^* is the minimum-cost perfect matching of the graph G defining the TSP and ϕ^* is the optimal TSP tour.

Proof. Consider $\phi^* = (x_{i_1}, x_{i_2}, \dots, x_{i_n})$. Starting from vertex x_{i_1} and travelling round the circuit ϕ^* , allocate the links traversed in an alternating manner to two sets M_1 and M_2 . Starting with M_1 , for example:

$$M_1 = \{(x_{i_1}, x_{i_2}), (x_{i_3}, x_{i_4}), \dots, (x_{i_{n-1}}, x_{i_n})\}$$

and $M_2 = \{(x_{i_2}, x_{i_3}), (x_{i_4}, x_{i_5}), \dots, (x_{i_n}, x_{i_1})\}$

M_1 and M_2 are matchings of G and:

$$C(M_1) + C(M_2) = C(\phi^*)$$

Since M_1 and M_2 are defined arbitrarily we can assume

$C(M_1) \leq C(M_2)$ without loss of generality, and so we have:

$$C(M^*) \leq C(M_1) \leq \frac{1}{2}C(\phi^*)$$

Hence the Lemma.

Proof. of Theorem 1

It is well known [2] that for a graph G

$$(1) \quad C(T^*) \leq C(\phi_p^*) < C(\phi^*)$$

where ϕ_p^* is the shortest hamiltonian path of G . (The last inequality becoming \leq if zero-cost links are allowed.)

The graph $G^e = (X, A_{T^*} \cup A_{M_0^*})$ - which is a partial graph of G - is Eulerian, i.e., has all vertices of even degree, since M_0^* is a matching of all odd degree vertices of T^* . Hence G^e contains an Eulerian circuit $\phi^e = (x_{i_1}, x_{i_2}, \dots, x_{i_k})$. Since ϕ^e traverses all the links of G^e it also visits all the vertices $x_i \in X$ at least once. Let $C(\phi^e)$ be the cost of ϕ^e , i.e.,

$$(2) \quad C(\phi^e) = C(T^*) + C(M_0^*)$$

If ϕ_0^* is the TSP solution to the problem defined by the induced subgraph $\langle X^0(T^*) \rangle$, then we have from Lemma 1, $C(M_0^*) \leq \frac{1}{2}C(\phi_0^*)$ and since $C(\phi_0^*) \leq C(\phi^*)$ we immediately obtain

$$(3) \quad C(M_0^*) \leq \frac{1}{2}C(\phi^*)$$

From expressions (1), (2) and (3) it follows that:

$$(4) \quad C(\phi^e) < \frac{3}{2}C(\phi^*)$$

Consider the traversal of ϕ^e starting from x_{i_1} up to the point when a vertex x_{i_r} is reached which has been visited previously - i.e., $x_{i_r} \in \{x_{i_1}, \dots, x_{i_{r-1}}\}$. Let r_{i_s} be the first vertex following x_{i_r} in the sequence of ϕ^e which has not been previously visited and consider the circuit $\phi_1 = (x_{i_1}, \dots, x_{i_{r-1}}, x_{i_s}, \dots, x_{i_k})$ derived from ϕ^e by replacing the path $P_{rs} = (x_{i_{r-1}}, x_{i_r}, \dots, x_{i_{s-1}}, x_{i_s})$ with the single link $(x_{i_{r-1}}, x_{i_s})$. Because of the triangularity condition we have:

$$c_{i_{r-1}i_s} \leq \sum_{(x_i, x_j) \in P_{rs}} c_{ij}$$

where P_{rs} is also used as an unordered set of the links on the path P_{rs} . Hence we have $C(\phi^e) \geq C(\phi_1)$.

In the same way, starting with a traversal of ϕ_1 a circuit ϕ_2 can be produced with a path of ϕ_1 replaced by a direct link and $C(\phi_1) \geq C(\phi_2)$. Eventually a hamiltonian circuit ϕ_H of G will result with:

$$C(\phi_H) \leq \dots \leq C(\phi_1) \leq C(\phi^e) < \frac{3}{2}C(\phi^*)$$

Hence the Theorem.

The algorithm implied by Theorem 1 consists of two parts: the calculation of an SST and finding a minimum-cost perfect matching. Several good $O(n^2)$ algorithms exist for finding the SST of a graph [1]. The best known algorithm for calculating minimum matchings is one developed by Lawler [6] and has growth rate $O(n^3)$. The overall growth rate of the proposed algorithm is - therefore - $O(n^3)$. (Note that the last step of converting ϕ^e to a hamiltonian circuit ϕ_H , can be done in linear time.)

REFERENCES

- [1] CHRISTOFIDES, N., Graph Theory - An algorithmic approach, Academic Press, London, 1975.
- [2] CHRISTOFIDES, N., "The shortest hamiltonian chain of a graph," SIAM J. on Appl. Math., 19, 1970, p. 689.
- [3] EILON, S. and CHRISTOFIDES, N., "The loading problem," Man. Sci., 17, 1971, p. 259.
- [4] GAREY, M. R. and JOHNSON, D.S., "The complexity of near-optimal graph coloring," J. ACM, 1976, p.
- [5] JOHNSON, D. S., DEMERS, A., ULLMAN, J. D., GAREY, M. R. and GRAM, R. L., "Worst-case performance bounds for simple 1-dimensional packing algorithms," SIAM J. on Comp., 3, 1974, p. 299.
- [6] LAWLER, E., Combinatorial Optimization, (to be published).
- [7] ROSENKRANTZ, D. J., STEARNS, R. E. and LEWIS, P. M., "Approximate algorithms for the travelling salesman problem," Proc. 15th IEEE Symposium on switching and automata theory, 1974, p. 33.