AD-A053 165 ARMY ENGINEER WATERWAYS EXPERIMENT STATION VICKSBURG MISS F/G 13/2
PRECAST CONCRETE ELEMENTS FOR STRUCTURES IN SELECTED THEATERS O--ETC(U)
FEB 78 J E MCDONALD, T C LIU


UNCLASSIFIED WES-TR-C-78-1 NL

1 OF 3
AD
A053165



1 OF 3

AD
A053165

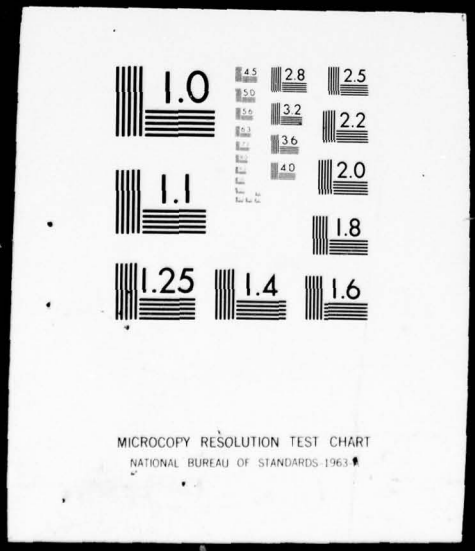

AD A053165







TECHNICAL REPORT C-78-1

PRECAST CONCRETE ELEMENTS FOR STRUCTURES IN SELECTED THEATERS OF OPERATIONS

by


James E. McDonald, Tony C. Liu

Concrete Laboratory
U. S. Army Engineer Waterways Experiment Station
P. O. Box 631, Vicksburg, Miss. 39180

DDC
RECEIVED
APR 25 1978
F

February 1978
Final Report

Approved For Public Release; Distribution Unlimited

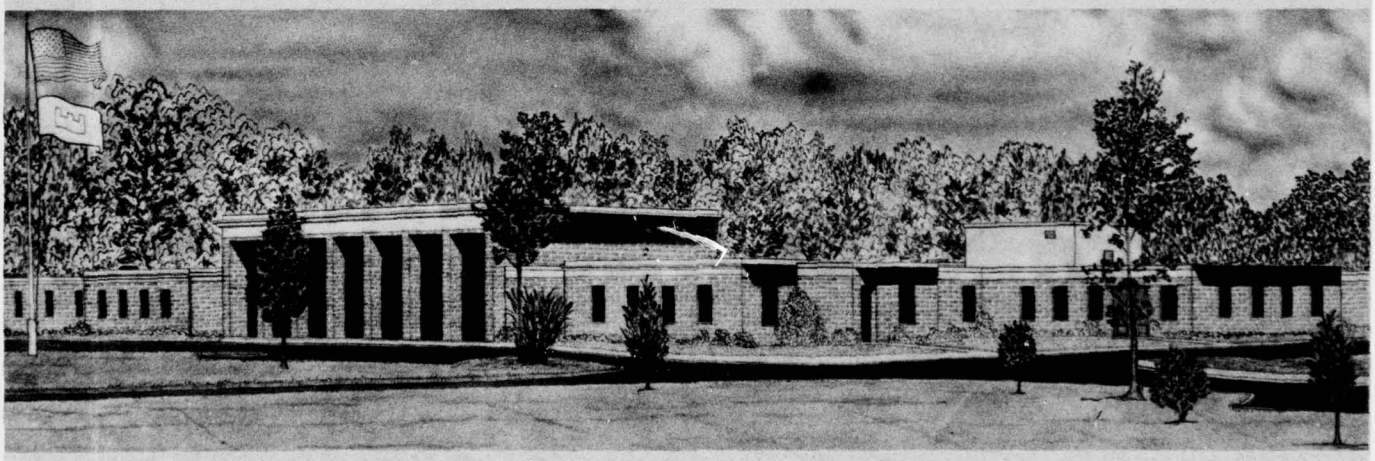

Prepared for Office, Chief of Engineers, U. S. Army
Washington, D. C. 20314

Under Project 4A762719AT40, Technical Area A2
Work Unit 019

AD No. _____
DDC FILE COPY

Destroy this report when no longer needed. Do not return it to the originator.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE *(When Data Entered)*

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER: ~~Technical Report C-78-1~~ WES-TR-C-78-1
2. GOVT ACCESSION NO.
3. RECIPIENT'S CATALOG NUMBER

4. TITLE *(and Subtitle)*: PRECAST CONCRETE ELEMENTS FOR STRUCTURES IN SELECTED THEATERS OF OPERATIONS.

5. TYPE OF REPORT & PERIOD COVERED: Final report. Feb 74-Sep 77

6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s): James E. McDonald, Tony C. Liu

8. CONTRACT OR GRANT NUMBER(s)

9. PERFORMING ORGANIZATION NAME AND ADDRESS: U. S. Army Engineer Waterways Experiment Station, Concrete Laboratory, P. O. Box 631, Vicksburg, Miss. 39180

10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS: Project 4A762719AT40, Technical Area A2, Work Unit 019

11. CONTROLLING OFFICE NAME AND ADDRESS: Office, Chief of Engineers, U. S. Army, Washington, D. C. 20314

12. REPORT DATE: Feb 1978

13. NUMBER OF PAGES: 298 P.

14. MONITORING AGENCY NAME & ADDRESS *(if different from Controlling Office)*

15. SECURITY CLASS. *(of this report)*: Unclassified

15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT *(of this Report)*

Approved for public release; distribution unlimited.

DDC RECEIVED APR 25 1978 F

17. DISTRIBUTION STATEMENT *(of the abstract entered in Block 20, if different from Report)*

18. SUPPLEMENTARY NOTES

19. KEY WORDS *(Continue on reverse side if necessary and identify by block number)*

Bridges
Concrete bridges
Concrete structures
Fabrication
Field fortifications
Precast concrete
Prefabrication
Structural members

20. ABSTRACT *(Continue on reverse side if necessary and identify by block number)*

The current state of the art of design, fabrication, and erection techniques of various prefabricated elements for concrete structures are reviewed. Included are precast concrete highway bridges, logging bridges, railway bridges, piles, culverts, pipes, floating structures, and field fortifications. The structural properties, advantages, and disadvantages of various elements and systems are discussed. Engineering guidance on the fabrication, handling,

(Continued)

next Page

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE *(When Data Entered)*

038 100

20. ABSTRACT (Continued).

storage, transportation, connection, and erection of precast concrete structural elements is provided.

Designs for two precast concrete military bridges capable of supporting military Heavy Equipment Transporters (HET's) are developed. These bridges can be easily transported to the construction site by existing military equipment and assembled with a minimum of time, labor, and equipment. A plan for the construction of a concrete precasting facility that will minimize the materials, manpower, and equipment necessary for mass production of the recommended precast concrete military bridges is formulated.

THE CONTENTS OF THIS REPORT ARE NOT TO BE USED FOR ADVERTISING, PUBLICATION, OR PROMOTIONAL PURPOSES. CITATION OF TRADE NAMES DOES NOT CONSTITUTE AN OFFICIAL ENDORSEMENT OR APPROVAL OF THE USE OF SUCH COMMERCIAL PRODUCTS.



PREFACE

The study reported herein was conducted by personnel of the Concrete Laboratory (CL) of the U. S. Army Engineer Waterways Experiment Station (WES) under the sponsorship of the Office, Chief of Engineers (OCE), U. S. Army, as a part of Project 4A762719AT40, "Mobility and Weapons Effects Technology"; Technical Area A2, "Lines of Communications and Mobility Engineering"; and Work Unit 019, "Prefabricated Elements for Concrete Structures." The OCE Technical Monitor was Mr. R. H. Barnard.

The study was conducted during the period February 1974 to September 1977 under the general supervision of Messrs. B. Mather, Chief of CL, and J. M. Scanlon, Chief of the Engineering Mechanics Division (EMD), and under the direct supervision of Mr. J. E. McDonald, Chief of the Structures Branch. This report was prepared by Mr. McDonald and Dr. T. C. Liu, EMD.

Directors of the WES during this study and the preparation and publication of this report were COL G. H. Hilt, CE, and COL J. L. Cannon, CE. Technical Director was Mr. F. R. Brown.

CONTENTS

	Page
PREFACE	2
CONVERSION FACTORS, U. S. CUSTOMARY TO METRIC (SI) UNITS OF MEASUREMENTS	5
PART I: INTRODUCTION	6
Background	6
Objectives	8
Scope	8
PART II: PRECAST CONCRETE	9
Definition	9
Advantages	9
Disadvantages	10
PART III: CONCRETE BRIDGE STRUCTURES	11
Highway Bridges	11
Logging Bridges	51
Railway Bridges	54
PART IV: PRECAST CONCRETE PILING	62
PART V: PRECAST CONCRETE CULVERTS AND PIPES	74
Precast Concrete Culverts	74
Precast Concrete Pipes	76
PART VI: PRECAST CONCRETE FLOATING STRUCTURES	79
PART VII: PRECAST CONCRETE FIELD FORTIFICATIONS	85
Security/Fighting Bunkers	85
Protective Shelters	94
Equipment and Supplies Revetment	98
PART VIII: FABRICATION, HANDLING, AND ERECTION	110
Fabrication	110
Handling	112
Transportation	117
Connections	119
Erection	120
PART IX: SUMMARY AND RECOMMENDATIONS	127
Summary	127
Recommendations	128
REFERENCES	129
TABLE 1	

Page

APPENDIX A: RESPONSE TO QUESTIONNAIRE SENT TO ENGINEER CONSTRUCTION GROUPS AND BATTALIONS A1

TABLE A1

FIGURES A1-A3

APPENDIX B: AASHO HIGHWAY LOADINGS B1

TABLE B1

FIGURES B1 and B2

APPENDIX C: AREA RAILROAD LOADINGS C1

APPENDIX D: RECOMMENDED PRECAST CONCRETE MILITARY BRIDGES . . . D1

FIGURES D1-D4

PHOTOS D1-D26

APPENDIX E: COMPUTER PROGRAM OF THE ANALYSIS AND DESIGN OF SIMPLE-SPAN, PRECAST-PRESTRESSED HIGHWAY OR RAILWAY BRIDGES E1

Description of Program E3
Input Data E4
Description of Output E8
Fortran Listing E11

APPENDIX F: CONCRETE PRECASTING FACILITY F1

General Requirements F3
Suggested Concrete Precasting Facility F5

APPENDIX G: TYPICAL PLANS FOR PRECAST CONCRETE HIGHWAY BRIDGES G1

APPENDIX H: TYPICAL PROPERTIES AND DETAILS OF PRESTRESSED CONCRETE PILES H1

APPENDIX I: TYPICAL DESIGN REQUIREMENTS FOR REINFORCED CONCRETE LOW-HEAD PRESSURE PIPE I1

CONVERSION FACTORS, U. S. CUSTOMARY TO METRIC (SI)
UNITS OF MEASUREMENTS

U. S. customary units of measurement used in this report can be converted to metric (SI) units as follows:

Multiply	By	To Obtain
inches	25.4	millimetres
feet	0.3048	metres
miles (U. S. statute)	1609.344	metres
square inches	6.4516	square centimetres
square feet	0.09290304	square metres
cubic inches	16.38706	cubic centimetres
cubic yards	0.7645549	cubic metres
pounds (mass)	0.4535924	kilograms
tons (short)	907.1847	kilograms
pounds (mass) per cubic inch	27.6799	grams per cubic centimetre
pounds (force)	4.448222	newtons
kips (force)	4.448222	kilonewtons
pounds (force) per square inch	0.006894757	megapascals
pounds (force) per square foot	47.88026	newtons per square metre
kips (force) per square inch	6.894757	megapascals
foot-pound-force	1.355818	joules
degrees (angle)	0.01745329	radians
Fahrenheit degrees	5/9	Celsius degrees or Kelvins

* To obtain Celsius (C) temperature readings from Fahrenheit (F) readings, use the following formula: $C = (5/9)(F - 32)$. To obtain Kelvin (K) readings, use: $K = (5/9)(F - 32) + 273.15$.

PRECAST CONCRETE ELEMENTS FOR STRUCTURES IN SELECTED THEATERS OF OPERATIONS

PART I: INTRODUCTION

Background

1. Even though tactical concepts and combat techniques have changed over the centuries, the engineer support mission to the combat forces has not. The U. S. Army engineer's job is still to enhance the mobility of friendly forces while deterring the movement of the enemy.[1] How this support has been provided in the past has changed with improved engineering developments. As the technology of warfare advances, the engineer in combat becomes harder pressed to support the deployment, rapid movement, and supply of the Army ground forces. The highly mobile Army needs increased ability for rapidly constructing and maintaining lines of communication (LOC) facilities, such as roads, bridges, airfields, and heliports throughout the theater of operations (TO). The Volunteer Army, a smaller force with reduced engineering resources, will have a significant effect on such construction. This will require improved efficiency, better training, better equipment, and better organized and led troops.

2. Present capabilities in construction of LOC facilities are limited to very basic conventional techniques. In concrete construction, this means building timber forms, mixing, placing, and curing of plain and reinforced concrete, or the use of "stick" construction. These conventional techniques are both time-consuming and require extensive logistic support. The concept of establishing designated engineer units to construct prefabricated structural elements in support of LOC construction has not been generally exploited in modern warfare. In isolated instances, the concept has been given limited trials in support of simple bridge and culvert construction on major road building, or in association with depot construction. The designs employed, however,

have always been locally conceived, quite limited in application, and with a minimum of quality control. Ninety percent of the Engineer Construction Groups and Battalions responding to a questionnaire (Appendix A) indicated that concrete precasting operations have a place in Army Engineer TOE units. However, less than 40 percent indicated any prior experience with either fabrication or erection of precast concrete elements. Obviously, a need exists for a family of prefabricated structural elements to be field fabricated in the TO for use in the rapid construction and/or repair of bridges, culverts, retaining walls, loading docks, berthing and pier facilities, and other related structures and appurtenances for LOC facilities.

3. Military bridge construction in a TO is generally limited to structures of a semipermanent type with sufficient capacity to carry divisional loads. Standard fixed bridges, as referred to briefly in TM 5-312,[2] are stock items available for issue from Army supply centers, together with component parts, necessary for erection of the bridge. The term nonstandard is used to identify bridges constructed from raw materials and designed to satisfy the requirements of a particular site. The design, layout, and construction of nonstandard highway and railroad bridges normally constructed in a TO are covered in considerable detail in TM 5-312. However, the majority of the attention is directed to timber and steel as principal construction materials.

4. The physical characteristics and properties of concrete materials, the selection of concrete mixture proportions, the design and construction of forms, and the procedures for the construction of concrete structures are discussed in detail in TM 5-742.[3] Also, the use of reinforced concrete, including precasting, is discussed within the limitations to which this type of construction is considered a responsibility of engineer troops.

5. The primary shortfall for use of troop-constructed, prefabricated concrete elements, either plain, reinforced, or prestressed, is the lack of well-conceived facility designs and construction guidance permitting their employment. The solution to this problem appears to be well within the state of the art for prefabrication and use of precast concrete structural elements.

Objectives

6. The objectives of the program discussed herein were to develop operational guidance, engineering criteria, and specific structural design for the prefabrication and effective use of standardized precast concrete structural elements for use in a wide variety of fixed, deliberate structures associated with TO facilities.

Scope

7. Literature was reviewed and consultations were held with prefabricators and erectors to determine:

a. The state of the art of present prefabricated structural techniques.

b. The structural properties, advantages, and disadvantages of the various systems and elements.

Materials, component configuration, structural efficiency, fabrication facilities, and erection equipment required were considered in this review. Based on this review, a plan is formulated for the construction of a central concrete precasting facility that will minimize the materials, manpower, and equipment necessary for mass production of selected structural elements, which can (a) be easily transported to the construction site by existing military equipment and (b) assembled with a minimum of time, labor, and equipment into a variety of functional structures.

PART II: PRECAST CONCRETE

Definition

8. The term "precast concrete" is used to describe products made of concrete under factory conditions either in a permanent factory or in a temporary casting yard on a construction site and erected on site as finished structural members.

9. The range of precast concrete structural members in common use is very wide, e.g., bridges, piles, culverts, pipes, and floating concrete marine structures. Prestressed concrete is especially well adapted to precasting techniques.

Advantages

10. Compared with on site concrete construction some of the advantages of precast concrete are as follows:[4]

a. Construction will be more rapid, and the structure is available for use in a shorter space of time.

b. Generally there will be a reduction in site costs as scaffolding and other temporary supports will not be needed in such quantities (if at all) as for on site concrete work.

c. There will be considerably less on site concrete work, thus reducing the demand for local site labor and the import of local raw materials.

d. Casting in precasting factories is usually unimpeded by adverse weather conditions.

e. Units can be made by mass production methods. Molds can be made to a precision not possible on site, and more intricate work can be carried out. However, since such molds are expensive to make, a considerable amount of repetition in the design is necessary for their use to be economical.

f. Units can be made to a good, even excellent, standard due to the use of a trained and specialized labor force working under factory conditions; also, units may be cast in the most favorable orientation to simplify shuttering and to obtain improved finishes on the most important faces of the units.

g. Factory sites are usually selected considering the availability of labor, the ready supply of good quality aggregates, and other materials.

h. The finished product can be inspected before it is erected and can be rejected for any substandard work before incorporation in the structure.

i. Certain structures, if required, can be dismantled and re-erected elsewhere.

Disadvantages

11. The disadvantages of precast concrete are summarized as follows:[4]

a. Skill is required to design and detail a joint that can be easily formed on site while at the same time providing the necessary strength.

b. Some additional reinforcement and fittings may be required for handling, transporting, and erection. It has to be appreciated that a precast concrete member must be designed not only to function as part of a total structure but also to withstand the stress conditions pertaining to handling, transport, and erection.

c. If a large number of units are required or if they are large in size, problems can arise concerning storage areas, transportation, and erection costs.

d. Precasting tends to be less suitable for structures with irregular features. To obtain the greatest economy from precision molds, there should be a high degree of repetition.

e. The size and weight of precast concrete units must be restricted as they all have to be lifted and placed in position by some means. The lifting capacity and range of cranes available can govern the size and weight of the units.

PART III: CONCRETE BRIDGE STRUCTURES

12. Precast concrete construction provides a rapid and economical method for erecting new bridges and for repairing or replacing existing structures. This is possible because precast construction eliminates most falsework and shoring at the bridge site and requires only a small erection crew. Precast construction is particularly advantageous in isolated places where labor and materials are not readily available. This is particularly true of those designs that require no cast-in-place concrete.

13. Highway bridges involving varying degrees of precast construction form the majority of those described in this report, just as they form the majority of the bridges being constructed. However, railway and logging bridges and elevated urban highways are also reviewed in a limited manner. An attempt was made to obtain a representative cross section of bridge types; however, considering the large field, many important structures have necessarily been omitted from discussion.

Highway Bridges

14. By far the greatest percentage of highway bridge superstructures encountered in American practice is of simple span, precast, prestressed girder, and cast-in-place deck slab construction (Figure 1). The precast concrete industry produces a variety of precast shapes for bridge construction including I-sections, slabs (solid and hollow), channels, boxes, and tees. These sections may be of reinforced, pretensioned, or posttensioned concrete or combinations of these types. While each section has inherent advantages, availability and local economic factors, as well as span length, often significantly influence the final selection of a particular section. While the majority of bridges discussed herein are of prestressed concrete, some reinforced concrete bridges will be included since they are likely to be more economical for very short spans. Some typical plans for precast concrete highway bridges are given in Appendix G.

15. It is difficult to classify highway bridges according to span

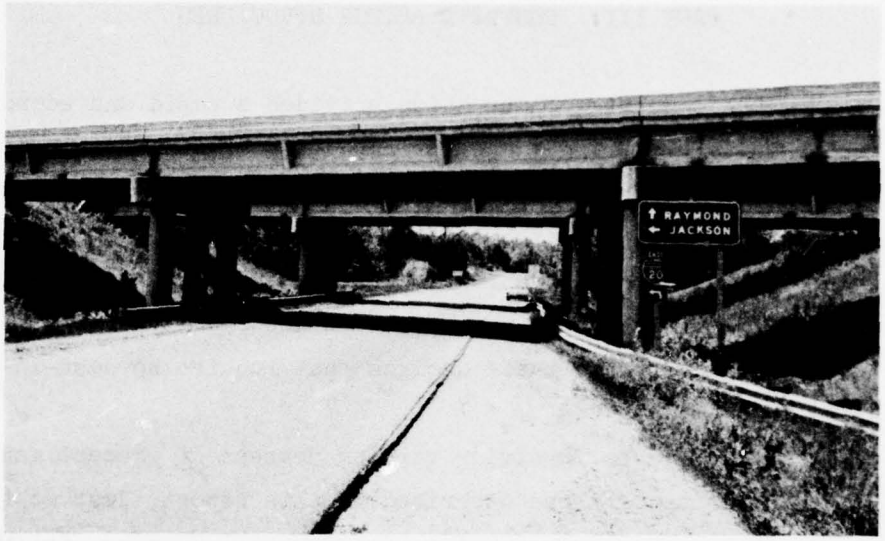


Figure 1. Typical prestressed concrete bridge

lengths since there is no definite line of demarcation between short, moderate, and long spans. For example, Libby[5] arbitrarily assumes short-span bridges to have a maximum span of 45 ft,* whereas Gerwick[6] considers bridge spans up to 140 ft as short spans. Therefore, for the purposes of this discussion, the more common types of bridge structures will be classified according to the type of precast element used.

Precast slab bridges

16. Prestressed solid slab elements are generally economical for use on spans up to about 30 ft. Such pretensioned elements are usually precast 3 to 4 ft wide with shear keys cast in the sides (Figure 2). After erection and grouting of the longitudinal shear keys, the slabs are topped with a wearing surface and leveling course. This topping can be a bituminous material or portland cement concrete.

17. Prestressed hollow-core slabs (Figure 2) are used in bridges with spans approximately 30 to 80 ft. Such slabs generally have either round or square voids. The elements may be precast in any desirable depth and width; however, a depth up to about 30 in. and a width of 3 ft are most common. Similar to solid slabs, grouted shear keys are used,

* A table of factors for converting U. S. customary units of measurement to metric (SI) units is given on page 5.

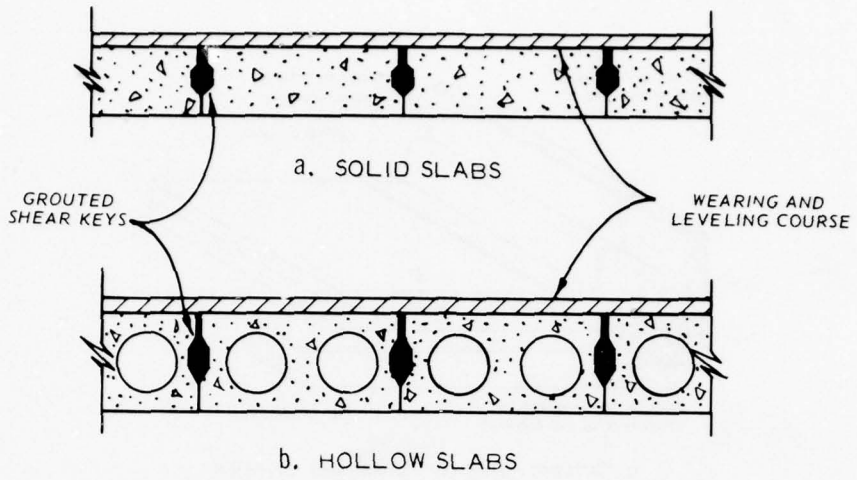



Figure 2. Typical sections of pretensioned slab bridges

and some type of leveling course is normally required.


18. As in the reinforced concrete bridges, a transverse tie is required to maintain proper alignment of the slab elements and ensure proper distribution of the live load between the elements. Slab elements are frequently fabricated with small transverse holes through the elements to allow insertion of threaded steel tie bars normally extending from one side of the bridge to the other. Nuts are then placed and tightened at each end of the tie bar. Occasionally, the transverse tie consists of a posttensioning tendon that is placed, stressed, and grouted after the slabs are erected.

19. Construction advantages of slab bridges include very simple details and formwork that are applicable to and favor plant fabrication methods. Precast elements are normally placed by mobile cranes, and since no falsework is required, time and personnel required for field erection are at a minimum.


20. A precast reinforced concrete slab bridge developed by the South Carolina Highway Department[7] requires no cast-in-place concrete, an important consideration in some situations. Four 5-ft-wide interior units and two 2-ft-wide exterior curb and handrail units are used to obtain a 22-ft roadway, curb to curb. Spans up to 14 ft have been built with an 8-1/4-in. slab thickness (Figure 3), and for this case, interior

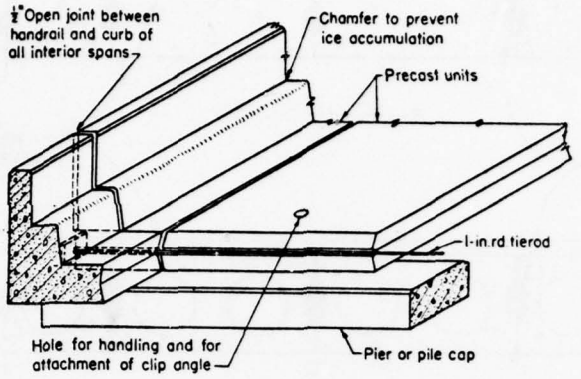

a. CUTAWAY VIEW OF CURB AND INTERIOR SECTIONS AT SUPPORT

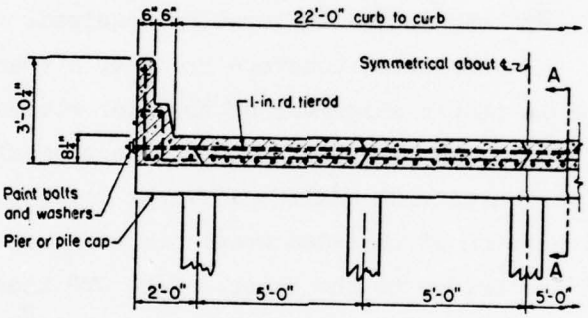

b. TRANSVERSE SECTION

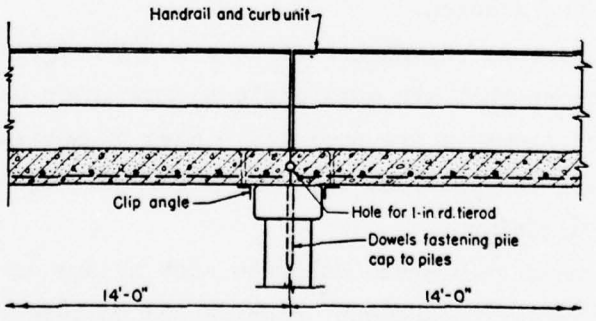

c. SECTION A-A AT SUPPORT

Figure 3. Precast concrete slab bridge developed by the South Carolina Highway Department (courtesy of Portland Cement Association[7])

and exterior units each weigh 7200 and 6300 lb, respectively. One complete span of the bridge deck is cast at once but is separated for handling purposes into individual units by longitudinal dividing strips of 10-gage sheet metal bent in a < shape. The units are erected at the bridge site in the same relative positions they occupy in the casting yard so that the joints fit closely and provide satisfactory lateral transfer of shear. Obviously, this method of precasting does not provide interchangeability of parts.


21. When all units are in position at a pier, a 1-in. steel rod is inserted through the transverse holes (Figure 3), and the threaded rod ends are tightened to tie the entire roadway together. This figure also shows that the slab units are connected to precast concrete pile caps with dowels.

22. Figure 4 illustrates a design developed by the Nebraska State Highway Department in which the individual slabs are formed with hollow cores to provide a reduction in weight. Each unit has two cylindrical hollow cores that extend through its entire length and cause approximate reductions of 35 percent in the cross-sectional area but only 10 percent in the moment of inertia of the concrete section.[7] The 16-ft span, precast reinforced concrete bridge design is based on American Association of State Highway Officials (AASHO)[8] H15-44 loading (Appendix B). The deck consists of seven precast units, each 1 ft 6-1/2 in. deep. Outside units are 3 ft 3 in. wide; interior units are 3 ft wide with each weighing approximately 7300 lb.


23. Shear keys and transverse tie rods are provided for lateral distribution of superimposed loads. One tie rod is located at midspan, and the other two are approximately 6 ft either side of midspans. Slab units are connected to concrete pile caps through welding of the reinforcement and use of cast-in-place concrete (Figure 4).

Precast channel bridges


24. Precast units of channel-shaped sections have been used extensively for short-span bridges to obtain greater strength with a minimum of dead weight.[7] Channel girders (Figure 5), both reinforced and prestressed, are being widely used in various parts of the country,

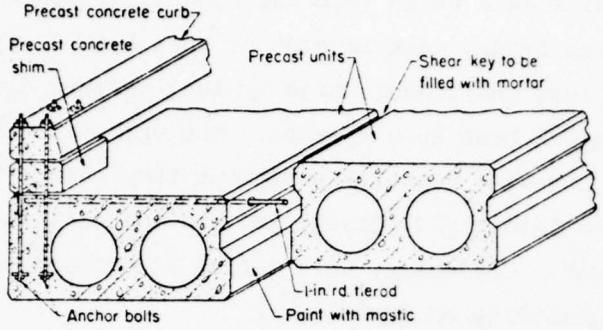

a. CUTAWAY VIEW OF DECK UNITS

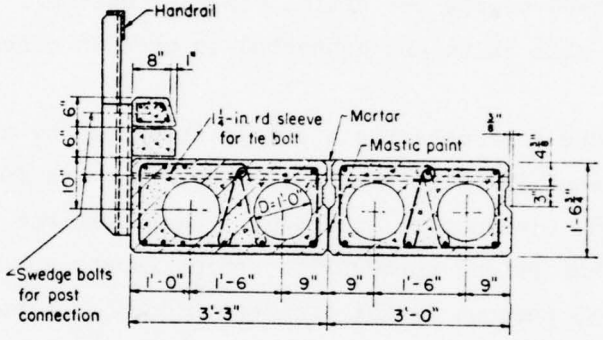

b. TRANSVERSE SECTION

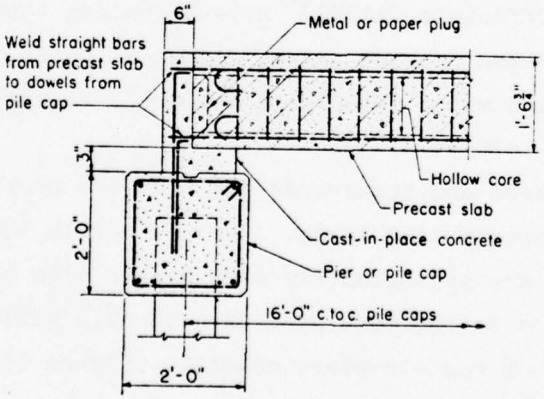

c. LONGITUDINAL SECTION NEAR SUPPORT

Figure 4. Precast hollow-core slab bridge developed by the Nebraska Highway Department (courtesy of Portland Cement Association[7])


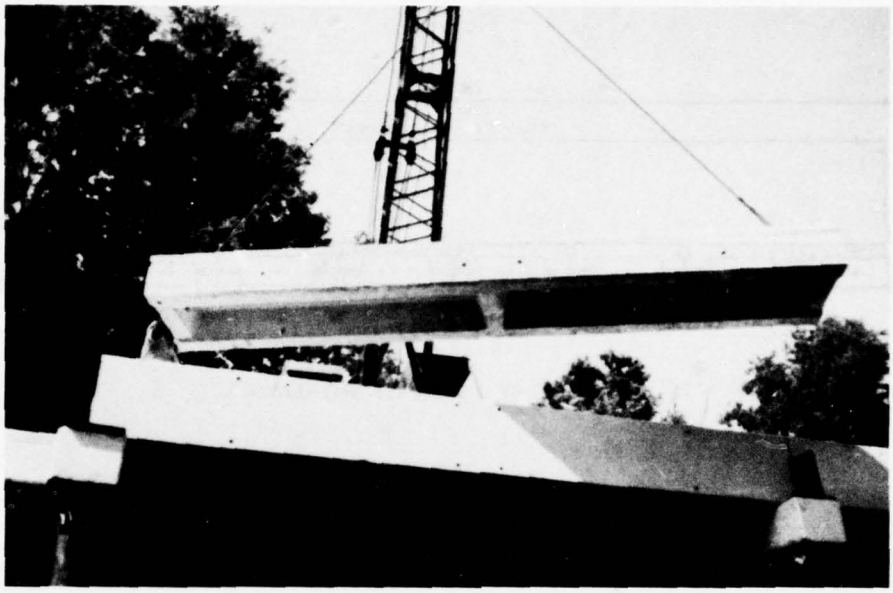


Figure 5. Precast channel girder


particularly for bridges on secondary roads. Design is based on the assumption that a pair of adjacent ribs will act as one unit. Shear keys and/or transverse tie rods distribute the loads laterally. Thus, the load carried by each element is less than a full wheel load, making possible an economical design with no sacrifice of rigidity.

25. The State Aid Division of the Mississippi State Highway Department (MSHD) makes extensive use of precast reinforced concrete channel girders for a 19-ft span bridge. This reinforced concrete bridge is designed for AASHO[8] loading H15-44 with a 26-ft 6-in. clear roadway (Figures 6-8). This superstructure is designed for use with timber or steel piling, and not only the channels but also all elements of the superstructure are precast.


26. The State Aid Division of MSHD also uses a similar channel section of precast, prestressed concrete designed according to AASHO loading H15-44 for a 31-ft span (Figures 9-11). Two 1-in. stressteel tendons in each leg of the channel are used for prestressing. After the concrete has reached a minimum strength of 3,000 psi, a prestressing force of 60,000 lb is applied to the two top tendons only for handling

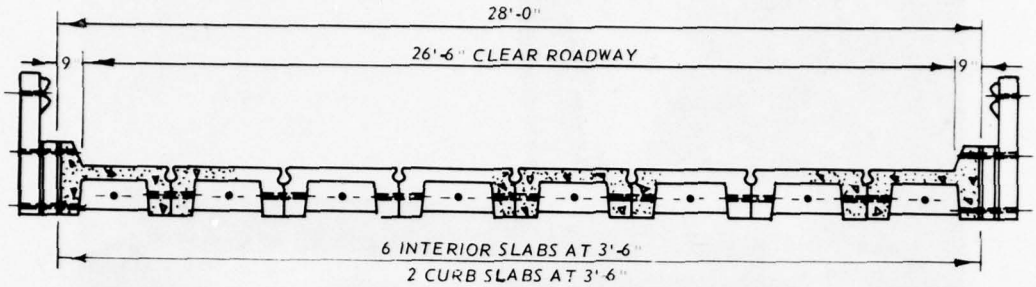

a. CROSS SECTION OF ROADWAY

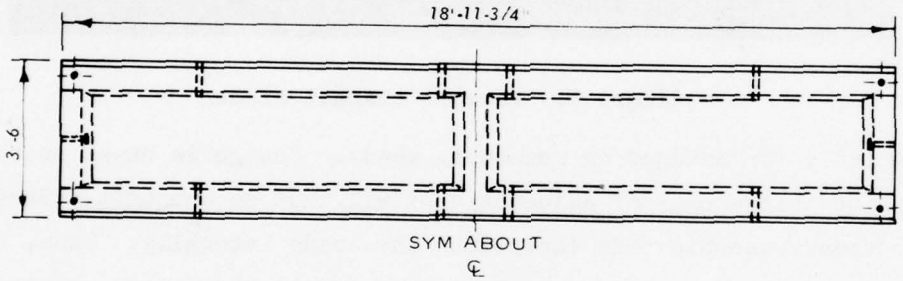

b. PLAN INTERIOR UNIT

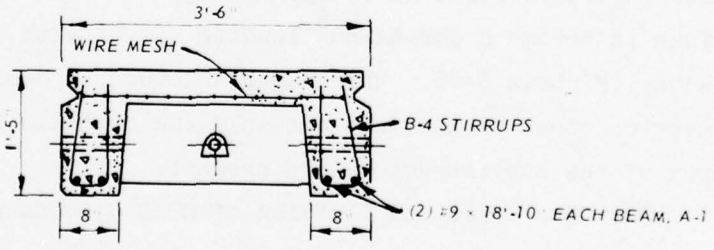

c. INTERIOR UNIT CROSS SECTION

Figure 6. Precast reinforced concrete channel girders for 19-ft span

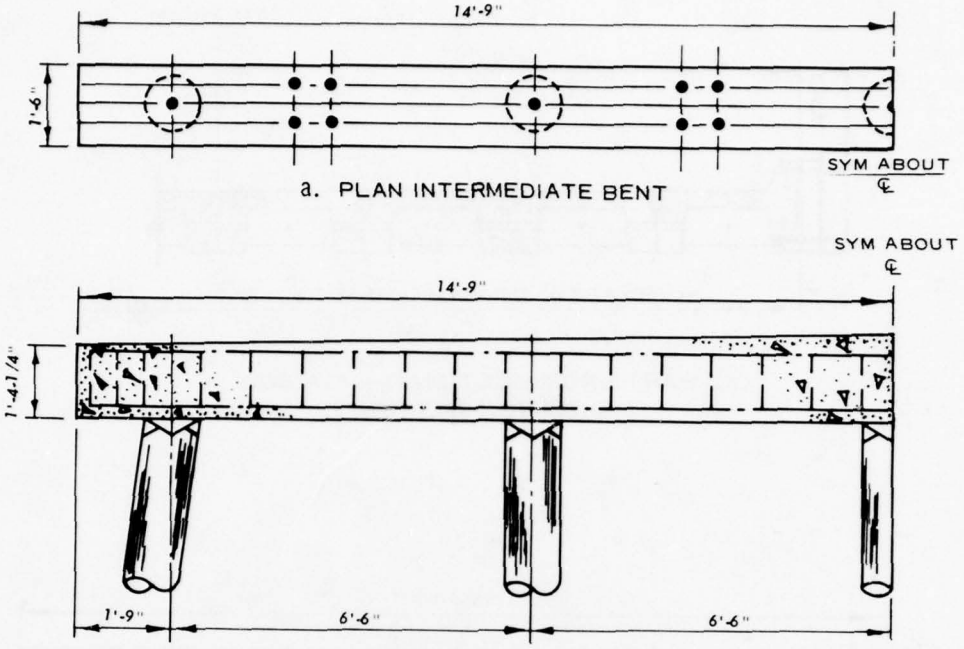


Figure 7. Precast pile cap for 19-ft span of reinforced concrete



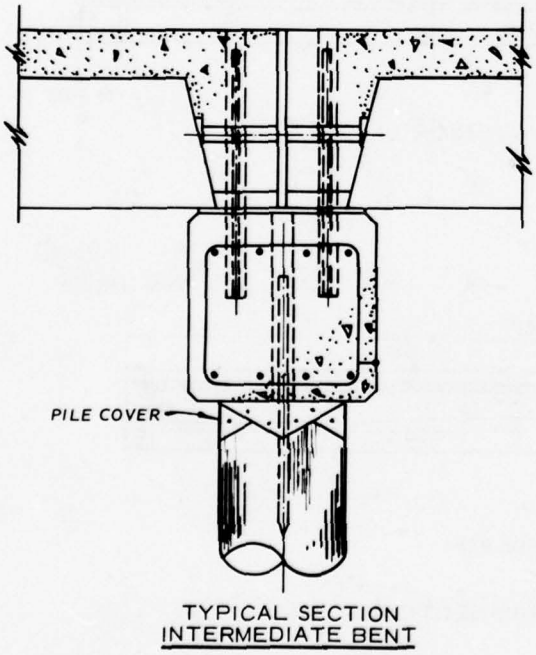



Figure 8. Connection details for 19-ft span of precast reinforced concrete

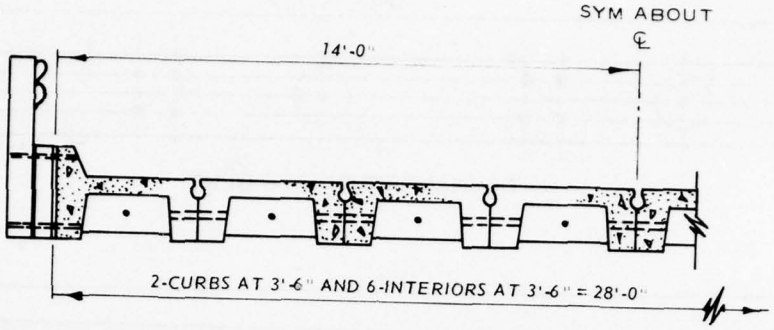

a. PART CROSS SECTION OF ROADWAY SHOWING ASSEMBLY

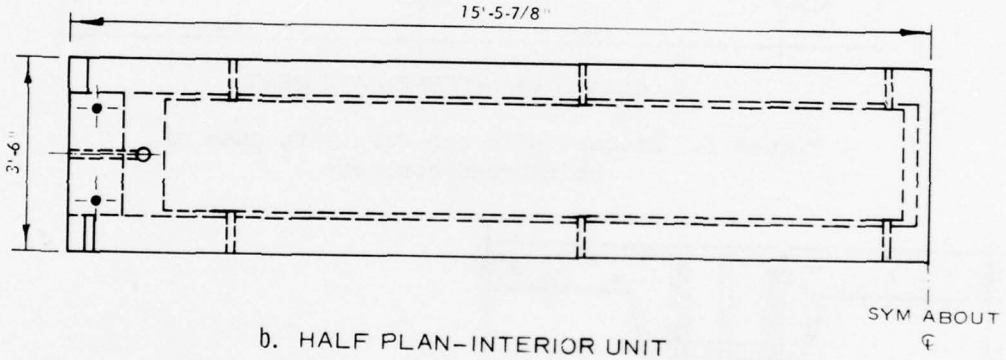


b. HALF PLAN–INTERIOR UNIT

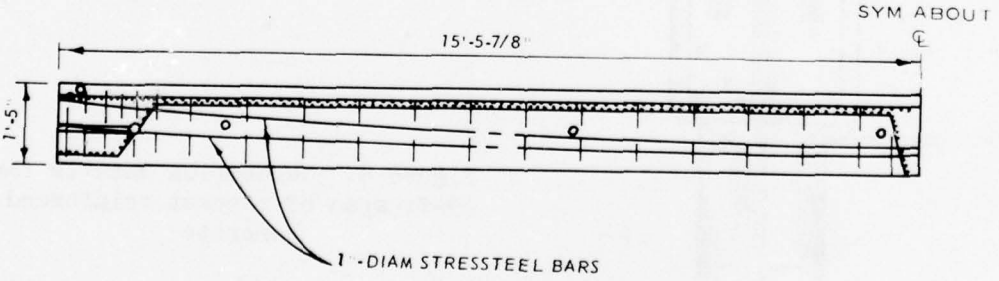


C. LONGITUDINAL SECTION

Figure 9. Precast, prestressed concrete girders for 31-ft span

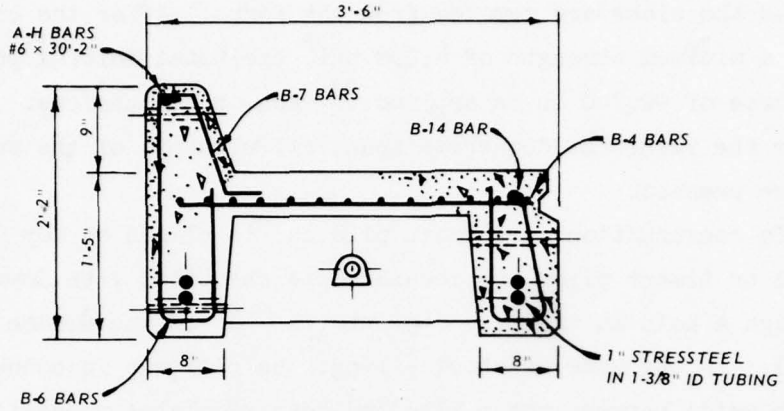


a. CURB UNIT CROSS SECTION
NEAR CENTER LINE

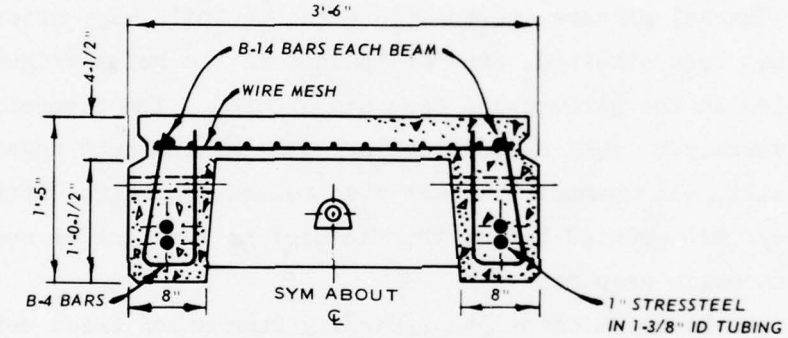

b. INTERIOR UNIT CROSS SECTION
NEAR CENTER LINE

Figure 10. Girder details for 31-ft span

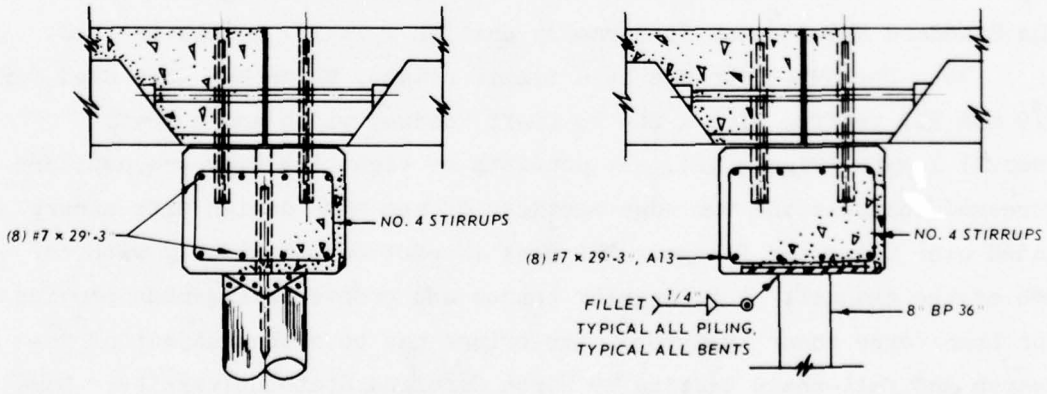

a. WOODEN PILING

b. STEEL PILING

Figure 11. Connection details for 31-ft span of precast, prestressed concrete

purposes, and the slabs are removed from the forms. After the concrete has reached a minimum strength of 4,200 psi, the total initial prestressing force of 90,700 lb is applied to each of the tendons. As was the case for the reinforced concrete span, all elements of the superstructure are precast.


27. In construction, a precast pile cap is placed on top of either steel or timber piles and connected to the piles with dowel pins driven through a hole in the pile cap into the top of the wooden piling (Figure 11a). In the case of steel piling, the pile cap is connected using fillet welds between the piling and bearing plates precast in the pile cap (Figure 11b).

28. Channel girders are positioned on the pile cap; after proper alignment has been obtained, pins are placed in the holes (Figure 11), and all holes in the girders and caps are grouted. The elements are tied transversely by bolting the legs of adjacent channels together. Longitudinally, all channel ends are also bolted together. After bolting, all keys are grouted before traffic use; no leveling or wearing course is normally required.


29. The North Carolina State Highway Commission tried several precast channel type bridges that required cast-in-place composite concrete. After several attempts, they decided that for their "county road" bridge, they needed a type of bridge that could be installed anywhere without depending on cast-in-place concrete. The resultant bridge is known as the Standard BMD-13[9] and is normally cast on a 14-in. double-tee bed.

30. The BMD-13 bridge is a simple bridge, which has been used for H10 and H15 traffic with a 24- to 29-ft roadway width and a 30-ft overall length (Figure 12). It consists of eight interior precast, prestressed channels and two edge sections of the same design with a curb added over the outer flange. The deck is cast monolithically with the web of the channel. A triangular tongue and groove arrangement provides for transverse shear transfer. The bridge has been the subject of research and full-scale testing by North Carolina State University. Some of the results of this research have been presented in Reference 9.

31. Connection details are less sophisticated than those shown

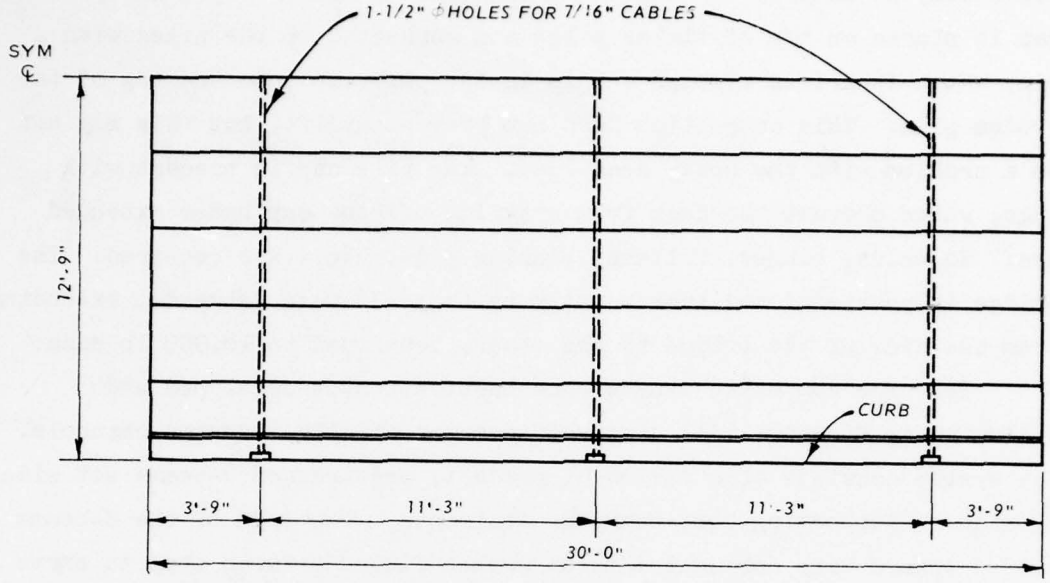

a. Plan

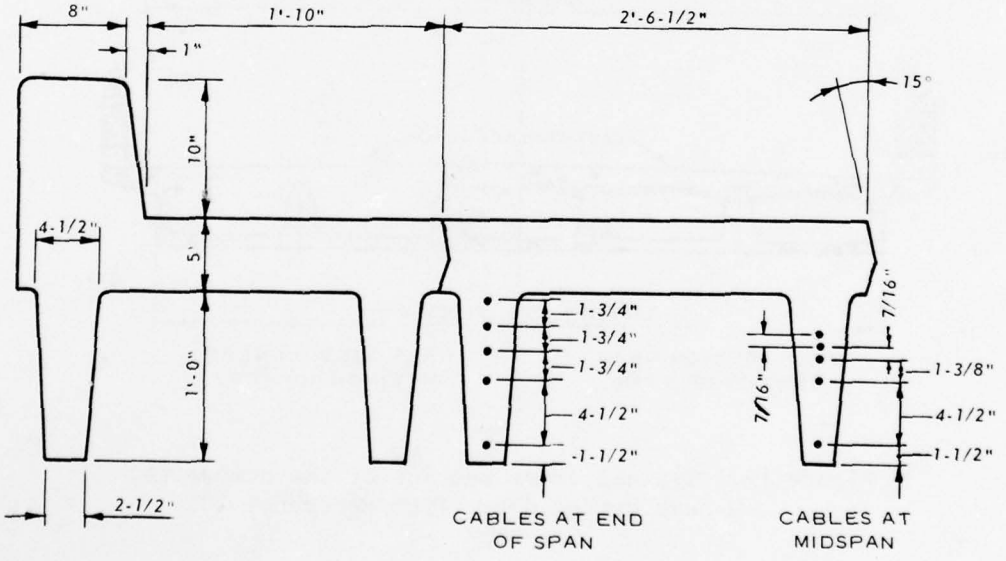

b. Partial section

Figure 12. North Carolina channel girder bridge

previously as used by the State Aid Division of MSHD. A precast pile cap is placed on top of timber piles and connected to the piles with a pin, which is driven through a hole in the pile cap into the top of the wooden pile. This connection does not prevent uplift, but this may not be a problem with the heavy dead load. The pile cap is precast with lugs, which prevent the deck from crawling off the cap under extended use. No welds, hinges, rollers, bearing pads, etc., are required. The bridge is posttensioned transversely by three 7/16-in. strands, extending from one side of the bridge to the other, tensioned to 18,900 lb each.

32. The composite U-beam construction system developed and evaluated in Missouri[10,11] uses what are essentially inverted channels. The system consists of a series of precast, prestressed U-beams set side by side on supporting bent beams or abutments. The legs of the U-beams extend upward with corrugated metal arches fitted between them to serve as stay-in-place forms for the cast-in-place top slab. The resulting bridge deck is very similar to a multicell box superstructure. Figure 13 presents a typical cross section of the composite U-beam bridge


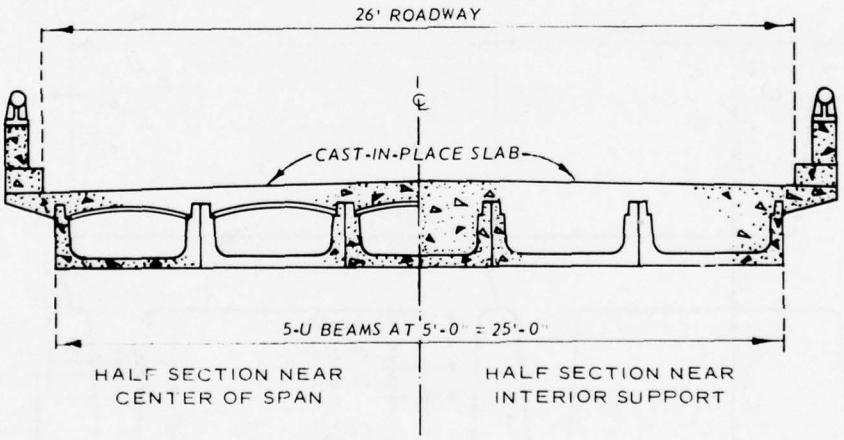


Figure 13. Typical cross section of the composite U-beam bridge deck (from Reference 10)

deck. The variation in beam depth (Figure 14) will accommodate AASHO HS20-44 loading over a span range of approximately 30 to 80 ft depending upon the thickness of the cast-in-place top slab.

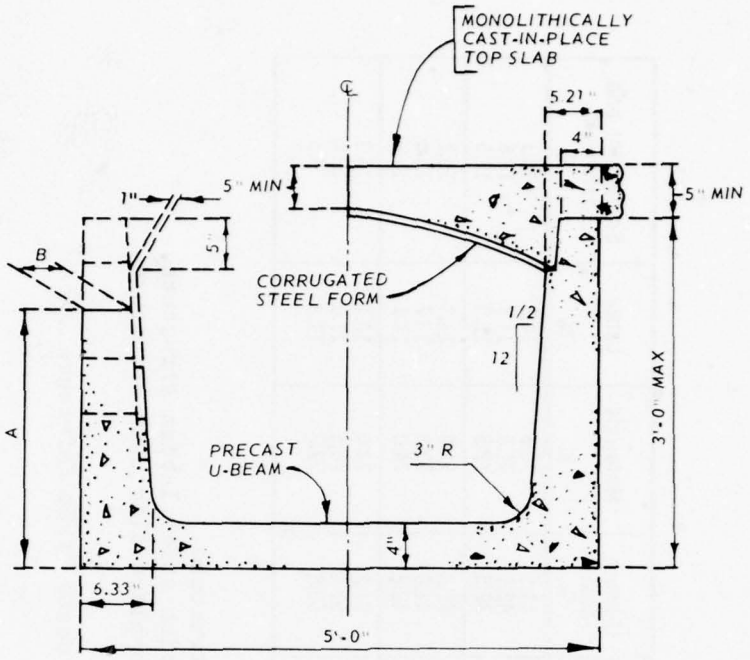

A	20"	24"	28"	32"	36"
B	4.67"	4.50"	4.33"	4.16"	4.00"

Figure 14. U-beam dimensions and details (from Reference 10)

33. Estimated costs of the U-beam system were compared with actual costs of three typical bridge structures selected to give a representative range of span length and to consider the most common types of bridge superstructures used for shorter spans in the Missouri highway system. From the prices listed in Figure 15, it can be seen that for the shorter span bridges, A-2141 and A-2039, the cost of the original superstructures exceeds the average estimated cost of the U-beam system by 10 and 13 percent, respectively. However, the estimated average cost of the U-beam system for bridge A-2416 is about 21 percent less than the actual cost of the original voided slab superstructure. Therefore, the U-beam system would appear to have an economic advantage for medium-span ranges.

Bridge	Cost of superstructure			Savings	U-beam cost	Materials	Labor	Equipment and overhead
	Proposed system		Actual bridge					
	Total	$/sq.ft.	$/sq.ft.	$/sq.ft.	%	%	%	%
A-2141 High	$19,882.40	6.83	7.38	.55	41.8	70.6	14.3	15.1
Average	19,284.23	6.63	7.38	.75	42.1	71.5	14.7	13.8
Low	18,760.58	6.45	7.38	.93	42.5	72.5	15.0	12.5
A-2039 High	24,820.91	7.44	8.22	.78	41.5	71.6	13.3	15.1
Average	23,956.68	7.18	8.22	1.04	41.8	72.8	13.7	13.5
Low	23,156.60	6.94	8.22	1.28	42.2	74.0	14.1	11.9
A-2416 High	58,756.60	8.74	10.33	1.59	51.2	74.0	10.7	15.3
Average	54,376.58	8.12	10.33	2.21	52.1	76.6	11.0	12.4
Low	50,088.78	7.51	10.33	2.82	52.8	79.2	11.3	9.5

A-2141: Three equal spans (34 ft) of precast slab structure.
A-2039: Three span (35, 43, 35 ft) continuous composite steel I-beam structure.
A-2416: Four span (43, 70, 70, 43 ft) voided cast-in-place slab deck structure.

Figure 15. Summary of superstructure costs (from Reference 10)

34. Channel stringers with a depth of 3 ft 5 in. were effectively used to span 95 ft on the Ardrossan[12] grade separation structure in Alberta, Canada. The 38-ft-wide bridge is designed to carry HS20 loading across spans of 103 ft. The center support (Figure 16) is a two-leg

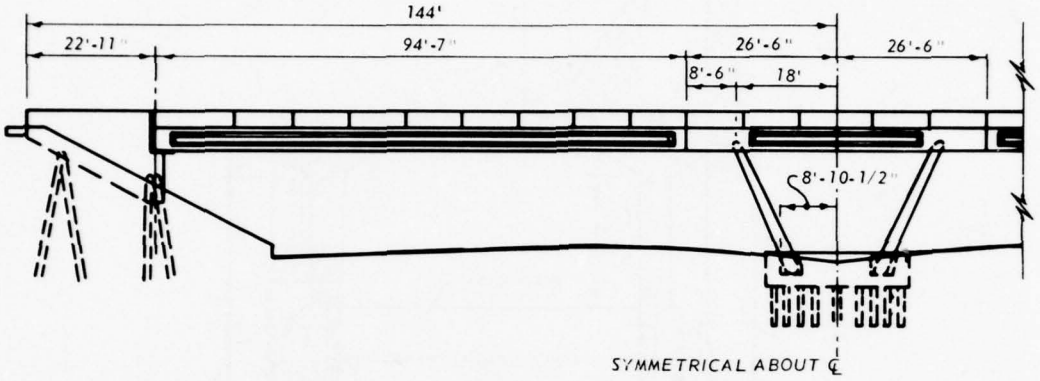


Figure 16. Ardrossan grade separation structure (from Reference 12)

frame that carries a 53-ft section. Legs taper from 18 ft apart in a common footing to 36 ft at stringers, which cantilever 8 ft 6 in. each way. The precast, conventionally reinforced pier legs were set in prepared pockets (Figure 17) and supported by cables while the center section stringers were placed and adjusted. The pockets were then filled with grout. The channel stringers (Figure 18) were set on neoprene pads on the cast-in-place fixed abutments and attached to the cantilevered ends of the center stringers by Cazaly hangers. The concrete of the stringers forms the deck of the bridge and is topped with 2 in. of asphalt wearing surface.

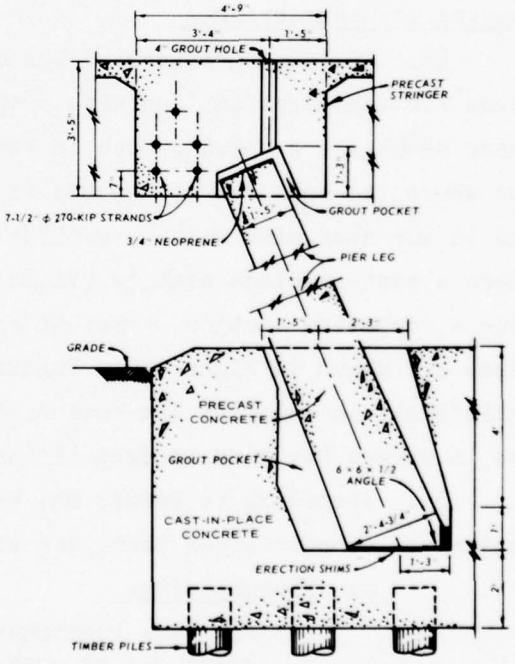


Figure 17. Center pier details (from Reference 12)

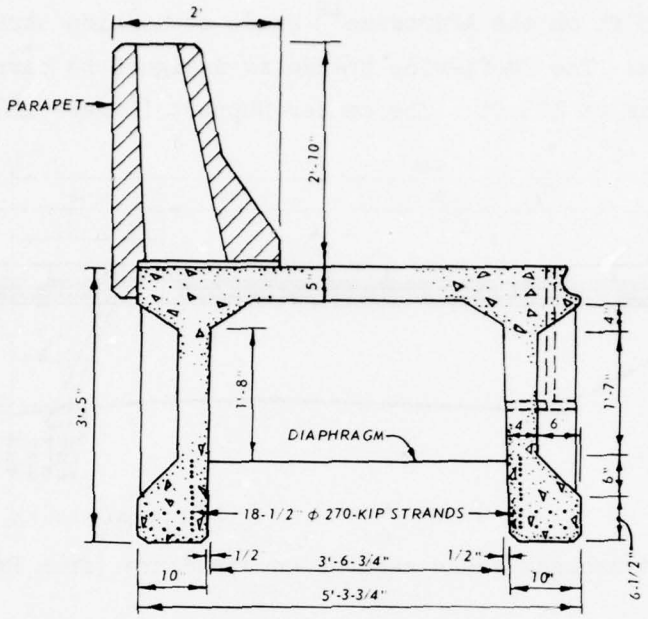


Figure 18. Channel stringer details (from Reference 12)

Precast box beam bridges


35. Precast, prestressed box beams have been accepted by engineers for many applications with a span range of 20 to 120 ft.[13,14] These beams are generally used in two basic types of highway structures, one where the top slab at the box is designed to carry full wheel loads and is the deck slab with or without a wearing surface, and the other where a cast-in-place slab is placed integrally with the beams to provide a composite section. Typical cross sections for the two types of beams are shown in Figure 19. Initially, box beams were used almost exclusively in adjacent box beam bridges; however, they have also found use in spread box beam bridges (Figure 20).

36. According to Bender and Kriesel[13] the advantages of noncomposite and composite box beams are as follows:

a. Noncomposite.


(1) Far less construction time is required; therefore, roads can be opened to traffic quickly.

(2) Less field labor, supervision, and inspection are required.

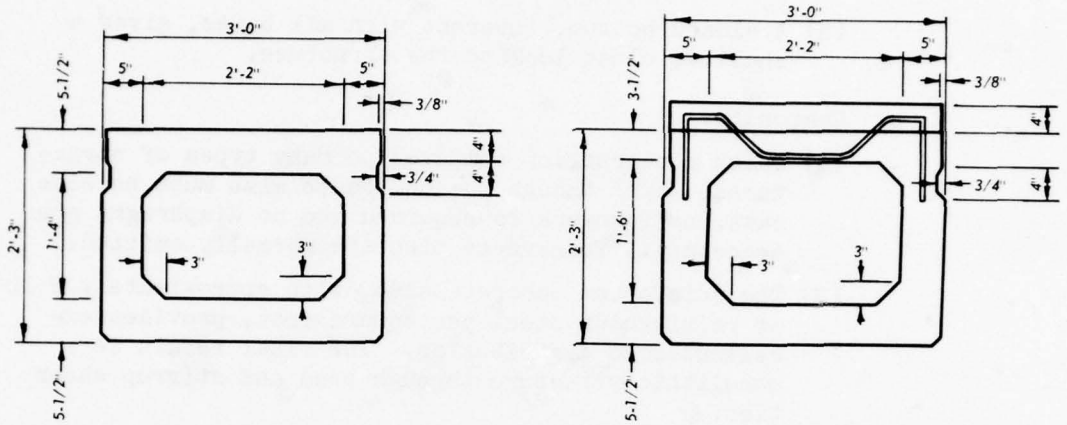


a. Noncomposite box beam b. Composite box beam

Figure 19. Typical cross sections for box beams (from Reference 13)

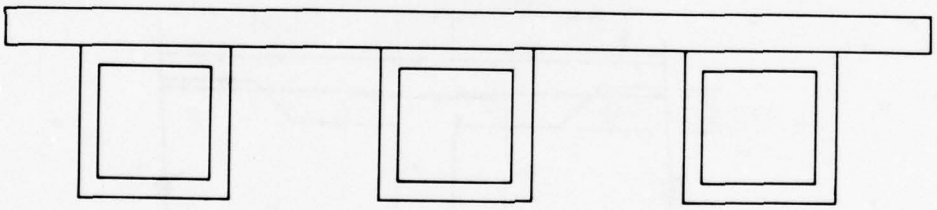

a. Spread box

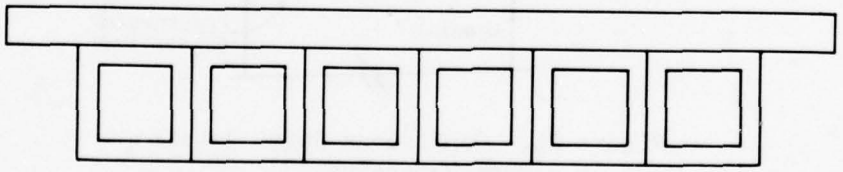

b. Adjacent box

Figure 20. Box beam bridge configuration

(3) An excellent depth-to-span ratio provides more clearance or more waterway opening than most other bridge types.

(4) Good load distribution is achieved through the grouted keyways.

(5) A closed bottom, inherent with all boxes, gives a shallow, clean look to the structure.

b. Composite.

(1) Quick construction compared to many types of structures. Even though the composite slab must be site cast, no formwork is required and no diaphragms are necessary. Transverse ties are normally omitted.

(2) The reinforced concrete slab, with approximately 2 lb of reinforcing steel per square foot, provides excellent load distribution. The final result is a monolithic structure through bond and stirrup shear ties.

(3) Continuity can be achieved, as illustrated in Figure 21, often resulting in further depth reduction, and always providing a closed joint over piers.

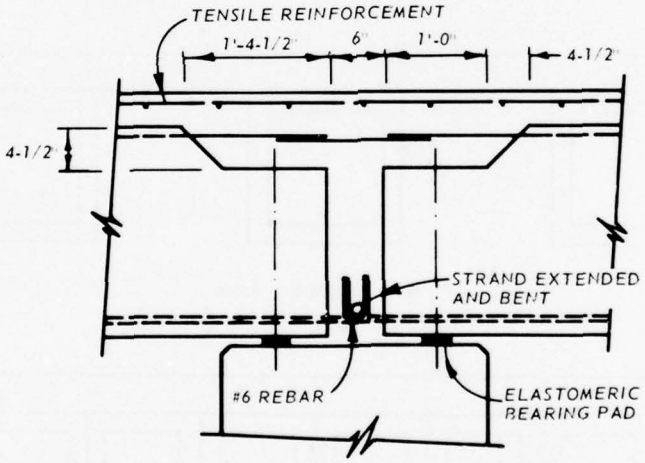


Figure 21. Continuous joint detail
(from Reference 13)

37. The alignment of a portion of Interstate Highway 87 through Connecticut traverses a swamp containing very soft peat and organic silts approximately 60 ft in depth and 3000 ft in length.[15] Normal construction procedures, such as removal and replacement of the unsuitable

material or use of sand drains, were not considered practical. Therefore, it was proposed that the swamp be crossed on a low-level, modular structure, which could be assembled rapidly and also serve as a work platform for pile driving and erection equipment while it was being built. Precast piles, pile caps, abutments, and prestressed concrete box beams overlain with a 4-in. mesh reinforced concrete wearing surface (Figure 22) were selected for preliminary design. Span lengths of 50 ft


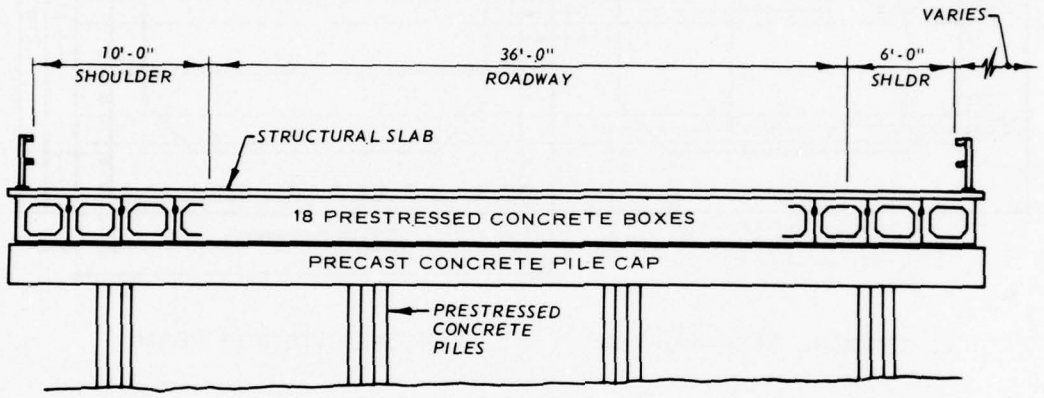


Figure 22. Typical section of I-87 roadway looking south (from Reference 15)

were determined by using the loading diagram for a crane, which weighed 434,000 lb with an 80-ft beam. Proceeding with a normal design for HS20 loading (Figure 23) indicated the need for a deeper box section or a composite section. Since a 4-in. concrete wearing surface was already planned, the addition of reinforcing steel made it a structural slab. The composite action between the box girders and slab was achieved by using an epoxy-polysulfide bonding compound.

38. Increased unsupported pile lengths that were encountered during construction made it necessary to distribute the horizontal forces over five bents by making the superstructure continuous over four spans. Continuity was achieved through cast-in-place concrete diaphragms at the fixed piers (Figure 24) and with the addition of steel bars in the structural slabs of each fixed pier.

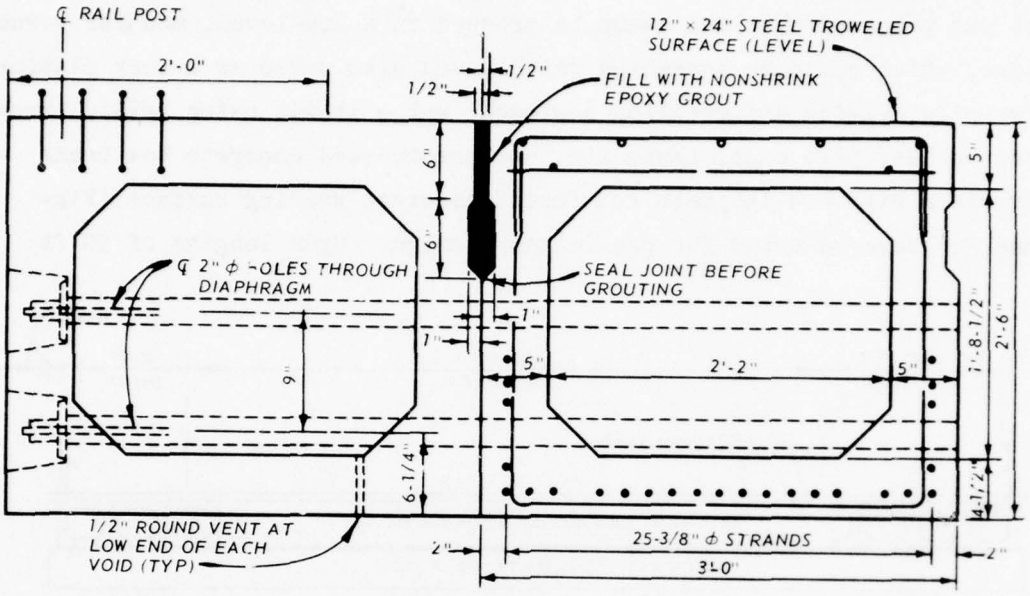

a. TYPICAL FASCIA BEAM b. TYPICAL INTERIOR BEAM

Figure 23. Prestressed box girder sections (from Reference 15)

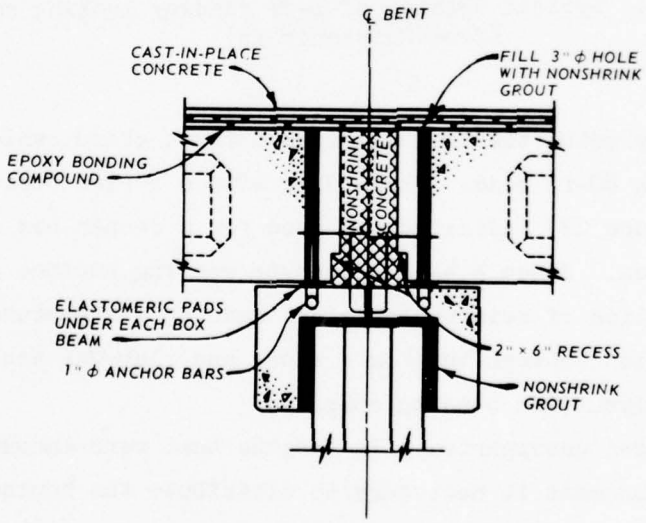


Figure 24. Typical fixed bent joint (from Reference 15)

Rectangular-girder bridges

39. The deck of the Baker River Bridge in Washington is composed of precast slabs and precast beams integrated by cast-in-place longitudinal joints.[7] A modification of the design used for this bridge is shown in Figure 25. The design loading of HS20-44 was used for the 26-ft loading and multiple 25-ft spans supported by pile bents. The superstructure is entirely precast reinforced concrete with the exception of the concrete required in the joints.

40. The precast reinforced concrete beams are designed as simply supported, rectangular beams for dead load and as T-beams for live load. These beam units weigh approximately 6300 lb each and are 10 in. wide,

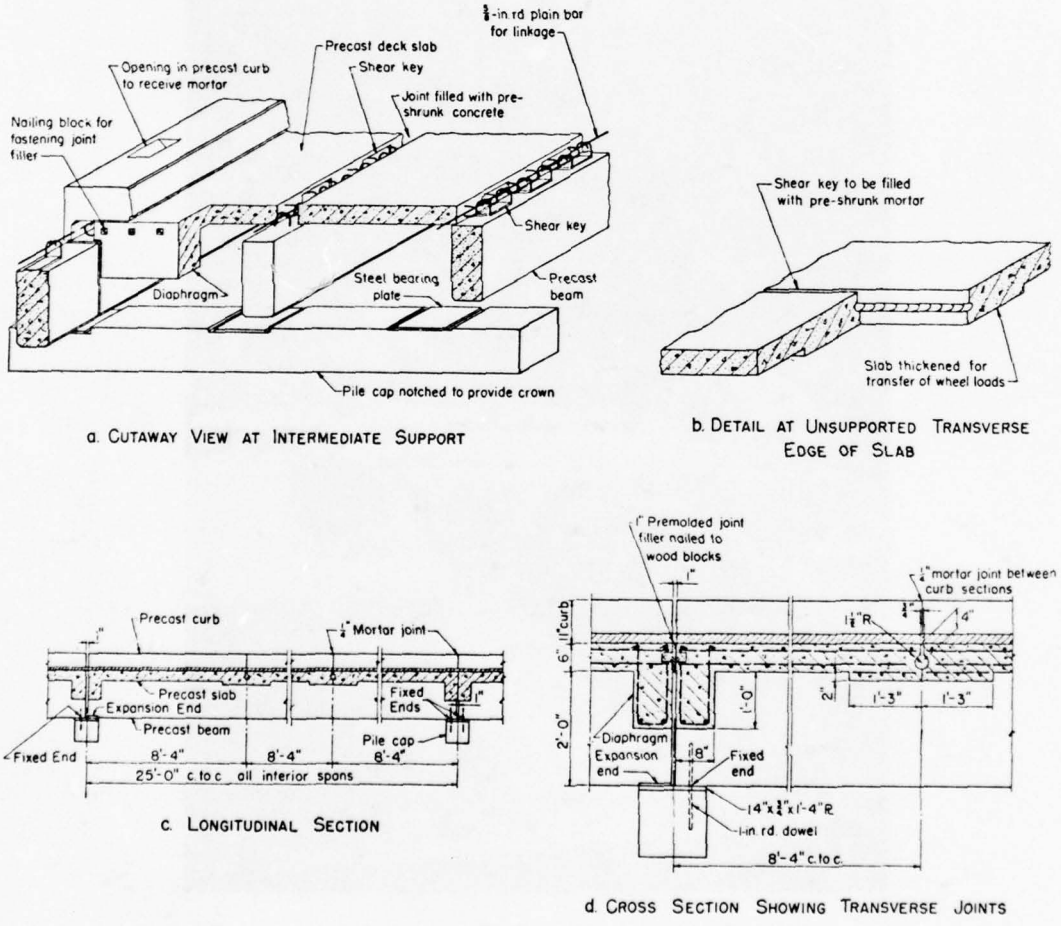


Figure 25. Bridge deck of precast beams and slabs (courtesy of Portland Cement Association[7])

2 ft deep, and 24 ft 11 in. long. Between any two beams, one span of the deck consists of three precast slabs, each approximately 8 ft 4 in. long, 4 ft 2-1/2 in. wide, and 6 in. deep. These deck slabs, weighing approximately 3100 lb each, are designed as simple spans between beams for both dead and live loads.

41. Figure 26 shows the erection of a bridge in Spokane County, Washington, some features of which are similar to the design used for



Figure 26. Erection of a bridge of precast beams and slabs (courtesy of Portland Cement Association[1])

the Baker River Bridge. Here haunches on the 30-ft, 7400-lb beams support the deck slabs. Precast slabs are 5 ft 9-1/8 in. by 15 ft by 5-1/2 in. thick and weigh 6000 lb.[7]

Precast tee-girder bridges

42. The single-tee girder is a popular section for bridge structures on secondary roads and county or town use. This is particularly true in the replacement of existing structures where speed in construction, as well as a low initial cost, is very important. In the span range studied (61 ft), single-tee bridges (Figure 27) showed a definite

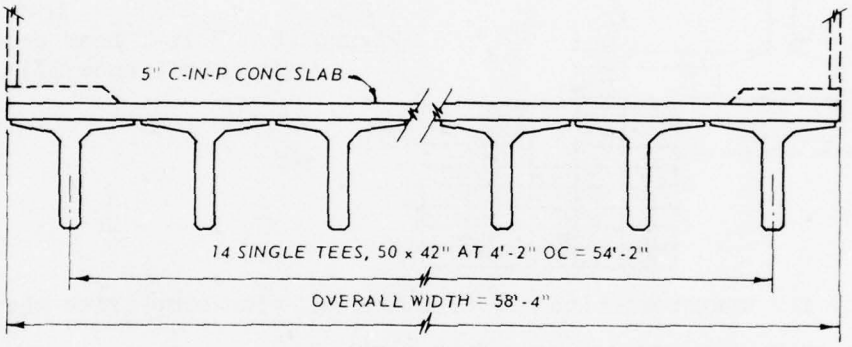



Figure 27. Cross section of single-tee bridge (from Reference 16)

cost advantage in a cost comparison made in Connecticut in the early 1960's.[16] The cost comparison was made on actual bid prices on vehicular bridge structures with (a) steel stringers with cast-in-place concrete slab, (b) prestressed concrete box beams with asphaltic wearing surfaces, (c) AASHO type III I-beams with cast-in-place concrete slab, and (d) single tees with cast-in-place concrete slab. According to Curtis,[16] total costs per square foot of deck were as follows:

System	Cost per Square Foot
Steel stringers	$9.15
Box beams	7.35
Type III, I-beams	6.87
Single tees	6.41

In addition to vehicular bridges, single-tee applications include pedestrian and material handling bridges.

43. In 1959, the Concrete Technology Corporation developed the bulb-T section[17] (Figure 28). The wide top flange ensures lateral

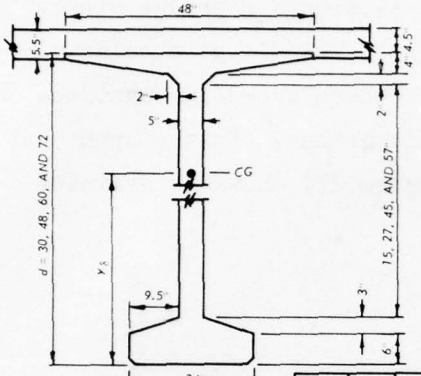

DEPTH d, IN.	AREA IN.^{2}	y_s IN.	MOMENT OF INERTIA IN.^{4}
24	380	12.14	28,900
30	410	14.95	51,100
36	440	17.78	80,700
48	500	23.51	164,000
60	560	29.29	283,200
72	620	35.12	442,800

Figure 28. Bulb-T beam properties (from Reference 17)

stability for transportation and erection and also simplifies the placing of a cast-in-place concrete deck slab.

44. The 60-in. bulb-T girder was used for the Naches River Bridge,[18] Yakima County, Washington. This structure is an example of building a small prestressed concrete bridge with spans longer than ordinary by plant precasting the girders in segments and posttensioning in the field. The bridge, designed for AASHO HS20 loading, consists of six lines of precast, prestressed concrete girders cantilevering 30 ft over piers, which are 155 ft apart (Figure 29). Comparisons were made between various available precast girder shapes with results as shown in Figure 30.

45. The girders had to be hauled 200 miles over the Cascade Mountains. Therefore, to simplify transport and handling, they were detailed in three pieces. The two end pieces, each 62 ft long, were precast with ducts in place for field prestressing. The middle piece, 90 ft long, was plant precast and prestressed, for its own moment envelope plus ducts was included for field prestressing. The middle


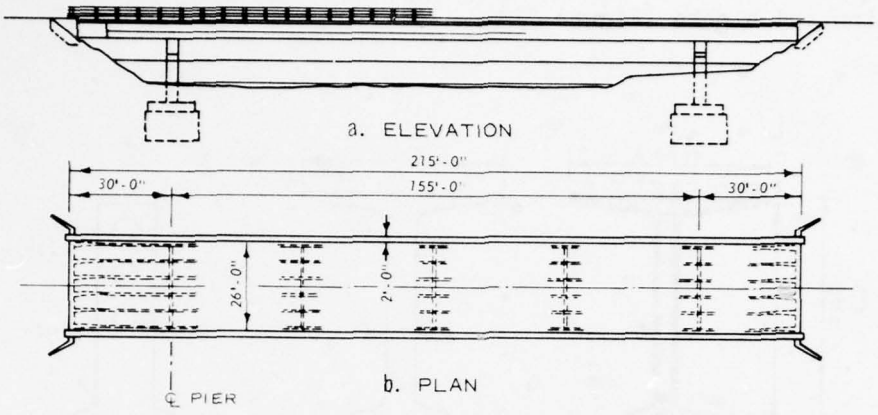


Figure 29. Elevation and plan of the bridge designed for AASHO HS20 loading (from Reference 18)

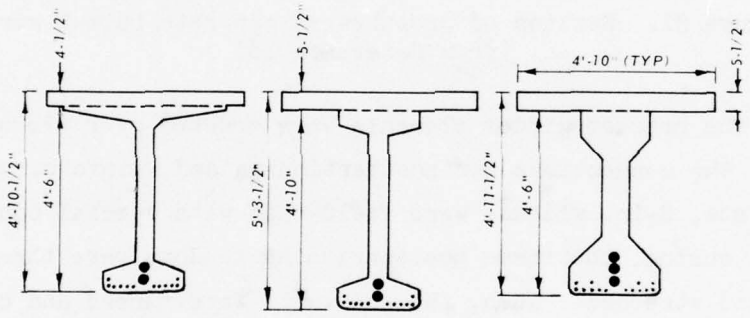

	54" BULB TEE	WSHD 100	AASHO IV
GIRDER WEIGHT	34 T	36 T	53 T
PRECAST CONCRETE	16 CY	17 CY	24 CY
C-I-P CONCRETE	8 CY	10 CY	10 CY
PRESTRESS	14 STRANDS	14 STR	16 STR
POSTTENSIONING	24 STRANDS	24 STR	36 STR
COST, CONCRETE	$2,400	$2,700	$3,400
COST, ALL PRESTRESS	$1,220	$1,220	$1,670
COST, ONE GIRDER	$3,620	$3,920	$5,070

7000-PSI PRECAST CONCRETE. 270-K 1/2" STRANDS. H-20 S-16 LOADING; 0 TENSION AT B FIBER COST VARIATION RANGE MERELY INDICATIVE, RELATIVE AND PROBABLE.

Figure 30. Comparison of three 120-ft simple span, prestressed concrete highway bridge girders (from Reference 18)

girder piece has a 5-1/2-in. web; the end pieces, for resistance to shear over piers, have 7-in. webs; and the girder ends have stress distribution end blocks (Figure 31).

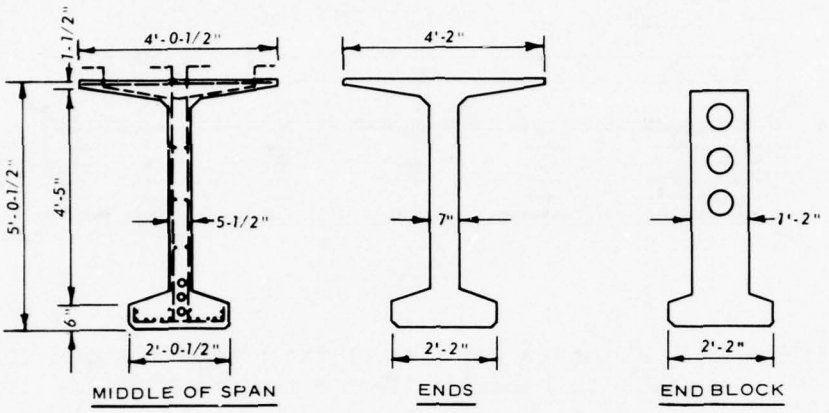


Figure 31. Section of prestressed concrete bulb-T girder (from Reference 18)

46. The precast girder elements were erected over piers and falsework bents; the connections for posttensioning and reinforcing were made; and the joints, 8-in. widths, were field cast with special concrete. After joint curing, the three posttensioning tendons were threaded, anchored, and stressed. Then, the end walls were formed and cast, followed by the intermediate diaphragms at 30- and 38-ft centers, the 4-1/2-in.-thick roadway slab, and finally the curbs (Figure 32).

47. A single-lane precast reinforced concrete bridge developed in England for the temporary replacement of damaged bridges is shown in Figure 33. To allow rapid emergency erection, the bridge deck is entirely precast with the exception of the curbing, which may be cast-in-place without interference to traffic.[7] The deck for this 20-ft span consists of T-girders placed side by side with <-shaped joint between adjacent flanges to ensure proper fit at these joints; the seven units for one span are cast together in the same relative position they will have in the completed structure. These joints are held tight by transverse tie rods, which assist in the lateral distribution of wheel

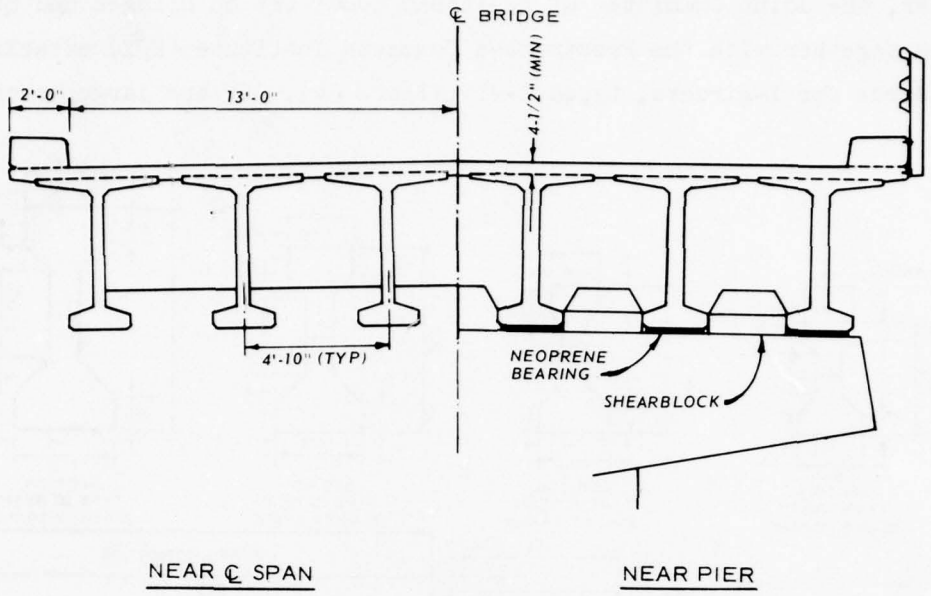


Figure 32. Roadway sections (from Reference 18)

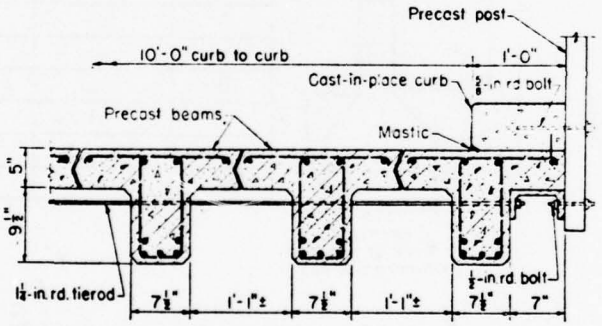



Figure 33. T-shaped precast units for bridge deck (courtesy of Portland Cement Association)

loads. At the ends of the span, precast concrete blocks are fitted into the openings between the flanges and the bridge seat and are grouted to create a solid abutment to retain the roadway fill and to give additional rigidity to the beam supports. This closure may also be cast-in-place concrete.

Precast I-girder bridges

48. Since the I-shaped girder is by far the most widely used

member, the Joint Committee of the AASHO Committee on Bridges and Structures together with the Prestressed Concrete Institute (PCI) established standards for I-girders, types I-VI (Figure 34). By and large, such

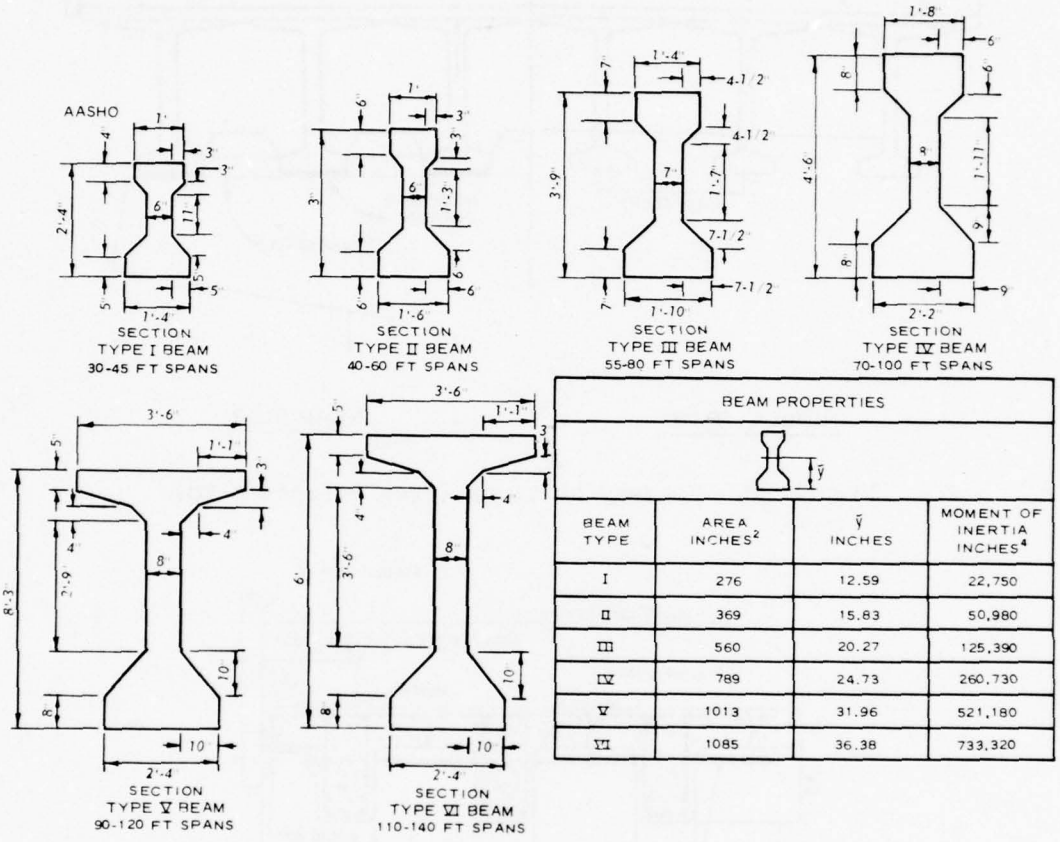

BEAM PROPERTIES

BEAM TYPE	AREA INCHES^2	$\bar{y}$ INCHES	MOMENT OF INERTIA INCHES^4
I	276	12.59	22,750
II	369	15.83	50,980
III	560	20.27	125,390
IV	789	24.73	260,730
V	1013	31.96	521,180
VI	1085	36.38	733,320

Figure 34. Dimensions and section properties for AASHO standard bridge beams (from Reference 17)

standards have been accepted throughout the country although there are minor modifications to the dimensions in some states. These girders are normally used with a composite cast-in-place deck slab. Diaphragms, either precast or cast-in-place concrete, are used in this type of construction in order to ensure lateral distribution of the live load. Span-spacing capacity for these standard beams is shown in Figure 35.

49. Possibilities of reduced costs and improved construction schedules were important factors in the selection of precast,

prestressed concrete elements for the majority of Illinois Toll Highway bridges.[19] In order to evaluate the performance of a structure characterized by the use of precast concrete, a representative bridge (Figures 36 and 37) was erected in advance of construction of the rest of the Illinois Toll Highway. Load tests were conducted to determine whether the assembly of precast elements behaved as an integral slab and girder system.[20]

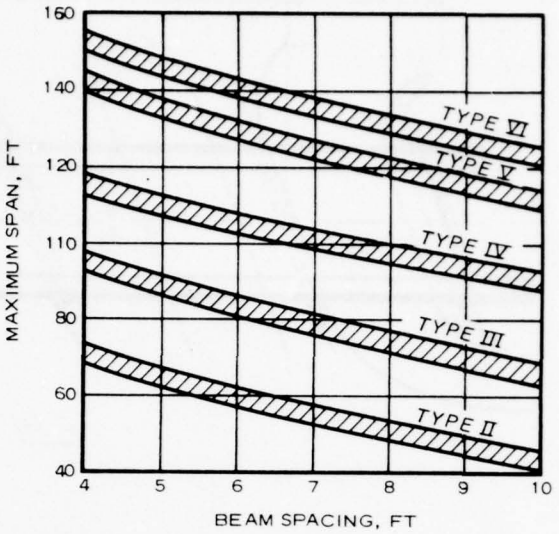


Figure 35. Span-spacing capacity for standard beams (from Reference 17)

50. Precast, prestressed hollow piles 3 ft in diameter with a wall thickness of 4 in. were used as intermediate supports between bridge abutments. After the bridge abutments and piles and pile caps were erected, the precast, prestressed girders were positioned on the structure. Cross sections and reinforcing for the I-shaped girders were as shown in Figure 38. The next stage of construction was to position and secure the precast concrete diaphragms. Precast, prestressed slabs were placed between girders (Figure 39) to serve as a form for the rest of the cast-in-place deck and provide positive slab reinforcement. The cast-in-place concrete was not carried across the supports to preserve a simple test slab. After that phase of testing, the diaphragms and the cast-in-place deck slabs over the supports were then cast, completing construction. The test structure was subjected to severe loads at different stages of construction. The resulting girder and slab moments were, in most instances, far in excess of design moments based on ASSHO H20 truck loads plus impact.[20] Based on these test results, it was concluded that there was no doubt that complete and positive composite action between the precast girders, precast slabs, and cast-in-place slab prevailed throughout the tests.[20]

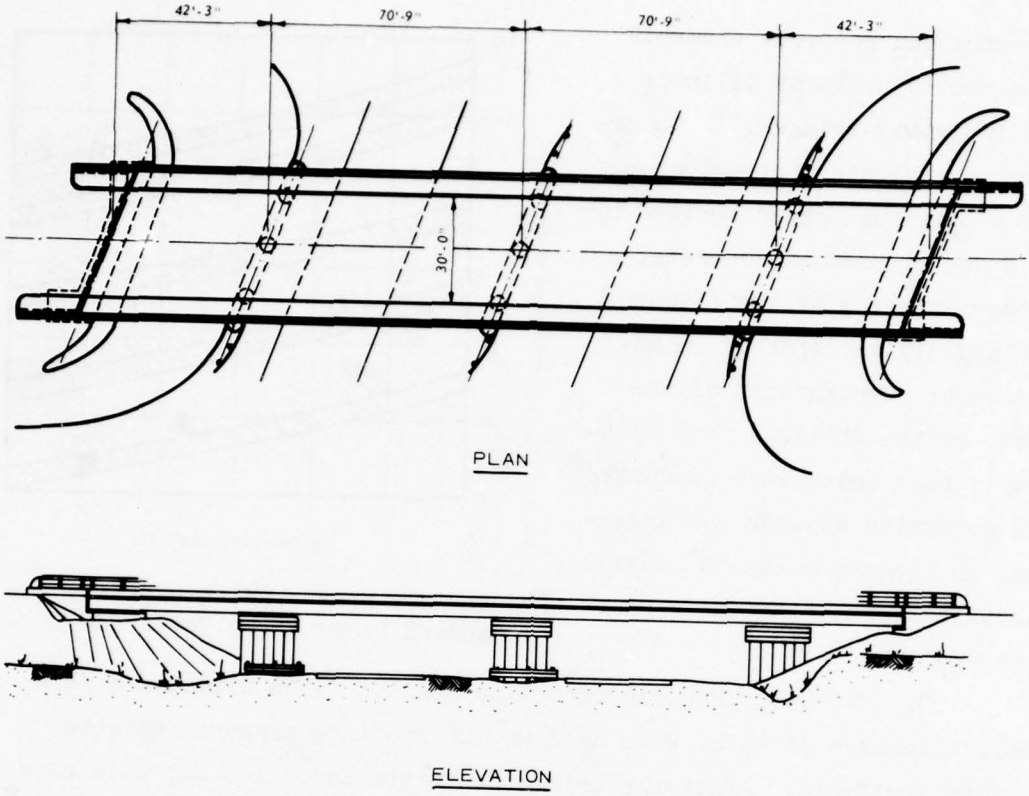


Figure 36. Typical bridge structure on the Illinois Toll Highway (from Reference 19)

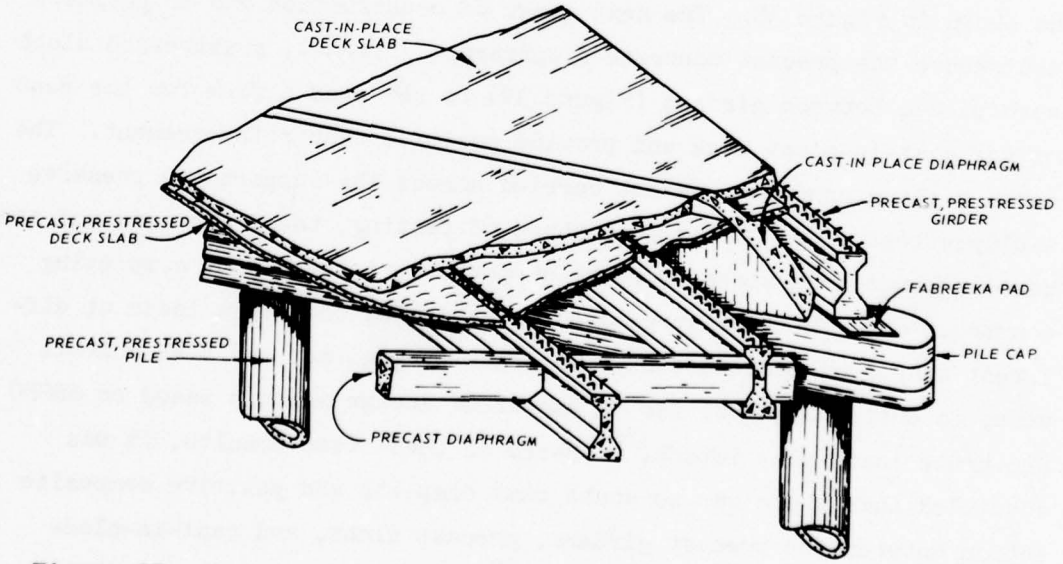


Figure 37. Cutaway view of bridge construction (from Reference 20)

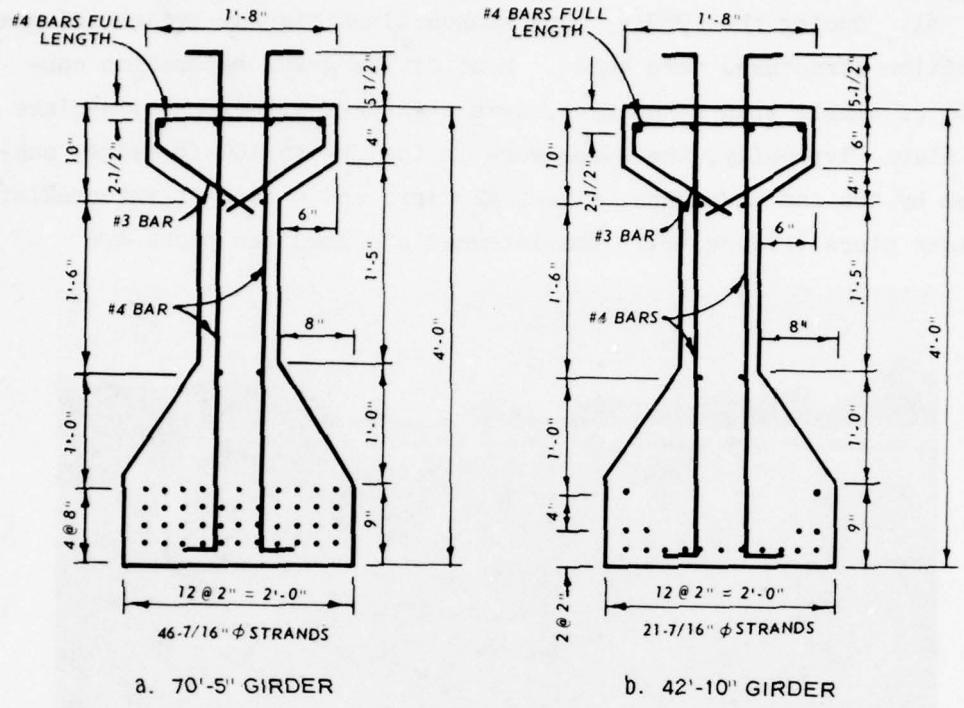


Figure 38. I-shaped girder cross sections and reinforcing (from Reference 20)

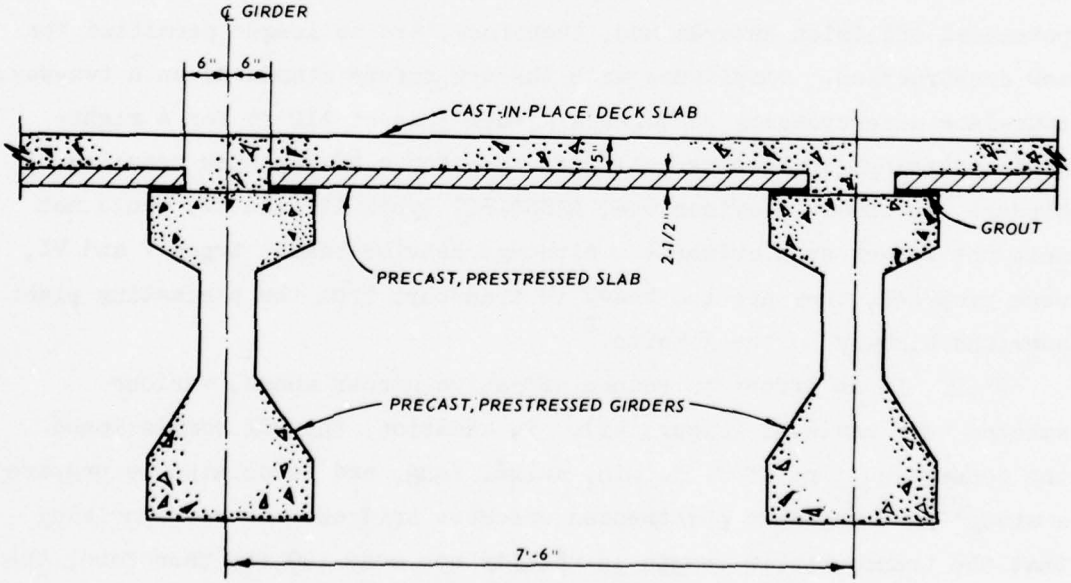


Figure 39. Deck details (from Reference 19)

51. During the 1960's, many standardized highway bridge and grade separation structures were built. Most of the grade separation consisted of simple span structures, span I-girders with a cast-in-place deck slab. Typically, the spans were in the 50- to 100-ft range, supported by two end abutments, a central pier, and a pair of intermediate shoulder piers (Figure 40). The intermediate shoulder piers are


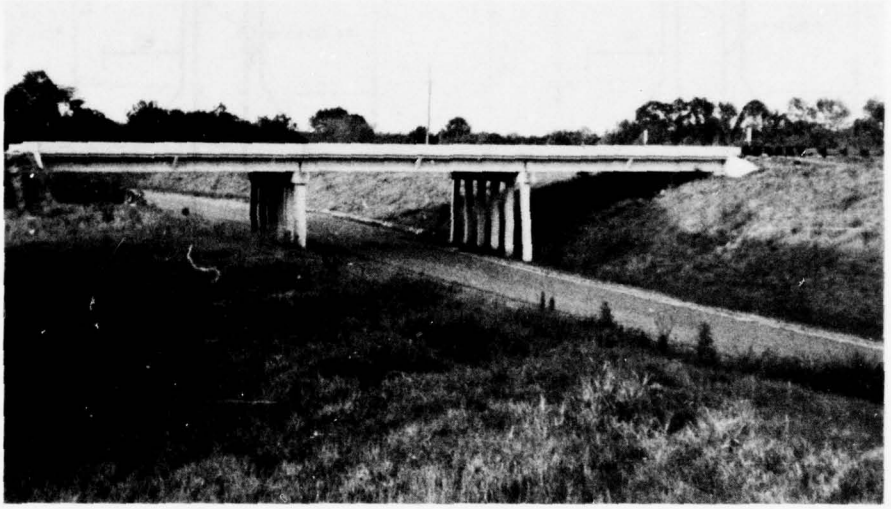



Figure 40. Typical grade separation structure

potential collision hazards and, therefore, are no longer permitted for new construction. Compliance with the new safety standards on a two-way, four-lane undercrossing requires a girder span of 112 ft for a right-angle crossing, increasing to 160-ft span for a 45-deg skew crossing.[21] Girders, in common previous use, AASHO-PCI types III and IV, would not meet the longer span criteria. Although heavier beams, types V and VI, were proposed, they are too heavy to transport from the precasting plant over the highway to the jobsite.[22]


52. In an effort to reduce effective girder spans, various schemes were reviewed (Figure 41). In addition, the PCI commissioned the consulting firm of T. Y. Lin, Kulka, Yang, and Associates to prepare a study[23] on long-span prestressed concrete bridges. It was concluded that the transportable length is usually not over 100 ft; therefore, the problem is how to achieve 160 to 170 ft with 100 ft or shorter members.

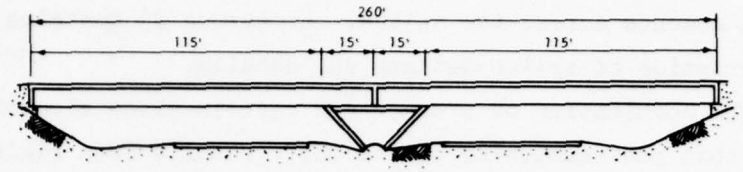

a. INVERTED A-FRAME CENTER PIER

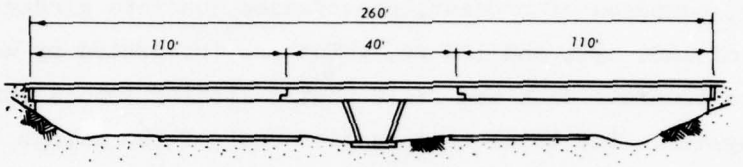

b. CANTILEVERED CENTER GIRDER

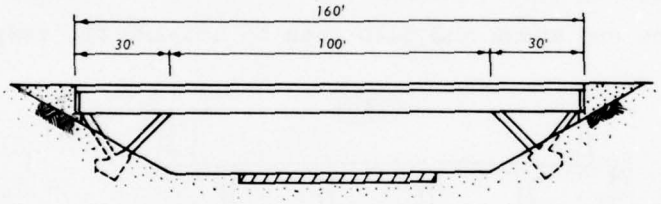

c. END PIERS EXTENDING INTO ROADWAY

Figure 41. Span-shortening systems (from Reference 21)

Furthermore, the key to the problem is the details of design and construction.

53. Longer spans are possible with existing I-girders by using relatively short precast segments that are easily transported to the site where they are either preassembled and erected, or assembled as they are being erected. In the United States, segmental construction usually joins larger elements than the approximately 10-ft lengths used in other countries because of the ready availability of larger equipment for hauling and erecting. Obviously it reduces the fieldwork and falsework required for splice construction. For example, a 40-ft length of AASHO-PCI type III beam with a deck strip 8 ft wide and 8 in. thick weighs about 56,000 lb, which is easily transportable by truck and trailer.[22] Joints between the ends of segments can be grouted, glued with epoxy resin, or left dry. Longitudinal posttensioning is used to

transmit the moments across the splice. Reference 23 contains a comprehensive description of splice designs and details.

54. The combination of precast and cast-in-place elements, arranged so that posttensioning of the whole results in a rigid frame structure, provides an economical and structurally efficient concrete bridge. The Yakima River Bridge[24] is a prestressed concrete, three-span frame bridge, composed of precast, prestressed concrete girders in all three spans of 120, 190, and 120 ft, which are integrated by means of a cast-in-place concrete deck and field posttensioning into a structurally continuous system. The total construction cost of the bridge designed for AASHO HS20 loading was $254,000 with completion in November 1967. The bridge superstructure (Figure 42) consists of modified Washington State standard 100-ft series precast, prestressed concrete girders with the length of the end spans and main span 85 and 120 ft, respectively.[24]

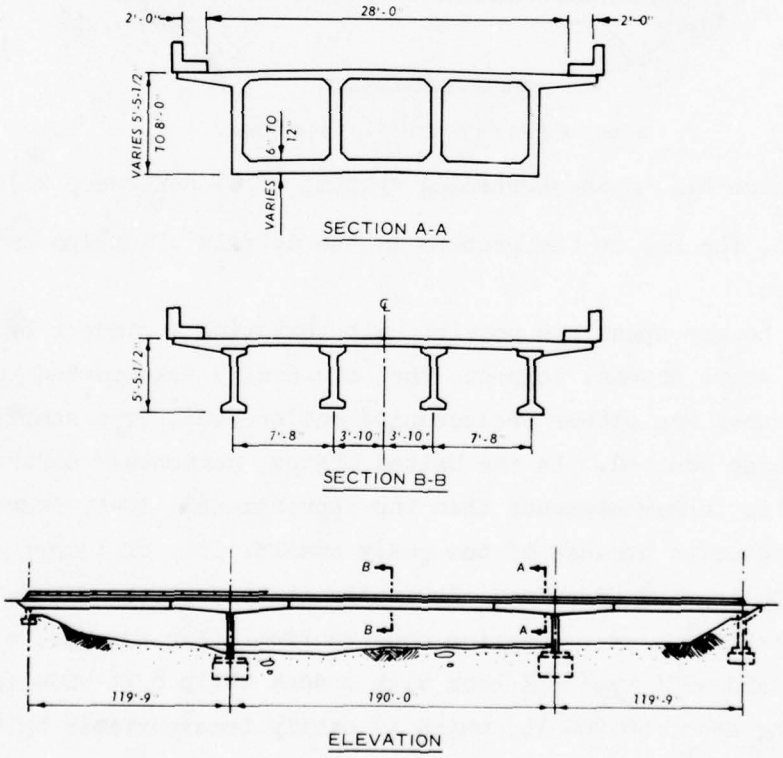


Figure 42. Elevation and sections of the bridge superstructure (from Reference 24)

They are rigidly connected into the cast-in-place concrete boxes over the piers in the maximum negative moment and high shear regions. Construction of the bridge, which required approximately 7 months, was according to the sequence shown in Figure 43.

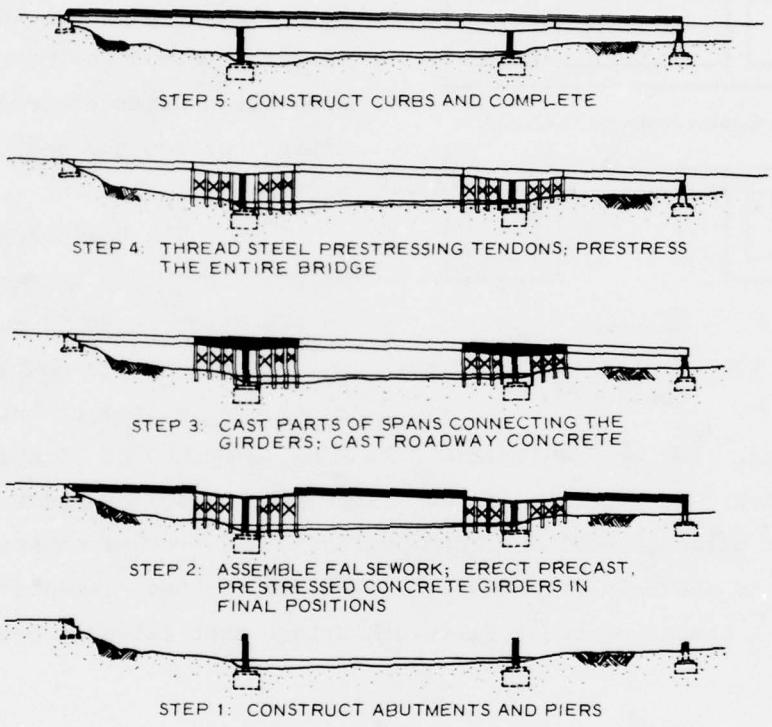


Figure 43. Construction sequence (from Reference 24)

Precast box girder bridges

55. A number of precast, prestressed concrete highway bridges and elevated roadways have been designed as box forms with cantilevered deck slabs. This type of design is frequently known as a spine beam, and the basic section may consist of a single cell or it may be in a multicell form (Figure 44). Such structures are frequently constructed segmentally either in situ or by precasting short lengths of the box section and then posttensioning the segments together to form the required bridge structure. Although various site conditions have a strong influence on the decision whether precasting should be employed in

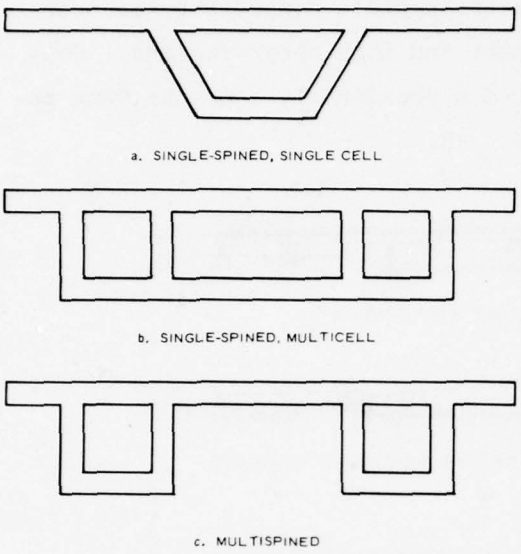


Figure 44. Typical types of box sections

segmental construction, one of the most important factors is the length of the superstructure. Generally, precast segmental construction is likely to be economical for long structures where the savings on formwork and the repetitive production under controlled conditions offset the cost of erection equipment.

56. The Oosterschelde Bridge[25] over the Eastern Scheldt in the Netherlands is an outstanding example of the double-cantilever system of bridge constructions. The bridge is 16,000 ft long, composed of 55 spans of 300 ft each. It consists of very large prestressed cylinder piles, precast pier elements posttensioned together, and precast superstructure elements as shown in Figure 45. The superstructure elements were all set from a traveling steel falsework bridge that extended over two and

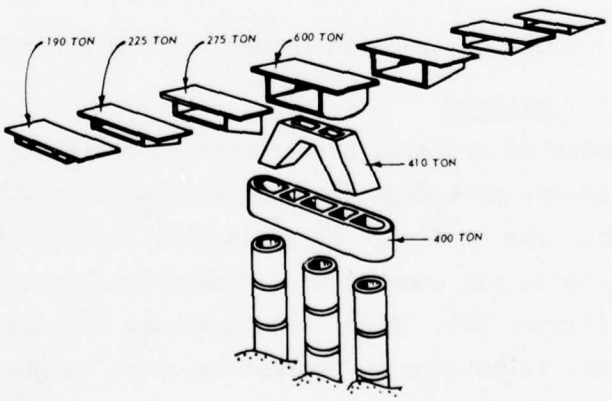


Figure 45. Elements of the Oosterschelde Bridge (after Reference 25)

one-half spans at a time (Figure 46). Elements were brought in under it by barge, then hoisted in symmetrical order about each pier. The joints were concreted, and the primary stressing was done before the next series was hoisted. In total, the bridge consumed 170,000 cu yd of concrete. About 85 percent of this was precast. Three different systems were employed using 3,300 tons of prestressing steel.

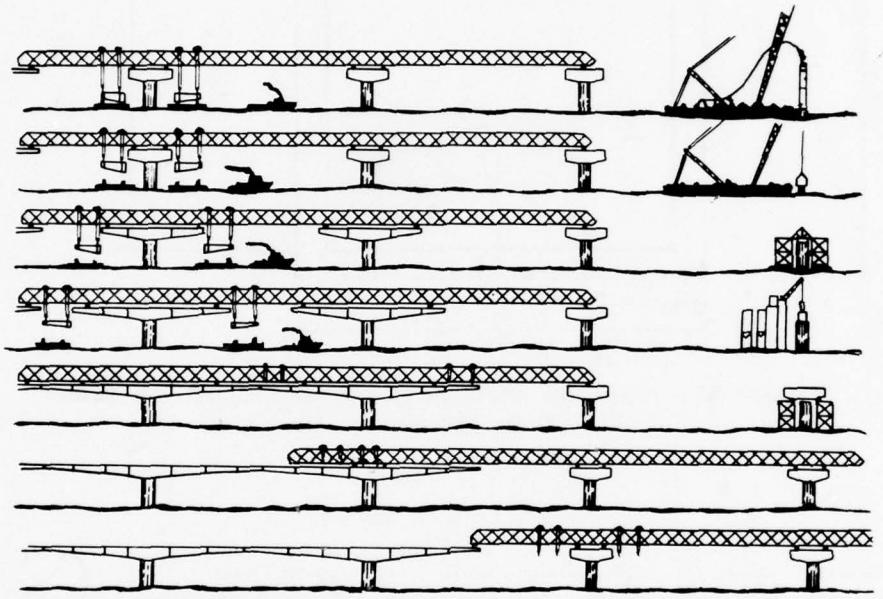


Figure 46. Schematic erection plan for Oosterschelde Bridge (from Reference 25)

57. Considerably smaller precast concrete segments were used in the construction of a private, medium span prestressed bridge in Mexico.[26] This one-lane bridge with a 130-ft central span was designed for an AASHO live load of H15 S-12-44 in such a way that the erection could be performed without the use of falsework or cranes. Because of the limited budget, it was not possible to secure adequate equipment and specialized personnel for the transportation of the precast pieces. Instead, a cableway was used to position the precast pieces (Figure 47), which weighed 4.4 to 6.6 tons. The work can be summarized in two stages, temporary construction stage and permanent stage. Figure 48 shows an elevation of both stages. In this particular project, four precast

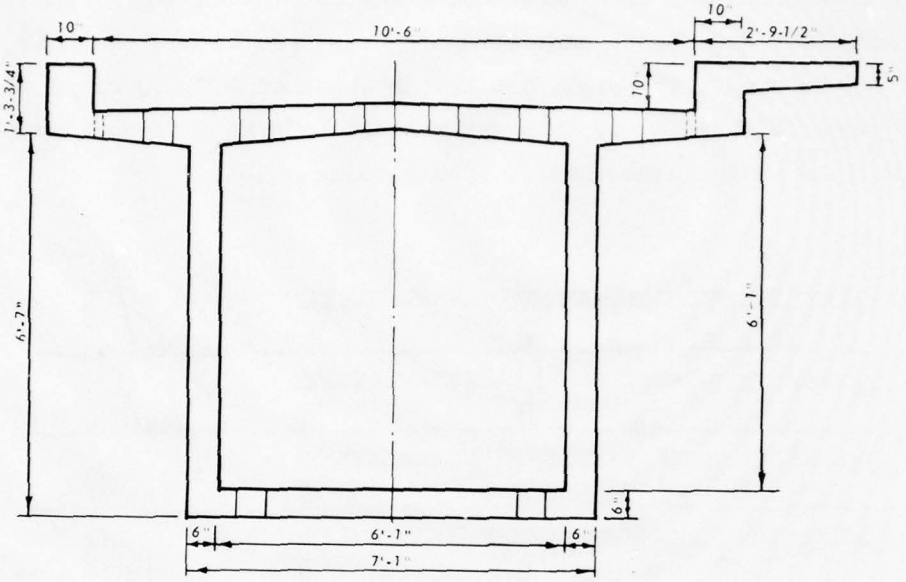


Figure 47. Typical section of precast concrete piece (from Reference 26)

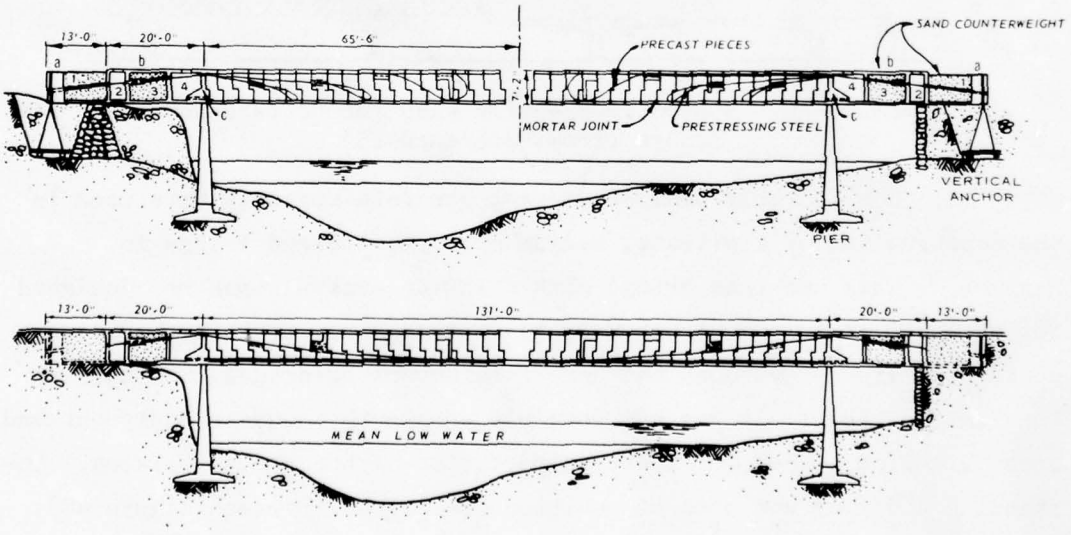


Figure 48. Temporary and permanent sections of prestressed, precast bridge (from Reference 26)

segments were placed daily, two on each site of the bridge. However, Cancio and Munoz[26] believe that it is feasible to place eight segments daily, four on each side, which would leave two phases of the construction stage ready for tensioning in only 1 day. With the proper hauling of segments, they believe it is possible to mount the 38 segments in 5 days.

58. After the required load tests, the functioning of the bridge was found satisfactory, and it was opened to traffic in 1963.

Logging Bridges

59. As a result of the heavy logging and construction equipment, and off-highway logging trucks used in the Pacific Northwest, it is common to build logging bridges for loads two to three times the standard AASHO HS20 loads. For example, the entirely precast Solleks River Bridge,[27] 230 ft long between supports (Figure 49) and 15 ft wide between curbs, was designed for a 75-ton truck. Erection was accomplished by a

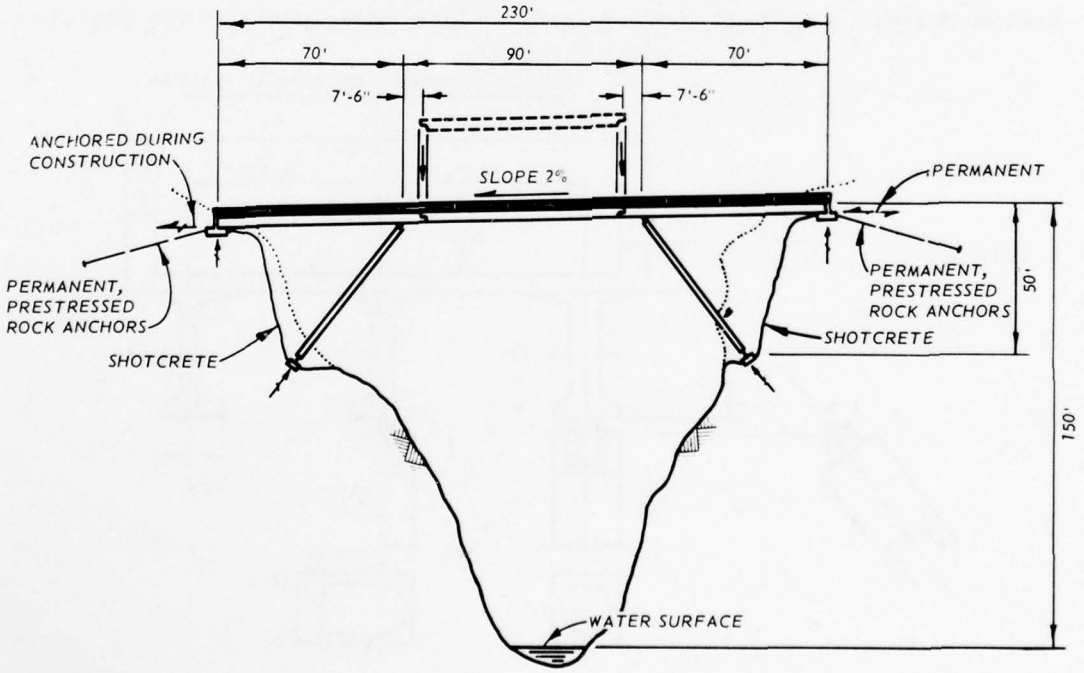


Figure 49. Profile of the Solleks River Bridge (from Reference 27)

1200-ft span skyline similar to those used in logging. The long span was dictated by the topography, an available spar tree, and the need for sufficient sag to carry loads up to approximately 20 tons.

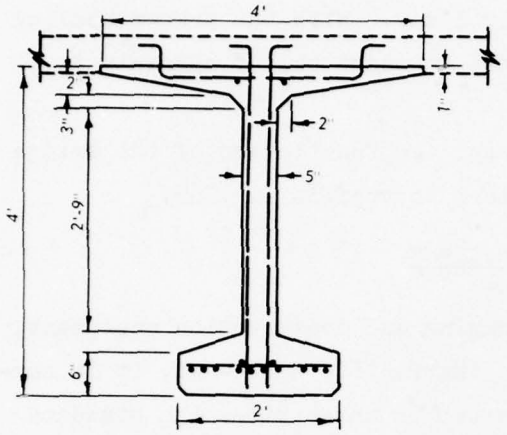


Figure 50. Precast, prestressed lightweight concrete girder section (from Reference 27)

60. Bridge construction began with excavating for the abutments and by benching for the strut footings. Precast, prestressed lightweight concrete struts, 64 ft 6 in. long and 2 ft 2 in. square in section with 1-ft-5-in.-diam core, were erected on the lower pins and guyed in the inclined final position. The 77-ft-6-in. end-span girders (Figure 50) were placed and pinned to the abutments. Girder webs were thickened at bearing points (Figure 51) to resist shear loads concentrated there. The 75-ft center-span girders were lowered into position

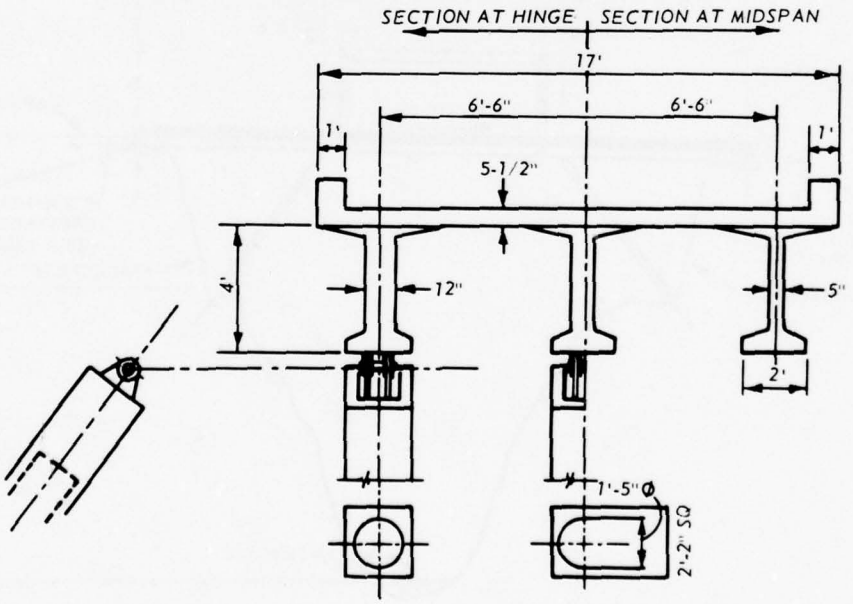


Figure 51. Bridge cross section at hinge and at midspan (from Reference 27)

to rest on side-span girders, which cantilevered out from the struts. The three precast, prestressed bulb-T girders were made continuous by mild reinforcement. The wide flange and thin edge of the girders made forming of the 5-in. cast-in-place composite deck simple.

61. Precast, prestressed girders made of lightweight concrete were also used for the Klickitat River Bridge[28] in Wahkiacus in Southern Washington. A clear span of 130 ft provides a single-lane roadway designed to carry logging trucks on an HS20 loading. Four type IV girders, modified by using a deeper web and adding a 4-ft flange at the top, were used to make a bridge 16 ft wide (Figure 52). The girders

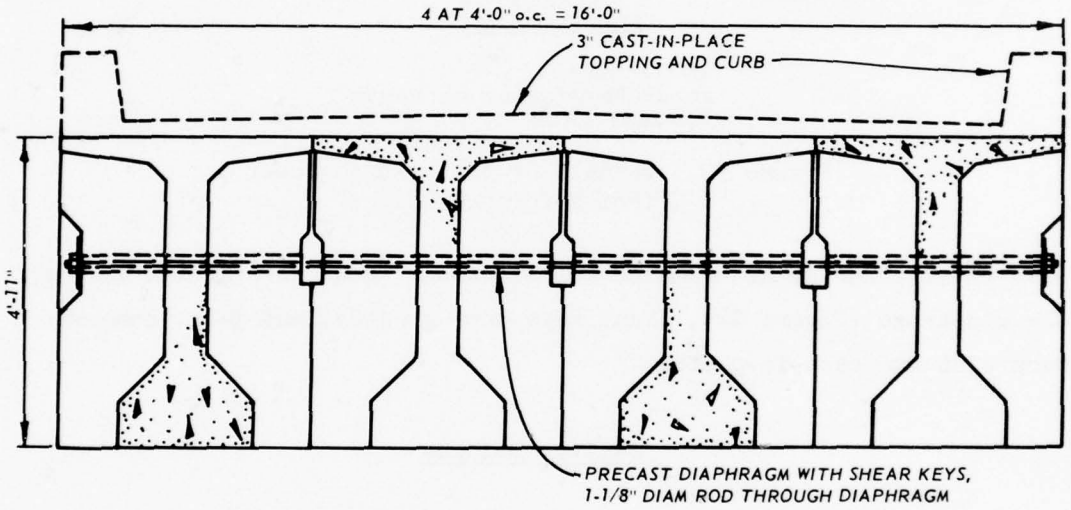


Figure 52. Cross section of the Klickitat River bridge girders (from Reference 28)

(Figure 53) were designed for four different loading conditions: (a) simple span, dead load, (b) cantilever each end 22 ft over supports while handling into position, (c) cantilever one end 22 ft, and (d) dead plus live load for the completed structure.

62. The four girders were cast in Portland, Oregon, and set in position in the casting yard as they would be placed in the bridge. Seven cross diaphragms were then formed simultaneously on all beams. The girders were transported on flatcars to within 500 ft of the bridge

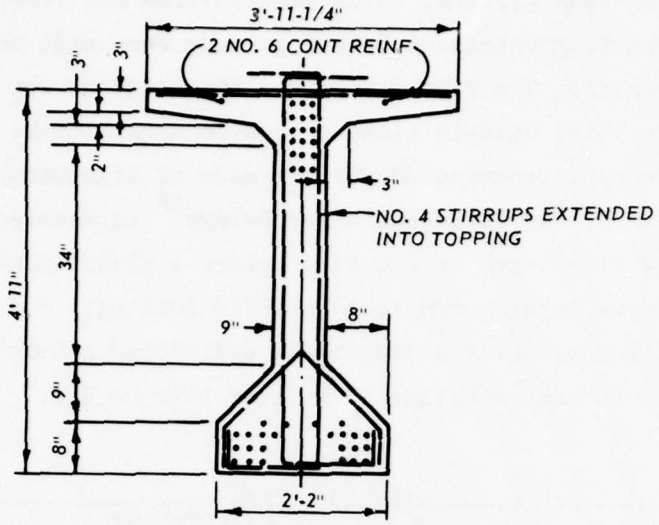


Figure 53. Details of the bridge girder (from Reference 28)

site where three cranes handled the erection. Rods were placed through the diaphragm (Figure 52), shear keys were grouted, and 3-in. concrete deck slab was cast-in-place.

Railway Bridges

63. As a result of its inherent economy, minimum maintenance, rapid construction, and excellent appearance, precast, prestressed concrete has gained wide acceptance for railroad bridges. Specifications for design, materials, and construction of prestressed concrete structures published in 1965 by the American Railway Engineering Association (AREA) initiated a new era in railroad bridge design. This publication,[29] with subsequent supplements, contains design tables for the precast, prestressed box girders for railway bridges shown in Figure 54. The design live load is Cooper E-72 (Appendix C). The designs for the 3- and 4-ft wide single-cell boxes are suitable for spans from 26 to 84 ft. The designs for the three double-cell box widths are for spans

from 26 to 50 ft. Where vertical clearance is not critical, the deeper boxes usually offer an economic advantage.

64. Prior to 1965, numerous railroad bridges were built using precast, prestressed concrete I-girders or box beams for the superstructure. The early application of prestressed box girders was to replace worn-out short-span timber trestles, but the structural efficiency of the box section has now found its place in medium-span bridges.[30] A new 78-mile Palmdale-Colton cutoff line in Southern California, opened to traffic in 1967, had some 42 railroad bridges, 37 of which were prestressed. These prestressed bridges totaled some 4400 ft in length and had span lengths ranging from 20 to as much as 86 ft.[30] Five of these structures had steel girders spanning over highways and used prestressed girders in the end spans. The prestressed girders consisted primarily of box girders (single- and double-cell) and hollow-slab girders. According to Barton,[31] precast girders, in preference to cast-in-place construction, were selected for the Colton cutoff for the following reasons:

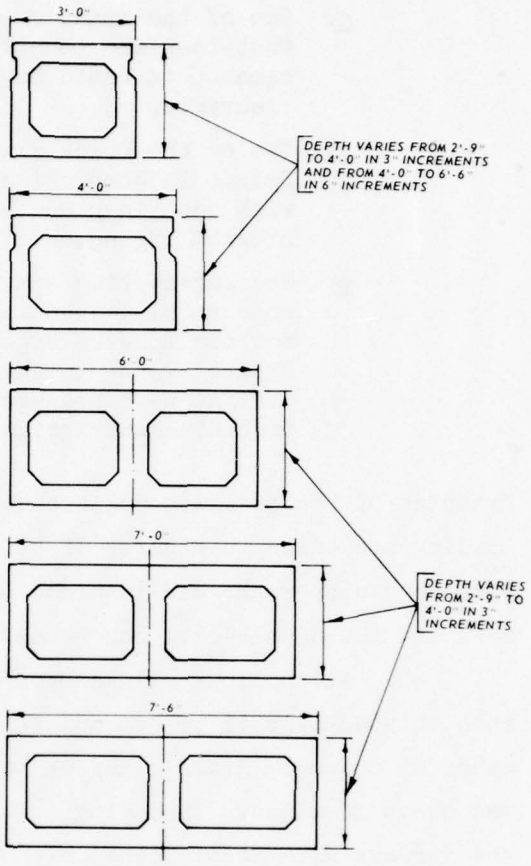


Figure 54. Standard box girders for railway bridges (from Reference 29)

a. A number of the bridges were located in the Mojave Desert where temperature conditions are extreme. Field labor was expected to be available only on a premium wage basis.

b. Bridges over public roads could be built without having the need for falsework and, in some instances, without requiring detours.

c. One of the spans crossed the tracks of another railroad. Cast-in-place construction would have been undesirable because it would have necessitated temporary impaired clearance.

d. Two of the bridges were located in flood control channels. Delays in completion of the project could have occurred with cast-in-place concrete, because falsework was prohibited during the flood season.

e. The engineering staff of the railroad preferred precast construction when the project was initiated. However, for the longest spans described herein, the 86-ft span at Rialto Avenue in the city of San Bernardino, alternative designs were prepared both for cast-in-place as well as precast construction.

Examples of the precast, prestressed girders designed for Cooper E-72 loading are shown in Figures 55-57. These girders incorporate transverse end diaphragms and intermediate diaphragms within both the single-cell and the double-cell box beams.

65. All hollow-cellular box girders were fabricated in Arizona, then shipped by rail to two unloading points, one at Palmdale and the other at Colton. After transfer to trucks, the maximum length of haul was about 30 miles. Unloading at the railroad siding and erection of the girders were accomplished with truck cranes having capacities of 35, 45, 50, 75, and 115 tons. The cranes worked singly, and in pairs, depending on the size of the girder and the access conditions at the bridge sites. All girders were seated on elastomeric bearing pads extending the full width of the girders. Keyways were grouted with an epoxy grout for shear transfer and also to provide torsional rigidity.

66. Shallow, single-cell, precast, prestressed box girders were utilized in an underpass (Figure 58) carrying Southern Pacific Railroad tracks over a local street in Fresno, California.[30] These box girders (Figure 59) were designed as simply supported to carry a Cooper E-72 loading over spans varying from 51 to 58 ft. All prestressed box girders were fabricated in Sacramento and hauled to Fresno by truck where they were erected in only 2 days. After seating on elastomeric pads designed to accommodate vertical load and temperature, keyways were grouted with an epoxy grout.

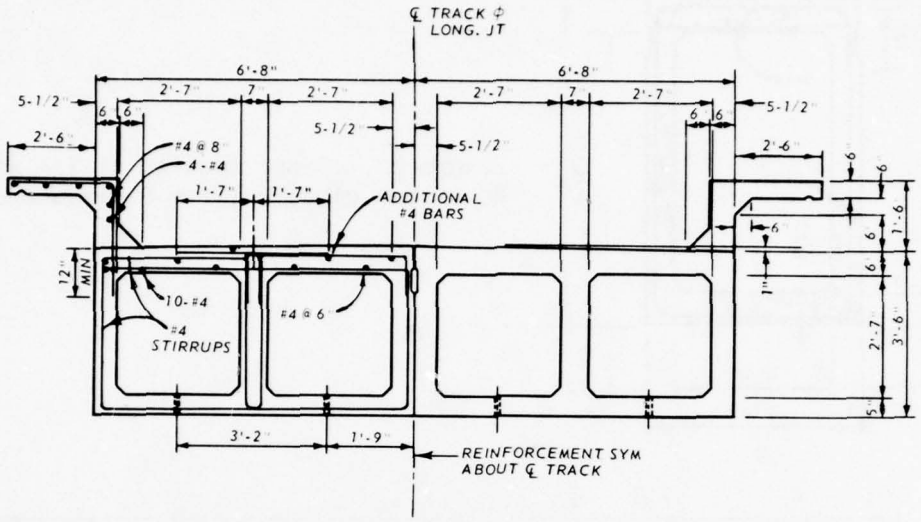


Figure 55. Cross section for 45-ft girder length (from Reference 31)

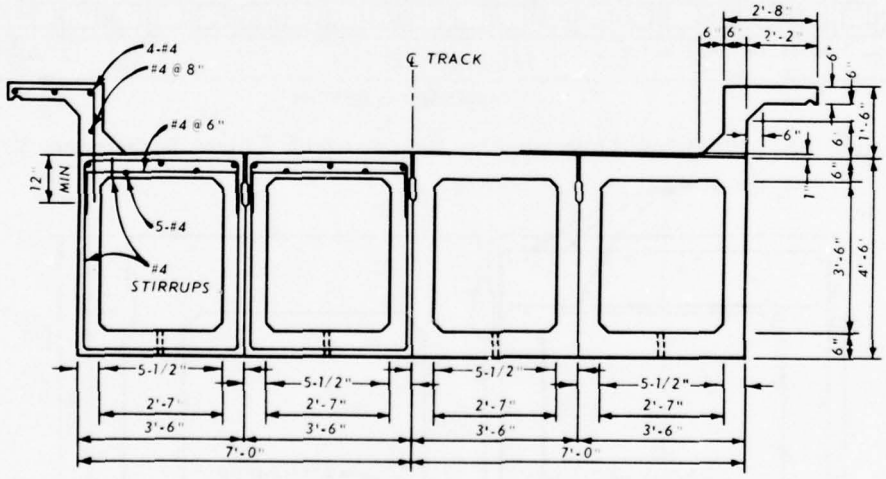


Figure 56. Cross section for 53-ft girder length (from Reference 31)

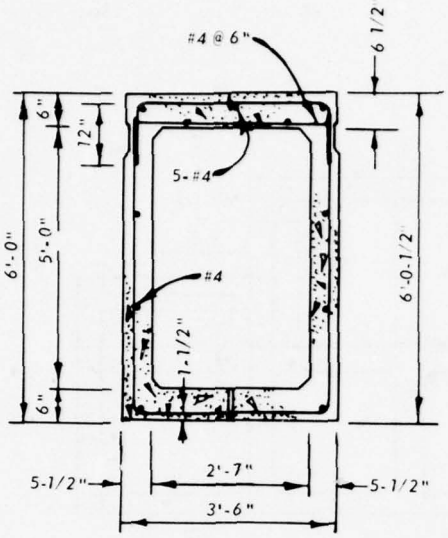


Figure 57. Cross section of 73- and 86-ft box girders (from Reference 31)

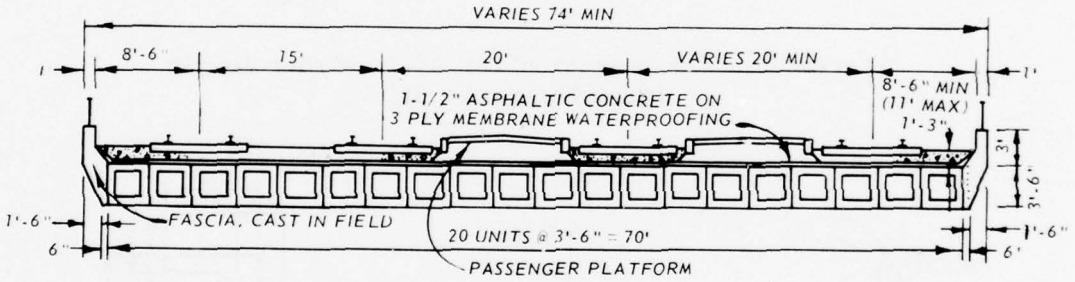


Figure 58. Section through the bridge deck (from Reference 30)

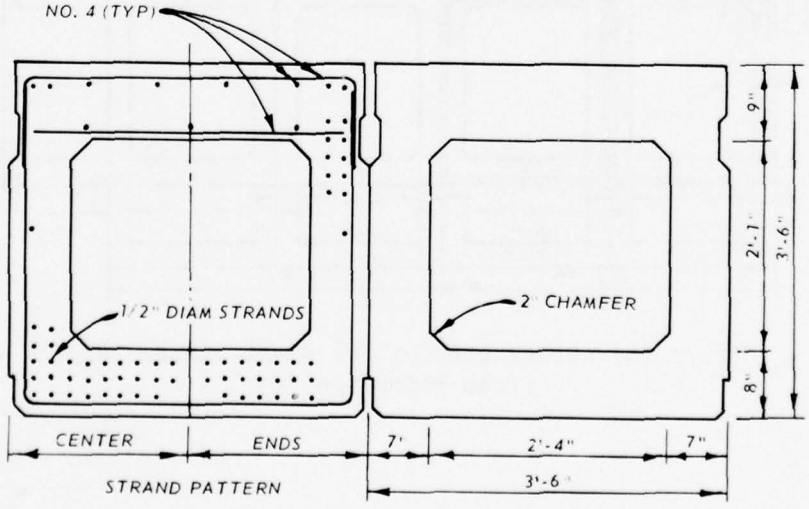


Figure 59. Hollow-cellular box girder details (from Reference 30)

67. The Seaboard Railroad[32] has installed a number of concrete trestles using the double-box design (Figure 60). The double-box

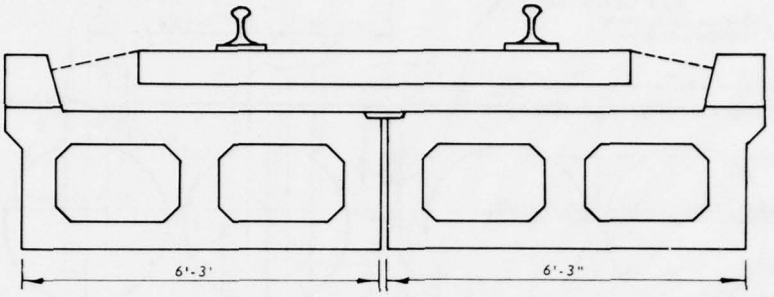


Figure 60. Seaboard Railroad double-box beams (from Reference 32)

design facilitates erection since only two beams are required to form a complete span. The joint between the two beams is at the track center line, and no shear keys or bonding is used.

68. The Cement and Concrete Association of Australia published a report[33] in 1970 on precast, prestressed concrete bridge girders for replacement of existing timber railway bridges. Twenty existing bridge types, nine of which are in the United States, are described. In addition, 14 proposed bridge sections were considered. Based on this review, the "Standard A" type girder (Figure 61) is recommended as the best design to use for replacement of existing timber trestles. Each unit weighs 28 tons and is designed for spans up to 39 ft with an E-50 loading. The design depth of this girder was selected to enable construction of the substructure, pile caps, and/or head stacks under the existing bridge, yet still maintain the same track alignment. The girders were also designed to simplify the production and speed of assembly on the job.

69. Renewal of the Southern Pacific Company's Dumbarton Bridge[34] across San Francisco Bay is an example of using prestressed concrete to replace portions of an existing wooden trestle. About a half mile of the 1-1/2-mile bridge was replaced with prestressed concrete spans and cylinder piles. Maintaining alignment and rapid completion of construction without greatly delaying or interfering with rail traffic were

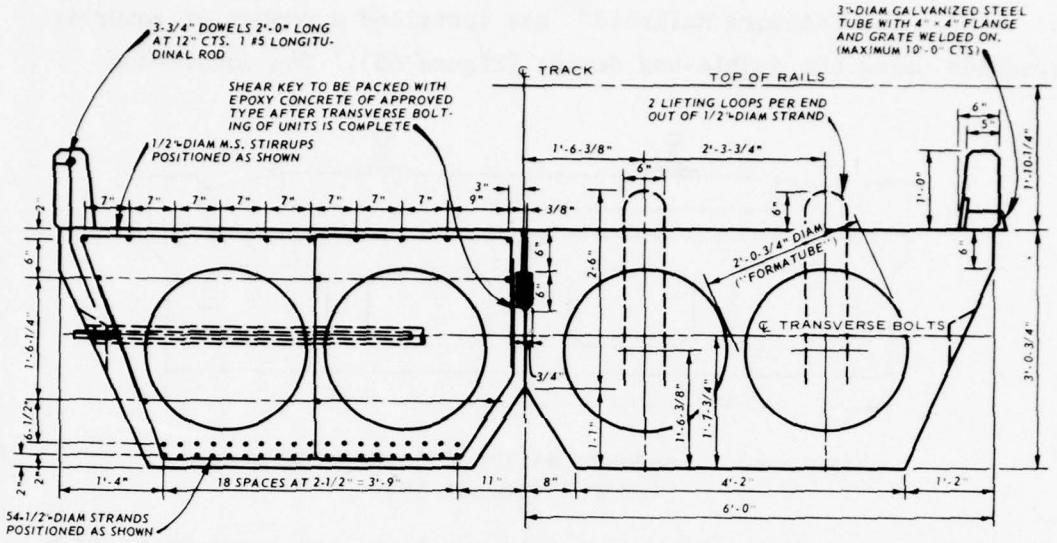


Figure 61. Design of the typical precast concrete box girder section (from Reference 33)

important considerations on this project. The timber trestle replaced was 16 ft wide and supported on pile bents 15 ft on centers. The bents were capped with 14- by 14-in. timbers that supported 12 longitudinal stringers spaced over the 16-ft width.

70. Based on results of an investigation of soil subsurface conditions, a two-pile bent--one piling driven to each side of the existing structure--capped with a structural element was selected. Preliminary designs and cost estimates, including future maintenance costs, were analyzed for several types of piling, caps, superstructures, and span lengths. On this basis, prestressed concrete spans 45 ft long and supported on bents of prestressed concrete cylindrical piles were selected.

71. Precast, prestressed concrete piles with a diameter of 48 in. and 5-in. walls were chosen for the final design. Pile caps were "binocular-shaped" in plan, 6 ft wide at the ends to obtain full bearing on the piling, and 3 ft 6 in. wide in the center. The caps, 5 ft 3 in. deep and 31 ft long, weighed 45 tons. The center of each cap had a 3-ft by 1-ft 6-in. blockout over the center of each pile through which the pile connection was made. To eliminate pile interference, the new bents were located midway between the existing bents. The components

were precast at a nearby contractor's plant, loaded directly on barges, and brought to the jobsite as work progressed.

72. The deck units were constructed in two halves from hollow, double-box units, 6 ft 8-2/5 in. by 3 ft 6 in. by 44 ft 9-3/5 in. long. Web thicknesses ranged from 5 to 8-1/2 in. The units were designed for Cooper E-72 loading in accordance with AREA.[29] The deck units were precast in Arizona and transported to the bridge site on flatcars. Normal rail traffic was diverted during working hours, and a trainload of deck units was hauled onto the bridge. The existing rails, ties, and ballast were removed; then the timber piling was cut off below the new substructure. A floating crane lifted out 45-ft sections of the timber deck. The concrete caps were then swept clean, bearing pads placed, and dowels set in place. The floating crane then moved the deck units into final position, placing them over the dowels. When the second unit was placed tightly against the first, an epoxy resin was poured in the keyway to bond the deck units together. Four panels (180 ft of bridge) were installed in this manner each day.

73. Prefabricated track panels were loaded onto a flatcar, moved to the construction site, then placed on temporary blocking on the new bridge. After properly aligning and bolting each track panel to the previously installed tracks, ballast was unloaded and the temporary blocking removed. The new and original tracks were joined at the end of each workday, and rail service over the entire bridge was resumed.

PART IV: PRECAST CONCRETE PILING

74. Essentially a pile is an elongated or columnar body installed in the ground for the purpose of transmitting forces to the ground. This is accomplished through both the frictional forces on the surface of their shafts and from direct bearing on their bases or points. Generally, one of these components predominates, and the pile is typed as an "end-bearing" or as a "friction" pile.[35]

75. Typical precast reinforced concrete piles commonly used for bridge trestles, and occasionally used for buildings, are shown in Figure 62.[36] When properly constructed and driven, precast concrete piles provide a permanent type of construction, even in salt water, without the need of maintenance.

76. Since piles are subjected to tensile stresses during transportation, driving, and under certain service conditions, the desirability of prestressing is evident. Therefore, prestressed concrete piles are being extensively used throughout the world in both marine structures and foundations. Most prestressed piles are precast in casting yards where modern production methods and quality control generally assure high-quality products. Prestressed concrete piles have been constructed in the form of cylindrical piles ranging from 10 in. up to 13 ft in diameter, as used on the Oosterschelde Bridge in the Netherlands, and up to 260 ft long, as employed in offshore platforms in the Gulf of Maracaibo, Venezuela.[6]


77. According to Gerwick,[6] prestressed concrete piles offer these advantages:

a. Durability.
b. Crack-free during handling and driving.
c. High load-carrying capacity.
d. High moment capacity.
e. Excellent combined load-moment capacity.
f. Ability to take uplift (tension).
g. Ease of handling, transporting, and driving.
h. Economy.

i. Ability to take hard driving and to penetrate hard strata.

j. High column strength.

k. Readily spliced and connected.


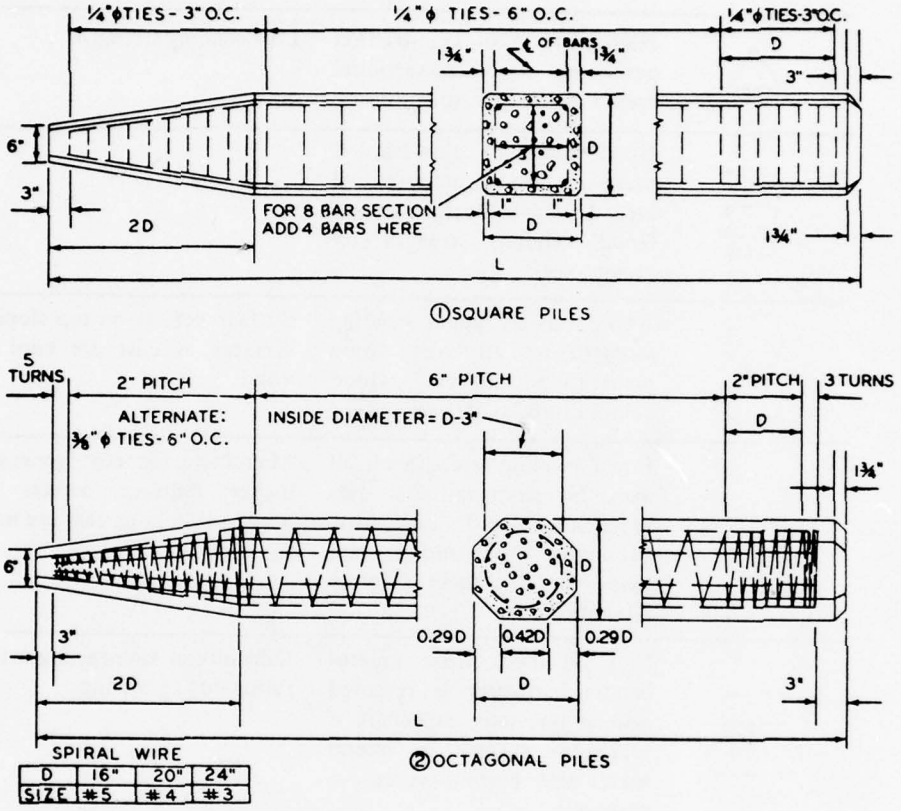


D	16"	20"	24"
SIZE	#5	#4	#3

Figure 62. Typical designs for precast concrete piles (from Reference 36)

There are also several disadvantages to the usage of prestressed concrete piles. A very heavy hammer is required for driving to minimize the intensity of the reflected stress wave and thus prevent pile damage. A special type of driving head is also necessary. The steel tendons used are very sensitive to corrosion due to the small wire size and must be completely covered with grout or concrete. In the design phase, piles resisting both moment and direct load require careful analysis. Piles having an unsupported length must be analyzed as a column to prevent failure through buckling. Typical properties and details of prestressed concrete piles are given in Appendix H.

78. Precast, prestressed concrete piles are manufactured in a variety of shapes[6] (Figure 63); however, most are solid square or

Shape	Advantages	Disadvantages
	Highest ratio of skin-friction perimeter to cross-sectional area. Low manufacturing cost.	Low bending strength.
	Good ratio of skin-friction perimeter to cross-sectional area. Low manufacturing cost. Good bending strength on major axes.	
	Approximately equal bending strength on all axes. Good penetrating ability. Good column stability (l/r ratio)	Surface defects on top sloping surfaces as cast are hard to avoid.
	Equal bending strength on all axes. No sharp corners—aids appearance and durability. Minimum wave and current loads. Good column stability (l/r ratio).	Manufacturing cost generally higher. Surface defects on upper surfaces as cast are hard to avoid.
	May be used where greater bending strength is required around one axis, especially if minimum surface to lateral wave and current forces is desired.	Difficulty in maintaining orientation during driving.
	High bending moment about both axes in relation to cross-sectional area.	High cost of manufacture. Difficulty of orientation.
	High bending moment about axis x - x in relation to cross-sectional area.	High cost of manufacture. Difficulty of orientation.

Note: Hollow cores may be employed with most shapes. Varying cross-sections may be employed along the length of the pile—such as enlarged tips for bearing, enlarged upper sections for moment, or a change to a circular upper section in order to eliminate corners, etc. These changed sections may either be cast monolithically or spliced on at any stage. Change in cross-section should employ a transition section at least twice the length of the radial change.

Figure 63. Cross-sectional shapes for prestressed concrete piles (courtesy of John Wiley and Sons, Inc.[6])

octagonal piles (Figure 64). When this type of pile exceeds approximately 2 by 2 ft, economics dictate that consideration be given to the use of hollow-core circular or octagonal piles. This is particularly true in the case of jetty work where the unsupported length of pile is very great as compared with its cross-sectional area.[37] An advantage of hollow prestressed concrete piles is the combination of light weight for easy handling with maximum economy of material and virtual freedom from cracking. The disadvantages of this type of pile are the requirements for a special type of driving head, a very heavy hammer, and some form of venting near the top to avoid damage from the "hydraulic ram" effect inside the hollow core.

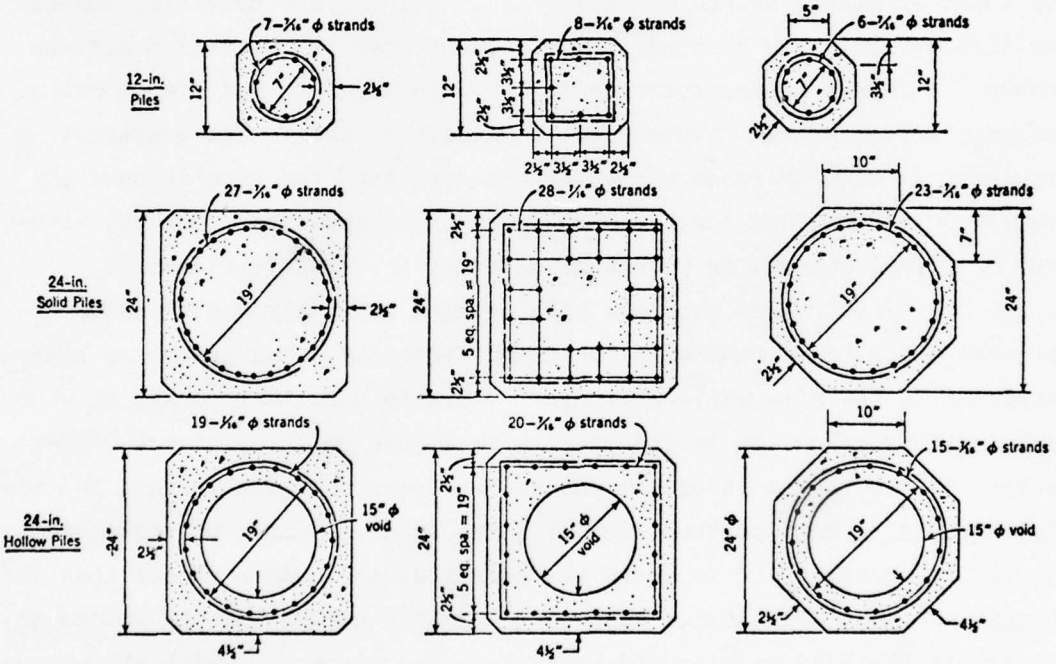


Figure 64. Typical pretensioned pile sections (AASHO-PCI Standard) (courtesy of John Wiley and Sons, Inc.[39])

79. Precast, posttensioned piles are normally competitive with pretensioned piles only when they can be made on the site or are over 40 ft long because of the end anchorage cost associated with them.[38] Posttensioned hollow tube piles with 48- to 72-in. diameters and 5-in. walls have been used extensively, particularly for deep foundations.

These piles are cast in sections with cored holes and aligned horizontally; then, the longitudinal tendons are threaded through, and the whole is posttensioned together. Driving is accomplished in the same manner as standard piles.

80. Experience seems to indicate that a prestress of about 700 psi in the piles will ensure safety during handling and driving under normal conditions.[39] However, prestressed concrete piles must be handled and stored with care to prevent damage to each pile. Piles should be lifted and blocked for storage at predesignated points such that bending stresses will be within acceptable limits. Where the sides and bottom of the pile are accessible, lifting is usually accomplished by tongs or slings around the pile. When this is not possible, inserts or lifting loops may be used. Inserts must have the specified minimum cover.[40] Impact is another consideration in handling and transporting and may impose static stresses of 50 percent or more. The construction engineer is usually responsible for ensuring that the pile is manufactured, delivered, and installed in its design condition, that is, without cracking, damage, or permanent deformation from overstress.

81. Prestressed concrete pile driving generally should be accomplished using heavy rams with low impact velocity, thus producing lower stresses in the pile while driving.[40] This is especially critical when driving long piles (50 ft and over) with little soil resistance. The weight of the hammer should be one to two times the pile weight, and the fall should be kept on the order of 3 ft. When a hammer proves inadequate, it is better to increase the weight of the hammer rather than the height of fall. The hammer must be controlled during fall by guides so as to hit the pile axially and squarely. The manner in which the operator releases the drop hammer and/or restrains it during its fall has an important effect on the actual velocity at impact (and thus on the effective energy delivered).

82. It has been found that pile hammers with an energy within the limits shown below are usually adequate for driving in the moderate to hard driving range.[39] These values are listed for reference rather than for absolute guidance:

Pile Size, in.	Ft-Lb of Energy
10	8,000-15,000
12	15,000-19,000
14	15,000-24,000
16-18	24,000-32,000
20-21	24,000-36,000
24 and over	32,000-38,000

83. In some cases, cracking or spalling has occurred during driving of prestressed concrete piles. This damage or failure can be classified into four types:[40]

a. Spalling of concrete at the head of pile due to a high compressive stress. This may be due to insufficient cushioning material between the pile driver cap and the pile, improper axial alignment of the hammer and pile, irregular cutoff of reinforcing in pile end, lack of adequate spiral reinforcing at the pile head or point, concrete fatigue due to a large number of high stress blows, or from not chamfering the edges and corners of the pile.

b. Spalling of concrete at the point of the pile due to hard driving resistance. Compressive stress when driving on bare rock can theoretically be twice the magnitude of that produced at the head of pile due to hammer impact.

c. Transverse cracking or breaking of the pile due to tensile stress reflected from the tip or head of the pile. This cracking may occur in the upper end, midlength, or lower end of the pile. As previously mentioned, use of a heavier hammer with lower velocity should help this situation.

d. Spiral or transverse cracking due to a combination of torsion and reflected tensile stress. This may be caused by the helmet or pile cap fitting too tightly on the pile and preventing normal rotation, or by excessive restraint of the pile in the leads and rotation of the leads.

84. A number of methods are in current use for lengthening of prestressed concrete piles (Figure 65). The simplest is the epoxy-doweled splice. This method usually has four dowels of deformed reinforcing bar precast into the top section. These dowels are extended 20 to 30 diameters in length into matching corrugated metal tubes precast in the head of the bottom section. Epoxy is poured into the holes and allowed to set (ranges from 30 min to 12 hr, depending on epoxy type

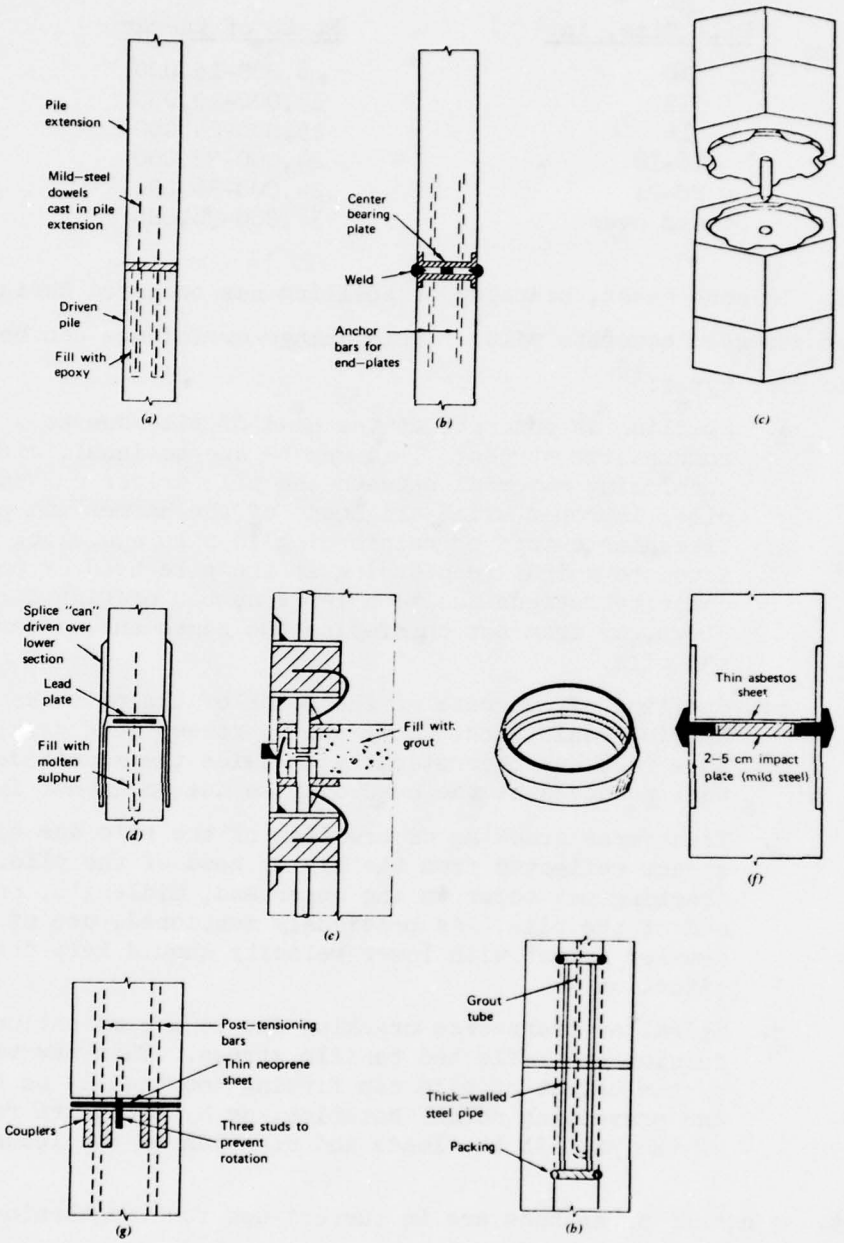


Figure 65. Typical splice details for prestressed concrete piles: (a) epoxy-doweled splice--United States, Norway; (b) welded splice; (c) mechanical splice (Swedish patent); (d) steel splice sleeve or "can"; (e) welded splice--Japanese patent; (f) "Brunsplice" joint--United States patent; (g) posttensioned splice--Great Britain; (h) steel pipe splice for hollow piles--Norway (courtesy of John Wiley and Sons, Inc.[6])

and temperature). The Japanese have adopted a cast steel end piece that facilitates anchoring of the tendons during manufacture and permits rapid jointing by welding. A Swedish mechanical splice engages and locks mechanically, as by a screwed joint or wedge effect. There are friction splices available in which a sleeve is driven over a male casting, locking itself by wedging. Other splices used are a posttensioned splice from Great Britian and a steel pipe splice for hollow piles from Norway. It is important that with any splice, the sections be essentially center-bearing, and the concrete immediately above and below the splice be contained with heavy spirals of steel.[6]

85. The most versatile and widely used connection of precast concrete pile to cast-in-place cap is similar to that used for many years in conventionally reinforced piles (Figure 66). The conventional

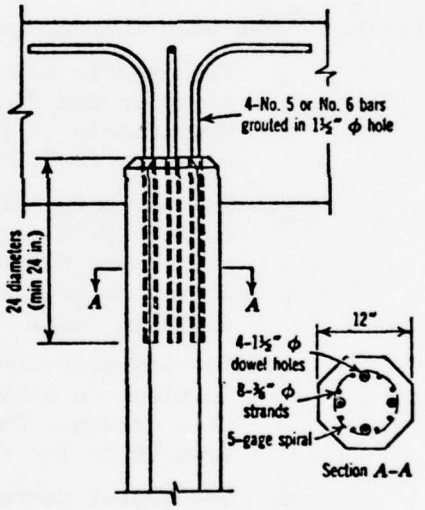


Figure 66. Connection of precast pile to cast-in-place cap (courtesy of John Wiley and Sons, Inc.[39])

reinforcing bars can be precast in the head of the pile, requiring a special driving head, or grouted into either precast holes or holes drilled after driving.

86. Service functions to which prestressed concrete piling installations may best be adopted are:[41]

a. Bearing piles--service stresses are compressive but the piles are subject to recoil during driving.

b. Sheet piles--service stresses are generally flexural.

Tensile stresses result from rebound during the driving process.

c. Combined bearing and sheet piles--driving stresses similar to sheet piles. Service loads may offset part or all of the flexural tensile stress, depending on the relative magnitude of vertical and lateral loads.

d. Outstanding vertical piles of pier or jetty bents--tensile stresses during the driving process, or combined tensile stress under the action of vertical and lateral loads. There is also the possibility of uplift forces.

e. Anchor piles--tensile stress waves during the driving process and maximum tension under a certain combination of service and environmental loads.

f. Fender piles--depending upon lengths, driving conditions, and ship berthing impact, either maximum service flexural tensile stress or maximum tensile stress due to rebound in the driving process may govern.

87. There are many construction sites where prestressed square piles have been used and several of these are:

a. The Pacific Gas and Electric Company's new steam-power plant in San Francisco uses 18-in.-square piles approximately 90 ft long, driven through fill and soft clays to rock.

b. The 43-story Wells-Fargo Building in San Francisco required 18-in.-square piles up to 138 ft long. These piles were tipped with a 3-ft-long steel "H" stub and driven in predrilled holes through sandy clay, sand, and clays to rock.

c. The New York City Bridge has 24-in.-square piles, jetted in place to within a few feet of final tip elevation, then driven. These piles were cast in lengths varying from 70 to 100 ft based on test soil borings.

d. The Bonnet Carre Highway Bridge near New Orleans, Louisiana, used 20-in.-square piles.

88. Octagonal prestressed concrete piles are also widely used, and the following are examples of this construction:

a. The National Art Gallery and Cultural Center of Melbourne, Australia, employs 18-in.-octagonal piles up to 100 ft long and driven through peat and clay to shale.

b. The Ala Moana Building, a 25-story tower in Honolulu, is supported by 18-in.-octagonal end-bearing piles approximately 170 ft long.

c. The Ilikai Building in Honolulu is supported on 16-1/2-in.-octagonal piles approximately 110 ft long. Piles had to be driven through an upper hard coral stratum, sometimes requiring several thousand blows before breaking through.

d. Louisville and Nashville Railroad, Louisville, Kentucky, used 24-in.-octagonal piles.

89. Several examples of the usage of prestressed concrete cylinder piles are:

a. The Oosterschelde Bridge (the Netherlands) used three piles per pier, cast 14 ft in diameter with 14-in.-thick walls and 20 ft in length, then joined together for the desired length.

b. The Dumbarton Bridge Renewal (Southern Pacific Company), San Francisco Bay, used two piles per bent, 48-in. outside diameter with 5-in. walls. The friction piles were 120 ft long, and the end-bearing piles were 60 to 74 ft long with no splices.

c. Construction of Interstate Route 87 in New York and Connecticut used 36-in. outside diameter with 5-in. walls. Splices were made using a combination of dowels and a 4-ft splice boot centered on the joint, filled with a quick-setting plasticized cement (Florok) that solidifies in a few minutes and reaches a strength of 5000 to 6000 psi in about 10 min. Driving could be resumed after 45 min.

d. A wharf project for the Port of Baton Rouge, Louisiana, used cylinder piles. The pile top was fixed to the pile cap girder by setting the heavy cage of mild reinforcing steel in the pile head and securing by a concrete plug.

90. Prestressed concrete sheet piles are being used as bulkhead walls for shoreline construction because of their durability, rigidity, and excellent appearance. One installation is a sheet pile wall in San Francisco Bay, and another typical construction is the sheet pile bulkhead walls at Davis Island, Tampa, Florida, used to protect the shoreline from erosion.

91. Prestressed concrete sheet piles are also used for cutoff walls, groins, wave-baffles, and retaining soil during excavation for foundations. In some recent building foundations, the prestressed concrete sheet piles were installed by a combination of predrilling and

driving. After excavation, the joints were welded and filled with non-shrink grout, and the sheet pile wall served as the permanent foundation wall of the building. When used for waterfront bulkheads and cutoff walls, the joints must be sealed, usually by filling with grout. A number of interlocks have been developed for prestressed sheet piles to give both structural strength and a degree of sand-and-water tightness. The ordinary tongue-and-groove interlock transmits shear but not tension. Steel sheet piles can be cut in half and embedded in the prestressed sheet piles, providing an interlock as tight and having same tensile strength as the steel. A polyethylene interlock has been developed that can be embedded in the concrete that acts both as an interlock capable of some tension and as a water stop.[6] Figure 67 shows the typical cross sections and details of prestressed concrete sheet piles and Figure 68, a plastic interlock detail. Driving concrete sheet piles is assisted frequently by jetting, and accurate setting is essential.

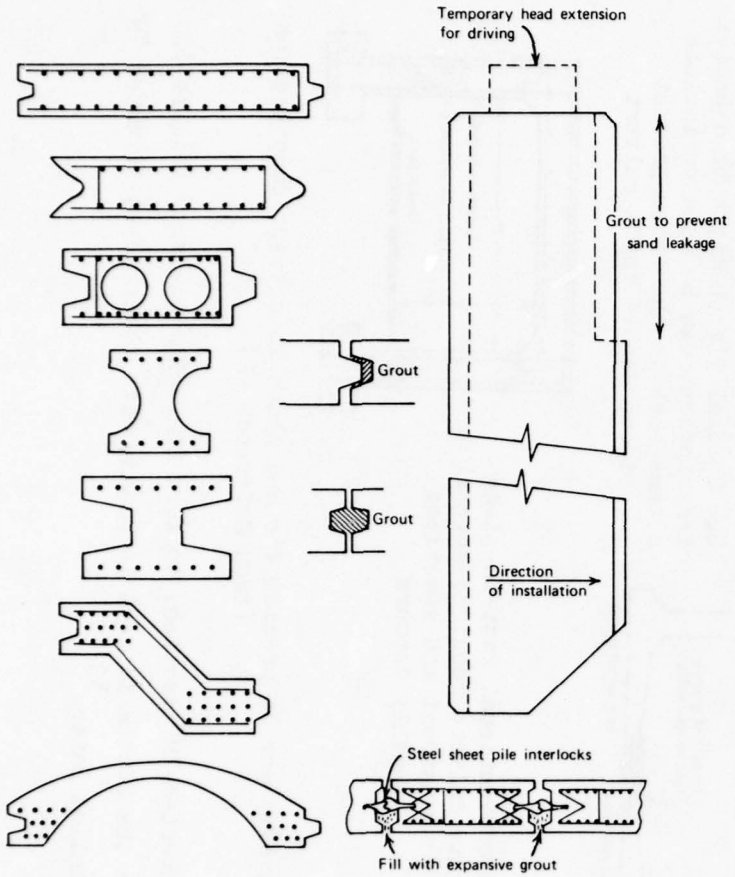


Figure 67. Typical cross sections and details of prestressed concrete sheet pile (courtesy of John Wiley and Sons, Inc.[6])

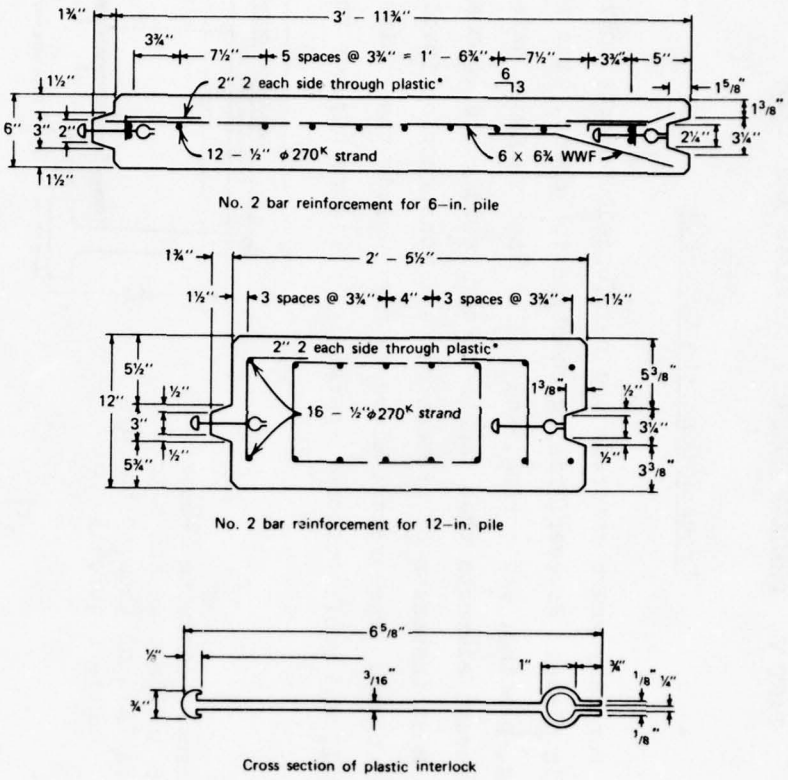



Figure 68. Plastic interlock for prestressed sheet piles (courtesy of John Wiley and Sons, Inc.[6])

PART V: PRECAST CONCRETE CULVERTS AND PIPES


Precast Concrete Culverts

92. For many years concrete and reinforced concrete culverts have been cast in place. However, rising construction costs, time required for forming, placing, and curing, and public inconvenience have created a need for precast elements that can be placed rapidly and economically.


93. Most instances of precast culvert construction involve rectangular boxes. The precast elements may include the entire box, the bottom, wall, and roof sections separately[42] (Figure 69), or the bottom

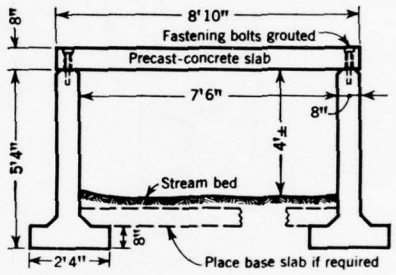

a. Precast concrete T-beams are turned upside down and a precast slab is laid on them to build a culvert quickly



b. Special T's (L might be a better description) can be used to include a base slab in the three precast pieces needed for a culvert

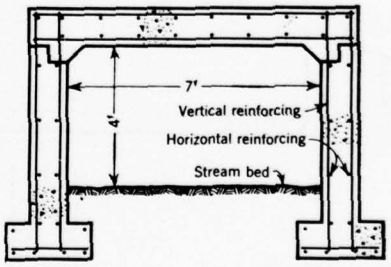

c. A conventional cast-in-place concrete culvert requires several days to construct and sometimes lengthly detours

Figure 69. Use of precast T's and slabs in culvert construction (from Reference 42)

end, an inverted "U" section, to form the walls and roof (Figure 70). Very often the bottom is cast in place, with the precast inverted "U" being installed later.[43]

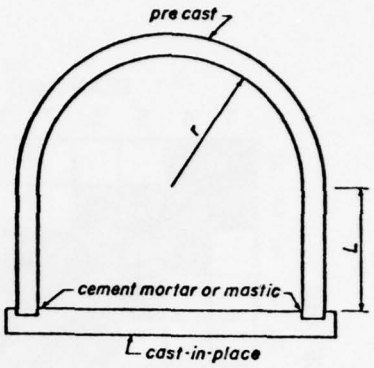


Figure 70. Precast horseshoe culvert (courtesy of Portland Cement Association[43])

94. Curved precast concrete members have been used to form two- or three-hinged arch culverts, as shown in Figure 71.

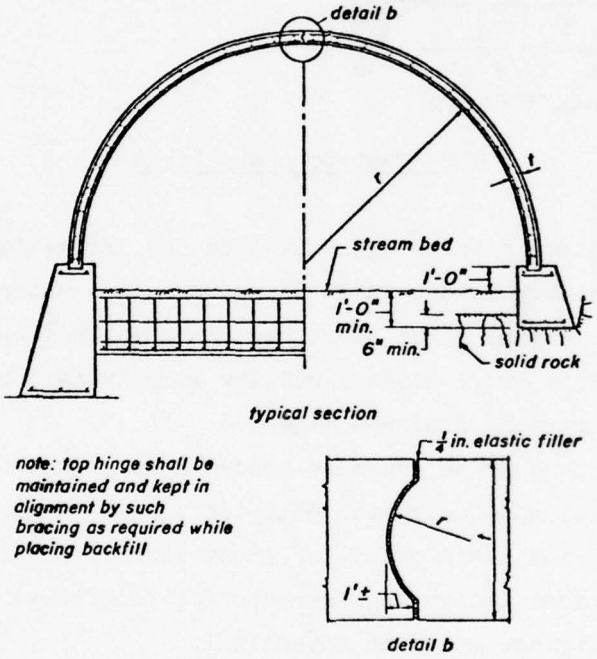


Figure 71. Precast circular arch culvert (courtesy of Portland Cement Association[43])

95. Standard precast concrete box culverts that are plant produced, manufactured under strict quality control procedures, and installed by rapid cut and fill procedures have been developed.[44,45] Figure 72 presents the recommended set of standard sizes produced in the United States and Canada. The design of standard box culverts has been verified by tests to meet the AASHO standards.

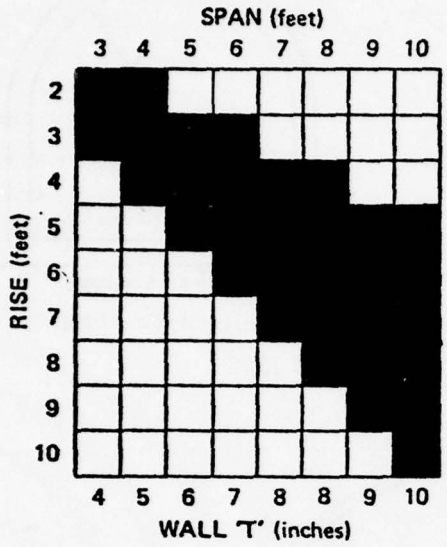


Figure 72. Recommended box culvert sizes and wall thickness (from Reference 44)

Precast Concrete Pipes

96. Concrete pipe is commonly used for irrigation, drain tile, storm sewer, sanitary sewer, culvert, and pressure water pipe. In addition, it has found many other uses, such as bomb shelters, cattle passes, septic tanks, silos, well casing, utility line trunks, bridge pier columns, and half-round drainage liners.

97. Standard pipes are mass produced in cylindrical, arch, flat base, and vertical and horizontal elliptic shapes (Figure 73). They may be nonreinforced, reinforced, or prestressed depending upon the intended use. Typical design requirements for reinforced concrete low-head pressure pipe are given in Appendix I.

98. Manufacturing processes[46] include cast and vibrated pipe, machine-made packerhead pipe, machine-made tamped pipe, machine-made centrifuged pipe, and combinations and innovations of these processes.

99. While special sizes and shapes of concrete pipe can be produced to meet nearly any need, Table 1[47] lists the common pipes that are available from most concrete pipe manufacturers as stock items. In addition, accessory items, such as bends, wyes, tees, connections, and manholes, are available in all common sizes.

100. A variety of standard joints are available to meet the requirements of the installation. They include the bell and spigot, tongue and groove, modified tongue and groove, rubber ring gasket, concrete or steel collar, and cement mortar joint (Figure 74). Joint sealing materials, such as bitumen, rubber, mastic, mortar, and epoxy, are commonly used on joints.

101. Special requirements can be met by the manufacture of concrete pipe in other than common sizes. For example, the use of reinforced circular, arch, or elliptical pipe in diameters to 120 in. is not unusual. Nonreinforced circular pipe, 84 in. in diameter, has been used successfully as highway storm drain by the California Division of Highways. The Bureau of Reclamation has used 156-in.-diam reinforced prestressed circular pipe for the Navajo Indian Irrigation Project in New Mexico. Probably the largest precast concrete pipe used to date in the United States has been the 17-ft-diam circular sections that are part of a storm drain in Troy, Michigan.

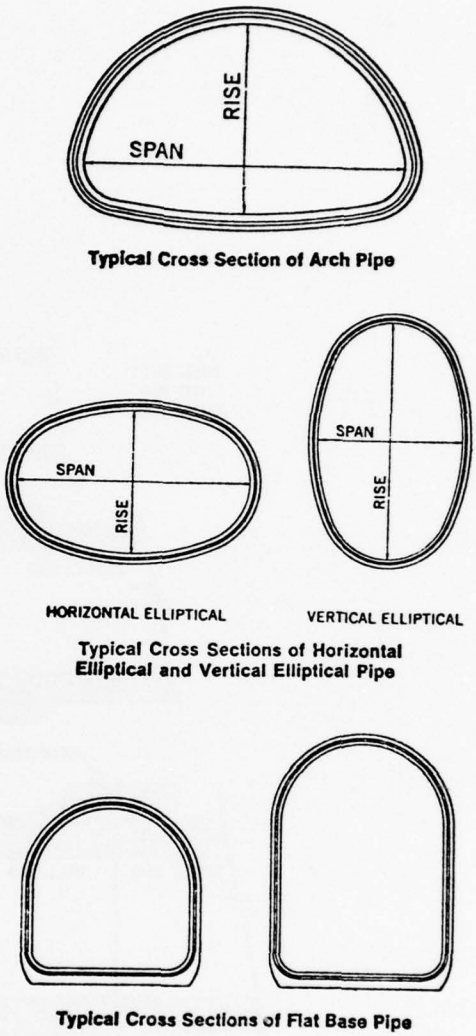


Figure 73. Typical cross sections of concrete (from Reference 47)

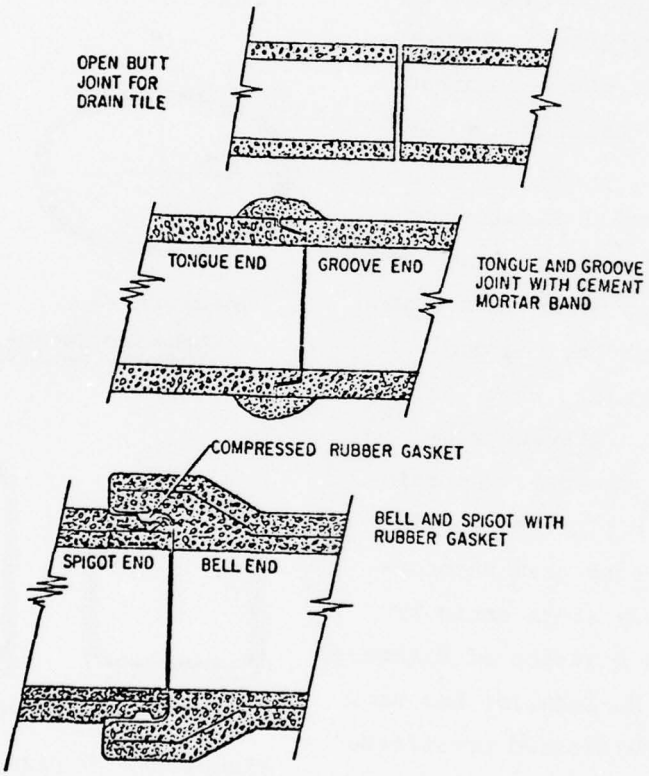


Figure 74. Typical concrete pipe joints (courtesy of McGraw-Hill Book Company)

PART VI: PRECAST CONCRETE FLOATING STRUCTURES

102. Precast concrete is well adapted for floating structures of all types. The first recorded use of reinforced concrete was the concrete boat that Lambot built about 1858 in France.[48] Reinforced concrete ships were constructed in substantial numbers in World Wars I and II, and a considerable number of concrete floating dry docks and moored floating docks are in service throughout the world.[49]

103. The more recent advent of prestressing makes possible more efficient structural designs since prestressing offers superior performance along with substantial economy.

104. Almost 20 large pretensioned concrete barges have been constructed in the Philippines and have been in practically continuous ocean service since 1964.[50] These barges are generally of 2000-ton capacity and carry both dry cargo and petroleum products.

105. Recently a number of barges and dredge hulls have been built of prestressed concrete in New Zealand for service in the South Pacific.

106. Prestressed concrete barges for the transport of cryogenic materials have been studied and proposed in England.[51] The favorable behavior of prestressed concrete at very low temperatures promises added security for this type of usage.

107. Structural lightweight concrete was used with excellent results and durability in some of the ships constructed during World Wars I and II; it appears that prestressed lightweight concrete may be an ideal material for precast concrete floating structures.[48]

108. Precast concrete pier components capable of handling live loads of 1000 lb/sq ft, high-concentrated wheel loads, and a gantry-type container crane are seen as a means of providing expedient military ports.[52] Conceptually this module is 35 ft wide, 97 ft 6 in. long, and 12 ft deep with a dead load of 970 to 980 short tons. Modules would be precast ashore, loaded on a Seabee barge ship, transported to the TO, unloaded, and floated into place. Through use of four caissons and Delong jacks, the pier modules would be jacked to the required elevation. After 24-in.-diam precast concrete piles are driven through

precast holes and epoxied to the girders, the caissons and jacks would be withdrawn to be used on another module. In addition to being used as pier components, modules could also be used as a causeway with a roadway width of 35 ft (Figure 75). Similarly, a dedicated elevating system could be used because with the elevating legs for support, the need for piling is eliminated. Such a structure could be easily lowered or raised as necessary during the course of normal ship off-loading. Additionally, it would have the capability of being easily relocated.

109. Large floating platforms consisting of concrete components mass produced ashore, constructed in modules, launched, towed to the site, and assembled are envisioned as a means for satisfying forward areas surveillance and basing requirements of the Navy in the mid 1980's.[53] Platform concepts consisting of single-story or multistory decks were classified according to their buoyant elements into three basic types: (a) elevated platforms (Figure 76) supported on vertical, hollow buoyant legs; (b) barge platforms (Figure 77) supported on barge-type hulls; and (c) semisubmersible platforms (Figure 78) supported on vertical legs atop submerged horizontal pontoons. The various configurations were investigated using concrete as the construction material; based on a synthesis of concepts, concrete production, construction methodology, and cost, it was concluded that concrete is a feasible and practical construction material for large ocean platforms.

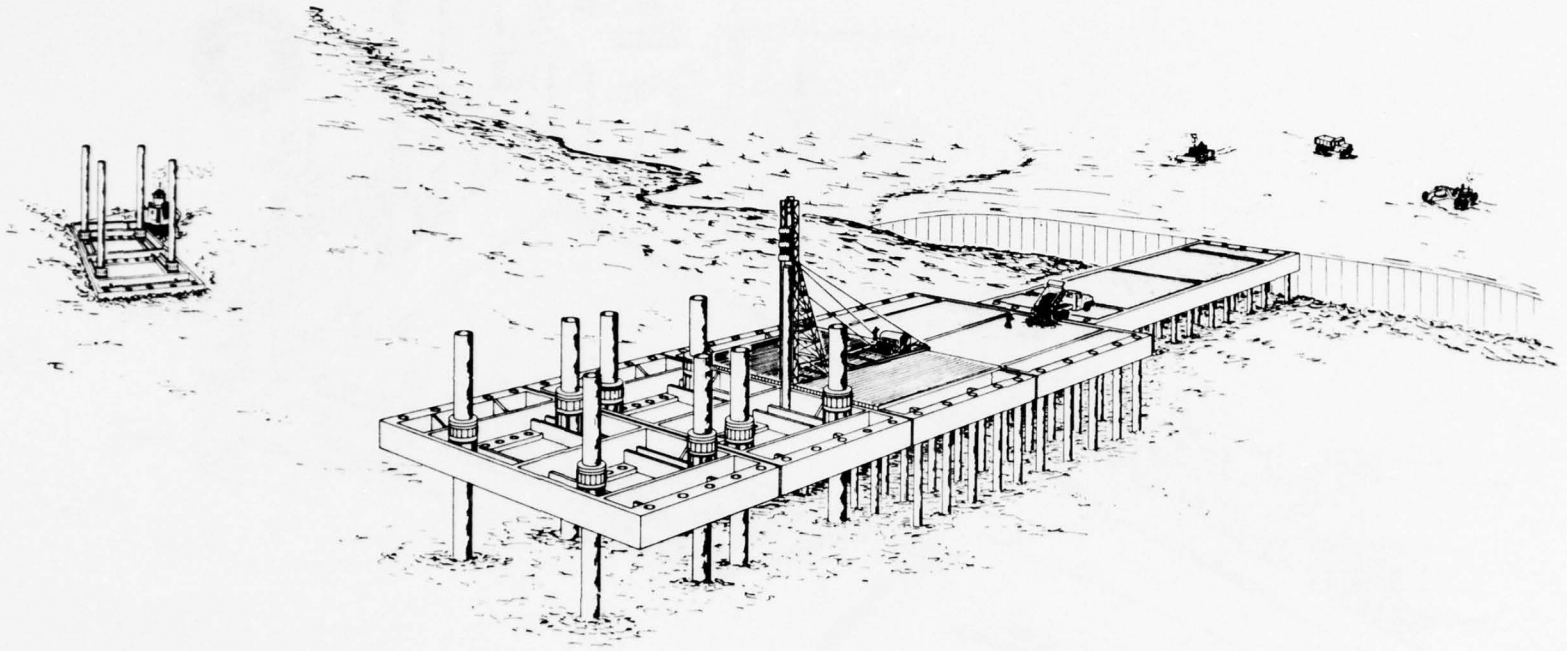


Figure 75. Artist's concept of concrete pier module installation (from Reference 52)

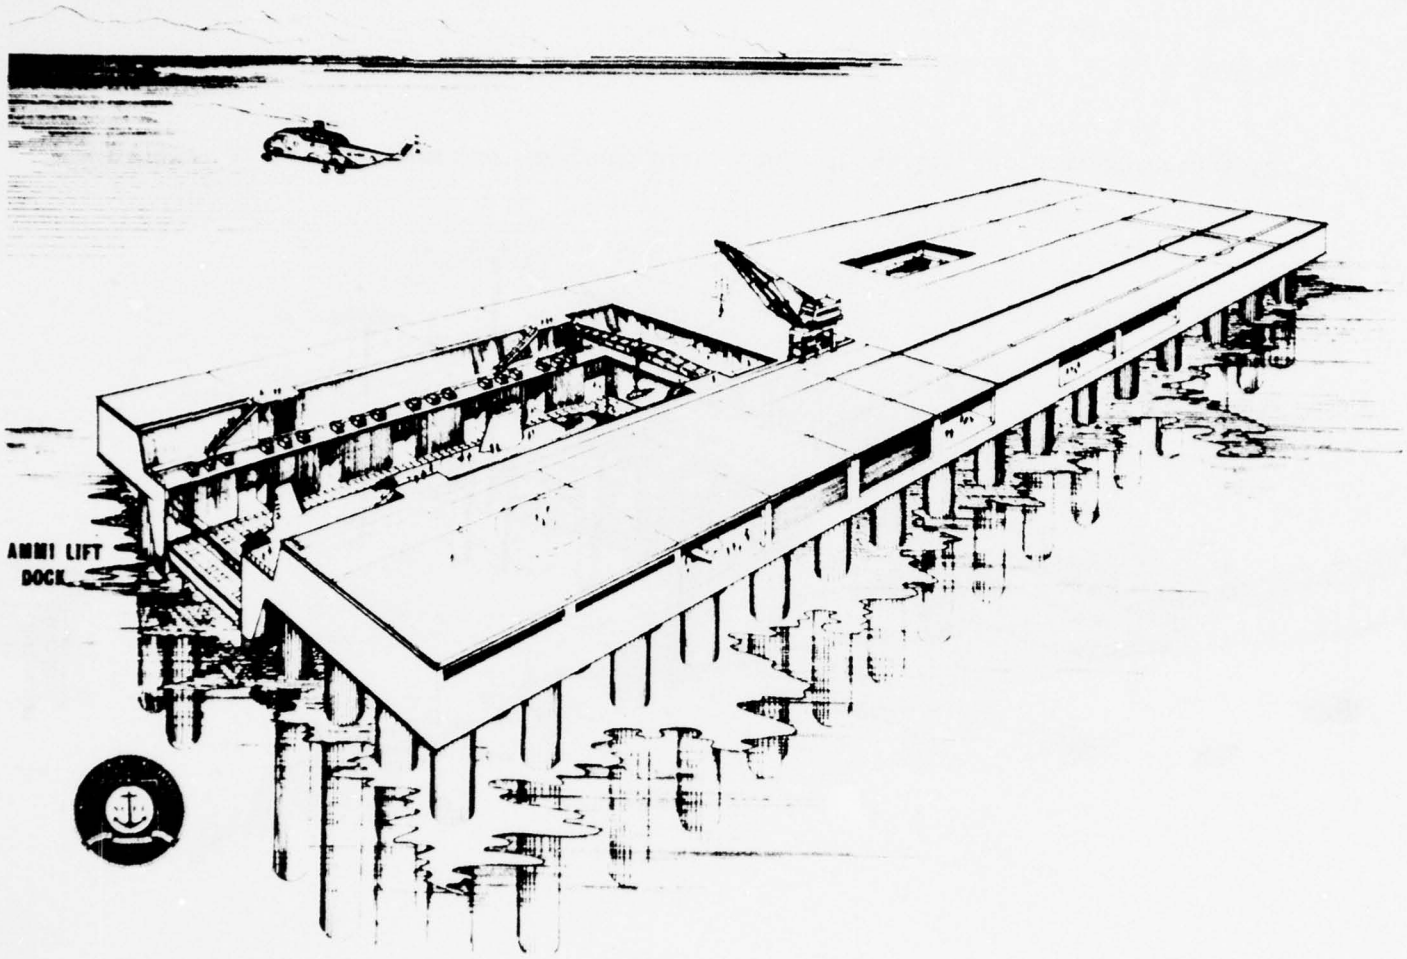


Figure 76. Elevated platform with circular cylindrical legs (from Reference 53)

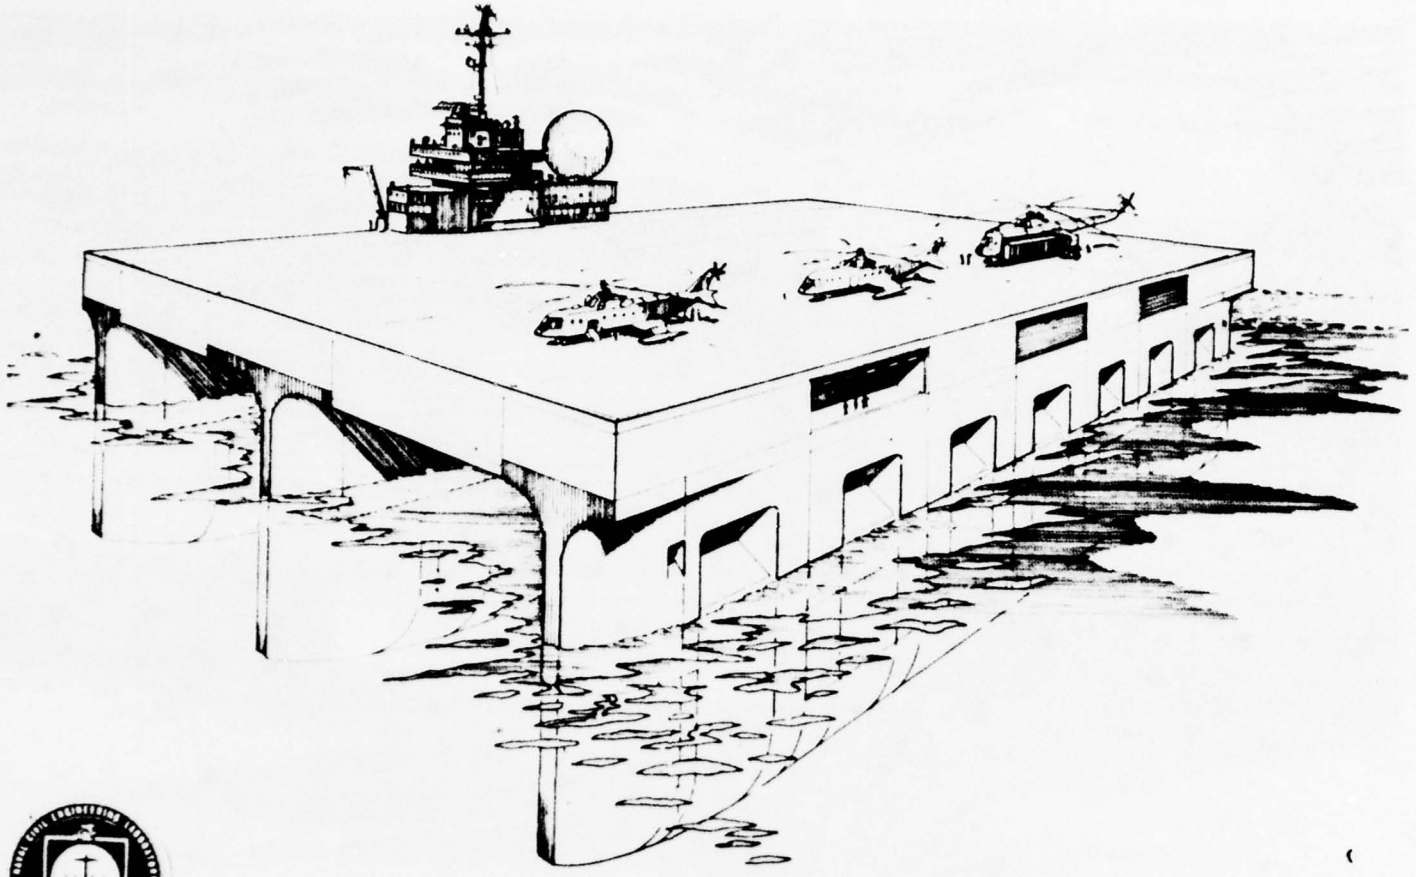


Figure 77. Three hundred- by three hundred-foot MOBS trimaran barge platform (from Reference 53)

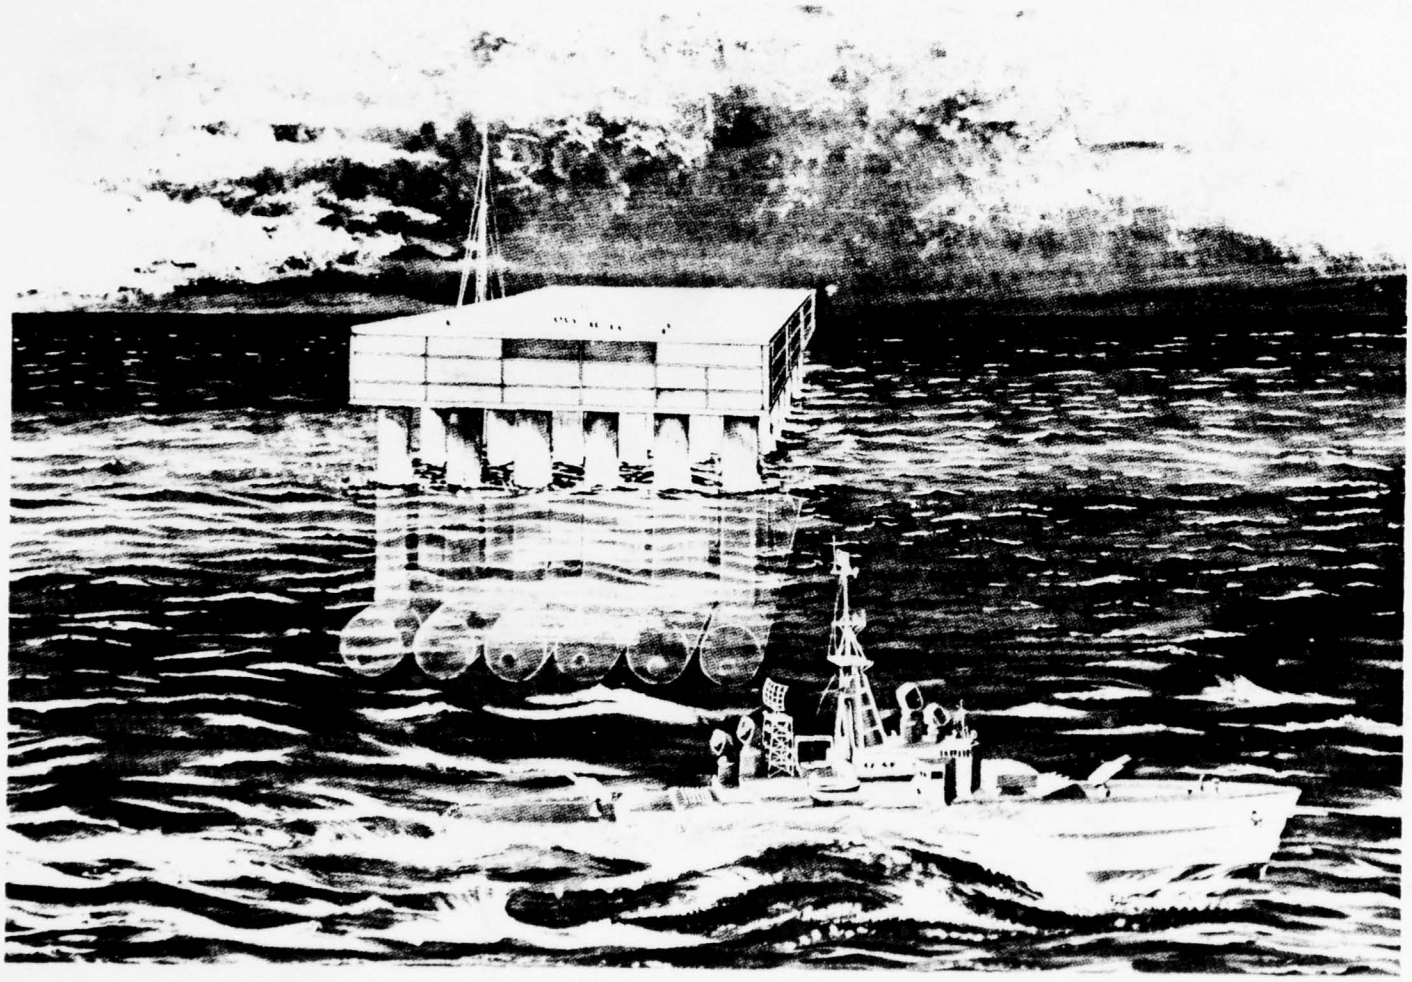


Figure 78. Three hundred- by three hundred-foot semisubmersible platform section (from Reference 53)

PART VII: PRECAST CONCRETE FIELD FORTIFICATIONS

110. Precast concrete field fortifications have been used by U. S. troops during combat operations. They include security/fighting bunkers, protective shelters, and equipment and supplies revetments. A brief discussion of these precast concrete field fortifications is given in the following sections.

Security/Fighting Bunkers


Concrete panel bunkers

111. A typical precast concrete panel security bunker[54] is shown in Figure 79. Security bunkers have been used partially buried and on towers but most often were installed on the ground surface. The firing ports are large for maximum visibility and are located on the front wall and each of the two sidewalls.




Figure 79. Precast concrete security bunker
(from Reference 54)

112. Figure 80 presents the structural detail of a typical precast concrete panel security bunker. This structure is designed to be

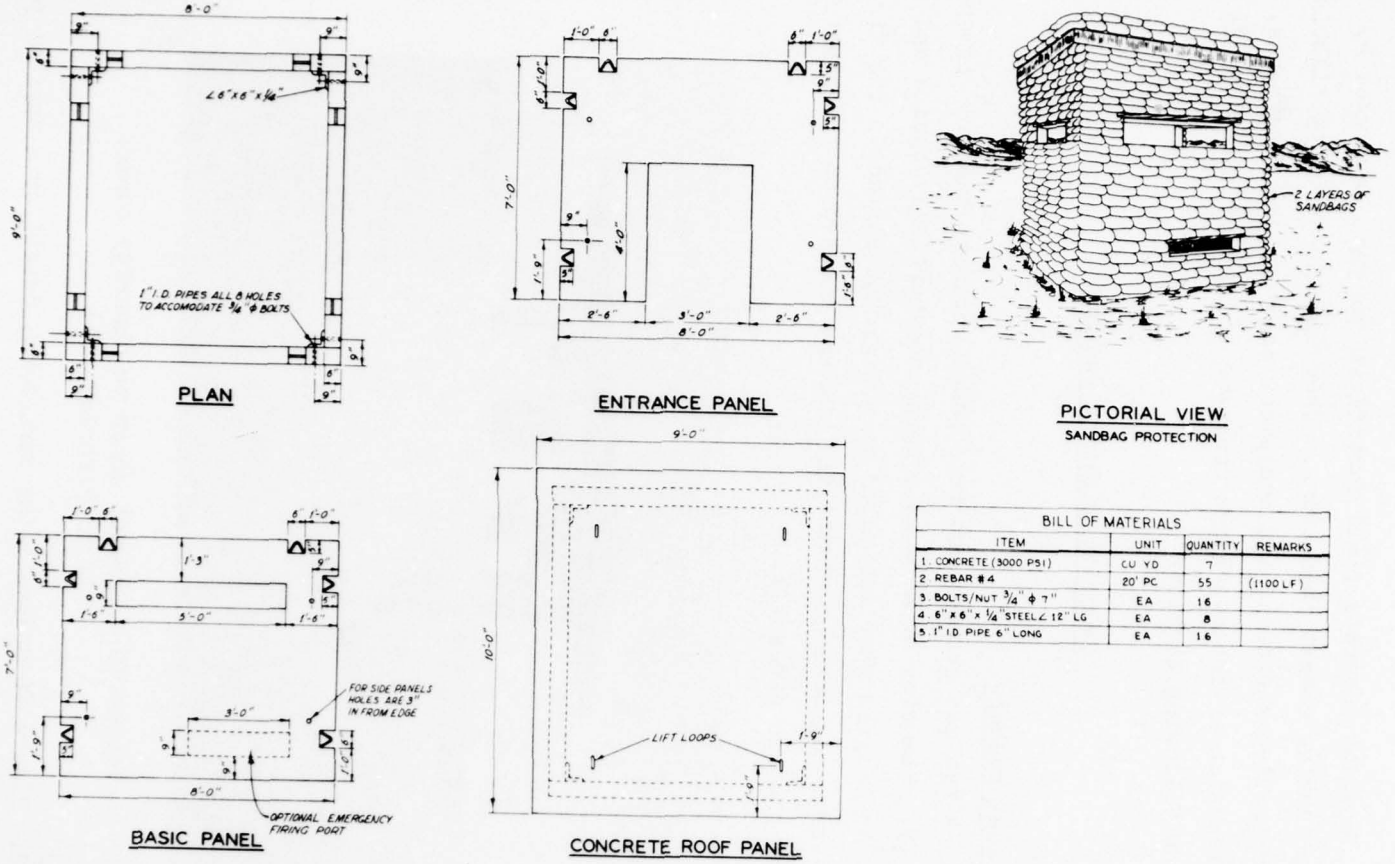

BILL OF MATERIALS			
ITEM	UNIT	QUANTITY	REMARKS
1. CONCRETE (3000 PSI)	CU YD	7	
2. REBAR #4	20' PC	55	(1100 LF)
3. BOLTS/NUT $\frac{3}{4}$" ϕ 7"	EA	16	
4. 6" x 6" x $\frac{1}{4}$" STEEL ∠ 12" LG	EA	8	
5. 1" I.D. PIPE 6" LONG	EA	16	

Figure 80. Structural plans for precast concrete panel security bunker (from Reference 54) (sheet 1 of 2)

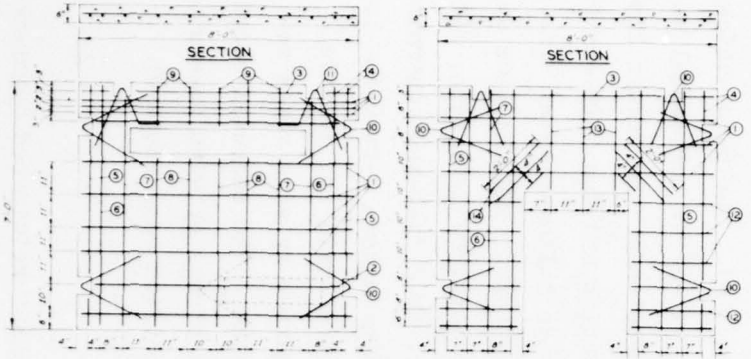


BASIC PANEL
3 REQUIRED

ENTRANCE PANEL
1 REQUIRED


REBAR SCHEDULE

ITEM	SHAPE	QUANTITY	LENGTH	TOTAL LENGTH
1	A	24	7'-10"	187'-11"
2	A	9	6'-10"	61'-6"
3	A	4	4'-10"	19'-4"
4	A	24	0'-10"	19'-11"
5	A	8	3'-10"	30'-8"
6	A	10	6'-10"	68'-4"
7	A	6	8'-5"	51'-4"
8	A	15	4'-10"	72'-6"
9	A	15	1'-1"	16'-3"
10	B	18	4'-0"	72'-0"
11	C	6	4'-0"	24'-0"
12	A	12	2'-4"	28'-0"
13	A	3	2'-10"	8'-6"
14	A	4	2'-0"	8'-0"
15	A	18	9'-10"	177'-0"
16	A	16	9'-10"	159'-0"
17	D	4	3'-6"	14'-0"

SHAPE DETAILS



SHAPE A SHAPE B SHAPE C SHAPE D

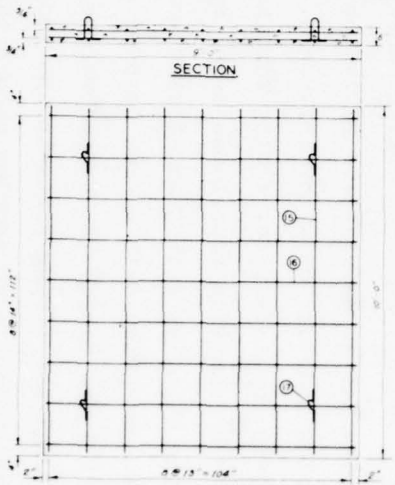

CONCRETE ROOF PANEL
3 REQUIRED

NOTES :
1. ALL REBARS #4
2. MAINTAIN 1" CLEARANCE BETWEEN REBARS AND CONCRETE SURFACES UNLESS OTHERWISE NOTED
3. DESIGN STRESS FOR REBAR STEEL IS 20,000 PSI
4. IF MOORING PORT IS DESIRED INCREASE HEIGHT OF P RING PORT SHOWN FOR BASIC PANEL AS REQUIRED INCREASE SHOULD BE MEASURED DOWN FROM TOP SURFACE OF EXISTING PORT

Figure 80 (sheet 2 of 2)

prefabricated in a rear area and transported to where needed for assembly.

113. Protection provided by this bunker is excellent, especially if loose earth is pushed up or sandbags are stacked against the walls and over the roof.[54]


Modified concrete arch bunkers

114. This bunker[55] was developed from components of the concrete arch shelter (see paragraph 122). The height of a shelter arch section was increased to provide the basic unit of the bunker. An end wall section from the concrete arch shelter was used as the roof, and a rectangular concrete section was designed as a backwall for the bunker (Figure 81).


115. The modified concrete arch bunker was semicircular in plan and consisted of three components: a 6-ft-high arch section, a rectangular backwall section, and a roof section (Figure 81a). The 6-in.-thick arch section had a 6-ft interior radius plus a 1-ft-6-in. horizontal extension, thus providing a 7-ft-6-in. inside dimension at the center line of the arch width. The 6-in.-thick backwall section and the 6-in.-thick roof section had an 8-in.-thick by 1-ft-6-in.-wide bulkhead beam. The arch section had four 8-in. by 1-ft-6-in. firing ports, and the back wall had one 8-in. by 1-ft-6-in. firing port and one 8-in. by 2-ft-6-in. firing port. By removing four loose 6-in. by 6-in. by 2-ft-6-in. concrete blocks, the 8-in. by 2-ft-6-in. firing port can be made a 2-ft-6-in. by 2-ft-6-in. emergency exit or can be used as a quick exit for grenade throwing (Figure 81b). The bunker was held together by wire ropes secured through the firing ports to the roof section. The backwall section was secured to the arch section around the pipe struts by wire rope also. Figure 82 shows the assembly details for the modified concrete arch bunker.

Concrete log bunkers

116. This bunker[55] is assembled from precast reinforced concrete logs of various lengths with interlocking ends (Figure 83). In the TO, the arrangement of the logs to form a fighting fortification would be left to the discretion of the tactical commander who could select a configuration to meet his specific requirements. Figure 84 presents the

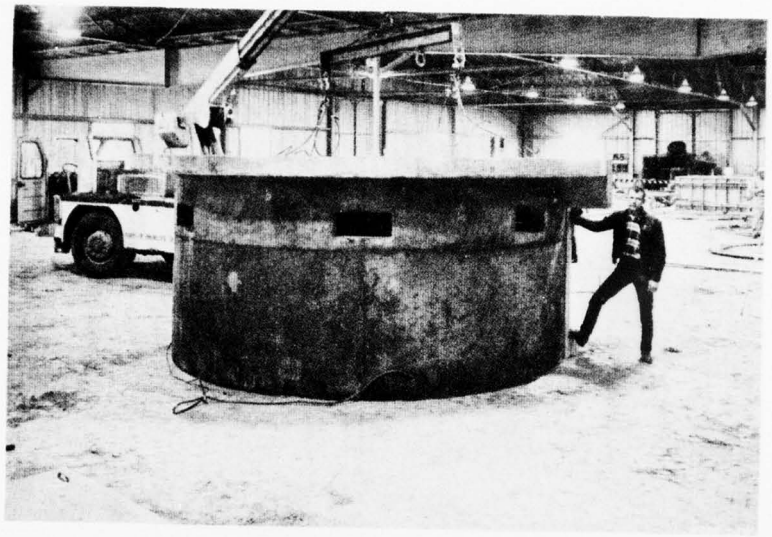

a. Front view

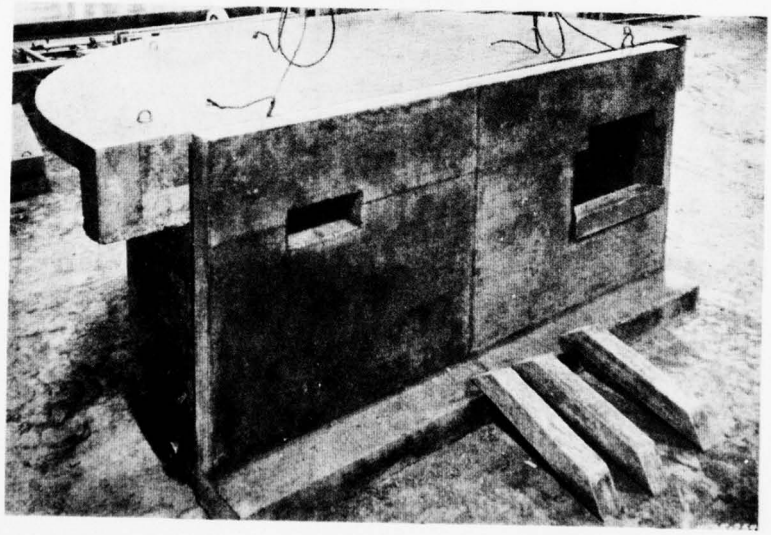

b. Rear view (three blocks are stacked on the block in the emergency exit to form a firing port)

Figure 81. Modified arch fighting bunker (from Reference 55)

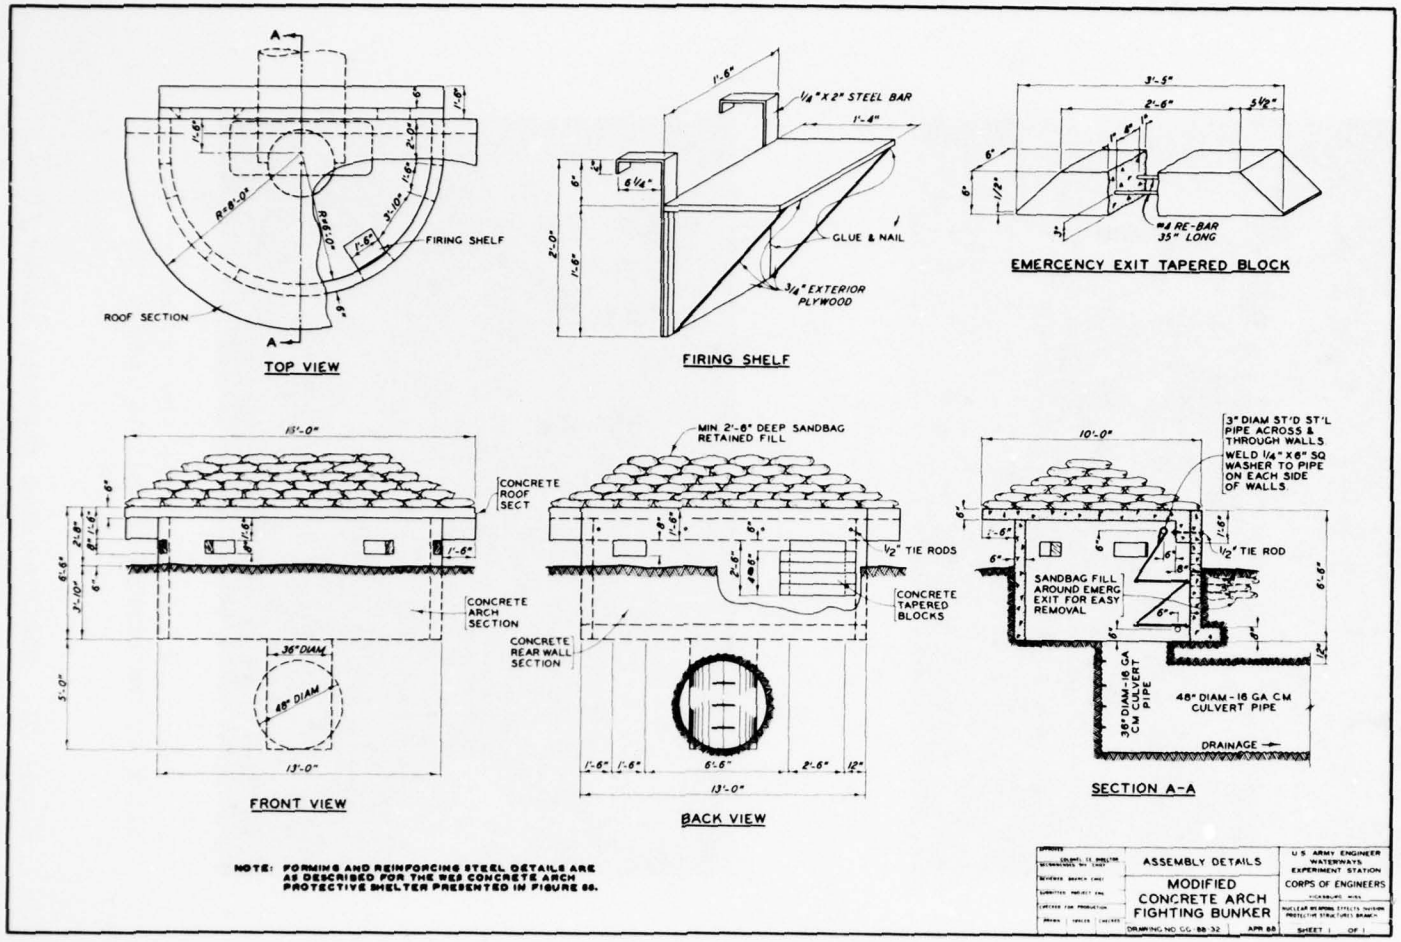


Figure 82. Modified concrete arch bunker (from Reference 55)



a. Installation of bunker (rear view)



b. Completed emplacement

Figure 83. Concrete log bunker (from Reference 55)


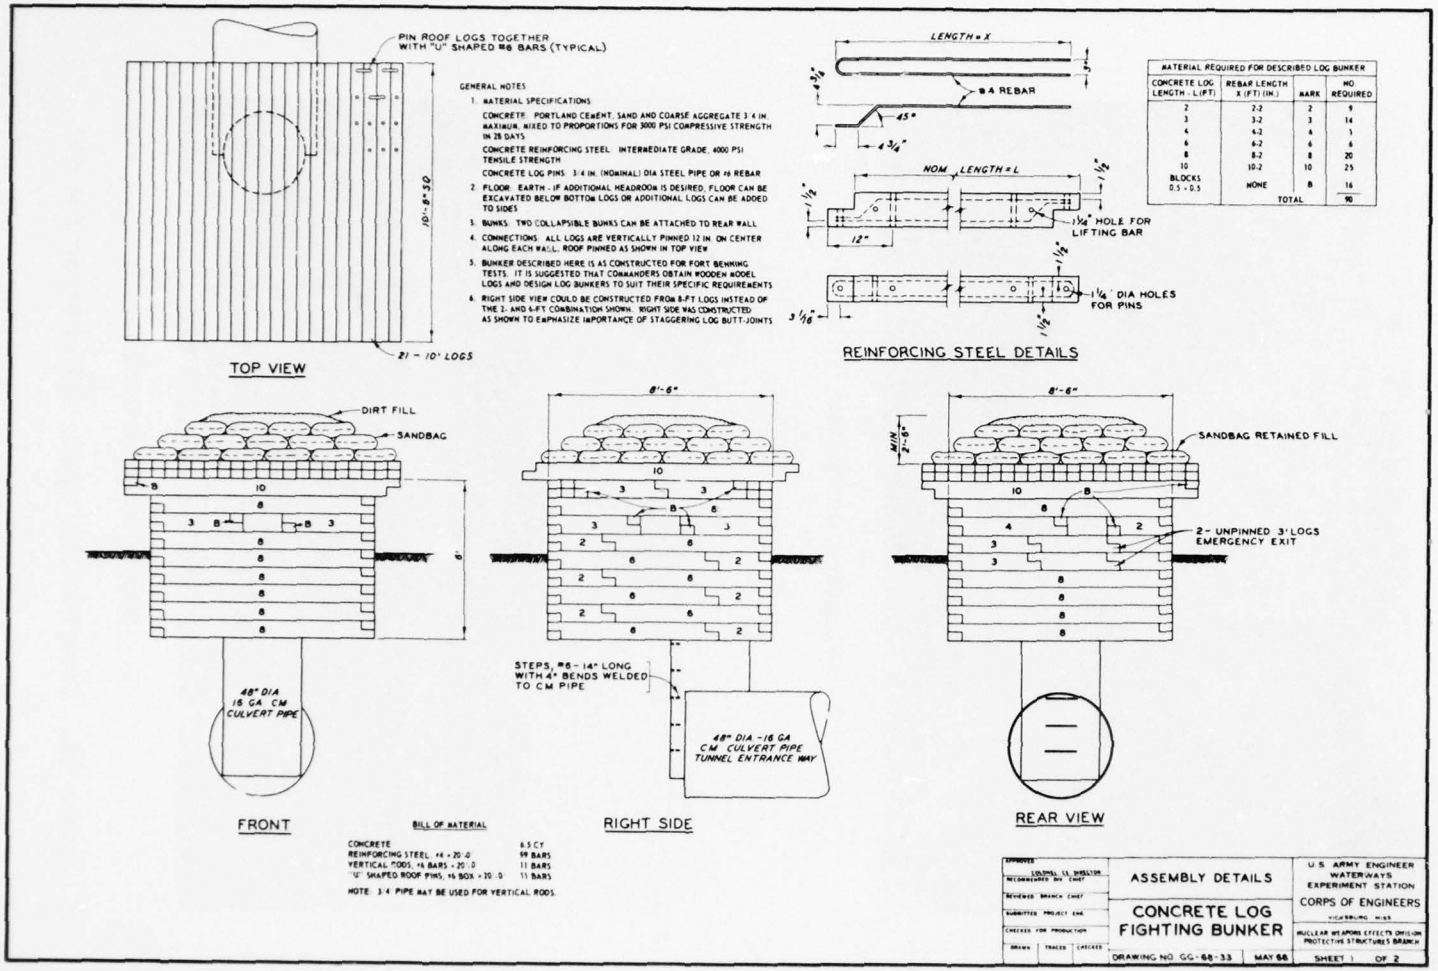



Figure 84. Concrete fighting bunker (from Reference 55) (sheet 1 of 2)

AD-A053 165 ARMY ENGINEER WATERWAYS EXPERIMENT STATION VICKSBURG MISS F/G 13/2
PRECAST CONCRETE ELEMENTS FOR STRUCTURES IN SELECTED THEATERS O--ETC(U)
FEB 78 J E MCDONALD, T C LIU

UNCLASSIFIED WES-TR-C-78-1 NL

2 OF 3
AD
A053165

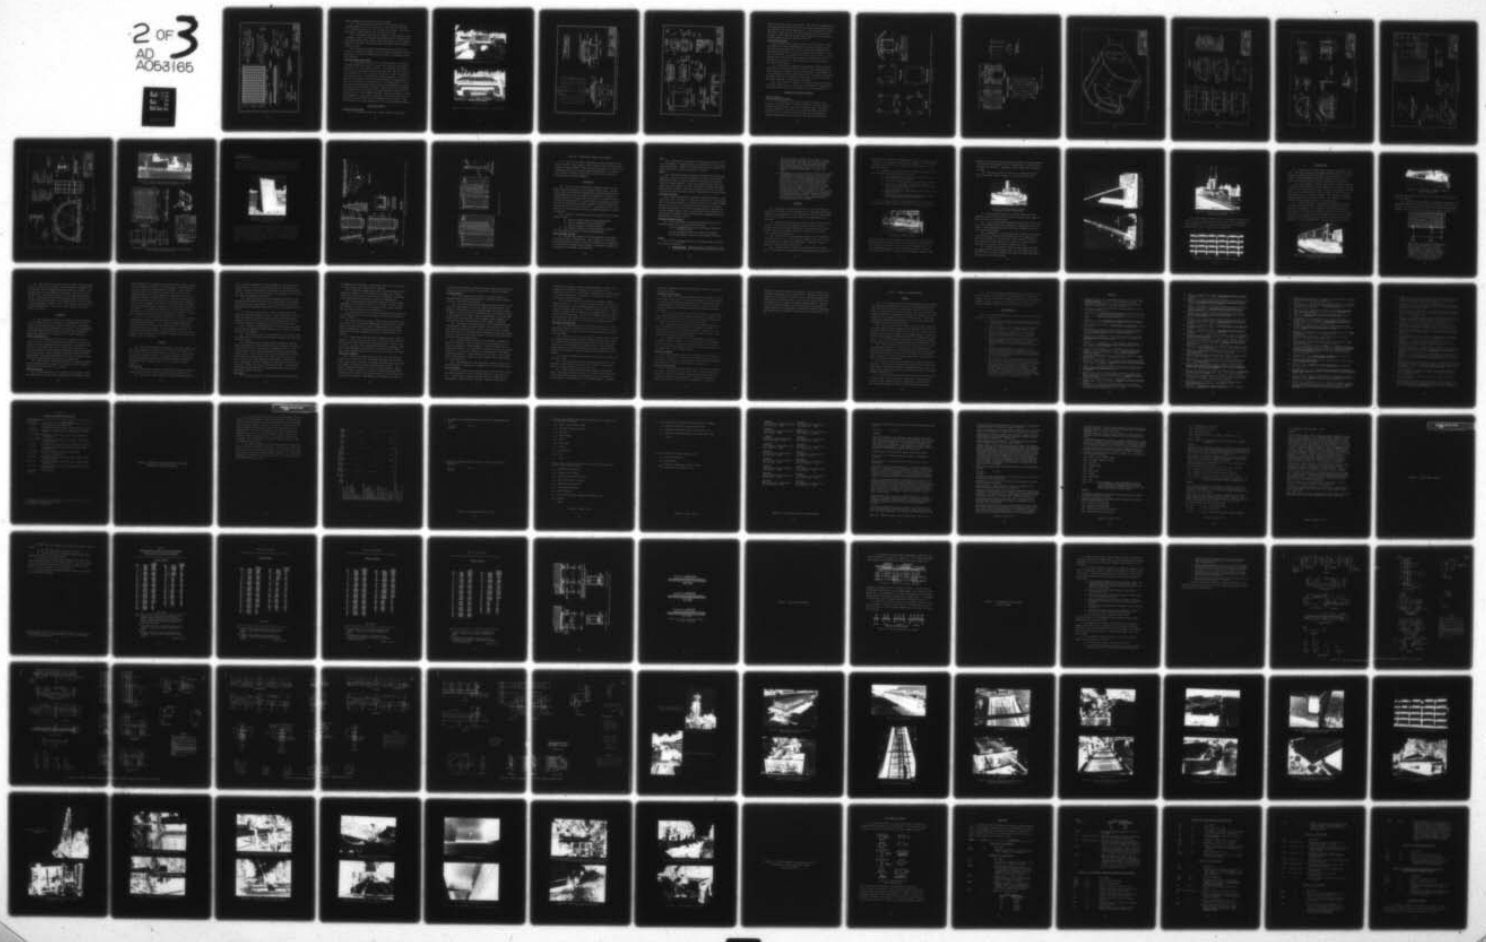

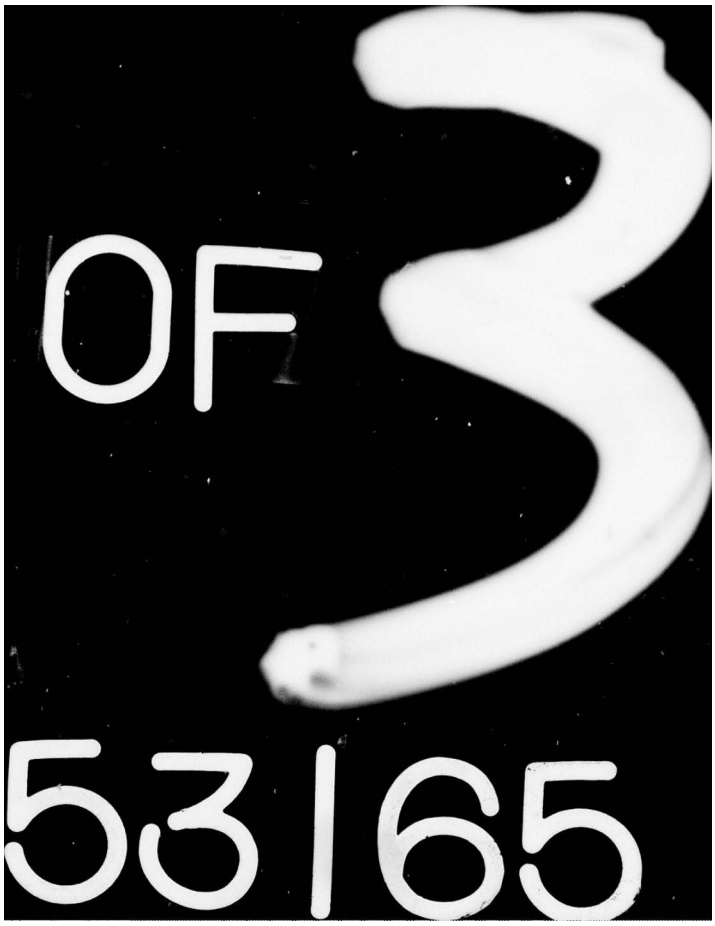
OF 3
53165

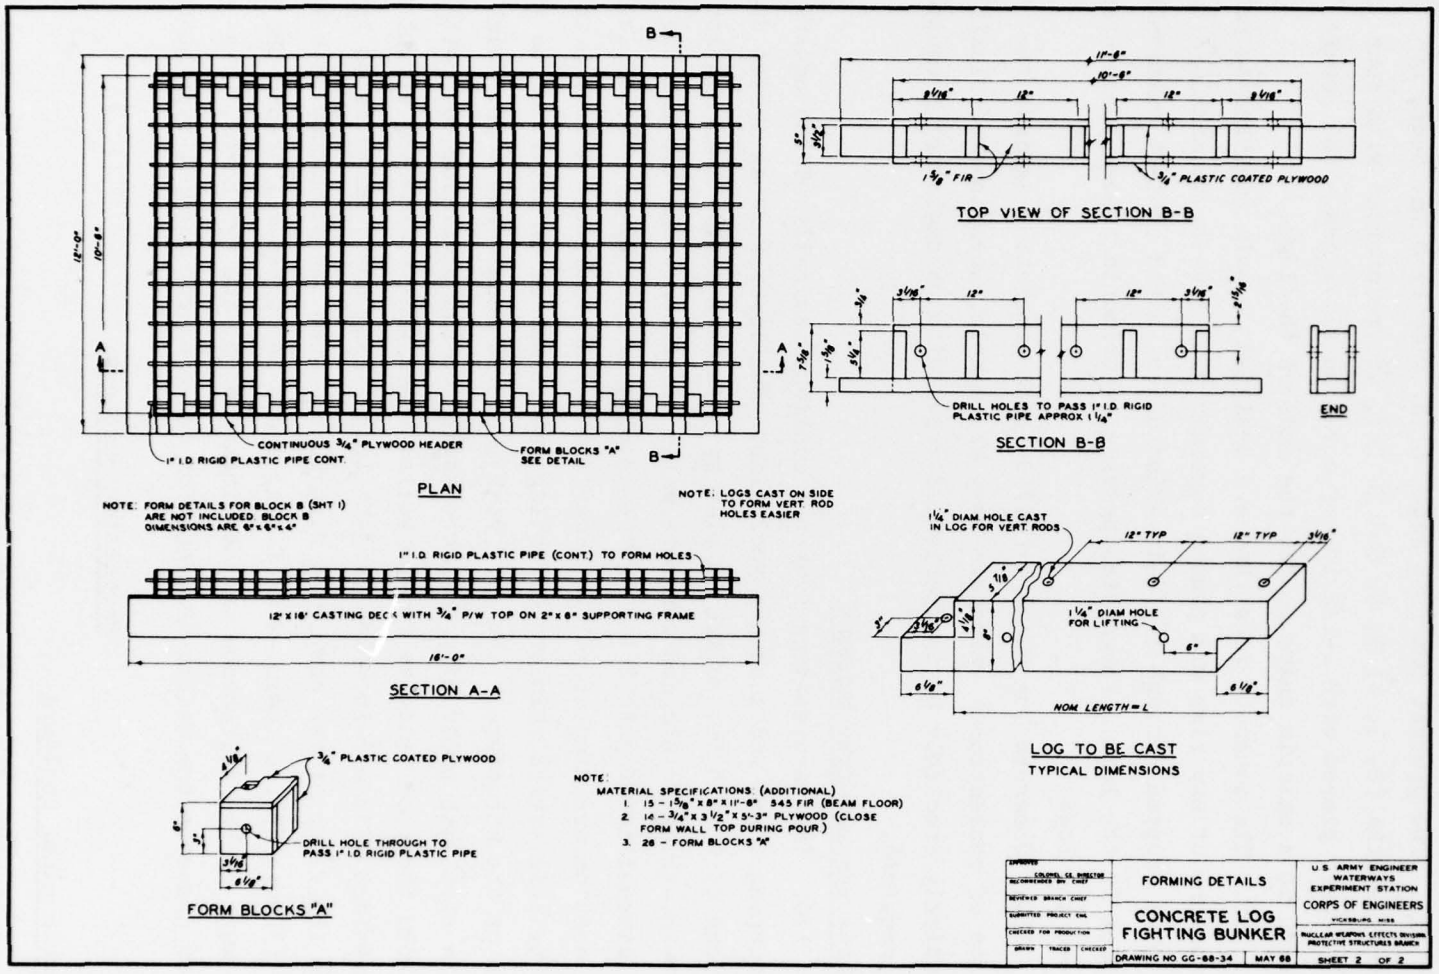


Figure 84 (sheet 2 of 2)

design drawings for a typical concrete log bunker.

117. The precast concrete logs, 6 in. wide by 8 in. deep, of various lengths (2, 3, 4, 6, 8, and 10 ft), are reinforced with four No. 4 rebars placed with 1-1/2 in. of cover on all sides. The rebars are bent in a hairpin shape to fit the ends of the logs.

118. The concrete logs that are designed to join together to make a structure of any size are pinned together with 3/4-in. (nominal)-diam pipe pins dropped through 1-1/2-in.-diam holes spaced at 1-ft intervals and cast in the logs. These pins provide a horizontal shear connection between the logs.

119. Concrete log bunkers provide good protection against the effects of conventional weapons. They are simple, inexpensive, flexible, and quickly erectable by inexperienced crews with no engineering equipment required.

Concrete parapet-type bunkers

120. The parapet-type bunker[55] consists basically of two square telescoping boxes and a square roof slab. The lower box has inside dimensions of 6 ft 6 in. square in plan by 3 ft 6 in high. This section has 6-in.-thick reinforced concrete walls and floor. The top box has inside dimensions of 9 ft 2 in. square in plan by 3 ft high. The walls of this section are also of 6-in.-thick reinforced concrete. A 1-ft-3-in.-wide by 6-in.-thick reinforced footing was formed as an extension to the walls of the structure. The roof slab is 13 ft square and 6 in. thick and is cast with protruding concrete strips on the underside to position and hold the roof relative to the walls. Each wall of the top structure is provided with a 6-in.-high by 5-ft-long firing port, which is 48 in. above the floor of the completed structure. When the structure is assembled (Figure 85), a 16-in.-wide firing shelf is formed all around the inside wall by the difference in the dimensions of the two boxes. Figure 86 presents the design drawings for the concrete parapet-type bunker.

Protective Shelters

Concrete panel shelters

121. The structural plans for a typical precast concrete panel



a. Bunker installation (rear view)



b. Completed bunker

Figure 85. Concrete parapet-type bunker (from Reference 55)


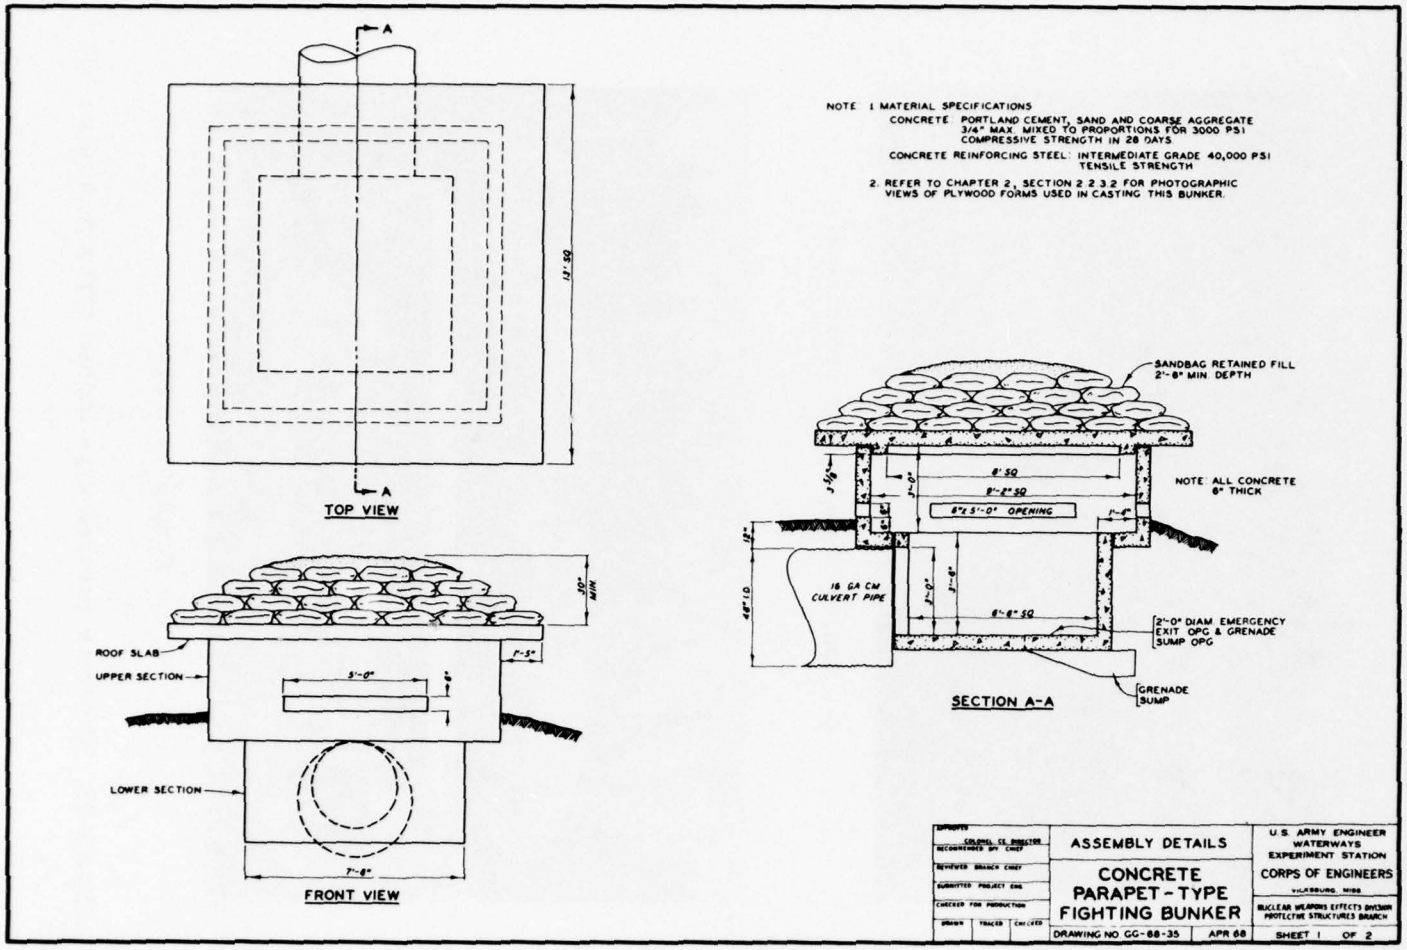


Figure 86. Concrete parapet-type fighting bunker (from Reference 55) (sheet 1 of 2)

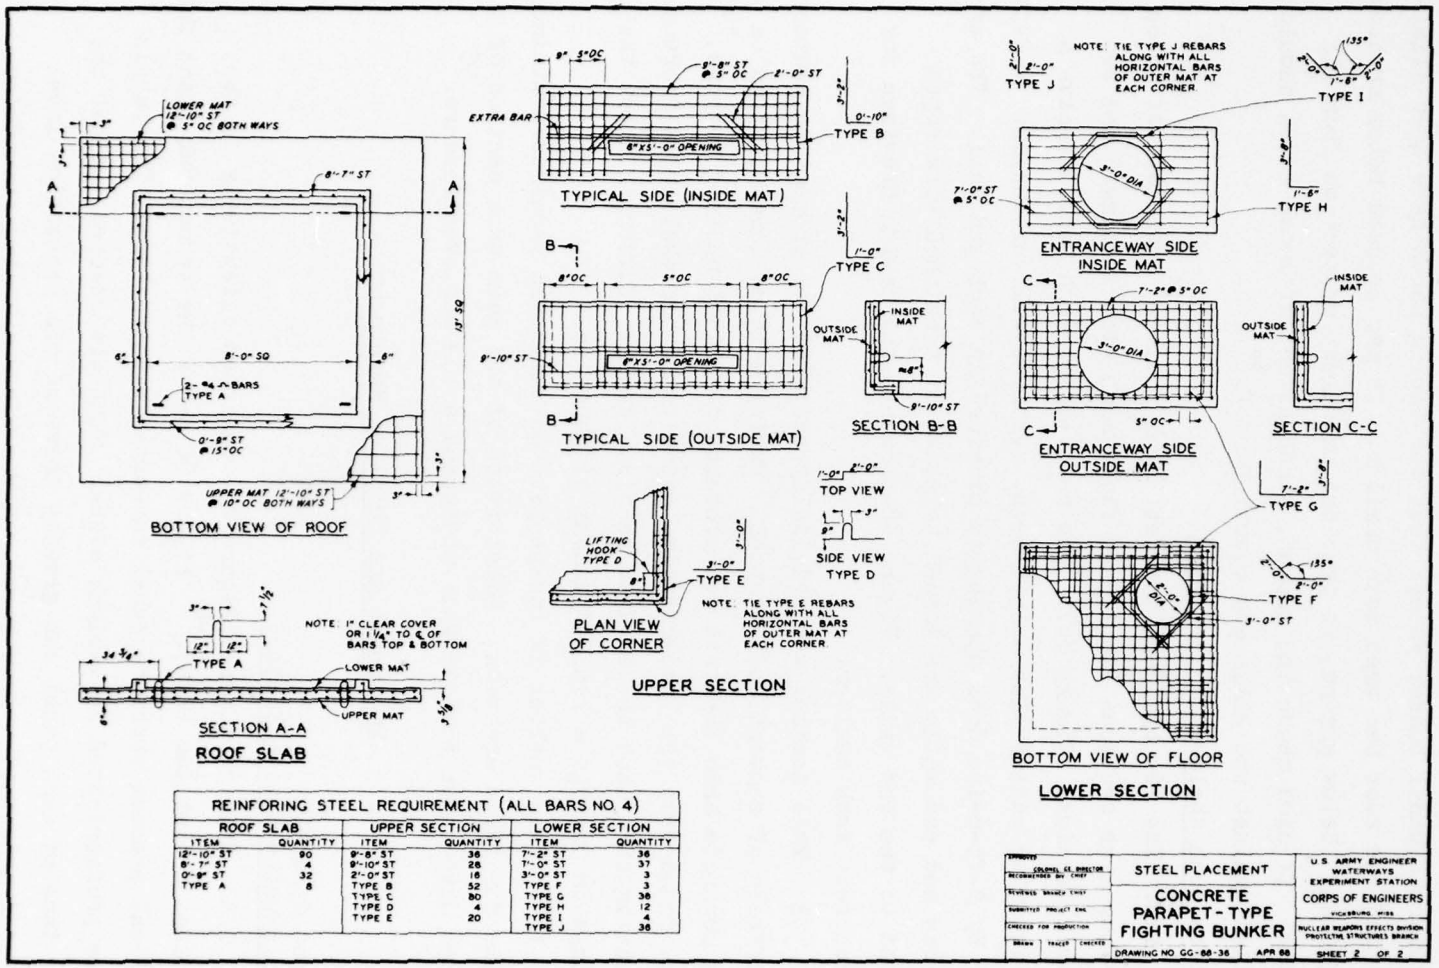

REINFORING STEEL REQUIREMENT (ALL BARS NO 4)

ROOF SLAB		UPPER SECTION		LOWER SECTION	
ITEM	QUANTITY	ITEM	QUANTITY	ITEM	QUANTITY
12'-10" ST	90	9'-8" ST	36	7'-2" ST	36
8'-7" ST	4	9'-10" ST	26	7'-0" ST	37
0'-8" ST	32	2'-0" ST	18	3'-0" ST	3
TYPE A	8	TYPE B	52	TYPE F	3
		TYPE C	80	TYPE G	38
		TYPE D	4	TYPE H	12
		TYPE E	20	TYPE I	4
				TYPE J	38

	STEEL PLACEMENT	U.S. ARMY ENGINEER WATERWAYS EXPERIMENT STATION
	CONCRETE PARAPET-TYPE FIGHTING BUNKER	CORPS OF ENGINEERS
	DRAWING NO GG-88-36 APR 88	SHEET 2 OF 2

Figure 86 (sheet 2 of 2)

quarters shelter are shown in Figure 87. This shelter is identical with the concrete panel bunker except that the firing ports have been eliminated and the roof has been made smaller. It may be used below or above the ground. Below ground, it provides excellent protection from all weapons. If used above the ground, sandbags and/or loose earth should be piled against the walls and over the roof.[54]

Concrete arch shelters

122. The 12- by 12-ft concrete arch shelter[55] consists of three 4-ft-long arch sections (including floor slab with footings) and two end wall sections (Figure 88). The 6-in.-thick arch sections have a 6-ft interior radius plus a 1-ft-6-in. vertical wall extension. A 2-ft-6-in. by 5-ft-6-in. door opening is provided in each end wall. The arch sections and end walls are joined together by tensioned wire ropes secured to the end walls. Figure 88 presents the design drawings for the concrete arch shelter.


123. This shelter was originally designed for protection against the effects of conventional weapons. During a later investigation on using concrete arch shelters for protection against nuclear weapons,[56] it was found that the load-carrying capacity of the shelter is increased by cutting the floor to the arch section itself. This will allow the footings to undergo a limited amount of punching.

124. This shelter is inexpensive to build and requires a minimum of time for field erection. Model tests of the main arch section of the shelter have shown that it will withstand a 100-psi overpressure.[56]

Equipment and Supplies Revetment

Precast concrete
panel revetment with footers


125. This structure (Figure 89) was used extensively in the Republic of Viet Nam (RVN).[54] Figure 90 shows the structural plans for a typical precast concrete panel revetment with footers. The panels can be prefabricated in various sizes. Sandbags stacked against the outer face of each panel can greatly increase the protection level against fragmentation from large-caliber high-explosive ammunition.

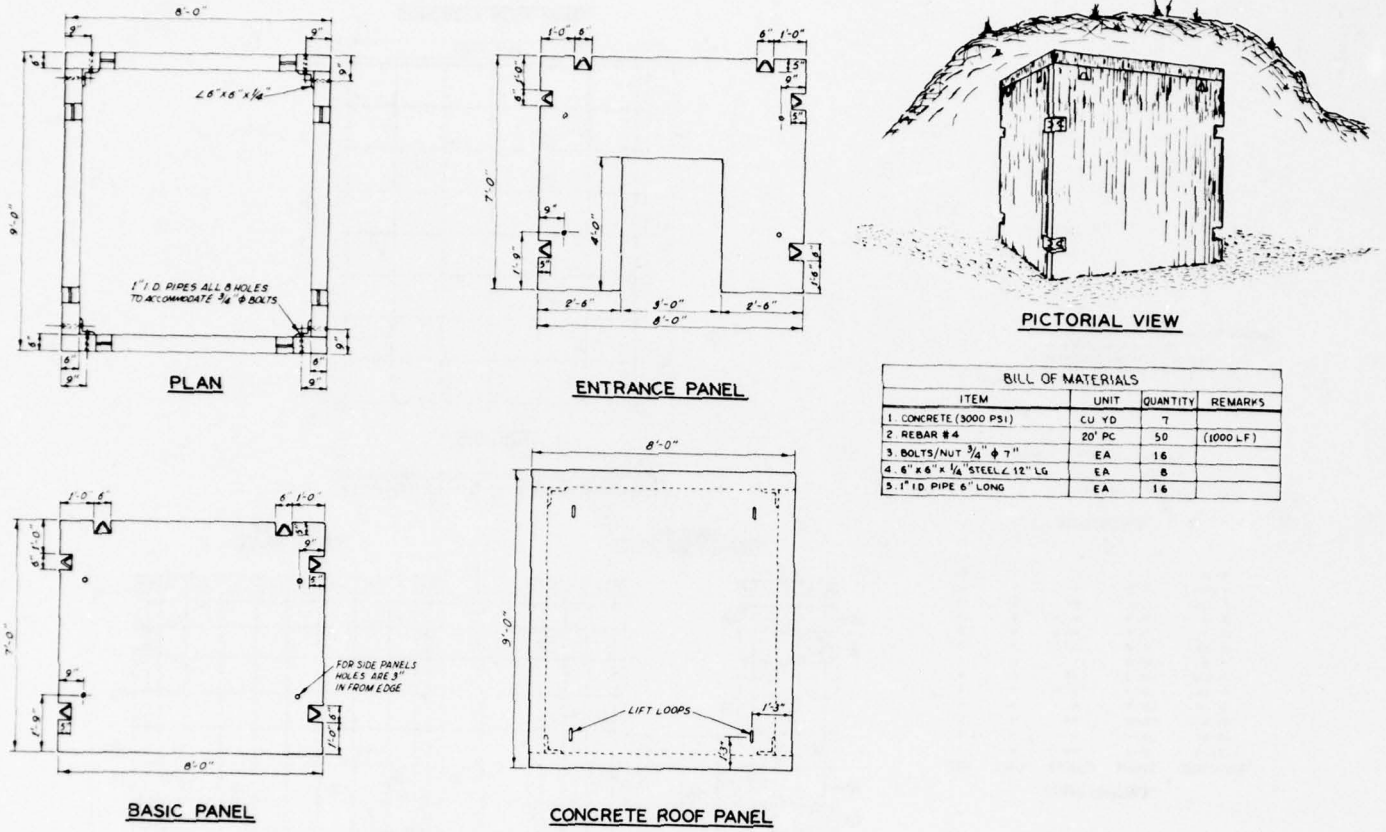


BILL OF MATERIALS

ITEM	UNIT	QUANTITY	REMARKS
1 CONCRETE (3000 PSI)	CU YD	7	
2 REBAR #4	20' PC	50	(1000 LF)
3 BOLTS/NUT 3/4" ϕ 7"	EA	16	
4 6"x6"x 1/4" STEEL ∠ 12" LG	EA	8	
5 1" I.D PIPE 6" LONG	EA	16	

Figure 87. Structural plans for precast concrete panel quarters shelter (from Reference 54) (sheet 1 of 2)

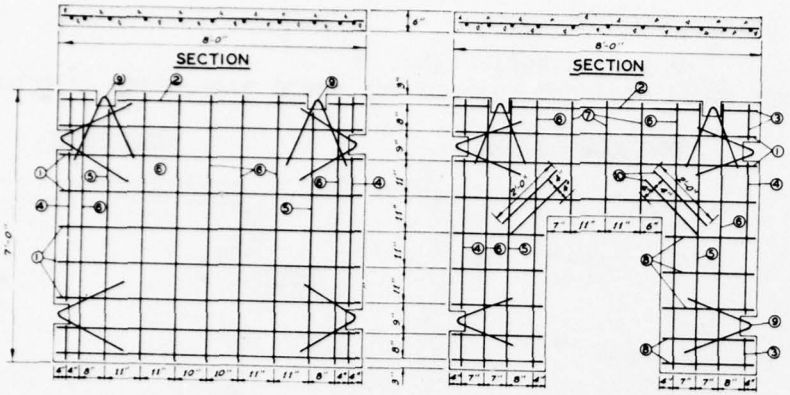


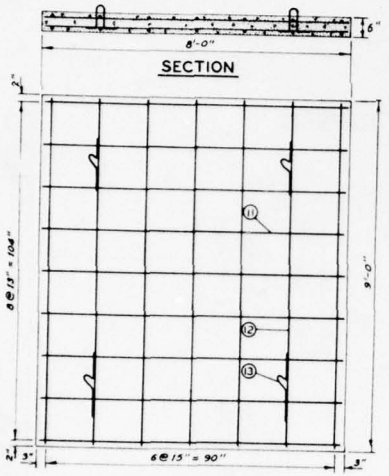

REBAR SCHEDULE

ITEM	SHAPE	QUANTITY	LENGTH	TOTAL LENGTH
1	A	27	7'-10"	211'-5"
2	A	4	4'-10"	19'-4"
3	A	24	0'-10"	19'-11"
4	A	8	3'-10"	30'-8"
5	A	8	6'-5"	51'-4"
6	A	25	6'-10"	170'-9"
7	A	3	2'-10"	8'-6"
8	A	10	2'-4"	23'-0"
9	B	24	4'-0"	96'-0"
10	A	4	2'-0"	8'-0"
11	A	18	7'-10"	141'-0"
12	A	14	8'-10"	123'-8"
13	C	4	3'-8"	14'-8"

SHAPE DETAILS



SHAPE A SHAPE B SHAPE C

NOTES 1. ALL REBARS #4
2. MAINTAIN 1 IN CLEARANCE BETWEEN REBARS AND CONCRETE SURFACES UNLESS OTHERWISE NOTED
3. DESIGN STRESS FOR REBAR STEEL IS 20,000 PSI

Figure 87 (sheet 2 of 2)

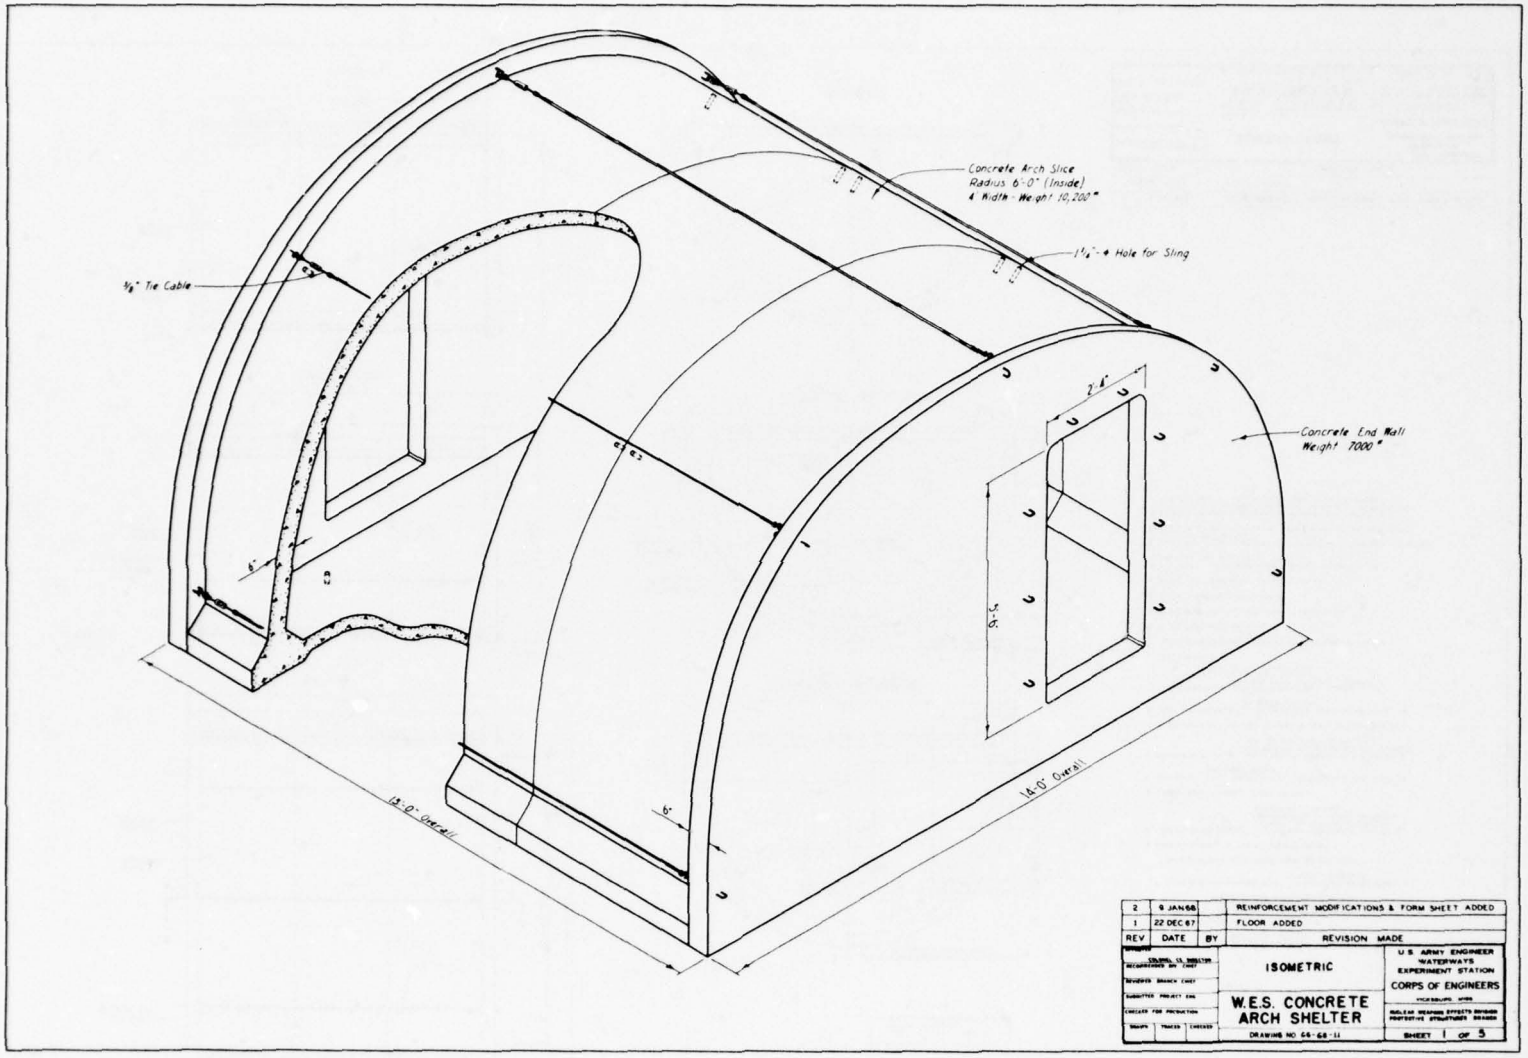


Figure 88. Concrete arch shelter (from Reference 55) (sheet 1 of 5)

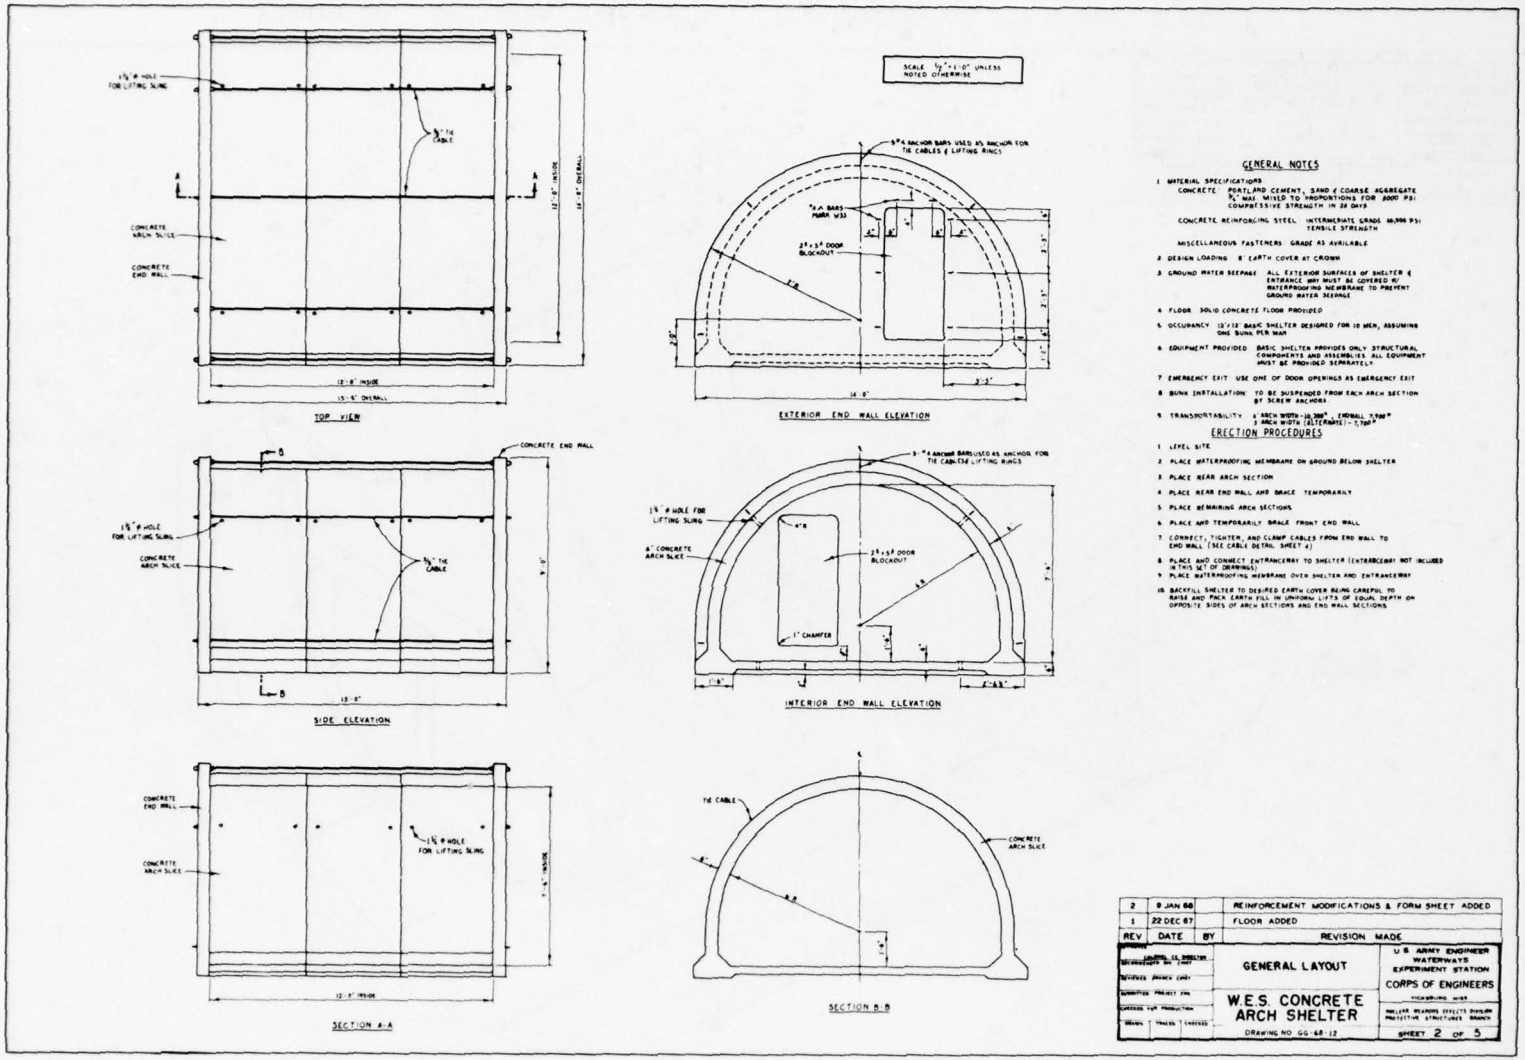


Figure 88 (sheet 2 of 5)


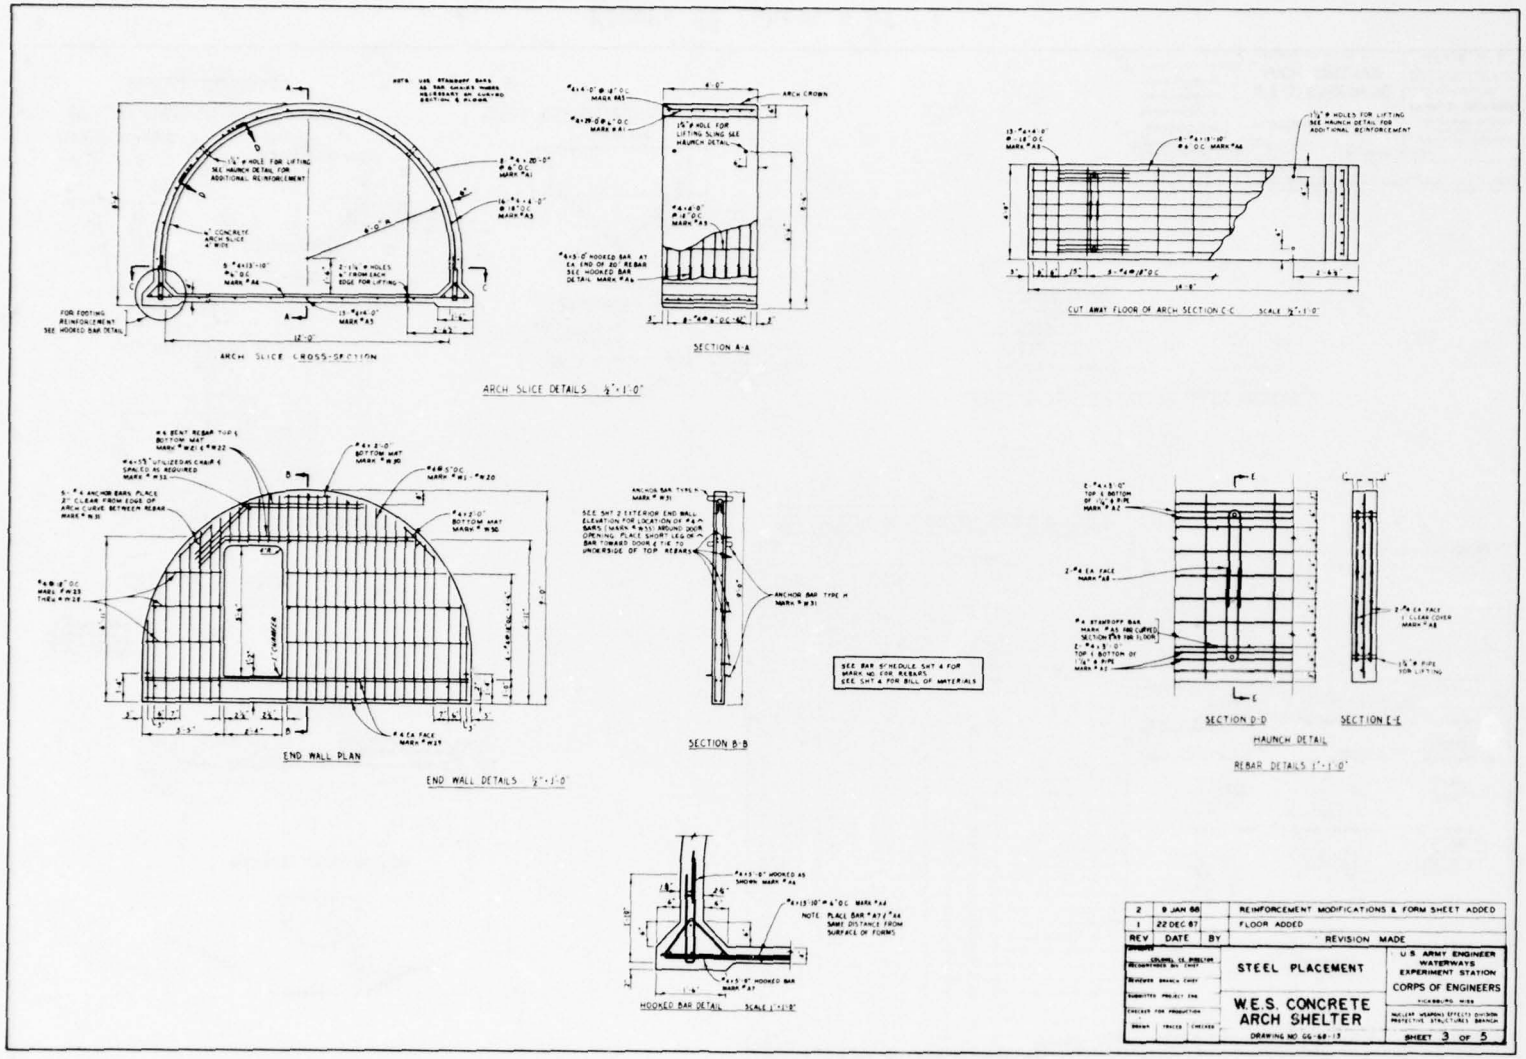


Figure 88 (sheet 3 of 5)

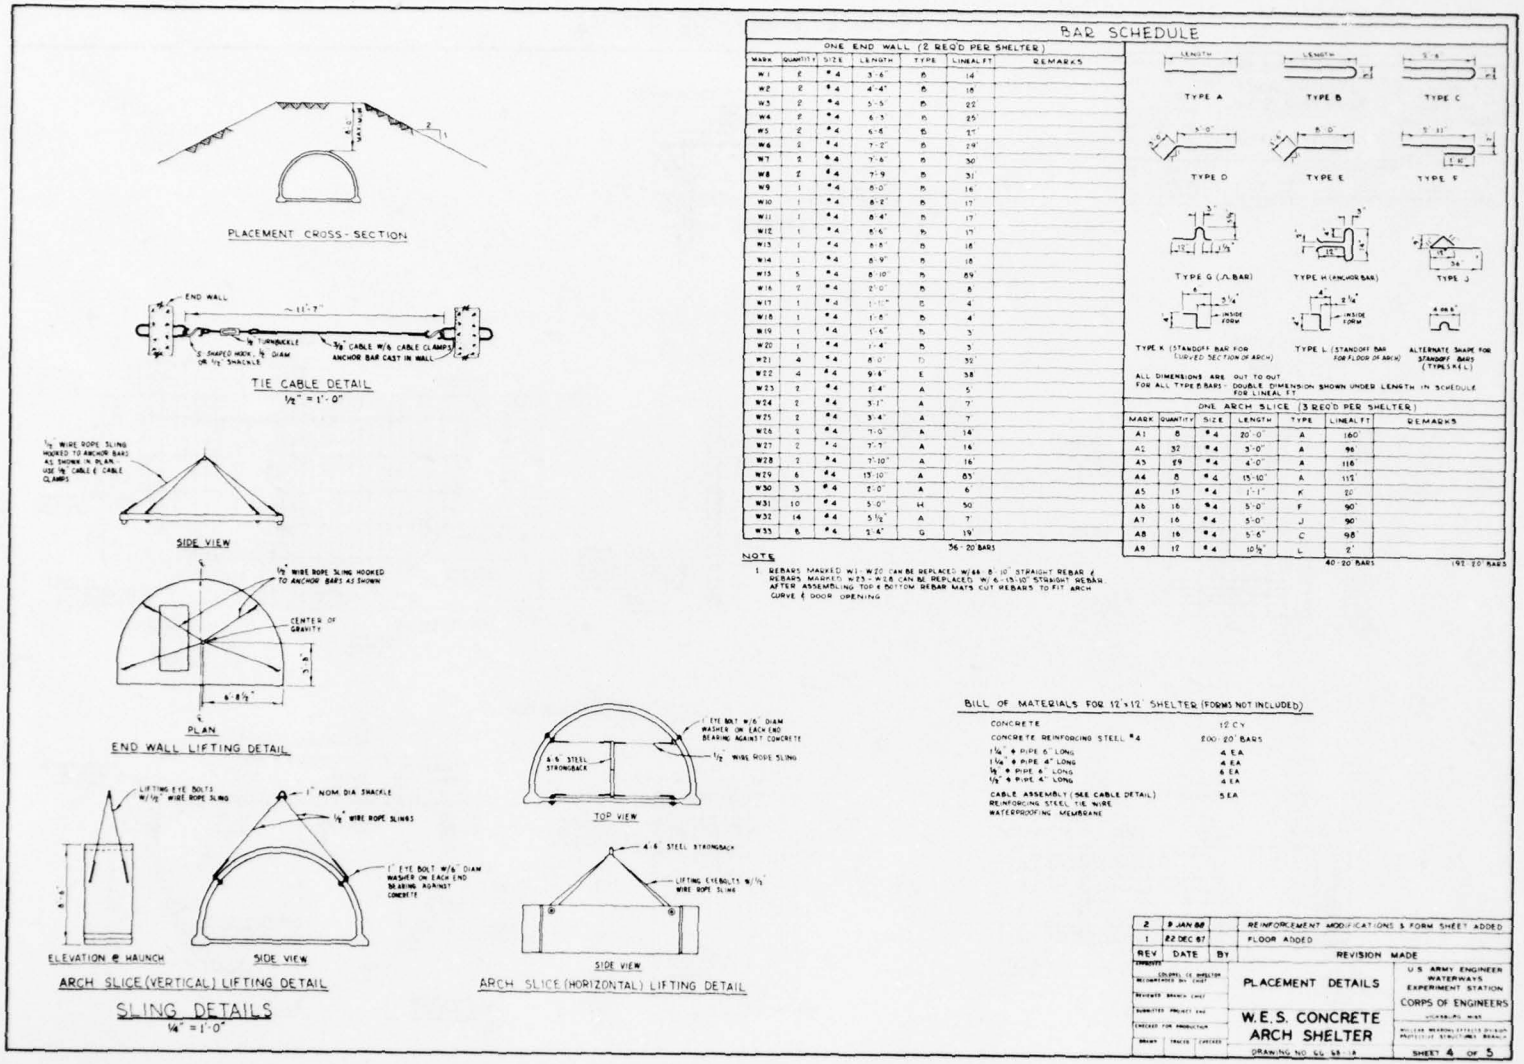

BAR SCHEDULE

ONE END WALL (2 REQ'D PER SHELTER)

MARK	QUANTITY	SIZE	LENGTH	TYPE	LINEAL FT	REMARKS
W1	2	#4	3'-6"	B	14	
W2	2	#4	4'-4"	B	18	
W3	2	#4	5'-5"	B	22	
W4	2	#4	6'-3"	B	25	
W5	2	#4	6'-8"	B	27	
W6	2	#4	7'-2"	B	29	
W7	2	#4	7'-6"	B	30	
W8	2	#4	7'-9"	B	31	
W9	1	#4	8'-0"	B	16	
W10	1	#4	8'-2"	B	17	
W11	1	#4	8'-4"	B	17	
W12	1	#4	8'-6"	B	17	
W13	1	#4	8'-8"	B	18	
W14	1	#4	8'-9"	B	18	
W15	5	#4	8'-10"	B	89	
W16	2	#4	2'-0"	B	8	
W17	1	#4	1'-11"	B	4	
W18	1	#4	1'-8"	B	4	
W19	1	#4	1'-6"	B	3	
W20	1	#4	1'-4"	B	3	
W21	4	#4	8'-0"	D	32	
W22	4	#4	9'-6"	E	38	
W23	2	#4	2'-4"	A	5	
W24	2	#4	3'-1"	A	7	
W25	2	#4	3'-4"	A	7	
W26	2	#4	7'-0"	A	14	
W27	2	#4	7'-7"	A	16	
W28	2	#4	7'-10"	A	16	
W29	6	#4	13'-10"	A	83	
W30	3	#4	2'-0"	A	6	
W31	10	#4	5'-0"	H	50	
W32	14	#4	5 1/2"	A	7	
W33	8	#4	2'-4"	G	19	

56 - 20 BARS

TYPE A | TYPE B | TYPE C | TYPE D | TYPE E | TYPE F | TYPE G (Δ BAR) | TYPE H (ANCHOR BAR) | TYPE J | TYPE K (STANDOFF BAR FOR CURVED SECTION OF ARCH) | TYPE L (STANDOFF BAR FOR FLOOR OF ARCH) | ALTERNATE SHAPE FOR STANDOFF BARS (TYPES K & L)

ALL DIMENSIONS ARE OUT TO OUT
FOR ALL TYPE B BARS: DOUBLE DIMENSION SHOWN UNDER LENGTH IN SCHEDULE FOR LINEAL FT

ONE ARCH SLICE (3 REQ'D PER SHELTER)

MARK	QUANTITY	SIZE	LENGTH	TYPE	LINEAL FT	REMARKS
A1	8	#4	20'-0"	A	160	
A2	32	#4	3'-0"	A	96	
A3	59	#4	4'-0"	A	118	
A4	8	#4	13'-10"	A	112	
A5	15	#4	1'-1"	K	20	
A6	18	#4	5'-0"	F	90	
A7	18	#4	5'-0"	J	90	
A8	18	#4	5'-6"	C	98	
A9	12	#4	10 1/2"	L	8'	

40 - 20 BARS | 192 - 20 BARS

NOTE
1. REBARS MARKED W1 - W20 CAN BE REPLACED W/ 66 - 8'-10" STRAIGHT REBAR & REBARS MARKED W21 - W28 CAN BE REPLACED W/ 6 - 13'-10" STRAIGHT REBAR AFTER ASSEMBLING TOP & BOTTOM REBAR MATS CUT REBARS TO FIT ARCH CURVE & DOOR OPENING

BILL OF MATERIALS FOR 12'x12' SHELTER (FORMS NOT INCLUDED)

CONCRETE	12 C.Y.
CONCRETE REINFORCING STEEL #4	200 - 20' BARS
1/4" ϕ PIPE 6" LONG	4 EA
1 1/4" ϕ PIPE 4" LONG	4 EA
1/2" ϕ PIPE 6" LONG	6 EA
1/2" ϕ PIPE 4" LONG	4 EA
CABLE ASSEMBLY (SEE CABLE DETAIL)	5 EA
REINFORCING STEEL TIE WIRE	
WATERPROOFING MEMBRANE	

REV	DATE	BY	REVISION MADE
2	9 JAN 68		REINFORCEMENT MODIFICATIONS & FORM SHEET ADDED
1	22 DEC 67		FLOOR ADDED

PLACEMENT DETAILS

W.E.S. CONCRETE ARCH SHELTER

DRAWING NO. 66-68-A

U.S. ARMY ENGINEER WATERWAYS EXPERIMENT STATION
CORPS OF ENGINEERS
VICKSBURG, MISS.

SHEET 4 OF 5

Figure 88 (sheet 4 of 5)

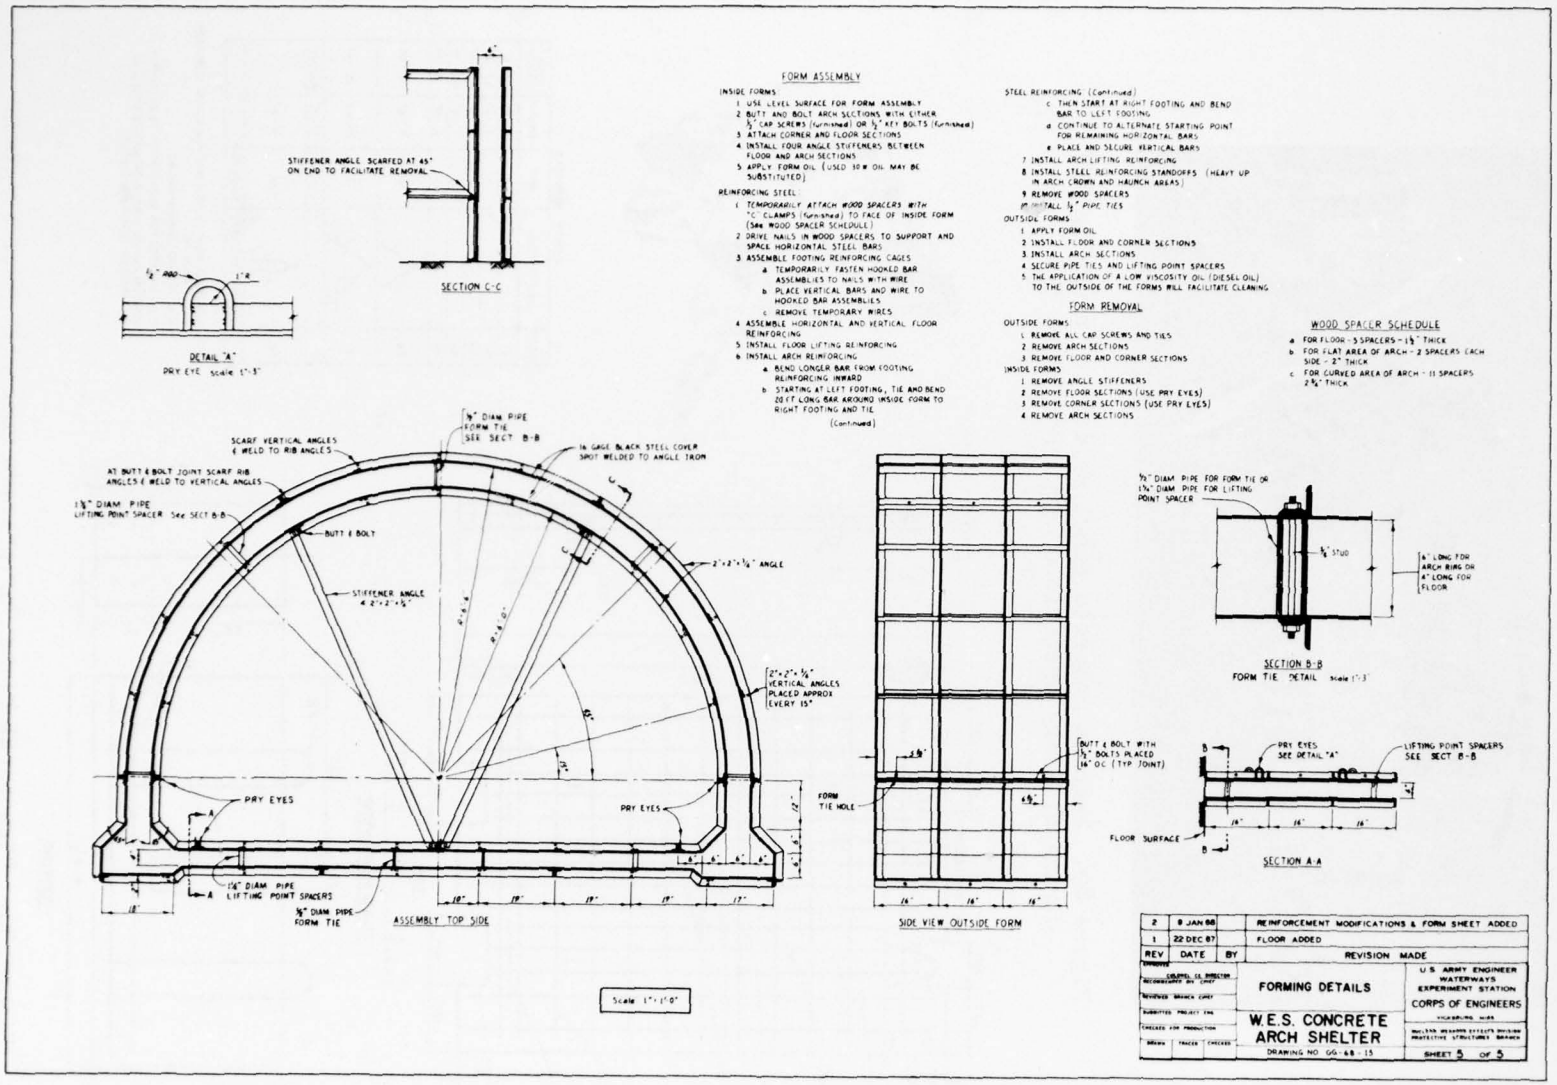


Figure 88 (sheet 5 of 5)


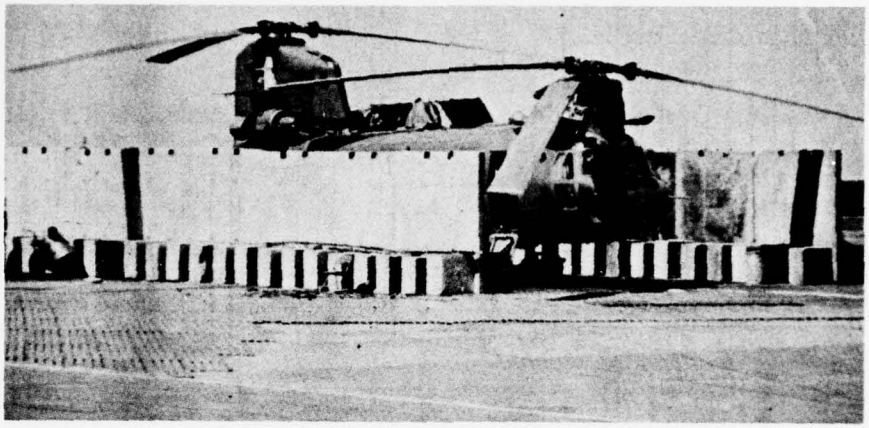


Figure 89. Precast concrete panel revetment in use in RVN during military operations (from Reference 54)

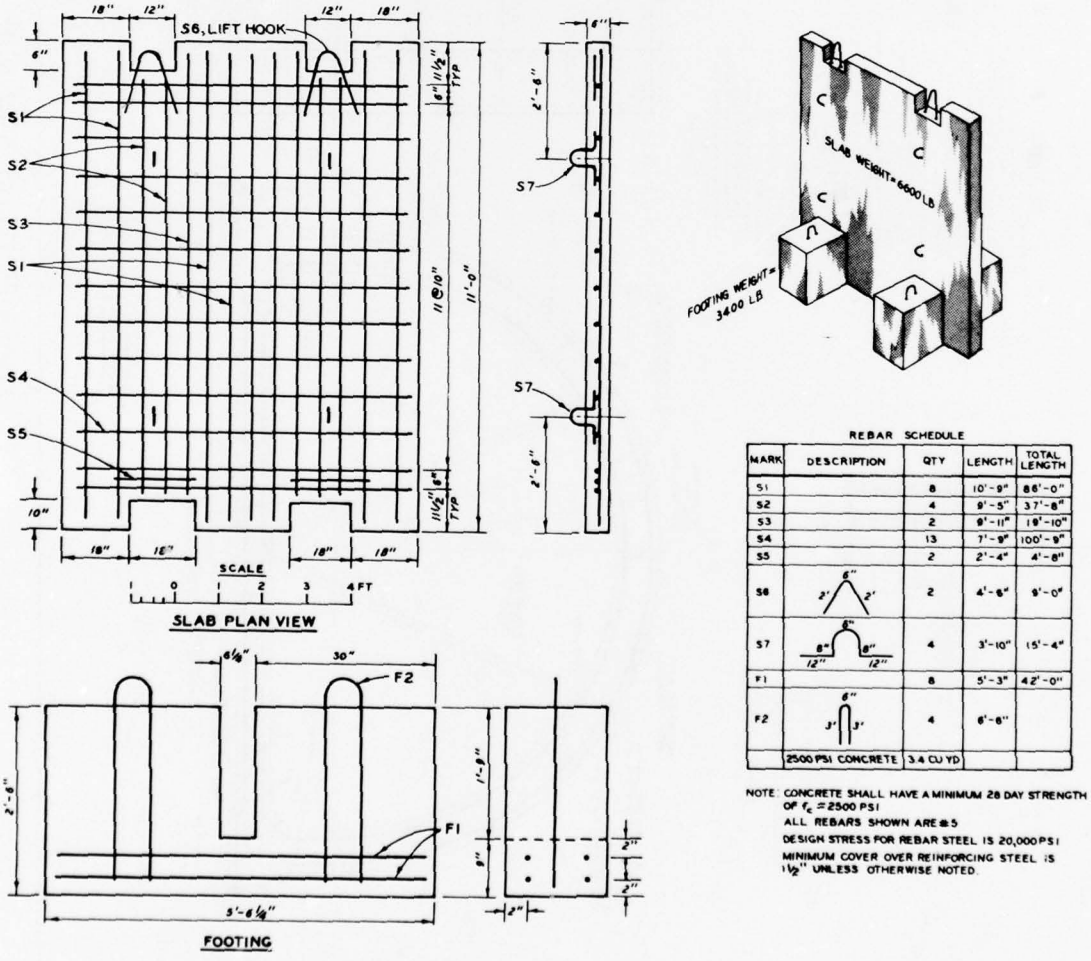

REBAR SCHEDULE

MARK	DESCRIPTION	QTY	LENGTH	TOTAL LENGTH
S1		8	10'-9"	86'-0"
S2		4	9'-5"	37'-8"
S3		2	9'-11"	19'-10"
S4		13	7'-9"	100'-9"
S5		2	2'-4"	4'-8"
S6	6" 2' 2'	2	4'-6"	9'-0"
S7	6" 8" 8" 12" 12"	4	3'-10"	15'-4"
F1		8	5'-3"	42'-0"
F2	6" 3' 3'	4	6'-6"	
	2500 PSI CONCRETE	3.4 CU YD		

NOTE: CONCRETE SHALL HAVE A MINIMUM 28 DAY STRENGTH OF $f_c' = 2500$ PSI
ALL REBARS SHOWN ARE #5
DESIGN STRESS FOR REBAR STEEL IS 20,000 PSI
MINIMUM COVER OVER REINFORCING STEEL IS 1½" UNLESS OTHERWISE NOTED.

Figure 90. Structural plans for precast concrete panel revetment with footers (from Reference 54)

Precast concrete
self-supporting panels

126. These panels are similar to those described in the previous paragraph, but they are cast with triangular rearward-facing flanges that make them self-supporting. Self-supporting revetment panels (Figure 91) offer an advantage over the panel-and-footers design in that



Figure 91. View of back of 9-ft-high self-supporting concrete panel (from Reference 54)

they are easier to set up where the ground surface is uneven or rough.[54] However, the fabrication effort and material costs of self-supporting panels are higher than those of panel-and-footers. Figure 92 gives the structural plans for typical precast concrete self-supporting revetment panels. The protection level provided by this design is the same as that of the panels with footers.

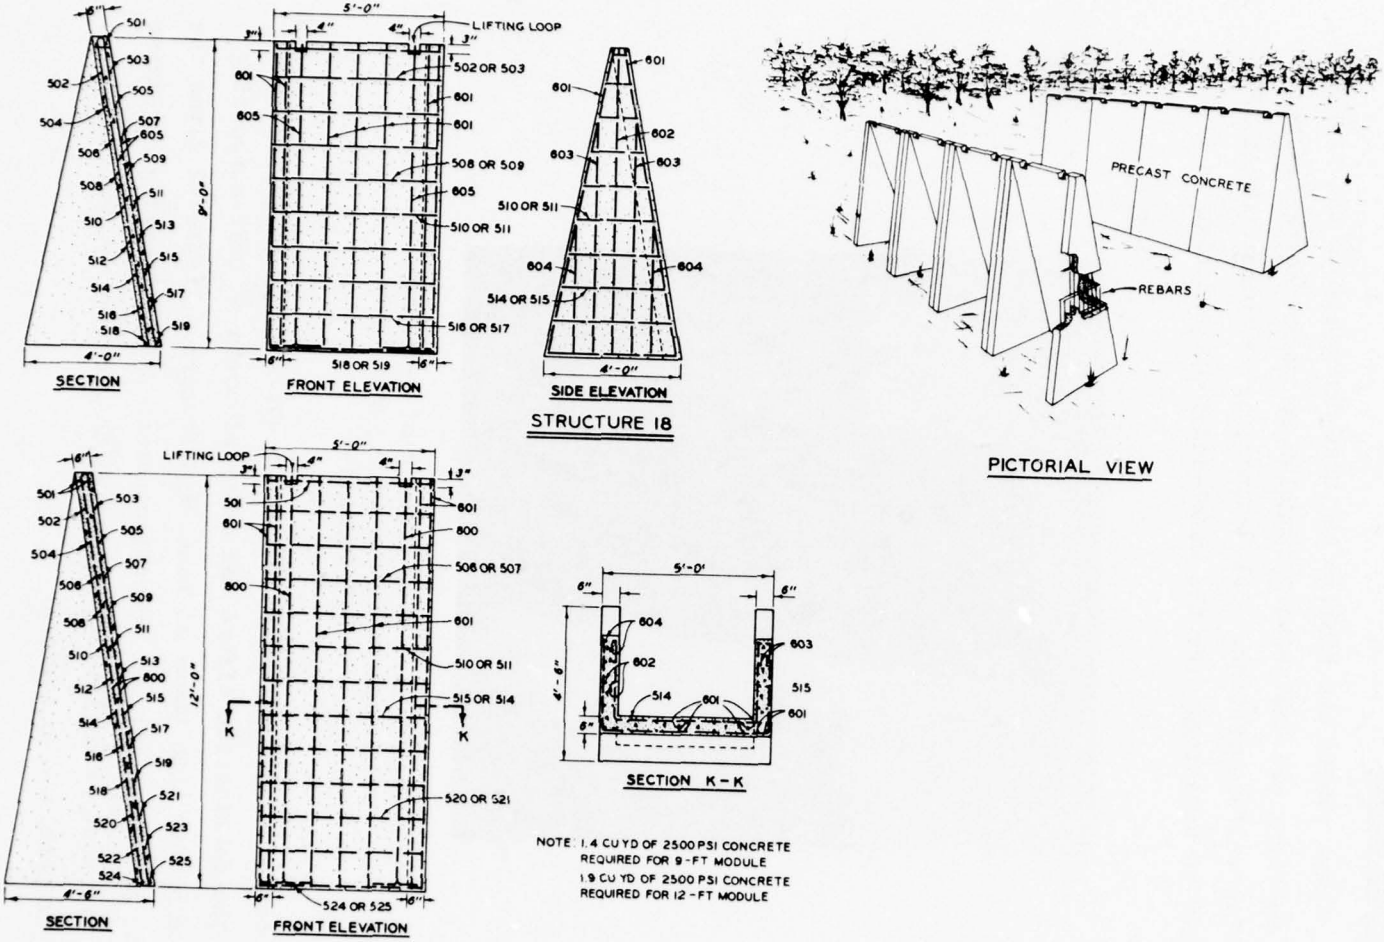



Figure 92. Structural plans for precast concrete self-supporting panel revetment (from Reference 54) (sheet 1 of 2)

REBAR SCHEDULE
HEIGHT: 12', BASE 4'-6", WEIGHT: 7700 LB

REBAR NO.	SIZE	QTY	TOT LENGTH	A	B	C	REMARKS
501	#5	1 EA	10'-4"	4"	4'-10"	4"	A B C
502		1	4'-10"	4"	4'-2"	4"	A B C
503		1	6'-2"	8"	4'-10"	8"	
504		1	5'-6"	8"	'-2"	8"	
505		1	6'-10"	1'-0"	4'-10"	1'-0"	
506		1	6'-2"	1'-0"	4'-2"	1'-0"	
507		1	7'-6"	1'-4"	4'-10"	1'-4"	
508		1	6'-10"	1'-4"	4'-2"	1'-4"	
509		1	8'-2"	1'-8"	4'-10"	1'-8"	
510		1	7'-6"	1'-8"	4'-2"	1'-8"	
511		1	8'-10"	2'-0"	4'-10"	2'-0"	
512		1	8'-10"	2'-0"	4'-2"	2'-0"	
513		1	9'-8"	2'-4"	4'-10"	2'-4"	
514		1	8'-10"	2'-4"	4'-2"	2'-4"	
515		1	10'-2"	2'-8"	4'-10"	2'-8"	
516		1	9'-6"	2'-8"	4'-2"	2'-8"	
517		1	10'-10"	3'-0"	4'-10"	3'-0"	
518		1	10'-2"	3'-0"	4'-2"	3'-0"	
519		1	11'-6"	3'-4"	4'-10"	3'-4"	
520		1	10'-10"	3'-4"	4'-10"	3'-4"	
521		1	12'-2"	3'-8"	4'-10"	3'-8"	
522		1	11'-6"	3'-8"	4'-2"	3'-8"	
523		1	12'-10"	4'-0"	4'-10"	4'-10"	
524		1	12'-2"	4'-0"	4'-2"	4'-0"	
525		1	13'-6"	4'-4"	4'-10"	4'-4"	
601	#6	14	188'-0"	12'-0"	—		A
602		4	47'-4"	11'-10"	—		
603		8	72'-0"	9'-0"	—		
604		8	40'-0"	5'-0"	—		
605		2	51'-6"	25'-0"	SEE DETAIL		

REBAR SCHEDULE
HEIGHT: 9', BASE: 4'-0", WEIGHT: 5500 LB

REBAR NO.	SIZE	QTY	TOT LENGTH	A	B	C	REMARKS
501	#5	1 EA	10'-4"	4	4'-10"	4"	A B C
502		1	5'-2"	6"	4'-2"	6"	A B C
503		1	6'-6"	10"	4'-10"	10"	
504		1	5'-10"	10"	4'-2"	10"	
505		1	7'-2"	1'-2"	4'-10"	1'-2"	
506		1	6'-8"	1'-3"	4'-2"	1'-3"	
507		1	8'-0"	1'-7"	4'-10"	1'-7"	
508		1	7'-4"	1'-7"	4'-2"	1'-7"	
509		1	8'-8"	1'-11"	4'-10"	1'-11"	
510		1	8'-2"	2'-0"	4'-2"	2'-0"	
511		1	9'-6"	2'-4"	4'-10"	2'-4"	
512		1	8'-10"	2'-4"	4'-2"	2'-4"	
513		1	10'-2"	2'-8"	4'-10"	2'-8"	
514		1	9'-8"	2'-9"	4'-2"	2'-9"	
515		1	11'-0"	3'-1"	4'-10"	3'-1"	
516		1	10'-10"	3'-1"	4'-2"	3'-1"	
517		1	11'-8"	3'-5"	9'-10"	3'-5"	
518		1	11'-2"	3'-6"	4'-2"	3'-6"	
519		1	12'-6"	3'-10"		3'-10"	
601	#6	14					A
602		4	35'-4"	8'-10"	—	—	
603		8	56'-0"	7'-0"	—	—	
604		8	32'-0"	4'-0"	—	—	
605		2	39'-4"	19'-8"	—	—	

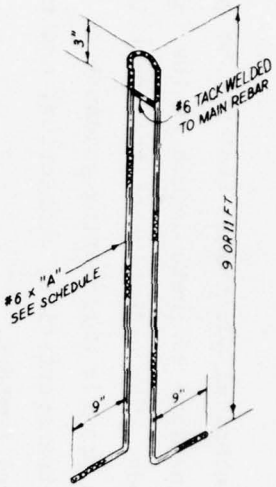

DETAIL REBAR NO. 605

Figure 92 (sheet 2 of 2)

PART VIII: FABRICATION, HANDLING, AND ERECTION

127. Many of the technical advantages that may be gained by using precast instead of cast-in-place concrete depend on the fabrication, handling, and erection methods. The objective of this part is to review contemporary practice and to provide engineering guidance on the fabrication, handling, storage, transportation, connection, and erection of precast concrete structural members.

Fabrication

128. Precast concrete elements are fabricated either in a permanent manufacturing plant or in a temporary jobsite plant. The permanent plant can economically incorporate more sophisticated machinery and equipment along with the flexibility to adjust to a variety of products, whereas the jobsite plant is tailored to the specific needs of that particular project.[6] A typical combat zone concrete precasting facility for prefabricated shelters, bunkers, and other small precast concrete parts is described in TM 5-302.[57] A suggested concrete precast facility for producing concrete military bridges (Appendix D) is given in Appendix F.

129. In general, the manufacturing plant comprises the following minimum elements:

a. Area for concrete plants and prestressing beds.

b. Area for storage forms and raw materials.

c. Area for storage of finished products.

130. Some guideline principles for manufacturing of precast concrete elements are given in the following paragraphs.

Proper drainage and road

131. Efficient and adequate surface drainage must be provided in all work areas and in storage areas. Areas adjacent to prestressing beds should be paved in order to reduce the possibility of contamination of strand surface and beds by dirt and mud, to facilitate drainage, and to increase the efficiency of the operation.

Beds

132. Foundation for beds should be stabilized to prevent differential settlement. Foundations may be pile supported or of the gravity-spread footing type. Height of bed should be set at best working level, particularly where considerable handwork is required.

Forms

133. Forms are generally designed for multiple reuse and should, therefore, be of steel, concrete, fiberglass, or heavy wood framing of equivalent strength. Accurate alignment of forms must be maintained during the casting operation. Form joints should be smooth and tight enough to prevent leakage of mortar. Forms must be cleaned immediately after removal of product. Particular attention must be paid to removal of grout from joints in working forms and from holes for affixing inserts.

Protection of steels

134. Proper storage must be provided for prestressing steel, mild reinforcing steel, and inserts to keep them clean and dry. High-strength steel is much more susceptible to corrosion than steel of lower strengths. Care should be taken in the storage of prestressing steel to prevent galvanic action that can occur when dissimilar metals are adjacent with an ionized medium common to both. Strand surface should always be inspected prior to placing concrete, and any found contaminated should be cleaned with an effective solvent.

Mixing and placing concrete

135. Proven procedures for mixing and placing concrete are described in detail in the following ACI publications:

ACI 614--Recommended Practice for Measuring, Mixing and Placing Concrete

ACI 306--Recommended Practice for Winter Concreting

ACI 605--Recommended Practice for Hot Weather Concreting

Curing

136. The ACI recommended practice for optimum curing for precast units should be followed:[58]

a. Initial curing. Immediately after the completion of the casting operation for molded precast units, each article

should be covered or enclosed by two layers of an approved water-saturated fabric until placed in position for final curing. The length of initial curing for units going into final steam curing will vary with steam curing temperature. From 1 to 4 hr is indicated, the higher the temperature, the longer the period.

b. Final curing. For final curing each article may be cured in the place in which cast under the original covering that must be kept thoroughly saturated for the entire curing period. For final curing each article may be moved at any time to a special curing chamber, where it may be left uncovered in an atmosphere completely saturated with a mist spray of either water or steam. In lieu of this treatment, final curing may be accomplished under two layers of an approved wet fabric thoroughly and continuously saturated with water for the entire curing period. The temperature of a curing room at atmospheric pressure should be maintained uniformly at some value between 50 and 180°F. Final curing may be performed under a pressure between 100 and 150 psi in saturated steam at 335 to 366°F.

Handling

137. Handling of the precast concrete units involves removal of the unit from the mold or form, transportation to temporary storage yard, loading, then transportation to the construction site, unloading, storage at the site (sometimes), and finally erection and attachment to the structure.

138. Since the pickup points are critical, precast concrete units should be lifted only at the designated points. When the units are stored, they must be similarly supported. Care should be exercised in handling units to avoid impact and unusual loading, such as lateral loads, vibration, and distortion.

139. Lifting loops for picking and handling must be designed with a safety factor of 6, i.e., their ultimate capacity should be 3X (dead load + impact) where impact = 100% dead load.[6] Embedment should be adequate to prevent pullout bond failure.

140. The angle that the sling or line makes with the lifting loop, at all positions during picking and handling, should be considered

and provision made therefor. Consideration should also be given to sway or swing, i.e., bending of the picking loop sideways. This will cause sharp bending stresses in the picking loops and may result in local concrete crushing.

141. Fabricated lifting inserts (e.g., fabricated plates) may be used, provided the following rules are applied:[6]

a. Their pullout value is ensured by mechanical or positive fastening in the concrete.

b. There are no welds transverse to the principal tension.

c. Plates are thick enough in themselves to withstand bearing from shackle pins--no built-up washers or cheek plate reinforcement of the eye.

d. Eyes are designed for shear, moment, and tension on the minimum section.

e. Steel used is ductile (serious failures have occurred when hard-grade brittle steels were used).

142. One popular type of lifting equipment is a rubber-tired, self-propelled, straddle machine (Figure 93). Straddle carriers are

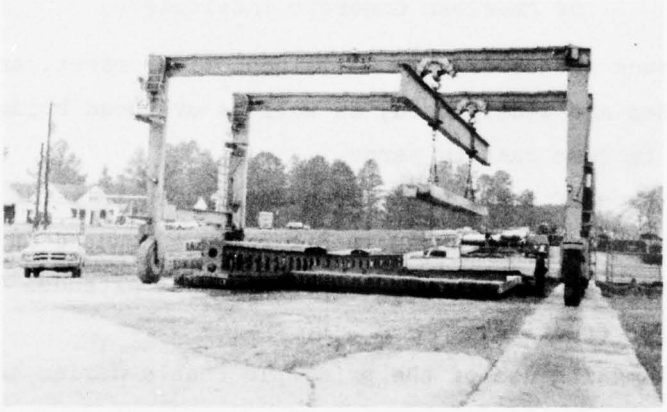


Figure 93. Straddle carrier

efficient machines for moving precast concrete units about the casting yard and loading them onto vehicles for transportation to the jobsite. These machines are made with inside clear widths ranging from 12 to 40 ft and heights from 12 to 40 ft and with wheel basis to suit the particular plant usage.[59] Although large and seemingly awkward, these

machines are constructed with 90-deg pivot steering so they can maneuver in the narrow aisles usually found in storage yards. Capacities up to 100,000 lb are available. Long girders can be handled by two machines in tandem.

143. The machine shown in Figure 94 is a heavy-duty forklift with an extra wide frame to enable it to carry long cored slabs.

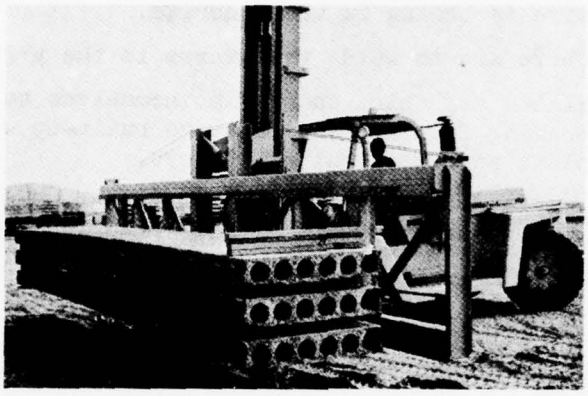


Figure 94. Forklift machine (courtesy of American Concrete Institute[59])

144. Truck cranes (Figure 95), locomotive cranes, and small hydraulic cranes are widely used, as well as overhead bridge cranes and gantry cranes in some casting yards.

145. A type of small crane frequently used in yards and for erecting is the hydraulic model shown in Figure 96. Mounted on a truck, the crane is easily maneuverable yet the boom can be extended to make the crane useful for erecting.

146. By making use of the principle that a device can be attached to any surface by creating a vacuum between the two, vacuum lifters have been developed for lifting precast concrete units[59] (Figure 97). One advantage of vacuum lifters is the reduction in handling time; it takes only a few seconds to attach or release the lifter.

147. Precast units should be stored in such a manner that each unit supports only its own weight, without any load imposed by other units.[59] Points of contact between units must be provided with protective material to prevent breakage.

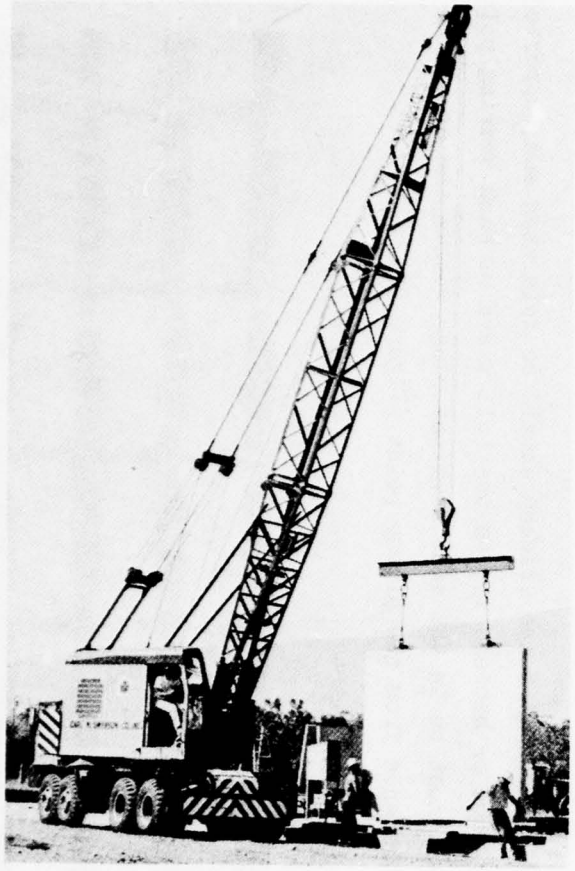


Figure 95. Truck crane (courtesy of American Concrete Institute[59])

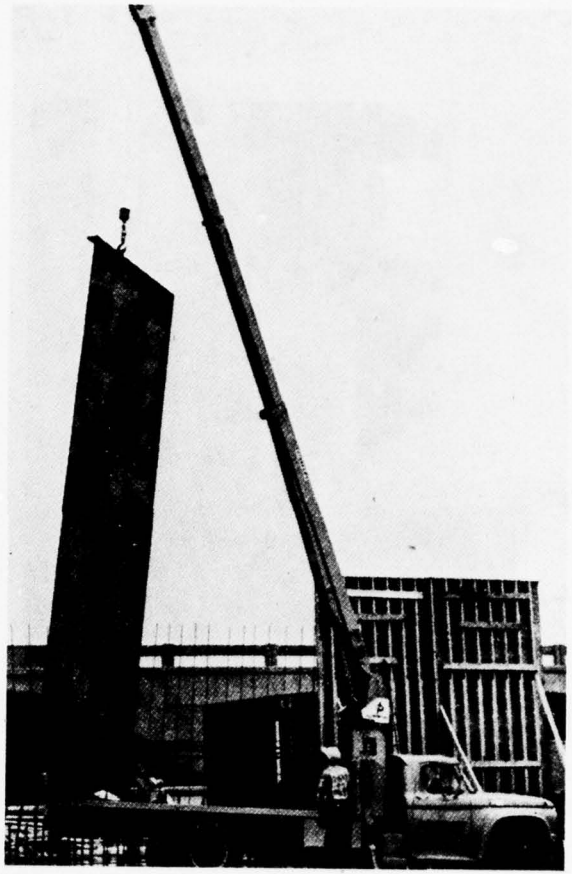


Figure 96. Hydraulic crane (courtesy of American Concrete Institute[59])

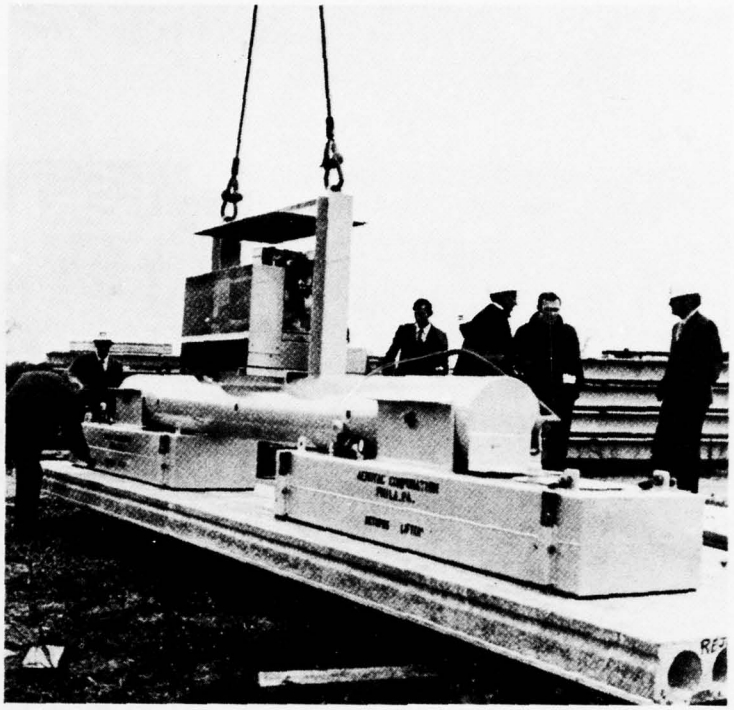


Figure 97. Vacuum lifter (courtesy of American Concrete Institute[59])

148. Units that are stacked should be separated and supported on strips of wood or battens across the full width of each bearing point.[59] All battens must be in the same vertical plane within the specified maximum distance from the pickup point (Figure 98).

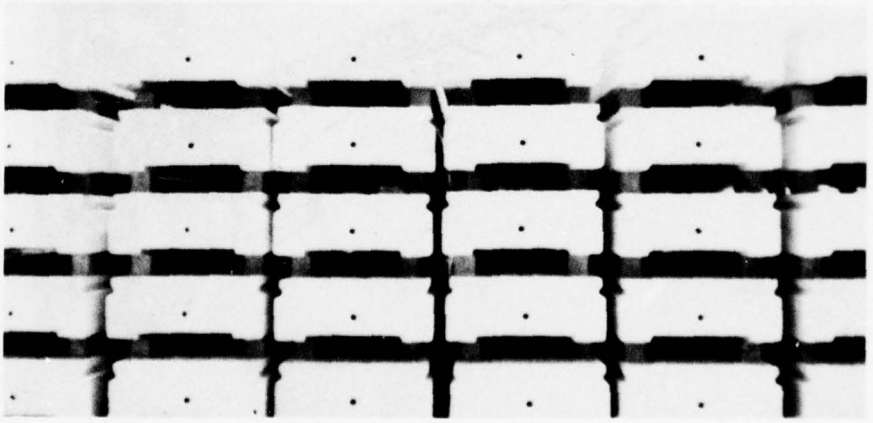


Figure 98. Storage of precast concrete elements

Transportation

149. Moderate-size precast concrete units can be transported by truck. Rail may be used for long-distance shipments and for over-length segments but often requires supplemental transportation to the actual jobsite. Barge transportation is very economical and practicable to water sites and can be used to transport heavy and oversize units.[6]

150. During transport, precast concrete units should be supported as they were in the storage yard, with added bracing to assure that they remain in this loaded position without shifting or overturning. Adequate padding must be inserted between chains, cables, or ropes and the precast concrete units to prevent clipping or other damage, a precaution especially important on edges and corners. This padding can consist of timber blocks or logging, rope mats, or plastic pads.

151. Lateral trussing or bracing might be necessary to prevent flexing of long slender units. A method that has been used successfully on long slender Tee- or I-girders is to attach short lengths of steel angle in both sides of the stem near the ends of the girder and a structural strut on each side at the midspan, with one or two stressing strands stressed between the angles and over the strut on each side[59] (Figure 99). For long members, pole trailers (Figure 100) are often

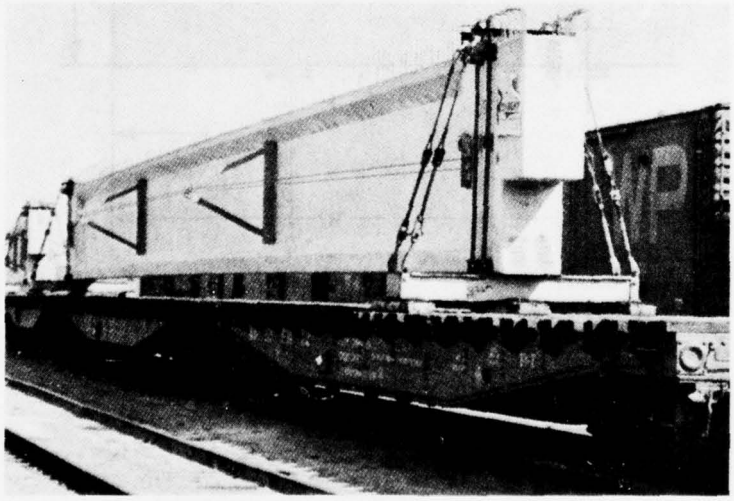


Figure 99. Long girder transported by rail cars (courtesy of American Concrete Institute[59])

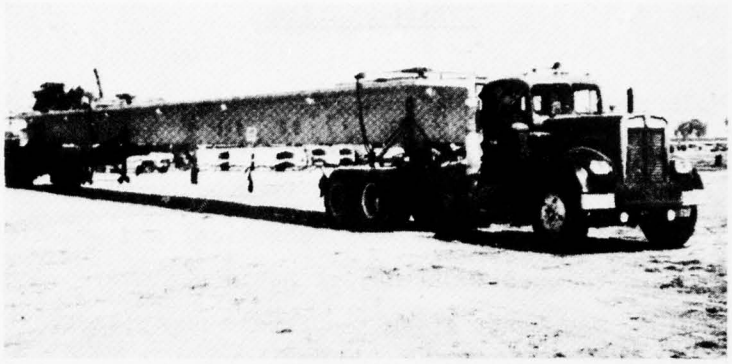


Figure 100. Pole trailer (courtesy of American Concrete Institute[59])

used, with the precast unit serving as the "pole" connection between truck and trailer.

152. Trucks with double bolsters are generally satisfactory provided the precast units are fully seated in the outer bolsters at not more than 3 ft or the depth of the number from the end, and the inner bolster is not more than 8 ft from the end of the unit (Figure 101).

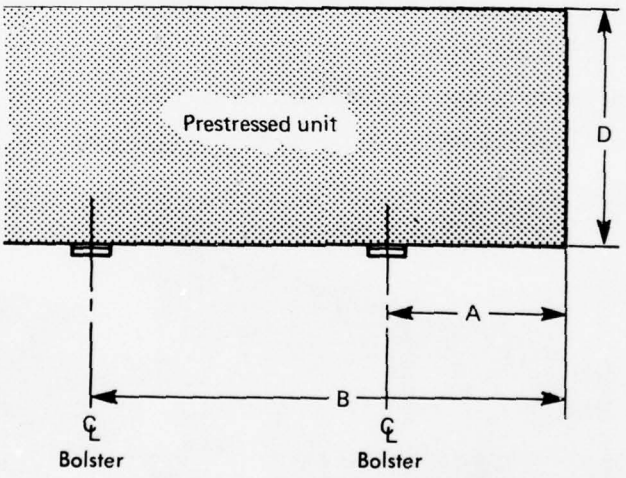


Figure 101. The distance from the center line of the rear bolster on a double-bolster dolly to the end of the prestressed member (distance A) should not exceed "D" or 3 ft, whichever is smaller. Distance "B" from center line of inner bolster to end of girder should not be more than 8 ft (courtesy of American Concrete Institute[59])

153. Upon arrival of the vehicle at the jobsite, the first operation is to remove all load binders, chains, and ropes confining the precast members. Then the exposed packing and padding are removed. Care should be taken to avoid damaging the concrete. Only one unit should be removed at a time except for small units that might be grouped on pallets. Units should be removed from alternate sides of the vehicle to avoid unbalancing the load, and the remaining units should be braced to prevent slipping or tipping. Units on the outside or top of the load should be unloaded first. Never try to slide a member out from the center of the load.

Connections

154. The connections between precast members should be designed in such a manner that they are capable of withstanding the ultimate vertical and horizontal loads for which the structure is proportioned, without failure, excessive deformation, or rotation. The recommendation of ACI-ASCE Committee 512[60] should be followed. The following paragraphs from Reference 60 are pertinent to the present discussion.

General considerations

155. It is recommended that joints and connections occur at logical locations in the structure and, when practical, at points that may be most readily analyzed and easily reinforced. Precautions should be made to avoid connection and joint details that would result in stress concentrations and the resulting spalling or splitting of members at contact surfaces. Liberal chamfers, steel-edged corners, adequate reinforcement, and cushioning materials are a few of the means by which such stress concentrations may be avoided or provided for.

156. The strength of a partially completed or completed structure should be governed by the strength of the connections; the connection should not be the weak link in the structure.

Loading conditions

157. Loading conditions to be considered in the design of joints and connections are service loads including wind and earthquake forces;

volume changes due to shrinkage, creep, and temperature change; erection loads; and loading encountered in stripping forms, shoring and removal of shores, storage, and transportation of members. Proper attention should be given to loads and the resulting stress peculiar to the sequence of erection. Typical examples of construction in which the sequence and manner of erection affect the loading and stresses in the member are possible eccentric loading due to the erection of members on one side only of a member, installation of composite concrete toppings on shored or unshored slabs or beams, and continuity moment connections over supports. All significant combinations of loading should be investigated, and the joints and connections should be designed for loadings consistent with these possible combinations of loading.

158. If it is not practical to provide for all possible temporary loading conditions that could occur during erection, special erection procedures may be warranted. If so, complete erection instructions should be included in the plans and specifications that become part of the erection contract documents. Loading sequences, connection sequences, and if necessary shoring or guying schedules should be clearly outlined. The disposition and strength of shoring should be stated and approved prior to construction.

Erection

159. The erection methods are determined by the span, height, and type of the structure, its location, the topography, the weight, size, and configuration of the precast elements, the method of connection, and the erection equipment available. In general, however, the majority of erection methods and techniques that have been developed and employed for precast concrete bridge construction fall into the following classes.[6]

Crane erection

160. This includes erection by land-operating cranes, by derricks on water, and by cranes or derricks mounted on the structure itself.

161. When using inclined slings, the temporary buckling stresses

due to increased compression in the top flanges of the girder must be considered, as well as the increased forces on the lifting loops or devices. Angles of force should be considered for each position during the lift. Lifting loops must be suitable for all angles of lift to prevent localized crushing or overstress.

162. Land cranes must have firm undersupport, adequate for the concentrated temporary loads under their tracks, wheels, or outriggers. The position of the crane, angles of lift, and working radii must be plotted on working drawings and accurately laid out and enforced in the field.

163. When two cranes are used to erect a single member, each should have sufficient capacity to take at least 66 percent of the total load, and precautions should be taken to prevent undue swinging and side-pull on the booms and to ensure that the girder does not hit one of the booms during the successive steps of rotation of the booms.

164. Derricks or cranes mounted on the structure must be properly secured, and the temporary loadings imposed on the structure, including torsion, must be checked.

165. Care should be taken to prevent either the unit being lifted or another part of the structure from hitting the boom as this may cause the boom to buckle.

166. Waterborne derrick barges should be checked for capacity during all stages of lift and placement, with due allowance for list due to load and wave action. The list of a waterborne derrick or crane tends to surge it out of position laterally, putting an added strain on anchor lines. Also, the rotation of the revolving crane or derrick while listing puts added strain on the barge, the derrick base and roller path, and the swing engines and also produces torsion in the boom. Furthermore, the list increases the actual picking radius as the load drifts outward and, thus, may overload the crane. Before picking near-capacity loads, therefore, a thorough engineering check must be made of all phases of the pick.

Floating-in

167. Either entire spans or major portions thereof may be built

or assembled on scaffolding on a barge, then towed to the site, moored in exact position, and lowered onto the bearings.

168. Large single barges may be used, or multiple barges may be joined with trussing. How the differential movement, due to waves, affects the precast span or element must be investigated. Wind forces on the barges and spans also must be taken into consideration.

169. Lowering may be accomplished by using the tides, flooding compartments in the barges, or jacks. In flooding, the effect of the free surface on stability must be considered. This usually requires that the barges or pontoons be compartmentalized.

170. Stability must also be carefully calculated during transport on the barges because of the great weights involved and the height of center of gravity.

171. With substructure elements, buoyancy may be provided within the element itself, and sinking accomplished by adding ballast, such as gravel, iron ore, concrete, or sand in compartments, or by flooding isolated compartments. Alternatively, positive buoyancy may be maintained and the element submerged by pulling or jacking against pile anchors.

172. Substructure units may also be transported under a barge or pontoons. In such a case, the unit may be constructed in a dry dock or basin, which is then flooded, thus allowing the barge to float in over it, pick it up, and carry it underneath itself until in position. This method takes advantage of the reduction in deadweight due to submergence, shows inherent stability, and all lifts and lowerings are direct.

Erection in falsework

173. A steel or aluminum truss is placed in position, and the elements are lifted one by one, for example, by crane, onto the falsework. When an entire span unit is erected, the precast units are jacked and shimmed to the exact profile, then jointed and stressed. This method is especially adapted to the case of parallel girders, because after one girder is erected and stressed, the stressing automatically decentering the falsework, the falsework span may be moved sidewise for the next parallel girder. Alternatively, the falsework truss span may

be above the final girder location, the precast units being raised from barges into position by hoists, and held until jointed and stressed.

Launching gantry

174. This method involves the use of a special erection or launching gantry, which may include means for moving itself forward as portions of the bridge are completed.

175. Under one system precast segments are moved forward at deck level from one abutment, out over the completed superstructure. The segment is then picked up by the launching gantry and carried forward. To enable it to pass through the supporting legs, it is usually rotated at right angles to its final position during movement, then turned back and set in its final position. The individual precast segments are usually jointed and stressed before the next segment is launched.

176. When using a launching gantry to erect prestressed girders, provision must be made for lateral transfer of the girders after they have been moved into their span. Rollers, wheels on tracks, skidding with jacks, etc., are often employed to accomplish this lateral transfer. Positive stops must be provided to prevent the girder being moved beyond the end of the cap through accident.

177. Launching gantries are major steel bridges in themselves, subject to reversal of stress conditions as they are moved and to impact as they handle the precast segments. Since the connections are usually field bolted, it is important that provision be made for frequent inspection of all joints and repairing or strengthening of any members accidentally damaged. If high-strength bolts are used, a clear identification marking must be placed on them to prevent careless replacement by a conventional bolt.

178. Safe walkways and, where applicable, moveable safety nets or platforms should be provided as an integral part of the launching gantry.

Direct launching

179. This scheme has been employed to move precast girders lengthwise from a completed portion of the superstructure to their span location. A light steel or aluminum launching nose is overbalanced by a counterweight or heavy rearward extension. Movement forward may be

accomplished by jacking, rolling, tracked carriages, or cranes. The girder must be analyzed for temporary stress conditions as it is cantilevered forward and, if necessary, strengthened by external trussing or internal reinforcement. This method is particularly suitable for a single span in remote locations.

180. The same principle has been used in Venezuela, Germany, France, and the U. S. S. R. to launch an entire series of spans of prestressed concrete, the girders being approximately uniformly stressed to take care of moment reversal until they are in final location. Then the tendons are deflected up and down to their permanent profile, or additional curved tendons added. Special "frictionless" bearings of teflon on chrome-nickel steel plates are used on top of the piers. The piers may require temporary guys or stays during the launching operations.

Cantilever-suspended span

181. The precast hammerhead section may be floated or lifted in, supported by barges or cranes at each end, and set on the pier. Temporary stresses as a simple span must be countered by external or internal reinforcement.

182. Since this is the section subject to maximum negative moment, its required final prestress force will generally be very high. During this stage, before the adjoining suspended spans are set, the tensile stresses in the bottom may exceed allowable limits. Stage stressing may be employed, or additional internal reinforcement provided in the bottom of the girders, or external structural steel beams bound to the segment.

183. Smaller hammerhead girders may be hoisted by one crane lifting at the center.

184. Stability may be provided by stressing temporarily or permanently to the pier shaft, by an inclined leg support from the pier base, or by falsework towers at one or both ends.

185. Precast girders are particularly adaptable to suspended spans. They may be lifted in with one or two cranes working from below or from the cantilevered ends of the superstructure, or they may be moved forward on a falsework truss or by launching gantry. Suspended

spans may be assembled from precast segments on barges and floated or lifted into place.

Progressive cantilevering

186. This is an extremely useful method for construction of concrete bridges with precast or cast-in-place segments. As each segment is placed, it is jointed and stressed back to the completed portion of the superstructure. The sequence of erection is chosen to keep the partially completed superstructure balanced about a pier, in double cantilever.

187. To facilitate setting of a precast segment, a step or ledge may be provided on the previous segment so that the new segment can be readily set into exact position. Erection bolts should be provided so the segment can be pulled into exact position and held.

188. Dry joints and epoxy joints are particularly adaptable to use with progressive cantilevering as they enable each segment to be jointed and stressed as one continuous operation, usually in one day. Other types of joints may be employed with accelerated curing so as to minimize delays between successive segments.

189. Temporary suspension of the cantilevered segments may be provided by external tendons, e.g., cables running up to a temporary tower above the pier. Stability during erection of the cantilevered arms may be provided by temporary vertical stressing down to the pier, by inclined legs, or by falsework towers.

Sliding of segments

190. Precast segments may be slid forward to their position in the span on skids, rails, or rollers over falsework trusses or falsework girders. Similarly, they may be slid along temporary or permanent wire rope cables to their correct position in the span.

Erection by helicopters

191. The precast concrete elements may be lifted into position by helicopters. The Army has used the helicopter to lift and move heavy construction materials, especially in areas where surface transport is limited or restricted, quite extensively. The lifting capacity of present helicopters is about 10 tons. Development of a heavy-lift

helicopter (25 tons) is now being undertaken. Several problems (e.g., relatively low-maximum loads, requirement for preslinging, lack of pilot training for construction operations, lack of efficient communication between pilots and surface crews, etc.) exist when using current inventory helicopters for erection of precast concrete elements. However, since most of these problems can be corrected with new equipment and proper training, it is reasonable to assume that helicopter operations may become much more important in precast concrete construction in the TO.

PART IX: SUMMARY AND RECOMMENDATIONS

Summary

192. The literature survey on the prefabricated concrete elements for structures revealed that precast concrete construction provides a rapid and economical method for erecting new structures and for the repair or replacement of existing structures. This is possible because precast construction eliminates most falsework and shoring at the construction site and requires only a small erection crew. Precast construction is particularly advantageous in isolated places where labor and materials are not readily available.

193. From the many precast concrete bridge structures evaluated, it appears that the precast channel girders developed by the State Aid Division of MSHD are most suitable for use in the TO. Designs for two modified precast concrete channel girder bridges capable of supporting military Heavy Equipment Transporters (HET's)[61] are developed in Appendix D. It is believed that the construction of these precast channel girder bridges is within the normal capabilities of Army engineer troops.

194. Precast, prestressed concrete piles have proven to be the most economical solution for a wide range of piling installations, especially when durability is important, when high axial load and moment capacities are required, and when the total volume in a geographical area is sufficient to justify a proper manufacturing setup and mobilization of proper driving equipment.

195. Precast concrete is well adapted for floating structures of all types. Precast concrete container pier modules that are mass produced ashore, constructed in modules, launched, towed to the site, and jacked to the required elevation are envisioned as a means for providing expedient military ports.

196. Precast concrete field fortifications have been widely used by United States troops during combat operations. Precast concrete security bunkers, quarters shelters, command and control shelters, and equipment and supplies shelters provide excellent protections.

197. Many of the technical advantages that may be gained by using precast instead of cast-in-place concrete depend on the fabrication, handling, and erection methods. Engineering guidance on the fabrication, handling, storage, transportation, connection, and erection of precast concrete structural members is given in Part VIII of this report.

Recommendations

198. The following recommendations are made based on the information survey reported herein:

a. Fabricate, erect, and test a prototype concrete channel girder bridge to validate the design and refine construction techniques.

b. Adopt the precast concrete channel girder bridge presented in Appendix D as a standard military bridge.

c. Either incorporate the results of this study into appropriate existing manuals[2,3,36] or, preferably, develop a new manual devoted to precast concrete.

d. Develop and evaluate designs for prefabricated concrete barges suitable for use as container pier modules, floating breakwaters, fuel transport and storage facilities, etc., as necessary in expedient TO military ports.

e. Evaluate the effectiveness of precast concrete in creating expedient barriers and obstacles. An evaluation of thermic methods to neutralize enemy protective structures and barriers of concrete should be included in such an investigation.

f. The following studies should be performed prior to the use of precast concrete elements in the TO: (1) the casting site be investigated to see if adequate materials (e.g. aggregate) for concrete are available); (2) the importance of the time factor for fabrication of the precast element be considered if the mission is urgent and the need is immediate; (3) the relocatability of the precast concrete elements versus structural steel; and (4) the economics of using precast concrete elements versus wood, steel, or cast-in-place concrete.

REFERENCES

1. Gribble, LTG W. C., Jr., "Army Engineering for the Future," The Military Engineer, Vol 66, No. 429, Jan-Feb 1974, pp 2-4.
2. Headquarters, Department of the Army, "Military Fixed Bridges," Technical Manual TM 5-312, Dec 1968, Washington, D. C.
3. _____, "Concrete and Masonry," Technical Manual TM 5-742, Jun 1970, Washington, D. C.
4. Hartland, R. A., Design of Precast Concrete, Wiley, New York, 1975.
5. Libby, J. R., Modern Prestressed Concrete, Van Nostrand, New York, 1971.
6. Gerwick, B. C., Jr., Construction of Prestressed Concrete Structures, Wiley-Interscience, New York, 1971.
7. Portland Cement Association, Precast Concrete Bridge Decks, Chicago, Ill., 1953.
8. The American Association of State Highway and Transportation Officials, Standard Specifications for Highway Bridges, 11th ed., Washington, D. C., 1973.
9. Berson, G. L., "Details of a Short Span Economical Bridge," Prestressed Concrete Institute Journal, Vol 11, No. 1, Feb 1966, pp 95-99.
10. Salmons, J. R. and Kagay, W. J., "The Composite U-Beam Bridge Superstructure," Prestressed Concrete Institute Journal, Vol 16, No. 3, May-Jun 1971, pp 20-32.
11. Salmons, J. R. and Mokhtari, S., "Structural Performance of the Composite U-Beam Bridge Superstructure," Prestressed Concrete Institute Journal, Vol 16, No. 4, Jul-Aug 1971, pp 21-33.
12. "Ardrossan Bridge Employs Precast, Prestressed Components," Civil Engineering, Vol 38, No. 2, Feb 1968, pp 48-49.
13. Bender, B. F. and Kriesel, W. G., "Precast, Prestressed Box Beams--A State-of-the-Art Report," Prestressed Concrete Institute Journal, Vol 14, No. 1, Feb 1969, pp 72-95.
14. Libby, J. R., "Segmental Box Girder Bridge Superstructure Design," Journal, American Concrete Institute, Vol 73, No. 5, May 1976, pp 279-290.
15. Goodkind, H., "The Use of Prestressed Concrete and Epoxies to Expedite Construction of Interstate Route 87," Prestressed Concrete Institute Journal, Vol 12, No. 1, Feb 1967, pp 71-79.
16. Curtis, R. B., "Single-Tee Bridges," Prestressed Concrete Institute Journal, Vol 12, No. 2, Apr 1967, pp 76-81.
17. Anderson, A. R., "Systems Concepts for Precast and Prestressed Concrete Bridge Construction," HRB Special Report 132, 1972, Highway Research Board, Washington, D. C., pp 9-21.

18. Grant, A., "Naches River Bridge," Prestressed Concrete Institute Journal, Vol 11, No. 4, Aug 1966, pp 40-48.

19. Bender, M. E., "Prestressed Concrete Bridges for the Illinois Toll Highway," Proceedings, World Conference on Prestressed Concrete, San Francisco, 1957, pp A 11-1 - A 11-8.

20. Janney, J. and Eney, W. J., "Full Scale Test of Bridge on Northern Illinois Toll Highway," Proceedings, World Conference on Prestressed Concrete, San Francisco, 1957, pp A 12-1 - A 12-18.

21. Jacques, F. J., "Study of Long Span Prestressed Concrete Bridge Girders," Prestressed Concrete Institute Journal, Vol 16, No. 2, Mar-Apr 1971, pp 24-42.

22. Anderson, A. R., "Stretched-Out AASHO--PCI Beams Types III and IV for Longer Span Highway Bridges," Prestressed Concrete Institute Journal, Vol 18, No. 5, Sep-Oct 1973, pp 32-49.

23. Prestressed Concrete Institute, Prestressed Concrete for Long Span Bridges, Chicago, Ill., 1968.

24. Grant, A., "Yakima River Bridge," Prestressed Concrete Institute Journal, Vol 13, No. 4, Aug 1968, pp 75-81.

25. Gerwick, B. C., Jr., "Bridge Over the Eastern Scheldt," Prestressed Concrete Institute Journal, Vol 11, No. 1, Feb 1966, pp 53-59.

26. Cancio, E. R. and Munoz, F. A., "Small Precast Concrete Pieces Make Up a Medium Span Prestressed Bridge," Journal, American Concrete Institute, Vol 62, No. 3, Mar 1965, pp 293-305.

27. Casad, D. D. and Birkeland, H. W., "Bridge Features Precast Girders and Struts," Civil Engineering, Vol 40, No. 7, Jul 1970, pp 42-44.

28. Laszlo, G., "A Prestressed Lightweight Concrete Bridge 131 Ft Long," Civil Engineering, Vol 37, No. 4, Apr 1967, pp 64-65.

29. American Railway Engineering Association, "Manual for Railway Engineering (Fixed Properties)," 2 vols, 1973, Chicago, Ill.

30. Studzinski, S. H., "Shallow Prestressed Girders for Fresno Underpass," Civil Engineering, Vol 37, No. 10, Oct 1967, pp 60-62.

31. Barton, R. M., "Prestressed, Precast Concrete Railroad Bridges," Journal, Structural Division, American Society of Civil Engineers, Vol 94, ST12, Dec 1968, pp 2885-2911.

32. Drew, F. P., "Studies of Box Beams for Railway Bridges," Prestressed Concrete Institute Journal, Vol 10, No. 3, Jun 1965, pp 46-51.

33. De Farranti, N. L., and Associates, "Report on Precast Prestressed Concrete Bridge Girders," TR No. 20, Jan 1970, Cement and Concrete Association of Australia, North Sydney, Australia.

34. Williamson, H. M. and Fuller, T. L., "Dumbarton Bridge Renewal," Civil Engineering, Vol 39, No. 7, Jul 1969, pp 44-47.

35. Whitaker, T., The Design of Piled Foundations, 1st ed., Pergamon Press, New York, 1970.

36. Headquarters, Department of the Army, "Pile Construction," Technical Manual TM 5-258, Jun 1963, Washington, D. C.

37. Williams, N. S., "The Transporting, Handling, Pitching, and Driving of Prestressed Concrete Piles," Structural Concrete, Vol 2, No. 5, Sep-Oct 1964, pp 212-233.

38. Weller, N. H. E., "Prestressed Concrete Piles," Prestressed Concrete Institute Journal, Vol 7, No. 5, Oct 1962, pp 46-55.

39. Lin, T. Y., Design of Prestressed Concrete Structures, 2d ed., Wiley, New York, 1963.

40. ACI Committee 543, "Recommendations for Design, Manufacture, and Installation of Concrete Piles," Journal, American Concrete Institute, Vol 70, No. 8, Aug 1973, pp 509-544.

41. Li Shu-t'ien, "Technological Frontiers of Prestressed Concrete Piling," Prestressed Concrete Institute Journal, Vol 12, No. 6, Dec 1967, pp 42-60.

42. Lenard, J. F., "Precast T's and Slabs Make Culverts Quickly," Civil Engineering, Vol 34, No. 10, Oct 1964, pp 64-65.

43. Portland Cement Association, "Concrete Culverts and Conduits," Report No. EB 061.02W, 1975, Skokie, Ill.

44. Boring, M. R., "Precast Reinforced Concrete Pipe Sections," Concrete Pipe News, Vol 25, No. 3, Jun 1973, pp 43-49.

45. Heger, F. J., Latona, R. W., and Bealey, M., "Computerized Design of Precast Reinforced Concrete Box Culverts," Structural Performance of Drainage Structures, Highway Research Board Record No. 443, pp 40-51, 1973, National Academy of Sciences--National Research Council, Washington, D. C.

46. Peckworth, H. F., ed., Concrete Pipe Handbook, 2d ed., American Concrete Pipe Association, Arlington, Va., 1967.

47. Concrete Pipe Design Manual, 2d ed., American Concrete Pipe Association, Arlington, Va., 1974.

48. Fintel, M., ed., Handbook of Concrete Engineering, Van Nostrand, New York, 1974.

49. Maxwell-Cook, P. V., ed., Concrete Sea Structures, FIP Symposium on Concrete Sea Structures, Federation Internationale de la Precontrainte, London, 1973.

50. Yee, A. et al., "Design and Construction of Oceangoing Pretensioned Concrete Barges," Journal, American Concrete Institute, Vol 72, No. 4, Apr 1975, pp 125-134.

51. Turner, F. H. and Corlett, E. C. B., "Prestressed Concrete Carriers for the Transportation and Storage of Cryogenic Liquids," Concrete Sea Structures, FIP Symposium on Concrete Sea Structures, 1973, pp 18-25.

52. Clark, A. A. et al., "Port Construction in the Theater of Operations," Technical Report H-73-9, Jun 1973, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.

53. Hromadik, J. J. at al., "Mobile Ocean Basing Systems--A Concrete Concept," Technical Note N-1144, Jan 1971, Naval Civil Engineering Laboratory, Port Hueneme, Claif.

54. Hoot, B. B. et al., "Evaluation of Field Fortifications," Technical Report N-74-5, Aug 1974, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.

55. Carre, G. L., "Design, Construction, and Evaluation of Protective Military Structures," Technical Report N-68-1, Aug 1968, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.

56. Kennedy, T. E. et al., "Expedient Field Fortifications for Use Against Nuclear Weapons," Technical Report N-74-7, Sep 1974, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.

57. Headquarters, Department of the Army, "Army Facilities Components System Design," Technical Manual TM 5-302, Vol 1, Sep 1973, Washington, D. C.

58. ACI Committee 612, "Curing Concrete," Journal, American Concrete Institute, Vol 30, No. 2, Aug 1958, pp 161-172.

59. Waddell, J. J., "Precast Concrete: Handling and Erection," Monograph No. 8, 1974, Iowa State University Press, Ames, Iowa, and American Concrete Institute, Detroit, Mich.

60. ACI-ASCE Committee 512, "Suggested Design of Joints and Connections in Precast Structural Concrete," Journal, American Concrete Institute, Vol 61, No. 8, Aug 1974, pp 921-938.

61. Robinson, J. H. and Rula, A. A., "Heavy Equipment Transporter (HET) Mobility Performance Evaluations," Technical Report M-76-4, Feb 1976, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.

62. American Society for Testing and Materials, "Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement," Designation: A 615-75, 1976 Book of ASTM Standards, Part 4, 1976, Philadelphia, Pa.

63. U. S. Department of Commerce, Bureau of Public Roads, "Standard Plans for Highway Bridges; Vol 1, Concrete Superstructures," Jun 1962, Washington, D. C.

64. Ben C. Gerwich, Inc., "Precast Prestressed Concrete Piles," San Francisco, Calif.

65. American Society for Testing and Materials, "Standard Specification for Reinforced Concrete Low-Head Pressure Pipe," Designation: C 361-76, 1977 Book of ASTM Standards, Part 16, 1977, Philadelphia, Pa.

Table 1

Commercially Stocked Concrete Pipe

Inside Diameter in.	Type of Pipe
4 to 24	Nonreinforced concrete drain tile
4 to 36	Nonreinforced concrete sewer, storm drain, and culvert
12 to 108*	Reinforced concrete culvert, storm drain, and sewer pipe
15 to 108*,**	Reinforced concrete arch culvert, storm drain, and sewer pipe
18 to 108*,**	Reinforced concrete elliptical culvert, storm drain, and sewer pipe
4 to 24	Nonreinforced concrete pipe for irrigation or drainage
6 to 24	Nonreinforced concrete irrigation pipe with rubber gasket joints
12 to 108	Reinforced concrete low-head pressure pipe
4 to 24	Perforated concrete pipe
20 to 96	Reinforced concrete water pipe--steel cylinder type, not prestressed
16 to 96	Reinforced concrete water pipe--steel cylinder type, prestressed
12 to 96	Reinforced concrete water pipe--noncylinder type, not prestressed
48 by 48 to 90 by 90	Flat base pipe

* Available in larger sizes on order.
** Equivalent circular sizes.

APPENDIX A: RESPONSE TO QUESTIONNAIRE SENT TO ENGINEER CONSTRUCTION GROUPS AND BATTALIONS

PRECEDING PAGE NOT FILMED
BLANK

1. As a starting point from which to gather information from the field, a brief questionnaire (Figure A1) was prepared to determine the interests and/or experiences of various Engineer troop units regarding precast concrete elements. Figure A2 is the list of the Engineer Construction Groups and Battalions furnished this questionnaire on 10 December 1974. The first four addresses (Construction Groups) were furnished questions 1-5 on the questionnaire; others (Construction Battalions) were sent questions 1-6. Of the 18 units contacted, 10 responded. Their responses are presented in detail in Figure A3 and then summarized in Table A1.

2. The general consensus was that concrete precasting operations do have a place in Army Engineer TOE units. However, less than 40 percent of the units responding indicated any prior experience with either fabrication or erection of precast concrete elements. All comments were considered in developing the direction and depth of the study, and most are addressed within the report.

Table A1: Summary of Response to Request for Information

	24th Engineer Gp (Const)	?? Engineer Gp (Const)	79th Engineer Bn (Const)	84th Engineer Bn (Const)	864th Engineer Bn (Const)	548th Engineer Bn (Const)	802d Engineer Bn (Const)	293d Engineer Bn (Const)	43d Engineer Bn (Const)	249th Engineer Bg (Const)
1. Do concrete precasting operations have a place in Army Engineer TOE units?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes
2. Should the proposed precasting facility include a prestressing capability?	Yes	No	Yes	Yes	No	No	No	No	Yes	Yes
3. Indicate those elements which should be included in the capabilities of a TOE precast facility:										
Types I & II AASHO I-Beams	x		x	x	x					
Tee Beams (Single/Double)	x	x	x	x	x				x	x
Box Beams			x	x						x
Channel Beams			x	x	x		x			
Slabs		x	x	x			x			
Wall Panels	x	x	x	x	x		x	x		
Piling			x	x			x			x
Box Culverts		x	x	x	x				x	x
Pipe			x	x		x		x		x
Other			x*			x**	x†	x††	x	x
4. Indicate those theatre of operations type structures most suited to precast concrete construction:										
Administrative Buildings		x	x		x		x			
Barracks-Type Buildings		x	x				x			
Bathhouse and Latrine Facilities			x		x		x			
Medical and Dental Facilities			x	x						
Communications Facilities			x	x	x				x	
Maintenance Facilities			x	x			x			x
Mess Facilities			x							
Protective Structures (Bunkers, Revetments, etc.)	x		x	x	x	x			x	x
Bridges	x		x	x	x	x			x	x
Others			x‡							x‡‡
5. In what organization should the precast facility be located?										
Engineer Construction Battalion TOE-5-115		x	x		x		x			
Engineer Construction Support Company TOE-5-114	x			x	x		x		x	
Engineer Concrete Mixing and Paving Team, TOE 5-590T	x					x				x
Other										
6. Has your Battalion had any experience with:										
Concrete Precasting	--	--	Yes	No	No	No	Yes	No	No	Yes
Prestressing	--	--	No	No	No	No	No	No	No	No
Erection of Commercial Precast Elements	--	--	Yes	No	No	No	Yes	Yes	No	No

* Culvert Headwalls, Refuse Sumps/Tanks, Fence and Utility Poles, Embankment Cribbing, Curbstones, Vehicle Barriers

** Drop Inlets, Members for Crib Walls

† Manholes, Catch Basins

†† Bridge Decking

‡ Warehouse Facilities

‡‡ POL Separators, Sewerage Structures

1. Do concrete precasting operations have a place in Army Engineer TOE units?

   Yes_____ No_____

   Comments:

2. Should the proposed precasting facility include a prestressing capability?

   Yes_____ No_____

   Comments:

Figure A1. Questionnaire (sheet 1 of 3)

3. Indicate those elements which should be included in the capabilities of a TOE precast facility:

_____ Types I and II AASHO I-Beams

_____ Tee Beams (Single or Double)

_____ Box Beams

_____ Channel Beams

_____ Slabs

_____ Wall Panels

_____ Piling

_____ Box Culverts

_____ Pipe

Other:

4. Indicate those theatre of operations type structures most suited to precast concrete construction:

_____ Administrative Buildings

_____ Barracks Type Buildings

_____ Bathhouse and Latrine Facilities

_____ Medical and Dental Facilities

_____ Communications Facilities

_____ Maintenance Facilities

_____ Mess Facilities

_____ Protective Structures (Bunkers, Revetments, etc.)

_____ Bridges

Others:

Figure A1 (sheet 2 of 3)

5. In what organization should the precast facility be located?

_____ Engineer Construction Battalion, TOE 5-115

_____ Engineer Construction Support Company, TOE 5-114

_____ Engineer Concrete Mixing and Paving Team, TOE 5-590T

Other:

6. Has your Battalion had any experience with:

_____ Concrete Precasting

_____ Prestressing

_____ Erection of commercial precast elements

If so, please provide synopsis of work

Figure A1 (sheet 3 of 3)

Commander
138th Engineer Construction Group
Fort Riley, KS 66442

Commander
24th Engineer Construction Group
APO New York 09227

Commander
2d Engineer Construction Group
APO San Francisco 96301

Commander
35th Engineer Construction Group
Fort Bragg, NC 28307

Commander
293d Engineer Bn (Construction)
APO New York 09034

Commander
94th Engineer Bn (Construction)
APO New York 09175

Commander
79th Engineer Bn (Construction)
APO New York 09360

Commander
249th Engineer Bn (Construction)
APO New York 09360

Commander
84th Engineer Bn (Construction)
APO San Francisco 96225

Commander
52d Engineer Bn (Construction)
Fort Carson, CO 80913

Commander
864th Engineer Bn (Construction)
Fort Lewis, WA 98433

Commander
92d Engineer Bn (Construction)
Fort Stewart, GA 31313

Commander
43d Engineer Bn (Construction)
Fort Benning, GA 31905

Commander
23d Engineer Bn (Construction)
APO Seattle 98749

Commander
802d Engineer Bn (Construction)
APO San Francisco 96271

Commander
548th Engineer Bn (Construction)
Fort Bragg, NC 28307

Commander
44th Engineer Bn (Construction)
APO San Francisco 96259

Commander
46th Engineer Bn (Construction)
Fort Rucker, AL 36360

Figure A2. Distribution list for the questionnaire

1. Do concrete precasting operations have a place in Army Engineer TOE units?

Yes 9 No 1

Comments:

Precasting operations can certainly result in great time and manpower savings when properly utilized. 24th Engineer Group has, however, had no good applications for precasting during recent peace time construction experience. For this reason, it would not be cost-effective to provide any of the units of this group a peace time precasting capability. A TO&E augmentation should, however, be developed to provide this capability in time of war.

Probably only in a fairly static Theater of OPNS environment.

Not necessary in a CONUS application; cheaper to commercially procure.

Not necessary in a rapid TO situation; lines move too fast for application.

Significant savings in forming material can be made; dependence on weather for construction can be reduced and control of curing conditions can be obtained by working indoors; manpower can be concentrated and used more economically by using a casting crew and a placement crew; and centralization of material operation can again economize on personnel and make quality monitoring more effective.

However, before implementation, consideration must be given to the cost effectiveness of obtaining the equipment vs. the type of construction projects units are presently allowed to do in a peace time training situation. Presently construction projects requiring precast and prestressed concrete are not being constructed by troop units. Therefore, this capability should not be added to the TOE's until needed in war or a change is made in the type of projects given to troop units.

Situations which call for precast building materials to be used could arise frequently enough to warrant a precasting capability in an Engineer Battalion. Such situations include structural members of fixed bridges and construction of field fortification and obtacles.

A precasting capability could have limited use in TOE units. However, most construction projects assigned to CONUS units would not merit precasting techniques. This unit has not been tasked with any

Figure A3. Detailed responses to the questionnaire (sheet 1 of 5)

project during the past 12 months nor are any projects under design which would merit establishing a precast operation.

We use precasting as much as possible now, particularly in the winter where we can construct the member inside a heated tent or shelter.

Experience and forecasted construction operations indicate that TOE units would do little precasting, and that which might be required would likely be tailored to a specific job.

Tailoring members most attractive. Availability of heavy timbers; steel sometimes limited. This is a good concept.

Current practices in Germany dictate that the larger more complex projects be assigned to civilian construction firms. We have precast some POL separator (3m × 4m) covers and similar structural elements. While engineer construction units in Europe have not, thus far, encountered a significant need for precast concrete, Theater of Operations facilities may lend themselves to use of precast concrete in the construction of walls, bridge slabs, liners for open ditches, and other areas. In the 79th Engineer Group in RVN we preferred to cast our reinforced concrete structures (such as bridge beams and slabs) in place. Nevertheless, the benefit-to-cost ratio for such uses should be investigated.

2. Should the proposed precasting facility include a prestressing capability?

Yes 5 No 5

Comments:

Without a prestressing capability, the facility would be very limited in application for bridge beams.

Precasting is on the verge of feasibility; prestressing too complicated for normal situations.

This operation is simple enough in practice to be easily incorporated and greatly expands mission capability.

Although precasting applications do arise, situations requiring prestressing at unit level are not as frequent to warrant a prestressing capability. In such instances it would probably be simpler to order the prestressed item as one would order a similar steel section.

Prestressing would require a very high level of engineering experience which would be extremely difficult to maintain in a TOE unit and is not recommended.

The design criteria used on a prestressed structure are close in so far as safety factors are concerned. I'm afraid our quality control isn't good enough (at troop unit level) to be absolutely sure we meet the specs of a prestressed member. You can see the trouble we would have by a structural failure traced to an ill-constructed

Figure A3 (sheet 2 of 5)

prestressed member. I know we preach quality control, and everyone honestly tries, but I'm just afraid this would go beyond what we are actually capable of doing in real life.

Casting prestressed concrete elements requires a higher degree of individual and unit technical expertise than will be found in TOE units.

A centralized facility is required. I would recommend this be in the Const. Spt. Company. With the proposed change of Const Bn to Combat Bn (Heavy), more rapid moves are anticipated. A prestressing facility must have more stability (i.e., fixed location, quality control).

If the precast facility is added, prestress capability should be included to make the facility as versatile and useful as possible.

3. Indicate those elements which should be included in the capabilities of a TOE precast facility:

   6 Types I and II AASHO I-Beams

   6 Tee Beams (Single or Double)

   3 Box Beams

   4 Channel Beams

   5 Slabs

   7 Wall Panels

   4 Piling

   7 Box Culverts

   5 Pipe

   4 Other: (Culvert Headwalls, Refuse Sumps/Tanks, Fence and Poles, Embankment Cribbing, Curbstones, Vehicle Barriers, Drop Inlets, Members for Crib Walls, Manholes, Catch Basins, Bridge Decking)

   Comments:

   The elements checked, being simplest, would most likely be employed in precasting operations if any.

4. Indicate those Theater of Operations type structures most suited to precast concrete construction:

   4 Administrative Buildings

   3 Barracks Type Buildings

   3 Bathhouse and Latrine Facilities

   2 Medical and Dental Facilities

Figure A3 (sheet 3 of 5)

__4__ Communications Facilities

__4__ Maintenance Facilities

__1__ Mess Facilities

__7__ Protective Structures (Bunkers, Revetments, etc.)

__7__ Bridges

__2__ Others: (Warehouse Facilities, POL Separators, Sewerage Structures)

Comments:

Although theater construction depends upon location, materials available, size of structure and permanence desired, those structures most suited to precast concrete would include hardened protective structure bridges, and some structures of a large size.

Those checked are usually "standard design." The others are dern near always a case-by-case, especially designed facility where we wouldn't gain that much by standard precasting.

Exact type depends on investment for forms. All of the above o.k. but X-marked probably most used.

5. In what organization should the precast facility be located?

__4__ Engineer Construction Battalion, TOE 5-115

__5__ Engineer Construction Support Company, TOE 5-114

__3__ Engineer Concrete Mixing and Paving Team, TOE 5-590T

____ Other: The facility should be included as a non-active augmentation to both TO&E 5-114 and TO&E 5-590T

Comment:

Even if you come up with a requirement for precasting capability in the present environment it will be hard to train and develop experience in the CONUS Const. Bns. because of laws, regulations, and opportunity for construction.

In the long run if we need to use such a capability in a TO that is fairly static we would probably be better off to develop it then rather than to work it into our TO&E units now. I've never seen the Mixing and Paving Team except in FM's. Are they for real?

6. Has your Battalion had any experience with:

Yes __3__ No __5__ Concrete Precasting

Yes __0__ No __8__ Prestressing

Yes __3__ No __5__ Erection of commercial precast elements

Figure A3 (sheet 4 of 5)

If so, please provide synoposis of work.

Comments:

Precast lintels, small slabs, curbing, and vehicle bumpers have been used on several projects. On a large MCA project headwalls, stairs, lintels, large curbstones, vehicle bumpers were precast. An entire administrative office area with offices, storage and latrines would have been precast but the weight of sections required to be cast was too high due to restriction imposed by lifting equipment. 20T crane is heaviest organic equipment available. This is a critical consideration. Precast POL separators were also placed on this project. A contractor did the placing with the assistance of the troops; however, site preparation included a concrete "leveling course" that was placed by the troops. Troops could have performed the entire operation. In several places, concrete leveling pieces were precast and placed in areas where groundwater level was too high, thereby preventing compaction. Restriction here, of course, was that no heavy loads be used but some settlement be permitted.

We've done our own precasting on every barracks/maintenance facility we've built in Korea. Major parts have been lintels, window casings, bond beams, and segments of ring foundations. We've used commercially produced, prestressed stringers to repair a bridge.

As I'm sure you are aware, we do as much precasting as we can right now. As part of your study you mentioned preparing standard designs for precast members. I think this would be particularly useful to our situation. We could have precast wall sections had we really had a feel for reinforcing requirements.

We have few masons in the Bn and precast members would certainly help out in the skilled manpower (or lack thereof).

If possible, it would be helpful if you could run a cost analysis as part of your survey comparing precasts with similar members, walls, etc., not precast.

Small roof slabs (-1 × 2m). 577th Engr Bn (Const) precast a concrete bridge deck for the Ban Thech bridge, 990 ft long in RVN, 1968.

Figure A3 (sheet 5 of 5)

PRECEDING PAGE NOT FILMED
BLANK

APPENDIX B: AASHO HIGHWAY LOADINGS

1. AASHO[8*] uses five standard truck loadings according to type of truck:

a. Two axle trucks--H20-44, H15-44, and H10-44.

b. Two axle trucks with semitrailers--HS20-44 and HS15-44.

Figure B1 illustrates this loading system.

2. The uniformly distributed lane loading (Figure B2) is used when it produces the more severe loading condition. For simple spans, it will be found that truck loads are critical for moment for spans under 140 ft and for shear for spans under 120 ft.

3. Table B1 presents the maximum moments, shears, and reactions for standard AASHO loadings.

---

* Raised numbers refer to similarly numbered items in the References at the end of the main text.

Table B1

Maximum Moments, Shears, and Reactions--Simple Spans, One Lane (courtesy of AASHTO[8])

H15-44 Loading

Span	Moment	End shear and end reaction (a)	Span	Moment	End shear and end reaction (a)
1	6.0(b)	24.0(b)	42	274.4(b)	29.6
2	12.0(b)	24.0(b)	44	289.3(b)	30.1
3	18.0(b)	24.0(b)	46	304.3(b)	30.5
4	24.0(b)	24.0(b)	48	319.2(b)	31.0
5	30.0(b)	24.0(b)	50	334.2(b)	31.5
6	36.0(b)	24.0(b)	52	349.1(b)	32.0
7	42.0(b)	24.0(b)	54	364.1(b)	32.5
8	48.0(b)	24.0(b)	56	379.1(b)	32.9
9	54.0(b)	24.0(b)	58	397.6	33.4
10	60.0(b)	24.0(b)	60	418.5	33.9
11	66.0(b)	24.0(b)	62	439.9	34.4
12	72.0(b)	24.0(b)	64	461.8	34.9
13	78.0(b)	24.0(b)	66	484.1	35.3
14	84.0(b)	24.0(b)	68	506.9	35.8
15	90.0(b)	24.0(b)	70	530.3	36.3
16	96.0(b)	24.8(b)	75	590.6	37.5
17	102.0(b)	25.1(b)	80	654.0	38.7
18	108.0(b)	25.3(b)	85	720.4	39.9
19	114.0(b)	25.6(b)	90	789.8	41.1
20	120.0(b)	25.8(b)	95	862.1	42.3
21	126.0(b)	26.0(b)	100	937.5	43.5
22	132.0(b)	26.2(b)	110	1,097.3	45.9
23	138.0(b)	26.3(b)	120	1,269.0	48.3
24	144.0(b)	26.5(b)	130	1,452.8	50.7
25	150.0(b)	26.6(b)	140	1,648.5	53.1
26	156.0(b)	26.8(b)	150	1,856.3	55.5
27	162.7(b)	26.9(b)	160	2,076.0	57.9
28	170.1(b)	27.0(b)	170	2,307.8	60.3
29	177.5(b)	27.1(b)	180	2,551.5	62.7
30	185.0(b)	27.2(b)	190	2,807.3	65.1
31	192.4(b)	27.3(b)	200	3,075.0	67.5
32	199.8(b)	27.4(b)	220	3,646.5	72.3
33	207.3(b)	27.5(b)	240	4,266.0	77.1
34	214.7(b)	27.7	260	4,933.5	81.9
35	222.2(b)	27.9	280	5,649.0	86.7
36	229.6(b)	28.1	300	6,412.5	91.5
37	237.1(b)	28.4			
38	244.5(b)	28.6			
39	252.0(b)	28.9			
40	259.5(b)	29.1			

(Continued)

Note: Spans in feet; moments in thousands of foot-pounds; shears and reactions in thousands of pounds. These values are subject to specification reduction for loading of multiple lanes. Impact not included.

(a) Concentrated load is considered placed at the support. Loads used are those stipulated for shear.

(b) Maximum value determined by Standard Truck Loadings. Otherwise the Standard Lane Loading governs.

(Sheet 1 of 4)

Table B1 (Continued)

H20-44 Loading

Span	Moment	End shear and end reaction (a)	Span	Moment	End shear and end reaction (a)
1	8.0(b)	32.0(b)	42	365.9(b)	39.4
2	16.0(b)	32.0(b)	44	385.8(b)	40.1
3	24.0(b)	32.0(b)	46	405.7(b)	40.7
4	32.0(b)	32.0(b)	48	425.6(b)	41.4
5	40.0(b)	32.0(b)	50	445.6(b)	42.0
6	48.0(b)	32.0(b)	52	465.5(b)	42.6
7	56.0(b)	32.0(b)	54	485.5(b)	43.3
8	64.0(b)	32.0(b)	56	505.4(b)	43.9
9	72.0(b)	32.0(b)	58	530.1	44.6
10	80.0(b)	32.0(b)	60	558.0	45.2
11	88.0(b)	32.0(b)	62	586.5	45.8
12	96.0(b)	32.0(b)	64	615.7	46.5
13	104.0(b)	32.0(b)	66	645.5	47.1
14	112.0(b)	32.0(b)	68	675.9	47.8
15	120.0(b)	32.5(b)	70	707.0	48.4
16	128.0(b)	33.0(b)	75	787.5	50.0
17	136.0(b)	33.4(b)	80	872.0	51.6
18	144.0(b)	33.8(b)	85	960.5	53.2
19	152.0(b)	34.1(b)	90	1,053.0	54.8
20	160.0(b)	34.4(b)	95	1,149.5	56.4
21	168.0(b)	34.7(b)	100	1,250.0	58.0
22	176.0(b)	34.9(b)	110	1,463.0	61.2
23	184.0(b)	35.1(b)	120	1,692.0	64.4
24	192.0(b)	35.3(b)	130	1,937.0	67.6
25	200.0(b)	35.5(b)	140	2,198.0	70.8
26	208.0(b)	35.7(b)	150	2,475.0	74.0
27	216.9(b)	35.9(b)	160	2,768.0	77.2
28	226.8(b)	36.0(b)	170	3,077.0	80.4
29	236.7(b)	36.1(b)	180	3,402.0	83.6
30	246.6(b)	36.3(b)	190	3,743.0	86.8
31	256.5(b)	36.4(b)	200	4,100.0	90.0
32	266.5(b)	36.5(b)	220	4,862.0	96.4
33	276.4(b)	35.6(b)	240	5,688.0	102.8
34	286.3(b)	36.9	260	6,578.0	109.2
35	296.2(b)	37.2	280	7,532.0	115.6
36	306.2(b)	37.5	300	8,550.0	122.0
37	316.1(b)	37.8			
38	326.1(b)	38.2			
39	336.0(b)	38.5			
40	345.0(b)	38.8			

(Continued)

(a) Concentrated load is considered placed at the support. Loads used are those stipulated for shear.

(b) Maximum value determined by Standard Truck Loading. Otherwise the Standard Lane Loading governs.

(Sheet 2 of 4)

Table B1 (Continued)

HS15-44 Loading

Span	Moment	End shear and end reaction (a)	Span	Moment	End shear and end reaction (a)
1	6.0(b)	24.0(b)	42	364.0(b)	42.0(b)
2	12.0(b)	24.0(b)	44	390.7(b)	42.5(b)
3	18.0(b)	24.0(b)	46	417.4(b)	43.0(b)
4	24.0(b)	24.0(b)	48	444.1(b)	43.5(b)
5	30.0(b)	24.0(b)	50	470.9(b)	43.9(b)
6	36.0(b)	24.0(b)	52	497.7(b)	44.3(b)
7	42.0(b)	24.0(b)	54	524.5(b)	44.7(b)
8	48.0(b)	24.0(b)	56	551.3(b)	45.0(b)
9	54.0(b)	24.0(b)	58	578.1(b)	45.3(b)
10	60.0(b)	24.0(b)	60	604.9(b)	45.6(b)
11	66.0(b)	24.0(b)	62	631.8(b)	45.9(b)
12	72.0(b)	24.0(b)	64	658.6(b)	46.1(b)
13	78.0(b)	24.0(b)	66	685.5(b)	46.4(b)
14	84.0(b)	24.0(b)	68	712.3(b)	46.6(b)
15	90.0(b)	25.6(b)	70	739.2(b)	46.8(b)
16	96.0(b)	27.0(b)	75	806.3(b)	47.3(b)
17	102.0(b)	28.2(b)	80	873.7(b)	47.7(b)
18	108.0(b)	29.3(b)	85	941.0(b)	48.1(b)
19	114.0(b)	30.3(b)	90	1,008.3(b)	48.4(b)
20	120.0(b)	31.2(b)	95	1,074.9(b)	48.7(b)
21	126.0(b)	32.0(b)	100	1,143.0(b)	49.0(b)
22	132.0(b)	32.7(b)	110	1,277.7(b)	49.4(b)
23	138.0(b)	33.4(b)	120	1,412.5(b)	49.8(b)
24	144.5(b)	34.0(b)	130	1,547.3(b)	50.7
25	155.5(b)	34.6(b)	140	1,682.1(b)	53.1
26	166.6(b)	35.1(b)	150	1,856.3	55.5
27	177.8(b)	35.6(b)	160	2,076.0	57.9
28	189.0(b)	36.0(b)	170	2,307.8	60.3
29	200.3(b)	36.6(b)	180	2,551.5	62.7
30	211.6(b)	37.2(b)	190	2,807.3	65.1
31	223.0(b)	37.7(b)	200	3,075.0	67.5
32	234.4(b)	38.3(b)	220	3,646.5	72.3
33	245.8(b)	38.7(b)	240	4,266.0	77.1
34	257.7(b)	39.2(b)	260	4,933.5	81.9
35	270.9(b)	39.6(b)	280	5,649.0	86.7
36	284.2(b)	40.0(b)	300	6,412.5	91.5
37	297.5(b)	40.4(b)			
38	310.7(b)	40.7(b)			
39	324.0(b)	41.1(b)			
40	337.4(b)	41.4(b)			

(Continued)

(a) Concentrated load is considered placed at the support. Loads used are those stipulated for shear.

(b) Maximum value determined by Standard Truck Loading (one HS truck). Otherwise the Standard Lane Loading governs.

Table B1 (Concluded)


HS20-44 Loading

Span	Moment	End shear and end reaction (a)	Span	Moment	End shear and end reaction (a)
1	8.0(b)	32.0(b)	42	485.3(b)	56.0(b)
2	16.0(b)	32.0(b)	44	520.9(b)	56.7(b)
3	24.0(b)	32.0(b)	46	556.5(b)	57.3(b)
4	32.0(b)	32.0(b)	48	592.1(b)	58.0(b)
5	40.0(b)	32.0(b)	50	627.9(b)	58.5(b)
6	48.0(b)	32.0(b)	52	663.6(b)	59.1(b)
7	56.0(b)	32.0(b)	54	699.3(b)	59.6(b)
8	64.0(b)	32.0(b)	56	735.1(b)	60.0(b)
9	72.0(b)	32.0(b)	58	770.8(b)	60.4(b)
10	80.0(b)	32.0(b)	60	806.5(b)	60.8(b)
11	88.0(b)	32.0(b)	62	842.4(b)	61.2(b)
12	96.0(b)	32.0(b)	64	878.1(b)	61.5(b)
13	104.0(b)	32.0(b)	66	914.0(b)	61.9(b)
14	112.0(b)	32.0(b)	68	949.7(b)	62.1(b)
15	120.0(b)	34.1(b)	70	985.6(b)	62.4(b)
16	128.0(b)	36.0(b)	75	1,075.1(b)	63.1(b)
17	136.0(b)	37.7(b)	80	1,164.9(b)	63.6(b)
18	144.0(b)	39.1(b)	85	1,254.7(b)	64.1(b)
19	152.0(b)	40.4(b)	90	1,344.4(b)	64.5(b)
20	160.0(b)	41.6(b)	95	1,434.1(b)	64.9(b)
21	168.0(b)	42.7(b)	100	1,524.0(b)	65.3(b)
22	176.0(b)	43.6(b)	110	1,703.6(b)	65.9(b)
23	184.0(b)	44.5(b)	120	1,883.3(b)	66.4(b)
24	192.7(b)	45.3(b)	130	2,063.1(b)	67.6
25	207.4(b)	46.1(b)	140	2,242.8(b)	70.8
26	222.2(b)	46.8(b)	150	2,475.1	74.0
27	237.0(b)	47.4(b)	160	2,768.0	77.2
28	252.0(b)	48.0(b)	170	3,077.1	80.4
29	267.0(b)	48.8(b)	180	3,402.1	83.6
30	282.1(b)	49.6(b)	190	3,743.1	86.8
31	297.3(b)	50.3(b)	200	4,100.0	90.0
32	312.5(b)	51.0(b)	220	4,862.0	96.4
33	327.8(b)	51.6(b)	240	5,688.0	102.8
34	343.5(b)	52.2(b)	260	6,578.0	109.2
35	361.2(b)	52.8(b)	280	7,532.0	115.6
36	378.9(b)	53.3(b)	300	8,550.0	122.0
37	396.6(b)	53.8(b)			
38	414.3(b)	54.3(b)			
39	432.1(b)	54.8(b)			
40	449.8(b)	55.2(b)			

(a) Concentrated load is considered placed at the support. Loads used are those stipulated for shear.

(b) Maximum value determined by Standard Truck Loading (one HS truck). Otherwise the Standard Lane Loading governs.

(Sheet 4 of 4)

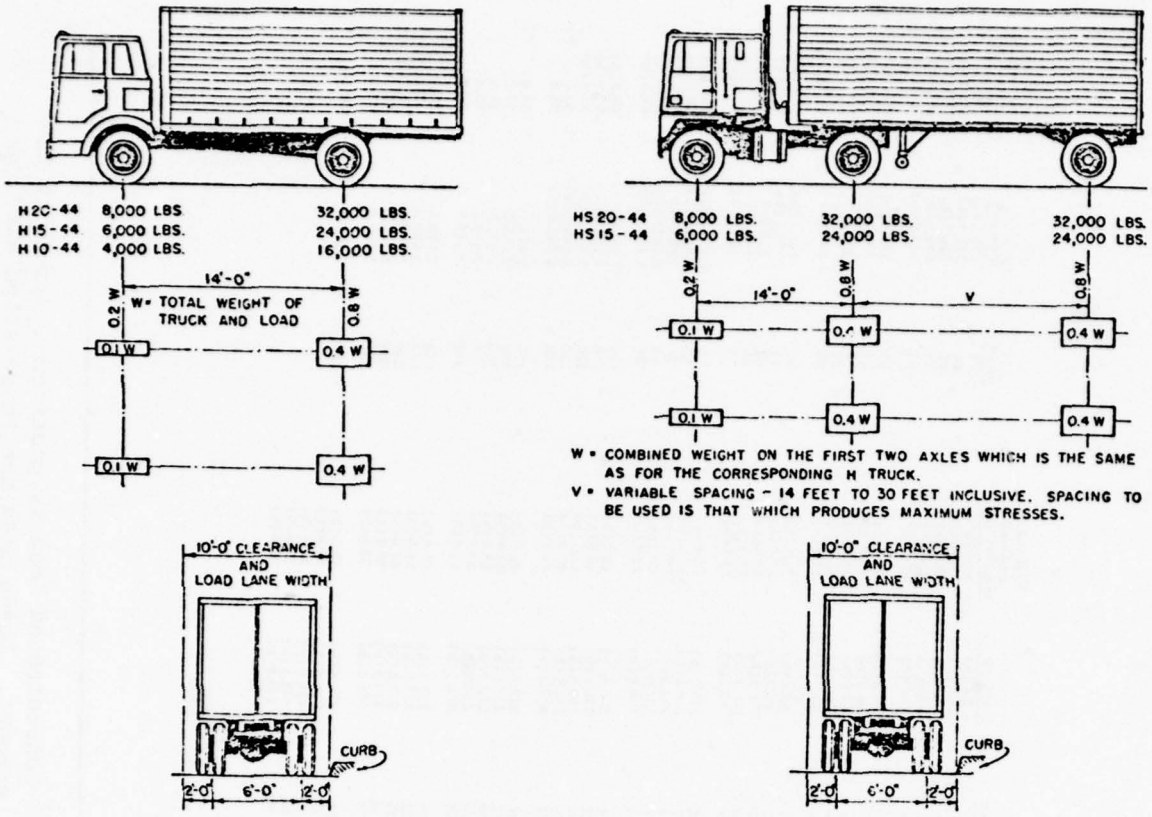

a. Standard H trucks

b. Standard HS trucks

Figure B1. Standard truck loadings (courtesy of AASHTO[8])

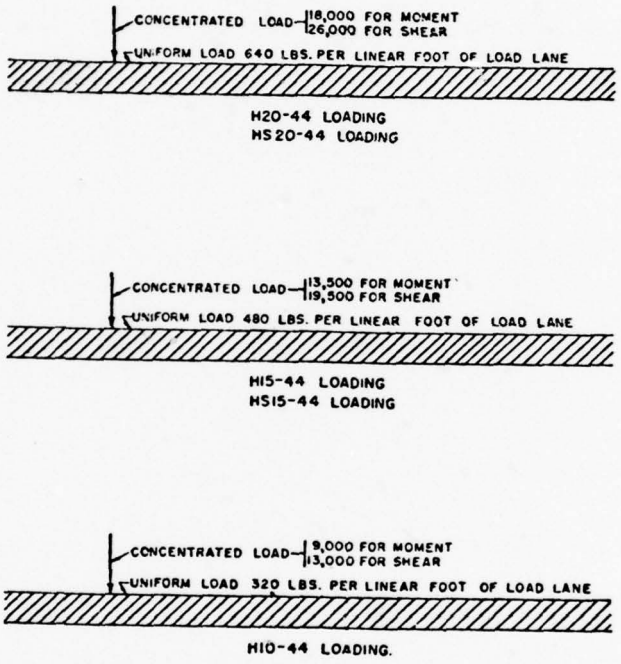


Figure B2. H lane and HS lane loadings (courtesy of AASHTO[8])

APPENDIX C: AREA RAILROAD LOADINGS

1. The standard railroad loading recommended by AREA[29] for fixed spans under 400 ft is Cooper E-72 (Figure C1). This loading represents two locomotives with maximum axial loads of 72 kips, followed by a

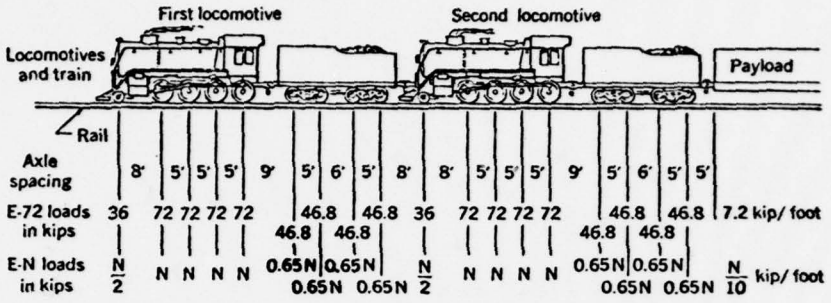


Figure C1. Cooper E-72 railroad loadings

uniformly distributed load of 7.2 kips/ft of track. If E-72 is not a satisfactory representation of the bridge usage, e.g. a bridge on a minor branch line, it is permissible to use another loading with the same axle spacing but with the loads all altered by a constant ratio. For example, E-N would have loads N/72 times those shown in Figure C1 for E-72.

2. Figure C2 illustrates the case of a multitrack bridge in which it is necessary to decide on track loadings. The AREA code does not require all tracks to be fully loaded simultaneously for bridges with three or more tracks.

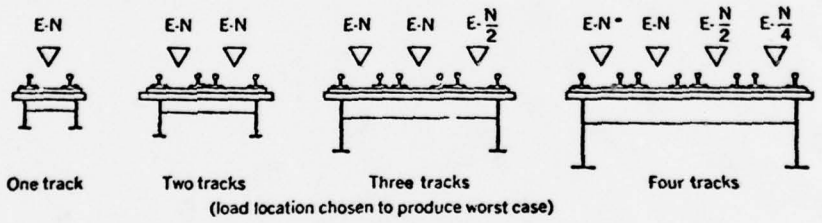


Figure C2. Loads on multitrack rail bridges

APPENDIX D: RECOMMENDED PRECAST CONCRETE MILITARY BRIDGES

1. From the many precast concrete bridge structures surveyed and evaluated (Part III), it appears that the precast channel girder bridges developed by the State Aid Division of MSHD are most suitable for use in the TO.

2. Since these bridges are designed for AASHO[8] H15 loadings, they need to be modified in order to support military HET's[61] (maximum weight = 172,000 lb). The design modification was accomplished by using a computer program (Appendix E) and was based on the following assumptions and criteria:

a. Precast channel elements will act as one unit. Shear keys and/or transverse tie rods will distribute the loads laterally. Thus, the load carried by each element is less than a full wheel load.

b. Modified AASHO HS20 loadings having a total weight of 172,000 lb are used.

c. The allowable stresses used in the design are those specified in the AASHO specification.

d. The minimum strength of concrete at 28 days is 5000 psi. Minimum concrete strength for removing channel elements is 3000 psi.

e. Minimum concrete strength before applying initial prestress is 4200 psi.

f. Stress-steel tendous have a minimum ultimate strength of 160,000 psi and yield strength of 140,000 psi.

g. All reinforcing bars conform to ASTM A 615.[62]

The design details of the recommended precast concrete channel girder bridges are given in Figures D1-D4.

3. The weights of the interior and exterior units are approximately 13,300 and 14,600 lb, respectively, for 19-ft span bridge and 20,000 and 30,000 lb, respectively, for 31-ft span bridge. Two exterior curb units and six interior units are required to obtain a 26-ft-6-in. clear roadway.

4. The recommended erection sequence for the precast concrete channel girder bridges is as follows:

a. Install precast concrete piles per TM 5-258.[36]

b. Place precast concrete pile cap on top of precast concrete piles and connect to the piles with dowel pins inserted


through holes in the pile cap into the precast holes (or holes drilled after driving) at the top of the piles. Grout all dowel holes.

c. Position channel girders on the pile cap, and after proper alignment has been obtained, pins are placed in the dowel holes and all holes in the girders and caps are grouted.


d. The girders are tied transversely by bolting the legs of adjacent channels together. Longitudinally, all channel ends are also bolted together.

e. After bolting, all keys are grouted before traffic use; no leveling or wearing course is required.


5. Photos D1 through D26 illustrate a typical fabrication, transportation, and erection sequence for a 19-ft span precast channel girder bridge supported on timber piles.

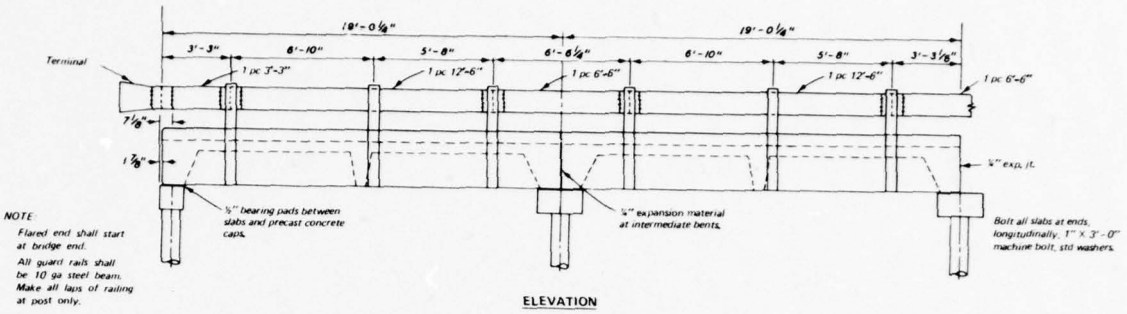

ELEVATION




CROSS SECTION OF ROADWAY

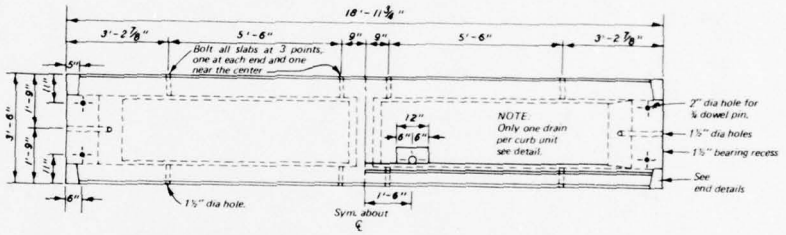


HALF PLAN—INTERIOR UNIT


HALF PLAN—CURB UNIT

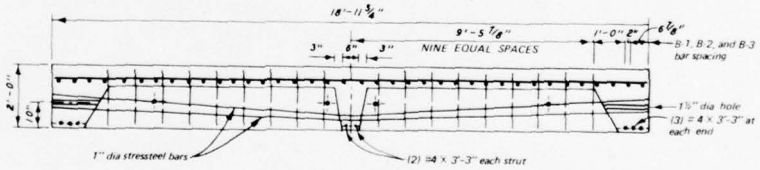

LONGITUDINAL CROSS SECTION




STRESSTEEL PROFILE

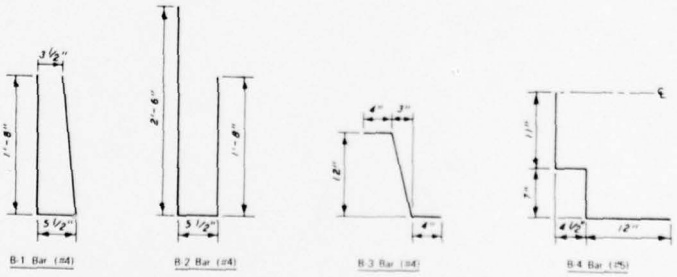


REINFORCEMENT DETAILS


Figure D1. Precast, prestressed concrete

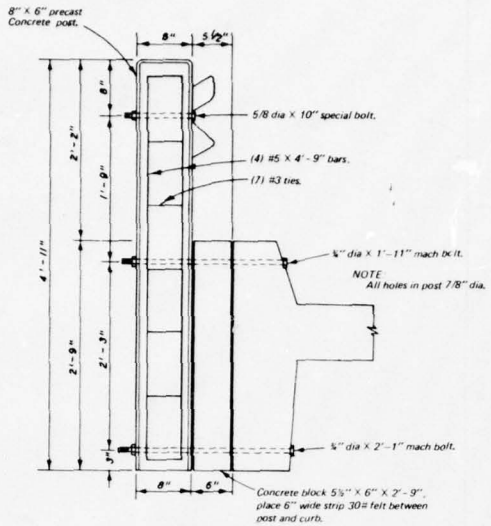


PRECAST POST DETAIL

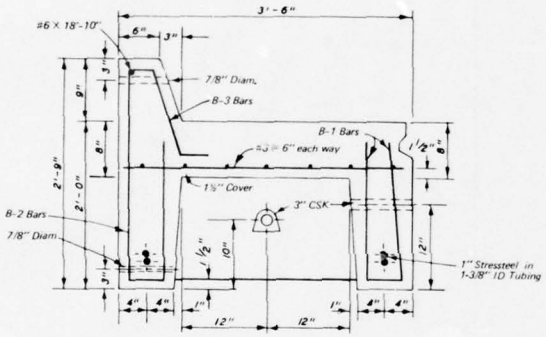


CURB UNIT CROSS-SECTION
NEAR CENTER LINE

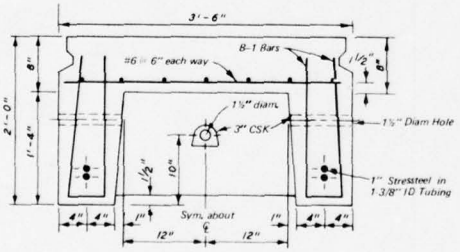


INTERIOR UNIT CROSS SECTION

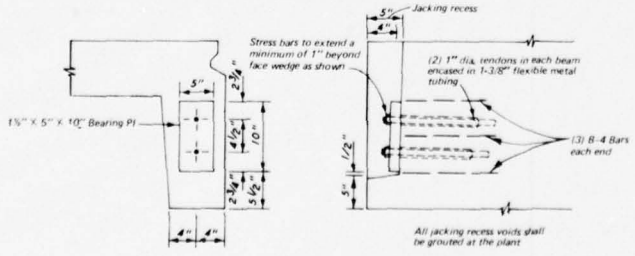

END DETAILS



SECTION AT DRAIN



KEY DETAIL

GENERAL NOTES

Concrete

All concrete shall have a minimum strength of 5,000 psi at 28 days.

Maximum size of concrete aggregate shall be 1".

Minimum concrete strength for removing these slabs from their forms shall be 3,000 psi.

Minimum concrete strength before applying initial prestress shall be 4,200 psi.

All exposed concrete corners shall be chamfered 3/4" unless otherwise noted.

Prestressing Steel

Stressteel tendons shall have a minimum ultimate strength of 160,000 psi, f_{sy} = 140,000 psi. ASTM A322 and A29. All tendons shall be grouted.

Prestressing Stressteel Bars

After concrete has reached a minimum strength of 3,000 psi, handling stresses of 60,000 pounds may be applied to the two top tendons only and the slabs removed from the forms. After concrete has minimum strength of 1,200 psi, the total initial prestressing force of 90,700 pounds shall be applied to each of the 1" tendons. When tensioning the tendons, corresponding tendons in each leg shall be jacked simultaneously. The tendons shall be jacked from one end.


Hardware

All machine and special bolts shall be galvanized steel ASTM A307, galvanized ASTM A153.

Reinforcing Bars


All reinforcing bars shall conform to ASTM A615.

stressed concrete bridge slab details for 19-ft spans

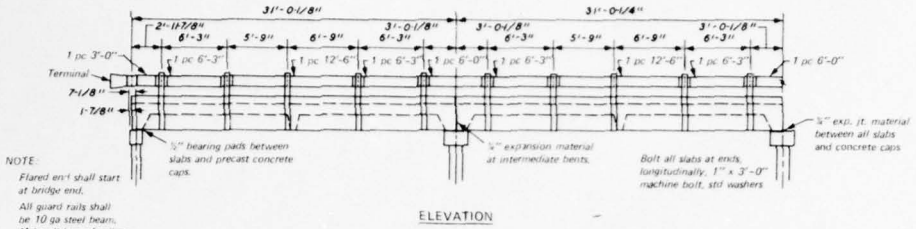


NOTE:
Flared end shall start at bridge end.
All guard rails shall be 10 ga steel beam. Make all laps of railing at post only.

ELEVATION




CROSS SECTION OF ROADWAY

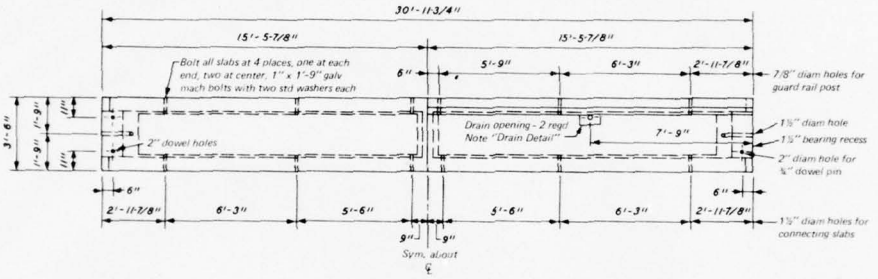


HALF PLAN—INTERIOR UNIT


HALF PLAN—CURB UNIT

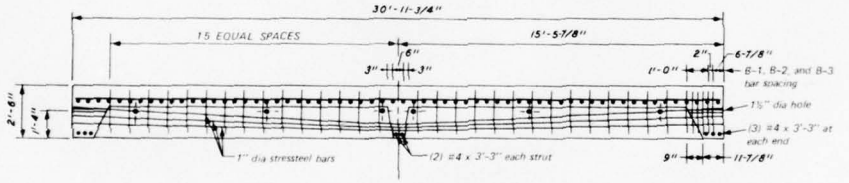


LONGITUDINAL CROSS SECTION




STRESSTEEL PROFILE

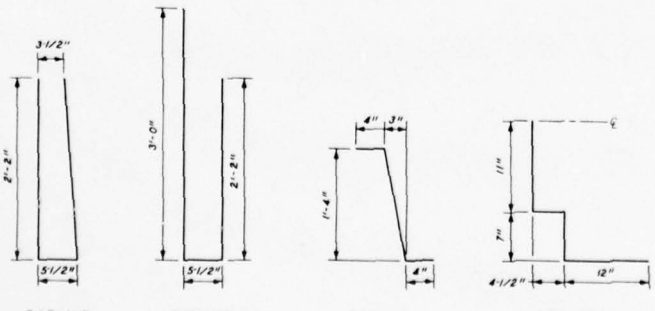


B-1 Bar (#4) B-2 Bar (#4) B-3 Bar (#4) B-4 Bar (#5)



PREC




CUR





INTERIOR

Figure D2. Precast, prestressed concrete br

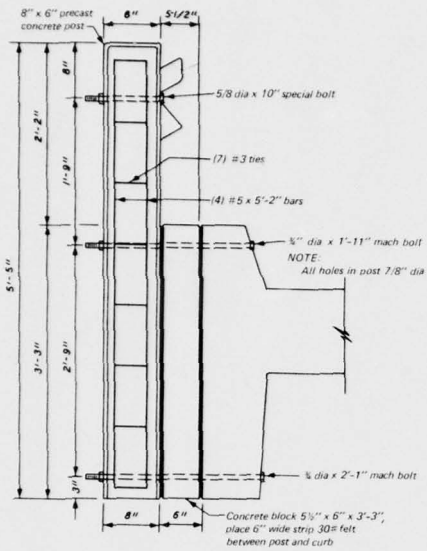


PRECAST POST DETAIL




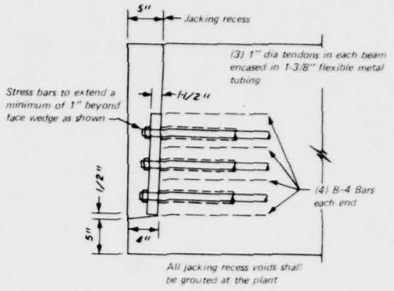


END DETAILS

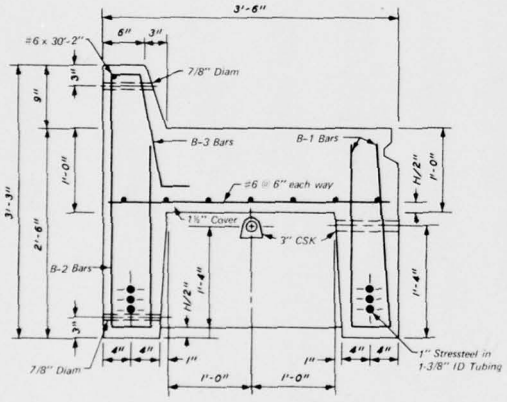


CURB UNIT CROSS-SECTION NEAR CENTER LINE

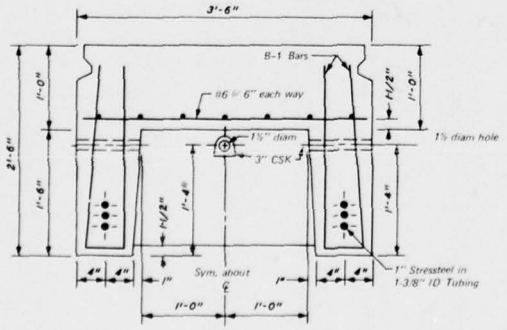

INTERIOR UNIT CROSS SECTION



SECTION AT DRAIN



KEY DETAIL

GENERAL NOTES

Concrete:

All concrete shall have a minimum strength of 5,000 psi at 28 days.

Maximum size of concrete aggregate shall be 1".

Minimum concrete strength for removing these slabs from their forms shall be 3,000 psi.

Minimum concrete strength before applying initial prestress shall be 4,200 psi.

All exposed concrete corners shall be chamfered 3/4" unless otherwise noted.

Prestressing Steel:

Stressteel tendons shall have a minimum ultimate strength of 160,000 psi, f_{sy} = 140,000 psi ASTM A322 and A29. All tendons shall be grouted.

Prestressing Stressteel Bars:

After concrete has reached a minimum strength of 3,000 psi, handling stresses of 60,000 pounds may be applied to the two top tendons only and the slabs removed from the forms. After concrete has minimum strength of 4,200 psi, the total initial prestressing force of 90,700 pounds shall be applied to each of the 1" tendons. When tensioning the tendons, corresponding tendons in each leg shall be jacked simultaneously. The tendons shall be jacked from one end.


Hardware:

All machine and special bolts shall be galvanized steel ASTM A307, galvanized ASTM A153.


Reinforcing Bars:

All reinforcing bars shall conform to ASTM A615.


stressed concrete bridge slab details for 31-ft spans

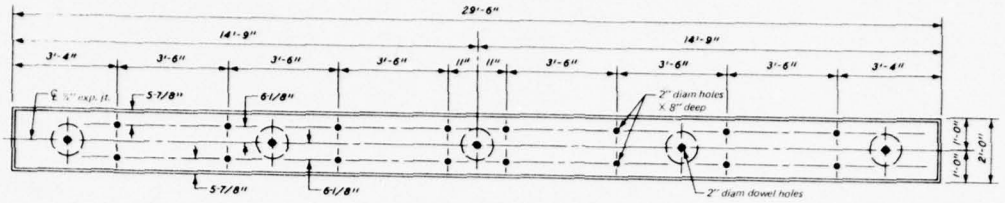


PLAN INTERMEDIATE BENT

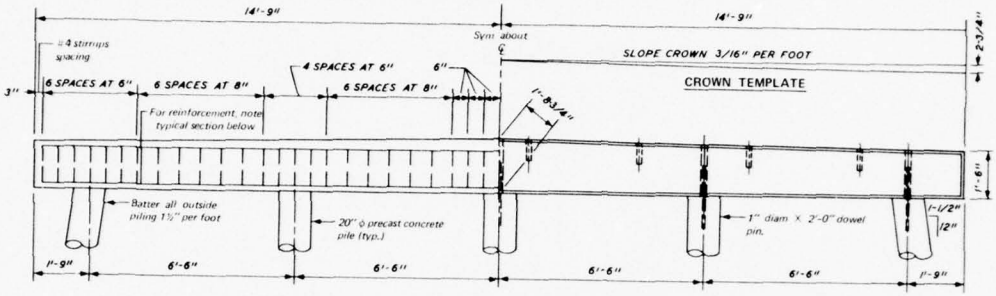

ELEVATION

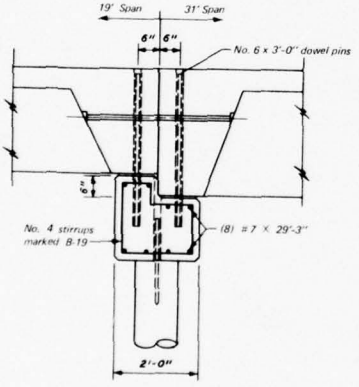


19' to 31'

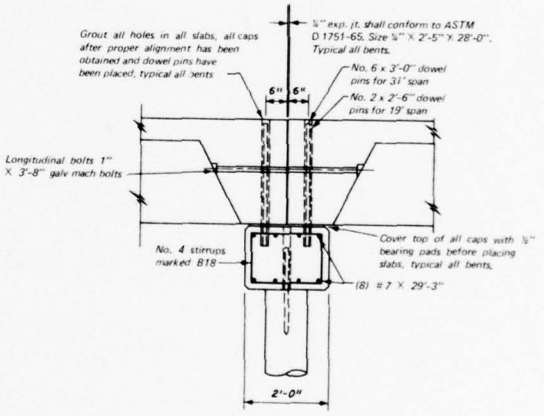


19' to 19' & 31' to 31'


TYPICAL SECTIONS




BEARING PADS



B17 STIRRUPS NO. 4




B18 STIRRUPS NO. 4




B19 STIRRUPS N

Figure D3. Precast concrete caps

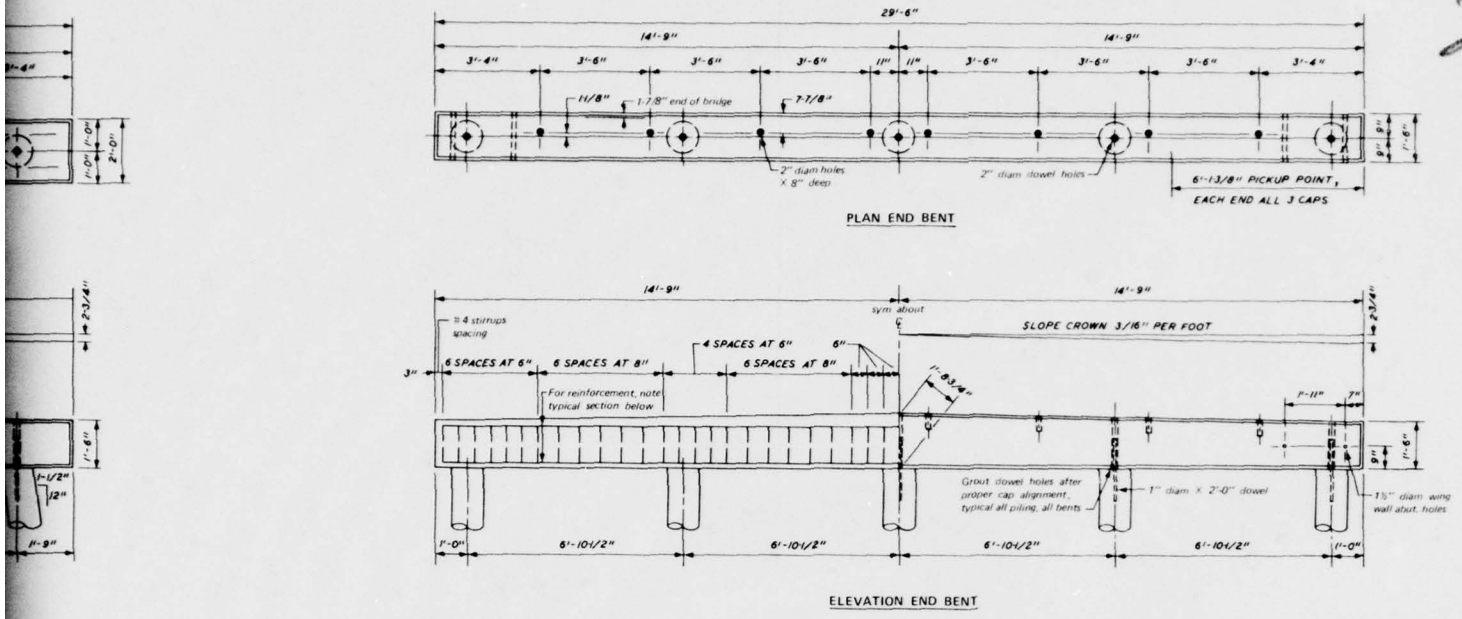


exp. jt. shall conform to ASTM D 1751-65. Size ¼" x 2'-5" x 28'-0", typical all bents.



to 31'

IONS

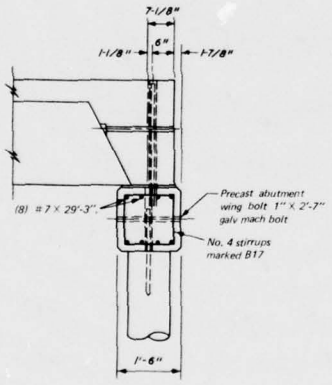

END SECTION

GENERAL NOTES

Concrete:

All concrete shall have a minimum ultimate compressive strength of 3,000 psi at 28 days.

Concrete shall reach a strength of 2,500 psi before caps may be lifted from forms.

All exposed edges shall be chamfered 3/4" x 45° unless otherwise noted.

Reinforcing:

All reinforcing steel shall be accurately located in the forms and firmly held in place by steel wire supports.

Reinforcing steel shall be deformed bars conforming to ASTM A615.


Reinforcing dimensions are to the ℄'s of bars unless otherwise noted.

Piling:


All piling shall meet AASHO specifications. Drive all piling to a minimum of 35 tons.

Hardware:

Hardware shall be either black mild steel or wrought iron.




B STIRRUPS NO. 4




B19 STIRRUPS NO. 4


Figure D3. Precast concrete caps

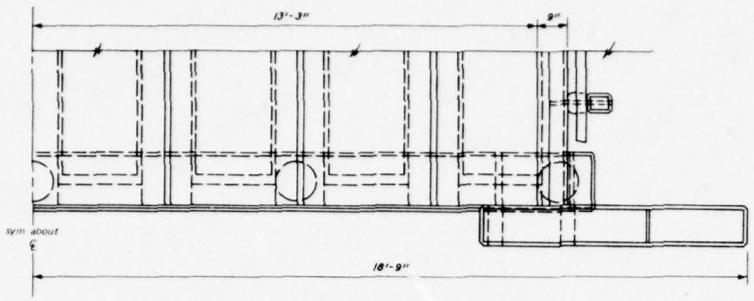


HALF PLAN

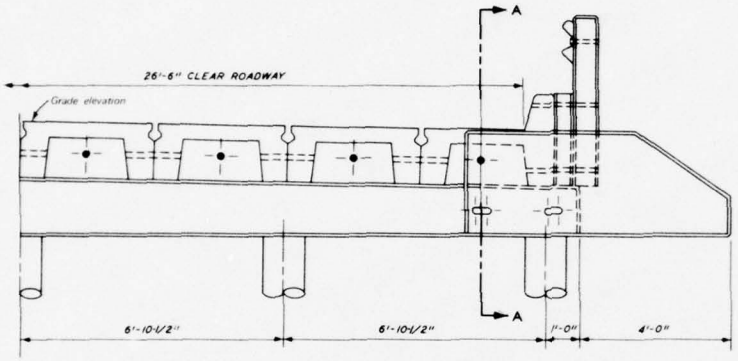


HALF ELEVATION

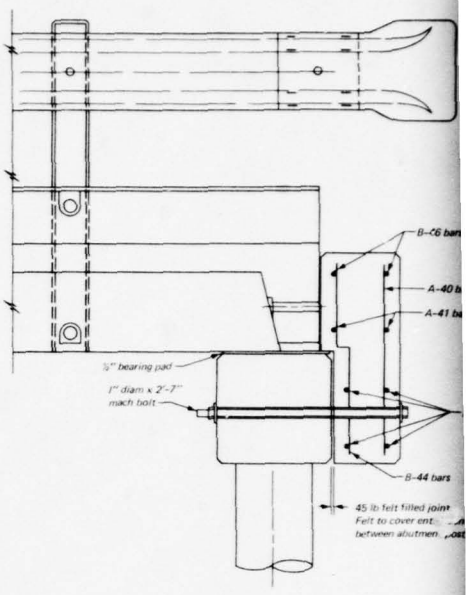


SECTION A-A




SLOT DETAIL

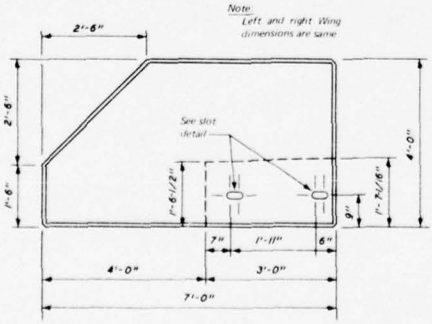

LEFT WING – FRONT VIEW




LEFT WING
RIGHT SIDE VIEW




RIGHT WING
LEFT SIDE VIEW


Figure D4. Precast concrete

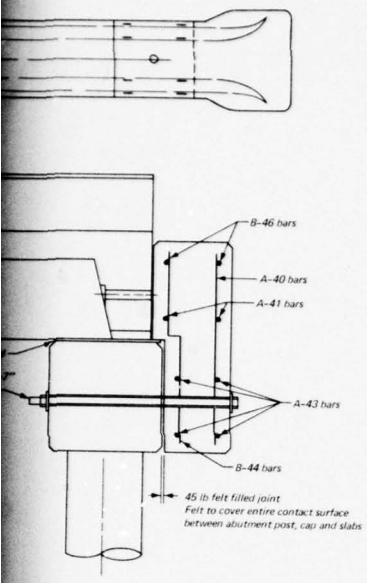


SECTION A-A

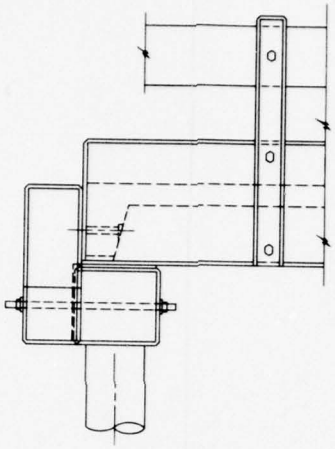

SIDE END ELEVATION




= 5 B-44




= 58-46 BARS
Dim. are OTO

Note:
Reinforcing steel details shall conform to
ACI Manual of Standard Practice For
Detailing Reinforced Concrete Structures




STRAIGHT BARS




= 5 TIE BARS
Dim. are OTO


REINFORCING DETAILS



RIGHT WING – TOP VIEW



RIGHT WING
FT SIDE VIEW

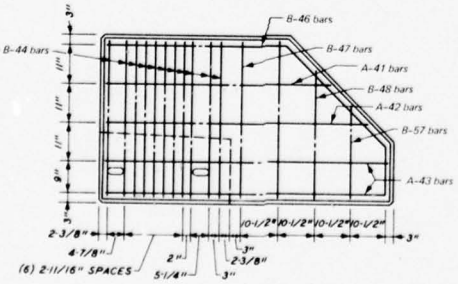

RIGHT WING – FRONT VIEW

GENERAL NOTES

Concrete:

All concrete shall have a minimum ultimate compressive strength of 3,000 psi at 28 days.

All exposed concrete corners shall be chamfered 3/4" x 45° unless otherwise noted.

Reinforcing:

All reinforcing steel shall be accurately located in the forms and firmly held in place by means of steel wire supports.

Reinforcing steel shall be deformed bars of intermediate or hard grade.

Reinforcing dimensions are to the ℄'s of bars unless otherwise noted.

Hardware:

All bolts shall be galvanized.

Precast concrete abutment wings

Photo D1. A minimal concrete production facility





Photo D2. Reinforcement storage

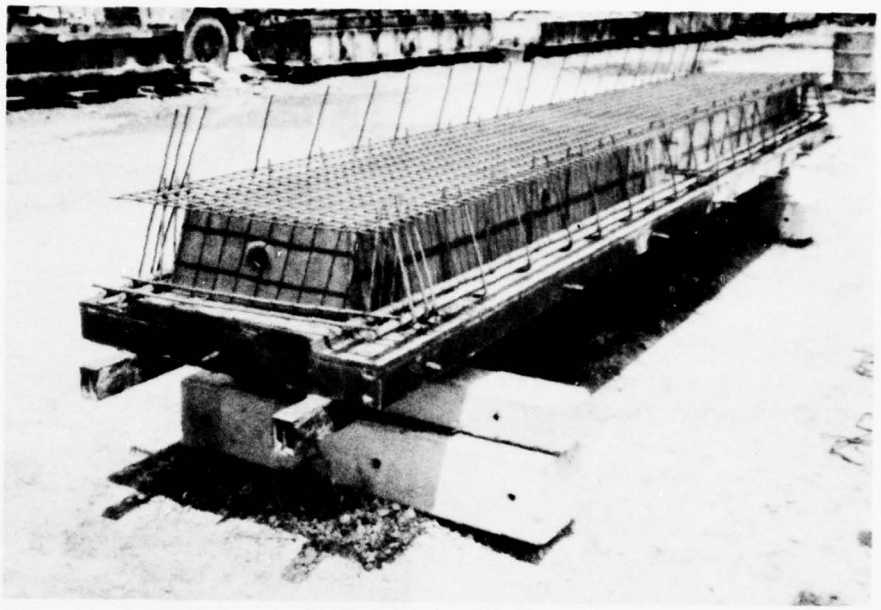


Photo D3. Base of exterior girder form with reinforcing positioned

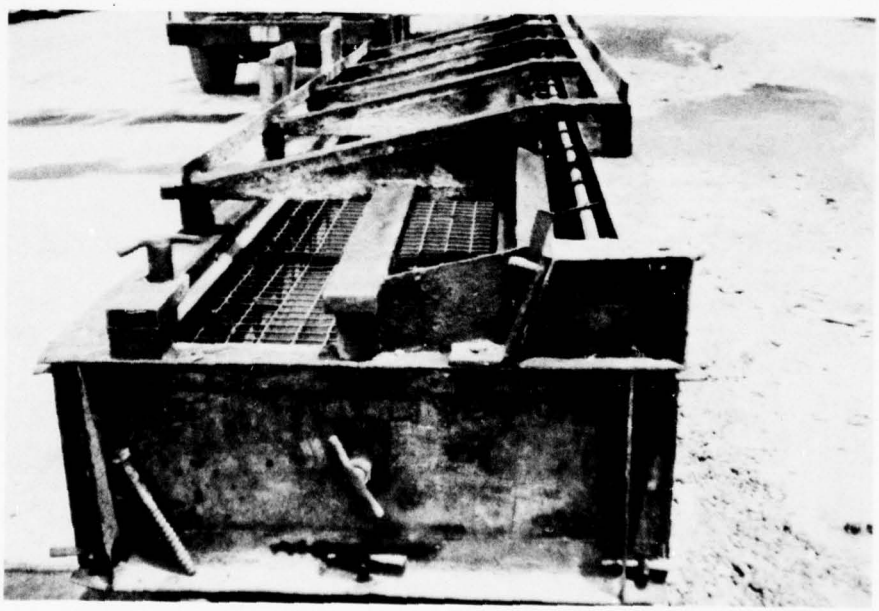


Photo D4. Exterior reinforced concrete girder immediately prior to casting

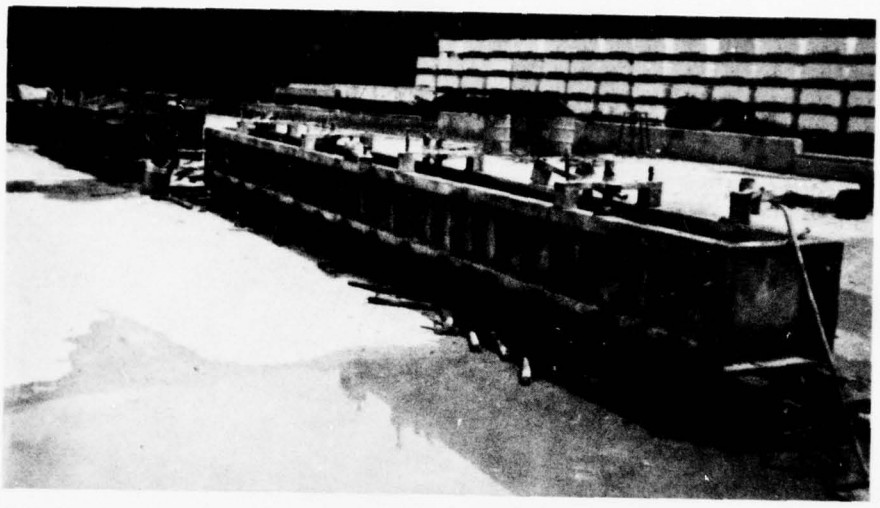


Photo D5. Pile cap form



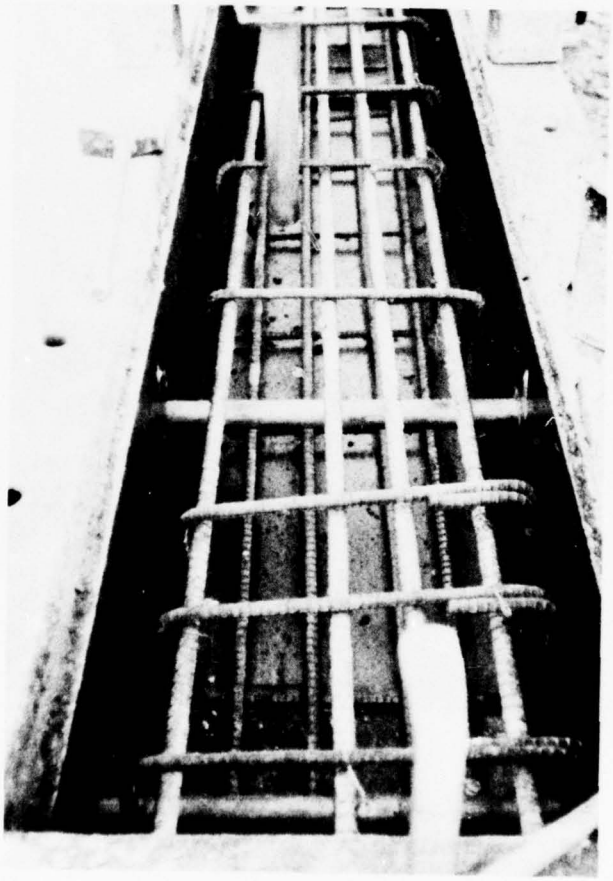


Photo D6. Pile cap reinforcing

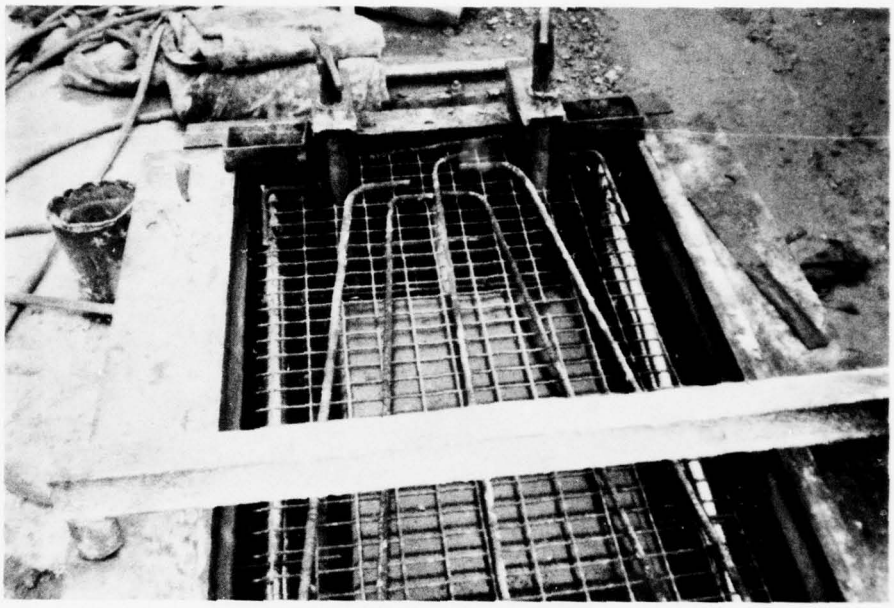


a. Top view

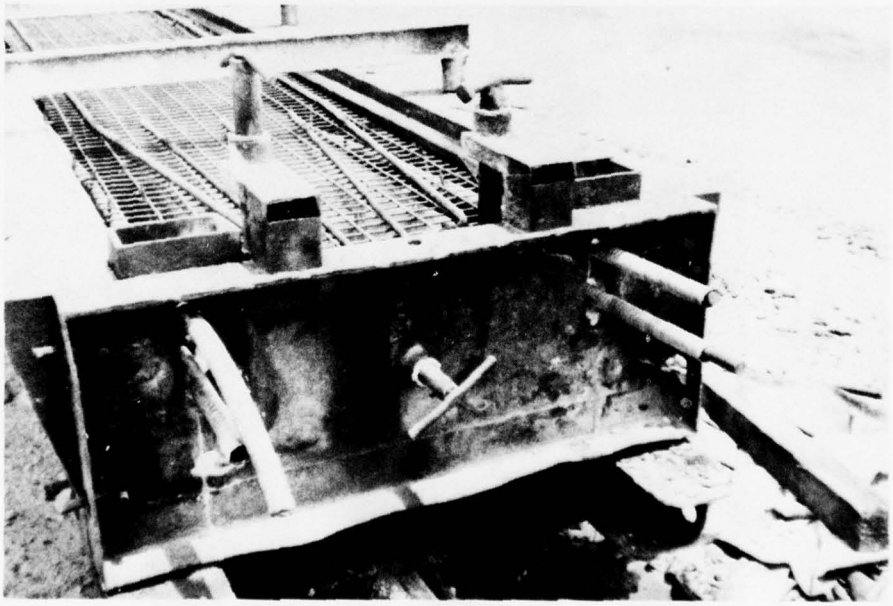


b. End view

Photo D7. Interior posttensioned concrete girder immediately prior to casting

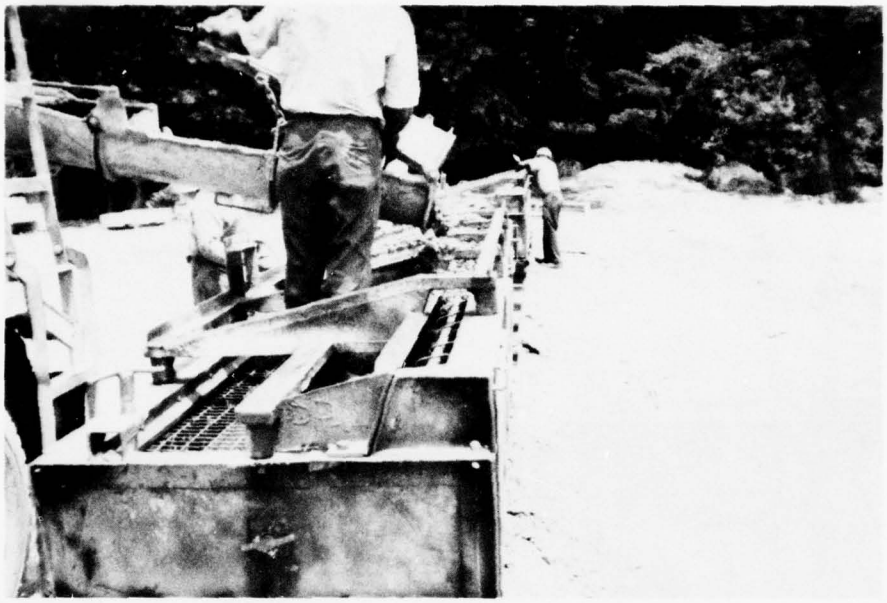

a. Exterior girder

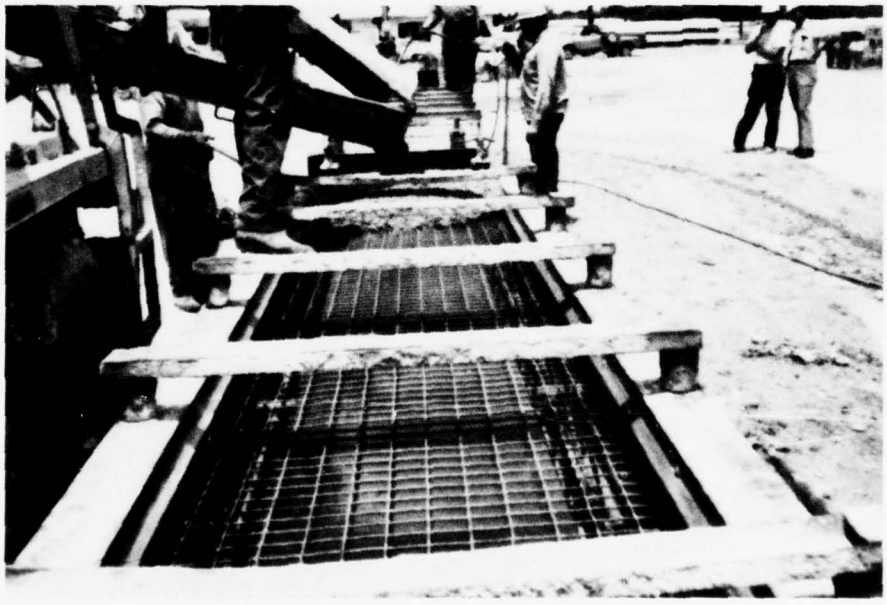


b. Interior girder

Photo D8. Placing, consolidation, and finishing of concrete channel girders



a. Conventional interior girder

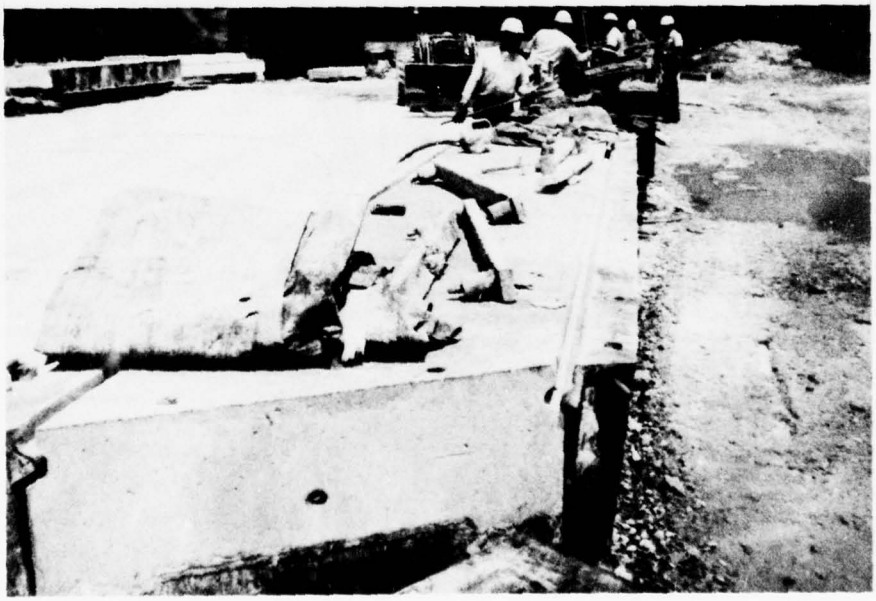

b. Skewed-end girder

Photo D9. Form stripping operations

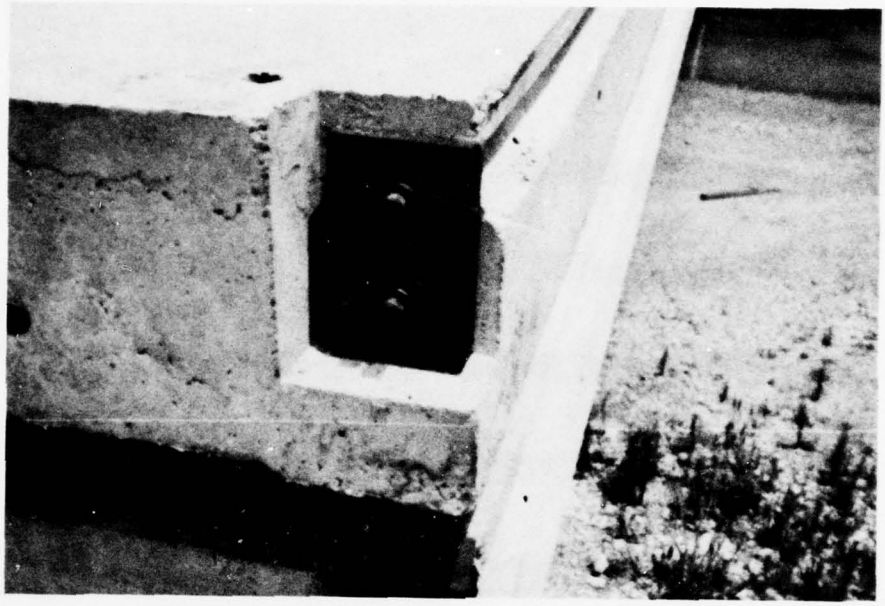


Photo D10. Channel girder after posttensioning and removal of excess tendon

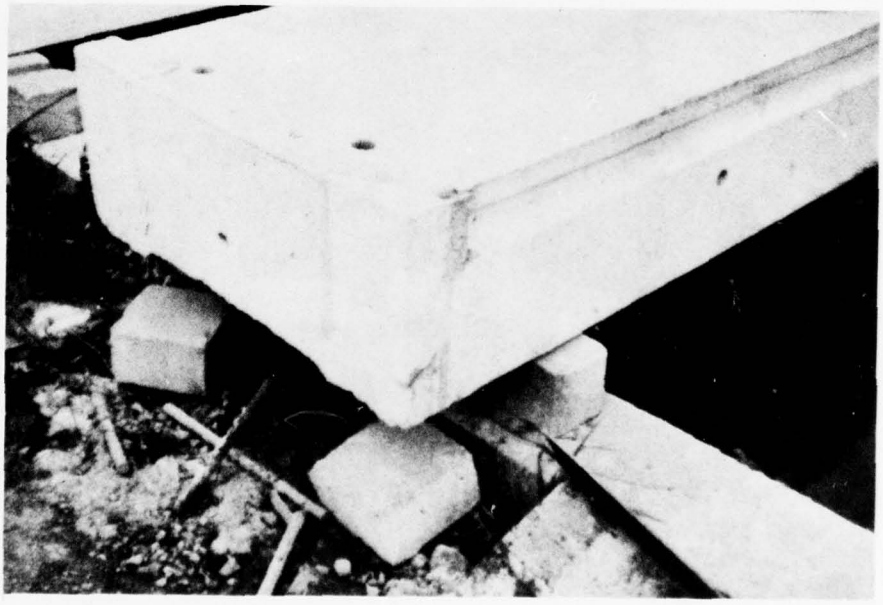


Photo D11. After grouting of stress-steel tendon, end anchorage protection is applied



Photo D12. Storage at precast plant

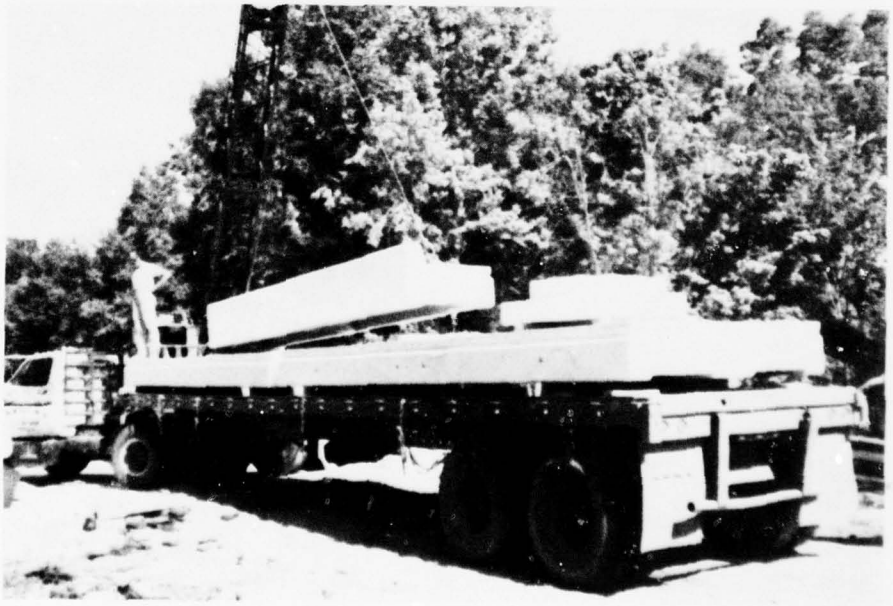


Photo D13. Typical transportation, precast plant to erection site

Photo D14. Pile driving equipment



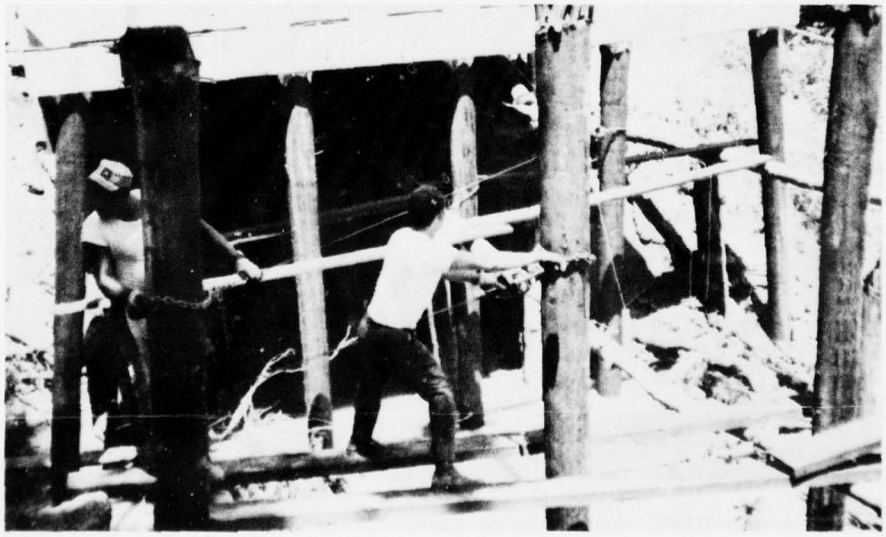


Photo D15. Using hand winches to obtain proper alignment of piles



Photo D16. Cutting piles at desired elevation

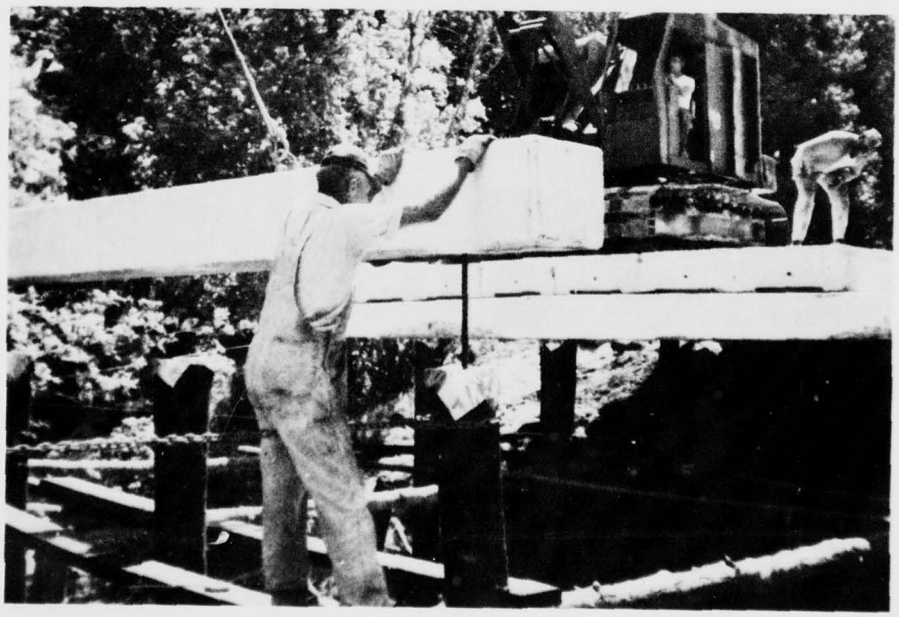


Photo D17. Installing precast concrete pile cap



Photo D18. Driving dowel pins through the pile cap

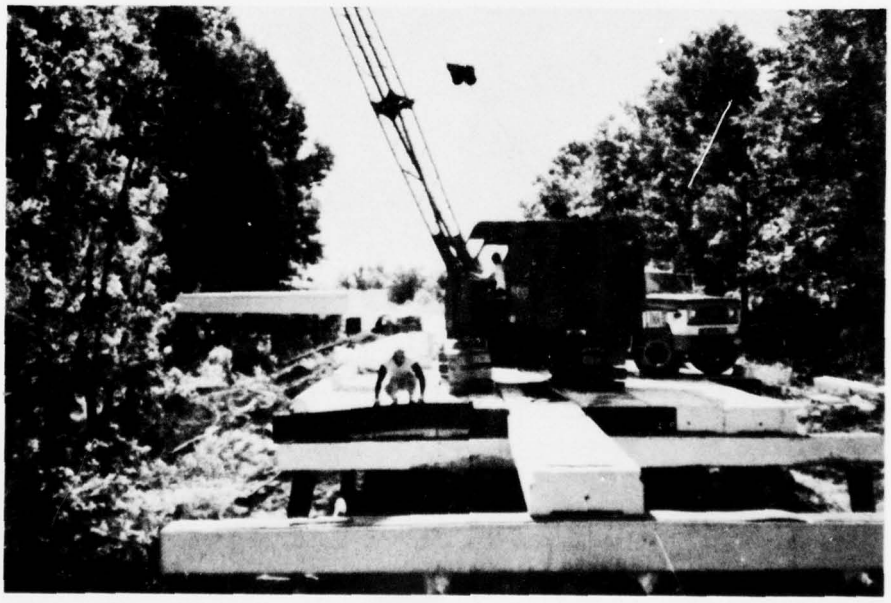



Photo D19. Positioning interior channel girders



Photo D20. Inserting dowel pins through channel girder into pile cap



Photo D21. Positioning exterior channel girder

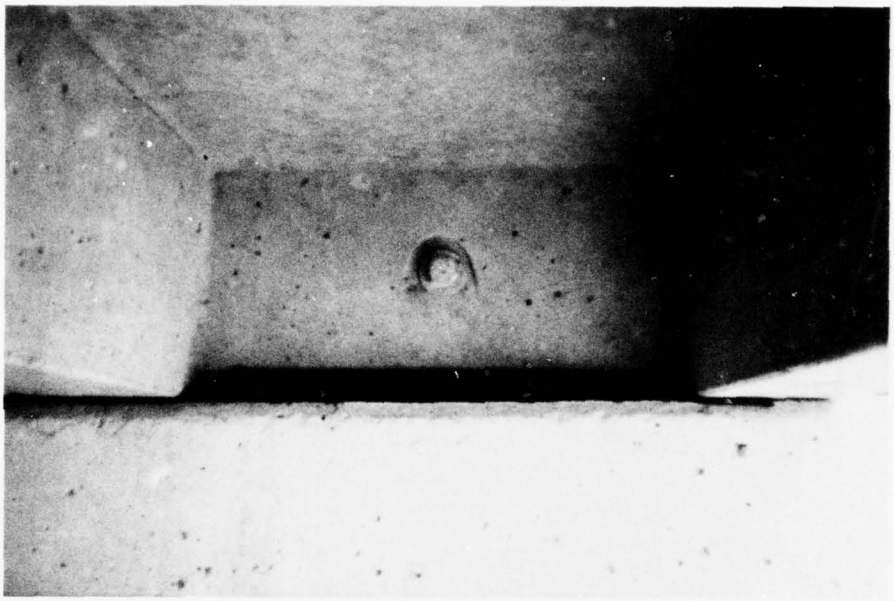

a. Longitudinal connection



b. Transverse connection

Photo D22. Bolted connections of adjacent channel girders



Photo D23. Upon completion of a bent, the crane is moved forward and the next bent is constructed using the same procedure



Photo D24. Installing precast abutment wing



Photo D25. Installing precast guard rail posts



Photo D26. Concreting keyways and dowels

APPENDIX E: COMPUTER PROGRAM OF THE ANALYSIS AND DESIGN OF SIMPLE-SPAN, PRECAST-PRESTRESSED HIGHWAY OR RAILWAY BRIDGES

Description of Program

1. The program performs the analysis and design of simple-span, precast-prestressed highway or railway bridges. The program will accommodate the composite and noncomposite sections included in Figure E1

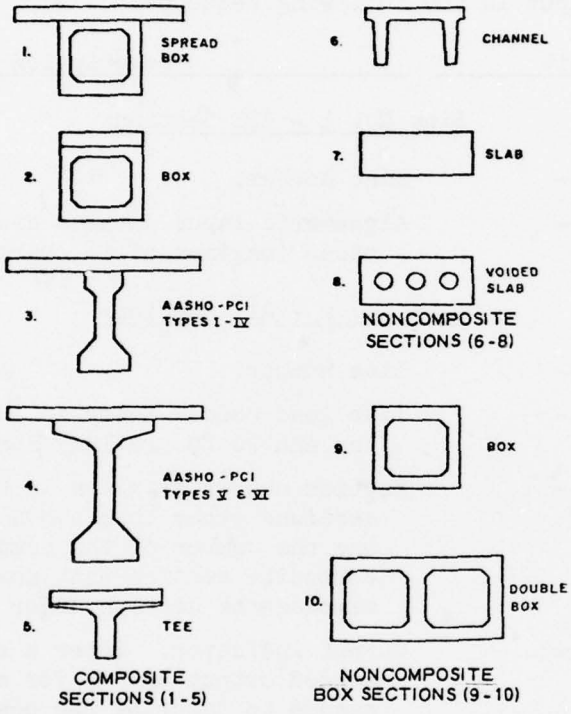


Figure E1. Composite and noncomposite sections

and will compute the following: section properties, dead- and live-load shears and moments, stresses for various loading conditions, ultimate design moments and resisting moments, spacing of shear reinforcement, horizontal shear stress between the composite slab and precast member, midspan elastic deflections for various loading conditions, and the number and center of gravity of prestressing strands required.

Input Data

2. Data may be input interactively through the question/response option of the program or read directly into the program from an input file. As the program uses a variable field format to read input, a comma or blank(s) is required to separate each input value of a line of data. Data is input in the following sequence:

Symbol	Unit	Description
		Line No. 1 - All Sections
LN	--	Line number.
TITLE	--	Alphameric input data to describe computations (maximum of 66 characters).
		Line No. 2 - All Sections
LN	--	Line number.
IDLD	--	Live load code. Enter 10 for highway loading and 20 for railway loading.
IDSEC	--	Section number as given in Figure E1. For sections other than shown in this figure, use the number of the composite or noncomposite section that most closely resembles the section under design.
IOTPT	--	Output indicator. Enter a blank for extended output and -1 for minimum output needed to describe the design.
IDPST	--	Indicator for geometry of prestressing strands. Enter 1 for straight parallel strands, 2 for depressed strands, and 3 for parabolic posttensioned strands.
FLOAD	--	Magnitude of live-load code.

Highway Loading	
Enter	AASHO Loading
20	H10-44
30	H15-44
40	H20-44
54	HS15-44
72	HS20-44
90	HS25-44

FLOAD (Cont'd)

Railroad Loading	
Enter	Cooper Loading
60	E-60
72	E-72
80	E-80

SPAN	ft	Span length (distance center to center of bearings).
SDL	kips per linear ft	Dead load to be applied to the noncomposite section, exclusive of beam weight.
CDL	kips per linear ft	Dead load to be applied to the composite section, exclusive of beam weight and SDL. Enter a blank for noncomposite sections.
ALLFR	--	Fraction of a truck load or track load to be applied to the section. Enter 1.0 for one truck load per beam (two lines of wheels), 0.5 for one-half truck load per beam, etc.
FIMP	--	Impact fraction to be used for railroad loading. Enter as a decimal fraction, i.e. 0.30 for 30 percent. As the highway loading impact fraction is computed by the program, enter a blank for highway loading.
FLL	--	Fraction of ALLFR to account for eccentricity and centrifugal force.

Line No. 3 - All Sections Other Than Noncomposite Box Sections

LN	--	Line number.
DSECT	in.	Depth of precast section.
ASECT	sq in.	Area of precast section.
SECTI	$in.^4$	Moment of inertia of precast section.
YT	in.	Distance from neutral axis of precast section to the top of the section.
YB	in.	Distance from neutral axis of precast section to the bottom of the section.
WTS	in.	Width of top slab or flange of precast section.
TTS	in.	Minimum thickness of top slab or flange of precast section.
BB	in.	Minimum width of web of precast section. Enter a blank if slab section (7).

Line No. 3A - Noncomposite Box Sections Only

LN	--	Line number.
WB	ft	Total width of box beam.
DB	ft	Total depth of box beam. (When top surface is sloped, use depth at lower edge.)
TTS	in.	Minimum thickness of top slab of box beam (at lower edge).
TBS	in.	Thickness of bottom slab of box beam.
TSW	in.	Thickness of sidewalls of box beam.
TMW	in.	Thickness of center wall of double-cell box beam. Enter a blank for single-cell box designs.
DH	in.	Depth and width of fillet.
DELTA	in.	Increase in thickness of top slab at higher edge due to sloping.

Line No. 4 - All Sections

LN	--	Line number.
DILOC	--	Diaphragm location expressed as fraction of span length, i.e., for diaphragms at third points, enter 0.33. If no diaphragms are used, enter 0.5.
DIAPH	kips	Weight per diaphragm.
HDPT	ft	Hold-down point for type 2 prestressing (maximum of 2 points). <u>This distance is measured from midspan.</u>
AS	$in.^2$	Area of a single prestressing strand or cable.
FSULT	kips per sq in.	Ultimate strength of prestressing steel.
RS	--	Ratio of steel stress at time of strand release or anchorage to ultimate prestressing steel strength.
R	--	Ratio of steel stress after loss of prestress to steel stress at anchorage.
EMIN	in.	Minimum feasible eccentricity of center of gravity of prestressing tendons <u>from bottom of beam.</u> See Table E1 for approximate values.

ESR	--	A factor to allow for strand relaxation and member shortening prior to computing stage 1 stresses. See Table E1 for approximate values.

Line No. 5 - All Sections

LN	--	Line number.
FCULT	kips per sq in.	Compressive strength of concrete in the prestressed member at 28 days.
FCI	kips per sq in.	Compressive strength of concrete in the prestressed member at time of anchorage or strand release.
FCPC	kips per sq in.	Compressive strength of concrete in the composite deck slab. Enter a blank if noncomposite.
FTENT	kips per sq in.	Allowable tensile stress in top fibers of the prestressed member.
FTENB	kips per sq in.	Allowable tensile stress in bottom fibers of the prestressed member.
FNPS	kips per sq in.	Allowable steel stress of nonprestressed reinforcement.
FV	kips per sq in.	Ultimate steel stress of stirrup reinforcement.
AV	sq in.	Area of all legs of stirrups at one section in the member.

Line No. 6 - All Sections

LN	--	Line number.
NSEC	--	Number of sections at which beam is to be analyzed for moment (maximum of 4).
NETRL	--	Enter 1 if number and location of prestressing strands are to be input; otherwise, enter -1.
DIST	--	For each desired section (maximum of 4) enter the distance as a fraction of the span, i.e., for midspan enter DIST as 0.5, and for the support enter DIST as 0.0. DIST (1) must be at midspan.

BMLL	ft-kips	Live-load moments for railroad loading at points corresponding to DIST values. The moments for Cooper's E-1 loading may be entered with appropriate FLOAD and ALLFR values, or 1 may be entered for FLOAD and ALLFR with the BMLL values entered as the actual moments to be applied to the section. The program computes the live-load moments for highway loading for each DIST value using the given FLOAD and ALLFR values.

Line No. 7 - Composite Sections Only

LN	--	Line number.
WCS	in.	Width of the composite deck slab.
TCS	in.	Thickness of the composite deck slab.
XNCS	in.	Ratio of the modulus of elasticity of the composite deck slab to the modulus of elasticity of the precast member.

Line No. 8 - Any Section with the Number and Location of Prestress Strands Included as Input

LN	--	Line number.
IDC	--	A number to identify the case.
STRNS	--	Number of prestressing strands.
YM	in.	Distance from the bottom of the beam to the centroid of the prestressing strands at midspan.
YE	in.	Distance from the bottom of the beam to the centroid of the prestressing strands at the end of the beam.


Description of Output

3. The output is generally self-explanatory. However, a few abbreviations or symbols are used. Those output symbols not described in the previous section on input data are defined as follows:


AD-A053 165 ARMY ENGINEER WATERWAYS EXPERIMENT STATION VICKSBURG MISS F/G 13/2
PRECAST CONCRETE ELEMENTS FOR STRUCTURES IN SELECTED THEATERS O--ETC(U)
FEB 78 J E MCDONALD, T C LIU

UNCLASSIFIED WES-TR-C-78-1 NL

3 OF 3
AD
A053165

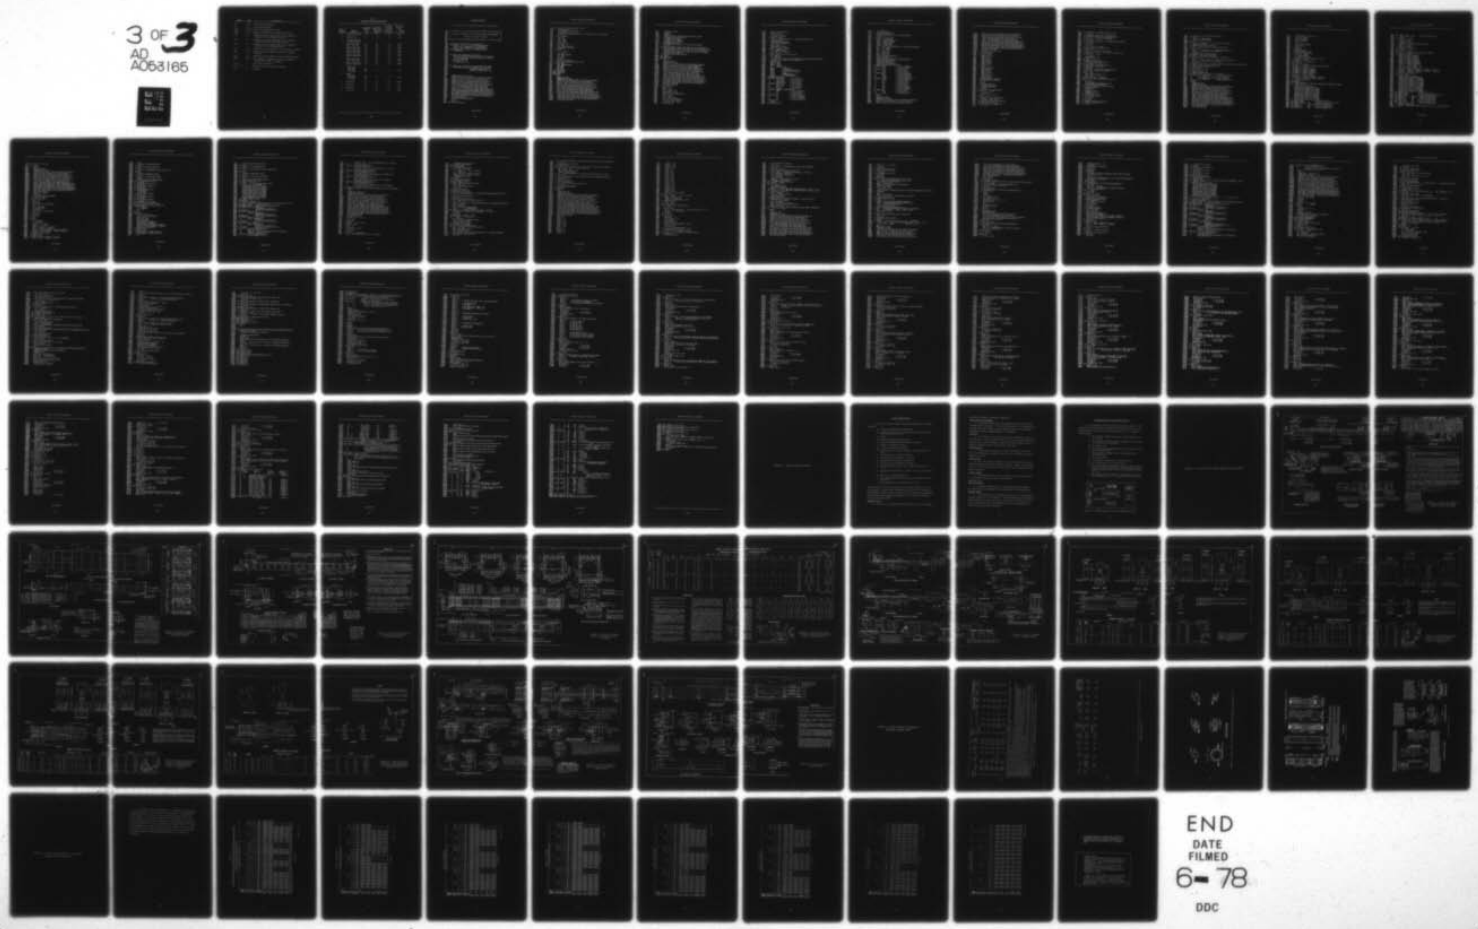

END
DATE
FILMED
6-78
DDC

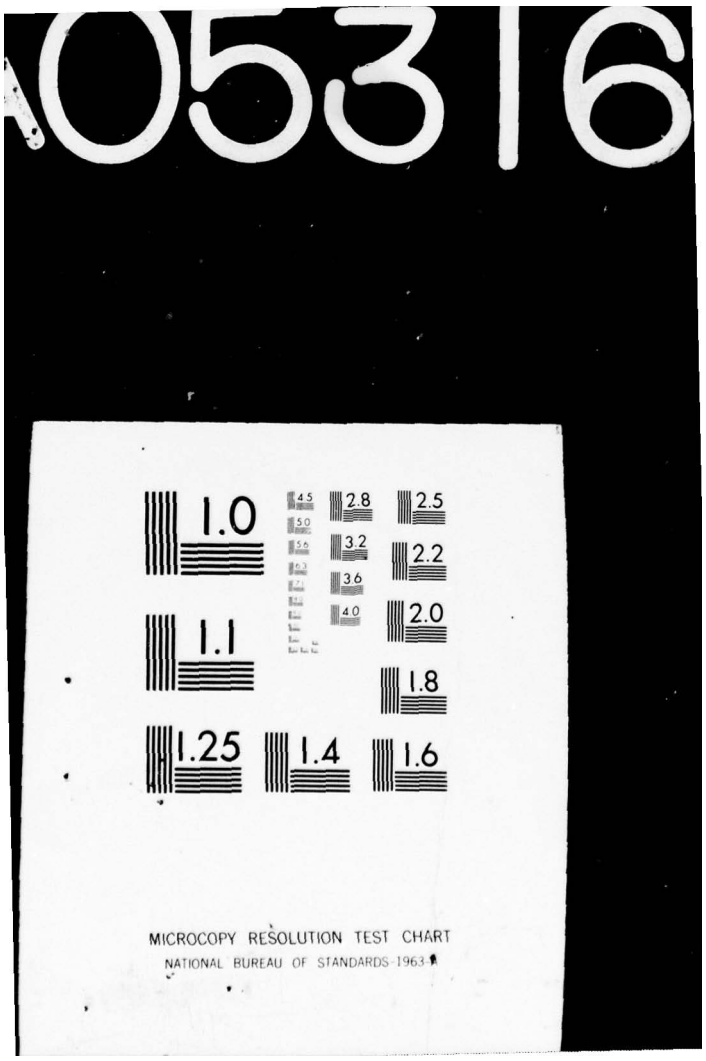
A05316
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0
4.5
5.0
5.6
6.3
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

Symbol	Unit	Description
SB	$in.^3$	Bottom section modulus.
ST	$in.^3$	Top section modulus.
ACMP	sq in.	Area of the composite section.
CMPI	$in.^4$	Moment of inertia of the composite section.
YTC	in.	Distance from the neutral axis of the composite section to top of precast section.
YBC	in.	Distance from the neutral axis of the composite section to bottom of precast section.
YTSC	in.	Distance from the neutral axis of the composite section to top of composite slab.
STC	$in.^3$	Composite section modulus at top of precast section.
SBC	$in.^3$	Composite section modulus at bottom of precast section.
STSC	$in.^3$	Composite section modulus at top of composite slab.
QTSC	$in.^3$	First moment of composite slab about composite neutral axis ($QTSC = A_{slab}XY_c$).
LL + I	--	Live-load plus impact.
DL + LL + I	--	Dead-load plus live-load plus impact.
ULT	--	Ultimate.

Table E1

Approximate Values for EMIN and ESR

Section Number in Figure E1	Type of Section	Approximate Value for EMIN in.	[1] Approximate Elastic Shortening Loss percent	[2] Approximate Strand Relaxation Loss @ 48 hr percent	Approximate Value of ESR $1.0 - \frac{(1 + 2)}{100}$
1	Composite spread box	2.0	5.0	2.5	0.925
2	Composite box	2.0	5.0	2.5	0.925
3	Composite AASHO-PCI standard sections				
	Type I 30-ft span	2.0	6.0	2.5	0.915
	Type I 45-ft span	3.0	9.5	2.5	0.88
	Type II 40-ft span	2.5	6.0	2.5	0.915
	Type II 60-ft span	3.5	9.5	2.5	0.88
	Type III 55-ft span	3.5	6.0	2.5	0.915
	Type III 80-ft span	4.0	9.5	2.5	0.88
	Type IV 70-ft span	3.5	6.0	2.5	0.915
	Type IV 100-ft span	4.5	9.5	2.5	0.88
4	Type V 90-ft span	4.5	7.0	2.5	0.905
	Type V 120-ft span	5.0	9.5	2.5	0.88
	Type VI 110-ft span	5.0	7.0	2.5	0.905
	Type VI 140-ft span	5.5	9.5	2.5	0.88
5	Composite tee				
	40-ft span	4.5			
	50-ft span	5.0	7.0	2.5	0.905
	60-ft span	6.0			
6	Channel				
	20-ft span	3.0			
	30-ft span	4.0	7.0	2.5	0.905
	40-ft span	5.0			
7	Solid slab	2.0	4.0	2.5	0.935
8	Voided slab	2.0	4.5	2.5	0.93
9	Single box	2.0	5.0	2.5	0.925
10	Double box	2.0	5.0	2.5	0.925

Fortran Listing

4. A listing of the computer program is given below.

```
C  ***********************************************************
C  *                                                         *
C  *   ANALYSIS AND DESIGN OF SIMPLE-SPAN PRECAST-PRESTRESSED *
C  *                                                         *
C  *                HIGHWAY OR RAILWAY BRIDGES               *
C  *                                                         *
C  ***********************************************************
C
C
C  ****WRITTEN BY CLIFFORD L FREYERMUTH,PCA
C  ****ADAPTED FOR USE IN "CORPS" PROGRAM LIBRARY
C       UNDER G-435 TIMESHARING SYSTEM,NOVEMBER
C       1976 BY ROY CAMPBELL,WES-CL,VICKSBURG,MS
C  ****MODIFIED NOV 1976 BY ROY CAMPBELL,WES-CL,
C       VICKSBURG,MS
C
C
C  FOR HARD COPY DOCUMENTATION CONTACT#
C       ENGINEER COMPUTER PROGRAMS LIBRARY(FTS 542-2581)
C       U. S. ARMY ENGINEER WATERWAYS EXPERIMENT STATION
C       CORPS OF ENGINEERS
C       P. O. BOX 631
C       VICKSBURG,MS 39180
C
C
C  FOR ADDITIONAL INFORMATION OR ASSISTANCE IN USING
C       THIS PROGRAM CALL# ROY CAMPBELL (FTS 542-3266)
C                          USAEWES,VICKSBURG,MS
C                          CONCRETE LAB,STRUCTURES BR
C
C
C
      CHARACTER TITLE*72,QT*1
      COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
     &FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
     &FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
     &FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BIO(5),
     &CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
     &F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
     &DV(2),TG(2),SPACE(2),VU(2),YES(4),BMCDL(4),
     &L(4),TITLE,IDC,STRNS,YM,YB,IDROX,IDLD,ICOMP,
     &IDSEC,IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
     &DB,YTS,TBS,TSW,TWW,DH,DELTA,DSECT,ASECT,SECTIXY,
     &YB,WTS,BB,DILOC,DIAPH,HDPT,AS,FSULT,RS,R,FCULT,FCI,
     &BOX1,SB,ST,Q,ACMP,CMPI,YTC,YBC,YTSC,STC,SBC,STSC,
     &QTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,WCS,TCS,
     &XNCS,ABOX,PSLS2,NETRL,LINES,UM,UMD,STRMN,YSE,AVJ,
     &VRLL,DFLG,EMIN,ESR
      CHARACTER FILN*8,FILNAM*10
      LC=1
      GO TO 2
  200 CALL DETACH(02,,)
```

(Continued)

```
530   201 PRINT,"IS JOB COMPLETED? Y OR N"
540       READ(5,9997) STO
550       IF(STO.EQ."Y") GO TO 9998
560       IF(STO.EQ."N") GO TO 2
570       PRINT,"*****CORRECT RESPONCE IS Y FOR YES OR N FOR NO*****"
580       GO TO 201
590     2 CALL MAKEFIL
600       CALL SR1
610       CALL  SR2
620       CALL  SR2A
630       CALL  SR3
640       IF(NETRL)8,8,7
650     8 CALL SR4A
660       CALL SR5A(UMR,UMP)
670       IF(NETRL) 20,200,200
680    20 NETRL = 1
690       IDC   =  1
700       I     =  NETRL
710       CALL SR4
720       CALL SR5(UMR,UMP)
730       CALL SR6
740       CALL SR7
750       GO TO 200
760     7 DO 10 I = 1,NETRL
770       READ (02,9999)LN,IDC,STRNS,YM,YE
780    21 CALL SR4
790       CALL SR5(UMR,UMP)
800       CALL SR6
810       CALL SR7
820    10 CONTINUE
830       GO TO 200
840 9997 FORMAT(A1)
850 9999 FORMAT(V)
860 9998 STOP
870       END
880       SUBROUTINE SR1
890       CHARACTER TITLE*72
900       COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
910&      FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
920&      FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
930&      FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BIO(5),
940&      CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
950&      F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
960&      DV(2),TG(2),SPACE(2),VU(2),YES(4),BMCDL(4),
970&      L(4),TITLE,IDC,STRNS,YM,YE,IDBOX,IDLD,ICOMP,
980&      IDSEC, IOTPT,FLOAD,SPAN,SDL,CDL,ALLFB,FIMP,FLL,WB,
990&      DB,TTS,TBS,TSW,TMW,DH,DELTA,DSECT,ASECT,SECTI,YT,
1000&      YB,WTS,BB,DILOC,DIAPW,HDRT,AS,FSULT,RS,RFCULT,FCI,
1010&      BOXI,SB,ST,Q,ACMP,CMPI,YTC,YBC,YTSC,STC,SBC,STSC,
1020&      QTSC,IDPST,FCPC,FTENT,FTRNB,FNPS,FV,AV,NSEC,WCS,TCB,
1030&      XNCS,ABOX,PSLS2,NETRL,LINES,UM,UMD,STRMN,YSE,AVJ,
1040&      VRLL,DFLG,EMIN,ESR
```

(Continued)

```
      READ(02,50)TITLE
      IDBOX=0
      ICOMP=0
      READ(02,9999)LN,IDLD,IDSEC,IOTPT,IDPST,FLOAD,
     SPAN,SDL,CDL,ALLFR,FIMP,FLL
      IF(IDSEC.EQ.9)IDBOX=1
      IF(IDSEC.EQ.10)IDBOX=2
      IF(IDSEC.LE.5)ICOMP=100
    3 IF(IDBOX-1)20,10,10
   10 READ(02,9999)LN,WB,DB,TTS,TBS,TSW,TMW,DH,DELTA
      GO TO 30
   20 READ(02,9999)LN,DSECT,ASECT,SECTI,YT,YB,WTS,TTS,BB
   30 READ(02,9999)LN,DILOC,DIAPH,HDPT,AS,FSULT,RS,R,EMIN,ESR
      READ(02,9999)LN,FCULT,FCI,FCPC,FTENT,FTENB,FNPS,FV,AV
      READ(02,9999)LN,NSEC,NETRL,(DIST(I),BMLL(I),I=1,NSEC)
      IF(ICOMP -100)22,21,22
   21 READ(02,9999)LN,WCS,TCS,XNCS
   22 RETURN
   50 FORMAT(A72)
 9999 FORMAT(V)
      END
      SUBROUTINE SR2
      CHARACTER TITLE*72
      COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
     FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
     FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
     FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BIO(5),
     CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
     F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
     DVC(2),TG(2),SPACE(2),VU(2),YES(4),BMCDL(4),
     L(4),TITLE,IDC,STRNS,YM,YE,IDBOX,IDLD,ICOMP,
     IDSEC,IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
     DB,TTS,TBS,TSW,TMW,DH,DELTA,DSECT,ASECT,SECTI,YT,
     YB,WTS,BB,DILOC,DIAPH,HDPT,AS,FSULT,RS,R,FCULT,FCI,
     BOXI,SB,ST,Q,ACMP,CMPI,YTC,YBC,YTSC,STC,SBC,STSC,
     QTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,WCS,TCS,
     XNCS,ABOX,PSLS2,NETRL,LINES,UM,UMD,STRMN,YSE,AVJ,
     VRLL,DFLG,EMIN,ESR
      IF(IDBOX-1)20,5,5
    5 ABOX = 0.0
      AYBOX = 0.0
      BOXI = 0.0
      A(1) = WB*12.*TTS
      YA(1)=DB*12.-TTS/2.
      BIO(1) = A(1)*(TTS)**2/18.
      YA(2)=TBS/2.
      Y(2) = TBS/2.
      A(2) = WB*12.*TBS
      BIO(2) = A(2)* TBS**2/12.
      D = DB*12.-TTS - TBS
      A(3) = (2.*TSW + TMW)*D
      YA(3)=TBS+D/2.
```

(Continued)

```
1570       BIO(3) = A(3)*D*D/12.
1580       YA(4)=YA(3)
1590       A(4)  = 2.*DH*DH
1600       IF(IDBOX-2  )2,1,2
1610     1 A(4) = 2.*A(4)
1620     2 BIO(4) = A(4)*(DH)**2/18.  + A(4)*(D/2.-DH/3.)**2
1630       A(5)=WB*5.*DELTA
1640       YA(5)=DB*12.+DELTA/3.
1650       BIO(5)=A(5)*DELTA**2/18.
1660       DO 3 I=1,5
1670       ABOX = ABOX + A(I)
1680       AYBOX=AYBOX+A(I)*YA(I)
1690     3 BOXI  =  BOXI + BIO(I)
1700       YB =  AYBOX/ABOX
1710       YT = DB*12. - YB+DELTA
1720       DO 4 I = 1,5
1730     4 BOXI = BOXI +A(I)*(YB-YA(I))**2
1740       SB = BOXI/YB
1750       ST = BOXI/YT
1760       Q = A(1)*(YA(1)-YB)+A(4)/2.*(DB*12.-TTS-DH/3.-YB)+(2.*TSW+TMW)
1770&      *(DB*12.-TTS-YB)**2/2.+A(5)*(YA(5)-YB)
1780       WTS =WB*12.
1790       ASECT = ABOX
1800       SECTI = BOXI
1810       DSECT = DB*12.
1820       BB    = 2.*TSW+ TMW
1830       WRITE         (6,48)TITLE
1840       WRITE         (6,49)WB,DB,TTS,TBS
1850       WRITE         (6,50)TSW,TMW,DH,DELTA
1860       WRITE         (6,54)
1870       WRITE         (6,51)ABOX,YB,YT
1880       WRITE         (6,52)BOXI,SB,ST,Q
1890    48 FORMAT(1X,A72//)
1900    49 FORMAT("BOX WIDTH       = ",F7.3,"FT",/
1910      &       "BOX DEPTH       = ",F7.3,"FT",/
1920      &       "TOP SLAB        = ",F7.3,"IN",/
1930      &       "BOTTOM SLAB     = ",F7.3,"IN")
1940    50 FORMAT("SIDE WALL       = ",F7.3,"IN",/
1950      &       "CEN. WALL       = ",F7.3,"IN",/
1960      &       "FILLET          = ",F7.3,"IN",/
1970      &       "DELTA           = ",F7.3,"IN")
1980    51 FORMAT("SECTION PROPERTIES",/
1990      &       "AREA            = ",F11.2,"SQ.IN",/
2000      &       "YT              = ",F11.2,"IN",/
2010      &       "YB              = ",F11.2,"IN")
2020    52 FORMAT("I               = ",F11.2,"IN**4",/
2030      &       "SB              = ",F11.2,"IN**3",/
2040      &       "ST              = ",F11.2,"IN**3",/
2050      &       "Q               = ",F11.2,"IN**3",/)
2060    53 FORMAT(1H /)
2070       RETURN
2080    20 SB = SECTI/YB
```

(Continued)

```
      ST = SECTI/YT
      IF(ICOMP-100)35,40,40
   35 WRITE(6,48)TITLE
      WRITE(6,58)ASECT,SECTI,YT,YB,WTS,BB,SB,ST
      RETURN
   40 ASLAB = TCS*WCS*XNCS
      YSLAB = YT + TCS/2.
      BIOS  = ASLAB*TCS**2/12.
      ACMP  = ASECT + ASLAB
      AYCMP = ASLAB*YSLAB
      YBARC = AYCMP/ACMP
      CMPI  = SECTI +ASLAB*YSLAB**2 + BIOS -ACMP*YBARC**2
      YTC   = YT -YBARC
      YBC   = YB +YBARC
      YTSC  = YTC + TCS
      STC   = CMPI/YTC
      SBC   = CMPI/YBC
      STSC  = CMPI/YTSC
      QTSC  = ASLAB*(YTSC-TCS/2.)
      WRITE(6,48)TITLE
      WRITE(6,58)ASECT,SECTI,YT,YB,WTS,BB,SB,ST
      WRITE(6,59)WCS,TCS,XNCS
      WRITE(6,55)ACMP,CMPI
      WRITE(6,56)YTC,YBC,YTSC
      WRITE(6,57)STC,SBC,STSC,QTSC
   55 FORMAT("ACMP              = ",F12.3,"IN**2",/
     &       "CMPI              = ",F12.3,"IN**4")
   56 FORMAT("YTC               = ",F12.3,"IN",/
     &       "YBC               = ",F12.3,"IN",/
     &       "YTSC              = ",F12.3,"IN")
   57 FORMAT("STC               = ",F12.3,"IN**3",/
     &       "SBC               = ",F12.3,"IN**3",/
     &       "STSC              = ",F12.3,"IN**3",/
     &       "QTSC              = ",F12.3,"IN**3",////)
   58 FORMAT("ASECT             = ",F12.3,"IN**2",/
     &       "SECTI             = ",F12.3,"IN**4",/
     &       "YT                = ",F12.3,"IN",/
     &       "TB                = ",F12.3,"IN",/
     &       "WTS               = ",F12.3,"IN",/
     &       "BB                = ",F12.3,"IN",/
     &       "SB                = ",F12.3,"IN**3",/
     &       "ST                = ",F12.3,"IN**3",)
   59 FORMAT("WCS               = ",F12.3,"IN",/
     &       "TCS               = ",F12.3,"IN",/
     &       "XNCS              = ",F12.3,"IN",///)
      RETURN
      END
      SUBROUTINE SR2A
      CHARACTER TITLE*72
      COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
     &FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
     &FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
```

(Continued)

```
2610&     FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BIO(5),
2620&     CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
2630&     F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
2640&     DV(2),TG(2),SPACE(2),VU(2),YES(4),BMCDL(4),
2650&     L(4),TITLE,IDC,STRNS,YM,YE,INBOX,IDUD,ICOMP,
2660&     IDSEC, IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
2670&     DB,TTS,TBS,TSW,TMW,DM,DELTA,DSECT,ASECT,SECTI,YT,
2680&     YB,WTS,BB,DILOC,DIAPH,HDMT,AS,FSULT,RS,R,FCULT,FCI,
2690&     BOXI,SB,ST,Q,ACMP,CMPI,YTC,YRC,YTSC,STC,SBC,STSC,
2700&     QTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,WCB,TCS,
2710&     XNCS,AHOX,PSLS2,NETRL,LINES,UM,UMD,STRMN,YSE,AVJ,
2720&     VRLL,DFLG,EMIN,ESR
2730      IF(IDLD  -10  )30,1,30
2740    1 WLLF=FLOAD-54.
2750      IF(WLLF)2,3,3
2760    2 CONLL(1)=2.8
2770      CONLL(2)=57.72
2780      CONLL(3)=40.
2790      CONLL(4)=32.
2800      CONLL(5)=2.8
2810      CONLL(6)=0.0
2820      CONLL(7)=33.2
2830      CONLL(8)=28.
2840      GO TO 4
2850    3 CONLL(1)=4.6667
2860      CONLL(2)=146.
2870      CONLL(3)=72.
2880      CONLL(4)=64.
2890      CONLL(5)=9.333
2900      CONLL(6)=7.
2910      CONLL(7)=127.3
2920      CONLL(8)=56.
2930    4 IF(SPAN-CONLL(2))5,6,6
2940    5 ZM=(1.-CONLL(1)/SPAN)/2.
2950      GO TO 7
2960    6 ZM=.5
2970    7 FL=FLOAD/CONLL(3)
2980      FIMP=50./(SPAN+125.)
2990      IF(FIMP-.3)9,9,8
3000    8 FIMP=.3
3010    9 IF(FLOAD - 54.)60,610,610
3020  610 DO 10 I = 1,NSEC
3030      Z = DIST(I)
3040      IF(Z - .5)12,11,12
3050   11 Z = ZM
3060   12 CBM1 = SPAN * Z *(1.- Z)
3070      IF(SPAN - CONLL(2))13,14,14
3080   13 IF(.3333 - Z)41,46,44
3090   41 IF(Z*SPAN-CONLL(8)/4.)42,17,17
3100   42 IF(SPAN-24.)44,43,43
3110   44 BML = CONLL(4)/2.*SPAN/4.
3120      GO TO 10
```

(Continued)

```
3130     43 BML=(SPAN-7.)/SPAN*32.*(SPAN/2.-3.5)
3140        GO TO 10
3150     46 IF(Z*SPAN +CONLL(8)/2.-SPAN)15,15,47
3160     47 IF(Z*SPAN +CONLL(8)/4.-SPAN)49,48,48
3170     48 BML =(1.- Z)*CONLL(4)/2.*Z*SPAN
3180        GO TO 10
3190     49 BML =(SPAN -(Z*SPAN+ 7.))/SPAN*CONLL(4)*Z*SPAN
3200        GO TO 10
3210     15 FZ =672.* Z
3220        GO TO 16
3230     17 FZ = (1.+ 3.* Z)*112.
3240     16 BML = CONLL(3) * CBM1 - FZ
3250        GO TO 10
3260     14 BML = (.32 * SPAN + 18.)* CBM1
3270     10 BMLL(I) =  BML * FL * ALLFR *( 1.+ FIMP + FLL)
3280        GO TO 200
3290     60 DO 90 I = 1, NSEC
3300        Z = DIST(I)
3310        IF(Z-.5)62,61,62
3320     61 Z= ZM
3330     62 CBM1 = SPAN*Z*(1.-Z)
3340        IF(SPAN- CONLL(2))63,64,64
3350     63 IF(.3333-Z)71,76,76
3360     71 IF(Z*SPAN + 14.- SPAN)85,72,72
3370     72 BML = CONLL(4)*SPAN/4.
3380        GO TO 90
3390     76 IF(Z*SPAN + CONLL(8)/2.-SPAN)85,77,77
3400     77 BML = (1.-7)*CONLL(4)*Z*SPAN
3410        GO TO 90
3420     85 FZ = 112.* Z
3430        BML = CONLL(3)*CBM1 - FZ
3440        GO TO 90
3450     64 BML =(.32*SPAN + 18.)*CBM1
3460     90 BMLL(I) = BML*FL*ALLFR*(1.+FIMP +FLL)
3470    200 Z = .25
3480        DO 20 I=1,2
3490        VL=(.32*SPAN*(1.-Z)+26.)*(1.-Z)
3500        IF(SPAN-CONLL(8))18,19,19
3510     18 IF(1.-Z-(CONLL(8)/2./SPAN))21,19,19
3520     21 FO=CONLL(6)/SPAN
3530        VKO=CONLL(4)
3540        GO TO 22
3550     19 FO=CONLL(5)/SPAN
3560        VKO=CONLL(3)
3570     22 VTRK=VKO*(1.-Z-FO)
3580        IF(VL-VTRK)23,24,24
3590     23 VLL(I)=VTRK
3600        GO TO 25
3610     24 VLL(I)=VL
3620     25 FIMP=50./(SPAN*(1.-Z)+125.)
3630        IF(FIMP-.3)27,27,26
3640     26 FIMP=.3
```

(Continued)

```
3650    27 VLL(I)=VLL(I)*FL*ALLFR*(1.+FIMP+FLL)
3660    20 Z=.3333
3670       FIMP = 50./(SPAN+125.)
3680       IF(FIMP -.3)300,300,301
3690   301 FIMP = .3
3700   300 VRULL  =(.32*SPAN + 26.)*FL*ALLFR*(1.+FIMP+FLL)
3710       IF(WLLF)91, 94, 94
3720    91 IF(SPAN- CONLL(8)/2.)92,92,93
3730    92 VRTLL  = CONLL(4)*FL* ALLFR*(1.+FIMP +FLL)
3740       GO TO 99
3750    93 VRTLL  = ( CONLL(4) + (1.-(CONLL(8)/2./SPAN))*8.)
3760       VRTLL  = VRTLL*FL*ALLFR*(1.+FIMP+FLL)
3770       GO TO 99
3780    94 IF(SPAN -CONLL(8)/2.)95,95,98
3790    95 IF(SPAN- CONLL(8)/4.)96,96,97
3800    96 VRTLL  = CONLL(4)/2.*FL*ALLFR*(1. +FIMP+FLL)
3810       GO TO 99
3820    97 VRTLL  = ( CONLL(4)/2.+ (1.-(CONLL(8)/4./SPAN))*32.)
3830       VRTLL  = VRTLL*FL*ALLFR*(1.+FIMP+FLL)
3840       GO TO 99
3850    98 VRTLL=( CONLL(4)/2. +(1.-(CONLL(8)/4./SPAN))*32. +(1.-(CONLL(8)/2.
3860&      /SPAN))*8.)*FL*ALLFR*(1.+FIMP+FLL)
3870    99 IF(VRULL-VRTLL)100,100,101
3880   100 VRLL = VRTLL
3890       IF(IOTPT)30,102,102
3900   101 VRLL = VRULL
3910       IF(IOTPT)30,102,102
3920   102 WRITE(6,105)BMLL(1),VLL(1),VLL(2),VRLL
3930   105 FORMAT("MAX LL+I MOMENT          =",F8.1,"FT KIPS",/
3940     &       "LL+I SHEAR AT 1/4 PT =",F8.1,"KIPS",/
3950     &       "LL+I SHEAR AT 1/3 PT =",F8.1,"KIPS",/
3960     &       "LL+I REACTION        =",F8.1,"KIPS",///)
3970    30 RETURN
3980       END
3990       SUBROUTINE SR3
4000       CHARACTER TITLE*72
4010       COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
4020&      FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
4030&      FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
4040&      FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BI0(5),
4050&      CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
4060&      F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
4070&      DV(2),TG(2),SPACE(2),VU(4),YES(4),BMCDL(4),
4080&      L(4),TITLE,IDC,STRNS,YM,PE,IDBOX,IDLD,ICOMP,
4090&      IDSEC, IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
4100&      DB,TTS,THS,TSW,TMW,DW,DELTA,DSECT,ASECT,SECTI,YT,
4110&      YB,WTS,BH,DILOC,DIAPH,HDPT,AS,FSULT,RS,RTFCULT,FCI,
4120&      BOXI,SB,ST,Q,ACMP,CMPI,YTC,YBC,YTSC,STC,SBC,STSC,
4130&      QTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,WCB,TCS,
4140&      XNCS,AHOX,PSLS2,NETRL,LINES,UM,UMO,STRMN,YSE,AVJ,
4150&      VRLL,DFLG,EMIN,ESR
4160       N = 1./(DILOC *2.)
```

(Continued)

```
      RDIA=DIAPH*(1./DILOC -1.)/2.
      DO 10 I=1,NSEC
      X = DIST(I)*SPAN
      BMDLT(I)=X*RDIA
      DO 10  J=1,N
      XN = J
      XD = XN*DILOC *SPAN
      IF(X-XD)1,2,2
    1 BM=0.0
      GO TO 10
    2 BM=DIAPH*(X-XD)
   10 BMDLT(I)=BMDLT(I)-BM
      IF(ICOMP -100)11,70,11
   11 DO 20 I = 1,NSEC
      X = DIST(I)*SPAN
      X = SPAN/2.*X-X*X/2.
      BMDLT(I) =BMDLT(I)+ X*ASECT*.15/144
   20 BMDLF(I) = SDL*X
   21 IF(IDLD -10 )41,40,41
   40 GO TO 42
   41 DO 43 I = 1,NSEC
   43 BMLL(I) = BMLL(I)*FLOAD*ALLFR*(1.+FIMP+FLL)
   42 DO 44  I =1,NSEC
   45 FTBWT(I) = BMDLT(I)/ST*12.
   46 FBBWT(I) =-BMDLT(I)/SB*12.
   47 FTSDL(I) = BMDLF(I)/ST*12.
   48 FBSDL(I) =-BMDLF(I)/SB*12.
   49 FTLL(I) = BMLL(I)/ST*12.
   53 FBLL(I) =-BMLL(I) /SB*12.
   54 FTTOT(I) = FTBWT(I)+FTSDL(I)+FTLL(I)
   44 FBTOT(I) = FBBWT(I)+FBSDL(I)+FBLL(I)
      IF(IOPT)156,55,55
  156 RETURN
   55 WRITE(6,150)
  150 FORMAT("STRESSES IN EXTREME FIBERS DUE TO EXTERNAL LOADS -
     &  KIPS PER SQ.IN.")
      WRITE(6,273)(I,I=1,NSEC)
      WRITE(6,274)(DIST(I),I=1,NSEC)
      WRITE(6,276)(FTBWT(I),I=1,NSEC)
      WRITE(6,277)(FBBWT(I),I=1,NSEC)
      WRITE(6,278)(FTSDL(I),I=1,NSEC)
      WRITE(6,277)(FBSDL(I),I=1,NSEC)
      WRITE(6,282)(FTLL(I),I=1,NSEC)
      WRITE(6,277)(FBLL(I),I=1,NSEC)
      WRITE(6,284)(FTTOT(I),I=1,NSEC)
      WRITE(6,277)(FBTOT(I),I=1,NSEC)
  273 FORMAT("NSEC                 ",13X,I1,3(9X,I1))
  274 FORMAT("DIST                 ",10X,F5.3,"L",3(4X,F5.3,"L"))
  276 FORMAT("BEAM WT TOP          ",8X,F7.3,3(3X,F7.3))
  277 FORMAT("          BOTTOM     -",8X,F7.3,3(3X,F7.3))
  278 FORMAT("SDL      TOP         ",8X,F7.3,3(3X,F7.3))
  282 FORMAT("LL       TOP         ",8X,F7.3,3(3X,F7.3))
```

(Continued)

```
4690   284 FORMAT("TOTAL    TOP      =",8X,F7.3,3(3X,F7.3))
4700       LINES = 19 + NSEC
4710       RETURN
4720    70 DO 80 I = 1,NSEC
4730       X=DIST(I)*SPAN
4740       X=SPAN/2.*X - X*X/2.
4750       BMDLT(I) = BMDLT(I)+ X*ASECT*.15/144.
4760       BMDLF(I) = SDL*X
4770    80 BMCDL(I) = CDL*X
4780       IF(IDLD -10)82,81,82
4790    81 GO TO 84
4800    82 DO 83 I = 1,NSEC
4810    83 BMLL(I) = BMLL(I)*FLMAD*ALLFR*(1.+FIMP*FLL)
4820    84 DO 85 I = 1,NSEC
4830       FTBWT(I)= BMDLT(I)/ST*12.
4840       FBBWT(I)=-BMDLT(I)/SB*12.
4850       FTSDL(I)= BMDLF(I)/ST*12.
4860       FBSDL(I)=-BMDLF(I)/SB*12.
4870       FTCDL(I)= BMCDL(I)/STC*12.
4880       FBCDL(I)= -BMCDL(I)/SBC*12.
4890       FSCDL(I)=  BMCDL(I)/STSC*12.
4900       FTLL(I) =  BMLL(I)/STC * 12.
4910       FBLL(I) = -BMLL(I)/SBC * 12.
4920       FSLL(I)=  BMLL(I)/STSC * 12.
4930       FTTOT(I) = FTBWT(I) +FTSDL(I) + FTCDL(I) + FTLL(I)
4940       FBTOT(I) = FBBWT(I) +FBSDL(I) + FBCDL(I) + FBLL(I)
4950    85 FSTOT(I) = FSCDL(I) +FSLL(I)
4960       IF(IOTPT)177,178,178
4970   178 WRITE (6,150)
4980       WRITE(6,373)(I,I=1,NSEC)
4990       WRITE(6,374)(DIST(I),I=1,NSEC)
5000       WRITE(6,376)(FTBWT(I),I=1,NSEC)
5010       WRITE(6,377)(FBBWT(I),I=1,NSEC)
5020       WRITE(6,378)(FTSDL(I),I=1,NSEC)
5030       WRITE(6,377)(FBSDL(I),I=1,NSEC)
5040       WRITE(6,380)(FTCDL(I),I=1,NSEC)
5050       WRITE(6,377)(FBCDL(I),I=1,NSEC)
5060       WRITE(6,382)(FTLL(I),I=1,NSEC)
5070       WRITE(6,377)(FBLL(I),I=1,NSEC)
5080       WRITE(6,384)(FTTOT(I),I=1,NSEC)
5090       WRITE(6,377)(FBTOT(I),I=1,NSEC)
5100   373 FORMAT("NSEC              =",13X,I1,3(9X,I1))
5110   374 FORMAT("DIST              =",10X,F5.3,"L",3(4X,F5.3,"L"))
5120   376 FORMAT("BEAM WT TOP       =",8X,F7.3,3(3X,F7.3))
5130   377 FORMAT("         BOTTOM   =",8X,F7.3,3(3X,F7.3))
5140   378 FORMAT("SDL      TOP      =",8X,F7.3,3(3X,F7.3))
5150   380 FORMAT("CDL      TOP      =",8X,F7.3,3(3X,F7.3))
5160   382 FORMAT("LL       TOP      =",8X,F7.3,3(3X,F7.3))
5170   384 FORMAT("TOTAL    TOP      =",8X,F7.3,3(3X,F7.3))
5180       WRITE(6,176)FSTOT(1)
5190   176 FORMAT(//,'COMPOSITE STRESS IN SLAB = ',F7.3,' KIPS PER SQ.IN.
5200      ',/)
```

(Continued)

```
3033T 01  05-05-77   15.199

5210  177 RETURN
5220      END
5230      SUBROUTINE SR4
5240      CHARACTER TITLE*72
5250      COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
5260&     FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
5270&     FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
5280&     FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BIO(5),
5290&     CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
5300&     F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
5310&     DV(2),TG(2),SPACE(2),VU(2),YFS(4),BMCDL(4),
5320&     L(4),TITLE,IDC,STRNS,YM,YE,IDBOX,IDLD,ICOMP,
5330&     IDSEC, IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
5340&     DBTTS,TBS,TSW,TMW,DH,DELTA,NSECT,ASECT,SECTI,WT,
5350&     YBWTS,BB,DILOC,DIAPH,HDPT,AS,FSULT,RS,RTFCULT,FCI,
5360&     BOXI,SB,ST,Q,ACMP,CMPI,YTC,YRC,YTSC,STC,SBC,STBC,
5370&     DTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,NCS,TCS,
5380&     XNCS,ABOX,PSLS2,NETRL,LINES,UM,UMD,STRMN,YSE,AVJ,
5390&     VRLL,DFLG,EMIN,ESR
5400      LINC = 18 + NSEC
5410      LINES = 6
5420      PI = STRNS *AS*FSULT*RS*ESR
5430      IF(IDPST-2)1,2,3
5440    1 DO 10 I =1,NSEC
5450   10 Y(I) = YM
5460      XS = 0.6
5470      GO TO 4
5480    2 HPT = (SPAN/2.-HDPT)*SPAN
5490      XS =  .6
5500      DO 11 I=1,NSEC
5510      X = DIST(I)-HPT
5520      IF(X)5,6,6
5530    5 Y(I) = YM + (YM-YE)*X/HPT
5540      GO TO 11
5550    6 Y(I) = YM
5560   11 CONTINUE
5570      K = 0
5580    4 I=0
5585   13 I=I+1
5590      F = PI/ASECT
5600      X = PI*(YB-Y(I))
5610      FTPI(I) = F - X/ST
5620      FBPI(I) = F + X/SB
5630      F1T(I) = FTPI(I) +  FTBWT(I)
5640      F1B(I) = FBPI(I) + FBBWT(I)
5650      F2T(I) = FTPI(I)*R/ESR  + FTBWT(I)+FTSDL(I)
5660      F2B(I) = FBPI(I)*R/ESR  + FBBWT(I)+FBSDL(I)
5670      IF(ICOMP -100)80,85,80
5680   80 FTCDL(I)=0.0
5690      FBCDL(I)=0.0
5700   85 F3T(I)= F2T(I) +FTCDL(I) +FTLL(I)
5710      F3B(I)= F2B(I) +FBCDL(I) +FBLL(I)
```

(Continued)

```
5720        KL=1
5730        IF(F1B(I)- XS*FCI)20,20,601
5740     20 KL=2
5750        IF(F1T(I)+FTENT)602,22,22
5760     22 KL=3
5770        IF(F1T(I)+.003*SQRT(FCI*1000.))603,77,77
5780     76 K=1
5790     77 KL=4
5800        IF(F3B(I)+FTENB)604,78,78
5810     78 KL=5
5820        IF(F3T(I)-.4*FCULT)79,79,605
5830     79 KL=6
5840        IF(F3B(I)-.4*FCULT)113,113,606
5850    113 IF(I-NE*NSEC) GO TO 13
5860        GO TO 32
5870    601 WRITE(6,701)I,F1B(I),XS
5880        GO TO 650
5890    602 WRITE(6,702)I,F1T(I)
5900        GO TO 650
5910    603 WRITE(6,703)I,F1T(I)
5920        WRITE(6,255)
5930         GO TO 650
5940    604 WRITE(6,704)I,F3B(I)
5950        GO TO 650
5960    605 WRITE(6,705)I,F3T(I)
5970        GO TO 650
5980    606 WRITE(6,706)I,F3B(I)
5990        GO TO 650
6000    650 IF(IDPST-2)651,651,652
6010    651 GO TO (20,22,76,78,79,13),KL
6020    652 GO TO (120,122,176,131,179,12),KL
6030      3 PI=PI/ESR
6040        F = PI/ASECT
6050        XS = .55
6060        K = 0
6070    125 I=0
6075     12 I=I+1
6080        X = (.9-DIST(I))*2
6090        Y(I) = YM + (YE-YM)*X*X
6100        X=PI*(YB-Y(I))
6110        FTPI(I)=F-X/ST
6120        FBPI(I)=F+X/SB
6130        F1T(I)=FTPI(I)+FTBWT(I)
6140        F1B(I)=FBPI(I)+FBBWT(I)
6150        F2T(I)=FTPI(I)*R+FTBWT(I)+FTSDL(I)
6160        F2B(I) = FBPI(I)*R+FBBWT(I)+FBSDL(I)
6170        IF(ICOMP-100)90,95,90
6180     90 FTCDL(I)=0.0
6190        FBCDL(I)=0.0
6200     95 F3T(I)=F2T(I) +FTCDL(I)+FTLL(I)
6210        F3B(I)=F2B(I) +FBCDL(I)+FBLL(I)
6220        KL=1
```

(Continued)

```
      IF(F1B(I)-XS*FCI)120,120,601
  120 KL=2
      IF(F1T(I)+FTENT)602,122,122
  122 KL=3
      IF(F1T(I)+0.003*SQRT(FCI*1000))603,177,177
  176 K = 1
  177 KL=4
      IF(F3B(I)+FTENB)604,131,131
  131 KL=5
      IF(F3T(I)-.4*FCULT)179,179,605
  179 KL=6
      IF(F3B(I)-0.4*FCULT)112,112,606
  112 IF(I.NE.NSEC) GO TO 32
   32 WRITE    (6,249)
      WRITE        (6,250)IDC,STRNS ,YM,YE
   24 WRITE(6,251)(I,I=1,NSEC)
      WRITE(6,252)(DIST(I),I=1,NSEC)
      WRITE(6,253)(FTPI(I),I=1,NSEC)
      WRITE(6,257)(FBPI(I),I=1,NSEC)
      WRITE(6,254)(F1T(I),I=1,NSEC)
      WRITE(6,258)(F1B(I),I=1,NSEC)
      WRITE(6,261)(F2T(I),I=1,NSEC)
      WRITE(6,259)(F2B(I),I=1,NSEC)
      WRITE(6,256)(F3T(I),I=1,NSEC)
      WRITE(6,260)(F3B(I),I=1,NSEC)
   34 LINES = LINES + LINC
  249 FORMAT(1H /)
  250 FORMAT(//,"CASE#",I2,/
     &"NO. OF STRANDS = ",F4.0,10X"YM=",F7.3,10X,"YB=",F7.3,/////)
  251 FORMAT("NSEC  -",17X,I3,3(9X,I3))
  252 FORMAT("DIST  -",14X,F5.3,"L",3(4X,F5.3,"L"))
  253 FORMAT("INITIAL PRESTRESS",/,
     &       "          TOP-",8X,F7.3,3(3X,F7.3))
  257 FORMAT("          BOTTOM",6X,F7.3,3(3X,F7.3))
  254 FORMAT("BEAM WT +",/,
     &       "INITIAL PRESTRESS",/,
     &       "          TOP-",8X,F7.3,3(3X,F7.3))
  258 FORMAT("          BOTTOM",6X,F7.3,3(3X,F7.3))
  261 FORMAT("BEAM WT + SDL +",/,
     &       "FINAL PRESTRESS",/,
     &       "          TOP-",8X,F7.3,3(3X,F7.3))
  259 FORMAT("          BOTTOM",6X,F7.3,3(3X,F7.3))
  256 FORMAT("ALL LOADS +",/,
     &       "FINAL PRESTRESS",/,
     &       "          TOP-",8X,F7.3,3(3X,F7.3))
  260 FORMAT("          BOTTOM",6X,F7.3,3(3X,F7.3),///)
  701 FORMAT(/,"*****OVERSTRESS*****",/,
     &       "SECTION NUMBER",I1,/,
     &       "BEAM WT + INITIAL PRESTRESS(",F7.3,"),BOTTOM",/,
     &       "EXCEEDS ",F4.2,"FCI",/)
  702 FORMAT(/,"*****OVERSTRESS*****",/,
     &       "SECTION NUMBER ",I1,/,
```

(Continued)

```
     &        "BEAM WT + SDL + INITIAL PRESTRESS(",F7.3,")TOP",/
     &        "EXCEEDS FTENT",/)
703  FORMAT(/,"*****WARNING*****",/
     &        "SECTION NUMBER",I1,/
     &        "BEAM WT + SDL + FINAL PRESTRESS(",F7.3,")TOP",/
     &        "EXCEEDS 0.03 SQRT FCI",/)
704  FORMAT(/,"*****OVERSTRESS*****",/
     &        "SECTION NUMBER",I1,/
     &        "ALL LOADS + FINAL PRESTRESS(",F7.3,")BOTTOM",/
     &        "EXCEEDS FTENT",/)
705  FORMAT(/,"*****OVERSTRESS*****",/
     &        "SECTION NUMBER",I1,/
     &        "ALL LOADS + FINAL PRESTRESS(",F7.3,")TOP",/
     &        "EXCEEDS 0.4 FCULT",/)
706  FORMAT(/,"*****OVERSTRESS*****",/
     &        "SECTION NUMBER",I1,/
     &        "ALL LOADS + FINAL PRESTRESS(",F7.3,")BOTTOM",/
     &        "EXCEEDS 0.4 FCULT",/)
255  FORMAT (/,46HCHECK CONVENTIONAL TENSILE REINF. AT TOP SLAB.,/)
     RETURN
     END
     SUBROUTINE SR5(UMR,UMP)
     CHARACTER TITLE*72
     COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
    &FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
    &FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
    &FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BIO(5),
    &CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
    &F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
    &DV(2),TG(2),SPACE(2),VU(2),YES(4),BMCDL(4),
    &L(4),TITLE,IDC,STRNS,YM,E,IDBOX,IDLD,ICOMP,
    &IDSEC, IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
    &DB,TTS,TBS,TSW,TMW,DH,DELTA,NSECT,ASECT,SECTI,T,
    &YB,WTS,BB,DILOC,DIAPH,HDPT,AS,FSULT,RS,RFCULT,FCI,
    &BOXI,SB,ST,Q,ACMP,CMPI,YTC,YBC,YTSC,STC,SBC,STSC,
    &QTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,WCS,TCS,
    &XNCS,ABOX,PSLS2,NETRL,LINES,UM,UMD,STRMN,YSE,AVJ,
    &VRLL,DFLG,EMIN,ESR
     TTS=TTS+DELTA/2.
     IF(IDLD  -10  )2,1,2
   1 UMD = 1.5
     UML = 2.5
     GO TO 5
   2 IF(IDLD  -20  )21,3,21
  21 WRITE  (6,50)
     STOP
   3 UML = 2.3
     IF(SPAN-100.)6,6,4
   4 UMD = 1.6
     GO TO 5
   6 UMD = 2. - .004*SPAN
   5 UMR = UMD*(BMDLT(1)+BMDLF(1))+ UML*BMLL(1)
```

(Continued)

```
7270        IF(ICOMP-100)301,300,301
7280   300  UMR=UMR+UMD*BMCDL(1)
7290   301  AST=AS*STRNS
7300        IF(ICOMP-100)30,60,60
7310    30  TTS = TTS + DELTA/2.
7320        D   = DSECT      -Y(1) + DELTA/2.
7330        P   = AST/WTS/D
7340        FSU = FSULT*(1.-.5*P*FSULT/FCULT)
7350        DFLG= 1.4 *D * P * FSU / FCULT
7360        IF(IDSEC-7)32,31,32
7370    31  TTS= DFLG
7380    32  IF(DFLG -TTS)11,11,10
7390    10  IF(IDSEC- 8)33,33,34
7400    34  BB = 2.*TSW + TMW
7410    33  ASF= .85*FCULT*(WTS-BB)*TTS/FSU
7420        ASR = AST - ASF
7430        PCR = ASR*FSU/BB/D/FCULT
7440        GO TO 12
7450    11  PCR = P*FSU/FCULT
7460    12  IF(PCR-.3) 14,14,13
7470    13  IF(DFLG-TTS) 16,16,15
7480    15  UMP  = 0.25*BB*D*D*FCULT  +0.85*FCULT*(WTS-BB)*TTS*(D-0.5*TTS)
7490        GO TO 19
7500    16  UMP  = 0.25*WTS*D*D*FCULT
7510        GO TO 19
7520    14  IF(DFLG - TTS)17,17,18
7530    17  UMP = AST*FSU*D*(1.-.6*P*FSU/FCULT)
7540        GO TO 19
7550    18  UMP  = ASR*FSU*D*(1. -.6*ASR*FSU/BB/D/FCULT) +.85*FCULT*(WTS-BB)*
7560&       TTS*(D -.5*TTS)
7570    19  UMP = UMP/12.
7580        AVJ = UMP/STRNS /AS/FSU/D*12.
7590        WRITE          (6,150)UMR,UMP
7600   150  FORMAT(//,"ULTIMATE MOMENT REQUIRED = ",F8.0,"
7610&       FT.KIPS ",/,"ULTIMATE MOMENT PROVIDED = " ,F8.0, "
7620&       FT.KIPS ")
7630        GO TO 500
7640    50  FORMAT(1H ,13HWRONG LL CODE)
7650    60  D = DSECT      -Y(1) +TCS
7660        P = AST/WCS/D
7670        FSU = FSULT*(1.-.5*P*FSULT/FCPC)
7680        DFLG =1.4*D*P*FSU/FCPC
7690        IF(DFLG -TCS)61,61,62
7700    62  IF(IDSEC-5) 64,63,64
7710    63  IF (DFLG -TCS -TTS)64,61,66
7720    66  ASF = .85*FCPC*(WCS-BB)*(TCS+TTS)/FSU
7730        ASR = AST -ASF
7740        PCR = ASR*FSU/BB/D/FCPC
7750        IF(PCR -.3)67,67,68
7760    67  UMP = ASR*FSU*D*(1.-.6*ASR*FSU/BB/D/FCPC) +.85*FCPC*(WCS-BB)*
7770&       (TCS+TTS)*(D -.5*(TCS+TTS))
7780        GO TO 19
```

(Continued)

```
7790      68 UMP =0.25*BB*D*D*FCPC+.85*FCPC*(WCS-BB)*(TCS+TTS)*(D-.5*(TCS+TTS))
7800         GO TO 19
7810      64 IF(DFLG-TTS-TCS)61,61,81
7820      81 WRITE(6,160)
7830     160 FORMAT('DEPTH OF COMP BLOCK MORE THAN TCS+TTS,UMP CALC APPROX')
7840      80 ASF = 0.85 * FCPC *(WCS-WTS)*TCS/FSU
7850         ASR = AST  - ASF
7860         PCR = ASR*FSU/WTS/D/FCPC
7870         IF(PCR-.30)85,85,87
7880      87 UMP = 0.25* WTS*D*D*FCPC +.85*FCPC*(WCS-WTS)*TCS*(D-0.5*TCS)
7890         GO TO 19
7900      85 UMP = ASR*FSU*D*(1.-0.6*ASR*FSU/WTS/D/FCPC)+.85*FCPC*(WCS-WTS)*
7910&        TCS*(D-0.5*TCS)
7920         GO TO 19
7930      61 PCR = P*FSU/FCPC
7940         IF(PCR-0.3)70,70,75
7950      70 UMP = AST*FSU*D*(1.-.6*P*FSU/FCPC)
7960         GO TO 19
7970      75 UMP =0.25*WCS*D*D*FCPC
7980         GO TO 19
7990     500 RETURN
8000         END
8010         SUBROUTINE SR6
8020         CHARACTER TITLE*72
8030         COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
8040&        FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
8050&        FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
8060&        FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BIO(5),
8070&        CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
8080&        F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
8090&        DV(2),TG(2),SPACE(2),VU(2),YES(4),BMCDL(4),
8100&        L(4),TITLE,IDC,STRNS,YM,YE,IDBOX,IDLD,ICOMP,
8110&        IDSEC, IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
8120&        DB,TTS,TBS,TSW,TMW,DH,DELTA,DSECT,ASECT,SECTI,YT,
8130&        YB,WTS,BB,DILOC,DIAPH,HDPT,AS,FSULT,RS,RYFCULT,FCI,
8140&        BOXI,SB,ST,Q,ACMP,CMPI,YTC,YBC,YTSC,STC,SBC,STSC,
8150&        QTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,WCS,TCS,
8160&        XNCS,ABOX,PSLS2,NETRI,LINES,UM,UMD,STRMN,YSE,AVJ,
8170&        VRLL,DFLG,EMIN,ESR
8180         XP(1) = 1.
8190         XP(2) = 1.
8200         XP(3) = 1.
8210         XP(4) = 1.
8220         XP(5) = .65
8230         XP(6) = .65
8240         XP(7) = .65
8250         XP(8) = .65
8260         XP(9) = .5
8270         XP(10) = 1.
8280         XP(11) = 1.
8290         XP(12) = 1.
8300         XP(13) = 1.
```

(Continued)

```
8310        XP(14) = .65
8320        XP(15) = .65
8330        XP(16) = .65
8340        XP(17) = .65
8350        XL(1) = 0.0
8360        XL(2) = 5.
8370        XL(3) = 10.
8380        XL(4) = 15.
8390        XL(5) = 24.
8400        XL(6) = 29.
8410        XL(7) = 35.
8420        XL(8) = 40.
8430        XL(9) = 48.
8440        XL(10) = 56.
8450        XL(11) = 61.
8460        XL(12) = 66.
8470        XL(13) = 71.
8480        XL(14) = 80.
8490        XL(15) = 85.
8500        XL(16) = 91.
8510        XL(17) = 96.
8520        IF(ICOMP-100)150,151,150
8530   150  TCS = 0.0
8540   151  DSECT = DSECT      +TCS + DELTA/2.
8550        SPMN1 = DSECT *0.75
8560        SPMN2 = AV/.0025/88
8570        IF(SPMN1 -SPMN2 )101,101,102
8580   101  SPMIN = SPMN1
8590        GO TO 103
8600   102  SPMIN = SPMN2
8610   103  W = SDL *CDL + ASECT*.15/144.
8620        X = .25
8630     2  DO 20 I=1,2
8640        VDL(I) = SPAN*W*(.5-X) + DIAPH*(1.001/DILCC -1.)/2.
8650        IF(IDLD  -10  )82,83,82
8660    83  UML=2.5
8670        GO TO 81
8680    82  VLL(I)=0.0
8690        UML=2.3
8700        XPPP= SPAN*(1.-X)
8710        DO 5 N=1,17
8720        XPP =XPPP-XL(N)
8730        IF(XPP)4,5,5
8740     5  VLL(I) = XPP*XP(N)/SPAN + VLL(I)
8750        XPP = XPP - 5.
8760        IF(XPP)4,4,3
8770     3  VLL(I) = XPP*XPP/20./SPAN* VLL(I)
8780     4  IF(X*SPAN-8.) 12,12,11
8790    11  VLL(I) = VLL(I)- 0.5*(X-8./SPAN)
8800    12  VLL(I) = VLL(I)*FLOAD*(1.+FIMP*FLL)*ALLFR
8810    81  XD=SPAN*(.5-X)
8820        IF(IDPST-2)6,7,8
```

(Continued)

```
8830      6 DV(I) =DSECT-YM +DELTA/2.
8840        GO TO 9
8850      8 DV(I) =DSECT -(YM+(XD/SPAN*2.)**2*(YE-YM))+DELTA/2.
8860        GO TO 9
8870      7 IF(HDPT-XD)10,6,6
8880     10 TG(I)  = (YE-YM)/(SPAN/2.-HDPT)/12.
8890        DV(I) =DSECT -(YM+(XD-HDPT)*TG(I)*12.)+ DELTA/2.
8900      9 PF = AS*STRNS *FSULT*RS*R
8910        VU(I) =UMD*VDL(I)+UML*VLL(I)
8920        DJ = DV(I)*AVJ
8930        VC =.18*BB*DJ
8940        SPACE(I) = AV*FV*DJ*P./(VU(I)-VC)
8950        IF(SPACE(I))200,201,201
8960    201 IF(SPACE(I)-SPMIN)20,20,200
8970    200 SPACE(I) = SPMIN
8980     20 X = .3333
8990        WRITE(6,50)SPACE(1)
9000        WRITE(6,51)SPACE(2)
9010     50 FORMAT('AT 1/4 PT,REQUIRED STIRRUP SPACING =',F7.2,' IN.')
9020     51 FORMAT('AT 1/3 PT,REQUIRED STIRRUP SPACING =',F7.2,' IN.')
9030        IF(IDLD-10)70,210,70
9040    210 DLVR = W*SPAN/2.
9050        RVULL= DLVR*UMD +UML*VRLL
9060        REACT= DLVR +VRLL
9070        WRITE(6,52)REACT
9080     52 FORMAT('DL+LL+I REACTION PER BEAM = ',F10.2,' KIPS ')
9090        IF(ICOMP-100)70,71,70
9100     71 RDL = CDL*SPAN/2.
9110        RVULL = RDL*UMD + VRLL*UML
9120        HSHR  = RVULL *QTSC/CMPI/WTS*1000.
9130        WRITE(6,54)HSHR
9140     54 FORMAT('ULT SHEAR STRESS BETWEEN SLAB AND BEAM AT REACTION '
9150&        ' = ',F7.3,' PSI ')
9160     70 RETURN
9170        END
9180        SUBROUTINE SR7
9190        CHARACTER TITLE*72
9200        COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
9210&       FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
9220&       FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
9230&       FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BIO(5),
9240&       CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
9250&       F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
9260&       DV(2),TG(2),SPACE(2),VU(2),YFS(4),BMCDL(4),
9270&       L(4),TITLE,IDC,STRNS,YM,YE,IDBOX,IDLD,ICOMP,
9280&       IDSEC, IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
9290&       DB,TTS,TBS,TSW,TMW,DH,DELTA,DSECT,ASECT,SECT1,YT,
9300&       YB,WTS,BB,DILOC,DIAPH,HDPT,AS,FSULT,RS,R,FCULT,FCI,
9310&       BOXI,SB,ST,Q,ACMP,CMPI,YTC,YBC,YTSC,STC,SBC,STBC,
9320&       QTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,WCS,TCS,
9330&       XNCS,AHOX,PSLS2,NETRL,LINES,UM,UMD,STRMN,YSE,AVJ,
9340&       VRLL,DFLG,FMIN,ESR
```

(Continued)

```
9350      IF(IDLD -10 )10,11,10
9360   10 CDFL=180
9370      GO TO 15
9380   11 IF(SPAN-56.)12,13,13
9390   13 CDFL=(SPAN-55.)*.1*162.
9400      GO TO 15
9410   12 IF(FLOAD-54.)14,16,16
9420   14 CDFL=149.
9430      GO TO 15
9440   16 CDFL=162.
9450   15 ET = 145.**1.5*33.*SQRT(FCI*1000.)/1000.
9460      EF = 145.**1.5*33.*SQRT(FCULT*1000.)/1000.
9470      PI = AS*STRNS *FSULT*RS*ESR
9480      DEFM = -PI*(YB-YM)
9490      DEFPI = DEFM*(SPAN*12.)**2/ET/SECTI/8.
9500      IF(IDPST-2)1,2,3
9510    2 DEFM = PI*(YE-YM)
9520      X = SPAN/2. - HDPT
9530      DEFPI = DEFPI + (DEFM*X/2.*SPAN/2.-DEFM*X/2.*(SPAN/2.-X/3.))*144.
95408     /ET/SECTI
9550      GO TO 1
9560    3 DEFM = PI*(YE-YM)
9570      DEFPI = DEFPI +SPAN/2.*DEFM*SPAN*1.5/ET/SECTI
9580    1 IF(DILOC)20,20,5
9590   20 WTSEC = ASECT*.15/144.
9600      GO TO 6
9610    5 WTSEC = ASECT*.15/144.*DIAPH/DILOC/SPAN
9620    6 DFBW1 = 5.*WTSEC*SPAN**4*1728./384./ET/SECTI
9630      DFSDL = DFBW1*SDL/WTSEC*ET/EF
9640      IF(ICOMP-100)41,40,41
9650   40 DFCDL = DFSDL*CDL/SDL*SECTI/CMPI
9660      DFLL  = DFSDL*SECTI/CMPI*BMLL(1)/BMDLF(1)*CDFL/180.
9670   60 DEF2  = DEFPI*R/ESR  + DFBW1 + DFSDL +DFCDL
9680      DEF1 = DEFPI+DFBW1
9690      GO TO 51
9700   41 DFLL  = DFSDL*BMLL(1)/BMDLF(1)*CDFL/180.
9710      DFCDL =0.0
9720      GO TO 60
9730   51 WRITE(6,50)DEF1,DEF2,DFLL
9740      RETURN
9750   50 FORMAT(/,'DEFLECTIONS',//'BEAM WEIGHT + PRESTRESS      = '
97608     ,F6.3,' IN.',/,'TOTAL DEAD LOAD + PRESTRESS = ',F6.3,' IN.',
97708     /,'LIVE LOAD + IMPACT             = ',F6.3,' IN.',//)
9780      END
9790      SUBROUTINE  SR4A
9800      CHARACTER TITLE*72
9810      COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
98208     FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
98308     FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
98408     FBTOT(4),Y(4),YLL(2),FSTOT(4),A(5),YA(5),BIO(5),
98508     CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
98608     F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
```

(Continued)

```
9870&     DV(2),TG(2),SPACE(2),VU(2),YES(4),BMCDL(4),
9880&     L(4),TITLE,IDC,STRNS,YM,YE,IDBOX,IDLD,ICOMP,
9890&     IDSEC, IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
9900&     DB,TTS,TBS,TSW,TMW,DH,DELTA,NSECT,ASECT,SECTI,YT,
9910&     YB,WTS,BB,DILOC,DIAPH,HDPT,AS,FSULT,RS,RFCULT,FCI,
9920&     BOXI,SB,ST,Q,ACMP,CMPI,YTC,YBC,YTSC,STC,SBC,STSC,
9930&     QTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,NCS,TCS,
9940&     XNCS,ABOX,PSLS2,NETRL,LINES,UM,UMD,STRMN,YSE,AVJ,
9950&     VRLL,DFLG,EMIN,ESR
9960      ABOX = ASECT
9970      BOXI =SECTI
9980  101 IF(IDPST-2)1,2,3
9990    1 PI=-ABOX*(ST*FTENT*R*.90/ESR + SB*(FBTOT(1)+FTENB))/(SB+ST)
10000       DO 10 I=1,NSEC
10010   10 YES(I)=ST/ABOX + (ST/PI*R/ESR*FTENT*.90)
10020       IF(YES(1)+EMIN-YB) 90,90,95
10030   90 GO TO 98
10040   95 YES(1)=YB-EMIN
10050       PI=-ABOX*(FBTOT(1)+FTENB)*SB/(SB+ABOX*YES(1))
10060   98 YM=YB-YES(1)
10070       YE=YM
10080       XS=0.6
10090       GO TO 4
10100    2 HPT=(SPAN/2.-HDPT)
10110       N=1./(DILOC *2.)
10120       RDIA=DIAPH*(1./DILOC -1.)/2.
10130       BMMIN=HPT*RDIA
10140       DO 7 J=1,N
10150       XN=J
10160       XD=XN*DILOC *SPAN
10170       IF(HPT-XD)5,6,6
10180    5 BM=0.0
10190       GO TO 7
10200    6 BM=DIAPH*(HPT-XD)
10210    7 BMMIN=BMMIN-BM
10220       BMMIN=BMMIN+ABOX*.15*HPT*(SPAN-HPT)/288.
10230       FTMIN = R/ESR*(BMMIN/ST*12.  + FTENT)
10240       PI= -ABOX*((FBTOT(1)+FTENB)*SB + FTMIN*ST)/(SB+ST)
10250       ECC=(FTMIN-FBTOT(1)-FTENB)*ST*SB/(SB+ST)/PI
10260       IF(ECC+EMIN-YB)70,70,75
10270   70 GO TO 80
10280   75 ECC = YB -EMIN
10290       PI=-ABOX*(FBTOT(1)+FTENB)*SB/(SB+ABOX*ECC)
10300   80 YM=YB-ECC
10310       YE1 = YB - ST/ABOX
10320       YE2 = YB - (SB*ABOX*.4*FCULT-SB*PI)/(ABOX*PI)
10330       IF(YE1-YE2)200,201,201
10340  200 YE= YE2 + 1.
10350       GO TO 203
10360  201 YE =YE1 + 1.
10370  203 XS =.6
10380       DO 11 I=1,NSEC
```

(Continued)

```
10390       X=DIST(I)* SPAN - HPT
10400       IF(X)8,9,9
10410     8 YES(I)=ECC-(YM-YE)*X/HPT
10420       GO TO 11
10430     9 YES(I)=ECC
10440    11 CONTINUE
10450       GO TO 4
10460     3 PI=-ABOX*((FBTOT(1)+FTENB)*SB+(FTENT+FTBWT(1))*R*ST)
10470       PI = PI/(ST + SB)
10480       XS=.55
10490       ECC=((FTBWT(1)+FTENT)*R+FBTOT(1)-FTENB)*SB*ST/(SB+ST)/PI
10500       IF(ECC+EMIN-YB)18,18,19
10510    18 GO TO 22
10520    19 ECC=YB-EMIN
10530       PI=-ABOX*(FBTOT(1)+FTENB)*SB/(SB+ABOX*ECC)
10540    22 YM=YB-ECC
10550       YE1 = YB - ST/ABOX
10560       YE2 = YB - (SB*ABOX*.4*FCULT-SB*PI)/(ABOX*PI)
10570       IF(YE1-YE2)300,301,301
10580   300 YE = YE2 + 1.
10590       GO TO 303
10600   301 YE = YE1  + 1.
10610   303 DO 12 I = 1,NSEC
10620       X=(.5-DIST(I))/.5
10630    12 YES(I)=YB-YM-(YE-YM)*X*X
10640     4 STRMN =PI/AS/FSULT/RS/R
10650       DO 13 I=1,NSEC
10660       IF (IDPST-2) 16,16,15
10670    15 F=PI/R/ABOX
10680       X=PI/R*YES(I)
10690       GO TO 17
10700    16 F=PI*ESR /R/ABOX
10710       X=PI*ESR /R*YES(I)
10720    17 FTPI(I)=F-X/ST
10730       FBPI(I)=F+X/SB
10740       FIT(I)=FTPI(I)+FTBWT(I)
10750       FIB(I)=FBPI(I)+FBBWT(I)
10760       F2T(I)=PI/ABOX-PI*YES(I)/ST+FTBWT(I)+FTSDL(I)
10770       F2B(I)=PI/ABOX+PI*YES(I)/SB+FBBWT(I)+FBSDL(I)
10780       IF(ICOMP -100) 61,60,61
10790    61 FTCDL(I)=0.0
10800       FBCDL(I)=0.0
10810    60 F3T(I) = F2T(I) +FTCDL(I) +FTLL(I)
10820       F3B(I) = F2B(I) +FBCDL(I) +FBLL(I)
10830       KL=1
10840       IF(F1B(I)-XS*FCI)20,20,601
10850    20 KL=2
10860       IF(F3T(I)-.4*FCULT)99,99,605
10870    99 KL=3
10880       IF(F3B(I)+FTENB)604,13,13
10890    13 CONTINUE
10900       YSE=YES(1)
```

(Continued)

```
10910       IF(IOTPT)170,160,160
10920   170 RETURN
10930   601 WRITE(6,701)I,F1B(I),XS
10940       GO TO 650
10950   604 WRITE(6,704)I,F3B(I)
10960       GO TO 650
10970   605 WRITE(6,705)I,F3T(I)
10980       GO TO 650
10990   650 GO TO (20,99,13),KL
11000   160 WRITE(6,50)STRMN,YM,YE
11010       WRITE(6,500)
11020   500 FORMAT('STRESSES DUE TO EXTERNAL LOADS AND PRESTRESS - KIPS'
11030  &    'PER SQ. IN.')
11040    24 WRITE(6,251)(I,I=1,NSEC)
11050       WRITE(6,252)(DIST(I),I=1,NSEC)
11060       WRITE(6,253)(FTPI(I),I=1,NSEC)
11070       WRITE(6,257)(FBPI(I),I=1,NSEC)
11080       WRITE(6,254)(F1T(I),I=1,NSEC)
11090       WRITE(6,258)(F1B(I),I=1,NSEC)
11100       WRITE(6,255)(F2T(I),I=1,NSEC)
11110       WRITE(6,259)(F2B(I),I=1,NSEC)
11120       WRITE(6,256)(F3T(I),I=1,NSEC)
11130       WRITE(6,260)(F3B(I),I=1,NSEC)
11140    50 FORMAT('MINIMUM STRANDS = ',F7.3,'    YM = ',F7.3,' IN. '
11150  &    '     YE = ',F7.3,' IN. ',///)
11160   250 FORMAT(//,"CASE#",I2,/
11170  &    "NO. OF STRANDS = ",F4.0,10X,"YM=",F7.3,10X,"YE=",F7.3,/////)
11180   251 FORMAT("NSEC  -",17X,I1,3(9X,I1))
11190   252 FORMAT("DIST  -",14X,F5.3,"L",3(4X,F5.3,"L"))
11200   253 FORMAT("INITIAL PRESTRESS",/
11210  &    "          TOP-",8X,F7.3,3(3X,F7.3))
11220   257 FORMAT("          BOTTOM",6X,F7.3,3(3X,F7.3))
11230   254 FORMAT("BEAM WT +",/
11240  &    "INITIAL PRESTRESS",/
11250  &    "          TOP-",8X,F7.3,3(3X,F7.3))
11260   258 FORMAT("          BOTTOM",6X,F7.3,3(3X,F7.3))
11270   255 FORMAT("BEAM WT + SDL +",/
11280  &    "FINAL PRESTRESS",/
11290  &    "          TOP-",8X,F7.3,3(3X,F7.3))
11300   259 FORMAT("          BOTTOM",6X,F7.3,3(3X,F7.3))
11310   256 FORMAT("ALL LOADS +",/
11320  &    "FINAL PRESTRESS",/
11330  &    "          TOP-",8X,F7.3,3(3X,F7.3))
11340   260 FORMAT("          BOTTOM",6X,F7.3,3(3X,F7.3),///)
11350   701 FORMAT(/,"*****OVERSTRESS*****",/
11360  &    "SECTION NUMBER",I1,/
11370  &    "BEAM WT + INITIAL PRESTRESS(",F7.3,"),BOTTOM",/
11380  &    "EXCEEDS ",F4.2,"FCI",/)
11390   704 FORMAT(/,"*****OVERSTRESS*****",/
11400  &    "SECTION NUMBER",I1,/
11410  &    "ALL LOADS + FINAL PRESTRESS(",F7.3,")BOTTOM",/
11420  &    "EXCEEDS FTENT",/)
```

(Continued)

```
11430  705 FORMAT(/,"*****OVERSTRESS*****",/
11440     &        "SECTION NUMBER",I1,/
11450     &        "ALL LOADS + FINAL PRESTRESS(",F7.3,")TOP",/
11460     &        "EXCEEDS 0.4 FCULT",/)
11470       RETURN
11480       END
11490       SUBROUTINE   SR5A(UMR,UMP)
11500       CHARACTER TITLE*72
11510       COMMON DIST(4),BMLL(4),BMDLT(4),BMDLF(4),FTBWT(4),
11520     &FBBWT(4),FTSDL(4),FBSDL(4),FTCDL(4),FBCDL(4),
11530     &FSCDL(4),FSCLL(4),FTLL(4),FBLL(4),FTTOT(4),
11540     &FBTOT(4),Y(4),VLL(2),FSTOT(4),A(5),YA(5),BIO(5),
11550     &CONLL(8),M(4),FTPI(4),FBPI(4),F1T(4),F1B(4),
11560     &F2T(4),F2B(4),F3T(4),F3B(4),XP(17),XL(17),VDL(2),
11570     &DV(2),TG(2),SPACE(2),VUL(2),YES(4),BMCDL(4),
11580     &L(4),TITLE,IDC,STRNS,YM,YE,IDBOX,IDLD,ICOMP,
11590     &IDSEC, IOTPT,FLOAD,SPAN,SDL,CDL,ALLFR,FIMP,FLL,WB,
11600     &DB,TTS,TBS,TSW,TMW,DH,DELTA,DSECT,ASECT,SECTI,YT,
11610     &YB,WTS,BB,DILOC,DIAPH,HDPT,AS,FSULT,RS,R,FCULT,FCI,
11620     &BOXI,SB,ST,Q,ACMP,CMPI,YTC,YBC,YTSC,STC,SBC,STSC,
11630     &QTSC,IDPST,FCPC,FTENT,FTENB,FNPS,FV,AV,NSEC,WCS,TCS,
11640     &XNCS,ABOX,PSLS2,NETRL,LINES,UM,UMD,STRMN,YSE,AVJ,
11650     &VRLL,DFLG,EMIN,ESR
11660       IF(IDLD  -10  )2,1,2
11670     1 UMD=1.5
11680       UML=2.5
11690       GO TO 5
11700     2 IF(IDLD  -20  )20,3,20
11710    20 WRITE         (6,50)
11720       STOP
11730     3 UML=2.3
11740       IF(SPAN-100.)6,4,4
11750     4 UMD=1.6
11760       GO TO 5
11770     6 UMD=2.-0.004*SPAN
11780     5 UMR=UMD*(BMDLT(1)+BMDLF(1))+UML*BMLL(1)
11790       IF(ICOMP-100)300,301,300
11800   301 UMR=UMR+UMD*BMCDL(1)
11810   300 IF(IOTPT)302,303,302
11820   303 WRITE(6,150)UMR
11830   302 ISTRN = STRMN
11840       IF(STRMN -ISTRN)100,101,100
11850   101 STRNS = STRMN
11860       GO TO 28
11870   100 STRNS = ISTRN + 1
11880    28 IF(ICOMP -100)40,60,60
11890    40 D= DSECT      +DELTA/2.-YB +YSE
11900       AST = AS* STRNS
11910       P = AST/WTS/D
11920       FSU = FSULT*(1. -.5*P*FSULT/FCULT)
11930       DFLG =1.4*D*P*FSU/FCULT
11940       TTS  = TTS + DELTA/2.
```

(Continued)

```
11950       IF(IDSEC -7)42,41,42
11960    41 TTS = DFLG
11970    42 IF(DFLG - TTS)11,11,43
11980    43 IF(IDSEC- 8)45,45,44
11990    44 BB =2.*TSW +TMW
12000    45 ASF = .85 * FCULT *(WTS-BB)*TTS/FSU
12010       ASR = AST - ASF
12020       PCR = ASR * FSU /BB / D / FCULT
12030       GO TO 12
12040    11 PCR  = P* FSU /FCULT
12050    12 IF(PCR-.3)14,14,13
12060    13 IF(DFLG-TTS)16,16,15
12070    15 UMP = 0.25*BB*D*D*FCULT + 0.85*FCULT*(WTS  *  BB)*TTS*(D-0.5*TTS)
12080       GO TO 32
12090    16 UMP = .25 *WTS*D*D*FCULT
12100    32 UMP = UMP/12.
12110       IF(UMP -UMR) 33,27,27
12120    33 WRITE(6,152)
12130   152 FORMAT(//,'P*FSU/FCULT MORE THAN .30,    UMP INADEQUATE ',//)
12140       GO TO 30
12150    14 IF(DFLG -TTS)17,17,18
12160    17 UMP = AST *FSU * D *(1.-.6*P*FSU/FCULT)
12170       GO TO 19
12180    18 UMP = ASR *FSU*D *(1.-.6*ASR*FSU/BB/D/FCULT) +.85*FCULT*
12190&      (WTS-BB)*TTS*(D-.5*TTS)
12200    19 UMP = UMP/12.
12210       IF (UMP -UMR)26,27,27
12220    26 STRNS = STRNS+ 1.
12230       GO TO 40
12240    27 IF(IOTPT)200,227,227
12250   227 WRITE(6,151)FCULT,STRNS,UMP
12260       GO TO 30
12270   201 IF(IOTPT)200,202,202
12280   202 WRITE(6,155)FCPC,STRNS,UMP
12290   155 FORMAT('FOR FCPC = ',F5.3,' PSI  AND ',F3.0,'  STRANDS ',
12300&      /,'ULTIMATE MOMENT PROVIDED = ',F8.0,' FT.KIPS ')
12310    30 CONTINUE
12320    50 FORMAT(/,14H WRONG LL CODE,/)
12330   150 FORMAT(//,'ULTIMATE MOMENT REQUIRED = ',F8.0,' FT.KIPS ')
12350   151 FORMAT('FOR FCULT = ',F5.3,' PSI  AND ',F3.0,' STRANDS ',
12360&      /,'ULTIMATE MOMENT PROVIDED = ',F8.0,' FT.KIPS ')
12370       WRITE        (6,49)
12380    49 FORMAT (1H1)
12390   200 RETURN
12400   160 D = DSECT    -YM *TCS
12410       AST = AS * STRNS
12420       P   = AST/WCS/D
12430       FSU = FSULT*(1.-.5*P*FSULT/FCPC)
12440       DFLG= 1.4*D*P*FSU/FCPC
12450       IF(DFLG-TCS)61,61,62
12460    62 IF(IDSEC-5)64,63,64
12470    63 IF(DFLG-TCS-TTS)61,61,66
```

(Continued)

```
12480    66 ASF =.85*FCPC*(WCS-BB)*(TCS+TTS)/FSU
12490       ASR = AST - ASF
12500       PCR = ASR*FSU/BB/D/FCPC
12510       IF(PCR -.3)67,67,69
12520    67 UMP =ASR*FSU*D*(1.-.6*ASR*FSU/BB/D/FCPC)+.85*FCPC*(WCS-BB)*
12530&      (TCS+TTS)*(D - 0.5*(TCS+TTS))
12540       UMP = UMP/12.
12550       IF(UMP -UMR)68,201,201
12560    68 STRNS= STRNS+1
12570       GO TO 60
12580    69 UMP = 0.25*BB*D*D*FCPC +.85*FCPC*(WCS-BB)*(TTS+TCS)
12590&      *(D-.5*(TCS+TTS))
12600       UMP = UMP/12.
12610       IF(UMP-UMR)33,201,201
12620    64 IF(DFLG -TCS-TTS)61,61,81
12630    81 IF(IOTPT)80,400,400
12640   400 WRITE(6,160)
12650   160 FORMAT(//,'DEPTH OF COMP BLOCK MORE THAN TCS+ TTS, UMP CALC ',
12660&      'APPROXIMATE ',/)
12670    80 ASF = 0.85*FCPC*(WCS-WTS)*TCS/FSU
12680       ASR = AST - ASF
12690       PCR = ASR*FSU/WTS/D/FCPC
12700       IF(PCR -.30)85,85,87
12710    87 UMP =0.25*WTS*D*D*FCPC +.85*FCPC*(WCS-WTS)*TCS*(D-0.5*TCS)
12720       UMP = UMP/12.
12730       IF(UMP-UMR)33,201,201
12740    85 UMP = ASR *FSU*D*(1.-0.6*ASR*FSU/WTS/D/FCPC) +0.85*FCPC*(WCS-WTS)*
12750&      TCS*(D-0.5*TCS)
12760       UMP = UMP/12.
12770       IF(UMP-UMR)68,201,201
12780    61 PCR = P*FSU/FCPC
12790       IF(PCR-0.3)70,70,75
12800    70 UMP = AST* FSU * D * (1. - .6 *P *FSU/FCPC)
12810       UMP = UMP/12.
12820       IF(UMP -UMR)68,201,201
12830    75 UMP = 0.25 *WCS *12.* D * D * FCPC
12840       UMP = UMP/12.
12850       IF(UMP-UMR)33,201,201
12860       END
12870CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
12880       SUBROUTINE MAKEFIL
12890       CHARACTER FILN*8,FILNAM*10,FILNAME*26
12900       CHARACTER STO*1
12910       COMMON L,LC
12920       DATA IOK / 040000000000 /
12930       DATA INAFT / 040370000000 /
12940     5 PRINT," "
12950       PRINT,"IS DATA TO BE INPUT FROM"
12960       PRINT,"EXISTING FILE(Y OR N)  ?"
12970       READ(5,9997) STO
12980       IF(STO.EQ."Y") GO TO 20
12990       IF(STO.EQ."N") GO TO 36
```

(Continued)

```
13000       PRINT," "
13010       PRINT,"******CORRECT RESPONCE IS Y FOR YES OR N FOR NO - RETRY"
13020       GO TO 5
13030    20 PRINT," "
13040       PRINT,"NOTE# TO RETURN TO PREVIOUS QUESTION ENTER THE"
13050       PRINT,"      LETTER R AS A QUESTION RESPONCE."
13060    21 PRINT," "
13070       PRINT,"ENTER NAME OF INPUT FILE"
13080       PRINT,"(MAX. 8 CHAR.)"
13090       READ(5,9995)FILN
13100       IF(FILN.EQ."R       ") GO TO 5
13110       ENCODE(FILNAM,9996)FILN
13120    27 CALL ATTACH(02,FILNAM,370,ISTAT)
13130       IF(ISTAT.EQ.INAFT) GO TO 28
13140       IF(ISTAT.NE.IOK) GO TO 502
13150       RETURN
13160    28 CALL DETACH(02,,)
13170       GO TO 27
13180    36 PRINT," "
13190       PRINT,"NOTE# TO RETURN TO PREVIOUS QUESTION ENTER THE"
13200       PRINT,"      LETTER R AS A QUESTION RESPONCE."
13210    37 PRINT," "
13220       PRINT,"IS DATA ENTERED AT TERMINAL TO BE"
13230       PRINT,"SAVED IN PERMENANT FILE (Y OR N)!"
13240       LC=1
13250       READ(5,9997) STO
13260       IF(STO.EQ."Y") GO TO 38
13270       IF(STO.EQ."N") GO TO 41
13280       IF(STO.EQ."R") GO TO 5
13290       PRINT,"*****CORRECT RESPONCE IS Y FOR YES,N FOR NO*****"
13300       PRINT," "
13310       GO TO 36
13320    38 PRINT,"ENTER NAME OF DATA FILE TO"
13330       PRINT,"BE CREATED (MAX. 8 CHAR.)!"
13340       READ(5,9995)FILN
13350       IF(FILN.EQ."R       ") GO TO 36
13360       ENCODE(FILNAME,9994)FILN
13370       CALL ACCESS(FILNAME,$500)
13380       ENCODE(FILNAM,9996)FILN
13390       CALL ATTACH(02,FILNAM,370,ISTAT,)
13400       IF(ISTAT.NE.IOK) GO TO 501
13410       GO TO 400
13420    41 CALL CREATE(02,320,0,ISTAT)
13430       LC=2
13440   400 CALL FILDATA
13450       REWIND 2
13460       IF(LC.EQ.2) RETURN
13470       IF(LC.EQ.3) GO TO 37
13480       IF(L.EQ.1) GO TO 415
13490       GO TO 9999
13500   415 ENCODE(FILNAME,9998)FILN
13510       CALL ACCESS(FILNAME,$506)
```

(Continued)

```
13520       IF(STO.EQ."Y") GO TO 38
13530       GO TO 37
13540   506 PRINT 507,FILN
13550   507 FORMAT("*****UNABLE TO RELEASE FILE NAMED ",A8)
13560       IF(STO.EQ."Y") GO TO 38
13570       GO TO 36
13580   500 PRINT,"*****UNABLE TO CREATE FILE - RETRY*****"
13590       GO TO 38
13600   501 PRINT,"*****UNABLE TO ACCESS NEWLY CREATED FILE - RETRY*****"
13610       GO TO 38
13620   502 PRINT 503,FILN
13630   503 FORMAT("*****UNABLE TO ACCESS FILE NAMED ",A8)
13640       PRINT 504
13650   504 FORMAT("     CHECK YOUR CATALOGUE OR DECODE THE")
13660       PRINT 505,ISTAT
13670   505 FORMAT("     FOLLOWING OCTAL ERROR MESSAGE,#,3X,O16)
13680       GO TO 21
13690  9994 FORMAT("CF,/",A8,",B/1,100/,R,W#")
13700  9995 FORMAT(A8)
13710  9996 FORMAT("/",A8,";")
13720  9997 FORMAT(A1)
13730  9998 FORMAT("RF,/",A8,"#")
13740  9999 RETURN
13750       END
13760
13770C
13780CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
13790       SUBROUTINE FILDAT
13800       CHARACTER X*15,V01*66,Y*1,Z*2,W*3
13810C
13820       DIMENSION V39(4),V40(4)
13830       COMMON L,LC
13840       PRINT 900
13850       PRINT,"*****OPTIONAL RESPONCES TO FOLLOWING QUESTIONS*****"
13860       PRINT," "
13870       PRINT,"     *ENTER LETTER H FOR HELP IN ANSWERING QUESTION*"
13880       PRINT 958
13890       PRINT,"     *ENTER LETTER R TO RETURN TO PREVIOUS QUESTION*"
13900       PRINT," "
13910       PRINT 900
13920   900 FORMAT(///)
13930   901 FORMAT(A1,65X)
13940   902 FORMAT(A1,14X)
13950   903 FORMAT(1X,A1)
13960   911 FORMAT("*****CORRECT RESPONCE IS#",//)
13970   931 FORMAT(A66)
13980   932 FORMAT(A1)
13990   934 FORMAT(A2)
14000   936 FORMAT(A3)
14010   938 FORMAT(I2)
14020   940 FORMAT(I1)
14030   942 FORMAT(I3)
```

(Continued)

```
14040   944 FORMAT(A15)
14050   946 FORMAT(V)
14060   951 FORMAT("*****NOTE#PRECAST SECTION IS THE NONCOMPOSITE SECTION")
14070   952 FORMAT("*****NOTE#PRECAST SECTION IS THE BEAM PORTION OF A"
14080      &     /,"           COMPOSITE BEAM-SLAB SECTION")
14090   958 FORMAT("      -NOTE#IF NO HELP GIVEN,CHECK OPERATING",/
14100      &       "       INSTRUCTION MANUAL.",//)
14110   961 FORMAT("      -NOTE#FOR SECTIONS OTHER THAN THOSE ABOVE,USE",/
14120      &       "           NUMBER OF THE COMPOSITE OR NONCOMPOSITE"
14130      &     /,"            SECTION WHICH MOST CLOSELY RESEMBLES THE"
14140      &     /,"            SECTION UNDER DESIGN.",//)
14150       L=0
14160     5 PRINT," "
14170       PRINT,"TITLE"
14180       PRINT,"ENTER TITLE(MAX. 66 CHAR.) -"
14190       READ(5,931) V01
14200       DECODE(V01,901)Y
14210       IF(Y.EQ."R") GO TO 10
14220       IF(Y.EQ."H") GO TO 20
14230       GO TO 30
14240    10 IF(LC.EQ.2) GO TO 12
14250       L=1
14260       RETURN
14270    12 LC=3
14280       RETURN
14290    20 PRINT," "
14300       PRINT,"*****TITLE IS THE HEADER FOR PROGRAM OUTPUT."
14310       PRINT,"      IT CAN INCLUDE SUCH INFORMATION AS"
14320       PRINT,"      PROJECT NAME,DATE,DATA BY,CHECKED BY,ETC."
14330       GO TO 5
14340    30 PRINT," "
14350       PRINT,"IDLD"
14360       PRINT,"ENTER LIVE LOAD CODE(10 FOR HWY;20 FOR RR) - "
14370       READ(5,934) Z
14380       IF(Z.EQ."R ") GO TO 5
14390       IF(Z.EQ."H ") GO TO 40
14400       DECODE(Z,938)IV02
14410       IF(IV02.EQ.10) GO TO 50
14420       IF(IV02.EQ.20) GO TO 50
14430    40 PRINT," "
14440       PRINT 911
14450       PRINT,"      10 FOR HIGHWAY LOADING"
14460       PRINT,"      20 FOR RAILROAD LOADING"
14470       GO TO 30
14480    50 PRINT," "
14490       PRINT,"IDSEC"
14500       PRINT,"ENTER SECTION NUMBER (1-10) - "
14510       READ(5,934) Z
14520       IF(Z.EQ."H ") GO TO 60
14530       IF(Z.EQ."R ") GO TO 30
14540       DECODE(Z,946)IV03
14550       IF(IV03)60,60,55
```

(Continued)

```
14560    55 IF(IV03-10)70,70,60
14570    60 PRINT," "
14580       PRINT 911
14590       PRINT," "
14600       PRINT,"     (STANDARD SECTIONS WITH A COMPOSITE DECK)"
14610       PRINT," "
14620       PRINT,"      1 FOR SPREAD BOX"
14630       PRINT,"      2 FOR BOX"
14640       PRINT,"      3 FOR AASHO-PCI TYPES I-IV"
14650       PRINT,"      4 FOR AASHO-PCI TYPES V-VI"
14660       PRINT,"      5 FOR TEE"
14670       PRINT," "
14680       PRINT," "
14690       PRINT,"     (NONCOMPOSITE-STANDARD SECTIONS)"
14700       PRINT," "
14710       PRINT,"      6 FOR CHANNEL"
14720       PRINT,"      7 FOR SLAB"
14730       PRINT,"      8 FOR VOIDED SLAB"
14740       PRINT," "
14750       PRINT," "
14760       PRINT,"     (NONCOMPOSITE BOX BEAMS)"
14770       PRINT," "
14780       PRINT,"      9 SINGLE BOX"
14790       PRINT,"     10 DOUBLE BOX"
14800       PRINT," "
14810       PRINT 961
14820       GO TO 50
14830    70 PRINT," "
14840       PRINT,"IOTPT"
14850       PRINT,"ENTER OUTPUT(TYPE) CODE(-1 FOR MIN;0 FOR TOT) - "
14860       READ(5,934) Z
14870       DECODE(Z,932)Y
14880       IF(Z.EQ."R ") GO TO 50
14890       IF(Z.EQ."-1") GO TO 86
14900       IF(Y.EQ."0") GO TO 88
14910       PRINT," "
14920       PRINT 911
14930       PRINT,"      -1 FOR MINIMUM OUTPUT"
14940       PRINT,"      0 (ZERO) FOR TOTAL OUTPUT"
14950       GO TO 70
14960    86 DECODE(Z,938)IV04
14970       GO TO 90
14980    88 DECODE(Z,940)IV04
14990       GO TO 90
15000    90 PRINT," "
15010       PRINT,"IOPST"
15020       PRINT,"ENTER GEOMETRY OF PRESTRESSING"
15030       PRINT,"STRANDS (1,2 OR 3)              - "
15040       READ(5,932)Y
15050       IF(Y.EQ."R") GO TO 70
15060       IF(Y.EQ."H") GO TO 100
15070       DECODE(Y,940)IV05
```

(Continued)

```
15080       IF(IV05) 100,100,95
15090    95 IF(IV05-3)110,110,100
15100   100 PRINT," "
15110       PRINT 911
15120       PRINT,"     1 FOR STRAIGHT PARALLEL STRANDS"
15130       PRINT,"     2 FOR DEPRESSED STRANDS"
15140       PRINT,"     3 FOR PARABOLIC POSTTENSIONED STRANDS"
15150       GO TO 90
15160   110 PRINT," "
15170       PRINT,"FLOAD"
15180       PRINT,"ENTER LIVE LOAD CODE (KIPS) - "
15190       READ(5,944) X
15200       IF(X.EQ."R              ") GO TO 90
15210       IF(X.EQ."H              ") GO TO 120
15220       DECODE(X,946)V06
15230       GO TO 130
15240   120 PRINT," "
15250       PRINT,"*****STANDARD LOADS ARE AS FOLLOWS*"
15260       PRINT," "
15270       PRINT,"     (HIGHWAY LOADING)"
15280       PRINT,"     20 FOR H10-44"
15290       PRINT,"     30 FOR H15-44"
15300       PRINT,"     40 FOR H20-44"
15310       PRINT,"     54 FOR HS15-44"
15320       PRINT,"     72 FOR HS20-44"
15330       PRINT,"     90 FOR HS25-44"
15340       PRINT," "
15350       PRINT,"     (RAILROAD LOADINGS)"
15360       PRINT,"     60 FOR COOPER S E-60 LOADING"
15370       PRINT,"     72 FOR COOPER S E-72 LOADING"
15380       PRINT,"     80 FOR COOPER S E-80 LOADING"
15390       GO TO 110
15400   130 PRINT," "
15410       PRINT,"SPAN"
15420       PRINT,"ENTER SPAN LENGTH (FT) - "
15430       READ(5,944) X
15440       IF(X.EQ."R              ") GO TO 110
15450       IF(X.EQ."H              ") GO TO 140
15460       IF(X.EQ."                H") GO TO 140
15470       DECODE(X,946)V07
15480       IF(IV03.LE.5) GO TO 160
15490       GO TO 150
15500   140 PRINT," "
15510       PRINT,"*****SPAN LENGTH IS DISTANCE FROM CENTER"
15520       PRINT,"     TO CENTER OF BEARINGS IN FEET."
15530       GO TO 130
15540   150 PRINT," "
15550       PRINT,"SDL"
15560       PRINT,"ENTER EXTERNAL DEAD LOADS (KIPS/FT) - "
15570       READ(5,944) X
15580       IF(X.EQ."R              ") GO TO 130
15590       IF(X.EQ."H              ") GO TO 155
```

(Continued)

```
15600       DECODE(X,946) V08
15610       GO TO 190
15620   155 PRINT," "
15630       PRINT,"*****SDL IS THE DEAD LOAD APPLIED TO A NONCOMPOSITE"
15640       PRINT,"     SECTION,EXCLUSIVE OF BEAM WEIGHT."
15650       GO TO 150
15660   160 PRINT," "
15670       PRINT,"SDL"
15680       PRINT,"ENTER EXTERNAL DEAD LOAD(KIPS/FT) - "
15690       READ(5,944) X
15700       IF(X.EQ."R               ") GO TO 130
15710       IF(X.EQ."H               ") GO TO 165
15720       DECODE(X,946) V08
15730       GO TO 170
15740   165 PRINT," "
15750       PRINT,"*****SDL IS THE DEAD LOAD APPLIED TO THE PRECAST"
15760       PRINT,"     SECTION OF COMPOSITE SECTION,EXCLUSIVE OF"
15770       PRINT,"     WEIGHT OF PRECAST SECTION"
15780       GO TO 160
15790   170 PRINT," "
15800       PRINT,"CDL"
15810       PRINT,"ENTER EXTERNAL DEAD LOAD"
15820       PRINT,"FOR COMPOSITE SECTION (K/FT) - "
15830       READ(5,944) X
15840       IF(X.EQ."R               ") GO TO 160
15850       IF(X.EQ."H               ") GO TO 180
15860       DECODE(X,946)V08A
15870       GO TO 190
15880   180 PRINT," "
15890       PRINT,"*****CDL IS THE EXTERNAL DEAD LOAD APPLIED TO COMPOSITE"
15900       PRINT,"     SECTION,EXCLUSIVE OF PRECAST SECTION WEIGHT AND SDL"
15910       GO TO 170
15920   190 PRINT," "
15930       PRINT,"ALLFR"
15940       PRINT,"ENTER FRACTION OF TRUCK OR TRACK "
15950       PRINT,"LOAD TO BE APPLIED TO SECTION   - "
15960       READ(5,944) X
15970       IF(X.EQ."R               ") GO TO 195
15980       IF(X.EQ."H               ") GO TO 200
15990       DECODE(X,946) V09
16000       V10A=0.
16010       IF(IV02.EQ.20) GO TO 210
16020       GO TO 230
16030   195 IF(IV03.LE.5) GO TO 170
16040       GO TO 150
16050   200 PRINT," "
16060       PRINT,"*****ENTER 1.0 FOR ONE TRUCK LOAD PER BEAM (TWO LINES"
16070       PRINT,"     OF WHEELS),0.5 FOR ONE-HALF TRUCK LOAD PER BEAM,ETC"
16080       GO TO 190
16090   210 PRINT," "
16100       PRINT,"FIMP"
16110       PRINT,"ENTER IMPACT FRACTION - "
```

(Continued)

```
16120       READ(5,944) X
16130       IF(X.EQ."R                ") GO TO 190
16140       IF(X.EQ."H                ") GO TO 220
16150       DECODE(X,946)V10A
16160       GO TO 230
16170   220 PRINT," "
16180       PRINT,"*****FIMP IS THE IMPACT FRACTION TO BE USED FOR RR"
16190       PRINT,"      LOADING.  ENTER AS DECIMAL FRACTION,I.E.,0.3 FOR"
16200       PRINT,"      30 PERCENT."
16210       GO TO 210
16220   230 PRINT," "
16230       PRINT,"FLL"
16240       PRINT,"ENTER FRACTION OF ALLFR - "
16250       READ(5,944) X
16260       IF(X.EQ."R                ") GO TO 235
16270       IF(X.EQ."H                ") GO TO 240
16280       DECODE(X,946)V11
16290       GO TO 250
16300   235 IF(IV02.EQ.20) GO TO 210
16310       GO TO 190
16320   240 PRINT,"*****FLL IS FRACTION OF ALLFR TO ACCOUNT FOR"
16330       PRINT,"      ECCENTRICITY AND CENTRIFUGAL FORCE."
16340       GO TO 230
16350   250 IF(IV03.GT.8) GO TO 410
16360       PRINT," "
16370       PRINT,"DSECT"
16380       PRINT,"ENTER DEPTH OF PRECAST SECTION(INCHES) - "
16390       READ(5,944) X
16400       IF(X.EQ."R                ") GO TO 230
16410       IF(X.EQ."H                ") GO TO 260
16420       DECODE(X,946)V12
16430       GO TO 270
16440   260 PRINT," "
16450       PRINT,"**** TOTAL DEPTH OF PRECAST SECTION"
16460       IF(IV03.LE.5) PRINT 952
16470       IF(IV03.GT.5) PRINT 951
16480       GO TO 250
16490   270 PRINT," "
16500       PRINT,"ASECT"
16510       PRINT,"ENTER AREA (INCHES**2) - "
16520       READ(5,944) X
16530       IF(X.EQ."R                ") GO TO 250
16540       IF(X.EQ."H                ") GO TO 280
16550       DECODE(X,946)V13
16560       GO TO 290
16570   280 PRINT," "
16580       PRINT,"*****TOTAL AREA OF PRECAST SECTION"
16590       IF(IV03.LE.5) PRINT 952
16600       IF(IV03.GT.5) PRINT 951
16610       GO TO 270
16620   290 PRINT," "
16630       PRINT,"SECTI"
```

(Continued)

```
16640       PRINT,"ENTER MOMENT INERTIA (INCHES**4) - "
16650       READ(5,944) X
16660       IF(X.EQ."R                ") GO TO 270
16670       IF(X.EQ."H                ") GO TO 300
16680       DECODE(X,946)V14
16690       GO TO 310
16700   300 PRINT," "
16710       PRINT,"******TOTAL MOMENT OF INERTIA OF PRECAST SECTION"
16720       IF(IV03.LE.5) PRINT 952
16730       IF(IV03.GT.5) PRINT 951
16740       GO TO 290
16750   310 PRINT," "
16760       PRINT,"YT"
16770       PRINT,"DISTANCE BETWEEN CENTROIDAL AXIS AND"
16780       PRINT,"TOP OF PRECAST SECTION (INCHES)    - "
16790       READ(5,944) X
16800       IF(X.EQ."R                ") GO TO 290
16810       IF(X.EQ."H                ") GO TO 320
16820       DECODE(X,946) V15
16830       GO TO 330
16840   320 PRINT," "
16850       IF(IV03.LE.5) PRINT 952
16860       IF(IV03.GT.5) PRINT 951
16870       GO TO 310
16880   330 PRINT," "
16890       PRINT,"YB"
16900       PRINT,"DISTANCE BETWEEN CENTROIDAL AXIS AND"
16910       PRINT,"BOTTOM OF PRECAST SECTION (INCHES) - "
16920       READ(5,944) X
16930       IF(X.EQ."R                ") GO TO 310
16940       IF(X.EQ."H                ") GO TO 340
16950       DECODE(X,946) V16
16960       GO TO 350
16970   340 PRINT," "
16980       IF(IV03.LE.5) PRINT 952
16990       IF(IV03.GT.5) PRINT 951
17000       GO TO 330
17010   350 PRINT," "
17020       PRINT,"WTS"
17030       PRINT,"ENTER WIDTH OF TOP SLAB OR FLANGE"
17040       PRINT,"OF PRECAST SECTION (INCHES)      - "
17050       READ(5,944) X
17060       IF(X.EQ."R                ") GO TO 330
17070       IF(X.EQ."H                ") GO TO 360
17080       DECODE(X,946) V17
17090       GO TO 370
17100   360 PRINT," "
17110       IF(IV03.LE.5) PRINT 952
17120       IF(IV03.GT.5) PRINT 951
17130       GO TO 350
17140   370 PRINT," "
17150       PRINT,"TTS"
```

(Continued)

```
17160       PRINT,"ENTER MINIMUM THICKNESS OF TOP SLAB"
17170       PRINT,"OR FLANGE OF PRECAST SECTION (INCHES) - "
17180       READ(5,944) X
17190       IF(X.EQ."R                ") GO TO 350
17200       IF(X.EQ."H                ") GO TO 380
17210       DECODE(Y,946) V18
17220       GO TO 390
17230   380 PRINT," "
17240       IF(IV03.LE.5) PRINT 952
17250       IF(IV03.GT.5) PRINT 951
17260       GO TO 370
17270   390 IF(IV03.EQ.7) V19=0.
17280       IF(IV03.EQ.7) GO TO 550
17290       PRINT," "
17300       PRINT,"BB"
17310       PRINT,"ENTER MINIMUM WIDTH OF WEB"
17320       PRINT,"OF PRECAST SECTION (INCHES) - "
17330       READ(5,944) X
17340       IF(X.EQ."R                ") GO TO 370
17350       IF(X.EQ."H                ") GO TO 400
17360       DECODE(X,946)V19
17370       GO TO 570
17380   400 PRINT," "
17390       IF(IV03.LE.5) PRINT 952
17400       IF(IV03.GT.5) PRINT 951
17410       GO TO 390
17420   410 PRINT," "
17430       PRINT,"WB"
17440       PRINT,"ENTER TOTAL WIDTH OF BOX BEAM (FEET) - "
17450       READ(5,944) X
17460       IF(X.EQ."R                ") GO TO 230
17470       IF(X.EQ."H                ") GO TO 410
17480       DECODE(X,946)V12A
17490   430 PRINT," "
17500       PRINT,"DB"
17510       PRINT,"ENTER TOTAL DEPTH OF BOX BEAM(FEET) -"
17520       READ(5,944) X
17530       IF(X.EQ."R                ") GO TO 410
17540       IF(X.EQ."H                ") GO TO 440
17550       DECODE(X,946)V13A
17560       GO TO 450
17570   440 PRINT," "
17580       PRINT,"*****NOTE#USE DEPTH AT LOWER EDGE WHEN"
17590       PRINT,"          TOP SURFACE IS SLOPED."
17600       GO TO 430
17610   450 PRINT," "
17620       PRINT,"TTS"
17630       PRINT,"ENTER MINIMUM THICKNESS OF TOP"
17640       PRINT,"SLAB OF BOX BEAM (INCHES )   - "
17650       READ(5,944) X
17660       IF(X.EQ."R                ") GO TO 430
17670       IF(X.EQ."H                ") GO TO 450
```

(Continued)

```
17680       DECODE(X,946,V14A
17690   470 PRINT," "
17700       PRINT,"TBS"
17710       PRINT,"ENTER THICKNESS OF BOTTOM"
17720       PRINT,"SLAB OF BOX BEAM (INCHES) - "
17730       READ(5,944) X
17740       IF(X.EQ."R                ") GO TO 450
17750       IF(X.EQ."H                ") GO TO 470
17760       DECODE(X,946) V15A
17770   490 PRINT," "
17780       PRINT,"TSW"
17790       PRINT,"ENTER THICKNESS OF SIDEWALLS"
17800       PRINT,"OF BOX BEAM (INCHES)       - "
17810       READ(5,944) X
17820       IF(X.EQ."R                ") GO TO 470
17830       IF(X.EQ."H                ") GO TO 490
17840       DECODE(X,946) V16A
17850       V17A=0.
17860   510 IF(IV03.EQ.9) GO TO 530
17870       PRINT," "
17880       PRINT,"TMW"
17890       PRINT,"ENTER THICKNESS OF CENTER WALL OF"
17900       PRINT,"DOUBLE-CELLED BOX BEAM (INCHES)  - "
17910       READ(5,944) X
17920       IF(X.EQ."R                ") GO TO 490
17930       IF(X.EQ."H                ") GO TO 510
17940       DECODE(X,946) V17A
17950   530 PRINT," "
17960       PRINT,"DH"
17970       PRINT,"ENTER DEPTH AND WIDTH OF FILLET (INCHES)  = "
17980       READ(5,944) X
17990       IF(X.EQ."R                ") GO TO 535
18000       IF(X.EQ."H                ") GO TO 540
18010       DECODE(X,946) V18A
18020       GO TO 550
18030   535 IF(IV03.EQ.9) GO TO 490
18040       GO TO 510
18050   540 PRINT," "
18060       PRINT,"*****NOTE#FILLET IS THE TRIANGULAR AREA THAT FORMS"
18070       PRINT,"          THE CORNER OF A CELL IN A BOX BEAM."
18080       GO TO 530
18090   550 PRINT," "
18100       PRINT,"DELTA"
18110       PRINT,"ENTER INCREASE IN THICKNESS OF TOP SLAB"
18120       PRINT,"OF BOX BEAM DUE TO SLOPING (INCHES)  - "
18130       READ(5,944) X
18140       IF(X.EQ."R                ") GO TO 530
18150       IF(X.EQ."H                ") GO TO 550
18160       DECODE(X,946) V19A
18170   570 PRINT," "
18180       PRINT,"DIAPH"
18190       PRINT,"ENTER DIAPHRAM LOCATION AS"
```

(Continued)

```
18200       PRINT,"A FRACTION OF SPAN LENGTH - "
18210       READ(5,944) X
18220       IF(X.EQ."R               ") GO TO 575
18230       IF(X.EQ."H               ") GO TO 580
18240       DECODE(X,946) V20
18250       GO TO 590
18260   575 IF(IV03.EQ.7) GO TO 370
18270       IF(IV03.GT.8) GO TO 550
18280       GO TO 390
18290   580 PRINT," "
18300       PRINT,"******NOTE.FOR DIAPHRAMS AT THIRD POINTS ENTER 0.33."
18310       PRINT,"           IF NO DIAPHRAMS ARE USED ENTER ZERO,"
18320       GO TO 570
18330   590 IF(V20.EQ.0.) GO TO 605
18340       PRINT," "
18350       PRINT,"DIAPH"
18360       PRINT,"ENTER WEIGHT PER DIAPHRAM (KIPS) - "
18370       READ(5,944) X
18380       IF(X.EQ."R               ") GO TO 570
18390       IF(X.EQ."H               ") GO TO 590
18400       DECODE(X,946) V21
18410       GO TO 610
18420   605 V21=0.
18430       V20=0.5
18440   610 IF(IV05.NE.2) GO TO 630
18450       PRINT," "
18460       PRINT,"HDPT"
18470       PRINT,"ENTER DISTANCE FROM MIDSPAN TO HOLD-DOWN"
18480       PRINT,"POINT FOR DEPRESSED STRANDS (FEET)      - "
18490       READ(5,944) X
18500       IF(X.EQ."R               ") GO TO 615
18510       IF(X.EQ."H               ") GO TO 610
18520       DECODE(X,946)V22
18530       GO TO 630
18540   615 IF(V21.EQ.0.) GO TO 570
18550       GO TO 590
18560   630 PRINT," "
18570       PRINT,"AS"
18580       PRINT,"ENTER AREA OF A SINGLE PRESTRESSING"
18590       PRINT,"STRAND OR CABLE (INCHES**2)        - "
18600       READ(5,944) X
18610       IF(X.EQ."R               ") GO TO 635
18620       IF(X.EQ."H               ") GO TO 630
18630       DECODE(X,946) V23
18640       GO TO 650
18650   635 IF(IV05.EQ.2) GO TO 610
18660       IF(V21.EQ.0.) GO TO 570
18670       GO TO 590
18680   650 PRINT," "
18690       PRINT,"FSULT"
18700       PRINT,"ENTER ULTIMATE STRENGTH OF"
18710       PRINT,"PRESTRESSING STEEL (KSI) - "
```

(Continued)

```
18720       READ(5,944) X
18730       IF(X.EQ."R              ") GO TO 630
18740       IF(X.EQ."H              ") GO TO 650
18750       DECODE(X,946) V24
18760   670 PRINT," "
18770       PRINT,"RS"
18780       PRINT,"ENTER RATIO OF STEEL STRESS AT TIME OF STRAND"
18790       PRINT,"RELEASE OR ANCHORAGE TO ULTIMATE PRESTRESSING"
18800       PRINT,"STEEL STRENGTH"
18810       READ(5,944) X
18820       IF(X.EQ."R              ") GO TO 650
18830       IF(X.EQ."H              ") GO TO 670
18840       DECODE(X,946) V25
18850   690 PRINT," "
18860       PRINT,"R"
18870       PRINT,"ENTER RATIO OF STEEL STRESS AFTER LOSS OF"
18880       PRINT,"PRESTRESS TO STEEL STRESS AT ANCHORAGE    - "
18890       READ(5,944) X
18900       IF(X.EQ."R              ") GO TO 670
18910       IF(X.EQ."H              ") GO TO 690
18920       DECODE(X,946) V26
18930   710 PRINT," "
18940       PRINT,"EMIN"
18950       PRINT,"ENTER MINIMUM FEASIBLE ECCENTRICITY OF CENTER OF"
18960       PRINT,"GRAVITY OF PRESTRESSING TENDONS FROM BOTTOM OF BEAM"
18970       PRINT,"(INCHES)"
18980       READ(5,944) X
18990       IF(X.EQ."R              ") GO TO 690
19000       IF(X.EQ."H              ") GO TO 720
19010       DECODE(X,946) V27
19020       GO TO 730
19030   720 PRINT 971
19040       PRINT 972
19050       GO TO 710
19060   730 PRINT," "
19070       PRINT,"ESR"
19080       PRINT,"ENTER FACTOR TO ALLOW FOR STRAND RELAXATION AND MEMBER"
19090       PRINT,"SHORTENING PRIOR TO COMPUTING STAGE 1 STRESSES       - "
19100       READ(5,944) X
19110       IF(X.EQ."R              ") GO TO 710
19120       IF(X.EQ."H              ") GO TO 740
19130       DECODE(X,946) V28
19140       GO TO 750
19150   740 PRINT 971
19160       PRINT 972
19170       GO TO 730
19180   750 PRINT," "
19190       PRINT,"FCULT"
19200       PRINT,"ENTER COMPRESSIVE STRENGTH OF CONCRETE IN"
19210       PRINT,"PRESTRESSED MEMBER AT 28 DAYS (KIPS PER SQ IN) - "
19220       READ(5,944) X
19230       IF(X.EQ."R              ") GO TO 730
```

(Continued)

```
19240       IF(X.EQ."H                ") GO TO 750
19250       DECODE(X,946) V29
19260   770 PRINT," "
19270       PRINT,"FCI"
19280       PRINT,"ENTER COMPRESSIVE STRENGTH OF CONCRETE IN"
19290       PRINT,"PRESTRESSED MEMBER AT TIME OF ANCHORAGE"
19300       PRINT,"OR STRAND RELEASE (KIPS PER SQ. IN.)    - "
19310       READ(5,944) X
19320       IF(X.EQ."R                ") GO TO 750
19330       IF(X.EQ."H                ") GO TO 770
19340       DECODE(X,946) V30
19350       V31A=0.
19360   790 IF(IV03.LE.5) GO TO 810
19370       GO TO 830
19380   810 PRINT," "
19390       PRINT,"FCPC"
19400       PRINT,"ENTER COMPRESSIVE STRENGTH OF CONCRETE "
19410       PRINT,"IN COMPOSITE DECK SLAB (KIPS PER SQ. IN.) - "
19420       READ(5,944) X
19430       IF(X.EQ."R                ") GO TO 770
19440       IF(X.EQ."H                ") GO TO 810
19450       DECODE(X,946) V31A
19460   830 PRINT," "
19470       PRINT,"FTENT"
19480       PRINT,"ENTER ALLOWABLE TENSILE STRESS IN TOP FIBERS"
19490       PRINT,"OF PRESTRESSED MEMBER (KIPS PER SQ. IN.)   - "
19500       READ(5,944) X
19510       IF(X.EQ."R                ") GO TO 835
19520       IF(X.EQ."H                ") GO TO 830
19530       DECODE(X,946) V32
19540       GO TO 850
19550   835 IF(IV03.LE.5) GO TO 810
19560       GO TO 770
19570   850 PRINT," "
19580       PRINT,"FTENB"
19590       PRINT,"ENTER ALLOWABLE TENSILE STRESS IN BOTTOM FIBERS"
19600       PRINT,"PRESTRESSED MEMBER (KIPS PER SQ. IN.)          - "
19610       READ(5,944) X
19620       IF(X.EQ."R                ") GO TO 830
19630       IF(X.EQ."H                ") GO TO 850
19640       DECODE(X,946) V33
19650   870 PRINT," "
19660       PRINT,"FNPS"
19670       PRINT,"ENTER ALLOWABLE STEEL STRESS OF NONPRESTRESSED"
19680       PRINT,"REINFORCEMENT (KIPS PER SQ. IN.)            - "
19690       READ(5,944) X
19700       IF(X.EQ."R                ") GO TO 850
19710       IF(X.EQ."H                ") GO TO 870
19720       DECODE(X,946) V34
19730   890 PRINT," "
19740       PRINT,"FV"
19750       PRINT,"ENTER ULTIMATE STEEL STRESS OF STIRRUP"
```

(Continued)

```
19760      PRINT,"REINFORCEMENT (KIPS PER SQ. IN,      - "
19770      READ(5,944) X
19780      IF(X.EQ."R              ") GO TO 870
19790      IF(X.EQ."H              ") GO TO 890
19800      DECODE(X,946) V35
19810  910 PRINT," "
19820      PRINT,"AV"
19830      PRINT,"ENTER AREA OF ALL LEGS OF STIRRUPS AV"
19840      PRINT,"ONE SECTION IN THE MEMBER (SQ. IN.) - "
19850      READ(5,944) X
19860      IF(X.EQ."R              ") GO TO 890
19870      IF(X.EQ."H              ") GO TO 910
19880      DECODE(X,946) V36
19890  930 PRINT," "
19900      PRINT,"NSEC"
19910      PRINT,"ENTER NUMBER OF SECTIONS AT WHICH BEAM IS TO"
19920      PRINT,"BE ANALYZED FOR MOMENT (MAXIMUM OF 4)      - "
19930      READ(5,932) Y
19940      IF(Y.EQ."R") GO TO 910
19950      IF(Y.EQ."H") GO TO 930
19960      DECODE(Y,940) IV37
19970  950 V39(1)=0.5
19980      DO 953 I=2,IV37
19990  953 V39(I)=0.
20000      DO 954 I=1,IV37
20010  954 V40(I)=0.
20020      PRINT 2000
20030      IF(IV37.EQ.20) GO TO 965
20035  955 IF(IV37.EQ.1) GO TO 970
20040      DO 960 I=2,IV37
20050      J=I
20060      PRINT 2001,I
20070      PRINT 2002,I
20080      READ(5,944) X
20090      IF(X.EQ."R              ") GO TO 930
20100      IF(X.EQ."H              ") GO TO 955
20110  960 DECODE(X,946) V39(J)
20120      GO TO 970
20130  965 PRINT 2004
20140      J=1
20150      PRINT 2006,J,V39(1)
20160      READ(5,944) X
20170      IF(X.EQ."R              ") GO TO 950
20180      IF(X.EQ."H              ") GO TO 965
20190      DECODE(X,946) V40(1)
20195      IF(IV37.EQ.1) GO TO 970
20200      DO 968 I=2,IV37
20210      J=I
20220      PRINT 2001,I
20230      PRINT 2002,I
20240      READ(5,944) X
20250      IF(X.EQ."R              ") GO TO 930
```

(Continued)

```
20260       IF(X.EQ."H                ") GO TO 965
20270       DECODE(X,946) V39(J)
20280       PRINT 2006,J,V39(J)
20290       READ(5,944) X
20300       IF(X.EQ."R                ") GO TO 965
20310       IF(X,EQ."H                ") GO TO 965
20320       DECODE(X,946) V40(J)
20330   968 CONTINUE
20340   970 PRINT," "
20350       PRINT,"METRL"
20360       PRINT,"IS NUMBER AND LOCATION OF PRESTRESSING"
20370       PRINT,"STRANDS TO BE INPUT DATA (Y OR N)    ? "
20380       READ(5,932) Y
20390       IF(Y.EQ."R") GO TO 950
20400       IF(Y.EQ."H") GO TO 970
20410       IF(Y.EQ."Y") GO TO 973
20420       IF(Y.EQ."N") GO TO 974
20430       PRINT,"*****CORRECT RESPONCE IS Y FOR YES AND N FOR NO******"
20440       GO TO 970
20450   973 IV38=1
20460       GO TO 990
20470   974 IV38=-1
20480       GO TO 1070
20490   990 PRINT," "
20500       PRINT,"IDC"
20510       PRINT,"ENTER A NUMBER TO IDENTIFY THE CASE (1 DIGIT MAX) - "
20520       READ(5,932) Y
20530       IF(Y.EQ."R") GO TO 970
20540       IF(Y.EQ."H") GO TO 990
20550       DECODE(Y,940) IV41A
20560  1010 PRINT," "
20570       PRINT,"STRNS"
20580       PRINT,"ENTER NUMBER OF PRESTRESSING STRANDS - "
20590       READ(5,944) X
20600       IF(X.EQ."R                ") GO TO 990
20610       IF(X.EQ."H                ") GO TO 1010
20620       DECODE(X,946) V42A
20630  1030 PRINT," "
20640       PRINT,"YM"
20650       PRINT,"ENTER DISTANCE FROM BOTTOM OF BEAM TO CENTROID OF"
20660       PRINT,"PRESTRESSING STRANDS AT MIDSPAN (INCHES)"
20670       READ(5,944) X
20680       IF(X.EQ."R                ") GO TO 1010
20690       IF(X.EQ."H                ") GO TO 1030
20700       DECODE(X,946) V43A
20710  1050 PRINT," "
20720       IF(IV05.EQ.1) V44A=V43A
20730       IF(IV05.EQ.1) GO TO 1070
20740       PRINT,"YE"
20750       PRINT,"ENTER DISTANCE FROM BOTTOM OF BEAM TO CENTROID"
20760       PRINT,"OF PRESTRESSING STRANDS AT END OF BEAM (INCHES) - "
20770       READ(5,944) X
```

(Continued)

```
20780       IF(X.EQ."R                ") GO TO 1030
20790       IF(X.EQ."H                ") GO TO 1050
20800       DECODE(X,946) V44A
20810 1070  IF(IV03.GT.5) GO TO 1130
20820 1075  PRINT," "
20830       PRINT,"WCS"
20840       PRINT,"ENTER WIDTH OF COMPRESSIVE SLAB (INCHES) - "
20850       READ(5,944) X
20860       IF(X.EQ."R                ") GO TO 1080
20870       IF(X.EQ."H                ") GO TO 1075
20880       DECODE(X,946) V45A
20890       GO TO 1090
20900 1080  IF(IV38) 970,970,1085
20910 1085  IF(IV05.EQ.1) GO TO 1038
20920       GO TO 1050
20930 1090  PRINT," "
20940       PRINT,"TCS"
20950       PRINT,"ENTER THICKNESS OF COMPOSITE DECK SLAB (INCHES) - "
20960       READ(5,944) X
20970       IF(X.EQ."R                ") GO TO 1075
20980       IF(X.EQ."H                ") GO TO 1090
20990       DECODE(X,946) V46A
21000 1110  PRINT," "
21010       PRINT,"XNCS"
21020       PRINT,"ENTER RATIO OF MODULUS OF ELASTICITY OF COMPOSITE"
21030       PRINT,"DECK TO MODULUS OF ELASTICITY OF PRECAST MEMBER - "
21040       READ(5,944) X
21050       IF(X.EQ."R                ") GO TO 1090
21060       IF(X.EQ."H                ") GO TO 1110
21070       DECODE(X,946) V47A
21080 1130  PRINT," "
21090  971  FORMAT(///,20X,"TABLE 1",///,
21100      &" SECTION        TYPE OF          APPROX.        APPROX.",/
21110      &" NUMBER         SECTION          VALUE OF       VALUE",/,
21120      &"                                 EMIN (IN)      OF ESR",///,
21130      &"   1      COMPOSITE SPREAD BOX     2.0            0.925",//,
21140      &"   2      COMPOSITE AASHO-PCI",//,
21150      &"   3      STANDARD SECTIONS",/,
21160      &"          TYPE I 30 FT SPAN        2.0            0.915",/,
21170      &"          TYPE I 45 FT SPAN        3.0            0.88",/,
21180      &"          TYPE II 40 FT SPAN       2.5            0.915",/,
21190      &"          TYPE II 60 FT SPAN       3.5            0.88",/,
21200      &"          TYPE III 55 FT SPAN      3.5            0.915",/,
21210      &"          TYPE III 80 FT SPAN      4.0            0.88",/,
21220      &"          TYPE IV 70 FT SPAN       3.5            0.915",/,
21230      &"          TYPE IV 100 FT SPAN      4.5            0.88",/,
21240      &"   4      TYPE V 90 FT SPAN        4.5            0.905",/,
21250      &"          TYPE V 120 FT SPAN       5.0            0.88",/,
21260      &"          TYPE VI 120 FT SPAN      5.0            0.905",/,
21270      &"          TYPE VI 140 FT SPAN      5.5            0.88",//)
21280  972 FORMAT(3X,"5",5X,"COMPOSITE TEE",/,
21290      &"                40 FT SPAN         4.5            0.905",/,
```

(Continued)

```
21300      &"                50 FT SPAN          5.0          0.905",/,
21310      &"                60 FT SPAN          6.0          0.905",//,
21320      &"   6             CHANNEL",/,
21330      &"                20 FT SPAN          3.0           0.905",/,
21340      &"                30 FT SPAN          4.0           0.905",/,
21350      &"                40 FT SPAN          5.0           0.905",//,
21360      &"   7            SOLID SLAB          2.0           0.935",//,
21370      &"   8            VOIDED SLAB         2.0           0.93",//,
21380      &"   9            SINGLE BOX          2.0           0.925",//,
21390      &"  10            DOUBLE BOX          2.0           0.925",////)
21400 2000 FORMAT(/,"*****NOTE-SECTION 1 MUST BE AT MIDSPAN;THEREFORE",/,
21410      &          "      DIST(1) SET EQUAL TO 0.5 BY PROGRAM",//)
21420 2002 FORMAT("ENTER DISTANCE TO SECTION ",I1,/,
21430      &       "FROM SUPPORT AS A FRACTION OF SPAN = ")
21440 2004 FORMAT(/,"*****NOTE-MOMENTS FOR COOPER'S E-1 RR LOADING MAY",/,
21450      &          "      BE ENTERED WITH APPROPIATE FLOAD AND",/,
21460      &          "      ALLR VALUES, OR 1. MAY BE ENTERED FOR",/,
21470      &          "      FLOAD AND ALLFR WITH THE BMLL VALUES",/,
21480      &          "      ENTERED AS ACTUAL MOMENTS TO BE APPLIED",/,
21490      &          "      TO SECTION.",///)
21500 2001 FORMAT(/,"DIST(",I1,")")
21510 2006 FORMAT(/,"BMLL(",I1,")",/,
21520      &       "ENTER LIVE LOAD MOMENTS FOR RAILROAD LOADING AT",/,
21530      &       "POINT CORRESPONDING TO SECTION DISTANCE OF ",F7.4,"L",/,
21540      &       "(FT KIPS)")
21550       LN=1
21560       PRINT 5500,LN
21570       PRINT 5502,V01
21580       LN=2
21590       PRINT 5501,LN
21600       PRINT 5504,IV02,IV03,IV04,IV05,V06,V07,V08,V08A,V09,V10A,V11
21610       LN=3
21620       PRINT 5501,LN
21630       IF(IV03.GT.8) GO TO 3000
21640       PRINT 5506,V12,V13,V14,V15,V16,V17,V18,V19
21650       GO TO 3020
21660 3000  PRINT 5508,V12A,V13A,V14A,V15A,V16A,V17A,V18A,V19A
21670 3020  LN=4
21680       PRINT 5501,LN
21690       PRINT 5510,V20,V21,V22,V23,V24,V25,V26,V27,V28
21700       LN=5
21710       PRINT 5501,LN
21720       PRINT 5512,V29,V30,V31A,V32,V33,V34,V35,V36
21730       LN=6
21740       PRINT 5501,LN
21750       PRINT 5514,IV37,IV38,(V39(J),V40(J),J=1,IV37)
21760       LN=7
21770       IF(IV03.GT.5) GO TO 3050
21780       PRINT 5501,LN
21790       PRINT 5516,V45A,V46A,V47A
21800       IF(IV38)3060,3060,3040
21810 3040  LN=8
```

(Continued)

```
21820       PRINT 5501,LN
21830       PRINT 5518,IV41A,V42A,V43A,V44A
21840       GO TO 3060
21850 3050  IF(IV38)3060,3060,3055
21860 3055  PRINT 5520,IV41A,V42A,V43A,V44A
21870 3060  LN=1
21880       WRITE(02,5522)LN,V01
21890       LN=2
21900       WRITE(02,5524)LN,IV02,IV03,IV04,IV05,V06,V07,V08,V08A,V09,V10A,V11
21910       LN=3
21920       IF(IV03.GT.8) GO TO 3080
21930       WRITE(02,5525)LN,V12,V13,V14,V15,V16,V17,V18,V19
21940       GO TO 3100
21950 3080  WRITE(02,5526)LN,V12A,V13A,V14A,V15A,V16A,V17A,V18A,V19A
21960 3100  LN=4
21970       WRITE(02,5528)LN,V20,V21,V22,V23,V24,V25,V26,V27,V28
21980       LN=5
21990       WRITE(02,5530)LN,V29,V30,V31A,V32,V33,V34,V35,V36
22000       LN=6
22010       WRITE(02,5532)LN,IV37,IV38,(V39(J),V40(J),J=1,IV37)
22020       LN=7
22030       IF(IV03.GT.5) GO TO 3200
22040       WRITE(02,5534)LN,V45A,V46A,V47A
22050       IF(IV38)3230,3230,3190
22060 3190  LN=8
22070       WRITE(02,5536)LN,IV41A,V42A,V43A,V44A
22080       GO TO 3230
22090 3200  IF(IV38)3230,3230,3210
22100 3210  WRITE(02,5536)LN,IV41A,V42A,V43A,V44A
22110 5500  FORMAT(" LINE NUMBER ",I1,/,
22120      &       "INPUT  SYMBOL    VALUE",//)
22130 5502  FORMAT("    1      TITLE   "A66,//)
22140 5501  FORMAT(" LINE NUMBER ",I1,/,
22150      &       "INPUT  SYMBOL      VALUE          COMMENT",//)
22160 5504  FORMAT("    2      IDLD        ",I2,
22170      &     /,"    3     IDSEC        ",I2,
22180      &     /,"    4     IOTPT        ",I2,
22190      &     /,"    5     IDPST         ",I1,
22200      &     /,"    6     FLOAD      ",F6.2,
22210      &     /,"    7     SPAN     ",F10.3,
22220      &     /,"    8      SDL     ",F10.3,
22230      &     /,"    9      CDL     ",F10.3,3X,"SET EQUAL TO ZERO FOR
22240      &   /,"                                NONCOMPOSITE SECTION"
22250      &     /,"   10     ALLER   ",5X,F5.3,
22260      &     /,"   11     FIMP    ",5X,F5.3,3X,,"SET EQUAL TO ZERO FOR",
22270      &     /,"                              HIGHWAY LOAD",
22280      &     /,"   12      FLL    ",5X,F5.3,///)
22290 5506  FORMAT("   13     DSECT   ",F10.3,
22300      &     /,"   14     ASECT   ",F10.3,
22310      &     /,"   15     SECTI   ",F11.3
22320      &     /,"   16      YT     ",F10.3,
22330      &     /,"   17      YB     ",F10.3,
```

(Continued)

```
22340      &      /,"  18      WTS    ",F10.3,
22350      &      /,"  19      TTS    ",F10.3,
22360      &      /,"  20       BE    ",F10.3,3X,"SET EQUAL TO ZERO FOR",
22370      &/,"                                 IDSEC EQUAL TO 7 (SLAB)",///)
22380 5508 FORMAT("  13       WR    ",F10.3,
22390      &      /,"  14       DE    ",F10.3,
22400      &      /,"  15      TTS    ",F10.3,
22410      &      /,"  16      TBS    ",F10.3,
22420      &      /,"  17      TSW    ",F10.3,
22430      &      /,"  18      TMW    ",F10.3,
22440      &      /,"  19       DF    ",F10.3,
22450      &      /,"  20    DELTA    ",F10.3,///)
22460 5510 FORMAT("  21     DILOC    ",4X,F5.3,3X,"WHEN ZERO OR BLANK,SET TO"
22470      &      /,"                                  0.5"
22480      &      /,"  22     DIAPH    ",F10.3,3X,"WHEN DILOC EQUAL ZERO,SET"
22490      &   /,"                                  EQUAL TO ZERO"
22500      &      /,"  23      HDPT    ",F10.3,3X,"WHEN IDPST NOT EQUAL 2,SET"
22510      &   /,"                                  EQUAL TO ZERO"
22520      &      /,"  24        AS    ",F10.3,
22530      &      /,"  25    FSULT     ",F10.3,
22540      &      /,"  26       RS      ",4X,F5.3,
22550      &      /,"  27        R      ",4X,F5.3,
22560      &      /,"  28     EMIN      ",4X,F5.3,
22570      &      /,"  29      ESR      ",4X,F5.3,///)
22580 5512 FORMAT("  30     FCULT     ",F10.3,
22590      &      /,"  31       FCI     ",F10.3,
22600      &      /,"  32      FCPC     ",F10.3,3X,"SET EQUAL TO ZERO FOR"
22610      &   /,"                                  NONCOMPOSITE SECTION"
22620      &      /,"  33     FTENT     ",F10.3,
22630      &      /,"  34     FTENB     ",F10.3,
22640      &      /,"  35      FNPS     ",F10.3,
22650      &      /,"  36        FV     ",F10.3,
22660      &      /,"  37        AV     ",F10.3,///)
22670 5514 FORMAT("  38      NSEC      ",I2,
22680      &      /,"  39     NCTRL      ",I2,3X,"  SET EQUAL TO 1 IF",
22690      &   /,"                                  STRAND DATA INPUT,OTHERWISE",
22700      &   /,"                                  SET EQUAL TO -1",
22710      &      /,"  40  DIST,BMLL ",F5.3,F8.3,/,3(16X,F5.3,F8.3,/),///)
22720 5516 FORMAT("  41       WCS    ",F10.3,
22730      &      /,"  42       TCS    ",F10.3,
22740      &      /,"  43      XNCS    ",F10.3,///)
22750 5518 FORMAT("  44       IDC    ",6X,I2,
22760      &      /,"  45      STRNS   ",F10.3,
22770      &      /,"  46        YM    ",F10.3,
22780      &      /,"  47        YE    ",F10.3,///)
22790 5520 FORMAT("  41       IDC    ",6X,I2,/,
22800      &      "  42      STRNS    ",F10.3,/,
22810      &      "  43        YM     ",F10.3,/,
22820      &      "  44        YE     ",F10.3,///)
22830 5522 FORMAT(I1,1X,A66)
22840 5524 FORMAT(I1,3(1X,I2),1X,I1,4(1X,F7.3),3(1X,F5.3))
22850 5525 FORMAT(I1,2(1X,F8.3),1X,F11.3,5(1X,F7.3))
```

(Continued)

```
22860 5526 FORMAT(I1,8(1X,F7.3))
22870 5528 FORMAT(I1,1X,F5.3,4(1X,F7.3),4(1X,F6.3))
22880 5530 FORMAT(I1,8(1X,F7.3))
22890 5532 FORMAT(2(I1,1X),I2,4(1X,F5.3,1X,F7.3))
22900 5534 FORMAT(I1,3(1X,F7.3))
22910 5536 FORMAT(I1,1X,I1,3(1X,F7.3))
22920 3230 PRINT," "
22930      IF(LC.EQ.2) GO TO 3231
22940      PRINT,"NOTE#EXIT PROGRAM TO CORRECT ERRORS IN DATA FILE"
22950      PRINT," "
22960 3231 PRINT,"DO YOU WISH TO EXIT PROGRAM(Y OR N) ? "
22970      READ(5,932)Y
22980      IF(Y.EQ."Y") STOP
22990      IF(Y.EQ."N") GO TO 3240
23000      PRINT," "
23010      PRINT,"*****CORRECT RES#ONCE IS Y FOR YES AND N FOR NO*****"
23020      GO TO 3230
23030 3240 RETURN
23040      END
```

APPENDIX F: CONCRETE PRECASTING FACILITY

General Requirements

1. A typical concrete precast facility comprises the following elements:

   a. Cement and aggregates storage areas.

   b. Reinforcing steel and prestressing strand storage areas and fabricating facility.

   c. Forms.

   d. Concrete casting and curing area.

   e. Concrete placing and consolidation equipment.

   f. Means of accelerated curing.

   g. Lifting and handling equipment.

   h. Stressing means (usually hydraulic jacking equipment, etc.).

   i. Storage area for finished products.

   j. Transportation equipment, e.g. trucks.

   k. Equipment for testing and inspection.

   l. Facilities for maintenance and repair.

   m. Utilities (water, power, fuel supply, compressed air, etc.).

   n. Storage and fabrication of inserts, voids, picking loops, etc.

   o. Burning and welding equipment.

   p. Shop engineering for shop and working drawings and computations.

   q. Plant management and administration office.

Obviously some of the items above may be performed offsite, or by outside agencies. However, the coordination of all of these items into a manufacturing system requires extremely careful planning and management. Some principles and general requirements for the concrete precasting facility are given below.[6]

Materials flow

2. The flow of the materials must be laid out so as to minimize

distance of movement and prevent congestion.

Proper roads and drainage

3. In all work areas and in the storage area, proper road and drainage must be provided. It is extremely important to eliminate ruts or holes that might cause a crane or forklift truck to tip, possibly injuring a worker or damaging product or equipment.

Utilities

4. The outlets for the utilities must be conveniently located in the work area. Boxes or guards should be installed to keep outlets and receptacles dry and clean and to protect them from accidental impact. Adequate lighting should be provided for night work.

Communications

5. Particularly from point of concrete placement in forms to batch and mixing plant, communications, such as a two-way voice radio, should be provided.

Casting beds

6. These beds must be designed to remain level and true despite repeated loading and frequent wetting of ground. Height of bed should be set at the best working level, particularly where considerable hand-work is required.

Proper storage

7. Prestressing steel, mild reinforcing steel, and inserts must be stored where they will be kept clean and dry.

Hydraulic jacks and strand vises

8. Stressing equipment must be properly maintained, cleaned, and lubricated in accordance with the manufacturer's recommendations.

Quality control

9. It is important to have quality control for the achievement of economy, schedules, and performance. Definite inspection, checking, and testing procedures must be provided to ensure that the product is correctly produced, not only for strength, but also for dimensional accuracy (within prescribed tolerance).

Suggested Concrete Precasting Facility

10. The suggested concrete precasting facility (Figure F1) for producing prestressed channel elements and pile bents for the recommended precast concrete military bridges (Appendix D) is composed of the following:

a. Two parallel concrete casting and curing areas, 20 by 200 ft each.

b. Two stockpile areas for coarse aggregates and one stockpile area for fine aggregate.

c. One cement silo.

d. One 66-cu yd, 100-ton standard Corps of Engineers aggregrate batching plant.[3]

e. One 200-barrel standard Corps of Engineers cement batching plant.[3]

f. Four truck mixers.

g. One temporary storage and prestressing area.

h. One storage area for finished product.

i. One reinforcement and equipment shop for fabrication and storage of reinforcing bars, prestressing steel, forms, inserts, picking loops, placing and consolidation equipment, etc.

j. One administration building for administration office, shop engineering office, and quality control laboratory.


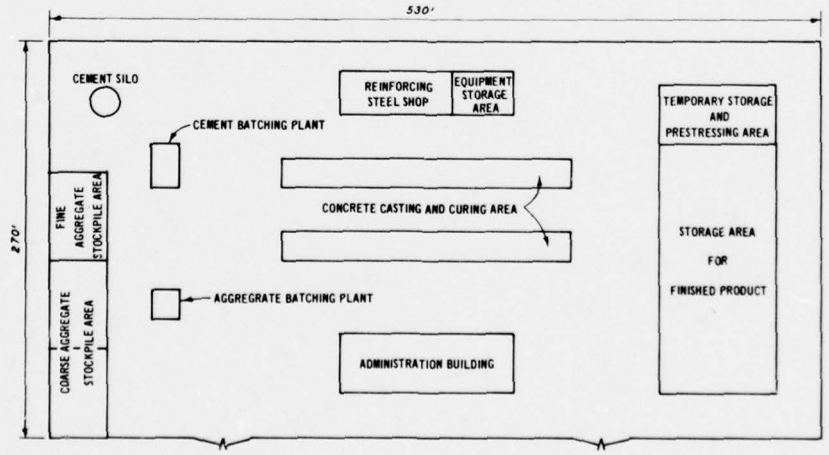


Figure F1. General plan of concrete precasting facility


APPENDIX G: TYPICAL PLANS FOR PRECAST CONCRETE HIGHWAY BRIDGES[63]

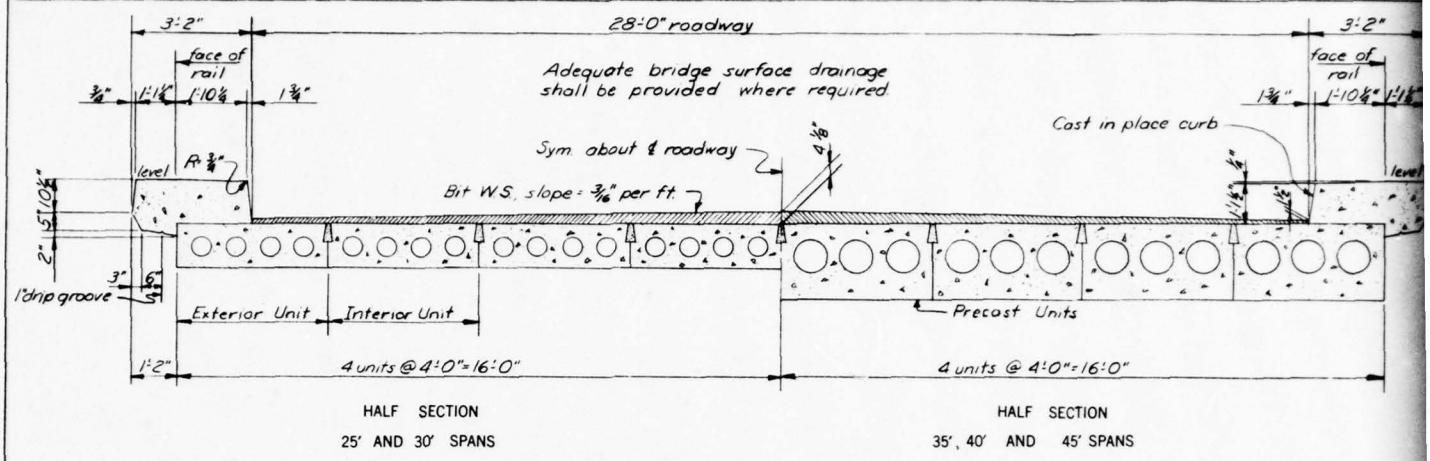

HALF SECTION
25' AND 30' SPANS

HALF SECTION
35', 40' AND 45' SPANS


TYPICAL CROSS SECTION AT MID SPAN

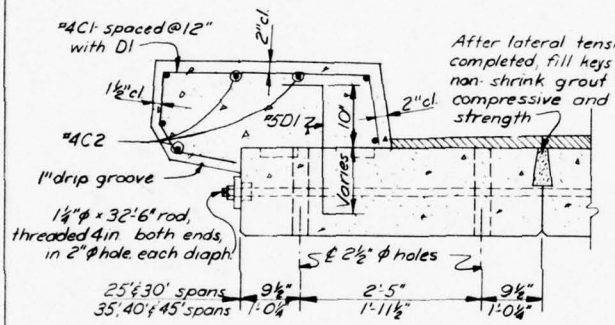


PART END ELEVATION

After lateral tensioning has been completed, fill keys with an approved non-shrink grout with a high compressive and impact resistant strength

Lateral Ties shall be provided through the diaphragms in the positions indicated. Each tie shall be equivalent to a 1⅛" A36 bar tensioned to 45000 lbs. Tension in 1⅛" steel ties may be applied by a torque of approximately 870 foot pounds

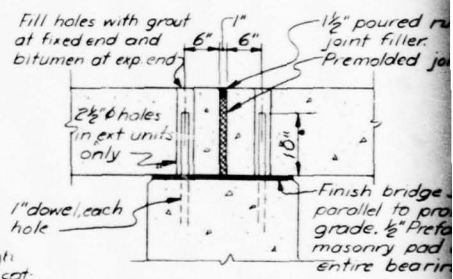


END DETAIL AT BEARING

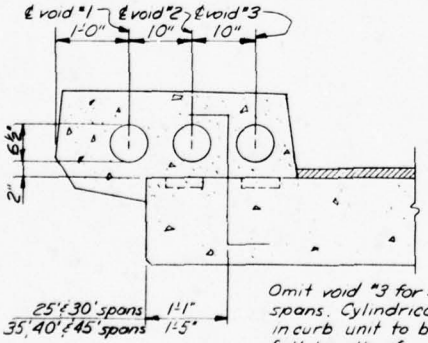

Omit void "3 for 35', 40' & 45' spans. Cylindrical voids in curb unit to be continuous full length of unit, except that all voids shall be stopped off 3" on either side of railing posts so as not to interfere with those elements.


ALTERNATE CURB DETAIL




After erection of deck units, cut off lifting devices flush with surface of concrete

When the deck units are handled they shall be lifted devices provided at the ends of the unit. Other types devices may be used provided they meet with the app of the engineer.


DETAIL OF LIFTING DEVICE
2 REQUIRED PER UNIT

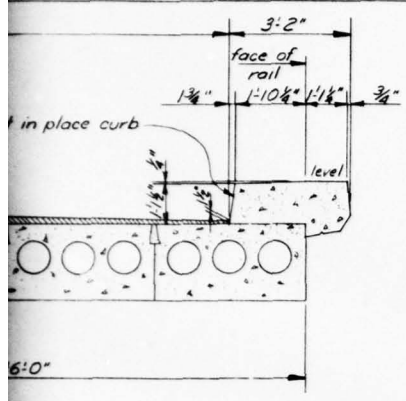

ON
SPANS

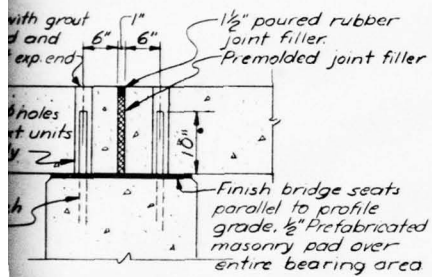

END DETAIL AT BEARING



After erection of deck units, cut off lifting devices flush with surface of concrete.


s are handled they shall be lifted by the the ends of the unit Other types of lifting d, provided they meet with the approval

OF LIFTING DEVICE
UIRED PER UNIT

SCHEDULE OF MATERIAL · PER SPAN

SPAN (Ft)	CONCRETE, C.Y. 8 DECK UNITS	CONCRETE, C.Y. 2 CURBS	CONCRETE, C.Y. TOTAL	REINFORCING STEEL (* Bent Bars) "3S1" * TYPE	"3S1" * No	"3S1" * LENGTH	"3S1" * "X"	"3S2" No	"3S2" LENGTH	"3S3" No	"3S3" LENGTH	"5D1" * No	"5D1" * LENGTH	"4C1" * No	"4C1" * LENGTH	"4C2" No	"4C2" LENGTH	TOTAL WEIGHT (lbs.)	No. OF ⅜"ϕ PRE-TENSION STRANDS	HANDLING WEIGHT PER 4 FOOT DECK UNIT SPAN	HANDLING WEIGHT PER 4 FOOT DECK UNIT WT.
25	298	70	368	2	280	7'-0	8"	24	25'-9	–	–	52	2'-9	52	5'-6	14	25'-9	1550	264	25	77T
30	412	84	496	2	296	7'-0	8"	24	30'-9	–	–	62	2'-9	62	5'-6	14	30'-9	1750	336	30	107T
35	561	97	658	1	392	7'-4	11"	16	35'-9	–	–	72	3'-2	72	5'-6	14	35'-9	2140	368	35	144T
40	652	111	763	1	424	8'-0	13"	16	40'-9	–	–	82	3'-2	82	5'-6	14	40'-9	2480	384	40	167T
45	863	124	987	1	472	9'-0	16"	16	45'-9	48	6'-0	92	3'-2	92	5'-6	14	45'-9	3060	416	45	221T

BENDING DIAGRAMS (All dimensions are out to out)



GENERAL NOTES

Specifications: "A.A.S.H.O. Standard Specifications for Highway Bridges", 1961, with tentative revisions for 1961.

Live Load: H20-S16-44

Steel Reinforcement: Reinforcing steel shall be deformed bars of intermediate, hard or rail grade conforming to A.S.T.M. A15 or A.S.T.M. A16 specifications. Unless otherwise noted, dimensions relative to placement of reinforcing steel are given to bar centers.

Structural Steel: Structural steel transverse tensioning rods shall conform to A.S.T.M. A36. Threads on the rods shall be cut to the Coarse Thread Series Class 2A. If desired, equivalent rods with rolled threads may be substituted. The rods shall be furnished with one heavy semifinished hexagon nut and one bearing plate at each end. The rods shall be shop painted with two coats of red lead iron oxide paint. The field paint for the exposed parts at the ends of the rod assemblies shall consist of one coat of tinted red lead iron oxide followed by a final coat of paint, the color of which will be specified by the engineer.

Pretensioning Steel: Individual tendons in all pretensioned sections shall consist of 7-wire cable strands which have a nominal diameter of ⅜" and shall conform to A.S.T.M. A416. An initial tensile force of 14,000 lbs. shall be applied to each strand in all beams.

Cast-in-place Concrete: Cast-in-place concrete shall be Class A(AE) with a minimum 28 day compressive strength of 3000 psi. The air entraining agent shall meet with the approval of the engineer. The alternate curb section with cylindrical voids, shown on this drawing, if desired, may be used in lieu of the solid type curb. The concrete quantities for the cast-in-place curbs are based on the solid curb detail.

Precast Pretensioned Concrete: The minimum compressive strength of prestressed concrete at the age of 28 days shall be 5000 psi. The design mix shall meet the approval of the engineer. The minimum compressive strength of concrete at the transfer of prestress shall be 4000 psi. If desired an admixture approved by the engineer may be used to increase the plasticity of the concrete mix.

Drainage: No provision for drainage have been made in these plans. See Appendix "A" for recommended drainage details.


Handrail: See Appendix B for recommended handrail details.

CONSTRUCTION TOLERANCES

Length: ± ½" in 10', max ± ¾"
Depth: ± 1/16" in 12", max ± 3/16"
Width: ± 1/16" in 12", max ± 3/16"
Straightness: 1/16" in 10', max. ⅜"
Out of square: 1/16" in 12", max. ¼"


ABUTMENT REACTIONS (kips)					
ITEM	SPAN (feet) 25	30	35	40	45
D.L.	89	117	153	177	225
L.L.*	92	99	106	110	114
TOTAL*	181	216	259	287	339
*Excluding Impact					

Figure G1. Sections and quantities of standard precast prestressed concrete voided slab bridges

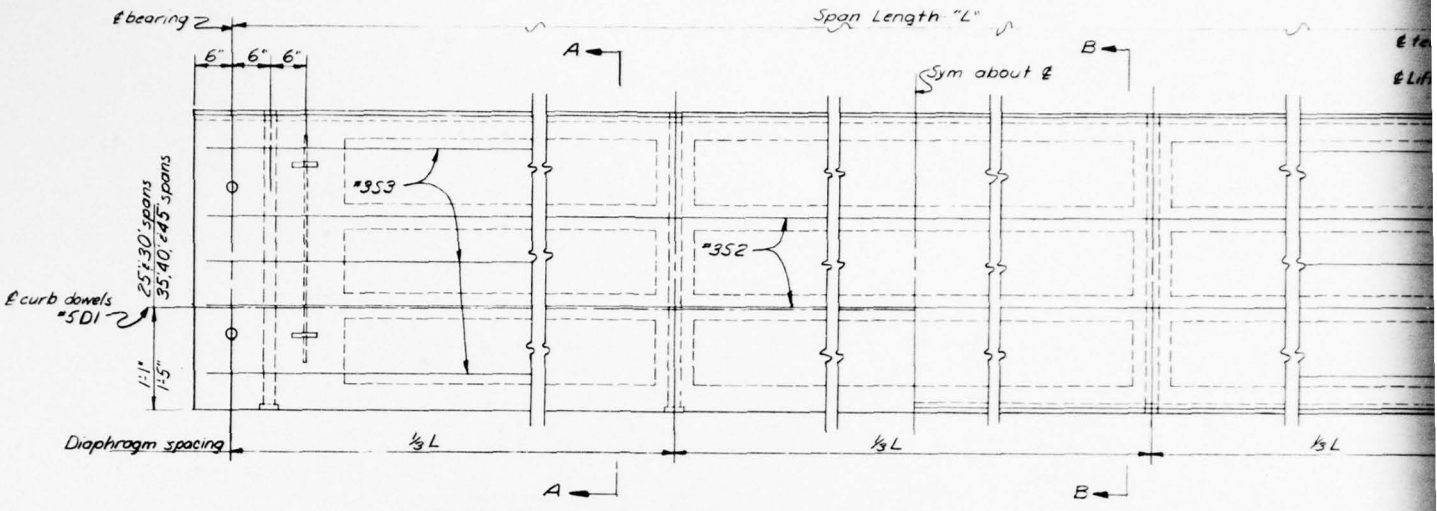

HALF PLAN TYPICAL EXTERIOR UNIT


HALF PLAN TYPICAL INTERIOR UNIT

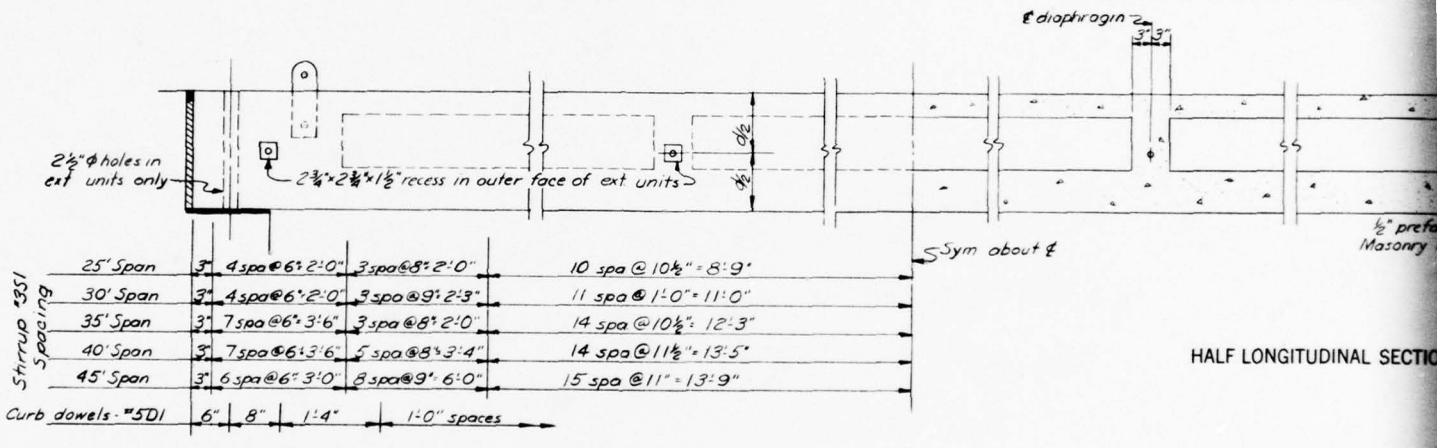


HALF LONGITUDINAL SECTIO

HALF ELEVATION

Provision may be made in the fascia of exterior units for approved inserts to facilitate forming the curbs.

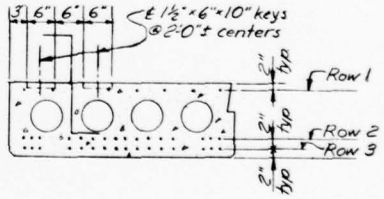


SECTION A-A

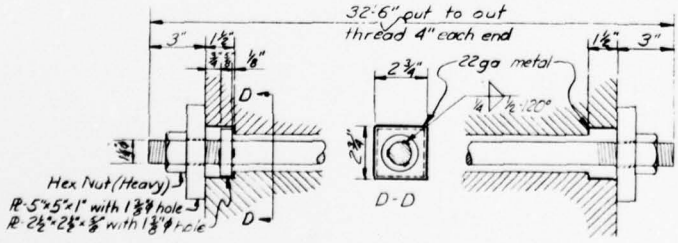


TENSIONING END

FIXED END


TENSIONING ROD DETAIL




SECTION C-C

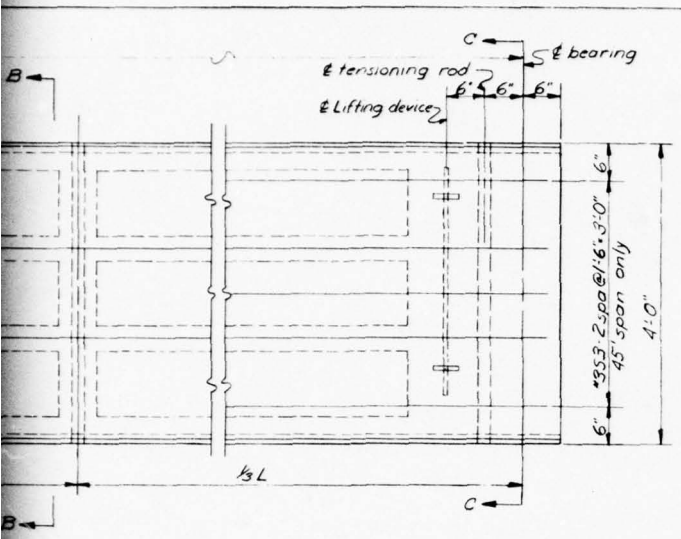


HALF PLAN TYPICAL INTERIOR UNIT

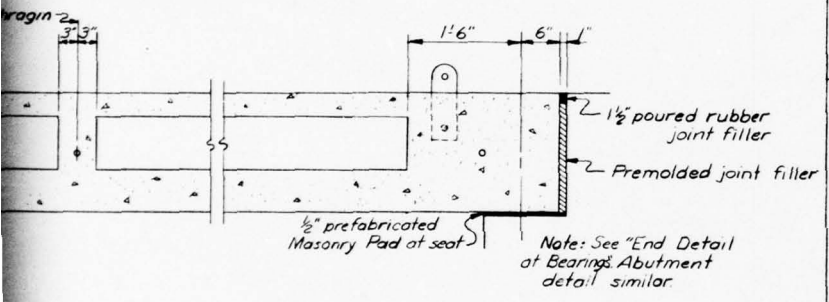

HALF LONGITUDINAL SECTION



A-A



C-C

DESIGN DETAILS FOR PRE-TENSIONED UNITS*					
DIMENSION	SPAN				
	25'	30'	35'	40'	45'
No strands: Row 1	8	8	8	8	8
No strands: Row 2	0	17	19	20	22
No. strands: Row 3	25	17	19	20	22
total	33	42	46	48	52
No of cyl voids	4	4	3	3	3
#353 in top & ends	0	0	0	0	6

*Same for exterior & interior units except for curb dowels & shear keys



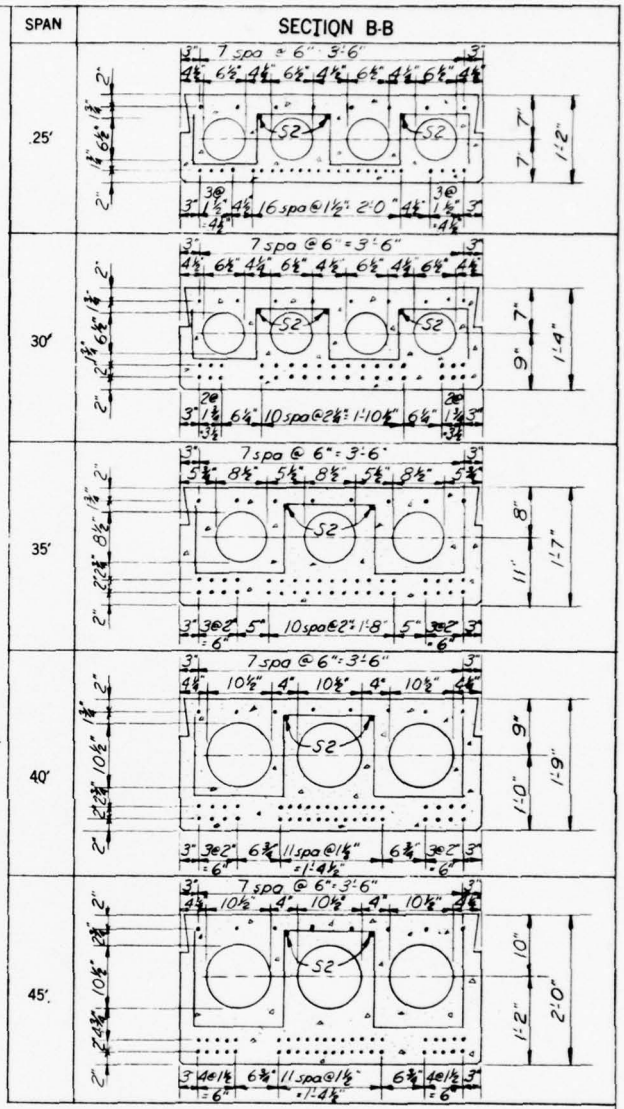


Figure G2. Details of standard precast prestressed concrete voided slab bridges

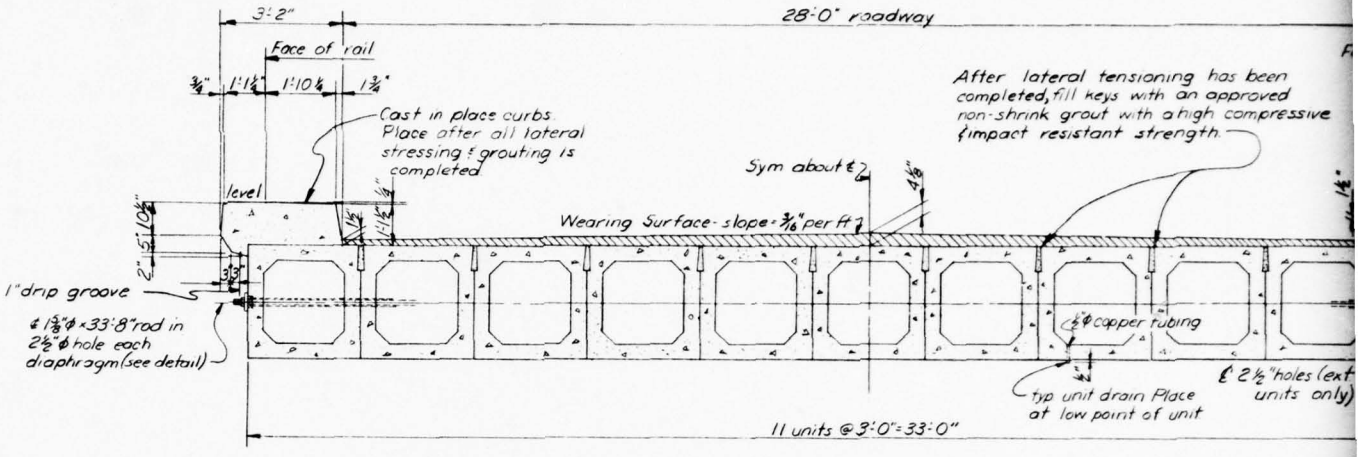


HALF SECTION AT MID SPAN

HALF SECTION AT BEARING

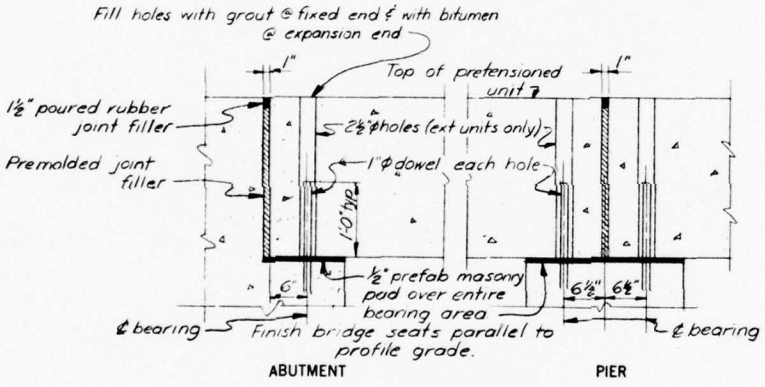

END DETAILS

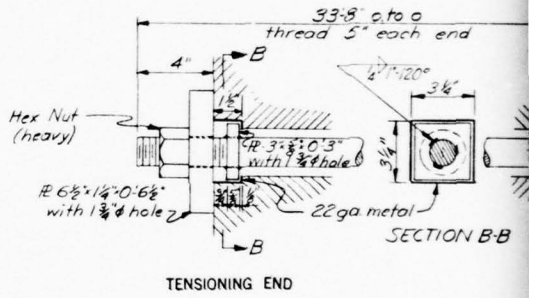


TENSIONING END


TENSIONING ROD DETA

SPAN (feet)	SCHEDULE OF MATERIAL - PER SPAN																				HANDLING WT PER UNIT (tons)
	CONCRETE (cy.)				REINFORCING STEEL																
	11 DECK UNITS	CURBS	TOTAL	"S51-40 & S50 "S61-60 & 70		"4S2		"4S3 *		"4S4		"4S5 *		"5D1 *		"4C1		"4C2 *		TOTAL WT (lbs)	NO OF 7/8"ϕ PRE-TENSION STRANDS	
				NO	L'GTH	NO	L'GTH	NO	L'GTH	NO	L'GTH	NO	L'GTH	NO	L'GTH	NO	L'GTH	NO	L'GTH			
40	645	88	733	66	5'-0	44	40'-9	682	4'-5	605	2'-8	374	6'-1	64	2'-6	14	40'-9	64	5'-0	6920	209	11.7
50	903	109	1012	66	5'-0	88	25'-9	847	4'-5	770	2'-8	462	7'-1	80	2'-6	28	25'-9	80	5'-0	8880	275	16.3
60	1230	130	1360	88	5'-0	88	30'-9	1012	4'-5	935	2'-8	550	8'-1	94	2'-6	28	30'-9	94	5'-0	11230	308	22.2
70	1560	151	1711	88	5'-0	88	35'-9	1177	4'-5	1100	2'-8	627	9'-1	110	2'-6	28	35'-9	110	5'-0	13330	352	28.1


*Denotes bent bars

BENDING DIAGRAM
(All dimensions are cut to out)

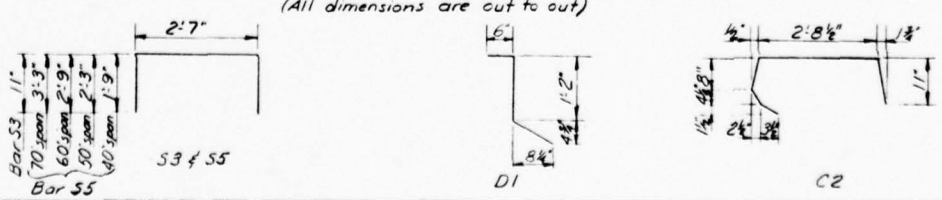

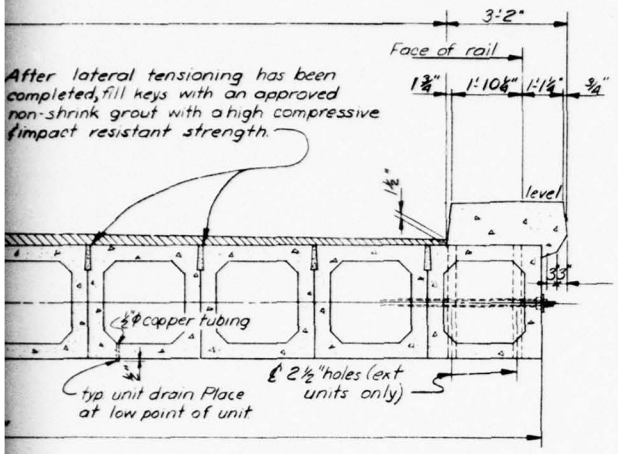

HALF SECTION AT BEARING

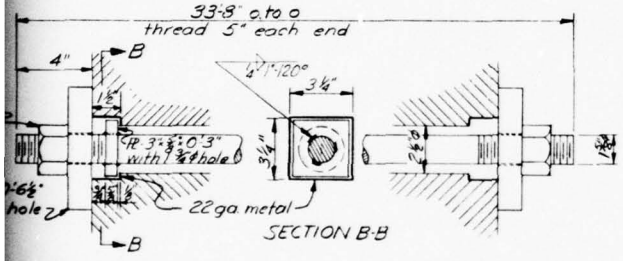

TENSIONING ROD DETAIL

GENERAL NOTES

Specifications: "A.A.S.H.O. Standard Specifications for Highway Bridges", 1961 with tentative revisions for 1961.

Live Load: H20-S16-44

Steel Reinforcement: Reinforcing steel shall be deformed bars of intermediate, hard or rail grade conforming to A.S.T.M. specifications A15 or A16. Unless otherwise noted, dimensions relative to placement of reinforcing steel are given to bar centers.

Structural Steel: Structural steel transverse tensioning rods shall conform to A.S.T.M. A36. Threads on the rod shall be cut to the coarse thread series Class 2A. If desired equivalent rods with rolled threads may be substituted. The rods shall be furnished with one heavy semifinished hexagon nut and one bearing plate at each end. The rods shall be shop painted with two coats of red lead iron oxide paint. The field paint for the exposed parts at the ends of the rod assemblies shall consist of one coat of tinted red lead iron oxide followed by a final coat of paint, the color of which shall be specified by the engineer.

Pretensioning Steel: Individual tendons in all pretensioned sections shall consist of seven-wire cable strands which have a nominal diameter of ⅜" and shall conform to A.S.T.M. A416, with an applied initial tensile force of 14000 lbs per strand.

Cast-in-place Concrete: Cast in-place concrete shall be Class A(AE) with a minimum 28 day compressive strength of 3000 psi. The air entraining agent shall meet with the approval of the engineer. Cylindrical voids, placed as shown, may be used in the curbs if desired. The concrete quantities for the cast in place curbs are based on the solid curb detail. All exposed corners are to be chamfered ¾" unless otherwise noted.

Precast Pretensioned Concrete: The minimum compressive strength of prestressed concrete at the age of 28 days shall be 5000 psi. The design mix shall meet the approval of the engineer. The minimum compressive strength of concrete at the transfer of prestress shall be 4000 psi. If desired an admixture approved by the engineer may be used to increase the plasticity of the mix.

Lateral Tensioning: Lateral ties shall be provided through the diaphragms in the positions indicated. Each tie shall be equivalent to a 1⅜" A36 steel bar tensioned to 57,000 lbs. Tension in 1⅜" steel bars may be applied by a torque of approximately 1100 foot pounds.

Handling Pretensioned Deck Units: When the deck units are handled they shall be lifted by the devices provided in the tops at the ends of the units. Other types of lifting devices than those shown on the plans may be used provided they meet with the approval of the engineer.

Drainage: No provisions for drainage have been made in these plans. See Appendix A for recommended drainage details.

Handrail: See Appendix B for recommended handrail details.

CONSTRUCTION TOLERANCES


Length: ± ⅛" in 10', max. ± ¾"
Depth: ± ⅛" in 12", max. ± 3/16"
Width: ± 1/16" in 12" max. ± 3/16"
Straightness: ⅛" in 10', max. 5/16"
Out of square: 1/16" in 12", max. ¼"

4C2*				
D	L'GTH	TOTAL WT (lbs)	NO. OF ⅜"ø PRE-TENSION STRANDS	HANDLING WT PER UNIT (tons)
4	5'-0	6920	209	11.7
0	5'-0	8880	275	16.3
4	5'-0	11230	308	22.2
0	5'-0	13330	352	28.1

ABUTMENT REACTIONS (KIPS)			
SPAN	DL	LL*	TOTAL
40'	171	110	281
50'	233	117	350
60'	309	122	431
70'	386	125	511

*No Impact

Figure G3. Sections and quantities of standard precast prestressed concrete box bridges

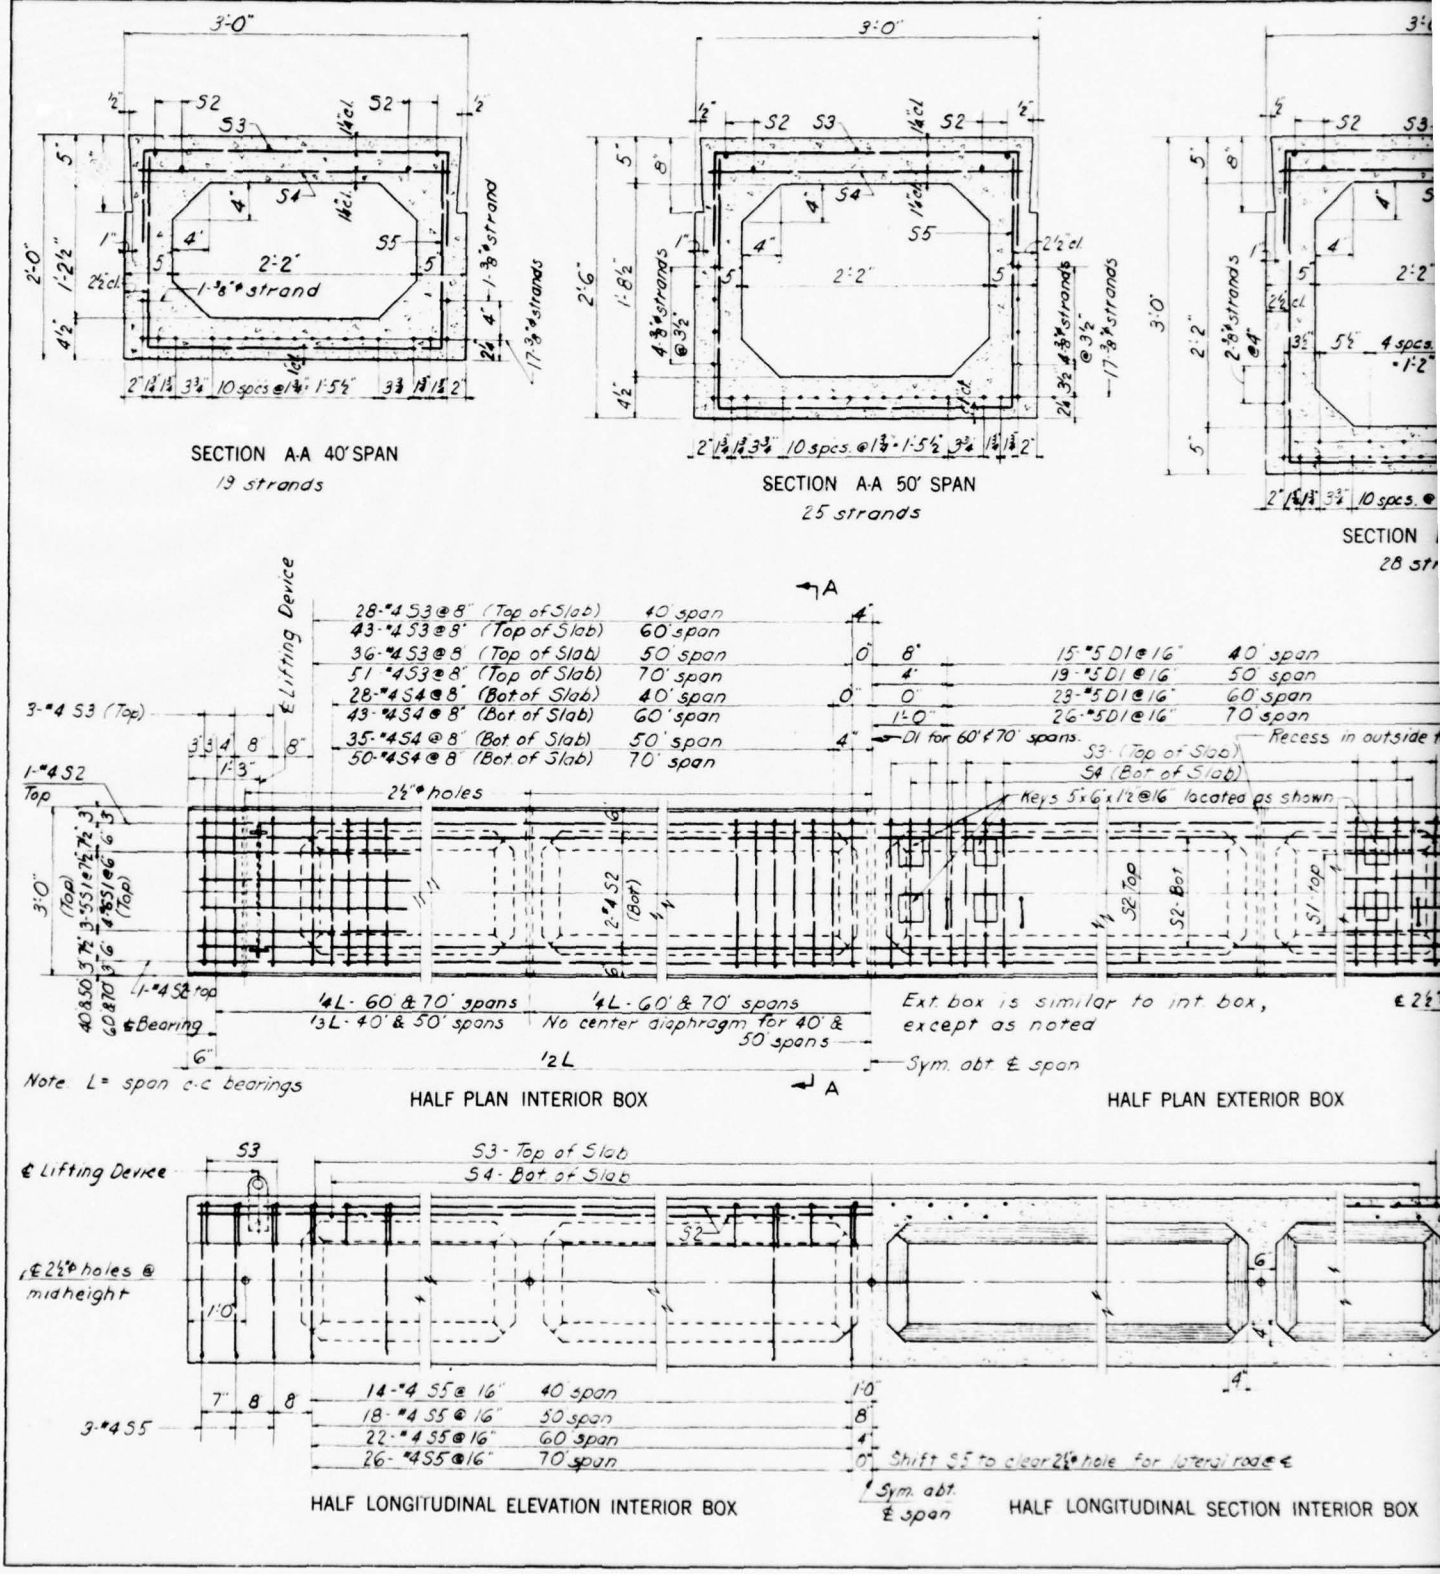
SECTION A-A 40' SPAN
19 strands
SECTION A-A 50' SPAN
25 strands
SECTION
28 str
28-#4 S3 @ 8" (Top of Slab) 40' span
43-#4 S3 @ 8" (Top of Slab) 60' span
36-#4 S3 @ 8 (Top of Slab) 50' span
51-#4 S3 @ 8" (Top of Slab) 70' span
28-#4 S4 @ 8" (Bot of Slab) 40' span
43-#4 S4 @ 8" (Bot of Slab) 60' span
35-#4 S4 @ 8" (Bot of Slab) 50' span
50-#4 S4 @ 8" (Bot of Slab) 70' span
15-#5 D1 @ 16" 40' span
19-#5 D1 @ 16" 50' span
23-#5 D1 @ 16" 60' span
26-#5 D1 @ 16" 70' span
D1 for 60' & 70' spans.
Recess in outside f
S3 (Top of Slab)
S4 (Bot of Slab)
Keys 5x6x1'-2 @16" located as shown
℄ Lifting Device
3-#4 S3 (Top)
1-#4 S2 Top
2½" ø holes
1-#4 S2 top
℄ Bearing
'4L - 60' & 70' spans
'3L - 40' & 50' spans
'4L - 60' & 70' spans
No center diaphragm for 40' & 50' spans
Ext. box is similar to int. box, except as noted
'2L
Sym. abt ℄ span
Note L = span c-c bearings
HALF PLAN INTERIOR BOX
HALF PLAN EXTERIOR BOX
S3 - Top of Slab
S4 - Bot of Slab
℄ 2½" ø holes @ midheight
3-#4 S5
14-#4 S5 @ 16" 40' span
18-#4 S5 @ 16" 50' span
22-#4 S5 @ 16" 60' span
26-#4 S5 @ 16" 70' span
Shift S5 to clear 2½" hole for lateral rod @ ℄
Sym. abt ℄ span
HALF LONGITUDINAL ELEVATION INTERIOR BOX
HALF LONGITUDINAL SECTION INTERIOR BOX

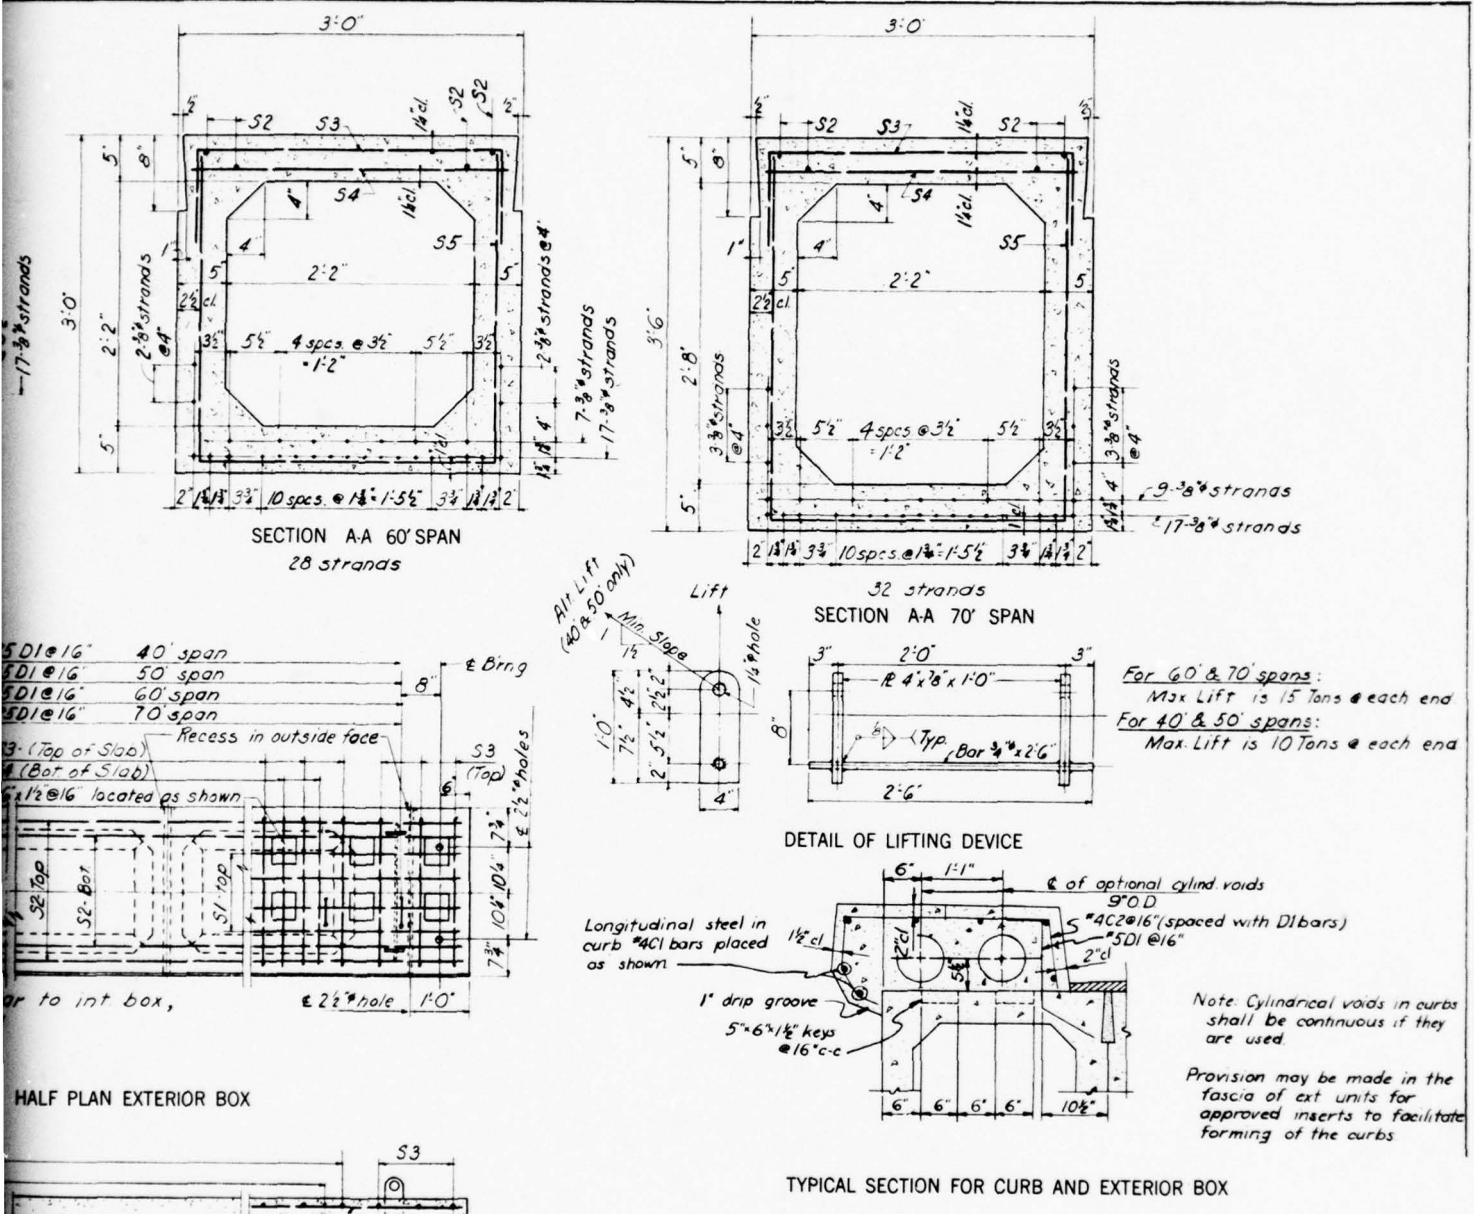


Figure G4. Details of standard precast prestressed concrete box bridges

SUMMARY OF QUANTITIES FOR ONE SPA

REINFORCING STEEL SCHEDULE

SLAB, CURBS, AND DIAPHRAGMS

	SPAN IN FEET	A.A.S.H.O. BEAM TYPE	#4 S1		#5 S2		#5 S3		#4 C		#4 S4		#4 P		#4 D1		#8 D2		#8 D3	
			Length	No.	Length	No.	Length	No.	Length	No.	Length	No.	Length	No.	Length	No.	Length	No.	Length	No.
24' ROADWAY	35	I	36'-4"	54	28'-10"	73	26'-6"	73	7'-2"	76	18'-1"	32	6'-7"	76	3'-9"	48	22'-3"	2	6'-1"	6
	40	II	21'-2"	108	"	83	"	83	"	84	20'-7"	"	"	84	"	"	"	"	"	"
	45	II	23'-8"	"	"	93	"	93	"	96	23'-1"	"	"	96	"	"	"	"	"	"
	50	III	26'-2"	"	"	103	"	103	"	102	17'-0"	48	"	102	"	"	22'-4"	"	5'-9"	"
	55	III	28'-8"	"	"	113	"	113	"	114	18'-8"	"	"	114	"	"	"	"	"	"
	60	III	31'-2"	"	"	123	"	123	"	126	20'-4"	"	"	126	"	"	"	"	"	"
	70	III	36'-2"	"	"	143	"	143	"	144	17'-8"	64	"	144	"	"	"	"	"	"
	80	IV	27'-10"	162	"	163	"	163	"	168	20'-2"	"	"	168	"	"	22'-5"	"	5'-5"	"
	90	IV	31'-2"	"	"	183	"	183	"	184	22'-8"	"	"	184	"	"	"	"	"	"
28' ROADWAY	35	II	36'-4"	69	33'-10"	73	31'-0"	73	8'-2"	76	18'-1"	32	6'-7"	76	3'-9"	56	26'-3"	2	5'-3"	8
	40	II	21'-2"	138	"	83	"	83	"	84	20'-7"	"	"	84	"	"	"	"	"	"
	45	II	23'-8"	"	"	93	"	93	"	96	23'-1"	"	"	96	"	"	"	"	"	"
	50	III	26'-2"	"	"	103	"	103	"	102	17'-0"	48	"	102	"	"	26'-4"	"	4'-11"	"
	55	III	28'-8"	"	"	113	"	113	"	114	18'-8"	"	"	114	"	"	"	"	"	"
	60	III	31'-2"	"	"	123	"	123	"	126	20'-4"	"	"	126	"	"	"	"	"	"
	70	III	36'-2"	"	"	143	"	143	"	144	17'-8"	64	"	144	"	"	"	"	"	"
	80	IV	27'-10"	207	"	163	"	163	"	168	20'-2"	"	"	168	"	"	26'-5"	"	4'-7"	"
	90	IV	31'-2"	"	"	183	"	183	"	184	22'-8"	"	"	184	"	"	"	"	"	"

GENERAL NOTES

Design Specifications: "AASHO Standard Specifications for Highway Bridges", 1961, with tentative revisions for 1961.

Design Dead Load: 19 psf of roadway included for future wearing surface.

Design Live Load: H15 for 24' roadway, H20-S16 for 28' roadway.

Beam Sections: The sections of prestressed members shown on the plans are the standard prestressed sections adopted by the Joint Committee of AASHO and the Prestressed Concrete Institute.

Precast Prestressed Concrete: The minimum compressive strength of prestressed concrete at the age of 28 days shall be 5,000 psi. The design mix shall be as approved by the engineer. The minimum compressive strength of concrete at the transfer of prestress shall be as called for on the plans for the various designs, but shall not be less than 4,000 psi.

Cast-in-Place Concrete: Cast-in-place concrete shall be Class A (A.E.) with a minimum 28-day compressive strength f'_c = 3,000 psi. The air entraining agent shall meet with the approval of the engineer.


Reinforcement Steel: Reinforcement steel shall be deformed bars of intermediate, hard or rail grade conforming to A.S.T.M. Specification A15 or A16.

Pretensioning Steel: Individual tendons in all pretensioned designs shall consist of high tensile strength 7-wire strands conforming to the requirements of A.S.T.M. Designation A416. In the designs which have deflected strands, proper allowance must be made in tensioning these strands so as to yield the required initial tension after the strands are in the deflected position. The initial tensile force applied to each $\frac{7}{16}$ inch strand shall be 18,900 lb. The initial tensile force applied to each $\frac{1}{2}$ inch strand shall be 25,200 lb.

Post-Tensioning Steel: The proposed types of tendons which will be used in the post-tensioned designs, all necessary additional details including those for end anchorages, methods to be employed, and procedures to be followed, shall be as approved by the engineer. A portion of the tendons shall be draped longitudinally in parabolic positions. All tendons shall be placed so that their center of gravity will be at the position shown on plans. The total relaxed post-tension force required at midspan shall be provided as called for in the various designs. The required relaxed forces shall be obtained by applying initial tensile forces of sufficient magnitude to allow for all subsequent losses, including those for elastic deformation, shrinkage, creep, friction, and efficiency of end anchorages. After securing the end anchorages all tendons shall be pressure grouted in their conduits in accordance with "Specifications".

Handling Prestressed Concrete Beams: The beams shall be maintained in an upright position, and shall be lifted by the devices provided in the top flanges at the ends of the beams. Other types of lifting devices than those shown on the plans may be used, provided they meet with the approval of the engineer.

SPAN IN FEET		35 Ext.	I
24' RDWY.	Dead Load	22.6	2
	Live Load	14.4	1
	Impact	4.3	
	Total	41.3	4
	Total One Abut.		149.0
28' RDWY.	Dead Load	24.1	2
	Live Load	25.6	3
	Impact	7.7	1
	Total	57.4	7
	Total One Abut.		224.



All dimensions
Bars S1, 2, 4, an

SUMMARY OF QUANTITIES FOR ONE SPAN

REINFORCING STEEL SCHEDULE

, AND DIAPHRAGMS													CONCRETE	
#4 D1		#8 D2		#8 D3		#4 D4		#6 D5		#6 D6		Total Weight	BEAMS Total Weight	SLAB, ETC. Volume	BEAMS Volume
ngth	No.	Length	No.	Length	No.	Length	No.	Length	No.	Length	No.	Lbs.	Lbs.	Cu.Yd.	Cu.Yd.
3'-9"	48	22'-3"	2	6'-1"	6	4'-8"	18	6'-7"	12	3'-0"	4	7,140	1,060, 800*	32.0	10.6, 10.2*
"	"	"	"	"	"	5'-8"	"	"	"	"	"	8,070	1,380, 1,040*	36.3	16.1, 15.6*
"	"	"	"	"	"	"	"	"	"	"	"	9,000	1,500, 1,170*	40.4	18.0, 17.5*
"	"	22'-4"	"	5'-9"	"	6'-9"	36	6'-6"	24	"	8	10,080	2,240, 1,490*	45.8	31.0, 29.3*
"	"	"	"	"	"	"	"	"	"	"	"	11,000	2,380, 1,690*	49.2	34.0, 32.3*
"	"	"	"	"	"	"	"	"	"	"	"	11,920	2,470	54.0	36.9
"	"	"	"	"	"	"	"	"	"	"	"	13,710	2,730	62.2	42.6
"	"	22'-5"	"	5'-5"	"	7'-10"	"	6'-5"	"	"	"	15,590	3,730	70.4	69.4
"	"	"	"	"	"	"	"	"	"	"	"	17,360	4,600	78.6	77.5
3'-9"	56	26'-3"	2	5'-3"	8	5'-8"	20	5'-9"	16	3'-0"	6	8,380	1,560, 1,200*	37.0	17.7, 17.1*
"	"	"	"	"	"	"	"	"	"	"	"	9,470	1,720, 1,380*	41.7	20.1, 19.5*
"	"	"	"	"	"	"	"	"	"	"	"	10,550	1,870, 1,540*	46.5	22.3, 21.7*
"	"	26'-4"	"	4'-11"	"	6'-9"	40	5'-8"	32	"	12	11,820	2,790, 2,030*	52.6	38.8, 36.7*
"	"	"	"	"	"	"	"	"	"	"	"	12,900	2,970, 2,240*	57.3	42.5, 40.4*
"	"	"	"	"	"	"	"	"	"	"	"	13,980	3,080	62.0	46.0
"	"	"	"	"	"	"	"	"	"	"	"	16,080	3,410	71.4	53.2
"	"	26'-5"	"	4'-7"	"	7'-10"	"	5'-7"	"	"	"	18,300	4,660	80.8	86.7
"	"	"	"	"	"	"	"	"	"	"	"	20,380	5,750	90.2	96.8

*Without end blocks

MAXIMUM BEAM REACTIONS TO KIPS

SPAN IN FEET		35		40		45		50		55		60		70		80		90	
		Ext.	Int.	Ext.	Int.	Ext.	Int.	Ext.	Int.	Ext.	Int.	Ext.	Int.	Ext.	Int.	Ext.	Int.	Ext.	Int.
24' RDWY.	Dead Load	22.6	24.0	27.6	29.1	30.8	32.5	39.6	41.9	43.3	45.8	47.9	50.5	55.4	58.2	73.5	76.7	82.2	85.6
	Live Load	14.4	19.8	15.2	20.6	16.0	21.4	16.7	22.2	17.5	23.0	18.2	23.8	19.7	25.4	21.2	27.0	22.7	28.6
	Impact	4.3	5.9	4.6	6.2	4.7	6.3	4.8	6.4	4.9	6.4	5.0	6.6	5.1	6.5	5.2	6.6	5.3	6.7
	Total	41.3	49.7	47.4	55.9	51.5	60.2	61.1	70.5	65.7	75.2	71.1	80.9	80.2	90.1	99.9	110.3	110.2	120.9
	Total One Abut.	149.0		171.6		187.2		226.0		243.6		264.6		299.8		377.6		417.8	
28' RDWY.	Dead Load	24.1	23.7	27.3	26.8	30.5	29.9	39.1	38.8	42.8	42.4	47.3	46.8	54.7	53.9	72.8	71.8	81.3	80.1
	Live Load	25.6	35.7	27.0	37.2	28.1	38.3	28.9	39.1	29.6	39.9	30.2	40.5	31.1	41.4	31.8	42.1	32.4	42.7
	Impact	7.7	10.7	8.1	11.2	8.3	11.3	8.3	11.2	8.2	11.1	8.2	10.9	8.0	10.6	7.8	10.3	7.6	10.0
	Total	57.4	70.1	62.4	75.2	66.9	79.5	76.3	89.1	80.6	93.4	85.7	98.2	93.8	105.9	112.4	124.2	121.3	132.8
	Total One Abut.	224.9		245.4		264.7		311.6		332.4		356.6		395.9		488.2		531.9	

BENDING DIAGRAM



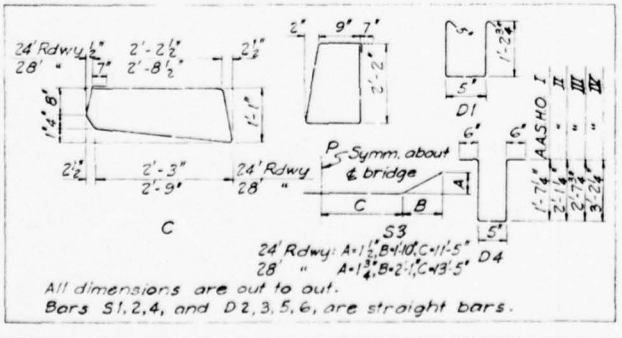


Figure G5. General notes and reinforcement quantities of standard precast I-girder bridges

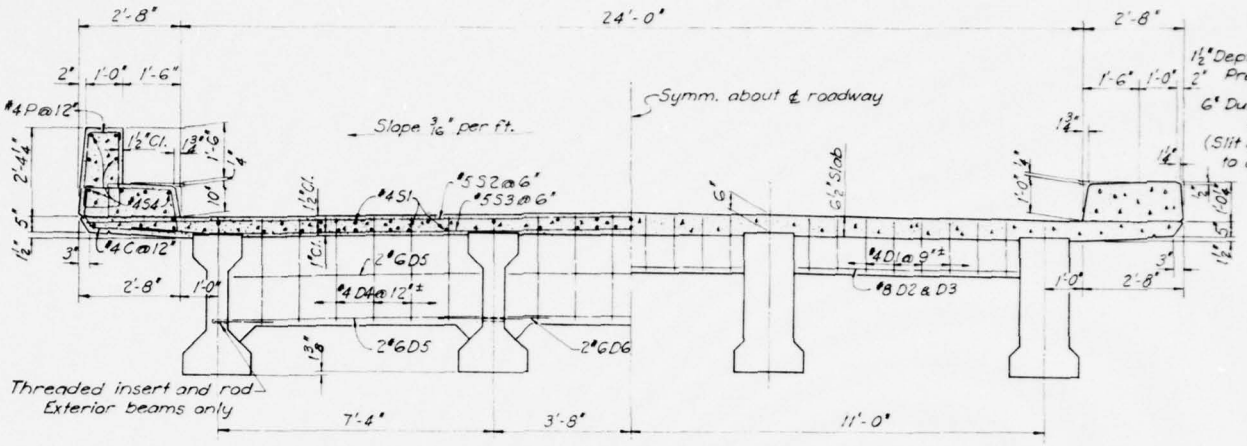


AT INTERIOR DIAPHRAGM AT BEARING

TYPICAL CROSS SECTION 24 FT ROADWAY

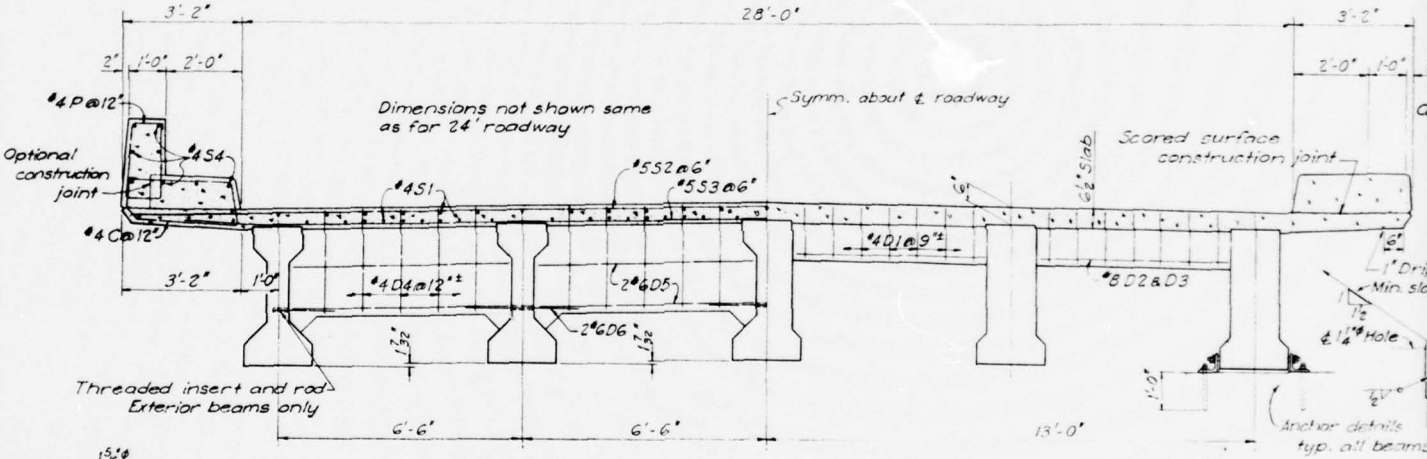


AT INTERIOR DIAPHRAGM AT BEARING

TYPICAL CROSS SECTION 28 FT. ROADWAY

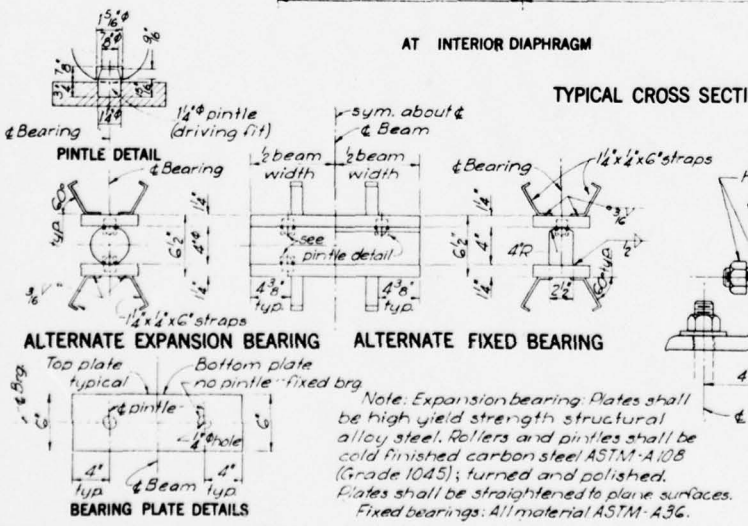

Note: Expansion bearing: Plates shall be high yield strength structural alloy steel. Rollers and pintles shall be cold finished carbon steel ASTM-A108 (Grade 1045); turned and polished. Plates shall be straightened to plane surfaces. Fixed bearings: All material ASTM-A36.

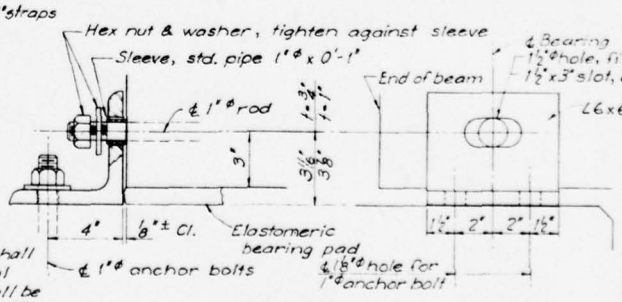


ANCHOR DETAILS
Galvanize after fabrication

ELASTOMERIC BE


SPAN IN FEET	
35 - 60	
70, 80	

Width of elastomeric p
Elastomeric bearings
Pad dimensions listed

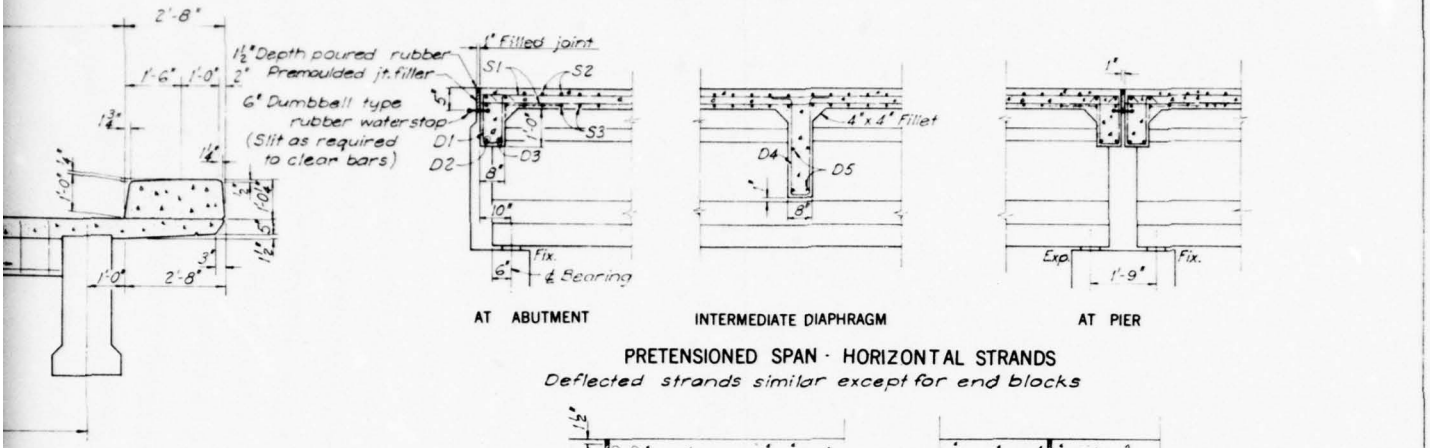



PRETENSIONED SPAN - HORIZONTAL STRANDS

Deflected strands similar except for end blocks

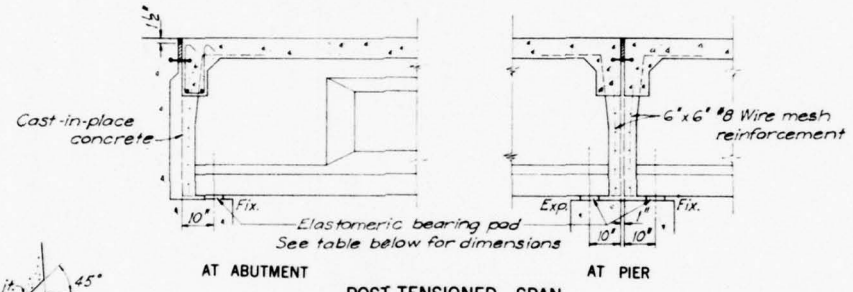

POST-TENSIONED SPAN

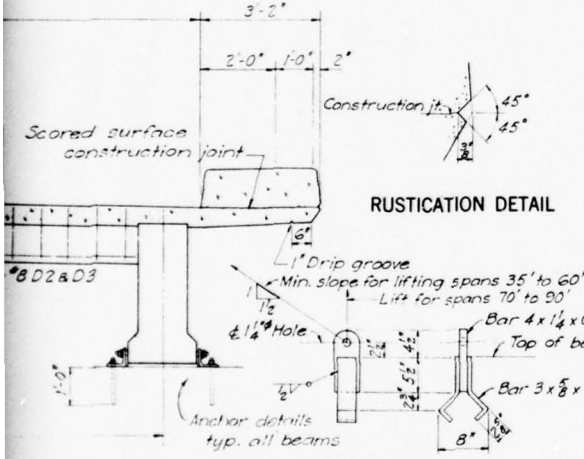

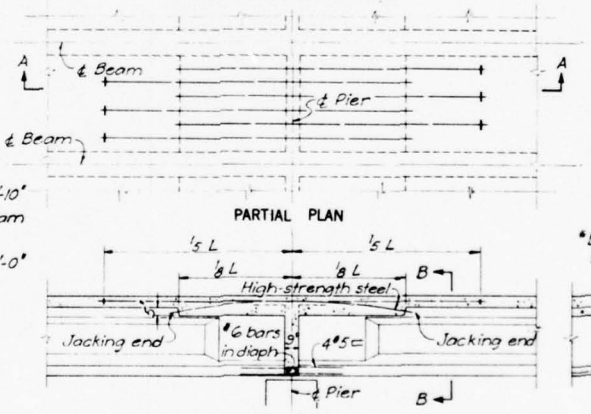


Span L Ft.	Final Prestress Force Per Beam - Kips* 24' Rdwy.	28' Rdwy.
35	95	86
40	85	99
45	99	117
50	90	107
55	105	125
60	120	142
70	153	183
80	157	186
90	190	226

*Based on live load continuity over three spans

SUGGESTED DETAIL FOR CONTINUITY OVER PIERS

(Continuity provided by post-tensioning underneath slab)

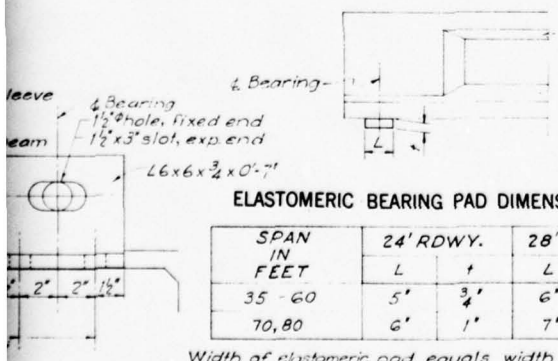


ELASTOMERIC BEARING PAD DIMENSIONS


SPAN IN FEET	24' RDWY. L	24' RDWY. t	28' RDWY. L	28' RDWY. t
35 - 60	5'	¾"	6'	¾"
70, 80	6'	1"	7'	1"

Width of elastomeric pad equals width of beam flange.
Elastomeric bearings are for use in moderate climate only.
Pad dimensions listed are for 70 Durometer hardness.


Figure G6. Details of standard precast I-girder bridges

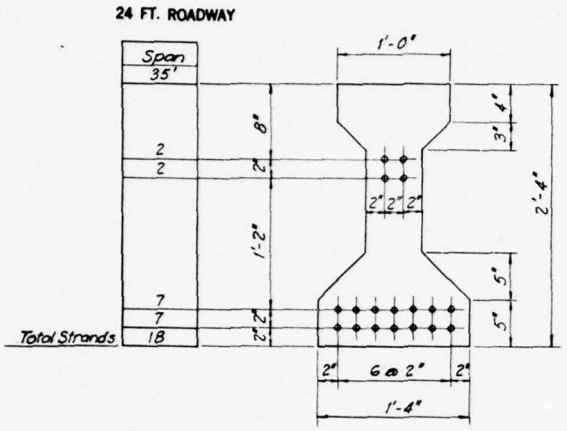


AASHO TYPE I BEAM

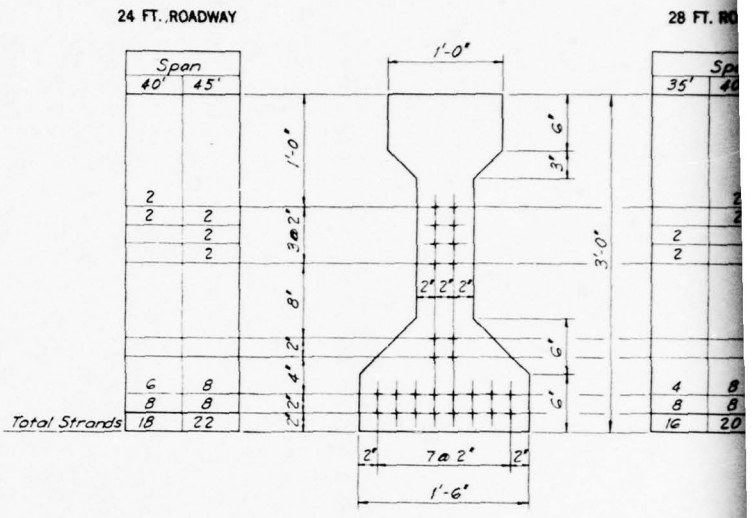

AASHO TYPE II BEAM

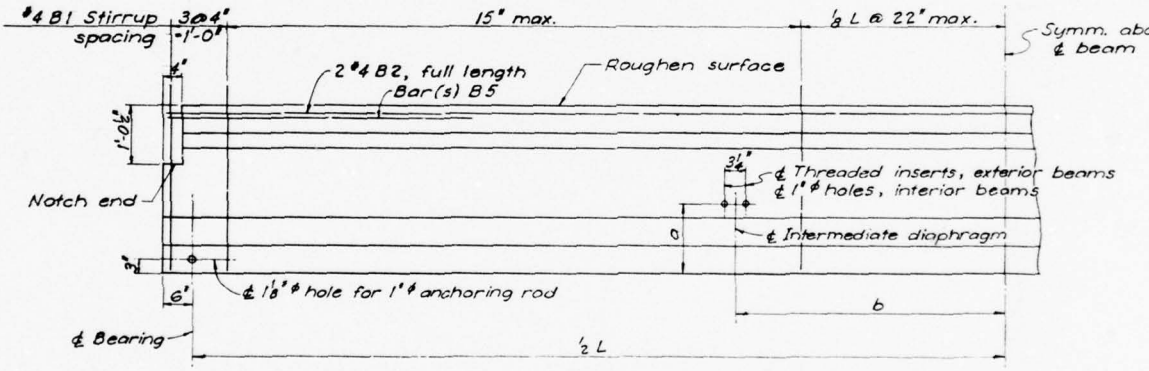


ELEVATION



SECTION

SUMMARY OF QUANTITIES · FOR ONE BEAM

SPAN IN FEET		AASHO BEAM TYPE	DIMENSION		REINFORCEMENT STEEL						Total Weight	CONCRETE	
					#4 B1		#4 B2		#4 B5			Volume	Weight
			a	b	Length	No.	Length	No.	Length	No.	Lbs.	Cu. Yd.	L
24' ROWY.	35	I	1'-1½"	0"	3'-9"	60	35'-8"	2	-	-	198	2.6	10,
	40	II	1'-3½"	"	4'-6"	68	20'-11"	4	-	-	260	3.9	15,
	45	II	"	"	"	76	23'-5"	"	-	-	291	4.4	17,
	50	III	1'-6"	8'-6"	5'-6"	82	25'-11"	"	-	-	371	7.3	29,
	55	III	"	9'-0"	"	90	28'-5"	"	11'-0"	2	421	8.1	32,
28' ROWY.	35	II	1'-3½"	0"	4'-6"	60	35'-8"	2	9'-0"	2	240	3.4	13,
	40	II	"	"	"	68	20'-11"	4	11'-0"	"	275	3.9	15,
	45	II	"	"	"	76	23' 5"	"	12'-0"	"	307	4.4	17,
	50	III	1'-6"	8'-6"	5'-6"	82	25'-11"	"	13'-0"	4	405	7.3	29,
	55	III	"	9'-0"	"	90	28'-5"	"	15'-0"	"	447	8.1	32,

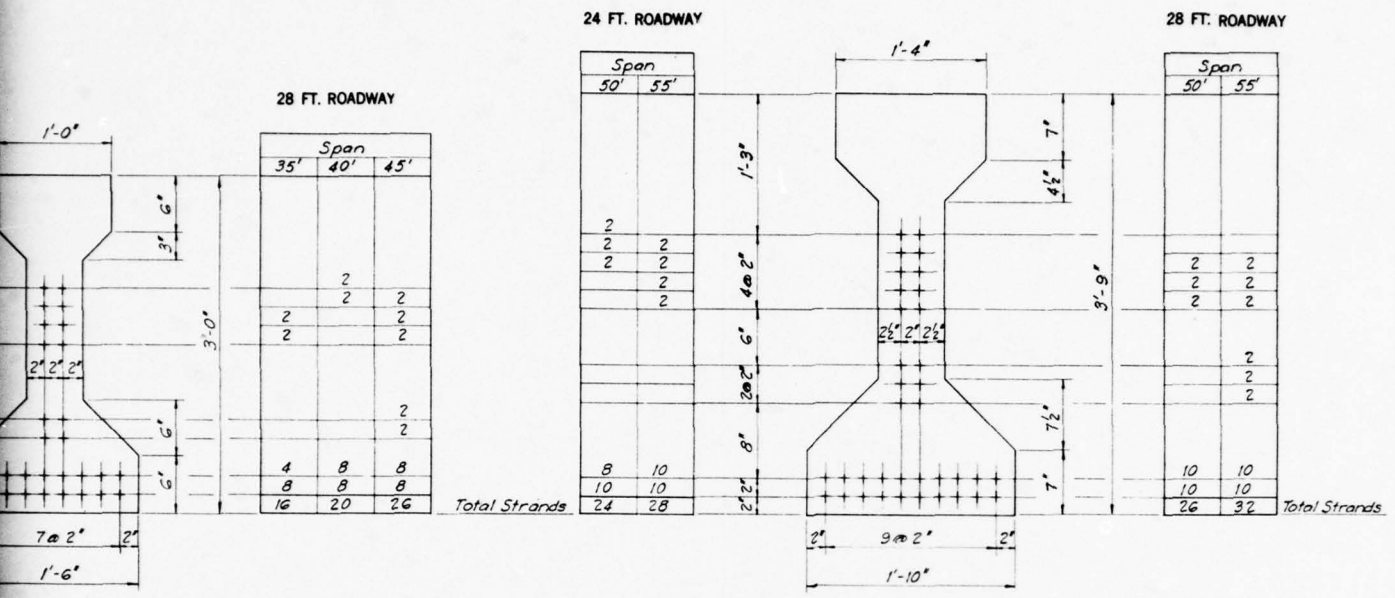


TYPE II BEAM

AASHO TYPE III BEAM

mm. about
beam

eams



SECTION

NOTES

All pretensioning strands are 7/16 inch in diameter and shall have a minimum ultimate strength of 27,000 lb. per strand. The initial tension applied shall be 18,900 lb. per strand.

The required strength of concrete at transfer of prestress shall be 4,000 psi, except in the case of the 45 foot span, 28 foot roadway, where it shall be 4,300 psi.


	CONCRETE		BENDING DIAGRAM
Total Weight	Volume	Weight of Beam	All dimensions are out to out.
Lbs.	Cu. Yd.	Lbs.	
198	2.6	10,400	
260	3.9	15,800	
291	4.4	17,700	
371	7.3	29,700	
421	8.1	32,700	
240	3.4	13,900	
275	3.9	15,800	
307	4.4	17,700	
405	7.3	29,700	
447	8.1	32,700	




B1

Bars B2 and B5 are straight bars.


Figure G7. Beam sections and elevations (pretensioned-straight strands) of standard precast I-girder bridges (spans 35 to 55 ft)

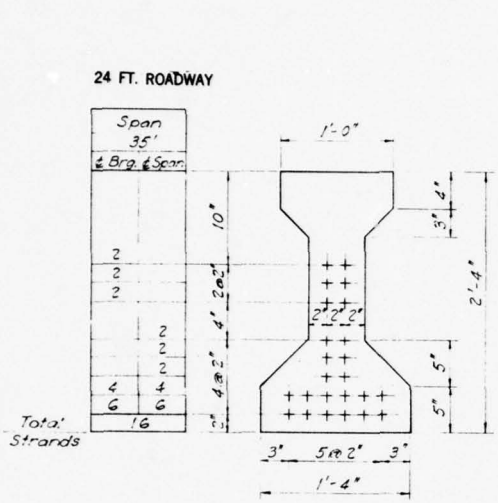


AASHO TYPE I BEAM

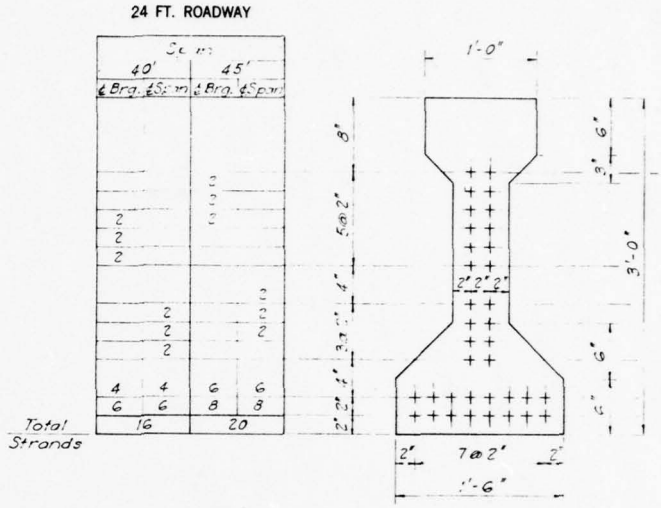

AASHO TYPE II BEAM

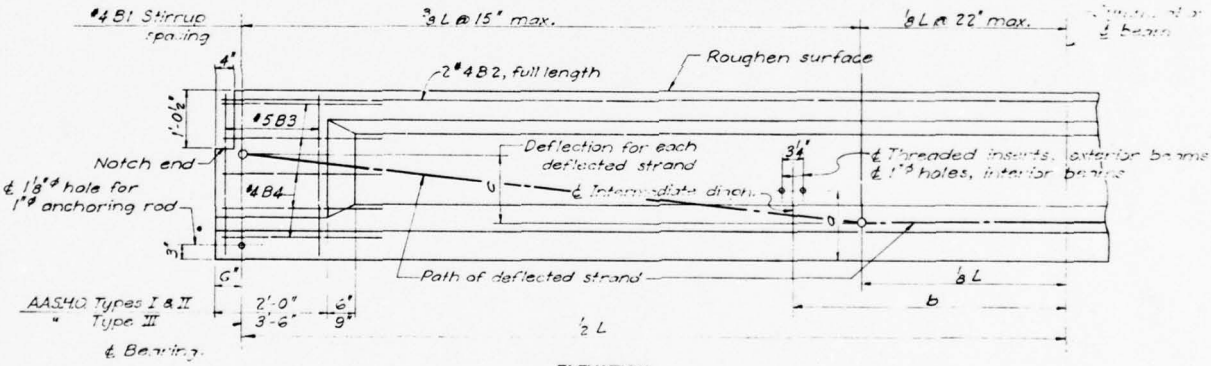


ELEVATION




AT END BLOCK

SUMMARY OF QUANTITIES FOR ONE BEAM

SPAN IN FEET		AASHO BEAM TYPE	DIMENSION a	DIMENSION b	DIMENSION c	REINFORCEMENT STEEL #4 B1 Length	#4 B1 No.	#4 B2 Length	#4 B2 No.	#5 B3 Length	#5 B3 No.	#4 B4 Length	#4 B4 No.	Total Weight Lbs.	CONCRETE Volume Cu. Yd.	CONCRETE Weight Lbs.
24' RDWY.	35	I	1'-1½"	0"	8"	3'-9"	54	35'-8"	2	5'-0"	8	3'-7"	16	263	2.7	10,8
	40	II	1'-3½"	"	10"	4'-6"	62	20'-11"	4	6'-4"	"	"	20	343	4.0	16,3
	45	II	"	"	1'-0"	"	70	23'-5"	"	"	"	"	"	374	4.5	18,2
	50	III	1'-6"	8'-6"	2'-0"	5'-6"	76	25'-11"	"	8'-2"	14	5'-8"	24	558	7.8	31,5
	55	III	"	9'-0"	2'-6"	"	84	28'-5"	"	"	"	"	"	594	8.5	34,4
28' RDWY.	35	II	1'-3½"	0"	1'-2"	4'-6"	54	35'-8"	2	6'-4"	8	3'-7"	20	311	3.5	14,3
	40	II	"	"	1'-0"	"	62	20'-11"	4	"	"	"	"	343	4.0	16,3
	45	II	"	"	1'-4"	"	70	23'-5"	"	"	"	"	"	374	4.5	18,2
	50	III	1'-6"	8'-6"	1'-10"	5'-6"	76	25'-11"	"	8'-2"	14	5'-8"	24	558	7.8	31,5
	55	III	"	9'-0"	"	"	84	28'-5"	"	"	"	"	"	594	8.5	34,4

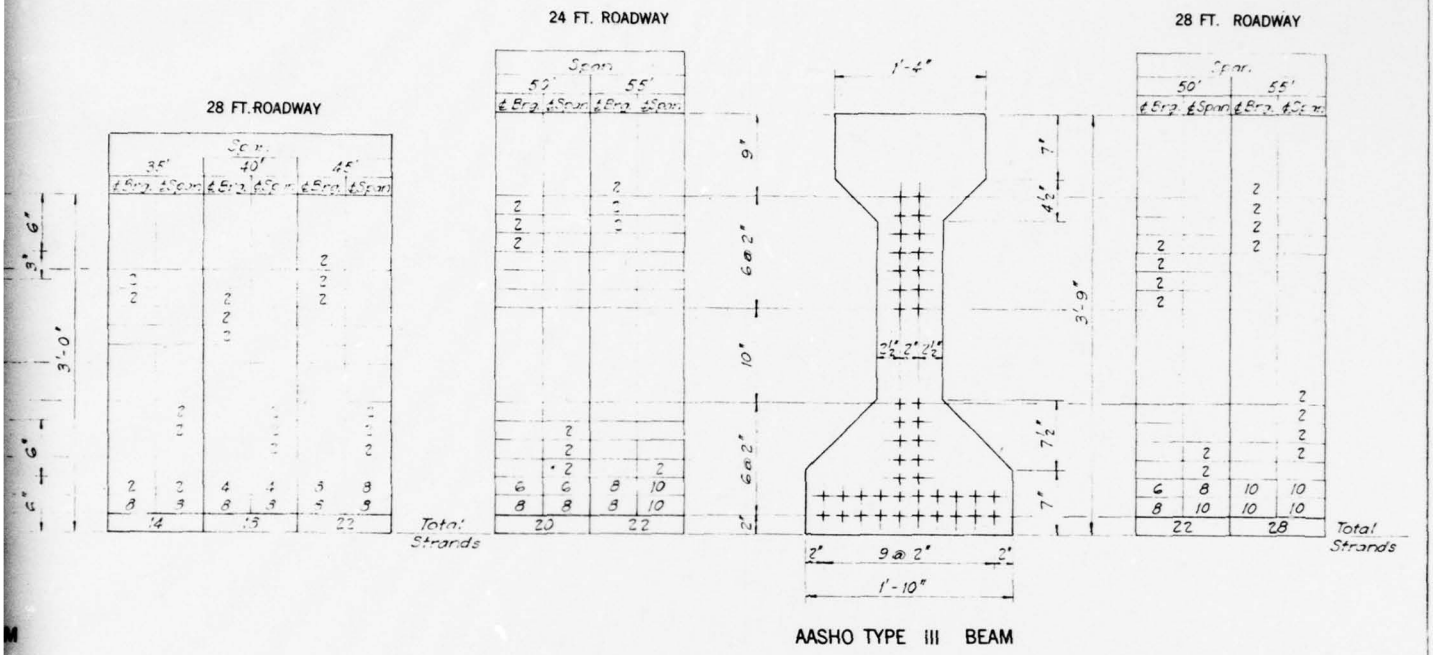

AASHO TYPE III BEAM

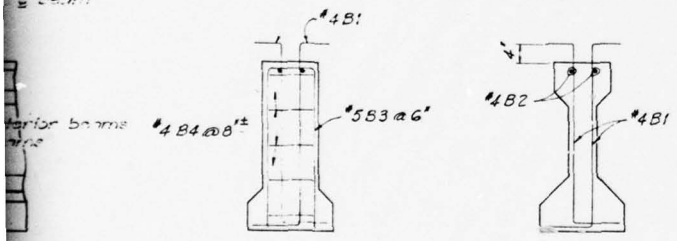

SECTIONS

NOTES

All pretensioning strands are 7/16 inch in diameter and shall have a minimum ultimate strength of 27,000 lb. per strand. The initial tension applied at ℄ span shall be 18,900 lb. for each strand in final position.

The required strength of concrete at transfer of prestress shall be 4,000 psi.

At transfer of prestress the sequence of release shall be: (a) the deflected strands, (b) the hold-down devices, and (c) the straight strands. An alternate procedure shall meet with the approval of the engineer.

E BEAM

	CONCRETE		BENDING DIAGRAM
Total Weight	Volume	Weight of Beam	All dimensions are out to out
Lbs.	Cu. Yd.	Lbs.	
263	2.7	10,800	
349	4.0	16,300	
374	4.5	18,200	
558	7.8	31,500	
594	8.5	34,400	
311	3.5	14,300	
343	4.0	16,300	
374	4.5	18,200	
558	7.8	31,500	
594	8.5	34,400	







Figure G8. Beam sections and elevations (pretensioned-deflected strands) of standard precast I-girder bridges (spans 35 to 55 ft)

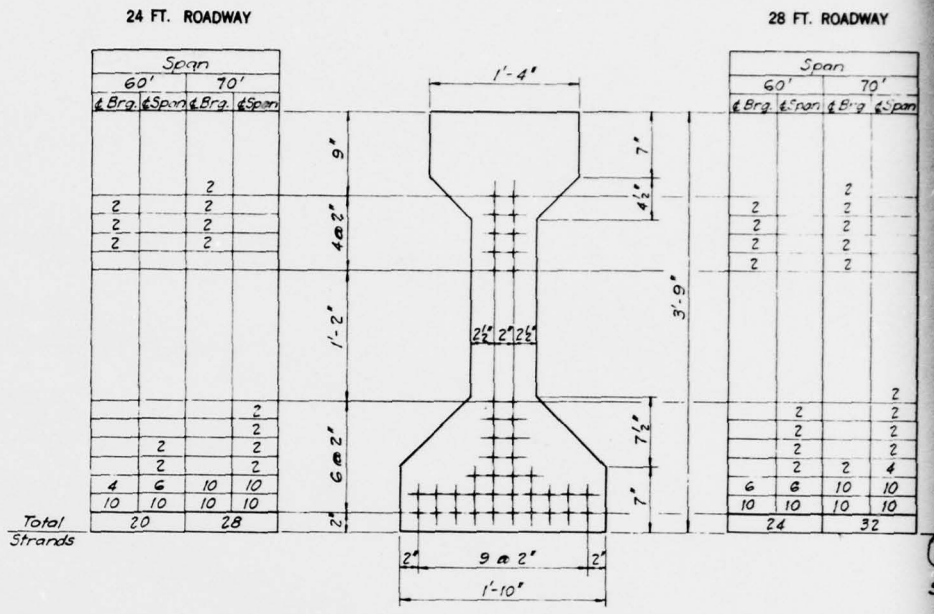

AASHO TYPE III BEAM

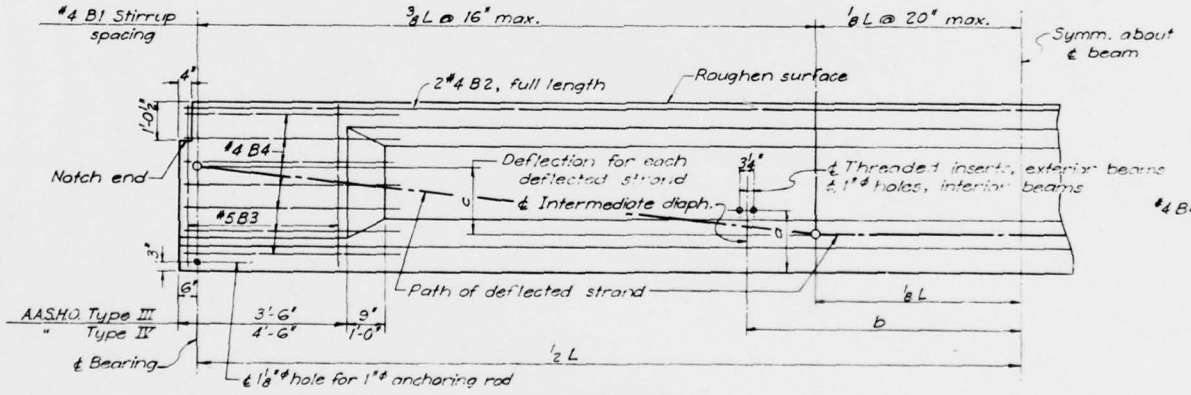

ELEVATION




AT END BLOCK

SECT

SUMMARY OF QUANTITIES FOR ONE SPAN

SPAN IN FEET		AASHO BEAM TYPE	DIMENSION			REINFORCEMENT STEEL								Total Weight	CONCRETE	
						#4 B1		#4 B2		#5 B3		#4 B4			Volume	Weight
			a	b	c	Length	No.	Length	No.	Length	No.	Length	No.	Lbs.	Cu. Yd.	Lbs
24' RDWY.	60	III	1'-6"	10'-0"	2'-2"	5'-6"	88	30'-11"	4	8'-2"	14	5'-8"	24	616	9.2	37,3
	70	III	"	11'-8"	2'-0"	"	102	35'-11"	"	"	"	"	"	681	10.6	43,1
	80	IV	1'-8½"	13'-4"	2'-10"	6'-5"	116	27'-8"	6	10'-1"	18	7'-2"	28	931	17.3	70,2
	90	IV	"	15'-0"	2'-6"	"	130	31'-0"	"	"	"	"	"	1,005	19.4	78,4
28' RDWY.	60	III	1'-6"	10'-0"	1'-10"	5'-6"	88	30'-11"	4	8'-2"	14	5'-8"	24	616	9.2	37,3
	70	III	"	11'-8"	"	"	102	35'-11"	"	"	"	"	"	681	10.6	43,1
	80	IV	1'-8½"	13'-4"	2'-2"	6'-5"	116	27'-8"	6	10'-1"	18	7'-2"	28	931	17.3	70,2
	90	IV	"	15'-0"	2'-4"	"	130	31'-0"	"	"	"	"	"	1,005	19.4	78,4

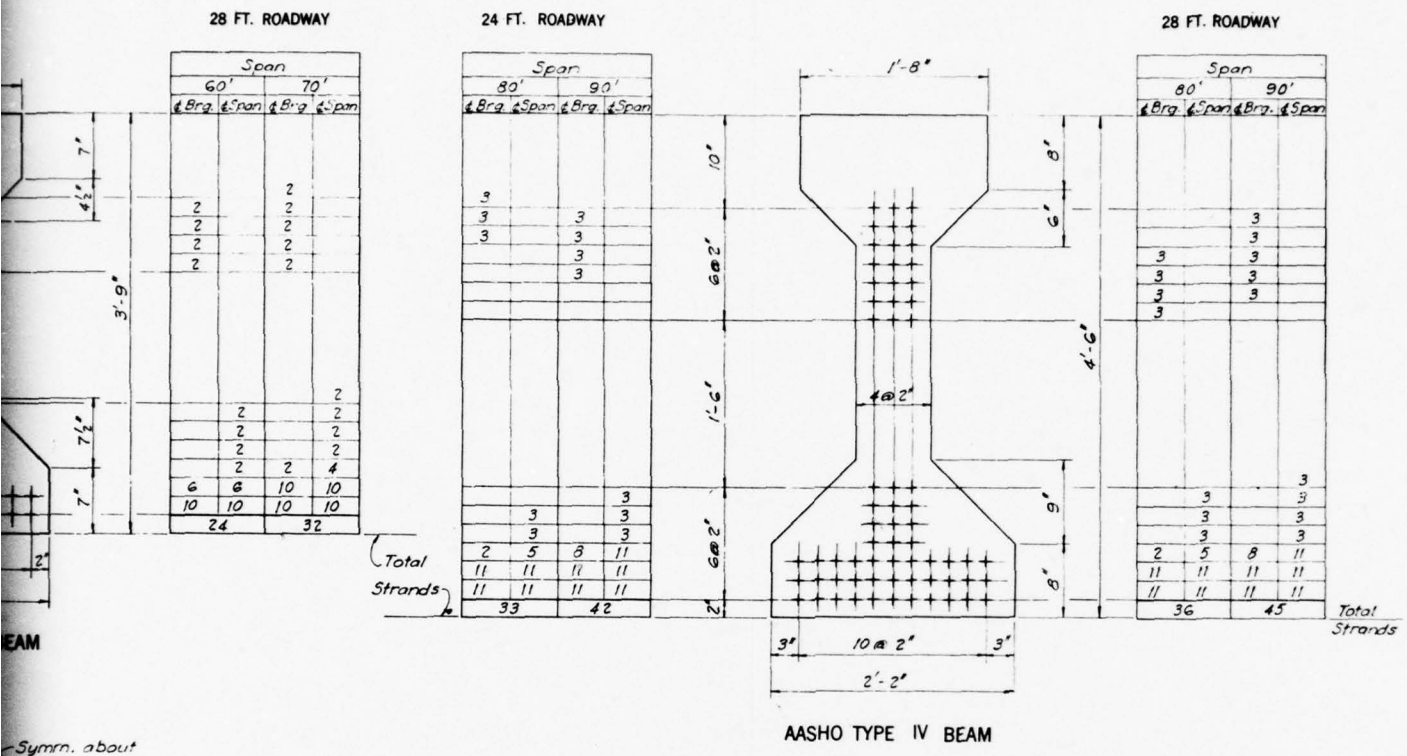


NOTES

All pretensioning strands are ½ inch in diameter and shall have a minimum ultimate strength of 36,000 lb. per strand. The initial tension applied at ℄ span shall be 25,200 lb. for each strand in final position.

The required strength of concrete at transfer of prestress shall be 4,000 psi, except in the cases of the 70 foot and 90 foot spans, 28 foot roadway, where it shall be 4,500 psi.

At transfer of prestress the sequence of release shall be: (a) the deflected strands, (b) the hold-down devices, and (c) the straight strands. An alternate procedure shall meet with the approval of the engineer.

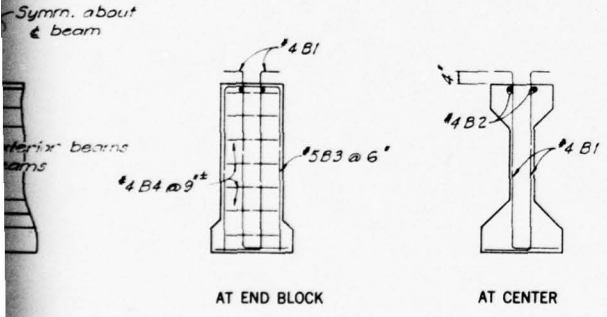

SECTIONS

ONE SPAN

	CONCRETE		BENDING DIAGRAM
Total Weight	Volume	Weight of Beam	All dimensions are out to out
Lbs.	Cu. Yd.	Lbs.	
616	9.2	37,300	
681	10.6	43,100	
931	17.3	70,200	
1,005	19.4	78,400	
616	9.2	37,300	
681	10.6	43,100	
931	17.3	70,200	
1,005	19.4	78,400	







Figure G9. Beam sections and elevations (pretensioned-deflected strands) of standard precast I-girder bridges (spans 60 to 90 ft)




AASHO TYPE III BEAM

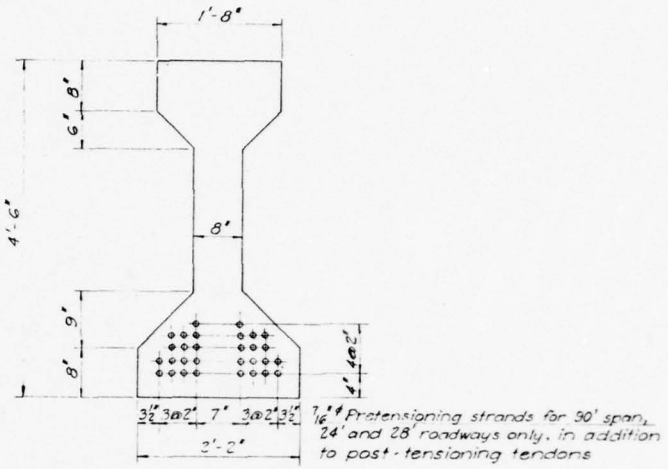

AASHO TYPE IV BEAM

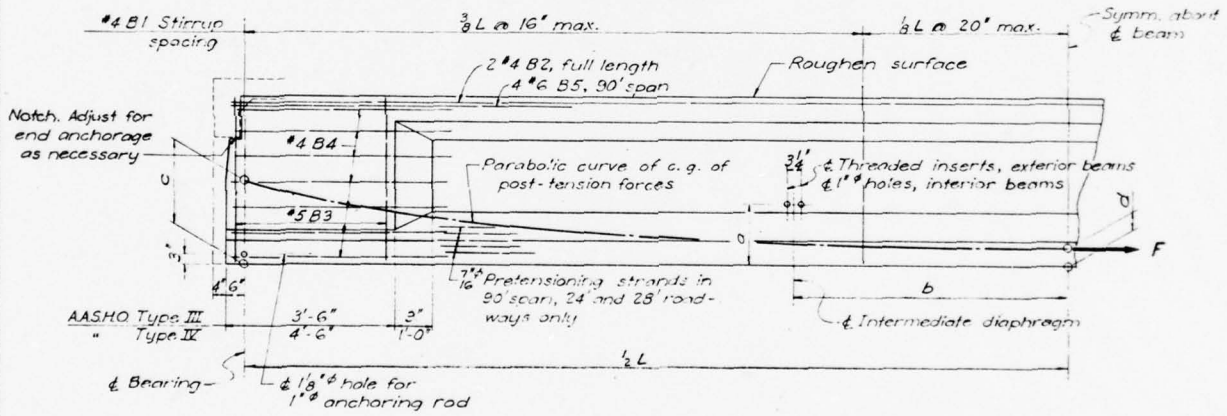

ELEVATION



AT END BLOC

SUMMARY OF QUANTITIES FOR ONE BEAM

	SPAN IN FT.	AASHO BEAM TYPE	DIMENSION a	b	c	d	REINFORCING STEEL SCHEDULE #4 B1 Length	No.	#4 B2 Length	No.	#5 B3 Length	No.	#4 B4 Length	No.	#6 B5 Length	No.	Total Weight Lbs.	Volume Cu. Y
24' ROWY.	60	III	1'-6"	10'-0"	15.20"	4.80"	5'-6"	88	30'-11"	4	8'-2"	14	5'-8"	24	-	-	616	9.3
	70	III	"	11'-6"	14.43"	4.71"	"	102	35'-11"	"	"	"	"	"	-	-	681	10.6
	80	IV	1'-8½"	13'-6"	20.13"	5.25"	6'-5"	116	27'-8"	6	10'-1"	18	7'-2"	28	-	-	931	17.3
	90	IV	"	15'-0"	27.00"	7.25"	"	130	31'-0"	"	"	"	"	"	12'-0"	8	1,149	19.4
28' ROWY.	60	III	1'-6"	10'-0"	17.00"	6.00"	5'-6"	88	30'-11"	4	8'-2"	14	5'-8"	24	-	-	616	9.3
	70	III	"	11'-6"	15.88"	5.25"	"	102	35'-11"	"	"	"	"	"	-	-	681	10.6
	80	IV	1'-8½"	13'-6"	19.56"	6.33"	6'-5"	116	27'-8"	6	10'-1"	18	7'-2"	28	-	-	931	17.3
	90	IV	"	15'-0"	27.00"	8.63"	"	130	31'-0"	"	"	"	"	"	12'-0"	8	1,149	19.4


NOTES


Pretensioning with straight strands shall be combined with post-tensioning only on the 90 foot span, 24 and 28 foot roadways. All pretensioning strands are $\frac{7}{16}$ inch in diameter and shall have a minimum ultimate strength of 27,000 lb. per strand. The initial tension applied shall be 18,900 lb. per strand.

The required strength of concrete at transfer of prestress shall be 4,000 psi, except in the cases of the 70 foot span, 28 foot roadway, and 90 foot span, 24 and 28 foot roadways, where it shall be 4,500 psi.

A grid consisting of #3 bars @ 2 inch centers in both directions shall be placed near each anchorage of the post-tensioning system.


Pretensioning strands for 90' span, 24' and 28' roadways only, in addition to post-tensioning tendons



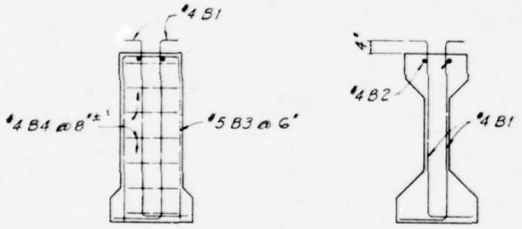


AT END BLOCK AT CENTER


SECTIONS



B4



B3



B1

Bars B2 and B5 are straight bars


BENDING DIAGRAM


All dimensions are out to out


FOR ONE BEAM


DULE				CONCRETE		F
B4	#6 B5		Total Weight	Volume	Weight of Beam	Total post-tension force at ℄ span after relaxation
h	No.	Length	No.	Lbs.	Cu. Yd.	Lbs.	Lbs.
"	24	-	-	616	9.2	37,300	404,600
	"	-	-	681	10.6	43,100	566,500
"	28	-	-	931	17.3	70,200	647,400
	"	12'-0"	8	1,149	19.4	78,400	404,600
"	24	-	-	616	9.2	37,300	485,500
	"	-	-	681	10.6	43,100	647,400
"	28	-	-	931	17.3	70,200	726,300
	"	12'-0"	8	1,149	19.4	78,400	485,500

Figure G10. Beam sections and elevations of standard precast posttensioned I-girder bridges (spans 60 to 90 ft)

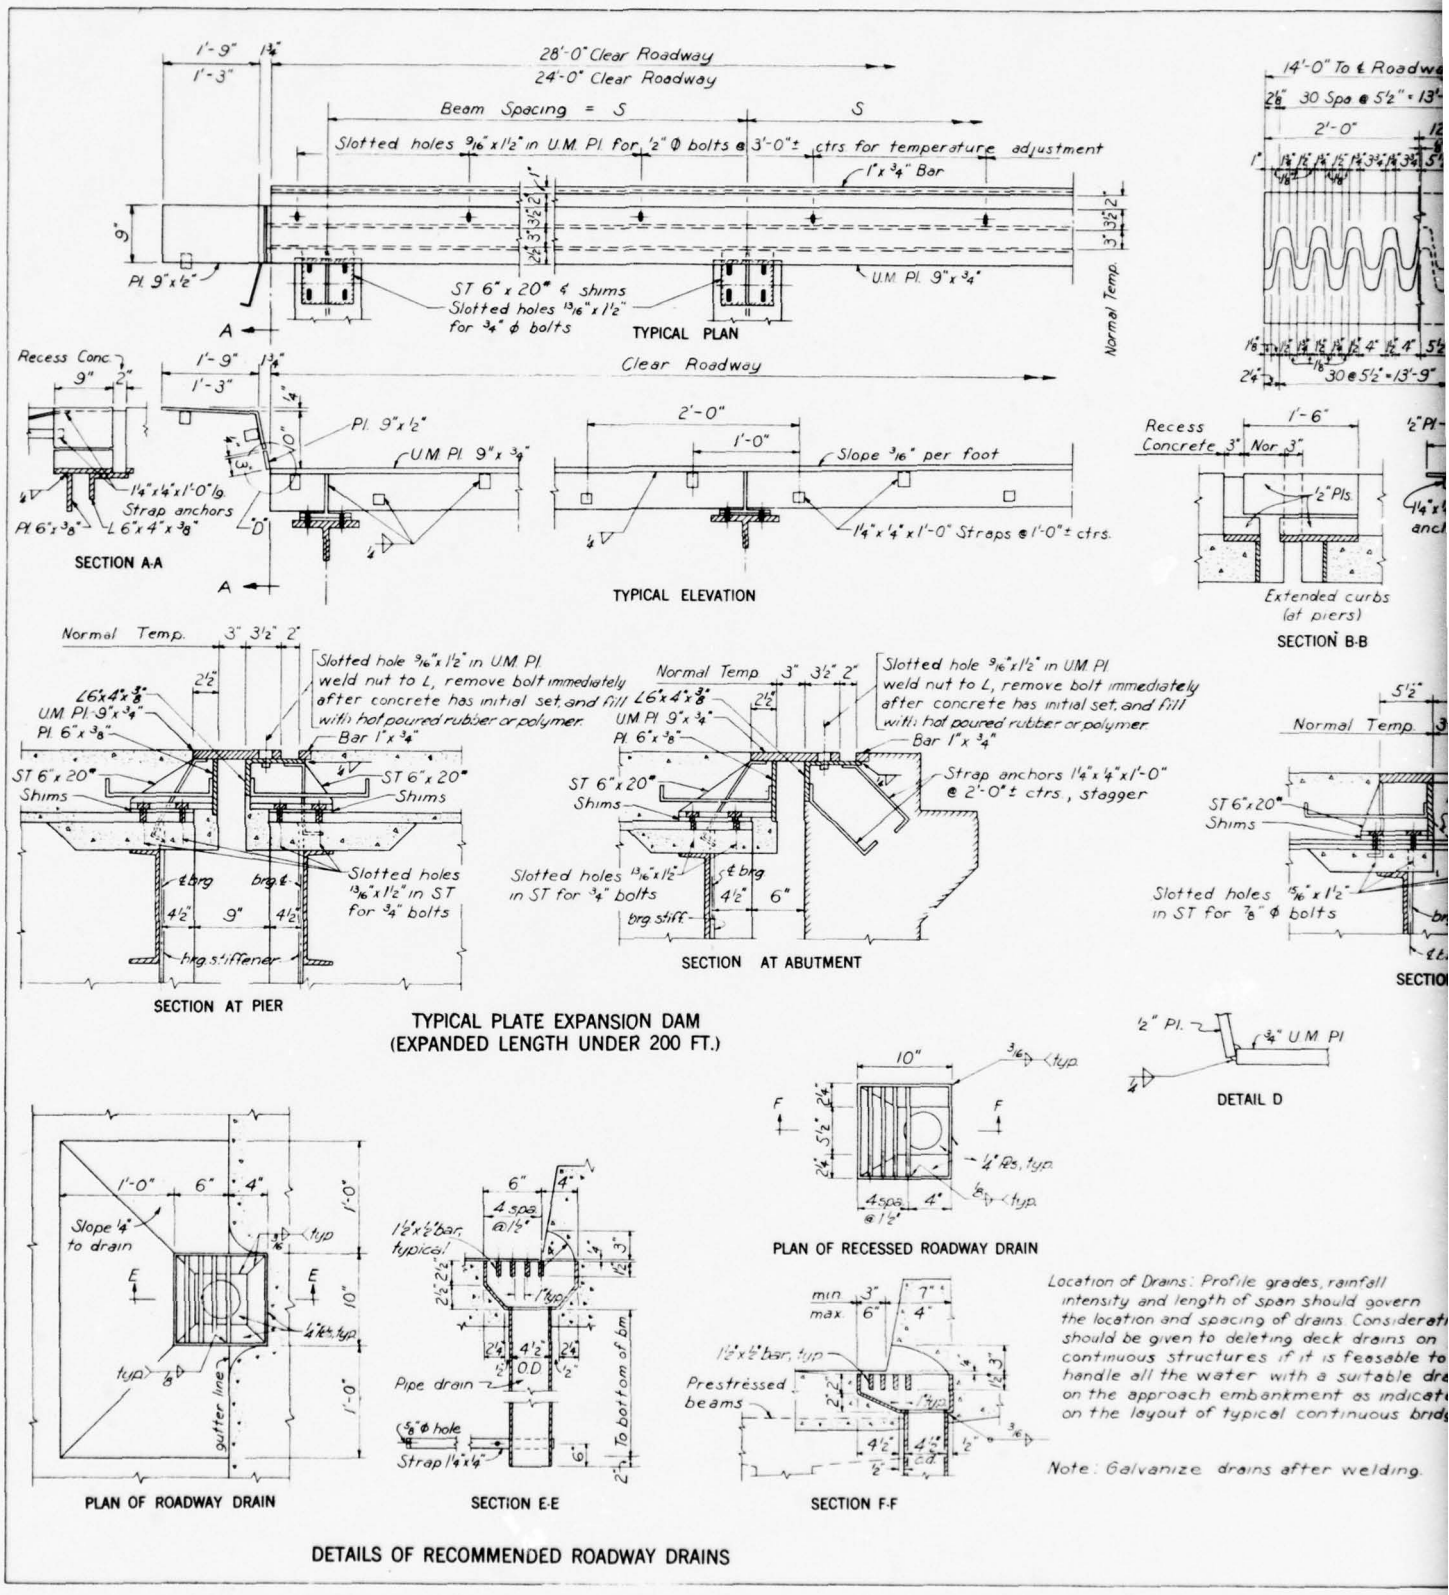
28'-0" Clear Roadway
24'-0" Clear Roadway
Beam Spacing = S
Slotted holes 9/16" x 1 1/2" in U.M. Pl. for 1/2" Ø bolts @ 3'-0"± ctrs for temperature adjustment
1" x 3/4" Bar
Pl. 9" x 1/2"
ST 6" x 20" ¢ shims
Slotted holes 13/16" x 1 1/2" for 3/4" ø bolts
U.M. Pl. 9" x 3/4"
Normal Temp.
TYPICAL PLAN
Recess Conc.
Clear Roadway
Pl. 9" x 1/2"
U.M. Pl. 9" x 3/4"
1 1/4" x 4" x 1'-0" lg. Strap anchors
Pl. 6" x 3/8"
L 6" x 4" x 3/8"
SECTION A-A
Slope 3/16" per foot
1 1/4" x 4" x 1'-0" Straps @ 1'-0"± ctrs.
TYPICAL ELEVATION
Recess Concrete
1/2" Pls.
Extended curbs (at piers)
SECTION B-B
Normal Temp.
Slotted hole 9/16" x 1 1/2" in U.M. Pl. weld nut to L, remove bolt immediately after concrete has initial set, and fill with hot poured rubber or polymer
L 6" x 4" x 3/8"
U.M. Pl. 9" x 3/4"
Pl. 6" x 3/8"
Bar 1" x 3/4"
ST 6" x 20" Shims
Slotted holes 13/16" x 1 1/2" in ST for 3/4" bolts
brg. stiffener
SECTION AT PIER
Strap anchors 1 1/4" x 4" x 1'-0" @ 2'-0"± ctrs, stagger
Slotted holes 13/16" x 1 1/2" in ST for 3/4" bolts
brg. stiff.
SECTION AT ABUTMENT
Slotted holes 5/16" x 1 1/2" in ST for 7/8" ø bolts
TYPICAL PLATE EXPANSION DAM
(EXPANDED LENGTH UNDER 200 FT.)
Slope 1/4" to drain
gutter line
PLAN OF ROADWAY DRAIN
1 1/2" x 1/2" bar, typical
Pipe drain
5/8" ø hole
Strap 1/4" x 1/4"
To bottom of dm
SECTION E-E
1/4" Rs, typ.
PLAN OF RECESSED ROADWAY DRAIN
1/2" Pl.
3/4" U.M. Pl.
DETAIL D
Prestressed beams
SECTION F-F
Location of Drains: Profile grades, rainfall intensity and length of span should govern the location and spacing of drains. Consideration should be given to deleting deck drains on continuous structures if it is feasable to handle all the water with a suitable drain on the approach embankment as indicated on the layout of typical continuous bridges.
Note: Galvanize drains after welding.
DETAILS OF RECOMMENDED ROADWAY DRAINS

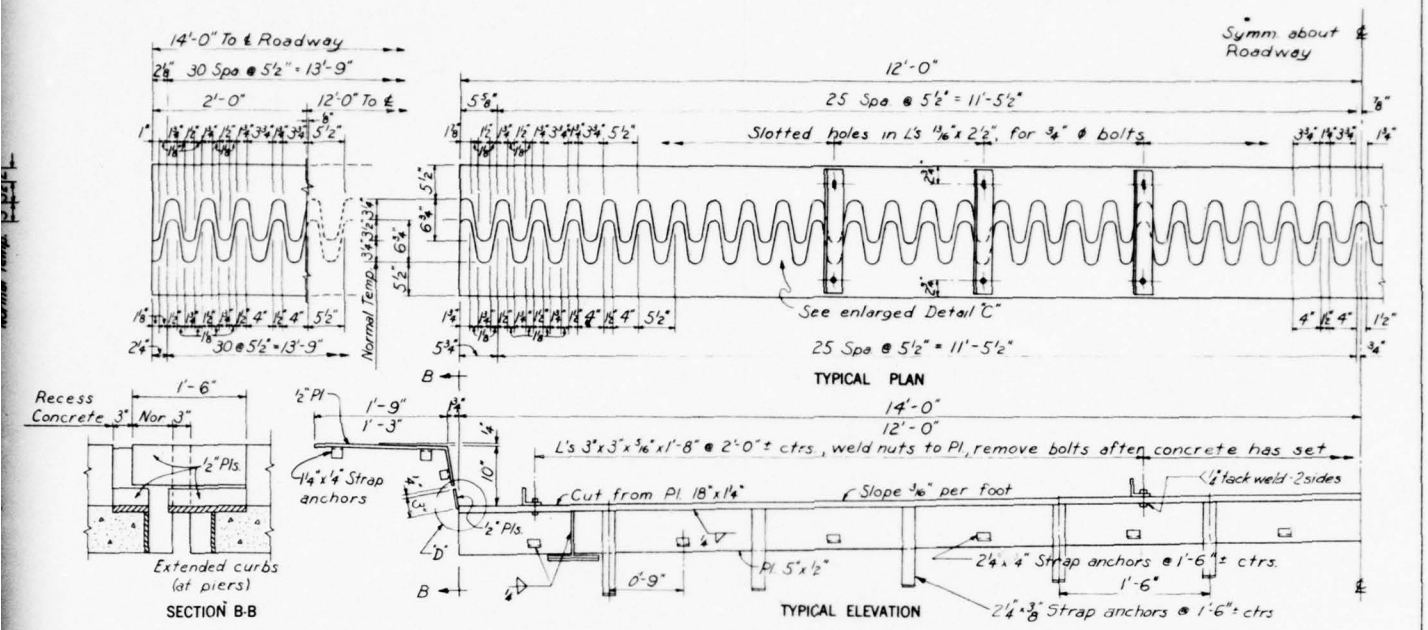





GENERAL NOTES

Specifications: AASHO Standard Specifications for Highway Bridges 1961, with tentative revisions for 1961.

Paint: All structural steel in expansion dams shall be given one shop coat of red lead iron oxide paint. Surfaces in contact with concrete shall not be painted. Surfaces inaccessible after erection shall be given three coats of paint in the shop. Field paint shall consist of one coat of tinted red lead iron oxide paint followed by one finish coat of aluminum or light green paint. All paint and workmanship shall conform to AASHO Standard Specifications for Highway Bridges, and special provisions for paint.

Structural Steel: Structural steel shall be A36 conforming to A.S.T.M. - A36. All erection bolts shall conform to A.S.T.M. - A307.


of Drains: Profile grades, rainfall
ty and length of span should govern
ation and spacing of drains. Consideration
be given to deleting deck drains on
uous structures if it is feasable to
all the water with a suitable drain
approach embankment as indicated
layout of typical continuous bridges.

alvanize drains after welding.


SUMMARY OF QUANTITIES FOR STRUCTURAL STEEL • (LBS.)				
TYPE OF SUPERSTRUCTURE	24 FT. R'DY.		28 FT. R'DY.	
	ABUT.	PIER	ABUT.	PIER
CONCRETE	1170		1380	
I-BEAM	1330	1420	1570	1690
PLATE GIRDER	2140	2800	3210	3290

* Weights listed are for one expansion dam.


Figure G11. Typical details for expansion dams and recommended roadway drains

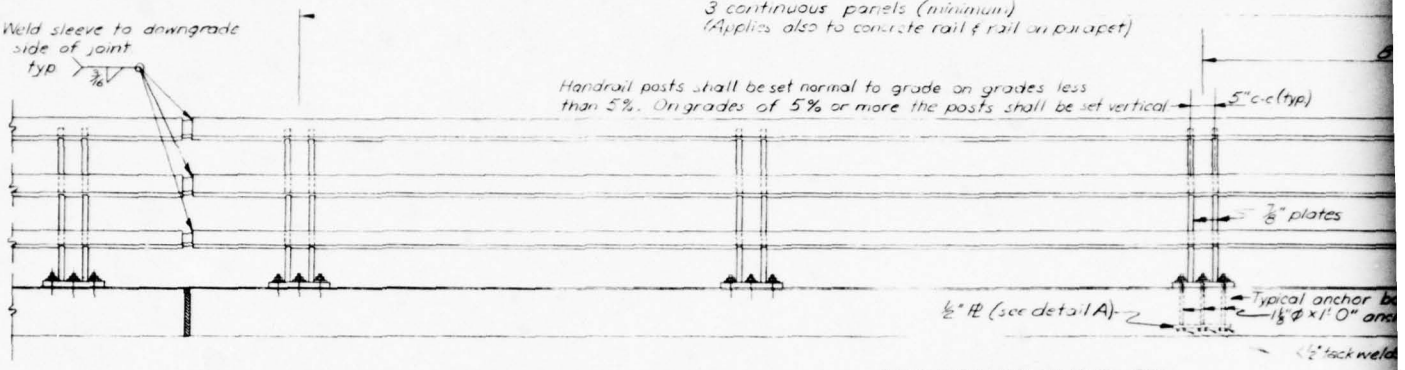


PART ELEVATION OF STEEL RAIL
(RECTANGULAR RAIL SHOWN)

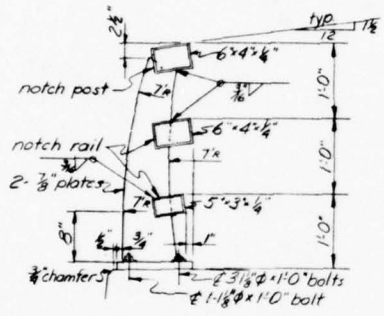


RECTANGULAR RAIL




PIPE RAIL




OVAL RAIL




ALTERNATE RAIL SECTIONS

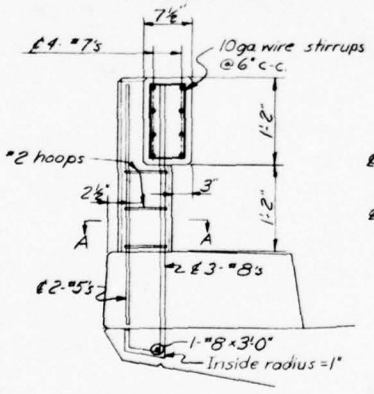


CONCRETE RAIL DETAILS



SECTION A-A




DETAIL A




3-RAIL SYSTEM


BASE PLATE DETAILS

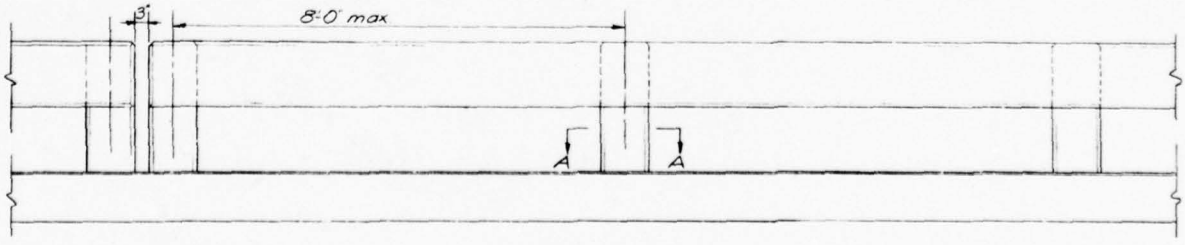


PART ELEVATION OF CONCRETE RAIL

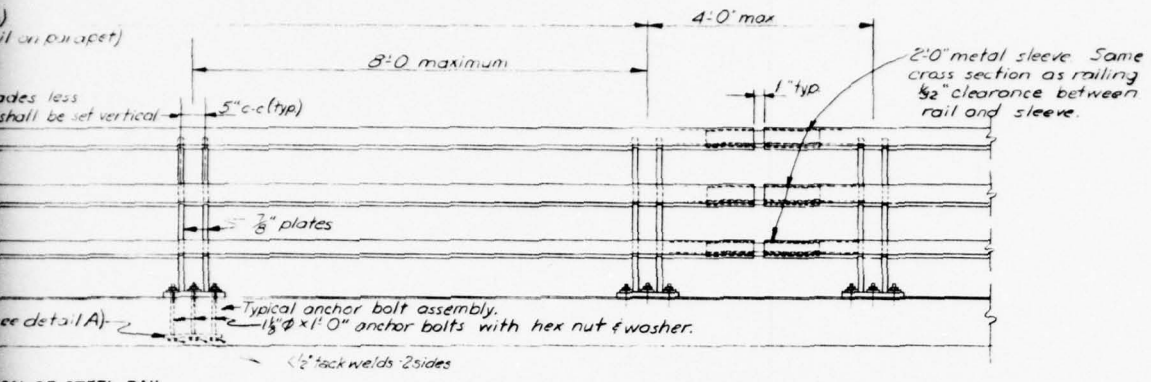

ON OF STEEL RAIL
LAR RAIL SHOWN)

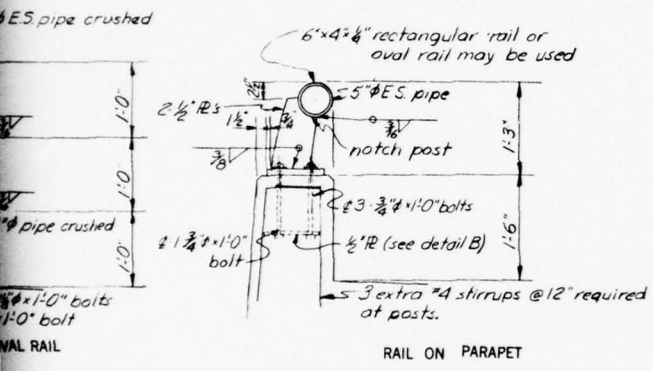


RAIL ON PARAPET

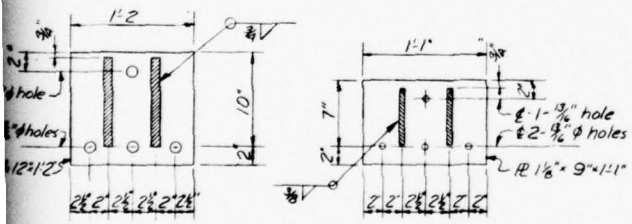

3-RAIL SYSTEM

RAIL ON PARAPET

BASE PLATE DETAILS

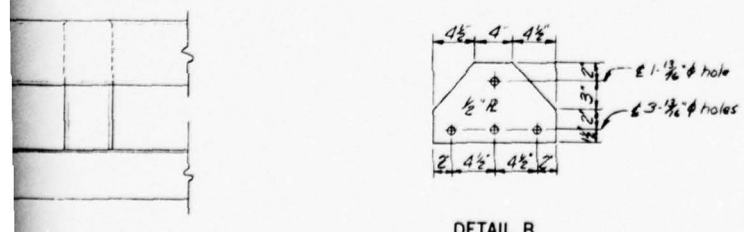

DETAIL B

GENERAL NOTES

Design Specifications: See following sheet for design procedures and specifications.

Loading: See following sheet for loadings of types C, F & H railing systems.

Structural Steel: All structural steel shall conform to ASTM specification A36 and A53, grade B (grade A for oval rails).

Concrete: Concrete cast-in-place rail & posts shall be Class Y(AE). Air entraining agents shall meet with the approval of the engineer.

Reinforcing Steel: Reinforcing shall be deformed intermediate grade steel conforming to ASTM spec. A15. Dimensions relating to spacing of reinforcing steel are to centers of bars.

Anchor Bolts: Anchor bolts shall conform to ASTM spec. A325. All anchor bolt assemblies shall be galvanized. All anchor bolts shall have a final tensile force equal to 70% of the minimum proof load applied to them. This may be done by applying approximately 250 ft-lbs of torque to ¾"ϕ bolts and 750 ft-lbs of torque to 1⅛"ϕ bolts.

Paint: All structural steel shall be given one shop coat of red lead iron oxide paint. Inside of railings shall be given one coat of paint in the shop. Field paint shall consist of one coat of tinted red lead iron oxide paint followed by one finish coat of aluminum or light green paint. All paint and workmanship shall conform to the AASHO Standard Specifications for Highway Bridges and the special provisions for paint.

Figure G12. Typical details for bridge railings

APPENDIX H: TYPICAL PROPERTIES AND DETAILS OF PRESTRESSED CONCRETE PILES[64]

Pile Size Diameter* in.	Shape**	Solid or Hollow†	A_c †† $in.^2$	Weight (plf)‡ lb	Number of Strands per Pile‡‡	Effective Prestress§ (to Nearest 5 psi) psi	I $in.^4$	I/c $in.^3$	Perimeter in.	Allowable Moment§§ 300-psi Tension kip in.	Allowable Moment§§ 600-psi Tension kip in.	Allowable Loads# Based on f'_c 6000 psi tons	Allowable Loads# Based on f'_c 7000 psi tons
						Bearing Piles							
10	Square	Solid	98	105	4--7/16 in.	720	790	158	38	161	209	59	69
12	Square	Solid	142	152	6--7/16 in.	745	1,664	277	46	290	373	85	100
14	Square	Solid	194	209	8--7/16 in.	725	3,112	445	54	456	589	116	135
16	Square	Solid	254	273	11--7/16 in.	765	5,344	668	62	711	912	152	178
18	Octagonal	Solid	268	288	11--7/16 in.	720	5,705	634	60	647	837	161	188
18	Square	Solid	322	346	14--7/16 in.	765	8,597	955	70	1,017	1,303	193	225
20	Square	Solid	398	428	13--1/2 in.	770	13,146	1,315	78	1,407	1,801	239	279
20	Square	11-in. H. C.	303	326	10--1/2 in.	775	12,427	1,243	78	1,336	1,709	182	212
24	Square	14-in. H. C.	418	450	13--1/2 in.	730	25,490	2,124	94	2,188	2,825	250	292
36	Round	26-in. H. C.	487	524	17--1/2 in.	820	60,016	3,334	113	3,734	4,735	292	341
48	Round	38-in. H. C.	675	726	24--1/2 in.	835	158,222	6,593	151	7,483	9,460	405	472
54	Round	44-in. H. C.	770	829	28--1/2 in.	855	233,409	8,645	170	9,985	12,578	462	539
12	TRICON	Solid	62	66	3--3/8 in.	645	348	57	34	53	70	37	43
14	TRICON	Solid	84	90	3--7/16 in.	630	626	87	40	81	107	50	59
16	TRICON	Solid	110	118	3--1/2 in.	640	1,091	130	46	123	162	66	77

(Continued)

* Nominal pile size is measured through the center of the pile, except for TRICON piles, which are measured along the side of the triangle.

** Circular piles with comparable properties may be used in lieu of octagonal piles shown.

† Holes for hollow core piles are circular.

†† Reduction in area for chamfers on square piles has been taken into account.

‡ Tables are based on regular concrete of 155 lb/cu ft density. The use of high strength lightweight concrete in piles for certain specific applications, such as fender piles, should be considered, when available, because its lower E value gives greater deflection and energy absorption characteristics. With lightweight concrete, an f'_c of 5000 psi should be used, and the values in the table should be adjusted accordingly.

‡‡ Based on 1/2-, 7/16-, and 3/8-in.-diameter high strength strands with ultimate strengths of 41,300, 31,000, and 23,000 lb, respectively. If different diameter or regular strength strand is used, the number of strands per pile should be increased or decreased, in accordance with strand manufacturers' tables, to provide approximately the same minimum effective prestress shown in the table.

§ Effective prestress assumes a uniform distribution of strands resulting in a uniform prestress. For special applications of sheet piles, eccentric prestress may be desirable and economical. Experience has shown that such eccentricity may be safely used provided the effective compression on the face with minimum prestress is above 400 psi.


§§ Allowable bending moments are listed for a permissible tensile stress of 300 psi with an effective prestress as given in the table, f'_c = 6000 psi, and assuming a modulus of rupture of 600 psi. Allowable moments for earthquake or similar transient loads are based on a tension of 600 psi. Where bending resistance is critical, the allowable moment may be increased by using more strands to raise the effective prestress to a maximum of 0.2 f'_c psi.

\# Allowable design loads are based on the accepted formula of $N = 0.2\ f'_c \times A_c$ and are computed for f'_c = 6000 and 7000 psi. Concrete strengths in excess of this may be used to increase allowable design loads whenever driving and soil conditions are favorable.

Figure H1. Properties of pretensioned prestressed concrete piles (sheet 1 of 2)


Pile Size in.	Shape	Solid or Hollow	A_c in.^{2}	Weight (plf) lb	Number of Strands per Pile	Effective Prestress (to Nearest 5 psi) psi	I in.^{4}	I/c		Perimeter in.	Allowable Moment (per Foot of Wall)	
								Per Pile in.^{3}	Per foot of Wall in.^{3}		300-psi Tension kip in.	600-psi Tension kip in.
					Sheet Piles							
9 × 36	Rectangular	Solid	324	348	14--1/2 in.	1,020	2,187	486	162	90	214	262
12 × 36	Rectangular	Solid	432	465	20--1/2 in.	1,090	5,184	864	288	96	400	487
18 × 36	Rectangular	W/2--10-in. H. C.	491	528	24--1/2-in.	1,150	16,515	1,835	612	108	887	1,071
					Fender Piles							
14	Square	Solid	194	209	12--7/16 in.	1,090	3,112	445	N/A	54	618	752
16	Square	Solid	254	273	12--1/2 in.	1,115	5,344	668	N/A	62	945	1,145

Figure H1 (sheet 2 of 2)

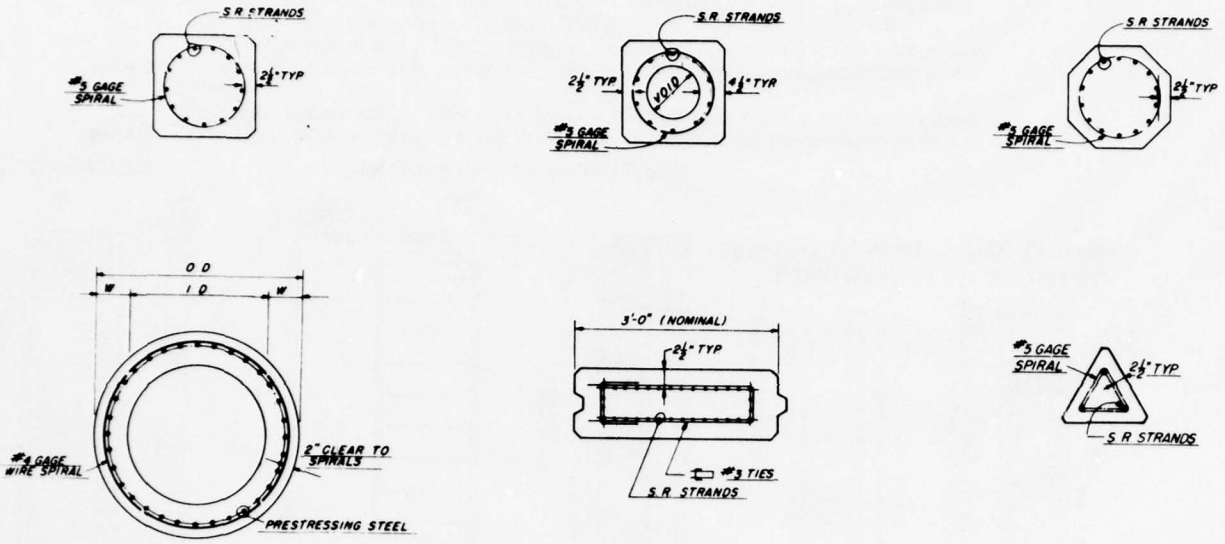

CROSS SECTIONS

Figure H2. Typical details for pretensioned prestressed concrete piles (sheet 1 of 3)

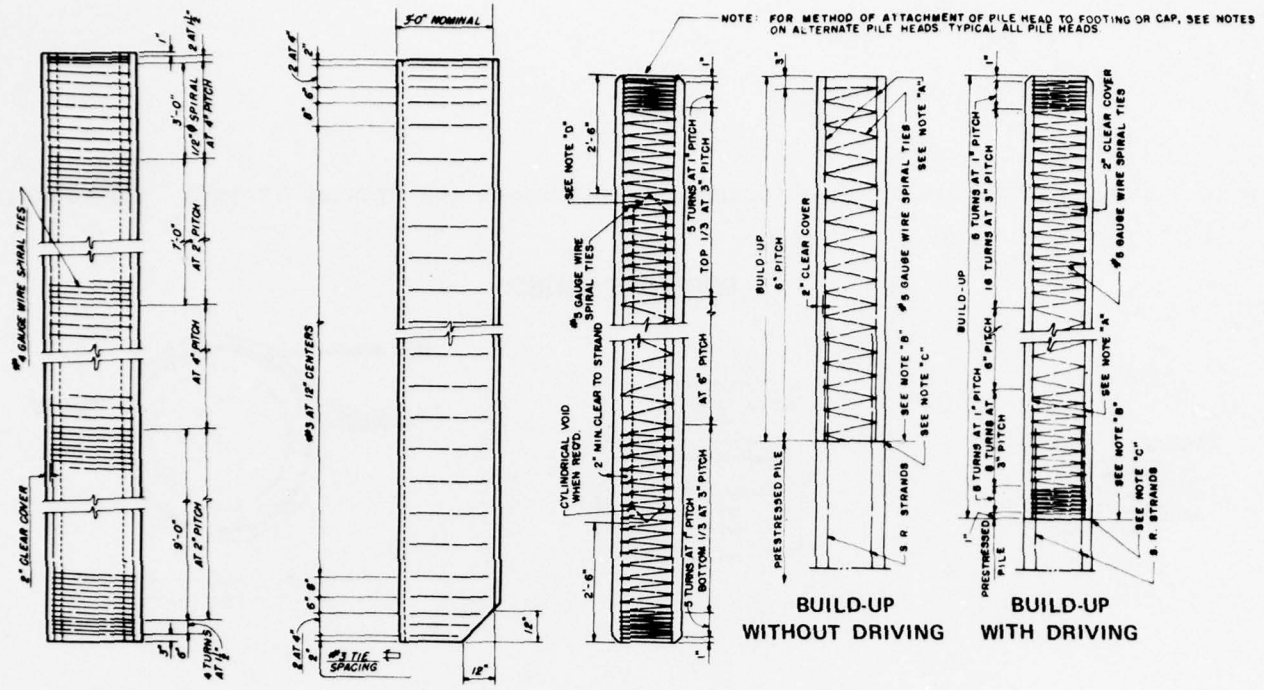

CYLINDER PILE SHEET PILE SQUARE PILE

Note A: The minimum area of reinforcing steel shall be 1½% of the gross cross-section of concrete. Placement of bars shall be in a symmetrical pattern of not less than four bars.

Note B: Method of attachment of pile to build-up may be any of the methods given in the notes on Alternate Pile Heads. If mild reinforcing steel is used for attachment, the area shall be no less than that used in the build-up.


Note C: Concrete around top half of pile shall be bush-hammered to prevent feather edges.

Note D: Conical end fitting or form may be rounded, flat or tapered with proper taping to prevent leakage.

ELEVATION

Figure H2 (sheet 2 of 3)

Reinforcement may be specified to project from the pile into the cap or footing. If so required, attachment of the pile to the cap or footing may be made by any one of the following methods unless otherwise specified:

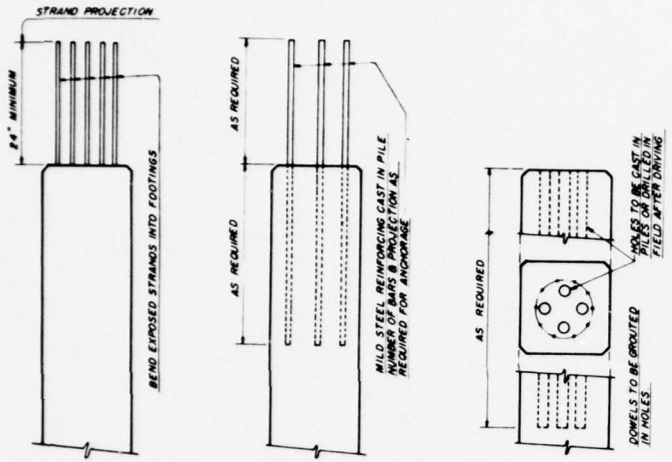


TYPE A TYPE B TYPE C


If mild reinforcing steel is used for projection into the cap or footing, the minimum area of steel required shall be 1½% of the gross cross-section of concrete pile, with not less than four bars being used for piles up to 24" in diameter, and not less than eight bars being used for piles greater than 24" in diameter. Arrangement of bars shall be in a symmetrical pattern with bars as close as practical to the sides of the pile. Anchorage of bars shall be sufficient to develop strength of bar, but not less than 20 bar diameters.

ALTERNATE PILE HEADS

When driving into rock or hard strata, either Type I or Type II alternate tips may be used in lieu of the standard flat tip. Size and length of steel section used shall be as determined by Engineer for adequate penetration. Type I or Type II tips may be used for either square or octagonal piles.




TYPE I



TYPE II

ALTERNATE PILE TIPS

Maximum lengths for pick-up are determined by using the following stress assumptions: Loading = 1.5 x full dead load (to allow for impact). Allowable tensile stress = $6.0\sqrt{f'c}$. These stress and loading criteria are based on normal care in handling of the pile.

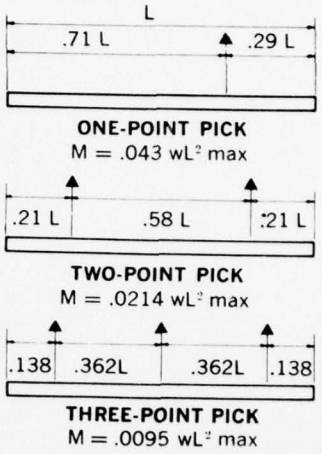

PICKING POINTS

Figure H2 (sheet 3 of 3)

APPENDIX I: TYPICAL DESIGN REQUIREMENTS FOR REINFORCED CONCRETE LOW-HEAD PRESSURE PIPE

1. The typical design requirements (e.g. diameter, wall thickness, compressive strength of the concrete, and the amount of circumferential reinforcement) for reinforced concrete low-head pressure pipes[65] are given in Table I1. The class of pipe given in this table for combined external and hydrostatic head is based on a field installation procedure at least comparable to one of those described in ASTM C 361-76.[65] Where the designer does not expect to attain such an installation, a detailed design analysis of the pipe should be made taking into consideration the anticipated external loading, hydrostatic head, and installation procedure.

Table II

Design Requirements for Reinforced Concrete Low-Head Pressure Pipe,

Concrete Design Strength 4500 psi

Circumferential reinforcement, in.²/linear ft of pipe																										
Internal Designated Dia, in.	12		15		18				21				24				27									
Type of Reinforcement	Circular		Circular		Circular		Elliptical		Circular		Elliptical		Circular		Elliptical		Circular						Elliptical	
Wall Thickness, in.	2	3	2	3	2¼	3	2¼	3	2⅜	3	2⅜	3	2½	3	2½	3	2⅝	3⅛	3¼		4¼		2⅝	3¼
Layers of Reinforcement	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Inner	Outer	Inner	Outer	Single	Single
Class*																								
A-25	0.07	0.06	0.10	0.08	0.12	0.11	0.12	0.12	0.15	0.13	0.14	0.14	0.18	0.16	0.16	0.16	0.21	0.19	0.13	0.09	0.11	0.07	0.18	0.18
B-25	0.10	0.08	0.14	0.11	0.18	0.15	0.16	0.12	0.23	0.19	0.20	0.14	0.29	0.25	0.23	0.18	0.35	0.30	0.20	0.11	0.15	0.08	0.27	0.20
C-25	0.13	0.09	0.19	0.14	0.25	0.19	0.22	0.14	0.32	0.26	0.27	0.19	0.40	0.33	0.32	0.24	0.49	0.41	0.27	0.14	0.20	0.09	0.39	0.27
D-25	0.16	0.11	0.25	0.17	0.32	0.24	0.28	0.17	0.42	0.33	0.37	0.23	0.54	0.43	0.44	0.30	...	0.54	0.35	0.16	0.24	0.10	0.51	0.35
A-50	0.11	0.10	0.14	0.13	0.18	0.16	0.24	0.24	0.21	0.19	0.28	0.28	0.25	0.23	0.32	0.32	0.29	0.27	0.19	0.15	0.16	0.12	0.36	0.36
B-50	0.13	0.11	0.19	0.15	0.23	0.20	0.24	0.24	0.29	0.26	0.28	0.28	0.36	0.32	0.32	0.32	0.43	0.38	0.26	0.17	0.20	0.13	0.36	0.36
C-50	0.16	0.13	0.24	0.18	0.30	0.25	0.26	0.24	0.38	0.32	0.32	0.28	0.47	0.40	0.39	0.32	0.57	0.49	0.32	0.19	0.25	0.14	0.45	0.36
D-50	0.19	0.15	0.29	0.21	0.37	0.29	0.33	0.24	0.48	0.39	0.42	0.28	0.61	0.50	0.50	0.37	...	0.61	0.41	0.22	0.29	0.15	0.58	0.41
A-75	0.17	0.17	0.21	0.21	0.26	0.26	...	...	0.30	0.30	...	...	0.34	0.34	...	...	0.38	0.38	0.25	0.20	0.21	0.17	...	...
B-75	0.17	0.17	0.23	0.21	0.29	0.26	...	...	0.35	0.32	...	...	0.43	0.39	...	...	0.50	0.46	0.31	0.23	0.25	0.18	...	...
C-75	0.20	0.17	0.28	0.23	0.35	0.30	...	...	0.44	0.38	...	...	0.54	0.47	...	...	0.65	0.57	0.39	0.25	0.30	0.19	...	...
D-75	0.23	0.18	0.34	0.26	0.43	0.35	...	...	0.55	0.45	...	...	0.68	0.57	...	...	...	0.69	0.46	0.27	0.35	0.20	...	...
A-100	0.25	0.25	0.32	0.32	0.38	0.38	...	...	0.44	0.44	...	...	0.50	0.50	...	...	0.57	0.57	0.31	0.26	0.29	0.24	...	...
B-100	0.25	0.25	0.32	0.32	0.38	0.38	...	...	0.44	0.44	...	...	0.50	0.50	...	...	0.58	0.57	0.38	0.28	0.31	0.23	...	...
C-100	0.25	0.25	0.32	0.32	0.41	0.38	...	...	0.50	0.44	...	...	0.61	0.55	...	...	0.73	0.65	0.45	0.30	0.35	0.24	...	...
D-100	0.26	0.25	0.38	0.32	0.48	0.40	...	...	0.61	0.51	...	...	0.75	0.64	...	...	...	0.77	0.52	0.33	0.40	0.25	...	...
A-125	0.32	0.32	0.39	0.39	0.47	0.47	...	...	0.55	0.55	...	...	0.63	0.63	...	...	0.71	0.71	0.40	0.31	0.38	0.32	...	...
B-125	0.32	0.32	0.39	0.39	0.47	0.47	...	...	0.55	0.55	...	...	0.63	0.63	...	...	0.71	0.71	0.44	0.35	0.40	0.31	...	...
C-125	0.32	0.32	0.39	0.39	0.47	0.47	...	...	0.57	0.55	...	...	0.68	0.63	...	...	0.81	0.72	0.50	0.37	0.41	0.30	...	...
D-125	0.32	0.32	0.42	0.39	0.53	0.47	...	...	0.67	0.57	...	...	0.82	0.71	...	...	...	0.85	0.57	0.40	0.45	0.30	...	...

* DESIGNATIONS A, B, C, AND D, FOR CLASS OF PIPE, DENOTE 5, 10, 15, AND 20 FT OF EARTH COVER OVER TOP OF PIPE. FIGURES 25, 50, 75, ETC., FOR CLASS OF PIPE, DENOTE HYDROSTATIC PRESSURE HEADS IN FEET (KILOPASCALS) MEASURED TO CENTER LINE OF PIPE.

(Continued)

Table I1 (Continued)

Circumferential reinforcement, in.²/linear ft of pipe																				
Internal Designated Dia, in.	30										33									
Type of Reinforcement	Circular								Elliptical		Circular								Elliptical	
Wall Thickness, in.	2¾	3⅛	3¼		3½		4¾		2¾	3½	2⅞	3⅛	3¼		3¾		4¾		2⅞	3¼
Layers of Reinforcement	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single
Class																				
A-25	0.24	0.23	0.16	0.10	0.15	0.10	0.12	0.08	0.20	0.20	0.28	0.26	0.18	0.12	0.16	0.11	0.13	0.09	0.22	0.22
B-25	0.41	0.37	0.25	0.14	0.22	0.13	0.17	0.09	0.31	0.22	0.48	0.44	0.29	0.17	0.25	0.14	0.19	0.10	0.36	0.25
C-25	0.60	0.51	0.33	0.17	0.30	0.15	0.21	0.10	0.45	0.30	...	0.64	0.41	0.22	0.33	0.17	0.25	0.12	0.50	0.33
D-25	...	0.69	0.43	0.21	0.39	0.19	0.26	0.11	0.59	0.39	...	...	0.53	0.27	0.43	0.21	0.32	0.14	0.71	0.43
A-50	0.33	0.31	0.22	0.17	0.21	0.16	0.17	0.13	0.39	0.39	0.37	0.36	0.25	0.19	0.23	0.17	0.19	0.15	0.43	0.43
B-50	0.50	0.45	0.31	0.20	0.28	0.19	0.22	0.14	0.39	0.39	0.58	0.54	0.37	0.24	0.31	0.20	0.25	0.16	0.43	0.43
C-50	0.68	0.60	0.40	0.24	0.37	0.21	0.26	0.15	0.51	0.39	...	0.73	0.48	0.28	0.40	0.24	0.32	0.18	0.57	0.43
D-50	...	0.78	0.49	0.27	0.45	0.24	0.32	0.16	0.69	0.45	...	...	0.62	0.33	0.49	0.27	0.37	0.20	0.78	0.49
A-75	0.42	0.42	0.28	0.23	0.27	0.22	0.23	0.19	...	...	0.47	0.46	0.32	0.26	0.29	0.24	0.25	0.20	...	...
B-75	0.59	0.54	0.38	0.26	0.35	0.25	0.27	0.20	...	...	0.67	0.64	0.44	0.31	0.38	0.27	0.32	0.22	...	...
C-75	0.77	0.69	0.46	0.30	0.43	0.27	0.32	0.20	...	...	...	0.83	0.55	0.36	0.46	0.30	0.38	0.24	...	...
D-75	...	0.86	0.56	0.33	0.51	0.30	0.37	0.21	...	...	...	...	0.69	0.41	0.55	0.33	0.43	0.25	...	...
A-100	0.63	0.63	0.36	0.29	0.35	0.29	0.32	0.27	...	...	0.69	0.60	0.40	0.33	0.39	0.31	0.35	0.29	...	...
B-100	0.67	0.63	0.44	0.33	0.41	0.31	0.33	0.25	...	...	0.77	0.73	0.51	0.39	0.45	0.33	0.38	0.29	...	...
C-100	0.86	0.78	0.53	0.37	0.49	0.33	0.38	0.26	...	...	...	0.93	0.63	0.43	0.53	0.37	0.44	0.30	...	...
D-100	...	0.95	0.64	0.41	0.57	0.37	0.43	0.27	...	...	...	...	0.75	0.48	0.63	0.40	0.49	0.31	...	...
A-125	0.78	0.78	0.43	0.36	0.44	0.35	0.42	0.36	...	...	0.86	0.86	0.47	0.40	0.47	0.39	0.47	0.39	...	...
B-125	0.78	0.78	0.51	0.40	0.48	0.38	0.44	0.34	...	...	0.87	0.86	0.58	0.46	0.52	0.41	0.48	0.38	...	...
C-125	0.95	0.86	0.59	0.43	0.55	0.40	0.45	0.33	...	...	...	1.02	0.70	0.50	0.61	0.44	0.50	0.37	...	...
D-125	...	1.04	0.70	0.47	0.64	0.43	0.48	0.32	...	...	...	...	0.82	0.55	0.70	0.47	0.55	0.38	...	...

(Continued)

Table II (Continued)

Circumferential reinforcement, in.²/linear ft of pipe																												
Internal Designated Dia, in.	36									39[b]								42										
Type of Reinforcement	Circular							Elliptical		Circular						Elliptical		Circular						Elliptical				
Wall thickness, in.	3 1/8	3 1/4		4		5		3 1/8	4	3 1/2		4 1/4		5 1/4		3 1/2	4 1/4	3 3/4		4 1/2		5 1/2		3 3/4	4 1/2			
Layers of Reinforcement	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single			
Class																												
A-25	0.31	0.21	0.14	0.17	0.12	0.15	0.10	0.24	0.24	0.22	0.15	0.19	0.13	0.16	0.11	0.26	0.26	0.24	0.16	0.20	0.14	0.17	0.12	0.28	0.28			
B-25	0.53	0.36	0.20	0.27	0.15	0.22	0.12	0.38	0.27	0.38	0.22	0.29	0.17	0.24	0.13	0.38	0.29	0.40	0.23	0.31	0.18	0.26	0.14	0.40	0.31			
C-25	...	0.49	0.26	0.37	0.19	0.28	0.14	0.52	0.37	0.52	0.28	0.40	0.21	0.31	0.15	0.52	0.40	0.54	0.30	0.43	0.22	0.34	0.17	0.54	0.43			
D-25	...	0.67	0.33	0.46	0.23	0.35	0.16	0.72	0.46	0.70	0.36	0.50	0.25	0.39	0.18	0.70	0.50	0.73	0.38	0.54	0.27	0.43	0.20	0.73	0.54			
A-50	0.41	0.29	0.22	0.24	0.19	0.21	0.16	0.47	0.47	0.30	0.23	0.26	0.20	0.23	0.18	0.51	0.51	0.32	0.24	0.28	0.21	0.25	0.19	0.55	0.55			
B-50	0.64	0.43	0.28	0.35	0.22	0.29	0.18	0.47	0.47	0.45	0.29	0.37	0.24	0.31	0.20	0.51	0.51	0.48	0.31	0.40	0.26	0.33	0.22	0.55	0.55			
C-50	...	0.56	0.33	0.43	0.26	0.35	0.20	0.62	0.47	0.59	0.36	0.47	0.28	0.38	0.22	0.59	0.51	0.64	0.38	0.50	0.30	0.42	0.24	0.64	0.55			
D-50	...	0.74	0.41	0.53	0.29	0.41	0.22	0.80	0.53	0.77	0.43	0.57	0.32	0.46	0.24	0.77	0.57	0.81	0.46	0.63	0.35	0.50	0.27	0.81	0.63			
A-75	0.52	0.37	0.29	0.31	0.26	0.28	0.22	...	...	0.39	0.31	0.34	0.27	0.30	0.24	...	...	0.41	0.33	0.36	0.29	0.33	0.26	...	...			
B-75	0.74	0.51	0.36	0.41	0.29	0.35	0.25	...	...	0.53	0.38	0.45	0.31	0.38	0.27	...	...	0.56	0.40	0.47	0.33	0.41	0.29	...	...			
C-75	...	0.66	0.42	0.50	0.32	0.41	0.26	...	...	0.69	0.44	0.54	0.36	0.45	0.29	...	...	0.72	0.46	0.58	0.38	0.50	0.32	...	...			
D-75	...	0.81	0.49	0.61	0.37	0.49	0.29	...	...	0.84	0.51	0.66	0.40	0.53	0.32	...	...	0.88	0.54	0.70	0.43	0.58	0.34	...	...			
A-100	0.75	0.45	0.38	0.42	0.34	0.38	0.32	...	...	0.47	0.40	0.46	0.36	0.42	0.34	...	...	0.50	0.42	0.49	0.40	0.45	0.37	...	...			
B-100	0.85	0.58	0.44	0.48	0.37	0.42	0.31	...	...	0.63	0.46	0.52	0.39	0.45	0.34	...	...	0.66	0.48	0.55	0.42	0.48	0.37	...	...			
C-100	...	0.73	0.49	0.57	0.40	0.48	0.33	...	...	0.77	0.52	0.63	0.43	0.52	0.36	...	...	0.80	0.55	0.67	0.46	0.56	0.39	...	...			
D-100	...	0.88	0.56	0.68	0.44	0.54	0.35	...	...	0.92	0.59	0.73	0.47	0.59	0.38	...	...	0.99	0.63	0.78	0.50	0.65	0.42	...	...			
A-125	0.94	0.53	0.45	0.52	0.43	0.51	0.43	...	...	0.56	0.47	0.56	0.47	0.55	0.47	...	...	0.60	0.50	0.60	0.50	0.59	0.50	...	...			
B-125	0.95	0.68	0.51	0.56	0.44	0.52	0.41	...	...	0.71	0.54	0.61	0.47	0.57	0.45	...	...	0.74	0.57	0.64	0.50	0.61	0.48	...	...			
C-125	...	0.81	0.57	0.66	0.47	0.54	0.40	...	...	0.84	0.62	0.70	0.50	0.59	0.43	...	...	0.88	0.64	0.75	0.54	0.65	0.47	...	...			
D-125	...	0.99	0.65	0.75	0.51	0.62	0.42	...	...	1.03	0.68	0.80	0.54	0.67	0.45	...	...	1.07	0.71	0.86	0.58	0.72	0.49	...	...			

(Continued)

Table 11 (Continued)

Internal Designated Dia, in.	Circumferential reinforcement, in.²/linear ft of pipe																									
	45*								48								51*									
Type of Reinforcement	Circular						Elliptical		Circular						Elliptical		Circular						Elliptical	
Wall thickness, in.	3⅞		4¾		5¾		3⅞	4¾	4⅛		5		5¾		4⅛	5	4¼		5¼		6		4¼	5¼
Layers of Reinforcement	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single
Class																								
A-25	0.26	0.18	0.22	0.15	0.19	0.13	0.36	0.30	0.28	0.19	0.24	0.16	0.21	0.14	0.32	0.32	0.30	0.20	0.25	0.17	0.23	0.15	0.34	0.34
B-25	0.43	0.25	0.33	0.19	0.28	0.15	0.43	0.33	0.45	0.27	0.36	0.21	0.32	0.18	0.45	0.36	0.49	0.29	0.38	0.22	0.34	0.19	0.49	0.38
C-25	0.62	0.33	0.46	0.24	0.37	0.19	0.62	0.46	0.66	0.36	0.50	0.27	0.44	0.22	0.66	0.50	0.72	0.40	0.53	0.28	0.47	0.24	0.72	0.53
D-25	0.80	0.42	0.58	0.29	0.47	0.22	0.80	0.58	0.86	0.45	0.65	0.32	0.54	0.26	0.86	0.65	0.97	0.50	0.69	0.35	0.58	0.28	...	0.69
A-50	0.35	0.26	0.30	0.23	0.27	0.21	0.59	0.59	0.38	0.28	0.32	0.25	0.30	0.23	0.63	0.63	0.41	0.30	0.35	0.26	0.32	0.25	0.67	0.67
B-50	0.51	0.33	0.42	0.27	0.36	0.23	0.59	0.59	0.55	0.36	0.45	0.30	0.40	0.26	0.63	0.63	0.58	0.39	0.48	0.31	0.43	0.28	0.67	0.67
C-50	0.70	0.42	0.54	0.32	0.46	0.27	0.70	0.59	0.75	0.45	0.59	0.36	0.52	0.30	0.75	0.63	0.81	0.49	0.63	0.38	0.55	0.33	0.81	0.67
D-50	0.88	0.50	0.67	0.38	0.55	0.30	0.88	0.67	0.97	0.54	0.73	0.41	0.62	0.34	0.97	0.73	1.06	0.59	0.77	0.44	0.68	0.37	...	0.77
A-75	0.44	0.36	0.39	0.31	0.35	0.28	..	...	0.47	0.38	0.42	0.34	0.39	0.31	...	...	0.50	0.41	0.44	0.36	0.42	0.33	...	...
B-75	0.61	0.43	0.50	0.36	0.44	0.31	...	...	0.65	0.46	0.54	0.39	0.49	0.35	...	...	0.69	0.49	0.57	0.41	0.52	0.37	...	...
C-75	0.78	0.51	0.63	0.41	0.54	0.34	...	...	0.84	0.54	0.68	0.44	0.60	0.39	...	...	0.90	0.58	0.72	0.47	0.65	0.42	...	...
D-75	0.99	0.59	0.75	0.46	0.62	0.37	...	...	1.06	0.64	0.81	0.50	0.72	0.43	...	...	1.14	0.70	0.86	0.53	0.76	0.46	...	...
A-100	0.53	0.45	0.52	0.43	0.48	0.40	...	...	0.57	0.48	0.55	0.45	0.51	0.42	...	...	0.62	0.51	0.59	0.48	0.54	0.45	...	...
B-100	0.70	0.52	0.58	0.44	0.52	0.39	...	...	0.75	0.55	0.64	0.48	0.57	0.44	...	...	0.79	0.59	0.67	0.50	0.61	0.46	...	...
C-100	0.87	0.59	0.71	0.49	0.61	0.42	...	...	0.95	0.65	0.77	0.53	0.69	0.47	...	...	1.02	0.70	0.81	0.56	0.73	0.50	...	...
D-100	1.08	0.69	0.83	0.54	0.70	0.45	...	...	1.15	0.73	0.90	0.58	0.79	0.51	...	...	1.24	0.79	0.97	0.63	0.84	0.54	...	...
A-125	0.65	0.53	0.64	0.54	0.63	0.54	...	...	0.69	0.56	0.68	0.57	0.67	0.57	...	...	0.74	0.60	0.73	0.60	0.72	0.61	...	...
B-125	0.79	0.62	0.67	0.54	0.66	0.51	...	...	0.84	0.66	0.73	0.57	0.70	0.55	...	...	0.89	0.70	0.76	0.61	0.74	0.58	...	...
C-125	0.98	0.70	0.80	0.57	0.69	0.50	...	...	1.05	0.74	0.86	0.63	0.77	0.56	..	...	1.12	0.79	0.91	0.66	0.82	0.59	...	...
D-125	1.16	0.77	0.91	0.63	0.78	0.53	...	...	1.24	0.83	1.00	0.68	0.87	0.59	...	...	1.33	0.89	1.06	0.72	0.94	0.64	...	...

(Continued)

Table I1 (Continued)

Circumferential reinforcement, in.²/linear ft of pipe

Internal Designated Dia, in.	54								57[b]								60							
Type of Reinforcement	Circular						Elliptical		Circular						Elliptical		Circular						Elliptical	
Wall thickness, in.	4½		5½		6¼		4½	5½	4¾		5¾		6½		4¾	5¾	5		6		6¾		5	6
Layers of Reinforcement	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single
Class																								
A-25	0.31	0.21	0.27	0.18	0.25	0.16	0.36	0.36	0.33	0.22	0.28	0.19	0.26	0.17	0.38	0.38	0.35	0.23	0.30	0.20	0.28	0.18	0.39	0.39
B-25	0.50	0.30	0.40	0.23	0.36	0.20	0.50	0.40	0.52	0.31	0.43	0.25	0.38	0.22	0.52	0.43	0.54	0.32	0.45	0.26	0.41	0.23	0.54	0.45
C-25	0.75	0.41	0.57	0.30	0.50	0.26	0.75	0.57	0.78	0.43	0.61	0.32	0.53	0.28	0.78	0.61	0.81	0.45	0.64	0.35	0.56	0.29	0.81	0.64
D-25	1.00	0.52	0.73	0.37	0.63	0.30	...	0.73	1.03	0.54	0.77	0.40	0.67	0.33	...	0.77	1.07	0.56	0.81	0.42	0.71	0.35	...	0.81
A-50	0.42	0.32	0.37	0.28	0.34	0.26	0.71	0.71	0.44	0.33	0.39	0.29	0.36	0.28	0.75	0.75	0.46	0.35	0.41	0.31	0.38	0.29	0.78	0.78
B-50	0.62	0.41	0.50	0.33	0.46	0.30	0.71	0.71	0.64	0.42	0.52	0.35	0.48	0.32	0.75	0.75	0.66	0.44	0.55	0.37	0.51	0.33	0.78	0.78
C-50	0.84	0.51	0.67	0.40	0.59	0.35	0.85	0.71	0.87	0.53	0.71	0.42	0.64	0.37	0.90	0.75	0.91	0.55	0.74	0.45	0.67	0.39	0.96	0.78
D-50	1.09	0.63	0.82	0.46	0.72	0.39	...	0.82	1.13	0.65	0.86	0.49	0.77	0.43	...	0.88	1.16	0.67	0.91	0.52	0.81	0.45	...	0.94
A-75	0.53	0.43	0.47	0.38	0.44	0.35	...	...	0.55	0.44	0.49	0.40	0.47	0.37	...	...	0.57	0.46	0.52	0.42	0.49	0.39	...	...
B-75	0.72	0.51	0.60	0.43	0.55	0.39	...	...	0.74	0.53	0.63	0.45	0.58	0.42	...	...	0.77	0.55	0.66	0.47	0.61	0.44	...	...
C-75	0.96	0.62	0.76	0.50	0.69	0.45	...	...	1.00	0.64	0.80	0.52	0.73	0.47	...	...	1.03	0.67	0.85	0.55	0.77	0.50	...	...
D-75	1.18	0.72	0.91	0.56	0.81	0.49	...	...	1.22	0.75	0.97	0.59	0.86	0.52	...	...	1.26	0.78	1.02	0.63	0.92	0.55	...	...
A-100	0.64	0.53	0.62	0.51	0.58	0.47	...	...	0.67	0.55	0.66	0.54	0.61	0.50	...	...	0.70	0.57	0.70	0.56	0.64	0.53	...	...
B-100	0.82	0.62	0.70	0.53	0.65	0.49	...	...	0.85	0.64	0.74	0.55	0.68	0.52	...	...	0.88	0.67	0.77	0.58	0.72	0.54	...	...
C-100	1.06	0.72	0.86	0.59	0.78	0.54	...	...	1.10	0.75	0.90	0.63	0.82	0.57	...	...	1.14	0.78	0.96	0.66	0.87	0.60	...	...
D-100	1.28	0.82	1.02	0.66	0.89	0.58	...	...	1.32	0.85	1.07	0.69	0.96	0.62	...	...	1.39	0.88	1.12	0.73	1.01	0.65	...	...
A-125	0.77	0.64	0.77	0.64	0.76	0.64	...	...	0.82	0.67	0.82	0.68	0.80	0.67	...	...	0.86	0.71	0.85	0.72	0.85	0.71	...	...
B-125	0.92	0.73	0.80	0.64	0.78	0.62	...	...	0.97	0.75	0.83	0.68	0.82	0.65	...	...	1.01	0.78	0.86	0.72	0.87	0.69	...	...
C-125	1.16	0.82	0.97	0.70	0.87	0.64	...	...	1.20	0.85	1.02	0.73	0.92	0.67	...	...	1.25	0.89	1.07	0.77	0.98	0.71	...	...
D-125	1.40	0.92	1.11	0.76	1.00	0.68	...	...	1.45	0.97	1.17	0.79	1.06	0.72	...	...	1.50	1.00	1.22	0.83	1.11	0.76	...	...

(Continued)

Table II (Continued)

Internal Designated Dia, in.	63*								66								69*							
Type of Reinforcement	Circular						Elliptical		Circular						Elliptical		Circular						Elliptical	
Wall Thickness, in.	5¼		6¼		7		5¼	6¼	5½		6½		7¼		5½	6½	5¾		6¾		7½		6¾	7½
Layers of Reinforcement	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single
Class																								
A-25	0.37	0.25	0.32	0.22	0.30	0.20	0.41	0.41	0.39	0.26	0.34	0.23	0.32	0.21	0.43	0.43	0.41	0.27	0.36	0.24	0.33	0.22	0.45	0.45
B-25	0.57	0.35	0.48	0.28	0.43	0.25	0.57	0.48	0.59	0.36	0.50	0.29	0.45	0.26	0.60	0.50	0.62	0.37	0.52	0.31	0.48	0.28	0.63	0.53
C-25	0.85	0.47	0.68	0.37	0.60	0.31	0.85	0.68	0.87	0.49	0.71	0.38	0.63	0.33	0.87	0.71	0.89	0.50	0.73	0.40	0.66	0.35	0.90	0.73
D-25	1.13	0.59	0.87	0.45	0.76	0.38	....	0.87	1.17	0.63	0.91	0.47	0.81	0.41	....	0.91	1.20	0.65	0.97	0.50	0.85	0.43	....	0.97
A-50	0.49	0.37	0.44	0.33	0.41	0.31	0.82	0.82	0.51	0.39	0.46	0.35	0.43	0.33	0.86	0.86	0.53	0.40	0.48	0.36	0.46	0.34	0.90	0.90
B-50	0.69	0.46	0.58	0.39	0.54	0.36	0.82	0.82	0.72	0.48	0.62	0.41	0.57	0.37	0.86	0.86	0.74	0.49	0.64	0.43	0.59	0.39	0.90	0.90
C-50	0.97	0.58	0.79	0.47	0.71	0.42	1.01	0.83	1.00	0.61	0.82	0.49	0.74	0.44	1.05	0.87	1.02	0.63	0.85	0.51	0.77	0.47	1.10	0.92
D-50	1.23	0.71	0.98	0.55	0.87	0.49	....	1.01	1.27	0.74	1.03	0.58	0.92	0.51	....	1.07	1.31	0.76	1.08	0.62	0.97	0.54	....	1.14
A-75	0.62	0.49	0.55	0.44	0.52	0.42	....	....	0.64	0.51	0.58	0.46	0.55	0.44	....	....	0.67	0.53	0.61	0.48	0.58	0.46	....	....
B-75	0.81	0.57	0.70	0.50	0.66	0.47	....	....	0.84	0.60	0.73	0.52	0.69	0.49	....	....	0.86	0.62	0.76	0.55	0.72	0.52	....	....
C-75	1.08	0.70	0.89	0.58	0.82	0.53	....	....	1.11	0.73	0.94	0.61	0.85	0.56	....	....	1.14	0.75	0.97	0.64	0.90	0.58	....	....
D-75	1.36	0.82	1.09	0.67	0.98	0.59	....	....	1.40	0.85	1.14	0.70	1.03	0.63	....	....	1.45	0.88	1.19	0.73	1.08	0.66	....	....
A-100	0.74	0.61	0.73	0.59	0.68	0.55	....	....	0.76	0.63	0.77	0.62	0.71	0.57	....	....	0.79	0.66	0.80	0.64	0.74	0.60	....	....
B-100	0.92	0.70	0.81	0.62	0.76	0.57	....	....	0.97	0.73	0.85	0.65	0.79	0.61	....	....	1.00	0.75	0.88	0.68	0.83	0.64	....	....
C-100	1.20	0.82	1.01	0.70	0.92	0.64	....	....	1.23	0.84	1.05	0.73	0.97	0.67	....	....	1.26	0.87	1.09	0.76	1.01	0.70	....	....
D-100	1.47	0.95	1.19	0.77	1.08	0.70	....	....	1.51	0.98	1.25	0.81	1.13	0.73	....	....	1.56	1.01	1.30	0.85	1.19	0.77	....	....
A-125	0.90	0.74	0.90	0.75	0.89	0.75	....	....	0.95	0.78	0.94	0.79	0.93	0.78	....	....	0.99	0.82	0.98	0.82	0.97	0.82	....	....
B-125	1.06	0.82	0.93	0.75	0.91	0.72	....	....	1.09	0.85	0.96	0.79	0.95	0.76	....	....	1.13	0.88	1.00	0.82	1.00	0.79	....	....
C-125	1.31	0.95	1.13	0.81	1.04	0.75	....	....	1.37	0.98	1.17	0.84	1.08	0.78	....	....	1.40	1.01	1.21	0.88	1.12	0.82	....	....
D-125	1.58	1.06	1.30	0.88	1.18	0.81	....	....	1.62	1.09	1.38	0.92	1.24	0.84	....	....	1.68	1.13	1.43	0.97	1.30	0.88	....	....

(Continued)

Table II (Continued)

Circumferential reinforcement, in ^{2}/linear ft of pipe

Internal Designated Dia, in.*	72								78						84					
Type of Reinforcement	Circular						Elliptical		Circular						Circular					
Wall thickness, in.	6		7		7½		6	7	6½		7½		8¼		7		8		8¾	
Layers of Reinforcement	Inner	Outer	Inner	Outer	Inner	Outer	Single	Single	Inner	Outer	Inner	Outer	Inner	Outer	Inner	Outer	Inner	Outer	Inner	Outer
Class																				
A-25	0.45	0.30	0.40	0.26	0.37	0.24	0.48	0.47	0.49	0.32	0.43	0.29	0.41	0.27	0.53	0.35	0.47	0.31	0.45	0.29
B-25	0.68	0.41	0.57	0.34	0.52	0.30	0.68	0.57	0.72	0.44	0.62	0.37	0.57	0.33	0.77	0.46	0.67	0.40	0.62	0.36
C-25	1.00	0.55	0.80	0.44	0.72	0.38	1.00	0.80	1.04	0.58	0.86	0.47	0.78	0.42	1.09	0.62	0.91	0.51	0.84	0.45
D-25	1.37	0.72	1.07	0.55	0.95	0.47	....	1.07	1.44	0.76	1.15	0.61	1.04	0.52	1.51	0.81	1.23	0.65	1.11	0.57
A-50	0.59	0.44	0.53	0.40	0.50	0.37	0.94	0.94	0.64	0.47	0.57	0.43	0.55	0.41	0.68	0.50	0.63	0.46	0.59	0.44
B-50	0.81	0.54	0.70	0.47	0.65	0.43	0.94	0.94	0.86	0.57	0.76	0.50	0.71	0.47	0.92	0.62	0.82	0.54	0.77	0.51
C-50	1.12	0.69	0.92	0.56	0.84	0.51	1.15	0.96	1.17	0.72	1.00	0.61	0.92	0.55	1.23	0.76	1.06	0.65	0.99	0.59
D-50	1.48	0.84	1.18	0.68	1.07	0.59	....	1.20	1.57	0.89	1.28	0.74	1.16	0.66	1.64	0.96	1.38	0.79	1.26	0.71
A-75	0.73	0.58	0.66	0.53	0.63	0.51	....	....	0.78	0.62	0.72	0.57	0.69	0.55	0.84	0.66	0.78	0.62	0.75	0.59
B-75	0.96	0.68	0.83	0.60	0.78	0.56	....	....	1.02	0.73	0.90	0.65	0.85	0.61	1.08	0.77	0.97	0.70	0.92	0.66
C-75	1.25	0.82	1.06	0.70	0.98	0.64	....	....	1.31	0.86	1.13	0.75	1.05	0.69	1.39	0.91	1.21	0.80	1.13	0.74
D-75	1.60	0.98	1.31	0.80	1.19	0.72	....	....	1.69	1.04	1.43	0.87	1.31	0.79	1.78	1.10	1.52	0.94	1.40	0.85
A-100	0.87	0.72	0.83	0.68	0.77	0.63	....	....	0.94	0.77	0.90	0.73	0.83	0.68	1.00	0.82	0.97	0.79	0.90	0.73
B-100	1.10	0.82	0.97	0.73	0.90	0.69	....	....	1.16	0.87	1.05	0.79	0.98	0.74	1.23	0.92	1.12	0.84	1.06	0.80
C-100	1.40	0.96	1.19	0.82	1.09	0.76	....	....	1.47	1.01	1.27	0.88	1.17	0.82	1.54	1.07	1.36	0.95	1.26	0.88
D-100	1.73	1.11	1.45	0.94	1.30	0.84	....	....	1.85	1.18	1.56	1.01	1.42	0.91	1.94	1.24	1.65	1.08	1.52	0.99
A-125	1.04	0.85	1.03	0.85	1.02	0.85	....	....	1.12	0.91	1.12	0.92	1.11	0.91	1.20	0.99	1.21	0.99	1.19	0.98
B-125	1.23	0.97	1.11	0.87	1.04	0.82	....	....	1.31	1.03	1.19	0.94	1.13	0.89	1.40	1.09	1.27	1.00	1.21	0.96
C-125	1.53	1.10	1.32	0.97	1.22	0.89	....	....	1.61	1.16	1.42	1.03	1.31	0.96	1.68	1.22	1.51	1.10	1.42	1.03
D-125	1.89	1.24	1.57	1.07	1.43	0.97	....	....	1.98	1.31	1.69	1.15	1.55	1.05	2.08	1.40	1.79	1.22	1.66	1.13

(Continued)

Table II (Concluded)

Circumferential reinforcement, in.²/linear ft of pipe																
Internal Designated Dia, in.	90				96				102				108			
Type of Reinforcement	Circular				Circular				Circular				Circular			
Wall thickness, in.	7½		8		8		8½		8½		9		9		9½	
Layers of Reinforcement	Inner	Outer	Inner	Outer	Inner	Outer	Inner	Outer	Inner	Outer	Inner	Outer	Inner	Outer	Inner	Outer
Class																
A-25	0.57	0.38	0.54	0.36	0.62	0.41	0.58	0.39	0.66	0.44	0.63	0.42	0.71	0.47	0.68	0.45
B-25	0.82	0.49	0.77	0.46	0.87	0.53	0.82	0.49	0.92	0.56	0.87	0.52	0.99	0.59	0.94	0.56
C-25	1.14	0.65	1.06	0.59	1.20	0.68	1.12	0.63	1.26	0.72	1.18	0.67	1.32	0.76	1.24	0.71
D-25	1.57	0.84	1.43	0.76	1.62	0.88	1.49	0.80	1.69	0.92	1.56	0.84	1.75	0.97	1.64	0.89
A-50	0.73	0.54	0.70	0.52	0.78	0.57	0.75	0.55	0.84	0.62	0.81	0.59	0.89	0.65	0.86	0.63
B-50	0.98	0.66	0.92	0.62	1.04	0.70	0.99	0.66	1.10	0.74	1.05	0.70	1.16	0.78	1.11	0.74
C-50	1.29	0.80	1.20	0.74	1.37	0.84	1.27	0.79	1.44	0.89	1.35	0.83	1.50	0.94	1.43	0.88
D-50	1.70	1.00	1.57	0.90	1.77	1.04	1.64	0.96	1.86	1.09	1.72	1.01	1.93	1.14	1.80	1.06
A-75	0.89	0.71	0.86	0.68	0.96	0.75	0.92	0.73	1.02	0.80	0.99	0.77	1.08	0.84	1.05	0.82
B-75	1.14	0.81	1.08	0.78	1.21	0.86	1.15	0.82	1.27	0.91	1.22	0.87	1.36	0.97	1.29	0.92
C-75	1.46	0.96	1.37	0.90	1.53	1.01	1.44	0.96	1.60	1.07	1.52	1.01	1.68	1.12	1.60	1.07
D-75	1.87	1.15	1.71	1.06	1.94	1.20	1.79	1.12	2.02	1.25	1.89	1.17	2.10	1.31	1.98	1.23
A-100	1.07	0.87	1.04	0.84	1.13	0.92	1.11	0.90	1.20	0.98	1.17	0.96	1.27	1.04	1.24	1.01
B-100	1.30	0.99	1.24	0.94	1.39	1.04	1.32	1.00	1.46	1.10	1.41	1.06	1.54	1.15	1.49	1.12
C-100	1.61	1.12	1.52	1.06	1.69	1.18	1.60	1.12	1.77	1.24	1.69	1.18	1.87	1.30	1.78	1.25
D-100	2.01	1.30	1.88	1.21	2.09	1.37	1.96	1.28	2.18	1.43	2.05	1.35	2.27	1.49	2.15	1.42
A-125	1.29	1.06	1.29	1.06	1.38	1.13	1.38	1.13	1.47	1.19	1.47	1.19	1.56	1.26	1.55	1.26
B-125	1.48	1.15	1.42	1.11	1.56	1.21	1.50	1.17	1.64	1.28	1.58	1.24	1.73	1.35	1.67	1.30
C-125	1.77	1.28	1.68	1.22	1.87	1.36	1.77	1.29	1.96	1.43	1.88	1.37	2.05	1.49	1.97	1.44
D-125	2.16	1.47	2.02	1.38	2.25	1.53	2.12	1.45	2.34	1.60	2.22	1.52	2.46	1.67	2.32	1.60

In accordance with letter from DAEN-RDC, DAEN-ASI dated 22 July 1977, Subject: Facsimile Catalog Cards for Laboratory Technical Publications, a facsimile catalog card in Library of Congress MARC format is reproduced below.

McDonald, James E
Precast concrete elements for structures in selected theaters of operations / by James E. McDonald, Tony C. Liu. Vicksburg, Miss. : U. S. Waterways Experiment Station ; Springfield, Va. : available from National Technical Information Service, 1978.
132, [139] p. : ill. ; 27 cm. (Technical report - U. S. Army Engineer Waterways Experiment Station ; C-78-1)
Prepared for Office, Chief of Engineers, U. S. Army, Washington, D. C., under Project 4A762719AT40, Technical Area A2, Work Unit 019.
References: p. 129-132.

1. Bridges. 2. Concrete bridges. 3. Concrete structures. 4. Fabrication. 5. Field fortifications. 6. Precast concconcrete. 7. Prefabrication. 8. Structural members. I. Liu, Tony C., joint author. II. United States. Army. Corps of Engineers. III. Series: United States. Waterways Experiment Station, Vicksburg, Miss. Technical report ; C-78-1.
TA7.W34 no.C-78-1