



AD-A134774

NRL Report 8744

A New Derivation for the Rough Surface Reflection Coefficient and for the Distribution of Sea Wave Elevations

A. R. MILLER

*Software Systems and Support Branch
Research Computation Division*

R. M. BROWN

*ENEWS Program
Tactical Electronic Warfare Division*

E. VEGH

*Identification Systems Branch
Radar Division*

September 30, 1983



NAVAL RESEARCH LABORATORY
Washington, D.C.

DTIC
ELECTE
NOV 16 1983
S E D

Approved for public release; distribution unlimited.

83 11 15 109

FILE COPY

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER NRL Report 8744	2. GOVT. ACCESSION NO. A134774	3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle) A NEW DERIVATION FOR THE ROUGH SURFACE REFLECTION COEFFICIENT AND FOR THE DISTRIBUTION OF SEA WAVE ELEVATIONS		5. TYPE OF REPORT & PERIOD COVERED Final report	
		6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) A. R. Miller, R. M. Brown, and E. Vegh		8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, DC 20375		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS PE 63267N, W1253 53-0700-03 and 57-044-A-3	
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Systems Command Washington, DC 20361		12. REPORT DATE September 30, 1983	
		13. NUMBER OF PAGES 5	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED	
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Rough surface reflection coefficient Fourier transform Sea wave elevation distribution Bessel functions Coherent reflected field			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) In this report the rough surface reflection coefficient for the coherent reflected field is derived. The result obtained assumes a plane wavefront incident on a Gaussian collection of sinusoidal surface waves with uniform phase distribution. The theoretical result obtained is compared with experimental data. In addition, the probability density function of sea wave elevations is obtained.			

DD FORM 1473
1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

A NEW DERIVATION FOR THE ROUGH SURFACE REFLECTION COEFFICIENT AND FOR THE DISTRIBUTION OF SEA WAVE ELEVATIONS

In 1961 C. I. Beard [1] found that experimental values of the coherent reflected field, $R = |\bar{E}/E_0\Gamma|$ were larger than the values given by the generally accepted theoretical formula

$$\left| \frac{\bar{E}}{E_0\Gamma} \right|_{S_A} = \exp(-2(2\pi g)^2) \quad (1)$$

for values of $g = (\sigma_h \sin \chi)/\lambda$ greater than 0.1 radian. Here \bar{E} is the average electric field due to the "sea surface" S_A , E_0 is the field due to the direct wave, Γ is the smooth sea reflection coefficient, σ_h is the standard deviation of the sea-surface elevation, χ is the grazing angle, and λ is the electromagnetic wavelength (Fig. 1).

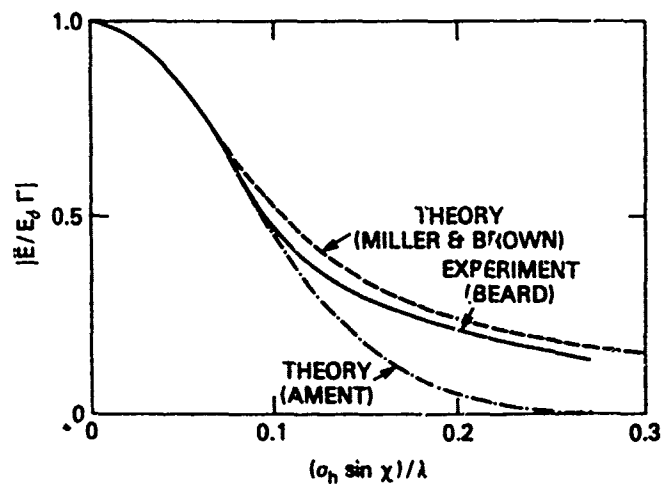


Fig. 1 -- Comparison of theoretical and experimental results for coherent forward scattering

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

This expression for $|\bar{E}/E_0\Gamma|_{S_A}$ was first published by W.S. Ament [2] in 1953 and was obtained from the equation

$$R = \int_{-\infty}^{\infty} \exp\left\{\frac{4\pi i}{\lambda} y \sin \chi\right\} D(y) dy, \quad (2)$$

essentially also derived in Ref. 2. Here $D(y)$ is the normalized probability density function for sea wave elevations, y . Equation (1) was obtained from Eq. (2), by assuming that sea waves were flat surfaces with sea height H , distributed normally, i.e., $y = H$ for "sea surface" S_A , and

$$D(y) = \frac{1}{\sqrt{2\pi} \sigma_H} \exp\left\{-\frac{1}{2} \frac{H^2}{\sigma_H^2}\right\}. \quad (3)$$

One might note that Eq. (2) is the Fourier transform of the density function, $D(y)$.

Manuscript approved May 20, 1983.

Brown and Miller [3] derived Eqs. (1) and (2) as well, using geometric optics. Moreover, they showed that the coherent reflected field was given by

$$R = \left| \frac{\bar{E}}{E_s \Gamma} \right|_S = \exp(-2(2\pi g)^2) I_0(2(2\pi g)^2) \quad (4)$$

where $I_0(x)$ is the modified Bessel function $J_0(ix)$. They derived this result by using geometric optics, assuming a planar wavefront incident on a Gaussian collection S of sinusoidal surface waves with uniform phase distribution.

Further, $|\bar{E}/E_s \Gamma|_S$ agreed with Beard's experimental curve (Fig. 1), with a systematic difference in g of 10%. Beard had estimated that wave elevations were within 10% of their correct values.

After reading Ref. 3, Ament suggested to the authors that a short proof of Eq. (4) might be obtained along the lines that he produced Eq. (1) from Eq. (2). In this report we present such a proof.

We assume that the "sea surface," S , has sea wave elevation that is a random variable, y , with

$$y = H \sin \frac{2\pi}{\Lambda} x$$

where Λ is water wavelength, H is distributed as in Eq. (3), and x is distributed uniformly on the interval $(-\Lambda/4, \Lambda/4)$.

It is a straightforward computation to show that the probability density function of y is given by

$$D(y) = \frac{1}{\pi^{3/2} \frac{\sigma_H}{\sqrt{2}}} \int_{|y|}^{\infty} \frac{\exp\left[-\frac{1}{2} \frac{H^2}{\sigma_H^2}\right]}{\sqrt{H^2 - y^2}} dH \quad (5)$$

where

$$\sigma_h = \sigma_y = \sigma_H / \sqrt{2}. \quad (6)$$

(see appendix). We see that

$$\begin{aligned} D(y) &= \frac{1}{\pi^{3/2} \sigma_h} \int_{|y|}^{\infty} \frac{\exp\left[-\frac{1}{4} \frac{H^2}{\sigma_h^2}\right]}{\sqrt{H^2 - y^2}} dH \\ &= \frac{1}{2\pi^{3/2} \sigma_h} \int_1^{\infty} \frac{\exp\left[-\left(\frac{y}{2\sigma_h}\right)^2 x\right]}{\sqrt{x} \sqrt{x-1}} dx, \end{aligned}$$

and using Ref. 4, page 319, 3.383-3,

$$\begin{aligned} D(y) &= \frac{\Gamma(1/2)/\sqrt{\pi}}{2\pi^{3/2} \sigma_h} \exp\left[-\frac{1}{2} \left(\frac{y}{2\sigma_h}\right)^2\right] K_0\left[\frac{1}{2} \left(\frac{y}{2\sigma_h}\right)^2\right] \\ &= \frac{1}{2\pi^{3/2} \sigma_h} \exp\left[\frac{-y^2}{8\sigma_h^2}\right] K_0\left[\frac{y^2}{8\sigma_h^2}\right]. \end{aligned} \quad (7)$$

where $K_0(x)$ is a Bessel function of imaginary argument defined by

$$K_0(x) = \int_0^\infty \cos(x \sinh t) dt, \quad x > 0.$$

Substituting Eq. (7) into Eq. (2) we have

$$R = \frac{1}{\pi^{3/2} \sigma_h} \int_0^\infty \cos\left(\frac{4\pi}{\lambda} y \sin \chi\right) \exp\left[-\frac{y^2}{8\sigma_h^2}\right] K_0\left(\frac{y^2}{8\sigma_h^2}\right) dy$$

$$= \frac{\sqrt{2}}{\pi^{3/2}} \int_0^\infty x^{-1/2} e^{-x} \cos\left(\frac{8\sqrt{2} \pi \sigma_h \sin \chi}{\lambda} \sqrt{x}\right) K_0(x) dx.$$

Now using Ref. 4, page 765, 6.755-9 we obtain Eq. (4).

Since Eq. (4) agrees with the experimental data and Eq. (2) is the Fourier transform of $D(y)$, Eq. (7) must be a good approximation for the actual distribution of sea wave elevations (see Fig. 2).

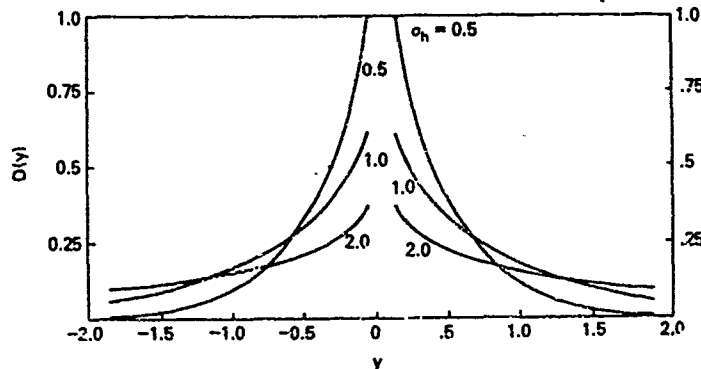


Fig. 2 — Probability density function for sea wave elevations, y (y in feet and the standard deviation of y , σ_h , also in feet)

CONCLUSIONS

In this report we derive the rough surface reflection coefficient for the coherent reflected field with the assumption of a plane wave front incident on a Gaussian collection of sinusoidal surface waves with uniform distribution. The theoretical result agrees with the experimental data, when the systematic difference in the experimental data is taken into account. Furthermore, $D(y)$ as given here is a good approximation for the actual distribution of sea wave elevations.

REFERENCES

1. C.I. Beard, "Coherent and Incoherent Scattering of Microwaves from the Ocean," *IRE Trans. Antennas & Propag.* **AP-9**(5), 470 (1961).
2. W.S. Ament, "Toward a Theory of Reflection by a Rough Surface," *Proc. IRE* **41**(1), 142 (1953).
3. R.M. Brown and A.R. Miller, "Geometric-Optics Theory for Coherent Scattering of Microwaves from the Ocean Surface," *NRL Report 7705* (1974).
4. I.S. Gradshteyn and I.M. Ryzhik, *Tables of Integrals, Series and Products* (Academic Press, 1980).

Appendix A

Consider the random variable $y = H \sin \theta$, where H is a random variable distributed normally with mean 0 and standard deviation σ_H and θ in a random variable, independent of H , distributed uniformly on the interval $|\theta| < \pi/2$. Let K , F , and D be the densities of H , θ , and y respectively. Then

$$K(H) = \frac{\exp(-H^2/2\sigma_H^2)}{\sigma_H\sqrt{2\pi}}, \quad |H| < \infty$$

and

$$F(\theta) = \begin{cases} \pi^{-1} & |\theta| < \pi/2 \\ 0 & |\theta| \geq \pi/2 \end{cases}.$$

Since θ and H are independent, the joint density, $g(\theta, H)$, of θ and H is given by $K(H)F(\theta)$ or

$$g(\theta, H) = \frac{\exp(-H^2/2\sigma_H^2)}{2^{1/2}\pi^{3/2}\sigma_H}.$$

Let $y = H \sin \theta$, $v = H$ so that $\theta = \text{Sin}^{-1}(y/v)$ and let $f(y, v)$ be the joint density of y and v . Then

$$f(y, v) = |J| g(\text{Sin}^{-1}(y/v), v)$$

where

$$|J| = \begin{vmatrix} \frac{\partial \theta}{\partial y} & \frac{\partial \theta}{\partial v} \\ \frac{\partial H}{\partial y} & \frac{\partial H}{\partial v} \end{vmatrix}.$$

A straightforward computation yields

$$|J| = \frac{1}{\sqrt{v^2 - y^2}}$$

and

$$f(y, H) = \frac{1}{2^{1/2}\pi^{3/2}\sigma_H} \frac{\exp(-H^2/2\sigma_H^2)}{\sqrt{H^2 - y^2}}.$$

Finally, integrate $f(y, H)$ over H to obtain

$$D(y) = \int_{-\infty}^{-|y|} f(y, H) dH + \int_{|y|}^{\infty} f(y, H) dH.$$

Since $f(y, H) = f(y, -H)$ it is clear that $D(y)$ is given by Eq. (5).

Note that the result $\sigma_y = \sigma_H/\sqrt{2}$ of Eq. (6) follows easily from the definitions of variance, expected value, and the hypothesis that θ and H are independent.